



- (51) **International Patent Classification:**
B60N 2/00 (2006.01) *B60N 2/70* (2006.01)
- (21) **International Application Number:**
PCT/EP2016/053758
- (22) **International Filing Date:**
23 February 2016 (23.02.2016)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
92 671 27 February 2015 (27.02.2015) LU
- (71) **Applicant: IEE INTERNATIONAL ELECTRONICS & ENGINEERING S.A.** [LU/LU]; Zone Industrielle, 6468 Echternach (LU).
- (72) **Inventors: GOEDERT, Guenter;** Pfälzelerstrasse 71, 54293 Trier (DE). **JUNGEN, Dietmar;** Im Acker 6, 54552 Mehren (DE). **BECK, Jörg;** Goldbachstrasse 21, 54470 Bernkastel-Kues (DE). **FAVALLI, Gianluca;** 5 rue du X Septembre, 4947 Hautcharage (LU).
- (74) **Agents: BEISSEL, Jean et al.;** Office Freylinger S.A., 234, Route d'Arlon, BP 48, 8001 Strassen (LU).

- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** WEIGHT-RESPONSIVE VEHICLE SEAT OCCUPANT DETECTION AND CLASSIFICATION METHOD AND SYSTEM


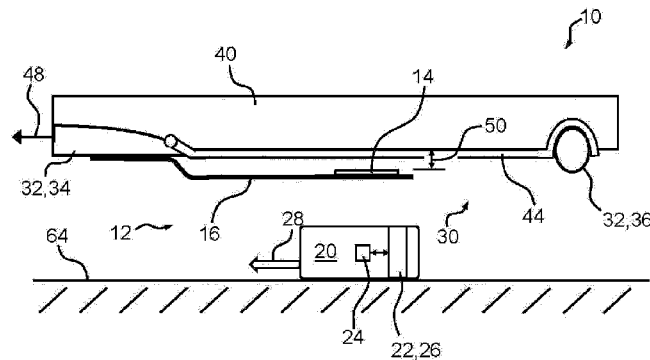


Fig. 2

(57) **Abstract:** A vehicle seat occupant classification system (12) for use in a vehicle seat (10) includes a weight-responsive sensor (14; 54, 56₁, 56₂, 56₃), at least one bracket member (16; 58) serving as a holder for the weight-responsive sensor (14; 54, 56₁, 56₂, 56₃) such that the weight-responsive sensor is arranged between the seat foam member (40) and the bracket member (16; 58), and an evaluation unit (20) configured to evaluate a status of the at least one weight-responsive sensor (14; 54, 56₁, 56₂, 56₃). The bracket member (16; 58) is fixedly attached to the seat base (30). If a mechanical load at least corresponding to a first pre-determined threshold value is applied by a seat occupant, a portion of the vehicle seat (10) is configured to come into mechanical interaction with the at least one weight-responsive sensor (14; 54, 56₁, 56₂, 56₃), and is configured to change a status of the at least one weight-responsive sensor (14; 54, 56₁, 56₂, 56₃) if a mechanical load at least corresponding to a second pre-determined threshold value is applied. A relative movement between the seat base (30) and the at least one weight-responsive sensor (14; 54, 56₁, 56₂, 56₃) is at least excluded for applied mechanical loads that are smaller than the first pre-determined threshold value.



Weight-Responsive Vehicle Seat Occupant Detection and Classification Method and System

Technical Field

[0001] The invention relates to a weight-responsive vehicle seat occupant detection and classification system, a method for detecting and classifying a vehicle seat occupancy using such vehicle seat occupant detection and classification system and a software module for carrying out the method.

Background Art

[0002] Vehicle seat occupancy detection systems are nowadays widely used in vehicles, in particular in passenger cars, for providing a seat occupancy signal for various appliances, for instance for the purpose of a seat belt reminder (SBR) system or an activation control for an auxiliary restraint system (ARS). Seat occupancy detection systems include seat occupancy sensors that are known to exist in a number of variants, e.g. based on capacitive sensing, on deformation sensing or on sensing of pressure/force. In order to meet requirements regarding easy integration and feared robustness, weight-sensitive seat occupancy sensors have typically been arranged on the B-surface of a vehicle seat, i.e. between a foam body of a seat cushion and a seat pan or cushion-supporting springs of the vehicle seat.

[0003] Further, vehicle seat occupancy detection systems are known to be employed as a means of assessing a potential activation of an installed vehicle passenger restraint system, such as an airbag.

[0004] For example, patent US 5,987,370 describes an apparatus for estimating the weight of an occupant of a seat in a motor vehicle. The apparatus includes a closed elastomeric bladder filled with fluid being installed in the foam cushion of a vehicle seat bottom. The apparatus includes at least one pressure sensor installed in a closed exit port of the bladder. A temperature sensor disposed in proximity to the bladder provides a temperature signal, and a controller estimates the weight of the occupant based on the temperature and pressure signals. The pressure sensor is configured to sense a differential pressure between the fluid and atmospheric pressure at the center of gravity of the

fluid in order to provide a stable output independent of changing atmospheric pressure and changing orientation of the bladder due to vehicle pitch and roll. The estimated weight is used as the criteria to distinguish between an adult, an infant or small child.

Description of the Invention

[0005] It is desirable to provide a vehicle seat occupant detection and classification system with an improved performance and range with regard to classifying vehicle seat occupants, including infant seats, for instance for the purpose of enabling or disabling installed auxiliary vehicle passenger restraint systems, such as airbags, and/or enabling or disabling a seat belt reminder (SBR) signal.

[0006] It is therefore an object of the invention to provide a vehicle seat occupant detection and classification system that is capable of reliably and reproducibly detecting a seat occupancy and/or of at least distinguishing a child from an adult occupant.

[0007] In one aspect of the present invention, the object is achieved by a vehicle seat occupant detection and classification system for use in a vehicle seat which includes a seat base configured for taking up a seat cushion having at least one seat foam member, and wherein the seat base and the seat cushion are provided for supporting a bottom of a seat occupant. The vehicle seat occupant detection and classification system comprises

- at least one weight-responsive sensor, and
- at least one bracket member, serving as a holder for the at least one weight-responsive sensor, wherein in an operational state, the at least one weight-responsive sensor is arranged between the at least one seat foam member and the at least one bracket member.

[0008] The at least one bracket member is fixedly attached to a portion of the seat base at a location below the at least one seat foam member such that a portion of the vehicle seat is configured to come into mechanical interaction with the at least one weight-responsive sensor if a mechanical load corresponding to at least a first pre-determined threshold value is applied by a seat occupant to and

being directed towards the at least one weight-responsive sensor. The at least one bracket member is further configured to change a status of the at least one weight-responsive sensor if a mechanical load corresponding to at least a second pre-determined threshold value is applied by the seat occupant, wherein the second pre-determined threshold value is larger than the first pre-determined threshold value.

[0009] The term “vehicle”, as used in this application, shall particularly be understood to encompass passenger cars, trucks and buses.

[0010] The seat occupant classification system may comprise, but is not limited to, classes selected out of a group formed by “*empty*”, “*child*”, “*child seat*” and “*adult*”.

[0011] The expression “mechanical interaction” between two objects, as used in this application, shall in particular be understood such that one of the two objects applies a mechanical force directly, via physical contact, or indirectly, via a third object, to the other one of the two objects.

[0012] A relative movement between the portion of the seat base to which the at least one bracket member is attached and the at least one weight-responsive sensor is at least excluded for applied mechanical loads that are smaller than the mechanical load corresponding to the first threshold value.

[0013] The expressions “above”, “higher”, “below”, and “lower”, as used in this application, shall in particular be understood with regard to a direction that is arranged perpendicular to the passenger cabin floor, wherein “above” and “higher” is meant to be further away from the passenger cabin floor, and “below” and “lower” is meant to be closer to the passenger cabin floor.

[0014] The advantage of the invention lies in that any seat cushion movement generated by applying a mechanical load to the vehicle seat cushion can be detected and used for seat occupancy classifying against a fixed reference level formed by the seat base and the at least one bracket member, enabling a precise and reproducible detection of the applied mechanical load being equivalent to the second pre-determined threshold value.

[0015] The system preferably further comprises an evaluation unit that is configured to evaluate a status of the at least one weight-responsive sensor for generating an output signal that is based on a result of the evaluation and that is indicative of at least one out of a seat occupancy status and a seat occupancy class.

[0016] The classification provided by the vehicle seat occupant detection and classification system can advantageously support the decision of enabling or disabling passenger restraint systems that are installed in the vehicle. In this way, the vehicle seat occupant detection and classification system can contribute in complying with requirements from vehicle safety regulations, such as FMVSS (Federal Motor Vehicle Safety Standard) No. 208 concerning occupant crash protection.

[0017] The evaluation unit may be configured to evaluate the status continuously or at specified intervals, periodically or event-triggered.

[0018] The output signal may be an electric signal, an electromagnetic signal or any other type of signal that appears to be suitable to those skilled in the art.

[0019] Further, in a suitable embodiment, the seat cushion movement can be detected substantially independent of a vehicle cabin temperature.

[0020] In one embodiment, the second pre-determined threshold value of the mechanical load may substantially be equal to the first pre-determined threshold value of mechanical load.

[0021] In a preferred embodiment of the vehicle seat occupant detection and classification system, the at least one bracket member comprises at least two bracket portions substantially shaped as rectangular plates. The bracket member is fixedly attached to the seat base by a first plate of the at least two rectangular plates, the at least one weight-responsive sensor is held by a second plate of the at least two rectangular plates, and the at least two rectangular plates are mutually fixedly attached in a pairwise manner.

[0022] The expression "fixedly attached", as used in this application, shall particularly be understood to encompass the use of material bonding by applying

methods such as welding, brazing or glueing as well as the use of force closure connections by, for instance, riveting or employing screw joints.

[0023] In this way, the at least one bracket member can be designed simply and can readily be provided in a cost-saving way. Further, at least one bracket part of the at least two bracket parts can include one or more bends about a direction arranged in parallel to a shorter side of the rectangle, so as to hold the at least one weight-responsive sensor in a height position that is different from a height position of the location of attachment of the at least one bracket member to the seat base, allowing for more design freedom.

[0024] Preferably, the at least one weight-responsive sensor is selected from, but not limited to, a group formed by a resistive pressure sensor, a micro-switch or a membrane switch. By that, a high degree of freedom for designing the vehicle seat occupant detection and classification system can be achieved.

[0025] In another preferred embodiment, the vehicle seat occupant detection and classification system comprises a plurality of weight-responsive sensors and a plurality of bracket members, wherein each bracket member serves as a holder for at least one weight-responsive sensor of the plurality of weight-responsive sensors.

[0026] In this way, besides providing redundancy for seat occupancy detection, the statuses of the plurality of weight-responsive sensors can be evaluated in a combined way, and conclusions based on positions of different portions of the vehicle seat and the statuses of the weight-responsive sensors the corresponding portion of the vehicle seat is configured to come into mechanical interaction with if a mechanical load is applied by a seat occupant, can be facilitated.

[0027] In yet another embodiment of the vehicle seat occupant detection and classification system, the at least one bracket member or at least one bracket member of the plurality of bracket members is resiliently deflectable in the direction of the mechanical load that is applied towards at least one of the weight-responsive sensors which the bracket member is holding, by a distance of at least 5 mm at a location that is distal to the location of attachment of the bracket

member to the seat base, if a mechanical load corresponding to the second threshold value is applied.

[0028] In this way, the difference between the first deflection of the portion of the vehicle seat that is configured to come into mechanical interaction with the at least one weight-responsive sensor at an applied mechanical load corresponding to the first pre-determined threshold value, and a second deflection of the portion of the vehicle seat at an applied mechanical load corresponding to the second pre-determined threshold value can be increased. Thereby, a seating comfort for the seat occupant can be enhanced, as the at least one weight-responsive sensor is a lesser obstacle for further deflection of the portion of the vehicle seat once it has come into mechanical interaction with the at least one weight-responsive sensor. Further, the increased difference between the first deflection and the second deflection can be exploited for a higher precision in defining the change of the status of the at least one weight-responsive sensor by the portion of the vehicle seat if a mechanical load corresponding to the second pre-determined threshold value is applied.

[0029] In another preferred embodiment, the evaluation unit is configured to evaluate the statuses of the plurality of weight-responsive sensors for generating the output signal by forming at least one logical combination of at least a subset of the statuses of the plurality of sensors. In this way, similar seat occupant classes can effectively and reliably be determined that are known to comprise at least one characteristic and distinguishing deflection of a specific portion of the vehicle seat by positioning at least one weight-responsive sensor of the plurality of weight-responsive sensors for coming into mechanical interaction with that specific portion of the vehicle seat.

[0030] In yet another preferred embodiment, the evaluation unit is configured to evaluate the statuses of the plurality of weight-responsive sensors by matching the statuses to a plurality of pre-determined patterns of statuses of the plurality of weight-responsive sensors. Each of the pre-determined pattern of statuses can be assigned to a specific seat occupancy class, so that, if the evaluation unit finds a match of the statuses of the plurality of weight-responsive sensors to one of the pre-determined patterns of statuses, the evaluation unit is

configured to generate an output signal that is indicative of the specific seat occupancy class.

[0031] It is another object of the invention to provide a method for detecting and classifying an occupancy of a vehicle seat. The method comprises steps of

- providing an embodiment of the vehicle seat occupant detection and classification system as disclosed herein,
- fixedly attaching the at least one bracket member with the at least one weight-responsive sensor to the seat base at a location below the at least one seat foam member,
- evaluating a status of the at least one weight-responsive sensor, and
- based on a result of the step of evaluating, generating an output signal that is indicative of at least one out of a seat occupancy status and a seat occupancy class. The advantages presented before regarding the vehicle seat occupant detection and classification system apply as well to the method in accordance with the invention.

[0032] The steps of evaluating the status and generating the output signal may be carried out continuously or at specified intervals, periodically, event-triggered and/or triggered by a vehicle control unit (VCU).

[0033] In a preferred embodiment of the method, the step of evaluating comprises forming at least one logical combination of at least a subset of the statuses of the plurality of weight-responsive sensors.

[0034] In one embodiment of the method, the step of evaluating comprises matching the statuses of the plurality of weight-responsive sensors to a plurality of pre-determined patterns of statuses of the plurality of weight-responsive sensors.

[0035] In yet another aspect of the invention, a vehicle seat is provided. The vehicle seat comprises a seat structure for erecting the vehicle seat on a passenger cabin floor of the vehicle, a seat cushion having at least one seat foam member, a seat base supported by the seat structure and configured for receiving the seat cushion, wherein the seat base and the seat cushion are provided for supporting a bottom of a seat occupant, and an embodiment of the vehicle seat

occupant detection and classification system as disclosed herein. In this way, a vehicle seat can be provided that includes a vehicle seat occupant detection and classification system that is able to detect and classify a seat occupancy in a precise and reproducible way.

[0036] Preferably, the seat base of the vehicle seat comprises a base frame and plurality of suspension springs, which are connected to the base frame.

[0037] In yet another aspect of the invention, a software module for controlling an execution of steps of an embodiment of the method disclosed herein is provided.

[0038] The method steps to be conducted are converted into a program code of the software module, wherein the program code is implementable in a digital memory unit of the evaluation unit or a separate vehicle control unit and is executable by a processor unit of the evaluation unit or the separate vehicle control unit.

[0039] The software module can enable a robust and reliable execution of the method and can allow for a fast modification of method steps.

[0040] These and other aspects of the invention will be apparent from and elucidated with reference to the embodiments described hereinafter.

Brief Description of the Drawings

[0041] Preferred embodiments of the invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Fig. 1 is a perspective partial view from above on a vehicle seat with an installed vehicle seat occupant detection and classification system in accordance with the invention;

Fig. 2 schematically illustrates a partial cross-sectional side view of the vehicle seat occupant detection and classification system pursuant to Fig. 1 in an unloaded condition;

Fig. 3 shows the vehicle seat occupant detection and classification system installed in the vehicle seat pursuant to Fig. 1, in a condition of a mechanical load applied by a seat occupant;

Fig. 4 is a schematic top view of the vehicle seat pursuant to Fig. 1;

Fig. 5 is a perspective top view of the bracket member of the vehicle seat occupant detection and classification system pursuant to Figs. 1 to 4; and

Fig. 6 is a schematic top view of the vehicle seat pursuant to Fig. 1 with an installed alternative embodiment of a vehicle seat occupant detection and classification system in accordance with the invention.

Description of Preferred Embodiments

[0042] Fig. 1 is a perspective partial view from above on a vehicle seat 10, in particular a passenger car seat, with an installed vehicle seat occupant detection and classification system 12 in accordance with the invention.

[0043] Fig. 2 schematically illustrates a partial cross-sectional side view of the vehicle seat 10 pursuant to Fig. 1. The vehicle seat 10 comprises a seat structure (not shown) by which it is erected on a passenger cabin floor 64, as is well known in the art. The vehicle seat further comprises a backrest (not shown) and a seat base 30. The seat base 30 is supported by the seat structure and configured for receiving the seat cushion. The seat base 30 and the seat cushion are provided for supporting a bottom of a seat occupant 62. The seat base 30 includes a base frame 32 substantially made of steel, and a suspension mat 42 with a plurality of steel suspension springs 44 connected to opposing edges of the base frame 32, as can best be seen in Fig. 4, wherein the seat foam member 40 is not shown for the purpose of clarity. The suspension mat 42 is deflected downwards if a mechanical load is applied on the seat cushion by the seat occupant 62. Points of fixation of the suspension springs 44 at the base frame 32, by definition, do not undergo any displacement, whereas a displacement of the seat cushion B-surface, which in an operational state is directed towards the suspension mat 42, represents in general a non-uniform, two-dimensional deflection field.

[0044] The deflection of the suspension mat 42 is depending on the type of mechanical load applied to the seat cushion, for instance a mechanical load applied by a human seat occupant, or a mechanical load applied by a lifeless object. A magnitude of the deflection of the suspension mat 42 is determined by

spring rates, geometry, material, design, base frame fixation, number of springs, spring connectors, and others.

[0045] Referring back to Fig. 2, the seat cushion comprises a seat foam member 40 for providing comfort to the seat occupant 62. The seat foam member 40 includes a top surface and a bottom surface (the B-surface). The seat base 30 has a top surface for receiving the seat cushion such that the B-surface of the seat cushion is in mechanical contact with the seat base top surface. A rear edge 36 of the seat base 30 is proximal to the backrest, and a front edge 34 of the seat base 30, which is provided to support a lower thigh region of an adult seat occupant, is distal to the backrest. A seating direction 48 shall be defined by a direction pointing from the front edge 34 of the seat base 30, and being arranged perpendicularly to the front edge 34 and horizontally to the passenger cabin floor 64.

[0046] The vehicle seat occupant detection and classification system 12 includes a weight-responsive sensor 14 and a bracket member 16 serving as a holder for the weight-responsive sensor 14. The weight-responsive sensor 14 is designed as a membrane switch.

[0047] As can best be seen in Fig. 5 in a perspective top view, the bracket member 16 comprises three bracket portions 18₁, 18₂, 18₃ that are designed integrally and are shaped as rectangular plates, each rectangular plate having two end regions close to the short edges of the rectangular plate. A first bracket portion 18₁ and a third bracket portion 18₃ of the three bracket portions 18₁, 18₂, 18₃ are kept flat, whereas the second bracket portion 18₂ includes two bends about a direction arranged in parallel to the shorter side of the rectangle. The first bracket portion 18₁ is fixedly attached with one of its end regions to the base frame 32 by a bolted connection, and the other end region abuts one of the end regions of the second bracket portion 18₂. The other end region of the second bracket portion 18₂, in turn, abuts a side region of the third bracket portion 18₃, which is arranged at a 90° angle to the first bracket portion 18₁. The weight-responsive sensor 14 is attached to a top side of the other end region of the third bracket portion 18₃ by an adhesive bond. The bracket member 16 may, for

instance, be produced by punching from a metal sheet and subsequent bending of the second bracket portion 18₂.

[0048] In the operational state of the vehicle seat occupant detection and classification system 12, as shown in Fig. 5, the weight-responsive sensor 14 is disposed, with regard to a direction perpendicular to the passenger cabin floor 64, between the B-surface of the seat foam member 40 and the bracket member 16. As is shown most clearly in Fig. 4, which is a schematic top view of the vehicle seat 10 with removed seat foam member 40, the third bracket portion 18₃ that holds the weight-responsive sensor 14 is arranged in the gap of a turn of one of the meandering suspension springs 44 so as to avoid mechanical contact with the suspension mat 42.

[0049] The bracket member 16 is fixedly attached to the seat base 30 at a location below the seat foam member 40 that is close to the front edge 34 of the seat base 30. The specific portion of the seat foam member 40 that is disposed close to the front edge 34 of the seat base 30 is configured to come into mechanical interaction with the weight-responsive sensor 14 if a mechanical load corresponding to a first pre-determined threshold value is applied by the seat occupant 62 to a front region of the seat cushion and is directed towards the weight-responsive sensor 14.

[0050] Fig. 2 shows the vehicle seat occupant detection and classification system 12 being installed in the vehicle seat 10 and in an unloaded condition. As can be seen best in Fig. 2, a relative movement between the base frame 32 and the weight-responsive sensor 14 is at least excluded for applied mechanical loads that are smaller than the first pre-determined threshold value. It is only when the applied mechanical load at least corresponds to the first pre-determined threshold value that a portion of the seat foam member 40 located above the weight-responsive sensor 14 comes into mechanical interaction with the weight-responsive sensor 14.

[0051] If the applied mechanical load corresponds at least to a second pre-determined threshold value, which is larger than the first pre-determined threshold value, the specific portion of the seat foam member 40 that is disposed above the weight-responsive sensor 14 is configured to change a switching status of the

weight-responsive sensor 14. This condition is illustrated in Fig. 3, wherein the weight-responsive sensor 14 is drawn in a solid line.

[0052] If the bracket member 16 was assumed to be made from an infinity rigid material, a difference between a first deflection 50 of the portion of the seat foam member 40 that is configured to come into mechanical interaction with the weight-responsive sensor 14 at an applied mechanical load corresponding to the first pre-determined threshold value, and a second deflection of the portion of the seat foam member 40 at an applied mechanical load corresponding to the second pre-determined threshold value, is equal to a travel of the membrane switch required for changing between an open status and a switched status of the membrane switch.

[0053] In an alternative material choice, the bracket member 16 is made from spring steel, and is thus resiliently deflectable in the direction of the mechanical load that is applied towards the weight-responsive sensor 14 held by the bracket member 16, by a distance of 10 mm at a location that is distal to the location of attachment of the bracket member 16 to the base frame 32, if a mechanical load corresponding to the second threshold value is applied. This condition is illustrated in Fig. 3 by the weight-responsive sensor 14 being drawn in a dashed line.

[0054] Referring again to Figs. 2 and 3, the vehicle seat occupant detection and classification system 12 further includes an evaluation unit 20 that is arranged in a position close to the vehicle seat 10. The evaluation unit 20 is configured to evaluate the status of the weight-responsive sensor 14 for generating an output signal 28 that is based on a result of the evaluation and that is indicative of a seat occupancy status. To this end, a cable connection (not shown in Fig. 2) is installed between the evaluation unit 20 and the weight-responsive sensor 14.

[0055] Initiated by a vehicle control unit after starting the vehicle, the evaluation unit 20 is configured to evaluate the status of the weight-responsive sensor 14 periodically and autonomously. To this end, the evaluation unit 20 comprises a software module 26 that is implemented in a digital memory unit 22 of the evaluation unit 20 and that is accessible and executable by a processor unit 24 of the evaluation unit 20. Method steps of evaluating a status of the weight-

responsive sensor 14 and of, based on a result of the step of evaluating, generating the output signal 28 that is indicative of the seat occupancy status are converted into a program code of the software module 26. The output signal 28 generated by the evaluation unit 20 is provided to the vehicle control unit via a CAN communication link, as is well known in the art.

[0056] A schematic top view of the vehicle seat 10 with an installed alternative embodiment of the vehicle seat occupant detection and classification system 52 is shown in Fig 6. Only differences with regard to the former embodiment will be described in the following.

[0057] The alternative embodiment of the vehicle seat occupant detection and classification system 52 comprises a plurality of two bracket members 58₁, 58₂ and a plurality of four weight-responsive sensors 54, 56₁, 56₂, 56₃ that are designed as membrane switches. The first bracket member 58₁ serves as a holder for one weight-responsive sensor 54 and is identically designed to the bracket member 16 of the former embodiment. The additional second bracket member 58₂ serves as a holder for three weight-responsive sensors 56₁, 56₂, 56₃ and comprises four bracket portions 60, each of which is of rectangular shape as described for the earlier embodiment.

[0058] The first bracket member 58₁ is fixedly attached by an adhesive bond to a side edge 38 of the base frame 32. The second bracket member 58₂ is fixedly attached by an adhesive bond to the front edge 34 of the base frame 32. Both the first bracket member 58₁ and the second bracket member 58₂ are arranged in gaps of turns of one of the meandering suspension springs 44 so as to avoid mechanical contact with the suspension mat 42.

[0059] The evaluation unit 20 is configured to periodically evaluate statuses of the four weight-responsive sensors 54, 56₁, 56₂, 56₃ for generating an output signal 28 that is indicative of a seat occupancy class by forming logical combinations of the statuses of the plurality of weight-responsive sensors 54, 56₁, 56₂, 56₃. By way of example, one of the logical combinations is given by the status of the weight-responsive sensor 54 on the first bracket member 58₁ being equivalent to "loaded" and all of the statuses of the three weight-responsive sensors 56₁, 56₂, 56₃ on the second bracket member 58₂ being "unloaded". In this

case, the evaluation unit 20 is configured to generate an output signal 28 that is indicative of the seat occupancy class "lifeless object", and more specifically, for instance a child seat.

[0060] Another example of one of the logical combinations is given by the status of the weight-responsive sensor 54 on the first bracket member 58₁ being equivalent to "loaded" and at least two of the statuses of the three weight-responsive sensors 56₁, 56₂, 56₃ on the second bracket member 58₂ being "loaded". In this case, the evaluation unit 20 is configured to generate an output signal 28 that is indicative of the seat occupancy class "adult".

[0061] Further logical combinations are contemplated, making use of the fact that human seat occupants and lifeless objects create different spatial deflections of the seat foam member 40, an insight which can be exploited for characterizing seat occupancy classes by logical combinations of the statuses of weight-responsive sensors at their locations of attachment to the base frame 32.

[0062] The evaluation unit 20 may alternatively or additionally be configured to evaluate the statuses of the plurality of four weight-responsive sensors 54, 56₁, 56₂, 56₃ by matching the statuses to a plurality of pre-determined patterns of statuses of the plurality of four weight-responsive sensors 54, 56₁, 56₂, 56₃. Each of the pre-determined patterns comprises information on the status, in this particular embodiment a switching status, of each of the four weight-responsive sensors 54, 56₁, 56₂, 56₃. The plurality of pre-determined patterns of statuses may be stored in the digital memory unit 22 of the evaluation unit 20. The plurality of pre-determined patterns of statuses may reflect observations on the spatial deflection of the seat foam member 40 by human seat occupants in various seating postures and/or by various lifeless objects.

[0063] While the invention has been illustrated and described in detail in the drawings and foregoing description, such illustration and description are to be considered illustrative or exemplary and not restrictive; the invention is not limited to the disclosed embodiments.

[0064] Other variations to be disclosed embodiments can be understood and effected by those skilled in the art in practicing the claimed invention, from a study of the drawings, the disclosure, and the appended claims. In the claims, the

word “comprising” does not exclude other elements or steps, and the indefinite article “a” or “an” does not exclude a plurality. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage. Any reference signs in the claims should not be construed as limiting scope.

Legend of Reference Numbers:

10	vehicle seat	38	side edge
12	vehicle seat occupant detection and classification system	40	seat foam member
14	weight-responsive sensor	42	suspension mat
16	bracket member	44	suspension spring
18	bracket portion	46	mechanical load
20	evaluation unit	48	seating direction
22	digital memory unit	50	first deflection
24	processor unit	52	vehicle seat occupant detection and classification system
26	software module	54	weight-responsive sensor
28	output signal	56	weight-responsive sensor
30	seat base	58	bracket member
32	base frame	60	bracket portion
34	front edge	62	seat occupant
36	rear edge	64	passenger cabin floor

Claims

1. A vehicle seat occupant detection and classification system (12) for use in a vehicle seat (10), said vehicle seat (10) including a seat base (30) configured for taking up a seat cushion having at least one seat foam member (40), the seat base (30) and the seat cushion being provided for supporting a bottom of a seat occupant (62), the vehicle seat occupant detection and classification system (12) comprising
 - at least one weight-responsive sensor (14; 54, 56₁, 56₂, 56₃), and
 - at least one bracket member (16; 58), serving as a holder for the at least one weight-responsive sensor (14; 54, 56₁, 56₂, 56₃), wherein in an operational state, the at least one weight-responsive sensor (14; 54, 56₁, 56₂, 56₃) is arranged between the at least one seat foam member (40) and the at least one bracket member (16; 58),wherein the at least one bracket member (16; 58) is fixedly attached to a portion of the seat base (30) at a location below the at least one seat foam member (40) such that a portion of the vehicle seat (10) is configured to come into mechanical interaction with the at least one weight-responsive sensor (14; 54, 56₁, 56₂, 56₃) if a mechanical load corresponding to at least a first pre-determined threshold value is applied by a seat occupant (62) to and being directed towards the at least one weight-responsive sensor (14; 54, 56₁, 56₂, 56₃), and is configured to change a status of the at least one weight-responsive sensor (14; 54, 56₁, 56₂, 56₃) if a mechanical load corresponding to at least a second pre-determined threshold value is applied, and wherein a relative movement between the portion of the seat base (30) to which the at least one bracket member (16; 58) is attached and the at least one weight-responsive sensor (14; 54, 56₁, 56₂, 56₃) is at least excluded for applied mechanical loads that are smaller than the first pre-determined threshold value.
2. The vehicle seat occupant detection and classification system (12) as claimed in claim 1, further comprising an evaluation unit (20) that is configured to evaluate a status of the at least one weight-responsive sensor (14; 54, 56₁,

56₂, 56₃) for generating an output signal (28) that is based on a result of the evaluation and that is indicative of at least one out of a seat occupancy status and a seat occupancy class,

3. The vehicle seat occupant detection and classification system (12) as claimed in claim 1 or 2, wherein the at least one bracket member (16) comprises at least two bracket portions (18₁, 18₂, 18₃) shaped as rectangular plates, wherein the at least one bracket member (16) is fixedly attached to the seat base (30) by a first plate of the at least two rectangular plates, the at least one weight-responsive sensor (14) is held by a second plate of the at least two rectangular plates, and the at least two rectangular plates are mutually fixedly attached in a pairwise manner.
4. The vehicle seat occupant detection and classification system (12) as claimed in any one of claims 1 to 3, wherein the at least one weight-responsive sensor (14; 54, 56₁, 56₂, 56₃) is selected from a group formed by a resistive pressure sensor, a micro-switch or a membrane switch.
5. The vehicle seat occupant detection and classification system (12) as claimed in any one of the preceding claims, comprising a plurality of weight-responsive sensors (14; 54, 56₁, 56₂, 56₃) and a plurality of bracket members (16; 58), wherein each bracket member (16; 58) serves as a holder for at least one weight-responsive sensor (14; 54, 56₁, 56₂, 56₃) of the plurality of weight-responsive sensors.
6. The vehicle seat occupant detection and classification system (12) as claimed in any one of the preceding claims, wherein the at least one bracket member (16; 58) or at least one bracket member (16; 58) of the plurality of bracket members is resiliently deflectable in the direction of the mechanical load that is applied towards at least one of the weight-responsive sensors (14; 54, 56₁, 56₂, 56₃) held by the bracket member (16; 58), by a distance of at least 5 mm at a location that is distal to the location of attachment of the bracket member (16; 58) to the seat base (30), if a mechanical load corresponding to the second threshold value is applied.
7. The vehicle seat occupant detection and classification system (12) as claimed in claim 5 or 6, wherein the evaluation unit (20) is configured to evaluate the

statuses of the plurality of weight-responsive sensors (14; 54, 56₁, 56₂, 56₃) for generating the output signal (28) by forming at least one logical combination of at least a subset of the statuses of the plurality of weight-responsive sensors (14; 54, 56₁, 56₂, 56₃).

8. The vehicle seat occupant detection and classification system (12) as claimed in any one of the preceding claims, wherein the evaluation unit (20) is configured to evaluate the statuses of the plurality of weight-responsive sensors (14; 54, 56₁, 56₂, 56₃) by matching the statuses to a plurality of pre-determined patterns of statuses of the plurality of weight-responsive sensors (14; 54, 56₁, 56₂, 56₃).
9. A method of detecting and classifying an occupancy of a vehicle seat (10), the method comprising steps of:
 - providing a vehicle seat occupant detection and classification system (12) according to any one of claims 1 to 8,
 - fixedly attaching the at least one bracket member (16; 58) with the at least one weight-responsive sensor (14; 54, 56₁, 56₂, 56₃) to the seat base (30) at a location below the at least one seat foam member (40),
 - evaluating a status of the at least one weight-responsive sensor (14; 54, 56₁, 56₂, 56₃), and
 - based on a result of the step of evaluating, generating an output signal (28) that is indicative of at least one out of a seat occupancy status and a seat occupancy class.
10. The method of detecting and classifying an occupancy of a vehicle seat (10) as claimed in claim 9, wherein the step of evaluating comprises forming at least one logical combination of at least a subset of the statuses of the plurality of weight-responsive sensors (14; 54, 56₁, 56₂, 56₃).
11. The method of detecting and classifying an occupancy of a vehicle seat (10) as claimed in claim 9 or 10, wherein the step of evaluating comprises matching the statuses of the plurality of weight-responsive sensors (14; 54, 56₁, 56₂, 56₃) to a plurality of pre-determined patterns of statuses of the plurality of weight-responsive sensors (14; 54, 56₁, 56₂, 56₃).

12. A vehicle seat (10), comprising

a seat structure for erecting the vehicle seat (10) on a passenger cabin floor (64) of the vehicle,

a seat cushion having at least one seat foam member (40),

a seat base (30) supported by the seat structure and configured for receiving the seat cushion, the seat base (30) and the seat cushion being provided for supporting a bottom of a seat occupant (62), and

a vehicle seat occupant detection and classification system (12) as claimed in any one of claims 1 to 8.

13. The vehicle seat (10) as claimed in claim 12, wherein the seat base (30) comprises a base frame (32) and a plurality of suspension springs (44) connected to the base frame (32).

14. A software module (26) for carrying out the method of classifying an occupancy of a vehicle seat (10) as claimed in any one of claims 9 to 11, wherein the method steps to be conducted are converted into a program code of the software module (26), wherein the program code is implementable in a digital memory unit (22) of the evaluation unit (20) or a separate vehicle control unit and is executable by a processor unit (24) of the evaluation unit (20) or the separate vehicle control unit.

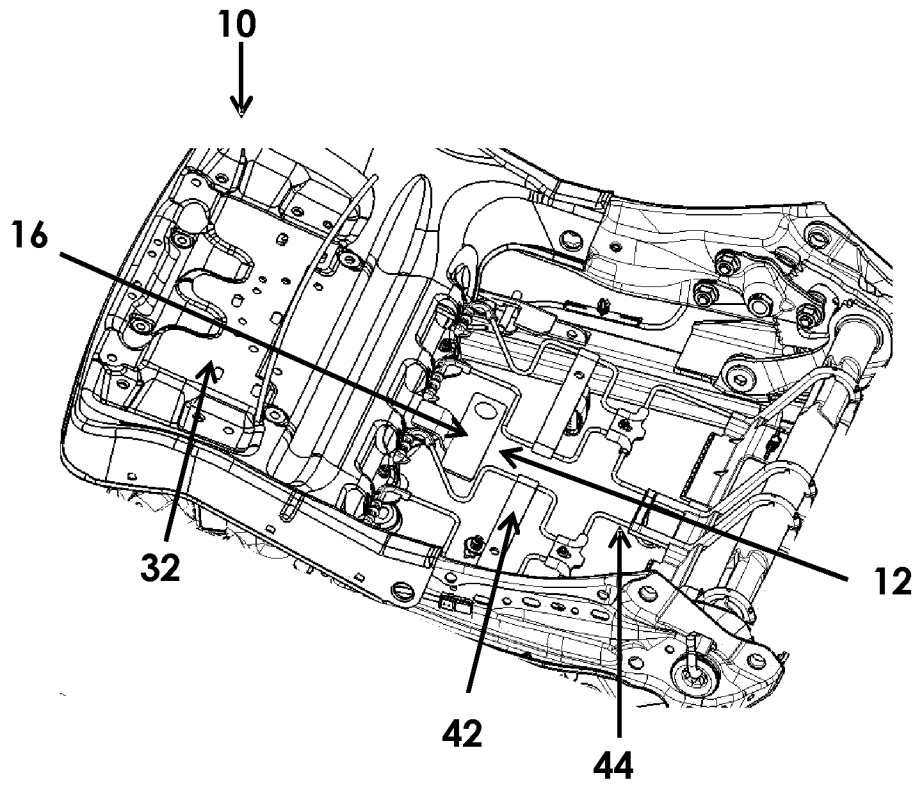


Fig. 1

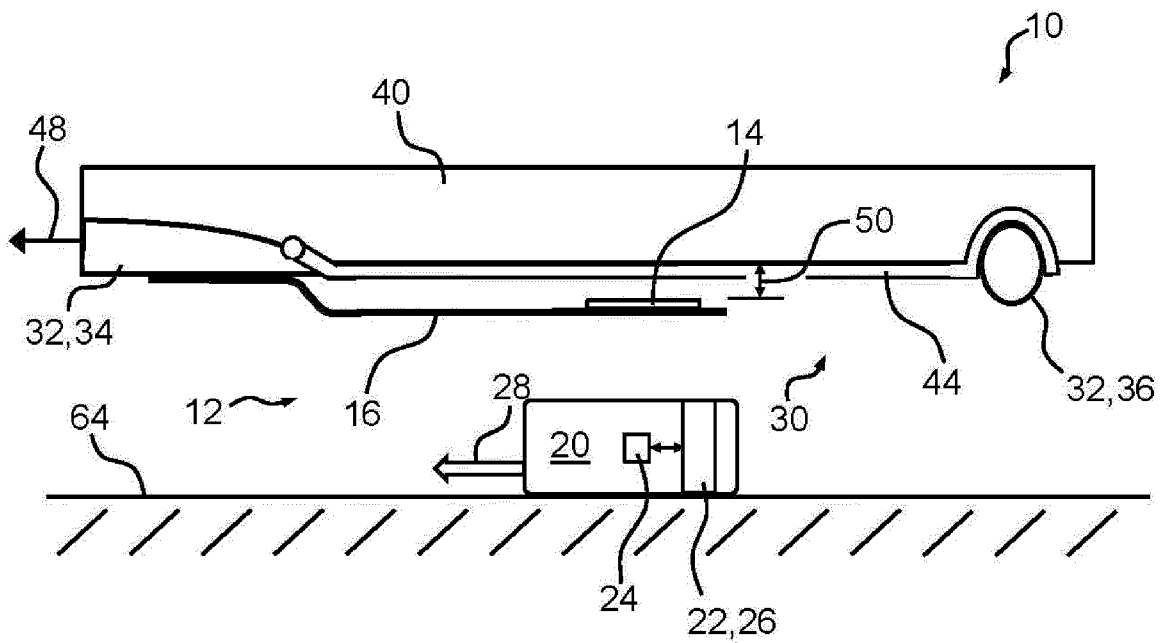


Fig. 2

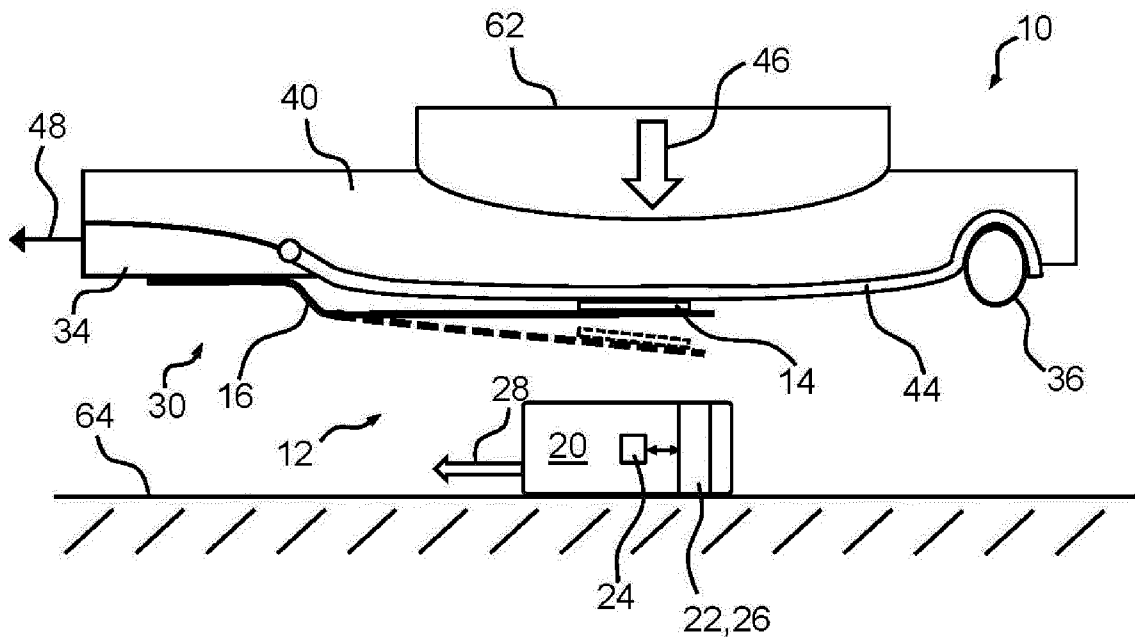


Fig. 3

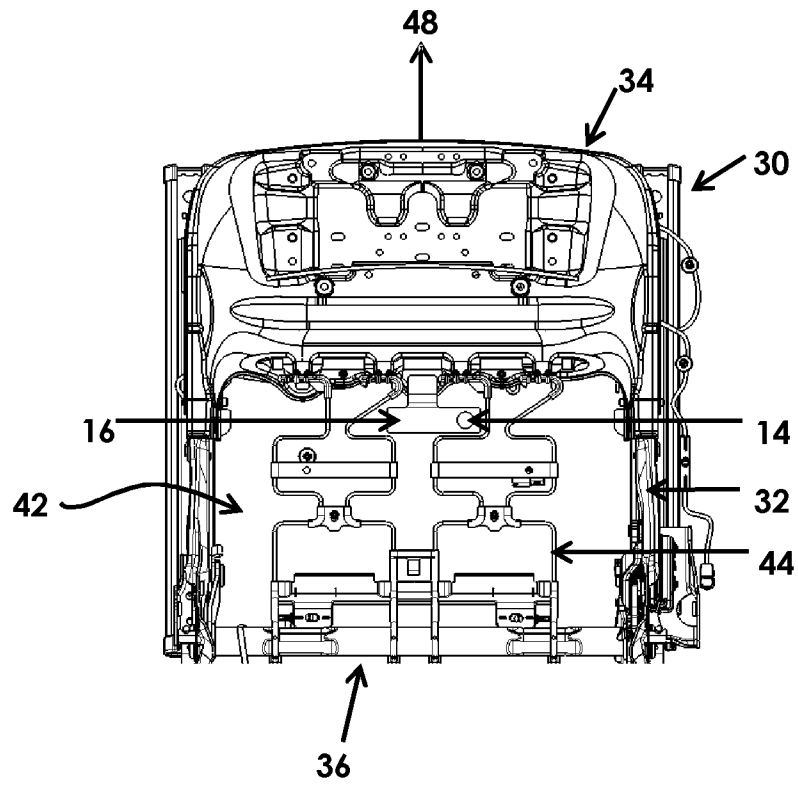


Fig. 4

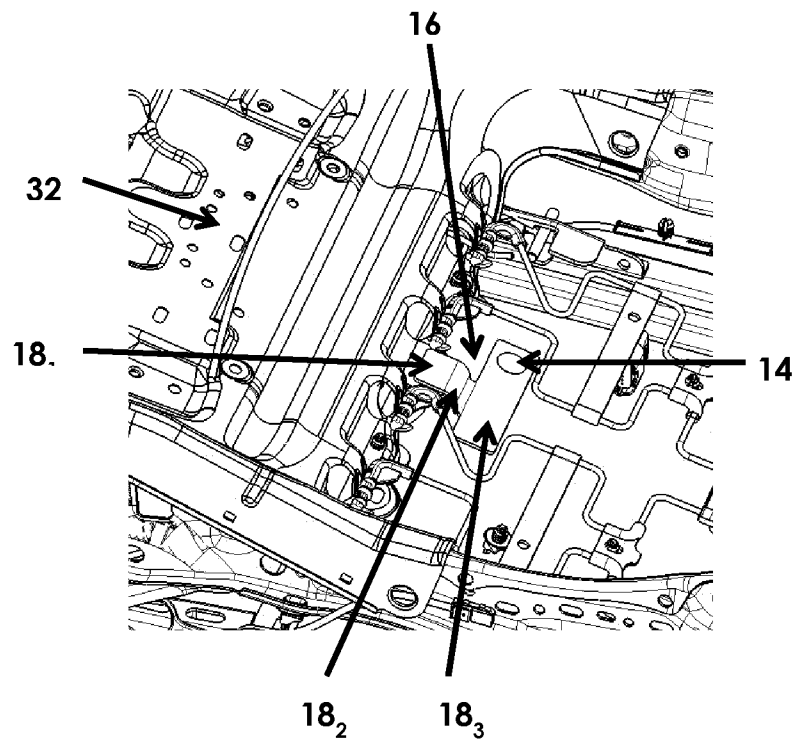


Fig. 5

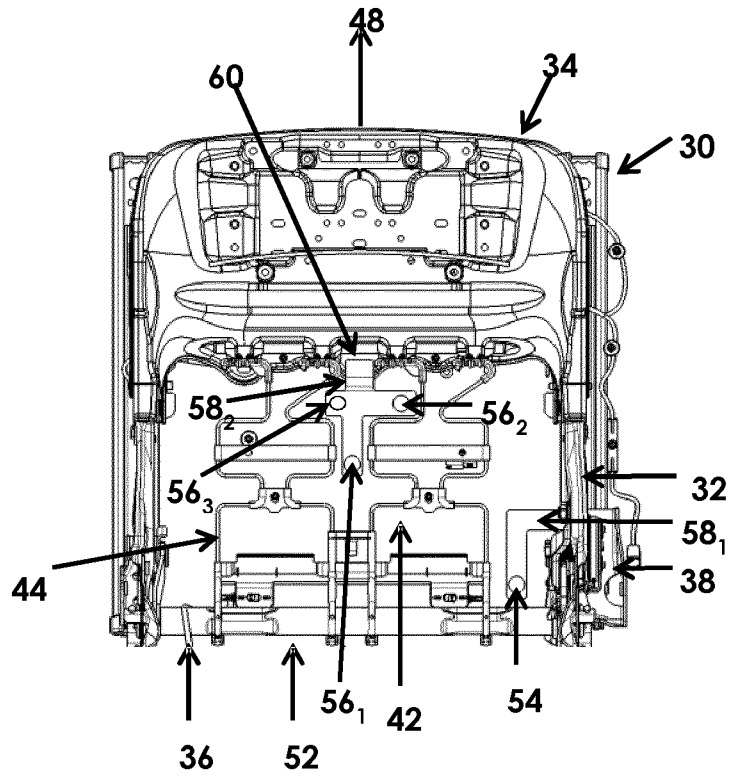


Fig. 6

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2016/053758

A. CLASSIFICATION OF SUBJECT MATTER
INV. B60N2/00 B60N2/70
ADD.
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
B60N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2014/017563 A1 (FUJIKURA LTD [JP]) 30 January 2014 (2014-01-30) abstract; figures 1,3,5-7,10-12,17,19 -----	1-14
X	EP 2 727 497 A1 (FUJIKURA LTD [JP]) 7 May 2014 (2014-05-07) paragraphs [0055] - [0210]; figures 1,2,4B,7A,8,9,17,22A, -----	1-14
X	JP H08 64056 A (NHK SPRING CO LTD) 8 March 1996 (1996-03-08) abstract; figures 1-6 -----	1-14
A	US 2009/107258 A1 (SAITOH YUKIHIRO [JP] ET AL) 30 April 2009 (2009-04-30) paragraphs [0056] - [0124]; figures 3A-3D,5,7,10-15 -----	1-14
	-/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search 3 May 2016	Date of mailing of the international search report 19/05/2016
---	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Lotz, Klaus-Dieter
--	--

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2016/053758

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 662 138 B1 (TAKAFUJI TETSUYA [JP] ET AL) 9 December 2003 (2003-12-09) column 6, line 28 - column 18, line 5; figures 1-15	1-14
A	----- US 2005/090958 A1 (HATTORI KATSU [JP] ET AL) 28 April 2005 (2005-04-28) paragraphs [0029] - [0105]; figures 1,3,4B-13 -----	1-14

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2016/053758

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
WO 2014017563	A1	30-01-2014	CN 104487285 A	01-04-2015
			EP 2878483 A1	03-06-2015
			WO 2014017563 A1	30-01-2014

EP 2727497	A1	07-05-2014	CN 103582438 A	12-02-2014
			EP 2727497 A1	07-05-2014
			JP 5747078 B2	08-07-2015
			JP W02013002289 A1	23-02-2015
			WO 2013002289 A1	03-01-2013

JP H0864056	A	08-03-1996	JP 3639617 B2	20-04-2005
			JP H0864056 A	08-03-1996

US 2009107258	A1	30-04-2009	DE 102008053626 A1	10-06-2009
			US 2009107258 A1	30-04-2009

US 6662138	B1	09-12-2003	JP 4513190 B2	28-07-2010
			JP 2001201412 A	27-07-2001
			US 6662138 B1	09-12-2003

US 2005090958	A1	28-04-2005	JP 4007293 B2	14-11-2007
			JP 2005088738 A	07-04-2005
			US 2005090958 A1	28-04-2005
