

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 October 2009 (08.10.2009)

(10) International Publication Number
WO 2009/121311 A1

- (51) International Patent Classification:
H04W 40/06 (2009.01)
- (21) International Application Number:
PCT/CN2009/071185
- (22) International Filing Date:
7 April 2009 (07.04.2009)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/042,675 4 April 2008 (04.04.2008) US
12/418,476 3 April 2009 (03.04.2009) US
- (71) Applicant (for all designated States except US):
HUAWEI TECHNOLOGIES CO., LTD. [CN/CN];
Huawei Administration Building, Bantian, Longgang District, Shenzhen, Guangdong 518129 (CN).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **TANG, Yang** [AU/US]; 11533 Windcrest Ln. 142, San Diego, California 92128 (US). **KWON, Young Hoon** [KR/US]; 9155 Judicial Dr., #5530, San Diego, California 92122 (US).

- (74) Agent: **UNITALEN ATTORNEYS AT LAW**; 7th Floor, Scitech Place, No. 22, Jian Guo Men Wai Ave., Chao Yang District, Beijing 100004 (CN).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

[Continued on next page]

(54) Title: SYSTEM AND METHOD FOR MULTI-STAGE ZERO FORCING BEAMFORMING IN A WIRELESS COMMUNICATIONS SYSTEM

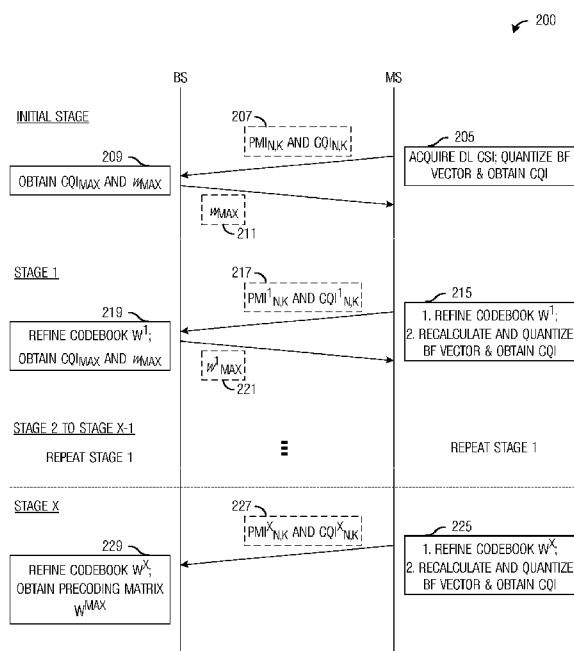


Fig. 2

(57) Abstract: A system and method for multi-stage zero forcing beamforming in a wireless communications system is provided. A method includes receiving feedback information from each mobile station (MS) in a first plurality of mobile stations (MSs), selecting a first MS from the first plurality of MSs, and broadcasting information related to the first MS to the first plurality of MSs. The first MS having a largest value of a first metric based on the feedback information received from the first plurality of MSs. The method also includes receiving feedback information from each MS in a second plurality of MSs, selecting a second MS from the second plurality of MSs, and creating a precoding matrix from feedback information from the first MS and the second MS. The second MS having a largest value of a second metric based on the feedback information received from the second plurality of MSs. A system and method for multi-stage zero forcing beamforming in a wireless communications system is provided. A method includes receiving feedback information from each mobile station (MS) in a first plurality of mobile stations (MSs), selecting a first MS from the first plurality of MSs, and broadcasting information related to the first MS to the first plurality of MSs. The first MS having a largest value of a first metric based on the feedback information received from the first plurality of MSs. The method also includes receiving feedback information from each MS in a second plurality of MSs, selecting a second MS from the second plurality of MSs, and creating a precoding matrix from feedback information from the first MS and the second MS. The second MS having a largest value of a second metric based on the feedback information received from the second plurality of MSs.

WO 2009/121311 A1

- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))* **Published:** — *with international search report (Art. 21(3))*

System and Method for Multi-Stage Zero Forcing Beamforming in a Wireless Communications System

[0001] This application claims the benefit of U.S. Patent Application No. 12/418,476 filed on April 3, 2009 and entitled “System and Method for Multi-Stage Zero Forcing Beamforming in a Wireless Communications System”, and the benefit of U.S. Provisional Application No. 61/042,675, filed on 04/04/2008, entitled “Multiple Stages Zero Forcing Beamforming,” which are hereby incorporated herein by reference.

TECHNICAL FIELD

[0002] The present invention relates generally to wireless communications, and more particularly to a system and method for multi-stage zero forcing beamforming in a wireless communications system.

BACKGROUND

[0003] In general, zero forcing beamforming (ZFBF) is a linear precoding scheme that decouples a multiuser channel into multiple independent sub-channels and reduces a precoder design into a power allocation problem. Typically, ZFBF performs well in high signal-to-noise ratio (SNR) environments. Furthermore, it is possible to incorporate additional techniques into ZFBF, such as dirty paper coding (DPC), to help improve performance.

[0004] Closed loop multi-user multiple input and multiple output (MU-MIMO) technologies recently have attracted significant attention from both standardization bodies and telecommunication industries around the world. By jointly taking advantage of multiuser diversity and inherent space-time diversity of MIMO system, MU-MIMO can significantly

-2-

improve system throughput and achieve higher bandwidth efficiency compared to conventional single user MIMO.

[0005] ZFBF is a promising candidate of close loop MU-MIMO technologies for next generation wireless communication systems. However, inherent quantization error accumulation and poor signal and interference to noise ratio (SINR) estimation may prevent ZFBF from commercialization.

SUMMARY OF THE INVENTION

[0006] These and other problems are generally solved or circumvented, and technical advantages are generally achieved, by embodiments of a system and method for multi-stage zero forcing beamforming.

[0007] In accordance with an embodiment, a method for performing zero forcing beamforming at a base station (BS) of a wireless communications system is provided. The method includes receiving feedback information from each mobile station (MS) in a first plurality of mobile stations (MSs), selecting a first MS from the first plurality of MSs, and broadcasting information related to the first MS to the first plurality of MSs. The first MS having a largest value of a first metric based on the feedback information received from the first plurality of MSs. The method also includes receiving feedback information from each MS in a second plurality of MSs, selecting a second MS from the second plurality of MSs, and creating a precoding matrix from feedback information from the first MS and the second MS. The second plurality of MSs is a subset of the first plurality of MSs, and the second MS having a largest

value of a second metric based on the feedback information received from the second plurality of MSs.

[0008] In accordance with another embodiment, a method for performing zero forcing beamforming at a mobile station (MS) of a wireless communications system is provided. The wireless communications system having a base station (BS). The method includes measuring a channel state information (CSI) of a communications channel between the BS and the MS, selecting a first codeword from a codebook representing a quantized version of the CSI, and transmitting an index of the first codeword and channel quality information (CQI) corresponding to the first codeword to the BS. The method also includes receiving an indication of a selected MS from the BS, refining the codebook based on the indication, selecting a second codeword representing a quantized version of the CSI from the refined codebook, and transmitting an index of the second codeword and channel quality information (CQI) corresponding to the second codeword to the BS.

[0009] In accordance with another embodiment, a method for performing zero forcing beamforming at a base station (BS) of a wireless communications system is provided. The BS is capable of actively supporting X mobile stations (MSs). The method includes selecting a first mobile station (MS) based on feedback information from a first plurality of MSs, broadcasting information related to the first MS to the first plurality of MSs, selecting a second MS based on feedback information from a second plurality of MSs, and broadcasting information related to the second MS to the second plurality of MSs. The method also includes selecting a third MS based on feedback information from a third plurality of MSs, and creating a precoding matrix from feedback information from the first MS, the second MS, and the third MS.

[0010] In accordance with another embodiment, a method for performing zero forcing beamforming at a mobile station (MS) of a wireless communications system is provided. The wireless communications system having a base station (BS) that is capable of actively supporting X mobile stations (MSs). The method includes measuring a channel state information (CSI) of a communications channel between the BS and the MS, computing a first feedback information based on the CSI, and transmitting the first feedback information to the BS. The method also includes receiving a first indication of a first selected MS from the BS, computing a second feedback information based on the first indication, and transmitting the second feedback information to the BS. The method further includes receiving a second indication of a second selected MS from the BS, computing a third feedback information based on the second indication, and transmitting the second feedback information to the BS.

[0011] In accordance with another embodiment, a method for wirelessly communicating in a wireless communications system is provided. The method includes performing a multi-stage zero forcing beamforming (MS ZFBF) to select a set of mobile stations (MSs) from a plurality of MSs in the wireless communications system, computing a precoding matrix based on results of the MS ZFBF, and transmitting to mobile stations in the set of MSs. The transmissions to each MS in the set of MSs uses an entry in the precoding matrix corresponding to the MS.

[0012] An advantage of an embodiment is that mobile stations compute their respective precoding vectors. This helps to diminish the accumulation of quantization error inherent in typical ZFBF and helps to improve performance.

[0013] A further advantage of an embodiment is that a predefined codebook may be updated based on broadcast information provided by a base station. The updated codebook helps to make

codewords in the codebook orthogonal to beamforming vectors. This helps to effectively increase codebook quantization resolution without enlarging codebook size.

[0014] Yet another advantage of an embodiment is that beamforming vectors provided by a base station help to make estimates of channel quality indicator by mobile stations more accurate.

[0015] The foregoing has outlined rather broadly the features and technical advantages of the present invention in order that the detailed description of the embodiments that follow may be better understood. Additional features and advantages of the embodiments will be described hereinafter which form the subject of the claims of the invention. It should be appreciated by those skilled in the art that the conception and specific embodiments disclosed may be readily utilized as a basis for modifying or designing other structures or processes for carrying out the same purposes of the present invention. It should also be realized by those skilled in the art that such equivalent constructions do not depart from the spirit and scope of the invention as set forth in the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] For a more complete understanding of the embodiments, and the advantages thereof, reference is now made to the following descriptions taken in conjunction with the accompanying drawings, in which:

[0017] Figure 1 is a diagram of a wireless communications system;

[0018] Figure 2 is a transmission flow diagram of transmissions occurring during a multi-stage zero forcing beamforming for computing a precoding matrix;

[0019] Figures 3a through 3c are flow diagrams of mobile station operations during an initial stage, an intermediate stage, and a final stage of a multi-stage zero forcing beamforming;

[0020] Figures 4a through 4c are flow diagrams of base station operations during an initial stage, an intermediate stage, and a final stage of a multi-stage zero forcing beamforming;

[0021] Figures 5a and 5b are flow diagrams of mobile station operations during a first stage and a second stage of a multi-stage zero forcing beamforming;

[0022] Figures 6a and 6b are flow diagrams of base station operations during a first stage and a second stage of a multi-stage zero forcing beamforming; and

[0023] Figure 7 is a flow diagram of base station operations in communicating with a mobile station.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

[0024] The making and using of the embodiments are discussed in detail below. It should be appreciated, however, that the present invention provides many applicable inventive concepts that can be embodied in a wide variety of specific contexts. The specific embodiments discussed are merely illustrative of specific ways to make and use the invention, and do not limit the scope of the invention.

[0025] The embodiments will be described in a specific context, namely an orthogonal frequency division multiple access (OFDMA) wireless communications making use of multi-user multiple input, multiple output (MU-MIMO). The invention may be applied to a wide variety of wireless communications systems using a wide variety of transmission mechanisms,

such as time division duplex (TDD), frequency division duplex (FDD), or code division duplex (CDD).

[0026] Figure 1 illustrates a wireless communications system 100. Wireless communications system 100 includes a base station (BS) 105. BS 105 may be responsible for serving mobile stations (MSs) operating within its coverage area, including but not limited to MSs 110 through 114. In general, BS 105 may transmit information for a MS over a downlink (DL) and allocate resources to a MS on an uplink (UL) based on a resource request for the MS. In order to more efficiently utilize available bandwidth, BS 105 and MSs 110 through 114 may use MU-MIMO, which may allow simultaneous transmissions to multiple MSs or simultaneous transmissions from one or more MSs. Generally, the number of simultaneous transmissions may be dependent on factors such as communications system configuration, number of transmit antennas, number of receive antennas, and so forth.

[0027] As discussed above, ZFBF may have several problems that impact its performance in a MU-MIMO environment: quantization error accumulation and poor signal and interference to noise ratio (SINR) estimation. A multi-stage ZFBF, as described below, may help to reduce quantization error accumulation and poor SINR estimation by performing precoder design at MSs rather than in the BS. Quantization error accumulation may be reduced since the MSs have an exact representation of a channel between the BS and the MS. If the precoder design is performed at the BS as in ZFBF, a quantized version of the channel (provided by the MS to the BS) would be used since quantization is required to help reduce feedback bandwidth. The use of the quantized version of the channel may lead to quantization error accumulation. Similarly,

SINR estimation performed at the MS yields better results than SINR estimation performed at the BS.

[0028] Figure 2 illustrates a transmission flow diagram of transmissions occurring during a multi-stage ZFBF 200 for computing a precoding matrix in a wireless communications system. In general, a multi-stage ZFBF occurs periodically in a wireless communications system. A frequency that a multi-stage ZFBF occurs may be dependent on factors such as expected mobility of MSs, desired accuracy of a precoding matrix, amount of overhead to be dedicated to determining a precoding matrix, and so forth. For example, if MSs in a wireless communications system have high mobility, then a frequency of multi-stage ZFBF should be high to help keep a precoding matrix accurate as the MSs move around, while if MSs have very slow mobility, then a frequency may be low without significant performance penalty.

[0029] Alternatively, rather than specifying a frequency for performing a multi-stage ZFBF to compute a precoding matrix, an occurrence of an event may be used to trigger a performing of a multi-stage ZFBF. For example, a specified event may be when a metric exceeds a threshold. Examples of metrics may include error rates (such as bit-error rate, frame-error rate, packet-error rate, and so forth), measurable values (such as SINR, signal to noise ratio (SNR), and so on), etc. The specified event may occur at either the BS or the MSs or both.

[0030] For discussion purposes, let a BS, such as BS 105, have N_{BS} transmit antennas and serves up to K active MSs (such as MSs 110 through 114), and a k-th MS (MS_k) may have N_{MS}^k receive antennas. Furthermore, a MIMO channel between BS and MS_k is denoted H_k , where

$H_k H_k^H = U_k \Sigma_k U_k^H$, in which $U_k = [u_{k1}, \dots, u_{kN_{BS}}]$ is a $N_{BS} \times N_{BS}$ unitary matrix and Σ is a

diagonal matrix with $H_k H_k^H$'s eigenvalues along its right diagonal in a non-increasing order.

Also, a predefined codebook $W = \{w_1, w_2, \dots, w_M\}$ is known for both BS 105 and all BSs.

Codebook W consists of M codewords, with the i -th codeword being represented by w_i .

[0031] Multi-stage ZFBF 200 comprises multiple stages, with a number of stages being a function of a number of active MSs that the BS can support. In general, for X active MSs that the BS can support, multi-stage ZFBF 200 includes $X+1$ stages. A first stage of multi-stage ZFBF 200 may be referred to as an initial stage.

[0032] The initial stage may involve user selection and may begin at MSs desiring to communicate. At these MSs, channel state information (CSI) for a DL may be acquired by the MSs (block 205). The discussion of MS operation describes the operations taking place at a single MS. However, the operations actually take place at a number of MSs. The operations at the different MSs may be occurring substantially concurrently to one another. Therefore, the description of MS operation should not be construed as being limiting to either the scope or spirit of the embodiments. A MS (for example, MS_k) may acquire the CSI for the DL by measuring a pilot transmitted by the BS, for example. Alternatively, MS_k may measure transmissions made on the DL by the BS over time to acquire the CSI.

[0033] In addition to acquiring the CSI, MS_k may quantize one or more of the column vectors of U_k with the predefined codebook W (block 205). The quantized beamforming vectors of specified channels may be represented by codewords of the codebook W . A variety of codeword selection metrics may be used and may be selected based on factors such as desired accuracy, available processing capability of MS_k , and so on. Examples of a codeword selection

-10-

metric include SNR, SINR, and so forth. In addition to the quantized beamforming vectors, channel quality information (CQI) associated with the selected codewords may be obtained (block 205). MS_k may then transmit indices of the selected codewords (PMI_{n,k}) and associated CQI (CQI_{n,k}) back to the BS (transmission 207).

[0034] At the BS, the BS may receive the indices of the selected codewords (PMI_{n,k}) and associated CQI (CQI_{n,k}) from each of the MSs desiring to communicate (over transmission 207, for example). In general, the BS will receive PMI_{n,k} and CQI_{n,k} from N_k MSs. Let the n-th PMI and CQI from MS_k be denoted PMI_{n,k} and CQI_{n,k}, where $n \in \{0,1,\dots,N_k\}$ and $k \in \{0,1,\dots,K\}$.

The BS may then select the MS with the largest CQI, $CQI_{\max} = \max_{\substack{k \in \{0,\dots,K\} \\ n \in \{0,\dots,N_k\}}} (CQI_{n,k})$ (block 209) and

broadcasts the corresponding codeword, denoted w_{\max} , or its PMI, denoted by PMI_{\max} , to all MSs (transmission 211).

[0035] Stage 1 may then begin. At MS_k, codebook \mathcal{W} may be refined based on broadcast w_{\max} or PMI_{\max} (block 215). The refined codebook is expressible as $\mathcal{W}^1 = \{w_1^1, w_2^1, \dots, w_M^1\}$, in which codeword w_i^1 is defined as $w_i^1 = w_i - w_i w_{\max}^H w_{\max}$. Based on codeword w_{\max} and U_k , MS_k also recalculates the beamforming vectors (block 215), given as $u_{ki}^1 = u_{ki} - u_{ki} w_{\max}^H w_{\max}$, where u_{ki}^1 represents the refined i-th beamforming vector of MS_k at stage 1. Refined vector u_{ki}^1 may then be quantized and represented by one of the codewords in codebook \mathcal{W}^1 . Additionally, CQI associated with the selected codeword is also obtained (block 215). Finally, the PMI of selected codewords in \mathcal{W}^1 ($PMI_{n,k}^1$) and associated CQI ($CQI_{n,k}^1$) are feedback from MS_k to BS (transmission 217).

-11-

[0036] At the BS, the BS receives N_k^1 PMI and CQI from MS_k. Let $PMI_{n,k}^1$ and $CQI_{n,k}^1$ denote the PMI and CQI of the n-th PMI and CQI of MS k at stage 1, where $n \in \{0,1, \dots, N_k^1\}$ and $k \in \{0,1, \dots, K\}$. The BS also refines its codebook based on the received transmissions (block 219). The BS selects the MS with the largest CQI among all stage 1 feedback, denoted by $CQI_{\max}^1 = \max_{\substack{k \in \{0, \dots, K\} \\ n \in \{0, \dots, N_k^1\}}} (CQI_{n,k}^1)$ (block 219), and broadcasts the corresponding PMI, denoted by PMI_{\max}^1 , (or its corresponding codeword) to all MSs (transmission 221). The codeword corresponding to PMI_{\max}^1 at stage 1 is denoted by w_{\max}^1 .

[0037] In general, once a MS has been selected by the BS, it is no longer considered for selection of the MS with the largest CQI. Alternatively, once a MS has been selected by the BS, it no longer participates in multi-stage ZFBF 200. Hence, the number of MSs being considered by the BS at a stage is less than the number of MSs being considered by the BS at a previous stage.

[0038] Stages 2 through X-1 are substantially iterations of stage 1. At MS_k, the MS_k may continue to refine its codebook based on the PMI_{\max}^{L-1} or w_{\max}^{L-1} broadcast by the BS, where L is the stage number; recalculate and quantize a beamforming vector based on the refined codebook; and then transmit back to the BS, $PMI_{n,k}^{L-1}$ and $CQI_{n,k}^{L-1}$. While at the BS, the BS receives $PMI_{n,k}^{L-1}$ and $CQI_{n,k}^{L-1}$ from the MSs and refines its codebook. Furthermore, the BS selects the MS with the largest CQI among all stage $L-1$ feedback, denoted $CQI_{\max}^{L-1} = \max_{\substack{k \in \{0, \dots, K\} \\ n \in \{0, \dots, N_k^{L-1}\}}} (CQI_{n,k}^{L-1})$, and

-12-

broadcast the corresponding PMI, denoted $PMI_{n,k}^{L-1}$, (or its corresponding codeword) to all MSs.

The codeword corresponding to $PMI_{n,k}^{L-1}$ at stage $L-1$ is denoted by w_{\max}^{L-1} .

[0039] Stage X. At MS_k, the MS_k may receive broadcasted PMI_{\max}^{X-1} from stage X-1 or corresponding codeword w_{\max}^{X-1} . The MS_k refine its codebook W^{X-1} based on the received broadcast (block 225). The refined codebook is denote by $W^X = \{w_1^X, w_2^X, \dots, w_M^X\}$, in which codeword w_i^X is defined as $w_i^X = w_i^X - w_i^X (w_{\max}^{X-1})^H w_{\max}^{X-1}$. The MS_k may also recalculate beamforming vectors, given as $u_{ki}^X = u_{ki}^{X-1} - u_{ki}^{X-1} (w_{\max}^{X-1})^H w_{\max}^{X-1}$, where u_{ki}^{X-1} represents the refined i-th beamforming vector of MS k at stage X-1 and u_{ki}^{X-1} represents the refined i-th beamforming vector of MS k at stage X. u_{ki}^X can be quantized and represented by a codeword in codebook W^X (block 225). Furthermore, CQI associated with selected codeword is also obtained. The PMI of the selected codewords ($PMI_{n,k}^X$) and associated CQI ($CQI_{n,k}^X$) are feedback to the BS (transmission 227).

[0040] At the BS, the BS receives N_k^X PMI and CQI from MS_k. Let $PMI_{n,k}^X$ and $CQI_{n,k}^X$ denote the PMI and CQI of the n-th PMI and CQI of MS_k at stage X, where $n \in \{0,1, \dots, N_k^X\}$ and $k \in \{0,1, \dots, K\}$. The BS may then refine its codebook with the received information. The BS selects the MS with the largest CQI among all Stage X feedback, denoted

by $CQI_{\max}^X = \max_{\substack{k \in \{0, \dots, K\} \\ n \in \{0, \dots, N_k^X\}}} (CQI_{n,k}^X)$. The codeword corresponding to PMI_{\max}^X at stage X is denoted

by w_{\max}^X . The ZFBF precoding matrix may then be obtained at the BS and may be expressed as

-13-

$W^{\max} = [w_{\max}, w_{\max}^1, \dots, w_{\max}^X]$. The ZFBF precoding matrix comprises the w_{\max} terms associated with MSs selected by the BS at each stage of multi-stage ZFBF 200.

[0041] Although the above discussion focuses on a multi-stage ZFBF wherein the number of stages in the multi-stage ZFBF is on the order of the number of MSs that the BS can actively support. However, since the multi-stage ZFBF may need to be repeated performed in rapid succession, having to iterate over so many stages may result in significant overhead that negatively impacts performance. Therefore, an alternate embodiment of the multi-stage ZFBF may have a fixed number of stages that is independent of the number of MSs that the BS can actively support. In such an embodiment, the multi-stage ZFBF may be used to allow for the fixed number of terms (i.e., vectors) in the precoding matrix to be computed at the MSs (the MSs having the largest CQI values) without incurring quantization error accumulation and using full unquantized CSI, while, the BS may compute the remainder of the terms in the precoding matrix using quantized CSI provided by the MSs.

[0042] Figure 3a illustrates a flow diagram of MS operations 300 in an initial stage of a multi-stage ZFBF to compute a precoding matrix. MS operations 300 may be descriptive of operations taking place in a MS, such as MS_k , of a number of MS desiring to communicate. MS operations 300 may occur each time a multi-stage ZFBF is performed to compute a precoding matrix.

[0043] MS operations 300 may begin with the MS acquiring CSI of a DL between a BS and the MS (block 305). The MS may acquire the CSI of the DL by measuring a pilot (or pilots) transmitted by the BS. Alternatively, the MS may acquire the CSI of the DL by measuring transmissions made by the BS over time. After acquiring the CSI of the DL, the MS may

-14-

compute (block 307) and then quantize (block 309) a beamforming vector(s). The beamforming vectors may be quantized by selecting codewords from a codebook W , which is known at both the MS and the BS. In addition to selecting the codewords, the MS may obtain CQI associated with the selected codewords (block 311). The MS may then transmit indices of the codewords (PMI) and the CQI back to the BS (block 313). MS operations 300 may then terminate.

[0044] Figure 3b illustrates a flow diagram of MS operations 330 in an intermediate stage of a multi-stage ZFBF to compute a precoding matrix. MS operations 330 may be descriptive of operations taking place in a MS, such as MS_k , of a number of MS desiring to communicate. MS operations 330 may occur each time a multi-stage ZFBF is performed to compute a precoding matrix. The number of times that MS operations 330 occurs may be dependent on the number of MSs that the BS may actively support. For example, with X MSs, MS operations 330 may occur a total of $X-1$ times.

[0045] MS operations 330 may begin with the MS receiving either w_{\max} or PMI_{\max} that was broadcast by the BS at the end of a prior stage of the multi-stage ZFBF (block 335). Typically, the BS will broadcast PMI_{\max} since it may require less information to transmit. For example, if L represents the stage number, then the MS may receive PMI_{\max}^{L-1} or w_{\max}^{L-1} from the BS. The MS may then use w_{\max} or PMI_{\max} to refine its codebook W . The MS may produce codebook W^L from codebook W^{L-1} , for example, if $L=1$, the refined codebook is expressible as

$W^1 = \{w_1^1, w_2^1, \dots, w_M^1\}$, codeword w_i^1 is defined as $w_i^1 = w_i - w_i w_{\max}^H w_{\max}$. Based on codeword

w_{\max} and U_k , the MS also recomputes the beamforming vectors (block 339), given as

$u_{ki}^L = u_{ki} - u_{ki} w_{\max}^H w_{\max}$, where u_{ki}^L represents the refined i -th beamforming vector of MS_k at stage

-15-

L. Refined vector u_{ki}^L may then be quantized and represented by one of codewords in codebook W^L (block 341). Additionally, CQI associated with the selected codeword is also obtained (block 343). Finally, the PMI of selected codewords in W^L ($PMI_{n,k}^L$) and associated CQI ($CQI_{n,k}^L$) are fed back from MS to BS (block 345). MS operations 330 may then terminate.

[0046] Optionally, MS operations 330 may include the MS acquiring the CSI of a DL between the BS and the MS. If the MS does not acquire the CSI of the DL between the BS and the MS, then the MS may use the CSI acquired during MS operations 300, for example.

[0047] Figure 3c illustrates a flow diagram of MS operations 360 in a final stage of a multi-stage ZFBF to compute a precoding matrix. MS operations 360 may be descriptive of operations taking place in a MS, such as MS_k, of a number of MS desiring to communicate. MS operations 360 may occur each time a multi-stage ZFBF is performed to compute a precoding matrix.

[0048] MS operations 360 may begin with the MS receiving either w_{\max}^{X-1} or PMI_{\max}^{X-1} that was broadcast by the BS at the end of a prior stage of the multi-stage ZFBF, where X is the number of MSs that the BS can actively support (block 365). Typically, the BS will broadcast PMI_{\max} since it may require less information to transmit. The MS may then use w_{\max}^{X-1} or PMI_{\max}^{X-1} to refine its codebook W (block 367). The MS may produce codebook W^X from codebook W^{X-1} , where the refined codebook is expressible as $W^X = \{w_1^X, w_2^X, \dots, w_M^X\}$, in which codeword w_i^X is defined as $w_i^X = w_i^{X-1} - w_i^{X-1} (w_{\max}^{X-1})^H w_{\max}^{X-1}$. The MS may also recalculate beamforming vectors, given as $u_{ki}^X = u_{ki}^{X-1} - u_{ki}^{X-1} (w_{\max}^{X-1})^H w_{\max}^{X-1}$, where u_{ki}^{X-1} represents the refined i-th beamforming vector of MS k at stage X-1 and u_{ki}^{X-1} represents the refined i-th beamforming vector of MS k at

-16-

stage X (block 369). u_{ki}^X can be quantized and represented by a codeword in codebook W^X (block 371). Furthermore, CQI associated with selected codeword is also obtained (block 373). The PMI of the selected codewords ($PMI_{n,k}^X$) and associated CQI ($CQI_{n,k}^X$) are fed back to the BS (block 375). MS operations 360 may then terminate.

[0049] Optionally, MS operations 360 may include the MS acquiring the CSI of a DL between the BS and the MS. If the MS does not acquire the CSI of the DL between the BS and the MS, then the MS may use the CSI acquired during MS operations 300 or MS operations 330, for example.

[0050] Figure 4a illustrates a flow diagram of BS operations 400 in an initial stage of a multi-stage ZFBF to compute a precoding matrix. BS operations 400 may be descriptive of operations taking place in a BS. BS operations 400 may occur each time a multi-stage ZFBF is performed to compute a precoding matrix.

[0051] BS operations 400 may begin with the BS receiving the indices of the selected codewords ($PMI_{n,k}$) and associated CQI ($CQI_{n,k}$) from each of the MSs desiring to communicate (block 405). In general, the BS will receive $PMI_{n,k}$ and $CQI_{n,k}$ from N_k MSs. Let the n-th PMI and CQI from MS_k be denoted $PMI_{n,k}$ and $CQI_{n,k}$, where $n \in \{0,1,\dots,N_k\}$ and $k \in \{0,1,\dots,K\}$.

The BS may then select the MS with the largest CQI, $CQI_{\max} = \max_{\substack{k \in \{0,\dots,K\} \\ n \in \{0,\dots,N_k\}}} (CQI_{n,k})$ (block 407) and

broadcasts the corresponding codeword, denoted w_{\max} , or its PMI, denoted by PMI_{\max} , to all MSs (block 409). BS operations 400 may then terminate.

-17-

[0052] Figure 4b illustrates a flow diagram of BS operations 430 in an intermediate stage of a multi-stage ZFBF to compute a precoding matrix. BS operations 430 may be descriptive of operations taking place in a BS. BS operations 430 may occur each time a multi-stage ZFBF is performed to compute a precoding matrix. The number of times that BS operations 430 occurs may be dependent on the number of MSs that the BS may actively support. For example, with X MSs, BS operations 430 may occur a total of X-1 times.

[0053] BS operations 430 may begin with the BS receiving N_k^L PMI and CQI from MS_k (block 435). Let $PMI_{n,k}^L$ and $CQI_{n,k}^L$ denote the PMI and CQI of the n-th PMI and CQI of MS k at stage L, where $n \in \{0,1,\dots,N_k^L\}$ and $k \in \{0,1,\dots,K\}$. The BS also refines its codebook based on the received transmissions (block 437). The BS selects the MS with the largest CQI among all stage L feedback, denoted by $CQI_{\max}^L = \max_{\substack{k \in \{0,\dots,K\} \\ n \in \{0,\dots,N_k^L\}}} (CQI_{n,k}^L)$ (block 439), and broadcasts the corresponding PMI, denoted by PMI_{\max}^L , (or its corresponding codeword) to all MSs (block 441). The codeword corresponding to PMI_{\max}^1 at stage 1 is denoted by w_{\max}^1 . BS operations 430 may then terminate.

[0054] Figure 4c illustrates a flow diagram of BS operations 460 in a final stage of a multi-stage ZFBF to compute a precoding matrix. BS operations 460 may be descriptive of operations taking place in a BS. BS operations 460 may occur each time a multi-stage ZFBF is performed to compute a precoding matrix.

-18-

[0055] BS operations 460 may begin with the BS receiving N_k^X PMI and CQI from MS_k (block 465). Let $PMI_{n,k}^X$ and $CQI_{n,k}^X$ denote the PMI and CQI of the n-th PMI and CQI of MS_k at stage X, where $n \in \{0,1,\dots,N_k^X\}$ and $k \in \{0,1,\dots,K\}$. The BS may then refine its codebook using the received information (block 467). The BS selects the MS with the largest CQI among all Stage X feedback, denoted by $CQI_{\max}^X = \max_{\substack{k \in \{0,\dots,K\} \\ n \in \{0,\dots,N_k^X\}}} (CQI_{n,k}^X)$ (block 469). The codeword corresponding to PMI_{\max}^X at stage X is denoted by w_{\max}^X . The ZFBF precoding matrix may then be obtained at the BS and may be expressed as $W^{\max} = [w_{\max}, w_{\max}^1, \dots, w_{\max}^X]$ (block 471). The ZFBF precoding matrix comprises the w_{\max} terms associated with MSs selected by the BS at each stage of multi-stage ZFBF 200. BS operations 460 may then terminate.

[0056] Figure 5a illustrates a flow diagram of MS operations 500 in a stage one (1) of a two-stage ZFBF to compute a precoding matrix for use in a wireless communications system, wherein a BS may support up to two active MSs. MS operations 500 may be an exemplary implementation of the initial stage of a multi-stage ZFBF discussed previously.

[0057] MS operation 500 may begin with the MS acquiring CSI of a DL between the BS and the MS at an X-th frame (block 505). After acquiring the CSI of the MS may search for a codeword in a codebook W that will maximize the SNR (block 510).

[0058] The maximized SNR of the MS may be obtained as

$$SNR_j^{\max} = \max \left(\frac{|(\mathbf{w}_1^i)' \mathbf{h}_j(X)|^2}{N(X)}, i \in [1, \dots, K_1] \right),$$

-19-

where w_1^i is the i -th codeword in the codebook, $N(X)$ is a background noise plus inter-cell interference at X -th frame and $h_j(X)$ is a beamforming vector of MS_j at the X -th frame.

[0059] The MS may transmit the maximum SNR (SNR_j^{\max}) and a codeword index corresponding to the maximum SNR (PMI_j^{\max}) back to the BS (block 515). According to an alternate embodiment, instead of finding the codeword that maximizes the SNR, the MS may select a codeword that first results in the SNR exceeding a threshold. By reporting the first codeword that results in the SNR exceeding a threshold, the MS may more rapidly report the SNR and the codeword index back to the BS, which may help to improve two-stage ZFBF performance.

[0060] The amount of feedback information transmitted back to the BS may be dependent on the configuration of the wireless communications system. For example, in a WiMAX wireless communications system using the partial usage of sub-carriers (PUSC) permutation, only one PMI is feedback. However, if the system is using the adaptive modulation and coding (AMC) permutation with multiple sub-bands, then PMI is feedback for each sub-band. MS operations 500 may then terminate.

[0061] Figure 5b illustrates a flow diagram of MS operations 550 in a stage two (2) of a two-stage ZFBF to compute a precoding matrix for use in a wireless communications system, wherein a BS may support up to two active MSs. MS operations 550 may be an exemplary implementation of the stage X of a multi-stage ZFBF discussed previously.

[0062] MS operations 550 may begin with the MS receiving broadcast information PMI^{\max} (block 555). The MS may make use of the received information to refine its codebook W (block

560). The i -th codeword of the refined codebook, denoted by w_{22}^i , is given as

$w_{22}^i = w_2^i - w_2^i (w_1^{\max})^H w_1^{\max}$, where w_2^i is the i -th codeword of the refined codebook.

[0063] After refining the codebook, the MS may search the refined codebook for a codeword that will maximize the SINR (block 565). The maximized SINR of the MS may be obtained as

$$SINR_{j_2}^{\max} = \max \left(\frac{|(\mathbf{w}_{22}^i)' \mathbf{h}_2^{\max}(X)|^2}{N(X) + |(\mathbf{w}_1^{\max})' \mathbf{h}_2^{\max}(X)|^2}, i \in [1, \dots, K_2] \right),$$

where \mathbf{w}_{22}^i is the i -th codeword of the refined codebook, $\mathbf{h}_2^{\max}(X)$ is a maximum equivalent channel, and $N(X)$ is a background noise plus inter-cell interference at X -th frame.

[0064] The MS may transmit the maximum SINR ($SINR_{j_2}^{\max}$) and a codeword index corresponding to the maximum SINR ($PMI_{j_2}^{\max}$) back to the BS (block 570). According to an alternate embodiment, instead of finding the codeword that maximizes the SINR, the MS may select a codeword that first results in the SINR exceeding a threshold. By reporting the first codeword that results in the SINR exceeding a threshold, the MS may more rapidly report the SINR and the codeword index back to the BS, which may help to improve two-stage ZFBF performance. MS operations 550 may then terminate. Furthermore, SNR may be used in place of SINR.

[0065] Optionally, MS operations 550 may include the MS acquiring the CSI of a DL between the BS and the MS. If the MS does not acquire the CSI of the DL between the BS and the MS, then the MS may use the CSI acquired during MS operations 500, for example.

[0066] Figure 6a illustrates a flow diagram of BS operations 600 in a stage one (1) of a two-stage ZFBF to compute a precoding matrix for use in a wireless communications system, wherein the BS may support up to two active MSs. BS operations 600 may be an exemplary implementation of the initial stage of a multi-stage ZFBF discussed previously.

[0067] BS operations 600 may begin with the BS receiving the maximum SNR (SNR_j^{\max}) and a codeword index corresponding to the maximum SNR (PMI_j^{\max}) from the MSs (block 605). The BS may select from the received information to select a MS with the largest priority factor (a value based on SNR) (block 610). The priority factor may be computed as

$$PF_1^{\max} = \max \left(\frac{\log(1 + SNR_j^{\max})^\alpha}{R_j^\beta}, j \in [1, \dots, N_1] \right),$$

where α and β are fairness parameters, R_j represents the average throughput of MS j and N_1 represents number of MSs providing feedback information. A MS associated with PF_1^{\max} is denoted by MS_1^{\max} .

[0068] The BS may then broadcast PMI corresponding to SNR^{\max} , denoted by PMI^{\max} , is broadcasted (block 615). It is assumed that the codeword in the codebook corresponding to PMI^{\max} is denoted by w_1^{\max} . BS operations 600 may then terminate.

[0069] Figure 6b illustrates a flow diagram of MS operations 650 in a stage two (2) of a two-stage ZFBF to compute a precoding matrix for use in a wireless communications system, wherein the BS may support up to two active MSs. BS operations 650 may be an exemplary implementation of the stage X of a multi-stage ZFBF discussed previously.

-22-

[0070] BS operations 650 may begin with the BS receiving the maximum SINR ($SINR_{j2}^{\max}$) and a codeword index corresponding to the maximum SINR (PMI_{j2}^{\max}) from the MSs (block 655).

The BS may then refine its codebook based on the received information (block 660). The BS may select from the received information to select a MS with the largest priority factor (a value based on SINR) (block 665). The priority factor may be computed as

$$PF_2^{\max} = \max \left(\frac{\log(1 + SINR_{j2}^{\max})^\alpha}{R_j^\beta}, j \in [1, \dots, N_2] \right),$$

where N_2 represents number of MSs providing feedback information. It is assumed that the codeword in the refined codebook corresponding to PF_2^{\max} is denoted by w_{22}^{\max} . The MS associated with PF_2^{\max} is denoted by MS_2^{\max} .

[0071] The BS may then compute a received SINR for both selected MSs (one MS selected in block 665 and one MS selected in block 610 of BS operations 600) (block 670). Then, the received SINR of MS_1^{\max} is given by

$$SINR_1^{\max} = \frac{|(\mathbf{w}_1^{\max})' \mathbf{h}_1^{\max}(X)|^2}{N(X) + |(\mathbf{w}_{22}^{\max})' \mathbf{h}_1^{\max}(X)|},$$

and the received SINR of MS_2^{\max} is given by

$$SINR_2^{\max} = \frac{|(\mathbf{w}_{22}^{\max})' \mathbf{h}_2^{\max}(X)|^2}{N(X) + |(\mathbf{w}_1^{\max})' \mathbf{h}_2^{\max}(X)|^2},$$

where h_1^{\max} and h_2^{\max} are beamforming vectors corresponding to MS_1^{\max} and MS_2^{\max} .

[0072] The BS may then create the precoding matrix w^{\max} (block 675). The precoding matrix w^{\max} may be created from information of the selected MSs. BS operations 650 may then terminate.

[0073] Figure 7 illustrates a flow diagram of BS operations 700 in communicating with a MS. BS operations 700 may be descriptive of operations occurring in a BS as the BS is communicating with a MS in a wireless communications system. BS operations 700 may occur continually while the BS is operating normally.

[0074] BS operations 700 may begin with the BS computing a precoding matrix (block 705). As discussed above, the BS may perform a multi-stage ZFBF in order to compute the precoding matrix. The multi-stage ZFBF utilizes the MSs themselves to compute terms of the precoding matrix, which may help to reduce (or eliminate) a problem with quantization error accumulation as well as improve SINR estimation accuracy. A number of stages in the multi-stage ZFBF may be a function of a number of active MSs that the BS is capable of actively supporting. Alternatively, the number of stages in the multi-stage ZFBF may be fixed at a specified number, where the specified number is less than the number of active MSs that the BS is capable of actively supporting.

[0075] After computing the precoding matrix, the BS may make transmissions to MSs, wherein a transmission to a MS makes use of an entry in the precoding matrix corresponding to the MS (block 710). The transmission to the MS may be multiplied with the entry in the precoding matrix corresponding to the MS prior to transmission. BS may continue transmitting to the MSs with periodic recomputation of the precoding matrix, with the periodicity being a specified value.

[0076] Although the embodiments and their advantages have been described in detail, it should be understood that various changes, substitutions and alterations can be made herein without departing from the spirit and scope of the invention as defined by the appended claims. Moreover, the scope of the present application is not intended to be limited to the particular embodiments of the process, machine, manufacture, composition of matter, means, methods and steps described in the specification. As one of ordinary skill in the art will readily appreciate from the disclosure of the present invention, processes, machines, manufacture, compositions of matter, means, methods, or steps, presently existing or later to be developed, that perform substantially the same function or achieve substantially the same result as the corresponding embodiments described herein may be utilized according to the present invention. Accordingly, the appended claims are intended to include within their scope such processes, machines, manufacture, compositions of matter, means, methods, or steps.

WHAT IS CLAIMED IS:

1. A method for performing zero forcing beamforming at a base station (BS) of a wireless communications system, the method comprising:

receiving feedback information from each mobile station (MS) in a first plurality of mobile stations (MSs);

selecting a first MS from the first plurality of MSs, wherein the first MS having a largest value of a first metric based on the feedback information received from the first plurality of MSs;

broadcasting information related to the first MS to the first plurality of MSs;

receiving feedback information from each MS in a second plurality of MSs, wherein the second plurality of MSs is a subset of the first plurality of MSs;

selecting a second MS from the second plurality of MSs, wherein the second MS having a largest value of a second metric based on the feedback information received from the second plurality of MSs; and

creating a precoding matrix from feedback information from the first MS and the second MS.

2. The method of claim 1, wherein the second plurality of MSs is smaller than the first plurality of MSs.

3. The method of claim 1, further comprising refining a codebook based on the received feedback information from each MS in the second plurality of MSs.

4. The method of claim 1, wherein the feedback information comprises a channel quality indicator (CQI) and an index to a codebook, the index indicating a quantized beamforming vector.

5. The method of claim 4, wherein the CQI feedback by a MS comprises a signal to noise ratio (SNR) measured by the MS, and wherein the selecting a first MS comprises:

computing the first metric based on the SNR; and

selecting a MS from the first plurality of MSs as the first MS, wherein the SNR of the MS resulted in the largest value of the first metric.

6. The method of claim 5, wherein the first metric comprises

$$PF_1^{\max} = \max \left(\frac{\log(1 + SNR_j^{\max})^\alpha}{R_j^\beta}, j \in [1, \dots, N_1] \right),$$

where PF_1^{\max} is a first priority factor, SNR_j^{\max} is a SNR reported by the MS j , α and β are fairness parameters, R_j represents an average throughput of MS j and N_1 represents number of MSs in the first plurality of MSs.

7. The method of claim 5, wherein the selecting a first MS comprises selecting a MS in the first plurality of MSs having the largest CQI as the first MS.

8. The method of claim 4, wherein the CQI feedback by a MS comprises a signal and interference to noise ratio (SINR) measured by the MS, and wherein the selecting a second MS comprises:

computing the second metric based on the SINR; and

-27-

selecting a MS from the second plurality of MSs as the second MS, wherein the SINR of the MS resulted in the largest value of the second metric.

9. The method of claim 8, wherein the second metric comprises

$$PF_2^{\max} = \max \left(\frac{\log(1 + SINR_{j_2}^{\max})^\alpha}{R_j^\beta}, j \in [1, \dots, N_2] \right),$$

where PF_2^{\max} is a second priority factor, $SINR_{j_2}^{\max}$ is a SINR reported by the MS j , α and β are fairness parameters, R_j represents an average throughput of MS j and N_2 represents number of MSs in the second plurality of MSs.

10. The method of claim 5, wherein the selecting a second MS comprises selecting a MS in the second plurality of MSs having the largest CQI as the first MS.

11. A method for performing zero forcing beamforming at a mobile station (MS) of a wireless communications system, the wireless communications system having a base station (BS), the method comprising:

- a) measuring a channel state information (CSI) of a communications channel between the BS and the MS;
- b) selecting a first codeword from a codebook representing a quantized version of the CSI;
- c) transmitting an index of the first codeword and channel quality information (CQI) corresponding to the first codeword to the BS;
- d) receiving an indication of a selected MS from the BS;
- e) refining the codebook based on the indication;
- f) selecting a second codeword representing a quantized version of the CSI from the

refined codebook; and

g) transmitting an index of the second codeword and channel quality information (CQI) corresponding to the second codeword to the BS.

12. The method of claim 11, wherein steps e), f), and g) are performed in response to determining that the indication does not indicate that the MS is the selected MS.

13. The method of claim 11, further comprising measuring a second CSI of the communications channel between the BS and the MS.

14. The method of claim 13, wherein the selecting a second codeword comprises selecting a codeword representing a quantized version of the second CSI from the refined codebook as the second codeword.

15. The method of claim 11, wherein the measuring a CSI comprises measuring a pilot transmitted by the BS.

16. The method of claim 11, wherein the refining the codebook is expressible as

$$W^1 = \{w_1^1, w_2^1, \dots, w_M^1\},$$

where i -th codeword of the refined codebook w_i^1 is defined as $w_i^1 = w_i - w_i w_{\max}^H w_{\max}$, with w_{\max}

being the indication transmitted by the BS, M is the size of the refined codebook, and w_i is the i -th codeword of the codebook.

17. The method of claim 11, wherein the selecting a first codeword comprises selecting a codeword from the codebook that maximizes a computed signal to noise ratio (SNR).

18. The method of claim 17, wherein computing the SNR is expressible as

$$SNR_j^{\max} = \max \left(\frac{|(\mathbf{w}_1^i)' \mathbf{h}_j(X)|^2}{N(X)}, i \in [1, \dots, K_1] \right),$$

where \mathbf{w}_1^i is the i -th codeword in the codebook, $N(X)$ is a background noise plus inter-cell interference at X -th frame and $\mathbf{h}_j(X)$ is a beamforming vector of MS_j , and X is a frame number.

19. The method of claim 11, wherein the selecting a first codeword comprises:

selecting a codeword from the codebook;

computing a signal to noise ratio (SNR) using the selected codeword;

selecting the selected codeword as the first codeword in response to determining that the SNR exceeds a first threshold; and

repeating the selecting a codeword, the computing a SNR, and the selecting the selected codeword as the first codeword in response to determining that the SNR does not exceed the first threshold.

20. The method of claim 11, wherein the selecting a second codeword comprises selecting a codeword from the codebook that maximizes a computed signal and interference to noise ratio (SINR).

21. The method of claim 20, wherein computing the SINR is expressible as

$$SINR_{j2}^{\max} = \max \left(\frac{|(\mathbf{w}_{22}^{\max})' \mathbf{h}_2^{\max}(X)|^2}{N(X) + |(\mathbf{w}_1^{\max})' \mathbf{h}_2^{\max}(X)|^2}, i \in [1, \dots, K_2] \right),$$

where \mathbf{w}_{22}^i is the i -th codeword in the refined codebook, $N(X)$ is a background noise plus inter-

cell interference at X-th frame and $h_2^{\max}(X)$ is a maximum equivalent channel, and X is a frame number.

22. The method of claim 11, wherein the selecting a second codeword comprises:
- selecting a codeword from the refined codebook;
 - computing a signal and interference to noise ratio (SINR) using the selected codeword;
 - selecting the selected codeword as the second codeword in response to determining that the SINR exceeds a second threshold; and
 - repeating the selecting a codeword, the computing a SINR, and the selecting the selected codeword as the first codeword in response to determining that the SINR does not exceed the first threshold.
23. A method for performing zero forcing beamforming at a base station (BS) of a wireless communications system, the BS capable of actively supporting X mobile stations (MSs), the method comprising:
- a) selecting a first mobile station (MS) based on feedback information from a first plurality of MSs;
 - b) broadcasting information related to the first MS to the first plurality of MSs;
 - c) selecting a second MS based on feedback information from a second plurality of MSs;
 - d) broadcasting information related to the second MS to the second plurality of MSs;
 - e) selecting a third MS based on feedback information from a third plurality of MSs; and
 - f) creating a precoding matrix from feedback information from the first MS, the second MS, and the third MS.

24. The method of claim 23, wherein the selecting a first MS comprises:
receiving feedback information from each MS in the first plurality of MSs; and
selecting a MS as the first MS from the first plurality of MSs, wherein the first MS
having a largest value of a first metric based on the feedback information received from the first
plurality of MSs.
25. The method of claim 23, wherein the selecting a second MS comprises:
receiving feedback information from each MS in the second plurality of MSs, wherein
the second plurality of MSs is a subset of the first set of MSs;
refining a codebook based on the received feedback information from the MSs in the
second plurality of MSs, producing a second codebook; and
selecting a MS as the second MS from the second plurality of MSs, wherein the second
MS having a largest value of a second metric based on the feedback information received from
the second plurality of MSs.
26. The method of claim 23, wherein the selecting a third MS comprises:
receiving feedback information from each MS in the third plurality of MSs, wherein the
third plurality of MSs is a subset of the second set of MSs;
refining a codebook based on the received feedback information from the MSs in the
second plurality of MSs, producing a third codebook; and
selecting a MS as the third MS from the third plurality of MSs, wherein the third MS
having a largest value of a third metric based on the feedback information received from the third
plurality of MSs.

27. The method of claim 23, wherein the feedback information comprises a channel quality indicator (CQI) and an index to a codebook, the index indicating a quantized beamforming vector.
28. The method of claim 23, wherein an initial stage comprises steps a) and b), wherein an intermediate stage comprises steps c) and d), wherein a final stage comprises steps e) and f), wherein X is greater than three (3), and the method further comprises:
- decrementing X ; and
 - repeating the intermediate stage until X is equal to three, wherein each time the intermediate stage is repeated, a new MS is selected, a new plurality of MSs is produced that is a subset of a plurality of MSs produced by an intermediate stage performed prior to the repeating of the intermediate stage or the initial stage.
29. The method of claim 28, wherein the creating a precoding matrix comprises creating the precoding matrix from feedback information from the first MS, the second MS, the third MS, and MSs selected from each time the intermediate stage is repeated.
30. A method for performing zero forcing beamforming at a mobile station (MS) of a wireless communications system, the wireless communications system having a base station (BS) that is capable of actively supporting X mobile stations (MSs), the method comprising:
- a) measuring a channel state information (CSI) of a communications channel between the BS and the MS;
 - b) computing a first feedback information based on the CSI;
 - c) transmitting the first feedback information to the BS;

-33-

- d) receiving a first indication of a first selected MS from the BS;
- e) computing a second feedback information based on the first indication;
- f) transmitting the second feedback information to the BS;
- g) receiving a second indication of a second selected MS from the BS;
- h) computing a third feedback information based on the second indication; and
- i) transmitting the second feedback information to the BS.

31. The method of claim 30, wherein steps e) and f) are performed in response to determining that the first indication does not indicate that the MS is the first selected MS.

32. The method of claim 30, wherein steps h) and i) are performed in response to determining that the second indication does not indicate that the MS is the second selected MS.

33. The method of claim 30, wherein the computing a first feedback information comprises:
selecting a first codeword from a codebook representing a quantized version of the CSI;
and
selecting a channel quality information (CQI) corresponding to the first codeword;
wherein the first feedback information comprises an index to the first codeword and the CQI.

34. The method of claim 30, wherein the computing a second feedback information comprises:
refining a codebook based on the first indication, producing a first refined codebook;
selecting a second codeword from the first refined codebook representing a quantized version of the CSI; and

selecting a second CQI corresponding to the second codeword;
wherein the second feedback information comprises an index to the second codeword and the second CQI.

35. The method of claim 30, wherein the computing a third feedback information comprises:
refining a codebook based on the second indication, producing a second refined codebook;

selecting a third codeword from the second refined codebook representing a quantized version of the CSI; and

selecting a third CQI corresponding to the second codeword;
wherein the third feedback information comprises an index to the second codeword and the third CQI.

36. The method of claim 30, wherein an initial stage comprises steps a), b), and c), wherein an intermediate stage comprises steps d), e), and f), wherein a final stage comprises steps g), h), and i), wherein X is greater than three (3), and the method further comprises:

decrementing X; and

repeating the intermediate stage until X is equal to three.

37. A method for wirelessly communicating in a wireless communications system, the method comprising:

performing a multi-stage zero forcing beamforming (MS ZFBF) to select a set of mobile stations (MSs) from a plurality of MSs in the wireless communications system;

computing a precoding matrix based on results of the MS ZFBF; and

transmitting to mobile stations in the set of MSs, wherein transmissions to each MS in the set of MSs uses an entry in the precoding matrix corresponding to the MS.

38. The method of claim 37, wherein the MS ZFBF comprises a number of stages that is based on a number of MSs that a BS can actively support.

39. The method of claim 37, wherein the MS ZFBF comprises a number of stages that is fixed and is smaller than a number of MSs that a BS can actively support.

40. The method of claim 39, wherein in each stage of the MS ZFBF a MS from the plurality of MSs is selected, and wherein the computing a precoding matrix comprises:

computing entries in the precoding matrix for MSs selected by the MS ZFBF; and

computing a remainder of entries in the precoding matrix based on information feedback by the MSs in the plurality of MSs.

100 ↘

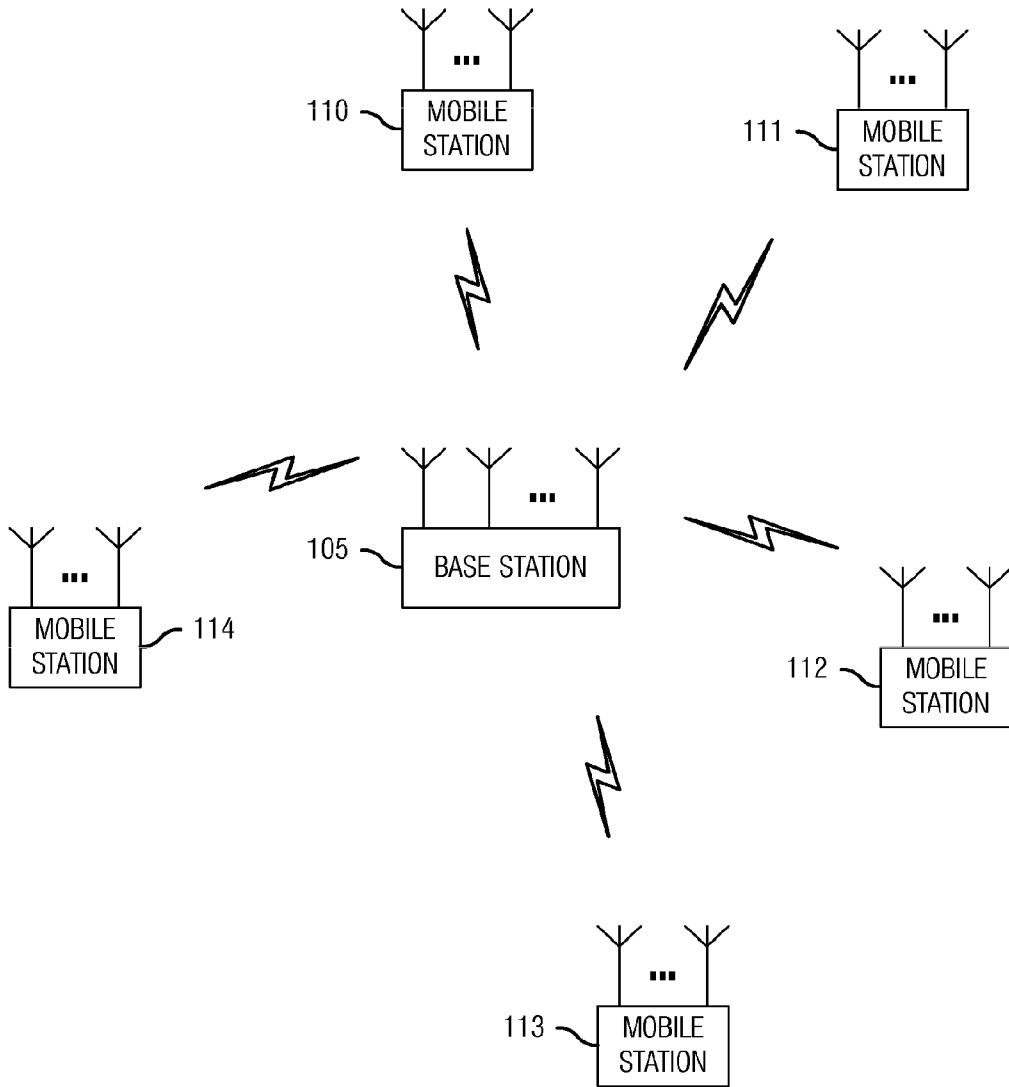


Fig. 1

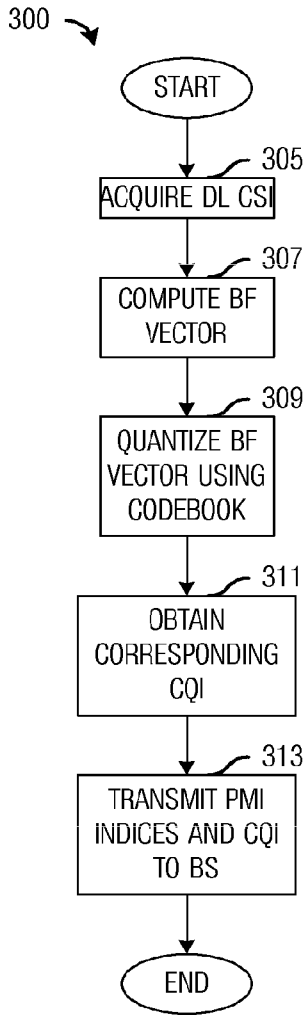


Fig. 3a

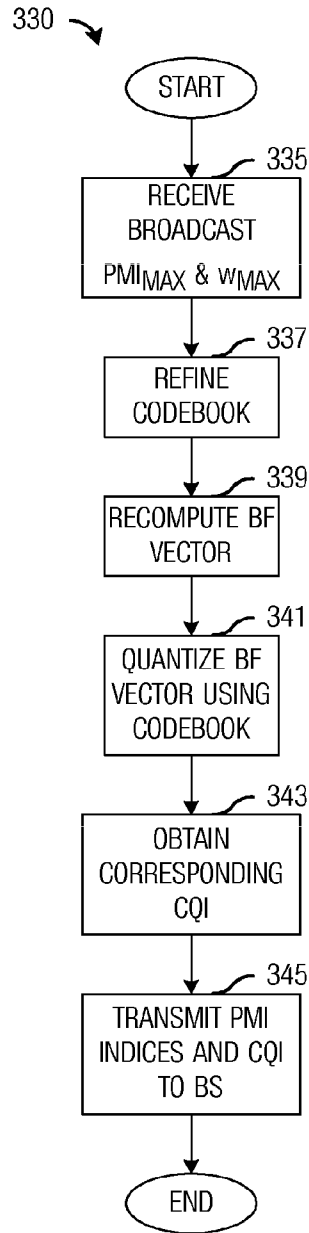


Fig. 3b

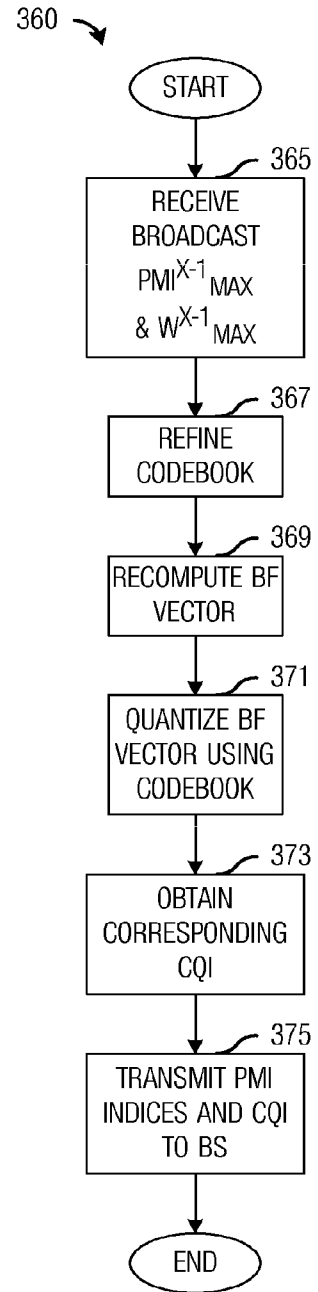


Fig. 3c

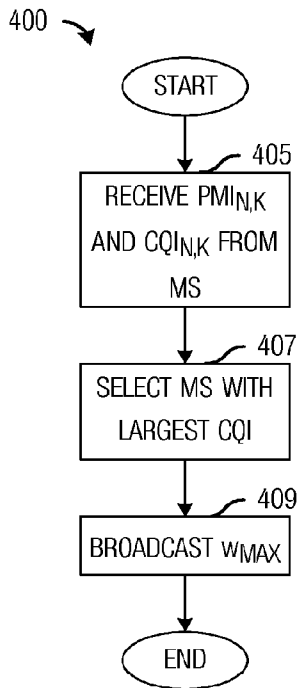


Fig. 4a

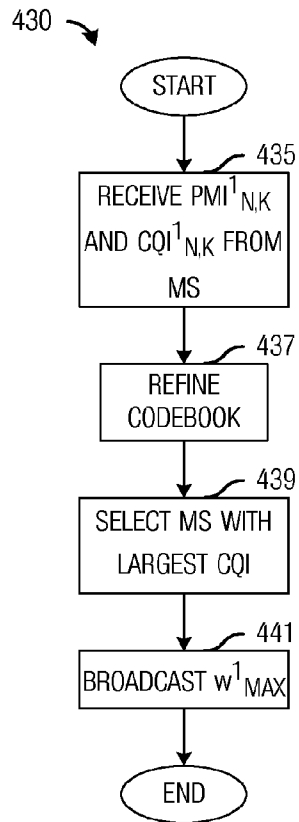


Fig. 4b

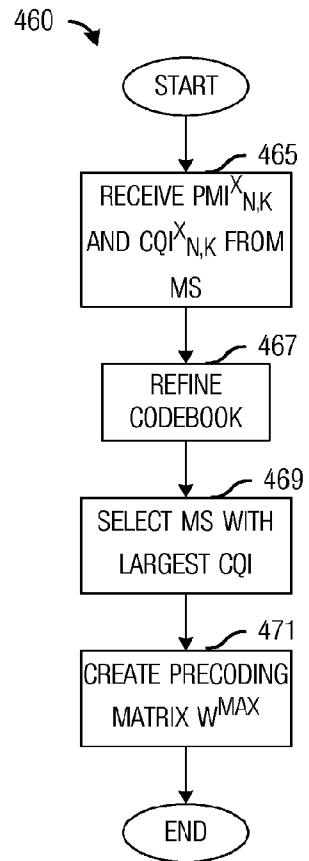


Fig. 4c

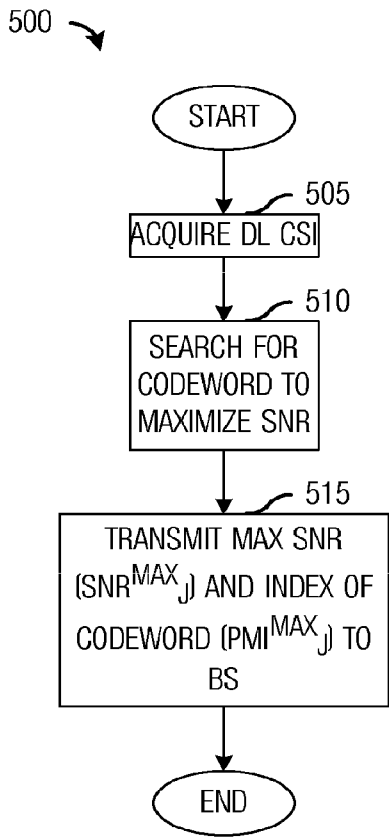


Fig. 5a

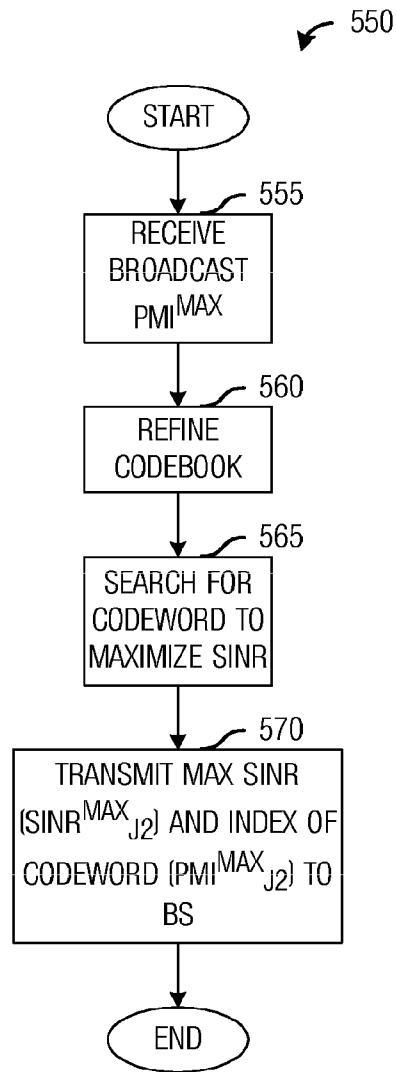


Fig. 5b

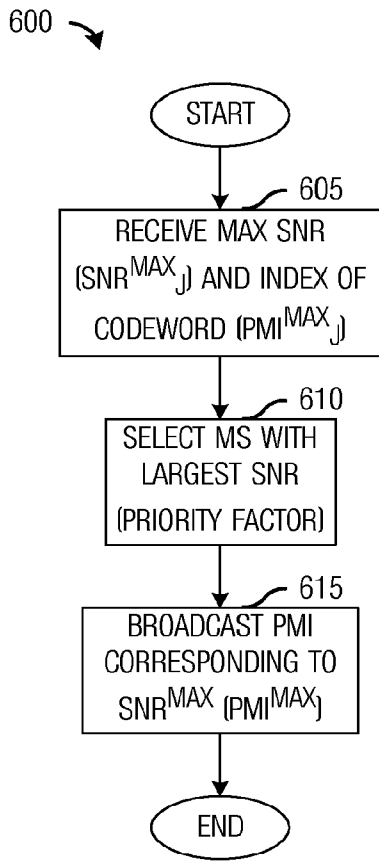


Fig. 6a

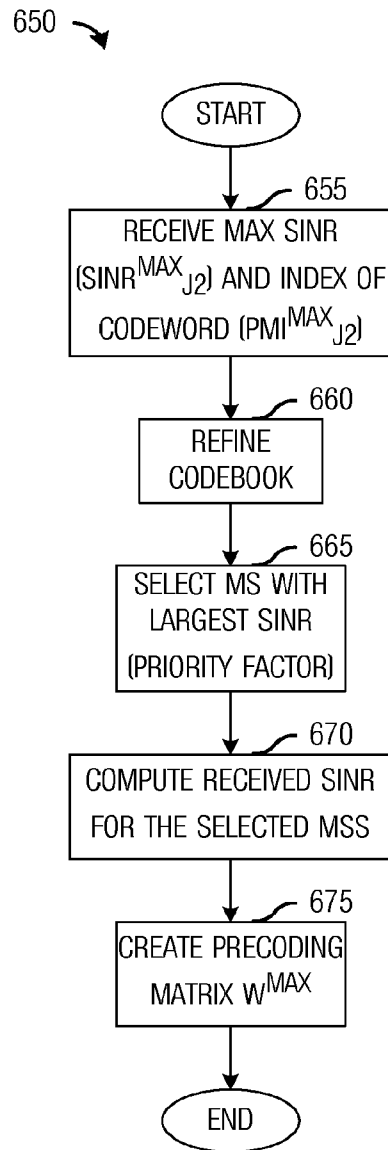


Fig. 6b

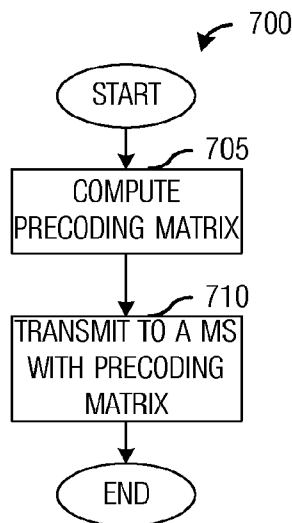


Fig. 7

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2009/071185

A. CLASSIFICATION OF SUBJECT MATTER <p style="text-align: center;">H04W40/06 (2009.01)i</p> <p>According to International Patent Classification (IPC) or to both national classification and IPC</p>				
B. FIELDS SEARCHED <p>Minimum documentation searched (classification system followed by classification symbols)</p> <p style="text-align: center;">IPC: H04W, H04Q7/-, H04B7/26, H04L12/-</p> <p>Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched</p> <p>Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)</p> <p style="text-align: center;">CPRS,CNKI,WPI,EPODOC,PAJ: zero, beamform+, feedback, precoding matrix, code</p>				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
A	CN1973473A (INTEL CORP) 30 MAY 2007 (30.05.2007) the whole document	1-40		
A	CN101036316A(NOKIA CORP)12 Sept. 2007 (12.09.2007) the whole document	1-40		
A	CN1885735A(SAMSUNG ELECTRONICS CO LTD et al) 27 Dec. 2006 (27.12.2006) the whole document	1-40		
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.				
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none;"> <p>* Special categories of cited documents:</p> <p>“A” document defining the general state of the art which is not considered to be of particular relevance</p> <p>“E” earlier application or patent but published on or after the international filing date</p> <p>“L” document which may throw doubts on priority claim (S) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>“O” document referring to an oral disclosure, use, exhibition or other means</p> <p>“P” document published prior to the international filing date but later than the priority date claimed</p> </td> <td style="width: 50%; border: none;"> <p>“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>“&”document member of the same patent family</p> </td> </tr> </table>			<p>* Special categories of cited documents:</p> <p>“A” document defining the general state of the art which is not considered to be of particular relevance</p> <p>“E” earlier application or patent but published on or after the international filing date</p> <p>“L” document which may throw doubts on priority claim (S) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>“O” document referring to an oral disclosure, use, exhibition or other means</p> <p>“P” document published prior to the international filing date but later than the priority date claimed</p>	<p>“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>“&”document member of the same patent family</p>
<p>* Special categories of cited documents:</p> <p>“A” document defining the general state of the art which is not considered to be of particular relevance</p> <p>“E” earlier application or patent but published on or after the international filing date</p> <p>“L” document which may throw doubts on priority claim (S) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>“O” document referring to an oral disclosure, use, exhibition or other means</p> <p>“P” document published prior to the international filing date but later than the priority date claimed</p>	<p>“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>“&”document member of the same patent family</p>			
Date of the actual completion of the international search <p style="text-align: center;">30 Jun. 2009(30.06.2009)</p>		Date of mailing of the international search report <p style="text-align: center;">16 Jul.2009(16.07.2009)</p>		
Name and mailing address of the ISA/CN The State Intellectual Property Office, the P.R.China 6 Xitucheng Rd., Jimen Bridge, Haidian District, Beijing, China 100088 Facsimile No. 86-10-62019451		Authorized officer <p style="text-align: center;">WU, Xingqiang</p> Telephone No. (86-10)62411337		

Form PCT/ISA/210 (second sheet) (April 2007)

Corrected Sheet

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CN2009/071185

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
CN1973473A	30.05.2007	US2005286663A1	29.12.2005
		WO2006007148A1	19.01.2006
CN101036316A	12.09.2007	WO2006018689A1	23.02.2006
		US2006039493A1	23.02.2006
		EP1779548A1	02.05.2007
		INDELNP200701462E	03.08.2007
CN1885735A	27.12.2006	none	