


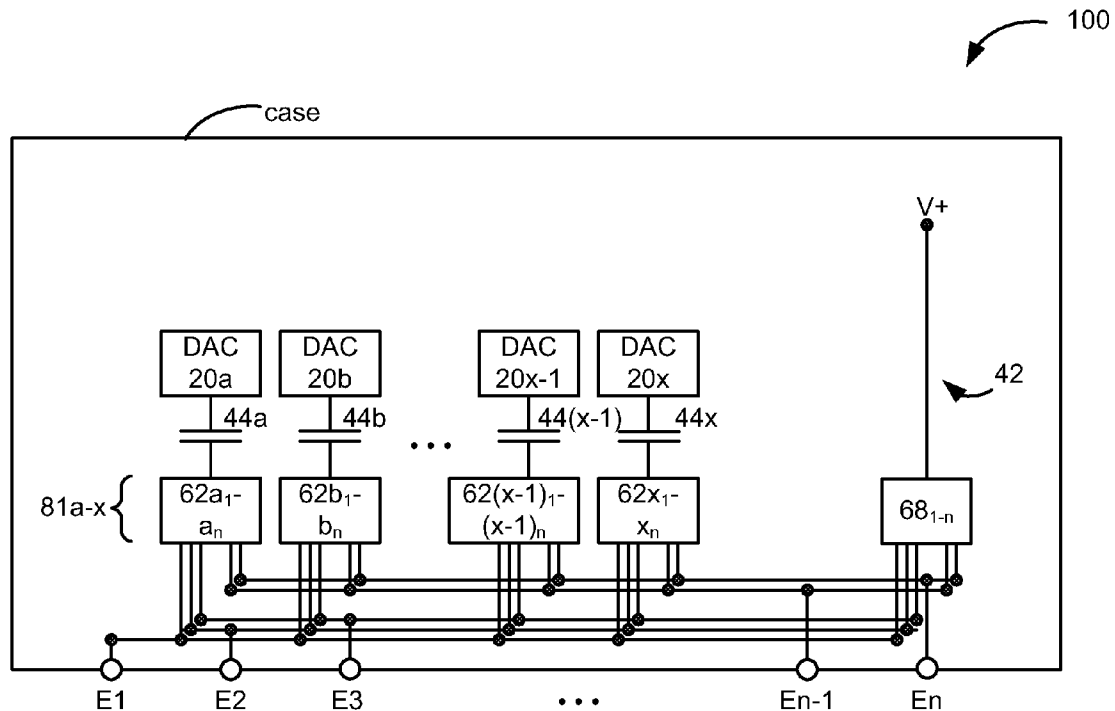

US 20100268309A1

(19) **United States**(12) **Patent Application Publication**
Parramon et al.(10) **Pub. No.: US 2010/0268309 A1**(43) **Pub. Date: Oct. 21, 2010**(54) **ARCHITECTURES FOR MULTI-ELECTRODE
IMPLANTABLE STIMULATOR DEVICES
HAVING MINIMAL NUMBERS OF
DECOUPLING CAPACITORS****Publication Classification**(51) **Int. Cl.**
A61N 1/05 (2006.01)
(52) **U.S. Cl.** **607/116**
(57) **ABSTRACT**(75) **Inventors:** **Jordi Parramon**, Valencia, CA
(US); **Rafael Carbutaru**, Valley
Village, CA (US)**Correspondence Address:****Wong, Cabello, Lutsch, Rutherford & Brucculeri
LLP**
20333 SH 249, Suite 600
Houston, TX 77070 (US)(73) **Assignee:** **Boston Scientific**
Neuromodulation Corporation,
Valencia, CA (US)(21) **Appl. No.: 12/425,505**(22) **Filed: Apr. 17, 2009**

Architectures for implantable stimulators having N electrodes are disclosed. The architectures contains X current sources, or DACs. In a single anode/multiple cathode design, one of the electrodes is designated as the anode, and up to X of the electrodes can be designated as cathodes and independently controlled by one of the X DACs, allowing complex patient therapy and current steering between electrodes. The design uses at least X decoupling capacitors: X capacitors in the X cathode paths, or one in the anode path and X-1 in the X cathode paths. In a multiple anode/multiple cathode design having X DACs, a total of X-1 decoupling capacitors are needed. Because the number of DACs X can typically be much less than the total number of electrodes (N), these architectures minimize the number of decoupling capacitors which saves space, and ensures no DC current injection even during current steering.



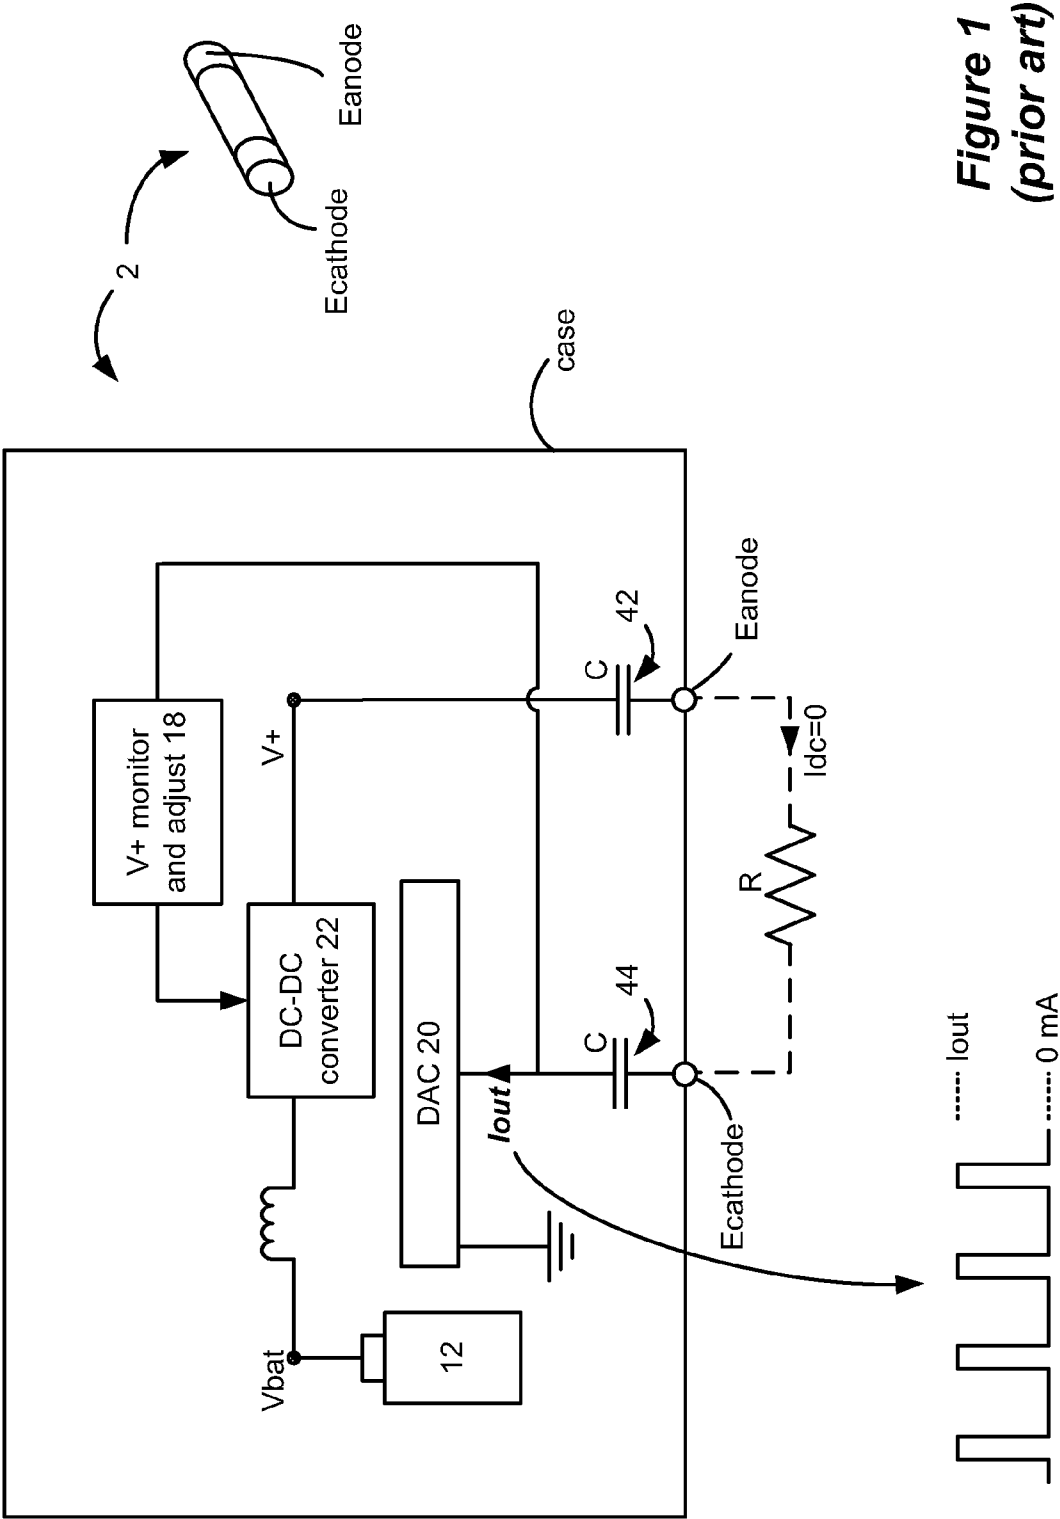


Figure 1
(prior art)

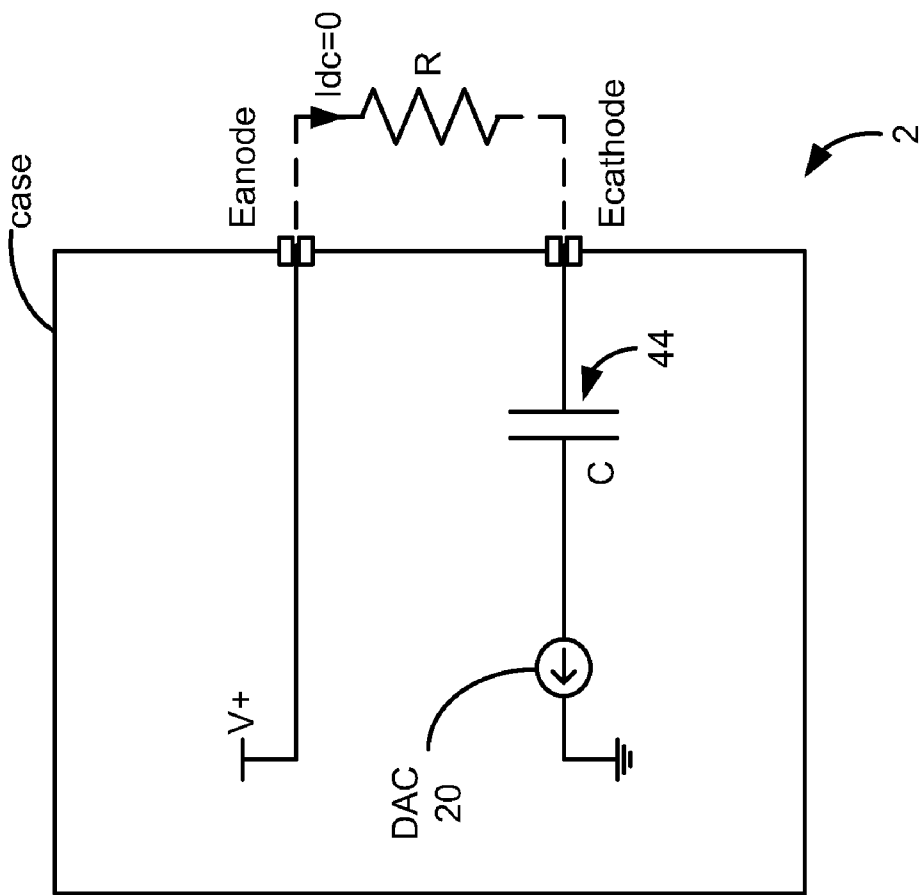


Figure 2
(prior art)

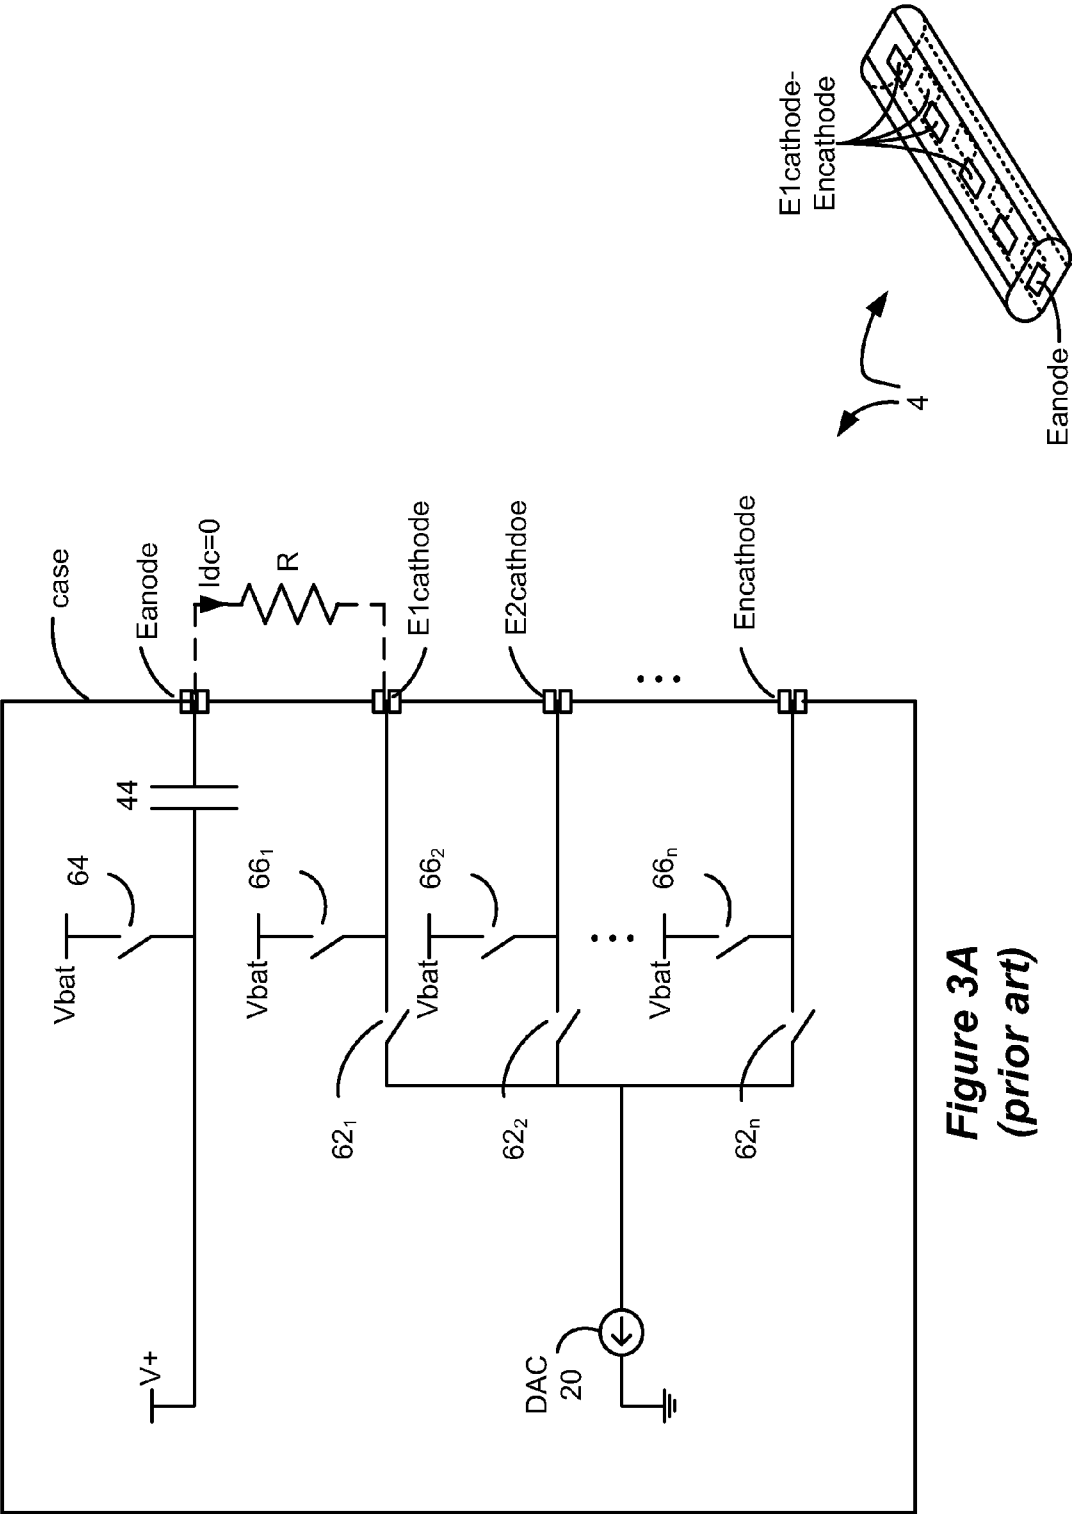
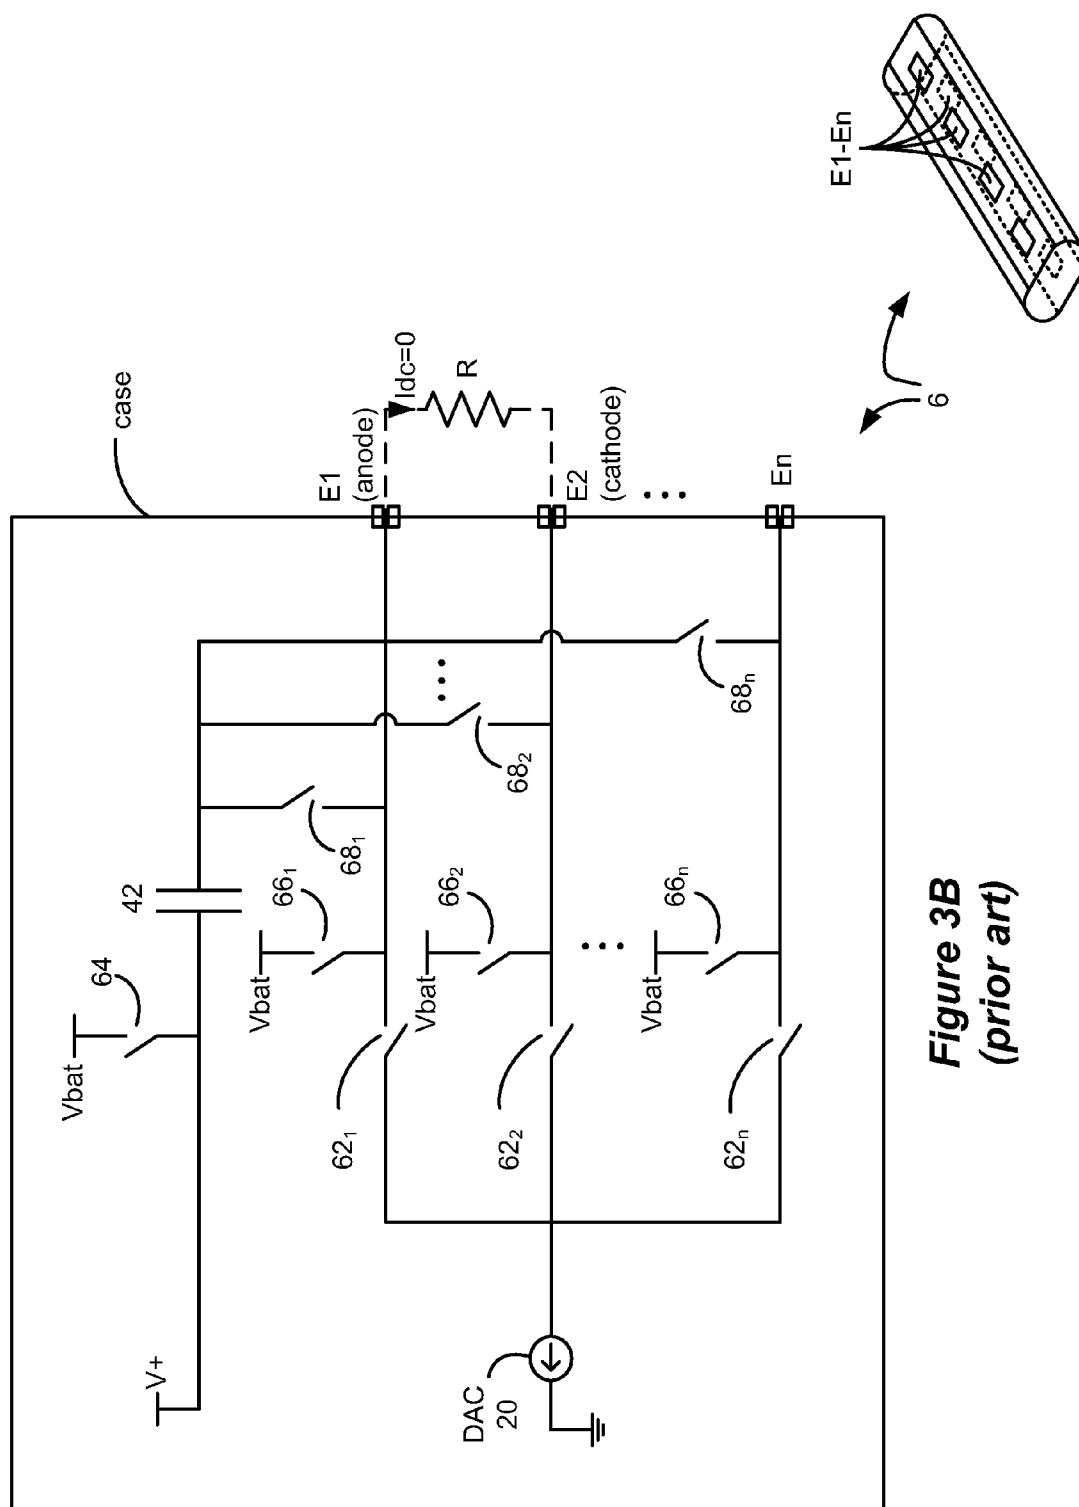


Figure 3A
(prior art)



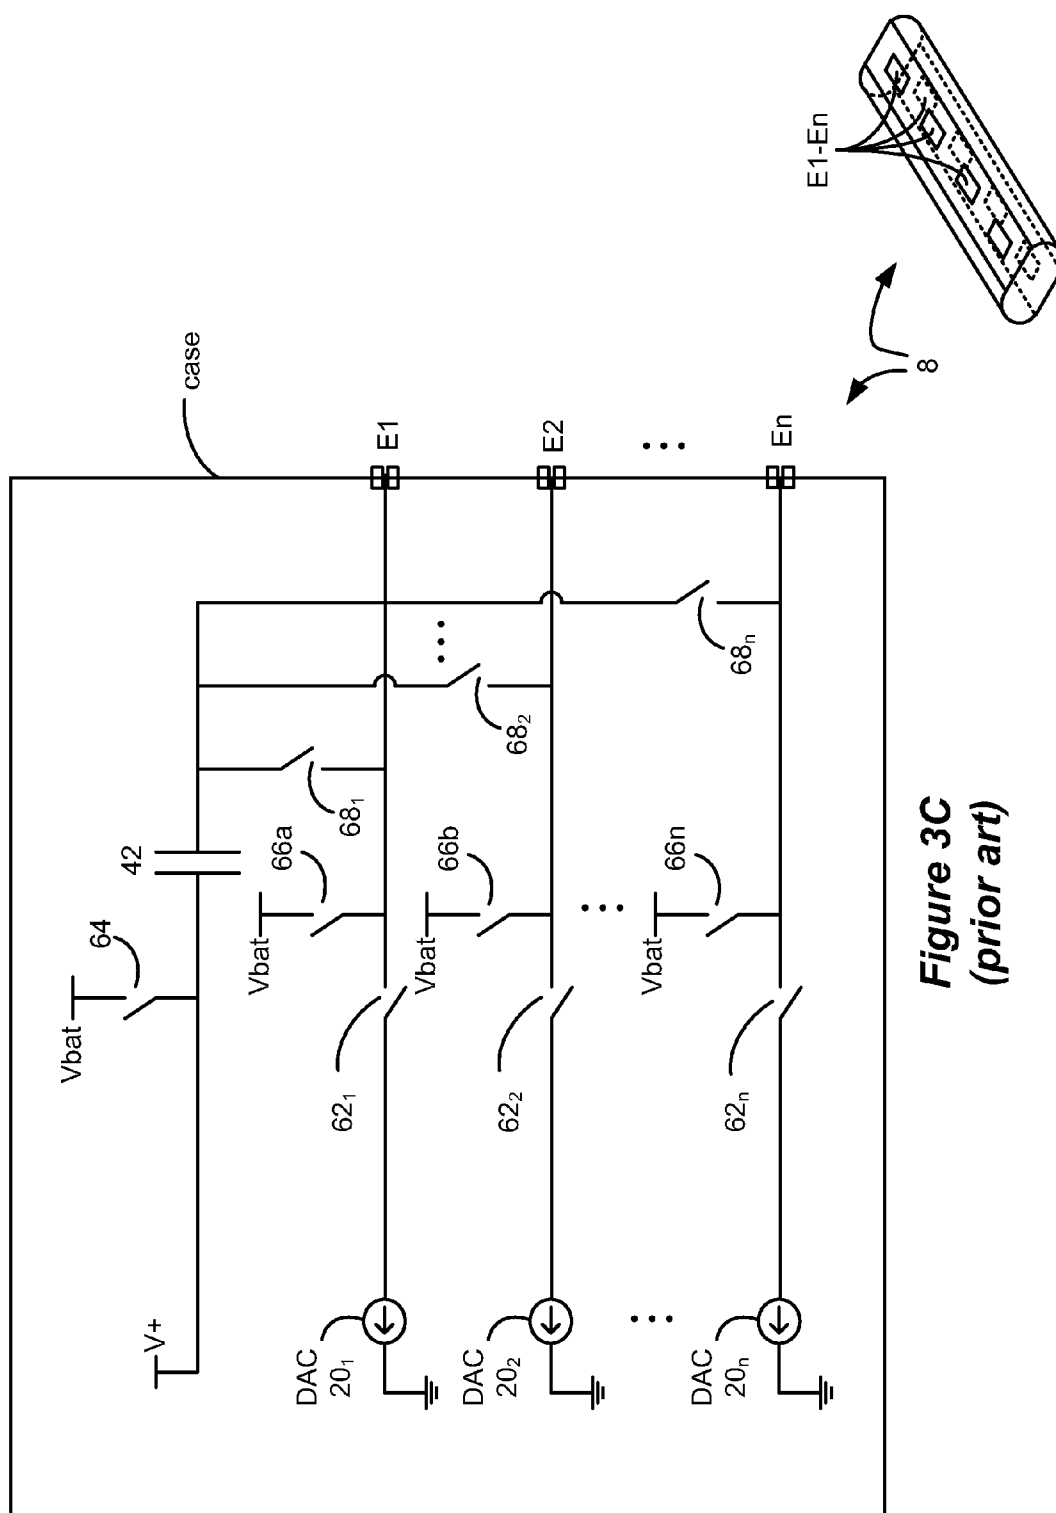


Figure 3C
(prior art)

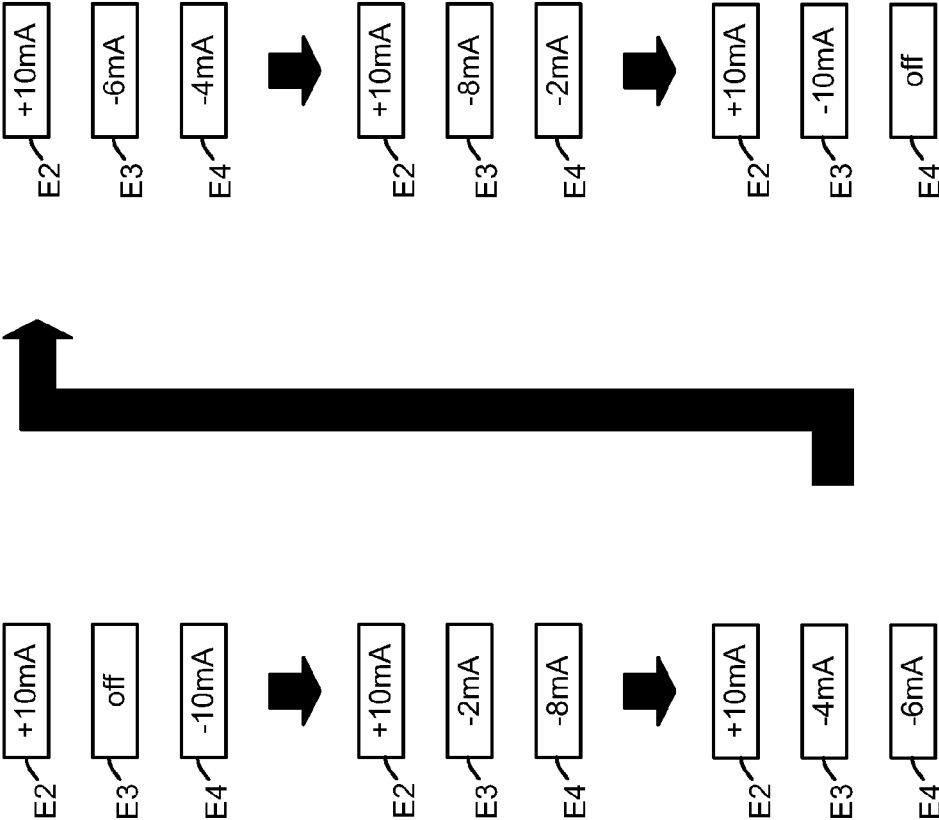


Figure 4
(prior art)

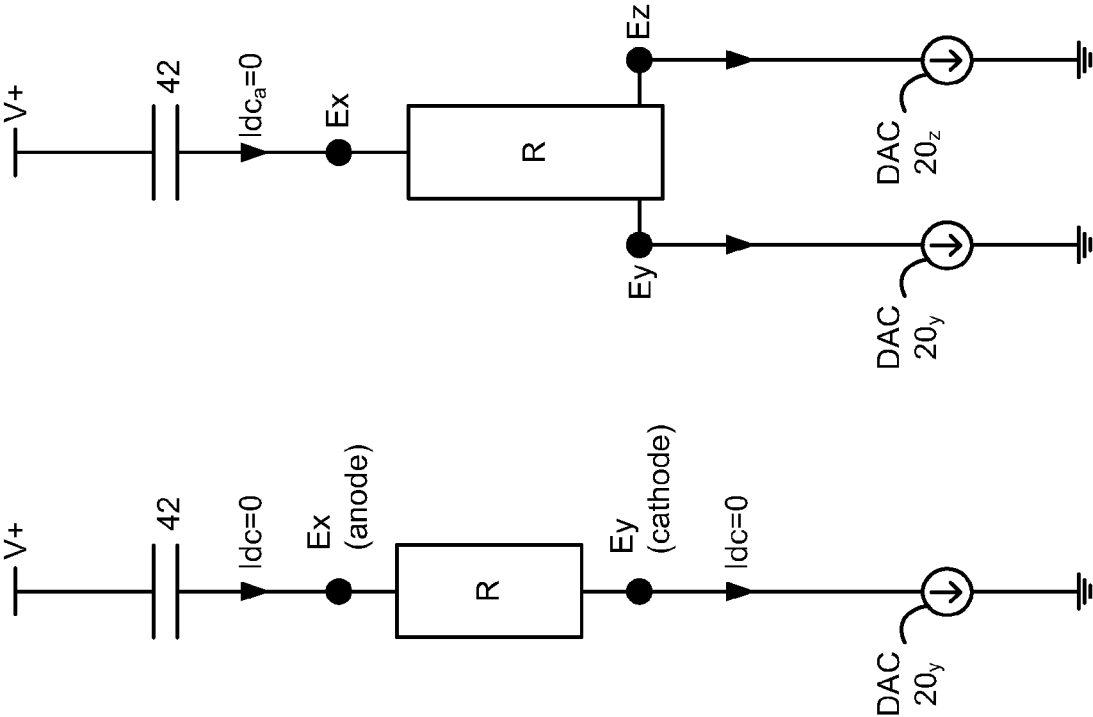


Figure 5
(prior art)

8

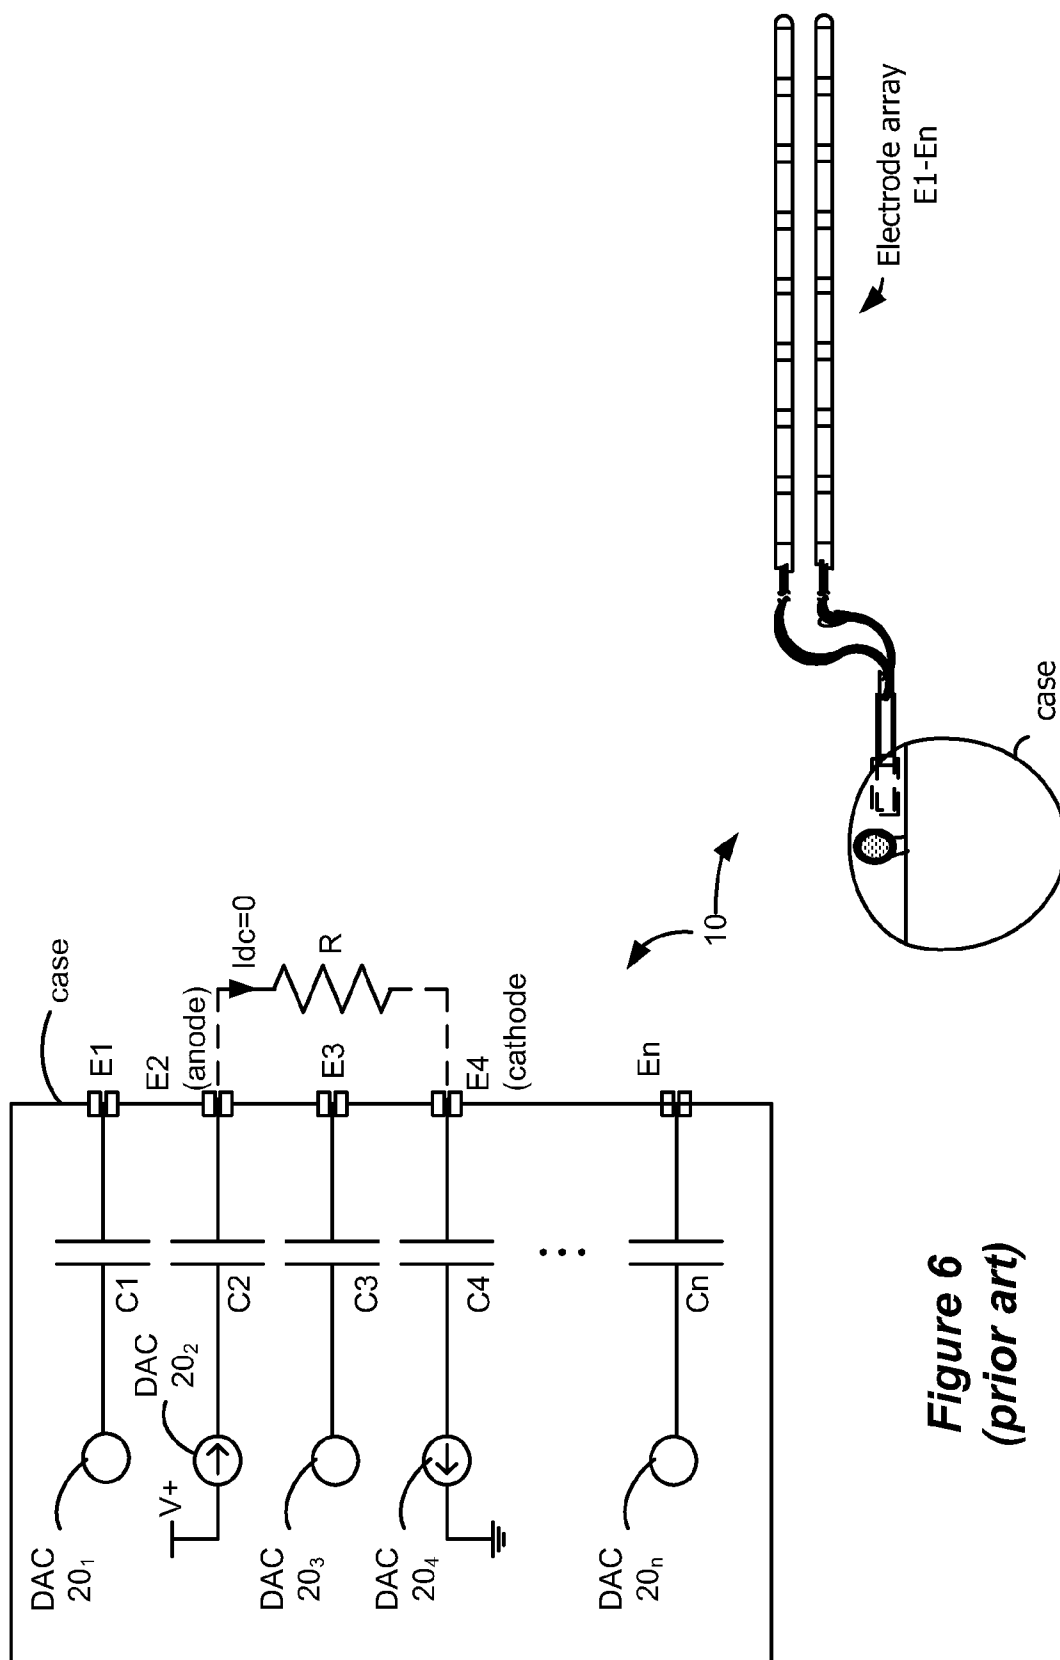


Figure 6
(prior art)

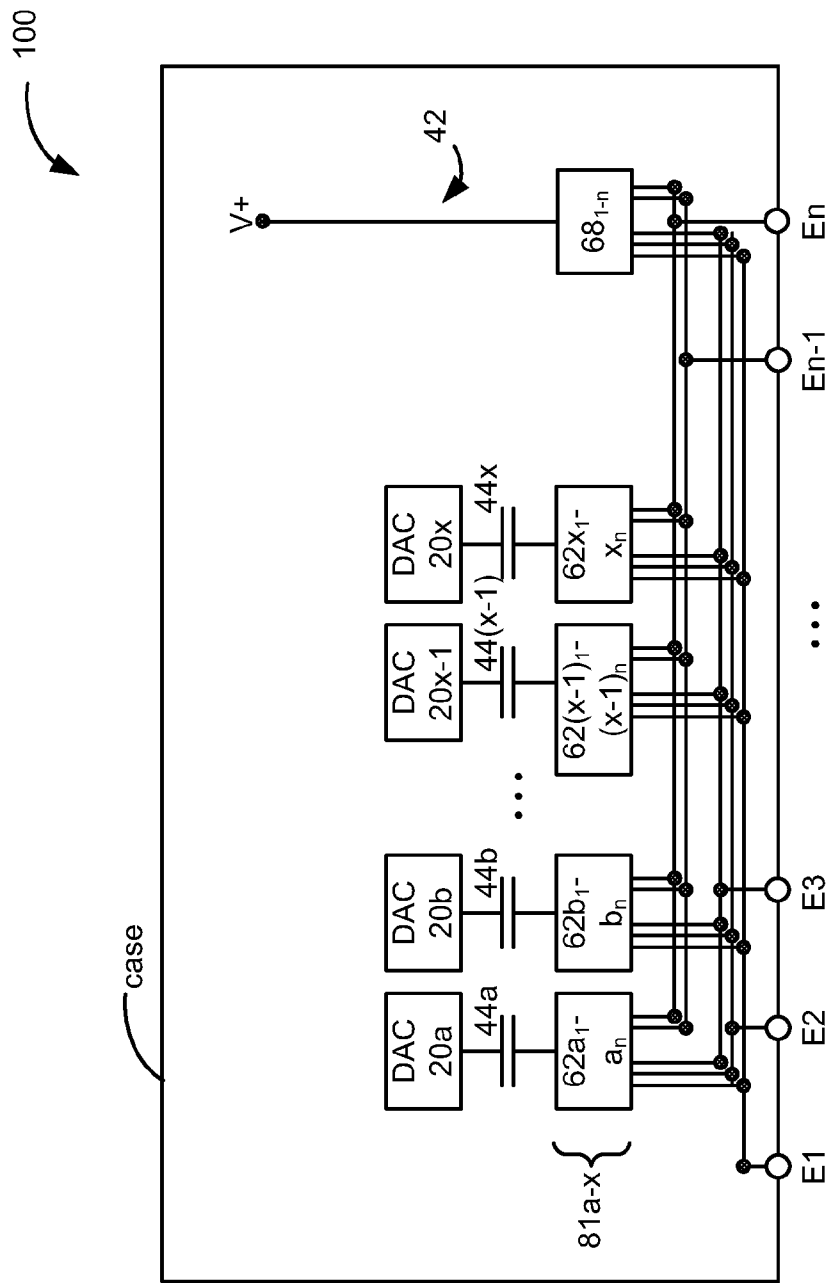
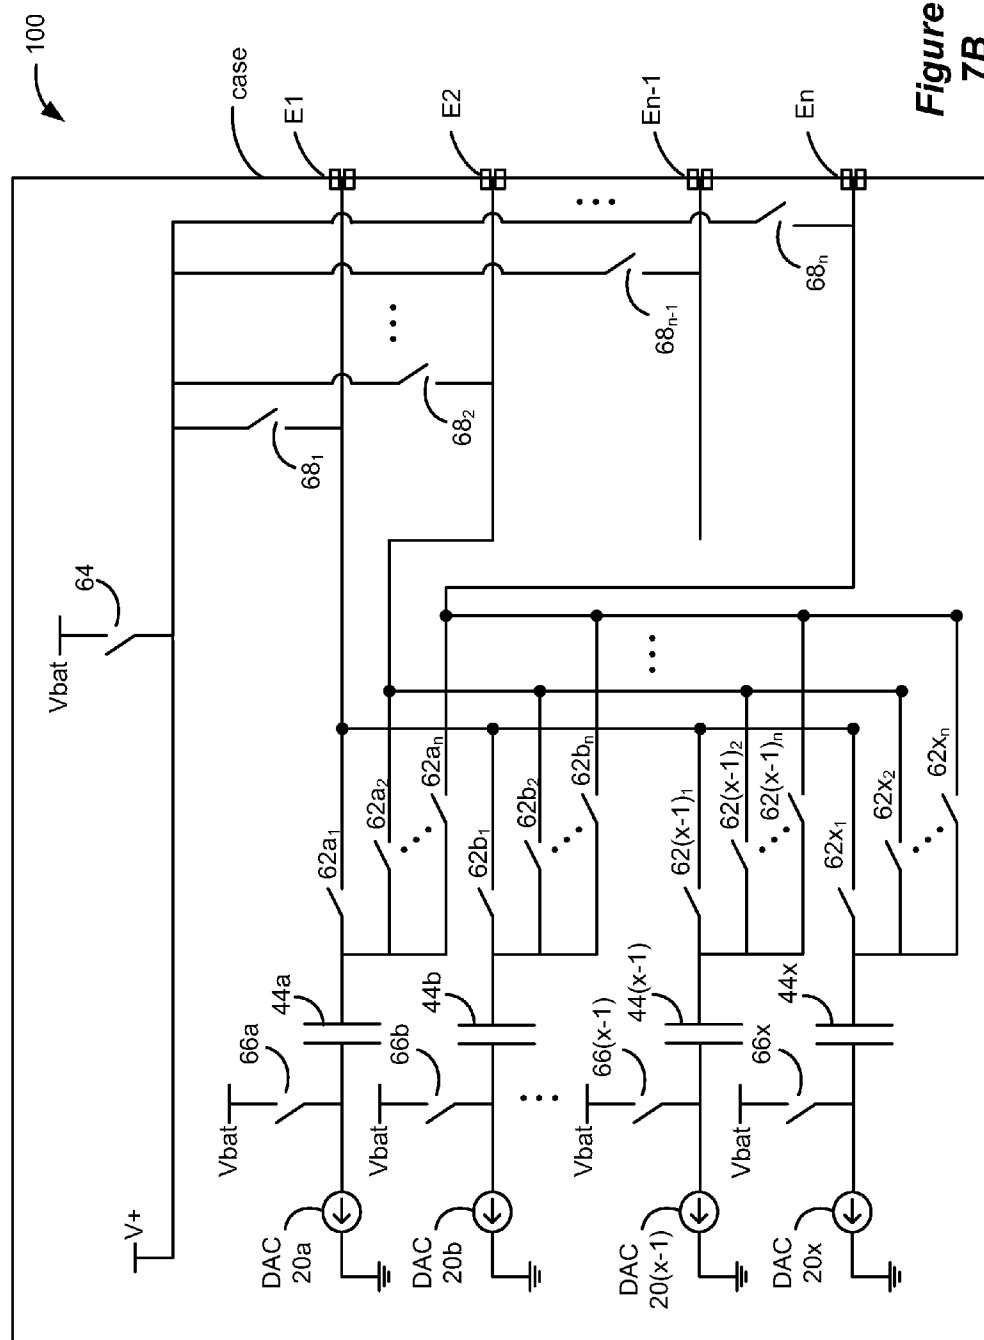


Figure 7A



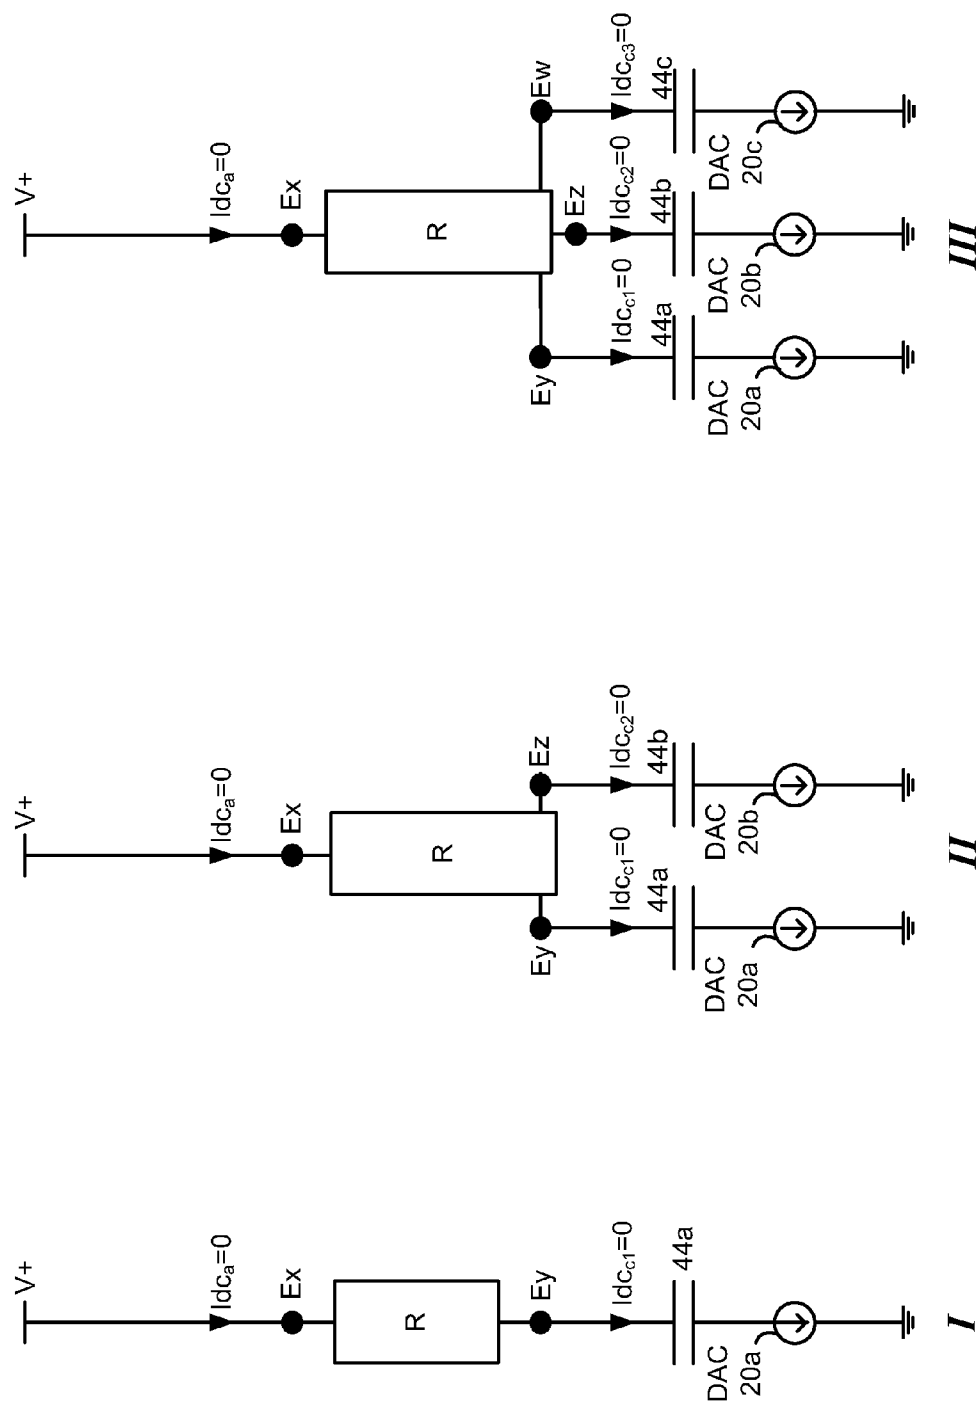


Figure 7C

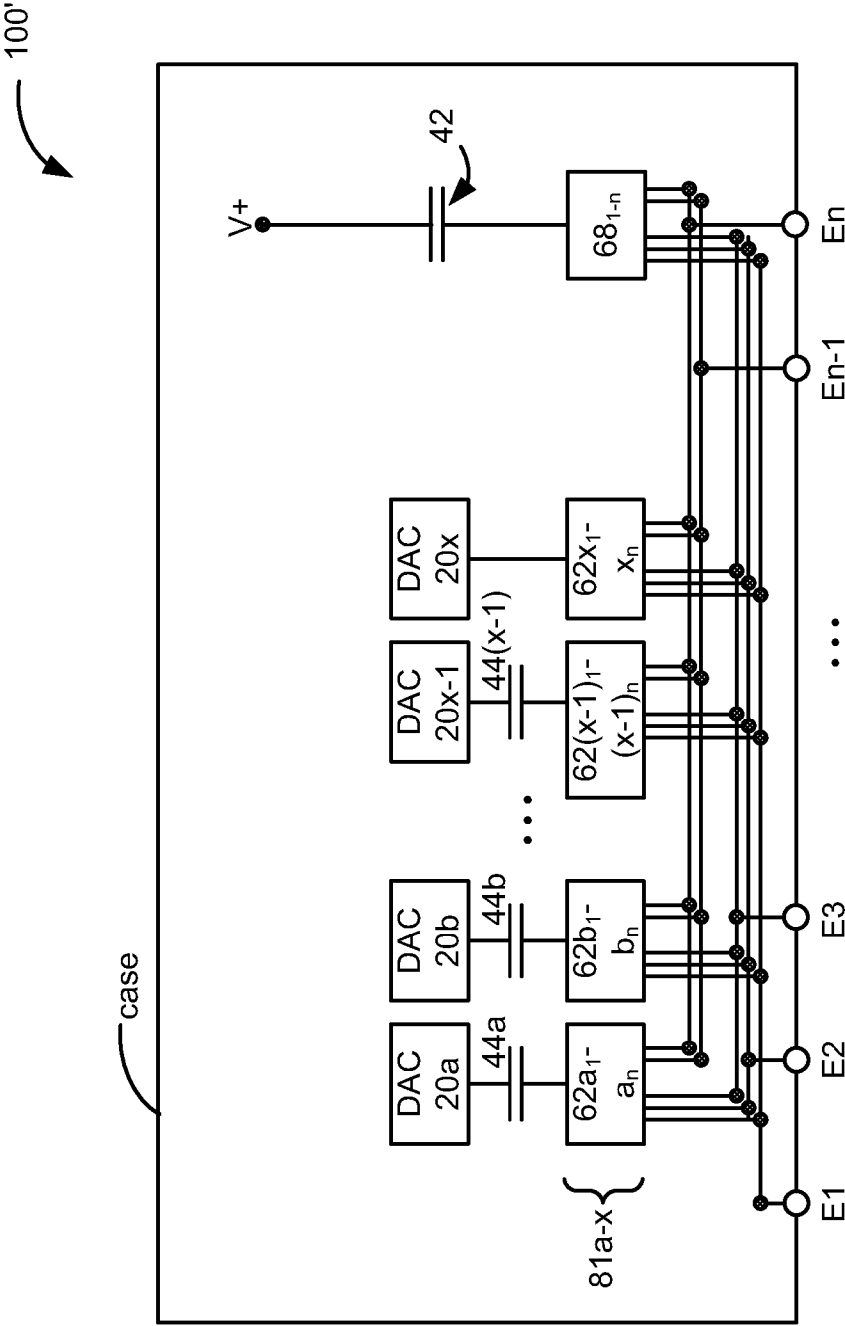
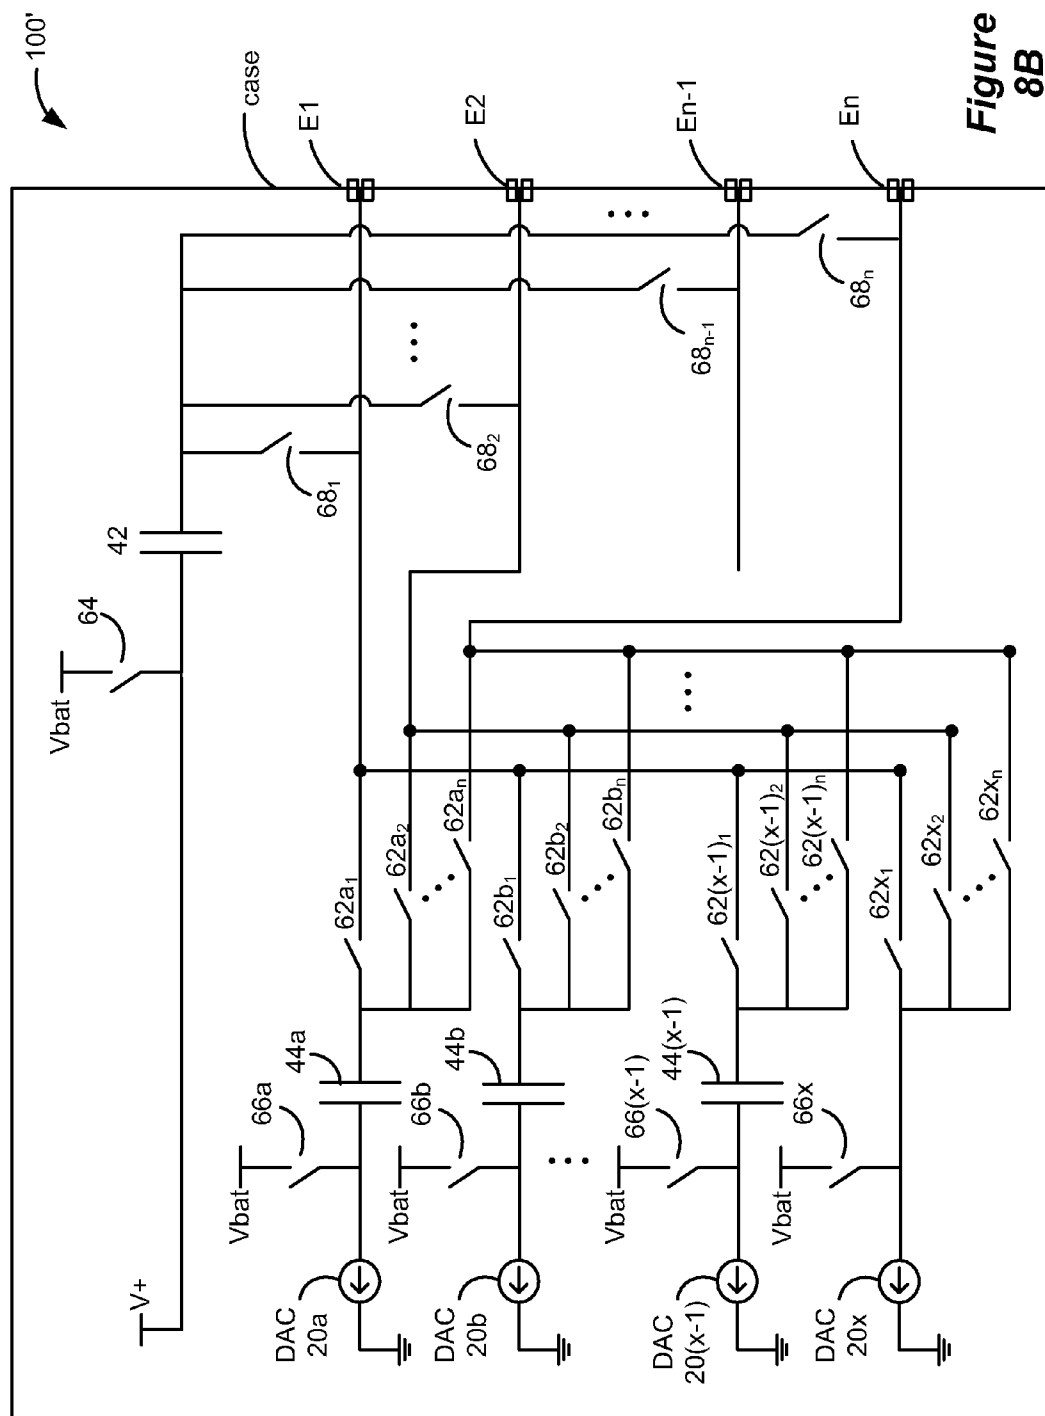


Figure 8A



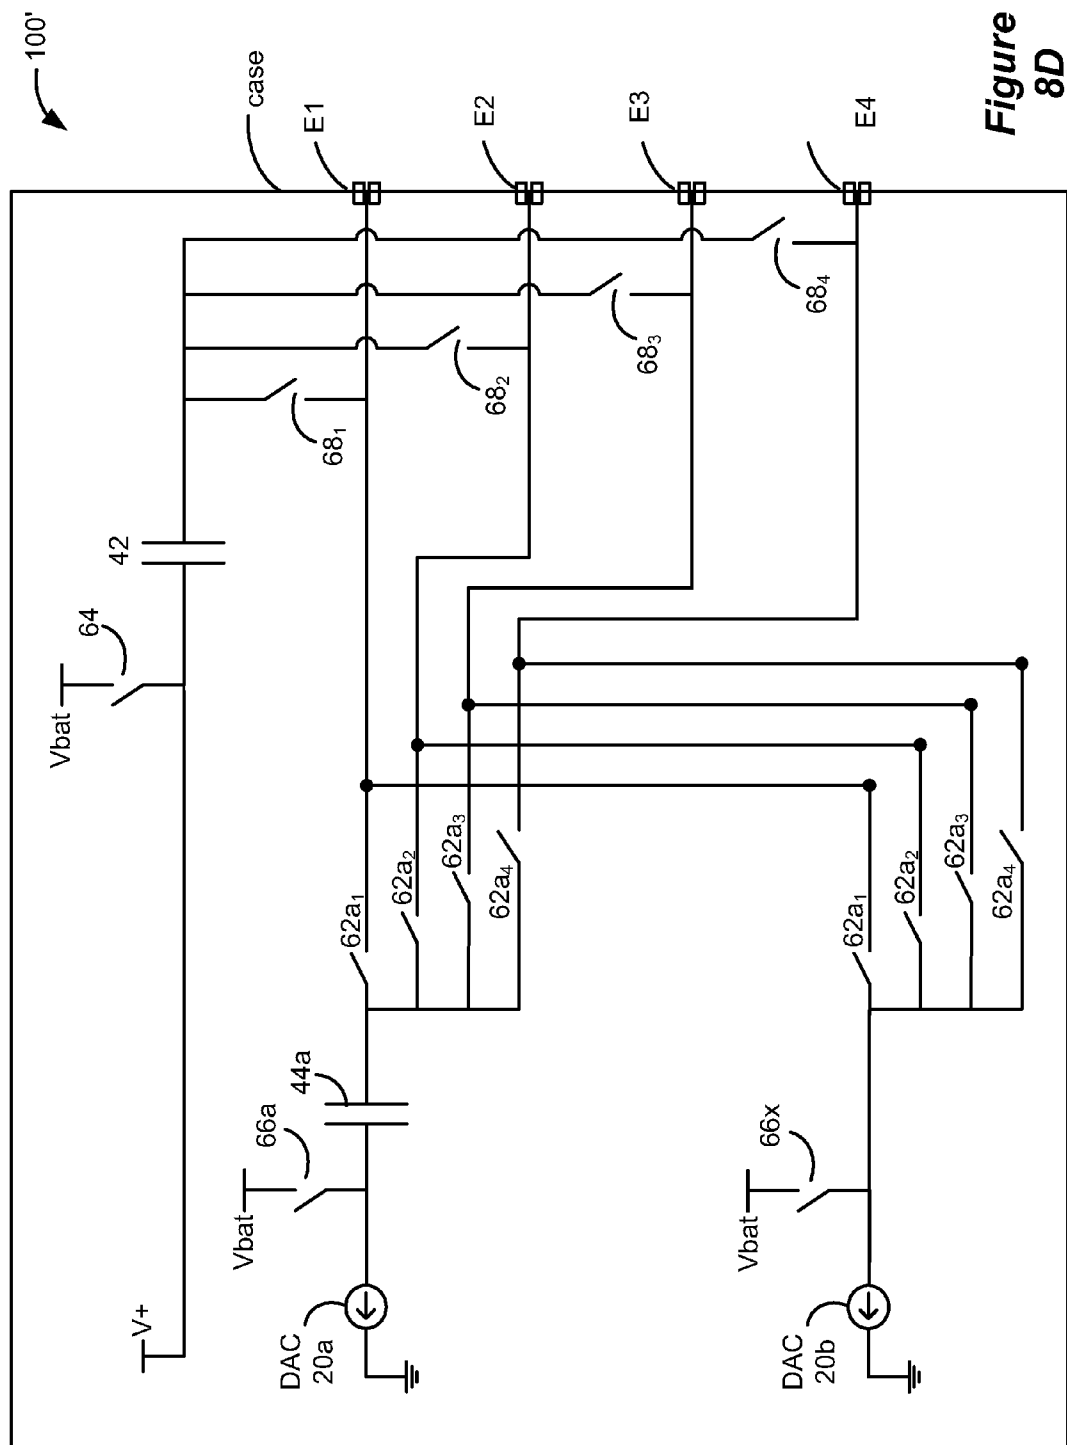


Figure 8D

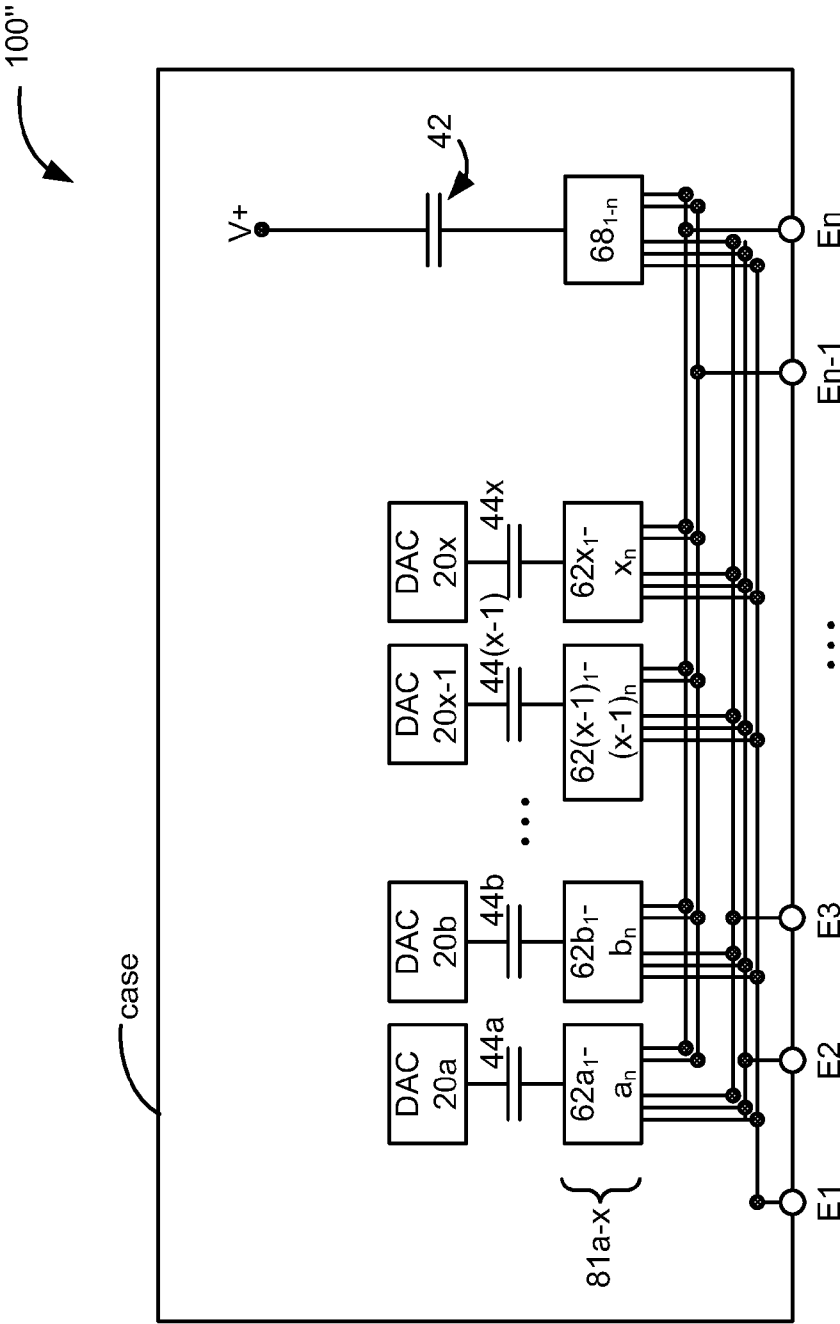


Figure 9

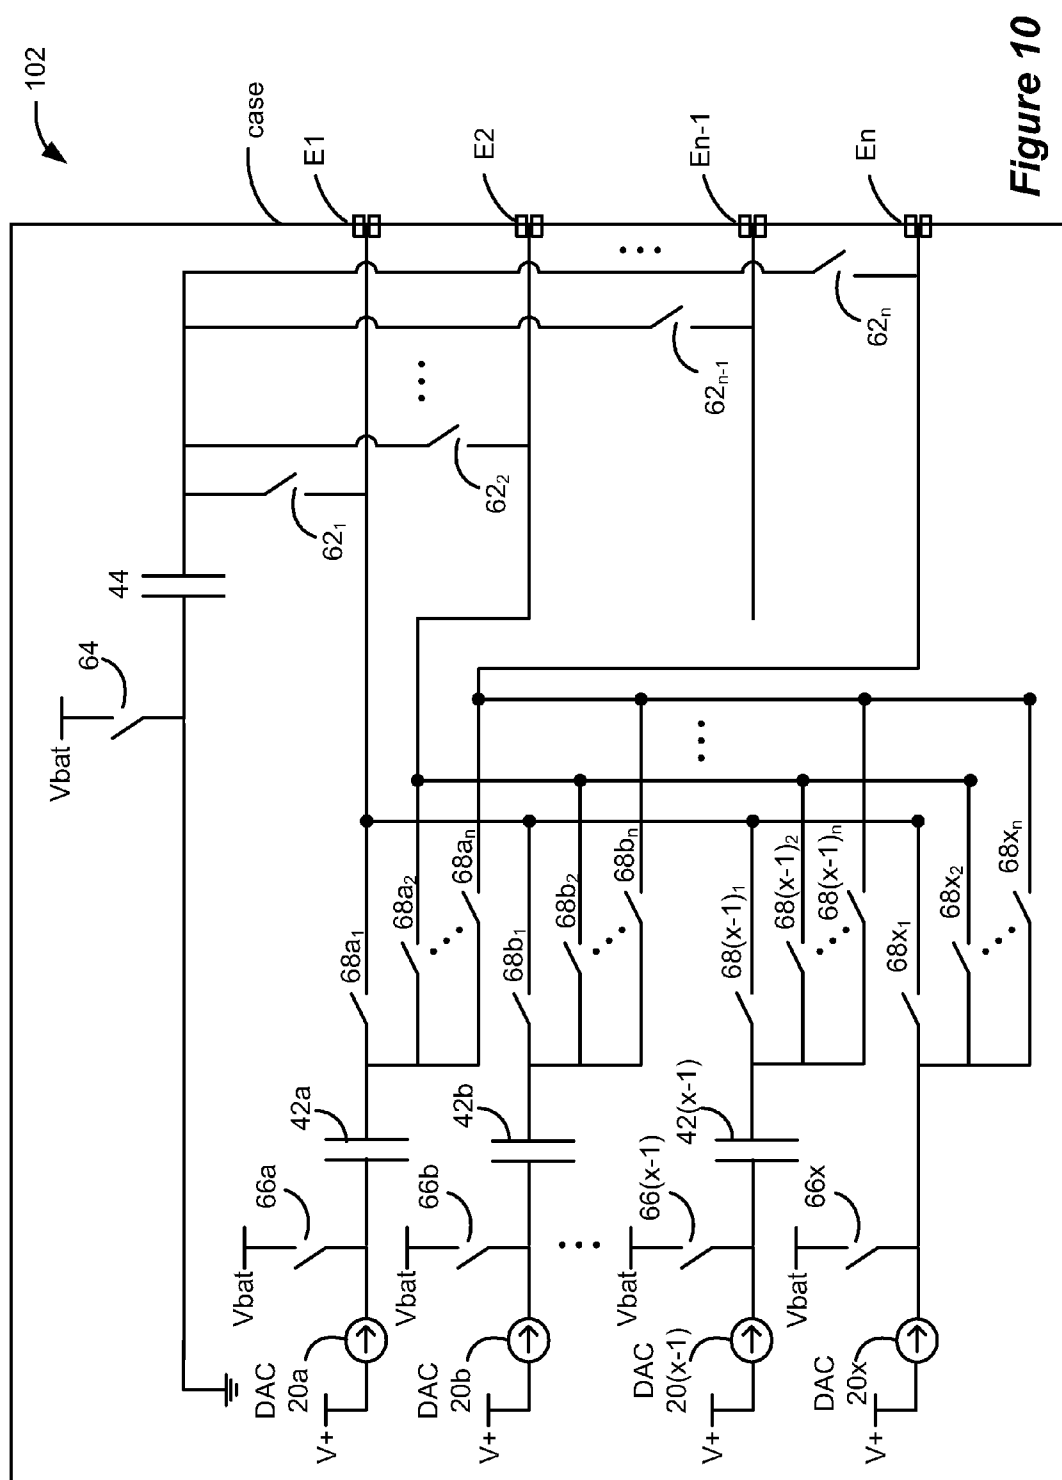


Figure 10

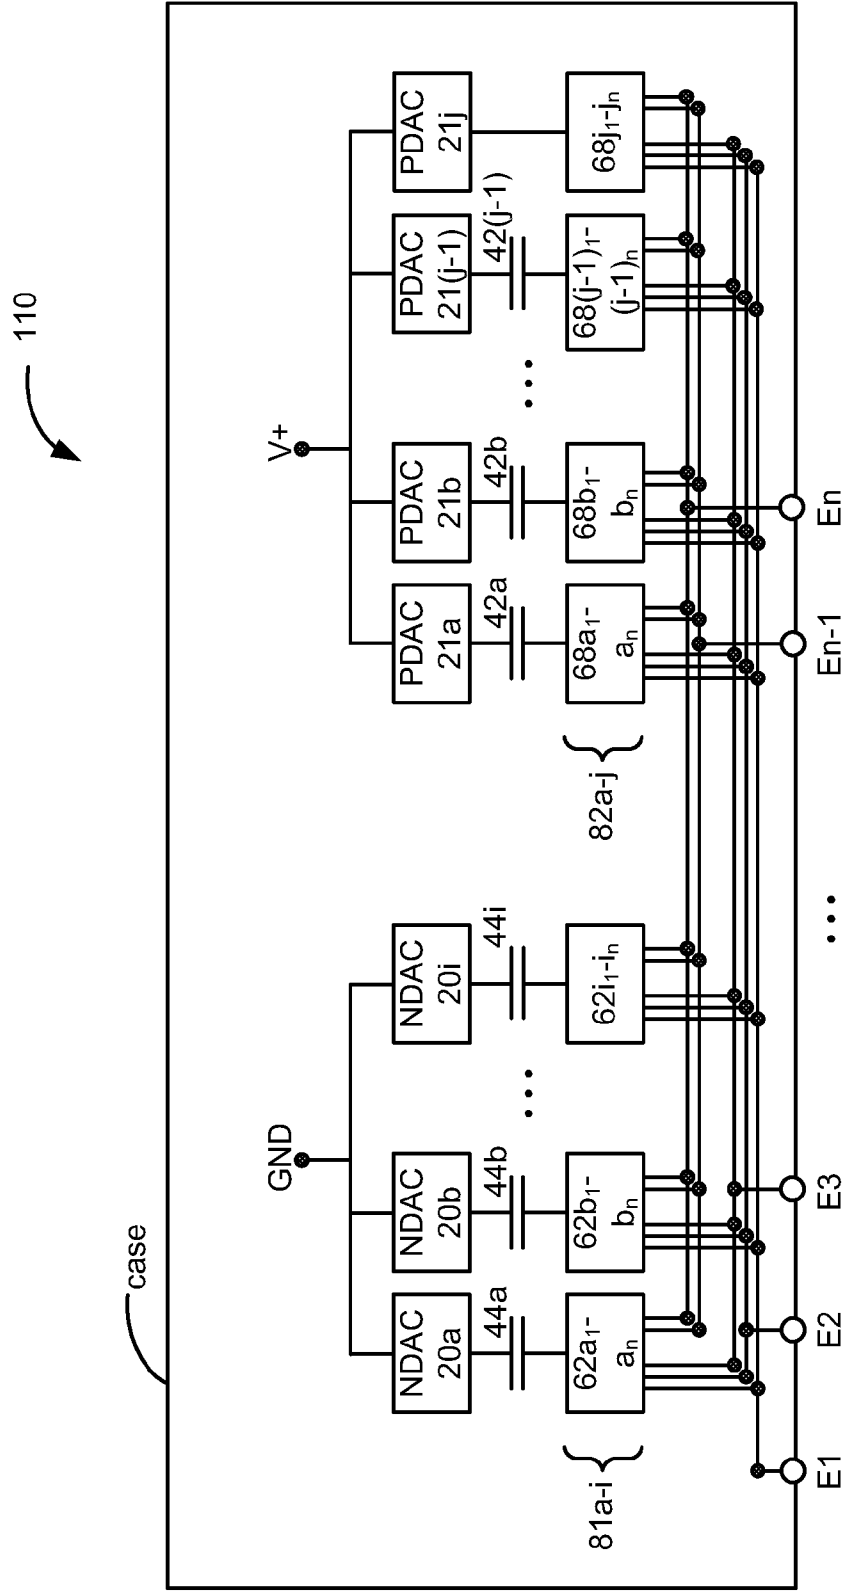


Figure 11A

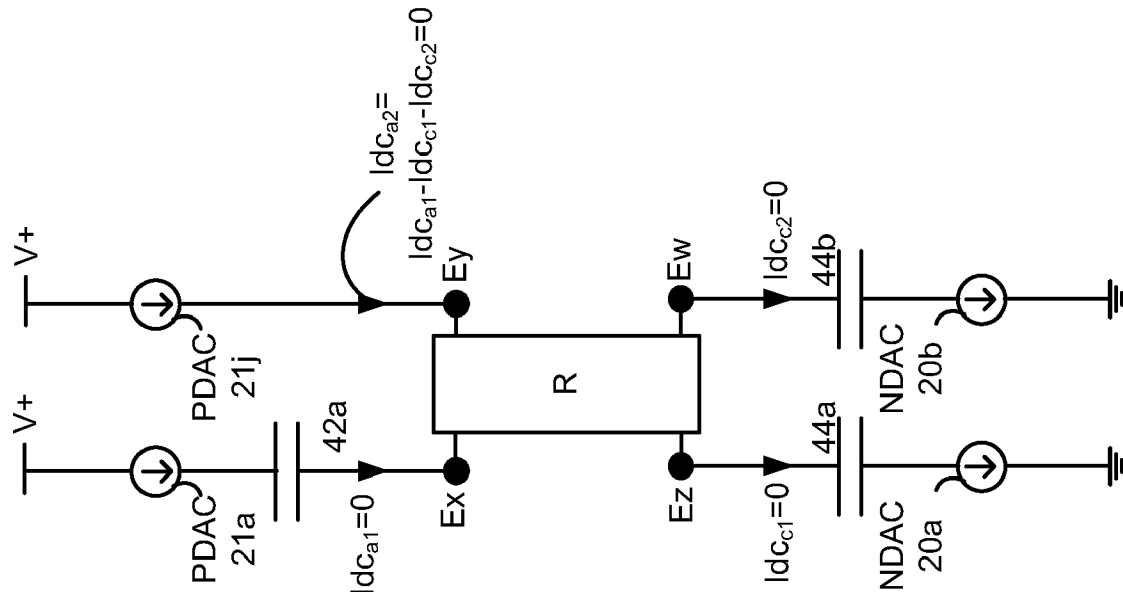


Figure 11B

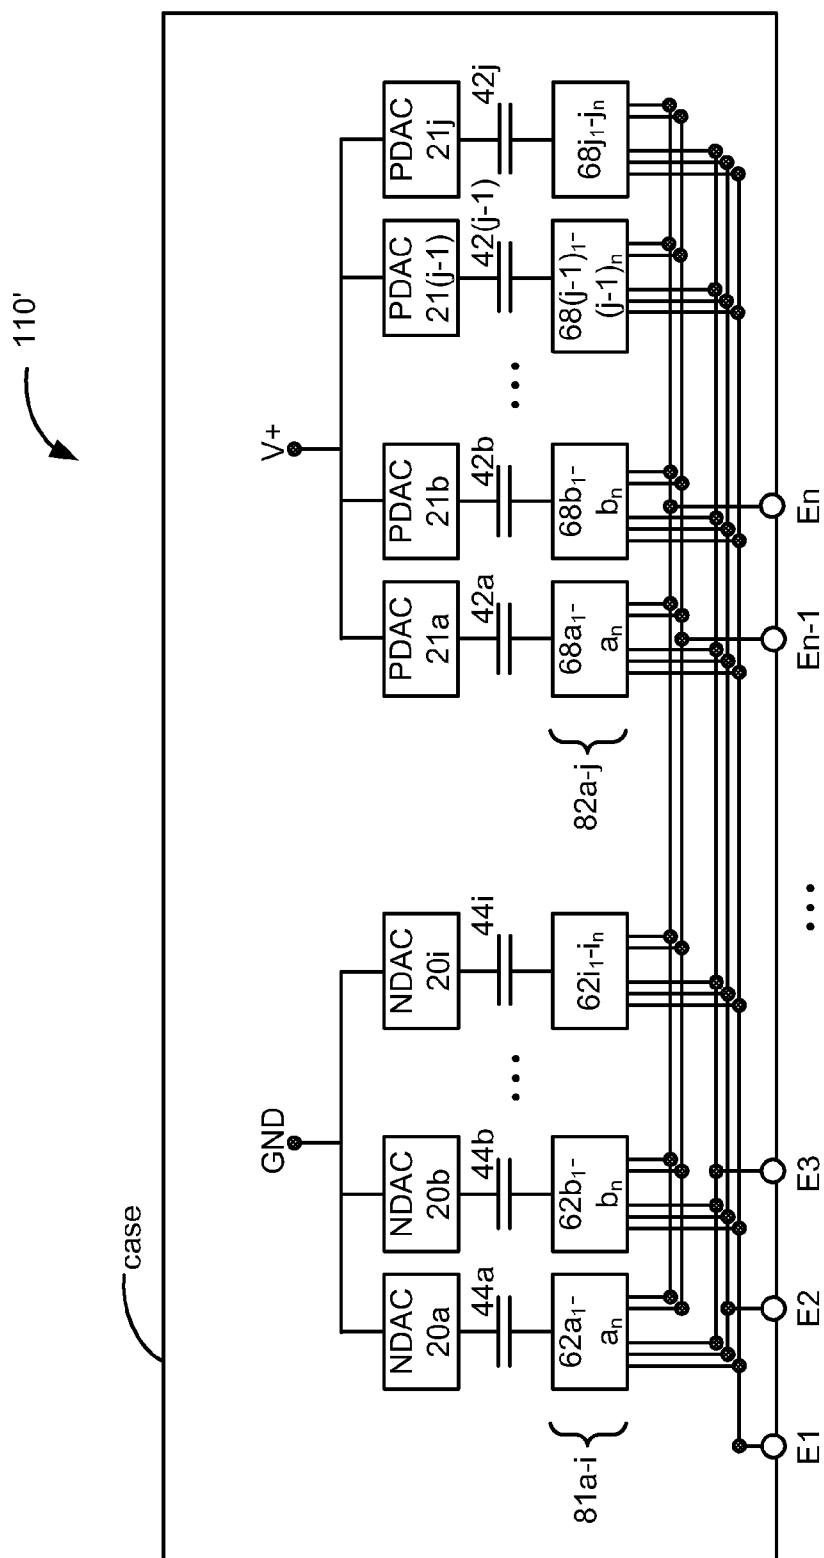


Figure 12

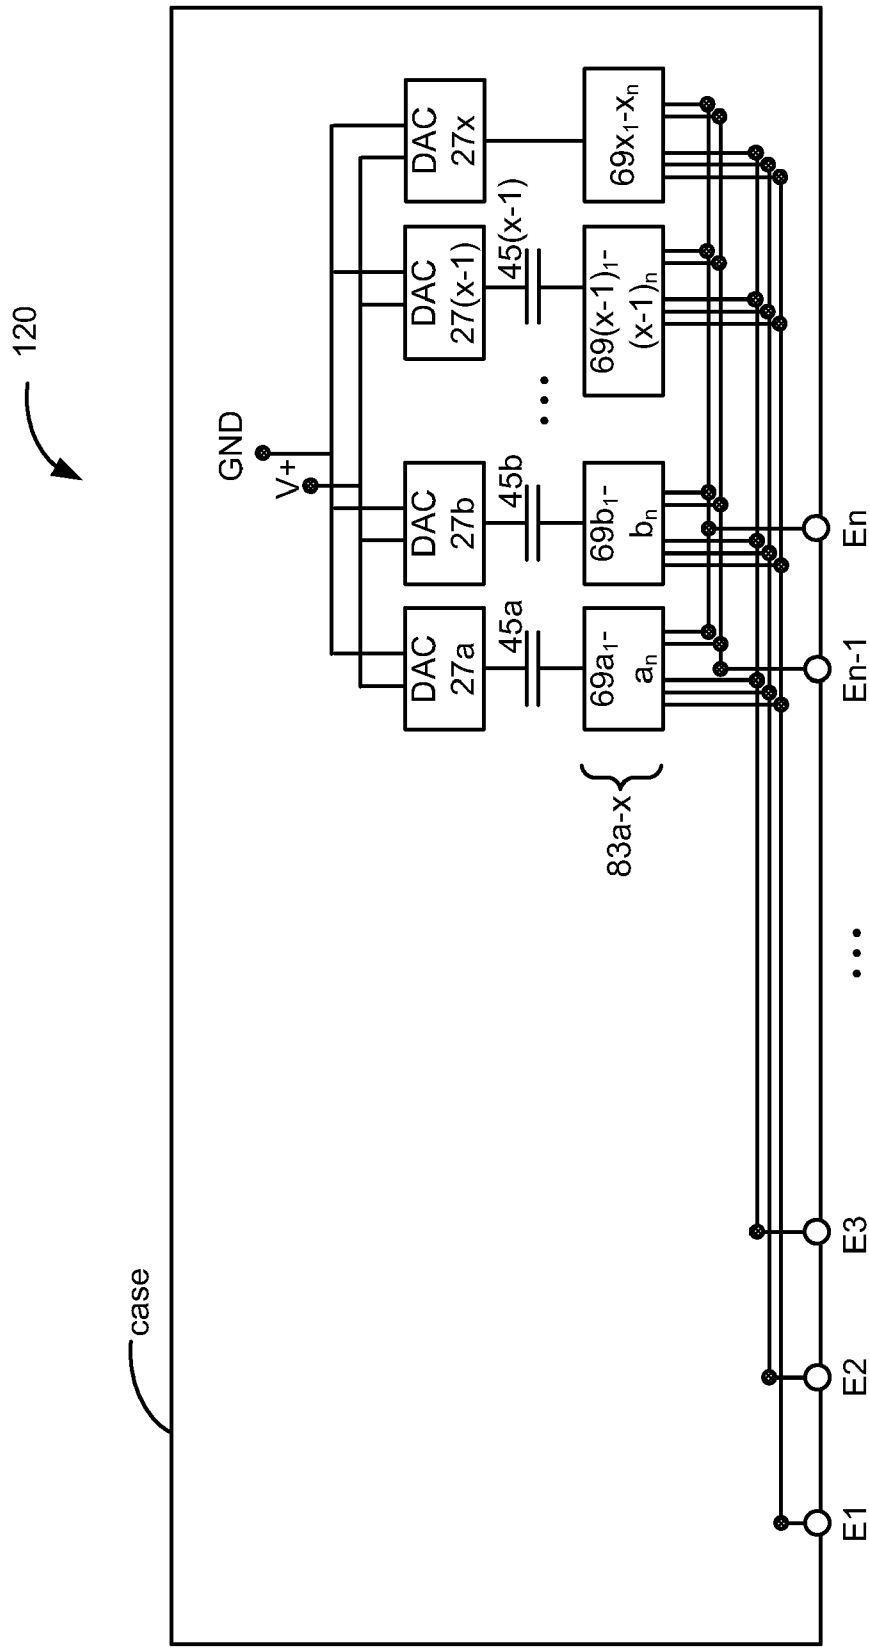


Figure 13

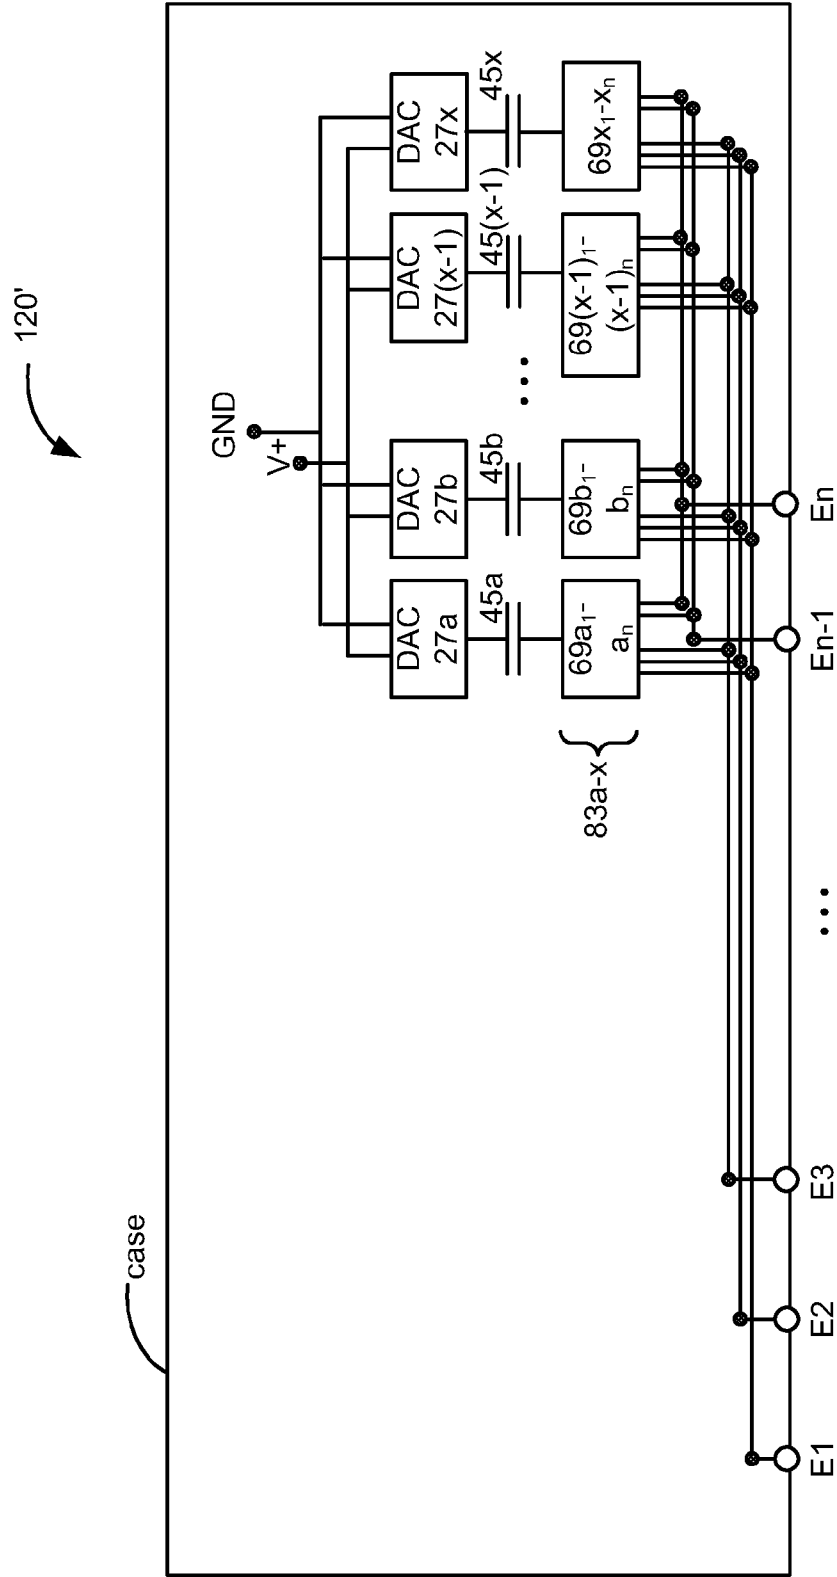


Figure 14

ARCHITECTURES FOR MULTI-ELECTRODE IMPLANTABLE STIMULATOR DEVICES HAVING MINIMAL NUMBERS OF DECOUPLING CAPACITORS

FIELD OF THE INVENTION

[0001] The present invention relates generally to multi-electrode implantable stimulator devices.

BACKGROUND

[0002] Implantable stimulation devices generate and deliver electrical stimuli to nerves and tissues for the therapy of various biological disorders, such as pacemakers to treat cardiac arrhythmia, defibrillators to treat cardiac fibrillation, cochlear stimulators to treat deafness, retinal stimulators to treat blindness, muscle stimulators to produce coordinated limb movement, spinal cord stimulators to treat chronic pain, cortical and deep brain stimulators to treat motor and psychological disorders, occipital nerve stimulators to treat migraine headaches, and other neural stimulators to treat urinary incontinence, sleep apnea, shoulder subluxation, etc. Implantable stimulation devices may comprise a microstimulator device of the type disclosed in U.S. Patent Application Publication 2008/0097529, or a spinal cord stimulator of the type disclosed in U.S. Patent Application Publication 2007/0135868, or other forms.

[0003] Microstimulator devices typically comprise a small, generally-cylindrical housing which carries electrodes for producing a desired electric stimulation current. Devices of this type are implanted proximate to the target tissue to allow the stimulation current to stimulate the target tissue to provide therapy. A microstimulator's case is usually on the order of a few millimeters in diameter by several millimeters to a few centimeters in length, and usually includes or carries stimulating electrodes intended to contact the patient's tissue. However, a microstimulator may also or instead have electrodes coupled to the body of the device via a lead or leads.

[0004] Some microstimulators 2 in the prior art contain only one two electrodes, such as is shown in FIG. 1, and are thus referred to as "bi-electrode" microstimulators. An example of a bi-electrode microstimulator device includes the Bion® device made by Boston Scientific Neuromodulation Corporation of Valencia, Calif. A single anode electrode, Eanode, sources current into a resistance R, i.e., the user's tissue. The return path for the current is provided by a single cathode electrode, Ecathode. Either of the anode or cathode electrodes could comprise the case of the device, or other conductive part of the case. Current flows by operation of a current source 20, which typically comprises a Digital-to-Analog Converter, or "DAC" 20, which is programmable to provide a desired therapeutic current, Iout, to the patient's tissue R. Such current Iout is typically pulsed as shown in the bottom of FIG. 1, and can have a frequency and duty cycle suitable for the patient.

[0005] A current source or DAC could also be coupled to the anode. However, as shown, the anode is coupled to a compliance voltage, V+, of sufficient strength to provide the current, Iout, programmed into the DAC 20. This compliance voltage can be generated from a battery voltage, Vbat, provided by a battery 12 in the microstimulator 2. A DC-DC converter 22 is used to boost Vbat to the desired compliance voltage V+, and is controlled by a V+ monitor and adjust circuitry 18. Because such circuitry for compliance voltage

generation is well known, and not directly germane to the issues presented by this disclosure, further elaboration is not provided.

[0006] Also shown in FIG. 1 is the provision of decoupling or blocking capacitors 42 and 44 hardwired to the anode and cathode respectively. As is well known, such decoupling capacitors only allow the passage of AC components of the current provided by the DAC 20, and thus prevent the DC injection of current into the patient's tissue R (Idc=0). Preventing DC current injection into the tissue is desired for safety: when the DC component of the current is removed, the possibility of current building up in the patient's tissue is minimized.

[0007] Although two decoupling capacitors 42 and 44 are shown in FIG. 1, only one is needed to prevent DC current injection, which one capacitor is coupled to the DAC 20. Thus, when the DAC 20 appears on the cathode side of the current path, only a cathode capacitor 44 is needed, as shown in FIG. 2. Likewise, were the DAC 20 on the anode side of the current path, only an anode capacitor 42 would be needed (not shown in FIG. 2). Using only one decoupling capacitor 42 or 44 is preferred because the decoupling capacitors tend to be rather large in comparison to the rest of the circuitry within the microstimulator 2, and hence take up significant room in the case. Reducing the number of decoupling capacitors therefore allows the microstimulator 2 to be made smaller, which simplifies the implanting procedure and conveniences the patient.

[0008] Bi-electrode microstimulators 2 benefit from simplicity. Because of their small size, such microstimulators 2 can be implanted at site requiring patient therapy, and without leads to carry the therapeutic current away from the body as mentioned previously. However, such bi-electrode microstimulators lack therapeutic flexibility: once implanted, the single cathode/anode combination will only recruit nerves in their immediate proximity, which generally cannot be changed unless the position of the device is manipulated in a patient's tissue.

[0009] To improve therapeutic flexibility, microstimulators having more than two electrodes have been proposed, and such devices are referred to herein as "multi-electrode" microstimulators to differentiate them from bi-electrode microstimulators discussed above. When increasing the number of electrodes in this fashion, the electrodes can be selectively activated once the device is implanted, providing the opportunity to manipulate therapy without having to manipulate the position of the device.

[0010] Exemplary multi-electrode microstimulators 4, 6, and 8 are shown in FIGS. 3A-3C respectively, and are disclosed in the '529 Publication referenced above. As its name suggests, the multi-electrode microstimulator comprises a plurality of electrodes, which electrodes may be located on the case in various manners, such as on two sides of the case as shown in the pictures at the bottom right of FIGS. 3A-3C. In this and subsequent examples, it should be noted that any of the electrodes can comprise the implant's case, or conductive portions thereof.

[0011] In the embodiment of FIG. 3A, there is provided a dedicated anode electrode, Eanode. By contrast, one of E1cathode-Encathode is selectable as the cathode via cathode switches 62₁-62_n. Selecting a particular cathode by closing its corresponding cathode switch couples that cathode to the DAC 20. For example, FIG. 3A shows the circuit that is

completed when E1cathode is selected. Notice that this design employs a single decoupling capacitor 42 in the anode path.

[0012] Also shown in FIG. 3A are recovery switches 64 and 66₁-66_n. As explained in the above-referenced '529 Publication, the recovery switches 64 and 66₁-66_n are activated at some point after provision of a stimulation pulse, and have the goal of recovering any remaining charge left on the decoupling capacitor 44 and in the patient's tissue. Thus, after a stimulation pulse, the recovery switch 64 and at least one of switches 66₁-66_n are closed. Closure of these switches places the same reference voltage on each plate of the decoupling capacitor 302, thus removing any stored charge. In one embodiment, for convenience, the reference voltage used is the battery voltage, Vbat, of the battery in the microstimulator 4, although any other reference potential could be used. Thus, during recovery, Vbat is placed on the left plate of capacitor 44 via recovery switch 64, and is likewise placed on the right plate (through the patient's tissue, R) via one or all of the recovery switches 66₁-66_n. As recovery is discussed in further detail in the '529 Publication, and it is not directly germane to this disclosure, it is not further discussed.

[0013] The embodiment of FIG. 3B improves upon the embodiment of FIG. 3A in that it allows the anode electrode to be selected as well as the cathode electrode. Thus, the device contains N electrodes, E1-En, any of which can comprise the anode or cathode at any given time. As before, which electrode acts as the cathode is determined by selecting a particular cathode switch 62₁-62_n. Which electrode acts as the anode is determined by selecting a particular anode switch 68₁-68_n. For example, FIG. 3B shows the circuit that is completed when E1 is selected as the anode, and E2 is selected as the cathode. Notice again that this design employs a single decoupling capacitor 42 in the anode path, regardless of which electrode is selected as the anode.

[0014] The embodiments of FIGS. 3A and 3B are similar in that the singular decoupling capacitor 42 prevents DC current injection to the patient's tissue R, i.e., Idc=0. As a result, these designs can be regarded as generally safe for the reasons stated earlier. Moreover, these designs are generally compact: most significantly, they only require a single decoupling capacitor 42.

[0015] However, the designs of FIGS. 3A and 3B have a shortcoming arising from their provision of a single DAC 20, namely the inability to simultaneously and independently modify the current at two or more different cathodes. Being able to so modify the current at two (or more) different cathode electrodes is desired in one example to "steer" current from one cathode to another. The concept of current steering is addressed in U.S. Patent Application Publication 2007/0239228, and so is only briefly explained here with reference to FIG. 4. FIG. 4 presents an initial condition, in which E2 has been designated as the anode, and E4 has been designated as the cathode. As the net amount of current provided by these electrodes must equal zero, E2 sources 10 mA, while E4 sinks -10 mA. In the next condition, some of the sink current (-2 mA) has been moved or "steered" from cathode electrode E4 to E3. Steering in 2 mA increments continues until in the last condition, all of the sink current (-10 mA) has been moved to cathode E3, while original cathode E4 is now off. Anode current can be similarly steered in some stimulators, but this is not shown. Being able to steer the current in this fashion not only improves the complexity of therapy that can be provided to the patient, but also allows for safe and comfortable experi-

mentation during fitting to determine the best electrodes to activate for a particular patient. However, the designs of FIGS. 3A and 3B cannot so steer the current at two different cathodes simultaneously.

[0016] An embodiment disclosed in the above-referenced '529 Publication capable of current steering is shown in FIG. 3C. This microstimulator 8 improves from the microstimulator 6 of FIG. 3B in that each electrode E1-En has its own dedicated, and independently-controllable, DAC 20₁-20_n. As a result, more than one electrode can be selected as the cathode at any given time via selection of two or more of the cathode selection switches 62₁-62_n, and the current sunk at each can be independently controlled by the corresponding DACs 20₁-20_n, which enables current steering of the sort depicted in FIG. 4.

[0017] Unfortunately, microstimulator 8 of FIG. 3C has a shortcoming related to its provision of a single decoupling capacitor 42, namely the possibility of direct DC current injection into the patient's tissue R during current steering. This is illustrated in FIG. 5. The first circuit shows the selection of Ex as the anode, and only a single electrode Ey as the cathode. In this condition, the decoupling capacitor 42 prevents DC current injection through the entirety of the current path. However, the second circuit shows the selection of electrodes Ey and Ez as cathodes, such as might occur when some of the current at Ey is steered to Ez. In this configuration, the decoupling capacitor 42 prevents DC current injection in the anode path Idc_a=0. However, no such decoupling capacitor appears in the cathode paths, and therefore DACs 20_y and 20_z are not prevented from providing a DC current through the patient's tissue. In short, while the design of FIG. 3C allows for current steering, and might be relatively compact by virtue of its single capacitor 42, it does not guarantee an absence of direct DC current injection into each cathode electrode.

[0018] FIG. 6 provides yet another design for a multi-electrode implantable stimulator 10. This type of design is often used in a spinal cord stimulator (SCS), such as that illustrated in the above-referenced '868 application. An SCS 10 will typically have a case which is coupled by leads to an electrode array. The electrode array is implanted into the patient's spine, while the case is implanted at a distant, less-critical location, such as in the patient's buttocks. Because the case is not implanted right at the location requiring stimulation, the case of the SCS 10 can typically be larger than the various microstimulators illustrated to this point.

[0019] As seen in FIG. 6, the SCS 10 has a plurality of electrodes E1-En. Hardwired to each electrode are decoupling capacitors C1-Cn, and coupled to each of these capacitors are DACs 20₁-20_n. In this particular design, the DACs can be controlled to operate as either current sources or current sinks, and thus their associated electrodes can comprise anodes or cathodes. Shown in FIG. 6 is an example in which DAC 20₂ is active as a source thus designating E2 as an anode, and DAC 20₄ is active as a sink thus designating E4 as a cathode. All other DACs, and their associated electrodes, are inactive.

[0020] Because the SCS 10 has individually-controllable DACs dedicated to each of the electrodes, current can readily be steered between the two electrodes. That is, two or more of the electrodes can act as cathodes (sinks) and/or two or more of the electrodes can act as anodes (sources) at one time. Moreover, because each electrode is hardwired to a decou-

pling capacitor C1-Cn, there is no risk of direct DC current injection into the tissue R of the patient, even during current steering.

[0021] The SCS **10** system therefore has many favorable functional benefits. However, the requirement that each of the N electrodes be hardwired to a dedicated decoupling capacitor means that N decoupling capacitors must be provided. As mentioned before, these capacitors can take up significant space in the case of the implantable stimulator. This may not be as critical of a concern where the implantable stimulator is an SCS **10** for example, because as mentioned, that type of device can generally support a larger case. However, where a small-sized microstimulator is concerned, the requirement of N capacitors for each of the N electrodes is prohibitive.

[0022] Accordingly, the inventor believes that the implantable stimulator art, and particularly the multi-electrode microstimulator art, would benefit from an architecture that would minimize device size and ensure patient safety. Specifically desirable would be a design that would minimize the number of decoupling capacitors required, but which would still prevent DC current injection even during current steering. Embodiments of such a solution are provided herein.

BRIEF DESCRIPTION OF THE DRAWINGS

[0023] FIGS. **1** and **2** illustrate the basic electrical components of a bi-electrode microstimulator in accordance with the prior art.

[0024] FIGS. **3A** through **3C** illustrate the basic electrical components of multi-electrode microstimulators in accordance with the prior art.

[0025] FIG. **4** illustrates the concept of current steering between electrodes in a multi-electrode stimulator device.

[0026] FIG. **5** illustrates DC current injection while steering the multi-electrode microstimulator of FIG. **3C**.

[0027] FIG. **6** illustrates the basic electrical components of a spinal cord stimulator in accordance with the prior art.

[0028] FIGS. **7A-7C** illustrate a single anode/multiple cathode stimulator having a minimal number of decoupling capacitors in accordance with an embodiment of the invention.

[0029] FIGS. **8A-8D** illustrate another single anode/multiple cathode stimulator having a minimal number of decoupling capacitors in accordance with an embodiment of the invention.

[0030] FIG. **9** illustrates a modification to the single anode/multiple cathode stimulators having one additional decoupling capacitor.

[0031] FIG. **10** illustrates implementation of the invention in a single cathode/multiple anode configuration.

[0032] FIGS. **11A** and **11B** illustrate implementation of the invention in a multiple anode/multiple cathode configuration having a minimal number of decoupling capacitors.

[0033] FIG. **12** illustrates a modification to the multiple anode/multiple cathode stimulator of FIG. **11A** having one additional decoupling capacitor.

[0034] FIG. **13** illustrates another implementation of the invention in a multiple anode/multiple cathode configuration having a minimal number of decoupling capacitors.

[0035] FIG. **14** illustrates a modification to the multiple anode/multiple cathode stimulator of FIG. **13** having one additional decoupling capacitor.

DETAILED DESCRIPTION

[0036] Architectures for implantable stimulators having N electrodes are disclosed. The architectures contains X current sources, or DACs. In a single anode/multiple cathode design, one of the electrodes is designated as the anode, and up to X of the electrodes can be designated as cathodes and independently controlled by one of the X DACs, allowing complex patient therapy and current steering between electrodes. The design uses at least X decoupling capacitors: X capacitors in the X cathode paths, or one in the anode path and X-1 in the X cathode paths. In a multiple anode/multiple cathode design having X DACs, a total of X-1 decoupling capacitors are needed. Because the number of DACs X can typically be much less than the total number of electrodes (N), these architectures minimize the number of decoupling capacitors which saves space, and ensures no DC current injection even during current steering.

[0037] A first embodiment of an improved multi-electrode stimulator **100** is shown in FIGS. **7A** and **7B**, and a second embodiment **100'** is shown in FIGS. **8A** and **8B**. The stimulators **100** and **100'** comprise single anode/multiple cathode stimulators similar to microstimulator **8** illustrated earlier in FIG. **3C**. However, stimulators **100** or **100'** could also be employed in a spinal cord stimulator **10** similar to that illustrated in FIG. **6**, or in any other implantable stimulator.

[0038] Stimulators **100** and **100'** comprises N electrodes, E1-En. In the configurations shown, any one of the electrodes can be programmed as the anode, and one or more of the other electrodes can be programmed as cathodes. As best shown in FIGS. **7B** and **8B**, any of the electrodes E1-En can be programmed as the anode via selection of its corresponding anode selection switch **68₁-68_n**. However, it is not important to the invention that the anode electrode be programmable. Instead, a dedicated anode electrode, similar to microstimulator **4** shown in FIG. **3A**, could also be used.

[0039] Recovery switches **64** and **66a-66x** are shown in FIGS. **7B** and **8B** for completeness. However, because the operation of such recovery circuitry is essentially similar to that discussed earlier, and is not required in embodiments of the invention, such circuitry is not again discussed.

[0040] In the both of stimulators **100** and **100'**, there are X DACs **20a-20x**, and X switch matrices **81a-x** for coupling those DACs to any of the electrodes E1-En. Each switch matrix **81** comprises N cathode selection switches **62_{1-n}** to couple a given DAC **20** to any of the N electrodes. For example, if it was desired to couple DAC **20b** to electrode E1, thus designating electrode E1 as a cathode, then selection switch **62b₁** in switch matrix **81b** would be selected.

[0041] Because there are X DACs **20a-20x**, a maximum of X electrodes can act as cathodes at any given time. (Actually, it is possible that more than X electrodes can act as cathodes so long as some of these cathodes share one of the DACs, but this possibility is not further discussed). Moreover, the current at each of those X cathode electrodes can be individually and simultaneously controlled. It would normally be the case that X (the number of DACs, or the maximum number of cathodes) is smaller than N (the number of electrodes). This is true because it is generally only desired to allow some subset of the electrodes (as opposed to all electrodes) act as cathodes at a given time. For example, in a microstimulator having N=8

electrodes, it might be desirable to at most designate $X=3$ cathodes at one time. In an even simpler example illustrated in FIG. 8D, which presents an implementation of stimulator 100', there are $N=4$ electrodes and $X=2$ DACs. This allows one electrode to operate as the anode, while at most two electrodes can operate as cathodes. In any event, because of the use of X individually-controllable DACs 20, current in the improved stimulator 100 can be steered, such as was illustrated in FIG. 4. As noted earlier, current steering is a useful feature in an implantable stimulator.

[0042] Unlike the microstimulator 8 of FIG. 3C, such steering can occur safely in stimulators 100 and 100' with no DC current injection into the patient's tissue R. Even further, and unlike the SCS 10 of FIG. 6, such safety is achieved by using a minimal number of decoupling capacitors.

[0043] Specifically, in each of stimulators 100 and 100', only X decoupling capacitors (i.e., equal to the number of DACs) are required to ensure no DC current injection. In the improved stimulator 100 of FIGS. 7A and 7B, there are no capacitors in the anode path, and X capacitors 44a to 44x in the cathode paths. In the improved stimulator 100' of FIGS. 8A and 8B, there is one capacitor 42 in the anode path, and $X-1$ capacitors 44a to 44(x-1) in the cathode paths. Again, because X is usually less than N , this cuts the total number of decoupling capacitors down from N to X when compared to the approach of FIG. 6 for example.

[0044] Even when only X total capacitors are used, the improved stimulators 100 and 100' guarantee no DC current injection in any path, even during current steering. This can be noticed from the different scenarios illustrated in FIGS. 7C and 8C for stimulators 100 and 100' respectively.

[0045] Starting with stimulator 100 and FIG. 7C, Scenario I shows selection of a single cathode electrode Ey using DAC 20a having a decoupling capacitor 44a. In this case, the cathode capacitor 44a prevents DC current injection at electrode Ey ($I_{dc_{c1}}=0$). Because the sum of the DC currents must equal 0 at the common node established by the patient's tissue R, then the current in the anode path at electrode Ex (I_{dc_a}) must also equal 0, even though the anode path lacks a capacitor.

[0046] Scenarios II and III include the selection of additional cathode electrodes, such that, generically speaking, one anode and Y cathodes are simultaneously designated as a given time. However, because each of the cathode paths includes a capacitor, and hence draws no DC current, then the current in the single anode path (I_{dc_a}) must again equal 0.

[0047] In stimulator 100' of FIGS. 8A and 8B, because only $X-1$ decoupling capacitors are in the cathode current paths, one of the DACs (e.g., 20x) is not coupled to a capacitor. However, because stimulator 100' also includes a capacitor 42 in the anode path, the lack of a capacitor in the one cathode path does not raise concerns about DC current injection, even during current steering.

[0048] This can be noticed from the different scenarios illustrated in FIG. 8C. Scenario I shows selection of a single cathode electrode Ey using DAC 20a having a decoupling capacitor 44a. In this case, both the anode capacitor 42 and the cathode capacitor 44a prevent DC current injection along the singular current path established. Scenario II shows selection of a single cathode electrode Ey using DAC 20x that does not have a decoupling capacitor. In this case, the anode capacitor 42 prevents DC current injection along the singular current path established.

[0049] Scenarios III to V illustrates the selection of additional cathode electrodes, such that, generically speaking, one anode and Y cathodes are simultaneously designated as a given time. Scenarios III and IV select two cathode electrodes Ey and Ez as cathodes, which could be a permanent therapy setting for a given patient or could be a temporary setting such as occurs during current steering between electrodes. In Scenario III, DACs 20a and 20b are used, each having a capacitor 44a and 44b. As capacitors are present in the anode path and both cathode paths, it is elementary that no DC current injection is possible. In scenario IV, DAC 20x, which lacks a capacitor, is used, along with DAC 20b, which includes a capacitor 44b. In this case, the DC current in the anode path is $I_{dc_a}=0$ by virtue of anode capacitor 42. The DC current in the cathode path established by DAC 20b is $I_{dc_{c1}}=0$ by virtue of cathode capacitor 44b. Because the sum of the DC currents must equal 0 at the common node established by the patient's tissue R, the DC current in the cathode path established by DAC 20x ($I_{dc_{c2}}$) is 0, even though that path lacks a decoupling capacitor. Scenario V furthers this example by the addition of yet another cathode path, but still the DC current in the cathode path established by DAC 20x ($I_{dc_{c3}}$) is 0.

[0050] To summarize, in stimulator 100', the cathode path established by DAC 20x need not contain a decoupling capacitor because all other paths to the patient's tissue R, i.e., the anode path and all other cathode paths, will contain a decoupling capacitor. Therefore, the circuitry is guaranteed to have no DC current injection into the patient's tissue, despite the lack of a decoupling capacitor in DAC 20x's cathode path.

[0051] While there is a size benefit to using only X capacitors, it should be noted that $X+1$ capacitors can also be used in another embodiment, such as stimulator 100'' shown in FIG. 9. In this embodiment, there is one capacitor 42 in the anode path, and X capacitors 44a to 44x in the cathode paths. Although stimulator 100'' contains one additional capacitor when compared with stimulators 100 and 100', it can still result in a smaller number of capacitors than in previous approaches requiring N capacitors, i.e., $X+1$ can still be significantly less than N . For example, consider the example discussed earlier of a microstimulator having $N=8$ electrodes with $X=3$ cathode electrodes activatable at one time. Regardless of whether 3 (X) or 4 ($X+1$) capacitors are used, the total number is still significantly less than 8 (N), resulting in substantial space savings.

[0052] To this point in the disclosure, it has been assumed that the improved stimulators 100 or 100' comprise a single anode/multiple cathode design. However, and as shown in FIG. 10, either of these embodiments can also be implemented in a multiple anode/single cathode design. FIG. 10 shows a multiple anode/single cathode stimulator 102 modeled after stimulator 100' having a single cathode path capacitor 42 and $X-1$ anode path capacitors 42a to 42(x-1). In this design, the circuitry has been modified to include cathode switches 62₁-62_n, which allows any one of the electrodes E1-En to function as the cathode or current sink. Multiple anodes can be selected via anode selection switches 68a₁ to 68x_n, which in conjunction with DACs 20a-20x can allow more than one electrode to act as an anode or current source at one time. Regardless of the cathode chosen, decoupling capacitor 44 will remain in the cathode path. Notice again that DACs 20a-20(x-1) are coupled to decoupling capacitors 42a to 42(x-1), while the anode path containing DAC 20x contains no decoupling capacitor. However, for the same reasons

discussed above, such architecture still guarantees no DC current injection, and is safe in this respect.

[0053] To this point in the disclosure, embodiments of the invention have been illustrated in either single anode/multiple cathode or multiple anode/single cathode configurations. However, the invention is also extendable to a multiple anode/multiple cathode configuration, such as is shown in stimulator **110** of FIG. **11A**. As shown, separate DACs are provided to service both the anodes and the cathodes. Specifically, NDACs **20a-20i** comprise current sinks and thus operate as cathode current sources, and are coupleable via cathode selection switches **62** to designate any of electrodes **E1-En** as cathodes. Likewise, PDACs **21a-21j** comprise opposite-polarity anode current sources, and are coupleable via anode selection switches **68** to designate any of electrodes **E1-En** as anodes. As one skilled in the art will appreciate, reference to “N” or “P” DACs relates to the polarity of the devices preferably used in the DAC circuitry, with PDACs generally comprising P-channel transistors, and NDACs generally comprising N-channel transistors. See, e.g., U.S. Patent Application Publication 2007/0038250. As shown, there are I NDACs **20**, and therefore (assuming no DAC sharing), I of the electrodes can act as cathodes at any given time. There are J PDACs **21**, and therefore (again assuming no sharing), J of the electrodes can act as anodes at a given time. In this example, $I+J=X$, meaning (consistent with earlier examples) that there are a total of X DACs **20** or **21** and a maximum of X electrodes that can be active (I cathodes and J anodes) at one time. In a sensible application, I and J could be equal.

[0054] Multiple anode/multiple cathode stimulator **110** comprises at least $X-1$ decoupling capacitors. This means a decoupling capacitor can be missing from any of the X NDACs **20** or PDACs **21** illustrated, but as shown, the capacitor is missing from the anode path coupled to the last PDAC **21j**. Thus, in the illustrated example, there are I cathode path capacitors, and $J-1$ anode path capacitors, for a total of $X-1$ capacitors.

[0055] Even though a capacitor is missing from PDAC **21j**'s anode path, the design is still guaranteed to allow no DC current injection at any electrode, because once again, the presence of capacitors in all other anode and cathode paths prevents this. The scenario illustrated in FIG. **11B** shows this, and based on similar earlier illustrations, should be self explanatory. Generically, assume P electrodes can be designated as anodes, including at least electrode **Ey** coupled to PDAC **21j**. Likewise, Q electrodes are simultaneously designated as cathodes. The result is $P+Q-1$ capacitors in the various paths. However, there can be no DC current injection into PDAC **21j**'s anode path despite the missing capacitor. Therefore, the $X-1$ capacitors ensure no DC current injection into the node formed by the patient's tissue R. Although the capacitor is shown as missing in an anode path, the capacitor may also be missing from one of the cathode paths to the same effect.

[0056] Because only $X-1$ decoupling capacitors are required in the stimulator **110** of FIG. **11A**, and because X can normally be made smaller than the total number of electrodes N, stimulator **110** can be made smaller than approaches requires N decoupling capacitors (see, e.g., FIG. **6**). For example, consider a spinal cord stimulator having $N=16$ electrodes, and which has three NDACs **20** and three PDACs **21**, meaning that a total of $X=6$ electrodes ($I=3$ anodes, $J=3$ cathodes) can be activated at any given time. Such a design

would require only $X-1=5$ decoupling capacitors instead of 16 as had been typical in previous spinal cord stimulator designs.

[0057] FIG. **12** illustrates a modification to the embodiment of stimulator **110** of FIG. **11A** in which no decoupling capacitor is missing from any of the anode or cathode paths. Although this stimulator **110'** requires one additional capacitor compared to stimulator **110** (X versus $X-1$), it can still result in a substantial reduction in the number of capacitors required. For example, and continuing the example above, the number of capacitors in a spinal cord stimulator could be cut from 16 to six for example.

[0058] FIG. **13** illustrates yet another multiple anode/multiple cathode stimulator **120**. In comparison to stimulator **110** of FIG. **11A** which was implemented using discrete NDACs and PDAC, stimulator **120** comprise X generic DACs **27a-x**. DACs **27a-x** are programmable to operate either as cathode (sink) current sources or anode (source) current sources, and therefore may comprise a combination of known NDAC and PDAC circuitry. DACs **27a-x** are coupleable to any of the N electrodes by switch matrices **83a-x**. Because the DACs **27a-x** are programmable to either sink or source current, the selection switches **69** in each of the switch matrices **83** may be implementable as transmission gates having both P and N channel transistors which can pass the sourced or sunk current with equal efficiency. The X DACs **27a-x** permit X of the electrodes can act as cathodes or anodes at any given time. More specifically, because there must be at least one cathode and anode at any given time, there can be M cathodes and $X-M$ anodes active at any given time, which M is a positive integer.

[0059] Like stimulator **110**, multiple anode/multiple cathode stimulator **120** comprises at least $X-1$ decoupling capacitors, as shown in FIG. **13**. This means a decoupling capacitor **45** can be missing from any of the X DACs **27** illustrated, but as shown, the capacitor is missing from the current path coupled DAC **27x**. Even though a capacitor is missing from DAC **27x**'s current path, the design is still guaranteed to allow no DC current injection at any electrode, because once again, the presence of capacitors in all other current paths prevents this. To summarize, because the $X-1$ capacitors prevent DC current injection into the node formed by the patient's tissue R, there can be no DC current injection into PDAC **27x**'s current path despite the missing capacitor. As with earlier embodiments, because only $X-1$ decoupling capacitors are required, stimulator **120** can generally be made smaller, etc.

[0060] FIG. **14** illustrates a modification to the embodiment of stimulator **120** of FIG. **13** in which no decoupling capacitor is missing from any of the current paths. Although this stimulator **120'** requires one additional capacitor compared to stimulator **120** (X versus $X-1$), it can still result in a substantial reduction in the number of capacitors required.

[0061] The disclosed stimulators improves upon the prior art. Because they contains a smaller number of DACs (X) relative to the number of electrodes (N), and accordingly contains a smaller number of decoupling capacitors (either $X-1$, X, or $X+1$ depending on the embodiment considered), the stimulator can be incorporated into a relatively small case. This facilitates use as a multi-electrode microstimulator for example, or allows a spinal cord stimulator case to be made that much smaller. Moreover, the disclosed designs guarantee no DC current injection, even during current steering, i.e., during the simultaneous activation of more than one cathode and/or more than one anode.

[0062] This disclosure has referred to “anodes” as being sources of current and “cathodes” as sinks of current. However, because this designation is relative, an “anode” can also refer to a sink of current and a “cathode” can also refer to a source of current. Therefore, as used herein, “anode” and “cathode” should simply be understood as having opposite polarities.

[0063] While the invention herein disclosed has been described by means of specific embodiments and applications thereof, numerous modifications and variations could be made thereto by those skilled in the art without departing from the literal and equivalent scope of the invention set forth in the claims.

What is claimed is:

1. An implantable medical device, comprising:
 - a plurality of N electrodes, wherein only one first of the electrodes is designated as either a cathode or an anode having a first current path, and wherein a second plurality of the other of the electrodes are designatable as the other of cathodes or anodes each having a second current path;
 - a plurality of X current sources, each current source being coupleable to one of the second electrodes, wherein X is less than N; and
 - a plurality of at least X capacitors, wherein the at least X capacitors are placed in the first or second current paths.
2. The device of claim 1, wherein the device comprises X+1 capacitors such that each of the first or second current paths contains a capacitor.
3. The device of claim 1, wherein the device comprises only X capacitors such that only one of the first or second current paths contains no capacitor.
4. The device of claim 3, wherein the X capacitors are placed in the second current paths such that only the first current path contains no capacitor.
5. The device of claim 3, wherein X-1 of the capacitors are placed in the second current paths and one of the capacitors is placed in the first current path such that only one of the second current paths contains no capacitor.
6. The device of claim 1, wherein the first electrode comprises an anode, and wherein the second electrodes are designatable as cathodes.
7. The device of claim 1, wherein the first electrode comprises a cathode, and wherein the second electrodes are designatable as anodes.
8. The device of claim 1, wherein the first electrode can be selected from any of the N electrodes.
9. The device of claim 1, wherein the first electrode comprises a dedicated one of the N electrodes.
10. A method for operating an implantable medical device having a plurality of electrodes, comprising:
 - simultaneously designating
 - only one first electrode as either a cathode or anode thereby establishing a first current path, and
 - a plurality of Y second electrodes as the other of the cathodes or anodes thereby establishing Y second current paths; and
 - placing only Y capacitors in the first or second current paths, wherein only one of the first or second current paths contains no capacitor.
11. The method of claim 10, wherein the Y capacitors are placed in the second current paths such that the first current path contains no capacitor.

12. The method of claim 10, wherein Y-1 of the capacitors are placed in the second current paths and one of the capacitors is placed in the first current path such that only one of the second current paths contains no capacitor.

13. The method of claim 10, wherein the first electrode is designated as an anode, and wherein the second electrodes are designated as cathodes.

14. The method of claim 10, wherein the first electrode is designated as a cathode, and wherein the second electrodes are designated as anodes.

15. The method of claim 10, wherein the first electrode can be selected from any of the plurality of electrodes.

16. The method of claim 10, wherein the first electrode comprises a dedicated one of the plurality of electrodes.

17. The method of claim 10, wherein the second electrodes are designated by coupling each to a current source.

18. An implantable medical device, comprising:
 - a plurality of N electrodes, wherein at least one first electrode is designatable as either a cathode or an anode having a first current path, and wherein at least one second electrodes is designatable as the other of cathodes or anodes having a second current path;
 - a plurality of J anode current sources, each anode current source being coupleable to one of the first electrodes; and
 - a plurality of I cathode current sources, each cathode current source being coupleable to one of the second electrodes; and
 - a plurality of at least J+I-1 capacitors, wherein the at least J+I-1 capacitors are placed in the first and second current paths.

19. The device of claim 18, wherein J is less than N and wherein I is less than N.

20. The device of claim 18, wherein the device comprises J+I capacitors such that each of the first or second current paths contains a capacitor.

21. The device of claim 18, wherein the device comprises only J+I-1 capacitors such that only one of the first or second current paths contains no capacitor.

22. The device of claim 18, wherein the at least one first electrode is designatable as an anode, and wherein the at least one second electrode is designatable as a cathodes.

23. The device of claim 18, wherein the at least one first electrode can be selected from any of the N electrodes.

24. The device of claim 18, wherein each of the J anode current sources are coupleable to any of the first electrodes by a switch matrix, and wherein each of the I cathode current sources are coupleable to any of the second electrodes by a switch matrix.

25. The device of claim 18, wherein the J anode current sources are coupled to a compliance voltage, and wherein the I cathode current sources are coupled to a reference voltage.

26. The device of claim 18, wherein J equals I.

27. An implantable medical device, comprising:
 - a plurality of N electrodes, wherein at least one first electrode is designatable as either a cathode or an anode having a first current path, and wherein at least one second electrodes is designatable as the other of cathodes or anodes having a second current path;
 - a plurality of X current sources, each current source being programmable as either a anode current source coupleable to one of the first electrodes, or as a cathode current source coupleable to one of the second electrodes;

a plurality only $X-1$ capacitors, wherein the $X-1$ capacitors are placed in the first and second current paths such that only one of the first or second current paths contains no capacitor.

28. The device of claim **27**, wherein X is less than N .

29. The device of claim **27**, wherein the at least one first electrode is designatable as an anode, and wherein the at least one second electrode is designatable as a cathodes.

30. The device of claim **27**, wherein the at least one first electrode can be selected from any of the N electrodes.

31. The device of claim **27**, wherein each of the X current sources are coupleable to any of the N electrodes by a switch matrix.

32. A method for operating an implantable medical device having a plurality of electrodes, comprising:

simultaneously designating

at least one P first electrode as either a cathode or anode thereby establishing P first current paths, and

a plurality of Q second electrodes as the other of the cathodes or anodes thereby establishing Q second current paths;

placing only $P+Q-1$ capacitors in the first or second current paths, wherein only one of the first or second current paths contains no capacitor.

33. The method of claim **32**, wherein the P first electrodes and the Q second electrodes can be selected from any of the plurality of electrodes.

34. The method of claim **32**, wherein each of the P first electrodes are coupled to a first current source of a first polarity and wherein each of the Q second electrodes are coupled to a second current source of a second polarity opposite the first polarity.

35. The method of claim **32**, wherein the first current sources are coupled to a compliance voltage, and wherein the second current sources are coupled to a reference voltage.

* * * * *