



(22) Date de dépôt/Filing Date: 2006/09/08

(41) Mise à la disp. pub./Open to Public Insp.: 2008/03/08

(45) Date de délivrance/Issue Date: 2020/04/14

(62) Demande originale/Original Application: 2 846 302

(51) Cl.Int./Int.Cl. *B61D 7/22* (2006.01),
B61D 7/02 (2006.01), *B61D 7/18* (2006.01),
B65D 88/26 (2006.01), *B65D 88/28* (2006.01)


(72) Inventeurs/Inventors:
FORBES, JAMES W., CA;
KHATTAB, MOHAMED A., CA;
BIS, TOMASZ, CA;
DAVIS, WILLIAM, CA

(73) Propriétaire/Owner:
NATIONAL STEEL CAR LIMITED, CA

(74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : RACCORDS DE WAGON-TREMIE ET METHODE DE FONCTIONNEMENT

(54) Title: RAILROADHOPPER CAR FITTINGS AND METHOD OF OPERATION

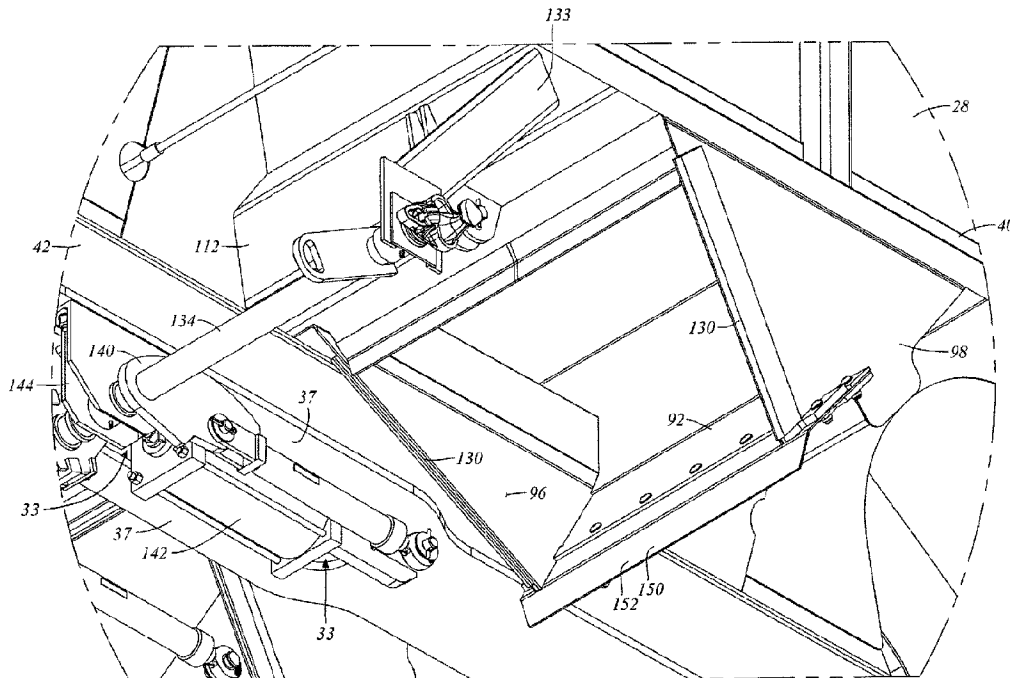

(57) **Abrégé/Abstract:**

A hopper car discharge section is driven by actuators. The Hopper car has pairs of left and right hand doors yoked together by a hollow section beam that extends clear across the car beneath the center sill. The left and right hand doors move through the same arc of motion. A pneumatic ram is used to drive the motion of the doors. The car has a straight-through center sill. The center sill has a bottom flange. The bottom flange splits at a widened portion. There is an accommodation, or pocket, located inside the center sill between the split sides of the bottom flange of the center sill. The pneumatic ram seats in that pocket and is connected to drive the doors.

RAILROAD HOPPER CAR FITTINGS
AND METHOD OF OPERATION

Abstract

5

10

A hopper car discharge section is driven by actuators. The Hopper car has pairs of left and right hand doors yoked together by a hollow section beam that extends clear across the car beneath the center sill. The left and right hand doors move through the same arc of motion. A pneumatic ram is used to drive the motion of the doors. The car has a straight-through center sill. The center sill has a bottom flange. The bottom flange splits at a widened portion. There is an accommodation, or pocket, located inside the center sill between the split sides of the bottom flange of the center sill. The pneumatic ram seats in that pocket and is connected to drive the doors.

RAILROADHOPPER CAR FITTINGS
AND METHOD OF OPERATION

Field of the Invention

5

This invention relates to the field of railroad freight cars, and, in particular to railroad freight cars such as may employ bottom unloading gates.

Background

10

There are many kinds of railroad cars for carrying particulate material, be it sand or gravel aggregate, plastic pellets, grains, ores, potash, coal or other granular materials. These materials are not liquid, yet may in some ways tend to flow in a somewhat liquid-like manner. Many of those cars have an upper opening, or accessway of some kind, by which the particulate is loaded, and a lower opening, or accessway, or gate, by which the particulate material exits the car under the influence of gravity. Clearly, while the inlet opening need not necessarily have a movable gate (but may include a cover to discourage contamination of the lading or exposure of the lading to the wind), the outlet opening requires a governor of some kind that is movable between a closed position for retaining the lading while the lading is being transporting, and an open position for releasing the lading at the destination. The terminology "flow through" or "flow through railroad car" or "center flow" car, or the like, may sometimes be used for cars of this nature where lading is introduced at the top, and flows out at the bottom.

15

20

25

30

35

Consider, for example, a hopper car for transporting aggregate, be it gravel or sand. The hopper may have a converging hopper discharge section that has the shape, generally speaking, of an inverted four sided, truncated pyramid. At the truncated bottom end, there may be a stationary plate and a moving plate, or door. When the moving plate and the stationary plate are brought together, the door is closed. The car is filled with lading, and is hauled to its destination. At the destination, the gate is opened, and the lading is allowed to escape from the hopper. However, it sometimes happens that, for example, the car may move while the gate is still obstructed by lading, such that the gate may tend to "plow" the aggregate. This may not necessarily lead to the retention of the original geometry of the closure, and, after a time, the gate may tend not to close as well as it might originally have done, or as might be desired. A number of considerations arise from dealing with this kind of issue. First, it may be helpful to diminish, or to avoid, the tendency to distort the geometry of the door closure in the first place. Second, if

the door seal region is prone to damage or abuse, it may be helpful to be able to replace the parts most likely to wear or be damaged relatively easily, rather than having to replace what might otherwise be considered permanent structure. Third, it is a consideration that parts employed in this kind of use may face an abrasive environment, even in normal, non-abusive operation. Fourth, particularly if the car is intended to be used with fine aggregates, such as sand, it may be desirable to employ a door seal that may tend to be somewhat tolerant of geometric mismatch, or creeping tolerances as parts are either damaged or bent out of shape.

Summary of the Invention

In an aspect of the invention, there is a door seal member for a gate of a hopper of a railroadcar. The door seal member has at least one fitting by which to secure the door seal member to one of (a) a movable closure member; and (b) another closure member co-operable with the movable member to form a closure. The door seal member also has a deflecting portion, and a land portion for engagement with the other of (a) the other member; and (b) the movable member. The deflecting portion is movable in a direction that, when the fitting is installed, includes an inward component of displacement relative to the hopper. The land portion is connected to the deflecting portion, and is movable to cause the deflecting portion to be displaced in that direction of closing of the hopper gate.

In another feature of that aspect of the invention, the door seal member stores energy when deflected. In an additional feature, the door seal member is made of a material having a rated yield strength of more than 70 ksi. In still another feature, the door seal member has a yield strength of greater than 100 ksi. In a further feature, the land and the deflecting portion are parts of a monolith. In yet another feature, the door seal member includes a bent lip located distant from the fitting, and the land is part of the bent lip. In a still further feature, the deflecting portion adjoins the fitting, and the land is formed on a portion of the door seal member connected to the deflecting portion distant from the fitting.

In still another feature, there is a door seal assembly that incorporates the door seal member of that aspect of the invention. The door seal assembly includes a second door seal member. The second door seal member has a proximal portion and a distal portion. The proximal portion is attachable to the same one of (a) the movable member; and (b) the stationary member, as the first door seal member. The distal portion extends away from the fitting, and has a first door seal member contact distant from the fitting. When assembled, the land of the first

door seal member lies more distant from the fitting than the first door seal member contact of the second door seal member. At least a portion of the deflecting portion lies more proximate to the fitting than the contact. The first door seal member is movable in engagement with the contact when the movable member and the stationary member come together, and the land is deflected.

5 In a further feature, the contact includes one of (a) a fulcrum; and (b) a rocker, against which the first door seal member acts. In still another feature, when assembled, the reinforcement is a backing member, and the land of the seal member is, when installed, cantilevered beyond the contact.

10 In another aspect of the invention, there is a door seal assembly for a closure of a hopper discharge section of a railroad hopper car. The discharge section is movable between a closed position for retaining lading in the hopper and an open position for permitting the release of lading from the hopper. The hopper discharge section includes a first closure member and a second closure member. At least one of the first and second closure members is movable. The
15 first and second closure members are co-operable. The door seal assembly includes a first member and a co-operating second member. The first member and the second member are securable to the first closure member of the discharge section of the hopper. The first member, when installed, extends from the first closure member, and when installed, the second member presents a fulcrum to the first member. The first member has a first portion that, when installed,
20 lies between a locus of securement thereof and the fulcrum. The first member, when installed, has a second portion cantilevered beyond the fulcrum.

In a feature of that aspect of the invention, the second portion includes a land that, on installation, is oriented to face predominantly toward the second closure member, and is operable
25 to engage at least a portion of the second closure member when the first and second closure members come together. In another feature, in operation, the second portion engages at least a portion of the second closure member, and, when so engaged, the second portion deflects in a first direction, and the first portion deflects in a reactive direction. In a further feature, the reactive direction is a direction that includes a component of direction that is inwardly with
30 respect to the hopper. In a still further feature, when the first and second closure members are in a closed condition the first portion of the first seal member is exposed to lading placed in the hopper, and the first portion of the first seal member is operable under the influence of lading bearing thereagainst to cause the second portion of the first seal member to bear more tightly against the second closure member.

35

In still another feature, in operation, the second portion of the first member of the door seal assembly deflects in a first direction on engagement of the first and second closure members, and the first portion of the first member deflects in a predominantly opposite direction. In yet another feature, as installed, the first portion of the first seal member faces inwardly toward, and is exposed to, lading borne by the hopper, and the first portion is operable under the influence of lading bearing thereagainst to urge the second portion of the first seal member to bear more forcefully against the second closure member. In another feature, the first seal member has an intermediate portion between the first and second portions thereof, and, in operation, the intermediate portion works against the fulcrum as the first and second closure members come together. In another further feature, the first seal member has a locus of contact against the fulcrum, and has slope continuity at that locus of contact. In another feature, the first seal member is operable to carry a bending moment across the fulcrum between the first and second portions of the first seal member. In a further feature, the second portion of the first seal member includes a bent lip. In still another feature, the fulcrum of the second member is cantilevered away from the first closure member of the discharge section.

In still another aspect of the invention, there is a hopper discharge section of a railroad hopper car, the discharge section being movable between a closed position for retaining lading in the hopper to a open position for permitting release of lading from the hopper. The hopper discharge section includes a first closure member and a second closure member. At least one of the first and second closure members is movable, and the first and second closure members are co-operable. The discharge section also includes a door seal assembly. The door seal assembly includes a first member and a co-operating second member. The first member and the second member are securable to the first closure member of the discharge section of the hopper. In the open condition, the first closure member includes a hopper slope sheet extension, the hopper slope sheet extension providing a surface against which lading to be discharged may slide, the surface having an angle of inclination. The first member is mountable to extend from the first closure member, and the second member is mountable to present a fulcrum to the first member. The first member has a first portion that, when installed, lies between the fulcrum and the discharge portion of the hopper, and a second portion cantilevered beyond the fulcrum. In the open condition, the first member lies in a position that is one of (a) substantially flush with; and (b) shy of, the surface of the slope sheet extension.

In another feature of that aspect of the invention, in the closed condition, at least part of the first portion of the first member of the seal assembly is located in a position that is proud of

the position of that member when the door is open. In a further feature, in the closed condition, at least part of the first portion of the first member of the seal assembly lies proud of the surface of the slope sheet.

5 In another aspect of the invention there is a hopper discharge section that has substantial structural reinforcement closely adjacent to the lower margin of the hopper at which the hopper discharge section has closure members, of which at least one is movable. In a feature of that aspect of the invention, the closure members may be reinforced along their outwardly facing sides by substantial structural members. In one feature, those structural members may form
10 closed hollow sections. In another feature, the distal margin of a movable closure member has a substantial structural reinforcement running therealong. In an additional feature, the reinforcement of the door margin may be a channel section. In another feature, the margin may include a doubler plate.

15 In another aspect of the invention, there is a method of operating a discharge section of a hopper car. The method includes establishing the car in an empty condition. A pair of closure members of the discharge section are brought together, that bringing together activating a seal member. The step of activating includes causing a part of the seal member to deflect inwardly relative to the hopper. In another feature, the method includes introducing lading into the hopper
20 to bear against a portion of the seal member, and, in so bearing, causing the seal to seat more tightly.

These and other aspects and features of the invention may be understood with reference to the description which follows, and with the aid of the illustrations of a number of examples.

25

Brief Description of the Figures

The description is accompanied by a set of illustrative Figures in which:

30 Figure 1a is a general arrangement, isometric view of a railroad freight car;
 Figure 1b is a side view of the railroad freight car of Figure 1a;
 Figure 1c is a top view of the railroad freight car of Figure 1a;
 Figure 1d is lateral cross-section of the railroad freight car of Figure 1a, taken on section
 ‘1d – 1d’ of Figure 1b;

Figure 1e is a longitudinal cross-section of the railroad freight car of Figure 1a, taken on section '1e – 1e' of Figure 1d;

Figure 2a is a plan view of a ridge plate member for the freight car of Figure 1a;

Figure 2b is an isometric detail of the ridge plate of Figure 2a, as installed; and

5 Figure 2c is an enlarged detail of the railroad freight car of Figure 1e.

Figure 3a is an enlarged detail of the side view of Figure 1a, showing a hopper discharge assembly with a gate in a closed position;

Figure 3b is a view similar to Figure 3a, but with the gate in an open condition;

Figure 3c shows a rear perspective view of a movable closure member of the gate of

10 Figure 3b under construction with side sill and outboard side sheet removed;

Figure 3d shows an isometric view of the discharge assembly of Figure 3a taken from below, outboard, and behind the door crank, with the movable door removed to reveal the geometry of the hopper discharge throat;

15 Figure 3e shows an isometric view of the discharge assembly of Figure 3a from below, outboard, and behind a fixed hopper discharge slope sheet;

Figure 3f shows a detail of a lip of the discharge assembly of Figure 3a as seen with the movable door in an open condition;

Figure 3g shows a similar detail of the lip in a closed condition;

Figure 3h is a detail of a section of the gate of Figure 3a;

20 Figure 3i is a detail of the door of Figure 3c taken on section '3i – 3i' of Figure 3h;

Figure 4a shows an isometric view of an alternate door assembly to that of the gate of Figure 3a;

Figure 4b shows a plan view, from in front, of the door assembly of Figure 4a;

Figure 4c shows a top view of the door assembly of Figure 4a;

25 Figure 4d shows a side view of the door assembly of Figure 4a;

Figure 4e shows a sectional view of the door assembly of Figure 4a taken on section '4e – 4e' of Figure 4b;

Figure 5a shows a detail of an alternate gate assembly to that of Figure 3h;

Figure 5b shows a detail of a further alternate gate assembly to that of Figure 3h;

30 Figure 5c shows still another alternative gate assembly to that of Figure 3h;

Figure 5d shows yet another alternative gate assembly to that of Figure 3h;

Figure 6a shows a scab isometric view of a portion of an alternate embodiment of gate assembly to that of Figure 3a;

35 Figure 6b shows a sectional view of the gate assembly of Figure 6a, analogous to the view of Figure 3i;

Figure 6c shows a detail of the gate assembly of Figure 6a taken on section '6c - 6c' of Figure 6b;

Figure 6d shows a section of an alternate gate assembly to that of Figure 6a;

5 Figure 7a shows an isometric view of an alternate railroad car to that of Figure 1a, the near side beam of the car being removed to reveal internal detail;

Figure 7b shows a side view of the railroad car of Figure 7a with some portions showing hidden details of a door mechanism;

Figure 7c shows a top view of the railroad car of Figure 7a;

10 Figure 7d shows a transverse cross-sectional view of the railroad car of Figure 7b taken on section '7d - 7d'; and

Figure 7e shows a transverse cross-sectional view of the railroad car of Figure 7b taken on section '7e - 7e'.

15 Figure 7f shows a cross-sectional view of the railroad car of Figure 7a with the side wall removed, and viewed on an angle downwardly and inwardly toward the center sill;

Figure 7g shows a perspective view of a gate assembly of the rail car of Figure 7a, looking on an upward and inboard angle;

Detailed Description

20

The description that follows, and the embodiments described therein, are provided by way of illustration of an example, or examples, of particular embodiments of the principles, aspects or features of the present invention. These examples are provided for the purposes of explanation, and not of limitation, of those principles and of the invention. In the description, like parts are marked throughout the specification and the drawings with the same respective reference numerals. The drawings are not necessarily to scale and in some instances proportions may have been exaggerated in order more clearly to depict certain features of the invention.

25

30 The terminology used in this specification is thought to be consistent with the customary and ordinary meanings of those terms as they would be understood by a person of ordinary skill in the railroad industry in North America. Following from decision of the CAFC in *Phillips v. AWH Corp.*, the Applicant expressly excludes all interpretations that are inconsistent with this specification, and, in particular, expressly excludes any interpretation of the claims or the language used in this specification such as may be made in the USPTO, or in any other Patent
35 Office, other than those interpretations for which express support can be demonstrated in this

specification or in objective evidence of record in accordance with *In re Lee*, (for example, earlier publications by persons not employed by the USPTO or any other Patent Office), demonstrating how the terms are used and understood by persons of ordinary skill in the art, or by way of expert evidence of a person or persons of at least 10 years experience in the railroad industry in North America or in other former territories of the British Empire and Commonwealth.

In terms of general orientation and directional nomenclature, for railroad cars described herein the longitudinal direction is defined as being coincident with the rolling direction of the railroad car, or railroad car unit, when located on tangent (that is, straight) track. In the case of a railroad car having a center sill, the longitudinal direction is parallel to the center sill, and parallel to the top chords. Unless otherwise noted, vertical, or upward and downward, are terms that use top of rail, **TOR**, as a datum. In the context of the car as a whole, the term lateral, or laterally outboard, or transverse, or transversely outboard refer to a distance or orientation relative to the longitudinal centerline of the railroad car, or car unit, or of the centerline of a centerplate at a truck center. The term "longitudinally inboard", or "longitudinally outboard" is a distance taken relative to a mid-span lateral section of the car, or car unit. Pitching motion is angular motion of a railcar unit about a horizontal axis perpendicular to the longitudinal direction. Yawing is angular motion about a vertical axis. Roll is angular motion about the longitudinal axis. Given that the railroad car described herein may tend to have both longitudinal and transverse axes of symmetry, a description of one half of the car may generally also be intended to describe the other half as well, allowing for differences between right hand and left hand parts. In this description, the abbreviation kspi stands for thousand of pounds per square inch. To the extent that this specification or the accompanying illustrations may refer to standards of the Association of American Railroads (AAR), such as to AAR plate sizes, those references are to be understood as at the earliest date of priority to which this application is entitled.

Figure 1a shows an isometric view of an example of a railroad freight car 20 that is intended to be representative of a wide range of railroad cars in which the present invention may be incorporated. While car 20 may be suitable for a variety of general purpose uses, it may be taken as being symbolic of, and in some ways a generic example of, a flow through car, in which lading is introduced by gravity flow from above, and removed by gravity discharge through gated or valved outlets below. Flow through, or center flow cars may include open topped hopper cars, grain cars, plastic pellet cars, potash cars, ore cars, and so on. In one embodiment

car **20** may be a hopper car such as may be used for the carriage of bulk commodities in the form of a granular particulate, be it in the nature of relatively coarse gravel or fine aggregate in the nature of fine gravel or sand or various ores or concentrate or coal. Car **20** may be symmetrical about both its longitudinal and transverse, or lateral, centreline axes. Consequently, it will be understood that the car has first and second, left and right hand side beams, bolsters and so on.

By way of a general overview, car **20** may have a car body **22** that is carried on trucks **24** for rolling operation along railroad tracks. Car **20** may be a single unit car, or it may be a multi-unit car having two or more car body units, where the multiple car body units may be connected at an articulated connector, or by draw bars. Car body **22** may have a lading containment vessel or shell **26** such as may include an upstanding wall structure **28** which may have a pair of opposed first and second end walls **30, 32**, that extend cross-wise, and a pair of first and second side walls **34, 36** that extend lengthwise, the end walls **30, 32** and side walls **34, 36** co-operating to define a generally rectangular form of peripheral wall structure **28**. Wall structure **28** may include top chords **38** running along the top of the walls, and side sills **40** running fore-and-aft along lower portions the side sheets of side walls **34, 36**. In some instances car **20** may have stub center sills at either end, in which case side walls **34, 36** may act as deep beams, and may carry vertical loads to main bolsters that extend laterally from the centerplates. Alternatively, or in addition to deep side beams, car **20** may include a center sill **42**, which may be a straight-through center sill, running from one end of the car body to the other. As seen in Figure **1d**, center sill **42** has a top flange **41**, a bottom flange **43**, and webs **39**. In the case of a single, stand alone car unit, draft gear and releaseable couplers may be mounted at either end of the center sill. In a center flow, or flow through car, the upper portion of the car may typically include means by which to admit lading under a gravity drop system. Such an intake, or entryway may be a large rectangular opening such as bounded by top chords **38**, or the car may have one or more hatches, whether covered or uncovered.

As shown in Figure **1c**, the interior of car body **22** may include end slope sheets **44** and lateral partitions such as may be identified as intermediate slope sheets **46** that may extend between the side walls of the car, in a manner such as may tend to divide the internal space **48** of car body **22** into two or more sub-compartments, sub-volumes or subspaces indicated generally as **50, 52** and **54** in this example, and which may be referred to as hoppers. Clearly, in some embodiments there may be one single hopper, in others two hoppers and in others three, four, or more hoppers. As may be noted, end sheets **44** may be slope sheets, and internal partition sheets **46** may also be slope sheets. Not atypically, each pair of fore-and aft opposed slope sheets, be

they end sheets or internal partitions, may be inclined at equal and opposite angles, and the angles of those sheets may be selected to be somewhat steeper than the free slope angle, or natural talus slope angle of the lading for which the car is designed, such that, when the gates are opened, the lading may tend to flow out, rather than sit at rest.

5

Car 20 may have relatively large slope sheets, be they 44 or 46, which may tend to extend to a height relatively close to top chords 38. That is, taking either the coupler centerline height or the center sill cover plate upper surface as a datum, slope sheets 46 may terminate at a height that is at least half way to top chord 38, and which may, in some embodiments, extend more than
10 $\frac{2}{3}$, $\frac{3}{4}$ or $\frac{4}{5}$ of that distance, as may be.

Car 20 may include a fitting 60 mounted at the apex where two adjacent slope sheets 46 meet. Fitting 60 may be termed a partition, or a divider, or a reinforcement. Although any of those terms may be used, fitting 60 may be referred to as a ridge plate. As seen in the plan view
15 of Figure 2a, ridge plate 60 may include a central portion 62, and end portions 64, 66. Central portion 62 may be formed of a flat bar, which may be of substantial thickness, be it $\frac{1}{2}$ inch, $\frac{5}{8}$ inch, $\frac{3}{4}$ inch, or some different dimension.

It may be that ridge plate 60 is formed of a single monolithic part, cut to shape.
20 Alternatively, the components of ridge plate 60, namely items 62, 64 and 66, may each be individually cut to shape, e.g., from a sheet or plate, and then assembled, typically by being butt welded together to yield the form shown in Figure 2a. On assembly, or sub-assembly, slope sheets 46 may be mounted together in a jig, along with ridge plate 60, and a laterally extending cross-gusset 70. Rather than having a single large fillet at the adjoining margins 72, 74 of slope
25 sheets 46, (as would occur absent fitting 60) fillets may be formed on either side of ridge plate 60, as indicated at 76, 78. Ridge plate 60 is positioned such that a portion thereof, identified as upper portion 80 extends upwardly proud of the junction of slope sheets 46, or, indeed, what would be the location of the junction of those sheets but for the interposition of ridge plate 60. Ridge plate 60 may also include a lower portion 82, that extends lower than this junction. The
30 width of ridge plate 60 (i.e., in the vertical direction) may permit it to function, *inter alia*, as a backing bar for welding, that presents a significant dimensional tolerance for fit up on either side. Furthermore, the upper margin 84 of upper portion 80 may provide a solid, hard edge of relatively thick material that may tend to resist abuse perhaps somewhat better than might a more conventional apex.

35

Ridge plate **60** may, in one embodiment, have a constant cross-section, such as that of portion **62**, at all locations across the car, from side sheet to side sheet. Alternatively, end portions **64**, **66** may have a generally triangular shape and may, along its upper margin have an arcuate or angularly inclined profile, and may extend generally upwardly in the outboard direction. This profile may be such that ridge plate **60** has an outboard margin **85** that mates with, and extends upwardly against, side sheet **35**, in a manner to form a stem such as may tend locally to discourage lateral deflection of top chord **38**. In one embodiment, at least a portion of margin **85** may extend to a height that lies upwardly of the lower margin of top chord **38**. Top chord **38** may be an angle or channel, or hollow structural section, such as a square or rectangular steel tube, and side sheet **35** may overlap the inner face of top chord **38**.

It may also be noted that a triangular tube **68** is formed by the co-operation of slope sheets **46** and the horizontal plate defined by cross-gusset **70**. This tube may extend from side sheet to side sheet, and may be welded thereto. End portions **64**, **66**, working in conjunction with side sheets **35**, may tend to form a stem of a T-section to which side sheet **35** forms the cross-piece or flange, by which the stiffening influence of the triangular tube is extended to the top chord. Expressed somewhat differently yet again, the combination of the tube and the two stems may tend to function in a manner akin to a spring that may resist lateral deflection of the top chords. In terms of vertical scale, the central portion **62** of ridge plate fitting **60** may be relatively small as compared to the lineal run or vertical rise of either slope sheet **46** or end slope sheet **44**. For example, it may be less than 20 % of either of those distances, and may be of lesser magnitude than the depth of the top chord or half the depth of the center sill. In other comparative terms, the depth of the central portion **62** of ridge plate fitting **60** may be less than the depth of tube **68** from cross-gusset **70** to the apex at the intersection of the planes of the upper surfaces of the adjacent slope sheets. The height of cross-gusset **70** may, itself, be more than half way to the height of the top chord upper flange, as measured from with the coupler centerline or from the center sill top cover plate upper surface. In absolute terms, the central portion of ridge plate fitting **60** may be less than 1 ft, and may, in one embodiment be less than 6 inches in depth.

Slope sheets **44** and **46** may have relatively large spans. So that the spans might not be unsupported, car **20** may include intermediate shear web panels **45** (associated with end slope sheets **44**) and **47** (associated with intermediate slope sheets **46**) that may extend amidst the otherwise unsupported span and provide a link to center sill **42**. Pairs of panels **45** and **47** may

be laterally outwardly splayed with respect to one another as seen, for example, in Figure 1d. Panels 45 and 47 may include lightening apertures as indicated at 49 and 51.

5 The lower regions of car body 22 may include gate or discharge assemblies 90, for the various hoppers, however many there may be, by which one or more members that are movable between closed and open positions may be used as a flow control to govern the egress of lading from that hopper.

10 Referring to Figure 3a, the discharge assemblies 90 may include the lower portion of, or a continuation of, one or both of the fore-and-aft slope sheets defining the fore and aft walls of that hopper. For example, hopper 50 (it being chosen arbitrarily, and generically) may include a first fore-and-aft hopper slope sheet extension 92, mounted to one slope sheet, e.g., item 44, and a second fore-and-aft slope sheet extension 94 mounted to an opposed slope sheet, e.g., be it item 46.

15 Discharge assemblies 90 may also include a pair of opposed side sheet members, 96, 98. Side sheet members 96, 98 may be steel plates, and may be positioned to co-operate with slope sheet extension 92 to define a converging, or funnel-like passageway, or conduit, leading to a throat, or opening, indicated generally as 100, at which an exit, or port, or gate, however it may be termed, is defined. In particular, the sides of the periphery of discharge opening 100 may be defined by the margins 106 of side sheet members 96 and 98 that angle upwardly and away from slope sheet extension 92. The bottom edge, or sill, of the discharge opening may be defined by the lowest margin or extremity of slope sheet extension 92, or such fittings or assemblies as may be mounted thereto, as may be described hereinbelow. First slope sheet extension 92 may be a panel that is rigidly fixed relative to the first slope sheet, and may be made from a metal, such as a steel, that may serve as a wear plate, and which may be hardened or alloyed for such a purpose. Slope sheet extension 92 may be reinforced along its lower lateral margin by a lip stiffening member 88, which may be a U-pressing, or channel, mounted to the outside face of extension 92 and forming a hollow section therewith, capped by the wings, or tabs 86 of side sheet members 96, 98.

30 Slope sheet extension 94 may be a movable slope sheet extension, and may be, or may be part of, a moveable closure member or closure assembly that is mounted to move between a closed position (Figure 3a) obstructing flow through throat 100, and an open position (Figure 3b) in which flow through throat 100 is less obstructed, such that lading may be discharged. To that end, slope sheet extension 94 may be connected to the rest of body 22 at a hinged or pivoted

member, such as a pivot pin or hinge **102**, such as may tend to constrain slope sheet extension **94** to a single degree of motion relative to opening **100**, which, in one embodiment, may be angular displacement (i.e., rocking or pivoting motion, about an axis, such as the axis of hinge **102**). By virtue of its motion, slope sheet extension **94** may be considered to be, or to be part of, a door or door assembly, or closure, or closure assembly such as may be referred to generally as **110**. A shroud **104**, which may be flexible, may be mounted along the nether edge of the slope sheet, be it **44** or **46**, and may have a depending margin **105** that engages the upper laterally extending margin of extension **94**. Shroud **104** may be biased to maintain contact with extension **94** and may be mounted to the underside of sheet **44** or **46**.

Where car **20** includes a straight through center sill, such as item **42**, rather than having a single full width hopper discharge assembly **90**, such as might tend to be centered on the longitudinal centerline of the car, there may be two such discharge assemblies **90**, one mounted to either side of center sill **42**, in car **20**. In this latter case, the center sill may tend to be protected from abrasion or other damage by one or more shrouds **108**. Shroud **108** may, in cross-section, have the form of an inverted V, whose arms may extend on an incline upwardly from the upper, laterally inboard margin of inboard side sheet members **96**, to meet at an apex above center sill **42** along the centerline of the car.

Considering now door assembly **110**, as a preliminary matter it may be noted that the lower laterally running margins of the slope sheets, be they items **44** or **46**, may be reinforced by a lateral margin reinforcement member, **112**. Member **112** may be such as to have, or to cooperate with the respective slope sheet to yield, a closed periphery hollow section, i.e., a hollow tube, that may be capped inboard by a web **113**, and outboard by side sheet **115** (Figure 3e) of the hopper (whichever it may be), thus providing a shear web to discourage deformation of the tube section. The tube so created may tend to add an aspect of robustness to the structure, and may tend to discourage dimensional distortion along the margin, and hence along the hinge and along the slope sheet extensions, as may be. In one embodiment, member **112** may be a generally channel shaped U-pressing, which may have somewhat splayed legs, the toes of the legs being mounted against, and welded to, the slope sheet, and the back standing outwardly therefrom.

Door assembly **110** may include motion accommodating, or motion permitting, fittings, such as hinge **102**. Hinge **102** may be received in a pivoting arm member, **114** which, itself may nest between webs **111** defining a clevis. Arm member **114** as may run along the back of the

door pan sheet, or wing, defined by extension 94. Arm member 114 may extend generally radially away from hinge 102 toward the distal margin of extension 94, and may be a substantially planar member lying in a plane perpendicular to the axis of hinge 102. Given that hopper doors seem to be prone to abuse in service, extension sheet 94 may have a laterally
5 extending reinforcement 116 that may run across the back of extension 94, not overly far from hinge 102. Reinforcement 116 may have, or may co-operate with extension 94 to define, a hollow structural section, which may include either internal shear webs, (one of which may be defined by the body of pivoting arm member 114 itself), or end caps defined by the inboard and outboard stiffeners 117, 119 of door assembly 110. Reinforcement 116 may have the general
10 form of a channel having toes welded to extension 94, and may be a U-pressing. Door assembly 110 may be reinforced along the distal edge of the door by yet another lateral reinforcement member 118. In one embodiment, member 118 may have the form of a channel section 120, which may be mounted with one leg welded flat to the back of sheet 94, quite near the distal margin of extension 94. Once again, member 118 may provide a certain robustness of structure,
15 such as may tend to discourage distortion of the distal margin of sheet 94 when the car moves with the door acting as something of an unintentional plow while the discharge section is still obstructed by the lading being discharged. In addition, either extension 94 may be thicker along its distal margin, or a further backing or reinforcement member such as a doubler 121 may be located between channel section 120 and extension 94. Reinforcement member 118 may extend
20 not only across the back of door assembly 110, but also across the back of the adjacent opposite handed door assembly 110 mounted on the opposite side of the car such that the two door assemblies may be yoked together. Door assembly 110 may also include end webs or end gussets, namely stiffeners 117, 119, such as may tend to run predominantly radially along the back of extension 94 near to the predominantly radially extending margins of extension 94.

25 The front or forward facing surface 124, or face of the panel or door sheet, or pan defined by extension 94, may, in one context, be defined in terms of facing toward the interior of the volume of the hopper, or in a direction facing toward the lading, or toward the opposed members of the hopper discharge assembly in either the closed or the open position. The back or rear face
30 126 of the door sheet will not tend to face inwardly with respect to the hopper, the lading or the discharge assembly under either the open or closed positions of the door. The front, or upward, or inward facing surface 124, however, will tend, in general, to face inwardly toward the lading. Door assembly 110 may include upstanding lips, or cheeks, or legs, such as side wall members 128, that stand proud of the inwardly facing surface of the door. The root of members 128 may
35 lie directly over the mating webs of the gussets, namely items 117 and 119 (Figure 3e). When the

mating moving and stationary portions of the discharge assembly come together, members **128** may tend to seat against the opposed lateral cheek, rim or lip, such as may be defined by a backing plate, or bar **130** welded to one or the other of items **96, 98** (Figures **3b, 3g, 3i**).

The door assembly **110** is driveable between open and closed conditions by an operating mechanism, indicated generally as **140**. This mechanism may include a driven shaft **134**, a crank arm **136**, and a link arm **138**. The outer end of shaft **134** is supported by support arm **133** depending from cross member **112** of body **22**. Link arm **138** may be of adjustable length, typically a device having a left hand thread at one end, and a right hand thread at the other, such that turning the barrel adjusts the length, at which point the device is secured, whether with locknuts, or wired locknuts, or by some other means. In any case, the link arm is adjustable on fit up when the door is installed and assembled. Door arm crank **136** may include an over-center stop **135**, such that when crank arm **136** and link arm **138** are moved to an over-center condition, (e.g., when the door is in a closed condition), and lading bears against the door, the crank and link may tend to be forced to a secured, closed position, rather than tending to creep to an open position such as may have a greater tendency to permit lading to leak. As seen in Figure **3d**, the entire arm assembly may be driven by a motive apparatus, which may include a pneumatic ram **142**, connected to a crank arm, clevis or double crank arm, **144**. As also seen in Figure **3d**, bottom flange **43** of center sill **42** splits and has a widened portion indicated at **37**. An accommodation, or pocket, **33**, within center sill **42** is seen between the split halves of bottom flange **43** in widened portion **37**. As seen in Figure **3d**, pneumatic ram **142** is mounted in pocket **33**, while the arm assembly is mounted under center sill **42**.

In one embodiment, the movable door assemblies **110** of adjacent discharge sections on either side of center sill **42** may be connected to a common shaft **134** driven by the motive apparatus. Double crank arm **144** may be rigidly mounted centrally to shaft **134** and may function as an input lever to provide torque thereto. The output levers, namely crank arms **136**, may also be rigidly mounted to shaft **134**. The ends of connecting rods or links arms **138** are mounted in a clevis formed in two webs **137, 139**, that embrace the inboard rear face reinforcement, item **117**, of the door panel namely extension **94** at its junction with the distal reinforcement channel section **120**.

A seal or seal assembly **150** may be mounted along the distal edge of slope sheet extension **92**. Seal assembly **150** may include a door seal member **152** having one or more fittings, such as through holes, by which member **152** may be attached to slope sheet extension **92**. The uppermost, or proximal margin of member **152** may be trapped between extension **92** and another member, which may be a reinforcement or backing, such as a backing plate **154**, that may run laterally across the back of extension **92**, near the lower margin of extension **92**.

Fasteners **156**, which may be threaded fasteners, or fasteners that involve plastic deformation or clinching, such as HuckTM bolts or rivets, may be used to secure the backing or reinforcement, and hence seal member **152**, in place. The fasteners may be pan head fasteners. In general it may be that the design may seek to minimize the extent to which downstream features stand proud of the plane **P** of extension **92**, (i.e., the plane of the discharge slope) such as might otherwise present loci at which particulate may catch and build up rather than slide.

Backing plate **154** may overlap the lower margin of extension **92**, such that a proximal portion **157** backs extension **92**, and a distal portion **158** extends in an inclined manner generally downward, predominantly in the direction of the slope of extension **92**. Distal portion **158** may have (when installed) a lowermost margin **160**, which may also provide a contact for the back, or downward side, of seal member **152**.

Seal member **152** may include a first margin, which may be called a proximal margin **162**, that is clamped by backing plate **154** to extension **92**. Seal member **152** may also include a first portion **164**, which may be termed a proximal portion, that overlies backing plate **154**. Seal member **152** may include a second portion, **166**, that may be a distal portion, that may be cantilevered beyond lowermost margin **160** of backing plate **154**. Second portion **166** may include a land, **170**, against which the opposing closure member may bear when the moving and stationary parts of the door are brought together. In one embodiment, it may be the most distal, laterally extending margin or lip **172** of door assembly **110** that contacts, and deflects, land **170**. It may be that land **170** is a surface of second portion **166** that faces generally toward lip **172**, and the distal margin **174** of second portion **166** may be bent, as at **176** to orient land **170** in such a manner as may tend to present that surface in an orientation generally perpendicular, or more nearly perpendicular than otherwise, to the motion of lip **172** on closing. Seal member **152** may be thought of as having a first face **178** that faces generally toward, or into the volume of the hopper space **180**, and, when the car is loaded, toward the lading. It may be that most of this surface faces at a somewhat upwardly angle. Seal member **152** may also have another surface, **182**, which may be termed the back or downward facing surface, which may, in the undeflected condition, tend to lie against backing plate **154**.

Seal member **152** may be considered to be a spring, i.e., an elastic energy storage device. When the opposed interface surface, or contact, e.g., lip **172**, engages land **170**, that motion may tend to urge land **170** to the deflected position δ_{174} shown in phantom lines in Figure **3h**. In so doing, seal member **152** is flexed against the contact point, or fulcrum, defined by the lowermost

margin 160 of backing plate 154. The bending moment tends to flex first portion 164 away from backing plate 154 as suggested by the reactive displacement identified by δ_{164} . When the door opens again, seal member 152 may tend to release, and to move back to its former undeflected position. When the door assembly is once more in the closed condition, seal member 152 may again flex as discussed above. When lading is retained in car 20, in whichever hopper may be employed, the weight of the lading may tend to bear against first portion 164, and may tend to urge first portion 164 toward, or against, backing plate 154. In doing this, land 170 may tend to be urged all the more tightly against lip 172, which may, in turn, tend to discourage the leakage of lading. As a matter of terminology, a fulcrum may tend to approximate a point or line contact about which the lever arm pivots or rotates. To the extent that the fulcrum is not a perfectly sharp point, but may have a radius, there may also be rocking action, to a greater or lesser extent, and, for a sufficiently large radius, the motion may be considered that of a rocker. In either case, the relationship is of a lever that, if pushed down on one side, rises on the other.

Side blocks 184 (Figures 3f and 3g) may be mounted at the lateral edges of first portion 164 to discourage sideways migration of lading past the side edges of seal member 152. Side blocks 184 may include an extending finger 186 that opposes and may abut the lower margin of extension 94 when the moving and stationary portions of the assembly come together. In a further optional feature, it may be helpful when the lading includes magnetizable materials, be it iron ore or concentrate, to employ a magnet such as magnet 188, near the door closure as seen in Figure 3g. Magnet 188 may be a rare earth magnet, and may be mounted close to, or at, the corner of the opening, i.e., adjacent to the lateral end of the seal member, when the side and transverse edges of the door may meet, and where there may be a small gap. The presence of magnet 188 may tend to attract iron filings (or filings of such other lading material as may be) to obstruct such gap, or crack, or opening in the vicinity of magnet 188.

Seal member 152, or analogous structure, could be mounted on the moving door member, and the stationary door member could have a lip analogous to lip 172; or alternatively, seal members could be placed on both sides of the closure interface, although this might perhaps seem redundant in some instances. In each of these alternatives, there is relative motion of the moving and stationary portions of the door assembly between open and closed conditions, such that discharge assembly 90 governs the retention and outflow of lading. At the coming together of the door components, mutual engagement of the one with the other causes elastic deflection of an energy storage device. The elastic deflection, may involve flexing a seal member in the manner of flexing a beam, and may include flexing the beam member over a contact, or rocker,

or fulcrum. Inasmuch as the flexing may be toward, or may include a component of displacement toward, the lading, or the space that the lading would normally occupy, the introduction of lading into the lading containment structure may tend to result in lading bearing against the flexed seal member, with the tendency to cause that seal member to seal more tightly than otherwise.

In the alternative embodiment of Figures **4a** – **4e**, the movable closure member, or door assembly of the apparatus of Figures **3a** – **3h** is replaced by a movable door assembly **190**. Door assembly **190** may include a first, or front sheet, **192**, central, or inboard, and outboard back panels **194**, **196**, a proximal or back closing member, or members **195** or **197** and a distal or front closing member **198**, those items being mounted in co-operative fashion to form a closed box section. The box section may be closed at its laterally outboard ends by webs such as may be in the nature of closure plates **200**. Door assembly **190** may have a central rebate or accommodation **202** such as may seat about the center sill. The inboard portions of the box section are closed about the periphery of accommodation **202** by webs such as may be identified as side members or cheek plates **204**, **206** that extend predominantly radially with respect to the axis or rotation of the door, and a closure plate **208** that extends predominantly longitudinally, and co-operates therewith to form a generally U-shaped peripheral wall. Left and right hand pairs of driven lug gussets **210**, **212** are mounted to either side of accommodation **202** and closure plate **208**, and extend from respective cheek plates **204**, **206** to front sheet **192** and front closing member **198**. Door assembly **190** may also include hinge lugs **214**, **216** and lug extension webs **218**, **220** that extend radially from lugs **214**, **216** and provide a shear web linkage between front sheet **192**, back panels **194**, **196**, front closing member **198**, and, in co-operation with lug **214** or **216** as may be, with back closing members **195** or **197**. On assembly, side closing members such as items **128** and **130** may be located on trial installation, and welded in place according to the actual fit-up of the door.

Front or distal closing member **198** may have the form of a bent plate that has a first margin abutting the back of front sheet **192** at a location near or adjacent to the distal margin **222** of front sheet **192**. In one embodiment, it may meet just shy of the lip, both on the distal edge and laterally. Closing member **198** may also include a first portion **224** such as may tend to be generally perpendicular to, and such as may abut, member **198**, and an extension, or skirt **226** such as may extend away from member **198**. Skirt **226** may extend rearwardly at an angle, and may run along the conforming margins of double shear lug gussets **210**, **212** and hinge lug gussets extension webs **218**, **220**. Skirt **226** may tend to be of greatest depth in the region of

double shear lug gussets **210**, **212**, and may diminish in size toward the laterally outboard extremities thereof, as on a taper. This may tend to form a reinforced channel along the bottom, or distal edge of the door, and hence to provide a means for spreading loads along that edge, and for transmitting rotational torque received at lug bores **228** all along the distal edge of the door.

5 This embodiment may tend to provide a relatively simple, and yet quite robust structure such as may tend to resist harsh or abusive service.

Figure **5a** shows an alternate embodiment of a gate or door assembly having a seal assembly, indicated generally as **230**. It may be taken that the basic structure of the railroad car and the discharge sections is as described above and that seal assembly **230** is similar to seal assembly **150** as described above. A seal member **152** is mounted between a backing member **234** and the distal margin **232** of the slope sheet extension **92**. In this case, backing member **234** includes a dog-leg portion **236** that stands outwardly (i.e., generally downwardly) of the plane ‘P’ of the first portion **164** of seal member **162**. Dog-leg portion **236** terminates in a return leg **238** having a formed curl, or cusp, or lip, **240**, that defines the rocking point or fulcrum against which seal member **152** works when engaged by lip **172**. When assembled there may be a gap, δ_{236} between seal member **152** and dog-leg portion **236**.

10
15

It may be noted that seal member **152** may have its upper margin clamped between the slope sheet extension and backing member (be it **154** or **234**) in such as way as to have a built-in end condition at their upper margins. That is, not only is the displacement of the upper margin fixed at zero, but the slope is also fixed at the angle at which the margin is clamped, and deflection implies bending and a bending moment (as opposed to a pin-jointed or hinged connection that can rotate freely). If seal member **152** is thought of as being a beam, which may have a bent end, the major portion of the beam may lie in a plane, when undeflected. Alternatively, a plane **J** may be constructed along the rearward face of the seal member across the point of tangency against the fulcrum or rocker of the distal margin of the backing plate. The closing action of the gate may tend to yield contact that has a component of motion that may tend to be perpendicular to that plane, and a component of motion that may tend to be parallel to that plane. The perpendicular component will tend to work on a moment arm, **L**, relative to the pivot or fulcrum point, to flex seal member **152**. To the extent that the end of the beam is bent, and the contact occurs out of this plane, the eccentricity of the component parallel to the plane may tend to enhance the tendency of the member to flex, rather as an eccentrically applied load may have an enhanced tendency to urge a column to buckle. This eccentricity, from the plane to the center of contact, is notionally indicated as **e**.

20
25
30
35

Another alternate embodiment of seal arrangement is shown in Figure **5b**. Again, this embodiment is substantially similar to that of Figure **5a**, except as noted. In this instance, the slope sheet extension of the movable door member, indicated as **244**, incorporates a distal edge lip **246** that is bent in the generally forward (i.e., forward in terms of the direction of motion when the door is closing), or upward direction. The mating, co-operating flexible seal member **248** has a tip **250**, that is caught by, and deflected by, engagement of lip **246**. This may tend to urge seal member **248** to deflect upwardly, away from backing member **252**. Introduction of lading may tend to cause seal member **248** to push more strongly toward backing member **252**, and, to the extent that door member **244** is in a fixed and locked position, the mutual engagement of parts may tend to become tighter. In this instance, seal member **248** may not have a bent distal lip, but may have a straight profile.

Still another embodiment is shown in Figure **5c**, the moving door assembly **260** may be substantially the same as door assembly **110**. A flexible seal member **262** is mounted to a backing bar **264** that is spaced therefrom by a washer, or spacer or shim **266**. The distal end of backing bar **264** may be bent as indicated at **268** to define a fulcrum **270** at the most distant tip. The included angle ψ between the door sheet **272** and the tangent plane of undeflected seal member **262** at the point of contact is less than 90 degrees, such that the tip **274** of door sheet **272** may tend to ride against, and progressively deflect, the cantilevered end portion **276** of seal member **262**. As before, introduction of lading into the hopper may tend to cause pressure to be exerted by the lading on seal member **262** between fulcrum **270** and shim **266**, such that it may tend to deflect into the gap region 'G' identified between seal member **262** and backing bar **264**.

In the similar embodiment of Figure **5d**, the seal member **282** is pre-bent on a curve to give a pre-existing gap **284** between the proximal portion of the seal member and the backing bar. The curve is such that at the point of engagement **286** between the distal edge **288** of the moving door sheet and seal member **282** there is a non-perpendicular slope, such that the resultant wedging action as the door is closed may tend to cause greater deflection in seal member **282**, increasing its curvature, widening gap 'G', and forcing the distal extremity of seal member **282** in the opposite direction.

Figure **6a** shows another embodiment of seal assembly, indicated generally as **300**. In this embodiment, the first member of the seal assembly may be an extension **302** of the slope sheet, or pan sheet of either the moving or stationary portion of the door, which may be an added

plate or an extended margin formed as an integral part of the door pan, or extension sheet. When formed integrally, the need for fasteners such as item 156 identified above, may be obviated. In any case, sheet 92 (or 94, as may be) may have an extended margin, as at 304, which may be integrally formed, and which may include a bent distal portion 306, defining a land 308 for engaging the other closure member when the opposed closure members of the gate are brought together. Assembly 300 may also include a second member in the form of a backing element, or backing member or reinforcement fence assembly 310, that may include an array of arms, or legs, or braces, however they may be termed, identified as 312, which may be in the form of tapered posts having a base or root leg fixed to the closure member lateral reinforcement or tube, namely item 88. The distal portion of the legs may support, and may have a niche, notch, slot, relief or rebate defining an accommodation in which a laterally extending member, such as a reinforcement or backing bar 314 is seated. Backing bar 314 may extend across the full width of the closure member, from side plate to side plate. Backing bar 314 may be fixed in place on braces 312 by such means as mechanical fasteners or welding. In this embodiment, a portion of extended margin 304, lying down-slope from reinforcement tube 88, extending over a distance *l*, is not permanently secured to either the forward faces of the legs 312 of fence assembly 310, or backing bar 314, but rather may be free to flex. As such, when the distal portion of the seal member is engaged, by pushing on land 308, the inward lower edge of backing bar 314 may act as a fulcrum, and the inner or proximal portion 318 of the first seal member (i.e., the portion of the margin extension lying between fulcrum edge 316 and reinforcement tube 88, may tend to be permitted to flex in a direction that is predominantly inwardly relative to the hopper more generally. As above, when engaged, and the gate is in a closed position, the presence of lading bearing against the flexed portion 318, may tend to urge the distal portion, 308 to bear all the more tightly against the opposing closure member, such as may be.

As shown in Figure 6c, the embodiment of Figure 6a may also include a mating door member 320 that has a bent lip, as indicated at 322. This bent lip may be of a similar flexural nature to the opposing bent lip 316, and, on engagement, either or both may deflect, and form a spring loaded seal. It may also be that the side plates 324 of the chute may be provided with internal stops, or abutments, identified in this instance as seal bars 326, against which the lateral margins of the gate door sheet 330 may engage, and whose ends may oppose, or abut, extension 304 on closure. Those seal bars 326 may be fit up on assembly, and welded in place from outside by means of pre-formed welding access slots 332.

The seal member, be it item 152, 262 or 302, transmits a bending moment across the

fulcrum (whether it be called a fulcrum, pivot, rocker, or some other term). Although seal member **152**, **262** or **304** may have a bend at the fulcrum, more generally it may tend to be a flat, or straight, beam, and so will also have slope continuity at the fulcrum. Thus the bending moment that deflects the distal portion of the seal member, will also cause flexure in the proximal portion. Assuming a beam, and imposing a Cartesian frame of reference in which the x-axis lies in the plane of the undeflected beam, and the y-axis is perpendicular to the x-axis, and assuming deflections that are relatively small as compared to the length of the beam, deflections of the distal portion that have a component that may be taken as being substantially perpendicular to the initial, undeflected profile of the beam, may be considered to be deflections in the –y direction. When this occurs, the proximal portion of the beam may tend to flex in the opposite, or +y direction. In this sense, it may be said that deflection of the distal portion in one direction yields a flexing of the proximal portion in a reactive, or in some sense, opposite, direction. This may also be expressed in somewhat different terms, taking plane **P** as a frame of reference. In the open position, that portion of the seal member lying inboard of the lip may tend to lie more or less flat flush with, or perhaps somewhat shy of, plane **P** of the slope sheet along which the lading may slide during discharge. More generally, all of the seal assembly may lie flush or shy of this plane. However, when the closure members mutually engage, the proximal portion (between the fulcrum and the proximal edge or part of the seal member attached to the slope sheet extension, be it **92** or **94**), will tend to flex to a position that is either less shy of the former, un-flexed position relative to plane **P**, or proud of plane **P**. Similarly, when lading is then added, and bears upon the flexed portion, it will tend to want to sit down, less proud than in its flexed, but unladed, position.

The seal member, be it item **152**, **262** or **304**, may be exposed to an abrasive service environment. As such, it may be made of a relatively abrasion resistant material, such as a high yield stress steel. It may be a stainless steel. In various embodiments, the yield stress may be as great or greater than 50 kpsi, 70 kpsi or 100 kpsi. In another embodiment it may be as great or greater than 130 kpsi. In another embodiment, it may be as great or greater than 150 kpsi. It may also be noted that the seal member, be it **152**, **262**, or **304**, may be replaceable without the need for employing welding or cutting torches. That is, when the part is no longer serviceable, either due to wear or damage, the fasteners can be removed, a new part inserted, new fasteners installed, and then the car may be operated as before.

Figure **7a** shows an isometric view of an alternate example of a railroad freight car **420** that is intended to be representative of a wide range of railroad cars in which the present

invention may be incorporated. In this view the near side beam is removed to permit internal features of the car to be seen more easily. While car **420** may be suitable for a variety of general purpose uses, it may be taken as being symbolic, and in some ways a generic example of a coal car. Car **420** may be symmetrical about both its longitudinal and transverse, or lateral, centreline axes. Consequently, it will be understood that the car has first and second, left and right hand side beams, bolsters and so on.

By way of a general overview, car **420** may have a car body **422** that is carried on trucks **424** for rolling operation along railroad tracks. Car **420** may be a single unit car, or it may be a multi-unit car having two or more car body units, where the multiple car body units may be connected at an articulated connector, or by draw bars. Car body **422** may have a lading containment vessel or shell **426** such as may include an upstanding wall structure **428** which may have a pair of opposed first and second end walls **430** that extend cross-wise, and a pair of first and second side walls **434** that extend lengthwise, the end walls **430** and side walls **434** co-operating to define a generally rectangular form of peripheral wall structure **428**. Wall structure **428** may include top chords **438** running along the top of the walls, and side sills **440** running fore-and-aft along lower portions the side sheets of side walls **434**. In some instances car **420** may have stub center sills at either end, in which case side walls **434** may act as deep beams, and may carry vertical loads to main bolsters that extend laterally from the centerplates. In the embodiment illustrated, there may be a straight through center sill **442**, and the side beams may have significant vertical bending resistance. Draft gear and releaseable couplers, articulated connectors, or draw-bars may be mounted at either end of the center sill.

The interior of car body **422** may include end slope sheets **444** and lateral partition walls or bulkheads such as may be identified as **446** that may extend between the side walls of the car, in a manner such as may tend to divide the internal space **448** of car body **422** into two or more sub-compartments, sub-volumes or subspaces, such as may be indicated generally as two end sub-compartments **450**, and three internal sub-compartments **452**, each of which may be referred to as a hopper. The number of hoppers may be more or less than that shown. In this example, each of the sub-compartments may have a cross-wise extending partition wall **446** that is substantially or predominantly vertical, in contrast to car **20**, in which the cross-wise extending members were predominantly inclined sheets, namely items **44** and **46**. Partition wall **446** may include an upper margin that dips down in the middle. The central dip may have a relatively large radius, and may give onto outboard tangents that run to the top chords. Partition wall **446** may perform the function of a shear web linking the top chords, the side sills, the side walls

stiffeners, and the center sill. The upper edges may function as diagonal wall braces. In some embodiments the lateral partition walls may have a central reinforcement **429**, sometimes referred to as a “horse collar”, mounted about the nadir, or low central region, of the upper margin of the partition wall **446**. Partition wall **446** may be made of a single, monolithic profile cut sheet, or may be made by joining two (or more) sheets together to form a web or panel. For example, partition wall **446** may include left and right half sheets, **432**, joined along the centerline of the car. Each half sheet may have a generally trapezoidal shape, with a long side for mating with the adjacent side wall, a parallel short side locatable at the car centerline, a bottom edge running laterally between the two upstanding sides, and a generally diagonal upper edge. The inboard upper corner may include a radius conforming to the profile of, or defining the profile of, the central dip. There may be a horse collar reinforcement **429** on one or both sides of partition wall **446**, as at **431** and **433**. Either or both of central reinforcements **431** or **433** may be in the nature of a doubler plate having a first margin conforming generally to the upper margin of the central portion of the partition. The reinforcements may be welded in place or may be mounted with an array of mechanical fasteners, such as rivets or Huck TM bolts, as illustrated. In some embodiments, one or other reinforcement, e.g., item **431**, may include a downwardly extending stem **435**. Where partition wall **446** is made of more than one piece, e.g., substantially equal halves as illustrated, the central reinforcement, or reinforcements, may tend to overlap the seam, as at the vertical seam at the centerline of the car. Further, the remaining outboard and upwardly extending portion of the upper margin of partition **446** may be reinforced, such as by reinforcements in the nature of angles **436** on one or both sides, which may themselves run generally diagonally toward the top chords **438**. The laterally outboard vertical margins of partitions **446** may be connected to the side walls **434** at the upstanding side post reinforcements, such as may be in the nature of angles **439**.

Side walls **434** of car **420** may include substantial main vertical side posts **454** at the longitudinal stations of the main bolsters, and further intermediate side posts **456** along the side beams of the car. In particular, each of the four internal bulkhead partitions **446** may be located at a station abreast of vertical side posts **456**. Side posts **454** and **456** may extend in a predominantly upstanding manner, and may be connected to side sills **440** and top chords **438**.

Car **420** may include discharge sections **460** whence lading may exit the car. In this instance, there may be a center sill shroud **462**, presenting an inverted V shape such as may tend to shed lading to either side, and depending inboard discharge chute side wall members **464** that adjoin, and extend downwardly from the lower margins of shroud **462**. The members may tend

to hang substantially vertically. Side sills **440** may have a generally upwardly extending leg **466**, to which the lower ends of the vertical side wall posts may be rooted. Side sills **440** may also have an inwardly extending leg **458**. The discharge section may include an outboard skirt, or chute side cheek, or sheet, or side wall member **468**, that may extend in a predominantly vertical plane generally downward and inboard of side sill **440**, and a transition member, or shroud, or portion **469**, whether formed integrally therewith or joined thereto on assembly. Transition portion **469** may have a first margin adjoining, and forming a sealed margin with, the wall sheet of side wall **434**, may have an inwardly and downwardly sloping portion, and may have an inboard margin adjoining, or formed integrally with, the upper margin of side wall member **468**. Side wall members **464** and **468** may be trapezoidal or triangular in shape, or, more generally, to have a pointy shape in the downward direction, as at **467**, the adjacent vertices of the pointy direction corresponding to the stationary and moving sides of the gate. However, side wall members **464** and **468** may also be straight-through members of constant section that run continuously along the side sill and center sill. In either case, side wall members **464** and **468** may define two sides of a generally four sided discharge chute **465**, those two sides being roughly parallel, and spaced apart by a distance that may correspond generally to a clearance distance between the center sill and the side sill.

The other two sides of the outlet, or discharge chute, may be defined by at least one moving wall, identified as a door assembly **470**, and a mating wall **472**, which may be either moving (as in a double door), or stationary. In the embodiment of Figure **7a – 7g**, mating wall **472** may be a fixed chute wall **474** that has lateral flanged edges or angle members **475** that may be mechanically attached (as by Huck bolts, for example) to side wall members **464**, **468**. Fixed chute wall **474** may have a laterally extending lower distal margin **476** that may be flexible in the manner of any of the seal members described above.

Door assembly **470** may be mounted to, and driven by, a door mechanism **480** such as is generally described in US published patent application publication No. US 2004/0244638 of Taylor, published December 9, 2004. Such a door mechanism **480** may impose a moving force on a lateral door pan reinforcement member **482**, which may both stiffen the distal margin of each door pan **484**, but also act as a yoke joining two adjacent door pans together, and compelling common motion between them. Door pans **484** may have a laterally reinforced proximal margin nearest their hinge axis, and splayed reinforcements **486** running between the distal and proximal margins. Each door pan **484** may include a flat central portion **488**, and inboard and outboard wings **490**, **492**. Wings **490** and **492** may be bent on generally parallel

bends, and may be bent upwardly at something less than a right angle, such that the distal margins 494 of wings 490 and 492 may have a tendency to splay somewhat outwardly. Wings 490, 492 may then be squeezed between side wall members 464 and 468 in a spring loaded interference fit. The spring loading may tend to bias margins 494 to ride against the adjacent surfaces of the side wall members, in such a manner as to form a locus of contact, such as might be termed a seal, such as may tend to impede passage of aggregate lading therepast. On closing, the laterally extending, distal margin 496 of door pan 484 may engage, and deflect in a resilient, sprung manner, the co-operating opposed distal margin of fixed chute wall 474.

The moving door panel may be mounted on a dog-legged hinge arm 481. That is, flat central portion 488 may be substantially planar, with the center of rotation of the door not being co-planar with the flat central portion. Rather, the hinge may be mounted at the end of the dog-leg arm 479 that stands out of the plane of pan 484. The structure of car 420 may include a laterally extending member 483, and a door hinge housing 485. Member 483 may include an inclined leg extending outwardly and downwardly from one of the partitions 446, and a depending leg extending generally downwardly from the outer margin of the inclined leg. The internal space so defined behind the shroud of member 483 may accommodate movement of the upper portion of the door to the open position, and the door hinge housing mounted thereto may accommodate the hinge.

Various embodiments have been described in detail. Since changes in and or additions to the above-described examples may be made without departing from the nature or scope of the invention, the invention is not to be limited to those details.

Claims

We Claim:

1. A railroad hopper car, said railroad hopper car having:
5 a first hopper, said first hopper being a bottom dumping hopper;
said first hopper having a first door movable between an open position and a closed
position;
an actuator, said actuator having an expanding cylinder mounted to drive said first door;
said hopper car having a center sill;
10 said center sill has a bottom flange;
said bottom flange has a widened portion;
and said widened portion has an accommodation defining a pocket therein; and
said actuator being mounted in said pocket in said center sill.
- 15 2. The railroad hopper car of claim 1 wherein said center sill has a bottom flange and said
actuator is mounted to said bottom flange.
3. The railroad hopper car of any one of claims 1 and 2 wherein:
said first hopper has a second door;
20 said first door of said first hopper is a left hand door;
said second door of said hopper is a right hand door; and
said left and right hand doors are commonly driven by said actuator.
4. The railroad hopper car of claim 3 wherein said left and right hand doors are joined to a
25 common yoke, said left and right hand doors being constrained to share the same motion.
5. The railroad hopper car of claim 4 wherein said actuator is connected to said left and
right hand doors by a transmission, and said transmission is connected to said yoke.
- 30 6. The railroad hopper car of any one of claims 4 and 5 wherein said yoke has the form of a
beam having a web and a flange, said beam defining a backing member of said first and second
doors.
7. The railroad hopper car of claim 6 wherein said left and right hand doors have a pivotally
35 mounted proximal end, and a lip distant from said proximal end; and said beam runs across said
left and right hand doors as a backing adjacent to said respective lips.

8. The railroad hopper car of any one of claims 4 to 7 wherein said yoke passes clear beneath said center sill across said car.

5 9. The railroad hopper car of any one of claims 1 and 3 wherein said first door has a cross-wise extending beam mounted along a lip margin thereof, and a hollow section member mounted cross-wise across a portion of said first door distant from said beam.

10 10. The railroad hopper car of claim 9 wherein said hollow section member is interrupted by a web, said web extending from said beam to a hinge distant from said beam.

11. The railroad hopper car of any one of claims 9 and 10 wherein said first door has an inboard backing web and an outboard backing web, and said hollow section member runs between said backing webs, said backing webs extending across said hollow section member.

15 12. The railroad hopper car of any one of claims 9 and 11 wherein:
there is also a second door spaced from said first door;
said center sill extends between said first and second doors;
said beam extends across said car and is mated to both said first door and said second
door; and said hollow section member is interrupted by said center sill.

20 13. The railroad hopper car of any one of claims 1 to 12 wherein said actuator is a pneumatic ram.

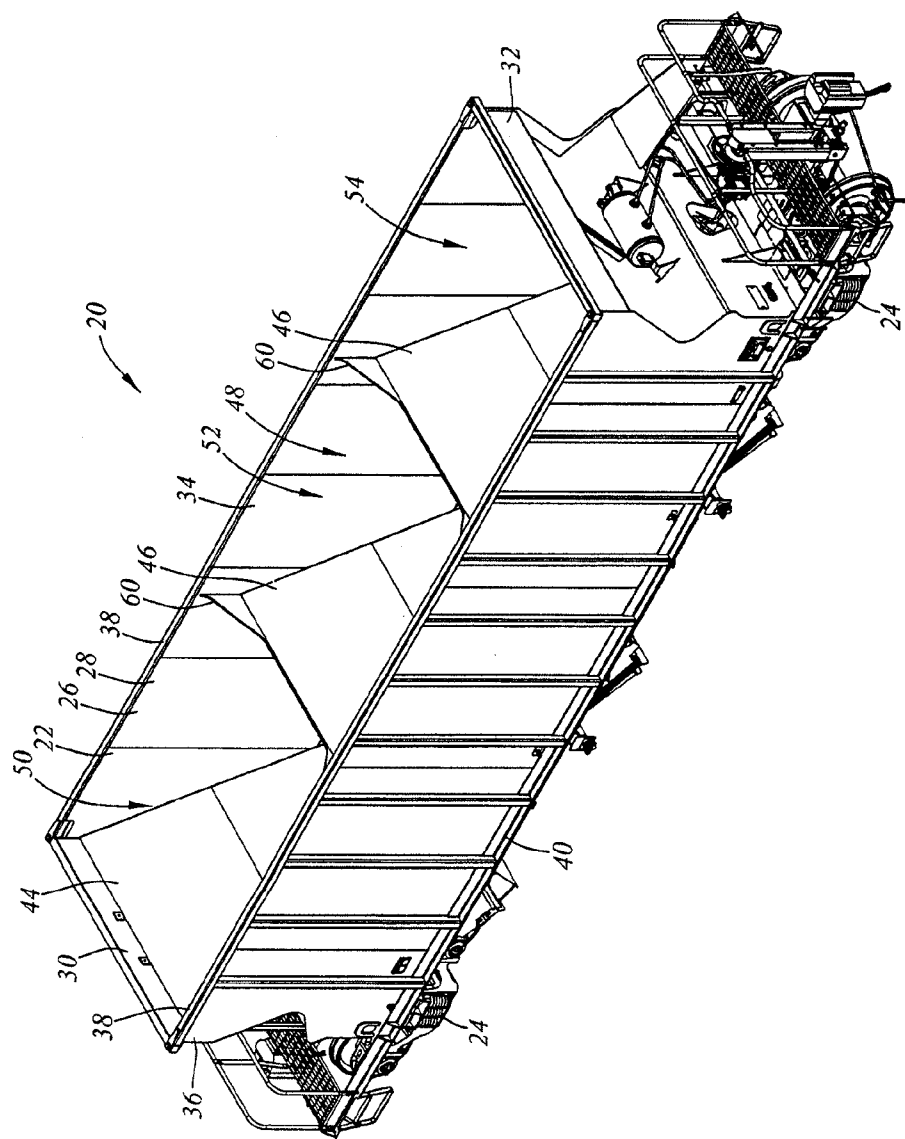
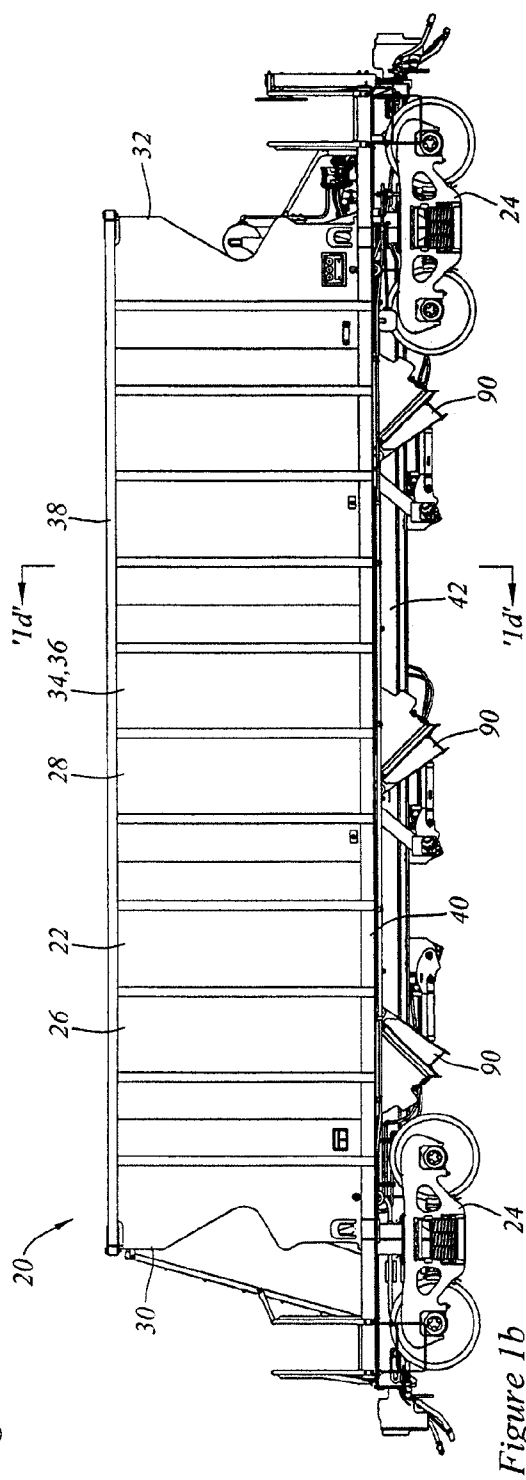
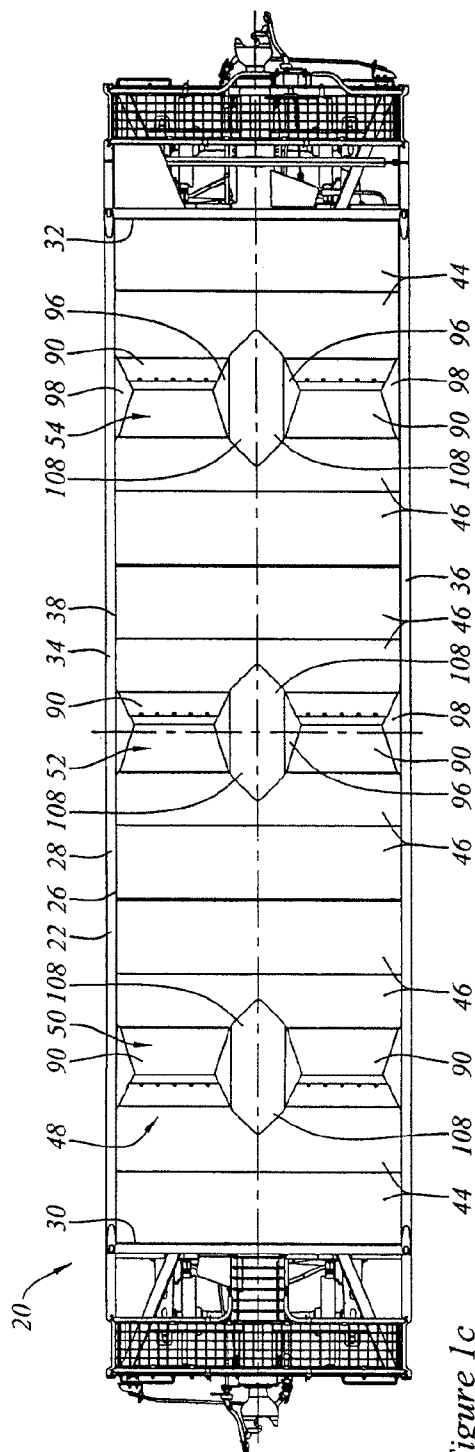


Figure 1a



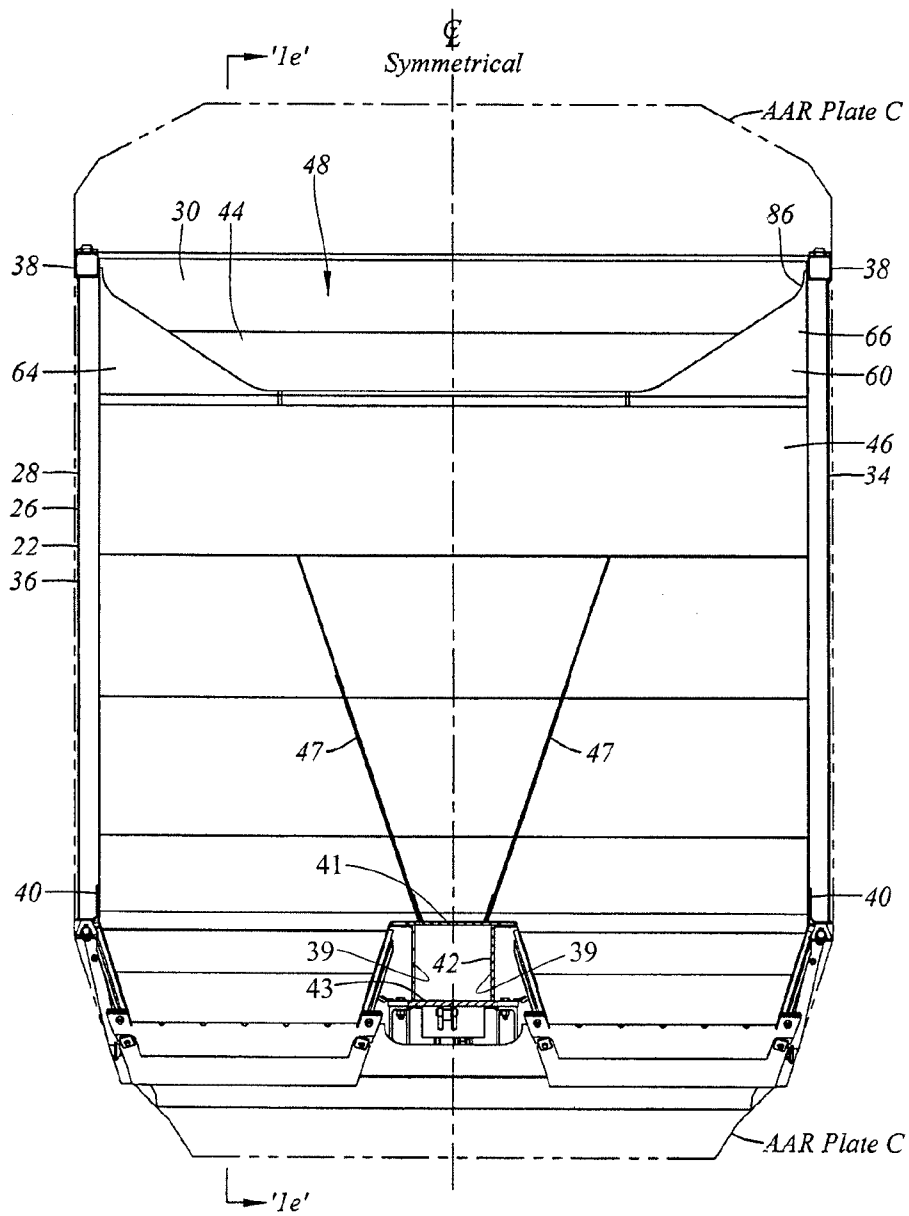


Figure 1d

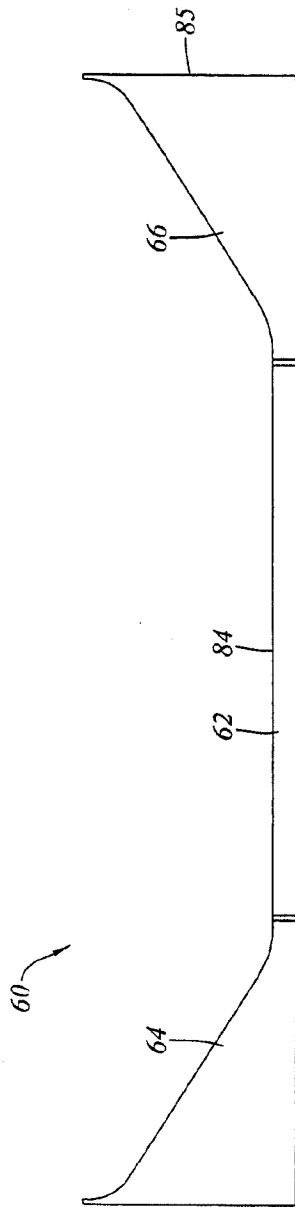


Figure 2a

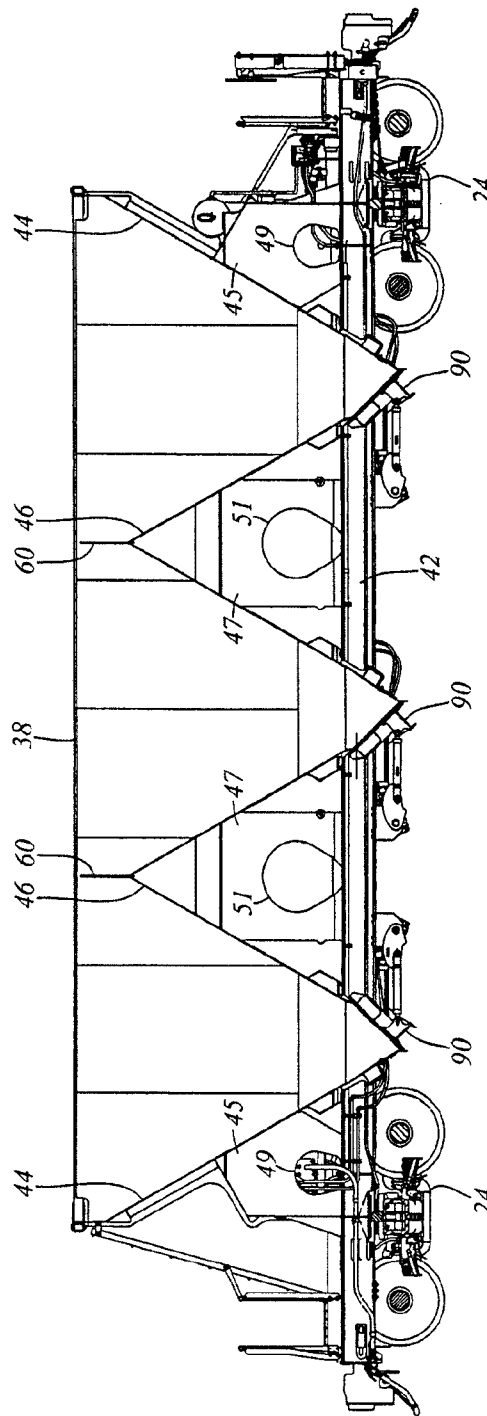


Figure 1e

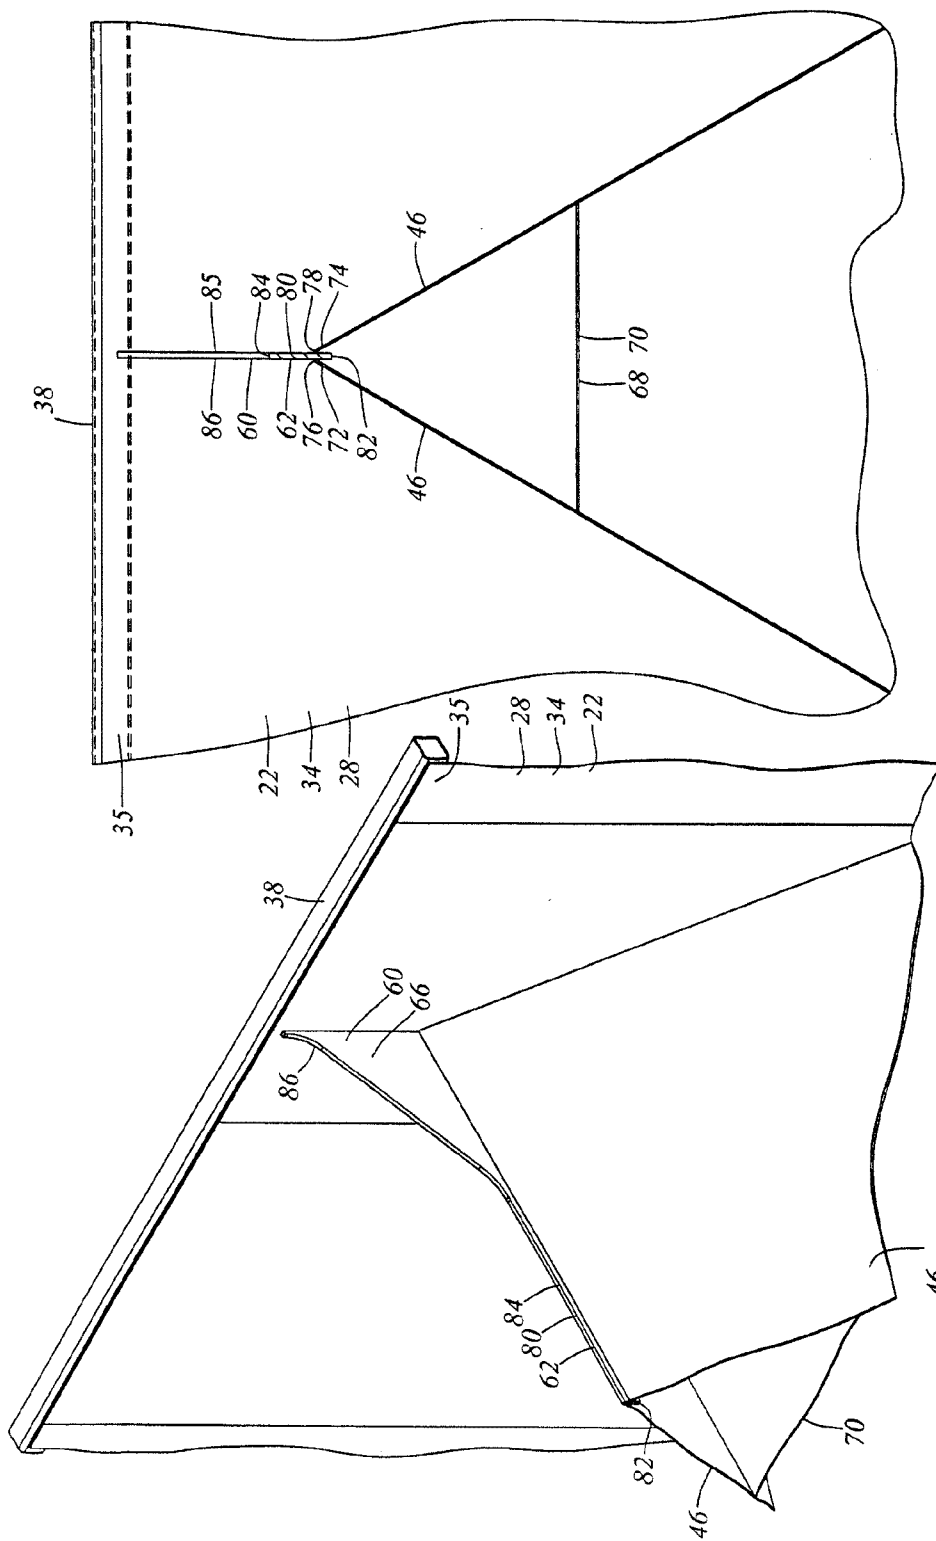


Figure 2c

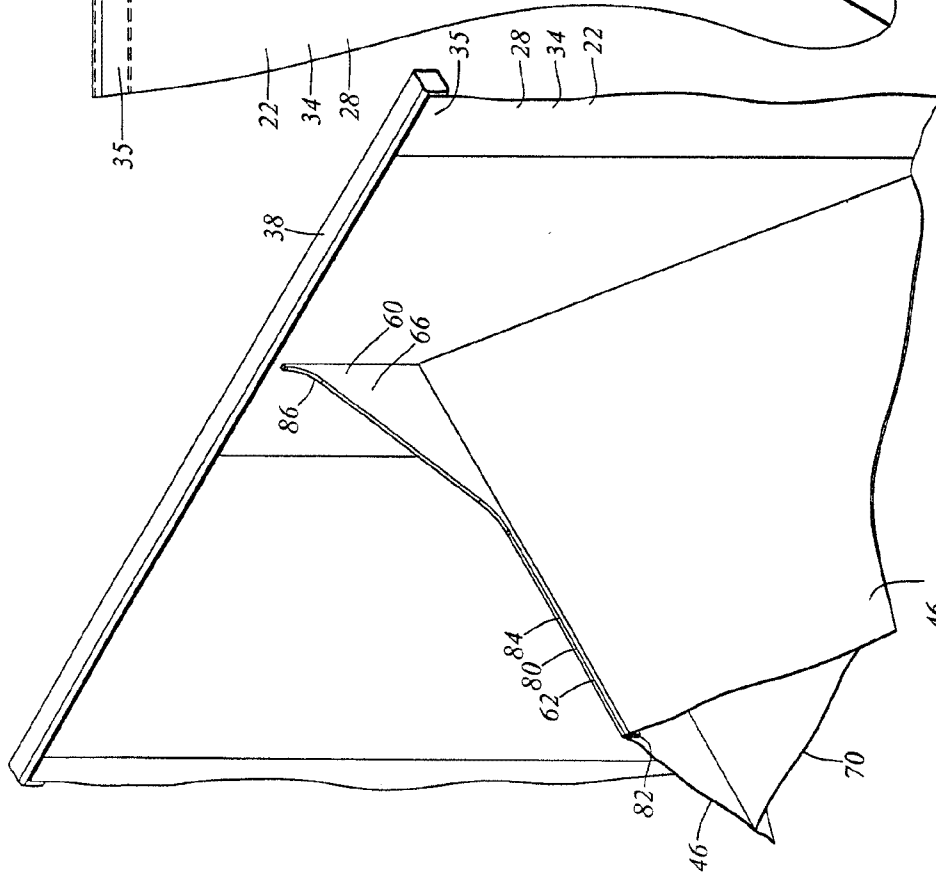


Figure 2b

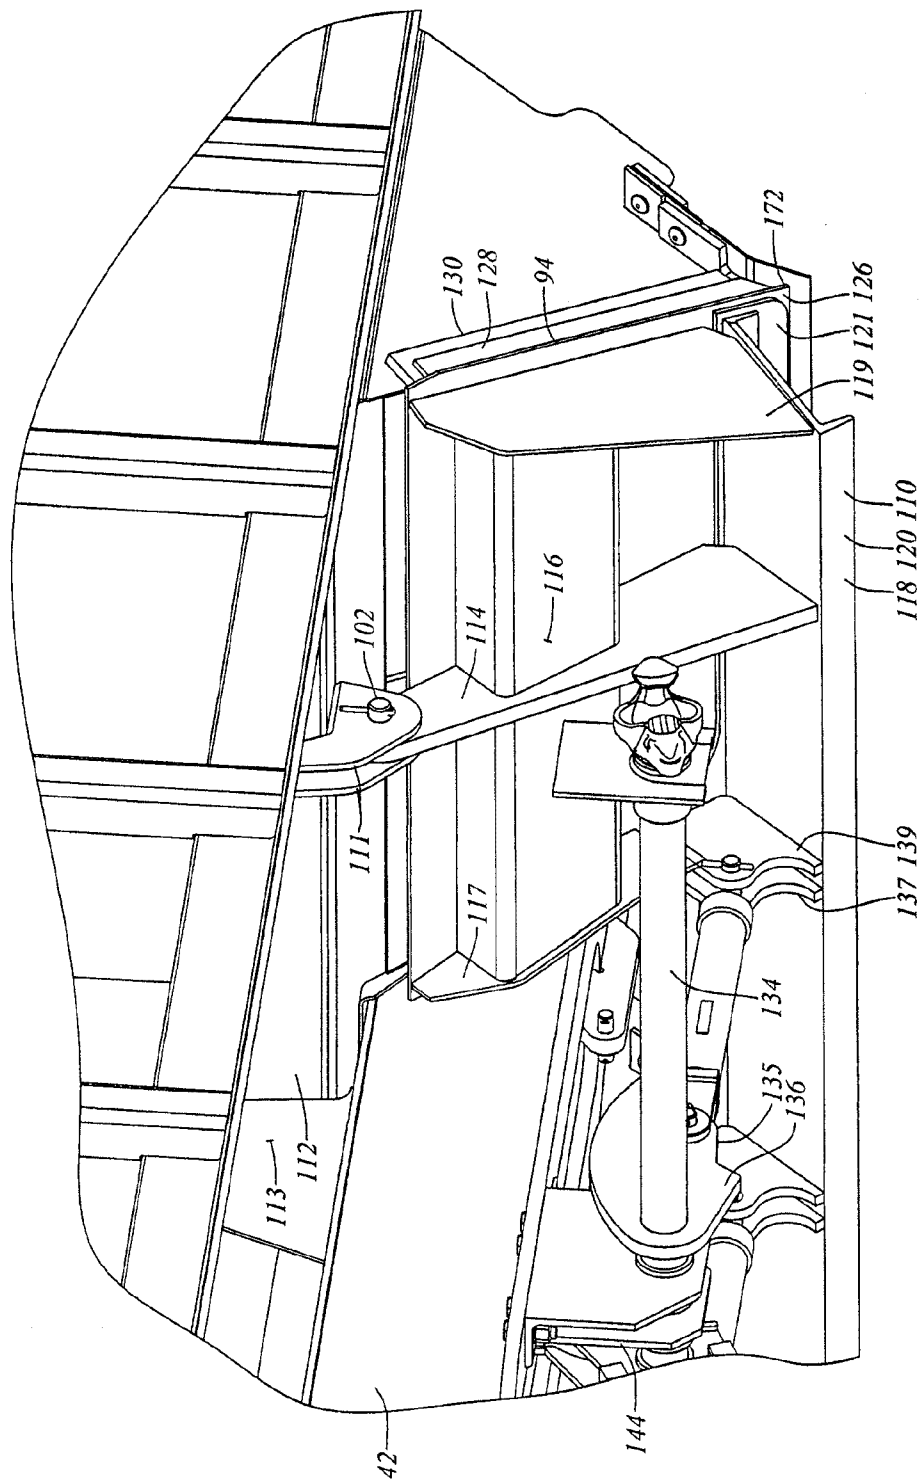


Figure 3c

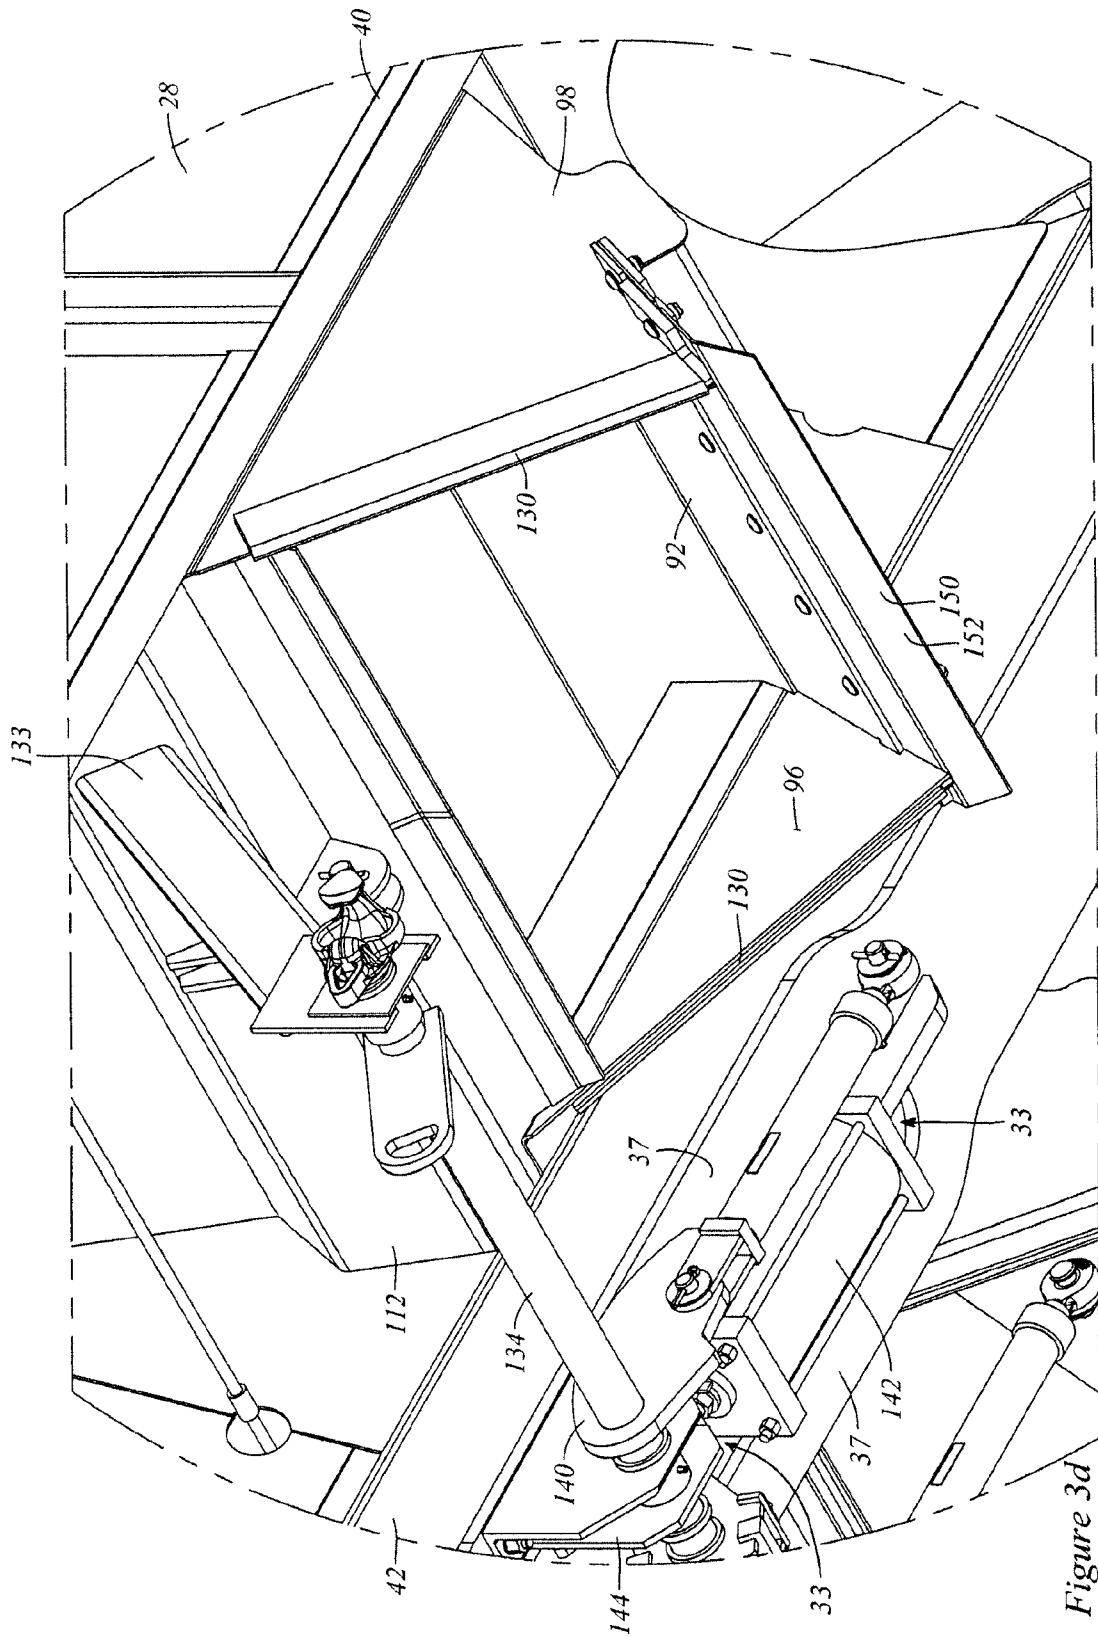
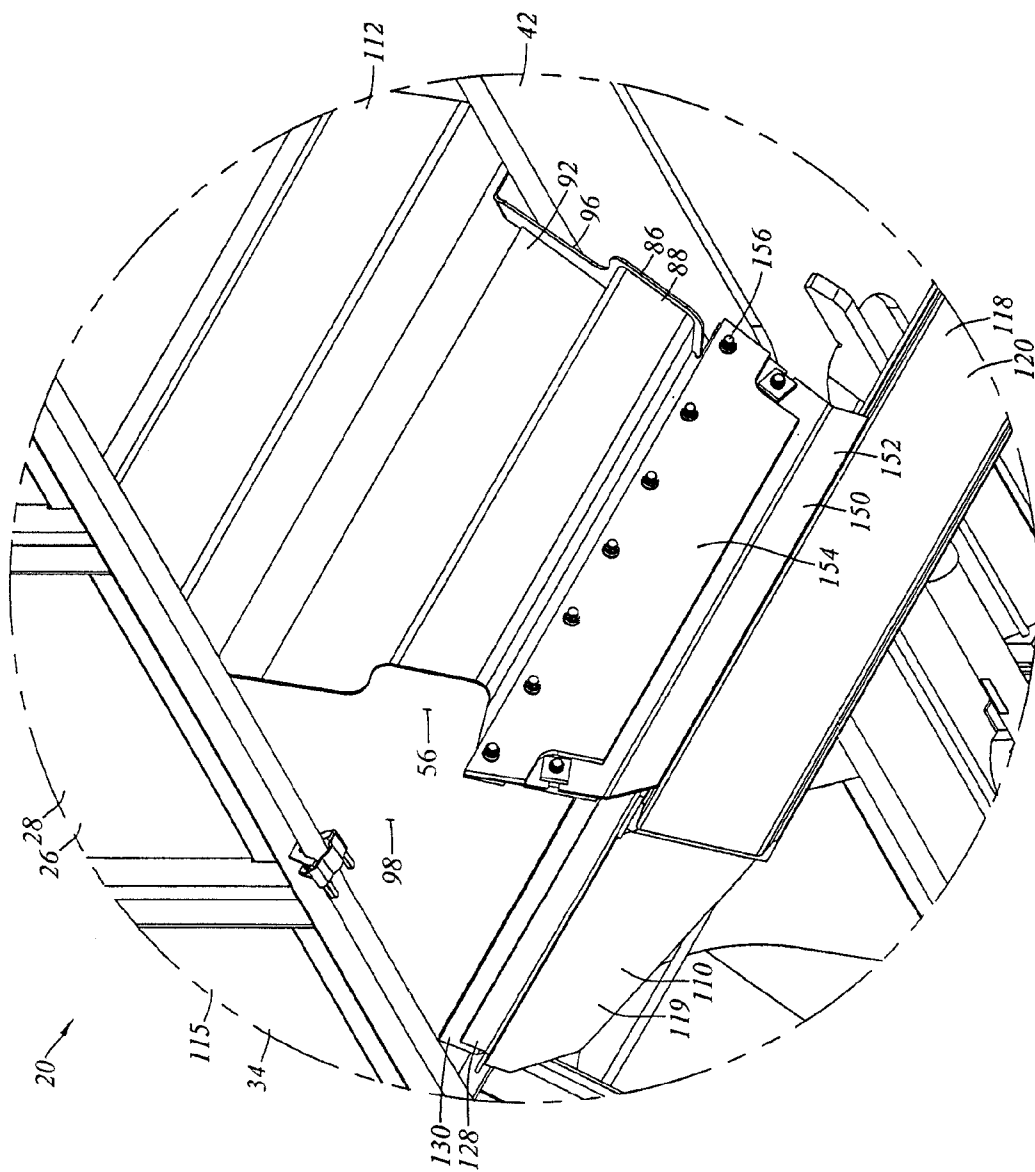


Figure 3d



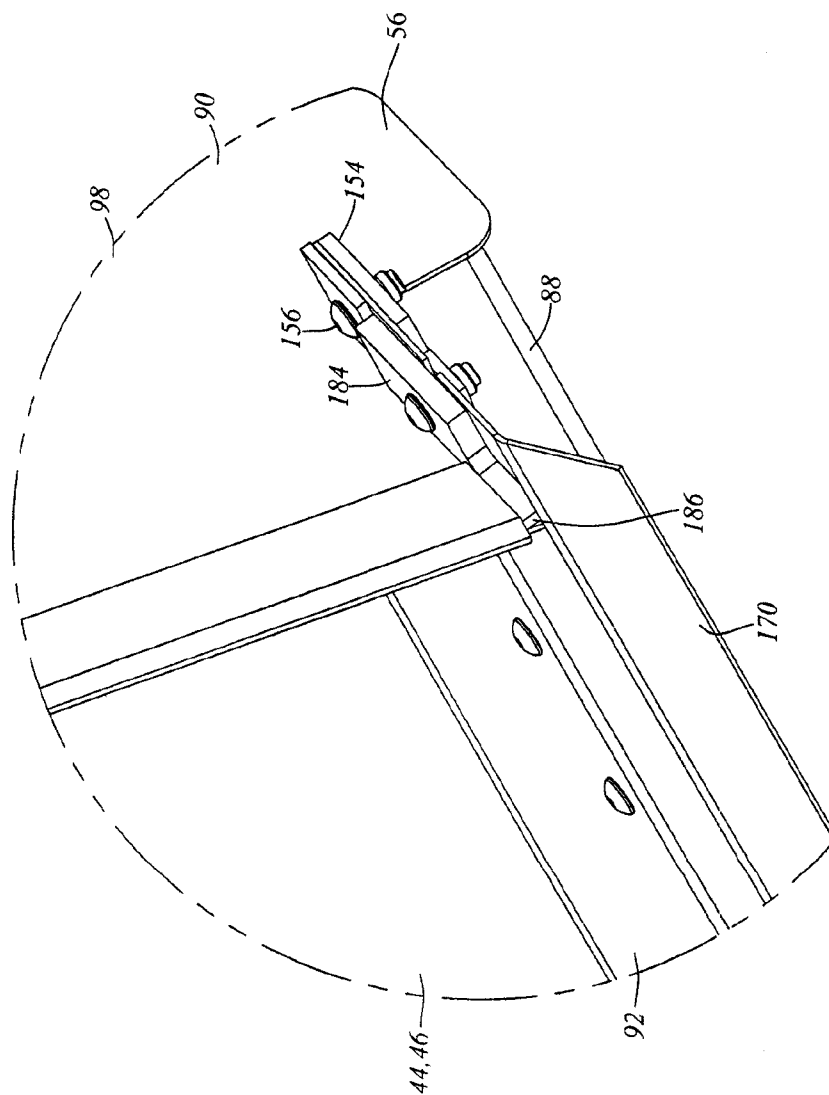


Figure 3f

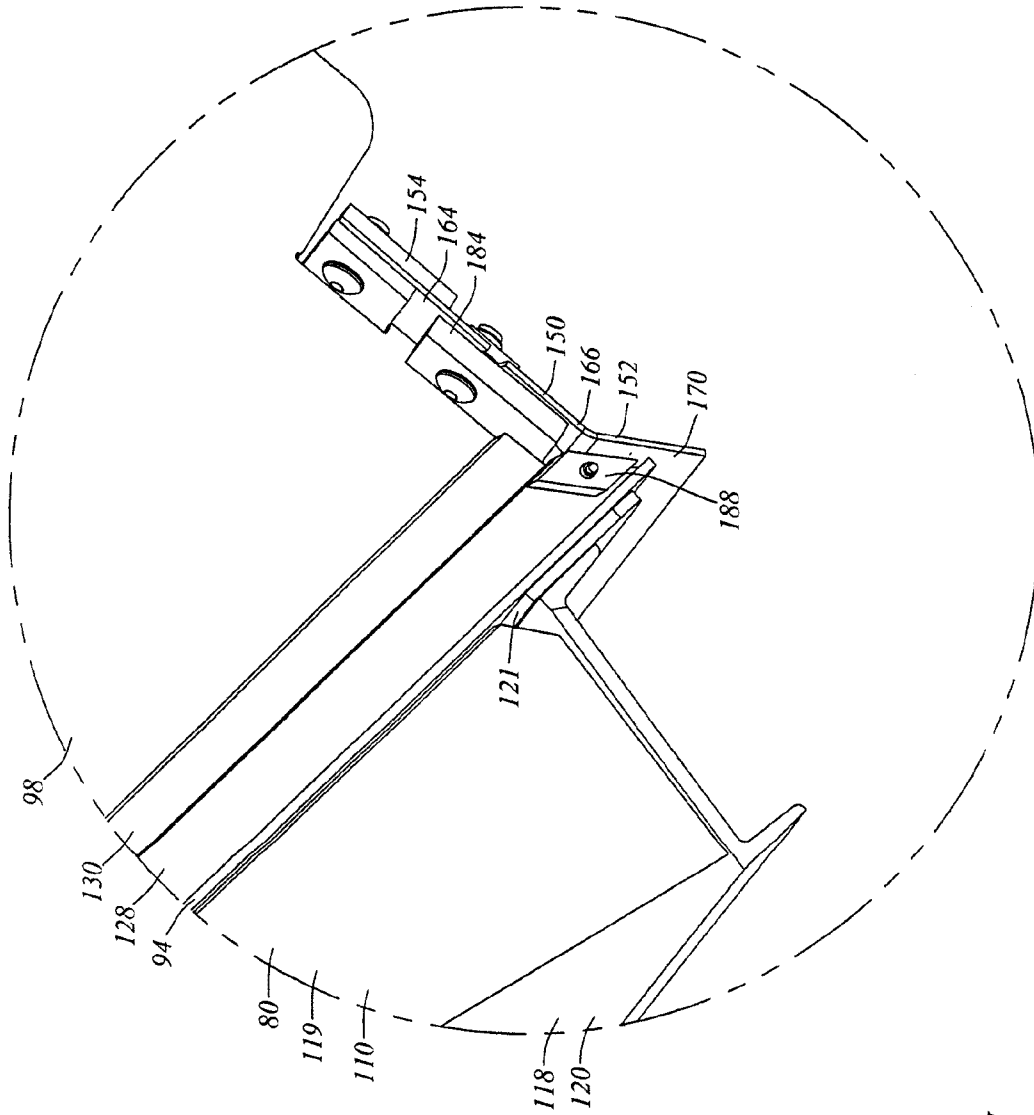
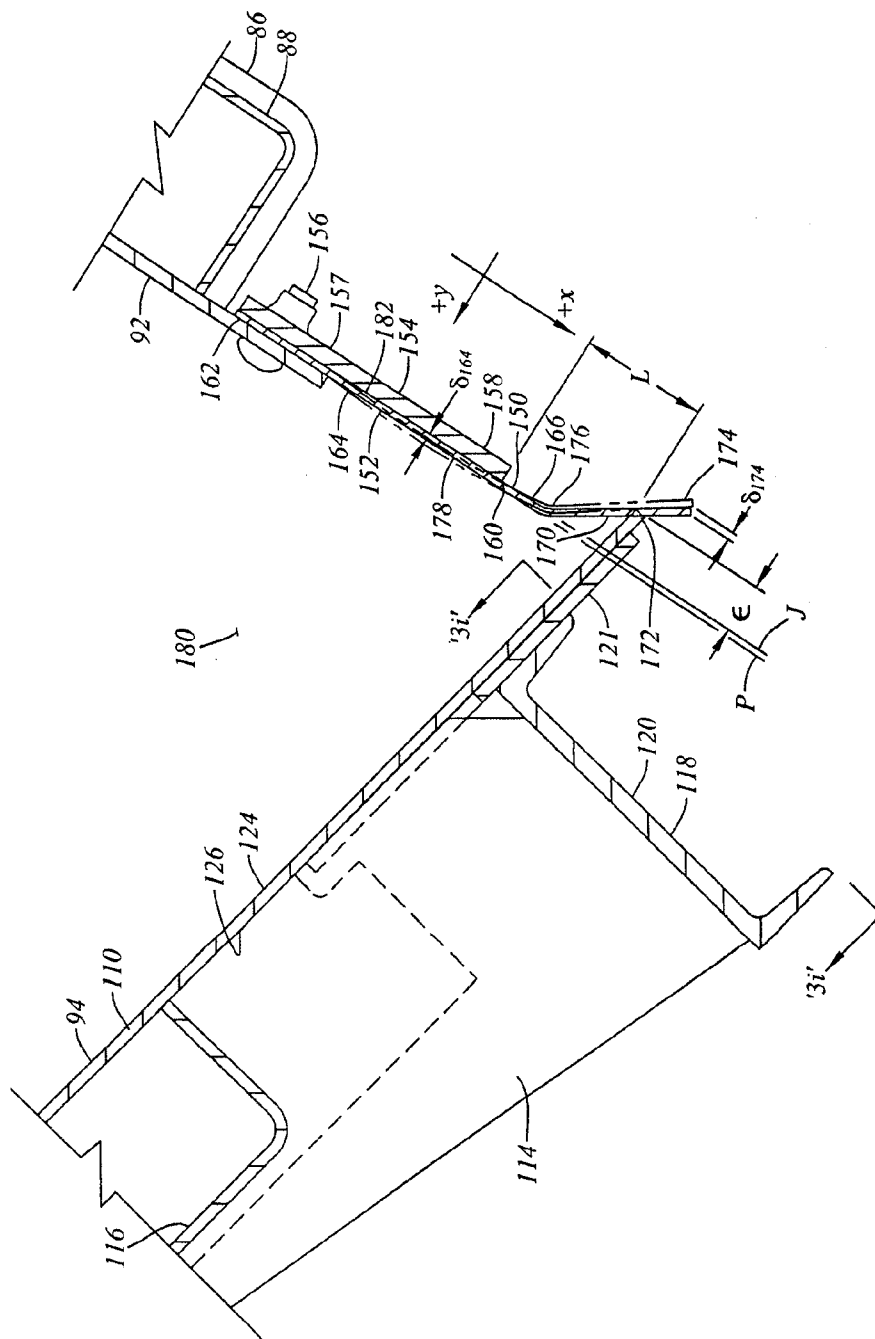


Figure 3g



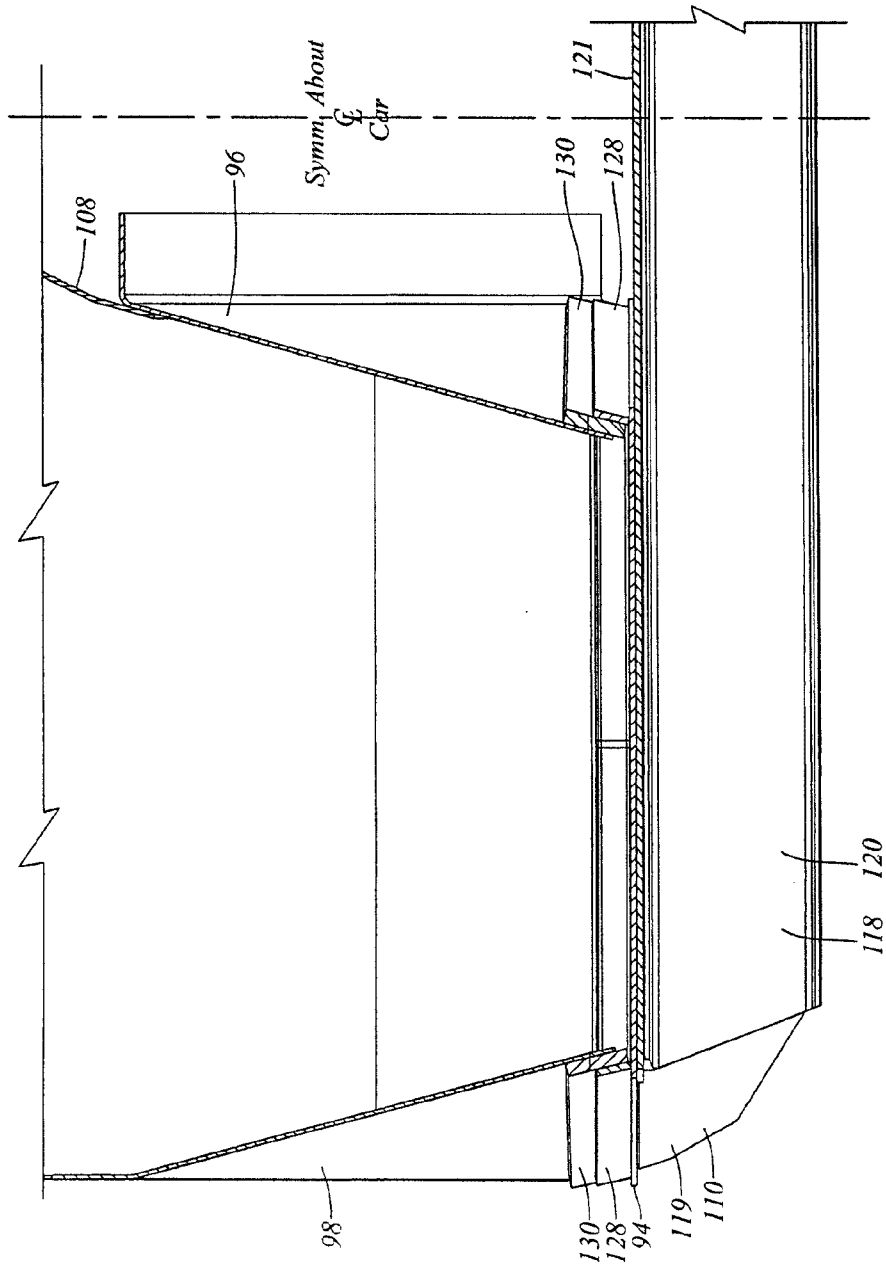
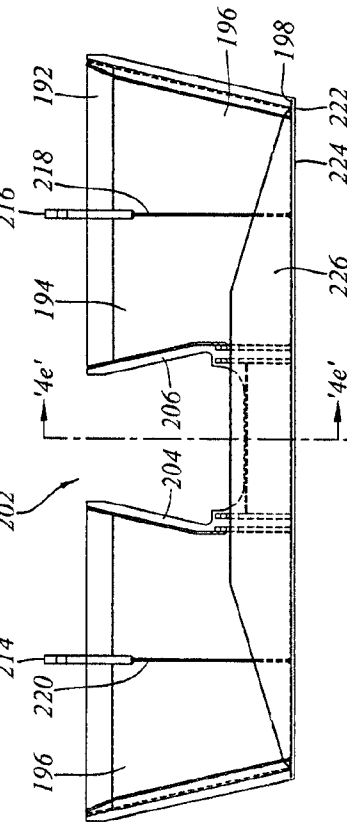

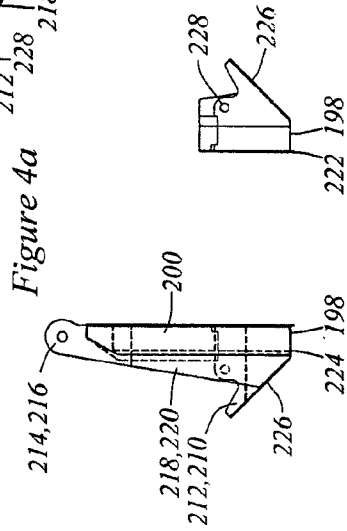
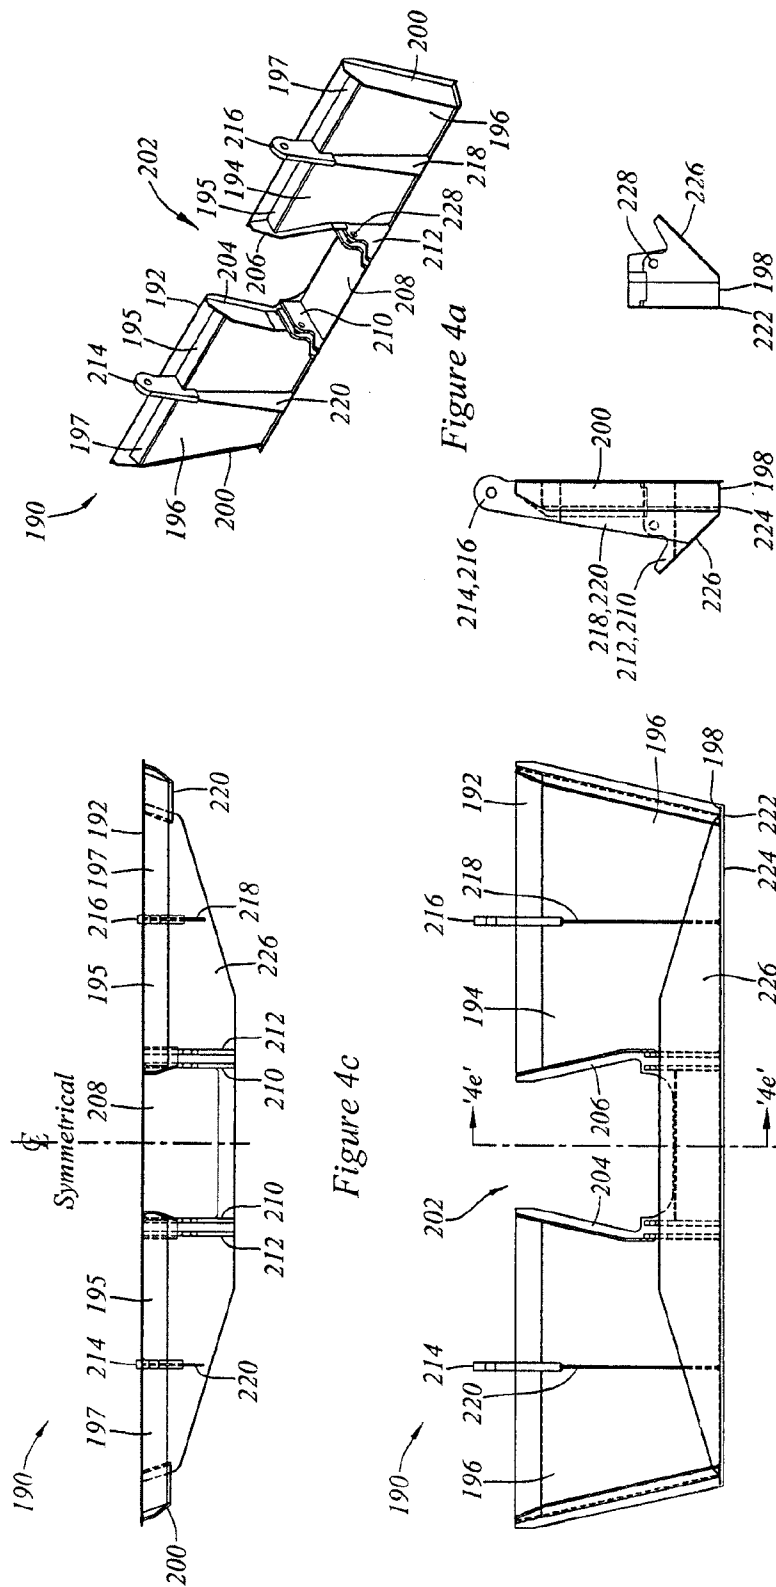


Figure 3i



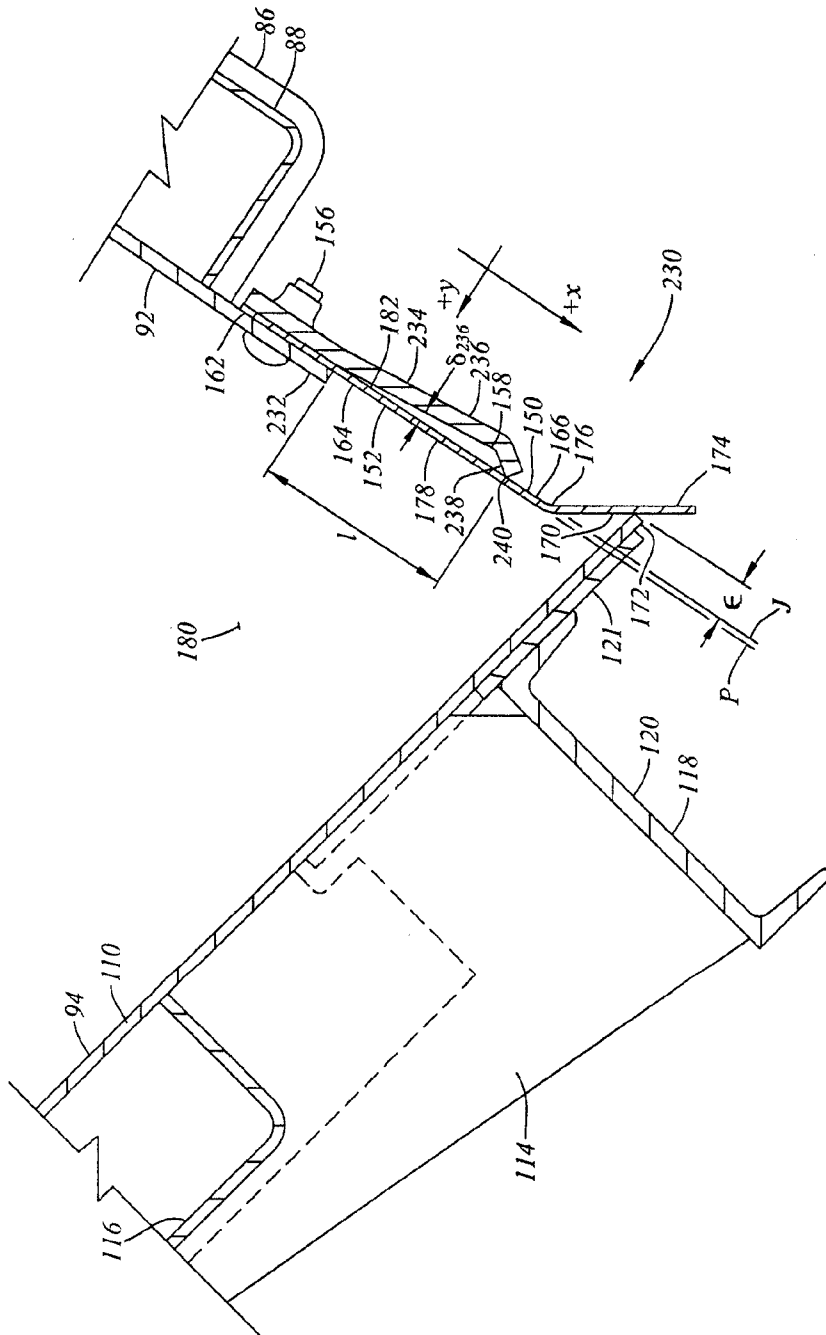


Figure 5a

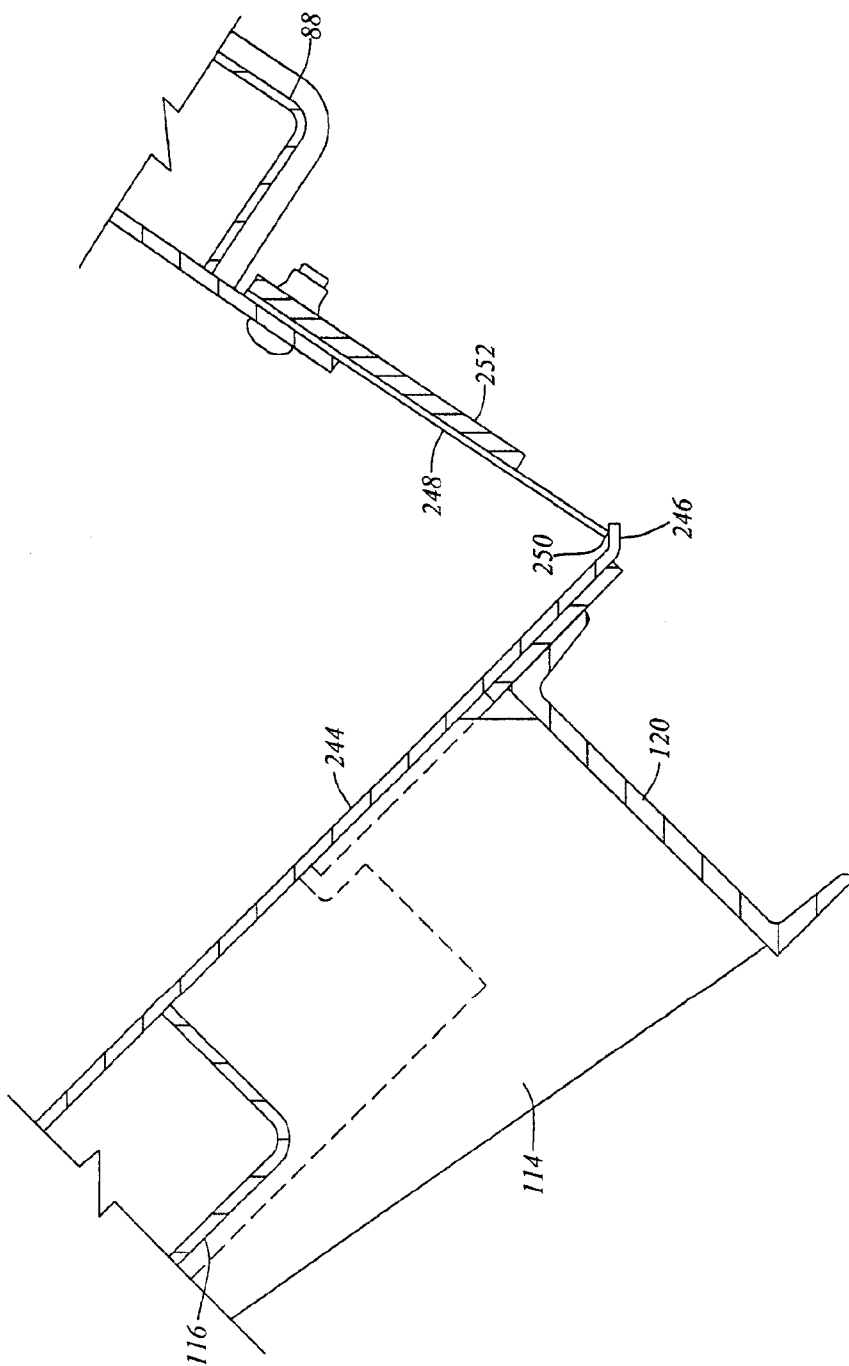


Figure 5b

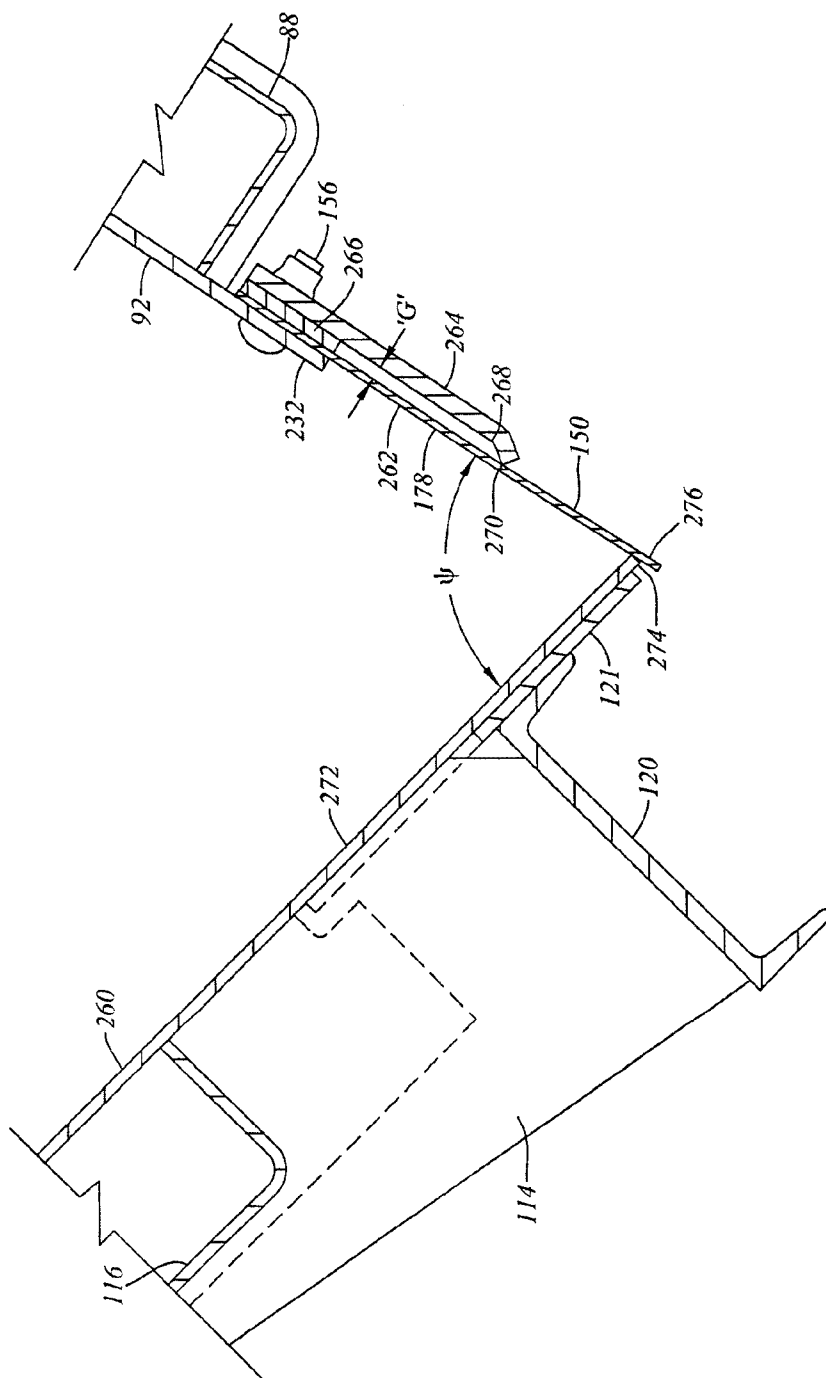


Figure 5c

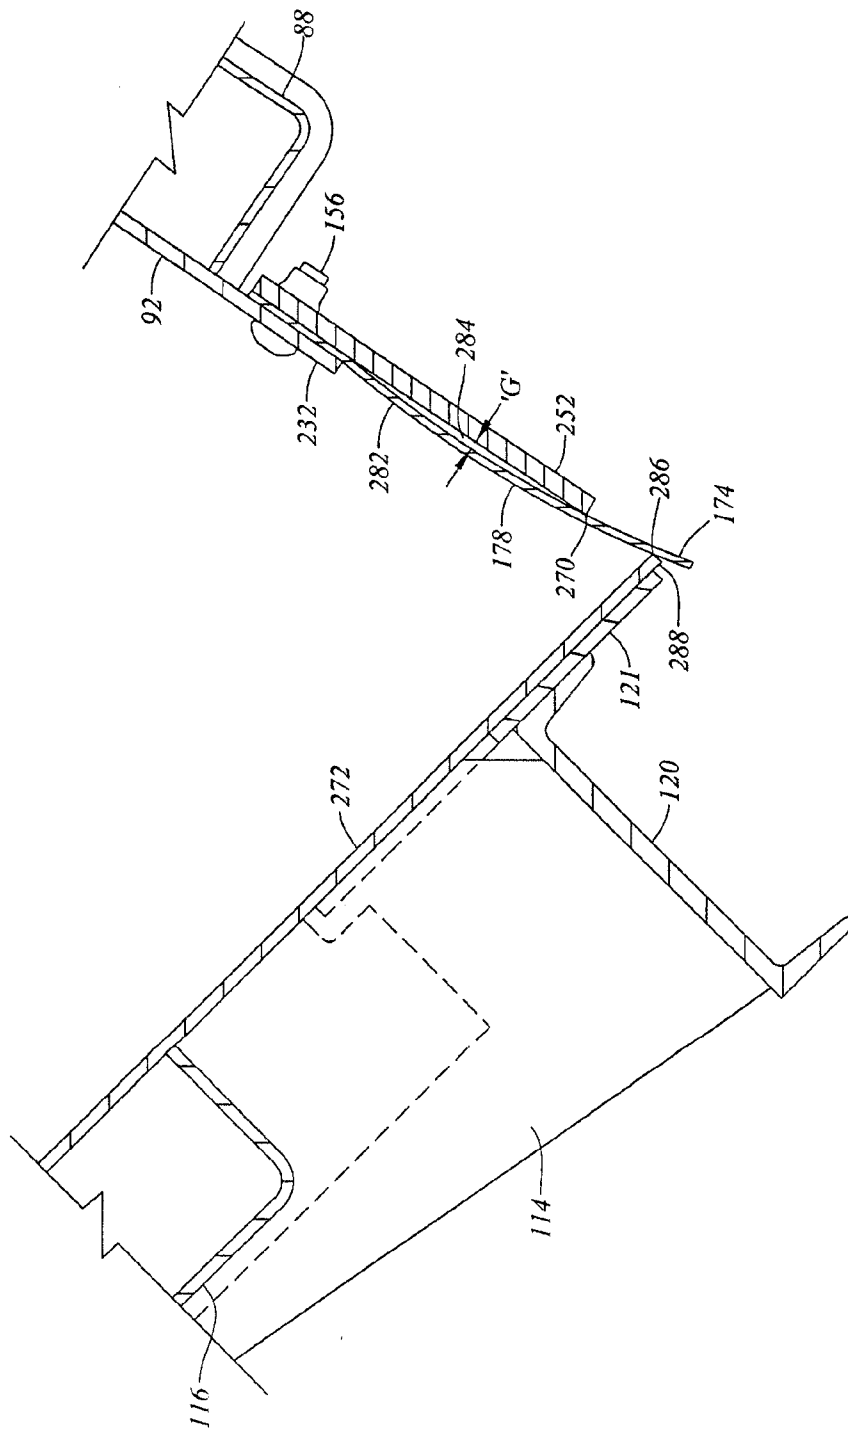


Figure 5d

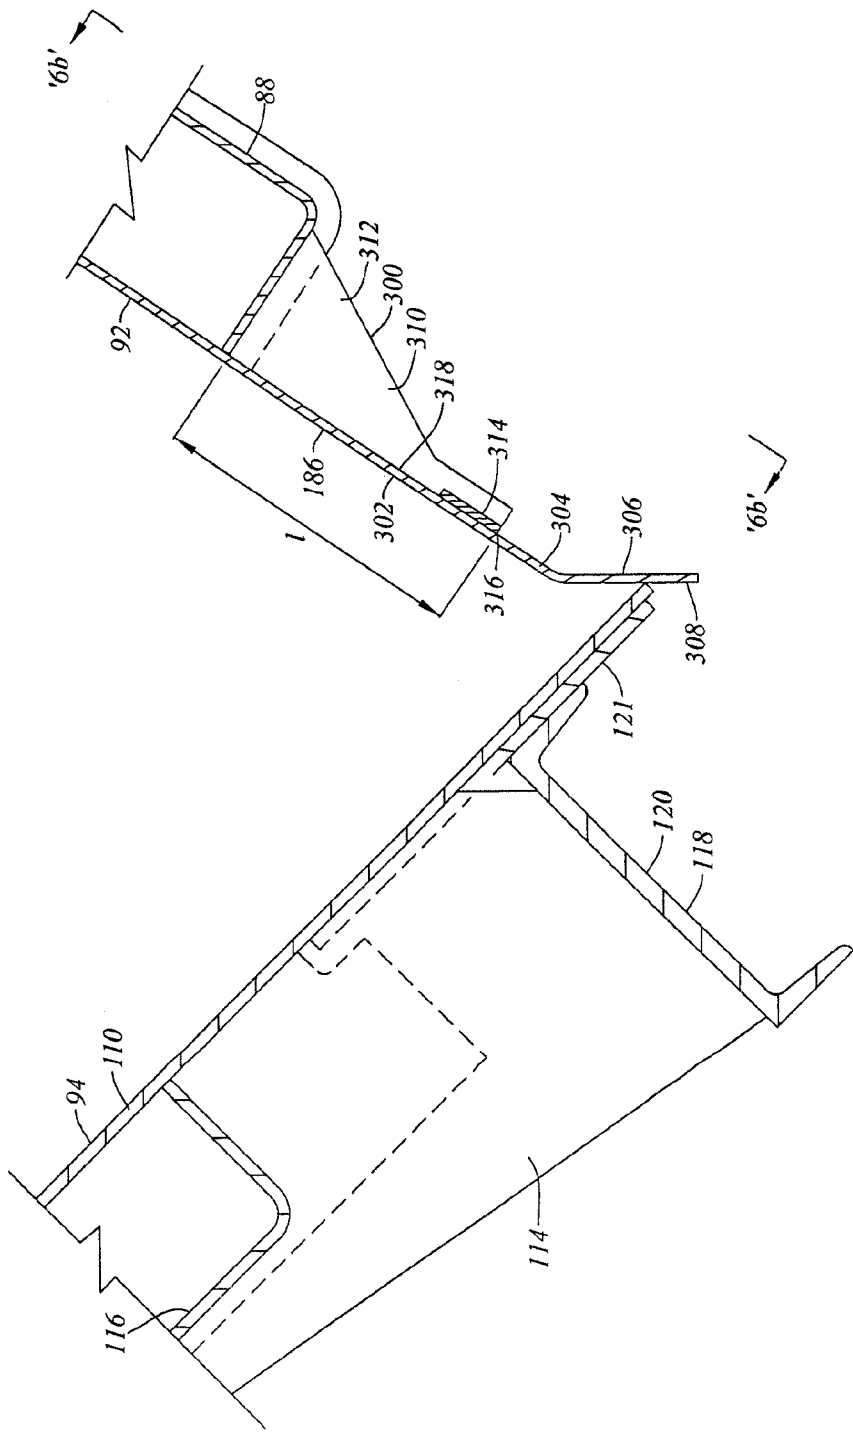


Figure 6a

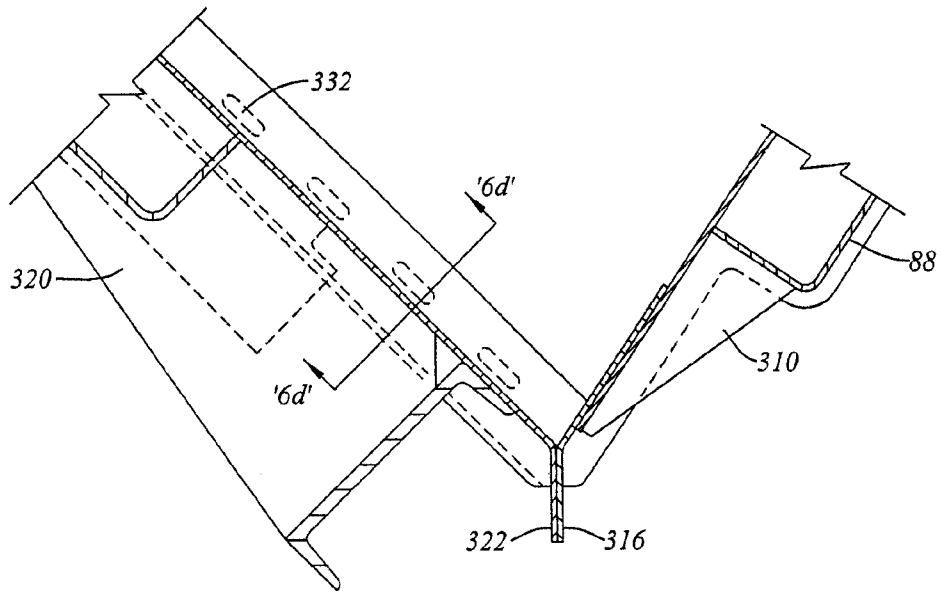


Figure 6c

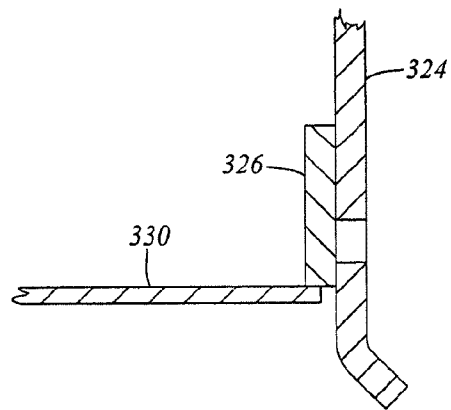


Figure 6d

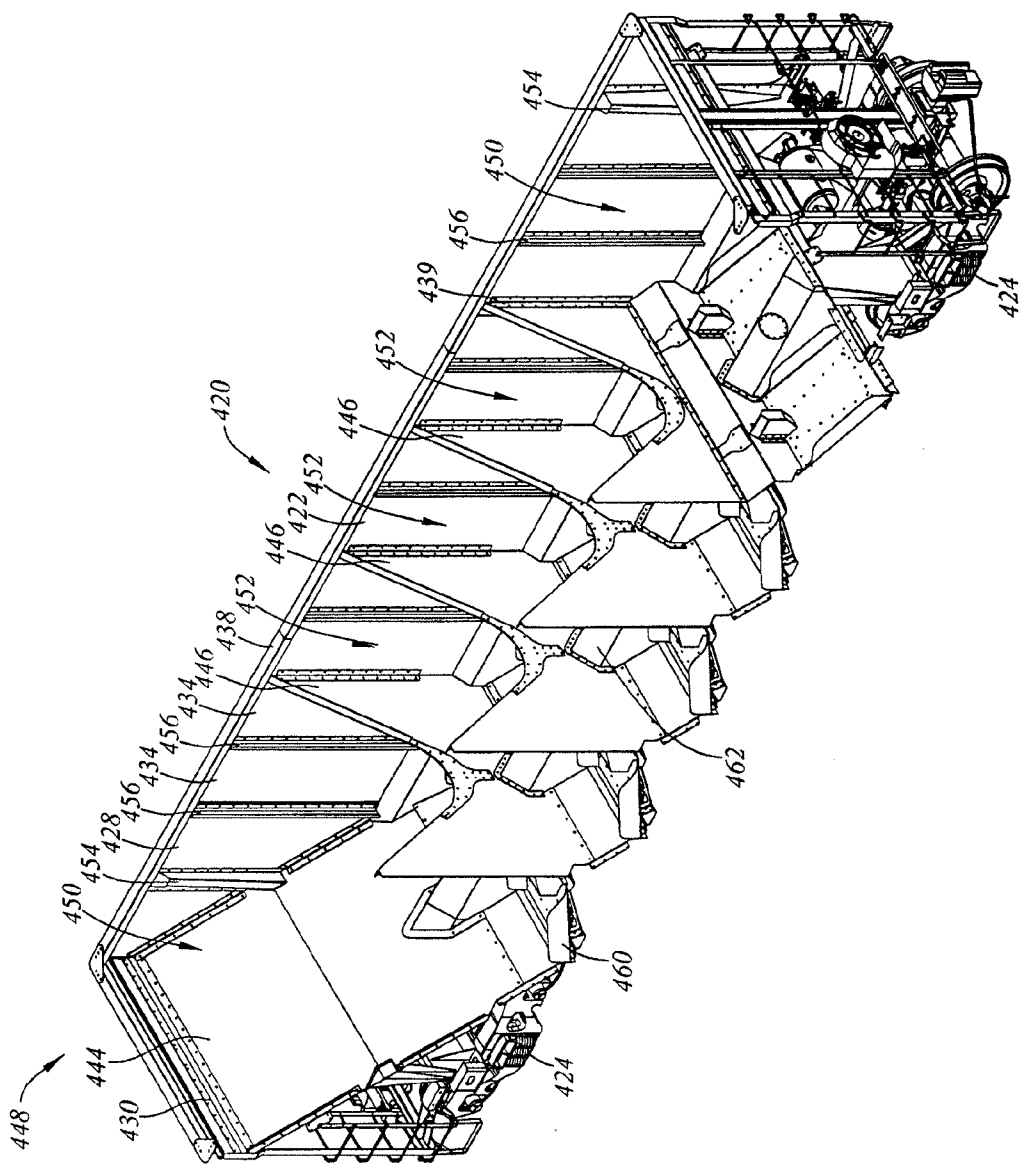


Figure 7a

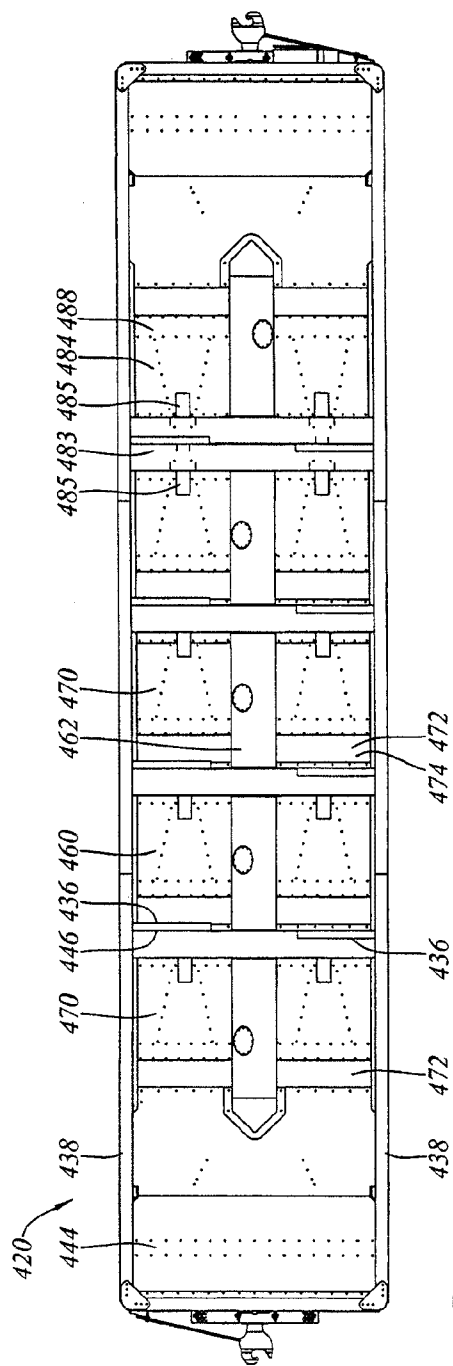


Figure 7c

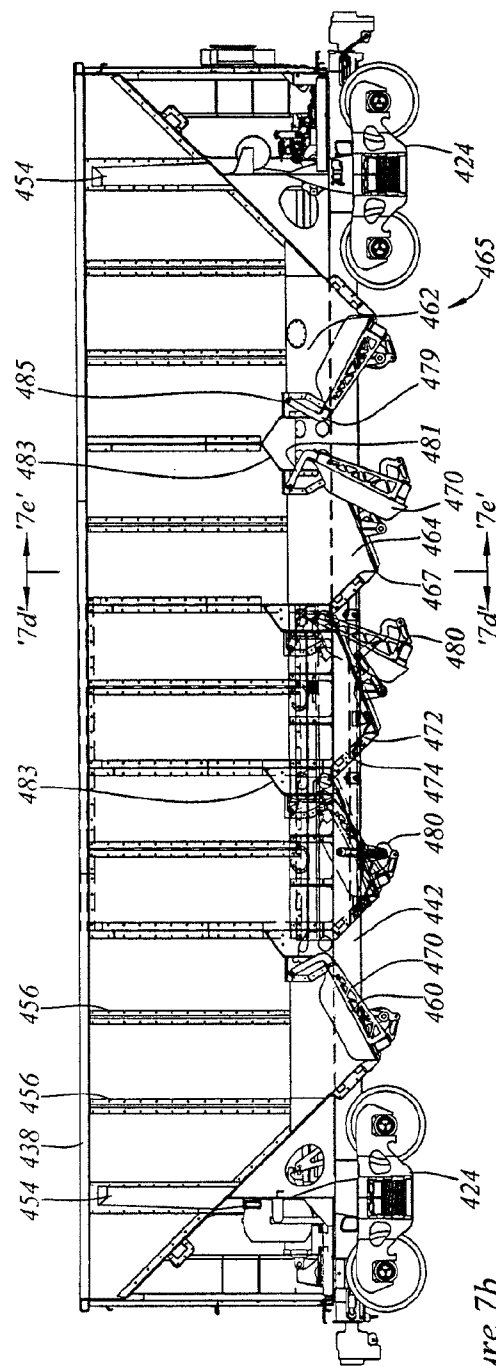


Figure 7b

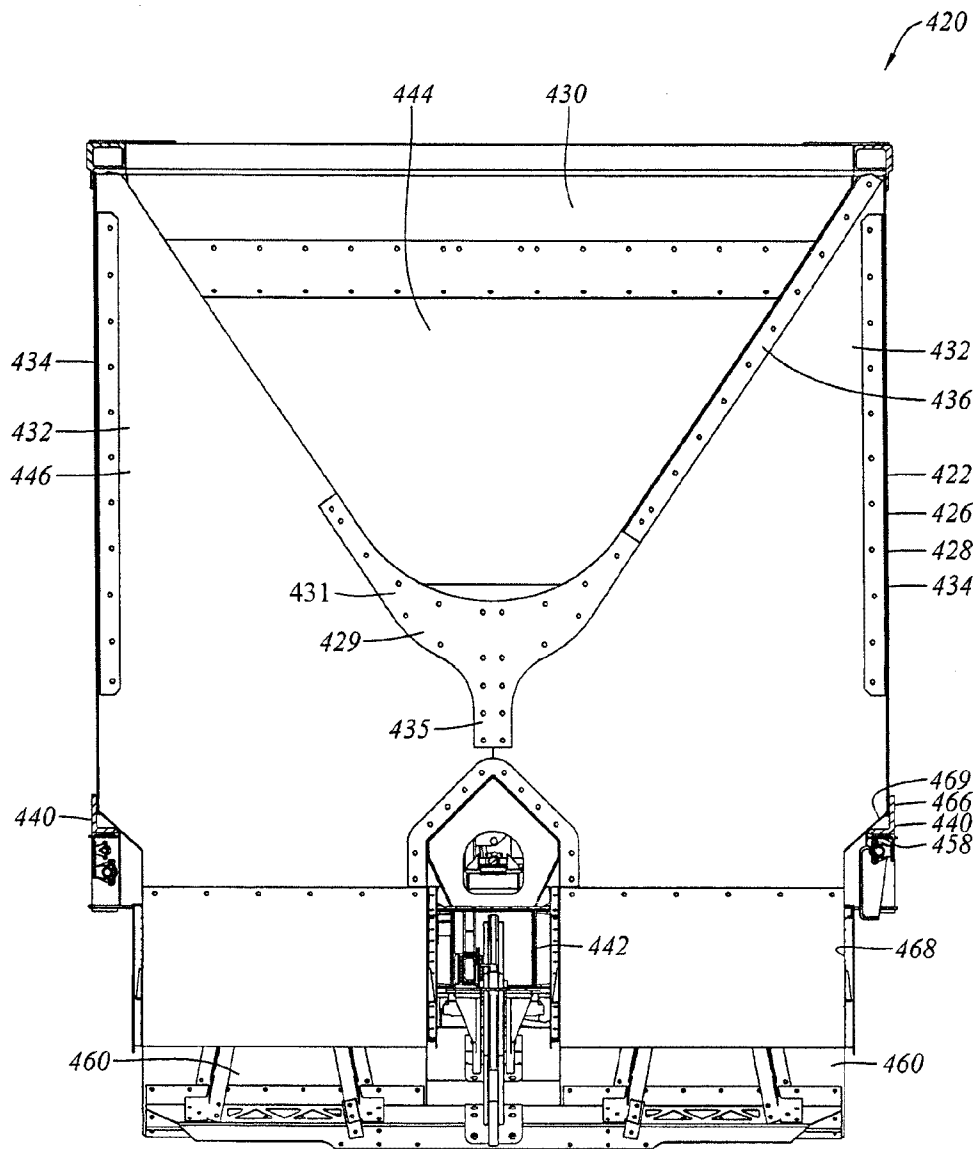


Figure 7d

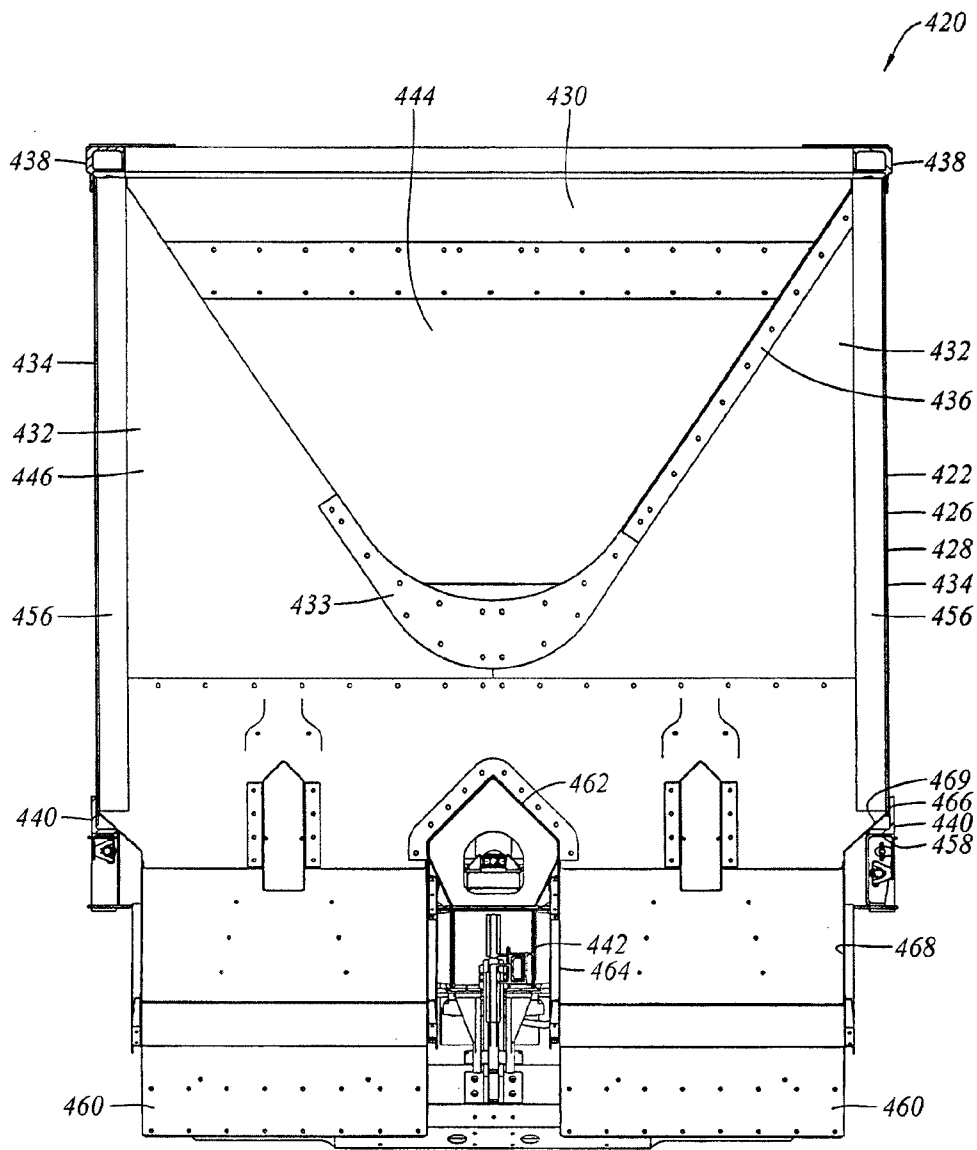


Figure 7e

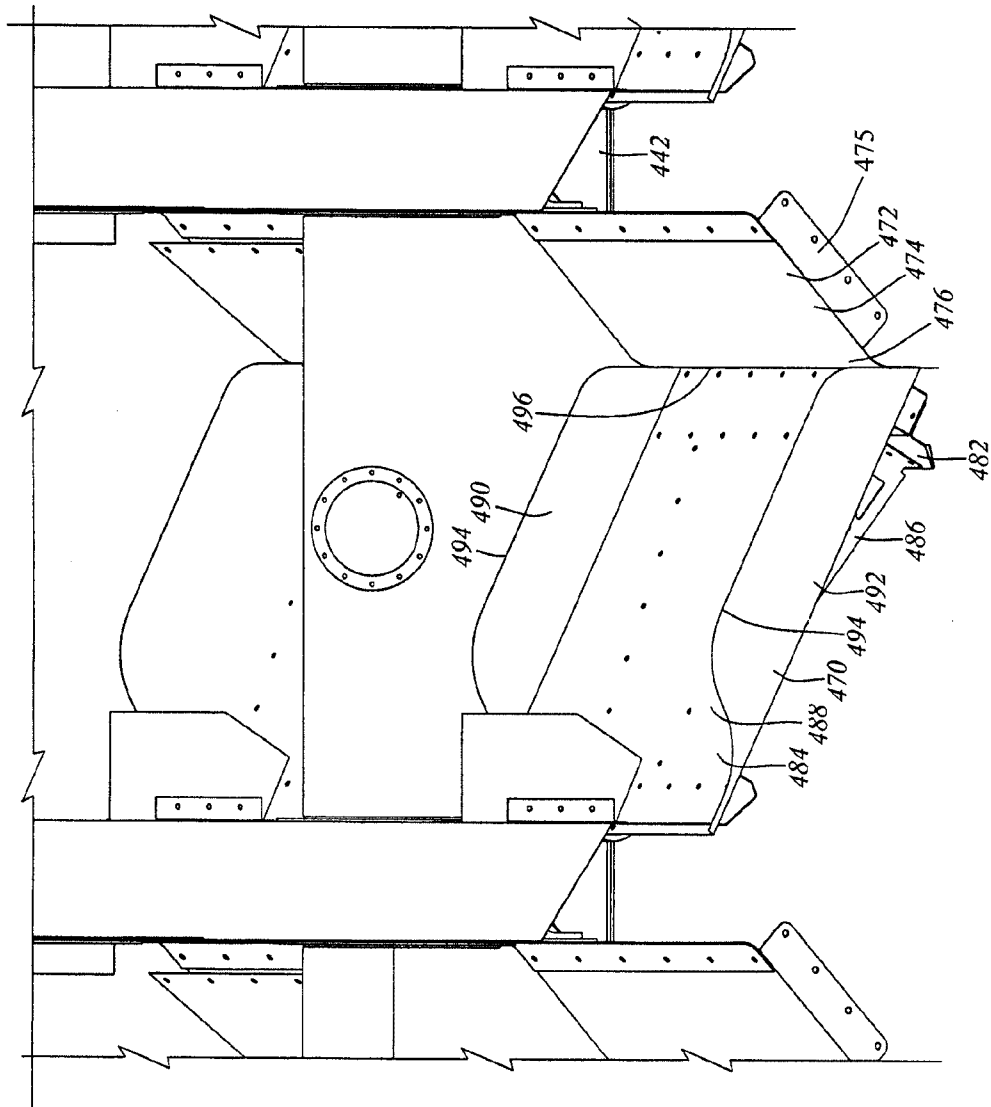


Figure 7f

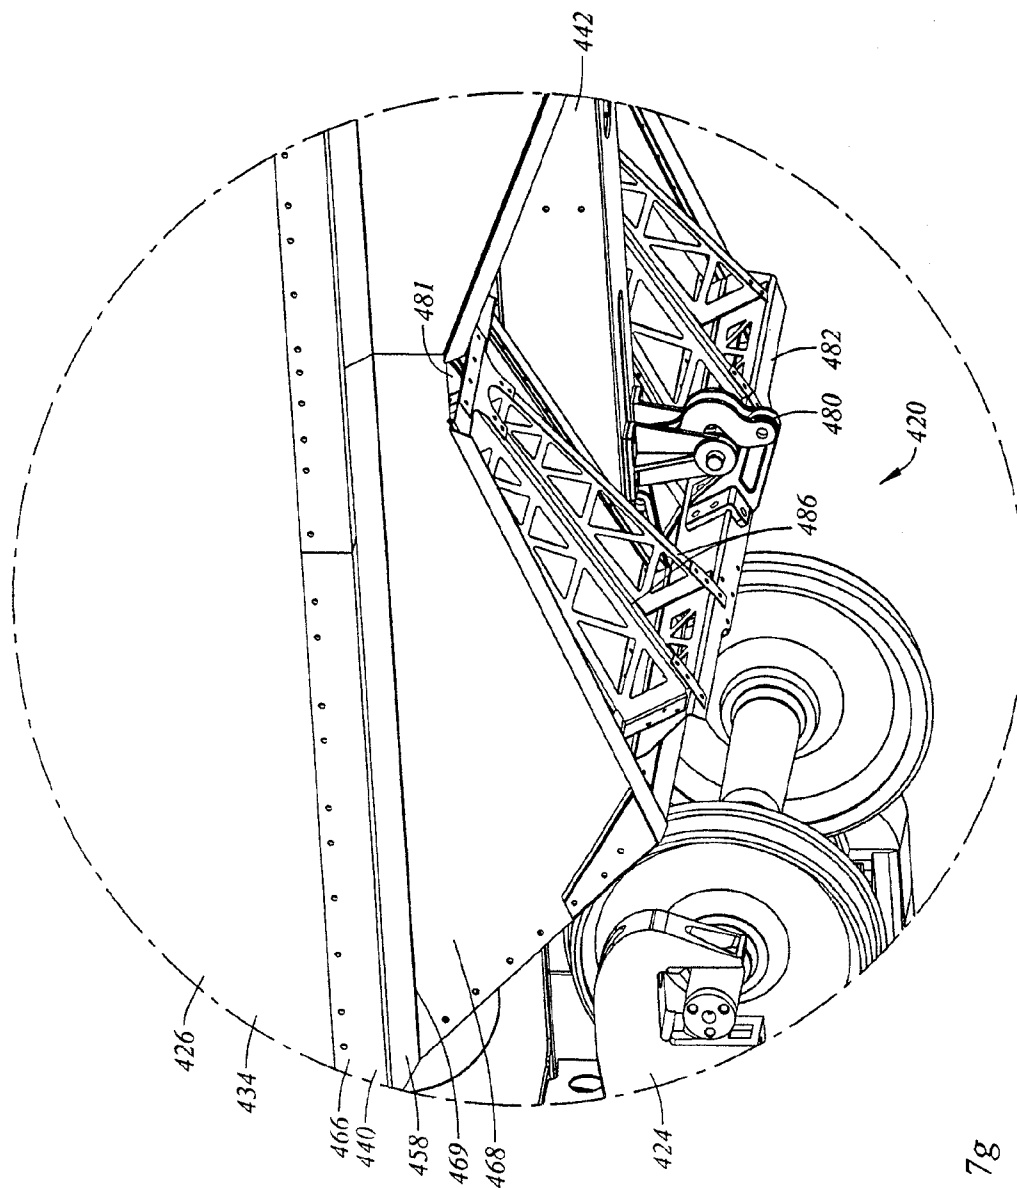


Figure 7g

