




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : B32B 31/30, 15/08</p>	<p>A1</p>	<p>(11) International Publication Number: WO 96/09169 (43) International Publication Date: 28 March 1996 (28.03.96)</p>
<p>(21) International Application Number: PCT/US95/11555 (22) International Filing Date: 12 September 1995 (12.09.95) (30) Priority Data: 311,630 23 September 1994 (23.09.94) US (71) Applicant: EASTMAN CHEMICAL COMPANY [US/US]; 100 North Eastman Road, Kingsport, TN 37660 (US). (72) Inventors: JONES, Allan, Scott; 105 Kay Avenue, Church Hill, TN 37642 (US). MCCONNELL, Richard, Leon; 421 Manderley Road, Kingsport, TN 37660 (US). (74) Agent: STEVENS, John, F.; P.O. Box 511, Kingsport, TN 37662-5075 (US).</p>		<p>(81) Designated States: CN, JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i></p>

(54) Title: EXTRUSION COATING PROCESS FOR MAKING AMORPHOUS POLYESTER LAYERS ON METAL FOIL SUBSTRATES

(57) Abstract

Disclosed is a process for forming a layered structure of metal sheet and polyester by heating the metal sheet, extrusion coating a thin layer of polyester on at least one side of the metal sheet, passing the coated sheet through nip rolls and optionally quenching the coated sheet to ensure the polyester coating(s) is in an amorphous state.

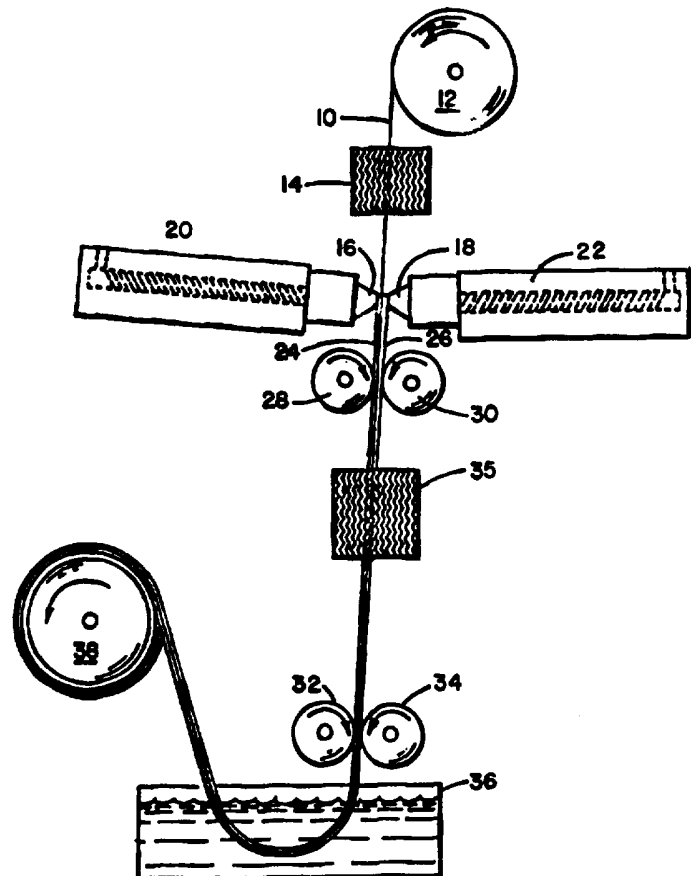

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

- 1 -

EXTRUSION COATING PROCESS FOR MAKING
AMORPHOUS POLYESTER LAYERS ON METAL FOIL SUBSTRATES

Technical Field

5 The present invention relates to a process for
forming a layered structure of metal sheet and polyester
by heating the metal sheet, extrusion coating a thin
layer of polyester on at least one side of the metal
sheet, passing the coated sheet through nip rolls and
10 optionally quenching the coated sheet to ensure the
polyester coating(s) is in an amorphous state.

Background of the Invention

 Current processes for making food and beverage cans
15 include the application of organic solvent based coating
compositions to steel or aluminum cans manufactured by
the draw-redraw (DRD) method or the drawn and wall-
ironed method (DWI). Because of solvent pollution
problems, this type of process is currently quite
20 undesirable. Another process involves the lamination of
preformed cast films or biaxially oriented films with
aluminum or steel can stock and then subsequently making
cans by the DWI or DRD procedure. It would be highly
desirable if this multistep process could be abbreviated
25 by in-line extrusion coating of aluminum or steel can
stock with polyester materials having good adhesion,
barrier and heat seal properties.

 U.S. Patents 4,452,374, 4,452,375 and 4,450,977
describe the manufacture of draw-redraw cans made by
30 using film laminated or extrusion coated steel sheet
material using olefin copolymers or polyolefin graft
copolymers. Polyester materials which have better
performance characteristics generally cannot be
extrusion coated by the procedures described in these
35 patents because of inadequate melt strength.

- 2 -

U.S. Patent 5,149,389 describes the lamination of certain polyester preformed cast films or biaxially oriented films with aluminum or steel can stock for preparation of cans by the DWI procedure.

5 U.S. Patent 4,352,925 describes heat-resistant adhesive compositions based on poly(ethylene terephthalate) copolyesters containing 30-50 mol % diethylene glycol and discloses that they may be coated on various substrates including metals. However, this
10 patent does not disclose the use of these copolyesters in the continuous extrusion coating of one or both sides of aluminum or steel can stock for the purpose of making cans.

U.S. Patent 3,589,975 discloses that extrusion
15 coating is one method for depositing a film onto metal to be used for can manufacturing.

Japanese Patent 2,047,050A describes the extrusion coating of many types of polymers (of which polyesters are one) onto sheets or foils of aluminum or treated
20 steels.

Japanese Patent 1,301,317A describes the extrusion coating of poly(ethylene terephthalate) onto electrolytically chrome coated steel (0.2 mm thick) at 200 m/min.

25 Japanese Patent 59,176,040 describes the extrusion coating of poly(butylene terephthalate) onto aluminum.

Japanese Patent 55,166,247A describes the extrusion coating of various polyesters including poly(ethylene terephthalate), poly(butylene terephthalate),
30 poly(1,4-cyclohexylenedimethylene terephthalate) and poly(ethylene isophthalate-co-terephthalate) onto various substrates. The substrates described are biaxially oriented film, paper, aluminum foil, or a combination of the substrates. The focus of the patent
35 is not on the coating of a metal substrate for can

- 3 -

making, but on the coating of a flexible substrate for other packaging applications.

U.S. Patent 4,810,321 describes the extrusion coating of polymers onto polyurethane coated metals.

5 European Patent 493,133A2 describes the extrusion coating of copolyesters onto steel. The metal/plastic laminate can then be used to make food or beverage cans.

10 European Patent 457,423A2 describes the extrusion coating of poly(ethylene isophthalate-co-terephthalate) copolyesters onto steel. The laminates can then be made into food or beverage cans by the draw-redraw method.

Description of the Invention

15 This invention is concerned with a continuous extrusion process for coating one or both sides of metal can stock. The coated can stock is subsequently converted into cans by means of either the DRD or DWI process. Such cans are useful as containers for beverages, food and the like. Typical metals used for
20 the manufacture of cans include aluminum, steel, tin coated steel, zinc coated steel, nickel coated steel, chrome coated steel and the like.

25 According to this invention, there is provided a process for forming a layered structure of metal sheet and polyester comprising

- 30 (A) directing a continuous length of metal sheet along a path extending in a downward, generally vertical direction,
- (B) coating at least one side of said sheet with a layer of molten polyester having repeat units from a dicarboxylic acid component comprising at least 80 mol % terephthalic acid,
35 naphthalenedicarboxylic acid, 1,4-cyclohexane-

- 4 -

5 dicarboxylic acid or mixtures thereof and repeat units from a glycol component comprising at least 80 mol % ethylene glycol, diethylene glycol, 1,4-cyclohexanedimethanol or mixtures thereof,

10 (C) prior to the coating step (B), heating the metal sheet to a temperature of 150°C to 350°C,

15 (D) immediately following the coating step (B), passing the coated metal sheet through a pair of cooperating nip rolls adjusted to firmly press the polyester into contact with said metal sheet, and

20 (E) following step (D), optionally quenching the layered structure to a temperature below the glass transition temperature of the polyester to thereby ensure that the polyester coating is in an amorphous state.

25 The process according to the present invention is illustrated in the drawing, wherein Figure 1 is a schematic elevation view. In Figure 1, flexible metal sheet material 10 is unwound on a continuous basis from roll 12 and directed along a path in a generally vertical direction. The sheet material is first passed through a heater 14, shown in the drawing as a pre-heating block. Heater 14 heats the material 10 to a temperature of between 150°C and 350°C. Next, sheet material passes between die lips 16 and 18 of extruders 20 and 22 respectively which are positioned to extrude molten polyester onto the surface of sheet material 10 to form coatings 24 and 26 thereon. Of course, if a

30

35

- 5 -

coating is only desired on one side, one of the extruders can be eliminated. The sheet material 10 is then passed through a pair of cooperating nip rolls 28 and 30 which are adjusted such that the nip is sufficiently close to firmly press the polyester into contact with the surface of sheet material 10. If desired, a second set of nip rolls 32 and 34 can be used to ensure good contact between the coatings and sheet material. It is also preferred that another heater 35 be used. The coated sheet material 10 is then quenched to a temperature below the glass transition temperature of the polyester coating to ensure that they are in an amorphous state. The coated sheet material is then taken up on roll 38. Quenching conveniently is accomplished by taking the coated sheet material through a water bath 36 at 1-60°C, preferably 10-40°C.

The preferred polyesters are those based on terephthalic acid, naphthalenedicarboxylic acid or 1,4-cyclohexanedicarboxylic acid with ethylene glycol, diethylene glycol or 1,4-cyclohexanedimethanol or mixtures of these components. The naphthalene-dicarboxylic acid used is generally the 2,6 isomer but the 1,4-, 1,5-, or 2,7-naphthalenedicarboxylic acids or mixtures of these acids are also useful. These naphthalenedicarboxylic acids may also contain up to about 25 mol % of other isomers such as the 1,2-, 1,3-, 1,6-, 1,7-, 1,8-, 2,3-, 2,4-, 2,5-, or 2,8- isomers.

In addition to the primary dibasic acids described above, other suitable modifying dibasic acids containing about 4 to about 36 carbon atoms may be present. Such modifying dibasic acids include fumaric, succinic, adipic, glutaric, azelaic, sebacic, isophthalic, sodiosulfoisophthalic and the like.

The preferred polyesters may also contain modifying amounts of other glycols containing from about 3 to

- 6 -

about 12 carbon atoms and may be aliphatic or cycloaliphatic in nature. Suitable modifying glycols include 1,3-propanediol, 1,4-butanediol, 1,5-pentanediol, 1,6-hexanediol, 2,2-dimethyl-
5 1,3-propanediol, 1,10-decanediol, 2,2,4,4-tetramethyl-1,3-cyclobutanediol and the like.

The polyesters are readily prepared by melt phase or solid state polycondensation procedures well known in the art. Useful polymers have inherent viscosity (I.V.)
10 values in the range of 0.7 to 1.5 dL/g. Polyesters useful in this invention will generally have crystalline melting points in the range of 100°C to 290°C or be amorphous polymers with glass transition temperatures greater than 100°C.

15 The thickness of the metal used to make cans is 0.05 to 0.5 mm for steel and 0.02 to 0.5 mm for aluminum can stock. In the process of this invention, the metal sheeting is heated to a temperature of 150°C to 350°C by means of a gas flame, infrared, induction heating or
20 other suitable heating method and passed to lamination rolls as shown in Figure 1. Just prior to the lamination rolls, one or two layers of polyester melt is extruded onto one or both sides of the preheated metal strips. The melt temperature of the polyesters is at
25 least as high as the crystalline melting point of the polymer and generally will be at least as high as 250°C. The polymer coating thickness on one or both sides of the metal sheeting will generally be in the range of 0.5 to 3.0 mil. When one layer of polyester is applied, the
30 polyester of choice is usually a copolyester having particularly good adhesion to metal. One such example is a poly(ethylene terephthalate) copolyester containing 10 to 40 mol % diethylene glycol. Also such copolyesters modified with 0.5 to 5.0 mol %
35 5-sodiosulfoisophthalic acid are highly suitable. When

- 7 -

two layers of polyester are applied to each side of the metal sheeting, the outer layer is generally a higher melting and less modified polyester such as poly(ethylene terephthalate), poly(ethylene terephthalate) copolyesters containing about 1 to about 20 mol % of other glycols, poly(1,4-cyclohexylene dimethylene) terephthalate, or poly(1,4-cyclohexylene dimethylene terephthalate) copolyesters containing about 1 to about 20 mol % of other glycols and the like. When tin coated steel is used as the metal substrate, it is important that the inner layer of polyester be applied at a temperature of less than about 230°C to avoid the melting of the tin coating.

It is preferred that the polyester coatings be extruded onto the preheated metal sheeting in a vertical direction as indicated in Figure 1. The polyester resins are extruded through a feedblock and cast film die onto the heated metal sheeting just prior to the nip roll. If two layers of polyester are applied, two extruders are required to feed the separate molten streams to the feedblock.

As the laminate exits the nip, it is heated by means of infrared or induction heating methods or passed through a heated oven and then through a second set of nip rolls to ensure that good, intimate contact is made with the metal and to provide a uniform thin coating of polyester. When two layers of polyester are used on each side of the metal, the inner layer is usually thinner than the outer layer.

The laminates are optionally quenched (usually in water) to a temperature below the glass transition temperature of the polyesters to ensure that the polyester coatings are in an amorphous state. Can blanks cut from the laminates are readily drawn and wall ironed or drawn and redrawn into cans.

- 8 -

Although not required, branching agents such as pyromellitic dianhydride, trimellitic anhydride or acid, trimethylolpropane, pentaerythritol and the like may be added to the polymer melt in the extruder to increase the melt viscosity and melt strength of the polyester before being extrusion coated onto the metal.

The polyester compositions described in this invention may contain additives generally known in the art. These include nucleation or crystallization aids, surface lubricants, denesting agents, stabilizers, antioxidants, ultraviolet light absorbing agents, pigments, colorants, and the like. The polyesters may also contain carbon black and/or black iron oxide. Generally the exterior polyester layer will contain pigments such as TiO_2 for printing and decoration purposes.

In addition to the coating of metal can sheeting, it is also possible to laminate the copolyesters of the present invention to aluminum or tin foil for subsequent use in food pouches, such as for potato chips, cookies, and the like. The coating on the foil makes it possible to heat seal the packages. As in the beverage/food can application, the exterior layers of the food pouch laminates generally contain pigments such as TiO_2 for printing and decoration purposes.

The following examples will further illustrate the invention.

Example 1 - Electrolytically chromium coated steel having a thickness of 0.3 mm is fed from a roll vertically downward and heated by means of gas flames to a temperature of 280°C. This heated metal sheeting is fed to a set of nip rolls at a speed of 100 ft/min. Poly(ethylene terephthalate) copolyester containing 18 mol % diethylene glycol and having an inherent

- 9 -

viscosity of 0.85 dL/g is extrusion coated onto both sides of the heated metal sheeting just prior to the point at which the metal reaches the nip (see Figure 1). This extrusion coating is accomplished by feeding
5 1/8 inch pellets of copolyester through an extruder having a 1 inch diameter, a single flight screw, and L/D ratio of 28/1. Copolyester melt is extruded through a feedblock and a 6 inch wide die having an opening of 15 mil at a melt temperature of 300°C. After passing
10 through the nip, the metal sheeting has a 0.6 mil coating of copolyester on each side. The copolyester/metal/copolyester laminate is passed through an oven maintained at 250°C and then through another set of nip rolls to ensure that good adhesion is obtained. The
15 laminate is then passed through a quench bath filled with chilled water to maintain the copolyester coating in an amorphous state.

Can blanks are diced from the laminated sheeting and cans are readily prepared by the draw and redraw
20 process or drawn and wall-ironed process. The cans have a good appearance and there are no cracks in the copolyester coating.

Similarly good results are achieved when the copolyester is pigmented with 10% TiO₂. Coated cans
25 from this composition have a nice white appearance which can be printed to provide decoration or descriptive material.

Example 2 - The procedure of Example 1 is repeated
30 except that two extruders are used on each side of the heated metal sheeting to provide a coextruded polyester coating 1 mil thick on each side of the metal. The inner layer of polyester is a poly(ethylene terephthalate) copolyester containing 29 mol %
35 diethylene glycol (I.V. 0.82 dL/g) applied at a melt

- 10 -

temperature of 300°C and the outer layer is poly(ethylene terephthalate) (I.V. 0.85 dL/g) applied at a melt temperature of 305°C.

5 Can blanks are diced from the laminated sheeting and cans are readily prepared by the draw/redraw process.

10 Example 3 - The procedure of Example 1 is repeated except that aluminum sheeting (0.2 mm thickness) is used instead of the chromium coated steel. The copolyester coating has a good appearance. Can blanks diced from this laminate are readily converted into cans by the draw and wall-ironed process.

15 Example 4 - The procedure of Example 2 is repeated except that aluminum sheeting (0.2 mm thickness) is used instead of the chromium coated steel and coextruded layers of poly(ethylene 2,6-naphthalenedicarboxylate) copolyester containing 32 mol % diethylene glycol (I.V. 20 0.87 dL/g) and poly(ethylene 2,6-naphthalene-dicarboxylate) containing 25 mol % 1,4-cyclohexane-dimethanol (I.V. 0.79 dL/g) are used.

25 Similarly good results are achieved when the copolyesters contain 7.5% TiO₂ pigments.

Example 5 - The procedure of Example 1 is repeated except the copolyester used is a poly(1,4-cyclohexylene-dimethylene terephthalate) containing 19 mol % ethylene glycol and 0.5 mol % 5-sodiosulfoisophthalic acid (I.V. 30 0.75 dL/g). The coated metal has a good appearance and is readily converted into cans.

35 Example 6 - The procedure of Example 1 is repeated except that 0.5 mol % pyromellitic dianhydride branching agent is injected at a midpoint in the extruder into the

- 11 -

poly(ethylene-co-diethylene terephthalate) copolyester melt. The coated metal has a good appearance and is readily converted into cans.

- 12 -

CLAIMS

We claim:

- 5 1. A process for forming a layered structure of metal sheet and polyester characterized by
- 10 (A) directing a continuous length run of metal sheet along a path extending in a downward, generally vertical direction,
- 15 (B) coating at least one side of said sheet with a layer of molten polyester having repeat units from a dicarboxylic acid component comprising at least 80 mol % terephthalic acid, naphthalenedicarboxylic acid, 1,4-cyclohexanedicarboxylic acid or mixtures thereof and repeat units from a glycol component comprising at least 80 mol % of ethylene glycol, diethylene glycol, 1,4-cyclohexanedi-
20 methanol or mixtures thereof,
- 25 (C) prior to the coating step (B), heating said metal sheet to a temperature of 150°C to 350°C,
- 30 (D) immediately following the coating step (B), passing the coated metal sheet through a pair of cooperating nip rolls adjusted to firmly press said polyester into contact with said metal sheet, and
- 35 (E) following step (D), optionally quenching said layered structure to a temperature below the glass transition temperature of the polyester

- 13 -

to thereby ensure that the polyester coating is in an amorphous state.

- 5 2. A process according to Claim 1 comprising coating both sides of said metal sheet in step (B).
- 10 3. A process according to Claim 1 which includes, immediately after step (D), the steps of (F) heating the coated sheet to a temperature such that the coating returns to a temperature of about 150°C to about 350°C, and (G) following step (F) and prior to step (E), passing said coated sheet through a pair of cooperating nip rolls adjusted to firmly press said polyester into contact with said metal sheet.
- 15 4. Process according to Claim 1 wherein said polyester coatings(s) has a thickness of about 0.5 to about 3.0 mils.
- 20 5. Process according to Claim 1 wherein said polyester coating(s) has a thickness of about 0.5 to about 3.0 mils and said metal sheet has a thickness of about 0.02 to about 0.5 mm.
- 25 6. Process according to Claim 1 wherein step (B) includes coextruding at least two layers of polyester on at least one side of said metal sheet.
- 30 7. Process according to Claim 1 wherein said polyester consists essentially of repeat units from about 80-100 mol % terephthalic acid, about 40-10 mol % diethylene glycol and about 60-90 mol % ethylene glycol.
- 35

- 14 -

8. Process according to Claim 1 wherein said polyester consists essentially of repeat units from about 95-99.5 mol % terephthalic acid, about 5-0.5 mol % 5-sodiosulfoisophthalic acid and about 80-100 mol % ethylene glycol.
- 5

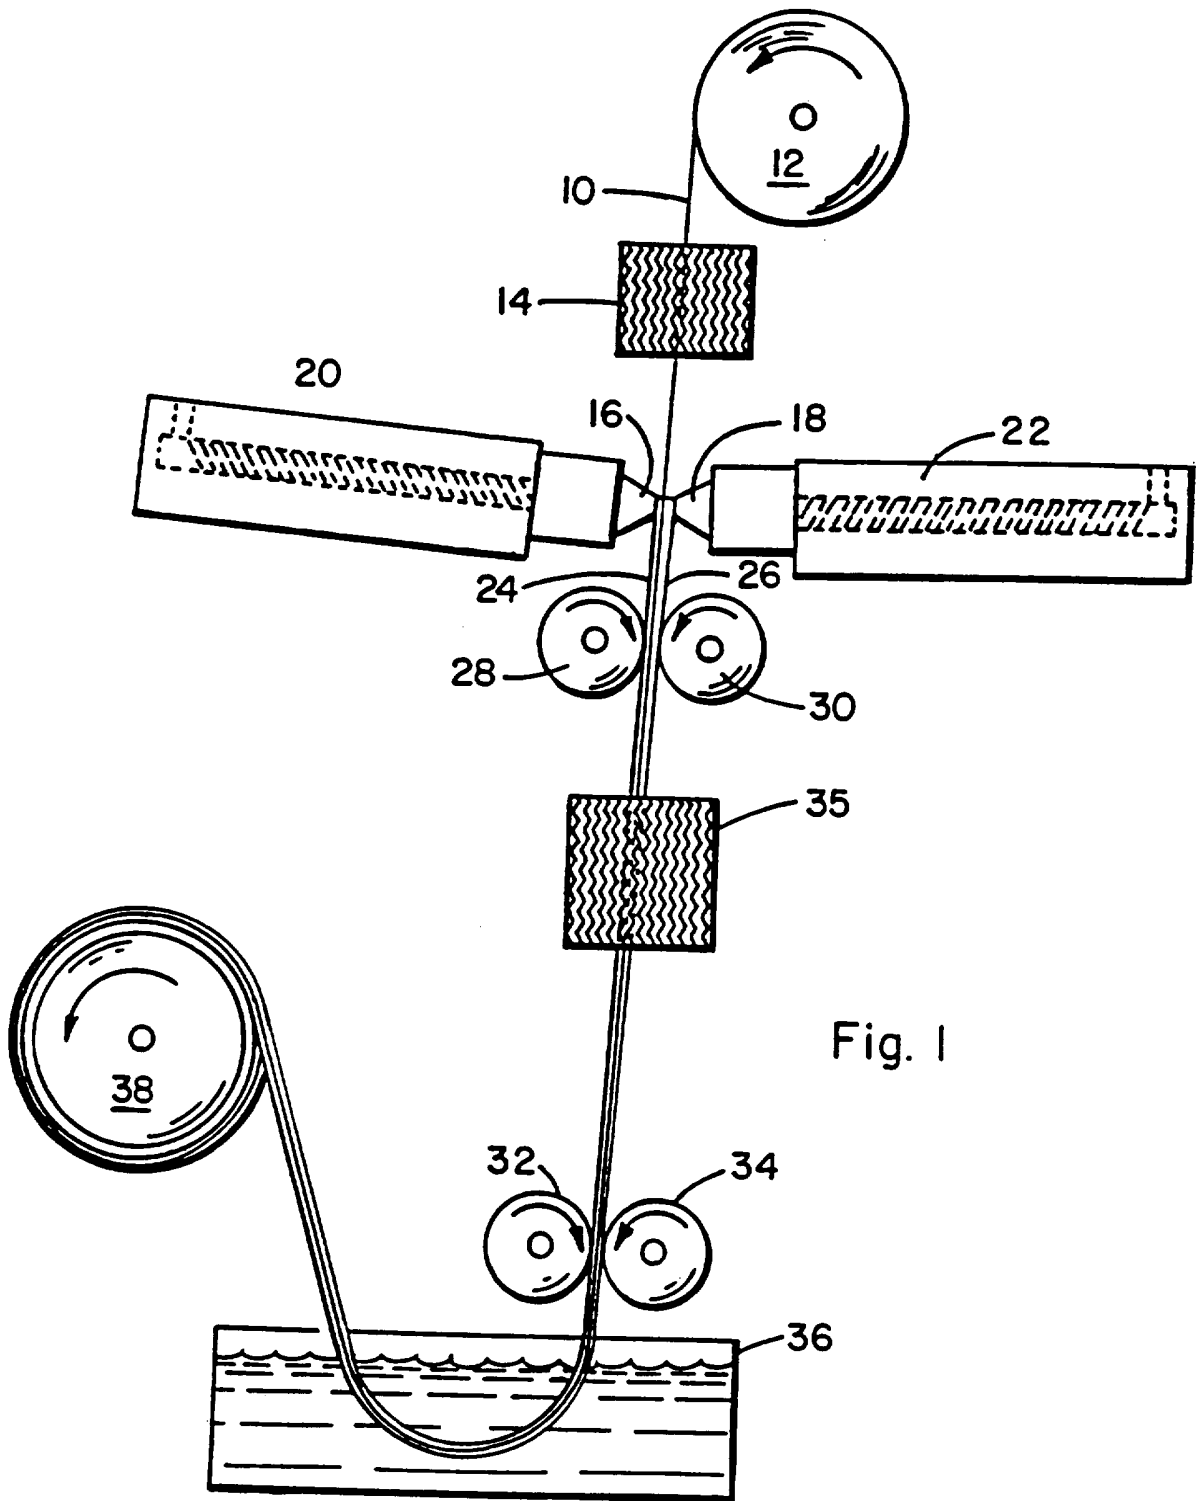


Fig. 1

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 95/11555

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 B32B31/30 B32B15/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 B32B C08G C08L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	US,A,5 407 702 (DAVID A. SMITH ET AL) 18 April 1995	1-5
P,Y	see claims 1-15,22; figures 1,3 ---	6-8
Y	EP,A,0 312 304 (MB GROUP PLC (FORMERLY KNOWN AS METAL BOX PLC)) 19 April 1989 cited in the application see page 3, line 35 - line 39; claims 1-14,17-19; figures 1-5 ---	1-7
Y	DE,A,15 04 109 (CONTINENTAL CAN COMPANY, INC.) 27 February 1969 see page 7, paragraph 1 - paragraph 2; claim 1; figure 1 ---	1-7
Y	US,A,4 143 790 (HIROSHI UENO ET AL) 13 March 1979 see column 8, line 7 - line 46; claims 1,2 ---	1-7
	-/--	

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

11 December 1995

Date of mailing of the international search report

22. 12. 95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+ 31-70) 340-3016

Authorized officer

Van Nieuwenhuize, O

INTERNATIONAL SEARCH REPORT

 Int. Application No
 PCT/US 95/11555

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	PATENT ABSTRACTS OF JAPAN vol. 17 no. 336 (M-1435) ,25 June 1993 & JP,A,05 042650 (NIPPON STEEL CORP) 23 February 1993, see abstract ---	1-7
Y	DATABASE WPI Week 9013 Derwent Publications Ltd., London, GB; AN 90-095333 & JP,A,02 047 050 (NIPPON STEEL CORP) , 16 February 1990 see abstract ---	1-7
Y	DATABASE WPI Week 8110 Derwent Publications Ltd., London, GB; AN 81-16177d & JP,A,55 166 247 (DAINIPPON PRINTING KK) , 26 December 1980 see abstract ---	1-7
Y	EP,A,0 067 060 (TAIYO STEEL CO., LTD.) 15 December 1982 see page 3, line 19; claims 1,6 ---	1-7
Y	PATENT ABSTRACTS OF JAPAN vol. 9 no. 264 (M-423) ,22 October 1985 & JP,A,60 112493 (MITSUBISHI RAYON KK) 18 June 1985, see abstract ---	8
Y	PATENT ABSTRACTS OF JAPAN vol. 16 no. 466 (C-0989) ,28 September 1992 & JP,A,04 164930 (KANEBO LTD) 10 June 1992, see abstract ---	8
A	see abstract -----	7

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/US 95/11555

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-5407702	18-04-95	NONE	
EP-A-312304	19-04-89	AU-B- 616442	31-10-91
		AU-B- 2547788	02-05-89
		CN-A- 1065825	04-11-92
		DE-A- 3879610	29-04-93
		WO-A- 8903303	20-04-89
		GB-A, B 2211465	05-07-89
		HK-A- 30495	17-03-95
		JP-T- 2501638	07-06-90
		PL-B- 162007	31-08-93
		PT-B- 88730	31-12-93
		TR-A- 26709	15-05-95
		US-A- 5149389	22-09-92
		US-A- 5093208	03-03-92
DE-A-1504109	27-02-69	NONE	
US-A-4143790	13-03-79	JP-C- 1327577	30-07-86
		JP-A- 52065588	31-05-77
		JP-B- 57023584	19-05-82
		AU-B- 504152	04-10-79
		AU-B- 1994276	01-06-78
		CA-A- 1088820	04-11-80
		GB-A- 1566422	30-04-80
EP-A-67060	15-12-82	JP-C- 1680842	13-07-92
		JP-B- 3041342	21-06-91
		JP-A- 57203545	13-12-82