



(19) **United States**

(12) **Patent Application Publication**

Birkeli

(10) **Pub. No.: US 2001/0022529 A1**

(43) **Pub. Date: Sep. 20, 2001**

(54) DATA TRANSMISSION

Related U.S. Application Data

(75) Inventor: Inge Birkeli, Lunner (NO)

(62) Division of application No. 08/894,188, filed on Aug. 14, 1997.

Correspondence Address:
FAUSTINO A. LICHAUCO
Fish & Richardson P.C.
225 Franklin Street
Boston, MA 02110-2804 (US)

Publication Classification

(51) Int. Cl.⁷ H03L 5/00
(52) U.S. Cl. 327/559; 327/333


(57) ABSTRACT

(73) Assignee: Dolphin Interconnect Solutions AS, a Norwegian corporation

A method for coupling a differential signal generated by a digital processing unit includes high-pass filtering the differential signal. The filtered output of the high-pass filter is then provided to an input of a differential amplifier, the output of which is fed back to the input of the differential amplifier.

(21) Appl. No.: 09/810,697

(22) Filed: Mar. 16, 2001

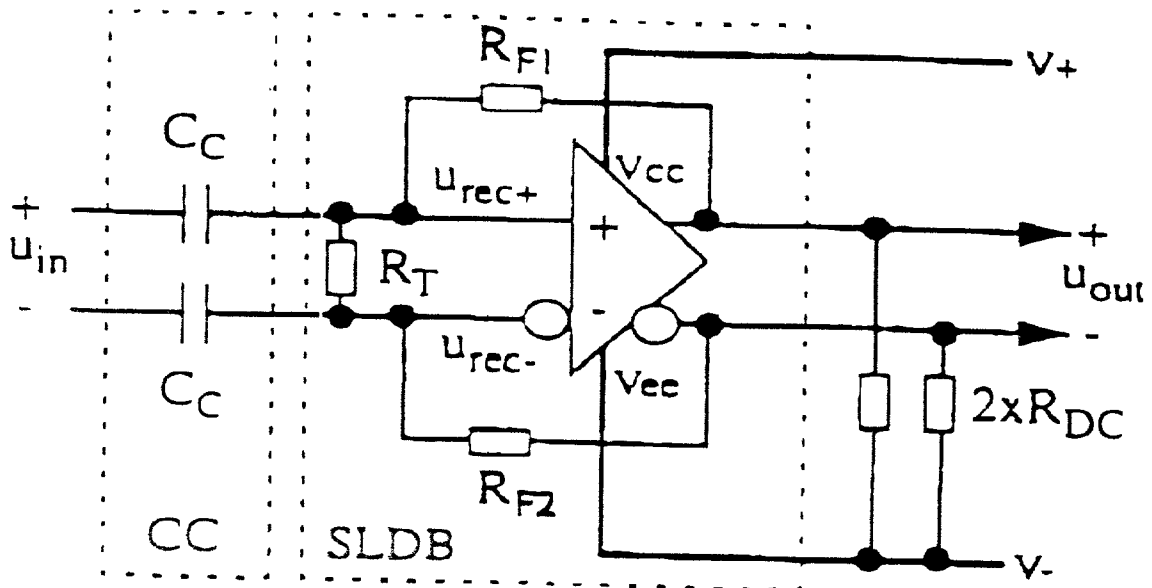

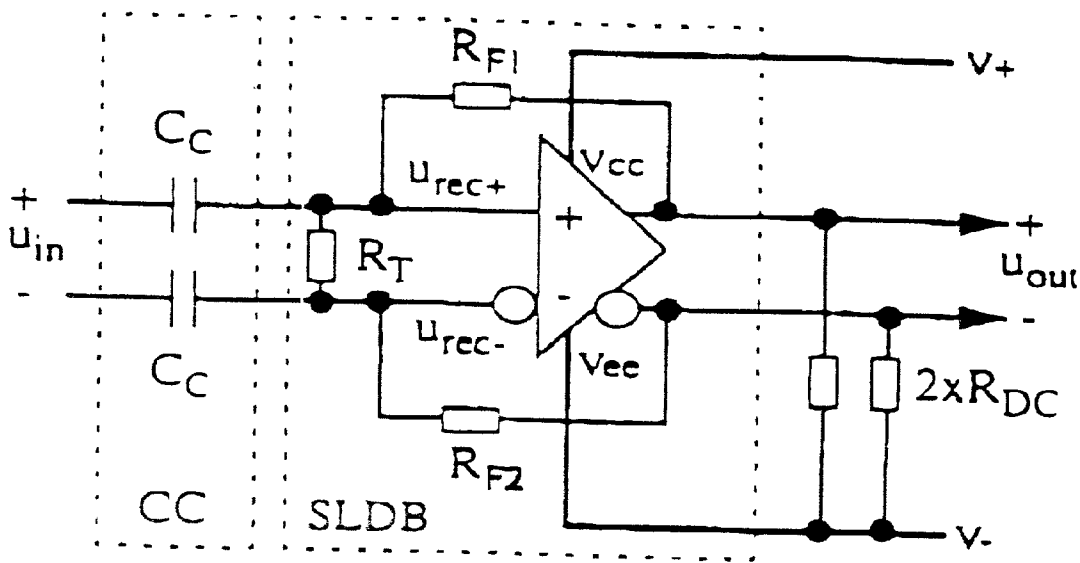


Fig. 1

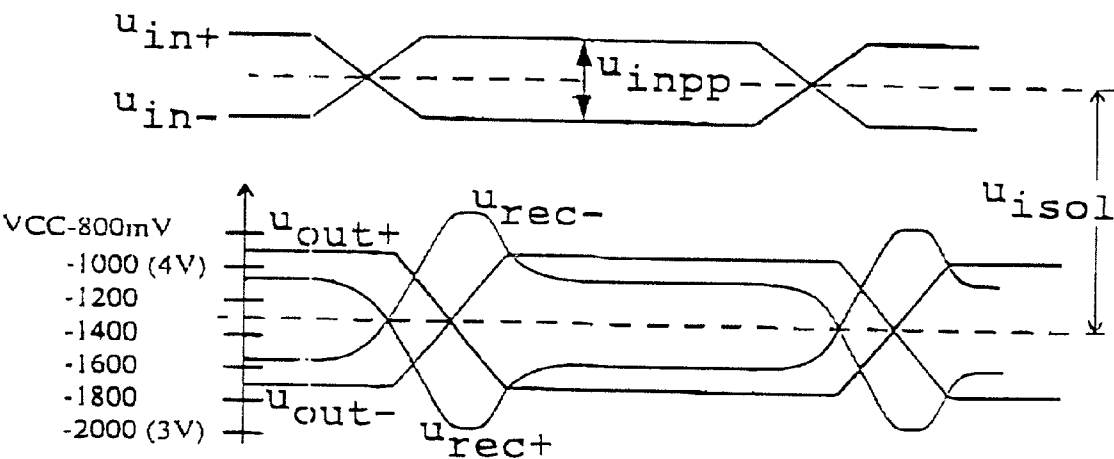


Fig. 2

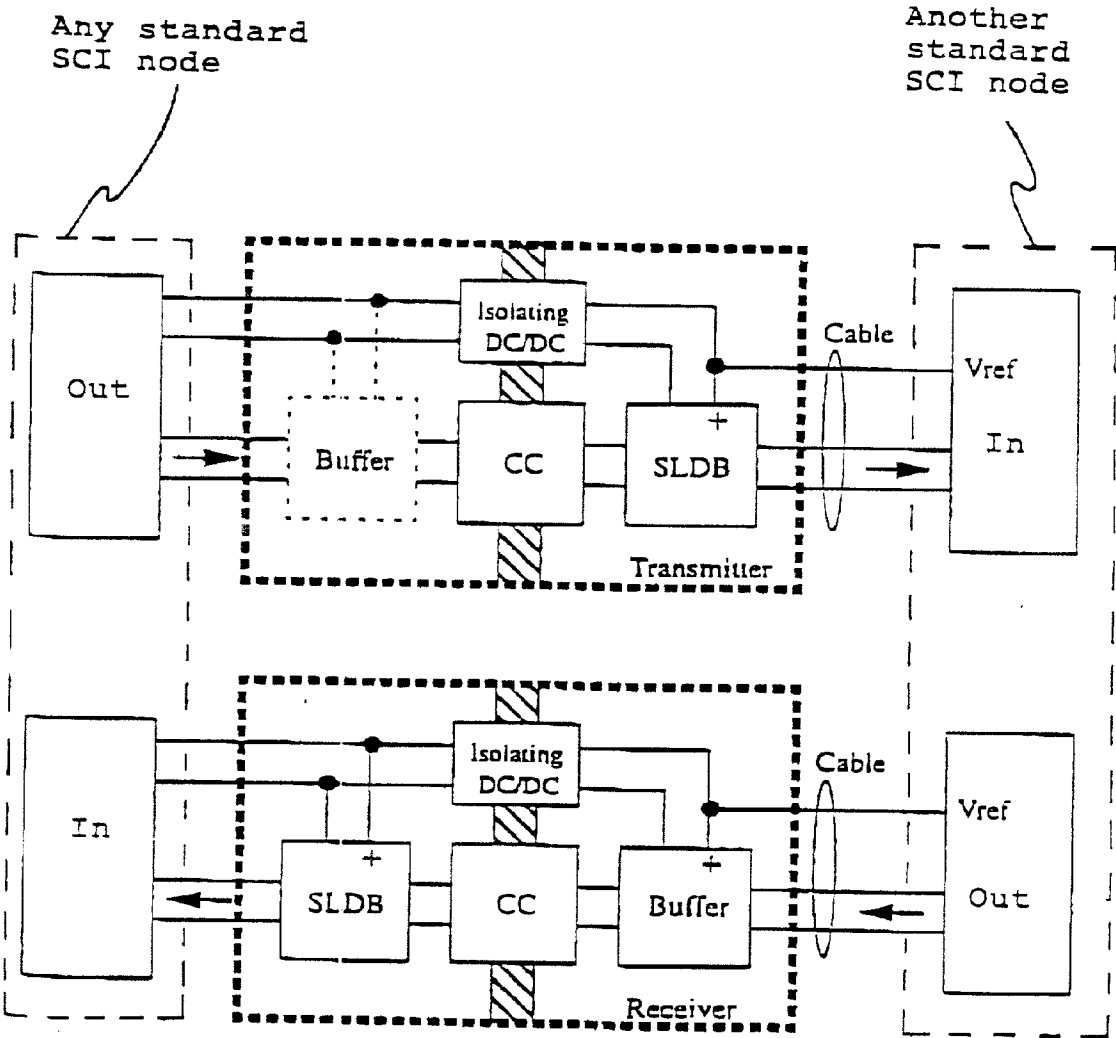


Fig. 3

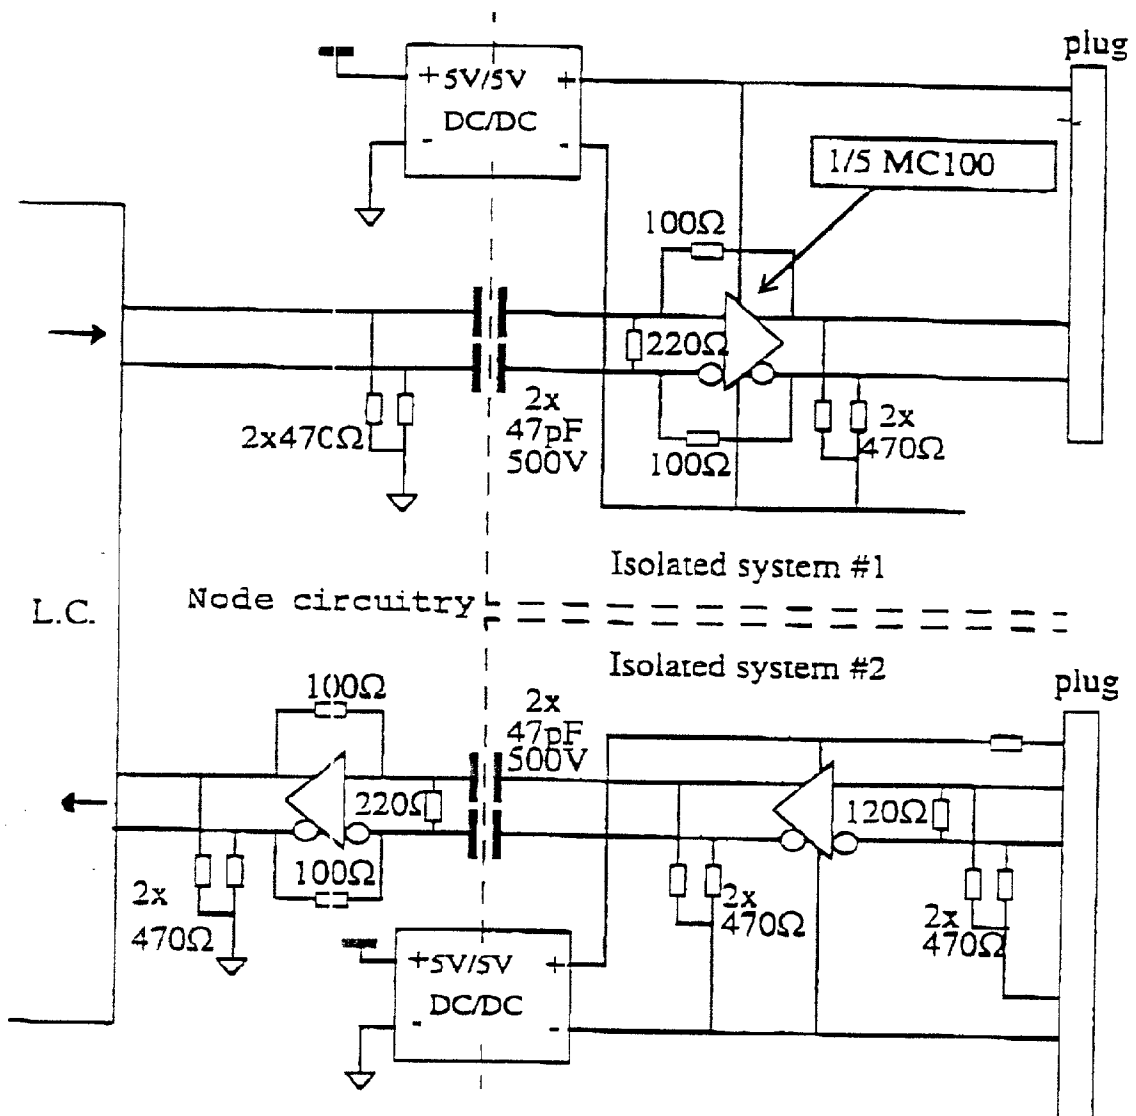


Fig. 4

f(Hz):	1M	10M	100M	250M	500M	1G	2G
Z(Ω):	7k	700	130	111	109	108	108

Isolator input impedance v.s. frequency component

Fig. 5

DATA TRANSMISSION

RELATED APPLICATIONS

[0001] This application is a divisional application of copending U.S. application Ser. No. 08/894,188, filed on Aug. 14, 1997, the contents of which are herein incorporated by reference.

[0002] The present invention relates to data transmission, and in particular, to the transmission of data between digital processing elements operating at differing voltage ranges.

BACKGROUND OF THE INVENTION

[0003] In many cases, it is important for one digital processing element, referred to as a "source element," to provide data to another, referred to as the "target element," for further processing.

[0004] One difficulty encountered in transmitting data in this manner is that any noise in the output signal of the source element is passed on to the target element. This can result in spurious errors in processing carried out by the target element.

[0005] Another difficulty encountered in transmitting data in this manner is that the signal voltage levels of a source element may not be those expected by the target element. This can occur when, for example, the source and target elements do not share a common power supply or grounding system.

[0006] One approach to transmitting data between a source and a target element is to transmit a differential signal. However, a difficulty in doing so is that the common mode range, which is the limited voltage range within which the signals must be kept, is often only 2V, with the upper limit at the most positive voltage (V_{cc}). For PECL (pseudo emitter coupled logic) or LVDS (low voltage differential signals) systems having power supplies, variations in the supply voltage, even when well within specifications, may cause the common mode range voltage (V_{CMR}) to exceed limits. A voltage drop on ground wires between the systems, caused by return current of other interfaces, electrostatic discharge, or ground currents of any source and frequency, may often also cause the common mode range voltage to exceed these limits. Although an excursion beyond the V_{CMR} limits will cause permanent damage to a device in only extreme cases, such excursions are very likely to cause data errors.

[0007] In some cases, there may be a missing ground connection between the source and the target. This can result in particularly large potential differences between the source and the target. In extreme cases, with 220V mains and a grounding error in both systems, the peak-to-peak voltage between the systems may exceed 300V.

BRIEF SUMMARY OF THE INVENTION

[0008] In accordance with the invention, there is provided a method for coupling a digital signal generated by a digital processing unit by high-pass filtering the differential signal, thereby generating a filtered differential signal. The filtered differential signal is then provided to an input of a differential amplifier, the output of which is fed back to the input.

This output can then be provided to, for example, a densec-on digital processing unit, or to a transmission cable.

[0009] In one practice of the invention, the high-pass filtering of the differential signal is achieved by applying a first voltage to a first capacitor and applying a second voltage to a second capacitor. The difference between this first and second voltage defines the differential signal. A resistive shunt is then provided between the first and second capacitors.

[0010] The output of the differential amplifier can be fed back to the input by providing a feedback resistor between the output and the input. This can be achieved by providing a first feedback resistor between a positive output of the differential amplifier and a positive input of the differential amplifier and providing a second feedback resistor between a negative output of the differential amplifier and a negative input of the differential amplifier.

[0011] The invention also includes an interface circuit for coupling a differential signal generated by a digital processing unit. Such an interface circuit includes a high-pass filter having a high-pass-filter input for receiving the differential signal and a high-pass-filter output. The high-pass filter is coupled to a differential amplifier having a differential-amplifier input in electrical communication with the high-pass-filter output. An output of the differential-amplifier is coupled to a resistive feedback-network. This resistive feedback-network provides electrical communication between the differential-amplifier output and the differential-amplifier input.

[0012] These and other features and advantages of the invention will be apparent from the following description and the accompanying drawings in which:

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] FIG. 1 shows the preferred embodiment of the interface isolation circuit of the invention,

[0014] FIG. 2 shows a voltage versus time diagram for input and output voltages of the interface circuit,

[0015] FIG. 3 shows the interface circuit in an application in an SCI link both in a transmitter and a receiver configuration,

[0016] FIG. 4 shows an application of interface circuits in connection with a link controller and

[0017] FIG. 5 is a table showing isolator input impedance versus frequency.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENT

[0018] FIG. 1 shows the preferred embodiment of the interface circuit for one bit, which consists of two main parts: a charge coupler CC including two capacitors C_C , and a part that is a self latching differential buffer SLDB including a differential amplifier (receiver) and a resistive feedback network including resistors R_{F1} , R_T and R_{F2} . Different types of differential amplifiers may fulfill the requirements set, but in the current implementation of the interface circuit the Motorola ECL in PC MC100E116 ECL is used. This Motorola circuit is of a type with open emitter followers at the output, and therefore a DC biasing resistor R_{DC} is applied to each output.

[0019] In FIG. 1, power to the differential amplifier is supplied from the output side of the circuit. The receiver can also be powered from the input side of the interface circuit. However, if the receiver power is to be supplied in this manner, a DC/DC converter with sufficient isolation capability must be used.

[0020] It should be noted that the resistor network of the self-latching differential buffer also serves as line AC impedance termination, and together with the two capacitors of the charge coupler, as a highpass filter.

[0021] Referring to FIG. 2, which shows the relation between input and output signals for the interface circuit of FIG. 1, the following remarks should be made. Initially, after power up, the state of the latch output u_{out} is arbitrary. However, at any transient of the input signal u_{in} , u_{out} will stay at or switch to the same state as u_{in} after transition, provided that the rise/fall-time, the transition level and the skew properties of the input signal are all within defined limits. The feedback resistors will cause the receiver to act like a Schmitt-trigger, i.e. accelerate the switching. The isolation voltage capability u_{isol} is indicated, and may typically have a value of about 500 V. The peak-to-peak voltage of the input differential signal is indicated as u_{inpp} , and the remaining symbols shown in FIG. 2 also appear in FIG. 1.

[0022] One notes, when looking at FIG. 2, that the voltages (e.g. u_{rec-}) on the input side of the differential amplifier react very rapidly to a change in u_{in+} and u_{in-} , i.e., the voltage rise of u_{rec-} is accelerated due to positive feedback. As clearly appears, u_{rec-} overshoots somewhat before finding a new stable value, since u_{rec-} will be a sum of a signal arriving from the input capacitors and a signal fed back (and divided down) by the feedback network from the amplifier output.

[0023] It is to be noted that the interface circuit shown in FIG. 1 is a low-cost circuit that consumes quite moderate power and saves space. The circuit exhibits extremely low signal delay, with typical delay values for the implementation shown in FIG. 1 being less than 0.5 ns, and very little skew. It is therefore well suited for parallel transmission, especially for applications like SCI links (scalable coherent interface links, refer to the IEEE standard for scalable coherent interface (SCI) std. 1596-1992). The interface circuit is also excellent for interfacing different signal families, and it eliminates any V_{CMR} problems as discussed in the introductory part of the description. Further, the circuit may easily be designed to withstand 500V, and for special applications, even up to 2000V.

[0024] There are three different families of differential signals which are of current interest for application with the interface circuit of the present invention. These families are: emitter coupled logic (ECL), pseudo emitter coupled logic (PECL) and low voltage differential signals (LVDS). The same circuitry may also be used with any other signal families having a typical signal swing in the range of 400 mV to 1V, rise and fall times of 250 ps to 2 ns, and maximum differential skew of 500 ps. With adapted components and component values, the principle of the circuit may be applied to any digital differential signal system.

[0025] In FIG. 3, there is depicted an application of the interface circuit of the invention with an SCI link, with signals as mentioned in the previous section, in order to

avoid all the general interfacing problems described in the introduction. The interface circuit of the invention, comprising the charge coupler section CC and the self latching differential buffer section SLDB, is arranged in respectively a transmitter and a receiver unit which also incorporates a buffer in front of the CC section in the receiver and an optional buffer in the transmitter. Power is supplied through an isolating DC/DC converter in both cases. The interface circuit of the invention may be integrated into an EDU device (External Divider Unit, for ring topology) or in a switch (for the case of star topology), or as a separate device to be inserted to the link cable. In FIG. 3, there is indicated a solution where the transmitter and receiver units are inserted (as one or two "boxes") between a standard SCI node, indicated at left, and a cable (or two cables) on the right that is connected to some other standard SCI node. The transmitter and receiver units may be add-on units to be coupled to the left node by means of the cable connector, and have corresponding cable connector(s) on the right side for mating with the cable. Or, the transmitter and receiver may be added or integrated inside the left node and be a part thereof. Power may be supplied from the closest node through the cable connector, or from an attached power supply. If the transmitter is instead connected to the SCI link on the left side of the drawing through a cable (not shown in FIG. 3), thus receiving signals of reduced quality, a buffer has to be applied prior to the CC section (such a buffer is indicated by dotted lines). Otherwise, if the transmitter circuitry is integrated in the node circuitry as mentioned above, or is directly connected thereto via a plug, this buffer may be omitted.

[0026] In the receiver section shown in FIG. 3, where a cable is connected on the right side, a buffer must of course be used to restore signal quality on the input side.

[0027] In FIG. 3, V_{ref} is the signal reference voltage of the signal type in question, i.e. for PECL signals $V_{ref} = V_{cc} + 5V$, for ECL signals $V_{ref} = V_{cc} = 0V$, and for LVDS signals V_{ref} is +2V, provided by dividing from V_{cc} .

[0028] FIG. 4 shows another application example where the interface circuit of the invention is used. This is an application with a link controller, and the drawing shows one out of eighteen bits, in each direction. Practical component values are also indicated in the drawing, and with these component values the relation between isolator input impedance and frequency will be as indicated in FIG. 5. The dashed lines indicate the separation between different systems, i.e., the isolation borders. The left "node circuitry" is the same as the left part of FIG. 3, i.e., to the left of the "wall" having slanted lines in FIG. 3. The top part of FIG. 4 shows a transmitter, and the lower part shows a receiver, as in FIG. 3. There are plugs on the far right side, indicating an integrated construction as mentioned above.

[0029] With the components selected as shown, and for the high signal frequencies of interest, the link controller will see an impedance quite near the desired 100 ohm value when looking toward the transmitter, while the isolating effect for low frequencies will be quite sufficient, in the megaohm range at DC. This effect appears clearly from FIG. 5.

Having described the invention, and a preferred embodiment thereof, I claim:

1. A method for coupling a differential signal generated by a digital processing unit, said method comprising:

high-pass filtering said differential signal, thereby generating a filtered differential signal;

providing said filtered differential signal to an input of a differential amplifier; and

feeding an output of said differential amplifier back to said input.

2. The method of claim 1, further comprising providing said output of said differential amplifier to a second digital processing unit.

3. The method of claim 1, further comprising providing said output of said differential amplifier to a transmission cable.

4. The method of claim 1, wherein high-pass filtering said differential signal comprises

applying a first voltage to a first capacitor;

applying a second voltage to a second capacitor, a difference between said first and second voltage defining said differential signal; and

providing a resistive shunt between said first and second capacitors.

5. The method of claim 1, wherein feeding an output of said differential amplifier back to said input comprises providing a feedback resistor between said output and said input.

6. The method of claim 1, wherein feeding an output of said differential amplifier back to said input comprises connecting said output directly to said input through a feedback resistor.

7. The method of claim 1, wherein feeding an output of said differential amplifier back to said input comprises:

providing a first feedback resistor between a positive output of said differential amplifier and a positive input of said differential amplifier; and

providing a second feedback resistor between a negative output of said differential amplifier and a negative input of said differential amplifier.

8. The method of claim 1, wherein providing said filtered differential signal to an input of a differential amplifier comprises:

providing a first input signal to a positive input of said differential amplifier; and

providing a second input signal to a negative input of said differential amplifier, a difference between said first and second input signals defining said filtered differential signal.

9. A method for interfacing digital processing units, said digital processing units communicating by means of a differential signal, said differential signal being communicated via a line pair having one positive-signal input line and one negative-signal input line, said method comprising:

providing said differential signal to a charge-coupler input stage;

providing an output of said charge-coupler input stage to an input of a self-latching differential-buffer stage;

providing resistive positive feedback between an output of said self-latching differential-buffer stage and said input of said self-latching differential-buffer stage.

10. The method of claim 9, wherein providing said differential signal to a charge-coupler input stage comprises:

providing a first capacitor for said positive-signal input line; and

providing a second capacitor for said negative-signal input line.

11. The method of claim 9, wherein providing an output of said charge-coupler input stage to an input of a self-latching differential-buffer stage comprises providing a differential amplifier having

a first input terminal connected to said first capacitor,

a second input terminal connected to said second capacitor,

a positive output terminal, and

a negative output terminal.

12. The method of claim 11, wherein providing a resistive positive feedback between an output of said self-latching differential-buffer stage and said input of said self-latching differential-buffer stage comprises:

providing a first feedback resistor connecting said positive output terminal with said positive input terminal; and

providing a second feedback resistor connecting said negative output terminal and said negative input terminal.

13. The method of claim 11, further comprising providing a cross-coupled resistor connected between said first input terminal and said second input terminal.

14. The method of claim 11, wherein providing said resistive positive feedback network comprises:

connecting a first resistor directly between said positive input terminal and said positive output terminal; and

connecting a second resistor directly between said negative input terminal and said negative output terminal;

15. A method for interfacing digital processing units communicating by means of differential signals, one of the differential signals being communicated by a line pair having a positive-signal input line and a negative-signal input line, said method comprising:

connecting said line pair to a charge-coupler input stage, said charge-coupler input stage including

a first capacitor for connection to said positive-signal input line,

and a second capacitor for connection to said negative-signal input line;

connecting an output of said charge-coupler input stage to a self-latching differential-buffer stage connected directly after said charge-coupler input stage, said self-latching differential-buffer stage including a differential amplifier having

a positive input connected to said first capacitor,

a negative input connected to said second capacitor,

a positive output,

a negative output,

open emitter followers,

a first DC biasing resistor connected between said positive output and a fixed supply voltage line, and

a second DC biasing resistor connected between said negative output and said fixed supply voltage line; and

providing feedback to said positive and negative inputs by connecting, through a resistive positive feedback network,

said positive output of said differential amplifier to said positive input of said differential amplifier, and

said negative output of said differential amplifier to said negative input of said differential amplifier.

16. A method for interfacing digital processing units communicating by means of differential signals communicated by a line pair having a positive-signal input line and a negative-signal input line, said method comprising:

connecting said line pair to a charge-coupler input stage, said charge-coupler input stage including

a first capacitor for connection to said positive-signal input line,

and a second capacitor for connection to said negative-signal input line;

connecting an output of said charge-coupler input stage to a self-latching differential-buffer stage connected directly after said charge-coupler input stage, said self-latching differential-buffer stage including a differential amplifier having

a positive input connected to said first capacitor,

a negative input connected to said second capacitor,

a positive output,

a negative output,

open emitter followers, and

a first DC biasing resistor connected between said positive output and a fixed supply voltage line, and

a second DC biasing resistor connected between said negative output and said fixed supply voltage line; and

providing feedback to said positive input and to said negative input by connecting, through a resistive positive feedback network, said resistive positive feedback network including

a first resistor directly connecting said positive output of said differential amplifier to said positive input of said differential amplifier, and

a second resistor directly connecting said negative output of said differential amplifier to said negative input of said differential amplifier.

17. A method of transforming a differential input signal into a differential output signal, said method comprising:

applying said differential input signal to a pair of input terminals;

coupling said differential input signal to a pair of differential-amplifier inputs through a pair of a-c coupling capacitors, each of said a-c coupling capacitors being coupled between a corresponding one of the pair of input terminals and a corresponding one of the pair of differential-amplifier inputs

passing a feedback signal from a pair of differential-amplifier outputs to said differential-amplifier inputs through a resistive positive feedback network, said resistive positive feedback network having:

a pair of feedback resistors, each one being coupled between a corresponding one of the pair of inputs of the differential amplifier and a corresponding one of the pair of outputs of the differential amplifier in a positive feedback arrangement; and

a cross-coupled resistor connected between the pair of inputs of the differential amplifier; and

providing a differential output signal through said pair of differential-amplifier outputs.

18. An interface circuit for signal transfer and galvanic isolation between digital processing units or between a digital processing unit and a transmission cable, said digital processing units communicating by means of differential signals, one of the differential signals being communicated via a line pair comprising one positive and one negative signal input line, said interface circuit comprising

a charge coupler input stage including one respective capacitor for each respective of said positive and negative signal input lines, at input end of said interface circuit, characterized by

a self-latching differential buffer stage connected directly after said input stage, said self-latching differential buffer stage comprising a differential amplifier having a pair of input terminals connected directly to respective ones of said capacitors, said amplifier having a pair of output terminals for producing a differential output signal, and a resistive positive feedback network comprising a pair of feedback resistors each one being coupled between a corresponding one of the pair of input terminals and a corresponding one of the pair of output terminals in a positive feedback arrangement and a cross-coupled resistor connected between the input terminals of the amplifier.

19. The interface circuit of claim 18, characterized in that the resistive network comprises a resistor connected directly between each respectively positive input and output terminal and each respectively negative input and output terminal of said differential amplifier.

20. An interface circuit for signal transfer and galvanic isolation between digital processing units or between a digital processing unit and a transmission cable, said digital processing units communicating by means of differential signals, one of the differential signals being communicated via a line pair comprising one positive and one negative signal input line, said interface circuit comprising a charge coupler input stage including one respective capacitor for each respective of said positive and negative signal input lines, at input end of said interface circuit, characterized by a self-latching differential buffer stage connected directly after said input stage, said self-latching differential buffer stage comprising a differential amplifier having its respec-

tive inputs connected directly to respective ones of said capacitors, and a resistive positive feedback network connected between the input and output terminals of the amplifier; and

wherein said differential amplifier is of a type having open emitter followers and has DC biasing resistors connected between each amplifier output and a fixed supply voltage line.

21. An interface circuit for signal transfer and galvanic isolation between digital processing units or between a digital processing unit and a transmission cable, said digital processing units communicating by means of differential signals, one of the differential signals being communicated via a line pair comprising one positive and one negative signal input line, said interface circuit comprising a charge coupler input stage including one respective capacitor for each respective of said positive and negative signal input lines, at input end of said interface circuit, characterized by a self-latching differential buffer stage connected directly after said input stage, said self-latching differential buffer stage comprising a differential amplifier having its respective inputs connected directly to respective ones of said capacitors, and a resistive positive feedback network connected between the input and output terminals of the amplifier; and

wherein the resistive network comprises a resistor connected directly between each respectively positive input and output and each respectively negative input and output of said differential amplifier and

wherein said differential amplifier is of a type having open emitter followers and has DC biasing resistors connected between each amplifier output and a fixed supply voltage line.

22. An interface circuit, comprising:

- a pair of input terminals for receiving a differential input signal;
- a pair of output terminals for producing a differential output signal;
- a differential amplifier having a pair of inputs and a pair of outputs;
- a pair of a-c coupling capacitors each one being coupled between a corresponding one of the pair of input terminals and a corresponding one of the differential-amplifier inputs; and

resistive positive feedback network comprising:

- a pair of feedback resistors each one being coupled between a corresponding one of the pair of inputs of the differential amplifier and a corresponding one of the pair of outputs of the differential amplifier in a positive feedback arrangement;
- a cross-coupled resistor connected between the pair of inputs of the differential amplifier.

23. An interface circuit for coupling a differential signal generated by a digital processing unit, said interface circuit comprising:

- a high-pass filter having a high-pass-filter input for receiving said differential signal and a high-pass-filter output;
- a differential amplifier having a differential-amplifier input in electrical communication with said high-pass-filter output, and a differential-amplifier output; and
- a resistive feedback-network providing electrical communication between said differential-amplifier output and said differential-amplifier input.

24. The interface circuit of claim 23, wherein said differential-amplifier output is configured for communication to a second digital processing unit.

25. The interface circuit of claim 23, wherein said differential-amplifier output is configured for communication to a transmission cable.

26. The interface circuit of claim 23, wherein said high-pass filter comprises:

- a first capacitor for connection to a first voltage;
- a second capacitor for connection to a second voltage, a difference between said first and second voltage defining said differential signal; and
- a resistive shunt between said first and second capacitors.

27. The interface circuit of claim 23, wherein said resistive feedback-network comprises a feedback resistor between said differential-amplifier output and said differential-amplifier input.

28. The interface circuit of claim 23, wherein said resistive feedback-network comprises a feedback resistor directly connecting said differential-amplifier output and said differential-amplifier input.

29. The interface circuit of claim 23, wherein said differential-amplifier output comprises a positive input and a negative input, said differential-amplifier input comprises a positive input and a negative input, and wherein said resistive feedback-network comprises:

- a first feedback resistor between said positive output and said positive input of said differential amplifier; and
- a second feedback resistor between said negative output and said negative input.

30. The interface circuit of claim 23, wherein providing said filtered differential signal to an input of a differential amplifier comprises:

- providing a first input signal to a positive input of said differential amplifier; and
- providing a second input signal to a negative input of said differential amplifier, a difference between said first and second input signals defining said filtered differential signal.

* * * * *