

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 June 2009 (18.06.2009)

PCT

(10) International Publication Number
WO 2009/076437 A1

(51) International Patent Classification:
H01R 12/22 (2006.01) **H05K 7/20** (2006.01)
G06F 13/40 (2006.01)

(74) Agents: RECKAMP, Christopher et al.; Vedder Price
P.C., 222 N. LaSalle Street, Chicago, IL 60601 (US).

(21) International Application Number:
PCT/US2008/086221

(22) International Filing Date:
10 December 2008 (10.12.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/955,798 13 December 2007 (13.12.2007) US

(71) Applicant (for all designated States except US): ATI
TECHNOLOGIES ULC [CA/CA]; 1 Commerce Valley
Drive East, Markham, Ontario L3T 7X6 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): HUNKINS, James,
D. [US/CA]; 58 Craigmere Cres, Toronto, Ontario M2N
2Y7 (CA). KING, Lawrence, J. [CA/CA]; 474 Double-
tree Lane, Newmarket, Ontario L3X 2E9 (CA). KODURI,
Raja [IN/US]; 410 Giannini Drive, Santa Clara, CA 95051
(US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE,
EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID,
IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK,
LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW,
MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT,
RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,
NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

(54) Title: ELECTRONIC DEVICES USING DIVIDED MULTI CONNECTOR ELEMENT DIFFERENTIAL BUS CONNEC-
TOR

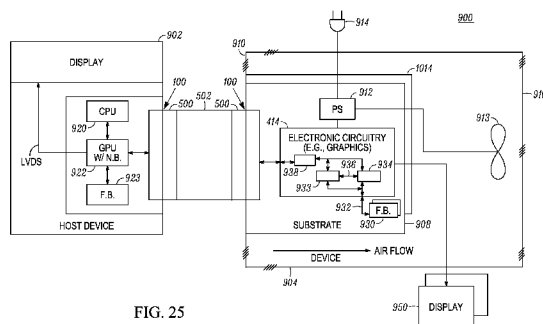


FIG. 25

(57) Abstract: In one example an electronic device includes a housing that includes an A/C input or DC input, and at least one circuit substrate that includes electronic circuitry, such as graphics processing circuitry that receives power based on the A/C input or DC input. The electronic device also includes a divided multi- connector element differential bus connector that is coupled to the electronic circuitry. The divided multi-connector element differential bus connector includes a single housing that connects with the circuit substrate and the connector housing includes therein a divided electronic contact configuration comprised of a first group of electrical contacts divided from an adjacent second group of mirrored electrical contacts wherein each group of electrical connects includes a row of at least lower and upper contacts. In one example, the electronic device housing includes air flow passages, such as grills, adapted to provide air flow through the housing. The electronic device housing further includes a passive or active cooling mechanism such as a fan positioned to cool the circuitry during normal operation. In one example, the electronic device does not include a host processor and instead a host processor is in a separate electronic device that communicates with the graphics processing circuitry through the divided multi connector element differential bus connector. In another example, a CPU (or one or more CPUs) is also co-located on the circuit substrate with the circuitry to provide a type of parallel host processing capability with an external device.



WO 2009/076437 A1

ELECTRONIC DEVICES USING DIVIDED MULTI CONNECTOR ELEMENT DIFFERENTIAL BUS CONNECTOR

RELATED CO-PENDING APPLICATIONS

[0001] This application is related to co-pending applications entitled “ELECTRICAL CONNECTOR, CABLE AND APPARATUS UTILIZING SAME”, filed on even date, having docket number 00100.07.0061, inventor James Hunkins, owned by instant Assignee and is incorporated herein by reference; and “DISPLAY SYSTEM WITH FRAME REUSE USING DIVIDED MULTI-CONNECTOR ELEMENT DIFFERENTIAL BUS CONNECTOR”, filed on even date, having docket number 00100.07.0062, inventors James Hunkins et al., owned by instant Assignee and is incorporated herein by reference.

FIELD OF THE INVENTION

[0002] The disclosure relates to electronic devices, that employ connectors that communicate differential signals.

BACKGROUND OF THE INVENTION

[0003] Electronic devices such as laptops, desktops, mobile phones and other devices may employ one or more graphics processing circuits such as a graphics processor (e.g. a graphics core co-located on a die with a host CPU, separate chip coupled to a mother board, or located on a plug-in card, a graphics core integrated with a memory bridge circuit, or any other suitable configuration) to provide graphics data and/or video information, video display data to one or more displays.

[0004] One type of communication interface design to provide the necessary high data rates and communication performance for graphics and/or video information between a graphics processor and CPU or any other devices is known as a PCI Express™ interface. This is a communication link that is a serial communications channel made up of sets of two differential wire pairs that provide for example 2.5 MBytes per second (Gen 1) or 5.0 MBytes

per second (Gen 2) in each direction. Up to 32 of these “lanes” may be combined in times 2, times 4, times 8, times 16, times 32 configurations, creating a parallel interface of independently controlled serial links. However, any other suitable communication link may also be employed. Due to the ever increasing requirements of multimedia applications that require the generation of graphics information from drawing commands, or a suitable generation of video puts increasing demands on the graphics processing circuitry and system. This can require larger integrated graphics processing circuits which generate additional heat requiring cooling systems such as active cooling systems such as fans and associated ducting, or passive cooling systems in desktops, laptops or other devices. There are limits to the amount of heat that can be dissipated by a given electronic device.

[0005] It has been proposed to provide external graphics processing in a separate device from the laptop, desktop or mobile device to allow faster generation of graphics processing through parallel graphics processing operations or to provide output to multiple displays using external graphics devices. However, since devices are becoming smaller and smaller there is an ever increasing need to design connections, including connectors and cabling that allow proper consumer acceptance and suitable speed and cost advantages. Certain video games for example may require high bandwidth graphics processing which may not be available given the cost, integrated circuit size, heat dissipation, and other factors available on a mobile device or non-mobile device.

[0006] From an electrical connector standpoint, for years there have been attempts by various industries to design connectors that provide the requisite bandwidths such as the multiple gigabytes necessary to communicate video frame information and/or graphics information between devices. One proposal has been to provide an external cable and circuit board connector that uses for example a 16 lane configuration for PCI-e™. This proposal results in a printed circuit board footprint of approximately 40.3 mm x 26.4 mm and a

connector housing depth profile 40.3 mm x 11.9 mm which includes the shell depth and housing of the connector. However, such large connectors have only been suitable for larger devices such as servers which can take up large spaces and can be many pounds in weight. For the consumer market such large connectors are too large and costly. A long felt need has existed for a suitable connector to accommodate multiple lanes of communication to provide the necessary bandwidth for graphics and video information.

[0007] Other connectors such as DisplayPort™ connectors are limited to only for example two lanes, although they have smaller footprints they cannot support the PCI-e™ cable specification features and have limited capabilities. Other proposals that allow for, for example a 16 lane PCI-e™ connection have even larger footprints and profiles and may employ for example 138 pin total stacked connector to accommodate 16 lanes (VHDCI). The size of the footprint and profile can be for example in excess of 42 millimeters by 19 millimeters for the footprint and in excess of 42 by 12 millimeters in terms of the PCI-e™ board profile that the connector takes up. Again, such connectors require the size of the mobile device or laptop device to be too large or can take up an unreasonable amount of real estate on the PC board or device housing to accommodate the size of such large connectors. In addition, such connectors also utilize large cabling which can be heavy and cumbersome in use with laptop devices. The costs can also be unreasonably high. In addition, motherboard space is at a premium and as such larger connectors are not practical.

[0008] From an electronic device perspective, providing external graphics processing capability in a separate device is also known. For example, docking stations are known that employ a PCI-e™ interface connector that includes a single lane to communicate with the CPU in for example a laptop computer that is plugged into the docking station. The docking station includes its own A/C connector and has additional display connector ports to allow external displays to be connected directly to the docking station. The laptop which may have

for example its own LCD display and internal graphics processing circuitry in the form of an integrated graphics processing core or card, utilizes the laptop's CPU to send drawing commands via the single lane PCI-e™ connector to the external graphics processor located in the docking station. However, such configurations can be too slow and typically employ a low end graphics processor since there is only a single lane of communication capability provided.

[0009] Other external electronic units that employ graphics processing circuitry to enhance the graphics processing capabilities of a desktop, laptop or other device are also known that employ for example a signal repeater that increases the signal strength of graphics communications across a multilane PCI-e™ connector. However, the connector is a large pin connector with large space in between pins resulting in a connector having approximately 140 pins if 16 lanes are used. The layout requirements on the mother board as well as the size of the connectors are too large. As a result, actual devices typically employ for example a single lane (approximately 18 pin connector) connector including many control pins. As such, although manufacturers may describe wanting to accommodate multilane PCI-e™ communications, practical applications by the manufacturers typically result in a single lane configuration. This failure to be able to suitably design and manufacture a suitably sized connector has been a long standing problem.

[0010] Other external devices allow PCI-e™ graphics cards to be used in notebooks. Again these typically use a single lane PCI-e™ connector. Such devices may include a display panel that displays information such as a games current frame rate per second, clock speed and cooling fan speed which may be adjusted by for example a function knob or through software as desired. A grill may be provided for example on a rear or side panel so that the graphics card may be visible inside and may also provide ventilation. The internal graphics card may be over-clocked in real time by turning a control knob for example to

attempt to increase performance of the external graphics processing capability. However, as noted, the communication link between the CPU and the laptop and the external electronic device with the graphics card typically has a single PCI-e™ lane limiting the capability of the graphics card.

[0011] Accordingly, a need exists for an improved connector and/or cable and/or electronic device that provides external graphics processing and/or interconnection of an external graphics processor with a portable device or non-portable device.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The invention will be more readily understood in view of the following description when accompanied by the below figures and wherein like reference numerals represent like elements, wherein:

[0013] FIG. 1 is a perspective view illustrating one example of an electrical connector in accordance with one example set forth in the disclosure;

[0014] FIG. 2 is a cross sectional view of the connector of FIG. 1;

[0015] FIG. 3 illustrates one example of upper and lower rows of contacts used in the connector of FIG. 1;

[0016] FIGs. 4 and 5 diagrammatically illustrate signaling configurations provided by the connector of FIG. 1 according to one example set forth in the disclosure;

[0017] FIG. 6 is a perspective view illustrating one example of a cable connector that mates with the connector of FIG. 1 in accordance with one example set forth in the disclosure;

[0018] FIGs. 7-14 are diagrams illustrating signaling provided by the electrical connector of FIG. 1 and cable connector of FIG. 6 in an electronic device or system in accordance with one disclosure set forth;

[0019] FIGs. 15-18 are diagrams illustrating signaling provided by the electrical connector of FIG. 1 and cable connector of FIG. 6 in an electronic device or system in accordance with one disclosure set forth;

[0020] FIGs. 19-24 are diagrams illustrating signaling provided by the electrical connector of FIG. 1 and cable connector of FIG. 6 in an electronic device or system in accordance with one disclosure set forth;

[0021] FIG. 25 diagrammatically illustrates a system employing the board connector of FIG. 1 in accordance with one example set forth in the disclosure;

[0022] FIG. 26 illustrates one example of an electronic device that includes at least one electrical connector described herein and a plurality of electronic circuit substrates each containing graphics processors in accordance with one example;

[0023] FIG. 27 diagrammatically illustrates an electronic device that employs at least one of the connectors described herein and active cooling mechanism to cool graphics processing circuitry in accordance with one example described herein;

[0024] FIG. 28 diagrammatically illustrates the device of FIGs. 17-20;

[0025] FIG. 29 is a block diagram illustrating one example of an electronic device that facilitates card plug-in of a plurality of plug-in cards in accordance with one embodiment described herein; and

[0026] FIG. 30 illustrates a block diagram of a system that employs a hub device in accordance with one example described herein.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0027] Briefly, in one example an electronic device includes a housing that includes an A/C input or DC input, and at least one circuit substrate that includes electronic circuitry, such as graphics processing circuitry that receives power based on the A/C input or DC input. The electronic device also includes a divided multi- connector element differential bus

connector that is coupled to the electronic circuitry. The divided multi-connector element differential bus connector includes a single housing that connects with the circuit substrate and the connector housing includes therein a divided electronic contact configuration comprised of a first group of electrical contacts divided from an adjacent second group of mirrored electrical contacts wherein each group of electrical connects includes a row of at least lower and upper contacts. In one example, the electronic device housing includes air flow passages, such as grills, adapted to provide air flow through the housing. The electronic device housing further includes a passive or active cooling mechanism such as a fan positioned to cool the circuitry during normal operation. In one example, the electronic device does not include a host processor and instead a host processor is in a separate electronic device that communicates with the graphics processing circuitry through the divided multi connector element differential bus connector. In another example, a CPU (or one or more CPUs) is also co-located on the circuit substrate with the circuitry to provide a type of parallel host processing capability with an external device.

[0028] In one example, the electronic circuitry communicates with a processor, such as a CPU, in another electronic device external to the housing of the electronic device and the graphics processing circuitry receives drawing commands from the external processor and communicates display data to a display that is coupled to the electronic device. In one example, the housing includes air ducting between the active cooling mechanism and the electronic circuitry. In one example, the divided multi-connector element differential bus connector provides drawing commands to the graphics processing circuitry from, for example, the processor located in the other electronic device. The divided multi connector element differential bus connector may be a unique 16 lane PCI Express™ type bus connector to provide high speed video and/or graphics information between electronic devices.

[0029] In one example, the electronic device includes power up control logic, such as a switch, that is operatively coupled to the divided multi connector element differential bus connector that waits to power up the graphics processing circuit until after the external device is powered up as detected from a signal from the divided multi connector element differential bus connector.

[0030] In another example, the electronic device includes a plurality of printed circuit boards each including graphics processing circuitry thereon and wherein each of the plurality of printed circuit boards is coupled to the divided multi connector element differential bus connector and wherein the graphics processing circuitry provide parallel or alternate graphics processing operations for a given display frame.

[0031] In another example, the circuit substrate includes electronic circuitry and a bus bridge circuit. A backplane is coupled to the bus bridge circuit that includes a plurality of card ports that are each configured to receive a plug-in card.

[0032] In another example, an electronic device does not utilize A/C power input but instead gets limited amounts of D/C power from another external device through a suitable connector. In one example, the electronic device includes a housing that includes a circuit substrate that includes a bus bridge circuit and a plurality of divided multi connector element differential bus connectors each coupled to the bus bridge circuit and each including a single connector housing with the divided electrical contact configuration. The bus bridge circuit is coupled to receive power from an external device connected to at least one of the plurality of bus connectors.

[0033] In one example, the divided multi-connector element differential bus connector includes a housing having therein a divided multi-connector element. The electrical connector is adapted to electrically connect with a substrate, such as a circuit board. The divided multi-connector element includes a divided electrical contact configuration that

includes a first group or subassembly of electrical contacts physically separate from an adjacent and second group or subassembly of contacts. The first group of electrical contacts and second group of electrical contacts each include a row of lower contacts and upper contacts. The second group of electrical contacts has an identical but mirrored configuration (e.g., with respect to a vertical axis) as the first group of electrical contacts.

[0034] In one example, the electrical connector housing is sized to provide a substrate footprint of approximately 12 mm x 53 mm and has a profile of approximately 53 mm x 6 mm and includes 124 pins configured for a 16 lane differential bus. The 16 lanes are divided into two 8 lane pin groupings. Also in one example, the first and second group of contacts include an end grounding contact wherein a respective end grounding contact is positioned adjacent to another end grounding contact in the other group and are located substantially in the center of the connector housing. Also in one example, rows of upper contacts are surface mount pins and rows of lower contacts are through hole pins that pass through the substrate.

[0035] An electrical device is also disclosed that employs the above mentioned electrical connector and has an electronic circuit substrate coupled to the electrical connector and also includes electronic circuitry located on the electronic circuit substrate that is coupled to the first and second group of electrical contacts. The electronic circuitry provides a plurality of differential data pair signals on either side of a center portion of the connector and also provides differential clock signals in a center portion of the first group of electrical contacts. The first row of upper contacts are used to provide control signals associated with the differential pair signals.

[0036] The second group of contacts are coupled such that the second row of lower contacts includes a plurality of differential data signals that are provided on adjacent pins separated by differential ground. A cable is also disclosed that has same end connectors that mate with the electrical connectors. In one example, the cable assembly has a 16 lane

connector on one end and an 8 lane connector on the other, adapted to electrically mate with only the first group of electrical contacts in the 16 lane connector and not the second group of electrical contacts thereby allowing a 16 lane board connector to be used to connect to an 8 lane unit.

[0037] One of the many advantages of the disclosed connector or cable or electronic device include the providing of a compact connector that provides high speed communication via a multilane differential signaling bus, such as a PCI Express™ compatible bus or interface. Additionally, an 8 lane connector may also be suitably connected with a 16 pin board connector via an 8 lane cabling system since a group of contacts and electronic circuitry provides the necessary data clock signal through a single grouping of contacts.

[0038] Referring to FIGs. 1 and 2, one example of an electrical connector 100 that may be coupled to a circuit substrate, such as a printed circuit board, includes a substrate positioning or locating pin 102 and a shell or housing connection post 104. The positioning pin 102 and housing connection post 104 are configured to pass through holes that have been drilled in the circuit substrate and facilitate the mounting of the electrical connector to the substrate. The electrical connector 100 includes a housing 106 that includes a divided multi-connector element 108 that is adapted to electrically connect with a circuit substrate, via for example separate subassemblies of contact pins. The divided multi-connector element 108 includes a divided electrical contact pin configuration that includes a first group or subassembly of electrical contacts 110 that are physically separate or disconnected from an adjacent and second group or subassembly of contacts 112.

[0039] Referring also to FIG. 3, the first group of electrical contacts 110 includes a row of lower contacts 114 and a row of upper contacts 116. Similarly, the second and separate group of electrical contacts 112 includes an identical but mirrored configuration as the first group of electrical contacts and as such, has identical and mirrored but separate

corresponding rows of lower contacts 118 and upper row of contacts 120. In this example, the first group of electrical contacts 110 form a complete 8 lane PCI Express™ communication interface when coupled to a PCI Express™ transceiver circuit, such transceiver circuits are known in the art. The rows of lower contacts 114 and 118 separate subassemblies and are through hole pins in this example. They are coupled in an electronic device to include and provide connection with differential receivers or transceivers (see for example, FIGs. 7-14). The groups of top rows of contact pins 116 and 120 are surface mount pins which mount to a surface of the circuit substrate, and are coupled to an electronic circuit to provide differential transmission signals. In this example, a 16 lane PCI Express™ compatible connection can be facilitated in a small profile and relatively inexpensive connector design. Each separate groupings of contacts are electronically connected to each provide 8 lanes of differential signaling based communication resulting in the 16 lane communication bus.

[0040] Referring back to FIG. 1, the housing 106 may be made of any suitable material including insulating plastic or any suitable composite material as known in the art. The electrical contacts may also be made of any suitable material such as copper alloys with suitable plating such as gold plating over nickel or any other suitable material and finish as desired. The lower row of contacts 114 in the first group are fabricated as a separate set of lower row of pins and serves as a subassembly of the connector 100. Lower row of contacts 118 are an identical and mirrored subassembly and separate from the lower row of contacts 114. Similarly, the upper row of contacts 116 and 120 are configured as separate assemblies each identical and mirrored to one another. In this example, a total of four sets of pins are used to provide the two groupings of upper and lower contacts. Among other advantages, the separation of the lower and upper contacts into separate subassemblies can help reduce the

number of pins required to provide the signaling required for a 16 lane or 8 lane PCI Express™ type bus. Other advantages will be recognized by those of ordinary skill in the art.

[0041] Also as shown in this example, the spacing between the surface mount pins may be, for example, .7 mm and the width of a surface mount pin may be, for example, .26 mm however any suitable spacing and width may be used. The through hole pins may have a spacing of, for example, 0.7 mm (and as shown in FIGs. 4 and 5), may be offset. In addition, the width of the through hole pins may be, for example, 0.74 mm. However, any suitable sizing may be employed as desired.

[0042] With the 16 lane PCI Express™ compatible configuration, the housing 106 is sized to provide a substrate footprint of approximately 12 mm x 53 mm such that the housing may have, for example, a 12.2 mm depth and a 53.25 mm width, or any other suitably sized dimensions. For example, the depth and width may be several millimeters larger or smaller as desired. Also in this example, the rows of lower and upper contacts for both the first and second group of electrical contacts include 124 pins configured for a 16 lane PCI Express™ interface (e.g., two 8 lane differential bus links).

[0043] The connector 100 as shown may include one or more friction tabs 116 that frictionally engage a cable connector that mates with the board connector 100. Other known connector engagement features may also be employed such as openings 118 and 120 that receive protrusions that extend from a corresponding mating cable connector.

[0044] Referring again to FIG. 2, the connector 100 may include as part of the housing, insulation covering 202 and ground contacts and frictional locks 206 and 208 that frictionally engage with a mating cable connector using techniques known in the art. Supporting structures 210 are also employed to support pins in their appropriate positions within the connector using known techniques. The connector 100 includes a center support structure 212 over which the upper rows of surface mount pins 116 are supported and over

which lower contacts 114 are also supported. The center support structure 212 supports the electrical contacts and in operation receives a mating connector whose contacts align with the upper and lower contacts 114 and 116 to make electrical contact.

[0045] FIGs. 4 and 5 diagrammatically illustrate a portion of a printed circuit substrate referred to as a substrate layout showing surface mount contacts 400 and through holes 402 that are positioned on a circuit substrate. The lower rows of contacts 114 and 118 are coupled to the through holes 402 to provide electrical contact and signal communication through the connector 100 to an electrical circuit or circuits on the printed circuit board. Traces or pins from an electrical circuit may be electrically coupled to the pads 400 to communication signals through the connector 100. The figure shows a pinout of the bottom row contacts of connector 100 and the electronic signals designated as 406 and 408 corresponding to respective contacts in the connector 100.

[0046] In this example, groupings of contacts form upper 8 lanes shown as 410 and a lower 8 lanes designated 412. Electronic circuitry 414, such as a PCI Express™ 16 lane interface circuit that may be integrated in a graphics processor core, CPU, bridge circuit such as a Northbridge, Southbridge, or any other suitable bridge circuit or any other suitable electronic circuit sends and receives signals identified as 406 and 408 via the connector 100. Electronic circuitry 14 is located on the electronic circuit substrate and is coupled to the first group of electrical contacts and second group of electrical contacts (shown here are only the lower contacts). The electronic circuitry 414 provides differential clock signals labeled 416 and 418 that are located in a center portion of the first group of contacts 110. The electronic circuitry also provides a plurality of differential data pair signals generally designated as 420 on either side of a center portion 421. Corresponding differential ground signals 424 are provided between the differential signals 420. Upper contacts 116 (not shown) provide control signals associated with the differential data pair signals 420. In this example, the

other group of contacts 112 does not include the differential clock signals 416 and 418. The electronic circuitry provides all of the necessary PCI Express™ type control signaling, clock signaling and power to run an 8 lane bus via the first grouping of contacts 110. 16 lanes may be accommodated by providing the signaling as shown. This incorporates utilizing the second group of contacts 112.

[0047] As also shown, the first group of electrical contacts 110 and second group of electrical contacts 112 are divided by adjacent ground contacts designated 426 and 428. The second group of contacts 112 are coupled such that the second row of lower contacts include a plurality of differential data signals 430 that are provided on adjacent pins separated by corresponding differential ground signals 432 and power is provided on an outer pin portion designated as 434 to a second row of lower contacts. Similarly, power is provided on an outer portion of the connector corresponding to the first group of contacts 114 shown as power signals 436. In this example, the electronic circuitry 414 includes differential multilane bus transceivers that are PCI Express™ compliant, as known in the art. However, any suitable circuitry may be coupled to the connector 100 as desired. As also shown, the first and second group of contacts 110 and 112 each include the end grounding contact 426 and 428 that are positioned adjacent to each other and substantially in the center of the housing.

[0048] In addition, the first and second groups of electrical contacts include sensing contacts positioned at an outer end of a row of contacts to determine proper connector insertion on both ends of the cable. In addition, the connector also includes a power control pin that can be used in conjunction with the sensing contacts to control power sequencing and other functions between the two connected systems.

[0049] FIG. 6 illustrates one example of a cable having a cable end connector 500 that is configured to matingly engage with the connector 100. The cable 502 includes an end

connector on either end thereof (although not shown) that are identical to the end connector 500 and the connector end 500 is adapted to mate with the divided multi-connector element 108. As such, the cable end connector 500 also includes a male portion 504 that engages with the contacts via center portion 212 of connector 100. As known in the art, the end connector may be made of any suitable materials including plastic and metal to provide the necessary structural, shielding and grounding characteristics as desired. The male portion 504 is adapted to frictionally engage with the friction tabs 116 of the board connector 100. The cable 502 may be made of two groups of wires each forming an 8 lane grouping. However, any suitable configuration may be used.

[0050] FIGs. 7-14 are diagrams illustrating electrical signals that are provided by the electrical circuitry 414 through connector 100 in one device and corresponding electrical circuitry that is in another device that is connected via the cable connector 502. As such, a host device (referred to as host side), such as a laptop computer or any other suitable device is connected via a cable to a downstream device via a connector 100 and the downstream device also contains the connector 100. As such, a simplified connector/cable pairing is suitably provided with high speed data communication capability. As illustrated, the connector 100 is operatively coupled to electronic circuitry to provide the signals on the pins as shown. As a point of reference, a portion of FIGs. 4 and 5 showing the signals is duplicated in FIGs. 7-14 shown by arrow 600. The top row of contacts 116 and 120 are shown by the portion labeled 602. As shown, the bottom rows of contacts 114 and 118 are primarily coupled between differential transmitters of for example a graphics processor (downstream device) and differential receivers of the host device whereas the top rows 116 and 120 of connector 100 are coupled between receivers of the graphics processor located in a downstream device and differential transmitters of a host device.

[0051] In the host device, the corresponding lower rows 114 and 118 shown as 604 are provided as shown. For example, a top row 116 and 120 on a host side device shown as signals 606 are provided by suitable electronic circuitry. In this example, the circuitry as noted above includes PCI Express™ compliant interface circuitry that provides in this example 16 lanes of information. The total number of pins used in this example is 124 pins. As such, this reflects a signal and pinout for a 16 lane to 16 lane connection.

[0052] FIGs. 15-18 illustrate instead, a signal and pinout configuration for an 8 lane to 8 lane connection using instead of a 16 lane sized connector, an 8 lane size connector. However, the identical signals are provided on the identical pins of the 8 pin connector as are provided on the first group of connectors 110 of the 16 lane connector. As such, an 8 lane connector may be employed that is similar in design to the connector shown in 100 except that half of the pins are used resulting in a housing that is sized to provide a footprint of approximately 12 mm x 32 mm and a profile of approximately 32 mm x 6 mm and includes a total of 68 pins configured in a row of lower contacts and upper contacts. As such, FIGs. 15-18 illustrate a host side connector 702 that is connected with a downstream device connector 704 via an 8 lane cable 706.

[0053] FIGs. 19-24 illustrate yet another configuration that employs pinout and signaling wherein a first device such as a host device employs an 8 lane connector with signaling shown as 702 with a cable that at another end includes the connector 100 with the pinout and signaling shown as 600 and 602. As such, an 8 –16 lane connector configuration may be used wherein only 8 lanes of the 16 lane connector are actually coupled to circuitry. In this manner, existing 16 lane connectors may be readily coupled to devices that employ 8 lane connectors if desired.

[0054] FIG. 25 illustrates one example of a system 900 that employs a first device 902, such as a host device such as a laptop, desktop computer or any other suitable device

and a second device 904 such as a device employing an electronic circuit that includes electronic circuitry 414 operatively mounted to substrate 908 such as a printed circuit board that contains connector 100. The electronic circuitry 414 may be, for example, a graphics processor or any other suitable circuitry and in this example includes PCI Express™ compliant transceiver circuitry to communicate with the host device 902 via the cable and connector structure described herein. The device 904 which may include, for example, a housing that includes grates that serve as air passages 910 that provide air flow for cooling the electronic circuitry and may also include an active cooling mechanism such as a fan 913 although suitably controlled to provide cooling via air flow, as known in the art. The substrate 908 may include a power supply circuit 912 that provides a suitable power for all electronic circuitry and may receive alternating current (AC) from an outlet through plug 914. The host device may include as known, one or more central processing units 920 and one or more graphics processors 922 in addition to suitable memory, operating system software and any other suitable components, software, firmware as known in the art. As such, in this example, the device 904 may receive drawing commands from the CPU 920 and/or GPU 922 via the differential signaling provided through the connectors 100 and cabling 502 to provide off device graphic processing enhancement through a suitable connector arrangement that is consumer friendly, relatively low cost and provides the data rates required for a high data rate video, audio and graphics processing.

[0055] The electronic circuitry 414 as noted above may include graphics processing circuitry such as graphics processor core or cores, one or more CPUs, or any other suitable circuitry as desired. As shown, in the case that the electronic circuitry includes graphics processing circuitry, one or more frame buffers 930 are accessible by the graphics processing circuitry through one or more suitable buses 932 as known in the art. Also, in another embodiment, where a single circuit substrate 908 is used, the electronic circuitry 414 may

include a plurality of graphics processing circuitry such as a plurality of graphics processors 932 and 934 that are operatively coupled via a suitable bus 936 and may be connected with the divided multi-connector element differential bus connector 100 via a bus bridge circuit 938 such as a PCI bridge, or any other suitable bus bridge circuit. The bus bridge circuit provides information to and from the connector 100 and also switches communication paths between the connector 100 and each of the graphics processors 932 and 936 as known in the art. As such, in this example, a plurality of graphics processors, for example, can provide parallel or alternate graphics processing operations for the host device 902 or other suitable device.

[0056] FIG. 26 diagrammatically illustrates one example of the device 904 in a housing 1000 that includes air flow passages shown as 1002, 1004 and 1006. In this example, the air flow passages are grills that provide air flow through the housing. The active air cooling mechanism 912 is shown as being a plurality of individual fans 1010 and 1012 that provide cooling for a plurality of printed circuit boards 908 and 1014 (e.g., cards) that may contain, for example, graphics processors, multimedia processors, CPUs, or any suitable electronic circuitry. Also referring to FIG. 28, in this example, each of the cards 908 and 1014 are connected by either separate standard PCI-E connectors 1220 and 1222 (or a board to board version of the divided multi-connector element differential bus connectors 400) on a backplane card 1224 which holds a PCI-E bridge which connectors the two cards to a separate divided multi connector element differential bus connector 100 (see for example, FIGs. 4 and 5).

[0057] Graphics card brackets 1020 and 1022 hold connectors for external monitors. In this example, no CPU is employed in the device 904 and in this example the device is used as a type of external graphics enhancement device. Also in this example, ducting such as plastic passages designated as 1030 direct air flow over the elements to be cooled on the

printed circuit boards or cards 908 and 1014. In addition, the power supply may also include a separate fan designated 1032. However, it will be recognized that any single fan for all cooling operations or multiple fans may be used as desired.

[0058] Referring to FIGs. 19-24, there may also be ducting to direct air flow from a grill to a fan as shown by ducting 1200. As also shown, the cards 908 and 1014 are separated to provide thermal convection as desired. Also shown as part of the power supply is an on/off switch 1040. The power supply may receive an A/C input such as an A/C signal from an outlet and convert the A/C to DC or may receive a DC input signal from a DC power source. In this example, the cards 908 and 1014 have in this example, PCI edge connectors at a bottom thereof 1220 and 1222 (see FIG. 28) that connect with a backplane 1224 that, in this example, lies horizontally beneath the cards 908 and 1014. The backplane includes connectors that mate with the card edge connector. The bus bridge circuit 938 acts as a switch to route information from the connector 100 to either or both of the cards 908 and 1014.

[0059] It will be recognized that many usage scenarios are possible. For example, a circuit board with one or more graphics processors for example may be utilized to upgrade a remote host system, that may also have one or more graphics processors therein depending upon performance requirements. Each graphics processor may be individually coupled to a connector 100 or each graphics processor may use, for example, 8 lanes of a single connector as desired or share all 16 lanes through a PCI-E switch device. In addition, portable devices such as laptops may enhance their graphics processing or video processing capability or other processing capabilities, if desired, since thermal limits and power limits are reduced due to the separate electronic device. As such, as used herein, graphics processing circuitry can include video processing such as video coding and decoding circuits, high definition television image processing, or any other suitable video processing or multimedia processing

operations as desired. It will be appreciated that external devices that may connect to the electronic device 904 for example may include set top boxes, televisions, game consoles, handheld devices, laptops, desktops, or any other suitable device as desired. In addition, one or more displays such as LCD displays may also be connected to the device 904. DisplayPorts may be utilized so that separate displays may be plugged into the electronic device 904 so that the output from the graphics processors therein can be displayed on one or more display (see FIG. 25). Alternatively, the graphics processor within the device 904 may send frame information or any other information back to the host device which may then use its own display capabilities to output the information on a different display.

[0060] Referring also to FIGs. 7-14, the CPWRON signal comes from the host device across the connector 100 indicating when, for example, the external device is powered up and active (a non-standby mode). The electronic circuitry in the device 904 then detects a CPWRON signal and powers up. The CPRSNT pins are used to detect full connection of the device 904 to an external device such as a host system to both help gate the power on of the device 904 and to notify the host system that the external device 904 is connected and powered. Two pins are used in one example to ensure that the connector 100 is fully seated before notifying the host system that it is available. In addition, a hot plug mechanism may also be utilized to detect when the device 904 is connected to another external device.

[0061] FIG. 29 illustrates another example of an electronic device 1300 that includes a circuit substrate 1302 that includes a bus bridge circuit 1304 that is coupled to the connector 100 and is coupled to bus slot ports 1306 and 1308. The bus slot ports 1306 and 1308 need not be connector 100 but may be, for example, PCI Express™ slots that receive PCI Express™ cards 1310 and 1312 that may include any suitable electronic circuitry thereon. The bus slot ports 1306 and 1308 may be mounted on an active backplane for example. The active backplane may be an active backplane card to facilitate easy connection with the bus

bridge circuit 1304. The active backplane card includes the plurality of card ports 1306 and 1308 that are configured to receive a plug-in card 1310 and 1312. The bus bridge circuit 1304 may be, for example, a Northbridge, Southbridge or other suitable bridge circuit that includes for example, the transceivers necessary to communicate via a PCI Express™ communication link, or any other suitable link. In this example, there is no graphics processing circuitry necessary since the graphics processor may be on one of the plug-in cards 1310 or 1312. This can result in a smaller electronic device 1300 which still facilitates high speed video communication through the connector 100. As such, standard PCI Express™ cards may be plugged into the slots 1306 and 1308 but a unique connector such as connector 100 is utilized to connect with another electronic device such as a device with a host CPU, for example.

[0062] FIG. 30 illustrates another electronic device 1400 that instead of utilizing standard bus slot connectors 1306 and 1308, utilizes connectors 100 so that additional electronic devices such as that shown in FIG. 25 (device 904) may be suitably connected to the hub device 1400. Also in this example, there is no need for A/C connector since the power for the PCI bridge circuit 1304 would be provided by a downstream device through a power connection in parallel to the connector 100. As also shown, a non-differential bus 1410 may also be employed between the electronic devices 1904 if desired to provide a direct communication link between the devices as opposed to going through the bus bridge circuit 1304. With the multiple graphics processors in the electronic devices 1904, parallel graphics processing or video processing may be employed if desired.

[0063] The device 1400 serves as an electronic hub device. It includes a plurality of divided multi connector element differential bus connectors 100 that are coupled to the bridge circuit 1304. Each of the other electronic devices 1904 include an A/C input but also include divided multi connector element differential bus connectors 100. Displays may also be

coupled so that output from the electronic circuitry may be provided to corresponding displays. The bus connection 1410 between the graphics processing circuitry of each external electronic device is different than the bus through the divided multi connector element differential bus connector. The displays display frames generated by the graphics processing circuitry from one or both of the electronic devices 1904.

[0064] The above detailed description of the invention and the examples described therein have been presented for the purposes of illustration and description only and not by limitation. It is therefore contemplated that the present invention cover any and all modifications, variations or equivalents that fall within the spirit and scope of the basic underlying principles disclosed above and claimed herein.

CLAIMS

What is claimed is:

1. An electronic device comprising:
a housing containing at least:
an A/C input or DC power input;
at least one circuit substrate comprising electronic circuitry operatively coupled to receive power based on the A/C input or DC power input;
a divided multi-connector element differential bus connector, operatively coupled to the electronic circuitry, comprised of a single housing and having disposed therein:
a divided electrical contact configuration comprised of a first group of electrical contacts divided from an adjacent second group of contacts, the first group of electrical contacts comprising:
a row of lower contacts and upper contacts; and
the second group of electrical contacts having an identical and mirrored configuration as the first group of contacts comprising:
an identical and mirrored corresponding row of lower contacts and upper contacts;
and wherein the housing further comprises air flow passages adapted to provide air flow through the housing and further houses a passive or an active cooling mechanism positioned to cool the electronic circuitry during normal operation.
2. The electronic device of claim 1 wherein the electronic circuitry comprises graphics processing circuitry is operative to communicate with a processor in another electronic device external to the housing through the divided multi-connector element differential bus connector and wherein the graphics processing circuitry is operative to receive at least drawing commands from the processor and communicate display data to a

display operatively coupled to the electronic device and wherein the housing is further adapted to house an air duct between the active cooling mechanism and the graphics processing circuitry.

3. The electronic device of claim 2 wherein the divided multi-connector element differential bus connector provides drawings commands to the graphics processing circuitry from a processor located in the other electronic device and wherein the graphics processing circuitry is operative to output display data generated based on the drawing commands to a display.

4. The electronic device of claim 1 comprising power up control logic operatively coupled to the divided multi-connector element differential bus connector and operative to wait to power-up the electronic circuitry until after an external device has powered up as detected from a signal from the divided multi-connector element differential bus connector.

5. The electronic device of claim 1 wherein the circuit substrate is a printed circuit board that comprises a plurality of processors each comprising graphics processing circuitry thereon and a bus bridge circuit operatively coupled to each of the processors, the bus bridge circuit being coupled to the divided multi-connector element differential bus connector and wherein the graphics processing circuitry from the plurality of printed circuit boards are operatively coupled together to provide parallel or alternate graphics processing operations for a given display frame.

6. The electronic device of claim 1 wherein the housing of the electrical connector is sized to provide a footprint of approximately 12mm X 53 mm and a profile of approximately 53 mm X 6 mm.

7. The electronic device of claim 6 wherein the rows of lower and upper contacts for both the first and second group of electrical contacts comprise 124 pins configured for two 8 lane differential buses.

8. The electronic device of claim 1 wherein the housing of the electrical connector is sized to provide a footprint of approximately 12mm X 32 mm and a profile of approximately 32 mm X 6 mm and comprising 68 pins configured in a row of lower contacts and upper contacts

9. The electronic device of claim 5 wherein each of the graphics processing circuitry is operative to communicate with a processor in another electronic device external to the housing through the divided multi-connector element differential bus connector and wherein each of the graphics processing circuitry is operative to communicate display data with the other electronic device using a plurality of lanes of differential links provided via the divided multi-connector element differential bus connector and wherein the housing is further adapted to house an air duct between an active cooling mechanism and each of the graphics processing circuitry.

10. An electronic device comprising:

a housing containing at least:

a bus bridge circuit

a plurality of card ports configured to receive external differential bus plug in cards;

a divided multi-connector element differential bus connector, operatively coupled to the bus bridge circuit, comprised of a single housing and having disposed therein:

a divided electrical contact configuration comprised of a first group of electrical contacts divided from an adjacent second group of contacts, the first group of electrical contacts comprising:

a row of lower contacts and upper contacts; and

the second group of electrical contacts having an identical and mirrored configuration as the first group of contacts comprising:

an identical and mirrored corresponding row of lower contacts and upper contacts;

an active backplane, operatively coupled to the bus bridge circuit, comprising a plurality of internal card ports each configured to receive a plug in card.

11. The electronic device of claim 10 wherein the housing further comprises air flow passages adapted to provide air flow through the housing and further houses an active cooling mechanism positioned to cool the graphics processing circuitry during normal operation.

12. An electronic device comprising:

a housing containing at least:

at least one circuit substrate comprising a bus bridge circuit;

a plurality of divided multi-connector element differential bus connectors, each operatively coupled to the bus bridge circuit, each comprised of a single housing, adapted to mechanically connect with a substrate, having disposed therein:

a divided electrical contact configuration comprised of a first group of electrical contacts divided from an adjacent second group of contacts, the first group of electrical contacts comprising:

a row of lower contacts and upper contacts; and

the second group of electrical contacts having an identical and mirrored configuration as the first group of contacts comprising:

an identical and mirrored corresponding row of lower contacts and upper contacts;

and

the bus bridge circuit operatively coupled to route information from one of the plurality of divided multi-connector element differential bus connectors to at least two of the plurality of plurality of divided multi-connector element differential bus connectors.

13. A system comprising:

an electronic hub device comprising:

a housing containing at least:

at least one circuit substrate comprising a bus bridge circuit;

a plurality of divided multi-connector element differential bus connectors, each operatively coupled to the bus bridge circuit, each comprised of a single housing, adapted to mechanically connect with a substrate, having disposed therein:

a divided electrical contact configuration comprised of a first group of electrical contacts divided from an adjacent second group of contacts, the first group of electrical contacts comprising:

a row of lower contacts and upper contacts; and

the second group of electrical contacts having an identical and mirrored configuration as the first group of contacts comprising:

an identical and mirrored corresponding row of lower contacts and upper contacts;
and

the bus bridge circuit operatively coupled to route information from one of the plurality of divided multi-connector element differential bus connectors to at least two of the plurality of plurality of divided multi-connector element differential bus connectors; and

at least a first and second external electronic device each comprising:

a housing containing at least:

one circuit substrate comprising a graphics processing circuit;

another divided multi-connector element differential bus connector identical in structure to the plurality of divided multi-connector element differential bus connectors of the electronic hub device, operatively coupled to the graphics processing circuit and to one of the plurality of divided multi-connector element differential bus connectors of the electronic hub device; and

a bus connection between the graphics processing circuitry of each external electronic device and different from through the divided multi-connector element differential bus connector; and

at least one display operatively coupled to at least one of the external electronic devices and operative to display frames generated by the graphics processing circuitry from both of the external electronic device; and

an electronic device comprising a divided multi-connector element differential bus connector and comprising a processor operative to provide drawing commands to each of the graphic processing circuitry of each of the plurality of external electronic devices for generation of display frames that are output to the at least one display.

14. The system of claim 13 wherein the housing of each of the plurality of divided multi-connector element differential bus connectors is sized to provide a footprint of approximately 12mm X 53 mm and a profile of approximately 53 mm X 6 mm.

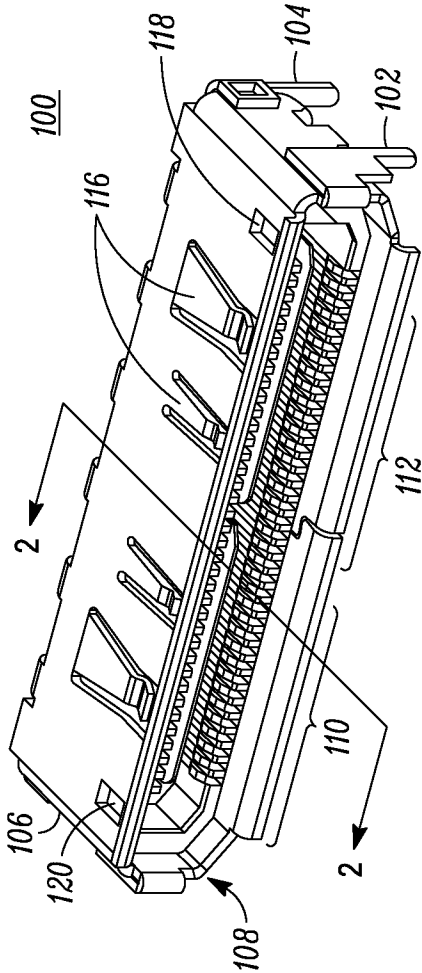


FIG. 1

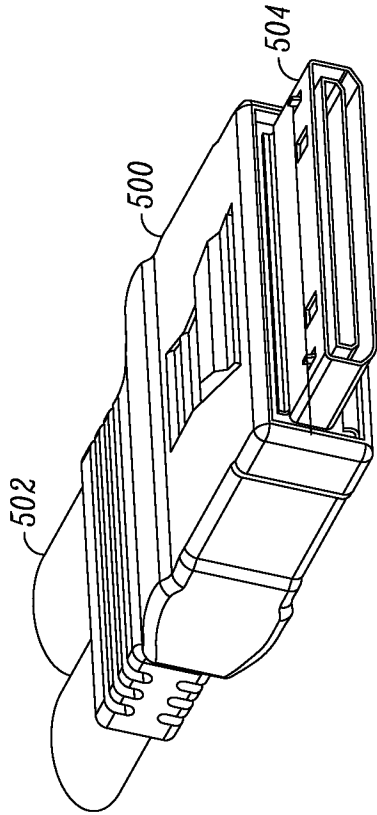


FIG. 6

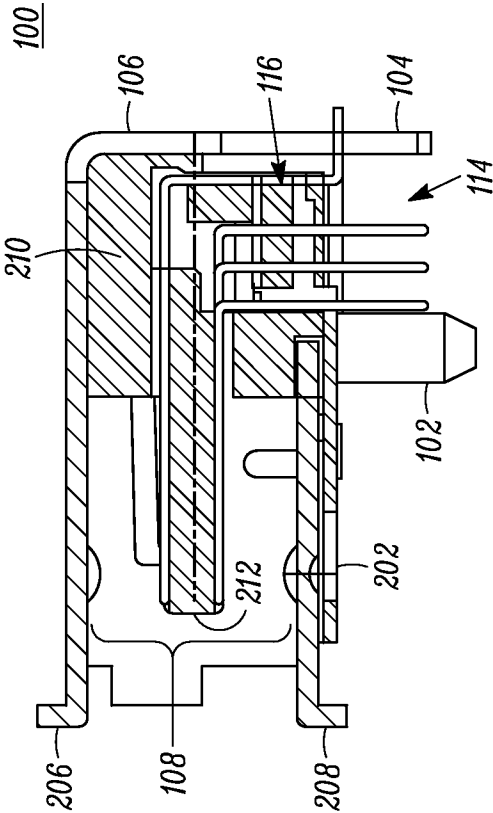


FIG. 2

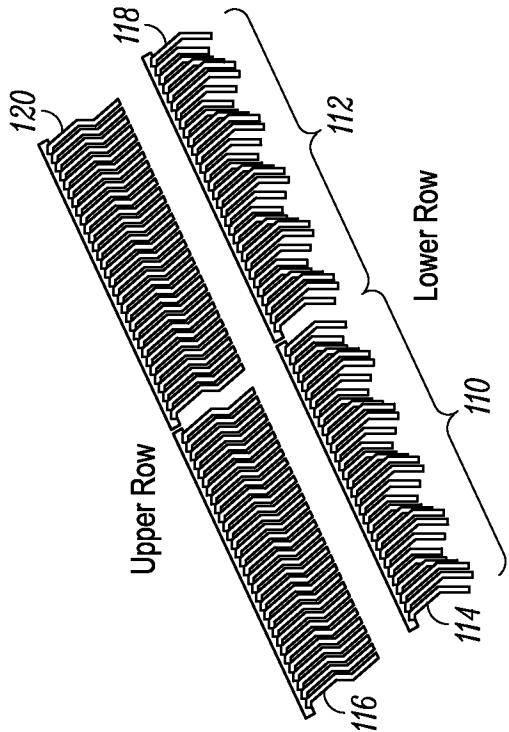


FIG. 3

FIG. 4 FIG. 5

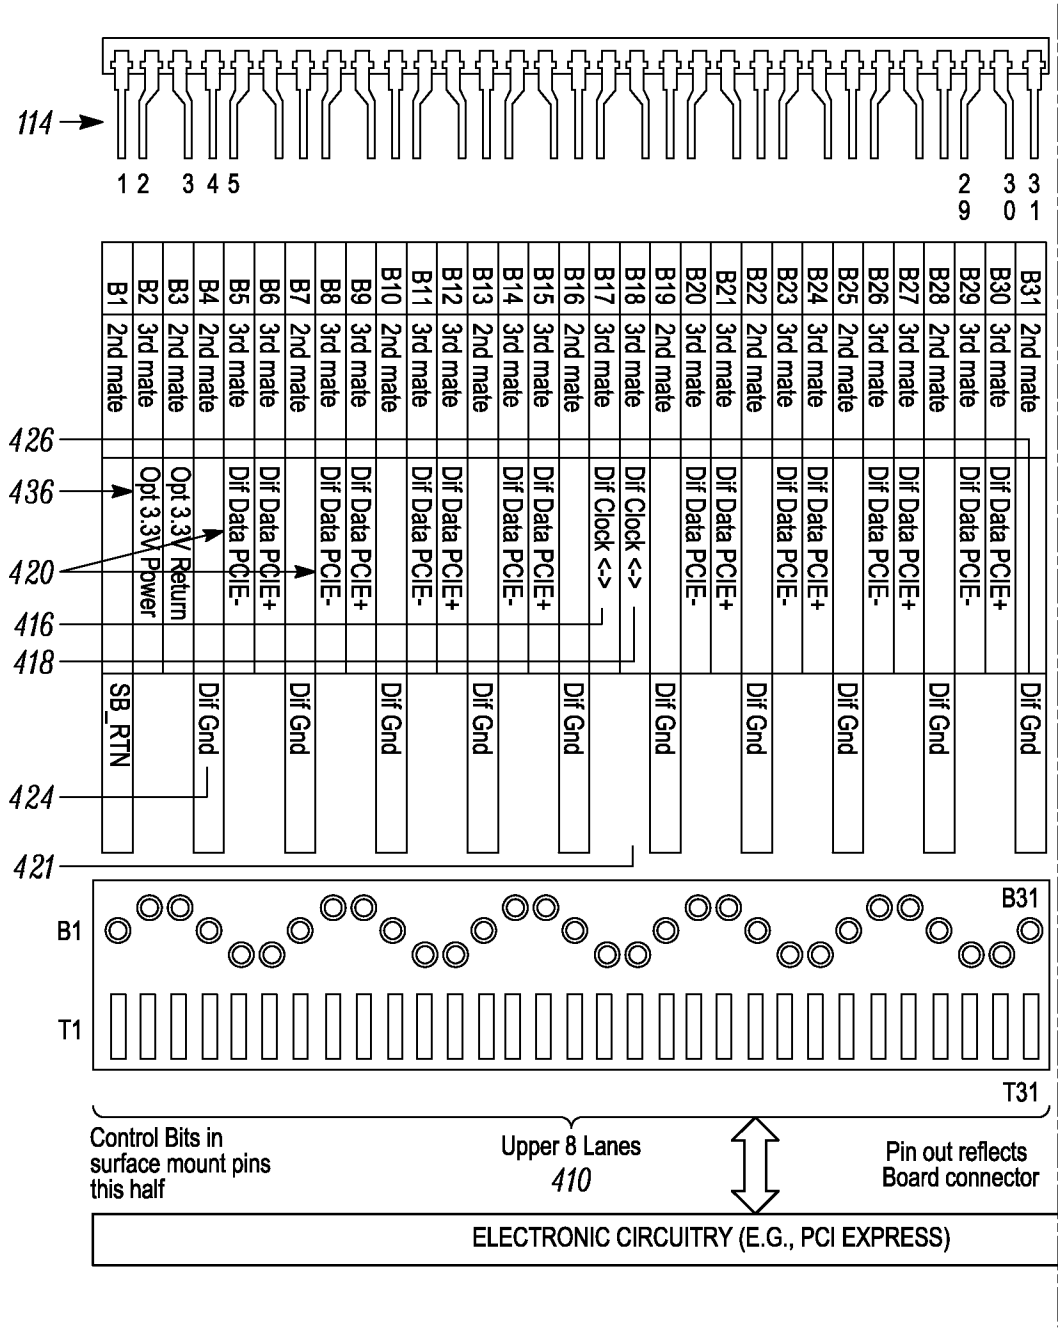


FIG. 4

4/27

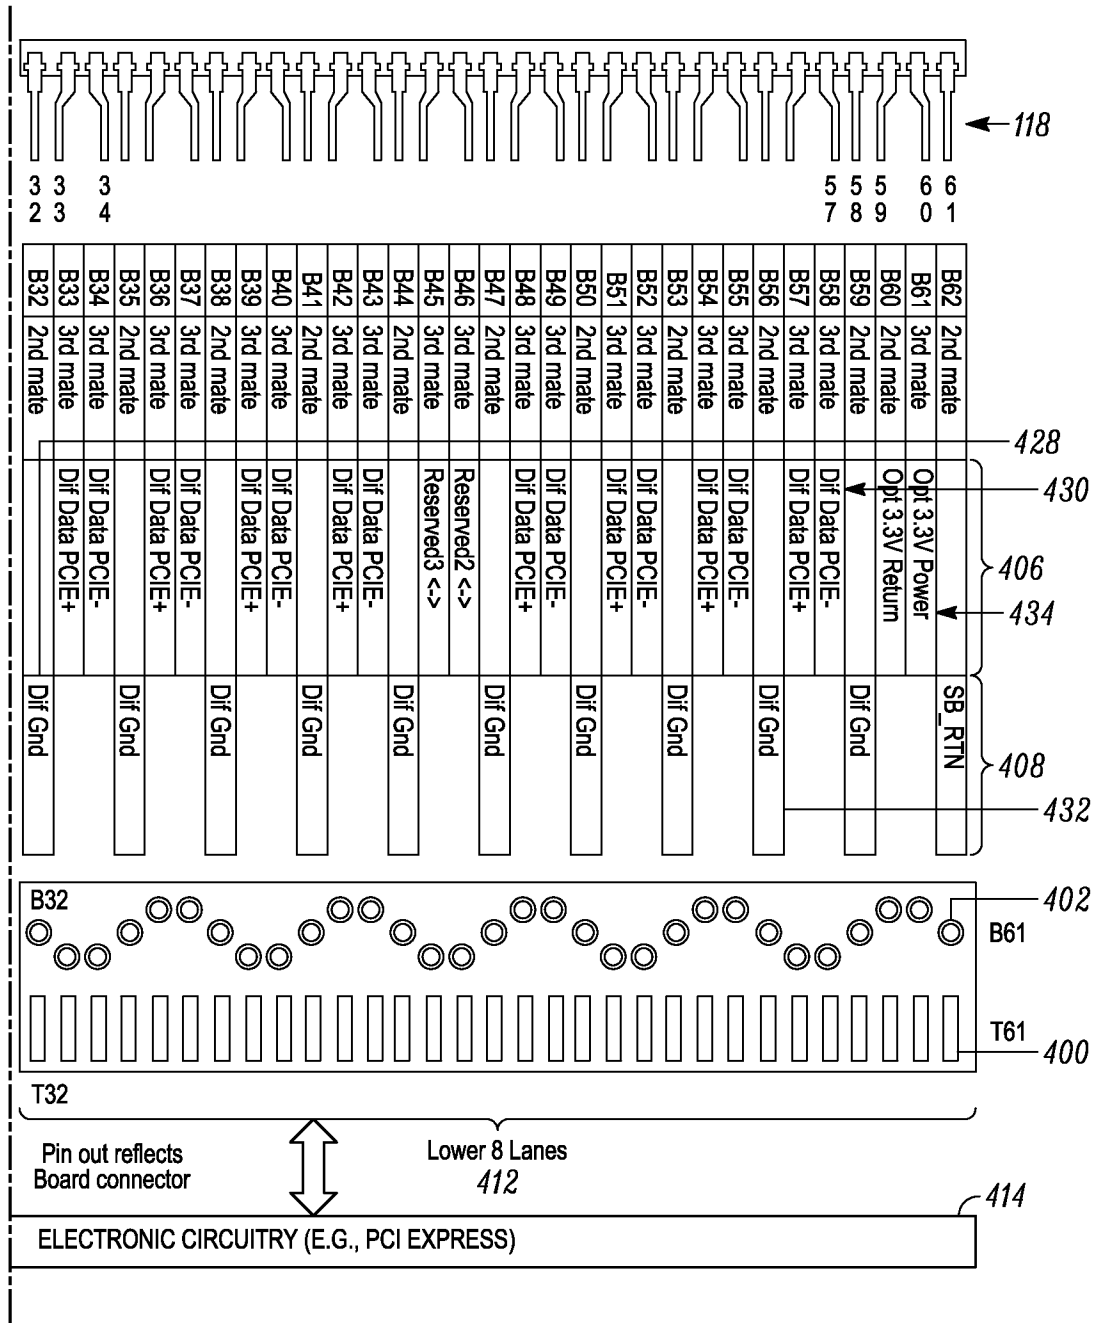


FIG. 5

FIG. 7	FIG. 8	FIG. 9	FIG. 10
FIG. 11	FIG. 12	FIG. 13	FIG. 14

5/27

Host Side

606

	Top row		
	Pin #	"Receptacle (SMT)"	"Plug side shape"
	Connector shell		
	T1	CPRSNT1#	3rd mate
	T2	Opt 3.3V Return <-->	2nd mate
TP0	T3	Dif Data PCIE+	3rd mate
TN0	T4	Dif Data PCIE-	3rd mate
	T5	Dif Gnd	2nd mate
TP1	T6	Dif Data PCIE+	3rd mate
TN1	T7	Dif Data PCIE-	3rd mate
	T8	Dif Gnd	2nd mate
TP2	T9	Dif Data PCIE+	3rd mate
TN2	T10	Dif Data PCIE-	3rd mate
	T11	Dif Gnd	2nd mate
TP3	T12	Dif Data PCIE+	3rd mate
TN3	T13	Dif Data PCIE-	3rd mate
	T14	Dif Gnd	2nd mate
	T15	Opt 3.3V Power <-->	3rd mate
	T16	Opt 3.3V Power <-->	3rd mate
	T17	Opt 3.3V Power <-->	3rd mate
	T18	Opt 3.3V Power <-->	3rd mate
	T19	Dif Gnd	2nd mate
TP4	T20	Dif Data PCIE+	3rd mate
TN4	T21	Dif Data PCIE-	3rd mate
	T22	Dif Gnd	2nd mate
TP5	T23	Dif Data PCIE+	3rd mate
TN5	T24	Dif Data PCIE-	3rd mate
	T25	Dif Gnd	2nd mate
TP6	T26	Dif Data PCIE+	3rd mate
TN6	T27	Dif Data PCIE-	3rd mate
	T28	Dif Gnd	2nd mate
TP7	T29	Dif Data PCIE+	3rd mate
TN7	T30	Dif Data PCIE-	3rd mate

FIG. 7

6/27

604

604				
Bottom row				
	Pin #	"Receptacle (Through hole)"	"Plug side shape"	
1st mate				
	B1	SB_RTN		2nd mate
	B2		Opt 3.3V Power	3rd mate
	B3		Opt 3.3V Return	2nd mate
	B4	Dif Gnd		2nd mate
	B5		Dif Data PCIE+	3rd mate
	B6		Dif Data PCIE-	3rd mate
	B7	Dif Gnd		2nd mate
	B8		Dif Data PCIE+	3rd mate
	B9		Dif Data PCIE-	3rd mate
	B10	Dif Gnd		2nd mate
	B11		Dif Data PCIE+	3rd mate
	B12		Dif Data PCIE-	3rd mate
	B13	Dif Gnd		2nd mate
	B14		Dif Data PCIE+	3rd mate
	B15		Dif Data PCIE-	3rd mate
	B16	Dif Gnd		2nd mate
	B17		Reserved2 <->	3rd mate
	B18		Reserved3 <->	3rd mate
	B19	Dif Gnd		2nd mate
	B20		Dif Data PCIE+	3rd mate
	B21		Dif Data PCIE-	3rd mate
	B22	Dif Gnd		2nd mate
	B23		Dif Data PCIE+	3rd mate
	B24		Dif Data PCIE-	3rd mate
	B25	Dif Gnd		2nd mate
	B26		Dif Data PCIE+	3rd mate
	B27		Dif Data PCIE-	3rd mate
	B28	Dif Gnd		2nd mate
	B29		Dif Data PCIE+	3rd mate
	B30		Dif Data PCIE-	3rd mate

FIG. 8

7/27

Downstream side

↖600

Flat Cable	Bottom row			
	Pin #	"Plug side shape"	"Receptacle (Through hole)"	
	Connector shell			
-----	B62	2nd mate		SB_RTN
	B61	3rd mate	Opt 3.3V Power	
	B60	2nd mate	Opt 3.3V Return	
	-----	B59	2nd mate	
RP0	B58	3rd mate	Dif Data PCIE+	
RN0	B57	3rd mate	Dif Data PCIE-	
-----	B56	2nd mate		Dif Gnd
RP1	B55	3rd mate	Dif Data PCIE+	
RN1	B54	3rd mate	Dif Data PCIE-	
-----	B53	2nd mate		Dif Gnd
RP2	B52	3rd mate	Dif Data PCIE+	
RN2	B51	3rd mate	Dif Data PCIE-	
-----	B50	2nd mate		Dif Gnd
RP3	B49	3rd mate	Dif Data PCIE+	
RN3	B48	3rd mate	Dif Data PCIE-	
-----	B47	2nd mate		Dif Gnd
-----	B46	3rd mate	Reserved2 <->	
-----	B45	3rd mate	Reserved3 <->	
-----	B44	2nd mate		Dif Gnd
RP4	B43	3rd mate	Dif Data PCIE+	
RN4	B42	3rd mate	Dif Data PCIE-	
-----	B41	2nd mate		Dif Gnd
RP5	B40	3rd mate	Dif Data PCIE+	
RN5	B39	3rd mate	Dif Data PCIE-	
-----	B38	2nd mate		Dif Gnd
RP6	B37	3rd mate	Dif Data PCIE+	
RN6	B36	3rd mate	Dif Data PCIE-	
-----	B35	2nd mate		Dif Gnd
RP7	B34	3rd mate	Dif Data PCIE+	
RN7	B33	3rd mate	Dif Data PCIE-	

FIG. 9

8/27

602

Top row			
Pin #	"Plug side shape"	"Receptacle (SMT)"	
1st mate			
T62	3rd mate	CPRSNT1#	
T61	2nd mate	Opt 3.3V Return <->	
T60	3rd mate	Dif Data PCIE+	TP0
T59	3rd mate	Dif Data PCIE-	TN0
T58	2nd mate	Dif Gnd	
T57	3rd mate	Dif Data PCIE+	TP1
T56	3rd mate	Dif Data PCIE-	TN1
T55	2nd mate	Dif Gnd	
T54	3rd mate	Dif Data PCIE+	TP2
T53	3rd mate	Dif Data PCIE-	TN2
T52	2nd mate	Dif Gnd	
T51	3rd mate	Dif Data PCIE+	TP3
T50	3rd mate	Dif Data PCIE-	TP4
T49	2nd mate	Dif Gnd	
T48	3rd mate	Opt 3.3V Power <->	
T47	3rd mate	Opt 3.3V Power <->	
T46	3rd mate	Opt 3.3V Power <->	
T45	3rd mate	Opt 3.3V Power <->	
T44	2nd mate	Dif Gnd	
T43	3rd mate	Dif Data PCIE+	TP4
T42	3rd mate	Dif Data PCIE-	TN4
T41	2nd mate	Dif Gnd	
T40	3rd mate	Dif Data PCIE+	TP5
T39	3rd mate	Dif Data PCIE-	TN5
T38	2nd mate	Dif Gnd	
T37	3rd mate	Dif Data PCIE+	TP6
T36	3rd mate	Dif Data PCIE-	TN6
T35	2nd mate	Dif Gnd	
T34	3rd mate	Dif Data PCIE+	TP7
T33	3rd mate	Dif Data PCIE-	TN7

FIG. 10

9/27

	T31	Opt 3.3V Return	2nd mate
	T32	Opt 3.3V Return	2nd mate
TP8	T33	Dif Data PCIE+	3rd mate
TN8	T34	Dif Data PCIE-	3rd mate
	T35	Dif Gnd	2nd mate
TP9	T36	Dif Data PCIE+	3rd mate
TN9	T37	Dif Data PCIE-	3rd mate
	T38	Dif Gnd	2nd mate
TP10	T39	Dif Data PCIE+	3rd mate
TN10	T40	Dif Data PCIE-	3rd mate
	T41	Dif Gnd	2nd mate
TP11	T42	Dif Data PCIE+	3rd mate
TN11	T43	Dif Data PCIE-	3rd mate
	T44	Dif Gnd	2nd mate
	T45	Reserved	3rd mate
	T46	CPERST	3rd mate
	T47	CPWRON	3rd mate
	T48	CWAKE	3rd mate
	T49	Dif Gnd	2nd mate
TP12	T50	Dif Data PCIE+	3rd mate
TN12	T51	Dif Data PCIE-	3rd mate
	T52	Dif Gnd	2nd mate
TP13	T53	Dif Data PCIE+	3rd mate
TN13	T54	Dif Data PCIE-	3rd mate
	T55	Dif Gnd	2nd mate
TP14	T56	Dif Data PCIE+	3rd mate
TN14	T57	Dif Data PCIE-	3rd mate
	T58	Dif Gnd	2nd mate
TP15	T59	Dif Data PCIE+	3rd mate
TN15	T60	Dif Data PCIE-	3rd mate
	T61	Opt 3.3V Return <->	2nd mate
	T62	CPRSNT2#	3rd mate
Connector shell			

Transmitters

FIG. 11

10/27

B31	Dif Gnd		2nd mate
B32	Dif Gnd		2nd mate
B33		Dif Data PCIE+	3rd mate
B34		Dif Data PCIE-	3rd mate
B35	Dif Gnd		2nd mate
B36		Dif Data PCIE+	3rd mate
B37		Dif Data PCIE-	3rd mate
B38	Dif Gnd		2nd mate
B39		Dif Data PCIE+	3rd mate
B40		Dif Data PCIE-	3rd mate
B41	Dif Gnd		2nd mate
B42		Dif Data PCIE+	3rd mate
B43		Dif Data PCIE-	3rd mate
B44	Dif Gnd		2nd mate
B45		Dif Clock <->	3rd mate
B46		Dif Clock <->	3rd mate
B47	Dif Gnd		2nd mate
B48		Dif Data PCIE+	3rd mate
B49		Dif Data PCIE-	3rd mate
B50	Dif Gnd		2nd mate
B51		Dif Data PCIE+	3rd mate
B52		Dif Data PCIE-	3rd mate
B53	Dif Gnd		2nd mate
B54		Dif Data PCIE+	3rd mate
B55		Dif Data PCIE-	3rd mate
B56	Dif Gnd		2nd mate
B57		Dif Data PCIE+	3rd mate
B58		Dif Data PCIE-	3rd mate
B59	Dif Gnd		2nd mate
B60		Opt 3.3V Return	2nd mate
B61		Opt 3.3V Power	3rd mate
B62	SB_RTN		2nd mate
1st mate			

Receivers

FIG. 12

11/27

-----	B32	2nd mate		Dif Gnd
-----	B31	2nd mate		Dif Gnd
RP8	B30	3rd mate	Dif Data PCIE+	
RN8	B29	3rd mate	Dif Data PCIE-	
-----	B28	2nd mate		Dif Gnd
RP9	B27	3rd mate	Dif Data PCIE+	
RN9	B26	3rd mate	Dif Data PCIE-	
-----	B25	2nd mate		Dif Gnd
RP10	B24	3rd mate	Dif Data PCIE+	
RN10	B23	3rd mate	Dif Data PCIE-	
-----	B22	2nd mate		Dif Gnd
RP11	B21	3rd mate	Dif Data PCIE+	
RN11	B20	3rd mate	Dif Data PCIE-	
-----	B19	2nd mate		Dif Gnd
DifClkP	B18	3rd mate	Dif Clock <->	
DifClkN	B17	3rd mate	Dif Clock <->	
-----	B16	2nd mate		Dif Gnd
RP12	B15	3rd mate	Dif Data PCIE+	
RN12	B14	3rd mate	Dif Data PCIE-	
-----	B13	2nd mate		Dif Gnd
RP13	B12	3rd mate	Dif Data PCIE+	
RN13	B11	3rd mate	Dif Data PCIE-	
-----	B10	2nd mate		Dif Gnd
RP14	B9	3rd mate	Dif Data PCIE+	
RN14	B8	3rd mate	Dif Data PCIE-	
-----	B7	2nd mate		Dif Gnd
RP15	B6	3rd mate	Dif Data PCIE+	
RN15	B5	3rd mate	Dif Data PCIE-	
-----	B4	2nd mate		Dif Gnd
	B3	2nd mate	Opt 3.3V Return	
	B2	3rd mate	Opt 3.3V Power	
-----	B1	2nd mate		SB_RTN
Connector shell				
Receivers (Trans on GPU)				

FIG. 13

12/27

T32	2nd mate	Opt 3.3V Return	
T31	2nd mate	Opt 3.3V Return	
T30	3rd mate	Dif Data PCIE+	TP8
T29	3rd mate	Dif Data PCIE-	TN8
T28	2nd mate	Dif Gnd	
T27	3rd mate	Dif Data PCIE+	TP9
T26	3rd mate	Dif Data PCIE-	TN9
T25	2nd mate	Dif Gnd	
T24	3rd mate	Dif Data PCIE+	TP10
T23	3rd mate	Dif Data PCIE-	TN10
T22	2nd mate	Dif Gnd	
T21	3rd mate	Dif Data PCIE+	TP11
T20	3rd mate	Dif Data PCIE-	TN11
T19	2nd mate	Dif Gnd	
T18	3rd mate	Reserved1 <->	
T17	3rd mate	CPERST# <->	
T16	3rd mate	CPWRON <->	
T15	3rd mate	CWAKE# <->	
T14	2nd mate	Dif Gnd	
T13	3rd mate	Dif Data PCIE+	TP12
T12	3rd mate	Dif Data PCIE-	TN12
T11	2nd mate	Dif Gnd	
T10	3rd mate	Dif Data PCIE+	TP13
T9	3rd mate	Dif Data PCIE-	TN13
T8	2nd mate	Dif Gnd	
T7	3rd mate	Dif Data PCIE+	TP14
T6	3rd mate	Dif Data PCIE-	TN14
T5	2nd mate	Dif Gnd	
T4	3rd mate	Dif Data PCIE+	TP15
T3	3rd mate	Dif Data PCIE-	TN15
T2	2nd mate	Opt 3.3V Return <->	
T1	3rd mate	CPRSNT2#	
1st mate			

Transmitters (Rec on GPU)

FIG. 14

13/27

FIG. 15 FIG. 16 FIG. 17 FIG. 18

Host Side			
Top row			
Pin #	"Receptacle (SMT)"	"Plug side shape"	
Connector shell			
	T1 CPRSNT1#	3rd mate	
	T2 Opt 3.3V Return <->	3rd mate	
	T3 Gnd	2nd mate	
TP0	T4 Dif Data PCIE+	3rd mate	
TN0	T5 Dif Data PCIE-	3rd mate	
	T6 Dif Gnd	2nd mate	
TP1	T7 Dif Data PCIE+	3rd mate	
TN1	T8 Dif Data PCIE-	3rd mate	
	T9 Dif Gnd	2nd mate	
TP2	T10 Dif Data PCIE+	3rd mate	
TN2	T11 Dif Data PCIE-	3rd mate	
	T12 Dif Gnd	2nd mate	
TP3	T13 Dif Data PCIE+	3rd mate	
TN3	T14 Dif Data PCIE-	3rd mate	
	T15 Dif Gnd	2nd mate	
	T16 Reserved1 <->	3rd mate	
	T17 CPERST# <->	3rd mate	
	T18 CPWRON <->	3rd mate	
	T19 CWAKE# <->	3rd mate	
	T20 Dif Gnd	2nd mate	
TP4	T21 Dif Data PCIE+	3rd mate	
TN4	T22 Dif Data PCIE-	3rd mate	
	T23 Dif Gnd	2nd mate	
TP5	T24 Dif Data PCIE+	3rd mate	
TN5	T25 Dif Data PCIE-	3rd mate	
	T26 Dif Gnd	2nd mate	
TP6	T27 Dif Data PCIE+	3rd mate	
TN6	T28 Dif Data PCIE-	3rd mate	
	T29 Dif Gnd	2nd mate	
TP7	T30 Dif Data PCIE+	3rd mate	
TN7	T31 Dif Data PCIE-	3rd mate	
	T32 Gnd	2nd mate	
	T33 Opt 3.3V Power <->	3rd mate	
	T34 CPRSNT2#	3rd mate	
Connector shell			
Transmitters			

FIG. 15

14/27

Bottom row				
	Pin #	"Receptacle (Through hole)"	"Plug side shape"	
1st mate				
	B1	SB_RTN		2nd mate
	B2		Opt 3.3V Power	3rd mate
	B3		Opt 3.3V Return	2nd mate
	B4	Dif Gnd		2nd mate
	B5		Dif Data PCIE+	3rd mate
	B6		Dif Data PCIE-	3rd mate
	B7	Dif Gnd		2nd mate
	B8		Dif Data PCIE+	3rd mate
	B9		Dif Data PCIE-	3rd mate
	B10	Dif Gnd		2nd mate
	B11		Dif Data PCIE+	3rd mate
	B12		Dif Data PCIE-	3rd mate
	B13	Dif Gnd		2nd mate
	B14		Dif Data PCIE+	3rd mate
	B15		Dif Data PCIE-	3rd mate
	B16	Dif Gnd		2nd mate
	B17		Dif Clock	3rd mate
	B18		Dif Clock	3rd mate
	B19	Dif Gnd		2nd mate
	B20		Dif Data PCIE+	3rd mate
	B21		Dif Data PCIE-	3rd mate
	B22	Dif Gnd		2nd mate
	B23		Dif Data PCIE+	3rd mate
	B24		Dif Data PCIE-	3rd mate
	B25	Dif Gnd		2nd mate
	B26		Dif Data PCIE+	3rd mate
	B27		Dif Data PCIE-	3rd mate
	B28	Dif Gnd		2nd mate
	B29		Dif Data PCIE+	3rd mate
	B30		Dif Data PCIE-	3rd mate
	B31	Dif Gnd		2nd mate
	B32		Opt 3.3V Return	2nd mate
	B33		Opt 3.3V Power	3rd mate
	B34	SB_RTN		2nd mate
1st mate				
Receivers				

FIG. 16

15 / 27

Downstream side				
Cable	Bottom row			
	Pin #	"Plug side shape"	"Receptacle (Through hole)"	
	Connector shell			
-----	B34	2nd mate		SB_RTN
----- RP0 RN0	B33	3rd mate	Opt 3.3V Power	
	B32	2nd mate	Opt 3.3V Return	
	B31	2nd mate		
----- RP1 RN1	B30	3rd mate	Dif Data PCIE+	
	B29	3rd mate	Dif Data PCIE-	
	B28	2nd mate		
----- RP2 RN2	B27	3rd mate	Dif Data PCIE+	
	B26	3rd mate	Dif Data PCIE-	
	B25	2nd mate		
----- RP3 RN3	B24	3rd mate	Dif Data PCIE+	
	B23	3rd mate	Dif Data PCIE-	
	B22	2nd mate		
----- DifClkP DifClkN	B21	3rd mate	Dif Data PCIE+	
	B20	3rd mate	Dif Data PCIE-	
	B19	2nd mate		
----- RP4 RN4	B18	3rd mate	Dif Clock	
	B17	3rd mate	Dif Clock	
	B16	2nd mate		
----- RP5 RN5	B15	3rd mate	Dif Data PCIE+	
	B14	3rd mate	Dif Data PCIE-	
	B13	2nd mate		
----- RP6 RN6	B12	3rd mate	Dif Data PCIE+	
	B11	3rd mate	Dif Data PCIE-	
	B10	2nd mate		
----- RP7 RN7	B9	3rd mate	Dif Data PCIE+	
	B8	3rd mate	Dif Data PCIE-	
	B7	2nd mate		
-----	B6	3rd mate	Dif Data PCIE+	
	B5	3rd mate	Dif Data PCIE-	
	B4	2nd mate		
-----	B3	2nd mate	Opt 3.3V Return	
	B2	3rd mate	Opt 3.3V Power	
	B1	2nd mate		
Connector shell				
Receivers (Trans on GPU)				

FIG. 17

16/27

Top row				
	Pin #	"Plug side shape"	"Receptacle (SMT)"	
1st mate				
	T34	3rd mate	CPRSNT1#	
	T33	3rd mate	Opt 3.3V Return <->	
	T32	2nd mate	Gnd	
	T31	3rd mate	Dif Data PCIE+	TP0
	T30	3rd mate	Dif Data PCIE-	TN0
	T29	2nd mate	Dif Gnd	
	T28	3rd mate	Dif Data PCIE+	TP1
	T27	3rd mate	Dif Data PCIE-	TN1
	T26	2nd mate	Dif Gnd	
	T25	3rd mate	Dif Data PCIE+	TP2
	T24	3rd mate	Dif Data PCIE-	TN2
	T23	2nd mate	Dif Gnd	
	T22	3rd mate	Dif Data PCIE+	TP3
	T21	3rd mate	Dif Data PCIE-	TP4
	T20	2nd mate	Dif Gnd	
	T19	3rd mate	Reserved1 <->	
	T18	3rd mate	CPERST# <->	
	T17	3rd mate	CPWRON <->	
	T16	3rd mate	CWAKE# <->	
	T15	2nd mate	Dif Gnd	
	T14	3rd mate	Dif Data PCIE+	TP4
	T13	3rd mate	Dif Data PCIE-	TN4
	T12	2nd mate	Dif Gnd	
	T11	3rd mate	Dif Data PCIE+	TP5
	T10	3rd mate	Dif Data PCIE-	TN5
	T9	2nd mate	Dif Gnd	
	T8	3rd mate	Dif Data PCIE+	TP6
	T7	3rd mate	Dif Data PCIE-	TN6
	T6	2nd mate	Dif Gnd	
	T5	3rd mate	Dif Data PCIE+	TP7
	T4	3rd mate	Dif Data PCIE-	TN7
	T3	2nd mate	Gnd	
T2	3rd mate	Opt 3.3V Power <->		
T1	3rd mate	CPRSNT2#		
1st mate				
Transmitters (Rec on GPU)				

FIG. 18

17/27

		FIG. 21	FIG. 22
FIG. 19	FIG. 20	FIG. 23	FIG. 24

	Connector shell		
└─	T1	CPRSNT1#	3rd mate
	T2	Opt 3.3V Return <->	3rd mate
-----	T3	Gnd	2nd mate
TP0	T4	Dif Data PCIE+	3rd mate
TN0	T5	Dif Data PCIE-	3rd mate
-----	T6	Dif Gnd	2nd mate
TP1	T7	Dif Data PCIE+	3rd mate
TN1	T8	Dif Data PCIE-	3rd mate
-----	T9	Dif Gnd	2nd mate
TP2	T10	Dif Data PCIE+	3rd mate
TN2	T11	Dif Data PCIE-	3rd mate
-----	T12	Dif Gnd	2nd mate
TP3	T13	Dif Data PCIE+	3rd mate
TN3	T14	Dif Data PCIE-	3rd mate
-----	T15	Dif Gnd	2nd mate
-----	T16	Reserved1 <->	3rd mate
-----	T17	CPERST# <->	3rd mate
-----	T18	CPWRON <->	3rd mate
-----	T19	CWAKE# <->	3rd mate
-----	T20	Dif Gnd	2nd mate
TP4	T21	Dif Data PCIE+	3rd mate
TN4	T22	Dif Data PCIE-	3rd mate
-----	T23	Dif Gnd	2nd mate
TP5	T24	Dif Data PCIE+	3rd mate
TN5	T25	Dif Data PCIE-	3rd mate
-----	T26	Dif Gnd	2nd mate
TP6	T27	Dif Data PCIE+	3rd mate
TN6	T28	Dif Data PCIE-	3rd mate
-----	T29	Dif Gnd	2nd mate
TP7	T30	Dif Data PCIE+	3rd mate
TN7	T31	Dif Data PCIE-	3rd mate
-----	T32	Gnd	2nd mate
	T33	Opt 3.3V Power <->	3rd mate
-----	T34	CPRSNT2#	3rd mate
		Connector shell	

Transmitters

FIG. 19

18/27

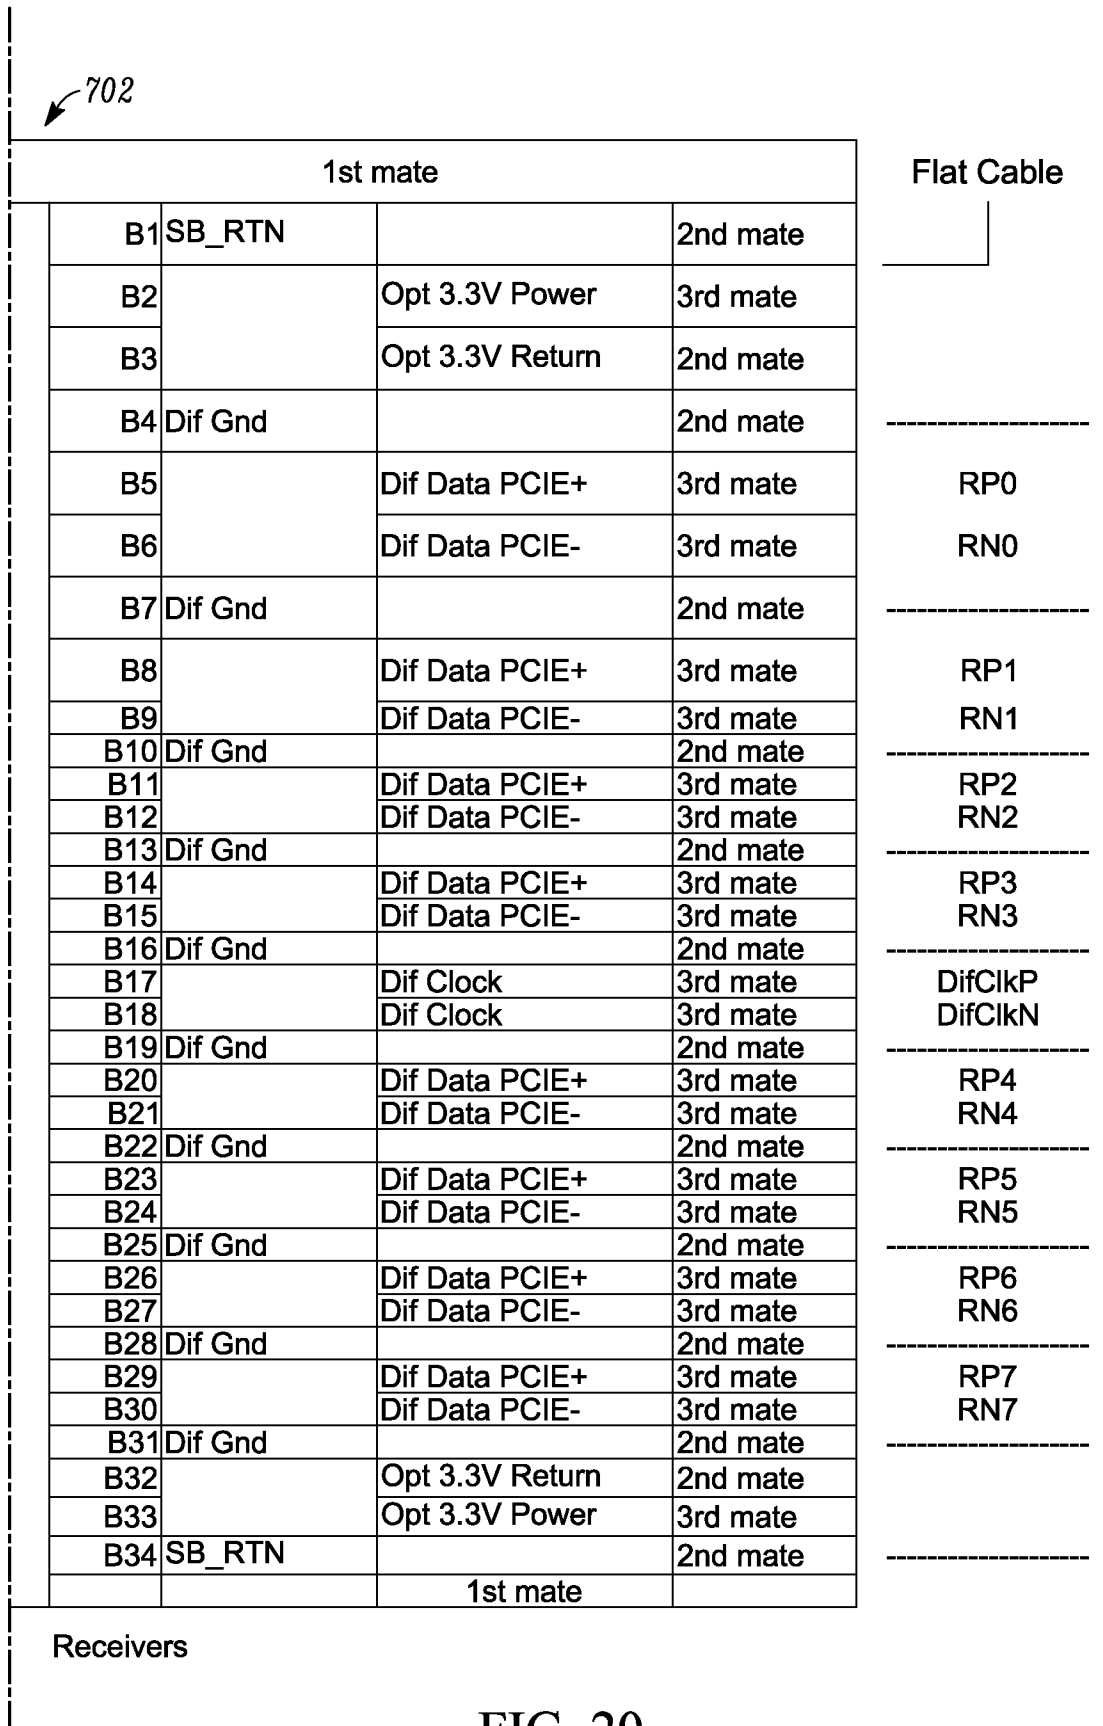


FIG. 20

19/ 27

Downstream side

↙ 600

Bottom Row					
Pin #	"From Pin #"	"Plug side shape"	"Receptacle (Through hole)"		
			Connector shell		
B62	B1	2nd mate		SB_RTN	1
B61	L	3rd mate	Opt 3.3V Power		2
B60	L	2nd mate	Opt 3.3V Return		3
B59	L	2nd mate		Dif Gnd	4
B58	L	3rd mate	Dif Data PCIE+		5
B57	L	3rd mate	Dif Data PCIE-		6
B56	L	2nd mate		Dif Gnd	7
B55	L	3rd mate	Dif Data PCIE+		8
B54	L	3rd mate	Dif Data PCIE-		9
B53	L	2nd mate		Dif Gnd	10
B52	L	3rd mate	Dif Data PCIE+		11
B51	L	3rd mate	Dif Data PCIE-		12
B50	L	2nd mate		Dif Gnd	13
B49	L	3rd mate	Dif Data PCIE+		14
B48	L	3rd mate	Dif Data PCIE-		15
B47	L	2nd mate		Dif Gnd	16
B46	L	3rd mate	Reserved2 <->		17
B45	L	3rd mate	Reserved3 <->		18
B44	L	2nd mate		Dif Gnd	19
B43	L	3rd mate	Dif Data PCIE+		20
B42	L	3rd mate	Dif Data PCIE-		21
B41	L	2nd mate		Dif Gnd	22
B40	L	3rd mate	Dif Data PCIE+		23
B39	L	3rd mate	Dif Data PCIE-		24

FIG. 21

20/27

↙ 602

Top Row					
	Pin #	"From Pin #"	"Plug side shape"	"Receptacle (SMT)"	
			1st Mate		
	T62	T1	3rd mate	CPRSNT1#	
	T61	L	2nd mate	Opt 3.3V Return <->	
	T60	L	3rd mate	Dif Data PCIE+	TP0
	T59	L	3rd mate	Dif Data PCIE-	TN0
	T58	L	2nd mate	Dif Gnd	
	T57	L	3rd mate	Dif Data PCIE+	TP1
	T56	L	3rd mate	Dif Data PCIE-	TN1
	T55	L	2nd mate	Dif Gnd	
	T54	L	3rd mate	Dif Data PCIE+	TP2
	T53	L	3rd mate	Dif Data PCIE-	TN2
	T52	L	2nd mate	Dif Gnd	
	T51	L	3rd mate	Dif Data PCIE+	TP3
	T50	L	3rd mate	Dif Data PCIE-	TP4
	T49	L	2nd mate	Dif Gnd	
	T48	L	3rd mate	Opt 3.3V Power <->	
	T47	L	3rd mate	Opt 3.3V Power <->	
	T46	L	3rd mate	Opt 3.3V Power <->	
	T45	L	3rd mate	Opt 3.3V Power <->	
	T44	L	2nd mate	Dif Gnd	
	T43	L	3rd mate	Dif Data PCIE+	TP4
	T42	L	3rd mate	Dif Data PCIE-	TN4
	T41	L	2nd mate	Dif Gnd	
	T40	L	3rd mate	Dif Data PCIE+	TP5
	T39	L	3rd mate	Dif Data PCIE-	TN5

FIG. 22

21/27

B38	L	2nd mate		Dif Gnd	25
B37	L	3rd mate	Dif Data PCIE+		26
B36	L	3rd mate	Dif Data PCIE-		27
B35	L	2nd mate		Dif Gnd	28
B34	L	3rd mate	Dif Data PCIE+		29
B33	L	3rd mate	Dif Data PCIE-		30
B32	L	2nd mate		Dif Gnd	31
B31	B4	2nd mate		Dif Gnd	32
B30	B5	3rd mate	Dif Data PCIE+		33
B29	B6	3rd mate	Dif Data PCIE-		34
B28	B7	2nd mate		Dif Gnd	35
B27	B8	3rd mate	Dif Data PCIE+		36
B26	B9	3rd mate	Dif Data PCIE-		
B25	B10	2nd mate		Dif Gnd	
B24	B11	3rd mate	Dif Data PCIE+		
B23	B12	3rd mate	Dif Data PCIE-		
B22	B13	2nd mate		Dif Gnd	
B21	B14	3rd mate	Dif Data PCIE+		
B20	B15	3rd mate	Dif Data PCIE-		
B19	B16	2nd mate		Dif Gnd	
B18	B17	3rd mate	Dif Clock <->		
B17	B18	3rd mate	Dif Clock <->		
B16	B19	2nd mate		Dif Gnd	
B15	B20	3rd mate	Dif Data PCIE+		
B14	B21	3rd mate	Dif Data PCIE-		
B13	B22	2nd mate		Dif Gnd	
B12	B23	3rd mate	Dif Data PCIE+		
B11	B24	3rd mate	Dif Data PCIE-		
B10	B25	2nd mate		Dif Gnd	
B9	B26	3rd mate	Dif Data PCIE+		
B8	B27	3rd mate	Dif Data PCIE-		
B7	B28	2nd mate		Dif Gnd	
B6	B29	3rd mate	Dif Data PCIE+		
B5	B30	3rd mate	Dif Data PCIE-		
B4	B31	2nd mate		Dif Gnd	
B3	L	2nd mate	Opt 3.3V Return		
B2	L	3rd mate	Opt 3.3V Power		
B1	B34	2nd mate		SB_RTN	
			Connector shell		

Receivers (Trans on GPU)

FIG. 23

22/27

T38	L	2nd mate	Dif Gnd	
T37	L	3rd mate	Dif Data PCIE+	TP6
T36	L	3rd mate	Dif Data PCIE-	TN6
T35	L	2nd mate	Dif Gnd	
T34	L	3rd mate	Dif Data PCIE+	TP7
T33	L	3rd mate	Dif Data PCIE-	TN7
T32	L	2nd mate	Opt 3.3V Return	
T31	L	2nd mate	Opt 3.3V Return	
T30	T4	3rd mate	Dif Data PCIE+	TP8
T29	T5	3rd mate	Dif Data PCIE-	TN8
T28	T6	2nd mate	Dif Gnd	
T27	T7	3rd mate	Dif Data PCIE+	TP9
T26	T8	3rd mate	Dif Data PCIE-	TN9
T25	T9	2nd mate	Dif Gnd	
T24	T10	3rd mate	Dif Data PCIE+	TP10
T23	T11	3rd mate	Dif Data PCIE-	TN10
T22	T12	2nd mate	Dif Gnd	
T21	T13	3rd mate	Dif Data PCIE+	TP11
T20	T14	3rd mate	Dif Data PCIE-	TN11
T19	T15	2nd mate	Dif Gnd	
T18	T16	3rd mate	Reserved1 <->	} CONTROL SIGNALS
T17	T17	3rd mate	CPERST# <->	
T16	T18	3rd mate	CPWRON <->	
T15	T19	3rd mate	CWAKE# <->	
T14	T20	2nd mate	Dif Gnd	
T13	T21	3rd mate	Dif Data PCIE+	TP12
T12	T22	3rd mate	Dif Data PCIE-	TN12
T11	T23	2nd mate	Dif Gnd	
T10	T24	3rd mate	Dif Data PCIE+	TP13
T9	T25	3rd mate	Dif Data PCIE-	TN13
T8	T26	2nd mate	Dif Gnd	
T7	T27	3rd mate	Dif Data PCIE+	TP14
T6	T28	3rd mate	Dif Data PCIE-	TN14
T5	T29	2nd mate	Dif Gnd	
T4	T30	3rd mate	Dif Data PCIE+	TP15
T3	T31	3rd mate	Dif Data PCIE-	TN15
T2	L	2nd mate	Opt 3.3V Return <->	
T1	T34	3rd mate	CPRSNT2#	
		1st Mate		

Transmitters (Rec on GPU)

FIG. 24

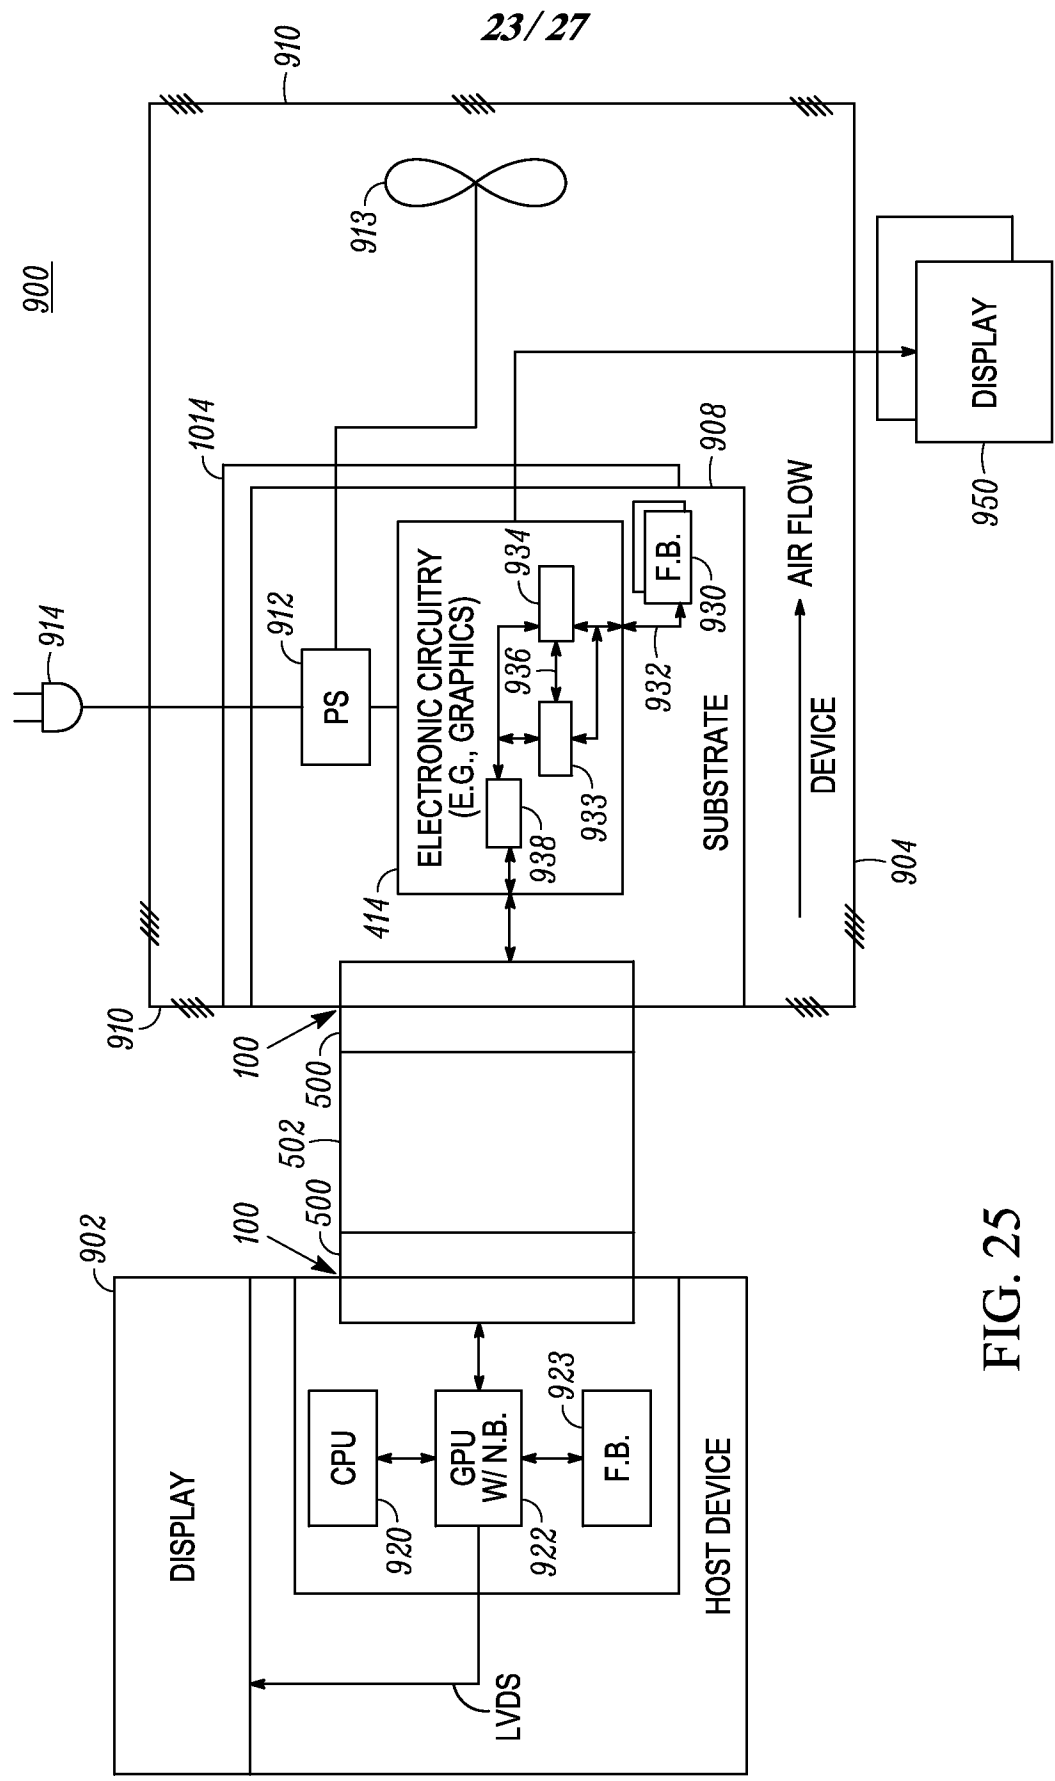


FIG. 25

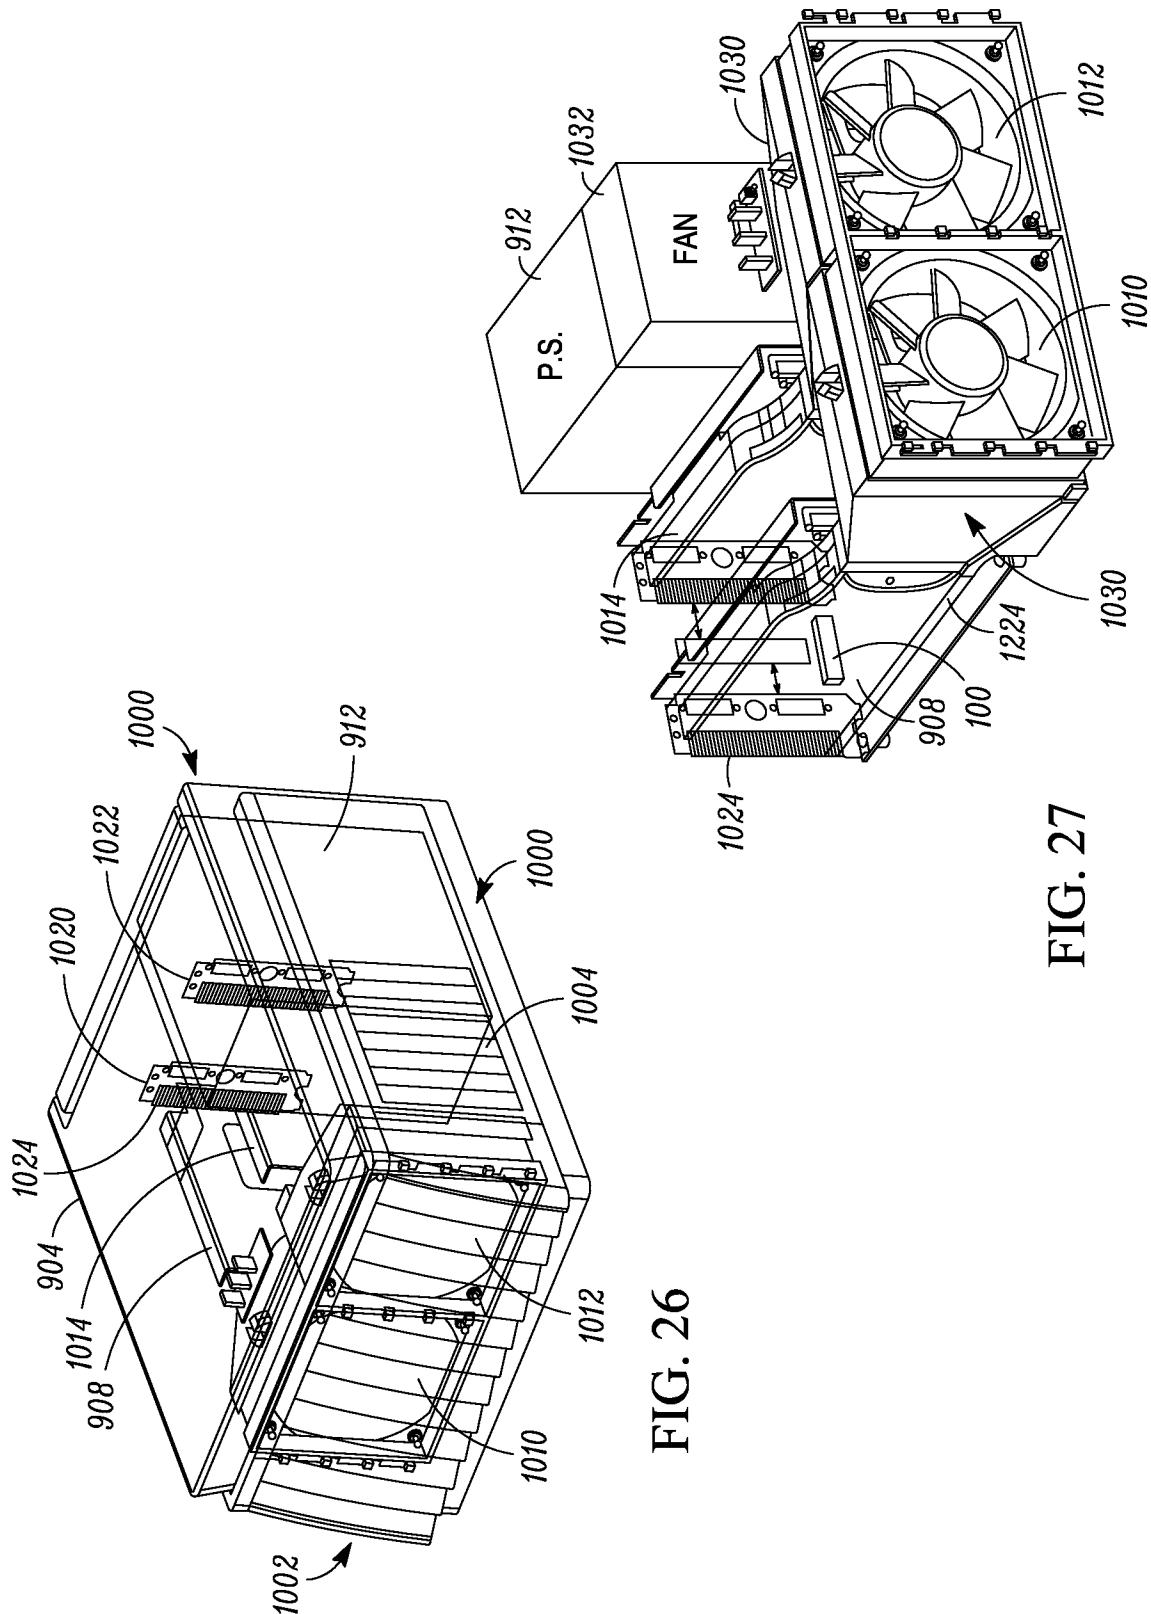


FIG. 26

FIG. 27

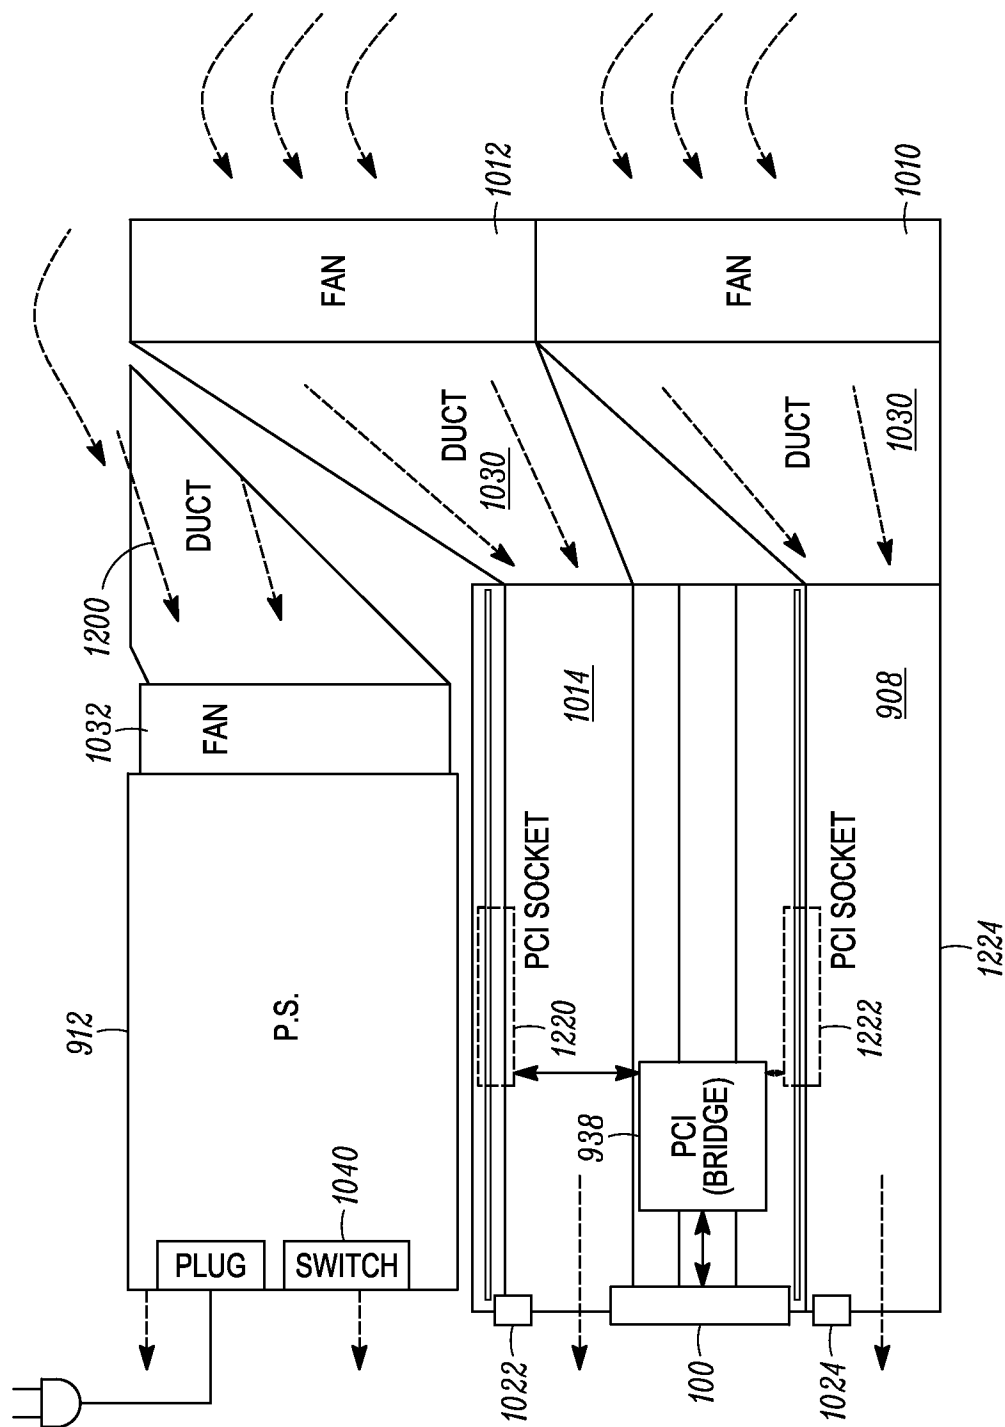


FIG. 28

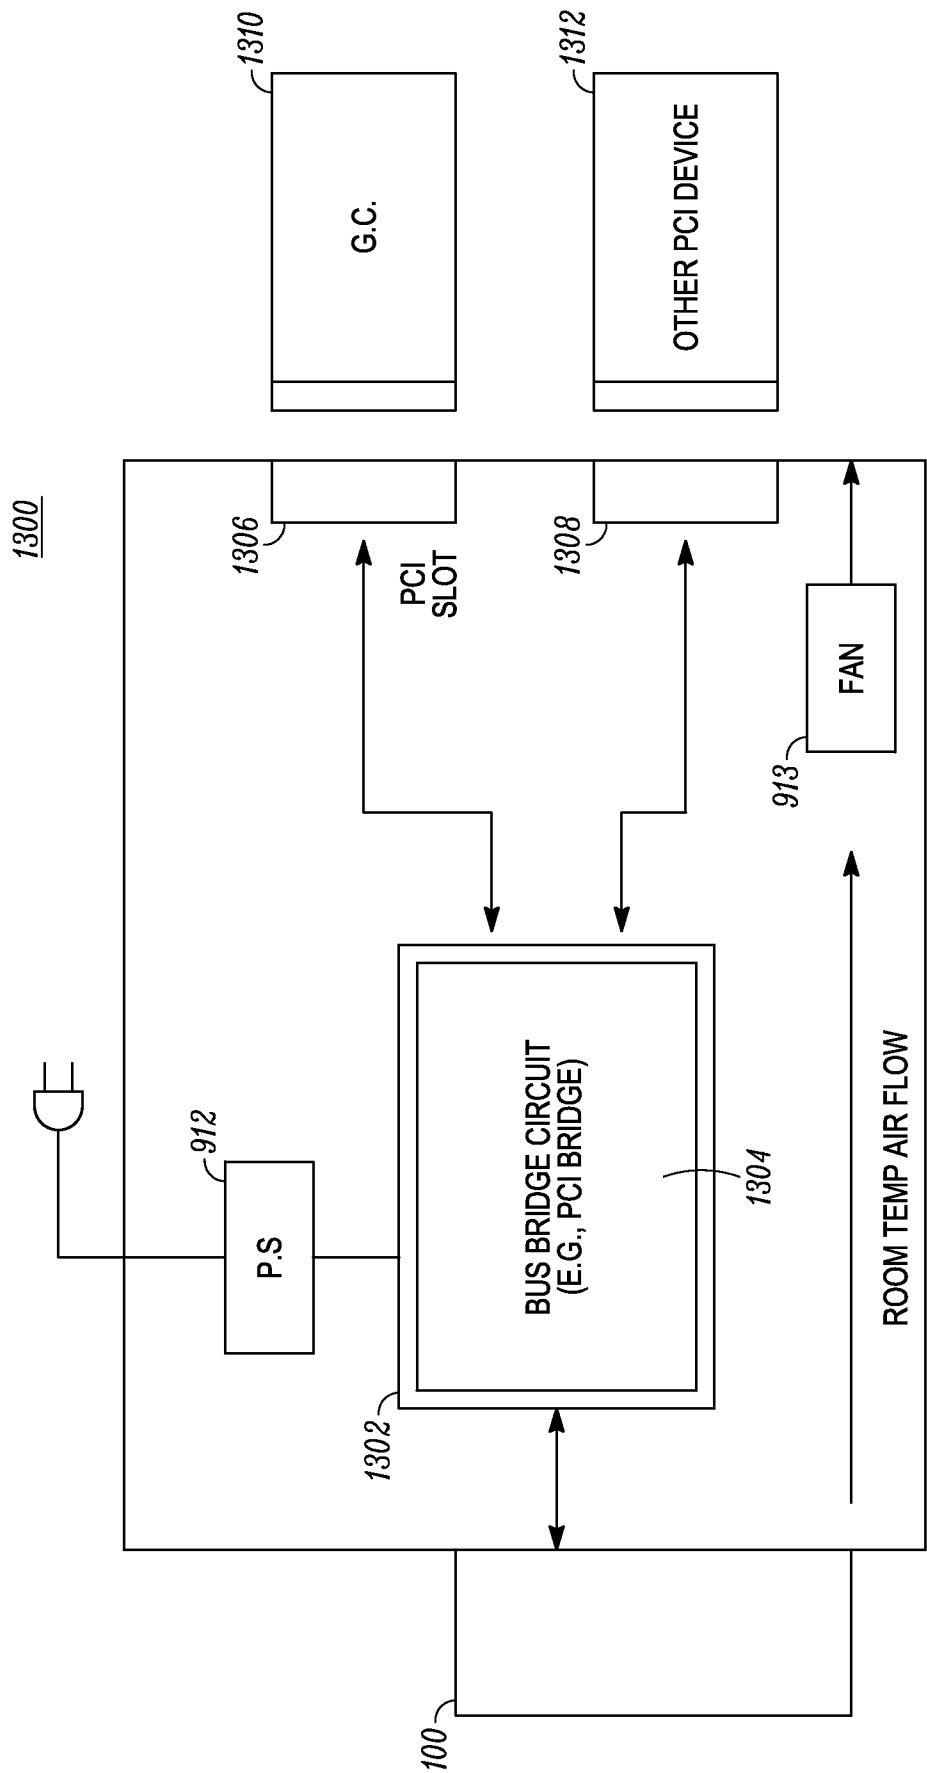


FIG. 29

27 / 27

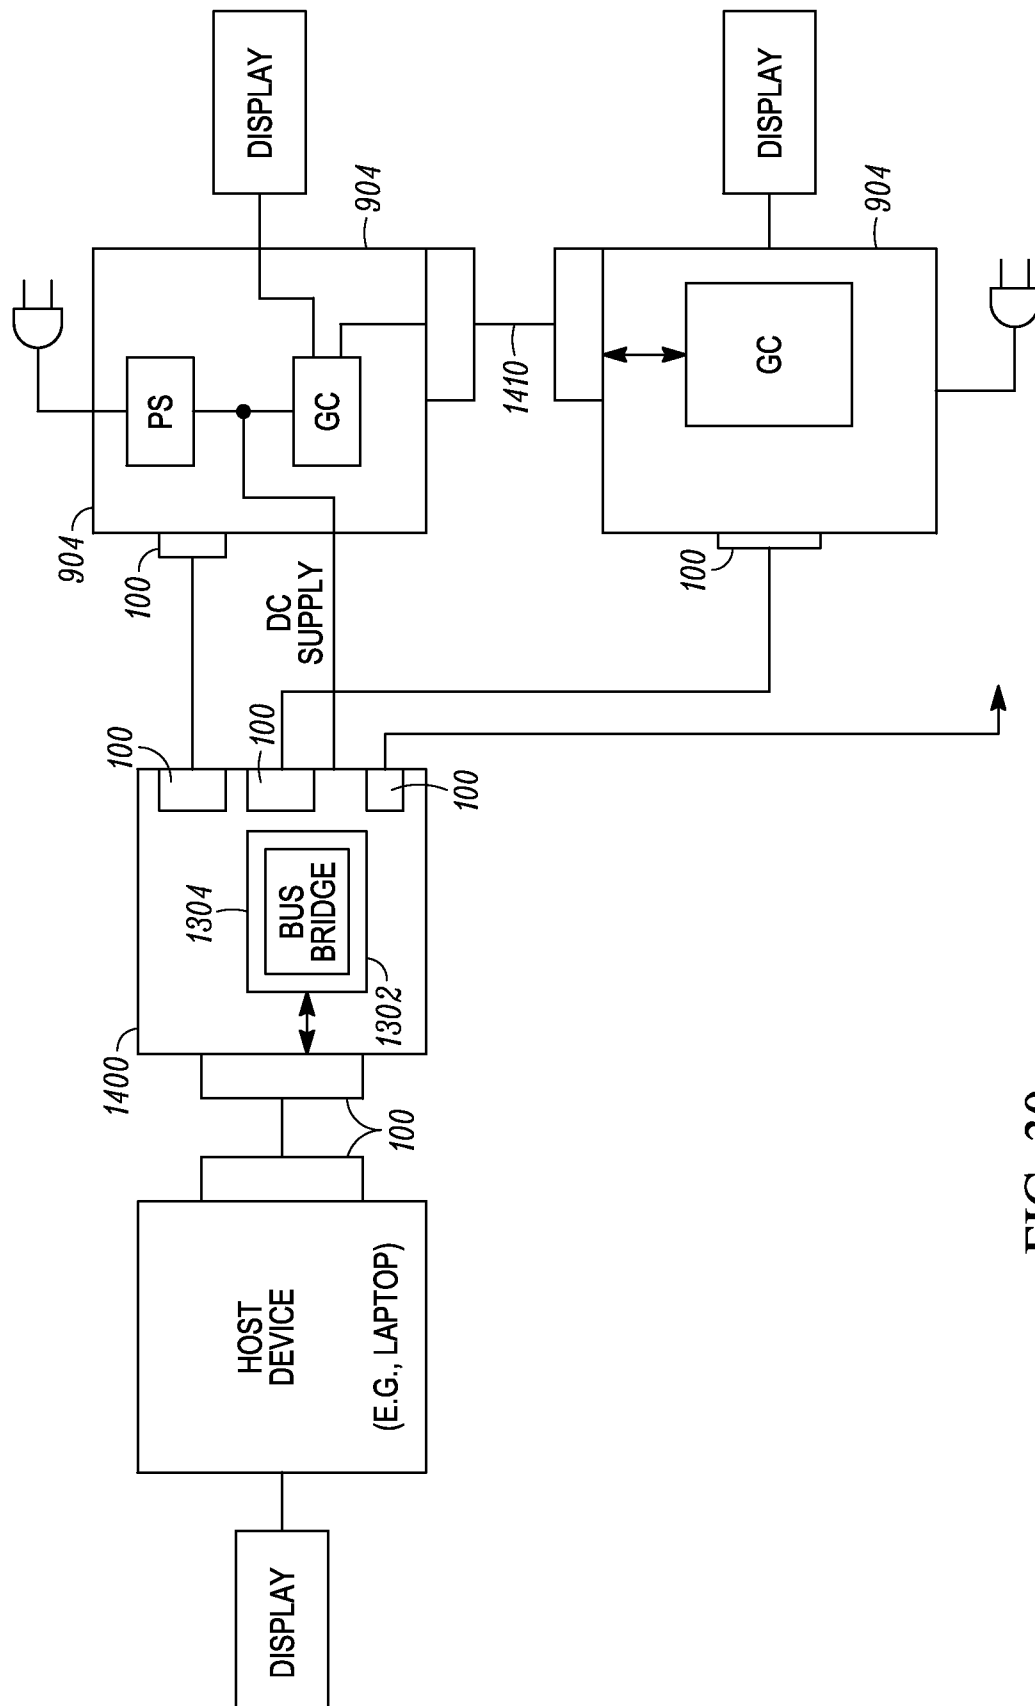


FIG. 30

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2008/086221

A. CLASSIFICATION OF SUBJECT MATTER

INV. H01R12/22 G06F13/40 H05K7/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01R G06F H05K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 338 635 B1 (LEE WEI-CHEN [US]) 15 January 2002 (2002-01-15) paragraph [0023] - paragraph [0028]; figure 1	1-14
A	US 2006/174047 A1 (CARTY CLARK [US]) 3 August 2006 (2006-08-03) paragraph [0009] - paragraph [0011] paragraph [0026] paragraph [0032] figures 1-3	1-14
A	US 6 721 188 B1 (JARVIS JERRY [US] ET AL) 13 April 2004 (2004-04-13) column 3, line 55 - column 4, line 20 column 8, line 3 - line 6; figures 2,4 -/--	1,2,11

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

27 February 2009

Date of mailing of the international search report

05/03/2009

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Criqui, Jean-Jacques

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2008/086221

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 261 104 B1 (LEMAN MICHAEL V [US]) 17 July 2001 (2001-07-17) column 3, line 51 - line 64 column 7, line 5 - line 64 figures 1-6 -----	10,12,13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2008/086221

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6338635	B1	15-01-2002	CN 2462594 Y TW 462546 Y	28-11-2001 01-11-2001
US 2006174047	A1	03-08-2006	NONE	
US 6721188	B1	13-04-2004	NONE	
US 6261104	B1	17-07-2001	US 2002072255 A1	13-06-2002