

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 January 2009 (22.01.2009)

PCT

(10) International Publication Number
WO 2009/011501 A2

(51) International Patent Classification:
H04L 29/02 (2006.01)

(21) International Application Number:
PCT/KR2008/003605

(22) International Filing Date: 24 June 2008 (24.06.2008)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:
10-2007-0072454 19 July 2007 (19.07.2007) KR
10-2008-0056236 16 June 2008 (16.06.2008) KR

(71) Applicant (for all designated States except US): **ELECTRONICS AND TELECOMMUNICATIONS RESEARCH INSTITUTE** [KR/KR]; 161, Gajeong-dong, Yuseong-gu, Daejeon, 305-350 (KR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KIM, Il Gyu** [KR/KR]; 739-2, Sangdo 1-dong, Dongjak-gu, Seoul 156-871 (KR). **KO, Young Jo** [KR/KR]; 102-706, Munghwa Apt., Wolpyeong2-dong, Seo-gu, Daejeon 302-747 (KR). **PARK, Hyeong Geun** [KR/KR]; 107-703, Yeolmae maeul Apt., Jijok-dong, Youseong-gu, Daejeon 302-223 (KR). **CHANG, Kap Seok** [KR/KR]; 203-1505, 2-danji, Chorok maeul Apt., 612, Boksu-dong,

Seo-gu, Daejeon 302-210 (KR). **YI, Hyo Seok** [KR/KR]; 503-1701, Yangeemaul Apt., Banseok-dong, Yuseong-gu, Daejeon 305-750 (KR). **KIM, Young-Hoon** [KR/KR]; 102-501, Hyundai Apt., 431-6, Doryong-dong, Yuseong-gu, Daejeon 305-340 (KR). **BANG, Seung Chan** [KR/KR]; 111-1102, Nuri Apt., Walpyung-dong, Seo-gu, Daejeon 302-280 (KR). **LEE, Kyoung Joon** [KR/KR]; 107-1304, Samsung Hanwool Apt., Shinseong-dong, Yuseong-gu, Daejeon 305-707 (KR).

(74) Agent: **YOU ME PATENT AND LAW FIRM**; Seolim Bldg., 649-10, Yoksam-dong, Kangnam-ku, Seoul, 135-080 (KR).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: METHOD FOR GENERATING DOWNLINK FRAME, AND METHOD FOR SEARCHING CELL

FIG. 4

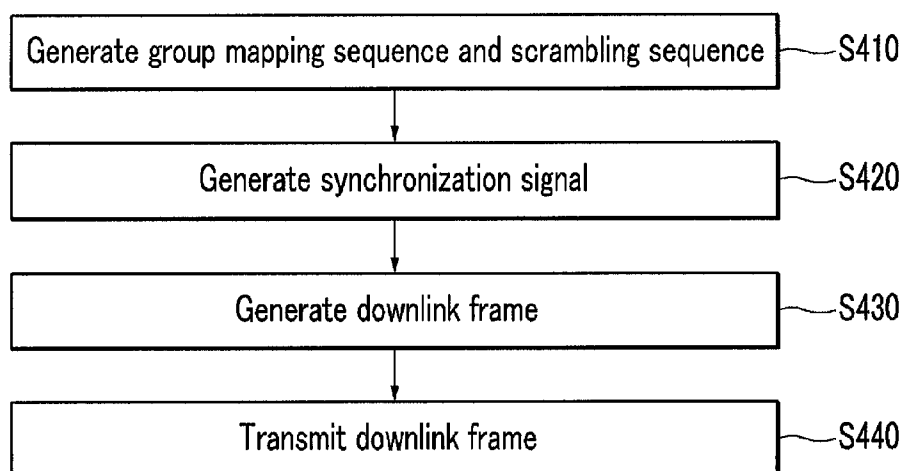

(57) Abstract: The present invention relates to a method of generating a downlink frame. The method of generating the downlink frame includes generating a first sequence and a second sequence for identifying cell groups; generating a first scrambling sequence and a second scrambling sequence that are one-to-two mapped to the sequence number of the primary synchronization signal; scrambling the first sequence with the first scrambling sequence and scrambling the second sequence with the second scrambling sequence; and generating a secondary synchronization signal including the scrambled first sequence and second sequence and mapping the secondary synchronization signal to a frequency domain.

WO 2009/011501 A2



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report*

【Invention Title】**METHOD FOR GENERATING DOWNLINK FRAME, AND METHOD FOR
SEARCHING CELL****【Technical Field】**

5 The present invention relates to a method of generating a downlink frame and a method of searching a cell, and more particularly, to a method of generating a downlink frame in a cellular system based on an orthogonal frequency division multiplexing (OFDM) scheme and a method of searching a cell by using the downlink frame.

10 This work was supported by the IT R&D program of MIC/IITA [2005-S-404-13, Development of Radio Wireless Transmission Technology for 3G Evolution].

【Background Art】

 In 3rd Generation Long Term Evolution (3G LTE), a total of 504 cell
15 identifiers are defined, and the 504 cell identifiers are divided into 168 cell identifier groups. Therefore, three cell identifiers exist in each cell identifier group. A downlink frame for 3G LTE includes two synchronization channels, that is, a primary synchronization channel and a secondary synchronization channel. The primary synchronization channel provides 5 msec-timing and
20 information on three cell identifiers in the cell identifier group to a terminal. Accordingly, three primary synchronization channel sequences are used in the LTE system, and the primary synchronization channel sequences transmitted in a cell are equal to each other at each location of primary synchronization

channel symbols. Since the secondary synchronization channel provides information on the cell identifier group and 10 msec-frame timing to the terminal, the secondary synchronization channel sequences transmitted from the location of two secondary synchronization channel symbols in the 10 msec-frame are
5 different from each other. Therefore, the number of secondary synchronization channel sequences becomes 336 ($=168 \times 2$).

FIG. 1 is a view illustrating a method of generating a secondary synchronization channel symbol according to the conventional art. As shown in FIG. 1, the secondary synchronization channel symbol according to the
10 conventional art is an OFDM signal in which two short binary sequences are combined to each other in a frequency domain, thereby providing cell group information and frame boundary information to the terminal. The length of the binary sequences is 31, and the number of binary sequences is also 31. Ultimately, the number of sequences (62 in length) of the secondary
15 synchronization symbol that can be generated as a pair of binary sequences is 961 in total, and only 336 sequences of these are used.

In the 3G LTE technique, four short binary sequences are used during a 10 msec-frame interval. At this time, the four short binary sequences may be different from one another or may be equal to one another, and four short binary
20 sequences are provided to every cell by the cell group identifier. It can use at least one same sequence or two same sequences among four short binary sequences between adjacent cells, particularly between adjacent cells when 10 msec synchronization of two cells match with each other. In this case,

interference between adjacent cells largely operates during a cell search process in the terminal, and performance can be significantly deteriorated.

【DETAILED DESCRIPTION】

【Technical Problem】

5 The present invention has been made in an effort to provide a method of generating a downlink frame that can reduce interference between adjacent cells and a method of efficiently searching a cell by receiving the downlink frame.

【Technical Solution】

 An exemplary embodiment of the present invention provides a method of
10 generating a downlink frame. The method includes: generating a first sequence and a second sequence for identifying cell groups; generating a first scrambling sequence and a second scrambling sequence that are one-to-two mapped to the sequence number of the primary synchronization signal; scrambling the first
15 sequence with the first scrambling sequence and scrambling the second sequence with the second scrambling sequence; and generating a secondary synchronization signal including the scrambled first sequence and second sequence and mapping the secondary synchronization signal to a frequency domain.

 Another embodiment of the present invention provides an apparatus for
20 generating a downlink frame. The apparatus includes: a sequence generator that generates a first sequence and a second sequence for identifying cell groups and generates a first scrambling sequence and a second scrambling sequence that are one-to-two mapped to the sequence number of the primary

synchronization signal; and a synchronization signal generator that, after scrambling the first sequence with the first scrambling sequence and scrambling the second sequence with the second scrambling sequence, generates a secondary synchronization signal including the scrambled first sequence and
5 second sequence.

Yet another embodiment of the present invention provides a method of searching a cell. The method includes: receiving a downlink frame including a primary synchronization signal and secondary synchronization signal; and determining a cell group to which a terminal belongs, by using the secondary
10 synchronization signal. In this case, the secondary synchronization signal is generated by alternately allocating a first sequence scrambled with a first scrambling sequence and a second sequence scrambled with a second scrambling sequence to a plurality of sub-carriers, and the first scrambling sequence and the second scrambling sequence are two-to-one mapped to the
15 sequence of the primary synchronization signal.

Yet another embodiment of the present invention provides an apparatus for searching a cell in a terminal. The apparatus includes: a first-stage searcher that acquires a sequence number allocated to a primary synchronization signal; and a second-stage searcher that identifies a cell group
20 to which the terminal belongs, from the secondary synchronization signal. In this case, the secondary synchronization signal is generated by alternately allocating a first sequence scrambled with a first scrambling sequence and a second sequence scrambled with a second scrambling sequence to a plurality of

sub-carriers, and the first scrambling sequence and the second scrambling sequence are two-to-one mapped to the sequence of the primary synchronization signal.

Yet another embodiment of the present invention provides a recording medium for recording a frame generating program. The frame generating program includes: a function for generating a first sequence and a second sequence for identifying cell groups; a function for generating a first scrambling sequence and a second scrambling sequence that are one-to-two mapped to the sequence number of the primary synchronization signal; a function for scrambling the first sequence with the first scrambling sequence and scrambling the second sequence with the second scrambling sequence; and a function for generating a secondary synchronization signal including the scrambled first sequence and second sequence and for mapping the secondary synchronization signal to a frequency domain.

15 **【Advantageous Effects】**

According to the above-described present invention, interference between sectors is reduced by scrambling two sequences to be allocated to a secondary synchronization channel with different scrambling code, thereby improving cell searching performance.

20 **【Brief Description of the Drawings】**

FIG. 1 is a view illustrating a method of generating a secondary synchronization channel symbol according to the conventional art.

FIG. 2 is a view illustrating a downlink frame of an OFDM system

according to an exemplary embodiment of the present invention.

FIG. 3 is a block diagram of a downlink frame generating apparatus according to an exemplary embodiment of the present invention.

FIG. 4 is a flowchart of a downlink frame generating method according to
5 an exemplary embodiment of the present invention.

FIG. 5 is a view illustrating an m-sequence generator.

FIG. 6 is a view illustrating a Gold sequence generator.

FIG. 7 is a view illustrating a sequence generator and a scrambling
sequence generator.

10 FIG. 8 is a view illustrating the first secondary synchronization signal
generating method according to an exemplary embodiment of the present
invention.

FIG. 9 is a view illustrating the second secondary synchronization signal
generating method according to an exemplary embodiment of the present
15 invention.

FIG. 10 is a view illustrating the third secondary synchronization signal
generating method according to an exemplary embodiment of the present
invention.

FIG. 11 is a view illustrating the fourth secondary synchronization signal
20 generating method according to an exemplary embodiment of the present
invention.

FIG. 12 is a view illustrating the fifth secondary synchronization signal
generating method according to an exemplary embodiment of the present

invention.

FIG. 13 is a block diagram of a terminal according to an exemplary embodiment of the present invention.

FIG. 14 is a block diagram of a second-stage searcher according to an
5 exemplary embodiment of the present invention.

FIG. 15 is a flowchart illustrating a cell searching method according to an exemplary embodiment of the present invention.

【Best Mode】

In the following detailed description, only certain exemplary
10 embodiments of the present invention have been shown and described, simply by way of illustration. As those skilled in the art would realize, the described embodiments may be modified in various different ways, all without departing from the spirit or scope of the present invention. Accordingly, the drawings and description are to be regarded as illustrative in nature and not restrictive. Like
15 reference numerals designate like elements throughout the specification.

Throughout this specification, unless explicitly described to the contrary, the word "comprise" and variations such as "comprises" or "comprising" will be understood to imply the inclusion of stated elements but not the exclusion of any other elements. In addition, the terms "-or", "-er", or the like described in the
20 specification represent a unit for processing at least one function and operation, which can be implemented by hardware components or software components and combinations thereof.

First, a configuration of a downlink frame and a synchronization channel

in an OFDM system according to an exemplary embodiment of the present invention will be described with reference to FIG. 2.

FIG. 2 is a view illustrating a downlink frame of an OFDM system according to an exemplary embodiment of the present invention. In FIG. 2, the horizontal axis represents a time axis, and the vertical axis represents a frequency axis or a sub-carrier axis.

As shown in FIG. 2, according to the exemplary embodiment of the present invention, one downlink frame 110 has a time interval of 10 msec and includes ten sub-frames 120. Moreover, one sub-frame 120 has a time interval of 1 msec and includes two slots 130, and one slot 130 includes seven OFDM symbols.

As shown in FIG. 2, according to the exemplary embodiment of the present invention, one downlink frame 110 has two synchronization intervals 140 in total including a synchronization interval in slot No. 0 and slot No. 10, respectively. However, it is not necessarily limited thereto. That is, one downlink frame 110 may include the synchronization interval in any slot, and may include one synchronization interval or three synchronization intervals or more. Furthermore, each slot includes a pilot interval.

The synchronization interval according to the exemplary embodiment of the present invention includes a primary synchronization channel symbol and a secondary synchronization channel symbol that are disposed so as to be adjacent to each other in view of time. As shown in FIG. 2, the primary synchronization channel symbol is located at the end of the slot and the

secondary synchronization channel symbol is located right ahead of the primary synchronization channel.

In an mobile communication system according to the exemplary embodiment of the present invention, a plurality of cells are grouped into a plurality of cell groups, and each of the cell groups includes at least two cells.

The primary synchronization channel includes information for identifying symbol synchronization and frequency synchronization and cell identifier information for identifying the cells in the cell groups, and the secondary synchronization channel includes information for identifying the cell group information and the frame synchronization.

A downlink frame generating apparatus according to the exemplary embodiment of the present invention will now be described with reference to FIG. 3. FIG. 3 is a block diagram of the downlink frame generating apparatus according to the exemplary embodiment of the present invention.

As shown in FIG. 3, the downlink frame generating apparatus according to the exemplary embodiment of the present invention includes a sequence generator 310, a synchronization signal generator 320, a frequency mapper 330, and an OFDM transmitter 340.

The sequence generator 310 generates a sequence for identifying cell groups and frame boundaries and a scrambling sequence, and transmits them to the synchronization signal generator 320. The scrambling sequence is for scrambling the sequence.

The synchronization signal generator 320 generates a secondary

synchronization signal by using the sequence and the scrambling sequence.

The frequency mapper 330 maps transmission data to the time and frequency domains by using the synchronization signal generated in the synchronization signal generator 320, and frame control information and
5 transmission traffic data transmitted from the outside, thereby generating the downlink frame.

The OFDM transmitter 340 receives the downlink frame from the frequency mapper 330 and transmits the downlink frame through a transmission antenna.

10 Referring to FIG. 4 through FIG. 12, a downlink frame generating method according to the exemplary embodiment of the present invention will now be described. FIG. 4 is a flowchart of the downlink frame generating method according to the exemplary embodiment of the present invention.

As shown in FIG. 4, the sequence generator 310 generates a plurality of
15 sequences and a plurality of scrambling sequences and transmits them to the synchronization signal generator 320 (S410).

First, a method of generating the sequences will be described with reference to FIG. 5. The sequence is a cyclic shift of an m-sequence that has a length of 31. A primitive polynomial can make the m-sequence that has a
20 length of 31, and six primitive polynomials are in existence, as indicated in Equation 1.

(Equation 1)

$$P0: x^5 + x^2 + 1$$

$$P1: x^5 + x^3 + 1$$

$$P2: x^5 + x^3 + x^2 + x + 1$$

$$P3: x^5 + x^4 + x^2 + x + 1$$

$$P4: x^5 + x^4 + x^3 + x + 1$$

$$5 \quad P5: x^5 + x^4 + x^3 + x^2 + 1$$

FIG. 5 is a view illustrating an m-sequence generator. As shown in FIG. 5, the m-sequence generator includes a plurality of delay operators 510, 520, 530, 540, and 550, and an exclusive OR operator 560. In FIG. 5, g_0 , g_1 , g_2 , g_3 , g_4 , and g_5 represent coefficients in the primitive polynomial of Equation 1. The coefficients g_0 and g_5 always have a value of 1, and the remaining coefficients g_1 , g_2 , g_3 , and g_4 have a value of 0 or 1 according to the primitive polynomial. For example, when the primitive polynomial is x^5+x^2+1 , the coefficients g_1 , g_3 , and g_4 have a value of 0, and the coefficient g_2 has a value of 1. When the value of the coefficient is 1, the output of a corresponding delay operator is connected to the output of the exclusive OR operator 560. Meanwhile, when the value of the coefficient is 0, the output of the corresponding delay operator is not connected to the output of the exclusive OR operator 560.

The downlink frame generating method according to the exemplary embodiment of the present invention uses the cyclic shift sequence of the m-sequence, which is defined by the primitive polynomial of x^5+x^2+1 , as a sequence. That is, assuming that $c^0=\{c^0_0, c^0_1, c^0_2, \dots, c^0_{30}\}$ is referred to as the m-sequence generated by counting any value in the sequence generator having the primitive polygonal of x^5+x^2+1 , 31 m-sequences may be generated as

indicated in Equation 2.

(Equation 2)

$$c^0 = \{c^0_0, c^0_1, c^0_2, \dots, c^0_{30}\}$$

$$c^1 = \{c^1_0, c^1_1, c^1_2, \dots, c^1_{30}\} = \{c^0_1, c^0_2, c^0_3, \dots, c^0_0\}$$

$$5 \quad c^2 = \{c^2_0, c^2_1, c^2_2, \dots, c^2_{30}\} = \{c^0_2, c^0_3, c^0_4, \dots, c^0_1\}$$

...

$$c^{30} = \{c^{30}_0, c^{30}_1, c^{30}_2, \dots, c^{30}_{30}\} = \{c^0_{30}, c^0_0, c^0_1, \dots, c^0_{29}\}$$

In Equation 2, the value of each element of the m-sequence is 1 or -1.

Next, a method of generating a scrambling sequence will be described

10 with reference to FIG. 6 and FIG. 7.

A Gold sequence having a good correlation characteristic may be used as the scrambling sequence. The Gold sequence is formed by combining two m sequences having the same length.

Preferred pairs refer to pairs of m-sequences that are capable of
 15 generating the Gold sequence among the m-sequences defined by the six primitive polynomials in Equation 1. That is, the preferred pairs are capable of generating the Gold sequence that has a length of 31, and the number of preferred pairs is 12, for example [P0 P2], [P0 P3], [P0 P4], [P0 P5], [P1 P2], [P1 P3], [P1 P4], [P1 P5], [P2 P3], [P2 P4], [P3 P5], and [P4 P5]. FIG. 6 is a view
 20 illustrating a Gold sequence generator. The Gold sequence generator shown in FIG. 6 generates the Gold sequence by using the preferred pair [P1 P2].

The Gold sequence may be generated by using one of the remaining

preferred pairs except the preferred pair including the polynomial, which is used for generating the sequence, among the 12 preferred pairs. In the downlink frame generating method according to the exemplary embodiment of the present invention, since the polynomial x^5+x^2+1 is used as a polynomial of the sequence, the Gold sequence is generated by one of the preferred pairs [P1 P2], [P1 P3], [P1 P4], [P1 P5], [P2 P3], [P2 P4], [P3 P5], and [P4 P5]. The number of Gold sequences generated by selecting one of 8 preferred pairs is 33, which is two more than the sequence length. In 33 Gold sequences generated from the selected preferred pair, any sequence may be used as the scrambling sequence.

When one of the preferred pairs including the polynomial used for generating the sequence, that is, [P0 P2], [P0 P3], [P0 P4], and [P0 P5], is selected as a preferred pair for generating the Gold sequence, the remaining Gold sequences, which exclude the sequence from (N+2) Gold sequences (where N is 31 as a length of the Gold sequence) to be generated, should be used as a scrambling sequence. That is, 33 Gold sequences are generated by one of the preferred pairs [P0 P2], [P0 P3], [P0 P4], and [P0 P5] including the polynomial used for generating the sequence, and 33 Gold sequences include the sequence. Accordingly, it should use the remaining Gold sequences except the sequence as a scrambling sequence.

With respect to the scrambling sequence, the m-sequence that is the same length as the sequence but is different from the sequence in the primitive polynomial and the cyclic shift sequence of the m-sequence may be used. That

is, as the scrambling sequence of the present invention, the m-sequence that is generated by using one of other polynomials except the polynomial x^5+x^2+1 in the polynomials expressed by Equation 1 and the cyclic shift sequence of the m-sequence is used. FIG. 7 is a view illustrating a sequence generator and a scrambling sequence generator. As shown in FIG. 7, when the m-sequence and the cyclic shift sequence of the m-sequence are used as the scrambling sequence, the scrambling sequence may be generated by varying only a connection part of the sequence generator having the same structure as the sequence. Accordingly, this has the merit of reducing complexity of a terminal.

The synchronization signal generator 320 generates the secondary synchronization signal by using the plurality of sequences and the plurality of scrambling sequences received from the sequence generator 310 (S420). The exemplary embodiment of the present invention describes the case where one frame includes two secondary synchronization channels, but is not limited thereto.

Five kinds of secondary synchronization signal generating methods according to the exemplary embodiment of the present invention will be described with reference to FIG. 8 through FIG. 12.

FIG. 8 is a view illustrating a first secondary synchronization signal generating method according to the exemplary embodiment of the present invention. As shown in FIG. 8, according to the first secondary synchronization signal generating method of the exemplary embodiment of the present invention, a first sequence $c_{p_0}^{(s)}(n)$ is scrambled with a first scrambling sequence s^p , and

the scrambled first sequence is allocated to even-numbered sub-carriers of the secondary synchronization channel in the sub-frame No. 0. Furthermore, in the first secondary synchronization signal generating method, a second sequence $c^{h_1^{(s)}}(n)$ is scrambled with a second scrambling sequence s^q that is different from the first scrambling sequence s^p , and the scrambled second sequence is allocated to odd-numbered sub-carriers of the secondary synchronization channel in the sub-frame No. 0. In addition, according to the first secondary synchronization signal generating method of the exemplary embodiment of the present invention, a third sequence $c^{h_2^{(s)}}(n)$ is scrambled with a third scrambling sequence, and the scrambled third sequence is allocated to even-numbered sub-carriers of the secondary synchronization channel in the sub-frame No. 5. Furthermore, in the first secondary synchronization signal generating method, a fourth sequence $c^{h_3^{(s)}}(n)$ is scrambled with a fourth scrambling sequence that is different from the third scrambling sequence, and the scrambled fourth sequence is allocated to odd-numbered sub-carriers of the secondary synchronization channel in the sub-frame No. 5.

That is, according to the first secondary synchronization signal generating method, each element of the first sequence $c^{h_0^{(s)}}(n)$ is multiplied by a corresponding element of the first scrambling sequence s^p , and the product is allocated to even-numbered sub-carriers of the secondary synchronization channel in the sub-frame No. 0. Moreover, each element of the second

sequence $c^{h_1^{(s)}}(n)$ is multiplied by a corresponding element of the second scrambling sequence s^q , and the product is allocated to odd-numbered sub-carriers of the secondary synchronization channel in the sub-frame No. 0. In addition, according to the first secondary synchronization signal generating

5 method, each element of the third sequence $c^{h_2^{(s)}}(n)$ is multiplied by a corresponding element of the third scrambling sequence, and the product is allocated to even-numbered sub-carriers of the secondary synchronization channel in the sub-frame No. 5. Moreover, each element of the fourth

10 sequence $c^{h_3^{(s)}}(n)$ is multiplied by a corresponding element of the fourth scrambling sequence, and the product is allocated to odd-numbered sub-carriers of the secondary synchronization channel in the sub-frame No. 5.

The first scrambling sequence is expressed as $s^p = \{s^p_0, s^p_1, s^p_2, \dots, s^p_{30}\}$, and the second scrambling sequence is expressed as $s^q = \{s^q_0, s^q_1, s^q_2, \dots, s^q_{30}\}$. Here, p and q represent a scrambling sequence number,

15 respectively.

The same scrambling sequence is used in the secondary synchronization channel of the sub-frame No. 0 and the secondary synchronization channel of the sub-frame No. 5 within one frame, or a different scrambling sequence is used in the secondary synchronization channel of the

20 sub-frame No. 0 and the secondary synchronization channel of the sub-frame No. 5 within one frame. FIG. 8 illustrates the case where the same scrambling sequence is used. That is, in FIG. 8, the first scrambling sequence and the

third scrambling sequence are the same, and the second scrambling sequence and the fourth scrambling sequence are the same.

In the first secondary synchronization signal generating method according to the exemplary embodiment of the present invention, the scrambling sequence numbers p and q are one-to-two mapped to a sequence number, which is allocated to the primary synchronization channel. That is, as described above, three primary synchronization channel sequences are defined in the system of current 3G LTE. Therefore, according to the first secondary synchronization signal generating method of the exemplary embodiment of the present invention, two scrambling sequences of the secondary synchronization channel are two-to-one mapped to the primary synchronization signal, as indicated in Equation 3.

(Equation 3)

Sequence number of primary synchronization channel: Scrambling sequence numbers p and q of secondary synchronization channel

0	:	0,	1
1	:	2,	3
2	:	4,	5

When the scrambling sequence is given with a cyclic shifted sequence of one m -sequence, p and q correspond to a cyclic shift index, respectively.

When the scrambling sequence numbers are one-to-two mapped to the sequence number that is allocated to the primary synchronization channel, the sequence number of the primary synchronization channel is detected at a first

cell searching stage of a terminal, thereby being capable of scrambling with the scrambling sequence number of the secondary synchronization channel corresponding to the sequence number of the primary synchronization channel, which is detected at the first cell searching stage.

5 FIG. 9 is a view illustrating a second secondary synchronization signal generating method according to the exemplary embodiment of the present invention.

 According to the second secondary synchronization signal generating method according to the exemplary embodiment of the present invention, a first
10 sequence and a second sequence are scrambled with the same scrambling sequence, respectively, and the scrambled first and second sequences are alternately allocated to the sub-carrier of the secondary synchronization channel.

 The second secondary synchronization signal generating method has
15 the merit that the number of scrambling sequences is reduced by half as compared with the first secondary synchronization signal generating method. In addition, as a scrambling sequence, the Gold sequence, the m-sequence, the cyclic shift sequence of the Gold sequence, or the cyclic shift sequence of the m-sequence can be used. According to the second secondary synchronization
20 signal generation method, as indicated in Equation 4, the scrambling sequence numbers are one-to-one mapped to the sequence number allocated to the primary synchronization channel.

(Equation 4)

Sequence number of primary synchronization channel: Scrambling
sequence numbers p and q of secondary synchronization channel

	0	:	0,	0
	1	:	1,	1
5	2	:	2,	2

FIG. 10 is a view illustrating a third secondary synchronization signal
generating method according to the exemplary embodiment of the present
invention. According to the third secondary synchronization signal generating
method of the exemplary embodiment of the present invention, the first
10 sequence and the second sequence are scrambled with one long-scrambling
sequence, and the scrambled first and second sequences are alternately
allocated to the secondary synchronization channel.

The length of the one long-scrambling sequence used in the third
synchronization signal generating method is the sum of the length of the first
15 sequence, the length of the second sequence, and the length of a DC
sub-carrier component. That is, the first sequence and the second sequence
have a length of 31, respectively, while the scrambling sequence used in the
third synchronization signal generating method has a length of 63.

According to the third secondary synchronization signal generating
20 method, a Gold sequence having the length of 63, an m-sequence having the
length of 63, a shifted sequence of the Gold sequence having the length of 63, or
a shifted sequence of the m-sequence having the length of 63 are used as a
scrambling sequence. Furthermore, the scrambling sequence is also mapped

to the DC sub-carrier. That is, the third secondary synchronization signal generating method is characterized by the fact that the sequence is not mapped to the DC sub-carrier, but the scrambling sequence is mapped to the DC sub-carrier. However, an element of the scrambling sequence mapped to the DC sub-carrier may not be actually transmitted. According to the third secondary synchronization signal generating method, the scrambling sequence number is one-to-one mapped to the sequence number allocated to the primary synchronization channel.

FIG. 11 is a view illustrating a fourth secondary synchronization signal generating method according to the exemplary embodiment of the present invention. According to the fourth secondary synchronization signal generating method, the first sequence is allocated to even-numbered sub-carriers of the secondary synchronization channel, the second sequence is scrambled with the scrambling sequence, and the scrambled second sequence is allocated to odd-numbered sub-carriers of the secondary synchronization channel. That is, the fourth secondary synchronization signal generating method relates to a method of applying the scrambling process to only the second sequence.

The length of the scrambling sequence used in the fourth synchronization signal generating method is the same as that of the second sequence. In addition, the scrambling sequence number, which is the same as the first sequence number, may be used. Furthermore, a Gold sequence, an m-sequence, a cyclic shift sequence of the Gold sequence, or a cyclic shift sequence of the m-sequence can be used as a scrambling sequence.

FIG. 12 is a view illustrating a fifth synchronization signal generating method according to the exemplary embodiment of the present invention. According to the fifth secondary synchronization signal generating method, the first sequence is scrambled with the scrambling sequence corresponding to the sequence number allocated to the primary synchronization channel, and the scrambled first sequence is allocated to even-numbered sub-carriers of the secondary synchronization channel. Moreover, the second sequence is scrambled with the scrambling sequence corresponding to the first sequence number, and the scrambled second sequence is allocated to odd-numbered sub-carriers of the secondary synchronization channel.

In the fifth secondary synchronization signal generating method, a Gold sequence, an m-sequence, a cyclic shift sequence of the Gold sequence, or a cyclic shift sequence of the m-sequence can be used as a scrambling sequence. However, the scrambling sequence for scrambling the first sequence and the second sequence should use different polynomials.

The frequency mapper 330 maps transmission data to the time and frequency domains by using the synchronization signal and transmission traffic data generated in the synchronization signal generator 320, thereby generating the frame of downlink signals (S430).

The OFDM transmitter 340 receives the frame of downlink signals and transmits the received downlink frame through the transmission antenna (S440).

Hereinafter, a method of searching cells in the terminal by using the downlink signals generated in accordance with the exemplary embodiment of

the present invention will be described with reference to FIG. 13 through FIG. 15.

FIG. 13 is a block diagram of a terminal according to the exemplary embodiment of the present invention, FIG. 14 is a block diagram of a second-stage searcher according to the exemplary embodiment of the present invention, and FIG. 15 is a flowchart illustrating a cell searching method according to the exemplary embodiment of the present invention.

As shown in FIG. 13, the terminal according to the exemplary embodiment of the present invention includes a receiving antenna 610, a down converter 620, a cell searcher 630, a data channel demodulator 640, a controller 650, and a clock generator 660. In addition, the cell searcher 630 includes a synchronization channel band-pass filter 631, a first-stage cell searcher 632, and a second-stage searcher 633.

The synchronization channel band-pass filter 631 receives received signals S1 and S2 and filters only a synchronization channel in an entire received band. The first-stage searcher 632 receives output signals S3 and S4 of the synchronization channel band-pass filter 631 and acquires 5msec-timing-information S5 of the downlink signal and sequence number S6 of the primary synchronization channel. Furthermore, the second-stage searcher 633 acquires a cell group identifier S7 and 10 msec-frame-boundary S8 by using the secondary synchronization channel structure of the present invention based on the information S5 and S6 received from the first-stage searcher 632. Moreover, the second-stage searcher 633 extracts a cell identifier S9 by

combining the sequence number S6 of the primary synchronization channel and the cell group identifier S7, and can transfer the extracted cell group identifier S7 to the controller 650.

As shown in FIG. 14, the second-stage searcher 633 includes cyclic
5 prefix (CP) removers 633a, fast Fourier transform transformers (FFTs) 633b, channel estimators 633c, channel compensators 633d, an antenna coupler 633e, a scrambling sequence generator 633f, a sequence generator 633g, a descrambling block 633h, and a maximum value selector 633i.

As shown in FIG. 15, the CP removers 633a receive the output signals
10 S3 and S4 of the synchronization channel band-pass filter 631 and remove the CP from the position of the primary synchronization channel symbol and the secondary synchronization channel symbol based on the 5 msec-timing-information S5 received from the first-stage searcher 632 (S710).

The fast Fourier transformers 633b perform fast Fourier transform on the
15 output signals of the CP removers 633a and change a time domain signal into a frequency domain signal (S720).

The channel estimators 633c estimate the channel by using a primary
synchronization channel component S10 among the outputs of the fast Fourier
transformer (FFT) 633b (S730), and the channel compensators 633d
20 compensate channel distortion of a secondary synchronization channel
component among the outputs of the fast Fourier transformer (FFT) 633b by
using channel values received from the channel estimators 633c (S740).

The antenna coupler 633e performs diversity combination for two

receiving antenna signals that are outputs of two channel compensators 633d (S750). The descrambling block 633h descrambles the output of the antenna coupler 633e by using the scrambling sequence generated by the scrambling sequence generator 633f and the sequence generated by the sequence generator 633g (S760).

The maximum value selector 633i selects the maximum value among the outputs of the descrambling block 633h, determines the cell group identifier S7 and the 10 msec-frame-boundary S8 from the maximum index value, and outputs the determined cell group identifier S7 and 10 msec-frame-boundary S8 (S770). Moreover, the maximum value selector 633i can also analogize the cell identifier number S9 by using the sequence number S6 of the primary synchronization channel and the cell group identifier number S7 (S780).

The exemplary embodiment of the present invention is not necessarily implemented by only the above-described apparatus and/or method, but can be implemented by, for example, a program that achieves the function corresponding to the configuration of the exemplary embodiment of the present invention and a recording medium in which the program is recorded. This can be easily implemented from the above-described exemplary embodiment of the present invention by those skilled in the related art.

While this invention has been described in connection with what is presently considered to be practical exemplary embodiments, it is to be understood that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover various modifications and equivalent

arrangements included within the spirit and scope of the appended claims.

【CLAIMS】**【Claim 1】**

A method for generating a frame, comprising:

generating a first sequence and a second sequence for identifying cell
5 groups;

generating a first scrambling sequence and a second scrambling
sequence that are one-to-two mapped to the sequence number of the primary
synchronization signal;

scrambling the first sequence with the first scrambling sequence and
10 scrambling the second sequence with the second scrambling sequence; and

generating a secondary synchronization signal including the scrambled
first sequence and second sequence and mapping the secondary
synchronization signal to a frequency domain.

15 【Claim 2】

The method of claim 1, wherein the mapping of the secondary
synchronization signal includes alternately disposing the scrambled first
sequence and second sequence on a plurality of sub-carriers.

20 【Claim 3】

The method of claim 1, wherein the scrambling of the first sequence and
the second sequence comprises:

multiplying each element of the first sequence by each element of the first scrambling sequence corresponding to each element of the first sequence; and

5 multiplying each element of the second sequence by each element of the second scrambling sequence corresponding to each element of the second sequence.

【Claim 4】

The method of claim 1, wherein the first sequence and the second
10 sequence are cyclic shifted sequences of an m-sequence, respectively.

【Claim 5】

The method of claim 1, wherein the first scrambling sequence is an m-sequence that has different primitive polynomial from the first sequence or a
15 cyclic shifted sequence of the m-sequence.

【Claim 6】

An apparatus for generating a frame, comprising:

a sequence generator that generates a first sequence and a second
20 sequence for identifying cell groups and generates a first scrambling sequence and a second scrambling sequence that are one-to-two mapped to the sequence number of the primary synchronization signal; and

a synchronization signal generator that, after scrambling the first

sequence with the first scrambling sequence and scrambling the second sequence with the second scrambling sequence, generates a secondary synchronization signal including the scrambled first sequence and second sequence.

5

【Claim 7】

The apparatus of claim 6, wherein the first sequence and the second sequence are a cyclic shift sequence of an m-sequence, respectively.

10 **【Claim 8】**

The method of claim 6, wherein the first scrambling sequence is an m-sequence that has different primitive polynomial from the first sequence or a cyclic shifted sequence of the m-sequence.

15 **【Claim 9】**

A method for searching cells, comprising:

receiving a downlink frame including a primary synchronization signal and a secondary synchronization signal; and

determining a cell group to which a terminal belongs, by using a
20 secondary synchronization signal,

wherein the secondary synchronization signal is generated by alternately allocating a first sequence scrambled with a first scrambling sequence and a second sequence scrambled with a second scrambling sequence to a plurality of

sub-carriers, and

the first scrambling sequence and the second scrambling sequence are two-to-one mapped to the sequence number of the primary synchronization signal.

5

【Claim 10】

The method of claim 9, further comprising

identifying a cell to which the terminal belonged, by using the primary synchronization signal.

10

【Claim 11】

The method of claim 9, wherein the first sequence and the second sequence are a cyclic shifted sequence of an m-sequence, respectively.

15

【Claim 12】

The method of claim 9, wherein the first scrambling sequence is an m-sequence that has different primitive polynomial from the first sequence or a cyclic shifted sequence of the m-sequence.

20

【Claim 13】

An apparatus for searching cells in a terminal, which receives a downlink frame including a primary synchronization signal and a secondary

synchronization signal, comprising:

a first-stage searcher that acquires a sequence number allocated to a primary synchronization signal; and

a second-stage searcher that identifies a cell group to which the terminal
5 belongs, from the secondary synchronization signal,

wherein the secondary synchronization signal is generated by alternately allocating a first sequence scrambled with a first scrambling sequence and a second sequence scrambled with a second scrambling sequence to a plurality of sub-carriers, and

10 the first scrambling sequence and the second scrambling sequence are two-to-one mapped to the sequence number of the primary synchronization signal.

【Claim 14】

15 The apparatus of claim 13, wherein the first sequence and the second sequence are a cyclic shift sequence of an m-sequence, respectively.

【Claim 15】

The method of claim 13, wherein the first scrambling sequence is an
20 m-sequence that has different primitive polynomial from the first sequence or a cyclic shifted sequence of the m-sequence.

【Claim 16】

A recoding medium that records a frame generating program, the frame generating program comprising:

a function for generating a first sequence and a second sequence for identifying cell groups;

5 a function for generating a first scrambling sequence and a second scrambling sequence that are one-to-two mapped to the sequence number of the primary synchronization signal;

a function for scrambling the first sequence with the first scrambling sequence and scrambling the second sequence with the second scrambling
10 sequence; and

a function for generating a secondary synchronization signal including the scrambled first sequence and second sequence and for mapping the secondary synchronization signal to a frequency domain.

15 **【Claim 17】**

The recording medium of claim 16, wherein the function for mapping the secondary synchronization signal includes alternately disposing the scrambled first sequence and second sequence on a plurality of sub-carriers.

20 **【Claim 18】**

The recording medium of claim 16, wherein the function for scrambling the first sequence and the second sequence comprises:

a function for multiplying each element of the first sequence by each

element of the first scrambling sequence corresponding to each element of the first sequence; and

a function for multiplying each element of the second sequence by each element of the second scrambling sequence corresponding to each element of the second sequence.

【Claim 19】

The recording medium of claim 16, wherein the first sequence and the second sequence are a cyclic shift sequence of an m-sequence, respectively.

10

【Claim 20】

The method of claim 16, wherein the first scrambling sequence is an m-sequence that has different primitive polynomial from the first sequence or a cyclic shifted sequence of the m-sequence.

FIG. 1



First secondary synchronization signal



Second secondary synchronization signal

FIG. 2

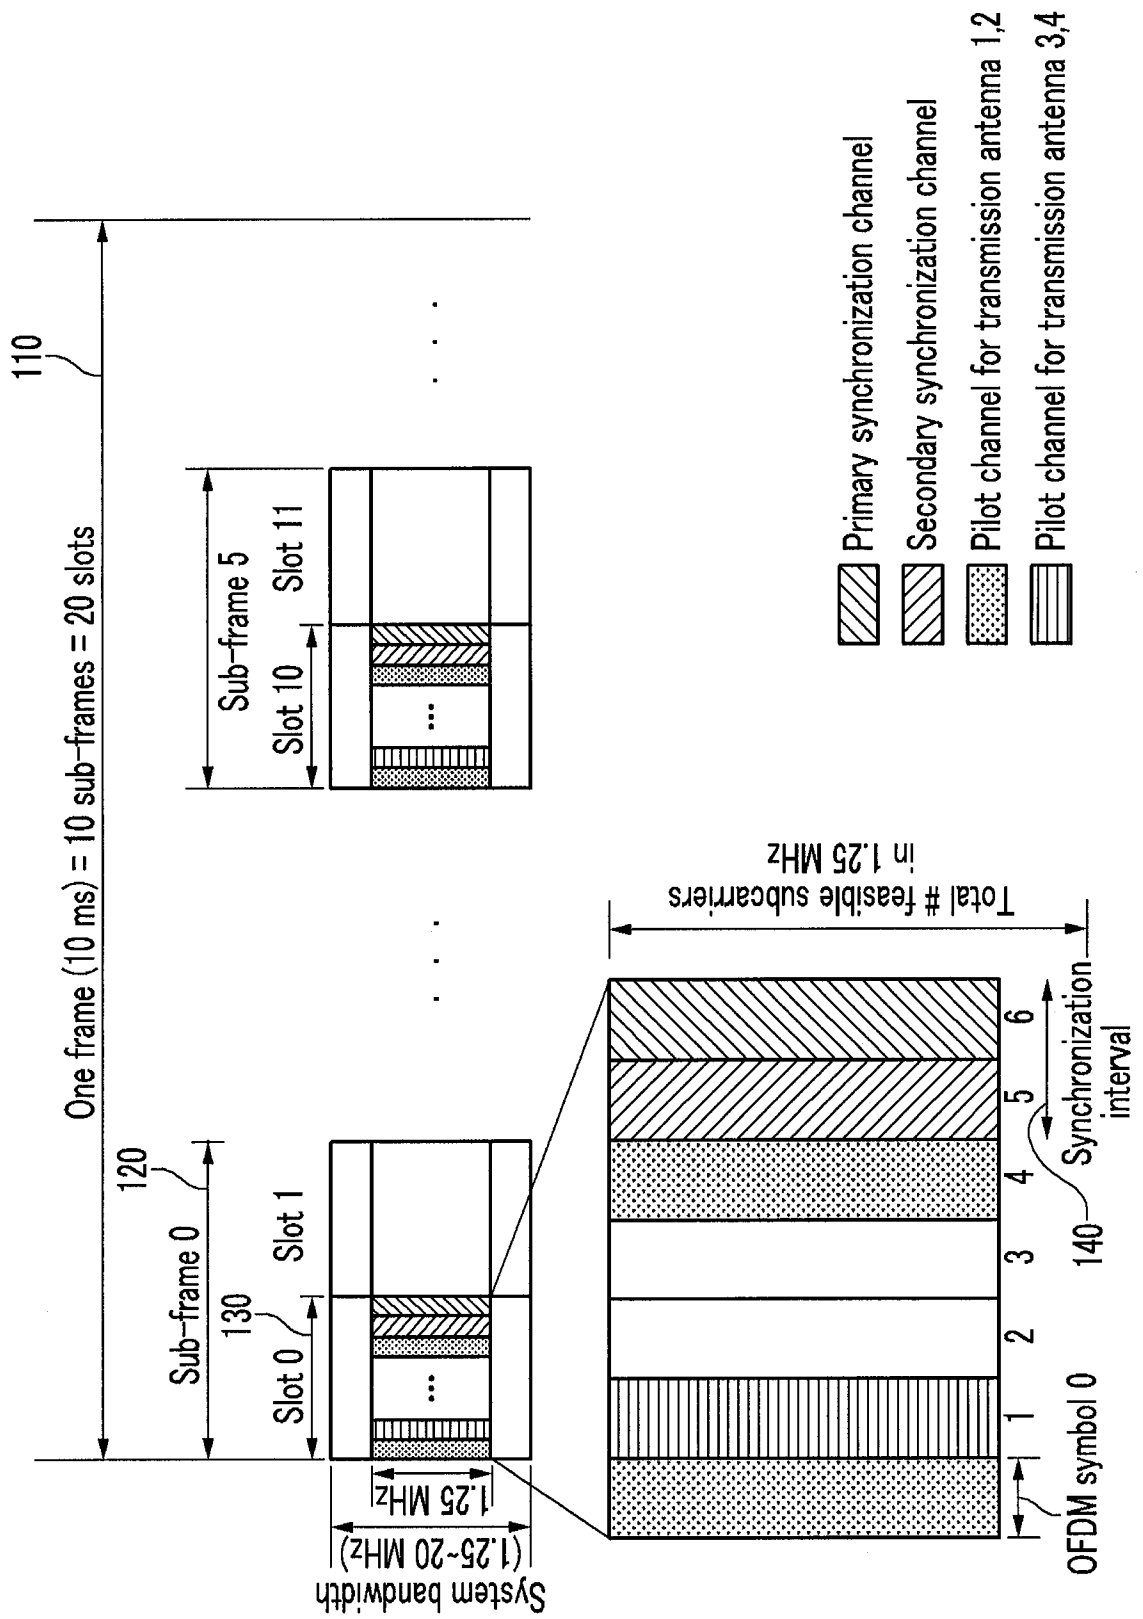


FIG. 3

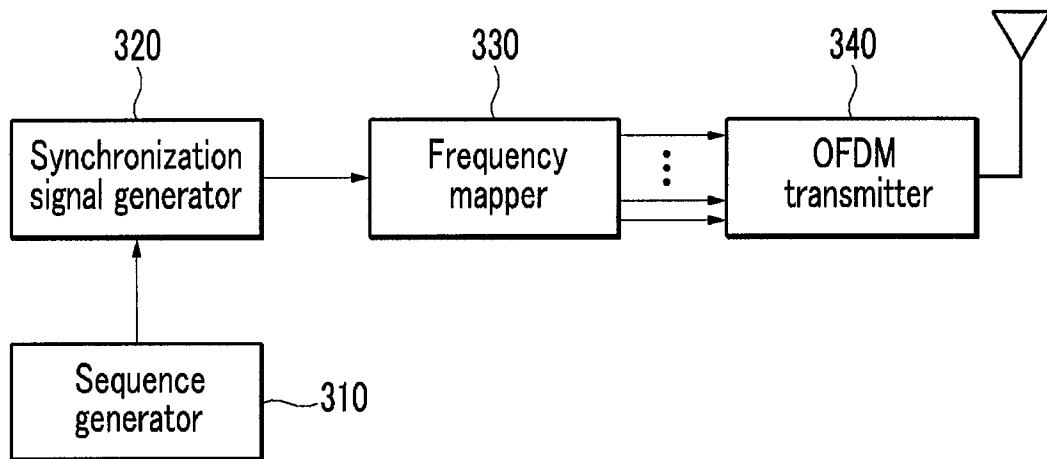


FIG. 4

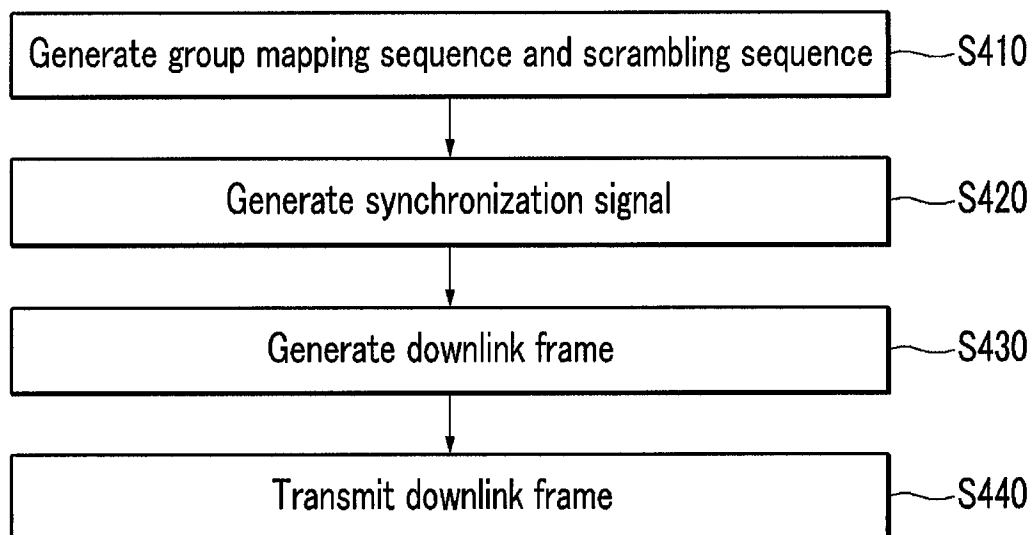


FIG. 5

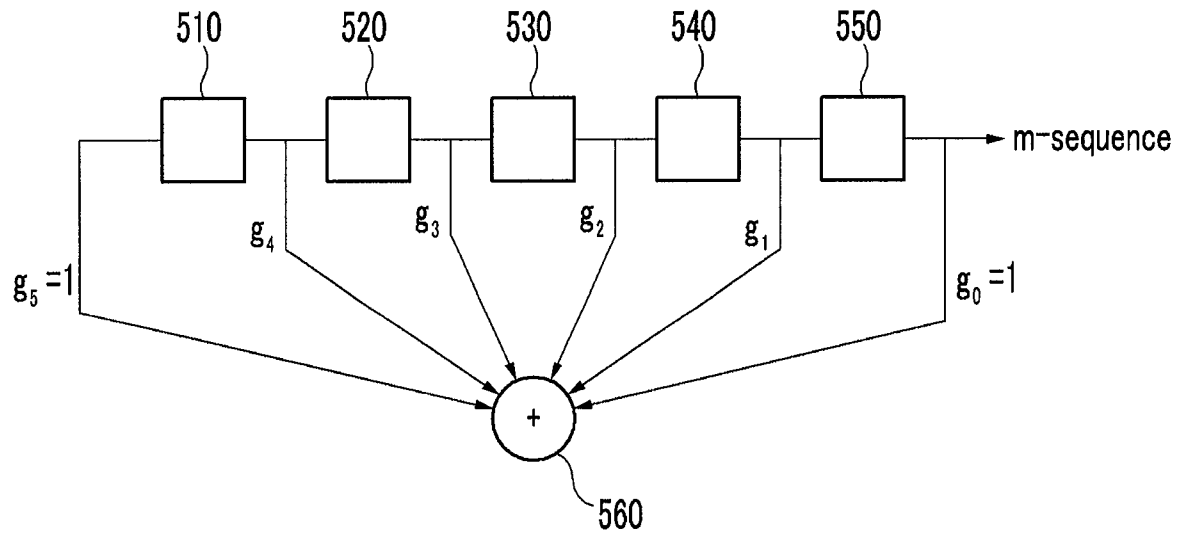


FIG. 6

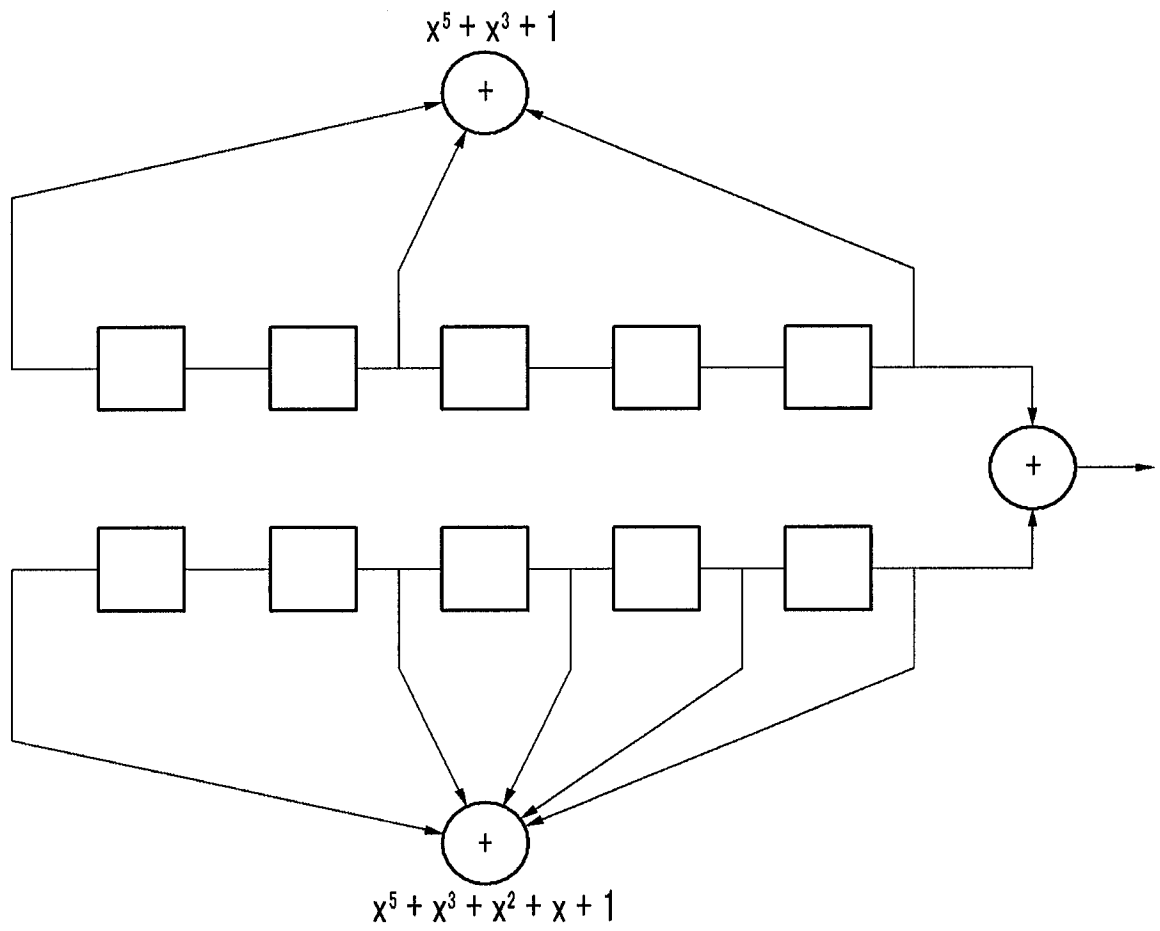


FIG. 7




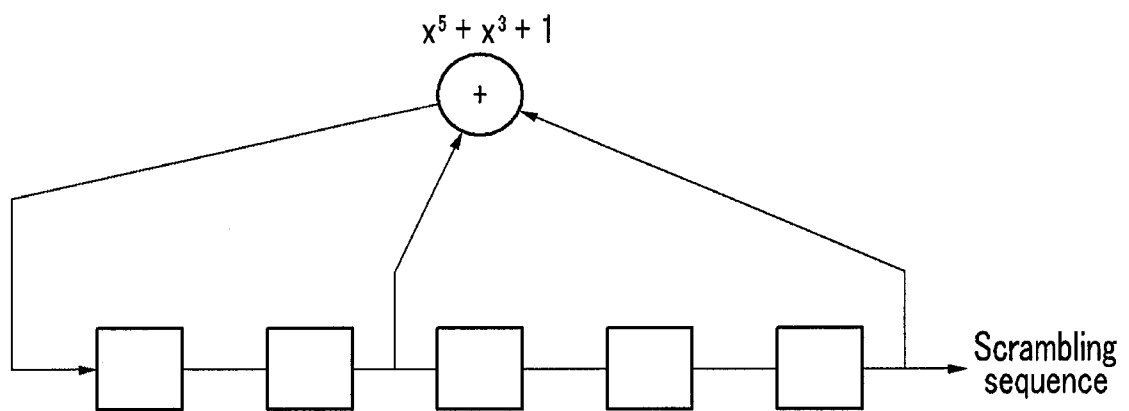


FIG. 8

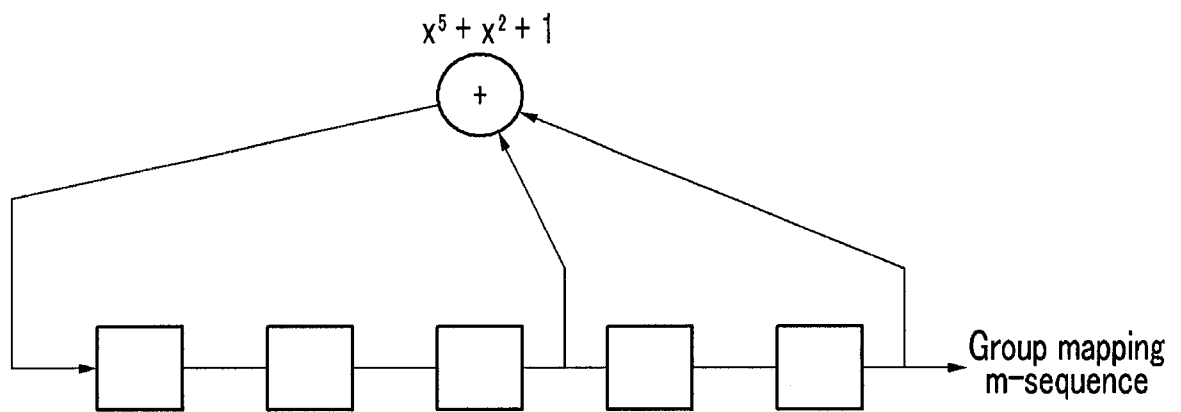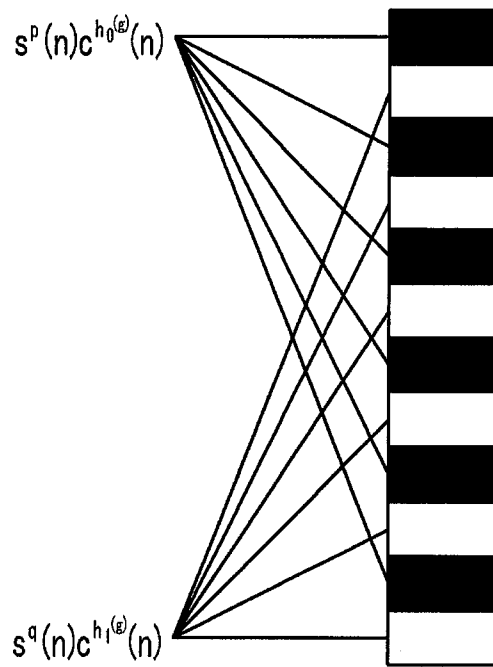

Secondary synchronization
signal of sub-frame 0

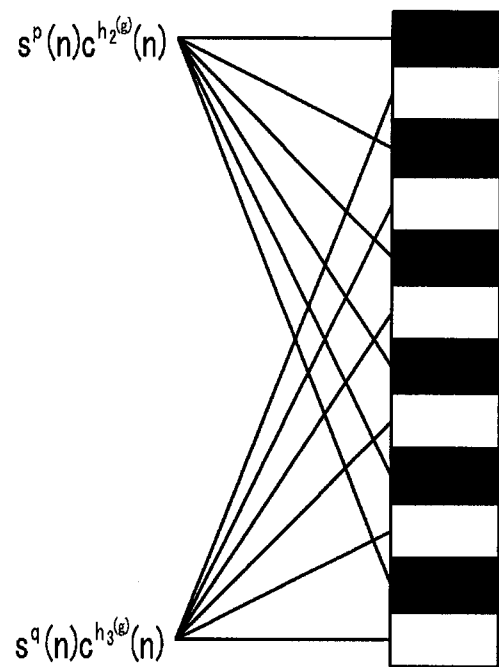

Secondary synchronization
signal of sub-frame 5

FIG. 9

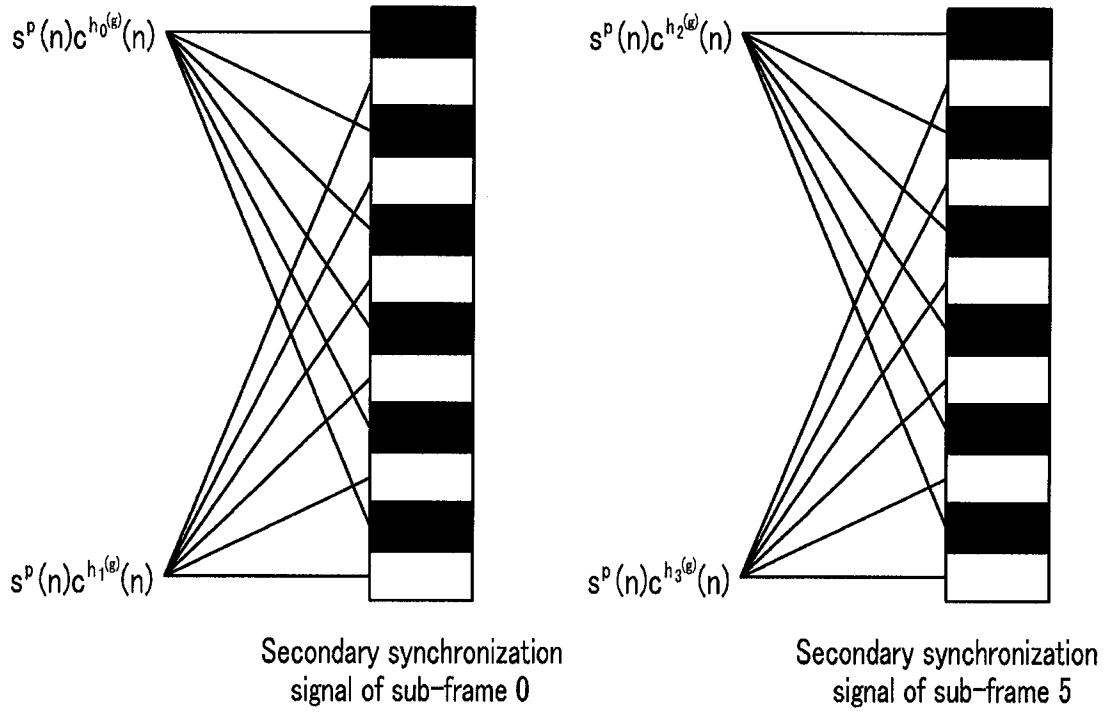


FIG. 10

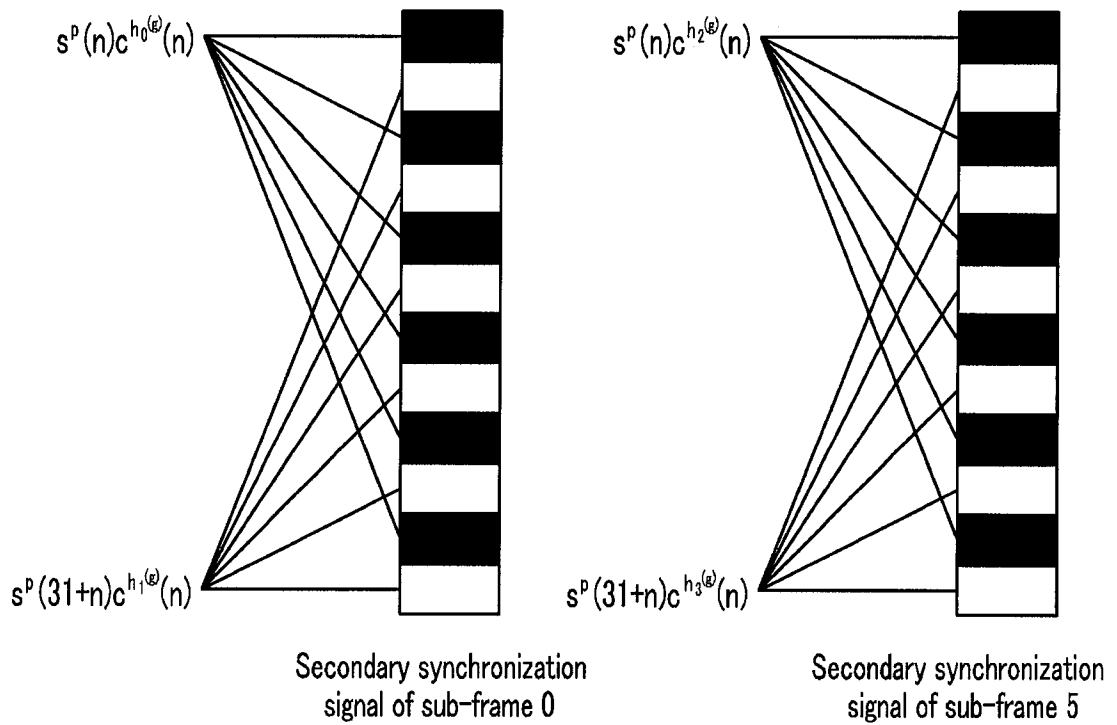


FIG. 11

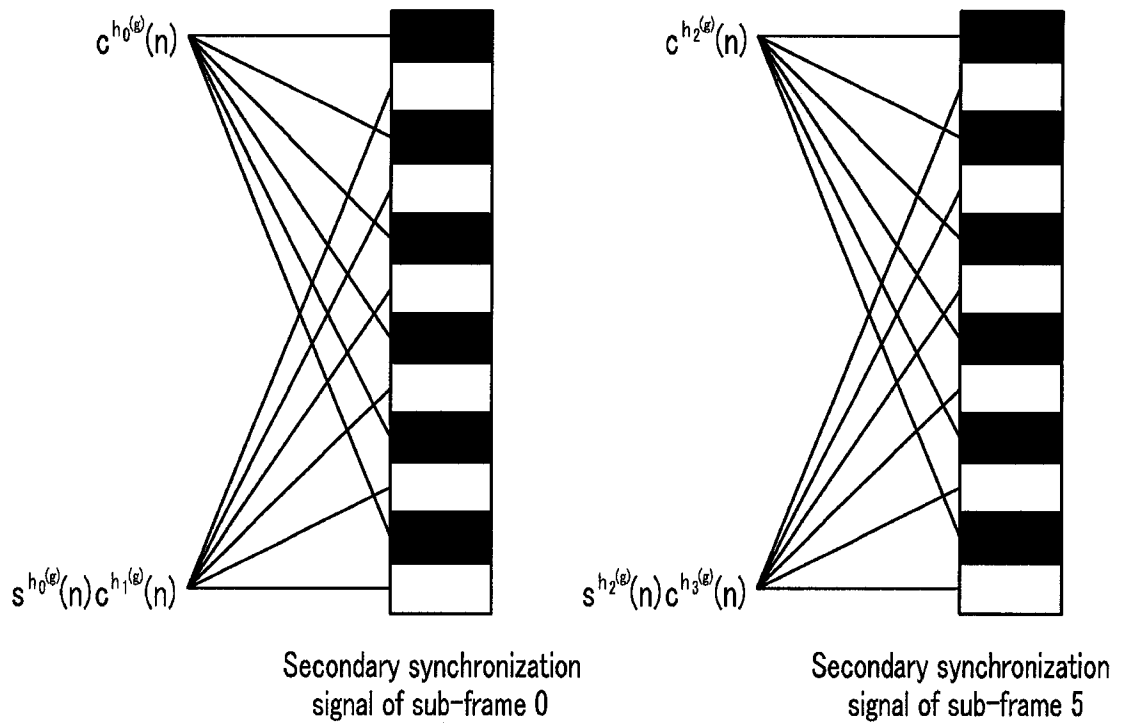


FIG. 12

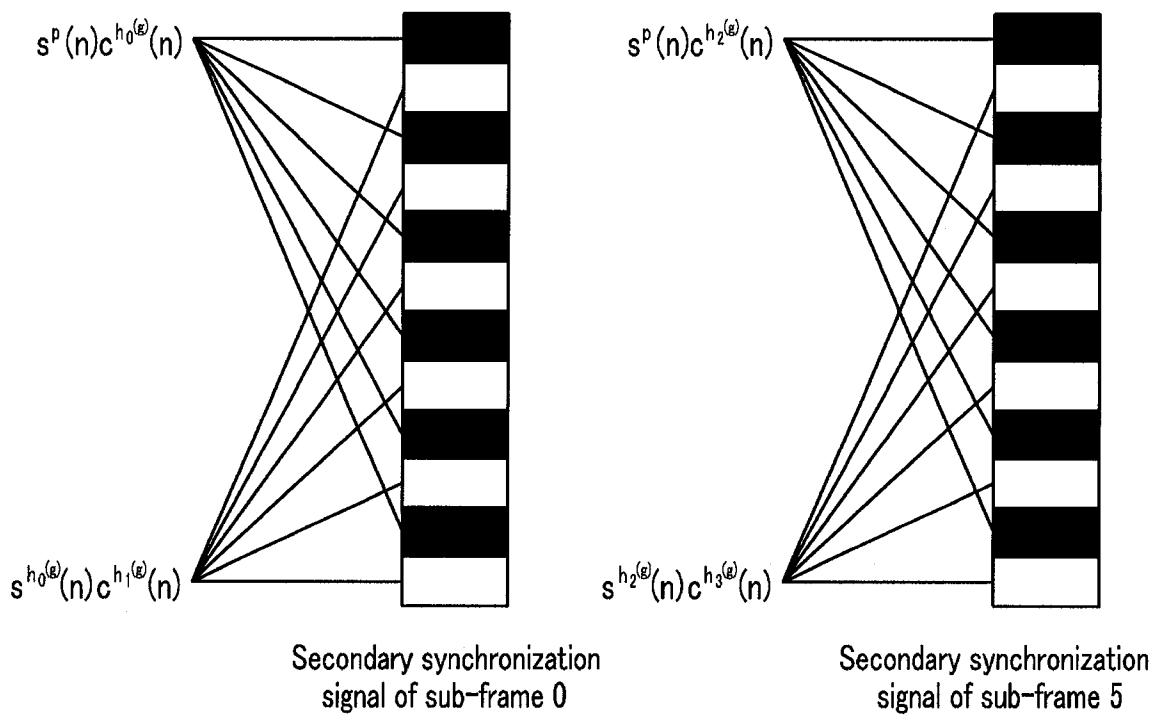


FIG. 13

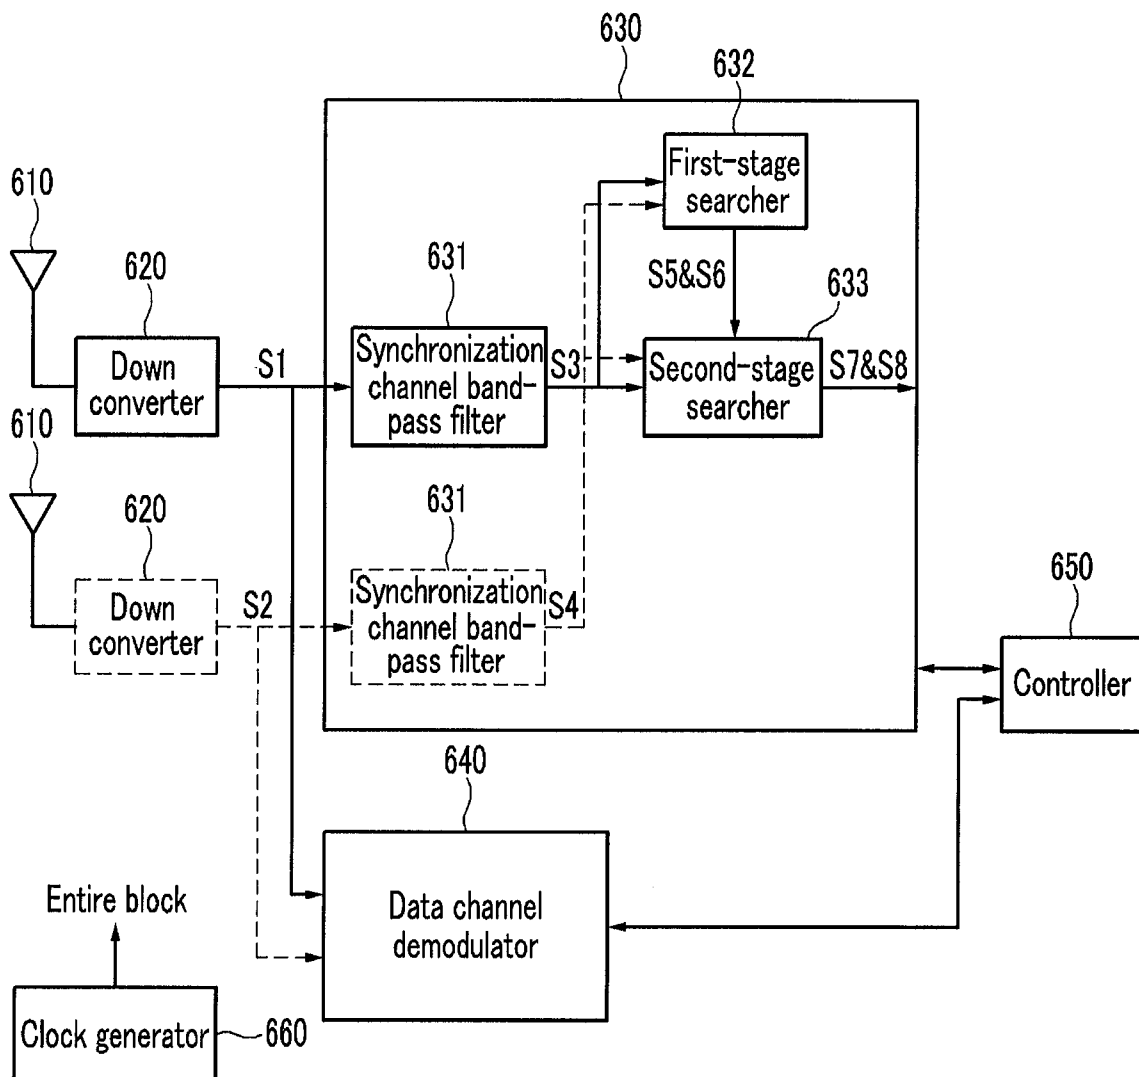


FIG. 14

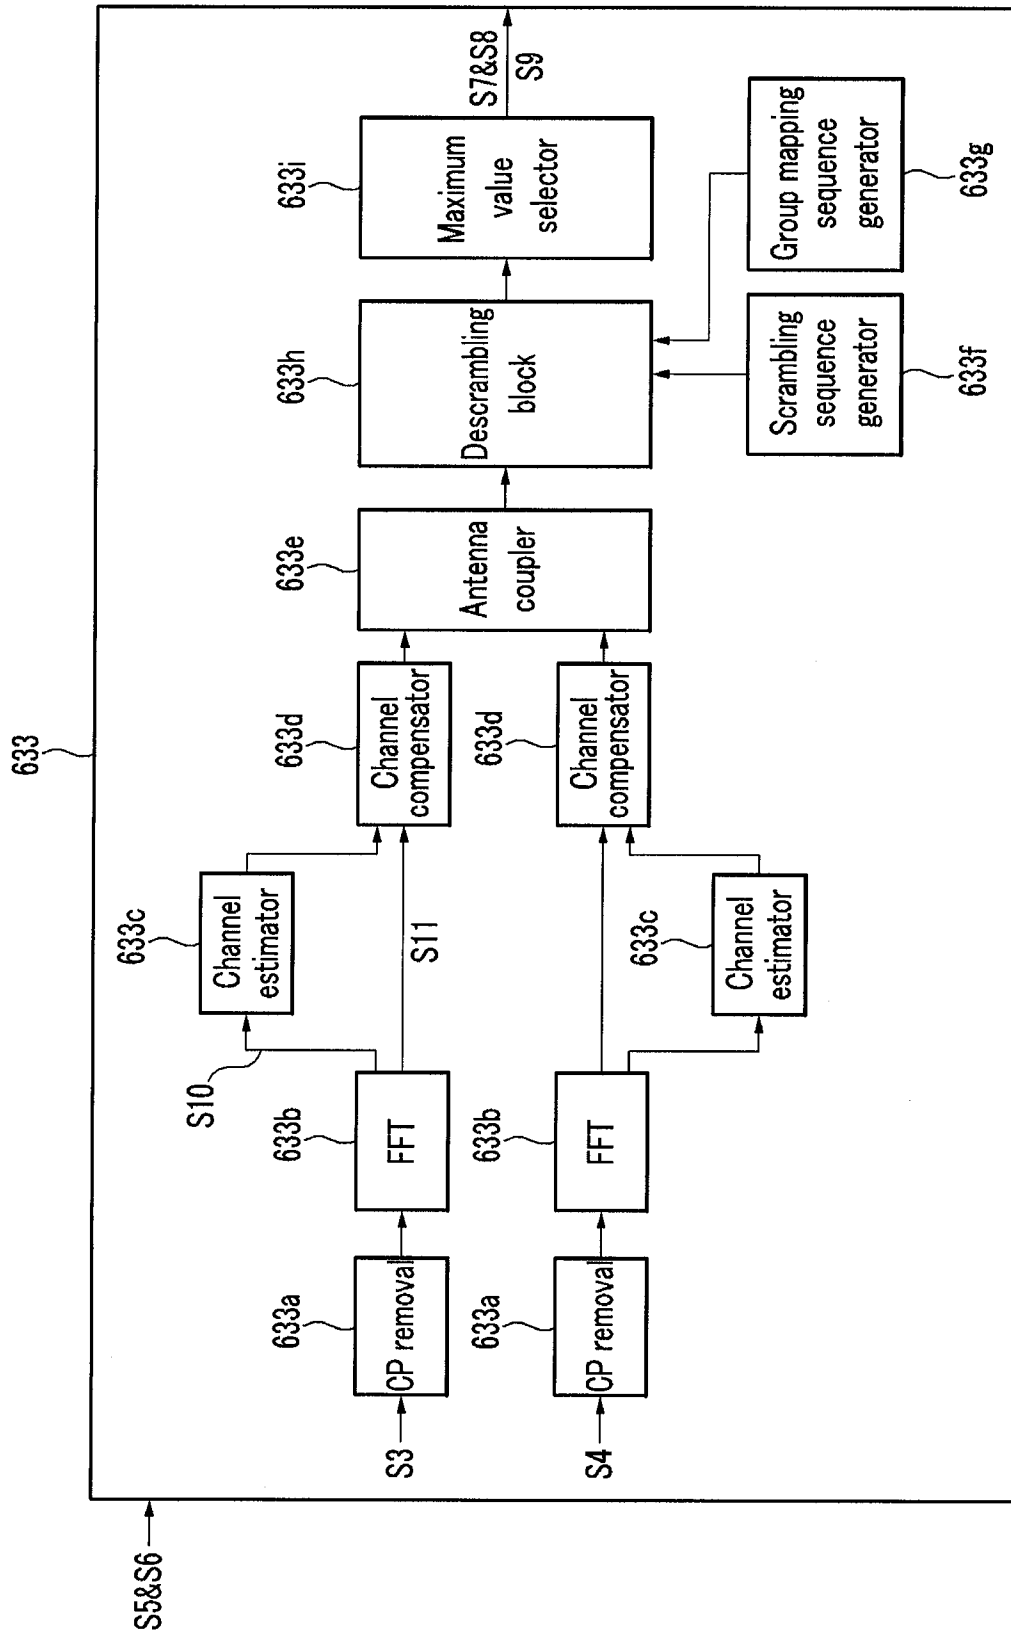


FIG. 15

