




(86) Date de dépôt PCT/PCT Filing Date: 2004/10/18
(87) Date publication PCT/PCT Publication Date: 2005/05/12
(45) Date de délivrance/Issue Date: 2010/12/07
(85) Entrée phase nationale/National Entry: 2006/04/06
(86) N° demande PCT/PCT Application No.: US 2004/034276
(87) N° publication PCT/PCT Publication No.: 2005/043853
(30) Priorité/Priority: 2003/10/23 (US10/690,613)

(51) Cl.Int./Int.Cl. *H04L 27/20* (2006.01)
(72) Inventeurs/Inventors:
MOFFATT, CHRISTOPHER DOUGLAS, US;
KOLAR, RAY J., US;
RICHARDS, CHARLES W., US
(73) Propriétaire/Owner:
HARRIS CORPORATION, US
(74) Agent: GOUDREAU GAGE DUBUC

(54) Titre : SYSTEME ET PROCEDE DE REDUCTION DU RAPPORT DE PUISSANCE VALEUR DE CRETE SUR
VALEUR MOYENNE DESTINES A DES SYSTEMES DE COMMUNICATION A ONDES PORTEUSES MULTIPLES
(54) Title: SYSTEM AND METHOD FOR REDUCING PEAK-TO-AVERAGE POWER RATIO FOR MULTI-CARRIER
COMMUNICATION SYSTEMS

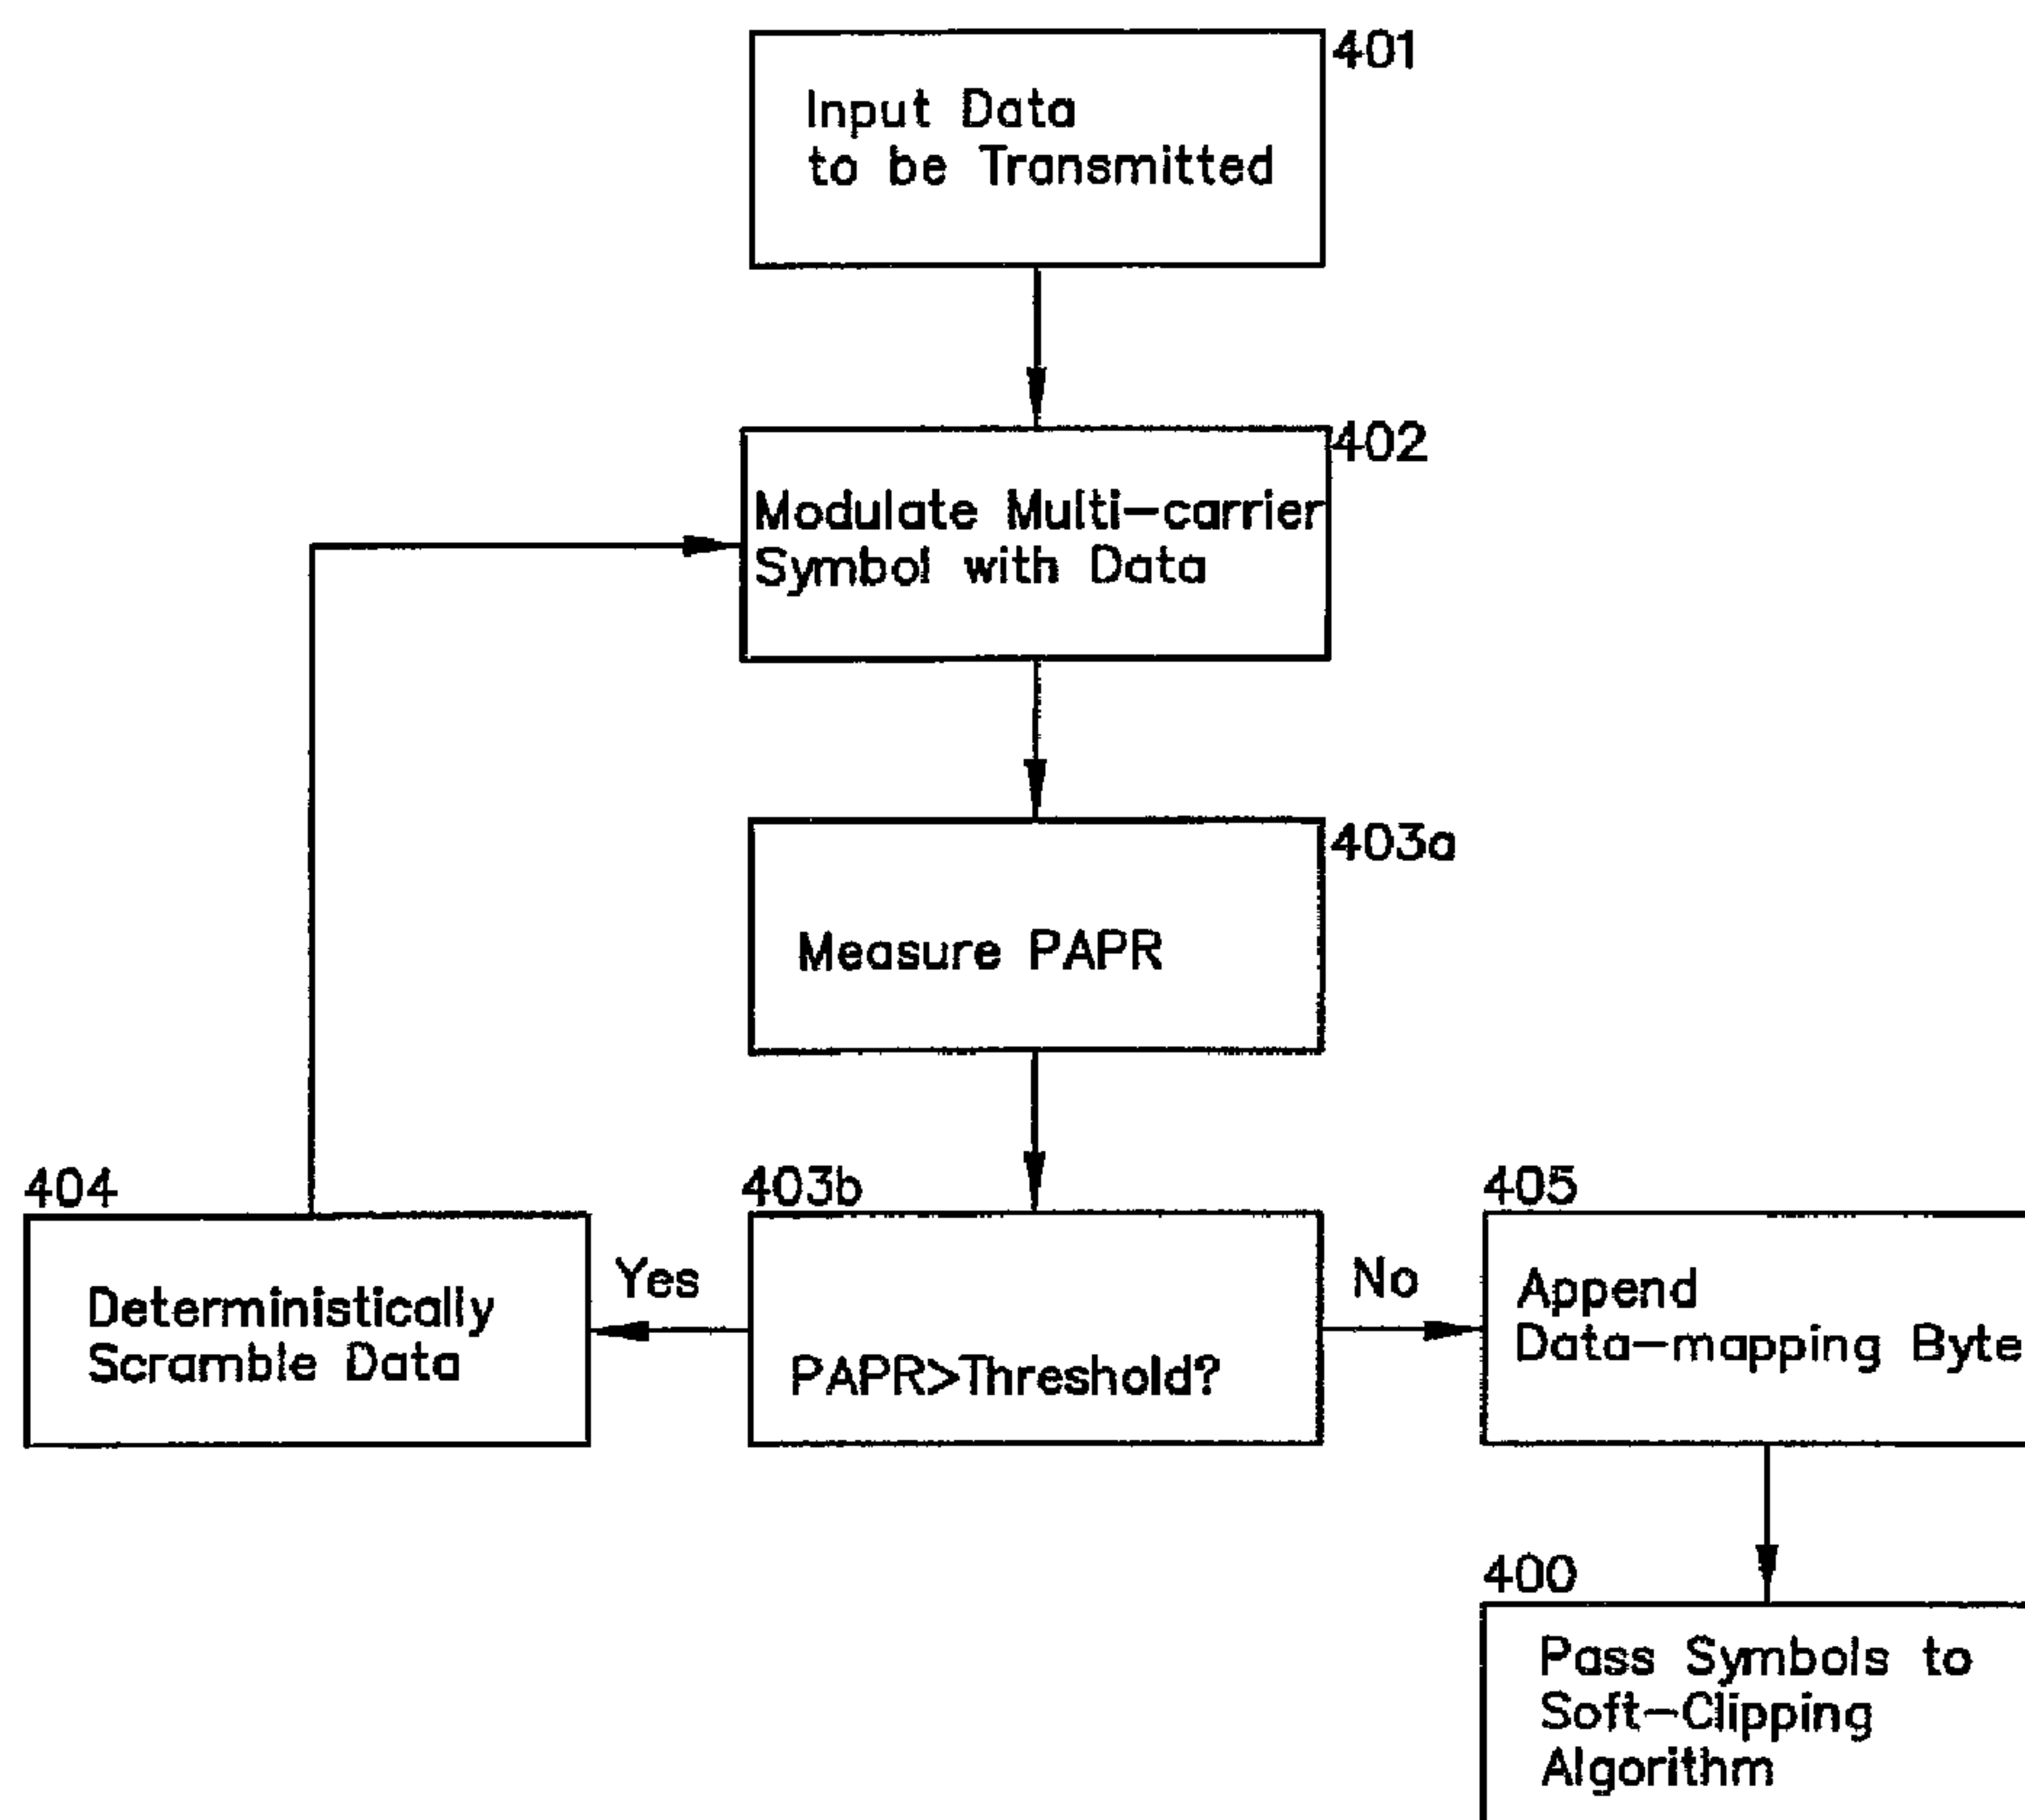

(57) Abrégé/Abstract:

The present disclosure presents a predictive signal producing method that effectively levels transmitter output power in a multi-carrier communication system and results in approaching amplifier performance normally associated with constant carrier

(57) Abrégé(suite)/Abstract(continued):

waveforms. Embodiments of the disclosed solution offers >10 dB reduction in the peak-to-average power required to support the transmission of, for example, orthogonal frequency division modulation ("OFDM") modulation techniques. Embodiments of the novel system and method maximize peak-to-average power ratio ("PAPR") reduction with selective mapping and soft clipping, which may include filtering, combined. This novel approach also minimizes overhead, bit error rate, retransmissions, and increases latency as well as implementing processing cycles with a number of iterations. The disclosed system and method improves the total system DC power efficiency and provides an optimal solution for PAPR reduction in multi-carrier communication systems such as, for example, OFDM.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 May 2005 (12.05.2005)

PCT

(10) International Publication Number
WO 2005/043853 A1

(51) International Patent Classification⁷: **H04L 27/20**

(21) International Application Number:
PCT/US2004/034276

(22) International Filing Date: 18 October 2004 (18.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/690,613 23 October 2003 (23.10.2003) US

(71) Applicant: **HARRIS CORPORATION** [US/US]; 1025
W. Nasa Blvd., Melbourne, FL 32919 (US).

(72) Inventors: **MOFFATT, Christoper, Douglas**; 1837 Palm
Place Drive, NE, Palm Bay, FL 32905 (US). **KOLAR,
Ray, J.**; 5180 Red Bay Lane, Grant, FL 32949 (US).
RICHARDS, Charles, W.; 412 Anchor Key, Melbourne
Beach, FL 32951.

(74) Agents: **YATSKO, Micheal, S.** et al.; Harris Corporation,
1025 W. Nasa Blvd., Melbourne, FL 32919 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report*
- *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments*

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: SYSTEM AND METHOD FOR REDUCING PEAK-TO-AVERAGE POWER RATIO FOR MULTI-CARRIER COM-
MUNICATION SYSTEMS

(57) Abstract: The present disclosure presents a predictive signal producing method that effectively levels transmitter output power in a multi-carrier communication system and results in approaching amplifier performance normally associated with constant carrier waveforms. Embodiments of the disclosed solution offers >10 dB reduction in the peak-to-average power required to support the transmission of, for example, orthogonal frequency division modulation ("OFDM") modulation techniques. Embodiments of the novel system and method maximize peak-to-average power ratio ("PAPR") reduction with selective mapping and soft clipping, which may include filtering, combined. This novel approach also minimizes overhead, bit error rate, retransmissions, and increases latency as well as implementing processing cycles with a number of iterations. The disclosed system and method improves the total system DC power efficiency and provides an optimal solution for PAPR reduction in multi-carrier communication systems such as, for example, OFDM.



WO 2005/043853 A1

**SYSTEM AND METHOD FOR REDUCING PEAK-TO-AVERAGE POWER
RATIO FOR MULTI-CARRIER COMMUNICATION SYSTEMS**

The peak-to-average power ratio ("PAPR"), also known
5 as peak-to-mean power ratio ("PMPR") or peak factor, is an
important characteristic of multi-carrier transmitted signals.
The peak of the signal can often be N times greater than the
average power level. These large peaks cause intermodulation
distortion which can result in an increase in the error rate.
10 These distortions are brought about from the limitations
inherent in a transmitting amplifier.

In order to prevent the transmitter amplifier from
limiting (clipping), the average signal power must be kept low
enough to keep the signal relatively linear through the
15 amplifier. In order to transmit a high power signal, a high
power amplifier is required which requires a large DC system
power. A much higher power amplifier is required to transmit
multi-carrier waveforms than for constant envelope waveforms.
For example, using 64 carrier waveforms, a 40 dBm power
20 amplifier would require about 15 dB of back off. Therefore,
instead of operation at 40 dBm (10 watts) the amplifier is
only capable of operating at 25 dBm (0.316 Watts). Thus in
order to transmit at the desired 40 dBm, a 55 dBm (316 Watt)
amplifier would be required. The associated power supply,
25 power consumption, can be substantially increased. In
addition, such large power requirements lead to associated
increased space demands and heat dissipation requirements.

With the large amount of interest and activity with
Orthogonal Frequency Division Modulation ("OFDM"), and in
30 particular 802.11a and 802.11g communication technology, the
PAPR problem is exaggerated. 802.11 with its use of complex
waveforms requires highly linear RF amplifiers. Current
802.11 physical layer integrated circuits have not implemented
PAPR reduction schemes. In particular, multi-tone OFDM
35 typically requires greater than 10 dB power amplifier back-off

because of a high peak-to-average power ratio. The net result of these factors is an increased DC power demand beyond that encountered with other 802.11 techniques. The effect may be less noticeable for short duty cycle signals, but can be significant for situations requiring continuous transmission of data.

OFDM, as mentioned above, is a method of transmitting data simultaneously over multiple equally-spaced and phase synchronized carrier frequencies, using Fourier transform processing for modulation and demodulation. The method has been proposed and adopted for many types of radio systems such as wireless Local Area Networks ("LAN") and digital audio and digital video broadcasting. OFDM offers many well-documented advantages for multi-carrier transmission at high data rates, particularly in mobile applications. Specifically, it has inherent resistance to dispersion in the propagation channel. Furthermore, when coding is added it is possible to exploit frequency diversity in frequency selective fading channels to obtain excellent performance under low signal-to-noise conditions. For these reasons, OFDM is often preferable to constant envelope modulation with adaptive equalization and is arguably less complex to implement.

The principal difficulty with OFDM, as alluded to above, is that when the sinusoidal signal of the N carriers add mostly constructively, the peak envelope power is, as much as N times the mean envelope power. If the peak envelope power is subject to a design or regulatory limit then this has the effect of reducing the mean envelope power allowed under OFDM relative to that allowed under constant envelope modulation. If battery power is a constraint, as is typically the case with portable equipment such as mobile consumer appliances, laptops, and sophisticated Department of Defense communication systems, then the power amplifiers required to behave linearly up to the peak envelope power must be operated

inefficiently with considerable back-off from compression. Digital hard limiting of the transmitted signal has been shown to alleviate the problem but only at the cost of spectral sidelobe growth and consequential bit error performance degradation.

Figure 1 illustrates 16 carriers in-phase with frequencies ranging from C hertz for carrier 101 to 16 C hertz for carrier 116, with the intermediate carriers having increasing frequencies with steps of C, characteristic of an OFDM signal. Each of the carriers as shown have a nominal maximum amplitude of one, however as seen in Figure 2 the disparate effects of the carriers added in-phase are readily apparent. Figure 2 shows the large peak amplitudes of the added carriers at around time sample 25 and around time sample 1575.

Figure 3 illustrates the peak-to-average power ratio of the 16 carriers modulated in-phase. The large peak-to-average power ratios correspond to the large amplitude spikes illustrated in Figure 2. The peak-to-average power ratio for Figure 3 is generated according to the function:

$$\frac{P_{peak}}{P_{avg}} = X_i^2 / \left(\frac{1}{N} \sum_{i=1}^N X_i^2 \right) \quad \text{where } X_i \text{ is the signal sample}$$

amplitude at sample number i and N is the number of samples of the multi-carrier symbol.

These problems provide a clear motivation to find other solutions for controlling the peak to mean envelope power ratio of the transmitted signal. One solution offered uses block coding to transmit across the carriers only those poly-phase sequences with small PAPR; however, this entails an exhaustive search to identify the best sequences and requires large look-up tables for encoding and decoding.

Some techniques, such as spectral whitening, serve to reduce the peak-to-average ratio and allow the use of RF

amplifiers closer to their 1 dB compression point, resulting in a decreased DC power demand. Some prior art solutions have used clipping or mapping to reduce the PAPR. However no solutions have employed or suggested a hybrid system,
5 including selective mapping and soft clipping as is presented in this disclosure.

It is an object of the present disclosure to obviate the disadvantages of the prior art and present a novel system and method for reducing the peak-to-average power ratio of a
10 signal for transmission in a multi-carrier communication system. One method sequences information data according to a data vector and modulates multi-carrier symbols with the sequenced data. The resultant modulated data signal's peak-to-average power ratio is measured and compared to a
15 predetermined threshold. In the method, if the peak-to-average power ratio exceeds the predetermined threshold, the data is re-sequenced in accordance with a new data vector and repeats the modulation and comparison processes. Otherwise the modulated data signal is appended with a data map
20 associated with the respective data vector and sampled. Those modulated data signal samples which exceed a predetermined range are clipped and the clipped modulated data signal is filtered, thereby reducing the PAPR ratio of the signal to be transmitted in a multi-carrier communication system.

25 It is a further object of the present disclosure to present a novel system and method, in a multi-carrier communication system, of transmitting data. An embodiment of a system and method includes sequencing the data according to one or more unique sequences, modulating one or more of the
30 sequences of data and selecting one of the modulated sequences of data, based on the PAPR. The system and method further include filtering the selected modulated sequence of data to remove amplitude peaks outside a threshold band, and

transmitting the filtered signal over the multi-carrier communication system.

It is another object of the present disclosure to present in a multi-carrier communication system with a linear
5 amplifier, a novel system and method of preventing limiting of the amplifier. The novel system and method include sequencing data to be transmitted based upon the resultant PAPR from the modulation of the sequenced data. Also included is sampling
10 the modulated sequenced data and truncating the samples which are outside a threshold, thereby forming a data signal that prevents limiting of the amplifier.

It is still another object of the present disclosure to present, in a multi-carrier communication system for transmitting data, a novel system and method for forming a
15 data signal that reduces the required power of a transmitter. The novel system and method includes providing the data to be transmitted in one or more unique sequences and modulating the one or more unique sequences thereby creating one or more unique modulated sequences. The system and method may also
20 include selecting for transmission one of the unique modulated sequences based on its associated PAPR, and truncating amplitudes of the selected sequence which are outside a predetermined range to thereby form a data signal that reduces power required to transmit the signal.

25 It is yet another object of the present disclosure to present a novel transmitter for transmitting data with multiple carriers. A transmitter may have a modulator for modulating multi-carrier symbols with the data, a processor for measuring the PAPR of the modulated data, and a logic
30 device for comparing the PAPR with a threshold. The transmitter may also have a processor for deterministically re-sequencing the data and an amplitude filter for reducing peaks of the modulated data signal that are outside a predetermined range.

The present disclosure presents a predictive signal producing method that effectively levels transmitter output power, and results in approaching amplifier performance normally associated with constant carrier waveforms of the prior art. This solution offers >10 dB reduction in the peak-to-average power required to support the transmission of OFDM modulation techniques. This approach maximizes PAPR reduction with selective mapping and soft clipping combined. The approach also minimizes overhead, bit error rate, retransmissions, and increases latency as well as implementing processing cycles with a number of iterations. The disclosed approach improves the total system DC power efficiency and provides an optimal solution for PAPR reduction in OFDM and is uniquely different from the prior art.

These and many other objects and advantages of the present disclosure will be readily apparent to one skilled in the art to which the disclosure pertains from a perusal of the claims, the appended drawings, and the following detailed description of the preferred embodiments.

20

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a representation of N=16 in-phase carriers typical of an OFDM system.

Figure 2 is a representation of the amplitude vs. time of the carriers of Figure 1 added in-phase.

Figure 3 is a representation of the PAPR of the added carriers vs. time.

Figure 4 is an overview of a PAPR reduction system and method according to disclosed embodiments.

Figure 5 is an overview of a soft-clipping method according to disclosed embodiments.

Figure 6 is a graphical representation of a windowing operation according to disclosed embodiments.

Figure 7 is an overview of a hardware implementation of disclosed embodiments.

DETAILED DESCRIPTION

5 An overview of a disclosed embodiment for a method of reducing PAPR is shown in Figure 4. The data to be transmitted is gathered in block 401. This data contains the information to be transferred from a data source. The data source being a computer, laptop, mobile phone, or appliance or
10 other data generation, relay, input or storage source. The sequence of the data is described in a data vector. In modulator 402, a multi-carrier symbol is modulated with the assembled data. The multi-carrier system preferably being OFDM or other 802.11 multi-carrier systems, however
15 embodiments of other non-802.11 multi-carrier systems are also envisioned.

The resultant PAPR of the modulated carriers containing the sequenced data, which is described with a data vector, is measured in block 403a. The measured PAPR is then
20 compared with a predetermined threshold in block 403b. The threshold may be, for example, user determined or derived from a regulatory requirement. It is also envisioned that the thresholds may be selected from a look up table or other empirical method. If the measured PAPR of the data vector is
25 above the appropriate threshold, meaning the PAPR is too high, the data is deterministically scrambled (or re-sequenced) in block 404 to create a different data vector, of course the different data vector contains the same data, just with a different or unique sequence. The new scrambled data or data
30 vector is modulated with the multi-carrier symbols in block 402. The PAPR of the new iterative data vector is then again measured. If the PAPR is again above the threshold the data is again deterministically scrambled to create yet another different data vector and continues the process through

modulation, measurement and scrambling until the PAPR of the respective data vector is within the threshold. This process is not directed towards obtaining the best sequence but rather directed to obtaining an acceptable sequence. However, if the PAPR is less than the threshold then a data mapping byte(s) descriptive of the data vector, (indicating the scrambled sequence of data) is appended to the modulated data in block 405. The data mapping byte is used to descramble the data on the receiver end. The modulated scrambled data and appended mapping byte is then passed to block 406 which passes the symbols to a soft clipping algorithm.

With reference now directed to Figure 5, the entire packet of the modulated data and appended mapping byte is sampled or processed from memory in block 501. The samples X_i are compared to a second threshold as indicated in block 502. If the sample X_i exceeds the threshold, a windowing operation or filtering operation is applied to the packet in which the samples which exceed the threshold are reduced or clipped. In addition to reducing X_i , it is also advantageous to reduce adjacent samples $\{X_{(i-K)} \dots X_{(i-2)}, X_{(i-1)}, X_{(i+1)}, X_{(i+2)} \dots X_{(i+K)}\}$, where K can be experimentally, theoretically or empirically determined as shown in block 503. The filtering could be a Gaussian-shaped filter, which has the same frequency and time-domain characteristics. The filtering operation, for example, can be implemented as a FIR or IIR, such as $h(n) = \{.75, .5, .75\}$. The filtering operation can also be adaptive using a measured parameter of the filter output to adapt the filter operation.

Figure 6 shows a representative example of the soft clipping algorithm. The second thresholds are shown as the window borders 601a and 601b. Those amplitudes that are above threshold 601a and/or below threshold 601b, labeled collectively as 600, are clipped or truncated by methods known

in the art. Thus the soft clipping algorithm filters out peaks above a dynamic threshold.

The result of the soft clipping process may increase out of band noise; however this effect can be ameliorated by a raised cosine filter or other appropriate filter. The second or windowing threshold may be dynamically adjusted based on several factors such as, but not limited to, the measured PAPR of the accepted data vector or may be predetermined by the user. The use of look-up tables for establishing the second threshold is likewise envisioned.

The PAPR method described above is envisioned to be implemented via either hardware or software, or both. A hardware implementation of an embodiment of a PAPR reduction system is shown in Figure 7. In Figure 7 the 802.11a MAC layer 701 is connected by a data bus 702a to a digital signal processor 703. The DSP is connected to the digital to analog converter 704 and the 802.11a physical layer 705 by respective data busses 702b and 702c. The physical layer 705 supplied with a baseband or intermediate frequency IF signal to an analog-to-digital ("A/D") Converter 706 which connects back to the DSP by data bus 702d.

The output of the digital to analog Converter 704 supplies an IF signal to the up-converter 709 which generates a radio frequency RF signal, or signal at a frequency applicable to the transmission media, to the power Amplifier 707 which amplifies the signal for transmission over the transmission channel by antenna 708 or by a transducer applicable to the transmission media.

The present disclosure presents a predictive signal-producing algorithm that effectively levels transmitter output power, and results in approaching amplifier performance normally associated with constant carrier waveforms of the prior art. The present disclosure also presents a technique to reduce the PAPR of waveforms produced from a multi-carrier

chipset, preferably OFDM or other multi-carrier waveform
producing chipsets, by using external methods to the chipset.
Prior art requires modification to the actual waveform
producing chipset (which is typically not possible) in order
5 to implement PAPR reduction techniques. The technique
presented here is unique in that it provides a method to
reduce PAPR without modification to the chipset.

CLAIMS

1. In a multi-carrier communication system, a method of transmitting data comprising the steps of:

- 5 (a) selecting a unique sequence and sequencing the data according to the selected unique sequences;
- (b) modulating the unique sequences of data;
- (c) comparing the peak-to-average power ration of the modulated unique sequence of data to a predetermined threshold
- 10 and;
- if the peak-to-average power ratio of the modulated unique sequence of data is below the predetermined threshold, proceeding to the step (d);
- if the peak-to-average power ratio of the modulated
- 15 unique sequence of data is above the predetermined threshold, selecting a new unique sequence, resequencing the data according to the selected unique sequence and proceed to the step (b);
- (d) filtering said data sequence to remove amplitude
- 20 peaks outside a threshold band to thereby create a filtered signal; and,
- (e) transmitting the filtered signal over the multi carrier communication system.

25 2. The method according to claim 1, wherein the step of filtering includes the step of comparing samples of the selected one to a threshold and reducing the amplitude of samples exceeding the threshold.

30 3. The method according to claim 2, further comprising the step of reducing the amplitude of samples adjacent to the samples exceeding the threshold.

1/7

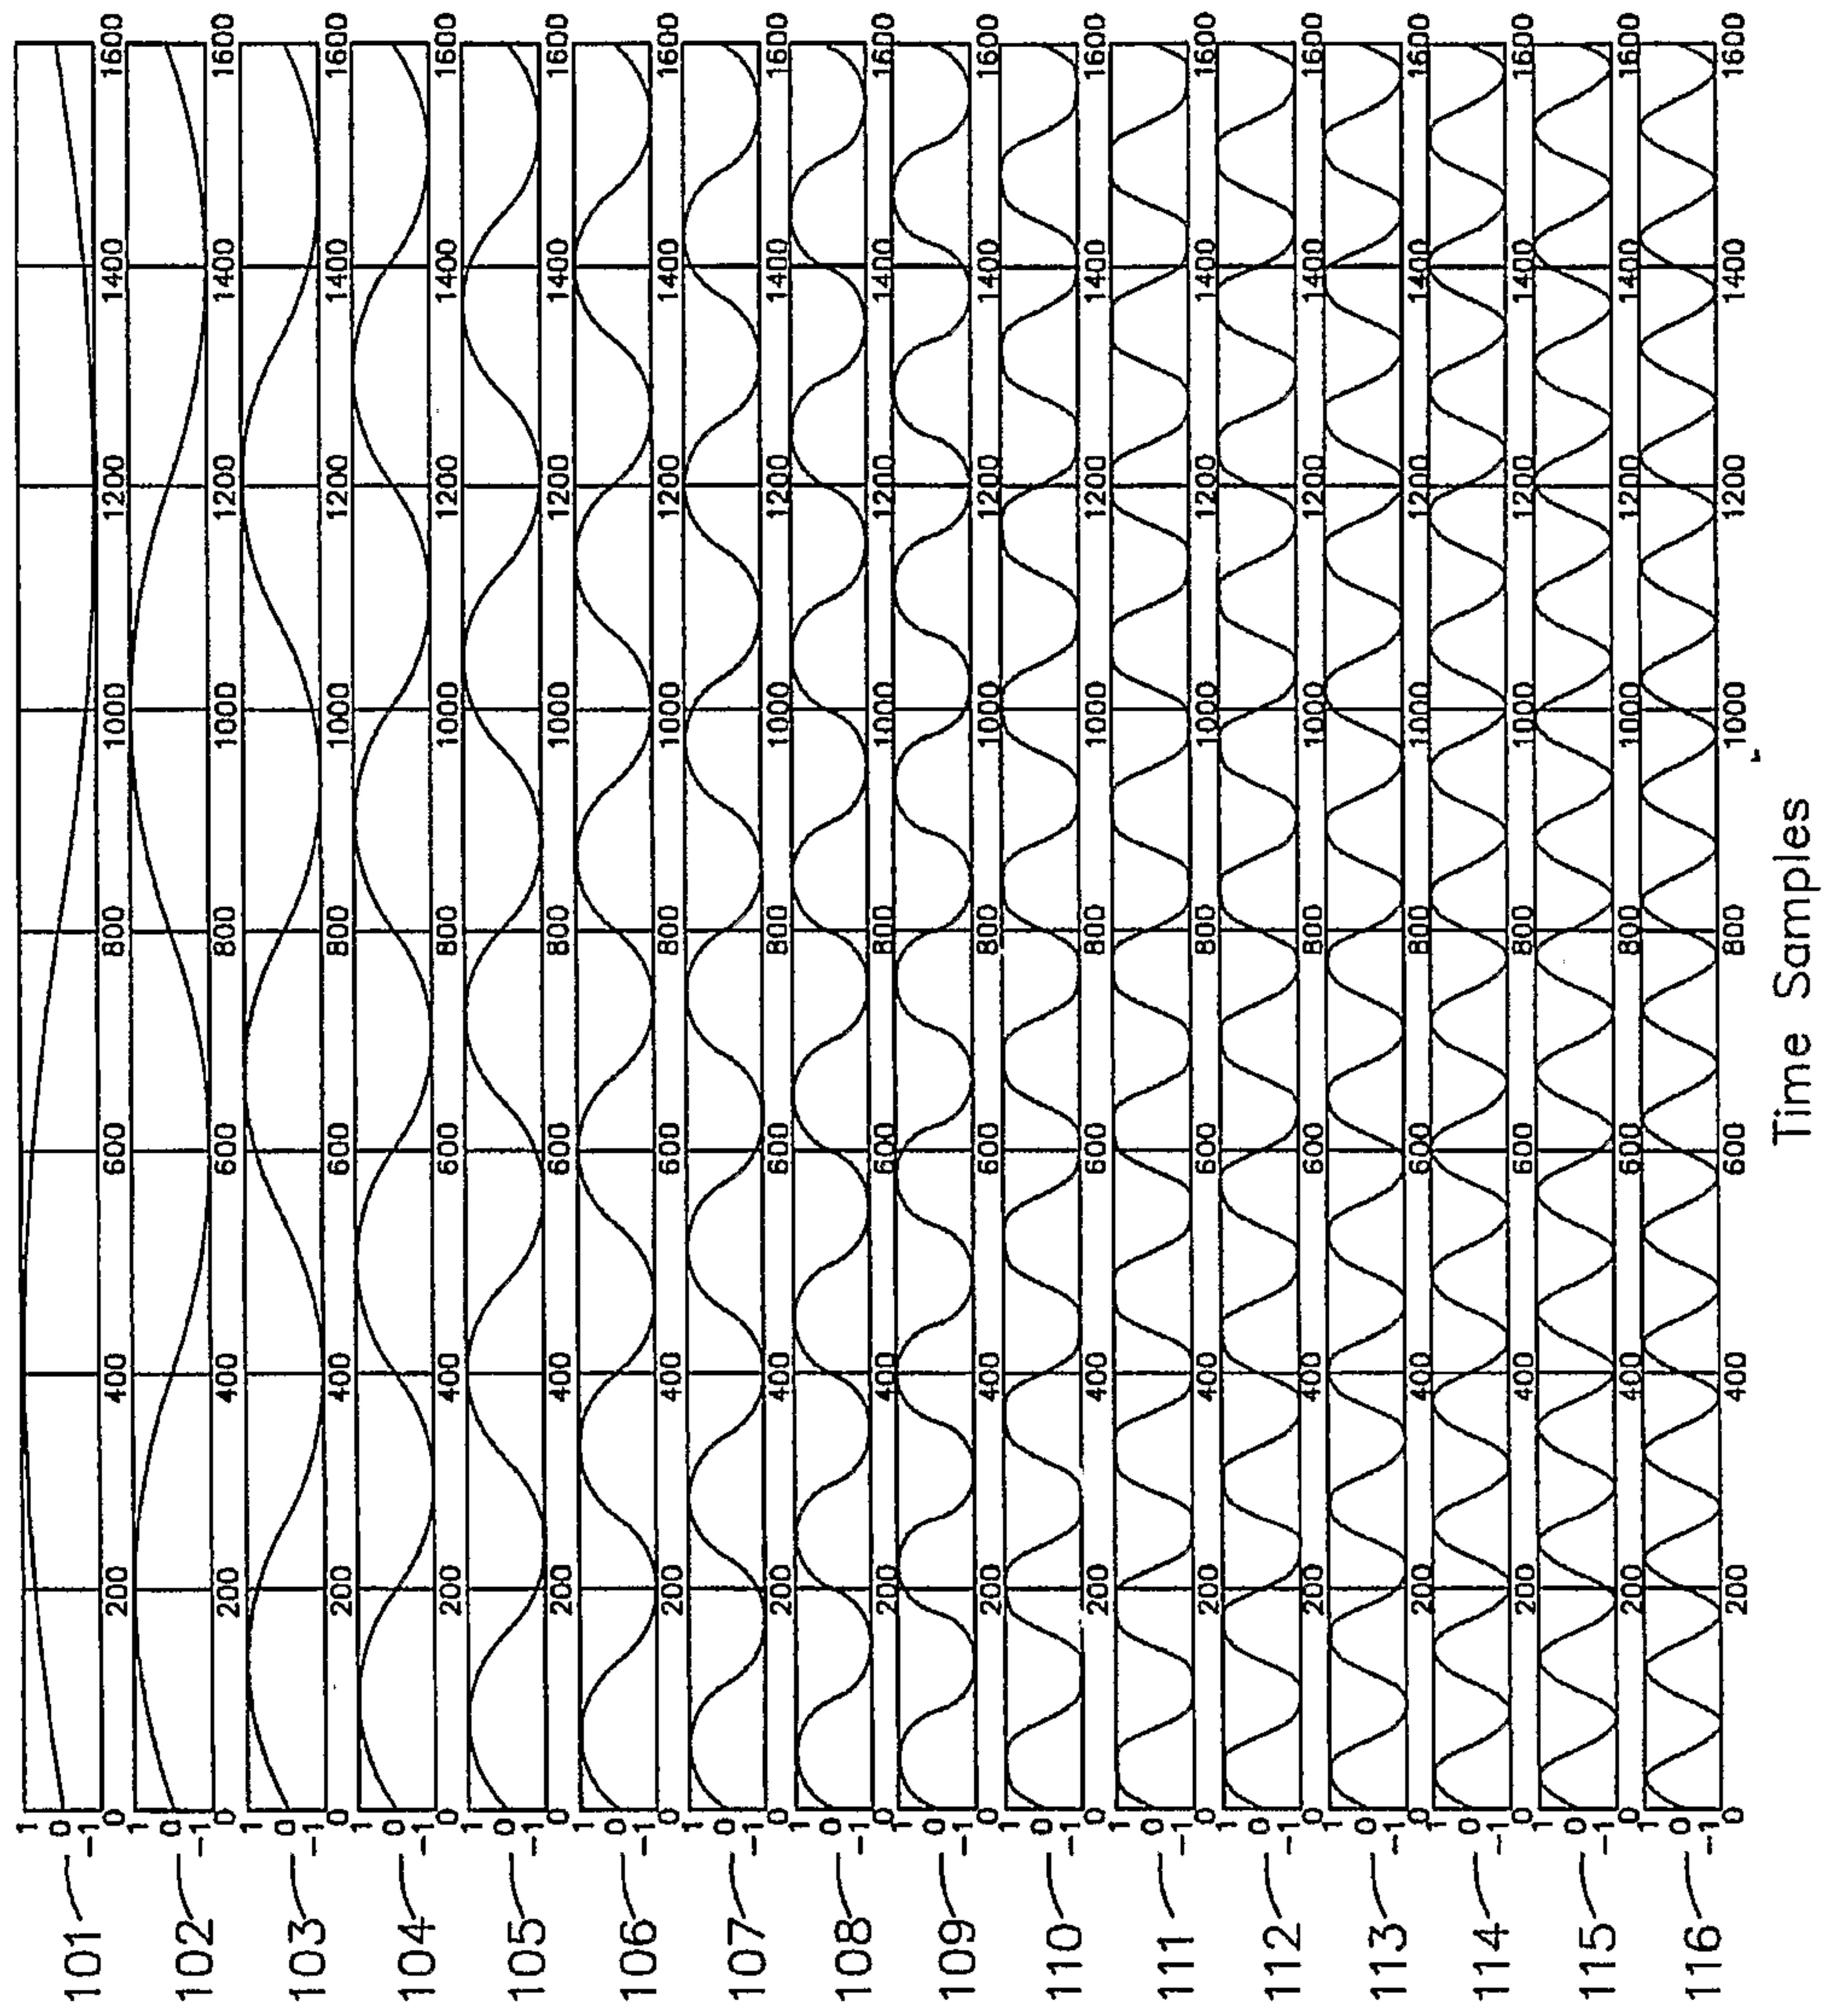
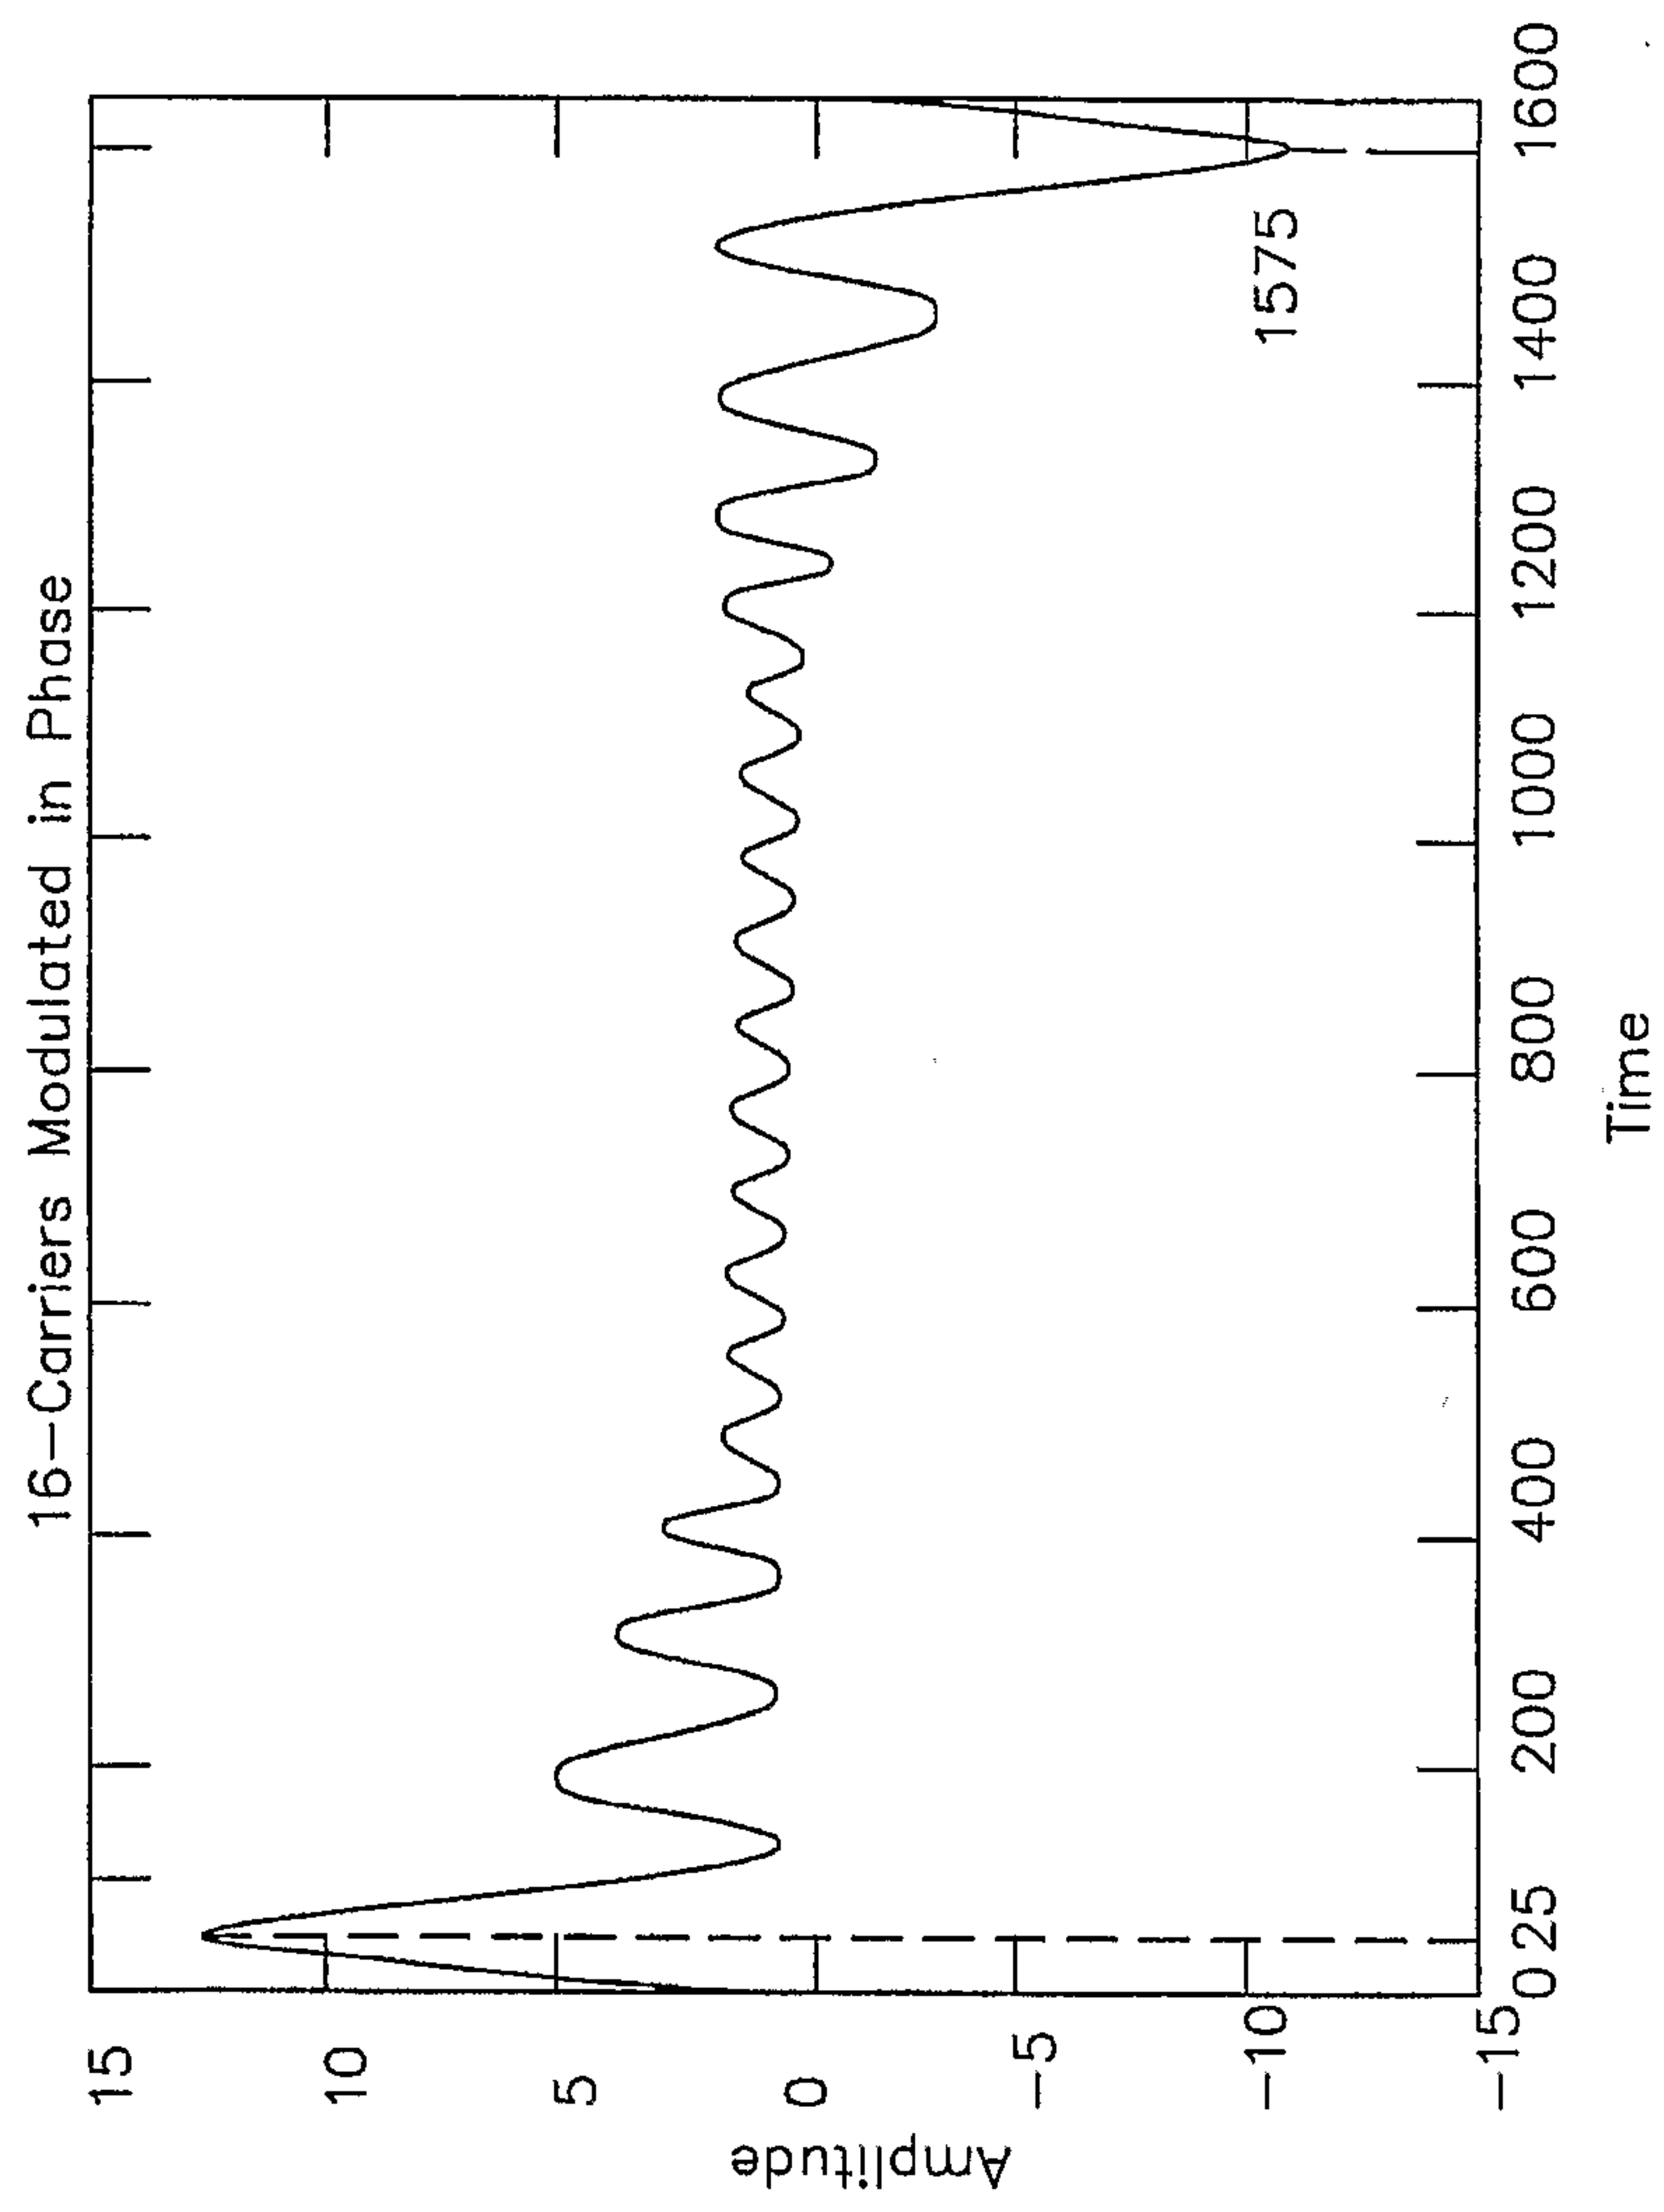


FIGURE 1
PRIOR ART

2/7

FIGURE 2
PRIOR ART

3/7

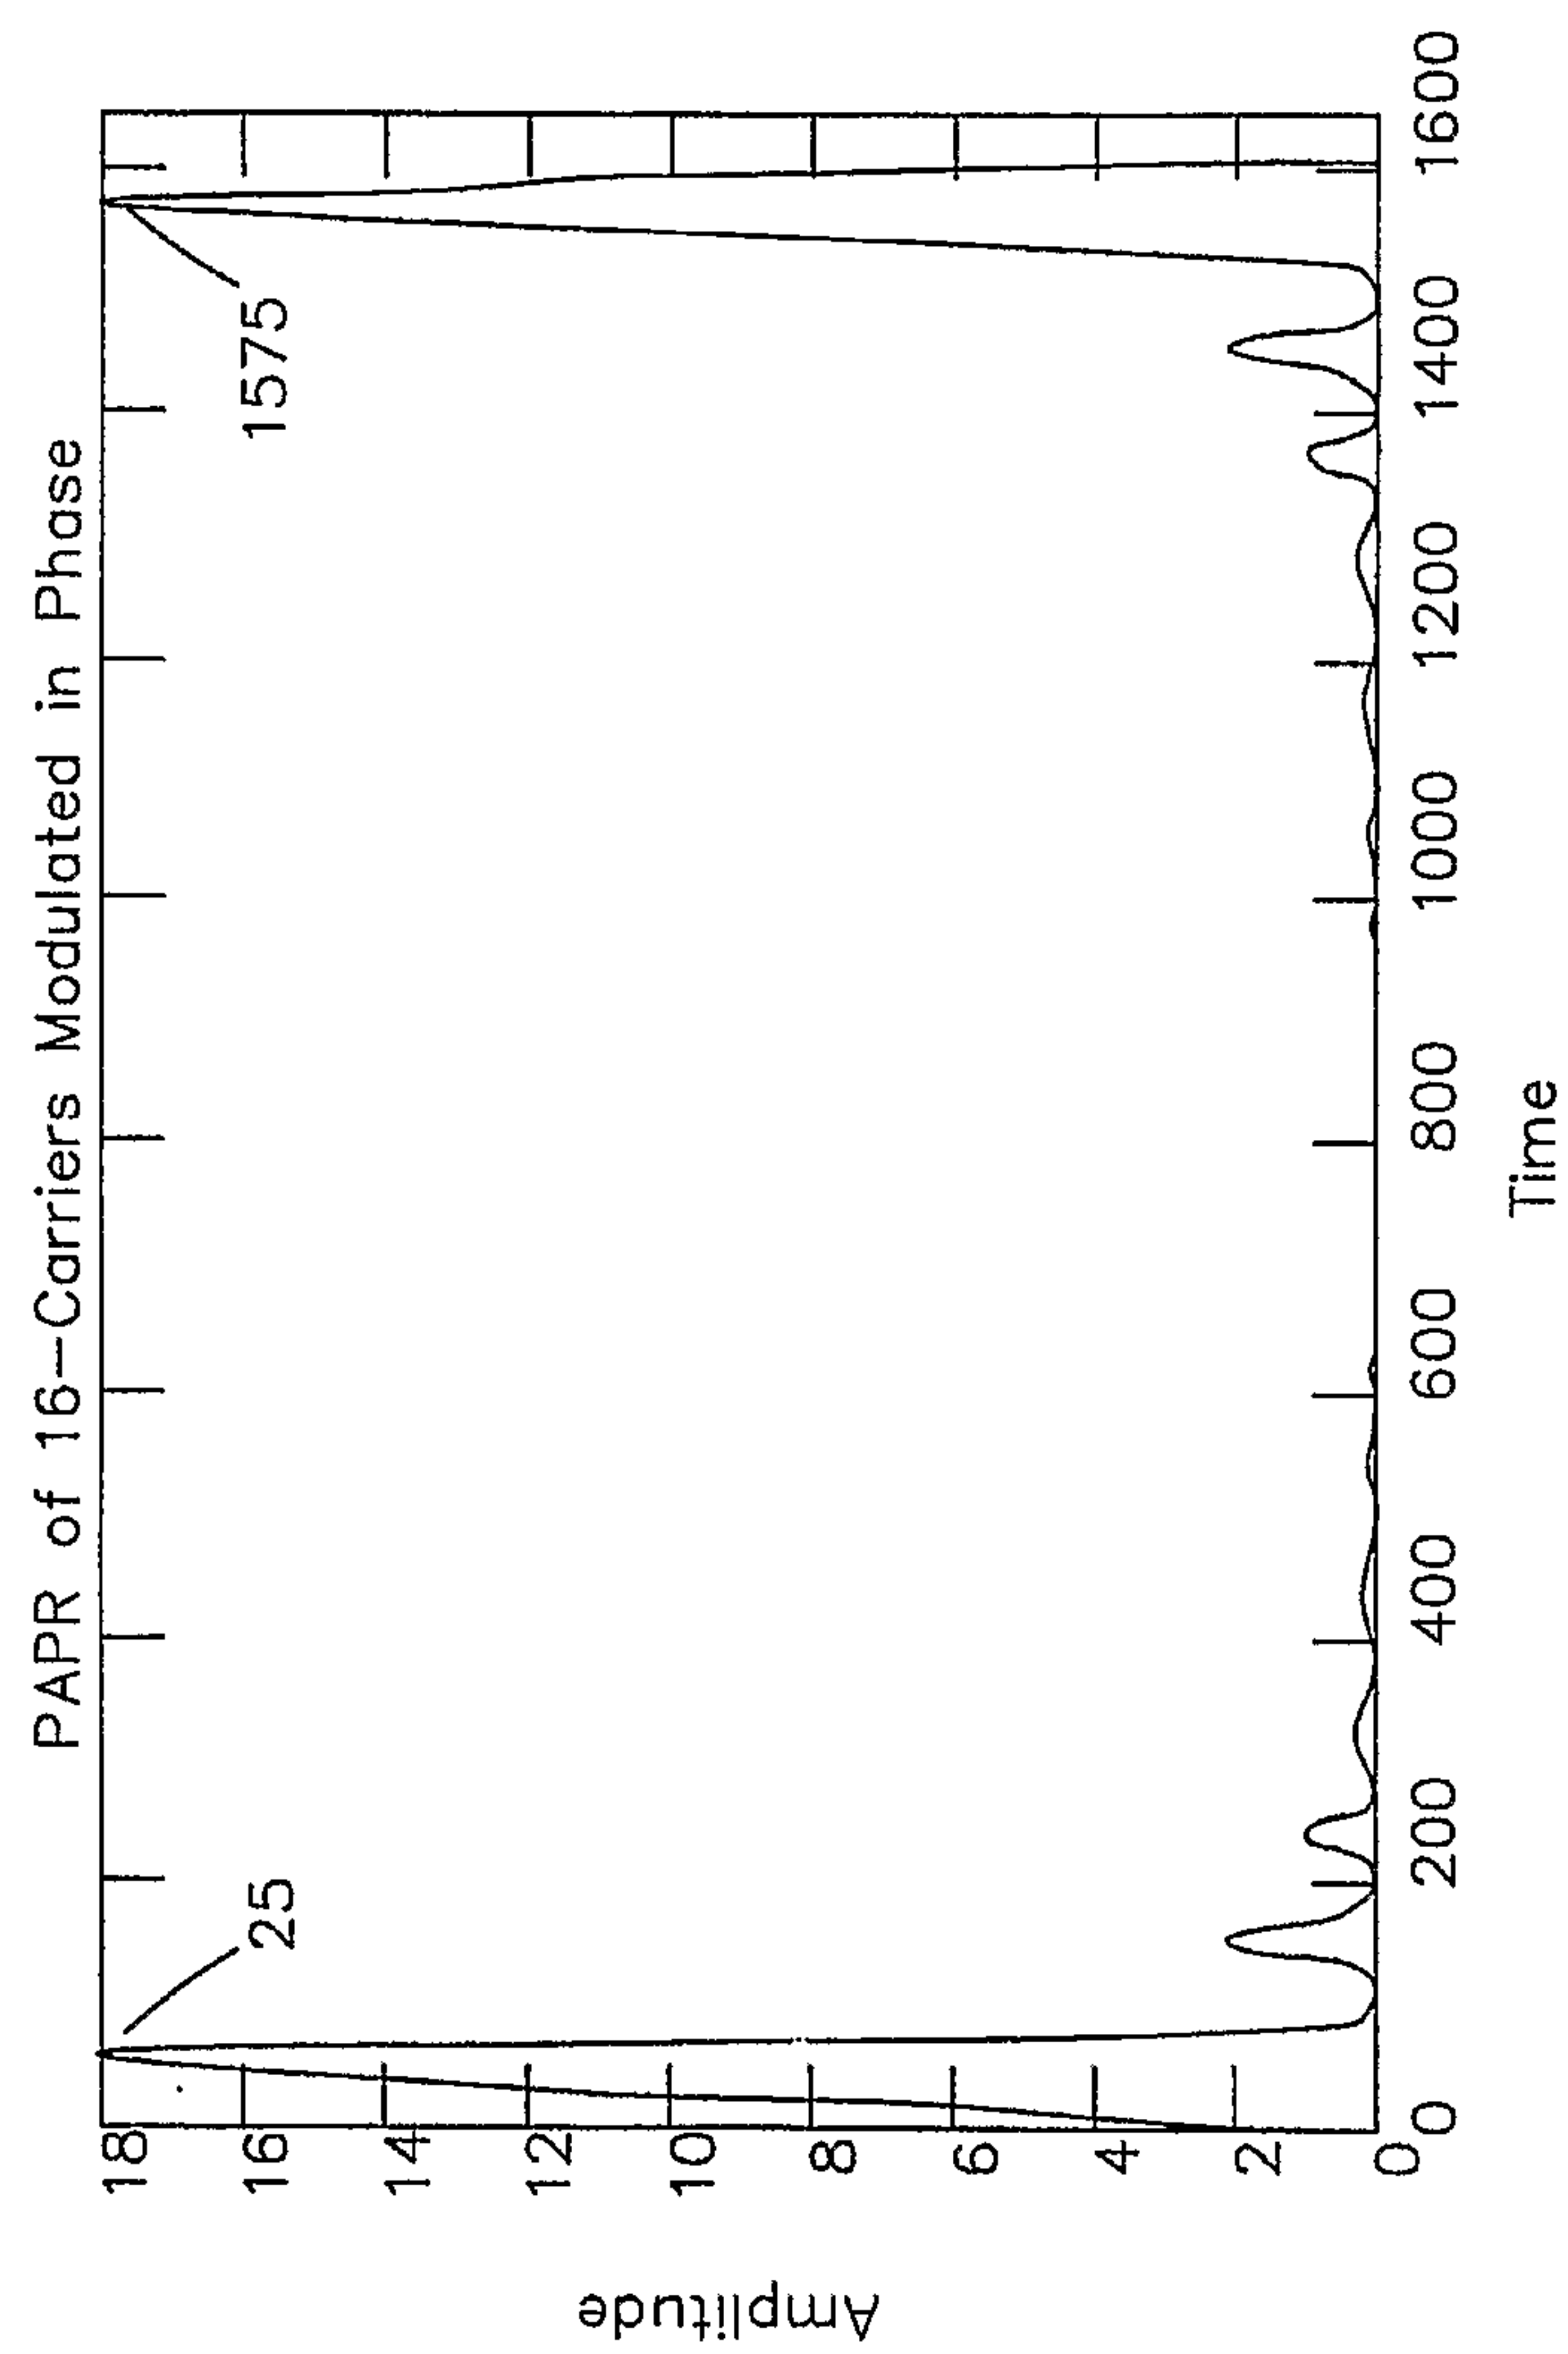


FIGURE 3
PRIOR ART

4/7

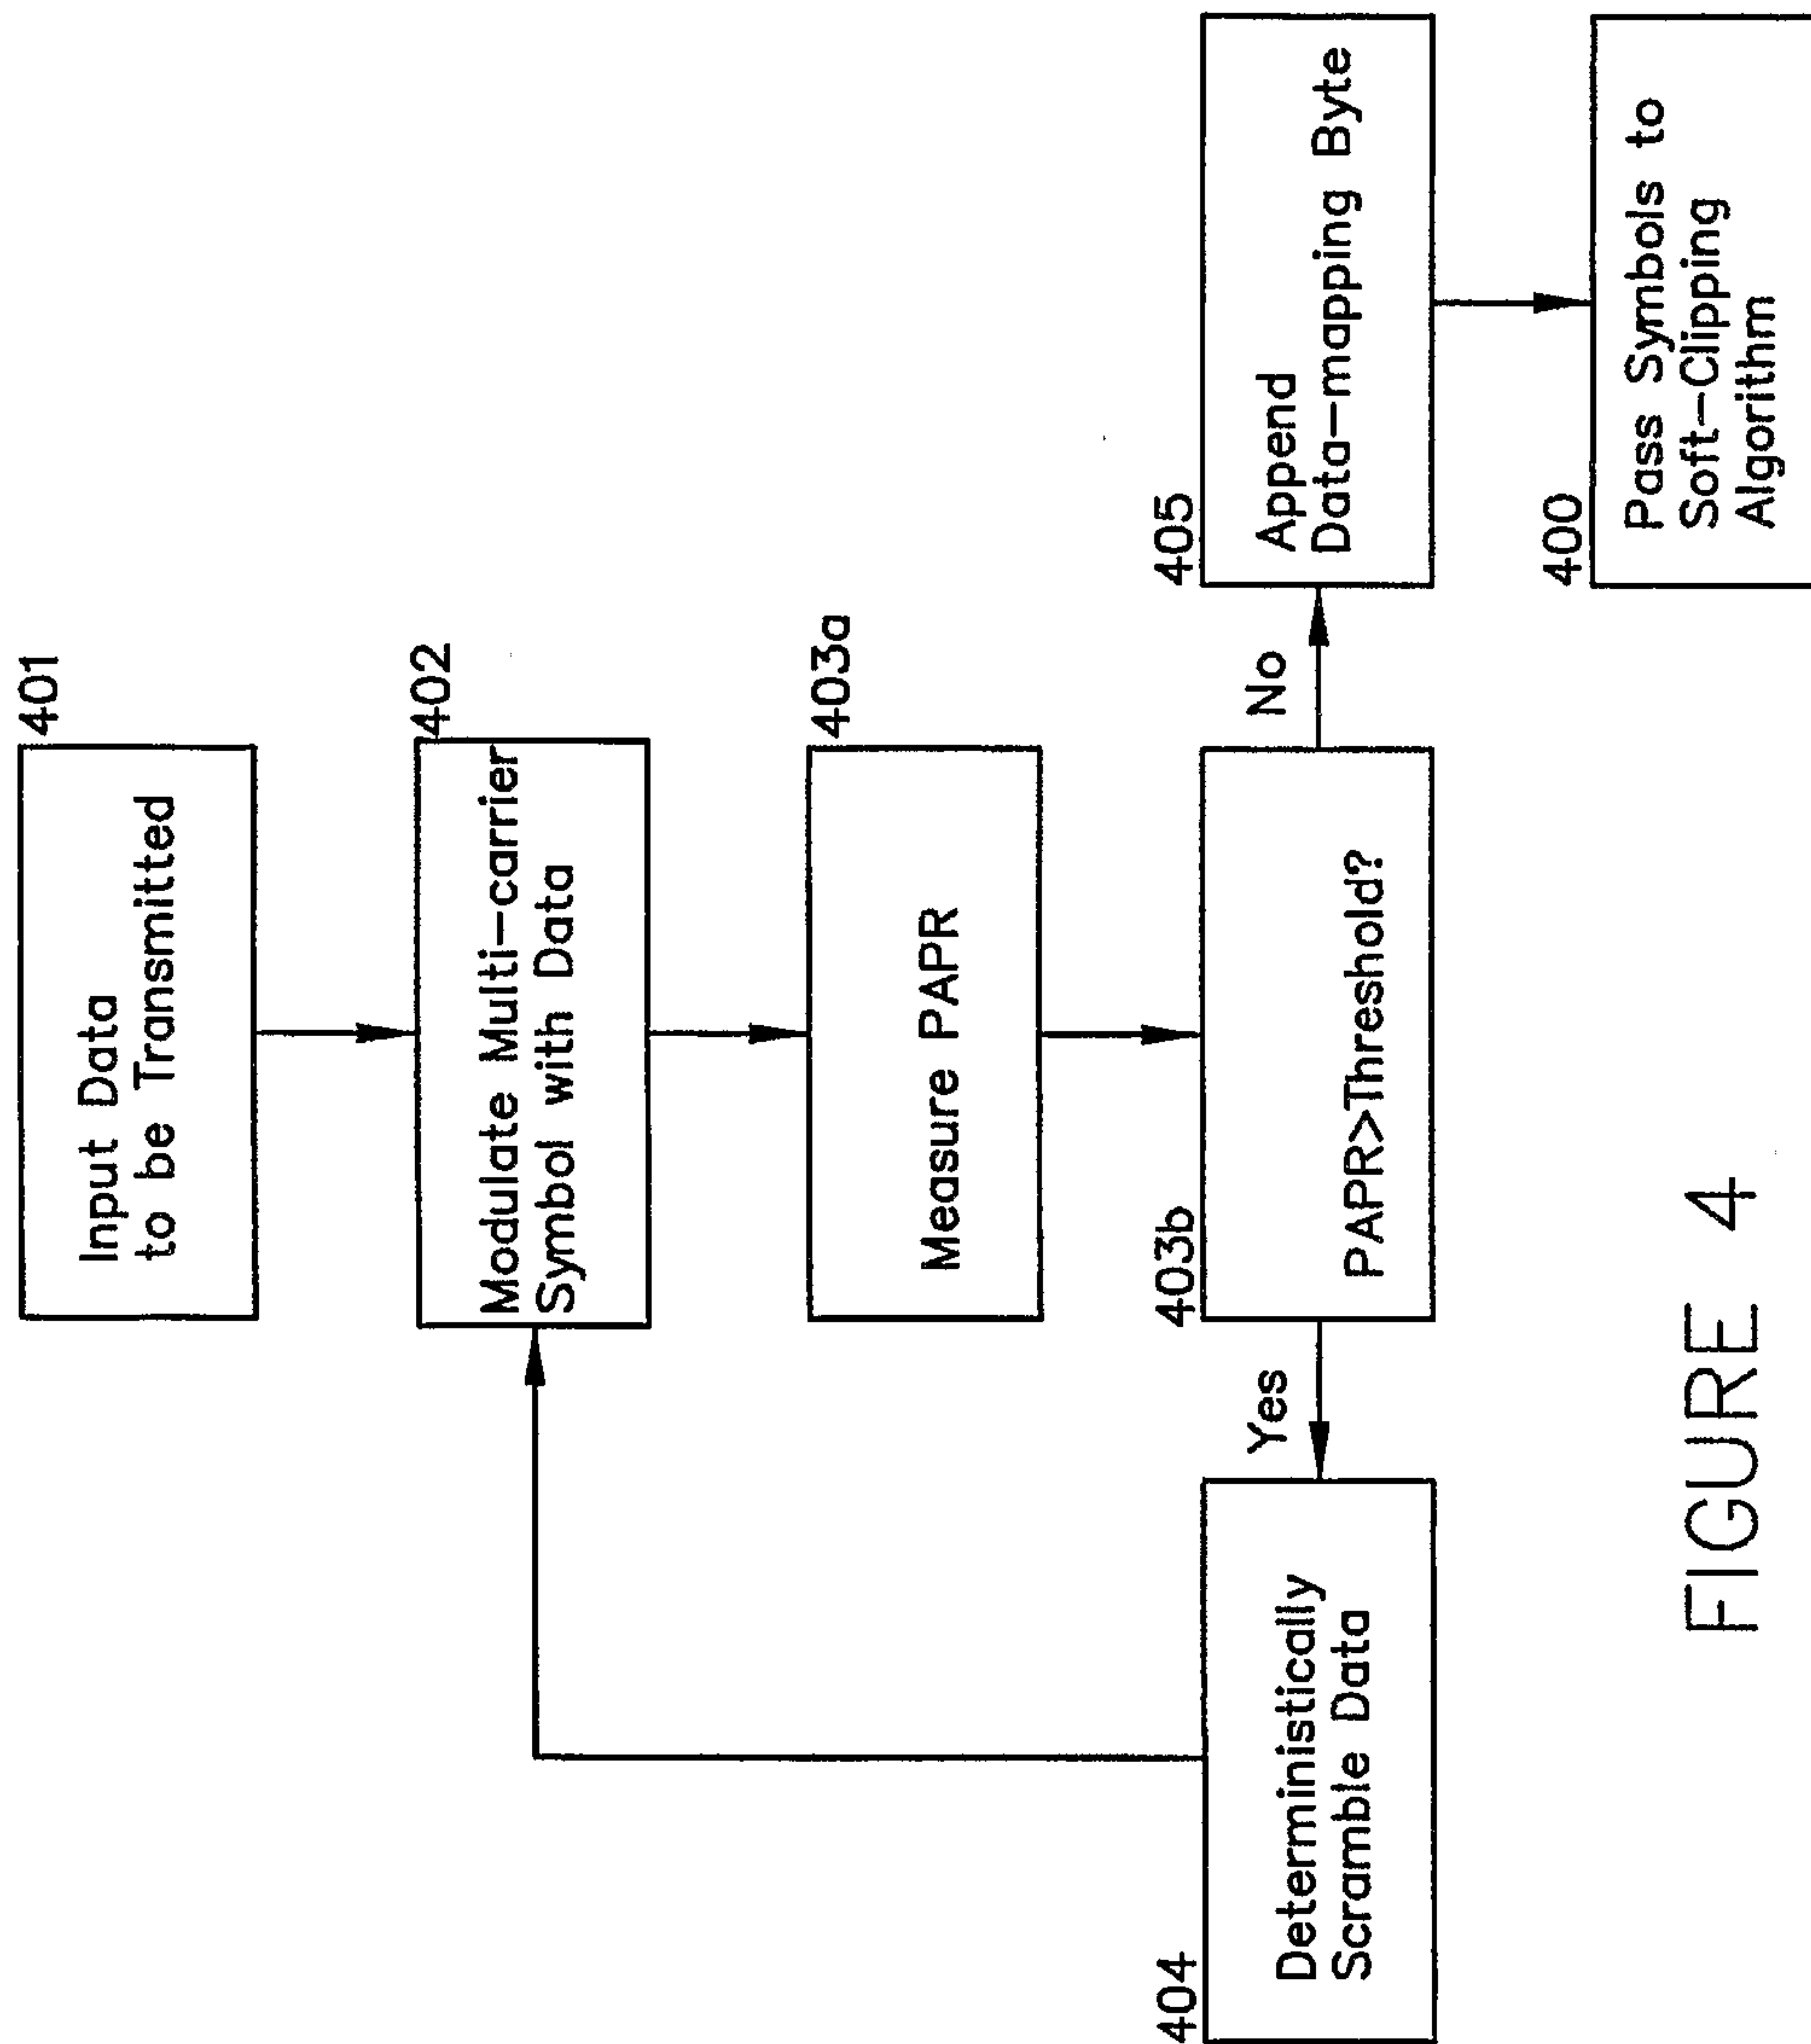


FIGURE 4

5/7

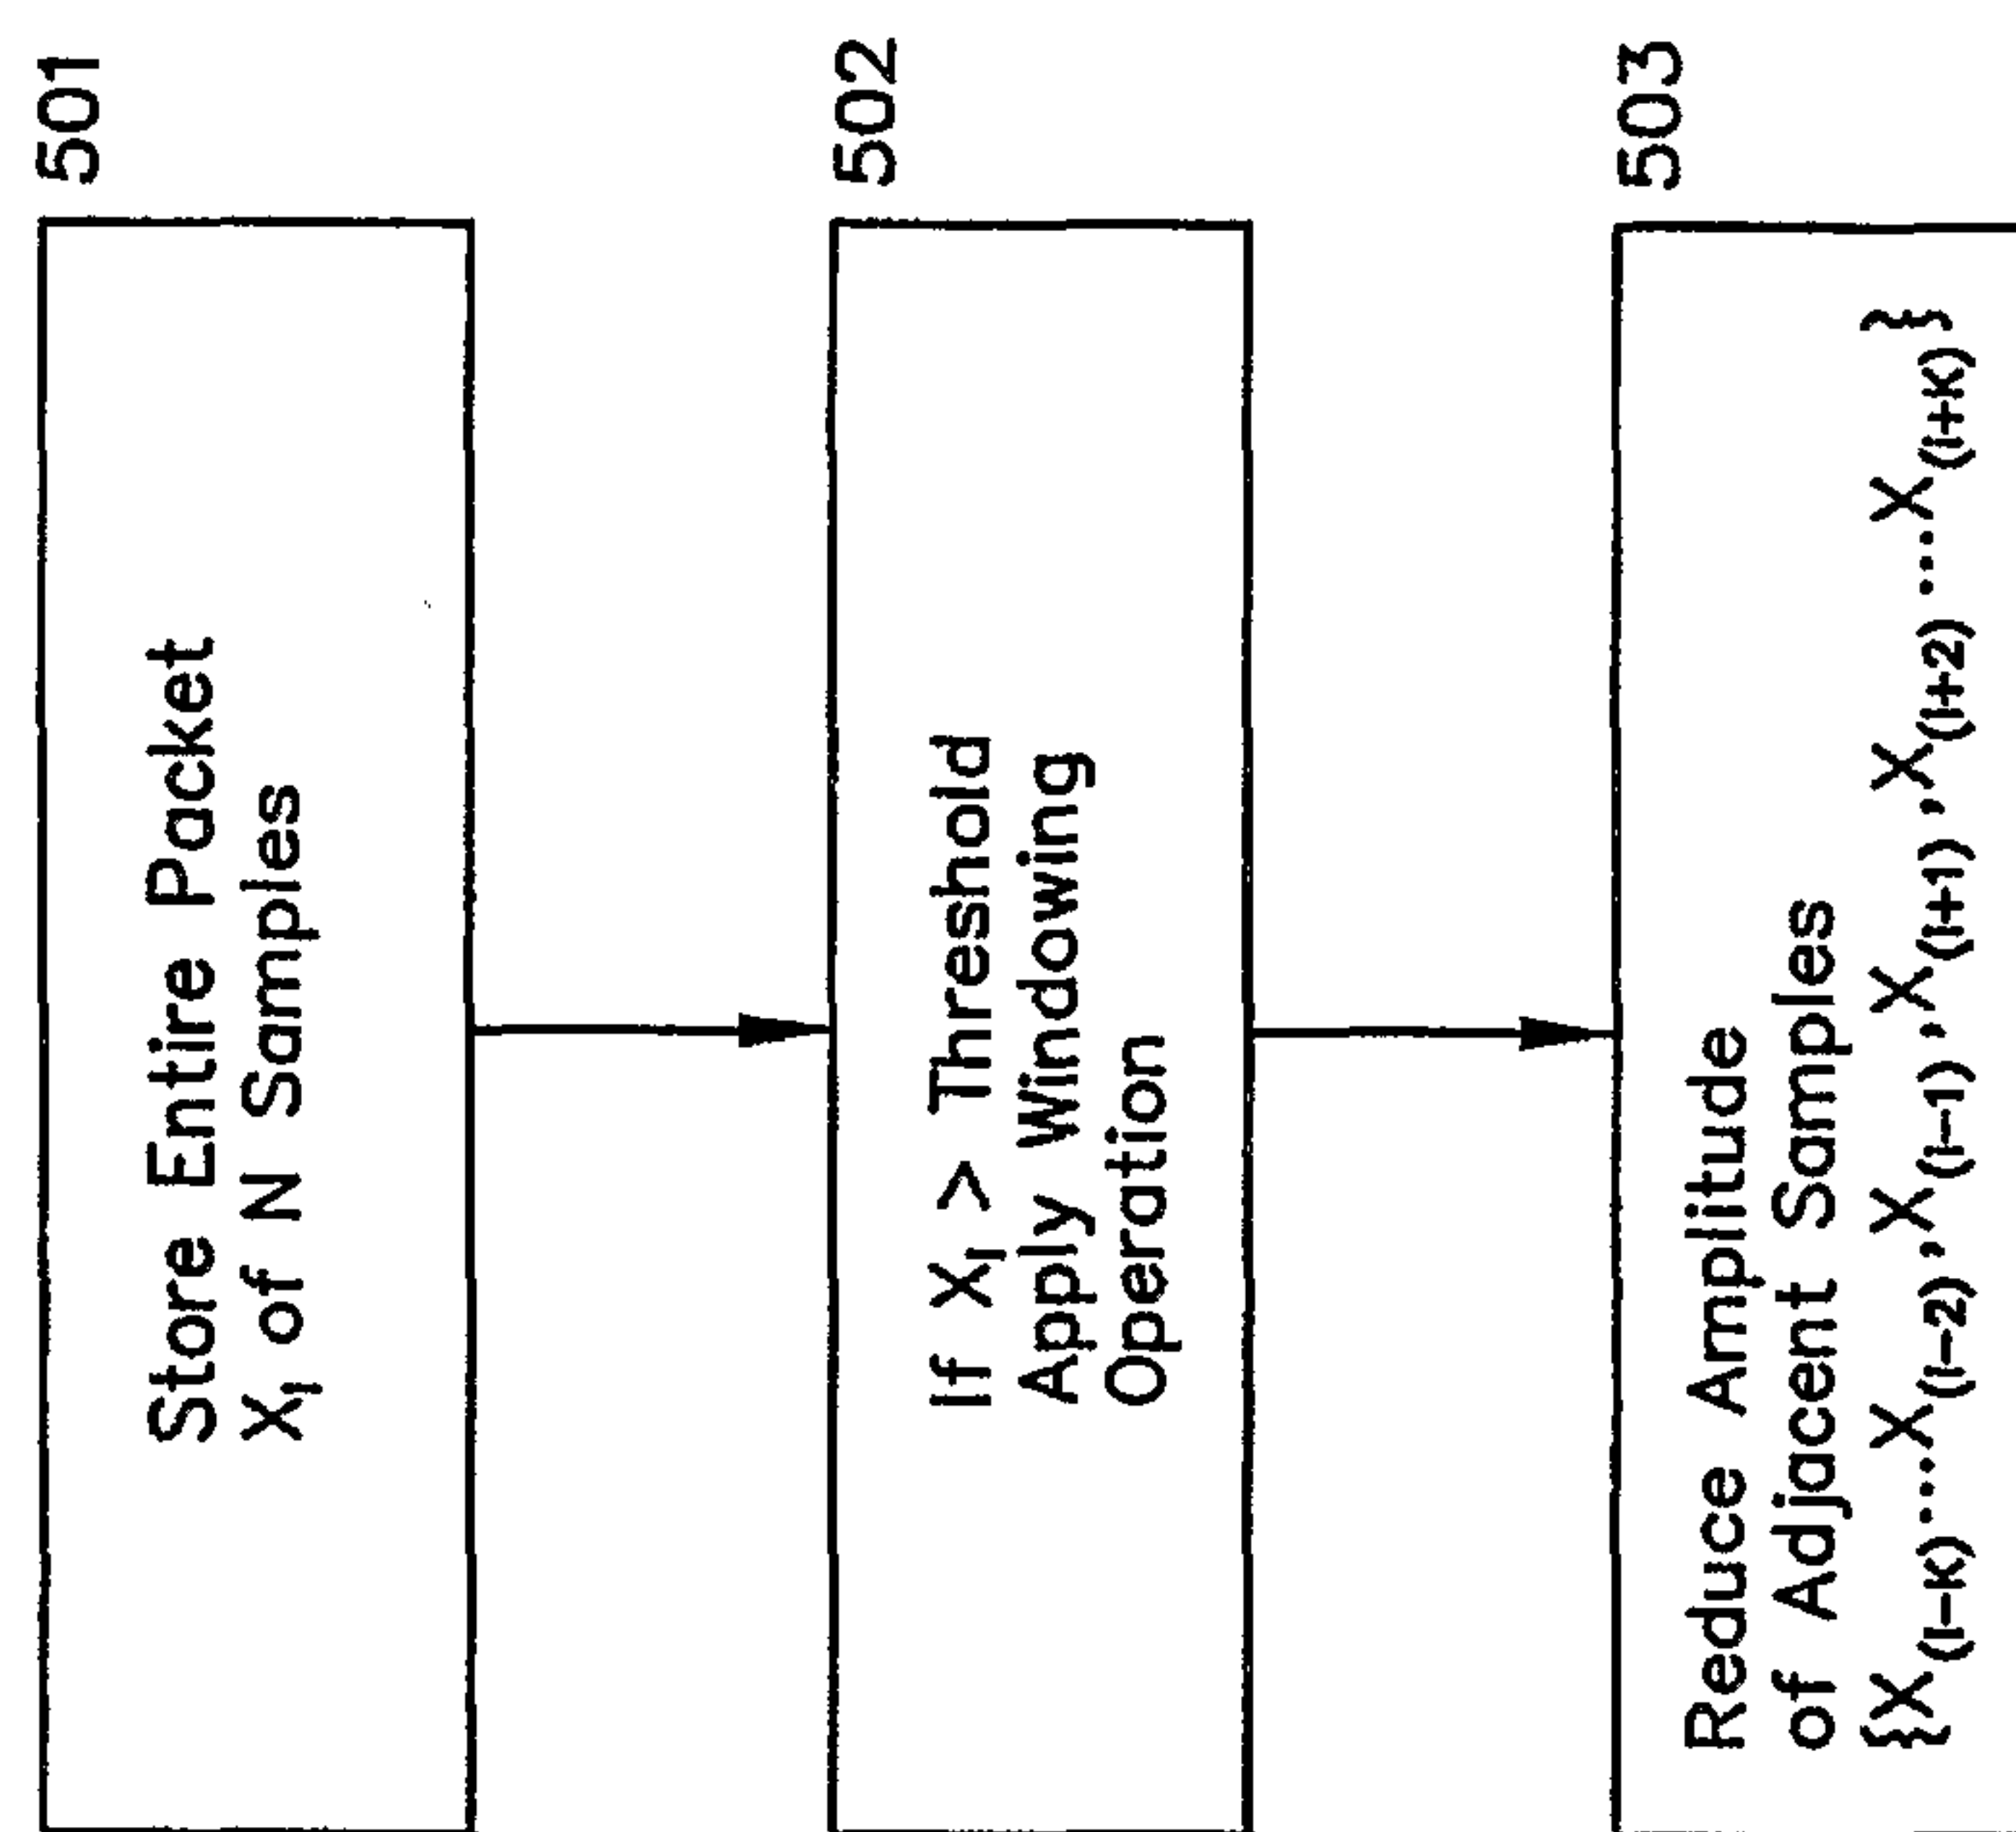


FIGURE 5

6/7

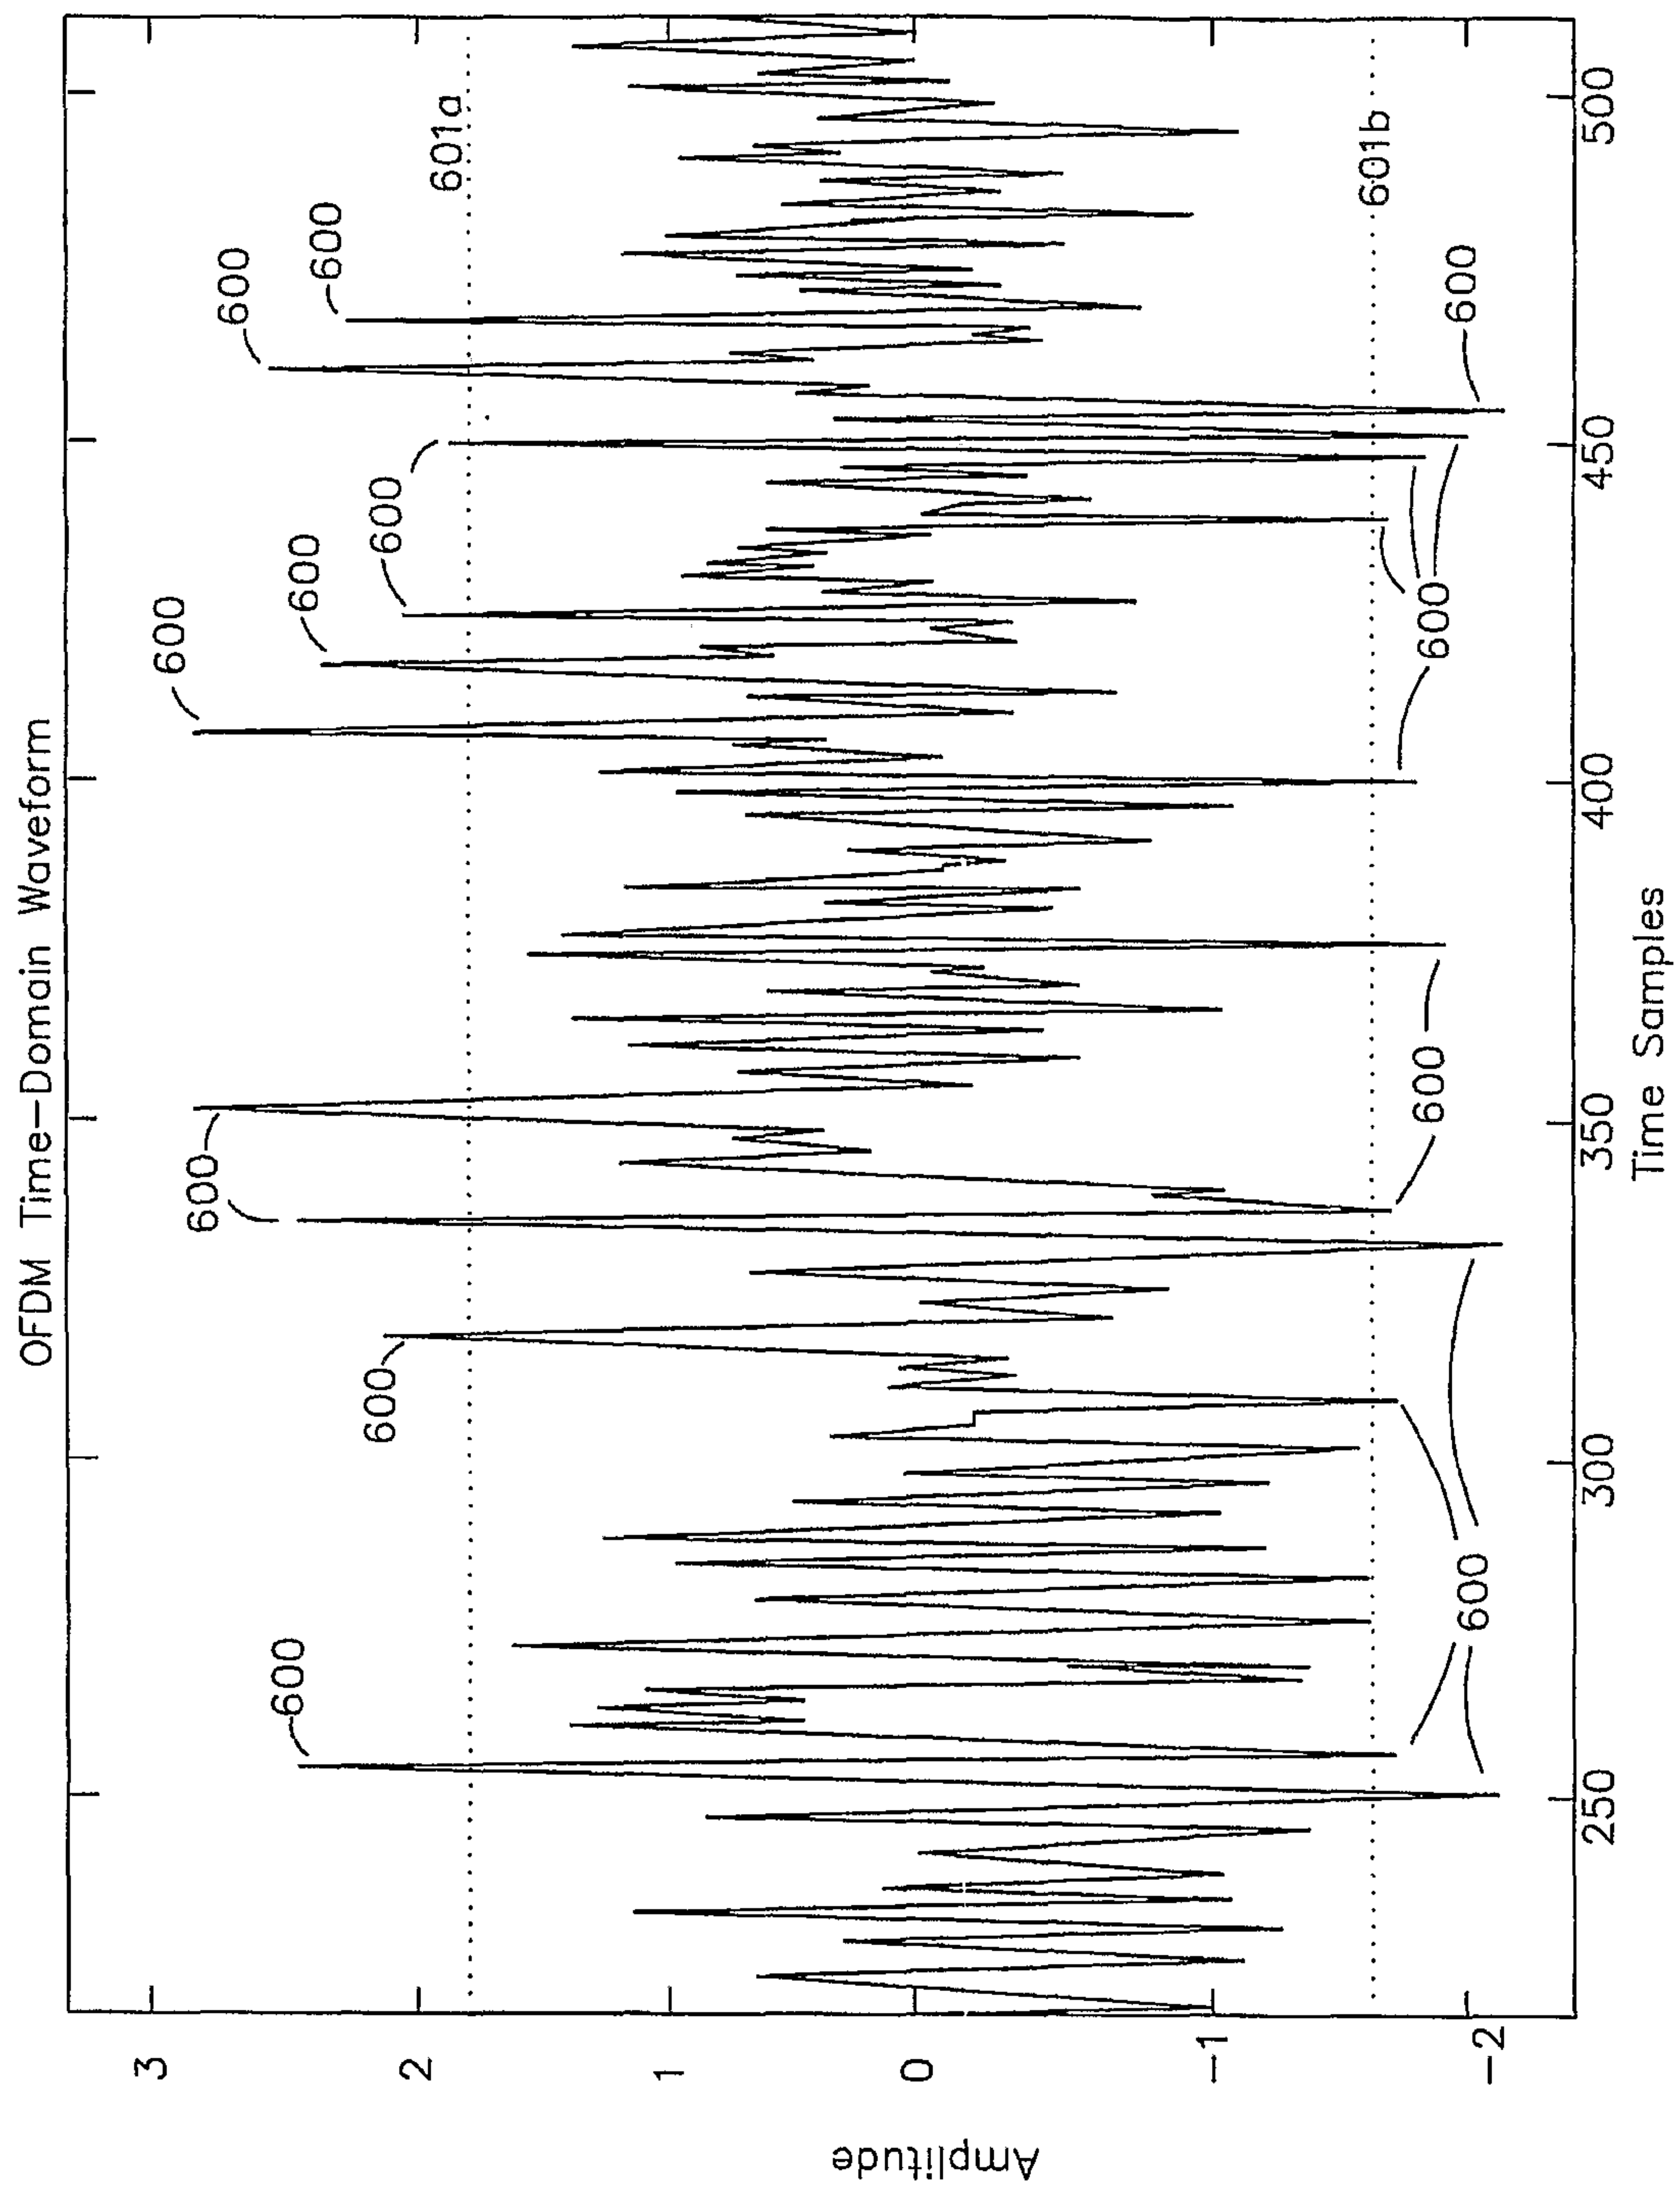


FIGURE 6

7/7

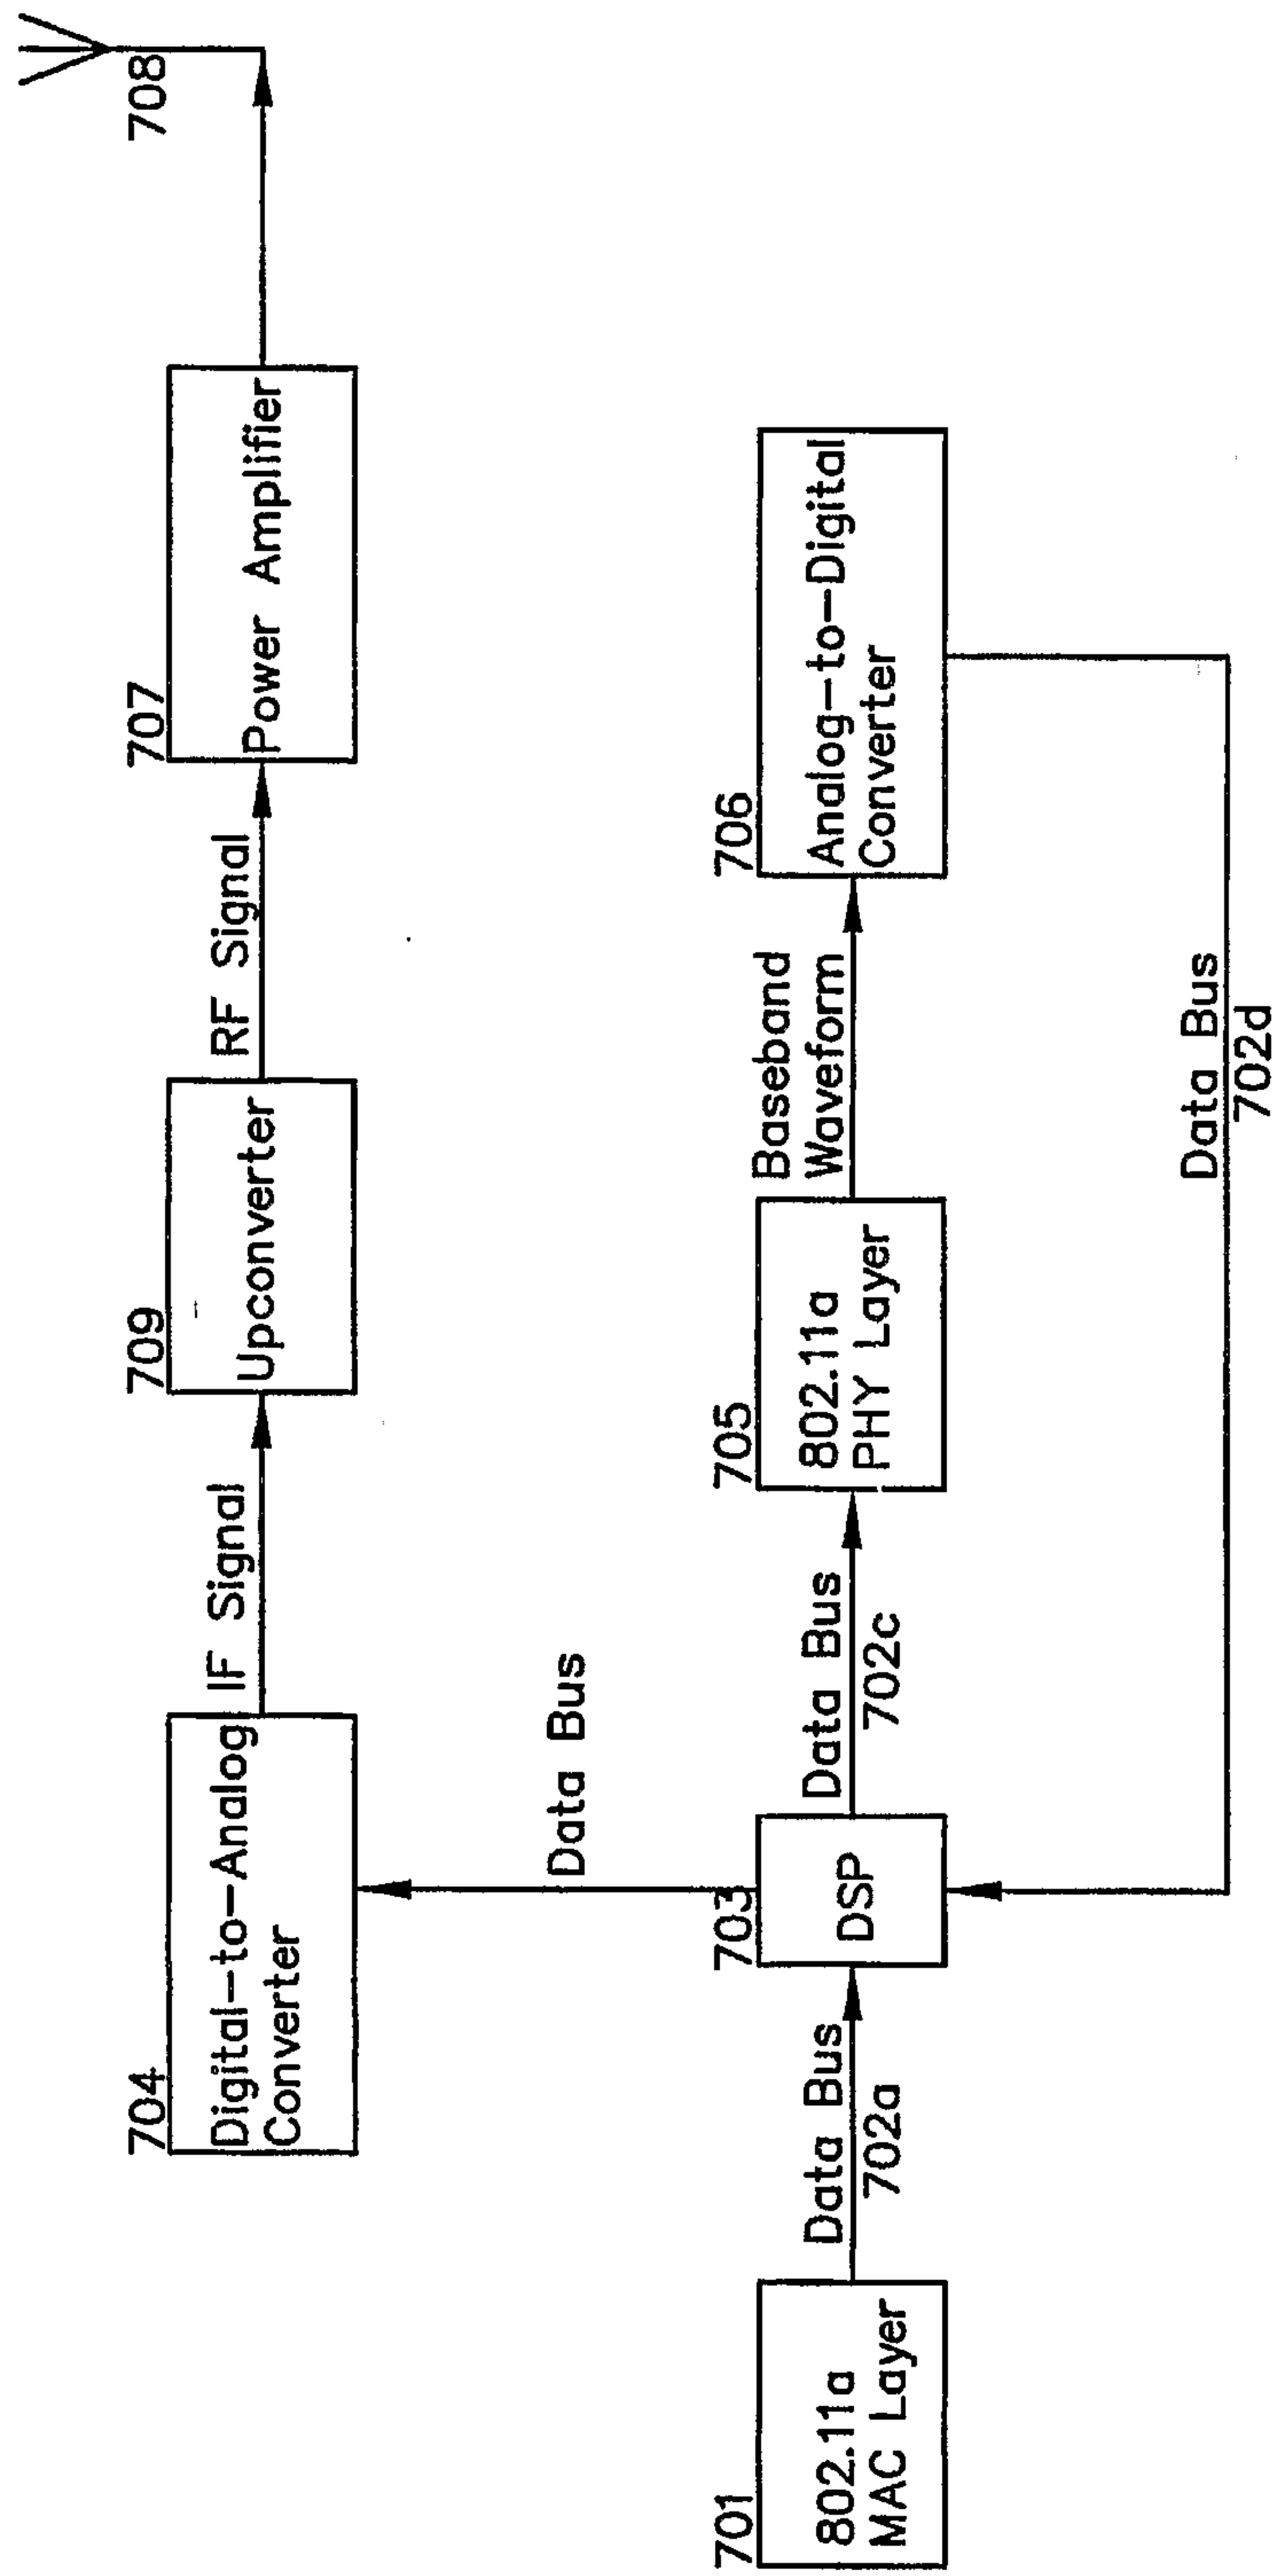


FIGURE 7

