




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : G05B 19/21	A1	(11) International Publication Number: WO 00/05631 (43) International Publication Date: 3 February 2000 (03.02.00)
(21) International Application Number: PCT/EP99/04764 (22) International Filing Date: 7 July 1999 (07.07.99) (30) Priority Data: 98202445.7 21 July 1998 (21.07.98) EP (71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (72) Inventors: AKKERMANS, Antonius, H., M.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). HEZEMANS, Cornelius, A.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). (74) Agent: FAESSEN, Louis, M., H.; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).		(81) Designated States: CN, JP, KR, SG, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: CONTROL SYSTEM, DRIVING SYSTEM AND CONTROL METHOD, APPARATUS INCLUDING THE DRIVING SYSTEM

(57) Abstract

A control system in accordance with the invention comprises error signal generating means (23) for generating an error signal (X_e) in response to a reference signal (X_r) and a first and a second position signal (X_{pa} , X_{pb} resp.). The reference signal is a measure of the desired value of a position of a first part (5) of a drive system with respect to a second part (0) of the drive system. The position signals (X_{pa} , X_{pb}) are a measure of the actual value of said position. The error signal (X_e) is a measure of the difference between the desired value and the actual value of the position. The control system further comprises energizing means (24) for energizing a motor (1) which is to be controlled by the control system in dependence on the error signal (X_e). The control system of the invention is characterized in that the error signal generating means (23) are adapted to generate weighting factors (X_{wa} , X_{wb}) from the reference signal (X_r), for weighting the position signals with the weighting factors and determining a sum (X_{el}) of the weighted position signals. The control system can be used in a recording/playback device for positioning a read/write head.

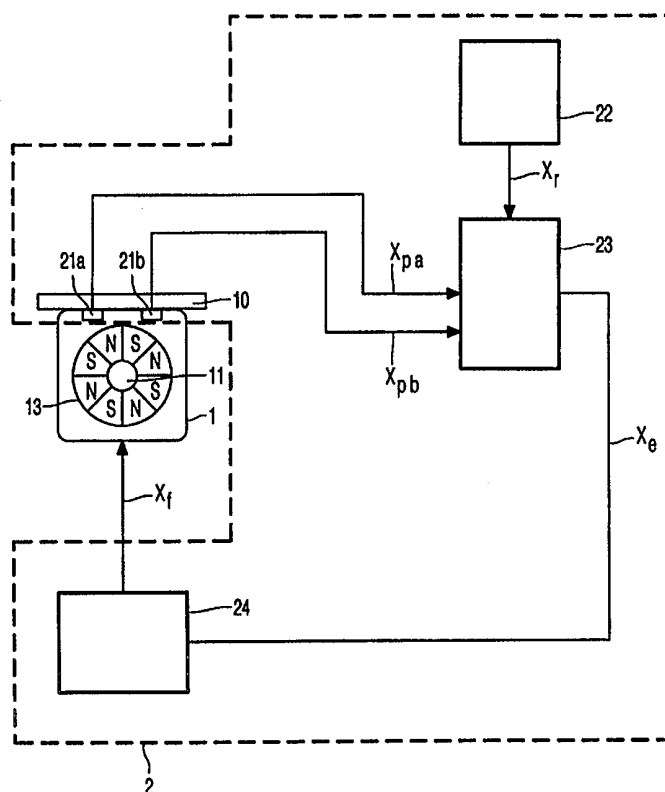

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Control system, driving system and control method, apparatus including the driving system.

The invention relates to a control system as defined in the opening part of Claim 1.

The invention also relates to a driving system including the control system.

The invention further relates to an apparatus for storing and/or reproducing
5 information, which apparatus includes the driving system.

The invention further relates to a method of controlling a motor, as defined in the opening part of Claim 8.

10 Such a control method, driving system, apparatus and method are known from WO 97/23873. In the driving system described therein the first and the second position signal are each generated by a Hall sensor. Furthermore, an inverted position signal is derived from each of the position signals. By means of the two position signals and one of the inverted
15 signals a status generator generates a status signal, which is applied to a multiplexer. The multiplexer also receives the two position signals and the two inverted position signals. Depending on the status signal the multiplexer transfers one of the inverted or non-inverted position signals to its output. The signal thus obtained on the output of the multiplexer is sawtooth-shaped. The reference means are adapted to compensate for abrupt changes in the output signal of the multiplexer by a corresponding variation of the reference signal. This
20 results in a uniform drive of the motor.

It is an object of the invention to provide a control system, a driving system, a method and an apparatus for storing and/or re producing information of the types defined
25 hereinbefore in which such a compensation is not required.

In order to achieve this object, the control system, the driving system and the apparatus is characterized as defined in Claim 1.

In order to achieve said object, the method is characterized as defined in Claim 8.

In accordance with the invention the position signals are used at the same time in order to calculate the error signal. This makes it possible to calculate an error signal which, regardless of the instantaneous value of the position, is always a monotonic function of the difference between the instantaneous value and the desired value of the position. As a result of this, compensation of the reference signal is not necessary.

These and other aspects of the invention will be described in more detail with reference to the drawings. In the drawings:

- 10 Fig. 1 diagrammatically shows a driving system,
- Fig. 2 diagrammatically shows error signal generating means,
- Fig. 3 shows a variant of a part of Fig. 2,
- Figs. 4A to 4D show signals appearing in the error signal generating means of Fig. 2,
- 15 Fig. 5 shows a part of Fig. 2, and
- Fig. 6 shows a unit for writing data onto and/or reading data from a data carrier.

Fig. 1 shows diagrammatically a driving system which comprises a motor 1 and a control system 2 for the motor. The motor is carried by a chassis which forms a first part and drives a second part formed by a shaft 11 with respect to the first part. For example, a reel for a magnetic or an optical tape, or a slide of a write/read head of an apparatus for reading or recording a disc-shaped data carrier, is mechanically coupled to the second part 11. The control means 2 include a measurement system 21a,b for generating a first and a second position signal X_{pa} , X_{pb} , which position signals are a measure of the instantaneous value of the position of the second part 11 with respect to the first part 10. In the present embodiment the motor 1 comprises a magnet ring 13 having nine magnetic pole pairs. The measurement system includes a first and a second Hall sensor 21a, 21b which are arranged in facing relationship with respect to the magnet ring and which generate the first and the second position signal, respectively. The position signals thus generated are periodic functions of the instantaneous value of the motor shaft angle α_p . The first and the second position signal are $\sin(9 \cdot \alpha_p)$ and $\cos(9 \cdot \alpha_p)$. In another version the measurement system comprises a first and a second optical sensor and the shaft of the motor carries a disc whose transmission is a function of the angle. In yet another version the measurement system comprises a disc whose resistance in a radial direction varies as a function of the angle and the radial resistance is measured by

means of a first slip contact at a central point on the disc and by means of two or more slip contacts at the periphery of the disc.

The control system further comprises reference means 22 for generating a reference signal X_r which is a measure of the desired position. If desired, the reference means 22 may generate one or more further reference signal for use by the error signal generating means 23. In the present case, the reference signal X_r is proportional to the value $9 \cdot \alpha_s$, where α_s is the desired value for the shaft of the motor 1. From the position signals X_{pa} , X_{pb} and the reference signal X_r the error signal generating means 23 derive an error signal X_e which is a measure of the difference between the desired value and the instantaneous value of the position. The control means 2 further comprise energizing means 24 for energizing the motor 1 with an energizing signal X_f in dependence on the error signal X_e .

Fig. 2 shows that the error signal generating means are adapted to derive weighting factors X_{wa} , X_{wb} from the reference signal, for weighting the position signals X_{pa} , X_{pb} with the weighting factors X_{wa} , X_{wb} and for determining a sum of the weighted position signals. The weighting factors are periodic functions of the reference signal X_r . In a variant the periodic functions are derived from the reference signal, for example, by a series expansion. However, in the present variant the error signal generating means comprise a first table 200 which supplies, as a function of the reference signal X_r , in the present case a 7-bit digital signal, a first weighting factor X_{wa} corresponding to $\sin(9 \cdot \alpha_s)$. A second table 201 supplies, as a function of the reference signal X_r , a second weighting factor X_{wb} corresponding to $\cos(9 \cdot \alpha_s)$.

A variant shown in Fig. 3 uses a single table 200' for calculating both the first weighting factor X_{wa} and the second weighting factor X_{wb} . Said table 201' receives an output signal X_r'' from a multiplexer 201'. This output signal X_r'' has been selected by the multiplexer 201' from a first input signal X_r and a second input signal X_r' in dependence on a binary selection signal X_s . The first input signal X_r corresponds to the reference signal, which is a measure of the angle $9 \cdot \alpha_s$. The adder 202' calculates the second signal X_r' , which is a measure of the angle $9 \cdot \alpha_s + \pi/2$, from the reference signal X_r . Depending on the value of the selection signal X_s the table 200' supplies an output signal X_w' corresponding to $\cos(9 \cdot \alpha_s)$ or $\sin(9 \cdot \alpha_s)$ and this signal X_w' is read into a first register 204' or into a second register 205' via a demultiplexer 203'. In the present variant the selection signal X_s is generated from the clock signal Cl by means of a divider 206'. The value of the selection signal X_s changes every period of the clock signal.

The error signal generating means 23 shown in Fig. 2 comprise a first multiplier 202 which receives the first position signals X_{pa} at its first input and which multiplies this signal by the second weighting factor W_{xb} applied to its second input by the second table 201. A second multiplier 203 receives the second position signal X_{pb} at its first input and the first weighting factor X_{wa} from the output of the first table 201 at its other input. The first multiplier 202 has an output connected to an inverting first input and the second multiplier 203 has an output connected to a second non-inverting input of a first adder.

The operation of the error signal generating means will now be explained with reference to Figs. 4A to 4D.

10 The signal X_{e1} supplied by the adder 206 is proportional to $\sin(9*(-\alpha_s - \alpha_d))$. This signal, shown in Fig. 4A, is suited as an error signal provided that the value of the angle $9*(-\alpha_s - \alpha_d)$ remains within an interval from $-\pi/2$ to $+\pi/2$.

In order to enable also larger deviations between the desired angle and the instantaneous angle to be corrected a second weighted sum X_{e2} is determined, which is a measure of $\cos(9*(-\alpha_s - \alpha_d))$. Consequently, X_{e1} and X_{e2} are periodic functions of the difference between the instantaneous value of the angle and the desired value of the angle, which are shifted in phase relative to one another. This signal is shown in Fig. 4B. For this purpose, a third multiplier 204 receives the first position signal X_{pa} at its first input and the first weighting factor X_{wa} at its second input. A fourth multiplier 205 receives the second position signal X_{pb} at its first input and the second weighting factor X_{wb} at its second input. The third multiplier and the fourth multiplier each have an output connected to, respectively, a first and a second input (both non-inverting) of a second adder 207. The signal X_{e2} is proportional to $\cos(9*(-\alpha_s - \alpha_d))$. Each of the adders 206, 207 has an output connected to a respective input of a counting unit 208.

25 The counting unit 208, which is shown in more detail in Fig. 5, determines the nearest integral value N of $9*(-\alpha_s - \alpha_d)/\pi$ (see Fig. 4C) from the first weighted sum X_{e1} and the second weighted sum X_{e2} . The value N is incremented if for a value of the first sum X_{e1} higher than a positive first threshold value T the sign of the second sum X_{e2} changes from positive to negative, or if for a value of the first sum X_{e1} lower than a negative second threshold value $-T$ the sign of the second sum X_{e2} changes from negative to positive. The value N is decremented if for a value of the first sum X_{e1} higher than a positive first threshold value T the sign of the second sum X_{e2} changes from negative to positive, or if for a value of the first sum X_{e1} lower than a negative second threshold value $-T$ the sign of the second sum X_{e2} changes from positive to negative.

The value N is equal to $\text{trunc}(9 \cdot (\alpha_p - \alpha_s) / \pi)$, where $\text{trunc}(x)$ is the rounded-up value of x . The value of N is consequently a measure of the number of periods corresponding to the deviation between the instantaneous angle α_p and the desired angle α_s .

The output of the first counter 206 is further connected to a first input 209a of a multiplexer 209. A second input 209b of the multiplexer 209 is connected to the output of the counting unit 208. The output of the counting unit 208 is connected to a selection input 209c of the multiplexer 209. The generated error signal X_e is supplied to the output of the multiplexer 209. The multiplexer 209 has its output coupled to its first input 209a when the value of the signal N at the selection input 209c corresponds to a value 0. The multiplexer 209 has its output coupled to its second input 209b when the value of the signal N at the selection input 209c differs from 0. The signal X_e at the output of the multiplexer 209 is shown in Fig. 4D. In the case of a comparatively small difference between the instantaneous position α_p and the desired position α_s , i.e. $-\pi/2 \leq 9 \cdot (-\alpha_s - \alpha_d) \leq \pi/2$, the error signal generating means 23 generate an error signal X_e which is equal to $\sin(9 \cdot (-\alpha_s - \alpha_d))$. In the case of a comparatively large difference, i.e. for an absolute value of $9 \cdot (-\alpha_s - \alpha_d) > \pi/2$, the error signal is equal to $\text{trunc}(9 \cdot (-\alpha_s - \alpha_d) / \pi)$. The quantization of the error signal X_e generated by the error signal generating means 23 is therefore finer in the case of a comparatively small difference than in the case of a comparatively large difference between the instantaneous position (α_p) and the desired position (α_s). This makes it possible to obtain an accurate positioning, while yet the total number of quantization levels can be limited.

For an absolute value of the difference larger than $3\pi/2$ the error signal X_s is independent of the difference. Moreover, the error signal generating means 23 generate an error signal X_e which in the case of a comparatively small difference between the instantaneous position α_p and the desired position α_s exhibits a comparatively large variation with respect to the variation of the difference in the case of a comparatively large difference.

The counting unit shown in Fig. 5 has a first input 208a for receiving the first sum X_{e1} and a second input 208b for receiving the second sum X_{e2} . The first input X_{e1} is connected to a non-inverting input of a first comparator 220 and to an inverting input of a second comparator 221. An inverting input of the first comparator 220 is further connected to a first bias voltage source 222, which supplies a voltage which is a measure of the positive threshold value T . The second comparator 221 has a non-inverting input connected to a second bias voltage source 223 which supplies a voltage which is a measure of the negative threshold value $-T$. The second input 208b of the counting unit 208 is connected to a non-inverting input

of a third comparator 224. The latter has its inverting input connected to ground. The third comparator 224 has its output connected to an input of a delay element 225. The delay element 225 has an output connected to a first input of an AND gate 226. The third comparator 224 has its output also connected to an input of an inverter 227. The inverter 227 has an output
5 connected to a second input of the first AND gate 226. The third comparator 224 has its output further connected to a first input of a second AND gate 228. The delay element 225 also has its output connected to an input of a second inverter 229. The second inverter 229 has an output connected to a second input of the second AND gate 228. The second AND gate 228 has an output connected both to a first input of a third AND gate 230 and to a first input of a
10 sixth AND gate 233. The first AND gate has an output connected both to a first input of a fourth AND gate 231 and to a first input of a fifth AND gate 232. The third AND gate 230 and the fifth AND gate 232 have their second inputs connected to the output of the second comparator 221. The fourth AND gate 231 and the sixth AND gate 233 have their second inputs connected to the output of the first comparator 220. The third AND gate 230 has an
15 output connected to a first input and the fourth AND gate 231 has an output connected to a second input of a first OR gate 234. The first OR gate has an output connected to the UP input of an UP/DOWN counter 236. The fifth AND gate 232 has an output connected to a first input and the sixth AND gate 233 has an output connected to a second input of a second OR gate 235. The second OR gate 235 has an output connected to the DOWN input of an UP/DOWN
20 counter 236. It is to be noted that in the variants described hereinbefore the functions of the control means 2 have been implemented in dedicated hardware. This is favorable in order to achieve short response times. In other variants the functions of the control means or parts thereof can be carried out by means of a suitably programmed general-purpose processor.

Fig. 6 shows diagrammatically a unit for writing data onto and/or reading data
25 from a data carrier 3. The data carrier 3 shown records the data as an optical pattern. In the version shown herein the data carrier 3 has a radiation-sensitive layer 31, for example a radiation-sensitive dye layer or a phase change layer. The data carrier 3 is driven in a customary manner by a motor 4, as a result of which it is rotated about an axis. A write and/or read head is arranged opposite the data carrier to write and/or read information patterns on the
30 data carrier 3.

In the version shown herein the write and/or read head 5 includes a radiation source 51, for example in the form of a solid-state laser. In another version the unit is intended for a magnetic data carrier and the write and/or read head has means for writing and/or reading magnetic patterns on the data carrier, for example a magnetic head.

The radial position of the head 5 relative to the data carrier 3 is controlled by a positioning mechanism. The head 5 and the data carrier 3 then respectively form a second part and a first part of a driving system. The driving system further includes a motor 1. The positioning mechanism may be constructed as an arm which is pivotable about an axis by means of the motor 1, the head being mounted on one end of the arm.

In the version described here the positioning mechanism takes the form of a slide which is translatable by means of the motor 1, a rotary movement of the shaft 14 of the motor 1 being converted into a translation of the head 5 by means of a rack and worm gear 15. The angle (α_p) of the shaft 14 is consequently related to the instantaneous value of the radial position of the head 5 with respect to the data carrier 3. When information is read from or information is written onto the data carrier 3 the data carrier 3 is rotated and the head 5 is moved in a radial direction in such a manner that the head follows an information track of the data carrier 3 with a linear velocity. When information is written onto the data carrier 3 the laser generates a modulated laser beam which is projected onto the radiation-sensitive layer 31 of the data carrier 3 by means of the lens system 52 (shown diagrammatically). As a result of this, the radiation-sensitive layer 31 is subjected to optically detectable changes, for example in the degree of reflection from this layer 31. During reading the lens system 52 projects a laser of beam of comparatively low intensity onto the radiation-sensitive layer 31. Radiation reflected from the radiation-sensitive layer is subsequently imaged onto an optical detector 6 via the lens system 52 and via a semi-reflecting mirror 53. In response to this radiation the optical detector produces signals X_d . A signal processor 7 derives low-frequency signals X_{lf} from the detector signals, which low-frequency signals are important inter alia for controlling the head movement. One of the signals X_{lf} , for example, is an indication of the extent to which the beam coincides with a track to be written/read. Another signal is an indication of the extent to which the beam is in focus on the radiation-sensitive layer. Furthermore, the signal processor 7 derives high-frequency signals X_{hf} from the detector signals X_d . The high-frequency signals represent, for example, audio and/or video information. Such a signal processor is described, for example, in EP 508 52. Moreover, the signal processor may perform error detection and channel decoding.

Reference means 22 including a microprocessor 81 having a memory 82 derive a reference signal X_r from the low-frequency signals in a customary manner, which reference signal is a measure of the desired position of the read head. Control means 23, 24 derive a signal X_f for energizing the positioning mechanism 9 from the reference signal X_r and position signals X_{pa} , X_{pb} obtained from the positioning mechanism 9. For this purpose, the

control means include means 23 and energizing means 24 as described with reference to Figs 1, 2, 4 and 5.

In the version described herein the read head 5 has a first actuator 56 which enables fine control of the position of the beam on the data carrier 3. The read head 5 further
5 has a second actuator 55 for controlling the focussing of the laser beam.

The manner in which the reference signal X_r is generated depends on the mode of the apparatus. In a first mode in which information is read or written the position of the beam is determined in the first place by the first actuator 56. The positioning mechanism 9 can then move the head 5 gradually in order to minimize the average excursion of the first actuator
10 56. Furthermore, the positioning mechanism 9 can become operative as soon as the excursion of the first actuator 56 exceeds a predetermined limit as described in US 5,321,676. In a second mode a search operation for a data carrier track to be read or written is effected. Usually, a large radial distance is covered for this purpose, the positioning mechanism 9 then playing an essential role. During the search operation a reciprocating movement can be
15 imposed on the first actuator 56, as is described in US 4,330,880. Thus, it is possible to achieve that the beam follows a track in periodically recurring time intervals during the search operation and thereby also read information during the search for a new track.

Obviously, a multitude of variants are conceivable to the expert without departing from the scope of the Claims. In an embodiment of the apparatus in accordance with
20 the invention the motor is, for example, a stepper motor having a first winding and a second winding which are 90° spaced apart, and the position signals are proportional to $\sin(\alpha)$ and $\cos(\alpha)$, where α is the angle occupied by the motor shaft. Controlling is possible by means of the error signal generating means shown in Fig. 2, in which X_{e1} is an error signal and X_{e2} is a further error signal. In that case each of the windings of the stepper motor has a driver which is
25 controlled by a respective error signal.

The invention further relates to any novel characteristic feature and to any combination of novel characteristic features.


CLAIMS:

1. A control system (2) comprising:
 - a measurement system (21a, 21b) for generating a first and a second position signal (X_{pa} and X_{pb} , respectively), which position signals are a measure of an instantaneous value of the position of a second part (11; 5) of a driving system, which second part is to be positioned with respect to a first part (10; 3) of said driving system,
 - error signal generating means (23) for generating an error signal (X_e) in response to a reference signal (X_r) and the first and a second position signal (X_{pa} and X_{pb} , respectively), which reference signal is a measure of a desired value of the position, which error signal (X_e) is a measure of the difference between the desired value and the instantaneous value of the position,
 - energizing means (24) for energizing the motor (1) in dependence on the error signal (X_e),characterized in that the error signal generating means (23) are adapted to derive weighting factors (X_{wa} , X_{wb}) from the reference signal (X_r), for weighting the position signals with the weighting factors, and for determining a sum (X_{e1}) of the weighted position signals.
2. A control system as claimed in Claim 1, characterized in that the position signals (X_{pa} , X_{pb}) are periodic functions of the instantaneous value of an angle (α_p) related to the position, the weighting factors (X_{wa} , X_{wb}) being periodic functions of the reference signal (X_r).
3. A control system as claimed in Claim 2, characterized in that error signal generating means (23) are adapted to determine a further sum (X_{e2}) from the weighted position signals, the sum (X_{e1}) and the further sum (X_{e2}) being periodic functions of the deviation between the instantaneous value (α_p) and the desired value of the angle (α_s), which periodic functions are shifted in phase with respect to one another, and the error signal generating means (23) being further adapted to determine a measure (N) of the number of

periods corresponding to the deviation between the instantaneous value (α_p) and the desired value of the angle (α_s).

4. A control system as claimed in Claim 1, 2 or 3, characterized in that the error
5 signal generating means (23) generate an error signal (X_e) which in the case of a comparatively small difference between the instantaneous position (α_p) and the desired position (α_s) exhibits a comparatively fine quantization with respect to the quantization in the case of a comparatively large difference.
- 10 5. A control system as claimed in Claim 1, 2, 3 or 4, characterized in that the error signal generating means (23) generate an error signal (X_e) which in the case of a comparatively small difference between the instantaneous position (α_p) and the desired position (α_s) exhibits a comparatively large variation with respect to the variation in the case of a comparatively large difference.
- 15 6. A driving system comprising a motor (1), a first part (3; 10), a second part (5; 11) to be driven with respect to the first part by means of the motor, and a control system as claimed in any one of the Claims 1 to 5.
- 20 7. An apparatus for storing and/or reproducing information, comprising a head (5) for writing information onto an information carrier (3) and/or for reading information stored on an information carrier (3), and a driving system as claimed in Claim 6, for positioning the head (5) with respect to the information carrier (3).
- 25 8. A method of controlling a motor (1) in a driving system having a first part (10; 3) and a second part (11; 5) to be driven with respect to the first part by the motor, which method comprises the steps of:
- generating a first and a second position signal (X_{pa} , X_{pb}) which depends on the value of the position of the second part with respect to the first part,
 - 30 - generating a reference value (X_r) which is a measure of the desired value of the position,
 - generating an error signal (X_e) which is a measure of the difference between the instantaneous value and the desired value of the position,

- energizing the motor in dependence on the error signal,
characterized in that
the method further comprises the steps of:
- deriving weighting factors (X_{wa} , X_{wb}) from the reference signal (X_r),
- 5 - weighting the position signals (X_{pa} , X_{pb}) with the weighting factor (X_{wa} ,
 X_{wb}), and
- determining a sum (x_{e1}) of the weighted position signals.

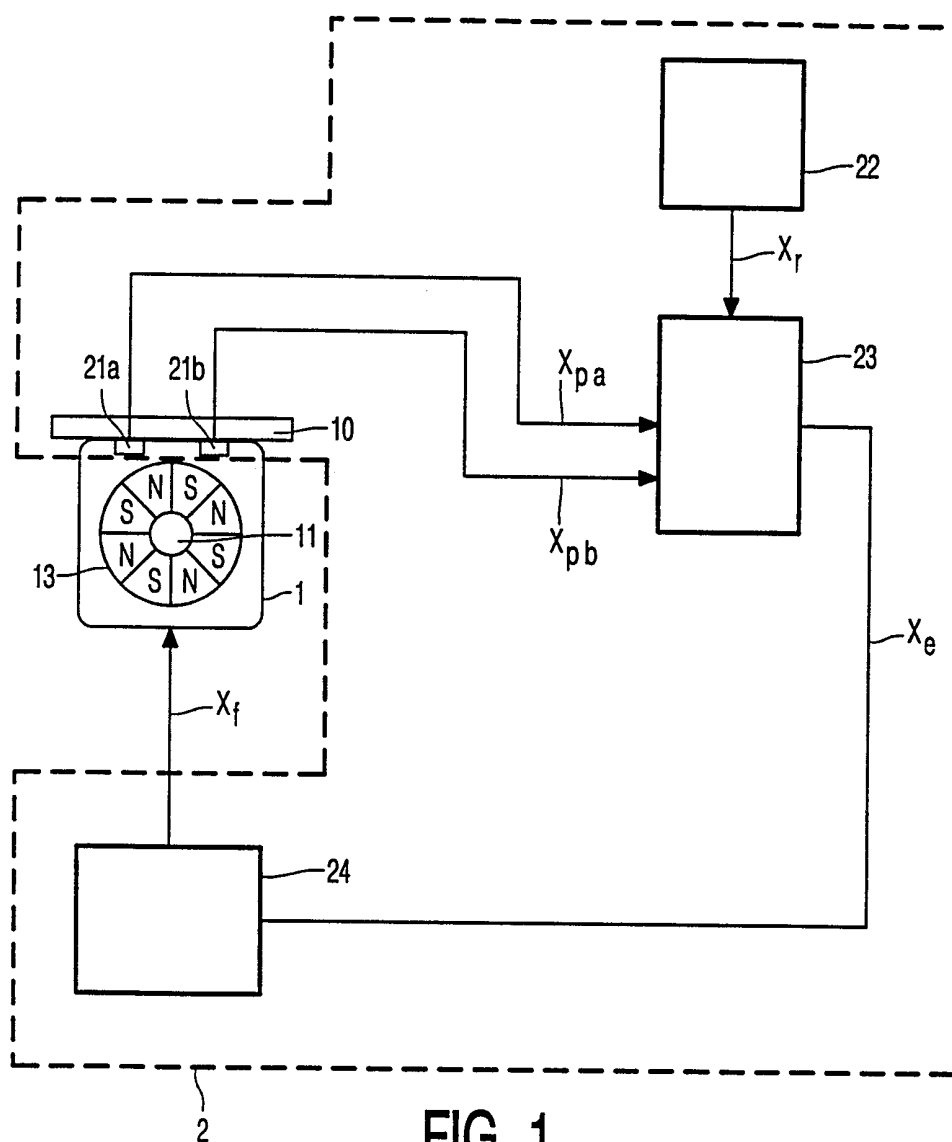$\frac{1}{6}$ 

2/6

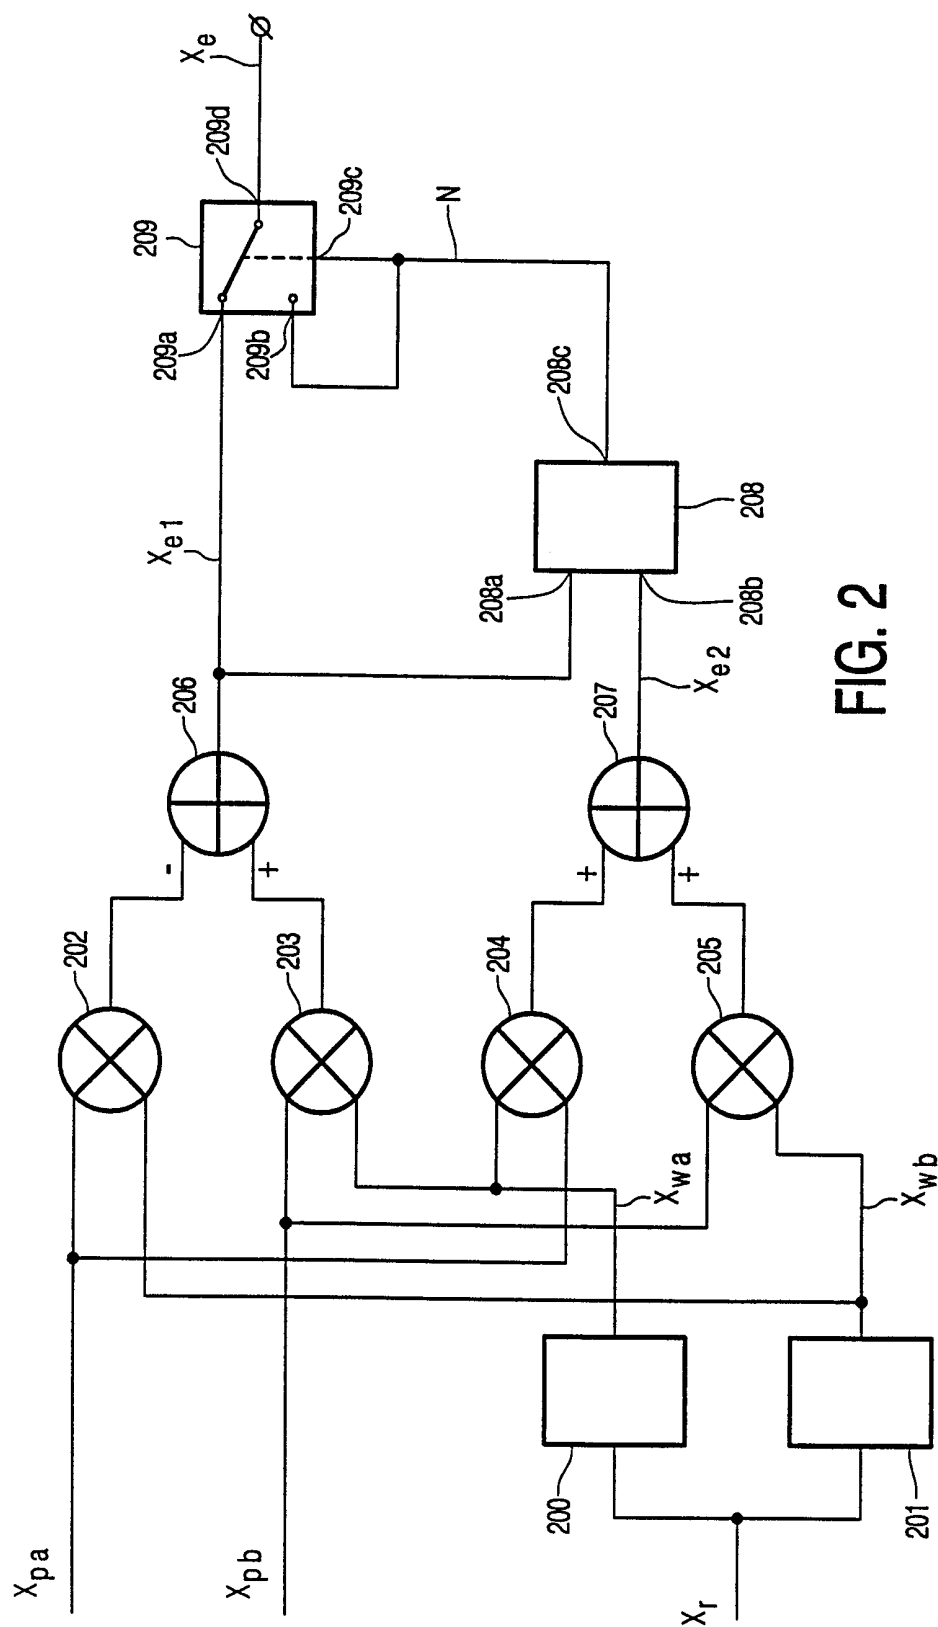


FIG. 2

3/6






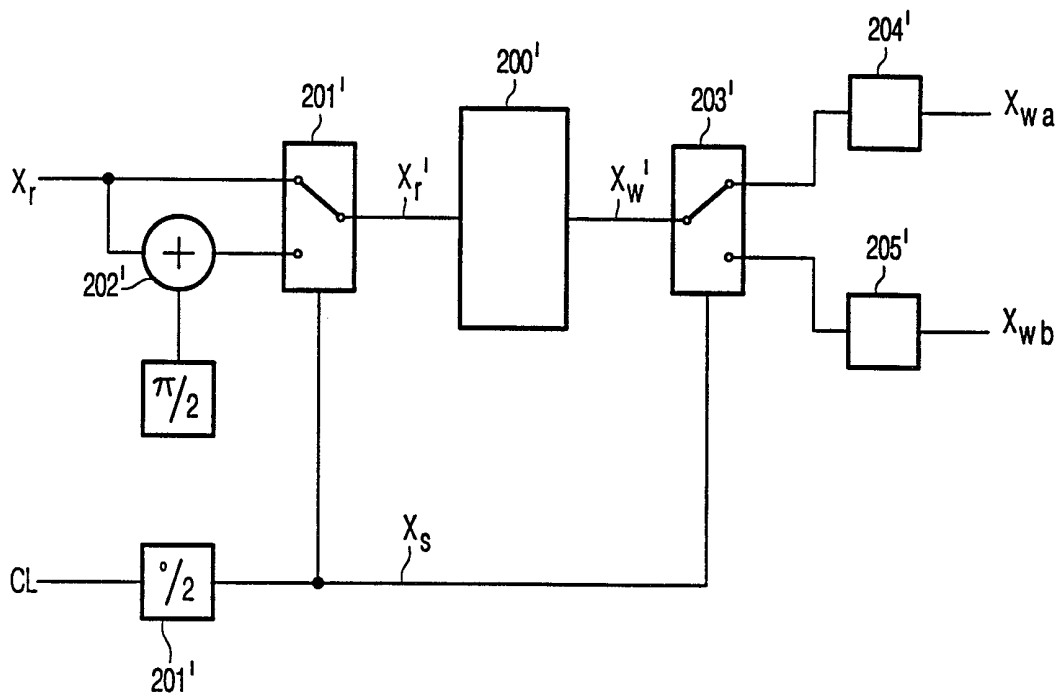


FIG. 3

4/6

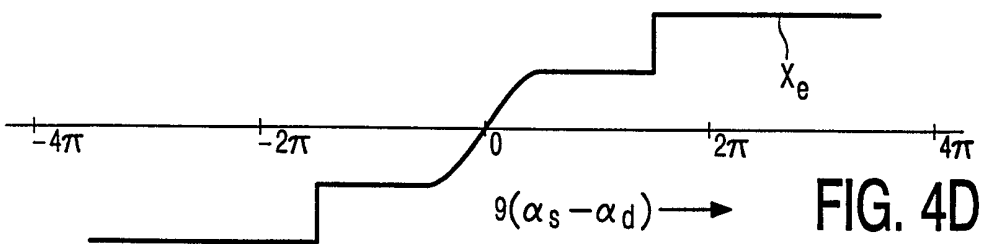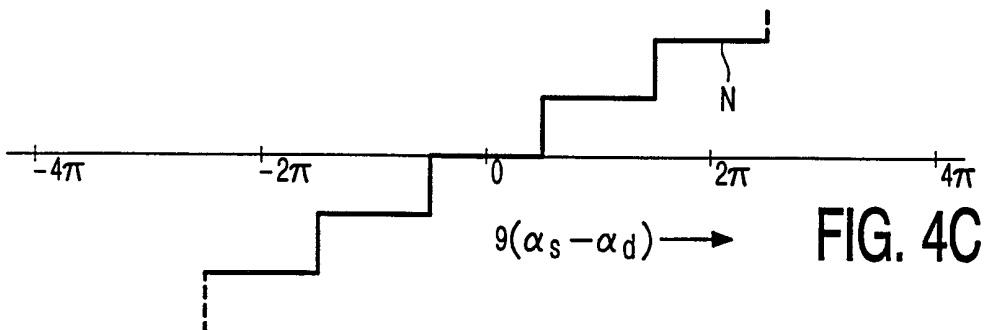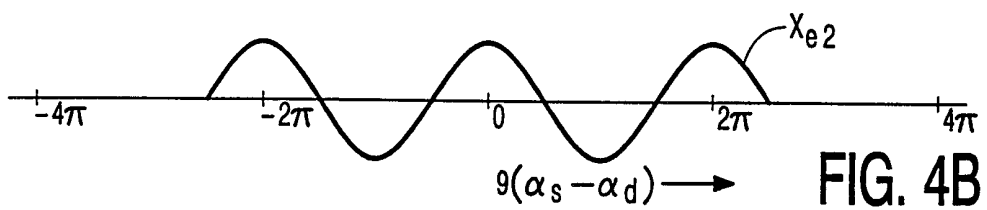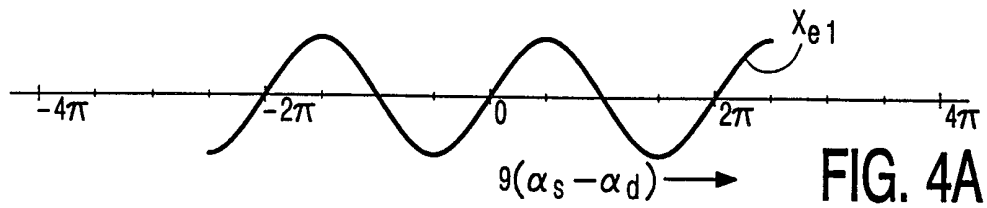

5/6

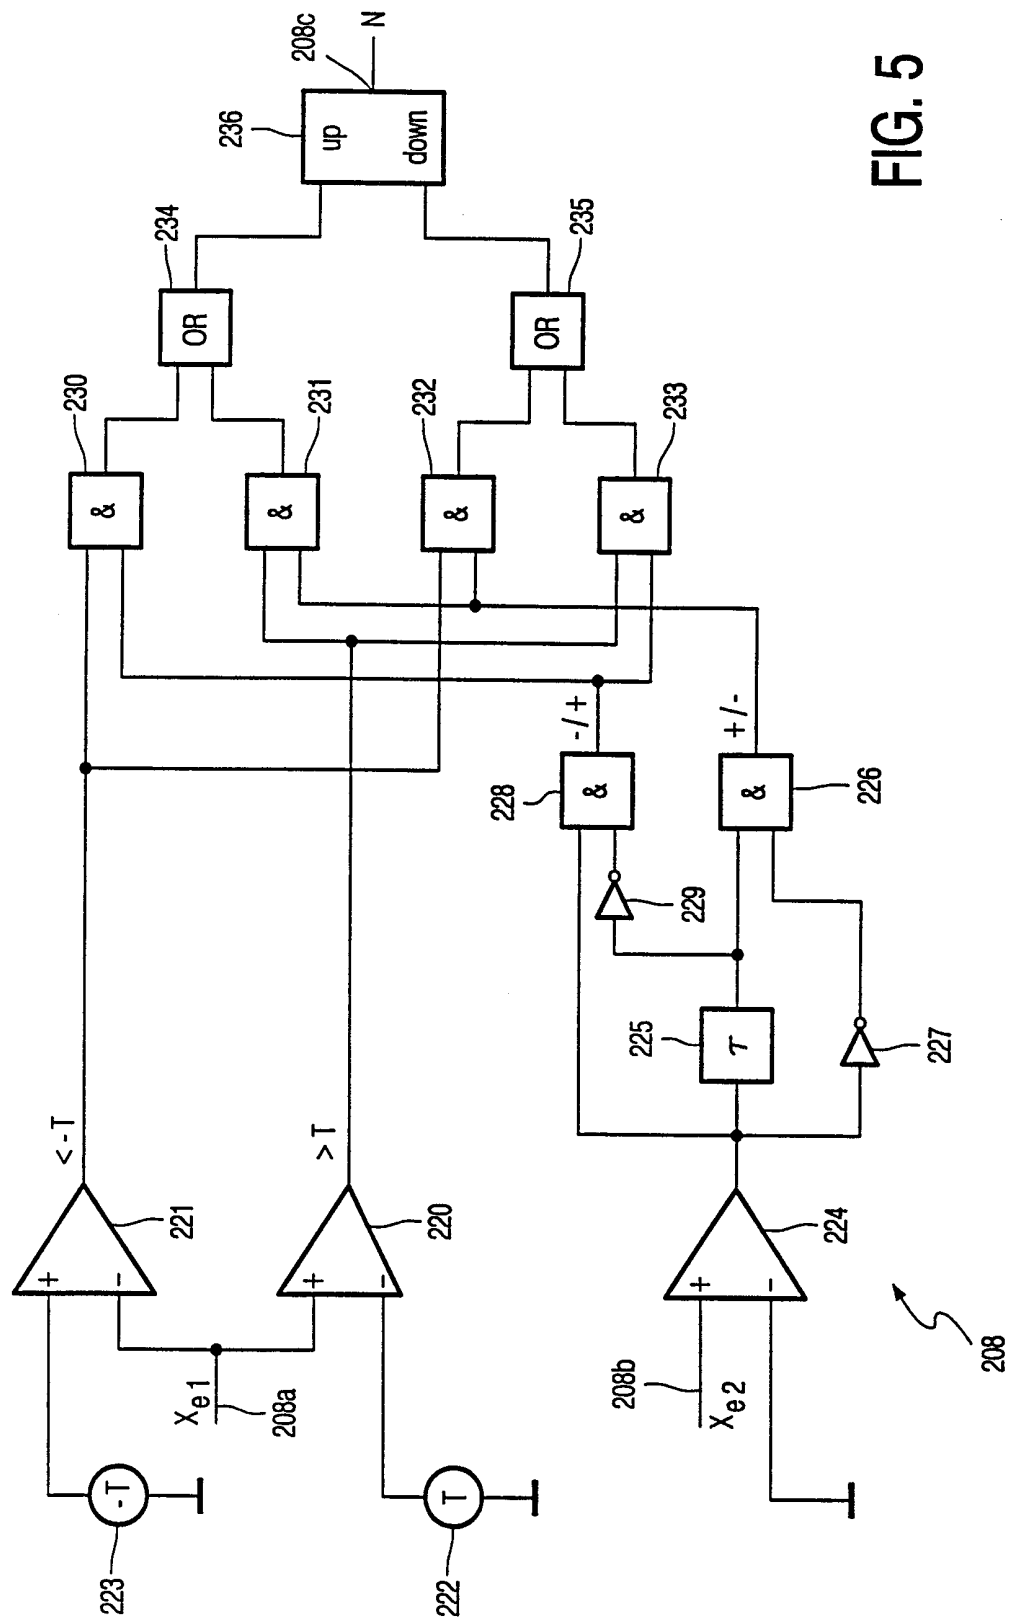

6/6

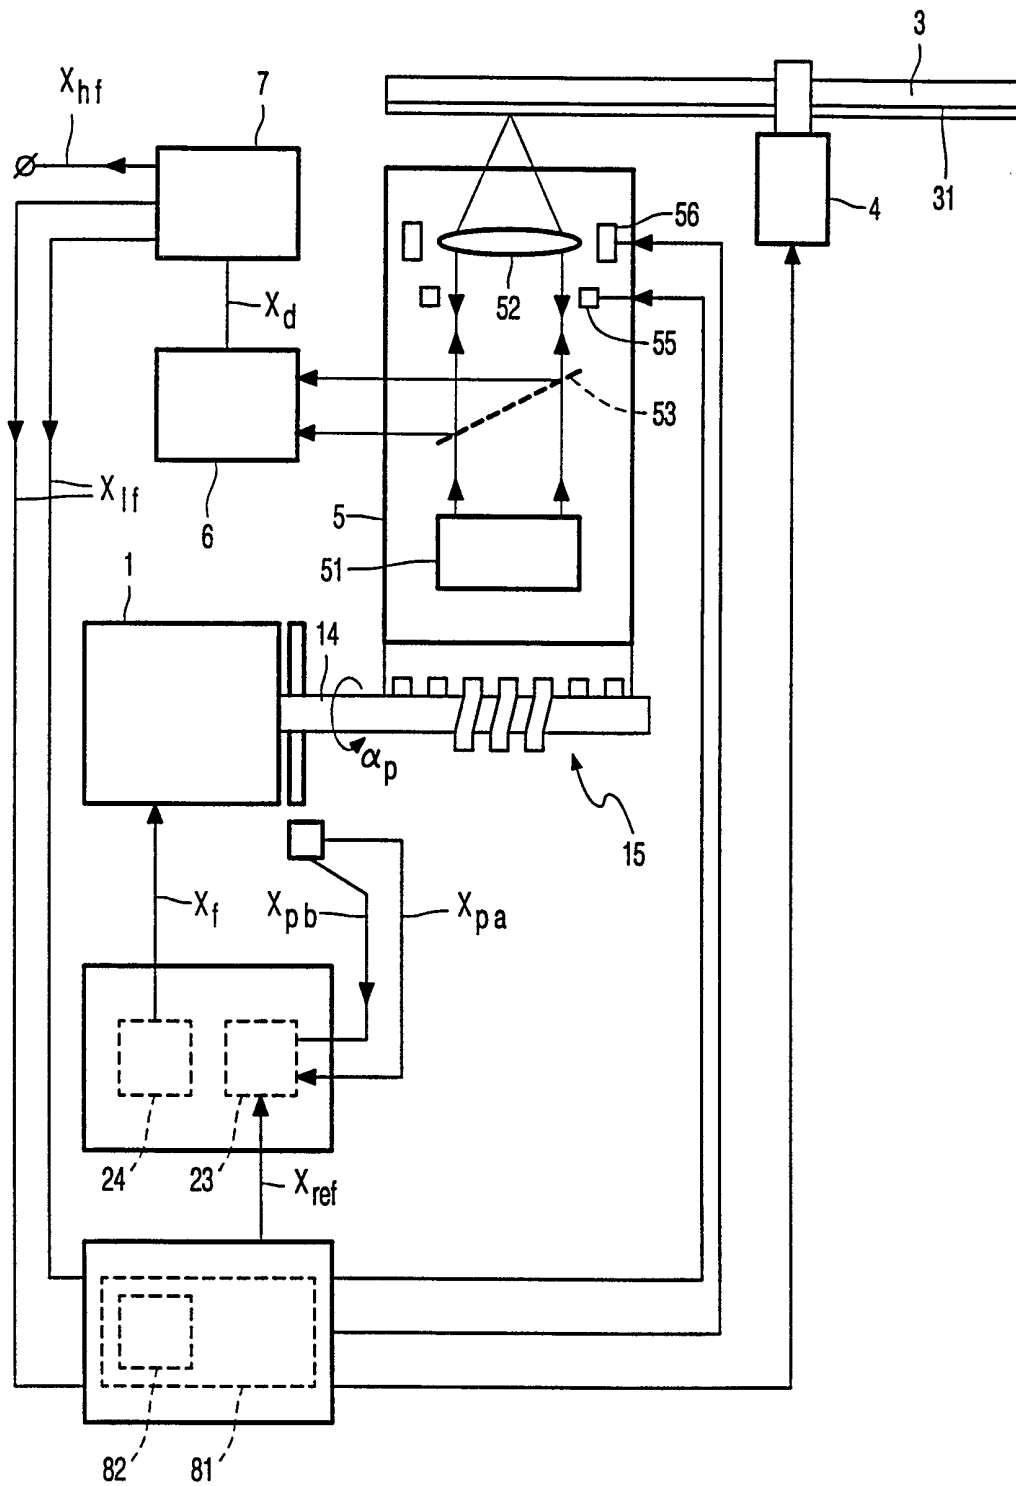


FIG. 6

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/04764

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G05B19/21

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G05B G11B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 97 23873 A (PHILIPS ELECTRONICS NV ;PHILIPS NORDEN AB (SE)) 3 July 1997 (1997-07-03) cited in the application the whole document ---	1,6-8
Y	US 5 636 193 A (OHMI TAKAO) 3 June 1997 (1997-06-03) column 6, line 21 -column 7, line 14; figure 1 ---	1,6-8
A	---	2-5
A	US 3 809 335 A (MANTEY J) 7 May 1974 (1974-05-07) column 4, line 15 -column 11, line 2; figure 1 ---	1-8
	--- -/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

16 November 1999

Date of mailing of the international search report

23/11/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Nettesheim, J

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/04764

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 320 589 A (HEIDENHAIN GMBH DR JOHANNES) 21 June 1989 (1989-06-21) the whole document -----	1-8

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 99/04764

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9723873 A	03-07-1997	EP 0815557 A US 5783924 A	07-01-1998 21-07-1998
US 5636193 A	03-06-1997	JP 7184386 A US 5936787 A	21-07-1995 10-08-1999
US 3809335 A	07-05-1974	BE 801723 A DE 2332852 A FR 2191190 A GB 1404676 A JP 911180 C JP 49044721 A JP 52042367 B	15-10-1973 17-01-1974 01-02-1974 03-09-1975 21-06-1978 27-04-1974 24-10-1977
EP 0320589 A	21-06-1989	DE 3742295 A DE 3889530 D	22-06-1989 16-06-1994