



(51) International Patent Classification:

H04R 5/02 (2006.01) H04R 27/00 (2006.01)
H04S 3/00 (2006.01) H04S 7/00 (2006.01)

(21) International Application Number:

PCT/EP2016/059561

(22) International Filing Date:

28 April 2016 (28.04.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15165526.3 28 April 2015 (28.04.2015) EP

(71) Applicant: **L-ACOUSTICS UK LTD** [GB/GB]; Adler Shine, Aston House, Cornwall Avenue, London N3 1LF (GB).

(72) Inventor: **HEIL, Christian**; L-acoustics Uk Limited, c/o Adler Shine, Aston House, Cornwall Avenue, London N3 1LF (GB).

(74) Agent: **HARRIS, Oliver John Richard**; Novagraaf UK, Centrum, Norwich Research Park, Colney Lane, Norwich Norfolk NR4 7UG (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LI, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: AN APPARATUS FOR REPRODUCING A MULTI-CHANNEL AUDIO SIGNAL AND A METHOD FOR PRODUCING A MULTI CHANNEL AUDIO SIGNAL

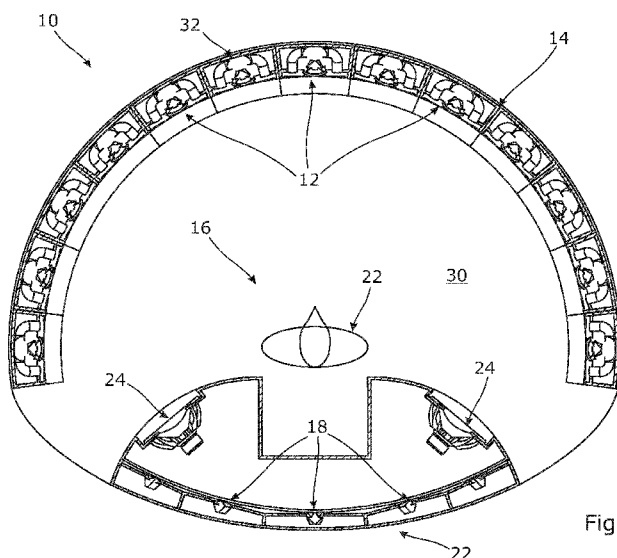


Figure 1

(57) Abstract: A method for producing a multi-channel audio signal from one or more sound object signals is disclosed, where, for each sound object signal a plurality of width signals is produced, the amplitudes of the width signals following a substantially Gaussian distribution. The width signals are processed to produce a plurality of pan signals which are mapped to at least one channel. Each channel in the audio signal is produced by combining the pan signals from each sound object. An apparatus (10) for reproducing such a multi-channel audio signal is also disclosed, in which a plurality of first loudspeakers (12) are provided spaced around a first arc (14) forward of a predetermined listening zone (16), each of the first loudspeakers (12) facing towards the listening zone (16) and substantially equidistant therefrom. A plurality of second loudspeakers (18) are provided spaced around a second arc (20) behind the listening zone (16), each of the second loudspeakers (18) facing towards the listening zone (16). An amplifier (28) produces an amplified signal from each channel in the audio signal, each amplified signal being provided to a corresponding

first or second loudspeaker (12, 18) whereby in use each sound object is reproduced by one or more loudspeakers (12, 18) such that the SPL at a point spaced from the apparatus (10) is less than the SPL at the listening zone (16).

TITLE

AN APPARATUS FOR REPRODUCING A MULTI-CHANNEL AUDIO SIGNAL AND A METHOD FOR PRODUCING A MULTI-CHANNEL AUDIO SIGNAL

Field of the Invention

- 5 [1] The present invention relates to multi-channel audio systems.

Background and Prior Art

- 10 [2] Multi-channel audio systems are distinguished from stereophonic audio systems by the number of channels of audio information and the corresponding number of loudspeakers used for playback. While stereophonic systems are characterised by two channels, common multi-channel audio systems have 5 or more channels.

- [3] One of the goals of multi-channel audio systems is to provide a listener with the immersive experience of a conductor or an artist on stage.

- 15 [4] One factor important to such an experience is the ability produce a realistic “sound stage” in which each object – for example musical instruments – within the produced sound is perceived by the listener to be originating from a position. Sound engineers place each sound object, typically at a virtual position between two channels, when mixing a multi-channel audio signal. The component of each sound object in the two channels is then determined using amplitude panning. When each channel is reproduced by a corresponding loudspeaker, the sound is perceived by the listener to originate from a location determined by the amplitude panning and the location of the loudspeakers to the listener.
- 20

- [5] Another factor important to such an experience is the sound pressure level (SPL) the system is able to produce where the listener is positioned. Concerts and similar live performances can involve peak SPL above 120 dB.

- 25 [6] Most multi-channel audio systems have loudspeakers placed near the walls of a room, with the listener positioned towards the centre of the room. To provide an SPL of 120 dB at the listener with such an arrangement, the SPL at most positions along the walls of the room itself is greater than 120 dB, which is undesirable in residential environments.

Summary of the Invention

[7] In accordance with a first aspect of the invention there is provided an apparatus for reproducing a multi-channel audio signal consisting of one or more sound objects in which each sound object is present in a plurality of channels, the apparatus comprising:

A plurality of first loudspeakers provided spaced around a first arc forward of a predetermined listening zone, each of the first loudspeakers facing towards the listening zone and substantially equidistant therefrom;

A plurality of second loudspeakers provided spaced around a second arc behind the listening zone, each of the second loudspeakers facing towards the listening zone;

An amplifier arranged to produce an amplified signal from each channel in the audio signal, each amplified signal being provided to a corresponding first or second loudspeaker;

Whereby in use each sound object is reproduced by one or more loudspeakers such that the SPL at a point spaced from the apparatus is less than the SPL at the listening zone.

[8] Preferably, the SPL at a point spaced from the apparatus the same distance as each first loudspeaker is spaced from the listening zone is 15 dB less than the SPL at the listening zone.

[9] Preferably, the number of first and second loudspeakers is at least 13, the number of first loudspeakers being greater than the number of second loudspeakers.

[10] Preferably, the plurality of second loudspeakers are provided closer to the listening zone than the first loudspeakers.

[11] Preferably, the apparatus further comprises an enclosure provided behind the listening zone, the amplifier and second loudspeakers being housed within the enclosure.

[12] Preferably, the apparatus further comprises a subwoofer housed within the enclosure.

[13] Preferably, each first loudspeaker is provided within a corresponding enclosure, the enclosures of adjacent first loudspeakers being coupled together.

[14] Preferably, the multi-channel audio signal is produced by the method of any one of claims 5 to 8.

[15] In accordance with a second aspect of the invention there is provided a method for producing a multi-channel audio signal from one or more sound object signals, comprising:

For each sound object signal:

Producing a plurality of de-correlated width signals, wherein the amplitudes of said width signals follows a substantially Gaussian distribution;

Processing the plurality of width signals to produce a plurality of pan signals, each pan signal being mapped to at least one channel;

For each channel in the audio signal, combining the pan signals from each sound object for that channel.

[16] Preferably, the step of de-correlating the phase of each width signal comprises adding to each width signal a different phase offset, and altering the phase offset of each width signal with a period T.

[17] Preferably, the substantially Gaussian distribution follows a user-configurable standard deviation.

[18] Preferably, the user-configurable standard deviation is configurable for each sound object signal.

[19] Preferably, the method further comprises the step of normalising the amplitudes of the width signals such that the amplitude of sum of the width signals is equal to the amplitude of the sound object signal.

[20] Preferably, the method further comprises processing each sound object signal to produce a depth-corrected signal, and producing the plurality of width signals from the depth-corrected signal..

Brief Description of the Figures

[21] The invention will now be described, by way of example, with reference to the accompanying drawings, in which:

[22] Figure 1 is a top view, partially cut away, of an apparatus for reproducing a multi-channel audio signal according to one embodiment of the invention;

[23] Figure 2 is a perspective rear view of the apparatus in Figure 1;

[24] Figure 3 is a perspective front view of the apparatus in Figure 1;

5 [25] Figure 4 is shows room sound pressure levels (SPL) when the apparatus of Figure 1 is in use;

[26] Figure 5 is shows comparable room SPL using conventional stereophonic loudspeakers and audio system;

10 [27] Figure 6 is shows comparable room SPL using conventional multi-channel loudspeakers and audio system; and

[28] Figure 7 is a signal processing diagram showing a method for producing a multi-channel audio signal according to one embodiment of the invention.

Description of Preferred Embodiments

15 [29] Figures 1 to 3 show an apparatus 10 for reproducing a multi-channel audio signal according to the embodiment. The apparatus 10 comprises a plurality of first loudspeakers 12 provided spaced around a first arc 14. Each of the first loudspeakers 12 face towards a listening zone 16 provided within the apparatus 10. The first loudspeakers 12 are preferably each substantially equidistant from the listening zone 16. The first arc 14 is preferably circular as shown in the drawings; however, elliptical
20 or other arcuate curves may also be used.

[30] A plurality of second loudspeakers 18 are provided spaced around a second arc 20. Each of the second loudspeakers 18 faces towards the listening zone 16.

25 [31] A listener 22 is shown in Figure 1 in the listening zone 16 facing towards the first loudspeakers 12. Throughout the specification, the terms 'forward' and 'behind' are used relative to the listening zone 16 according to the orientation of the listener 22 shown in Figure 1.

[32] As seen in Figure 1, the first loudspeakers 12 are positioned forward of the listening zone 16 and surround the forward 180° from the listening zone 16. The second loudspeakers 18 are positioned behind the listening zone 16. In the embodiment,

thirteen (13) first loudspeakers 12 and five (5) second loudspeakers 18 are used, though other quantities may be used. It is preferred that at the number of first and second loudspeakers should be at least thirteen, however.

[33] Two low frequency drivers 24 are provided, to either side of and behind the listening zone 16 in an enclosure 26. The low frequency drivers 24 are configured as subwoofers. The second loudspeakers 18 are also provided in the enclosure 26.

[34] The second arc 20 shown in Figure 1 has a larger radius than the first arc 14. The loudspeakers 18 are positioned closer to the listener 22 than the loudspeakers 12. This reduces the size of the apparatus 10, enabling installation in smaller rooms, without affecting the sound reproduction as experienced by the listener.

[35] An amplifier 28 produces amplified signals from each channel in the audio signal. Preferably, the audio signal has a separate channel for each loudspeaker 12, 18 and 24. Thus, the amplifier 28 provides a separate, amplified signal to each loudspeaker and to the subwoofers. The amplifier 28 is housed behind the listening zone 16 in the enclosure 26. The term amplifier 28 encompasses a multi-channel amplifier, multiple single-channel amplifiers, or a combination of both. Class D amplifiers are preferred for efficiency although other classes may be utilised.

[36] The apparatus 10 has a base 30 on which the enclosure 26 is mounted. Each first loudspeaker 12 is provided in an enclosure 32 mounted to the base 30. Adjacent enclosures 32 are connected via plates 34 extending between their top surfaces. When mounted in this manner, the enclosures 32 form a continuous arc.

[37] The multi-channel audio signal consists of one or more sound objects. Each sound object is present in a plurality of channels of the audio signal as will be described in more detail below.

[38] When the audio signal is reproduced by the apparatus 10, each sound object is reproduced by one or more loudspeakers 12, 18. The sound from each loudspeaker converges on the listening zone 16. Since each loudspeaker 12 is substantially equidistant from the listening zone 16, sounds from adjacent loudspeakers 12 reproducing a sound object arrive at the listening zone 16 at the same time and will add constructively at the listening zone 16.

- [39] When the apparatus 10 reproduces the audio signal, the SPL at a point spaced from the apparatus 10 is less than the SPL at the listening zone 16. Two factors contribute to this effect. First, the listening zone 16 is substantially equidistant from the loudspeakers 12 such that their sound outputs combine within the listening zone 16, while at other locations there will be different path lengths from each loudspeaker resulting in some destructive interference. Secondly, the loudspeakers are located near and oriented towards the listening zone 16, while outside the apparatus 10 the average distance to the loudspeakers increases with increasing distance from the apparatus, resulting in a reduced SPL.
- [40] Figures 4 to 6 show the results of SPL modelling in a 50m² room. In each of these figures, the model was set to produce an SPL of 125dB at the listening zone, and the SPL throughout the room was then calculated.
- [41] Figure 4 shows the SPL using the apparatus 10, in which the SPL at the walls of the room is at least 10 dB and up to 15-20 dB lower than the listening zone. Figure 5 shows the SPL using a traditional stereophonic arrangement. The SPL is greatest in this arrangement in the immediate vicinity of the loudspeakers and adjacent walls. Figure 6 shows the SPL in typical multi-channel systems with loudspeakers at the periphery of the room. As shown, the SPL throughout the room and the walls is relatively even.
- [42] Production of conventional audio signals involves arranging monaural tracks, with each track representing a sound object; such tracks are also referred to as sound object signals. For a studio recording, there would be a track for each instrument and vocal singer. The sound engineer arranges these tracks, adjusting relative amplitudes. The tracks are then mixed together and reduced to the number of channels using amplitude panning techniques.
- [43] The preferred method of producing an audio signal according to the embodiment involves three process stages applied to the track for each sound object – depth, width and pan – described below with reference to Figure 7.

Depth:

- [44] Each track, or sound object signal, is filtered via a low pass second order IIR filter 102, a low shelf second order IIR filter 104 and a high shelf second order IIR filter 106. These filters 102, 104 and 106 are applied in order to represent frequency variations that occur when the distance to a sound source increases. A gain stage 108, provided

at the output of the filter 106, produces two depth-corrected output signals, referred to as direct and reverberant signals.

[45] Examples of filters 102, 104 and 106 and gain stage 108 are given below for a depth parameter d having a value between 0 and 1, where 0 is close to the listener and 1 is far away:

[46] Filter 102 may be a Butterworth 2nd order low pass filter with a cut-off frequency f_c , where $f_c = 20 \text{ kHz}$ if $d \leq 0.2$, and $f_c = 20 \text{ kHz} - 15 \text{ kHz} * (d - 0.2)/0.8$ if $d > 0.2$.

[47] Filter 104 may be a low Shelf second order IIR filter with a corner frequency of 80 Hz, $Q = 0.5$, and $\text{gain(dB)} = 3.0 * (1.0 - 5*d)^2$ if $d \leq 0.2$, and $\text{gain(dB)} = -6.0 * ((d - 0.2)/0.8)^2$ if $d > 0.2$.

[48] Filter 106 may be a high shelf second order IIR filter with a corner frequency of 16 kHz, $Q = 0.5$, and $\text{gain(dB)} = 6.0 * (1.0 - 5*d)^2$ if $d \leq 0.2$, and $\text{gain(dB)} = 0.0$ if $d > 0.2$.

[49] Gain stage 108 may be a simple gain control where $\text{gain(dB)} = 3.0 * (1.0 - 5*d)^2$ if $d \leq 0.2$, and $\text{gain(dB)} = -12.0 * ((d - 0.2)/0.8)^2$ if $d > 0.2$.

[50] It should be appreciated that the above values are one example only, and other values may be used.

[51] The direct signal is passed to the Width stage described below. The reverberant signal is processed using an acoustic space simulator 110. The simulator 110 adds a configurable amount of reverberation. Balancing the amplitudes of the direct and reverberant signals, for example in the gain stage 108, provides an additional sense of depth. The simulator 110 uses a 1 input, n outputs algorithm. The n outputs have similar energy content, but are de-correlated using feedback delay networks with a different time constants for each output.

[52] The de-correlated nature of the n outputs enables them to be played by adjacent loudspeakers without affecting the listener's location of the sound object (which is located by the direct signal), whilst contributing to focussing acoustic energy at the listening zone 16 and providing a sense of depth. Typically, $n < 13$ and the n outputs may be mapped to all channels in the audio signal, with several of them being fed by the same output. Alternatively, the n outputs may be mapped to a subset of these channels using, for example, standard audio panning techniques.

Width:

- [53] The direct signal from the depth stage is input to a fourth order crossover filter 112 that splits the signal into two bands: a low frequency (LF) part, and a high frequency (HF) part. The crossover frequency of the filter 112 is chosen so that it is below the spatial aliasing frequency $f_a = 2c/d_{\text{speaker}}$, where f_a is the spatial aliasing frequency, c is the speed of propagation of sound in air, and d_{speaker} is the distance between the centers of two adjacent speakers. In the embodiment, the f_a is approximately 500 Hz, but nothing prevents use of a lower frequency.
- [54] The HF part of the signal is passed through k parallel gain stages 114, to produce k signals, with Figure 7 drawn for the instance of $k=5$. The gain stages 114 apply gains to each of the k signals following a Gaussian distribution, whose standard deviation is controlled by an adjustable Width parameter. It is preferred that the gains of the gain stages 114 are normalised such that the sum of the k gain stage 114 outputs does not show any amplitude deviation from the HF input signal. The greater the value of the Width parameter, the more even the distribution of gains applied by the gain stages 114. This results in more control over the SPL outside the apparatus 10.
- [55] It is preferred that k is an odd number, so that the middle of the k signals has a greater amplitude than the other of the k signals, which aids the listener 22 to locate the sound object. In other embodiments, values of k other than 5 may be used.
- [56] Each of the k signals passes through one of k all-pass FIR filters 116. Each FIR filter 116 alters the phase of the incoming signal with a spectral period T and a different initial phase offset compared to the other FIR filters 116 to produce one of k width signals, shown in Figure 7 at 118. The k width signals are de-correlated in phase due to the effect of the filters 116. Phase oscillation patterns such as sinusoids can be used, as well as other phase oscillation patterns.
- [57] The effect of the Width processing stage is to produce k width signals with relative phase properties to enable their playback on k adjacent loudspeakers of the apparatus 10, without creating frequency cancellations in the listening zone 16.
- [58] Figure 7 shows the LF part being summed to the middle signal of the k signals. In other embodiments, the LF part could be applied to more than one of the k signals or follow the same gain/pan distribution as the HF part described above.

Pan:

- [59] The k width signals are each passed through a second order IIR low shelf filter 120 and gain stage 122 to produce k pan signals. The filter 120 provides a low-frequency gain correction that reduces the change in tonality of a sound object when panned across loudspeakers 12, 18. Typically, the gain of the filter 120 is -3dB when an object is equidistant to its two closest speakers.
- [60] Next, standard amplitude panning techniques are used to map the k pan signals to channels in the audio signal. The k pan signals are panned with an angular step corresponding to the angular distance between loudspeakers 12, 18 depending on the location of the sound object. This results in a set of signals, in k or $k+1$ of the channels in the audio signal, with similar energy content but de-correlated in phase. This contributes to focussing acoustic energy at the listening zone. The listener's ability to locate the sound object is unaffected: the listener will determine the location of a sound object based on the loudest apparent source of sound; the de-correlated signals to either side of the loudest signal for each sound object to not affect the listener's location of the sound object since de-correlated sound has no apparent location to a listener.
- [61] The above processing is performed for each sound object, and the outputs combined for channel to produce the multi-channel audio signal. This processing technique provides a sound stage with superior three-dimensionality, enhanced user ability to locate each sound object with precision, while maintaining a precise control of how the acoustic energy spreads outside the apparatus.
- [62] While aspects of the present disclosure have been particularly shown and described with reference to the embodiments above, it will be understood by those skilled in the art that various additional embodiments may be contemplated by the modification of the disclosed apparatuses, systems and methods without departing from the spirit and scope of the invention as defined by the claims.

CLAIMS

1. An apparatus (10) for reproducing a multi-channel audio signal consisting of one or more sound objects in which each sound object is present in a plurality of channels, the apparatus comprising:
 - 5 A plurality of first loudspeakers (12) provided spaced around a first arc (14) forward of a predetermined listening zone (16), each of the first loudspeakers (12) facing towards the listening zone (16) and substantially equidistant therefrom;
 - A plurality of second loudspeakers (18) provided spaced around a second arc (20) behind the listening zone (16), each of the second loudspeakers (18) facing towards
10 the listening zone (16);
 - An amplifier (28) arranged to produce an amplified signal from each channel in the audio signal, each amplified signal being provided to a corresponding first or second loudspeaker (12, 18);
 - Whereby in use each sound object is reproduced by one or more loudspeakers (12,
15 18) such that the SPL at a point spaced from the apparatus (10) is less than the SPL at the listening zone (16).
2. The apparatus of claim 1, wherein the SPL at a point spaced from the apparatus (10) the same distance as each first loudspeaker (12) is spaced from the listening zone (16) is 15 dB less than the SPL at the listening zone (16).
- 20 3. The apparatus of claim 2, wherein the number of first and second loudspeakers (12, 18) is at least 13, the number of first loudspeakers (12) being greater than the number of second loudspeakers (18).
4. The apparatus of claim 3, wherein the plurality of second loudspeakers (18) are provided closer to the listening zone (16) than the first loudspeakers (12).
- 25 5. The apparatus of claim 1, wherein the apparatus (10) further comprises an enclosure (26) provided behind the listening zone (16), the amplifier (28) and second loudspeakers (18) being housed within the enclosure (26).
6. The apparatus of claim 5, wherein the apparatus (10) further comprises a subwoofer (24) housed within the enclosure (26).

7. The apparatus of claim 1, wherein each first loudspeaker (12) is provided within a corresponding enclosure (32), the enclosures (32) of adjacent first loudspeakers (12) being connected together to form a continuous arc.
8. The apparatus of claim 3, wherein the multi-channel audio signal is produced by the method of any one of claims 5 to 8.
9. A method for producing a multi-channel audio signal from one or more sound object signals, comprising:

For each sound object signal:

Producing a plurality of de-correlated width signals, wherein the amplitudes of said width signals follows a substantially Gaussian distribution;

Processing the plurality of width signals to produce a plurality of pan signals, each pan signal being mapped to at least one channel;

For each channel in the audio signal, combining the pan signals from each sound object for that channel.

10. The method of claim 9, wherein the step of de-correlating the phase of each width signal comprises adding to each width signal a different phase offset, and altering the phase offset of each width signal with a period T.
11. The method of claim 9, wherein the substantially Gaussian distribution follows a user-configurable standard deviation.
12. The method of claim 11, wherein the user-configurable standard deviation is configurable for each sound object signal.
13. The method of claim 11, further comprising the step of normalising the amplitudes of the width signals such that the amplitude of sum of the width signals is equal to the amplitude of the sound object signal.
14. The method of claim 9, further comprising processing each sound object signal to produce a depth-corrected signal, and producing the plurality of width signals from the depth-corrected signal.

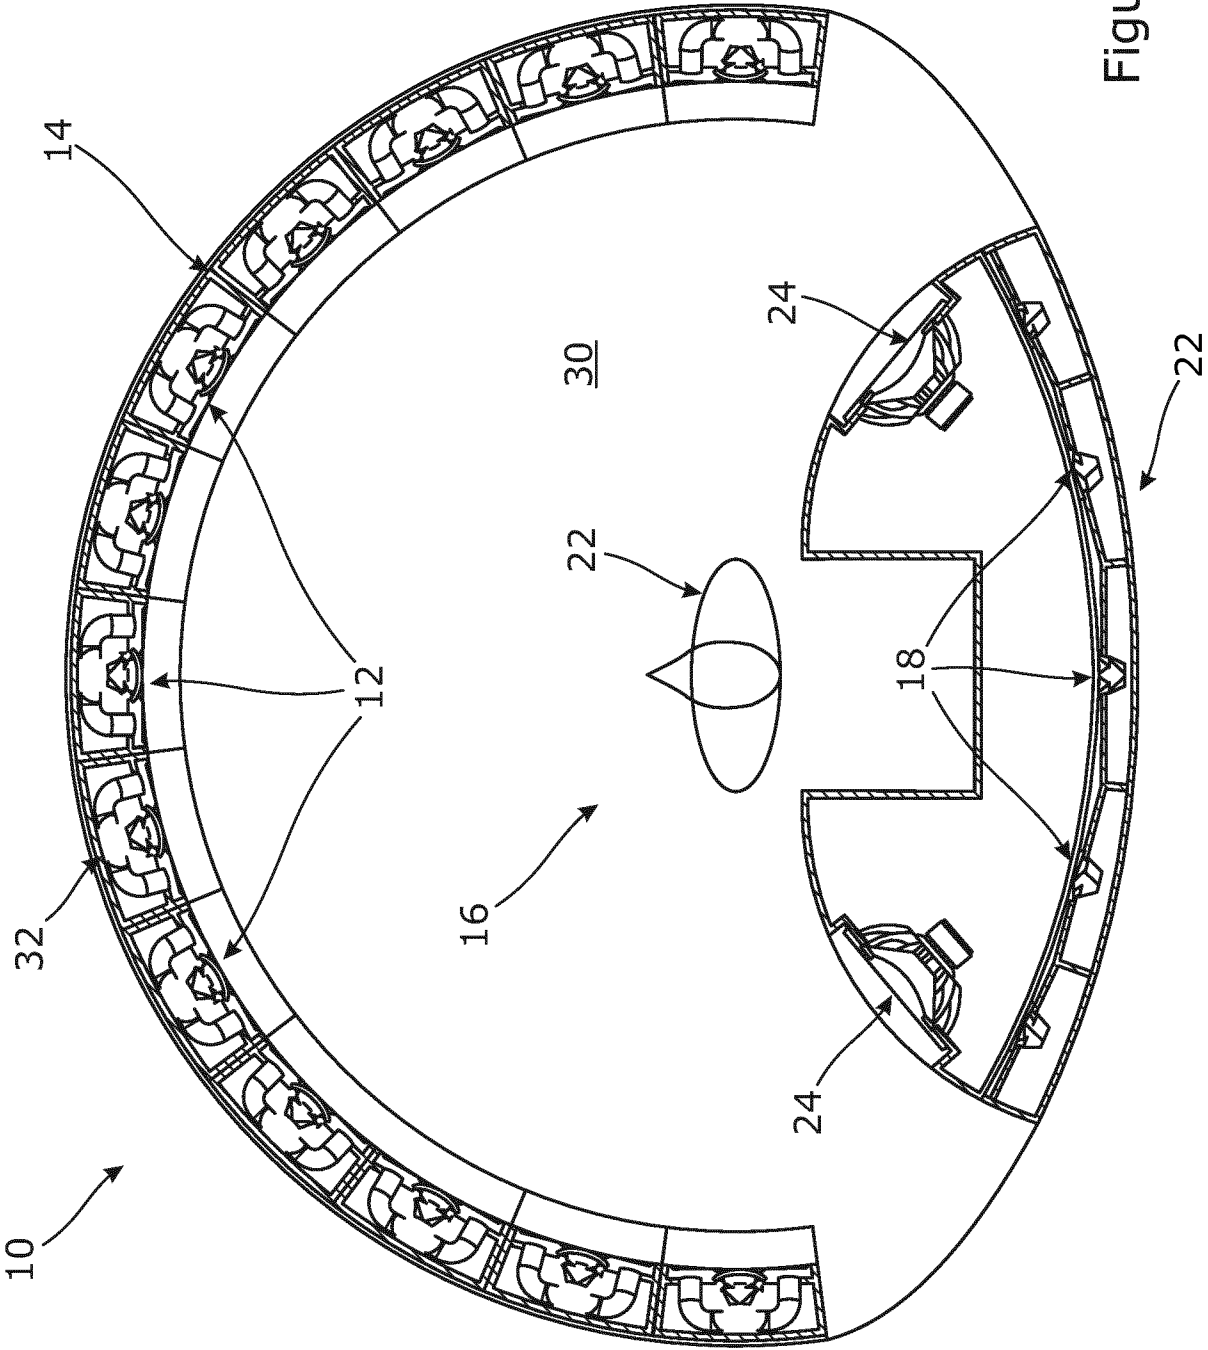


Figure 1

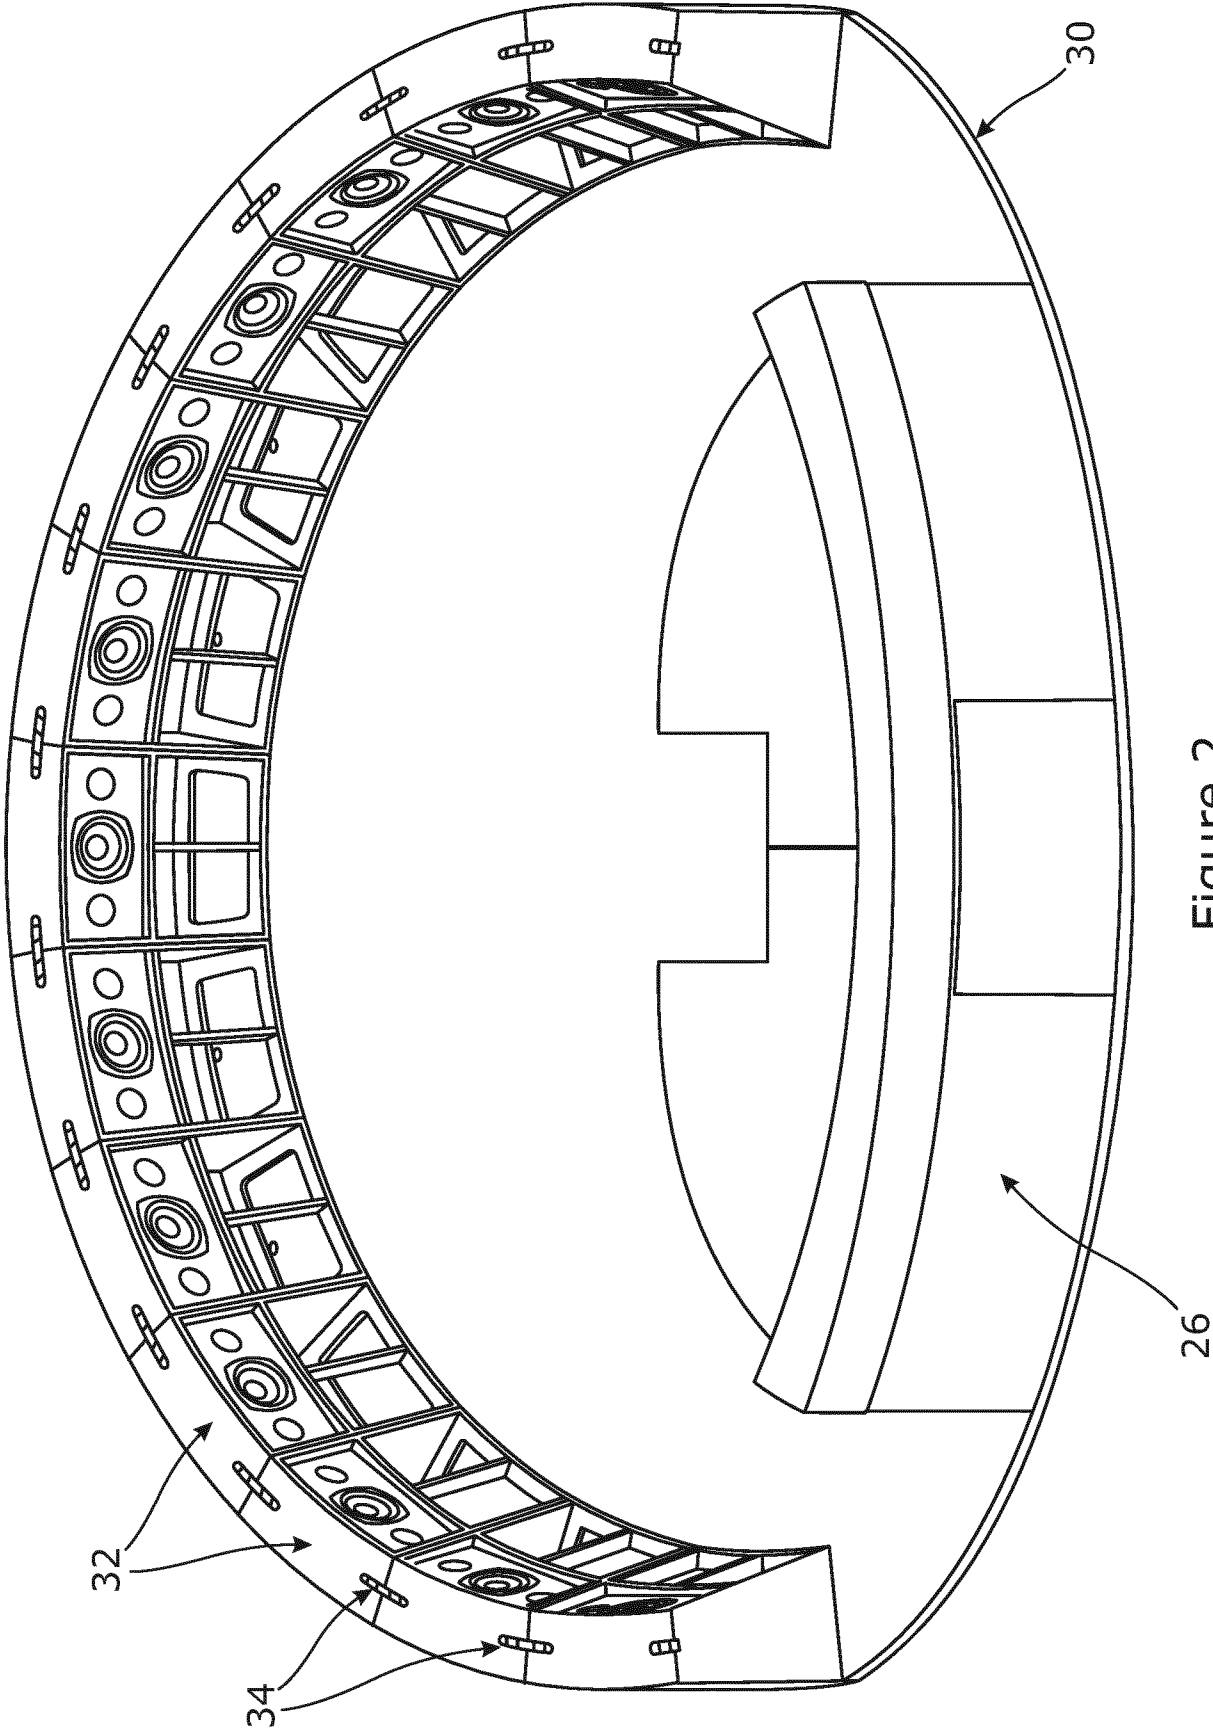


Figure 2

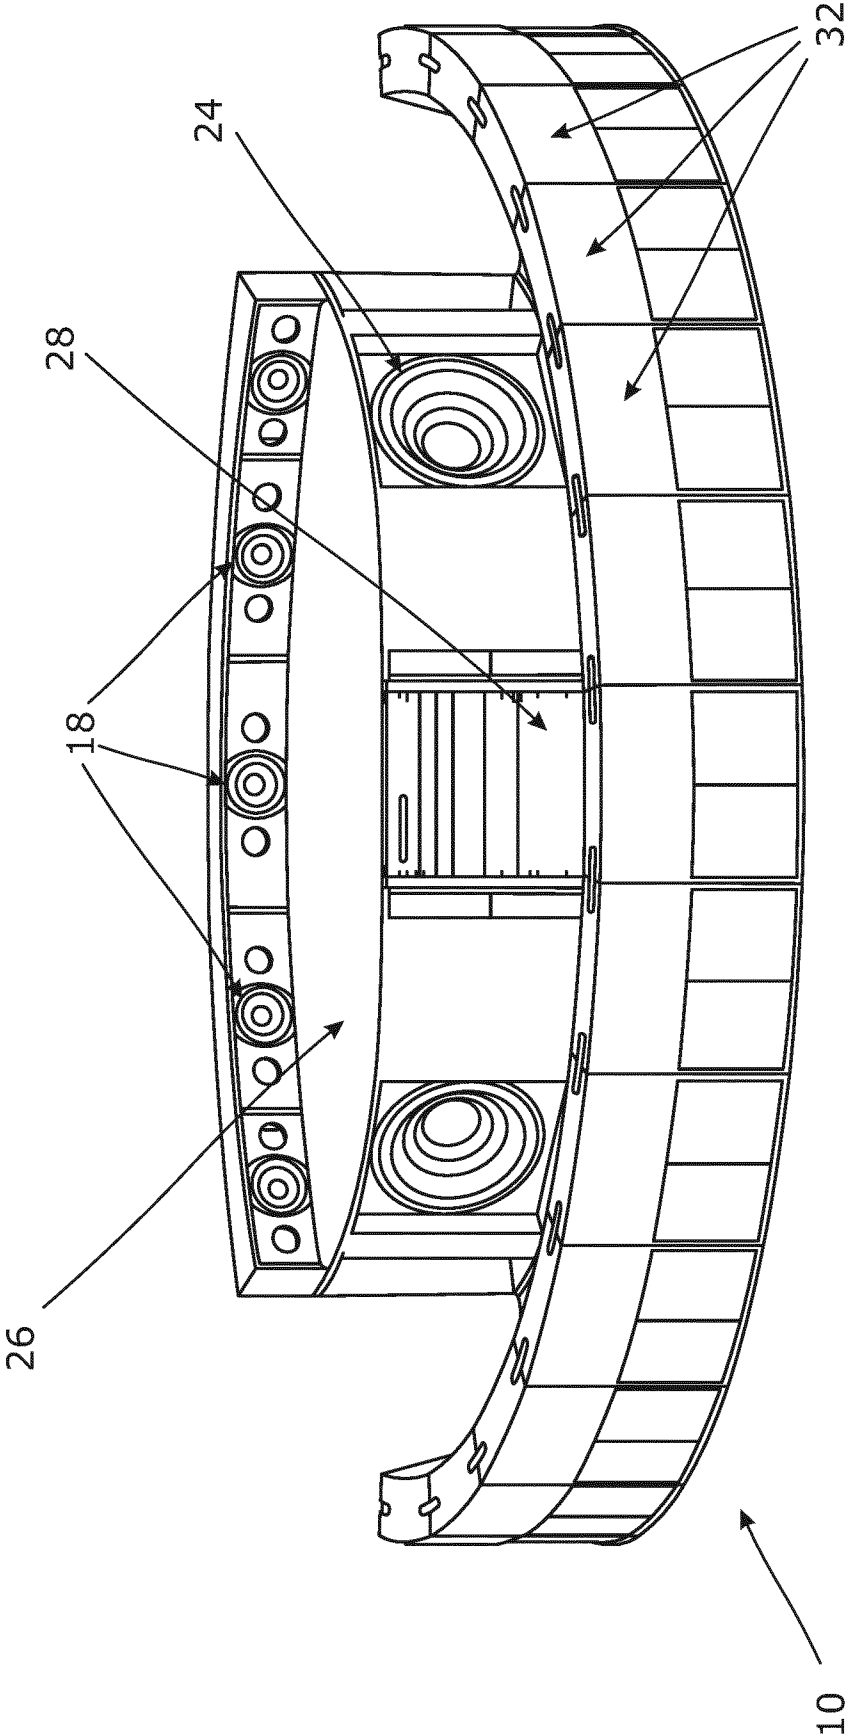


Figure 3

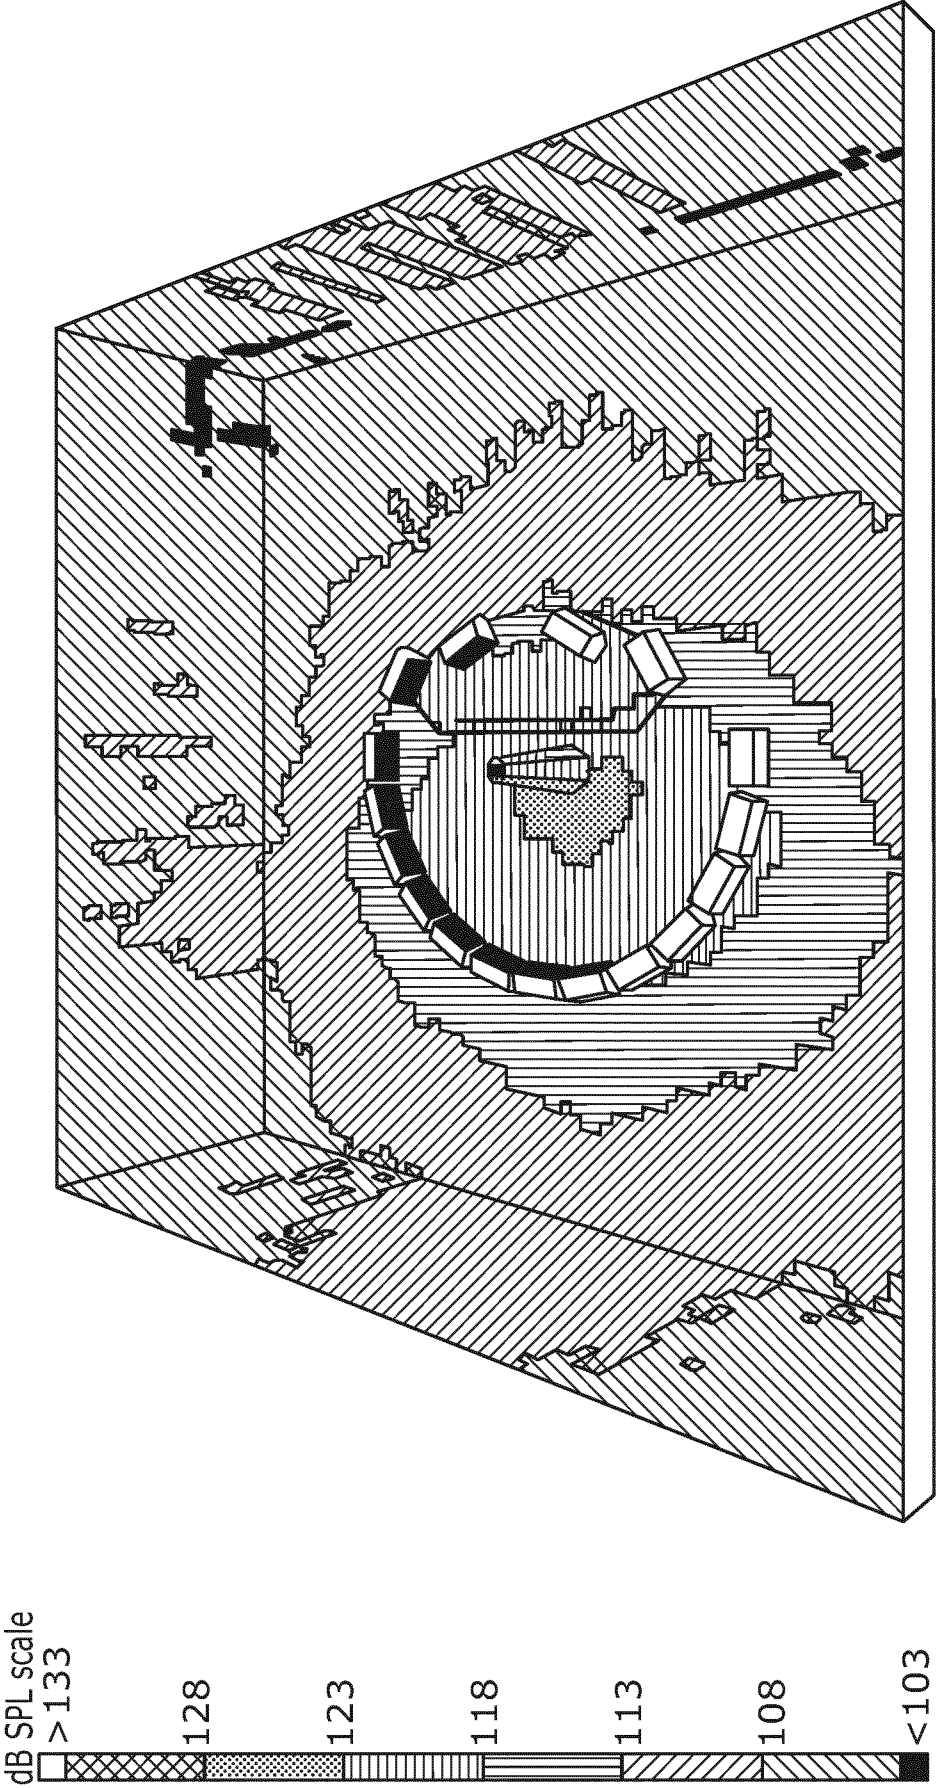


Figure 4

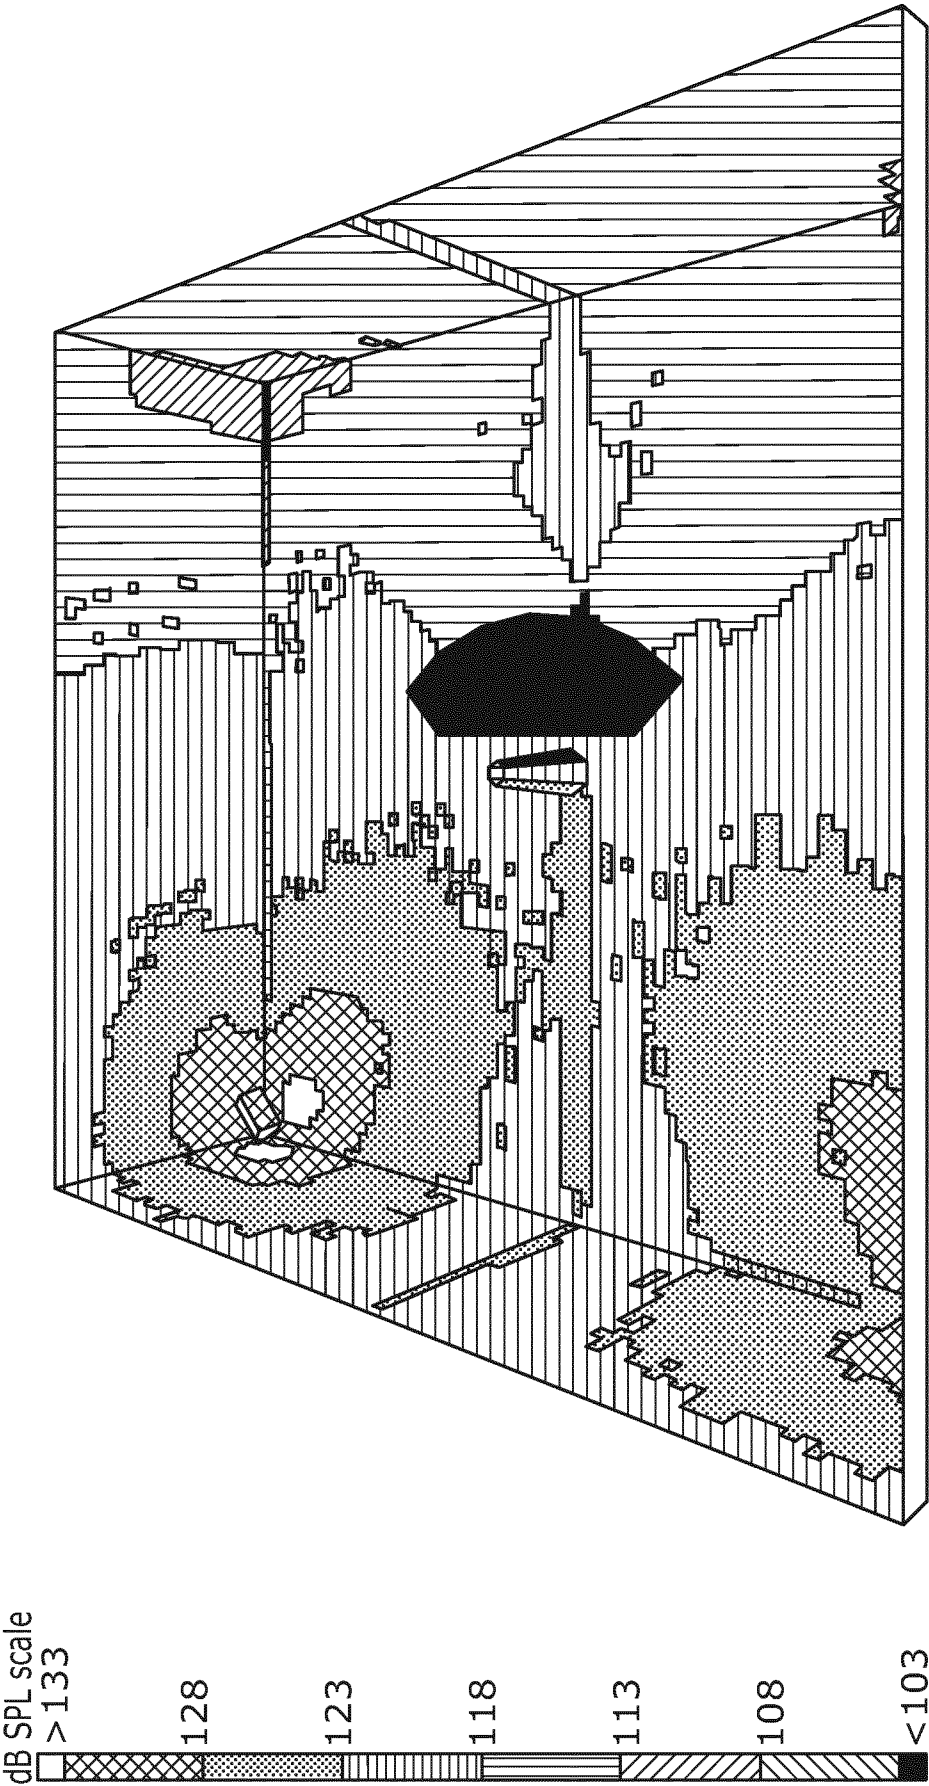


Figure 5


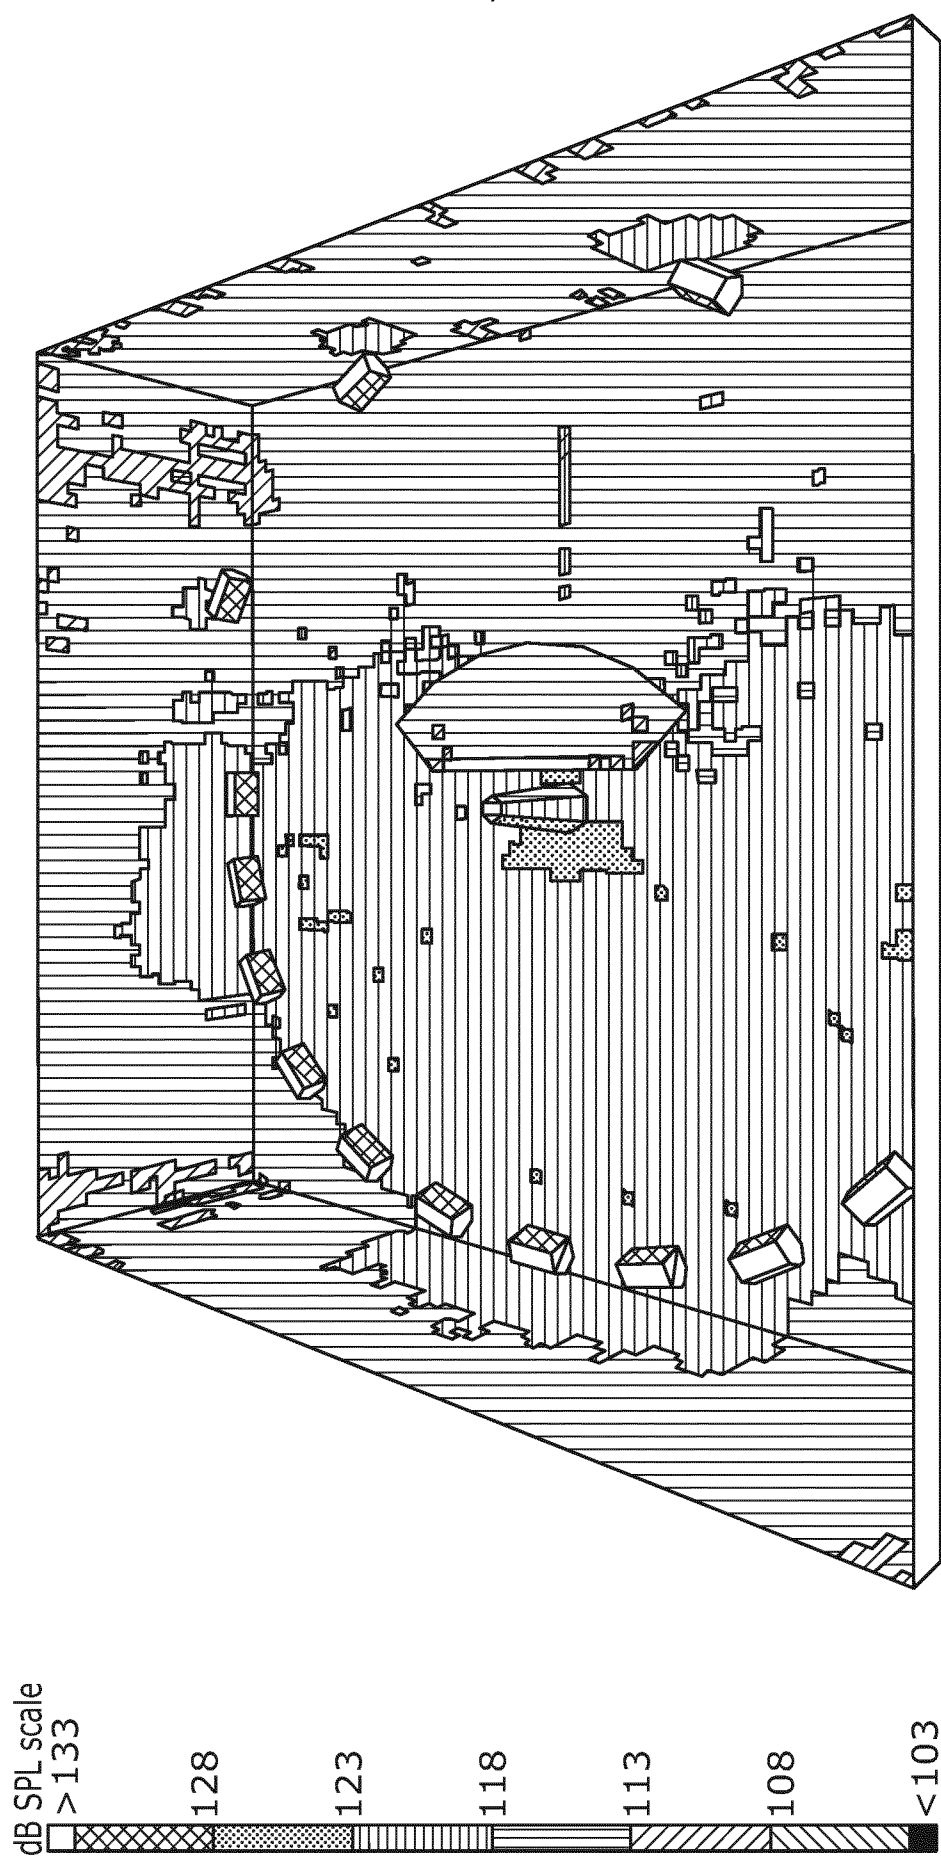


Figure 6

7/7

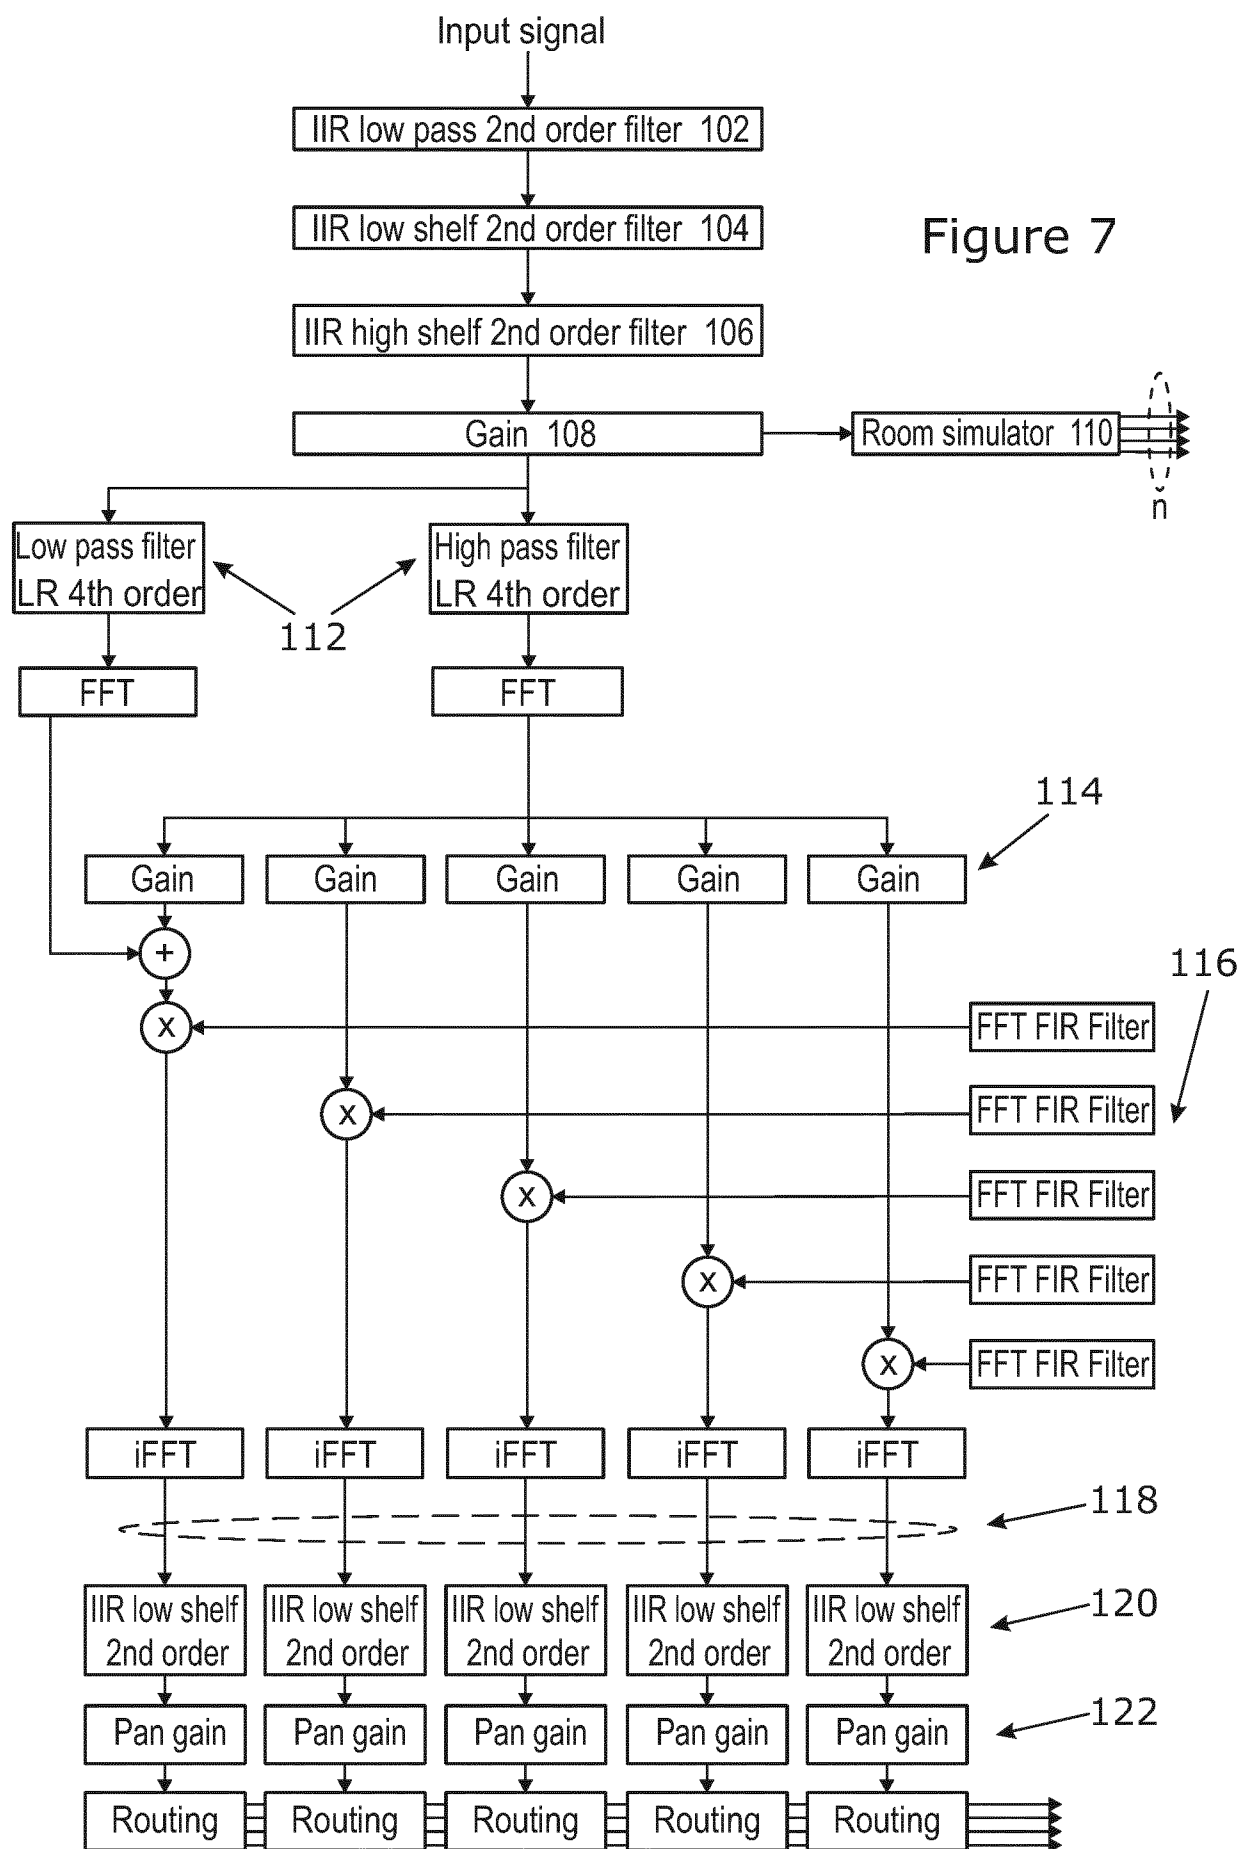

INTERNATIONAL SEARCH REPORT

International application No.
PCT/EP2016/059561

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☒ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2016/059561

A. CLASSIFICATION OF SUBJECT MATTER

INV. H04R5/02 H04S3/00
ADD. H04R27/00 H04S7/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04S H04R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>CHANG JI-HO ET AL: "Experimental validation of sound field control with a circular double-layer array of loudspeakers", THE JOURNAL OF THE ACOUSTICAL SOCIETY OF AMERICA, AMERICAN INSTITUTE OF PHYSICS FOR THE ACOUSTICAL SOCIETY OF AMERICA, NEW YORK, NY, US, vol. 133, no. 4, 1 April 2013 (2013-04-01), pages 2046-2054, XP012173276, ISSN: 0001-4966, DOI: 10.1121/1.4792486 [retrieved on 2013-04-03] Sections I, II.A, III, V; figures 1, 2, 5-8</p> <p>----- -/--</p>	1-4,7,8



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

19 May 2016

Date of mailing of the international search report

03/06/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Joder, Cyril

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2016/059561

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2005/086527 A1 (DECICCIA ILARIO CARMEN [AU]) 15 September 2005 (2005-09-15) page 14, line 17 - page 21, line 6; figures 1-7 -----	1,5,6,8
X	EP 0 966 179 A2 (CENTRAL RESEARCH LAB LTD [GB]) 22 December 1999 (1999-12-22)	9-12,14
A	paragraphs [0001], [0013] - [0018], [0031] - [0035]; figures 6-11 -----	13
A	US 2015/043736 A1 (OLSEN MARTIN [DK] ET AL) 12 February 2015 (2015-02-12) paragraph [0001] - paragraph [0038]; figure 1 -----	1-8
A	V. PULKKI: "Uniform spreading of amplitude panned virtual sources", PROCEEDINGS OF THE 1999 IEEE WORKSHOP ON APPLICATIONS OF SIGNAL PROCESSING TO AUDIO AND ACOUSTICS. WASPAA'99 (CAT. NO.99TH8452), 1 October 1999 (1999-10-01), pages 187-190, XP055120731, DOI: 10.1109/ASPAA.1999.810881 ISBN: 978-0-78-035612-2 Sections 3-4 -----	9-14
A	Franz Zotter ET AL: "PHANTOM SOURCE WIDENING WITH DETERMINISTIC FREQUENCY DEPENDENT TIME DELAYS", Proc. of the 14 th Int. Conference on Digital Audio Effects (DAFx-11), 19 September 2011 (2011-09-19), pages 307-312, XP055247232, Paris - FRANCE ISBN: 978-2-9540351-0-9 Retrieved from the Internet: URL: http://recherche.ircam.fr/pub/dafx11/Papers/85_e.pdf [retrieved on 2016-02-04] Section 2 -----	9-14

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2016/059561

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2005086527	A1	15-09-2005	NONE
EP 0966179	A2	22-12-1999	EP 0966179 A2 22-12-1999
		GB 2343347 A	03-05-2000
		US 6498857 B1	24-12-2002
US 2015043736	A1	12-02-2015	CN 104170408 A 26-11-2014
		EP 2826264 A1	21-01-2015
		JP 2015510376 A	02-04-2015
		KR 20140138907 A	04-12-2014
		US 2015043736 A1	12-02-2015
		WO 2013135819 A1	19-09-2013

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-14

Apparatus for reproducing a multi-channel audio signal and method for producing a multi-channel audio signal.

1.1. claims: 1-8

Multi-channel audio reproducing apparatus comprising a plurality of first loudspeakers provided spaced around a first arc forward of a listening zone and a plurality of second loudspeakers provided spaced around a second arc behind the listening zone, whereby sound objects are reproduced by one or more loudspeakers such that the SPL at a point spaced from the apparatus is less than the SPL at the listening zone.

1.2. claims: 9-14

A method for producing a multi-channel audio signal from one or more sound object signals, comprising for each sound object signal: Producing a plurality of de-correlated width signals, whose amplitudes follow a substantially Gaussian distribution; Processing the plurality of width signals to produce a plurality of pan signals, which are mapped to at least one channel.
