

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2013/030390 A1

(43) International Publication Date

7 March 2013 (07.03.2013)

(51) International Patent Classification:

C08L 79/02 (2006.01)

(21) International Application Number:

PCT/EP2012/067044

(22) International Filing Date:

2 September 2012 (02.09.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1115172.7 2 September 2011 (02.09.2011) GB

(71) Applicant (for all designated States except US): **KNAUF INSULATION** [BE/BE]; 95, rue de Maestricht, B-4600 Visé (BE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **JACKSON, Roger** [GB/GB]; Knauf Insulation, PO Box 10, Stafford Road, St Helens, Merseyside WA10 3NS (GB). **HAMPSON, Carl** [GB/GB]; Knauf Insulation, PO Box 10, Stafford Road, St Helens, Merseyside WA10 3NS (GB). **ROBINSON, James** [GB/GB]; Knauf Insulation, PO Box 10, Stafford Road, Merseyside, St Helens, Merseyside WA10 3NS (GB). **PACOREL, Bénédicte** [FR/GB]; Knauf Insulation, PO Box 10, Stafford Road, St Helens, Merseyside WA103NS (GB).

(74) Agents: **FARMER, Guy** et al.; ARC-IP sprl, Rue Emile Francqui 4, B-1435 Mont-Saint-Guibert (BE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

WO 2013/030390 A1

(54) Title: CARBOHYDRATE BASED BINDER SYSTEM AND METHOD OF ITS PRODUCTION

(57) Abstract: The present invention relates to an aqueous carbohydrate based binder composition, comprising a carbohydrate component and an amine component, wherein the carbohydrate component comprises one or more pentose sugars, as well as to a method of its production.

## Carbohydrate based binder system and method of its production

The present invention relates to an aqueous carbohydrate based binder composition, comprising a carbohydrate component and an amine component, wherein the carbohydrate component comprises one or more pentose sugars, as well as to a method of its production.

5 Binders are generally useful in the manufacture of articles which are based on non- or only loosely-assembled matter. For example, binders are extensively used in the production of products comprising consolidated fibers, e.g. in the form of thermosetting binder compositions which are cured upon heat treatment. Examples 10 of such thermosetting binder compositions include a variety of phenol-aldehyde, urea-aldehyde, melamine-aldehyde, and other condensation-polymerization materials like furane and polyurethane resins. Binder compositions based on phenol-aldehyde, resorcinol-aldehyde, phenol/aldehyde/urea, phenol/melamine/urea etc., are frequently used for bonding fibers, textiles, plastics, rubbers, and may other 15 materials.

The mineral wool and fiber board industries have historically used a phenol formaldehyde binder in their products. Phenol formaldehyde binders provide suitable properties to the final products, are readily available and easy to process. However, 20 environmental considerations have lead to the development of alternative binder systems, such as carbohydrate-based binders, which are obtained e.g. by reacting a carbohydrate with a multiprotic acid (cf. WO 2009/019235), or as esterification products obtained by reacting a polycarboxylic acid with a polyol (cf. US 2005/0202224). Because these alternative binders are not based on formaldehyde 25 as a reagent, they have been collectively referred to as "formaldehyde-free binders".

Recently, binders which are obtained as reaction products of an amine component and a reducing sugar (or non-carbohydrate carbonyl) component have been identified as a promising class of such formaldehyde-free binders (WO 30 2007/014236). Such binders may be made via a Maillard reaction forming polymeric melanoidins which provide sufficient bonding strength.

However, in addition to avoiding binder systems which contain less desirable reactants or reaction products, such as formaldehyde, an increase in the cure rate of the binder is constantly desired, thus reducing production time and making the binder potentially useful in lower temperature ranges.

5 In view of the above, a need exists for an environmentally acceptable binder composition which further offers improved curing rates, when compared to conventional binders, and can preferably be produced using natural renewable materials.

10 Accordingly, the technical problem underlying the present invention is therefore to provide a binder composition which is mainly based on renewable resources and provides improved cure rates, as well as a method for producing the same.

15 According to the present invention, the above-described technical problem is solved by providing an aqueous binder composition, comprising a carbohydrate component (a) and an amine component (b), wherein the carbohydrate component (a) comprises one or more pentose(s) in a total amount of 3 to 70 mass%, based on the mass of the total carbohydrate component (a).

20 According to the present invention, the expression "aqueous binder composition" is not specifically restricted and includes any mixture of at least the afore-mentioned binder components (a) and (b) in water or a water-containing solvent. Such a mixture may be a (partial) solution of one or more of said binder components, or may be 25 present in form of a dispersion, such as an emulsion or a suspension. According to the present invention, the term "aqueous" is not restricted to water only as a solvent, but also includes solvents which are mixtures containing water as one component. According to a preferred embodiment of the present invention, the aqueous binder composition is a solution or a suspension.

30 The solid content of the above aqueous binder composition may, for example, range from 5 to 95 mass%, from 8 to 90 mass%, or from 10 to 85 mass%, based on the mass of the total aqueous binder composition. In particular, the solid content of the aqueous binder composition may be adjusted to suit each individual application.

Particularly when used as a binder for mineral wool insulation, the solid content of the aqueous binder composition may be in the range of 5 to 25 mass%, preferably in the range of 10 to 20 mass%, or more preferably in the range of 12 to 18 mass%, based on the mass of the total aqueous binder composition. Particularly when used as a

5 binder for wood boards, the solid content of the aqueous binder composition may be in the range of 50 to 90 mass%, preferably in the range of 55 to 85 mass%, or more preferably in the range of 60 to 80 mass%, based on the mass of the total aqueous binder composition.

10 Herein, the expression "carbohydrate component" is not specifically restricted and generally includes one or more polyhydroxy aldehydes and/or polyhydroxy ketones, and specifically includes saccharides, such as monosaccharides, disaccharides, oligosaccharides and polysaccharides, or further reducing sugars. The carbohydrate component of the present invention may comprise one or more compounds of the  
15 general formula  $C_m(H_2O)_n$ , wherein m and n may be the same or different from each other, but also includes derivatives thereof wherein, for example, amino groups are added (e.g. to yield glycosamines) or oxygen atoms are removed (e.g. to yield deoxycarbohydrates). Herein, the above-mentioned term "carbohydrate component" further includes naturally occurring carbohydrate derivatives, and such derivatives,  
20 which may form during the preparation of the carbohydrate component (e.g. during cellulolysis).

Moreover, herein, the expression "amine component" is not specifically restricted and generally includes any compounds acting as a nitrogen-source which can undergo a  
25 polymerization reaction with the carbohydrate component of the present invention.

According to a preferred embodiment of the present invention, the amine component is selected from the group consisting of proteins, peptides, amino acids, organic amines, polyamines, ammonia, ammonium salts of a monomeric polycarboxylic acid,  
30 ammonium salts of a polymeric polycarboxylic acid, and ammonium salts of an inorganic acid, or any combination thereof.

The amine component may comprise one or more of: triammonium citrate, ammonium sulphate, ammonium phosphate including mono- and diammonium

phosphate, diethylenetriamine, aliphatic amines including 1,4-butanediamine, 1,5-pentanediamine, hexamethylenediamine, 1,7-heptanediamine, 1,8-octanediamine, 1,9-nonenediamine, 1,10-decanediamine, 1,11-undecanediamine, 1,12-dodecanediamine, 1,5-diamino-2-methylpentane, a Jeffamine, a polyamine, a 5 polyamine comprising two or more primary amine groups, separated by an alkyl group, particularly an alkyl group comprising at least 4 carbon atoms, a heteroalkyl group, a cycloalkyl group, a heterocycloalkyl group, as well as derivatives and combinations thereof.

10 Herein, the expression "ammonium" is not specifically restricted and, for example, includes compounds of the general formulae  $[^+NH_4]_x$ ,  $[^+NH_3R^1]_x$ , and  $[^+NH_2R^1R^2]_x$ , wherein x is an integer of at least 1, and R<sup>1</sup> and R<sup>2</sup> are each independently selected from alkyl, cycloalkyl, alkenyl, cycloalkenyl, heterocyclyl, aryl, and heteroaryl.

15 Moreover, according to the present invention, the term "pentose" is not specifically restricted and includes any natural and synthetic carbohydrates containing five carbon atoms. According to one embodiment of the present invention, the term "pentose" includes the monosaccharides xylose, arabinose, ribose, lyxose, ribulose and xylulose, including their D- and L-stereoisomers, as well as any combination 20 thereof. Moreover, the pentoses of the present invention also include such derivatives, which are formed e.g. through addition of an amino group (pentosamines), removal of an oxygen atom (deoxypentoses), rearrangement reactions, protonation or deprotonation.

25 According to the present invention, the one or more pentose(s) are present in the carbohydrate component in a total amount of 3 to 70 mass%, based on the mass of the total carbohydrate component (a). However, the amount of said one or more pentose(s) may be adjusted, e.g. to achieve improved cure rates of the binder composition, and may, for example be in the range of 3 to 65 mass%, 3 to 60 mass% 30 or 3 to 55 mass%, based on the mass of the total carbohydrate component (a). According to a further example of the present invention, the amount of said one or more pentose(s) may be in the range of 5 to 70 mass% or in the range of 10 to 70 mass%, or in the range of 15 to 70 mass%, based on the mass of the total carbohydrate component (a). However, according to a further embodiment of the

present invention, the total amount of the one or more pentose(s) present in the carbohydrate component may also be more than 70 mass%, such as more than 80 mass% or more than 90 mass%. Specific examples include pentose contents of 50 mass% or less, 45 mass% and less, as well as 40 mass% and less.

5 According to a further embodiment, the present invention relates to a binder composition as defined above, wherein the carbohydrate component (a) further comprises one or more hexose(s) in a total amount of 97 to 30 mass%, based on the mass of the total carbohydrate component (a).

10 According to the present invention, the amount of said one or more hexose(s) may be adjusted, e.g. to achieve improved cure rates of the binder composition, and may, for example be in the range of 97 to 35 mass%, 97 to 40 mass% or 97 to 45 mass%, based on the mass of the total carbohydrate component (a). According to a further 15 example of the present invention, the amount of said one or more hexose(s) may be in the range of 95 to 30 mass%, in the range of 90 to 30 mass%, or in the range of 85 to 30 mass%, based on the mass of the total carbohydrate component (a).

According to the present invention, the term "hexose" is not specifically restricted and 20 includes any natural and synthetic carbohydrates containing six carbon atoms. According to one embodiment of the present invention, the term "hexose" includes the monosaccharides allose, altrose, glucose, mannose, gulose, idose, galactose, talose, fructose, psicose, sorbose, tagatose, including their D- and L-stereoisomers, as well as any combination thereof. Moreover, the hexoses of the present invention 25 also include such derivatives, which are formed e.g. through addition of an amino group (hexosamines), removal of an oxygen atom (deoxyhexoses), rearrangement reactions, protonation or deprotonation. According to a preferred embodiment of the present invention, the hexose is or includes dextrose.

30 According to the present invention, the ratio of the one or more pentose(s) to the one or more hexose(s) may be adjusted, e.g. within the above-mentioned ranges, in order to achieve improved cure properties or increased binding performance in the final product. However, said desired ratio of pentose(s) to hexose(s) depends on the type and amount of said hexose and pentose fractions within the carbohydrate component

of the above-defined binder.

Furthermore, in view of environmental considerations, the sources of the carbohydrates constituting the carbohydrate component (a) of the binder composition

5 as defined above are preferably renewable sources, such as cellulose-based sources present in (energy) plants, plant products, wood (chips), used paper, paper mill waste, brewery waste, timber bark, etc.

In a further embodiment, the present invention relates to a binder composition as  
10 defined above, wherein said binder composition further comprises an amino acid component (c).

Herein, the expression "amino acid component" is not specifically restricted, and includes all natural and synthetic amino acids, as well as oligomers thereof, such as  
15 peptides, and polymers thereof, such as proteins. According to the present invention, the amino acid component (c) comprises one or more amino acids in an amount of 1 to 25 mass%, 2 to 20 mass% or 3 to 15 mass%, based on the total mass of the solid content of the binder composition as defined above.

20 Said amino acid component (c) is suited to further improve the properties of the binder composition, for example, in respect of ease of applicability to a product and/or enhanced rigidity and/or stability of color.

25 Preferably, in view of environmental considerations, also the amino acids constituting the amino acid component (c) of the binder composition defined above are obtained from renewable sources, such as cellulose-based sources present in (energy) plants, plant products, wood, used paper, paper mill waste, etc.

30 The above-defined binder composition may be cured by a variety of technologies known in the art, such as application of heat, irradiation, addition of curing-initiators, etc. According to a further embodiment, the present invention relates to a binder obtainable by heating the binder composition as defined above.

According to a further aspect, the present invention relates to a method of producing

an aqueous binder composition, comprising a carbohydrate component (a) and an amine component (b), wherein the carbohydrate component (a) comprises one or more pentose(s) in a total amount of 3 to 70 mass%, based on the mass of the total carbohydrate component (a), wherein the method comprises the steps: (i) 5 hydrolyzing one or more cellulose-based carbohydrate source(s), (ii) isolating the carbohydrates from the one or more hydrolyzed cellulose-based carbohydrate source(s), (iii) using the isolated carbohydrates from the one or more cellulose-based carbohydrate source(s) to form a carbohydrate component (a), comprising one or more pentose(s) in a total amount of 3 to 70 mass%, based on the mass of the total 10 carbohydrate component (a), and (iv) adding an amine component (b).

According to the method of the present invention, the expressions "carbohydrate component", "amine component", "amino acid component", "pentose(s)" and "hexose(s)" are as defined above.

15 Moreover, the expression "hydrolyzing" used herein is not specifically restricted and generally refers to all chemical and physico-chemical reactions which yield carbohydrate compounds from a cellulose-based carbohydrate source. For example, the expression "hydrolyzing" includes heat/pressure treatment, acidic and/or basic 20 treatment, enzymatic treatment, or treatment with synthetic catalysts, as well as metal chloride hydrolysis e.g. using zinc chloride or calcium chloride, as well as any combination thereof. The process of "hydrolyzing" the cellulose-based carbohydrate source may be carried out in a single process or may contain a sequence of processes. For example, a cellulose-based carbohydrate source may be hydrolyzed 25 by an acidic treatment, or may be hydrolyzed by a combination of an enzymatic treatment and a subsequent acidic treatment.

According to one embodiment, the present invention relates to a method as defined above, wherein step (i) of hydrolyzing one or more cellulose-based carbohydrate 30 source(s) independently comprises treatment with heat/pressure, enzymatic and/or acidic treatment and/or metal chloride hydrolysis of each of said one or more cellulose-based carbohydrate source(s).

Herein, the expression "cellulose-based carbohydrate source" is not specifically

restricted and includes any natural or synthetic material, or mixture of materials, which contains cellulose or cellulose derivatives. In this context, the term "cellulose" is not specifically restricted and does not only refer to cellulose as such, but also includes any other carbohydrate oligomers and polymers which occur in plant 5 biomass, such as hemicellulose or derivatives thereof. The term "cellulose" further includes any breakdown-products resulting from natural and synthetic cellulolysis, such as celldextrins, as well as lower molecular weight poly- and oligosaccharides. Typically, a cellulose-based carbohydrate source will contain a variety of different 10 carbohydrate polymers. For example, most plant biomass contains lignocellulose comprising a mixture of cellulose and hemicellulose.

According to the present invention, the step of isolating the carbohydrates from the one or more hydrolyzed cellulose-based carbohydrate source(s) is not specifically restricted and includes any chemical or physical treatment to obtain a composition 15 containing one or more carbohydrates. For example, the term "isolating" may include a simple step of separating solids, such as plant fibers, from the hydrolyzing reaction mixture to obtain a carbohydrate solution comprising one or more carbohydrates. On the other hand, the "isolating"-step may include a combination of a variety of techniques, such as filtration, centrifugation, crystallization, precipitation, solvent 20 removal by evaporation, etc, in order to obtain a carbohydrate-containing composition having a desired purity or constitution.

According to the present invention, the hydrolysis and isolating steps of the method as defined above may preferably be adjusted - considering the type and amount of 25 cellulose-based carbohydrate to be hydrolyzed - to obtain a carbohydrate fraction, comprising one or more pentose(s) in the required amount to readily prepare the binder composition of the present invention. For example, depending on the cellulose-based carbohydrate source(s), the steps of hydrolyzing said sources and isolating the thus obtained carbohydrates may be adjusted to readily obtain an 30 aqueous solution of said carbohydrate component (a) comprising 3 to 70 mass% of one or more pentose(s), based on the mass of the total carbohydrate component present in said aqueous solution. According to a further example of the present invention, an aqueous solution of a carbohydrate component (a) comprising 3 to 65 mass%, 3 to 60 mass%, or 3 to 55 mass% of the one or more pentose(s), based on

the mass of the total carbohydrate component (a), may be obtained after the hydrolysis and isolation steps of the above-defined method. According to a further example of the present invention, the amount of said one or more pentose(s) of said carbohydrate component (a) present in the aqueous solution obtained after the afore-  
5 mentioned hydrolysis and isolation steps may be in the range of 5 to 70 mass%, in the range of 10 to 70 mass%, or in the range of 15 to 70 mass%, based on the mass of the total carbohydrate component (a) present in said aqueous solution. Further examples of the pentose content in said aqueous solution of said carbohydrate component (a) obtained from the above-mentioned steps of hydrolyzing and isolating  
10 include 50 mass% or less, 45 mass% or less, and 40 mass% or less.

In the method of the present invention, the step of using the isolated carbohydrates from the one or more cellulose-based carbohydrate source(s) to form a carbohydrate component is not specifically restricted and includes any techniques suited to arrive  
15 at a desired carbohydrate composition constituting the carbohydrate component (a) as defined above. For example, the carbohydrate component may be formed by using carbohydrate mixtures, e.g. as a solid mixture or in form of a solution or dispersion, obtained after the isolating step as such, or may be formed by combining two or more carbohydrate mixtures obtained from cellulose-hydrolyzation. According  
20 to the present invention, the step of using the isolated carbohydrates from the one or more cellulose-based carbohydrate source(s) to form a carbohydrate component also includes the case wherein one or more carbohydrates are added to carbohydrate mixture obtained after cellulose-hydrolyzation and carbohydrate isolation. For example, a carbohydrate mixture obtained from hydrolysis of a specific cellulose-  
25 based carbohydrate source, containing mainly xylose as a pentose, may be supplemented with other pentoses or one or more hexoses, such as dextrose.

In a further embodiment, the present invention relates to the method as defined above, wherein the carbohydrate component (a) further comprises one or more hexose(s) in a total amount of 97 to 30 mass%, based on the mass of the total carbohydrate component (a). According to a further example of the present invention, an aqueous solution of a carbohydrate component (a) comprising 97 to 35 mass%, 97 to 40 mass%, or 97 to 45 mass% of the one or more hexose(s), based on the mass of the total carbohydrate component (a), may be obtained after the hydrolysis

and isolation steps of the above-defined method. According to a further example of the present invention, the amount of said one or more hexose(s) of said carbohydrate component (a) present in the aqueous solution obtained after the afore-mentioned hydrolysis and isolation steps may be in the range of 95 to 30 mass%, in the range of 5 90 to 30 mass%, or in the range of 85 to 30 mass%, based on the mass of the total carbohydrate component (a) present in said aqueous solution.

In such a case, the steps of hydrolyzing the one or more cellulose-based carbohydrate source(s) and of isolating the resulting carbohydrates may preferably 10 be adjusted to readily yield an aqueous solution of a carbohydrate component comprising 3 to 70 mass%, 3 to 65 mass%, 3 to 60 mass%, 3 to 55 mass%, 5 to 70 mass%, 10 to 70 mass%, or 15 to 70 mass% of one or more pentose(s), and 97 to 30 mass%, 97 to 35 mass%, 97 to 40 mass%, 97 to 45 mass%, 95 to 30 mass%, 90 to 30 mass%, or 85 to 30 mass% of one or more hexose(s), based on the mass of the 15 total carbohydrate component present in said solution.

According to a further embodiment of the method as defined above, the at least one pentose is selected from the group consisting of xylose, arabinose, ribose, lyxose, ribulose and xylulose, or any combination thereof.

20 According to the present invention, it is preferred to use a cellulose-based carbohydrate source which yields, upon hydrolysis, a significant amount of one or more pentose(s) readily usable in the preparation of the binder composition as defined above. According to a further embodiment of the present invention, such 25 cellulose-based carbohydrate source(s) are selected from the group consisting of agricultural residues such as corn stover and sugarcane bagasse; dedicated energy crops such as sugar beet, switchgrass, *Miscanthus*, hemp, willow and corn; wood residues, such as wood chips, timber bark, saw mill discards and paper mill discards; municipal paper waste, such as used paper and low grade paper waste; as well as 30 industrial cellulose sources, such as brewery waste and dairy products.

For example, in view of environmental aspects, the above cellulose sources include all sorts of cellulose-containing waste, such as paper waste e.g. coming up in industrial paper production processes (for example paper pulp discards), non-

recyclable low grade paper waste, contaminated cellulose-containing waste, or cellulose-containing composite materials, etc.

Further, another embodiment relates to the above-defined method of the present  
5 invention, wherein step (iii) of forming the carbohydrate component (a) includes combining carbohydrates and/or carbohydrate mixtures obtained from at least two different cellulose-based carbohydrate sources.

According to the present invention, in order to obtain a desired carbohydrate  
10 component having a carbohydrate composition which is effective in a binder composition, one or more carbohydrates or carbohydrate mixtures obtained from different cellulose-based carbohydrate sources may be combined. In such a case, the chemical composition of such carbohydrate mixtures resulting from hydrolysis of each of the different cellulose-based carbohydrate sources may be identified by  
15 suitable analytical methods known in the art and subsequently combined as desired.

A further embodiment of the present invention relates to the method as defined above, wherein said binder composition further comprises an amino acid component (c).

20 As mentioned above, the presence of an amino acid component may be useful in order to obtain an improved binder composition, e.g. with respect to increased cure rates.

25 In another embodiment, the present invention relates to the above-defined method, wherein said amino acid component (c) is formed by using amino acids obtained from step (i) of hydrolyzing one or more cellulose-based carbohydrate source(s).

According to the present invention, a single cellulose-based carbohydrate source  
30 may also be hydrolyzed more than once, e.g. by using different methods or conditions of hydrolyzation in order to obtain different carbohydrate (and/or amino acid) compositions and maximize the carbohydrate (and/or amino acid) yield from a single source. For example, a cellulose-based carbohydrate source, such as a plant biomass, may be hydrolyzed in a first step to e.g. mainly break down the

hemicellulose part thereof, thus yielding a mixture of pentoses and hexoses, such as xylose and glucose. The same cellulose-based carbohydrate source may then be subsequently subjected to another hydrolyzation step in order to e.g. effectively break down the cellulose part contained therein, thus yielding mainly hexoses, such

5 as glucose. It is further possible to employ one or more hydrolysis steps which provide a specific yield of amino acids usable in the aqueous binder composition of the present invention.

In view of the above, the total number of hydrolyzation steps employed to a single 10 cellulose-based carbohydrate source is not limited herein and includes, for example, three, four, five or six subsequent hydrolysis steps. According to the present invention, the respective carbohydrate/amino acid fractions obtained from each of said hydrolysis steps may be combined in a manner to adjust a desired composition regarding the content of pentose(s), hexose(s) and amino acid(s).

15 However, according to the present invention, in order to form the amino acid component (c) usable in the binder composition defined above, amino acids obtained from the same hydrolysis and isolating steps employed for obtaining the carbohydrate component or parts thereof, may be used. For example, hydrolysis of a 20 cellulose-based carbohydrate source may, next to the afore-mentioned carbohydrates, simultaneously yield one or more amino acids, which may then be readily used in the binder composition of the present invention. Such a process would be highly beneficial in terms of product efficiency and use of resources.

25 Binder compositions in accordance with the present invention and/or produced by a method in accordance with the present invention may be applied to, for example, a collection of loose matter and cured or cross-linked, for example by heating; the binder may hold a collection of loose matter together. Alternatively or additionally, the binder may be used to impregnate a surface and/or to provide a coating at a surface.

30 The binders and binder compositions described herein may be used in respect of products comprising a product selected from the group consisting of: mineral wool insulation, glass wool insulation, stone wool insulation, a collection of fibers, a collection of particles, a collection of cellulose containing particles or fibers, a wood

board, an orientated strand board, a wood particle board, plywood, an abrasive, a non-woven fiber product, a woven fiber product, a foundry mould, a refractory product, a briquette, a friction material, a filter, and an impregnated laminate.

- 5 Particularly when used as a binder for mineral wool insulation, the amount of a cured binder may be  $\geq 2\%$  or  $\geq 3\%$  or  $\geq 4\%$  and/or  $\leq 15\%$  or  $\leq 12\%$  or  $\leq 10\%$  or  $\leq 8\%$  by weight with respect to the total weight of binder and mineral wool. This may be measured by loss on ignition.
- 10 Particularly when used as a binder for wood boards or cellulosic materials, the amount of a cured binder (weight of dry binder to weight of dry wood or to weight of dry cellulosic containing material) may be  $\geq 7\%$  or  $\geq 10\%$  or  $\geq 12\%$  and/or  $\leq 25\%$  or  $\leq 20\%$  or  $\leq 18\%$  or  $\leq 15\%$ .
- 15 The figures show:

Figure 1 shows a diagram wherein cure rate of various binder compositions is related to the carbohydrate composition thereof with respect its pentose/hexose content.

- 20 Figure 2 shows a diagram of different cure rates obtained from various xylose-containing binder compositions.

Figures 3 shows laboratory cure rates obtained with binders using different proportions of glucose and xylose as the carbohydrate component of a binder and ammonium sulphate as the amine component.

- 25 The binder system of the present invention is free of environmentally problematic reactants/products and is particularly formaldehyde-free, and at the same time shows excellent cure rates which enable the reduction of cure time or cure temperature, thus providing a more efficient production, e.g. of fiber-based products such as glass
- 30 or rock wool. In addition, as a further ecologically valuable asset, the binder system of the present invention may be produced by a method according to which cellulose-based, and thus renewable carbohydrate sources are used for preparing the carbohydrate component of said binder composition. Said cellulose-based

carbohydrate sources may be energy plants known to contain high amounts of cellulose, or cellulose-containing wastes of all sorts, such as (low grade) paper waste, or waste incurred during industrial paper production.

5 The following examples are intended for further illustration without intention to limit the subject matter of the present invention.

Examples:

Example 1: Cure rates of xylose-containing binder compositions using

10 hexamethylenediamine ("HMDA")

Aqueous binder compositions were prepared according to the formulations provided in Table 1, below. The overall compositions are based on 80 mass% sugars + 20 mass% hexamethylenediamine, calculated solids 70 mass%.

15

Table 1

Formulations (mass% of pentose in brackets)	Gelling time (s)	Components (g)					
		HMDA	DMH	Xylose	Water	Mannose	Arabinose
DMH	851	10.00	30.80	-	9.20	-	-
7/8 DMH+ 1/8 Xylose (9,68)	528	10.18	27.43	2.94	9.45	-	-
3/4 DMH+ 1/4 Xylose (20,01)	451	10.36	23.94	5.99	9.71	-	-
5/8 DMH+ 3/8 Xylose (31,05)	359	10.56	20.32	9.15	9.97	-	-
1/2 DMH+ 1/2 Xylose (43,23)	305	10.69	16.47	12.54	10.30	-	-
3/8 DMH+ 5/8 Xylose (55,55)	286	10.96	12.66	15.82	10.56	-	-
1/4 DMH+ 3/4 Xylose (69,34)	266	11.14	8.58	19.40	10.87	-	-
1/8 DMH+ 7/8 Xylose (83,99)	251	11.40	4.39	23.03	11.18	-	-
Xylose (100,00)	-	11.49	-	26.95	11.49	-	-
1/3 DMH+ 1/3 Xylose+ 1/3 Mannose (31,95)	380	10.56	10.16	9.15	10.85	9.33	-
1/2 Arabinose+ 1/4 DMH+ 1/4 Xylose (69,23)	286	11.17	8.60	6.45	10.87	-	12.90

The ratios pentose versus hexose were calculated on a molarity basis (with the content in mass% of the pentose(s) provided in brackets), and the calculated solids

5 were kept the same to allow a like for like comparison of the formulations.

The two last formulations containing sugar mixtures reflect typical carbohydrate mixtures obtained when hydrolyzing soft wood and sugar beet. As can clearly be taken from the graph in Figure 1, the presence of a pentose (here: xylose or a

10 mixture of xylose/arabinose) significantly improves the cure rate achieved with the resulting binder composition. However, surprisingly, there is no linear relation

between the pentose content and improvement in cure rates, and the effect attenuates when adding great excesses of xylose. Accordingly, the amount of pentose in the carbohydrate component should be adjusted to optimize cure speed.

- 5 When replacing half of the hexose DMH (dextrose monohydrate) in a 2/3 DMH and 1/3 xylose composition with the hexose mannose, which has a similar structure when compared to dextrose, said mixture results in a similar curing kinetic when compared to the above-mentioned composition comprising 2/3 DMH and 1/3 xylose.
- 10 Also, replacing parts of the xylose with another pentose (arabinose) results in similar curing kinetics when compared to the composition containing only xylose.

Example 2: Cure rates of xylose-containing binder compositions using  $(\text{NH}_4)_2\text{SO}_4$

- 15 Three aqueous binder compositions (up to 100 mL) were prepared according to the formulations provided in Table 2, below.

20 Table 2

Formulations	85.3% Glucose + 0.8% Xylose + 13.9% $(\text{NH}_4)_2\text{SO}_4$	46.6% Glucose + 38.4% Xylose + 15.0% $(\text{NH}_4)_2\text{SO}_4$	83.7% Xylose + 16.3% $(\text{NH}_4)_2\text{SO}_4$
Glucose (g)	16.20	8.20	-
Xylose (g)	0.15	6.75	13.51
$(\text{NH}_4)_2\text{SO}_4$ (g)	2.64	2.64	2.64

These formulations were dropped on filter pads and heated at 140°C. Brown polymers were formed on the filter pads, then dissolved in water and absorbance of the solutions was measured to build the cure rates of each formulation over time.

25 The resulting cure rates can be taken from Figure 2, from which it is apparent that small (catalytic) amounts of a pentose are not sufficient to significantly accelerate the cure rate.

Example 3: Cure rates of glucose-xylose containing binder compositions using  $(\text{NH}_4)_2\text{SO}_4$

5 The cure rate of the following formulations of binders was tested in the laboratory:

Sample	A	B	C	D	E	F
<b>Molar % glucose</b>	100	85	70	50	30	0
<b>Molar % xylose</b>	0	15	30	50	70	100
<b>Actual weight % of Xylose</b>	0%	12.82%	26.32%	45.45%	66.04%	100%
<b>Weight glucose (g)</b>	4.50	3.83	3.15	2.25	1.35	0.00
<b>Weight xylose (g)</b>	0.00	0.56	1.13	1.88	2.63	3.75
<b>Weight of DMH required (g)</b>	4.95	4.21	3.47	2.48	1.49	0.00
<b>Ammonia Sulphate (g)</b>	0.50	0.50	0.50	0.50	0.50	0.50
<b>Total solids weight (g)</b>	5.00	4.89	4.78	4.63	4.48	4.25
<b>Water (g)</b>	13.05	13.12	13.18	13.27	13.36	13.50
<b>Total batch weight (g)</b>	18.50	18.39	18.28	18.13	17.98	17.75

The results are shown in Figure 3 which plots light absorbance at 470nm or each sample being cured (y-axis) against time T in minutes (x-axis). It is interesting to

10 note that Sample D (about 45% wt. xylose and 55% wt. glucose; about 50% mol xylose and 50% mol glucose) gave a cure rate similar to 100% xylose; this indicates a synergy between xylose and glucose and, more generally, between pentose(s) and hexose(s) in binders disclosed herein.

## Claims

1. An aqueous binder composition, comprising a carbohydrate component (a) and an amine component (b), wherein the carbohydrate component (a) comprises one or more pentose(s) in a total amount of 3 to 70 mass%, based on the mass of the total carbohydrate component (a).
2. The binder composition according to claim 1, wherein the carbohydrate component (a) further comprises one or more hexose(s) in a total amount of 97 to 30 mass%, based on the mass of the total carbohydrate component (a).
3. The binder composition according to claim 1 or 2, wherein the one or more pentose(s) is/are selected from the group consisting of xylose, arabinose, ribose, lyxose, ribulose and xylulose, or any combination thereof.
4. The binder composition according to any one of claims 1 to 3, wherein the amine component (b) is selected from the group consisting of proteins, peptides, amino acids, organic amines, polyamines, ammonia, ammonium salts of a monomeric polycarboxylic acid, ammonium salts of a polymeric polycarboxylic acid, and ammonium salts of an inorganic acid, or any combination thereof.
5. The binder composition according to any one of claims 1 to 4, wherein said binder composition further comprises an amino acid component (c).
6. A binder obtainable by heating the binder composition according to any one of claims 1 to 5.
7. A method of producing an aqueous binder composition, comprising a carbohydrate component (a) and an amine component (b), wherein the carbohydrate component (a) comprises one or more pentose(s) in a total amount of 3 to 70 mass%, based on the mass of the total carbohydrate component (a),  
wherein the method comprises the steps:

- (i) hydrolyzing one or more cellulose-based carbohydrate source(s),
- (ii) isolating the carbohydrates from the one or more hydrolyzed cellulose-based carbohydrate source(s),
- (iii) using the isolated carbohydrates from the one or more cellulose-based carbohydrate source(s) to form a carbohydrate component (a), comprising one or more pentose(s) in a total amount of 3 to 70 mass%, based on the mass of the total carbohydrate component (a), and
- (iv) adding an amine component (b).

8. The method according to claim 7, wherein step (i) of hydrolyzing one or more cellulose-based carbohydrate source(s) independently comprises treatment with heat/pressure, enzymatic and/or acidic treatment and/or metal chloride hydrolysis of each of said one or more cellulose-based carbohydrate source(s).

9. The method according to claim 7 or 8, wherein the carbohydrate component (a) further comprises one or more hexose(s) in a total amount of 97 to 30 mass%, based on the mass of the total carbohydrate component (a).

10. The method according to any one of claims 7 to 9, wherein the one or more pentose(s) is/are selected from the group consisting of xylose, arabinose, ribose, lyxose, ribulose and xylulose, or any combination thereof.


11. The method according to any one of claims 7 to 10, wherein the one or more cellulose-based carbohydrate source(s) are selected from the group consisting of agricultural residues such as corn stover and sugarcane bagasse; dedicated energy crops such as sugar beet, switchgrass, *Miscanthus*, hemp, willow and corn; wood residues, such as wood chips, timber bark, saw mill discards and paper mill discards; municipal paper waste, such as used paper and low grade paper waste; as well as industrial cellulose sources, such as brewery waste and dairy products.

12. The method according to any one of claims 7 to 11, wherein the amine component (b) is selected from the group consisting of proteins, peptides, amino acids, organic amines, polyamines, ammonia, ammonium salts of a

monomeric polycarboxylic acid, ammonium salts of a polymeric polycarboxylic acid, and ammonium salts of an inorganic acid, or any combination thereof.

13. The method according to any one of claims 7 to 12, wherein step (iii) of forming the carbohydrate component (a) includes combining carbohydrates and/or carbohydrate mixtures obtained from at least two different cellulose-based carbohydrate sources.
14. The method according to any one of claims 7 to 13, wherein said binder composition further comprises an amino acid component (c).
15. The method according to claim 14, wherein said amino acid component (c) is formed by using amino acids obtained from step (i) of hydrolyzing one or more cellulose-based carbohydrate source(s).
16. A method of manufacturing a product selected from the group consisting of: mineral wool insulation, glass wool insulation, stone wool insulation, a collection of fibers, a collection of particles, a collection of cellulose containing particles or fibers, a wood board, an orientated strand board, a wood particle board, plywood, an abrasive, a non-woven fiber product, a woven fiber product, a foundry mould, a refractory product, a briquette, a friction material, a filter, and an impregnated laminate  
comprising the steps of:
  - applying to non-or loosely assembled matter a binder in accordance with any of claims 1 to 4 or a binder manufactured in accordance with any of claims 7 to 15; and
  - curing the binder.

Figure 1  
Binder recipes: 80% sugars+ 20% HMDA

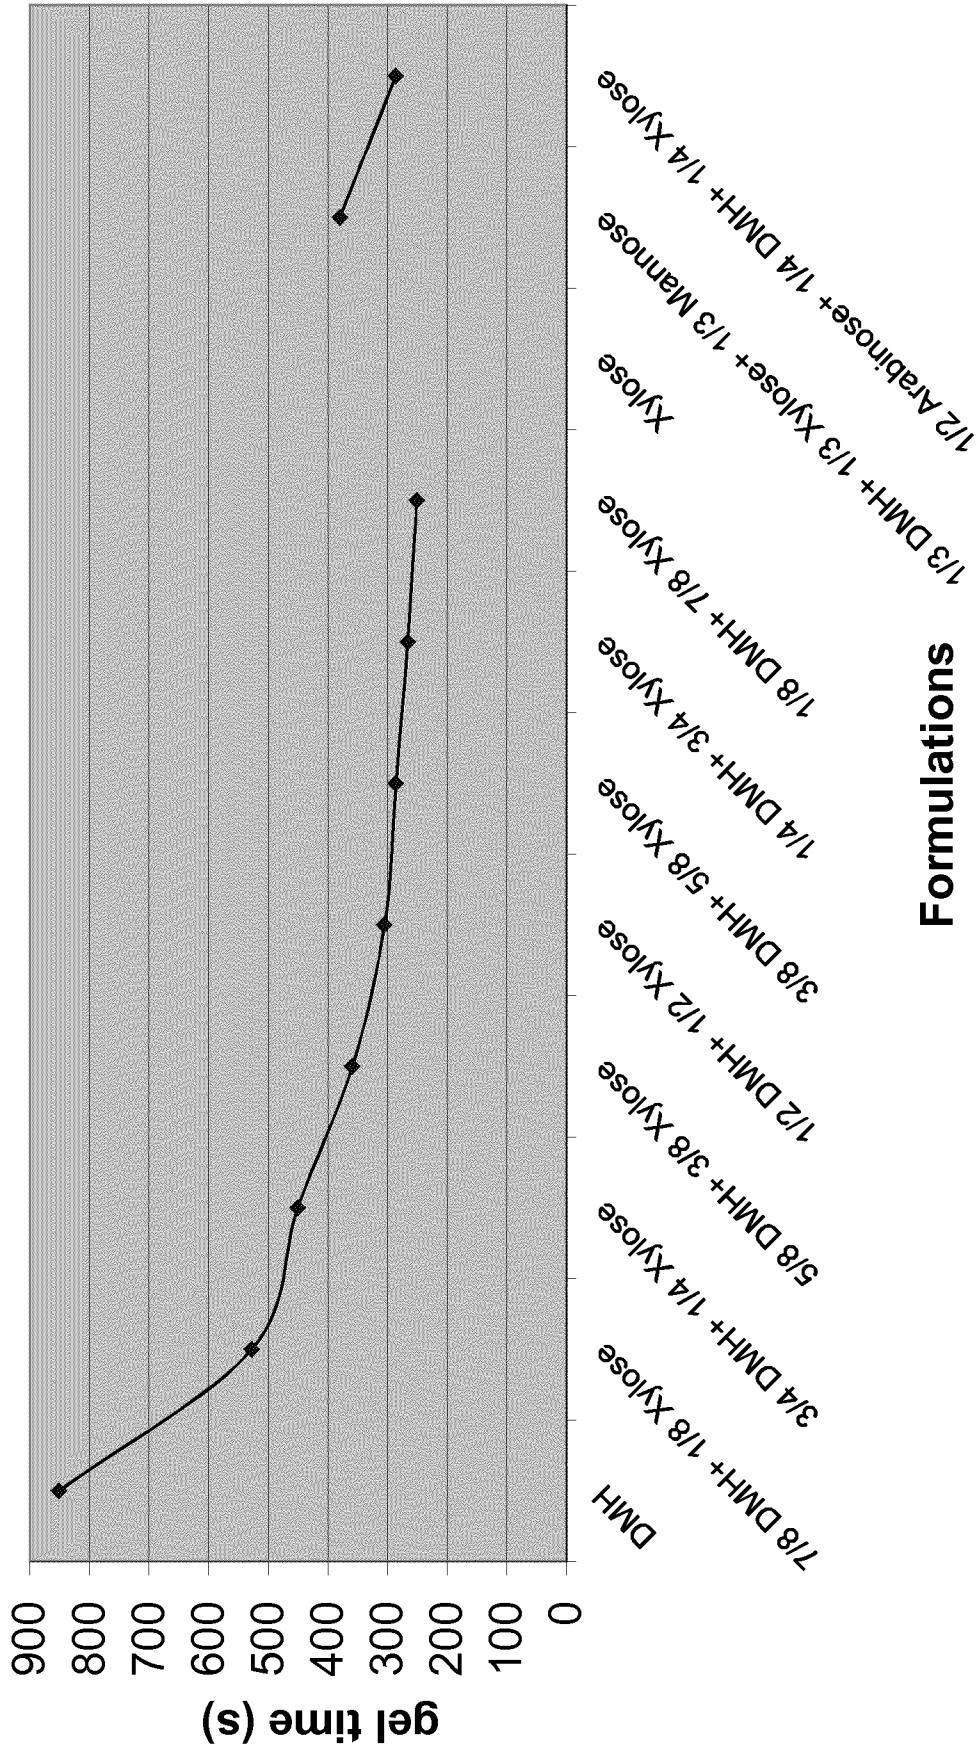

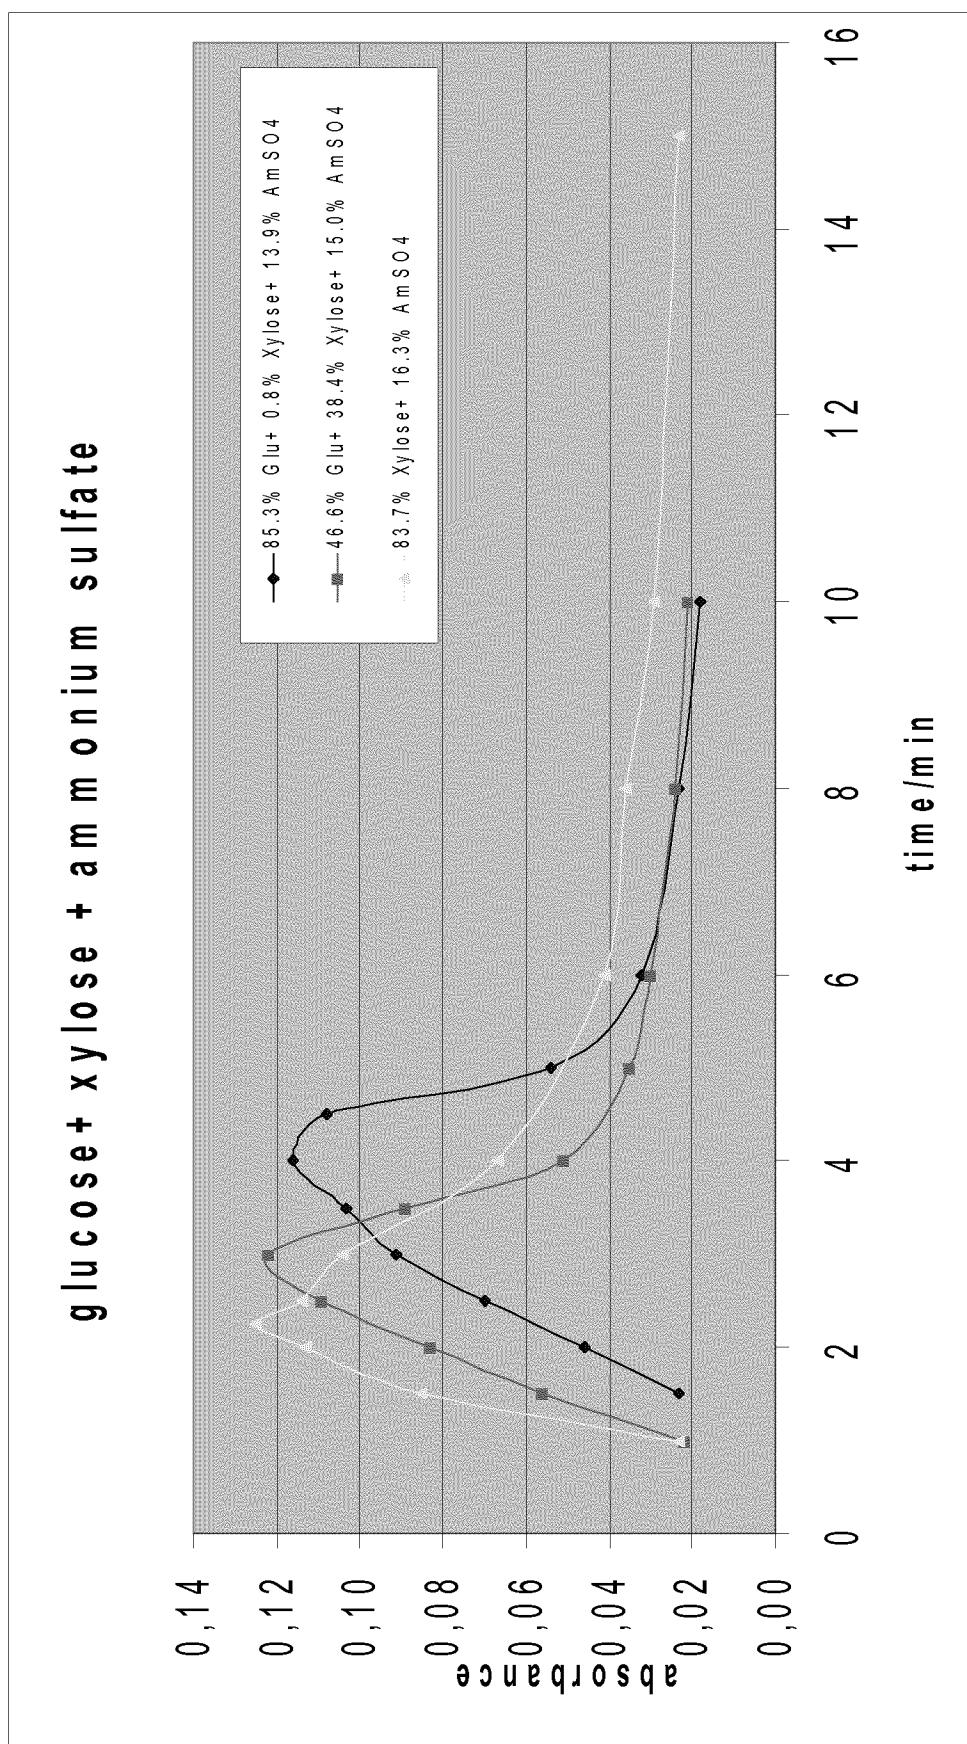
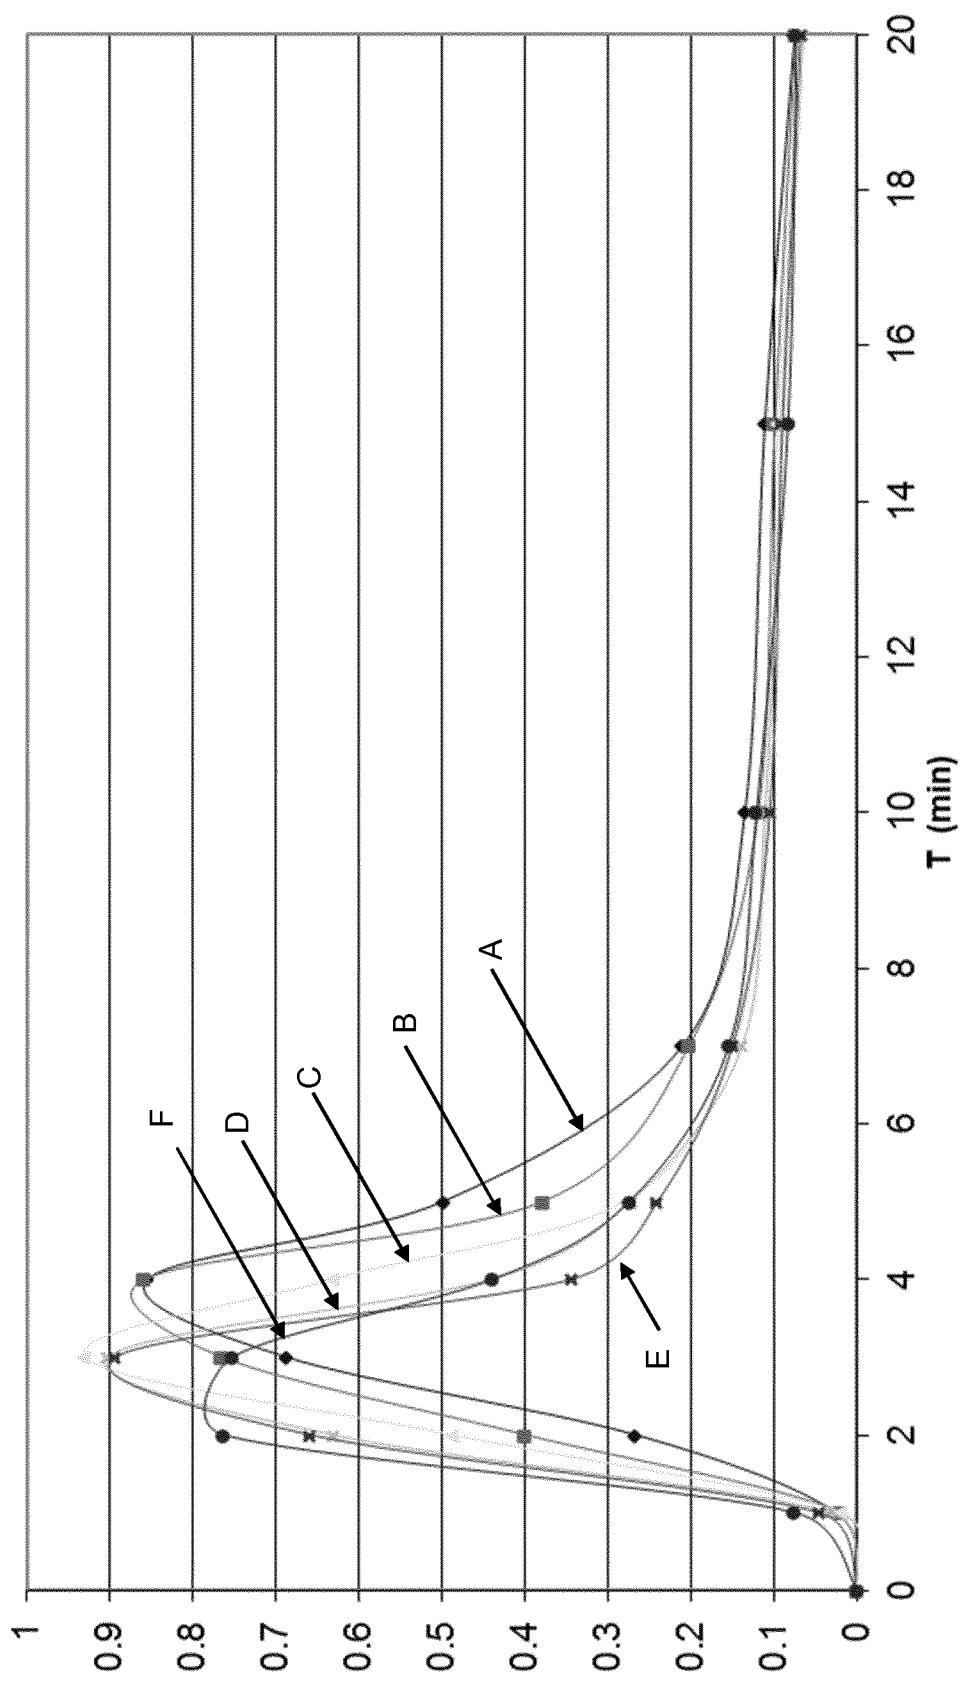


Figure 2

**Figure 3**

# INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2012/067044

**A. CLASSIFICATION OF SUBJECT MATTER**  
**INV. C08L79/02**  
**ADD.**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
**C08L**

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

**EPO-Internal, CHEM ABS Data, WPI Data**

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2011/046271 A1 (SHOOSHTARI KIARASH ALAVI [US] ET AL) 24 February 2011 (2011-02-24) the whole document -----	1,3-8, 10-16
Y	WO 2007/014236 A2 (KNAUF INSULATION GMBH [US]; SWIFT BRIAN LEE [US]; XU RUIJIAN [US]; KIS) 1 February 2007 (2007-02-01) cited in the application the whole document -----	1,3-8, 10-16
Y	DE 19 05 054 A1 (DIERKS FORESTS INC) 21 August 1969 (1969-08-21) page 18 - page 19; claims 1-4 -----	1,3-8, 10-16



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

13 February 2013

19/02/2013

Name and mailing address of the ISA/  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040,  
Fax: (+31-70) 340-3016

Authorized officer

Bardili, Burkhardt

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/EP2012/067044
---

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
US 2011046271	A1	24-02-2011	EP 2467522 A1 US 2011046271 A1 WO 2011022226 A1	27-06-2012 24-02-2011 24-02-2011
-----				
WO 2007014236	A2	01-02-2007	AU 2006272595 A1 BR PI0614664 A2 CA 2615780 A1 CN 101287788 A CN 102766423 A EA 200800424 A1 EP 1919999 A2 EP 2433983 A1 JP 2009503193 A KR 20080049012 A US 2007027283 A1 US 2007123679 A1 US 2007123680 A1 US 2007142596 A1 US 2010130649 A1 US 2011135937 A1 US 2011220835 A1 WO 2007014236 A2	01-02-2007 12-04-2011 01-02-2007 15-10-2008 07-11-2012 29-08-2008 14-05-2008 28-03-2012 29-01-2009 03-06-2008 01-02-2007 31-05-2007 31-05-2007 21-06-2007 27-05-2010 09-06-2011 15-09-2011 01-02-2007
-----				
DE 1905054	A1	21-08-1969	NONE	
-----				