


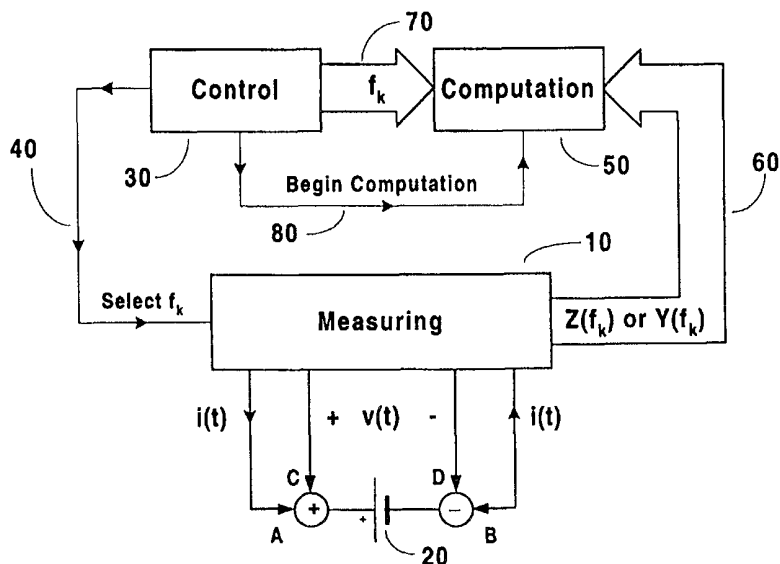

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01N 27/416, G01R 31/36	A1	(11) International Publication Number: WO 00/16083 (43) International Publication Date: 23 March 2000 (23.03.00)
(21) International Application Number: PCT/US99/20838 (22) International Filing Date: 10 September 1999 (10.09.99) (30) Priority Data: 09/151,324 11 September 1998 (11.09.98) US (71)(72) Applicant and Inventor: CHAMPLIN, Keith, S. [US/US]; 5437 Elliot Avenue South, Minneapolis, MN 55417 (US). (74) Agents: CHAMPLIN, Judson, K. et al.; Westman, Champlin & Kelly, P.A., International Centre – Suite 1600, 900 Second Avenue South, Minneapolis, MN 55402–3319 (US).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: METHOD AND APPARATUS FOR DETERMINING BATTERY PROPERTIES FROM COMPLEX IMPEDANCE/ADMITTANCE

**(57) Abstract**

A device (10, 30, 50) includes a microprocessor or microcontroller and measures real and imaginary parts of complex immittance of a cell or battery (20) at n discrete frequencies, where n is an integer number equal to or greater than 2. The device determines cell/battery properties by evaluating components of an equivalent circuit model comprising $2n$ frequency-independent elements. Equating real and imaginary parts of measured immittance (60) to values appropriate to the model at the n measurement frequencies (70) defines a system of $2n$ nonlinear equations. Introducing $2n$ intermediate variables permits solving these equations and leads to values for the $2n$ model elements. A table of element values contains virtually the same information as the spectrum of complex immittance over a wide frequency range but provides this information in a more concise form that is easier to store, analyze, and manipulate. Thus, the $2n$ element values may themselves comprise the desired result.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

**METHOD AND APPARATUS FOR DETERMINING
BATTERY PROPERTIES FROM COMPLEX
IMPEDANCE/ADMITTANCE**

BACKGROUND OF THE INVENTION

5 Small-signal ac measurement techniques have
proven useful in determining properties of
electrochemical cells and batteries such as cranking
power, percent capacity, and state-of-health. These
techniques have generally utilized single-frequency
10 measurements of a single quantity, such as
conductance (e.g., U.S. patents 5,585,728 and
5,140,269 to Champlin), resistance (e.g., U.S. patent
3,676,770 to Sharaf et al, U.S. patent 3,753,094 to
Furuishi, U.S. patent 5,047,722 to Wurst et al), or
15 "impedance" (e.g., U.S. patent 4,697,134 to Burkum et
al, U.S. patent 5,773,978 to Becker). However,
considerably more information of an electrical,
chemical, and physical nature is contained in the
continuous spectrum of complex immittance, i.e.,
20 either impedance or admittance, displayed over a
range of frequencies. (See, e.g., David Robinson,
"Electrochemical Impedance Spectroscopy in Battery
Development and Testing", *BATTERIES INTERNATIONAL*,
31, pp. 59-63, April, 1997). A big challenge for
25 field testing batteries is to acquire such
information from a relatively small number of
measurements obtained at a few selected "spot"
frequencies.

 Muramatsu discloses one approach to this
30 challenge in U.S. patent 4,678,998. He measures

-2-

impedance magnitude at two frequencies. At each frequency he compares the measured magnitude with that of a predetermined experimental relationship between impedance magnitude, remaining capacity, and remaining service life. He reports that such measurements can separately determine the battery's remaining capacity and its remaining service life. Randin discloses a second approach in U.S. Patent 4,743,855. He reportedly determines a battery's state-of-discharge from the argument (i.e., phase angle) of the difference between complex impedances measured at two frequencies. Bounaga discloses still another approach in U.S. patent 5,650,937. He reportedly determines state-of-charge from measurements of only the imaginary part of complex impedance obtained at a single frequency. All three of these approaches have fairly limited objectives, however. Much more information is actually contained in the complete spectrum of complex immittance than is acquired by Muramatsu, Randin, or Bounaga.

Equivalent circuit modeling may assist one in relating complex immittance spectra to electrical, chemical, or physical properties of a battery. A complex nonlinear least-squares curve-fitting procedure has been used by electrochemists to relate impedance spectra to nonlinear electrochemical models. (See, e.g., J. Ross Macdonald and Donald R. Franceschetti, "Precision of Impedance Spectroscopy Estimates of Bulk, Reaction Rate, and Diffusion Parameters", *Journal of Electroanalytical Chemistry*,

-3-

307, pp. 1-11, 1991; see also Bernard A. Boukamp, "A Package for Impedance/Admittance Data Analysis", *Solid State Ionics*, **18**, pp.136-140, 1986). This complex procedure, however, requires measuring the
5 complete spectral distribution of cell/battery impedance and then making initial estimates of the model's parameters to ensure ultimate convergence.

An equivalent circuit model is an interconnection of electrical elements introduced to
10 represent terminal characteristics of the battery. In a linear small-signal model, these elements comprise discrete resistances capacitances and inductances. Such models have been described by a number of workers including Hampson, et al (N. A.
15 Hampson, et al, "The Impedance of Electrical Storage Cells", *Journal of Applied Electrochemistry*, **10**, pp.3-11, 1980), Willihnganz and Rohner (E. Willihnganz and Peter Rohner, "Battery Impedance", *Electrical Engineering*, **78**, No. 9, pp. 922-925,
20 September, 1959), and DeBardelaben (S. DeBardelaben, "Determining the End of Battery Life", INTELLEC 86, *IEEE Publication CH2328-3/86/0000-0365*, pp. 365 - 386, 1986; and S. DeBardelaben, "A Look at the Impedance of a Cell", INTELLEC 88, *IEEE Publication*
25 *CH2653-4/88/000-0394*, pp. 394 - 397, 1988). However, none of these workers has disclosed means for determining component values of an equivalent circuit model from a small number of measurements obtained at a few selected "spot" frequencies. That is an

-4-

important contribution of the invention disclosed herein.

SUMMARY OF THE INVENTION

A device includes a microprocessor or
5 microcontroller and measures real and imaginary parts
of complex immittance of a cell or battery at n
discrete frequencies, where n is an integer number
equal to or greater than 2. The device determines
cell/battery properties by evaluating components of
10 an equivalent circuit model comprising $2n$ frequency-
independent linear electrical elements. Equating
measured real and imaginary parts of complex
immittance to theoretical real and imaginary values
appropriate to the model at each of the n discrete
15 frequencies defines a set of $2n$ nonlinear equations
in $2n$ unknowns. By introducing $2n$ intermediate
variables, this formidable problem is made linear and
is systematically solved for the values of the
components of the model. Once these values are
20 known, a table of the $2n$ element values contains
virtually the same information as the continuous
spectrum of complex immittance displayed over a range
of frequencies. However, the table of values
provides this information in a much more concise form
25 that is easier to store, analyze, and manipulate.
Thus, circuit element values may themselves comprise
the desired result. Moreover, the circuit elements
represent actual processes occurring within the
battery. Accordingly, a predetermined relationship
30 between one or more of the elements and an additional

-5-

electrical, chemical, or physical property of the cell/battery may be invoked to determine the additional property.

The method and apparatus disclosed herein are efficient, accurate, and easily implemented with a microcontroller or microprocessor. The invention is suitable for a variety of diagnostic applications ranging from hand-held battery testers to "smart" battery chargers and battery "fuel gauges" in electric vehicles. Although a lead-acid automotive storage battery is used as an example to teach the method, the invention is equally applicable to both primary and secondary cells and batteries, and to those employed in a variety of other applications and/or employing other chemical systems.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1a is a spectral plot of measured real part of admittance of an actual 12-volt automotive storage battery.

FIG. 1b is a spectral plot of measured imaginary part of admittance of an actual 12-volt automotive storage battery.

FIG. 2 depicts a general small-signal ac equivalent circuit model of a cell or battery comprising $2n$ frequency-independent linear elements.

FIG. 3 depicts the equivalent circuit model of FIG. 2 with $n=2$.

FIG. 4a is a plot of the experimental data of FIG. 1a compared with a theoretical curve calculated from the model of FIG. 3.

-6-

FIG. 4b is a plot of the experimental data of FIG. 1b compared with a theoretical curve calculated from the model of FIG. 3.

FIG. 5 depicts the equivalent circuit model of FIG. 2 with $n=3$.

FIG. 6a is a plot of the experimental data of FIG. 1a compared with a theoretical curve calculated from the model of FIG. 5.

FIG. 6b is a plot of the experimental data of FIG. 1b compared with a theoretical curve calculated from the model of FIG. 5.

FIG. 7 is a block diagram of a device for determining battery properties from spot-frequency complex immittance according to the present invention.

FIG. 8 is a flow chart depicting the control algorithm for the invention embodiment disclosed in FIG. 7.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The impedance of a cell or battery is a complex quantity. At a particular discrete or "spot" frequency f_k , the complex impedance can be written in terms of its real and imaginary parts as

$$Z(f_k) = R(f_k) + jX(f_k) \quad (1)$$

where $j = \sqrt{-1}$. The real quantities $R(f_k)$ and $X(f_k)$ are, respectively, the resistance and the reactance of the cell/battery at the frequency f_k . They physically represent ratios of in-phase voltage amplitude to

-7-

current amplitude, and quadrature voltage amplitude to current amplitude, respectively, at the frequency f_k .

The admittance of a cell or battery is likewise a complex quantity. At a particular discrete or "spot" frequency f_k , the complex admittance can be written

$$Y(f_k) = G(f_k) + jB(f_k). \quad (2)$$

10

The real quantities $G(f_k)$ and $B(f_k)$ are, respectively, the conductance and the susceptance of the cell/battery at the frequency f_k . They physically represent ratios of in-phase current amplitude to voltage amplitude, and quadrature current amplitude to voltage amplitude, respectively, at the frequency f_k .

Complex admittance and complex impedance are related to each other by the reciprocal relationship

20

$$Y(f_k) = 1/Z(f_k). \quad (3)$$

Accordingly, spectra of complex admittance and spectra of complex impedance contain exactly the same information about the cell or battery. The term "immittance" will herein denote either quantity in instances where the choice is immaterial.

Measured spectra of real and imaginary parts of complex admittance of a typical automotive

30

-8-

storage battery are disclosed in FIGS. 1a and 1b, respectively, over the frequency range from 5 Hz to 1000 Hz. Considerable information about a battery is expressed in such spectral plots. One sees from FIG. 5 1b, for example, that the battery passes through series resonance near 250 Hz, being capacitive ($B > 0$) below this frequency and inductive ($B < 0$) above. However, most of the battery information displayed in FIGS. 1a and 1b is very subtle, and not at all 10 obvious from the plots.

FIG. 2 discloses a small-signal ac equivalent circuit model introduced herein to assist in reducing spectral plots of complex immittance, such as those displayed in FIGS. 1a and 1b, to a 15 small set of frequency-independent parameters. One sees that the model of FIG. 2 comprises a series interconnection of a single two-element series R-L subcircuit and $n-1$ two-element parallel R-C subcircuits. For $n=2$, this general equivalent 20 circuit model reduces to the simple model discussed by both Willihnganz and Rohner and by DeBardelaben.

A complete disclosure of my method for determining circuit-model element values from measured values of spot-frequency complex immittance 25 follows. I begin with an expression for the complex impedance of the model of FIG. 2

$$Z = R + jX = R1 + j\omega L1 + \frac{1}{1/R2 + j\omega C2} + \dots + \frac{1}{1/Rn + j\omega Cn} \quad (4)$$

-9-

where $\omega = 2\pi f$ is the angular frequency. The inductance and the capacitances are eliminated from this expression by writing them in terms of time constants

$$\begin{aligned} \tau_1 &= L1/R1 \\ \tau_2 &= R2C2 \\ &\vdots \\ \tau_n &= RnCn \end{aligned} \quad (5)$$

The result is

$$Z = R + jX = R1(1 + j\omega\tau_1) + \frac{R2}{(1 + j\omega\tau_2)} + \dots + \frac{Rn}{(1 + j\omega\tau_n)} \quad (6)$$

Multiplying both sides of equation (6) by the product $(1 + j\omega\tau_2) \dots (1 + j\omega\tau_n)$ clears the fractions and yields

$$(R + jX)(1 + j\omega\tau_2) \dots (1 + j\omega\tau_n) = R1(1 + j\omega\tau_1) \dots (1 + j\omega\tau_n) + R2(1 + j\omega\tau_3) \dots (1 + j\omega\tau_n) + \dots + Rn(1 + j\omega\tau_2) \dots (1 + j\omega\tau_{n-1}) \quad (7)$$

For $n=3$, equation (7) reduces to

$$(R + jX)(1 + j\omega\tau_2)(1 + j\omega\tau_3) = R1(1 + j\omega\tau_1)(1 + j\omega\tau_2)(1 + j\omega\tau_3) + R2(1 + j\omega\tau_3) + R3(1 + j\omega\tau_2) \quad (8)$$

Equation (7) is divided into two equations by multiplying the terms out, separating them into real and imaginary parts, and then separately equating real to real, and imaginary to imaginary. For $n=3$, this procedure leads to

-10-

Real Part:

$$(\omega^2 \mathbf{R})(\tau_2 \tau_3) + (\omega \mathbf{X})(\tau_2 + \tau_3) - \omega^2 \{ \mathbf{R1}(\tau_2 \tau_3 + \tau_3 \tau_1 + \tau_1 \tau_2) \} + (\mathbf{R1} + \mathbf{R2} + \mathbf{R3}) = \mathbf{R} \quad (9)$$

5 Imaginary Part:

$$(\omega^2 \mathbf{X})(\tau_2 \tau_3) - (\omega \mathbf{R})(\tau_2 + \tau_3) + \omega \{ \mathbf{R1}(\tau_1 + \tau_2 + \tau_3) + \mathbf{R2} \tau_3 + \mathbf{R3} \tau_2 \} - \omega^3 \{ \mathbf{R1}(\tau_1 \tau_2 \tau_3) \} = \mathbf{X} \quad (10)$$

Equations (9) and (10) are nonlinear since
 10 the $2n$ unknown resistances and time constants appear
 as combinations of products. I attack this
 formidable problem by defining a new set of $2n$
 intermediate variables. These new variables are the
 various combinations of the model's resistances and
 15 time constants that multiply functions of battery
 resistance, battery reactance, and frequency. For
 $n=3$, the six intermediate variables are defined by

$$\Psi_1 \equiv (\tau_2 + \tau_3) \quad (11a)$$

$$\Psi_2 \equiv (\tau_2 \tau_3) \quad (11b)$$

$$\Psi_3 \equiv (\mathbf{R1} + \mathbf{R2} + \mathbf{R3}) \quad (11c)$$

$$\Psi_4 \equiv (\tau_1 + \tau_2 + \tau_3) \mathbf{R1} + \tau_3 \mathbf{R2} + \tau_2 \mathbf{R3} \quad (11d)$$

$$\Psi_5 \equiv (\tau_2 \tau_3 + \tau_3 \tau_1 + \tau_1 \tau_2) \mathbf{R1} \quad (11e)$$

$$\Psi_6 \equiv (\tau_1 \tau_2 \tau_3) \mathbf{R1} \quad (11f)$$

20

When expressed in terms of these new
 variables, equations (9) and (10) are linear. At the
 angular spot frequency ω_k , these two equations are

-11-

$$\{\omega_k \mathbf{X}(\omega_k)\} \Psi_1 + \{\omega_k^2 \mathbf{R}(\omega_k)\} \Psi_2 + \{1\} \Psi_3 + \{0\} \Psi_4 - \{\omega_k^2\} \Psi_5 + \{0\} \Psi_6 = \mathbf{R}(\omega_k) \quad (12)$$

and

$$5 \quad -\{\omega_k \mathbf{R}(\omega_k)\} \Psi_1 + \{\omega_k^2 \mathbf{X}(\omega_k)\} \Psi_2 + \{0\} \Psi_3 + \{\omega_k\} \Psi_4 + \{0\} \Psi_5 - \{\omega_k^3\} \Psi_6 = \mathbf{X}(\omega_k) \quad (13)$$

In general, equations such as (12) and (13) comprise a pair of linear inhomogeneous equations for the $2n$ intermediate variables, Ψ_1, \dots, Ψ_{2n} . Even though linear, such equations are still not solvable since they contain an insufficient number of relationships between variables. However, by evaluating the complex impedance at n discrete frequencies, $\omega_1, \dots, \omega_n$, the two equations expand into a solvable set of $2n$ linear inhomogeneous equations in $2n$ unknowns. Such a system can be solved by the well-known method known as Cramer's rule. Cramer's rule expresses the $2n$ solutions, Ψ_1, \dots, Ψ_{2n} , as ratios of determinants having $2n$ columns and $2n$ rows. For $n=3$, these six solutions are of the form

$$\Psi_1 = A_1/A_D; \dots; \Psi_6 = A_6/A_D \quad (14)$$

25 where A_D and $A_1 \dots A_6$ are (6×6) determinants given by

-12-

$$A_D = \begin{vmatrix} \omega_1 X(\omega_1) & \omega_1^2 R(\omega_1) & 1 & 0 & -\omega_1^2 & 0 \\ \omega_2 X(\omega_2) & \omega_2^2 R(\omega_2) & 1 & 0 & -\omega_2^2 & 0 \\ \omega_3 X(\omega_3) & \omega_3^2 R(\omega_3) & 1 & 0 & -\omega_3^2 & 0 \\ -\omega_1 R(\omega_1) & \omega_1^2 X(\omega_1) & 0 & \omega_1 & 0 & -\omega_1^3 \\ -\omega_2 R(\omega_2) & \omega_2^2 X(\omega_2) & 0 & \omega_2 & 0 & -\omega_2^3 \\ -\omega_3 R(\omega_3) & \omega_3^2 X(\omega_3) & 0 & \omega_3 & 0 & -\omega_3^3 \end{vmatrix} \quad (15)$$

$$A_1 = \begin{vmatrix} R(\omega_1) & \omega_1^2 R(\omega_1) & 1 & 0 & -\omega_1^2 & 0 \\ R(\omega_2) & \omega_2^2 R(\omega_2) & 1 & 0 & -\omega_2^2 & 0 \\ R(\omega_3) & \omega_3^2 R(\omega_3) & 1 & 0 & -\omega_3^2 & 0 \\ X(\omega_1) & \omega_1^2 X(\omega_1) & 0 & \omega_1 & 0 & -\omega_1^3 \\ X(\omega_2) & \omega_2^2 X(\omega_2) & 0 & \omega_2 & 0 & -\omega_2^3 \\ X(\omega_3) & \omega_3^2 X(\omega_3) & 0 & \omega_3 & 0 & -\omega_3^3 \end{vmatrix} \quad (16)$$

5

$$A_2 = \begin{vmatrix} \omega_1 X(\omega_1) & R(\omega_1) & 1 & 0 & -\omega_1^2 & 0 \\ \omega_2 X(\omega_2) & R(\omega_2) & 1 & 0 & -\omega_2^2 & 0 \\ \omega_3 X(\omega_3) & R(\omega_3) & 1 & 0 & -\omega_3^2 & 0 \\ -\omega_1 R(\omega_1) & X(\omega_1) & 0 & \omega_1 & 0 & -\omega_1^3 \\ -\omega_2 R(\omega_2) & X(\omega_2) & 0 & \omega_2 & 0 & -\omega_2^3 \\ -\omega_3 R(\omega_3) & X(\omega_3) & 0 & \omega_3 & 0 & -\omega_3^3 \end{vmatrix} \quad (17)$$

$$A_3 = \begin{vmatrix} \omega_1 X(\omega_1) & \omega_1^2 R(\omega_1) & R(\omega_1) & 0 & -\omega_1^2 & 0 \\ \omega_2 X(\omega_2) & \omega_2^2 R(\omega_2) & R(\omega_2) & 0 & -\omega_2^2 & 0 \\ \omega_3 X(\omega_3) & \omega_3^2 R(\omega_3) & R(\omega_3) & 0 & -\omega_3^2 & 0 \\ -\omega_1 R(\omega_1) & \omega_1^2 X(\omega_1) & X(\omega_1) & \omega_1 & 0 & -\omega_1^3 \\ -\omega_2 R(\omega_2) & \omega_2^2 X(\omega_2) & X(\omega_2) & \omega_2 & 0 & -\omega_2^3 \\ -\omega_3 R(\omega_3) & \omega_3^2 X(\omega_3) & X(\omega_3) & \omega_3 & 0 & -\omega_3^3 \end{vmatrix} \quad (18)$$

-13-

$$A_4 = \begin{vmatrix} \omega_1 X(\omega_1) & \omega_1^2 R(\omega_1) & 1 & R(\omega_1) & -\omega_1^2 & 0 \\ \omega_2 X(\omega_2) & \omega_2^2 R(\omega_2) & 1 & R(\omega_2) & -\omega_2^2 & 0 \\ \omega_3 X(\omega_3) & \omega_3^2 R(\omega_3) & 1 & R(\omega_3) & -\omega_3^2 & 0 \\ -\omega_1 R(\omega_1) & \omega_1^2 X(\omega_1) & 0 & X(\omega_1) & 0 & -\omega_1^3 \\ -\omega_2 R(\omega_2) & \omega_2^2 X(\omega_2) & 0 & X(\omega_2) & 0 & -\omega_2^3 \\ -\omega_3 R(\omega_3) & \omega_3^2 X(\omega_3) & 0 & X(\omega_3) & 0 & -\omega_3^3 \end{vmatrix} \quad (19)$$

$$A_5 = \begin{vmatrix} \omega_1 X(\omega_1) & \omega_1^2 R(\omega_1) & 1 & 0 & R(\omega_1) & 0 \\ \omega_2 X(\omega_2) & \omega_2^2 R(\omega_2) & 1 & 0 & R(\omega_2) & 0 \\ \omega_3 X(\omega_3) & \omega_3^2 R(\omega_3) & 1 & 0 & R(\omega_3) & 0 \\ -\omega_1 R(\omega_1) & \omega_1^2 X(\omega_1) & 0 & \omega_1 & X(\omega_1) & -\omega_1^3 \\ -\omega_2 R(\omega_2) & \omega_2^2 X(\omega_2) & 0 & \omega_2 & X(\omega_2) & -\omega_2^3 \\ -\omega_3 R(\omega_3) & \omega_3^2 X(\omega_3) & 0 & \omega_3 & X(\omega_3) & -\omega_3^3 \end{vmatrix} \quad (20)$$

5 and

$$A_6 = \begin{vmatrix} \omega_1 X(\omega_1) & \omega_1^2 R(\omega_1) & 1 & 0 & -\omega_1^2 & R(\omega_1) \\ \omega_2 X(\omega_2) & \omega_2^2 R(\omega_2) & 1 & 0 & -\omega_2^2 & R(\omega_2) \\ \omega_3 X(\omega_3) & \omega_3^2 R(\omega_3) & 1 & 0 & -\omega_3^2 & R(\omega_3) \\ -\omega_1 R(\omega_1) & \omega_1^2 X(\omega_1) & 0 & \omega_1 & 0 & X(\omega_1) \\ -\omega_2 R(\omega_2) & \omega_2^2 X(\omega_2) & 0 & \omega_2 & 0 & X(\omega_2) \\ -\omega_3 R(\omega_3) & \omega_3^2 X(\omega_3) & 0 & \omega_3 & 0 & X(\omega_3) \end{vmatrix}. \quad (21)$$

The determinants disclosed in equations (15) - (21) can be systematically evaluated from spot-frequency immittance measurements by well-known numerical expansion techniques. Once their values are known, the intermediate variables Ψ_1, \dots, Ψ_6 follow from equations (14). The defining equations of the intermediate variables, equations (11a) - (11f), are then combined in particular ways to evaluate the elements of the equivalent circuit model.

-14-

The technique proceeds as follows. One first combines the defining equations for $n-1$ of the $2n$ intermediate variables to yield an equation for the $n-1$ capacitive time constants τ_2, \dots, τ_n . These $n-1$ equations are identified by not containing resistances. For example, for $n=3$, I combine equation (11a) and equation (11b) to obtain the following quadratic equation:

$$\tau_{2,3}^2 - \Psi_1 \tau_{2,3} + \Psi_2 = 0. \quad (22)$$

The two roots of equation (22) are given by the well-known quadratic formula

$$\tau_{2,3} = \frac{\Psi_1}{2} \pm \sqrt{(\Psi_1/2)^2 - \Psi_2}. \quad (23)$$

For the general case of arbitrary n , combining the $n-1$ defining equations that contain no resistances leads to the following polynomial equation of order $n-1$:

$$\tau^{(n-1)} - \Psi_1 \tau^{(n-2)} + \dots \pm \Psi_{n-1} = 0. \quad (24)$$

The $n-1$ roots of equation (24) are the capacitive time constants τ_2, \dots, τ_n . Although general formulas similar to equation (23) do not exist to solve higher order polynomial equations, the roots of equation (24) can always be found using well-known numerical root-finding algorithms.

-15-

Once the capacitive time constants have been determined, the inductive time constant τ_1 follows by eliminating **R1** from the two defining equations for intermediate variables that are proportional to **R1**. For example, with **n=3**, I combine equations (11e) and (11f) to obtain

$$\tau_1 = \{(\Psi_5/\Psi_6) - 1/\tau_2 - 1/\tau_3\}^{-1}. \quad (25)$$

For the general case of arbitrary **n**, the expression for τ_1 is of the form

$$\tau_1 = \{(\Psi_{(2n-1)}/\Psi_{2n}) - 1/\tau_2 - \dots - 1/\tau_n\}^{-1}. \quad (26)$$

Thus, in principle, all **n** time constants are known.

In general, there are **2n** equations defining the **2n** intermediate variables. The first **n-1** of these equations contain no resistances and are employed to determine the capacitive time constants. Two of the remaining **n+1** equations are employed to determine the inductive time constant. By choosing either one of these two equations, along with all of the remaining **n-1** unused equations, one obtains a set of **n** linear inhomogeneous equations in the **n** unknowns **R1, ..., Rn**. Cramer's rule can then be invoked to solve this system for the values of these **n** resistances. For example, with **n=3**, I use equations (16c), (16d), and (16f) to obtain the following set of three linear equations in three unknowns:

-16-

$$\begin{array}{rcl}
\{1\}R1 & + \{1\}R2 & + \{1\}R3 = \Psi_3 \\
\{\tau_1 + \tau_2 + \tau_3\}R1 & + \{\tau_3\}R2 & + \{\tau_2\}R3 = \Psi_4 \\
\{\tau_1\tau_2\tau_3\}R1 & + \{0\}R2 & + \{0\}R3 = \Psi_6
\end{array} \quad (27)$$

Cramer's rule yields the following three solutions:

5

$$R1 = \frac{\begin{vmatrix} \Psi_3 & 1 & 1 \\ \Psi_4 & \tau_3 & \tau_2 \\ \Psi_6 & 0 & 0 \end{vmatrix}}{\begin{vmatrix} 1 & 1 & 1 \\ \tau_1 + \tau_2 + \tau_3 & \tau_3 & \tau_2 \\ \tau_1\tau_2\tau_3 & 0 & 0 \end{vmatrix}} \quad (28)$$

$$R2 = \frac{\begin{vmatrix} 1 & \Psi_3 & 1 \\ \tau_1 + \tau_2 + \tau_3 & \Psi_4 & \tau_2 \\ \tau_1\tau_2\tau_3 & \Psi_6 & 0 \end{vmatrix}}{\begin{vmatrix} 1 & 1 & 1 \\ \tau_1 + \tau_2 + \tau_3 & \tau_3 & \tau_2 \\ \tau_1\tau_2\tau_3 & 0 & 0 \end{vmatrix}} \quad (29)$$

and

$$R3 = \frac{\begin{vmatrix} 1 & 1 & \Psi_3 \\ \tau_1 + \tau_2 + \tau_3 & \tau_3 & \Psi_4 \\ \tau_1\tau_2\tau_3 & 0 & \Psi_6 \end{vmatrix}}{\begin{vmatrix} 1 & 1 & 1 \\ \tau_1 + \tau_2 + \tau_3 & \tau_3 & \tau_2 \\ \tau_1\tau_2\tau_3 & 0 & 0 \end{vmatrix}}. \quad (30)$$

10

Thus, in principle, all n resistance values are known.

-17-

Finally, I invert equations (5) to determine the single inductance value and the $n-1$ capacitance values from the n known time constants and the n known resistance values

5

$$L1 = \tau_1 R1 \quad (31a)$$

$$C2 = \tau_2 / R2 \quad (31b)$$

$$\vdots \quad \vdots$$

$$Cn = \tau_n / Rn \quad (31c)$$

This completes the disclosure of my method for determining the $2n$ element values. Although n is
10 unrestricted in principle, the problem of expanding large determinants will probably limit n to the range $2 \leq n \leq 8$. In summary, the steps are:

1. One first finds $2n$ intermediate variables by evaluating $2n$ ratios of
15 determinants comprising $2n$ columns and $2n$ rows. The determinants comprise sums and differences of products combining the n spot frequencies with real and imaginary parts of impedance or admittance at the n spot frequencies.

20 2. The $n-1$ capacitive time constants are found as roots of a polynomial equation of order $n-1$. The polynomial's coefficients comprise $n-1$ of the $2n$ intermediate variables whose defining equations contain no resistances.

25 3. The inductive time constant is determined from an equation containing the capacitive time constants found in step 2 along

-18-

with the ratio of the two intermediate variables proportional to R_1 .

4. The n resistances are determined by evaluating n ratios of $(n \times n)$ determinants. Elements of these determinants contain the n time constants found in steps 2 and 3 along with n of the remaining $n+1$ intermediate variables not employed in step 2.

5. Finally, the one inductance and the $n-1$ capacitances are evaluated by combining each of the n resistances with a corresponding time constant.

In practice, this procedure is readily implemented in software.

15 The exact procedure disclosed above can be simplified by choosing one of the n spot frequencies, say ω_n , to be sufficiently high that the impedance of the series chain of R-C subcircuits is negligibly small at this frequency. A preliminary measurement of $Z(\omega_n)$ then gives approximations to R_1 and L_1 directly. Subtracting $R_1 + j\omega_k L_1$ from the total measured impedance $Z(\omega_k)$ at each of the $n-1$ remaining spot frequencies and equating this result to the theoretical impedance of the R-C subcircuit chain at each frequency leads to a system of $2n-2$ equations in $2n-2$ unknowns. Solving for the appropriate $2n-2$ intermediate variables by Cramer's rule involves evaluating determinants that are fewer in number and smaller in size than the determinants evaluated in the exact procedure disclosed above.

-19-

FIG. 3 discloses an equivalent circuit model derived from FIG. 2 by letting $n=2$. This simple model is essentially the one discussed by Willihnganz and Rohner and by DeBardelaben in the publications cited earlier. By using the exact procedure disclosed above, I evaluated the four linear circuit elements of the model of FIG. 3 from the experimental data disclosed in FIGS. 1a and 1b at the two spot frequencies $f_1 = 5$ Hz and $f_2 = 1000$ Hz. The results of this evaluation procedure are displayed in Table 1.

Table 1. Model Element Values for $n=2$

	$R1 = 4.388 \text{ m}\Omega$	$R2 = 12.987 \text{ m}\Omega$
15	$L1 = 0.3885 \text{ }\mu\text{H}$	$C2 = 2.602 \text{ F}$

Theoretical curves of the real and imaginary parts of admittance as functions of frequency were calculated for the model of FIG. 3 by assuming the element values displayed in Table 1. The theoretical curves are plotted along with the measured curves for comparison in FIGS 4a and 4b. One sees that the experimental and theoretical curves agree exactly at the two spot frequencies as would be anticipated. However, away from the spot frequencies the agreement is seen to be poor. This indicates that the model of FIG. 3 does not adequately represent the battery over this frequency range.

Much better agreement is obtained with the $n=3$ model depicted in FIG. 5. Using the exact

-20-

procedures disclosed above, I evaluated the six linear circuit elements of the model of FIG. 5 from the experimental data disclosed in FIGS. 1a and 1b at the three spot frequencies $f_1 = 5$ Hz, $f_2 = 70$ Hz, and
5 $f_3 = 1000$ Hz. The results are displayed in Table 2.

Table 2. Model Element Values for n=3

	$R1 = 4.381 \text{ m}\Omega$	$R2 = 1.227 \text{ m}\Omega$	$R3 = 13.257 \text{ m}\Omega$
10	$L1 = 0.411 \text{ }\mu\text{H}$	$C2 = 1.812 \text{ F}$	$C3 = 3.14 \text{ F}$

Theoretical curves of the real and imaginary parts of admittance as functions of frequency were calculated for the model of FIG. 5 by
15 assuming the element values displayed in Table 2. These curves are plotted along with the measured curves for comparison in FIGS. 6a and 6b. Once again one sees that the experimental and theoretical curves agree exactly at the spot frequencies. Away from
20 these frequencies, however, the agreement is seen to also be very good. Such good agreement proves the model of FIG. 5 to be an excellent representation of the battery over the frequency range from 5 Hz to 1000 Hz. Accordingly, the n=3 model much more
25 closely describes actual processes within the battery than does the n=2 model.

The excellent agreement between the experimental curves and the theoretical predictions of the model means that Table 2 contains virtually
30 the same information about the battery as does the

-21-

continuous spectrum of complex admittance displayed in FIGS. 1a and 1b. However, Table 2 provides this information in a much more concise form that is far easier to store, analyze, and manipulate. 5 Accordingly, the information displayed in Table 2 may itself comprise the desired result.

Moreover, since the circuit elements defined in the extended model closely describe actual processes occurring within the battery, a 10 predetermined relationship can additionally be invoked if desired, to implement a final step of determining one or more additional battery property. For example, I have found that the battery's cold-cranking ampere (CCA) capacity is quite accurately 15 given by

$$CCA = 2662/R1 \quad (32)$$

where **R1** is expressed in milliohms. Thus, the 20 battery whose complex admittance spectrum is disclosed in FIGS. 1a and 1b is capable of supplying 608 cold-cranking amperes. This important information is not at all obvious from the spectral plots of FIGS. 1a and 1b. Other electrical 25 properties such as state-of-charge and ampere-hour capacity; chemical properties such as ion concentration and plate composition; and physical properties such as battery temperature and effective plate area, find similar expression in the complex

-22-

immittance spectra of the battery and may be determined in a comparable manner.

Figure 7 discloses a block diagram of a device for determining cell/battery properties from spot-frequency complex immittance according to the present invention. Measuring circuitry 10 electrically couples to cell/battery 20 by means of current-carrying contacts A and B and voltage-sensing contacts C and D. Measuring circuitry 10 passes a periodic time-varying current $i(t)$ through contacts A and B and senses a periodic time-varying voltage $v(t)$ across contacts C and D. By appropriately processing and combining $i(t)$ and $v(t)$, measuring circuitry 10 determines real and imaginary parts of complex immittance at a measuring frequency f_k ; where f_k is a discrete frequency component of waveforms $i(t)$ and $v(t)$.

Control circuitry 30 couples to measuring circuitry 10 via command path 40 and commands measuring circuitry 10 to determine the complex immittance of cell/battery 20 at each one of n discrete measuring frequencies, where n is an integer number equal to or greater than 2. This action defines $3n$ experimental quantities: the values of the n measuring frequencies and the values of the n imaginary and n real parts of the complex immittance at the n measuring frequencies.

Computation circuitry 50 couples to measuring circuitry 10 and to control circuitry 30 via data paths 60 and 70, respectively, and accepts the $2n$ experimental values from measuring circuitry

-23-

10 and the values of the n measuring frequencies from control circuitry 30. Upon a "Begin Computation" command from control circuitry 30 via command path 80, computation circuitry 50 invokes the procedure
5 disclosed above to combine these $3n$ quantities numerically to evaluate the $2n$ elements of the equivalent circuit model. These $2n$ element values may themselves comprise the desired result. However, if desired, computation circuitry 50 can also perform
10 an additional step by relating one or more of the model element values to an additional cell/battery property to determine the additional property.

In practice, a single microprocessor or microcontroller running an appropriate software
15 program can perform the functions of both control circuitry 30 and computation circuitry 50 as well as much of the function of measuring circuitry 10. Microprocessor controlled impedance measuring apparatus is disclosed in a copending U.S. patent
20 application.

Figure 8 discloses a flow chart depicting a control algorithm for the invention embodiment of FIG. 7. Upon entering the procedure at 100, control circuitry 30 initializes a counter at 105 used to
25 identify each spot frequency f_k . At 110, control circuitry 30 commands measuring circuitry 10 to excite the cell/battery with a periodic signal having a sinusoidal component at frequency f_k and to determine the real and imaginary parts of complex
30 immittance at this frequency. At decision block 115,

-24-

control circuitry 30 determines whether this procedure has been performed at all of the desired spot frequencies. If the answer is no, the counter is incremented at 120 and the procedure repeated at a new frequency. If yes, control circuitry 30 commands computation circuitry 50 to begin the computation at 125. Computation circuitry 50 begins at step 130 by determining the $2n$ intermediate variables from the values of real and imaginary parts of complex immittance at the n spot frequencies along with the n spot frequency values themselves. The $2n$ frequency-independent model elements are then evaluated from the $2n$ intermediate variable values at step 135. Finally, at optional step 140 computation circuitry 50 can, if desired, invoke an additional predetermined relationship between one or more of the model elements and a desired cell/battery property to determine the desired property.

This completes the disclosure of my invention. The method and apparatus are efficient, accurate, and easily implemented with a microcontroller or microprocessor. The invention is quite general and suitable for a wide variety of diagnostic applications ranging from hand-held battery test instruments to "smart" battery chargers and battery "fuel gauges" in electric vehicles. Although a lead-acid storage battery was used as an example to teach the method, the disclosed invention is equally applicable to both primary and secondary cells and batteries, and to cells/batteries employed

-25-

in a variety of other applications and/or employing other chemical systems.

The present invention has been described with reference to a preferred embodiment. However,
5 workers skilled in the art will recognize that changes may be made in form and detail without departing from the spirit and scope of the invention.

-26-

WHAT IS CLAIMED IS:

1. A device for determining values of at least one of $2n$ elements comprising an equivalent circuit model of an electrochemical cell or battery where n is an integer equal to or greater than two, said device comprising:

measuring circuitry adapted to couple to said cell or battery and adapted to pass a periodic current through said cell or battery, to sense a periodic voltage across said cell or battery, and to determine a real part and an imaginary part of complex immittance of said cell or battery at a measurement frequency comprising a component frequency of said periodic current and said periodic voltage;

control circuitry coupled to said measuring circuitry and adapted to command said measuring circuitry to select each one of n said measurement frequencies thereby defining n said real parts, n said imaginary parts and n said measurement frequencies; and,

computation circuitry coupled to said measuring circuitry and to said control circuitry and adapted to numerically combine values of said n real parts, said n imaginary parts, and said n measurement frequencies to

-27-

determine said values of at least one of said $2n$ elements comprising said equivalent circuit model of said electrochemical cell or battery.

5

2. A device as in claim 1 wherein n is equal to three.

3. A device as in claim 1 wherein said control
10 circuitry and said computation circuitry comprise a microprocessor or microcontroller running a software program adapted to select each one of said n measurement frequencies and to numerically combine values of said n real parts, said n imaginary parts,
15 and said n measurement frequencies to determine said values of at least one of said $2n$ elements comprising said equivalent circuit model of said electrochemical cell or battery.

20 4. A device as in claim 3 wherein said software program is further adapted to numerically combine values of said n real parts, said n imaginary parts, and said n measurement frequencies to evaluate $2n$ intermediate variables, and said values at least
25 one of said $2n$ elements are determined from values of said $2n$ intermediate variables.

5. A device for determining an electrical, chemical, or physical property of an electrochemical
30 cell or battery comprising:

-28-

measuring circuitry adapted to couple to
said cell or battery and adapted to
pass a periodic current through said
cell or battery, to sense a periodic
5 voltage across said cell or battery,
and to determine a real part and an
imaginary part of complex immittance
of said cell or battery at a
measurement frequency comprising a
10 component frequency of said periodic
current and said periodic voltage;
control circuitry coupled to said
measuring circuitry and adapted to
command said measuring circuitry to
15 select each one of n said measurement
frequencies thereby defining n said
real parts, n said imaginary parts and
 n said measurement frequencies where n
is an integer number equal to or
20 greater than two; and,
computation circuitry coupled to said
measuring circuitry and to said
control circuitry and adapted to
numerically combine values of said n
25 real parts, said n imaginary parts,
and said n measurement frequencies to
determine said electrical, chemical,
or physical property of said
electrochemical cell or battery.

30

-29-

6. A device as in claim 5 wherein n is equal to three.

7. A device as in claim 5 wherein said control
5 circuitry and said computation circuitry comprise a microprocessor or microcontroller running a software program adapted to select each one of said n measurement frequencies and to numerically combine values of said n real parts, said n imaginary parts,
10 and said n measurement frequencies to determine said electrical, chemical, or physical property of said electrochemical cell or battery.

8. A device as in claim 7 wherein said
15 software program is further adapted to numerically combine values of said n real parts, said n imaginary parts, and said n measurement frequencies to evaluate $2n$ intermediate variables, and said electrical, chemical, or physical property of said
20 electrochemical cell or battery is determined from values of said $2n$ intermediate variables.

9. A device as in claim 8 wherein said
software program is further adapted to numerically
25 combine said $2n$ intermediate variables to evaluate circuit model elements and said electrical, chemical, or physical property of said electrochemical cell or battery is determined from values of said circuit model elements.

30

-30-

10. A method for determining an electrical, chemical, or physical property of an electrochemical cell or battery comprising the steps of:
- 5 measuring real and imaginary parts of complex immittance of said electrochemical cell or battery at n discrete frequencies where n is an integer number equal to or greater than two;
 - 10 evaluating $2n$ intermediate variables by numerically combining values of said n discrete frequencies and values of said real and imaginary parts of said complex immittance at said n discrete frequencies;
 - 15 evaluating $n-1$ capacitive time constants by numerically combining values of $n-1$ of said $2n$ intermediate variables;
 - 20 evaluating an inductive time constant by numerically combining values of said $n-1$ capacitive time constants and values of two of said $2n$ intermediate variables;
 - 25 evaluating n resistive elements by numerically combining values of said $n-1$ capacitive time constants, the value of said inductive time constant, and values of n of said $2n$ intermediate variables;

-31-

evaluating n reactive elements by
numerically combining each value of
said n resistive elements with a
corresponding value of one of said $n-1$
5 capacitive time constants and said
inductive time constant; and
relating values of one or more of said
resistive elements and said reactive
elements to said electrical, chemical,
10 or physical property of said
electrochemical cell or battery.

11. A method as in claim 10 wherein n is equal
to three.

15 12. A method for determining element values of
an equivalent circuit model of an electrochemical
cell or battery, said model comprising a series
interconnection of a single two-element series R-L
20 subcircuit and $n-1$ two-element parallel R-C
subcircuits where n is an integer number equal to or
greater than two, said method comprising the steps
of:

25 measuring real and imaginary parts of
complex immittance of said
electrochemical cell or battery at n
discrete frequencies;

30 evaluating $2n$ intermediate variables by
numerically combining values of said n
discrete frequencies and values of

-32-

said real and imaginary parts of said complex immittance at said n discrete frequencies;

evaluating $n-1$ capacitive time constants by numerically combining values of $n-1$ of said $2n$ intermediate variables;

evaluating an inductive time constant by numerically combining values of said $n-1$ capacitive time constants and values of two of said $2n$ intermediate variables;

evaluating a resistance of said single R-L subcircuit and $n-1$ resistances of said $n-1$ R-C subcircuits by numerically combining values of said $n-1$ capacitive time constants, the value of said inductive time constant, and values of n of said $2n$ intermediate variables; and,

evaluating an inductance of said R-L subcircuit and $n-1$ capacitances of said $n-1$ R-C subcircuits by numerically combining a resistance value for each said subcircuit with a corresponding time constant value associated with the same said subcircuit.

13. A method as in claim 12 wherein n is equal to three.

-33-

14. A method for determining element values of an equivalent circuit model of an electrochemical cell or battery, said model comprising a series
5 interconnection of a single two-element series R-L subcircuit and $n-1$ two-element parallel R-C subcircuits where n is an integer equal to or greater than two, said method comprising the steps of:

10 measuring real and imaginary parts of complex immittance of said electrochemical cell or battery at n discrete frequencies where one of said n discrete frequencies is a high frequency;

15 evaluating a resistance and an inductance of said R-L subcircuit by numerically combining the value of said high frequency and values of said real and imaginary parts of said complex
20 immittance at said high frequency;

evaluating a difference impedance at each of $n-1$ remaining frequencies by numerically combining values of said resistance, said inductance, and said
25 remaining frequency, with the value of said complex immittance at each said remaining frequency;

evaluating $2n-2$ intermediate variables by numerically combining values of said
30 $n-1$ remaining frequencies and values

-34-

of real and imaginary parts of said difference impedance at said $n-1$ remaining frequencies;

evaluating $n-1$ capacitive time constants of said $n-1$ R-C subcircuits by numerically combining values of $n-1$ of said $2n-2$ intermediate variables;

evaluating $n-1$ resistances of said $n-1$ R-C subcircuits by numerically combining values of said $n-1$ capacitive time constants and values of $n-1$ of said $2n-2$ intermediate variables; and,

evaluating $n-1$ capacitances of said $n-1$ R-C subcircuits by numerically combining a resistance value of each said subcircuit with a corresponding capacitive time constant value of the same said subcircuit.

15. A method as in claim 14 wherein n is equal to three.

16. A method for determining electrical, chemical, or physical properties of an electrochemical cell or battery comprising the steps of:

measuring real and imaginary parts of complex immittance of said electrochemical cell or battery at n discrete frequencies where n is an

-35-

integer number equal to or greater than two and one of said discrete frequencies is a high frequency;

5 evaluating a first resistance and an inductance by numerically combining the value of said high frequency and values of said real and imaginary parts of said complex immittance at said high frequency;

10 evaluating a difference impedance at each of $n-1$ remaining frequencies by numerically combining values of said first resistance, said inductance, and said remaining frequency with the

15 value of said complex immittance at each of said $n-1$ remaining frequencies;

 evaluating $2n-2$ intermediate variables by numerically combining values of said

20 $n-1$ remaining frequencies and values of real and imaginary parts of said difference impedance at said $n-1$ remaining frequencies;

 evaluating $n-1$ time constants by

25 numerically combining values of $n-1$ of said $2n-2$ intermediate variables;

 evaluating $n-1$ second resistances by numerically combining values of said

$n-1$ time constants and values of $n-1$

30 of said $2n-2$ intermediate variables;

-36-

evaluating $n-1$ capacitances by numerically combining the value of each of said $n-1$ second resistances with a corresponding value of each of said $n-1$ time constants; and,
relating values of one or more of said first resistance, said $n-1$ second resistances, said inductance, and said $n-1$ capacitances to said electrical, chemical, or physical property of said electrochemical cell or battery.

17. A method as in claim 16 wherein n is equal to three.

18. A device for determining an electrical chemical, or physical property of an electrochemical cell or battery adapted to perform the steps of the method of claim 10.

19. A device for determining element values of an equivalent circuit model for an electrochemical cell or battery, said model comprising a series interconnection of single two-element series R-L subcircuit and $n-1$ two-element parallel R-C subcircuits where n is an integer number equal to or greater than two, said device adapted to perform the steps of:

measuring real and imaginary parts of complex immittance of said

-37-

electrochemical cell or battery at n discrete frequencies;

evaluating $2n$ intermediate variables by numerically combining values of said n discrete frequencies and values of said real and imaginary parts of said complex immittance at said n discrete frequencies;

evaluating $n-1$ capacitive time constants by numerically combining values of $n-1$ of said $2n$ intermediate variables;

evaluating an inductive time constant by numerically combining values of said $n-1$ capacitive time constants and values of two of said $2n$ intermediate variables;

evaluating a resistance of said single R-L subcircuit and $n-1$ resistances of said $n-1$ R-C subcircuits by numerically combining values of said $n-1$ capacitive time constants, the value of said inductive time constant, and values of n of said $2n$ intermediate variables; and,

evaluating an inductance of said R-L subcircuit and $n-1$ capacitances of said $n-1$ R-C subcircuits by numerically combining a resistance value for each said subcircuit with a corresponding time constant value

-38-

associated with the same said subcircuit.

20. A device for determining element values of
5 an equivalent circuit model of an electrochemical
cell or battery, said model comprising a series
interconnection of single two-element series R-L
subcircuit and n-1 two-element parallel R-C subcircuits
where n is an integer number equal to or greater than
10 two, said device adapted to perform the steps of:

measuring real and imaginary parts of
complex immittance of said
electrochemical cell or battery at n
discrete frequencies where one of said
15 n discrete frequencies is a high
frequency;

evaluating a resistance and an inductance
of said R-L subcircuit by numerically
combining the value of said high
20 frequency and values of said real and
imaginary parts of said complex
immittance at said high frequency;

evaluating a difference impedance at each
of n-1 remaining frequencies by
25 numerically combining values of said
resistance, said inductance, and said
remaining frequency, with the value of
said complex immittance at each said
remaining frequency;

-39-

evaluating $2n-2$ intermediate variables by
numerically combining values of said
n-1 remaining frequencies and values
of real and imaginary parts of said
5 difference impedance at said n-1
remaining frequencies;

evaluating n-1 capacitive time constants of
said n-1 R-C subcircuits by
numerically combining values of n-1 of
10 said $2n-2$ intermediate variables;

evaluating n-1 resistances of said n-1 R-C
subcircuits by numerically combining
values of said n-1 capacitive time
constants and values of n-1 of said
15 $2n-2$ intermediate variables; and,

evaluating n-1 capacitances of said n-1 R-C
subcircuits by numerically combining a
resistance value of each said
subcircuit with a corresponding
20 capacitive time constant value of the
same said subcircuit.

21. A device for determining an electrical,
chemical, or physical property of an electrochemical
25 cell or battery adapted to perform the steps of:

measuring real and imaginary parts of
complex immittance of said
electrochemical cell or battery at n
discrete frequencies where n is an
30 integer number equal to or greater





-40-

than two and one of said discrete frequencies is a high frequency;
evaluating a first resistance and an inductance by numerically combining
5 the value of said high frequency and values of said real and imaginary parts of said complex immittance at said high frequency;
evaluating a difference impedance at each
10 of $n-1$ remaining frequencies by numerically combining values of said first resistance, said inductance, and said remaining frequency with the value of said complex immittance at
15 each of said $n-1$ remaining frequencies;
evaluating $2n-2$ intermediate variables by numerically combining values of said $n-1$ remaining frequencies and values
20 of real and imaginary parts of said difference impedance at said $n-1$ remaining frequencies;
evaluating $n-1$ time constants by numerically combining values of $n-1$ of
25 said $2n-2$ intermediate variables;
evaluating $n-1$ second resistances by numerically combining values of said $n-1$ time constants and values of $n-1$ of said $2n-2$ intermediate variables;


-41-

evaluating n-1 capacitances by numerically
combining the value of each of said n-
1 second resistances with a
corresponding value of each of said
5 n-1 time constants; and,
relating values of one or more of said
first resistance, said n-1 second
resistances, said inductance, and said
n-1 capacitances to said electrical,
10 chemical, or physical property of said
electrochemical cell or battery.

1/3

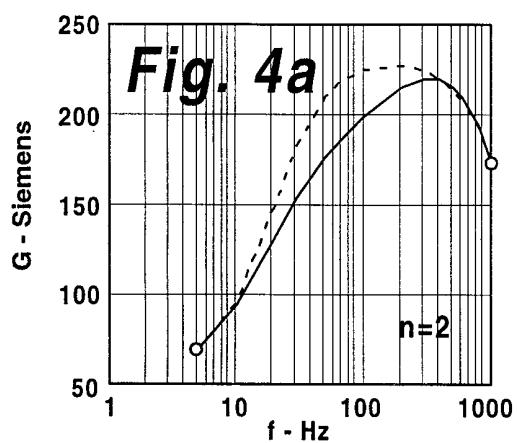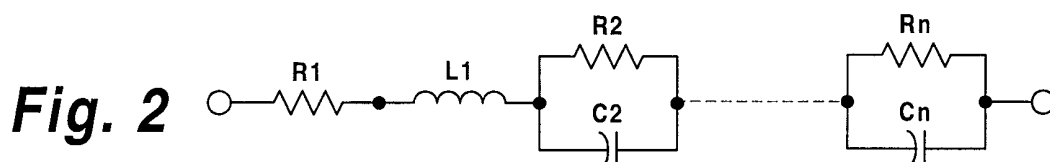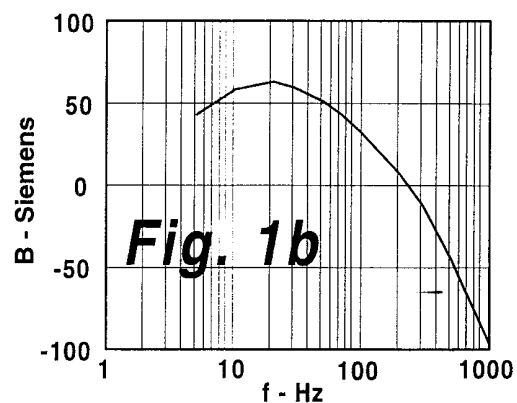
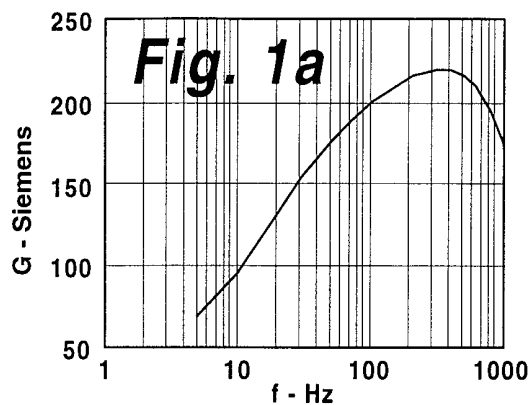


— Experiment
 ○○ Spot-Frequency Measurements
 -- Calculated from Fig. 3 Model

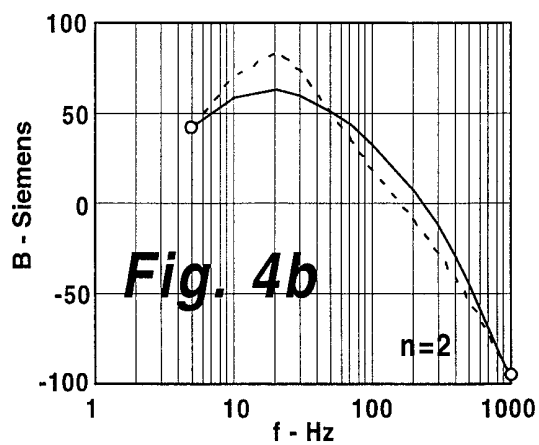


— Experiment
 ○○ Spot-Frequency Measurements
 -- Calculated from Fig. 3 Model


2/3

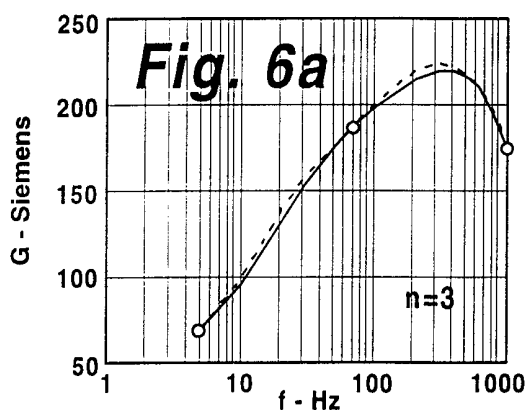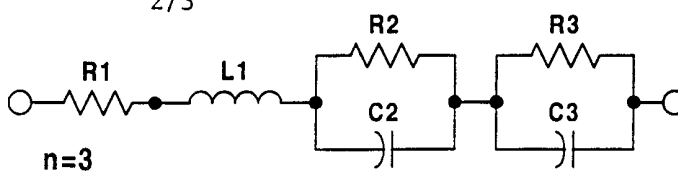
Fig. 5

— Experiment
 ○○ Spot-Frequency Measurements
 -- Calculated from Fig. 5 Model

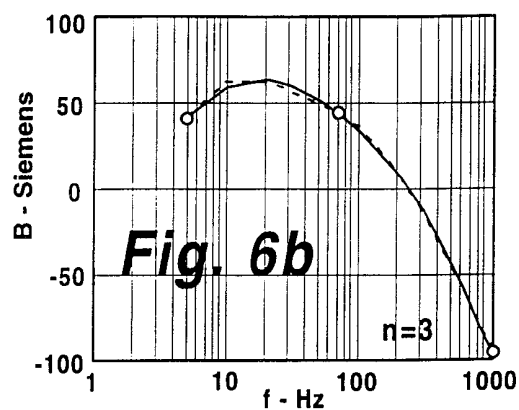

— Experiment
 ○○ Spot-Frequency Measurements
 -- Calculated from Fig. 5 Model

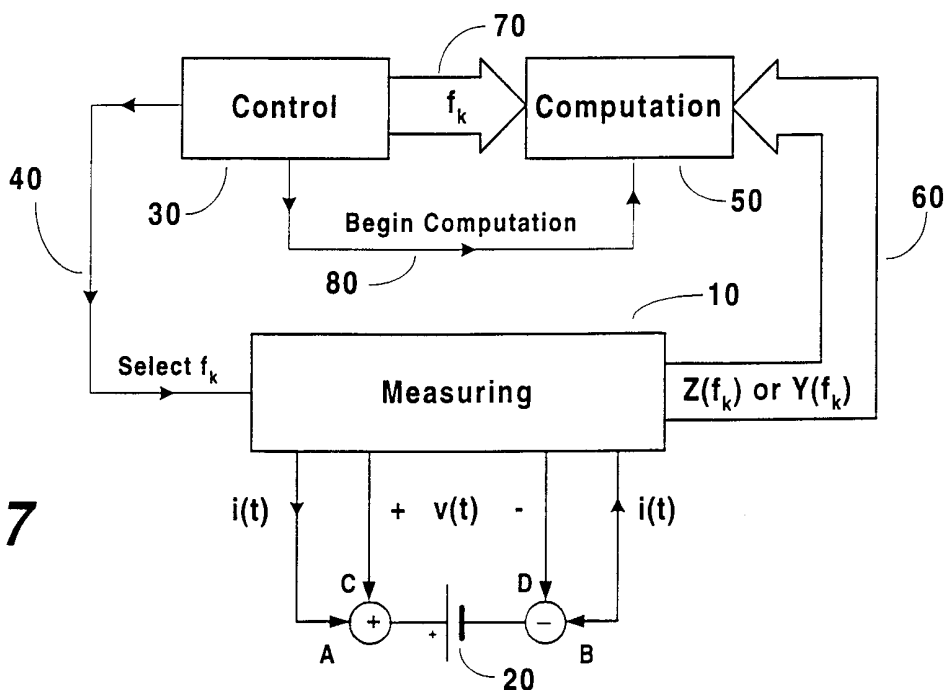Fig. 7

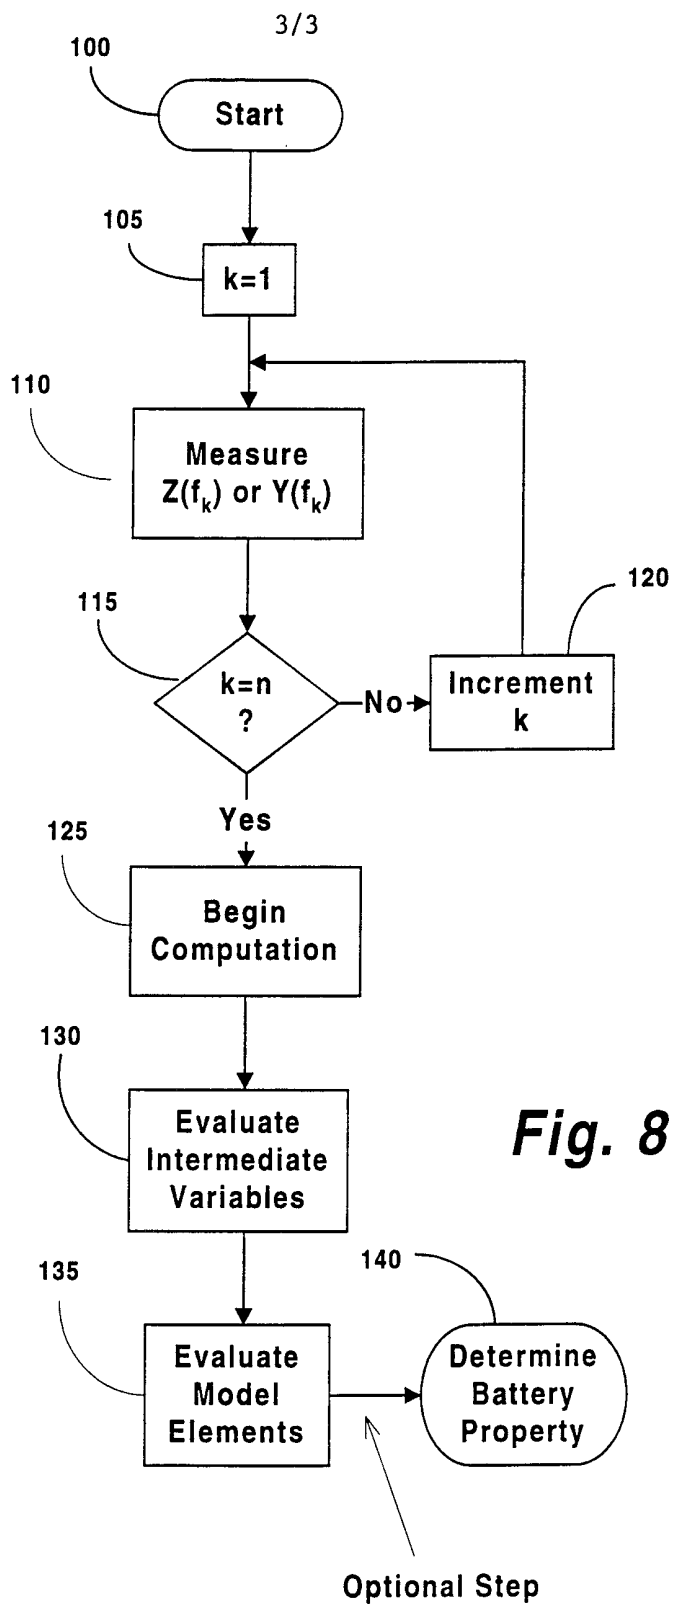

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US99/20838

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : G01N 27/416; G01R 31/36

US CL : 324/426, 430; 702/63

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 324/426, 427, 430; 702/63, 64, 65; 340/636

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
none

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
none

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4,678,998 A (MURAMATSU) 07 July 1987 (07.07.87), see entire document.	1-21
A	US 4,743,855 A (RANDIN et al) 10 May 1988 (10.05.88), see entire document.	1-21
A	U 5,650,937 A (BOUNAGA) 22 July 1997 (22.07.97), see entire document.	1-21
A	US 5,773,978 A (BECKER) 30 June 1998 (30.06.98), see entire document.	1-21



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	"&" document member of the same patent family

Date of the actual completion of the international search

10 November 1999 (10.11.1999)

Date of mailing of the international search report

01 DEC 1999

Name and mailing address of the ISA/US

Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703)305-3230

Authorized officer

Diep N. Do *M. Do*
Telephone No. 703-305-4900