



(51) International Patent Classification:

B60L 11/18 (2006.01) *H01M 10/48* (2006.01)
G01R 31/36 (2006.01) *H02J 7/00* (2006.01)
H01M 10/42 (2006.01) *H01M 10/44* (2006.01)

(21) International Application Number:

PCT/IB2014/001958

(22) International Filing Date:

29 September 2014 (29.09.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2013-206843 1 October 2013 (01.10.2013) JP

(71) Applicant: **TOYOTA JIDOSHA KABUSHIKI KAISHA** [JP/JP]; 1, Toyota-cho, Toyota-shi, Aichi-ken, 471-8571 (JP).

(72) Inventors: **MATSUMOTO, Junichi**; c/o TOYOTA JIDOSHA KABUSHIKI KAISHA, of 1, Toyota-cho, Toyota-shi, Aichi-ken, 471-8571 (JP). **OGURA, Takashi**; c/o TOYOTA JIDOSHA KABUSHIKI KAISHA, of 1, Toyota-cho, Toyota-shi, Aichi-ken, 471-8571 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: POWER STORAGE SYSTEM

FIG. 6

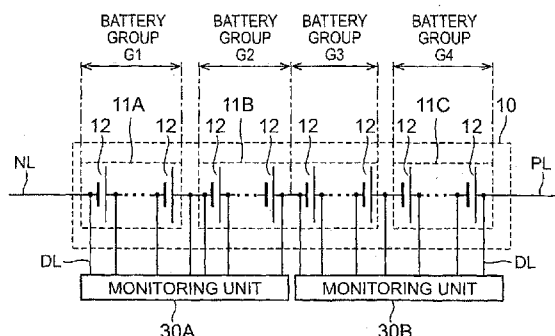

(57) Abstract: A power storage system includes a power storage device and a controller. The controller controls discharge processing based on voltage values of power storage elements. The controller determines an abnormal state according to voltage fluctuation after the voltage values are made uniform. The controller performs first processing when the following conditions i) and ii) are satisfied and performs second processing when the following conditions i) and iii) are satisfied. The condition i) is that the power storage elements are divided into a plurality of groups, each group consists of each power storage stack included in the power storage device. The condition ii) is that the voltage values of the power storage elements are different in each group. The condition iii) is that, in the plurality of groups in each of which the voltage values are made uniform, the voltage values are different among the plurality of groups.

POWER STORAGE SYSTEM

BACKGROUND OF THE INVENTION

1. Field of the Invention

5 [0001] The present invention relates to a technique for detecting voltage values of a plurality of power storage elements and discharging power storage elements to suppress variation of the voltage values in a plurality of power storage elements.

2. Description of Related Art

10 [0002] Japanese Patent Application Publication No. 2001-218376 (JP 2001-218376 A) describes a technique for detecting voltage values of a plurality of cells connected in series and discharging a specific cell such that variation of the voltage values in a plurality of cells falls within an allowable range. In each of the cells, a discharge resistor and a discharge switch are connected in parallel, and a specific discharge switch is turned on, thereby discharging only the specific cell.

15 [0003] As in JP 2001-218376 A, if variation of the voltage values in a plurality of cells is within the allowable range, the abnormal state according to voltage fluctuation can be easily specified by monitoring voltage fluctuation thereafter. If a specific abnormal state is generated, there is a case where voltage fluctuation due to the abnormal state is generated. Therefore, it is possible to determine the generation of the abnormal state by
20 recognizing voltage fluctuation due to the abnormal state. When variation of the voltage values is generated, it is difficult to recognize voltage fluctuation due to an abnormal state. Therefore, it is preferable that variation of the voltage values is within the allowable range.

25 [0004] In JP 2001-218376 A, all cells constituting an assembled battery are connected to one voltage detection circuit. The number of cells constituting the assembled battery is able to be appropriately determined. For example, if the number of cells increases, there is a case where a plurality of voltage detection circuits should be connected to the assembled battery. The detection result of each of the voltage detection circuits optionally includes a detection error, and the detection error is optionally different among the voltage detection circuits. Accordingly, there is a case where variation of the

voltage values of the cells in the assembled battery is generated by variation in the detection error of a plurality of voltage detection circuits.

[0005] If the cells are discharged such that variation of the voltage values associated with variation in the detection error falls within the allowable range, the time
5 until variation of the voltage values falls within the allowable range is delayed by the discharge time. Accordingly, the determination of the abnormal state described above is delayed.

[0006] For example, there is a case where, in order to improve the output of an assembled battery, a plurality of battery stacks are connected in series to constitute the
10 assembled battery. Each battery stack is constituted by connecting a plurality of cells in series. Each battery stack is replaced individually or a plurality of battery stacks are used in different temperature environments, and thus, in the plurality of battery stacks, variation in the full charging capacity of the cells is generated. Accordingly, in the plurality of battery stacks, variation of the voltage values of the cells is likely to be generated.

15 [0007] If the cells are discharged such that variation of the voltage values falls within the allowable range, the time until variation of the voltage values falls within the allowable range is delayed by the discharge time. Accordingly, the determination of the abnormal state described above is delayed.

20 SUMMARY OF THE INVENTION

[0008] A power storage system according to a first aspect of the invention has a power storage device, a plurality of voltage detection circuits, a discharge circuit, and a controller. The power storage device includes a plurality of power storage stacks connected in series, each of the power storage stacks include a plurality of power storage
25 elements connected in series. The plurality of voltage detection circuits is configured to detect voltage values of the respective power storage elements. The discharge circuit is configured to perform discharge processing for discharging each power storage element. The controller is configured to control the discharge processing based on the voltage values detected by the voltage detection circuits. The controller is configured to

determine an abnormal state according to voltage fluctuation after the voltage values are made uniform. The controller is configured to perform first processing when all of the following conditions i) to iv) are satisfied, and to perform second processing when all of the conditions i) to iii) and a condition v) are satisfied. The condition i) is that in at least
5 one power storage stack, different voltage detection circuits are connected to the power storage elements included in one power storage stack. The condition ii) is that at least one voltage detection circuit is connected to the power storage elements of different power storage stacks. The condition iii) is that the power storage elements are divided into a plurality of groups, each group consists of a plurality of power storage elements included
10 in the same power storage stack and connected to the same voltage detection circuit. The condition iv) is that the voltage values of the power storage elements are different in each group. The condition v) is that in the plurality of groups in each of which the voltage values of the power storage elements are made uniform, the voltage values are different among the plurality of groups. The first processing is processing for making the voltage
15 values of the power storage elements in the group corresponding to the condition iv) uniform by the discharge processing. The second processing is processing for making the voltage values of the power storage elements included in the plurality of groups corresponding to the condition v) uniform by the discharge processing.

[0009] According to the first aspect of the invention, it is possible to make the
20 voltage value of all power storage elements in a power storage device by discharge processing (first and second processing) of the discharge circuit uniform. Specifically, it is possible to make the voltage values among a plurality of groups uniform by the second processing while making the voltage values in the group uniform by the first processing. With this, in the power storage device, it is possible to make uniform the voltage values of
25 all power storage elements.

[0010] Here, one group is divided for each voltage detection circuit. With this, the voltage values of the power storage elements included in each group are not affected by the detection errors in the voltage detection circuits. Accordingly, it is possible to make the voltage values in the group uniform without regard for variation of the voltage values

associated with variation in the detection error of the voltage detection circuits. Furthermore, one group is divided for each power storage stack. With this, the voltage values of the power storage elements in each group are not affected by variation in the full charging capacity apt to be generated among a plurality of power storage stacks.

5 Accordingly, it is possible to make the voltage values in the group uniform without regard for variation of the voltage values associated with variation in the full charging capacity in a plurality of power storage stacks.

[0011] When making the voltage values in the group uniform, it is not necessary to suppress variation of the voltage values associated with variation in the detection error or full charging capacity, and discharge processing for suppressing variation is not required. 10 With this, it becomes easy to reduce the time until the voltage values of the power storage elements in each group are made uniform, and it is possible to suppress delay of the determination of an abnormal state. If the voltage values in the group are made uniform, in the second processing, it is possible to discharge all power storage elements in the group 15 in a state in which the voltage values are made uniform. Accordingly, it is possible to make the voltage values of all power storage elements in the power storage device uniform while performing the determination of an abnormal state in the group.

[0012] A power storage system according to a second aspect of the invention has a power storage stack, a plurality of voltage detection circuits, a discharge circuit, and a 20 controller. The power storage stack includes a plurality of power storage elements connected in series. The plurality of voltage detection circuits is connected to different power storage elements in the power storage stack. The voltage detection circuit is configured to detect voltage values of the respective power storage elements. The discharge circuit is configured to perform discharge processing for discharging each power 25 storage element. The controller is configured to control the discharge processing based on the voltage values detected by the voltage detection circuits. The controller is configured to determine an abnormal state according to voltage fluctuation after the voltage values are made uniform. The controller is configured to perform first processing when the following conditions i) and ii) are satisfied, and to perform second processing

when the condition i) and a condition iii) are satisfied. The condition i) is that the power storage elements are divided into a plurality of groups, each group consists of a plurality of power storage elements connected to the same voltage detection circuit.

The condition ii) is that the voltage values of the power storage elements are different in each group. The condition iii) is that in the plurality of groups in each of which the voltage values of the power storage elements are made uniform, the voltage values are different among the plurality of groups. The first processing is processing for making the voltage values of the power storage elements in the group corresponding to the condition ii) uniform by the discharge processing. The second processing is processing for making the voltage values of the power storage elements included in the plurality of groups corresponding to the condition iii) uniform by the discharge processing.

[0013] In the second aspect, as in the first aspect, the voltage values among a plurality of groups are made uniform while making the voltage values in the group uniform, whereby it is possible to make the voltage values of all power storage elements in the power storage device uniform.

[0014] Here, one group is divided for each voltage detection circuit, and thus, as in the first aspect, it is possible to make the voltage values in the group uniform without regard for variation of the voltage values associated with variation in the detection error of the voltage detection circuits. Then, it becomes easy to reduce the time until the voltage values of the power storage elements are made uniform in each group, and it is possible to suppress delay of the determination of an abnormal state. If the voltage values in the group are made uniform, in the second processing, it is possible to discharge all power storage elements in the group in a state in which the voltage values are made uniform. Accordingly, it is possible to make the voltage values of all power storage elements in the power storage device uniform while performing the determination of an abnormal state in the group. The power storage device includes a plurality of power storage stacks connected in series, each of the power storage stacks including a plurality of power storage elements connected in series. The voltage detection circuit is configured to detect a voltage value of each power storage element. The discharge circuit is configured to

perform discharge processing for discharging each power storage element. The controller is configured to control the discharge processing based on the voltage values detected by the voltage detection circuits. The controller is configured to determine an abnormal state according to voltage fluctuation after the voltage values are made uniform. The controller is configured to perform first processing when the following conditions i) and ii) are satisfied, and to perform second processing when the condition i) and a condition iii) are satisfied. The condition i) is that the power storage elements are divided into a plurality of groups, each group having each power storage stack. The condition ii) is that the voltage values of the power storage elements are different in each group. The condition iii) is that in the plurality of groups in each of which the voltage values of the power storage elements are made uniform, the voltage values are different among the plurality of groups. The first processing is processing for making the voltage values of the power storage elements in the group corresponding to the condition ii) uniform by the discharge processing. The second processing is processing for making the voltage values of the power storage elements included in the plurality of groups corresponding to the condition iii) uniform by the discharge processing.

[0015] A power storage system according to a third aspect of the invention has a power storage device, a voltage detection circuit, a discharge circuit, and a controller.

[0016] In the third aspect, as in the first aspect, the voltage values among a plurality of groups are made uniform while making the voltage values in the group uniform, whereby it is possible to make the voltage values of all power storage elements in the power storage device uniform.

[0017] Here, one group is divided for each power storage stack, and thus, as in the first aspect, it is possible to make the voltage values in the group uniform without regard for variation of the voltage values associated with variation in the full charging capacity. Then, it becomes easy to reduce the time until the voltage values of the power storage elements are made uniform in each group, and it is possible to suppress delay of the determination of an abnormal state. If the voltage values in the group are made uniform, in the second processing, it is possible to discharge all power storage elements in the group

in a state in which the voltage values are made uniform. Accordingly, it is possible to make the voltage values of all power storage elements in the power storage device uniform while performing the determination of an abnormal state in the group.

[0018] In the first to third aspects of the invention, as an abnormal state, there is failure of a Zener diode associated with the flowing of a leakage current in the Zener diode.

[0019] With the above-described configuration, the voltage values of the power storage elements in the group are made uniform with a reference voltage value, making it easy to recognize the above-described voltage fluctuation associated with failure of the Zener diode.

[0020] In the first to third aspects of the invention, as an abnormal state, there is a state in which a power storage element continues to be discharged. With the above-described configuration, the voltage values of the power storage elements in the group are made uniform, making it easy to recognize a decrease of the voltage value in a specific power storage element and to recognize a state in which a power storage element continues to be discharged.

BRIEF DESCRIPTION OF THE DRAWINGS

[0021] Features, advantages, and technical and industrial significance of exemplary embodiments of the invention will be described below with reference to the accompanying drawings, in which like numerals denote like elements, and wherein:

FIG. 1 is a diagram illustrating the configuration of a battery system;

FIG. 2 is a diagram illustrating an assembled battery and a monitoring unit;

FIG. 3 is a diagram illustrating the circuit configuration of a part in a monitoring unit;

FIG. 4 is a flowchart illustrating equalization processing;

FIG. 5 is a flowchart illustrating discharge determination;

FIG. 6 is a diagram illustrating battery groups;

FIG. 7 is a flowchart illustrating first stage discharge determination;

FIG. 8 is an explanatory view when a cell to be discharged is specified in the first

stage discharge determination;

FIG. 9 is a flowchart illustrating second stage discharge determination;

FIG. 10 is an explanatory view when a cell to be discharged is specified in the second stage discharge determination;

5 FIG. 11 is a diagram illustrating a state in which a leakage current flows in a Zener diode; and

FIG. 12 is a diagram illustrating the relationship of voltage values of cells when a leakage current flows in a Zener diode.

10

DETAILED DESCRIPTION OF EMBODIMENTS

[0022] Hereinafter, an example of the invention will be described.

[0023] FIG. 1 is a diagram illustrating the configuration of a battery system of this example. The battery system is an example of a power storage system of the invention. An assembled battery 10 is connected to a load 20 through a positive electrode line PL and
15 a negative electrode line NL. The assembled battery is an example of a power storage device of the invention. The positive electrode line PL is connected to a positive electrode terminal of the assembled battery 10, and the negative electrode line NL is connected to a negative electrode terminal of the assembled battery 10.

[0024] A system main relay SMR-B is provided in a positive electrode line PL,
20 and a system main relay SMR-G is provided in a negative electrode line NL. When the system main relays SMR-B, SMR-G are turned on, the assembled battery 10 is connected to the load 20. When the system main relays SMR-B, SMR-G are turned off, the connection of the assembled battery 10 and the load 20 is interrupted.

[0025] The battery system illustrated in FIG. 1 is able to be mounted in, for
25 example, a vehicle. In this case, a motor generator is able to be used as the load 20. The motor generator receives power output from the assembled battery 10 and generates kinetic energy for making the vehicle travel. The motor generator is able to convert kinetic energy generated at the time of braking of the vehicle to power and is able to output power to the assembled battery 10.

[0026] Next, the configuration of the assembled battery 10 will be described referring to FIG. 2. The assembled battery 10 has three battery stacks 11 (11A to 11C) connected in series. The battery stacks are an example of power storage stacks of the invention. In this example, the number of battery stacks 11 constituting the assembled
5 battery 10 is optionally a plural number. The battery stacks 11A to 11C are able to be replaced individually.

[0027] For example, when only the battery stack 11B reaches the life end due to deterioration, only the battery stack 11B is able to be replaced with a different battery stack 11. The different battery stack 11 is connected in series with the battery stacks 11A and
10 11C being previously used. As the different battery stack 11, a new battery stack 11 or a used battery stack 11 is able to be used. The used battery stack 11 is a battery stack 11, which has not yet reached the life end and is able to be continuously used, among recovered battery stacks 11.

[0028] Each of the battery stacks 11A to 11C has a plurality of cells 12 connected
15 in series. The cells are an example of power storage elements of the invention. The number of cells 12 constituting the battery stack 11 is able to be appropriately set. The battery stack 11 optionally includes a plurality of cells 12 connected in parallel. As the cells 12, a secondary battery, such as a nickel-hydrogen battery or a lithium ion battery, is optionally used. Instead of the secondary battery, an electric double layer capacitor is
20 optionally used.

[0029] The positive electrode terminal and the negative electrode terminal of each cell 12 are connected to a monitoring unit 30 (30A, 30B) through detection lines DL. The monitoring unit 30 is used to detect a voltage value V_b of each cell 12, and an output signal of the monitoring unit 30 is input to a controller 40. In this example, although two
25 monitoring units 30A, 30B are connected to the assembled battery 10, the number of monitoring units 30 is optionally a plural number.

[0030] In the configuration illustrated in FIG. 2, the monitoring unit 30A is connected to all cells 12 of the battery stack 11A and some cells 12 of the battery stack 11B. The monitoring unit 30B is connected to all cells 12 of the battery stack 11C and some

cells 12 of the battery stack 11B. The battery stack 11B includes the cells 12 connected to the monitoring unit 30A and cells 12 connected to the monitoring unit 30B.

[0031] The controller 40 has a memory 41, and the memory 41 stores various kinds of information. The memory 41 is optionally provided outside the controller 40.

5 The controller 40 is able to output a control signal for switching the system main relays SMR-B, SMR-G illustrated in FIG. 1 between on and off. A timer 42 measures the time t_1 and outputs the measurement result to the controller 40. A timer 43 measures the time t_2 and outputs the measurement result to the controller 40. The details of the time t_1 , t_2 will be described below.

10 [0032] Next, the circuit configuration of the monitoring unit 30 (30A, 30B) will be described referring to FIG. 3. FIG. 3 illustrates the circuit configuration of a part in the monitoring unit 30.

[0033] A resistive element R11 is provided in each detection line DL. When a current that is greater than an allowable current value flows in the resistive element R11, 15 the resistive element R11 is fused, whereby the connection of the monitoring unit 30 and the assembled battery 10 is able to be interrupted. With this, it is possible to suppress the flowing of an excessive current from the assembled battery 10 into the monitoring unit 30.

[0034] A Zener diode D is connected in parallel with each cell 12 through two detection lines DL. The cathode of the Zener diode D is connected to the positive 20 electrode terminal of the cell 12, and the anode of the Zener diode D is connected to the negative electrode terminal of the cell 12. The Zener diode D is used to suppress the application of an overvoltage from the assembled battery 10 to the monitoring unit 30. That is, when an overvoltage is applied from the assembled battery 10 to the monitoring unit 30, a current flows from the cathode to the anode of the Zener diode D, thereby 25 suppressing the application of an overvoltage to the monitoring unit 30. A plurality of Zener diodes D are connected in series.

[0035] Each detection line DL is branched into two lines, and the branch lines BL1, BL2 are respectively provided with resistive elements R21, R22. The Zener diode D is connected to a connection point of the resistive elements R21, R22 and the resistive

element R11. In the two detection lines DL connected to the cell 12, a capacitor (flying capacitor) C and a switch SW1 are connected to the branch line BL1 of one detection line DL and the branch line BL2 of the other detection line DL.

[0036] Specifically, the capacitor C and the switch SW1 are connected to the
5 branch line BL1 between the resistive element R21 and a sampling switch SW21 and to the branch line BL2 between the resistive element R22 and a sampling switch SW22. The sampling switches SW21, SW22 receive a control signal from the controller 40 and are switched between on and off.

[0037] The switch SW1 receives a control signal from the controller 40 and is
10 switched between on and off. Each switch SW1 is connected in parallel with each cell 12 through the detection line DL, and when the switch SW1 is turned on, a closed circuit is constituted by the switch SW1, the cell 12, and the detection line DL, thereby discharging the cell 12. A discharge current of the cell 12 flows in the resistive elements R11, R21, R22, whereby it is possible to lower the voltage value Vb of the cell 12.

15 [0038] Since each capacitor C is connected in parallel with each cell 12 through the detection line DL, the capacitor C is charged with electric charges stored in the cell 12. With this, a voltage value Vc of the capacitor C becomes equal to the voltage value Vb of the cell 12.

[0039] The sampling switches SW21, SW22 corresponding to a specific cell 12
20 are turned on, whereby it is possible to detect the voltage value Vb of the specific cell 12. That is, the voltage value Vc of the capacitor C is detected. The sampling switch SW21 is connected to one input terminal comparator COM, and the sampling switch SW22 is connected to the other input terminal of the comparator COM. An output signal of the comparator COM is subjected to AD conversion and then input to the controller 40. With
25 this, the controller 40 is able to detect the voltage value Vb (voltage value Vc) of each cell 12.

[0040] The controller 40 sequentially turns on the sampling switches SW21, SW22 corresponding to each cell 12, thereby sequentially detecting the voltage value Vb (voltage value Vc) of each cell 12. A plurality of sampling switches SW21, SW22 are

able to be constituted by a multiplexer.

[0041] As described above, the switch SW1 is turned on and the cell 12 is discharged, whereby it is possible to suppress variation of the voltage values Vb (voltage value Vc) in a plurality of cells 12. Processing for suppressing variation of the voltage values Vb is referred to as equalization processing.

[0042] As described above, the monitoring unit 30 of this example has a circuit (voltage detection circuit) that detects the voltage value Vb of each cell 12, and a circuit (discharge circuit) that discharges each cell 12. The voltage detection circuit and the discharge circuit are optionally constituted separately. Specifically, the voltage detection circuit is able to be connected to each cell 12, and the discharge circuit is able to be connected to each cell 12 using a connection line different from a connection line of the voltage detection circuit and each cell 12. The voltage detection circuits are provided corresponding to the number of monitoring units 30. The number of discharge circuits is able to be appropriately set, and for example, the discharge circuits are able to be provided corresponding to the number of monitoring units 30.

[0043] Next, the equalization processing will be described using the flowchart illustrated in FIG. 4. Processing illustrated in FIG. 4 is executed by the controller 40, and for example, the processing illustrated in FIG. 4 is able to be performed while the assembled battery 10 is not connected to the load 20. The controller 40 is able to be operated with power supplied from a power supply different from the assembled battery 10.

[0044] In Step S101, the controller 40 specifies a cell 12 that is discharged by the equalization processing, and the measurement of the time t1 starts using the timer 42. When performing processing of Step S101, there is optionally no cell 12 to be discharged, and in this case, a cell 12 to be discharged is not specified. The details of the processing for specifying a cell 12 to be discharged will be described below.

[0045] In Step S102, the controller 40 performs determination about whether or not there is a cell 12 to be discharged based on the result of the processing of Step S101. When a cell 12 to be discharged is specified, the controller 40 performs processing of Step

S103, and when a cell 12 to be discharged is not specified, the controller 40 performs processing of Step S106.

[0046] In Step S103, the controller 40 starts discharging for the cell 12 specified by the processing of Step S101. Specifically, the controller 40 switches the switch SW1 (see FIG. 3) corresponding to the specified cell 12 from off to on, thereby discharging the cell 12. The switch SW1 corresponding to a cell 12 not to be discharged remains off. When the discharging of the cell 12 starts, the controller 40 starts the measurement of the time t2 using the timer 43. The measured time t2 represents the time when the switch SW1 is turned on and the cell 12 continues to be discharged.

[0047] In Step S104, the controller 40 performs determination about whether or not the measured time t2 is equal to or greater than a second predetermined time t_{th2}. The second predetermined time t_{th2} is able to be appropriately set, and information specifying the second predetermined time t_{th2} is able to be stored in the memory 41. The controller 40 waits until the measured time t2 becomes equal to or greater than the second predetermined time t_{th2} after the discharging of the cell 12 starts.

[0048] When the measured time t2 is equal to or greater than the second predetermined time t_{th2}, the controller 40 ends the discharging of the cell 12 in Step S105. Specifically, the controller 40 switches the switch SW1, which is turned on by the processing of Step S103, to off. When ending the discharging of the cell 12, the controller 40 resets the measured time t2.

[0049] In Step S106, the controller 40 performs determination about whether or not the time t1 that starts to be measured by the processing of Step S101 is equal to or greater than a first predetermined time t_{th1}. The first predetermined time t_{th1} is the time that specifies the execution period of the processing of Step S101, and is equal to or greater than the second predetermined time t_{th2}. Information specifying the first predetermined time t_{th1} is able to be stored in the memory 41.

[0050] The controller 40 waits until the measured time t1 becomes equal to or greater than the first predetermined time t_{th1}, and when the measured time t1 is equal to or greater than the first predetermined time t_{th1}, the controller 40 resets the measured

time t1 and then performs the processing of Step S101 again.

[0051] Next, the processing of Step S101 illustrated in FIG. 4, that is, the details of the processing for specifying a cell 12 to be discharged will be described using the flowchart illustrated in FIG. 5. Processing illustrated in FIG. 5 is executed by the controller 40.

[0052] In Step S201, as first stage discharge determination, the controller 40 specifies a cell 12 to be discharged in each battery group G. The battery groups are an example of groups of the invention. As illustrated in FIG. 6, an assembled battery 10 is divided into four battery groups G (G1 to G4).

[0053] Each of the battery groups G1 to G4 has cells 12 that are included in the same battery stack 11 (11A to 11C) and are connected to the same monitoring unit 30 (30A, 30B). In the configuration illustrated in FIG. 6, although the number of battery groups G1 to G4 is four, the invention is not limited thereto. The number of battery groups changes depending on the number of battery stacks 11 or the number of monitoring units 30. The details of the processing of Step S201 will be described below.

[0054] In Step S202, as second stage discharge determination, the controller 40 specifies cells 12 to be discharged in each of the battery groups G1 to G4. The cells 12 to be discharged are all cells 12 included in the battery group G. The details of the processing of Step S202 will be described below.

[0055] Next, the details of the processing (first stage discharge determination) of Step S201 illustrated in FIG. 5 will be described using the flowchart illustrated in FIG. 7. Processing illustrated in FIG. 7 is executed by the controller 40.

[0056] In Step S301, the controller 40 detects the voltage values V_b of all cells 12 included in each of the battery groups G1 to G4 based on the output signals of the monitoring units 30A, 30B. In Step S302, the controller 40 performs determination about whether or not the voltage values V_b are different in each of the battery groups G1 to G4 and variation of the voltage values V_b is generated.

[0057] Specifically, the controller 40 first specifies a minimum voltage value V_{b_min1} in each of the battery groups G1 to G4. Here, there is at least one cell 12

having the voltage value Vb_min1 in each of the battery groups G1 to G4. Next, the controller 40 calculates the voltage difference $\Delta V1$ between the voltage value Vb of each of the remaining cells 12 and the voltage value Vb_min1 .

[0058] The remaining cells 12 are the cells 12 that have the voltage value Vb greater than the voltage value Vb_min1 . The voltage difference $\Delta V1$ is a value obtained by subtracting the voltage value Vb_min1 from the voltage value Vb of each of the remaining cells 12. When the calculated voltage difference $\Delta V1$ is equal to or greater than a threshold value ΔV_th1 , the controller 40 determines that variation of the voltage values Vb is generated. When variation of the voltage values Vb is generated, the controller 40 performs processing of Step S303.

[0059] The determination about whether or not variation of the voltage values Vb is generated is performed for all cells 12 excluding the cell 12 having the voltage value Vb_min1 in each of the battery groups G1 to G4. In the battery groups G1 to G4, the voltage values Vb_min1 are optionally different from one another.

[0060] When the voltage difference $\Delta V1$ is less than the threshold value ΔV_th1 , the controller 40 determines that variation of the voltage values Vb is not generated, in other words, the voltage values Vb are uniform. The threshold value ΔV_th1 is a value equal to or greater than 0 [V] and is able to be appropriately set taking into consideration a range in which variation of the voltage values Vb is allowable. Information specifying the threshold value ΔV_th1 is able to be stored in the memory 41. When variation of the voltage values Vb is not generated, the controller 40 ends the processing illustrated in FIG. 7. In this case, in the first stage discharge determination, a cell 12 to be discharged is not specified.

[0061] In Step S303, the controller 40 specifies, as a cell 12 to be discharged, a cell 12 that is determined to have variation of the voltage values Vb by the processing of Step S302. The cell 12 that is specified as a target to be discharged is a cell 12, which has the voltage value Vb greater than the voltage value Vb_min1 by at least the threshold value ΔV_th1 , in each of the battery groups G1 to G4.

[0062] The controller 40 sets a discharge execution flag for the cell 12 specified

as a target to be discharged. If identification information (number or the like) is provided for all cells 12 constituting the assembled battery 10, the controller 40 is able to store the identification information and the discharge execution flag in the memory 41 in association with each other. With this, the controller 40 confirms the identification information and the discharge execution flag, thereby recognizing a cell 12 to be discharged.

[0063] When the first stage discharge determination is performed, in the processing of Step S103 illustrated in FIG. 4, the controller 40 discharges the cell 12 for which the discharge execution flag is set. The processing of Step S103 is an example of first processing of the invention. With this, in the battery group G, variation of the voltage values V_b is suppressed, thereby making the voltage values V_b uniform. When performing the processing illustrated in FIG. 4, in the battery group G, the voltage values V_b are optionally not made uniform depending on the discharge amount of each of the cells 12 for the second predetermined time t_{th2} . However, the processing illustrated in FIG. 4 is repeatedly performed, thereby making the voltage values V_b uniform in the battery group G.

[0064] In Step S304, the controller 40 excludes the battery group G including the cell 12 to be discharged specified by the processing of Step S303 from the second stage discharge determination. Specifically, the controller 40 does not set the discharge execution flag for all cells 12 excluding the cell 12 to be discharged in the battery group G including the cell 12 to be discharged. With this, the controller 40 confirms the identification information and the setting content of the discharge execution flag, thereby recognizing a cell 12 not to be discharged. As the cell 12 not to be discharged, there is the cell 12 having the voltage value V_{b_min1} .

[0065] FIG. 8 illustrates the voltage values V_b (an example) of the cells 12 in each of the battery groups G1 to G4. The vertical axis of FIG. 8 represents the voltage value V_b , and the horizontal axis of FIG. 8 represents the cell 12.

[0066] In the example illustrated in FIG. 8, in the battery group G4, the voltage value V_b of each of cells 12 marked with an asterisk is greater than the voltage values V_b (that is, voltage value V_{b_min1}) of the remaining cells 12 by at least the threshold value

ΔV_{th1} . For this reason, the cell 12 marked with an asterisk is specified as a target to be discharged in the first stage discharge determination. The battery group G4 is excluded from the second stage discharge determination. In each of the remaining battery groups G1 to G3, since the voltage values V_b of the cells 12 are uniform, in the first stage discharge determination, in each of the battery groups G1 to G3, a cell 12 to be discharged is not specified.

[0067] Next, the details of the processing (second stage discharge determination) of Step S202 illustrated in FIG. 5 will be described using the flowchart illustrated in FIG. 9. Processing illustrated in FIG. 9 is executed by the controller 40.

10 [0068] In Step S401, the controller 40 performs determination about whether or not the voltage values V_b are different and variation of the voltage values V_b is generated among a plurality of battery groups G (G1 to G4). A battery group G that is subjected to the processing of Step S401 is a battery group G in which variation of the voltage values V_b is not generated in the first stage discharge determination. In the battery group G, all
15 cells 12 have the voltage difference $\Delta V1$ less than the threshold value ΔV_{th1} . For this reason, the voltage values V_b of all cells 12 included in the battery group G are substantially equal.

[0069] The controller 40 recognizes the voltage values V_b of the cells 12 included in each battery group G and then performs determination about whether or not variation of the voltage values V_b is generated among a plurality of battery groups G. Specifically,
20 the controller 40 first specifies a minimum voltage value V_{b_min2} among the voltage values V_b in a plurality of battery groups G and calculates the voltage difference $\Delta V2$ between the voltage value V_b of each of the remaining battery groups G and the voltage value V_{b_min2} . The voltage value V_b of each of the remaining battery groups G is
25 greater than the voltage value V_{b_min2} , and the voltage difference $\Delta V2$ is a value obtained by subtracting the voltage value V_{b_min2} from the voltage value V_b of each of the remaining battery groups G.

[0070] When the calculated voltage difference $\Delta V2$ is equal to or greater than a threshold value ΔV_{th2} , the controller 40 determines that variation of the voltage values

Vb is generated in a plurality of battery groups G. When variation of the voltage values Vb is generated, the controller 40 performs processing of Step S402.

[0071] The threshold value ΔV_{th2} is a value equal to or greater than 0 [V] and is able to be appropriately set taking into consideration a range in which variation of the voltage values Vb is allowable. The threshold value ΔV_{th2} is optionally the same as or is optionally different from the above-described threshold value ΔV_{th1} . Information specifying the threshold value ΔV_{th2} is able to be stored in the memory 41.

[0072] The determination about whether or not variation of the voltage values Vb is generated is performed for all battery groups G excluding the battery group G having the voltage value Vb_min2. However, as described above, the processing of S401 is not performed for the battery group G excluded from the second stage discharge determination by the processing illustrated in FIG. 7.

[0073] When the calculated voltage difference $\Delta V2$ is less than the threshold value ΔV_{th2} , the controller 40 determines that variation of the voltage values Vb is not generated, in other words, the voltage values Vb are uniform. In this case, the controller 40 ends the processing illustrated in FIG. 9. When there is only one battery group G that is subjected to the processing of Step S401, since variation of the voltage values Vb is unable to be recognized, the controller 40 ends the processing illustrated in FIG. 9.

[0074] When variation of the voltage values Vb is generated in a plurality of battery groups G, the controller 40 specifies, as a cell 12 to be discharged, all cells 12 included in the battery group G that is determined to have variation of the voltage values Vb. In the battery group G that is determined to have variation of the voltage values Vb, the voltage values Vb of the cells 12 included in the battery group G become greater than the voltage value Vb_min2 by at least the threshold value ΔV_{th2} .

[0075] As in the processing of Step S303 illustrated in FIG. 7, the controller 40 sets a discharge execution flag for the cells 12 specified as a target to be discharged. The setting content of the discharge execution flag is able to be stored in the memory 41 in association with the identification information of the cells 12.

[0076] When the discharge execution flag is set for all cells 12 included in the

battery group G, all cells 12 in the battery group G are discharged by the processing of Step S103 illustrated in FIG. 4. The processing of S103 is an example of second processing of the invention. As described above referring to FIG. 3, since each cell 12 is connected to the same resistive elements R11, R21, R22, the discharge amount of each cell 12 per unit
5 time becomes equal in all cells 12. That is, in all cells 12 of the battery group G, the voltage values Vb are lowered in a state where the voltage values Vb are uniform.

[0077] When performing the processing illustrated in FIG. 4, the voltage values Vb are optionally not made uniform in a plurality of battery groups G depending on the discharge amount of each of the cells 12 for the second predetermined time t_{th2} .
10 However, the processing illustrated in FIG. 4 is repeatedly performed, and the voltage values Vb are able to be made uniform in a plurality of battery groups G.

[0078] FIG. 10 illustrates the voltage values Vb (an example) of the cells 12 in each of the battery groups G1 to G4. FIG. 10 corresponds to FIG. 8.

[0079] In the example illustrated in FIG. 10, the voltage values Vb of each of the
15 battery groups G1, G2 are greater than the voltage values Vb of the battery group G3, that is, the voltage value Vb_min2 by at least the threshold value ΔV_{th2} . For this reason, cells 12 marked with an asterisk in FIG. 10 are specified as a target to be discharged. All cells 12 of the battery groups G1, G2 are specified as a target to be discharged. The cells 12 included in the battery group G3 are excluded from a target to be discharged.

[0080] According to this example, the cells 12 that are specified as a target to be
20 discharged by the first stage discharge determination and the second stage discharge determination are discharged. In the examples illustrated in FIGS. 8 and 10, the cells 12 marked with an asterisk are discharged.

[0081] The cell 12 that is specified as a target to be discharged by the first stage
25 discharge determination is discharged, whereby it is possible to suppress variation of the voltage values Vb in all cells 12 of the battery group G. In the example illustrated in FIG. 8, it is possible to make the voltage values Vb of all cells 12 in the battery group G4 uniform with the voltage value Vb_min1. In the battery group G4, after the voltage values Vb of all cells 12 are made uniform with the voltage value Vb_min1, the second

stage discharge determination is performed.

[0082] The cells 12 specified as a target to be discharged by the second stage discharge determination are discharged, whereby it is possible to suppress variation of the voltage values V_b in all battery groups G subjected to the second stage discharge determination. In the example illustrated in FIG. 10, it is possible to make the voltage values V_b of all cells 12 in the battery groups $G1$ to $G3$ uniform with the voltage value V_{b_min2} .

[0083] As described above, while the voltage values V_b of all cells 12 in the battery group $G4$ are made uniform with the voltage value V_{b_min1} , the voltage value V_{b_min1} is greater than the voltage value V_{b_min2} . For this reason, the cells 12 in the battery group $G4$ are specified as the cells to be discharged by the the second stage discharge determination, after the voltage values V_b are made uniform with the voltage value V_{b_min1} . And then, all cells 12 included in the battery group $G4$ are discharged by the second processing, and the voltage values V_b of all cells 12 included in the battery group $G4$ are made uniform with the voltage value V_{b_min2} .

[0084] As a result, in the assembled battery 10 (all battery groups $G1$ to $G4$), the voltage values V_b of all cells 12 are made uniform with the voltage value V_{b_min2} , whereby it is possible to suppress variation of the voltage values V_b . In this way, according to this example, it is possible to suppress variation of the voltage values V_b in the assembled battery 10 while suppressing variation of the voltage values V_b in each of the battery groups $G1$ to $G4$.

[0085] When suppressing variation of the voltage values V_b in the assembled battery 10, first, variation of the voltage values V_b in each battery group G is suppressed. Accordingly, in each battery group G , determination about whether or not an abnormal state described below is generated is easily performed.

[0086] In the cell 12, if minute short-circuiting is generated between the positive electrode and the negative electrode, the cell 12 continues to be discharged. It is preferable to perform determination early about whether or not the abnormal state is generated even when the equalization processing illustrated in FIG. 4 is performed.

[0087] If variation of the voltage values V_b in a plurality of cells 12 is suppressed, the lowering (voltage fluctuation) of the voltage value V_b associated with minute short-circuiting is easily recognized. That is, if minute short-circuiting is generated in a specific cell 12, the voltage value V_b of the specific cell 12 is lower than the uniform
5 voltage values V_b of the remaining cells 12, and thus it is easily determined that an abnormal state, such as minute short-circuiting, is generated.

[0088] In the circuit configuration illustrated in FIG. 3, if the Zener diode D fails, as indicated by arrows of FIG. 11, a leakage current optionally flows in the Zener diode D. At this time, the voltage value V_c of the capacitor C on a current path indicated by a thick
10 dotted line of FIG. 11 is lower than the voltage value V_b of the cell 12A. If a leakage current does not flow in the Zener diode D, the voltage value V_c becomes equal to the voltage value V_b .

[0089] The voltage value V_c output from the comparator COM is expressed by Expression (1).

15 [0090] [Equation 1]

$$V_c = V_b - 2 \times I_{\text{leak}} \times R \dots (1)$$

[0091] In Expression (1), I_{leak} is the value of a leakage current flowing in the Zener diode D. R is a resistance value of the resistive element R11. " $I_{\text{leak}} \times R$ " represents the amount of voltage drop associated with the flowing of a leakage current in
20 the resistive element R11. In a path indicated by the arrows of FIG. 11 in which a leakage current flows, two resistive elements R11 are provided, and thus the amount of voltage drop becomes two times " $I_{\text{leak}} \times R$ ".

[0092] As illustrated in Expression (1), the voltage value V_c is lower than the actual voltage value V_b of the cell 12A. For this reason, if the charging/discharging of
25 the cell 12 (assembled battery 10) is controlled based on the voltage value V_c , there is a concern that the cell 12A is overcharged. When controlling the charging of the cell 12, the charging of the cell 12 is controlled such that the voltage value V_c is not greater than an upper limit voltage value determined in advance.

[0093] If the voltage value V_c is less than the voltage value V_b of the cell 12A,

there is a concern that the charging of the cell 12A is performed until the voltage value V_c reaches the upper limit voltage value. Since the voltage value V_b is greater than the voltage value V_c , when the voltage value V_c reaches the upper limit voltage value, there is a concern that the voltage value V_b exceeds the upper limit voltage value and the cell 12A is overcharged. It is preferable to perform determination early about whether or not the abnormal state is generated even when the processing illustrated in FIG. 4 is performed.

[0094] As illustrated in FIG. 11, when a leakage current flows in the Zener diode D corresponding to the cell 12A, the voltage value V_c of the capacitor C corresponding to each of the cells 12B, 12C is raised by " $I_{\text{leak}} \times R$ ". For this reason, if the relationship between a voltage drop (voltage fluctuation) of " $2 \times I_{\text{leak}} \times R$ " and a voltage rise (voltage fluctuation) of " $I_{\text{leak}} \times R$ " is able to be specified, it is able to be determined that the Zener diode D fails. Each of the cells 12B, 12C is the cell 12 connected in series with the cell 12A. In other words, the positive electrode terminal of the cell 12B is connected to the negative electrode terminal of the cell 12A, and the negative electrode terminal of the cell 12C is connected to the positive electrode terminal of the cell 12A.

[0095] As described above, in order to determine failure of the Zener diode D, it is necessary to suppress variation of the voltage values V_b in advance in a plurality of cells 12. If the voltage values V_b of a plurality of cells 12 are made uniform with a reference voltage value (arbitrary value) V_{ref} , thereafter, when the Zener diode D fails, the voltage value V_c detected by the monitoring unit 30 has a relationship illustrated in FIG. 12.

[0096] As illustrated in FIG. 12, the voltage value V_c of the cell 12A corresponding to the failed Zener diode D is less than the reference voltage value V_{ref} by " $2 \times I_{\text{leak}} \times R$ ". The voltage value V_c of each of the cells 12B, 12C is greater than the reference voltage value V_{ref} by " $I_{\text{leak}} \times R$ ". For this reason, when the voltage difference between the voltage value V_c of the cell 12A and the reference voltage value V_{ref} and the voltage difference between the voltage value V_c of at least one of the cells 12B, 12C and the reference voltage value V_{ref} have a relationship illustrated in FIG. 12, it is able to be determined that the Zener diode D corresponding to the cell 12A fails.

[0097] Even if the voltage difference with respect to the reference voltage value

Vref is not confirmed, it is optionally possible to determine failure of the Zener diode D. Specifically, it is optionally only confirmed that the voltage value Vc of the cell 12A is less than the reference voltage value Vref and the voltage value Vc of at least one of the cells 12B, 12C is greater than the reference voltage value Vref. In this case, it is able to be
5 determined that the Zener diode D corresponding to the cell 12A fails. However, as described above, the voltage difference to the reference voltage value Vref is confirmed, whereby it is possible to determine failure of the Zener diode D with high precision. The controller 40 performs processing for determining a specific cell continuing to be discharged due to minute short-circuiting described above or failure of the Zener diode D
10 as an abnormal state. The processing for determining an abnormal state is executed after the first processing is performed.

[0098] If the voltage values Vb (voltage values Vc) of a plurality of cells 12 are made uniform with the reference voltage value Vref, it is not possible to recognize the relationship of the voltage values Vc illustrated in FIG. 12, and it is not possible to
15 determine failure of the Zener diode D. Accordingly, in order to determine failure of the Zener diode D, as described above, it is necessary to suppress variation of the voltage values Vb (voltage values Vc) in a plurality of cells 12.

[0099] When suppressing variation of the voltage values Vb in a plurality of cells 12, as in this example, a plurality of cells 12 are divided into a plurality of battery groups G,
20 and it is possible to suppress variation of the voltage values Vb in each battery group G.

[0100] As a method of suppressing variation of the voltage values Vb, in all cells 12 constituting the battery stack 11, suppressing variation of the voltage values Vb or suppressing variation of the voltage values Vb in all cells 12 connected to one monitoring unit 30 is considered. However, in these cases, defects described below occur.

25 [0101] In the configuration illustrated in FIG. 6, the battery stack 11B includes the battery group G2 connected to the monitoring unit 30A and the battery group G3 connected to the monitoring unit 30B. A detection error optionally occurs in each of the monitoring units 30A, 30B, and the detection error optionally differs according to the monitoring units 30A, 30B.

[0102] In this case, although the voltage values V_b of all cells 12 included in the battery stack 11B are actually equal, the voltage value V_b detected by the monitoring unit 30A and the voltage value V_b detected by the monitoring unit 30B are different due to the difference in the detection error described above. In all cells 12 constituting the battery stack 11B, when suppressing variation of the voltage values V_b , variation in the voltage values V_b caused by the difference in the detection error between the monitoring units 30A, 30B is suppressed.

[0103] Accordingly, until variation of the voltage values V_b caused by the difference in the detection error between the monitoring units 30A, 30B is suppressed, it is not possible to perform the determination of an abnormal state described above. In other words, it takes time until the determination of an abnormal state is able to be performed.

[0104] In this example, processing for suppressing variation of the voltage values V_b in each of the battery groups G2, G3 illustrated in FIG. 6 is performed by the first stage discharge determination and the first processing. For this reason, in the first stage discharge determination and the first processing, it is not necessary to suppress variation of the voltage values V_b caused by the difference in the detection error between the monitoring units 30A, 30B. Therefore, it is possible to reduce the time until variation of the voltage values V_b is suppressed and to perform the determination of the abnormal state described above in earlier timing.

[0105] The cells 12 of different battery stacks 11 are optionally connected to one monitoring unit 30. For example, as illustrated in FIG. 6, the battery stack 11A (battery group G1) and the battery group G2 included in the battery stack 11B are connected to the monitoring unit 30A.

[0106] In the battery stacks 11A, 11B, variation in the deterioration state of the cells 12 is generated, whereby the cells 12 are optionally different in full charging capacity. For example, if a temperature environment or the like is different around the battery stacks 11A, 11B, in the battery stacks 11A, 11B, variation in the deterioration state of the cells 12 is optionally generated. Each battery stack 11 is able to be replaced individually, and thus, as described above, if one of the battery stacks 11A, 11B is replaced with a different

battery stack 11, in the battery stacks 11A, 11B, variation in the deterioration state of the cells 12 is generated.

[0107] If variation in the full charging capacity of the cells 12 is generated, variation of the voltage values V_b is likely to be generated. For example, when two cells
5 12 having different full charging capacities are charged with the same current amount, the amount of voltage rise in the cell 12 having a small full charging capacity becomes greater than the amount of voltage rise in the cell 12 having a large full charging capacity. When two cells 12 having different full charging capacities are discharged with the same current amount, the amount of voltage decrease in the cell 12 having a small full charging capacity
10 becomes greater than the amount of voltage decrease in the cell 12 having a large full charging capacity. In this way, variation of the voltage values V_b depends on variation in the full charging capacity of the cells 12.

[0108] In all cells 12 included in the battery groups G1, G2 illustrated in FIG. 6, when suppressing variation of the voltage values V_b , variation of the voltage values V_b
15 due to variation in the full charging capacity described above should also be suppressed. In this example, variation of the voltage values V_b in each of the battery groups G1, G2 is suppressed based on the first stage discharge determination. For this reason, in the first stage discharge determination and the first processing, it is not necessary to suppress variation of the voltage values V_b due to variation in the full charging capacity.
20 Therefore, it becomes easy to reduce the time until variation of the voltage values V_b is suppressed, and it is possible to perform the determination of the abnormal state described above in earlier timing.

[0109] According to this example, it is possible to suppress variation of the voltage values V_b in the assembled battery 10 while making it easy to perform the
25 determination of the abnormal state described above in a state in which variation of the voltage values V_b in each battery group G is suppressed.

[0110] The invention is not limited to the configuration illustrated in FIG. 6. For example, the invention is optionally applied to a configuration in which one battery stack 11 is connected to a plurality of monitoring units 30. In this case, the cells 12 included in

one battery stack 11 are optionally divided into a plurality of battery groups G according to a plurality of monitoring units 30. The number of battery groups G becomes equal to the number of monitoring units 30.

[0111] The invention is optionally applied to a configuration in which one monitoring unit 30 is connected to a plurality of battery stacks 11. In this case, the cells 12 of each battery stack 11 are optionally divided into a plurality of battery groups G. The number of battery groups G becomes equal to the number of battery stacks 11. As described above, if the battery groups G are set and then the same processing as in this example is performed, the same effects as in this example are able to be obtained.

[0112] In this example, although the monitoring unit 30 detects the voltage value V_b of each cell 12, the invention is not limited thereto. For example, when one battery module is constituted by a plurality of cells 12 connected in series, the monitoring unit 30 is able to detect the voltage value of each battery module. The battery modules are an example of power storage elements of the invention. A plurality of battery modules are connected in series, whereby one battery stack 11 is constituted. In this case, it is possible to suppress variation of the voltage values in a plurality of battery modules.

[0113] In this example, the cells 12 to be discharged are specified based on the first stage discharge determination and the second stage discharge determination, and all cells 12 that are specified as a target to be discharged are discharged in the processing of Step S103 illustrated in FIG. 4. The timing of discharging the cells 12 is able to be appropriately set. Specifically, the processing (first processing) for making the voltage values V_b in the battery group G uniform and the processing (second processing) for making the voltage values V_b of a plurality of battery groups G uniform are optionally performed simultaneously or are optionally performed in different timing in an order of the first processing and the second processing. In FIG. 5, the first stage discharge determination and the second stage discharge determination are performed continuously. Meanwhile, the first processing is optionally performed after the first stage discharge determination is performed, and thereafter, the second stage discharge determination is optionally performed. In this case, in the flowchart of FIG. 4, after the first stage

discharge determination and the first processing are executed, the second stage discharge determination and the second processing are repeated. When the first processing and the second processing are performed in different timing, it is not necessary to perform S304.

CLAIMS

1. A power storage system comprising:

a power storage device that includes a plurality of power storage stacks connected in series, each of the power storage stacks including a plurality of power storage elements connected in series;

a plurality of voltage detection circuits configured to detect voltage values of the respective power storage elements;

a discharge circuit configured to perform discharge processing for discharging each power storage element; and

a controller configured to control the discharge processing based on the voltage values detected by the voltage detection circuits, the controller configured to determine an abnormal state according to voltage fluctuation after the voltage values are made uniform, the controller configured to perform first processing when all of the following conditions i) to iv) are satisfied, and the controller configured to perform second processing when all of the conditions i) to iii) and a condition v) are satisfied

i) in at least one power storage stack, different voltage detection circuits are connected to the power storage elements included in one power storage stack,

ii) at least one voltage detection circuit is connected to the power storage elements of different power storage stacks,

iii) the power storage elements are divided into a plurality of groups, each group consists of a plurality of power storage elements included in the same power storage stack and connected to the same voltage detection circuit,

iv) the voltage values of the power storage elements are different in each group, and

v) in the plurality of groups in each of which the voltage values of the power storage elements are made uniform, the voltage values are different among the plurality of groups,

the first processing is processing for making the voltage values of the power storage elements in the group corresponding to the condition iv) uniform by the discharge processing, and

the second processing is processing for making the voltage values of the power storage elements included in the plurality of groups corresponding to the condition v) uniform by the discharge processing.

2. A power storage system comprising:

a power storage stack that includes a plurality of power storage elements connected in series;

a plurality of voltage detection circuits connected to different power storage elements in the power storage stack, the voltage detection circuit configured to detect voltage values of the respective power storage elements;

a discharge circuit configured to perform discharge processing for discharging each power storage element;

a controller configured to control the discharge processing based on the voltage values detected by the voltage detection circuits, the controller configured to determine an abnormal state according to voltage fluctuation after the voltage values are made uniform, the controller configured to perform first processing when the following conditions i) and ii) are satisfied, and the controller configured to perform second processing when the condition i) and a condition iii) are satisfied

i) the power storage elements are divided into a plurality of groups, each group consists of a plurality of power storage elements connected to the same voltage detection circuit,

ii) the voltage values of the power storage elements are different in each group, and

iii) in the plurality of groups in each of which the voltage values of the power storage elements are made uniform, the voltage values are different among the plurality of groups,

the first processing is processing for making the voltage values of the power storage elements in the group corresponding to the condition ii) uniform by the discharge processing, and

the second processing is processing for making the voltage values of the power storage elements included in the plurality of groups corresponding to the condition iii)

uniform by the discharge processing.

3. A power storage system comprising:

a power storage device that includes a plurality of power storage stacks connected in series, each of the power storage stacks including a plurality of power storage elements connected in series;

a voltage detection circuit configured to detect a voltage value of each power storage element;

a discharge circuit configured to perform discharge processing for discharging each power storage element; and

a controller configured to control the discharge processing based on the voltage values detected by the voltage detection circuits, the controller configured to determine an abnormal state according to voltage fluctuation after the voltage values are made uniform, the controller configured to perform first processing when the following conditions i) and ii) are satisfied, and the controller configured to perform second processing when the condition i) and a condition iii) are satisfied

i) the power storage elements are divided into a plurality of groups, each group having each power storage stack,

ii) the voltage values of the power storage elements are different in each group, and

iii) in the plurality of groups in each of which the voltage values of the power storage elements are made uniform, the voltage values are different among the plurality of groups,

the first processing is processing for making the voltage values of the power storage elements in the group corresponding to the condition ii) uniform by the discharge processing, and

the second processing is processing for making the voltage values of the power storage elements included in the plurality of groups corresponding to the condition iii) uniform by the discharge processing.

4. The power storage system according any one of claims 1 to 3, further comprising:

a Zener diode that is connected to each power storage element through a line connecting each power storage element and the voltage detection circuit and has a cathode connected to a positive electrode terminal of each power storage element and an anode connected to a negative electrode terminal of each power storage element,

wherein the controller is configured to determine, as the abnormal state, that a leakage current flows in the Zener diode corresponding to a specific power storage element when the following conditions vi) to viii) are satisfied

vi) the voltage values in the group have been made uniform with a reference voltage value,

vii) the voltage value of the specific power storage element is less than the reference voltage value, and

viii) the voltage value of the power storage element connected in series with the specific power storage element is greater than the reference voltage value.

5. The power storage system according any one of claims 1 to 3,

wherein the controller is configured to determine, as the abnormal state, that a specific power storage element continues to be discharged when the following conditions ix) and x) are satisfied

ix) the voltage values in the group have been made uniform with a reference voltage, and

x) the voltage value of the specific power storage element is less than the reference voltage.

FIG. 1

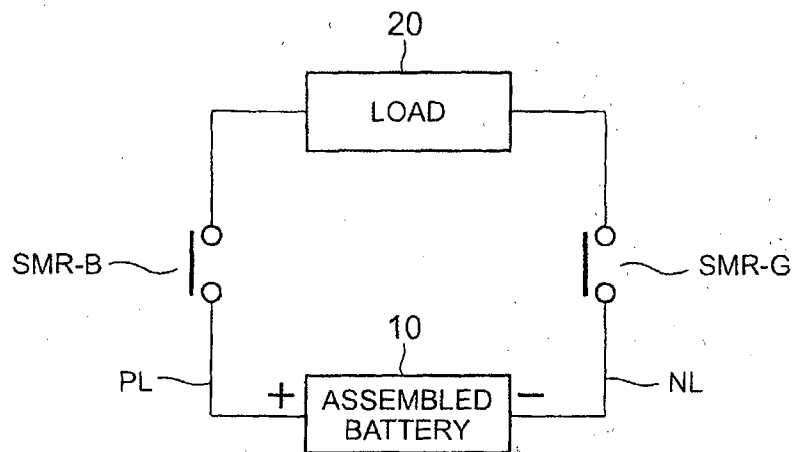


FIG. 2

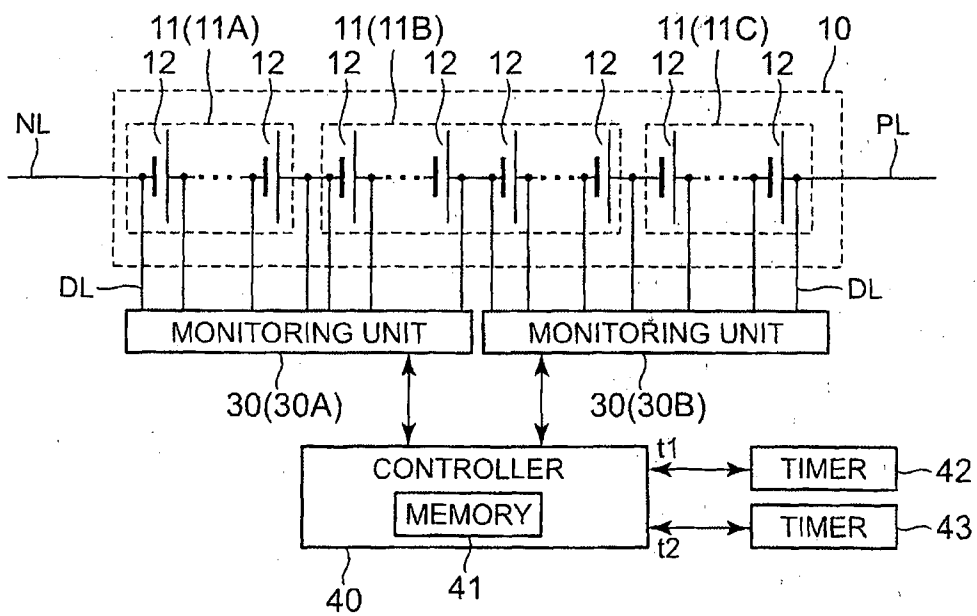


FIG. 3

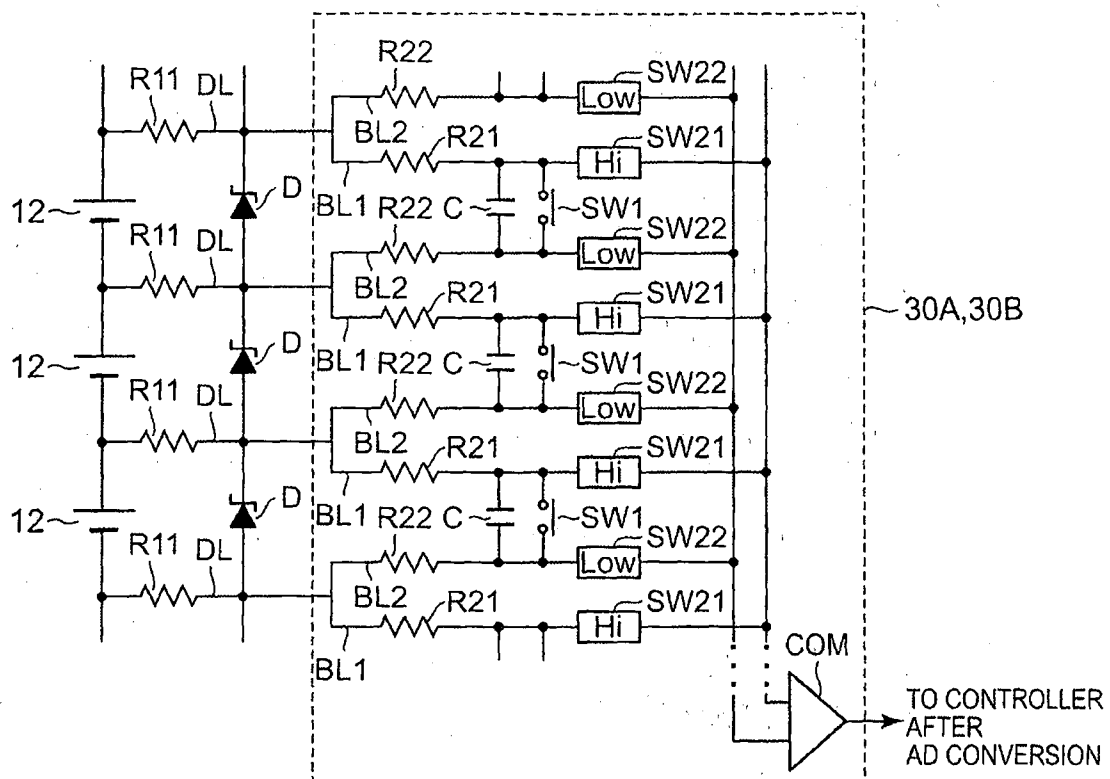


FIG. 4

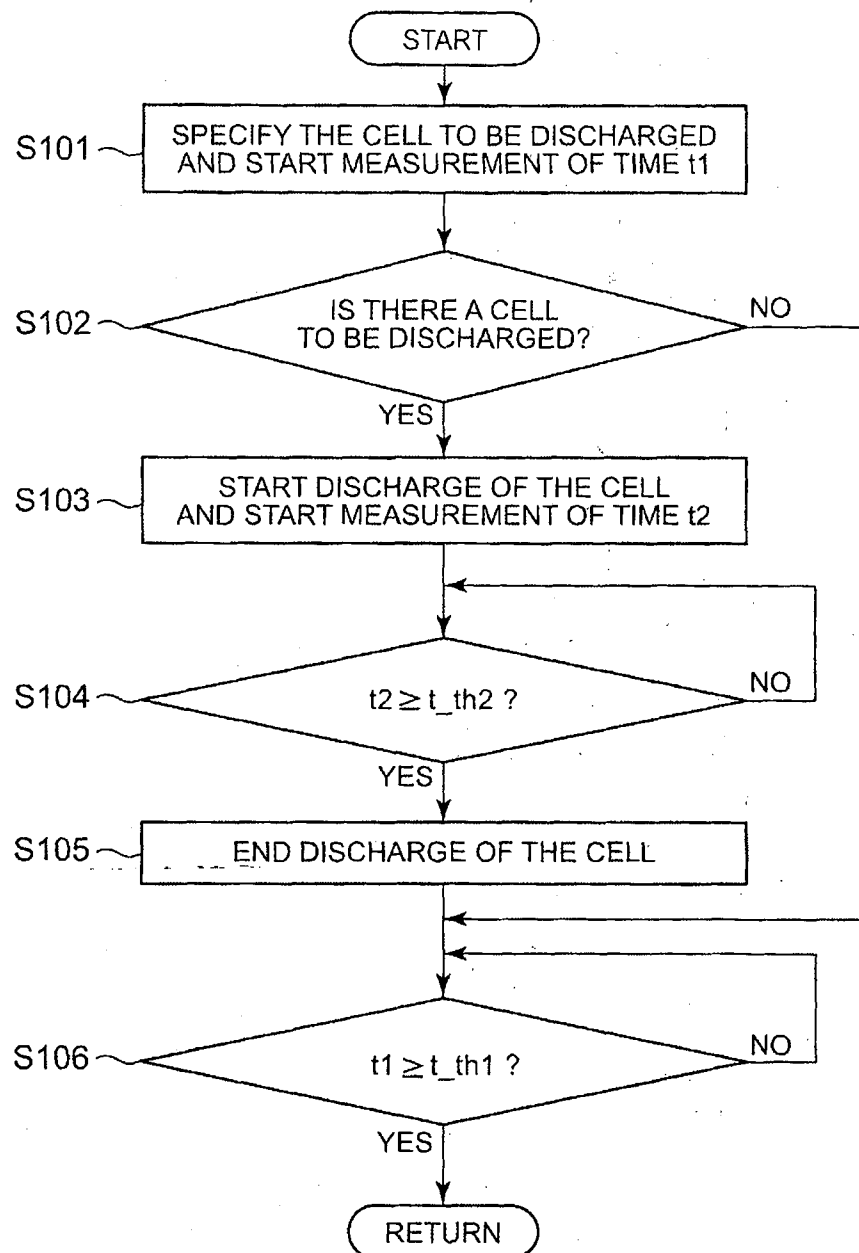


FIG. 5

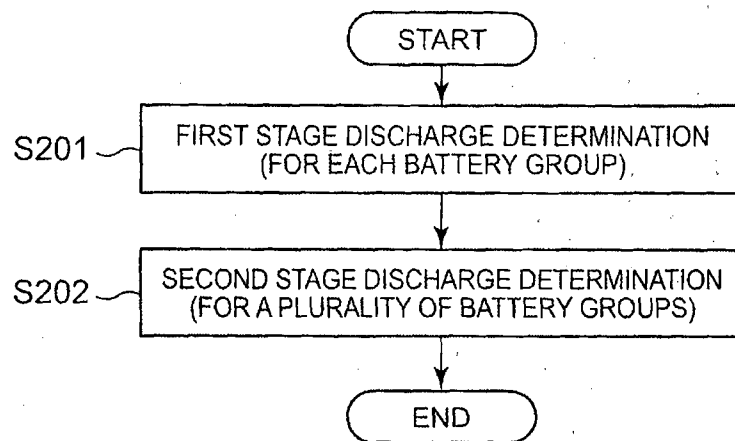


FIG. 6

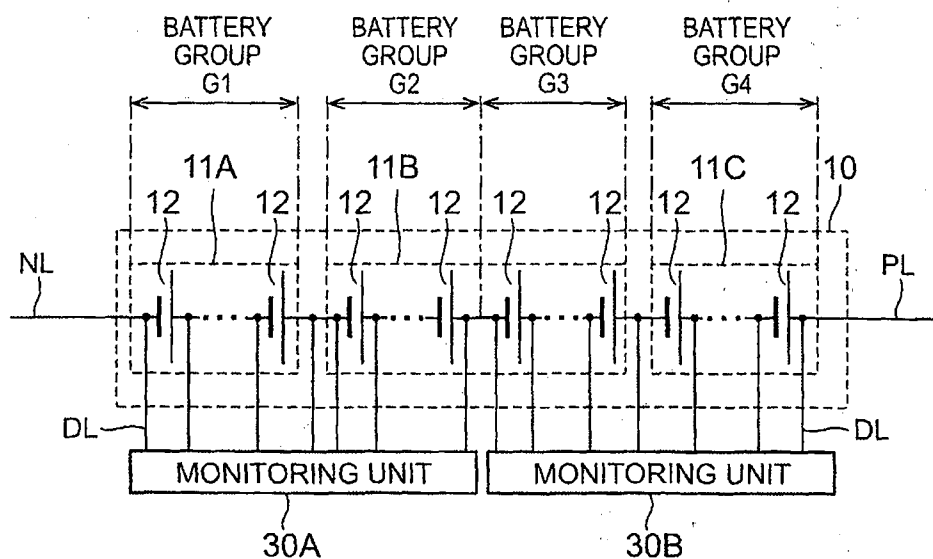


FIG. 7

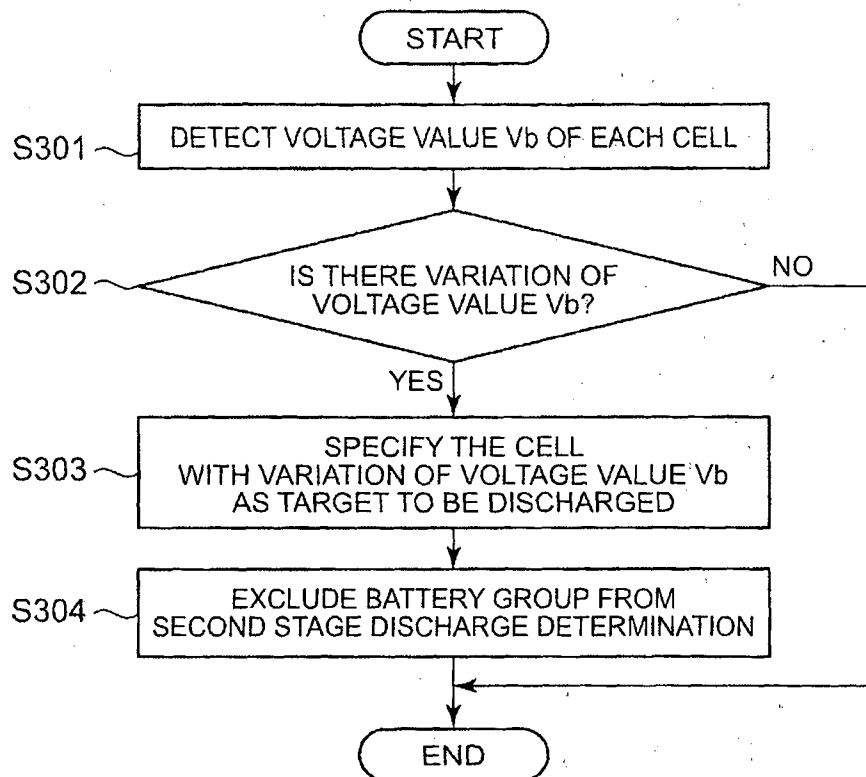


FIG. 8

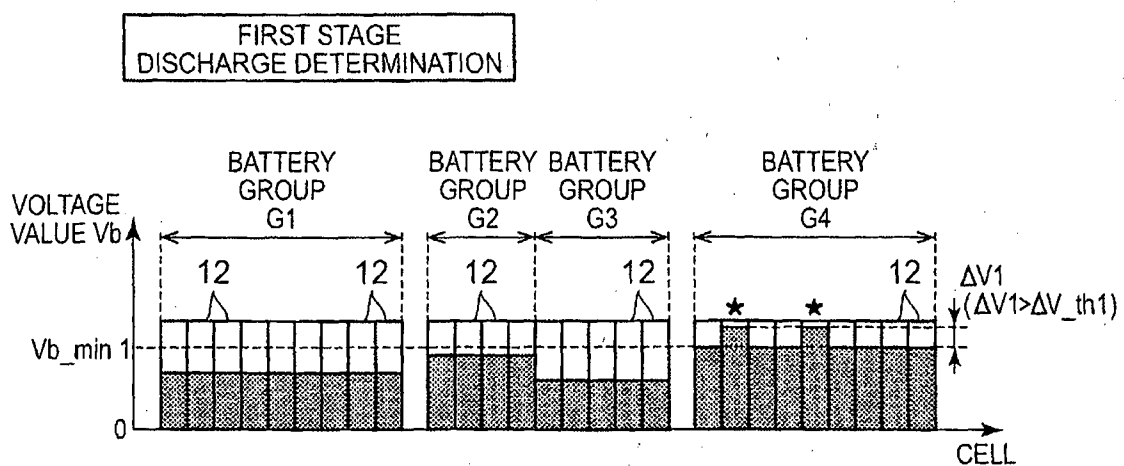


FIG. 9

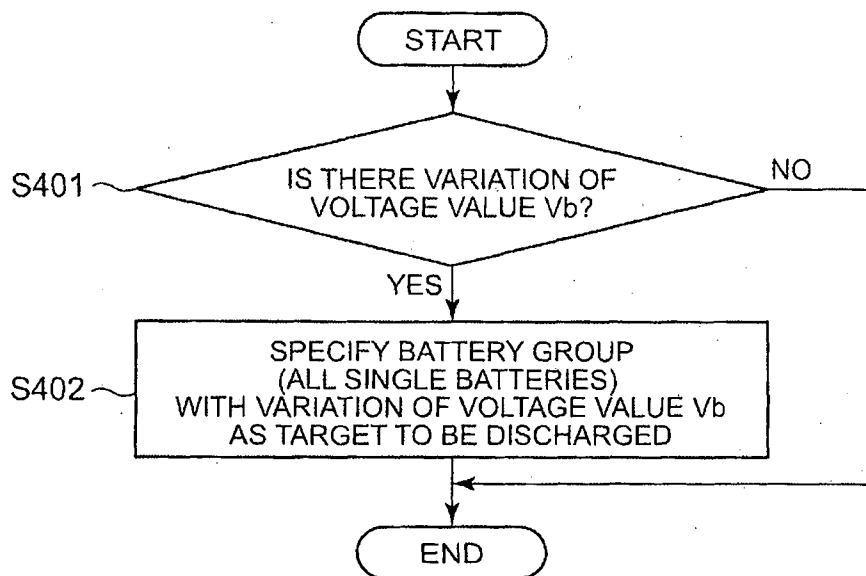


FIG. 10

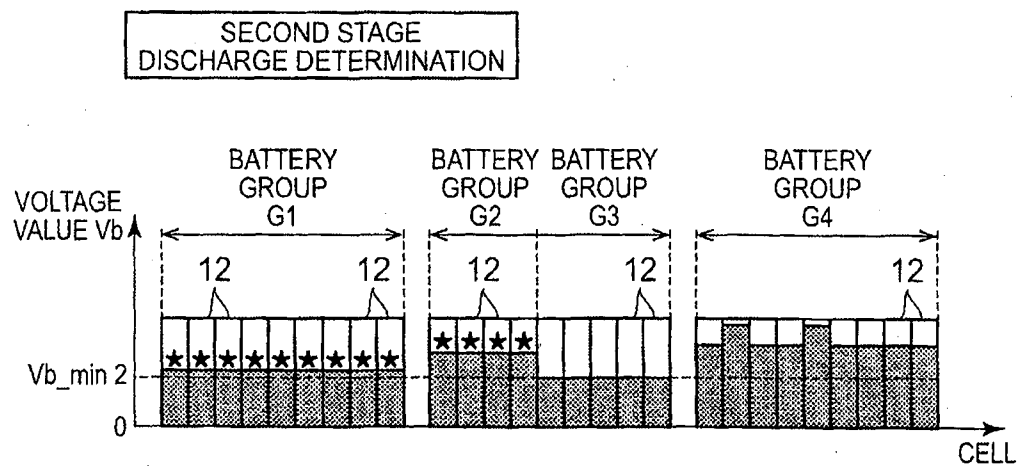


FIG. 11


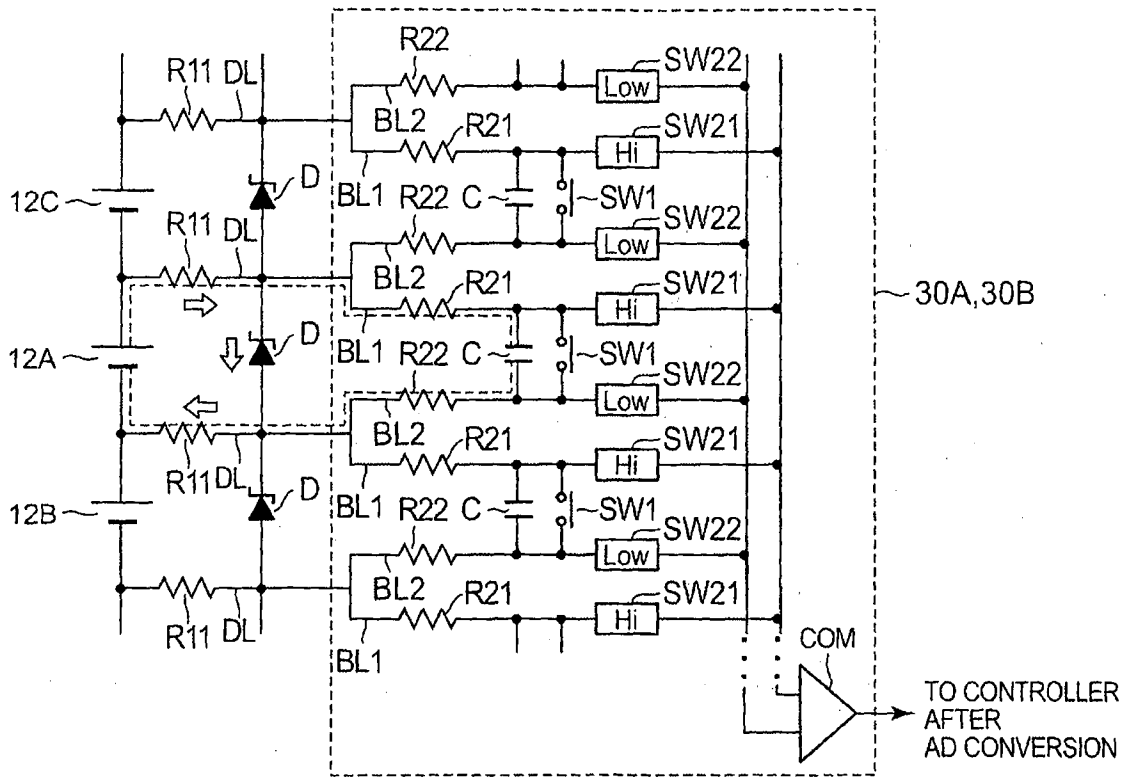


FIG. 12

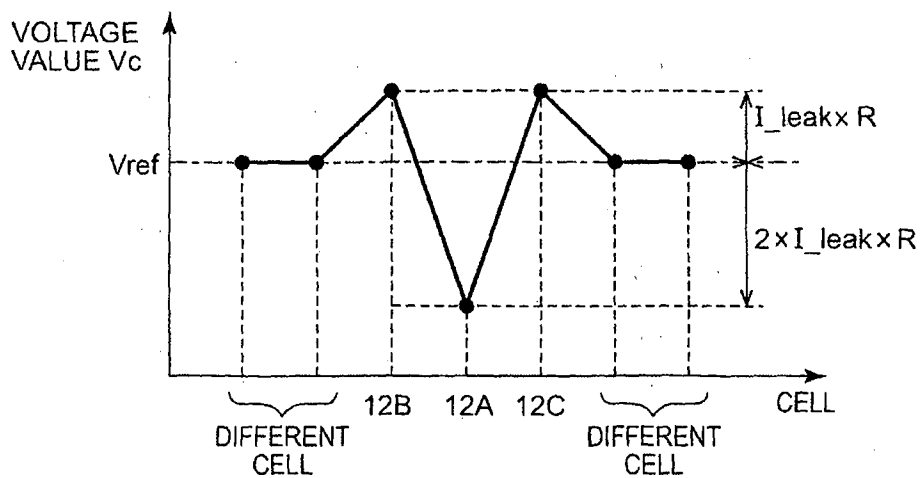

INTERNATIONAL SEARCH REPORT

International application No

PCT/IB2014/001958

A. CLASSIFICATION OF SUBJECT MATTER

INV. B60L11/18 G01R31/36 H01M10/42 H01M10/48 H02J7/00
H01M10/44

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B60L G01R H01M H02J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 2 400 626 A2 (HITACHI VEHICLE ENERGY LTD [JP]) 28 December 2011 (2011-12-28)	2,5
Y	paragraphs [0018] - [0022], [0034] -	4
A	[0037], [0068] - [0079], [0094] - [0102], [0109], [0123], [0124]; figures 1,2,7A,7B,11,15,18	1,3
Y	----- WO 2012/132414 A1 (DENDO SHARYO GIJUTSU KAIHATSU KK) 4 October 2012 (2012-10-04) the whole document -& EP 2 693 595 A1 (EVTI INC [JP]) 5 February 2014 (2014-02-05) paragraphs [0027], [0039] - [0045], [0056] - [0071]; figures 1-4	4
Y	----- US 2013/026989 A1 (GIBBS JAMES C [US] ET AL) 31 January 2013 (2013-01-31) paragraphs [0025], [0027], [0038]; figures 2,4	4

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

5 February 2015

Date of mailing of the international search report

11/02/2015

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Schwake, Andree

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2014/001958

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 2400626	A2	28-12-2011	EP 2400626 A2	28-12-2011
			JP 5453184 B2	26-03-2014
			JP 2012010562 A	12-01-2012
			US 2011316520 A1	29-12-2011
			US 2014159671 A1	12-06-2014

WO 2012132414	A1	04-10-2012	CN 103460549 A	18-12-2013
			EP 2693595 A1	05-02-2014
			JP 2012217243 A	08-11-2012
			US 2014015475 A1	16-01-2014
			WO 2012132414 A1	04-10-2012

EP 2693595	A1	05-02-2014	CN 103460549 A	18-12-2013
			EP 2693595 A1	05-02-2014
			JP 2012217243 A	08-11-2012
			US 2014015475 A1	16-01-2014
			WO 2012132414 A1	04-10-2012

US 2013026989	A1	31-01-2013	CN 102903981 A	30-01-2013
			DE 102012212872 A1	31-01-2013
			US 2013026989 A1	31-01-2013
