



(51) International Patent Classification:

H04W 72/14 (2009.01) H04W 72/12 (2009.01)

(21) International Application Number:

PCT/KR2017/010722

(22) International Filing Date:

27 September 2017 (27.09.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/401,179 29 September 2016 (29.09.2016) US
62/401,180 29 September 2016 (29.09.2016) US

(71) Applicant: **LG ELECTRONICS INC.** [KR/KR]; 128,
Yeoui-daero, Yeongdeungpo-gu, Seoul 07336 (KR).

(72) Inventors: **YI, Seungjune**; IP Center, LG Electronics Inc.,
19, Yangjae-daero 11-gil, Seocho-gu, Seoul 06772 (KR).
LEE, Sunyoung; IP Center, LG Electronics Inc., 19, Yang-
jae-daero 11-gil, Seocho-gu, Seoul 06772 (KR).

(74) Agent: **KIM, Yong In** et al.; KBK & Associates, 7th Floor,
82, Olympic-ro, Songpa-gu, Seoul 05556 (KR).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,

UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: UPLINK TRANSMISSION BASED ON UL-GRANT ASSOCIATED WITH SPECIFIC LOGICAL CHANNEL PRIORI-
TY

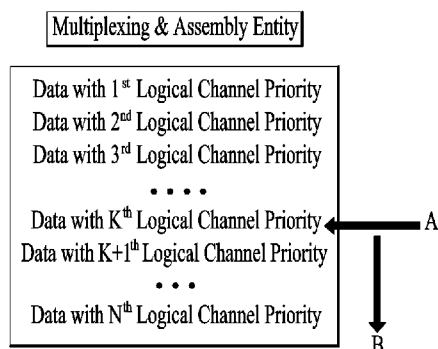

(57) Abstract: Method and apparatus for a user equipment (UE) transmit-
ting uplink signals in a wireless communication system are disclosed. For
this end, the UE, receiving first uplink grant information and logical channel
priority information associated with the first uplink grant, constructs a first
data unit including data from one or more radio bearers with first logical
channel priority corresponding to the logical channel priority information.
And, the UE transmits the first data unit to a network.



Description

Title of Invention: UPLINK TRANSMISSION BASED ON UL-GRANT ASSOCIATED WITH SPECIFIC LOGICAL CHANNEL PRIORITY

Technical Field

- [1] The present invention relates to uplink signals transmission in a wireless communication system. More specifically, the present invention related to methods and apparatus for transmitting uplink signals based on UL-grant associated with specific logical channel priority.

Background Art

- [2] As an example of a mobile communication system to which the present invention is applicable, a 3rd Generation Partnership Project Long Term Evolution (hereinafter, referred to as LTE) communication system is described in brief.
- [3] FIG. 1 is a block diagram illustrating network structure of an evolved universal mobile telecommunication system (E-UMTS). The E-UMTS may be also referred to as an LTE system.
- [4] As illustrated in FIG. 1, the E-UMTS network includes an evolved UMTS terrestrial radio access network (E-UTRAN), an Evolved Packet Core (EPC) and one or more user equipment. The E-UTRAN may include one or more evolved NodeB (eNodeB or eNB) 20, and a plurality of user equipment (UE) 10 may be located in one cell. One or more E-UTRAN mobility management entity (MME)/system architecture evolution (SAE) gateways 30 may be positioned at the end of the network and connected to an external network.
- [5] As used herein, "downlink" refers to communication from eNodeB 20 to UE 10, and "uplink" refers to communication from the UE to an eNodeB. UE 10 refers to communication equipment carried by a user and may be also referred to as a mobile station (MS), a user terminal (UT), a subscriber station (SS) or a wireless device. eNode B 20 may be referred to as eNB, gNB etc. However, in the following explanation, the term 'UE' and 'eNodeB' are used for convenience.
- [6] FIG. 2 is a block diagram depicting architecture of a typical E-UTRAN and a typical EPC.
- [7] As illustrated in FIG. 2, an eNodeB 20 provides end points of a user plane and a control plane to the UE 10. MME/SAE gateway 30 provides an end point of a session and mobility management function for UE 10. The eNodeB and MME/SAE gateway may be connected via an S1 interface.
- [8] The eNodeB 20 is generally a fixed station that communicates with a UE 10, and

may also be referred to as a base station (BS) or an access point. One eNodeB 20 may be deployed per cell. An interface for transmitting user traffic or control traffic may be used between eNodeBs 20.

- [9] The MME provides various functions including NAS signaling to eNodeBs 20, NAS signaling security, AS Security control, Inter CN node signaling for mobility between 3GPP access networks, Idle mode UE Reachability (including control and execution of paging retransmission), Tracking Area list management (for UE in idle and active mode), PDN GW and Serving GW selection, MME selection for handovers with MME change, SGSN selection for handovers to 2G or 3G 3GPP access networks, Roaming, Authentication, Bearer management functions including dedicated bearer establishment, Support for PWS (which includes ETWS and CMAS) message transmission. The SAE gateway host provides assorted functions including Per-user based packet filtering (by e.g. deep packet inspection), Lawful Interception, UE IP address allocation, Transport level packet marking in the downlink, UL and DL service level charging, gating and rate enforcement, DL rate enforcement based on APN-AMBR. For clarity MME/SAE gateway 30 will be referred to herein simply as a "gateway," but it is understood that this entity includes both an MME and an SAE gateway.
- [10] A plurality of nodes may be connected between eNodeB 20 and gateway 30 via the S1 interface. The eNodeBs 20 may be connected to each other via an X2 interface and neighboring eNodeBs may have a meshed network structure that has the X2 interface.
- [11] As illustrated in FIG. 2, eNodeB 20 may perform functions of selection for gateway 30, routing toward the gateway during a Radio Resource Control (RRC) activation, scheduling and transmitting of paging messages, scheduling and transmitting of Broadcast Channel (BCCH) information, dynamic allocation of resources to UEs 10 in both uplink and downlink, configuration and provisioning of eNodeB measurements, radio bearer control, radio admission control (RAC), and connection mobility control in LTE_ACTIVE state. In the EPC, and as noted above, gateway 30 may perform functions of paging origination, LTE-IDLE state management, ciphering of the user plane, System Architecture Evolution (SAE) bearer control, and ciphering and integrity protection of Non-Access Stratum (NAS) signaling.
- [12] The EPC includes a mobility management entity (MME), a serving-gateway (S-GW), and a packet data network-gateway (PDN-GW). The MME has information about connections and capabilities of UEs, mainly for use in managing the mobility of the UEs. The S-GW is a gateway having the E-UTRAN as an end point, and the PDN-GW is a gateway having a packet data network (PDN) as an end point.
- [13] FIG. 3 is a diagram showing a control plane and a user plane of a radio interface protocol between a UE and an E-UTRAN based on a 3GPP radio access network standard. The control plane refers to a path used for transmitting control messages used

for managing a call between the UE and the E-UTRAN. The user plane refers to a path used for transmitting data generated in an application layer, e.g., voice data or Internet packet data.

- [14] A physical (PHY) layer of a first layer provides an information transfer service to a higher layer using a physical channel. The PHY layer is connected to a medium access control (MAC) layer located on the higher layer via a transport channel. Data is transported between the MAC layer and the PHY layer via the transport channel. Data is transported between a physical layer of a transmitting side and a physical layer of a receiving side via physical channels. The physical channels use time and frequency as radio resources. In detail, the physical channel is modulated using an orthogonal frequency division multiple access (OFDMA) scheme in downlink and is modulated using a single carrier frequency division multiple access (SC-FDMA) scheme in uplink.
- [15] The MAC layer of a second layer provides a service to a radio link control (RLC) layer of a higher layer via a logical channel. The RLC layer of the second layer supports reliable data transmission. A function of the RLC layer may be implemented by a functional block of the MAC layer. A packet data convergence protocol (PDCP) layer of the second layer performs a header compression function to reduce unnecessary control information for efficient transmission of an Internet protocol (IP) packet such as an IP version 4 (IPv4) packet or an IP version 6 (IPv6) packet in a radio interface having a relatively small bandwidth.
- [16] A radio resource control (RRC) layer located at the bottom of a third layer is defined only in the control plane. The RRC layer controls logical channels, transport channels, and physical channels in relation to configuration, re-configuration, and release of radio bearers (RBs). An RB refers to a service that the second layer provides for data transmission between the UE and the E-UTRAN. To this end, the RRC layer of the UE and the RRC layer of the E-UTRAN exchange RRC messages with each other.
- [17] One cell of the eNB is set to operate in one of bandwidths such as 1.25, 2.5, 5, 10, 15, and 20 MHz and provides a downlink or uplink transmission service to a plurality of UEs in the bandwidth. Different cells may be set to provide different bandwidths.
- [18] Downlink transport channels for transmission of data from the E-UTRAN to the UE include a broadcast channel (BCH) for transmission of system information, a paging channel (PCH) for transmission of paging messages, and a downlink shared channel (SCH) for transmission of user traffic or control messages. Traffic or control messages of a downlink multicast or broadcast service may be transmitted through the downlink SCH and may also be transmitted through a separate downlink multicast channel (MCH).
- [19] Uplink transport channels for transmission of data from the UE to the E-UTRAN

include a random access channel (RACH) for transmission of initial control messages and an uplink SCH for transmission of user traffic or control messages. Logical channels that are defined above the transport channels and mapped to the transport channels include a broadcast control channel (BCCH), a paging control channel (PCCH), a common control channel (CCCH), a multicast control channel (MCCH), and a multicast traffic channel (MTCH).

[20] FIG. 4 shows uplink transmission by a UE in LTE system.

[21] In LTE, when the UE wants to transmit data in uplink, it first requests UL grant by transmitting buffer status report (BSR) to the eNB (S410). Based on the buffer status report from the UE, the eNB allocates UL grant to the UE via PDCCH signaling (S420). The PDCCH includes various Downlink Control Information (DCI) using various formats, and, among them, DCI format 0 is used to allocate an UL grant to the UE.

Disclosure of Invention

Technical Problem

[22] The problem in the prior art is that an UL grant is allocated for all RBs of a UE, and it cannot be guaranteed that the UE uses the received UL grant for RBs with a specific logical channel priority. For fine control of RB scheduling, a mechanism to use UL grant only for RBs with a specific logical channel priority needs to be considered.

Solution to Problem

[23] To achieve these objects and other advantages and in accordance with the purpose of the invention, as embodied and broadly described herein, a method for a user equipment (UE) transmitting uplink signals in a wireless communication system, the method comprising: receiving first uplink grant information and logical channel priority information associated with the first uplink grant; constructing a first data unit including data from one or more radio bearers with first logical channel priority corresponding to the logical channel priority information; and transmitting the first data unit to a network, is provided.

[24] The first data unit may further include data from a radio bearer with next higher logical channel priority than the first logical channel priority, if there is remaining space in the first data unit after including the data from one or more radio bearers with first logical channel priority.

[25] Alternatively, the first data unit may further comprise padding, if there is remaining space in the first data unit after including the data from one or more radio bearers with first logical channel priority.

[26] The logical channel priority information may be received through a PDCCH (Physical Downlink Control Channel).

- [27] Alternatively, the logical channel priority information may be received in a format of a MAC (Medium Access Control) CE (Control Element) through a PDSCH (Physical Downlink Shared Channel).
- [28] Here, receiving the first uplink grant information may comprise: receiving multiple logical channel priority informations respectively associated with multiple uplink grants.
- [29] Alternatively, receiving the first uplink grant information may comprise: receiving multiple logical channel priority informations associated with the first uplink grant.
- [30] In another aspect of the present invention, a user equipment (UE) for transmitting uplink signals in a wireless communication system, the method comprising: a transceiver configured to receive first uplink grant information and logical channel priority information associated with the first uplink grant; and a processor configured to construct a first data unit including data from one or more radio bearers with first logical channel priority corresponding to the logical channel priority information, is provided.
- [31] The processor may further include data from a radio bearer with next higher logical channel priority than the first logical channel priority within the first data unit, if there is remaining space in the first data unit after including the data from one or more radio bearers with first logical channel priority.
- [32] Alternatively, the processor may further include padding within the first data unit, if there is remaining space in the first data unit after including the data from one or more radio bearers with first logical channel priority.
- [33] The transceiver may receive the logical channel priority information through a PDCCH (Physical Downlink Control Channel).
- [34] Alternatively, the transceiver may receive the logical channel priority information in a format of a MAC (Medium Access Control) CE (Control Element) through a PDSCH (Physical Downlink Shared Channel).
- [35] The transceiver may be configured to receive multiple logical channel priority informations respectively associated with multiple uplink grants.
- [36] Or, the transceiver may be configured to receive multiple logical channel priority informations associated with the first uplink grant.

Advantageous Effects of Invention

- [37] According to the present invention, fine control of RB scheduling is possible by a mechanism to use UL grant only for RBs with a specific logical channel priority.

Brief Description of Drawings

- [38] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this application, il-

illustrate embodiment(s) of the invention and together with the description serve to explain the principle of the invention. In the drawings:

- [39] FIG. 1 is a block diagram illustrating network structure of an evolved universal mobile telecommunication system (E-UMTS);
- [40] FIG. 2 is a block diagram depicting architecture of a typical E-UTRAN and a typical EPC;
- [41] FIG. 3 is a diagram showing a control plane and a user plane of a radio interface protocol between a UE and an E-UTRAN based on a 3GPP radio access network standard;
- [42] FIG. 4 shows uplink transmission by a UE in LTE system;
- [43] FIG. 5 is a diagram for explaining the resource allocation according to LTE;
- [44] FIG. 6 shows a concept of UL-grant with specific logical channel priority information;
- [45] FIG. 7 shows an example of QoS BSR;
- [46] FIG. 8 is a block diagram of a communication apparatus according to an embodiment of the present invention; and
- [47] FIG. 9 is a schematic view showing the configuration of a UE according to an embodiment of the present invention.

Mode for the Invention

- [48] Reference will now be made in detail to the preferred embodiments of the present invention with reference to the accompanying drawings. The detailed description, which will be given below with reference to the accompanying drawings, is intended to explain exemplary embodiments of the present invention, rather than to show the only embodiments that can be implemented according to the invention.
- [49] The following detailed description includes specific details in order to provide a thorough understanding of the present invention. However, it will be apparent to those skilled in the art that the present invention may be practiced without such specific details. In some instances, known structures and devices are omitted or are shown in block diagram form, focusing on important features of the structures and devices, so as not to obscure the concept of the invention.
- [50] As described before, according to LTE, the UL grant is allocated for all RBs of a UE, and it cannot be guaranteed that the UE uses the received UL grant for RBs with a specific logical channel priority.
- [51] FIG. 5 is a diagram for explaining the resource allocation according to LTE.
- [52] When UE wants to transmit uplink signals, the MAC of the UE may construct data unit (e.g. MAC PDU) based on the operation of Multiplexing and Assembly entity within the MAC. As shown in FIG. 5, the MAC of UE according to LTE constructs the data unit from data with the highest logical channel priority (e.g. 1st logical channel

priority) (A). When there is a remaining resource within the data unit after including the highest logical channel priority, the MAC of UE may further include data with next highest logical channel priority in descending order (B).

- [53] Specific operation of MAC of the UE is as following. Following is the operation of Multiplexing and assembly entity with regards to logical channel prioritization.
- [54] The Logical Channel Prioritization procedure is applied when a new transmission is performed. RRC controls the scheduling of uplink data by signalling for each logical channel: *priority* where an increasing *priority* value indicates a lower priority level, *prioritisedBitRate* which sets the Prioritized Bit Rate (PBR), *bucketSizeDuration* which sets the Bucket Size Duration (BSD).
- [55] The MAC entity shall maintain a variable B_j for each logical channel j . B_j shall be initialized to zero when the related logical channel is established, and incremented by the product $PBR * TTI$ duration for each TTI, where PBR is Prioritized Bit Rate of logical channel j . However, the value of B_j can never exceed the bucket size and if the value of B_j is larger than the bucket size of logical channel j , it shall be set to the bucket size. The bucket size of a logical channel is equal to $PBR * BSD$, where PBR and BSD are configured by upper layers.
- [56] The MAC entity shall perform the following Logical Channel Prioritization procedure when a new transmission is performed:
- [57] - The MAC entity shall allocate resources to the logical channels in the following steps:
- [58] - Step 1: All the logical channels with $B_j > 0$ are allocated resources in a decreasing priority order. If the PBR of a logical channel is set to "infinity", the MAC entity shall allocate resources for all the data that is available for transmission on the logical channel before meeting the PBR of the lower priority logical channel(s);
- [59] - Step 2: the MAC entity shall decrement B_j by the total size of MAC SDUs served to logical channel j in Step 1.
- [60] Note that the value of B_j can be negative.
- [61] - Step 3: if any resources remain, all the logical channels are served in a strict decreasing priority order (regardless of the value of B_j) until either the data for that logical channel or the UL grant is exhausted, whichever comes first. Logical channels configured with equal priority should be served equally.
- [62] - The UE shall also follow the rules below during the scheduling procedures above:
- [63] - the UE should not segment an RLC SDU (or partially transmitted SDU or re-transmitted RLC PDU) if the whole SDU (or partially transmitted SDU or re-transmitted RLC PDU) fits into the remaining resources of the associated MAC entity;
- [64] - if the UE segments an RLC SDU from the logical channel, it shall maximize the size of the segment to fill the grant of the associated MAC entity as much as possible;

- [65] - the UE should maximise the transmission of data.
- [66] - if the MAC entity is given an UL grant size that is equal to or larger than 4 bytes while having data available for transmission, the MAC entity shall not transmit only padding BSR and/or padding (unless the UL grant size is less than 7 bytes and an AMD PDU segment needs to be transmitted).
- [67] The MAC entity shall not transmit data for a logical channel corresponding to a radio bearer that is suspended.
- [68] For the Logical Channel Prioritization procedure, the MAC entity shall take into account the following relative priority in decreasing order:
 - [69] - MAC control element for C-RNTI or data from UL-CCCH;
 - [70] - MAC control element for BSR, with exception of BSR included for padding;
 - [71] - MAC control element for PHR, Extended PHR, or Dual Connectivity PHR;
 - [72] - MAC control element for Sidelink BSR, with exception of Sidelink BSR included for padding;
 - [73] - data from any Logical Channel, except data from UL-CCCH;
 - [74] - MAC control element for BSR included for padding;
 - [75] - MAC control element for Sidelink BSR included for padding.
- [76] Notes that, when the MAC entity is requested to transmit multiple MAC PDUs in one TTI, steps 1 to 3 and the associated rules may be applied either to each grant independently or to the sum of the capacities of the grants. Also the order in which the grants are processed is left up to UE implementation. It is up to the UE implementation to decide in which MAC PDU a MAC control element is included when MAC entity is requested to transmit multiple MAC PDUs in one TTI. When the UE is requested to generate MAC PDU(s) in two MAC entities in one TTI, it is up to UE implementation in which order the grants are processed.
- [77] In order for UE to use UL grant for RBs with a specific logical channel priority, it is proposed that when the eNB allocates an UL grant to a UE, the eNB can also indicate the specific logical channel priority that can use the UL grant. When the UE receives an UL grant and the specific logical channel priority indication, the UE can construct a PDU including only data from the RBs with the indicated priority, and transmits the PDU to the eNB using the UL grant.
- [78] FIG. 6 shows a concept of UL-grant with specific logical channel priority information.
- [79] As shown in FIG. 6, when the UL-grant is received together with specific logical channel priority information, the UE may construct PDU from data from one or more RBs with k^{th} logical channel priority corresponding to the received logical channel priority information (A).
- [80] If the UE receives an UL grant without logical channel priority information, the UE may construct a PDU including only data from the RBs with the highest QoS, and

transmits the PDU to the eNB using the UL grant.

[81] If there is remaining space in UL grant after including data from RBs with indicated priority, the UE can fill the remaining space with data from RBs with next lower priority as shown in FIG. 6 with reference character B. But, the UE can fill the remaining space with one of the followings:

[82] - Padding

[83] - Data from RBs with next higher priority

[84] - Data from RBs with next lower priority

[85] In this embodiment, the UL-Grant can be received with logical channel priority information. But, UL-grant can be received with QoS Class Identifier, RB priority etc. The other type of information can do corresponding roll as the logical channel priority information above.

[86] When an RB is configured, the UE receives logical channel priority indication of corresponding RB from the eNB.

[87] It is possible that multiple UL grants, one for each priority information, can be allocated to the UE by one UL grant allocation signaling. When the UE receives at least one set of UL grant and priority indication, the UE constructs multiple PDUs, one PDU for each priority indication, and transmits them using the respective UL grants.

[88] For the signaling of UL grant and priority indication, there can be two embodiments. The two embodiments may be used at the same, e.g. embodiment 1 is used for only one logical channel priority and embodiment 2 is used for multiple logical channel priority.

[89]

[90] Embodiment 1: PDCCH includes UL grant and logical channel priority indication (allocation by PHY signaling)

[91] In the LTE, UL grant is already included in the DCI format 0 (i.e. resource block assignment and hopping resource allocation).

[92] For this embodiment, priority indication is also included in the DCI format 0. The length of the priority indication field is preferred to be able to indicate the maximum number of logical channel priorities that one UE supports. In LTE, the maximum number of logical channel priorities is 8, and the priority indication field should be 3 bits in this case.

[93] To allocate multiple UL grants via one PDCCH signaling, multiple sets of UL grant and priority indication are included in the PDCCH. The DCI format 0 can be extended to include multiple sets.

[94]

[95] Embodiment 2: PDCCH indicates PDSCH, and PDSCH includes UL grant and logical channel priority indication (allocation by MAC signaling)

- [96] As the number of available bits in PDCCH is limited, multiple sets of UL grant and priority indication may not be included in one PDCCH. Thus, in this embodiment, the PDCCH indicates PDSCH, and the downlink MAC PDU transmitted on the PDSCH includes multiple sets of UL grant and priority indication. It is possible that only one set of UL grant and priority indication is included in the PDSCH.
- [97] The existing DCI formats 1, 2, 3, 4, 5, 6 can be used for this indication as they are, but a special indication may be added in those DCI formats to indicate that the corresponding PDSCH includes UL grant and priority indication. It is possible that a new DCI format can be introduced to indicate that PDSCH includes UL grant and priority indication.
- [98] In the PDSCH, the set of UL grant and priority indication can be defined as a MAC Control Element, called UL grant MAC CE. An LCID can be allocated for the UL grant MAC CE. One UL grant MAC CE may include one set of UL grant and priority indication. It is possible that one UL grant MAC CE includes multiple sets of UL grant and priority indication.
- [99]
- [100] **Improvement of BSR**
- [101] In another aspect of the present invention, BSR transmission is considered.
- [102] In LTE, the UE buffer status is reported via BSR MAC CE where the buffer status is reported per Logical Channel Group (LCG). Each LCG has at least one Logical Channels (LoCH), and each LoCH belongs to only one LCG.
- [103] The problem in the LTE is that with the BSR MAC CE, the eNB does not know the exact amount of data in one logical channel, because the buffer status is reported per LCG not per LoCH.
- [104] On the other hand, if the buffer status is reported per LoCH in one BSR MAC CE, the size of BSR MAC CE would be significantly increased, because one LoCH BSR requires 2 bytes (i.e. 5 bits LoCH ID and 6 bits BS).
- [105] From the overall system point of view, what is important for the eNB to know is what amount of data with higher QoS is waiting for transmission in the UE side.
- [106] Therefore, it would be efficient a mechanism to report buffer status of specific QoS is further considered.
- [107] In order for UE to report buffer status per QoS (say QoS BSR), it is proposed that the UE calculates a Buffer Size (BS) of a QoS, say QoS_BS, by summing up all the amount of data available for transmission in RBs with the corresponding QoS, and reports the QoS_BS together with the QoS ID.
- [108] The QoS ID can be represented as various ways, e.g. QoS Class Identifier (QCI), logical channel priority, RB priority, etc. When an RB is configured, the UE receives QoS ID of corresponding RB from the eNB.

- [109] The UE considers RBs with the same QoS ID as one group, say QoS group, and calculates and reports the amount of data per QoS group.
- [110] The UE may trigger QoS BSR in at least one of following cases:
- [111] - When a first data arrives at the QoS group. In other words, a new data arrives at the empty buffer of the QoS group.
- [112] - When a first data arrives at one of the RBs belonging to the QoS group. In other words, a new data arrives at the empty buffer of a RB belonging to the QoS group.
- [113] When a QoS BSR is triggered, the UE may calculate for each QoS the amount of data available for transmission of RBs belonging to the corresponding QoS. This is called QoS_BS.
- [114] After calculating QoS_BS for all QoS groups, the UE may construct a QoS BSR by including QoS ID and QoS_BS for each QoS. In the QoS BSR, the UE includes set of QoS ID and QoS_BS in decreasing order of QoS.
- [115] If the QoS BSR is truncated due to the lack of space in UL grant, the UE may include set of QoS ID and QoS_BS only up to a set that can fit to the remaining space in UL grant. After constructing QoS BSR, the UE may transmit it to the eNB.
- [116] FIG. 7 shows an example of QoS BSR.
- [117] The UE can be configured with 5 RBs, together with corresponding QoS ID. The lower value of QoS ID means higher QoS.
- [118] When a QoS BSR is triggered, the UE calculates QoS_BS per QoS.
- [119] After calculating QoS_BS for each QoS, the UE constructs QoS BSR in the decreasing order of QoS by including QoS ID and corresponding QoS_BS.
- [120]
- [121] **Apparatus for the above methods**
- [122] FIG. 8 is a block diagram of a communication apparatus according to an embodiment of the present invention.
- [123] The apparatus shown in FIG. 8 can be a user equipment (UE) and/or eNB adapted to perform the above mechanism, but it can be any apparatus for performing the same operation.
- [124] As shown in FIG. 8, the apparatus may comprise a DSP/microprocessor (110) and RF module (transceiver; 135). The DSP/microprocessor (110) is electrically connected with the transceiver (135) and controls it. The apparatus may further include power management module (105), battery (155), display (115), keypad (120), SIM card (125), memory device (130), speaker (145) and input device (150), based on its implementation and designer's choice.
- [125] Specifically, FIG. 8 may represent a UE comprising a receiver (135) configured to receive signal from the network, and a transmitter (135) configured to transmit signals to the network. These receiver and the transmitter can constitute the transceiver (135).

The UE further comprises a processor (110) connected to the transceiver (135: receiver and transmitter).

- [126] Also, FIG. 8 may represent a network apparatus comprising a transmitter (135) configured to transmit signals to a UE and a receiver (135) configured to receive signal from the UE. These transmitter and receiver may constitute the transceiver (135). The network further comprises a processor (110) connected to the transmitter and the receiver.
- [127] FIG. 9 is a schematic view showing the configuration of a UE according to an embodiment of the present invention.
- [128] As shown in FIG. 9, the UE according to the present embodiment may include a reception (Rx) module 1101 for receiving a UL Grant signal from an eNode B on a specific message, a transmission (TX) module 1102 for transmitting data to the eNode B using the received UL Grant signal, a Msg3 buffer 1103 for storing UL data transmitted in a random access procedure, and a HARQ entity 1104 for controlling the transmission of UL data of the UE.
- [129] In particular, multiplexing and assembly entity 1105 can perform the above explained construction of data unit based on the UL-Grant with logical channel priority information.
- [130] Meanwhile, the HARQ entity 1104 according to the present embodiment may transfer the data acquired from the multiplexing and assembly entity 1105 or the msg3 buffer 1103 to a specific HARQ process 1106, and control the specific HARQ process 1106 to transmit the data acquired from the multiplexing and assembly entity 1105 or the Msg3 buffer 1103 through the Tx module 1102.
- [131] In the configuration of the UE shown in FIG. 9, the Tx module 1102 and the Rx module 1101 may be configured as a physical layer processing module 1108, and the HARQ entity 1104, the multiplexing and assembly entity 1105 and one or more HARQ processes 1106 may be configured as a MAC layer module 1109. However, the invention is not limited thereto. In addition, the Msg3 buffer 1103 and the HARQ buffers 1107 corresponding to the HARQ processes 1106 may be implemented using any storage medium.
- [132] It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the spirit or scope of the invention. Thus, it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.
- [133] The embodiments of the present invention described herein below are combinations of elements and features of the present invention. The elements or features may be considered selective unless otherwise mentioned. Each element or feature may be

practiced without being combined with other elements or features. Further, an embodiment of the present invention may be constructed by combining parts of the elements and/or features. Operation orders described in embodiments of the present invention may be rearranged. Some constructions of any one embodiment may be included in another embodiment and may be replaced with corresponding constructions of another embodiment. It is obvious to those skilled in the art that claims that are not explicitly cited in each other in the appended claims may be presented in combination as an embodiment of the present invention or included as a new claim by subsequent amendment after the application is filed.

- [134] In the embodiments of the present invention, a specific operation described as performed by the BS may be performed by an upper node of the BS. Namely, it is apparent that, in a network comprised of a plurality of network nodes including a BS, various operations performed for communication with an MS may be performed by the BS, or network nodes other than the BS. The term 'eNB' may be replaced with the term 'fixed station', 'Node B', 'Base Station (BS)', 'access point', 'gNB', etc.
- [135] The above-described embodiments may be implemented by various means, for example, by hardware, firmware, software, or a combination thereof.
- [136] In a hardware configuration, the method according to the embodiments of the present invention may be implemented by one or more Application Specific Integrated Circuits (ASICs), Digital Signal Processors (DSPs), Digital Signal Processing Devices (DSPDs), Programmable Logic Devices (PLDs), Field Programmable Gate Arrays (FPGAs), processors, controllers, microcontrollers, or microprocessors.
- [137] In a firmware or software configuration, the method according to the embodiments of the present invention may be implemented in the form of modules, procedures, functions, etc. performing the above-described functions or operations. Software code may be stored in a memory unit and executed by a processor. The memory unit may be located at the interior or exterior of the processor and may transmit and receive data to and from the processor via various known means.
- [138] Those skilled in the art will appreciate that the present invention may be carried out in other specific ways than those set forth herein without departing from the spirit and essential characteristics of the present invention. The above embodiments are therefore to be construed in all aspects as illustrative and not restrictive. The scope of the invention should be determined by the appended claims and their legal equivalents, not by the above description, and all changes coming within the meaning and equivalency range of the appended claims are intended to be embraced therein.

Industrial Applicability

- [139] While the above-described method has been described centering on an example

applied to the 3GPP system, the present invention is applicable to a variety of wireless communication systems, e.g. IEEE system, in addition to the 3GPP system.

Claims

- [Claim 1] A method for a user equipment (UE) transmitting uplink signals in a wireless communication system, the method comprising:
receiving first uplink grant information and logical channel priority information associated with the first uplink grant;
constructing a first data unit including data from one or more radio bearers with first logical channel priority corresponding to the logical channel priority information; and
transmitting the first data unit to a network.
- [Claim 2] The method of claim 1, wherein the first data unit further includes data from a radio bearer with next higher logical channel priority than the first logical channel priority, if there is remaining space in the first data unit after including the data from one or more radio bearers with first logical channel priority.
- [Claim 3] The method of claim 1, wherein the first data unit further comprises padding, if there is remaining space in the first data unit after including the data from one or more radio bearers with first logical channel priority.
- [Claim 4] The method of claim 1, wherein the logical channel priority information is received through a PDCCCH (Physical Downlink Control Channel).
- [Claim 5] The method of claim 1, wherein the logical channel priority information is received in a format of a MAC (Medium Access Control) CE (Control Element) through a PDSCH (Physical Downlink Shared Channel).
- [Claim 6] The method of claim 1, wherein receiving the first uplink grant information comprises:
receiving multiple logical channel priority informations respectively associated with multiple uplink grants.
- [Claim 7] The method of claim 1, wherein receiving the first uplink grant information comprises:
receiving multiple logical channel priority informations associated with the first uplink grant.
- [Claim 8] A user equipment (UE) for transmitting uplink signals in a wireless communication system, the UE comprising:
a transceiver configured to receive first uplink grant information and logical channel priority information associated with the first uplink

grant; and

a processor configured to construct a first data unit including data from one or more radio bearers with first logical channel priority corresponding to the logical channel priority information.

[Claim 9] The UE of claim 8, wherein the processor further includes data from a radio bearer with next higher logical channel priority than the first logical channel priority within the first data unit, if there is remaining space in the first data unit after including the data from one or more radio bearers with first logical channel priority.

[Claim 10] The UE of claim 8, wherein the processor further includes padding within the first data unit, if there is remaining space in the first data unit after including the data from one or more radio bearers with first logical channel priority.


[Claim 11] The UE of claim 8, wherein the transceiver receives the logical channel priority information through a PDCCH (Physical Downlink Control Channel).

[Claim 12] The UE of claim 8, wherein the transceiver receives the logical channel priority information in a format of a MAC (Medium Access Control) CE (Control Element) through a PDSCH (Physical Downlink Shared Channel).


[Claim 13] The UE of claim 8, wherein the transceiver is configured to receive multiple logical channel priority informations respectively associated with multiple uplink grants.

[Claim 14] The UE of claim 8, wherein the transceiver is configured to receive multiple logical channel priority informations associated with the first uplink grant.


[Fig. 1]

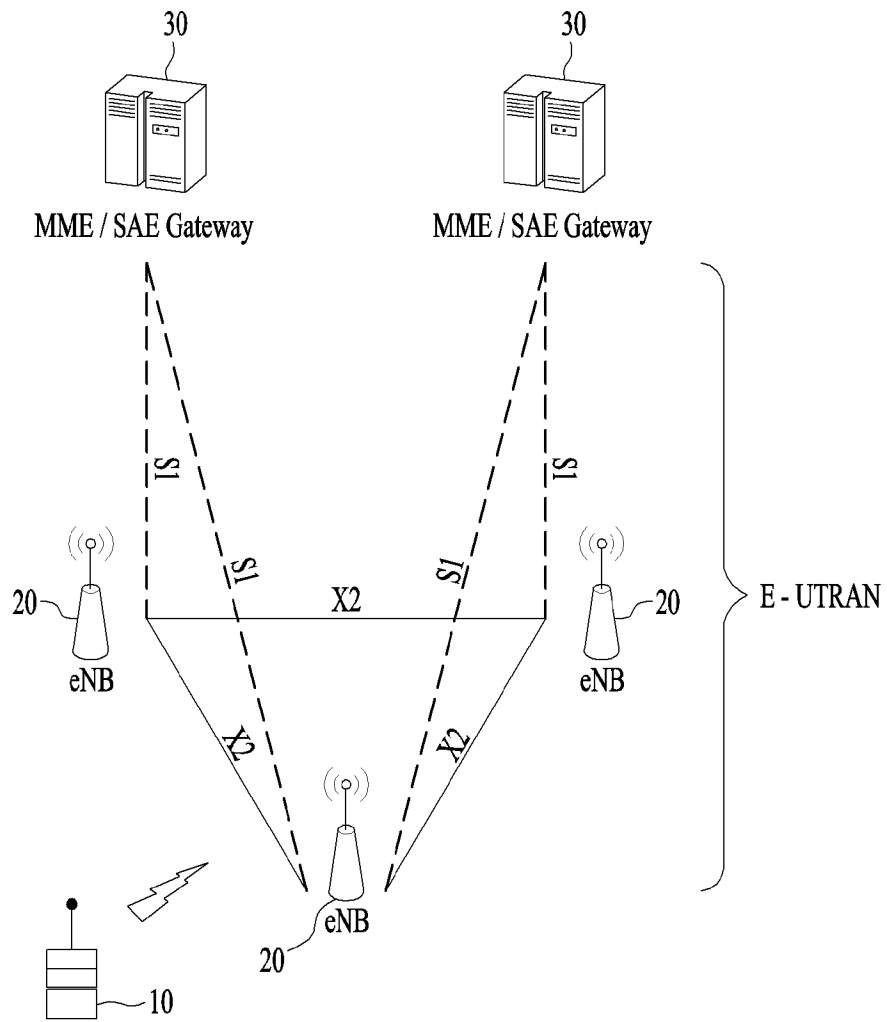


[Fig. 2]

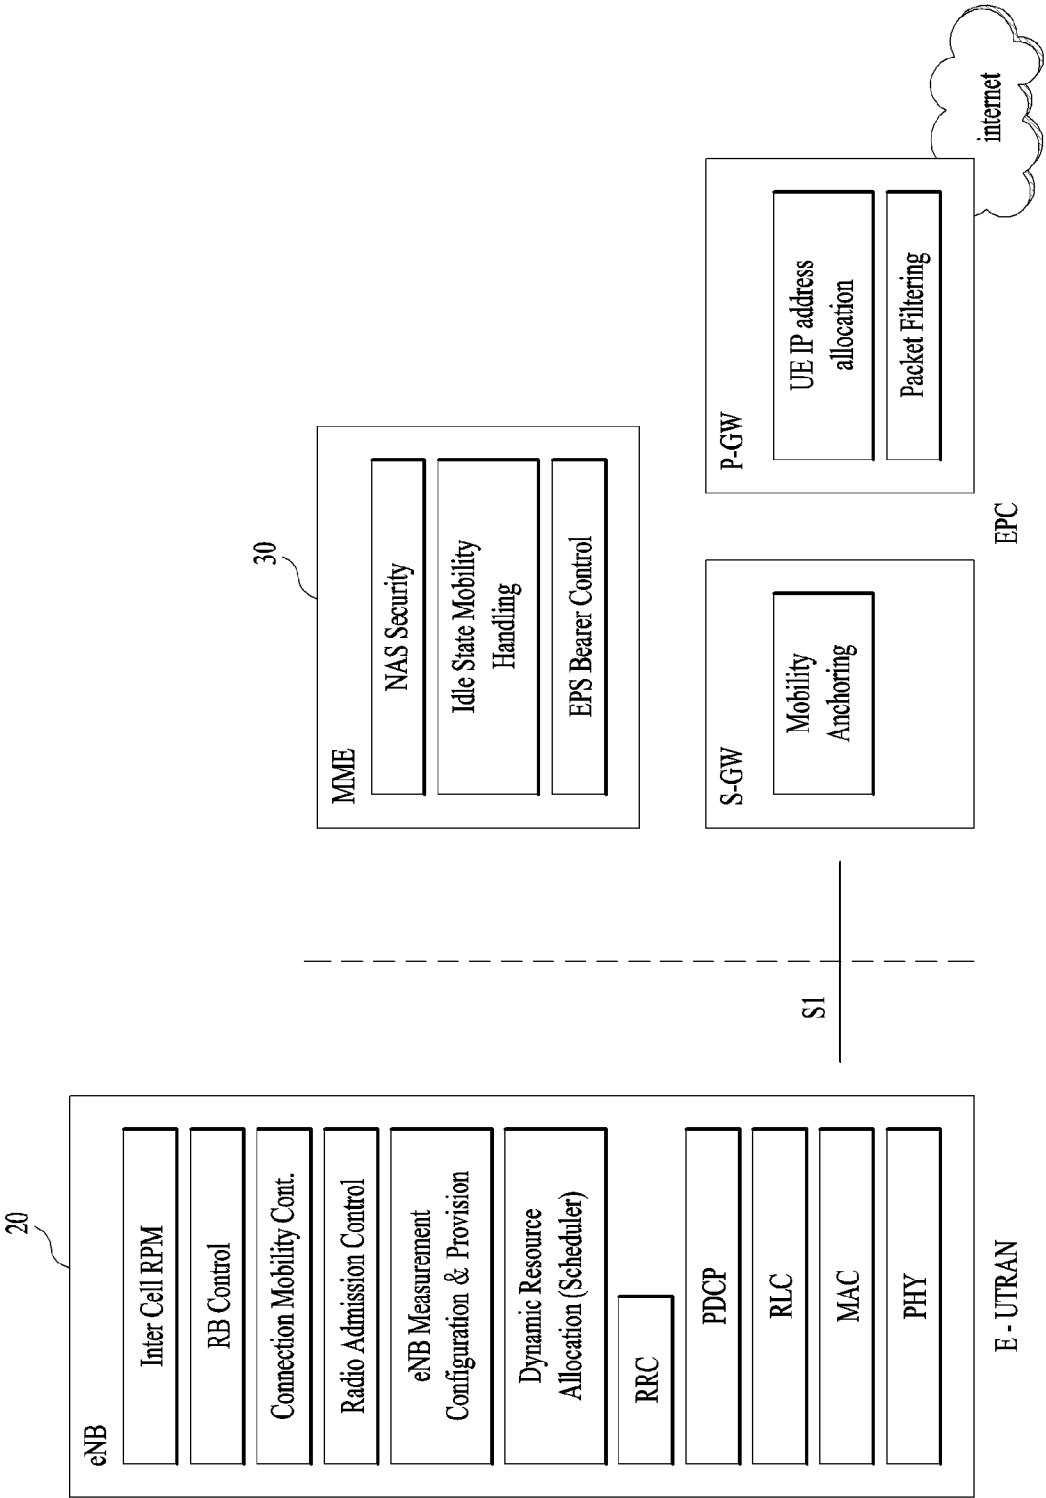

[Fig. 3]

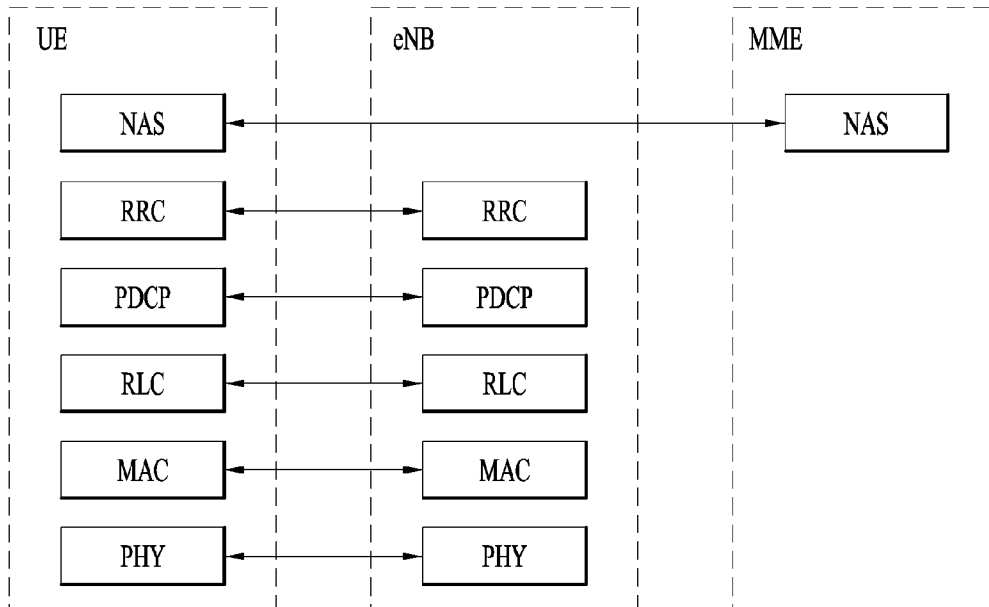


(a) Control-Plane Protocol Stack

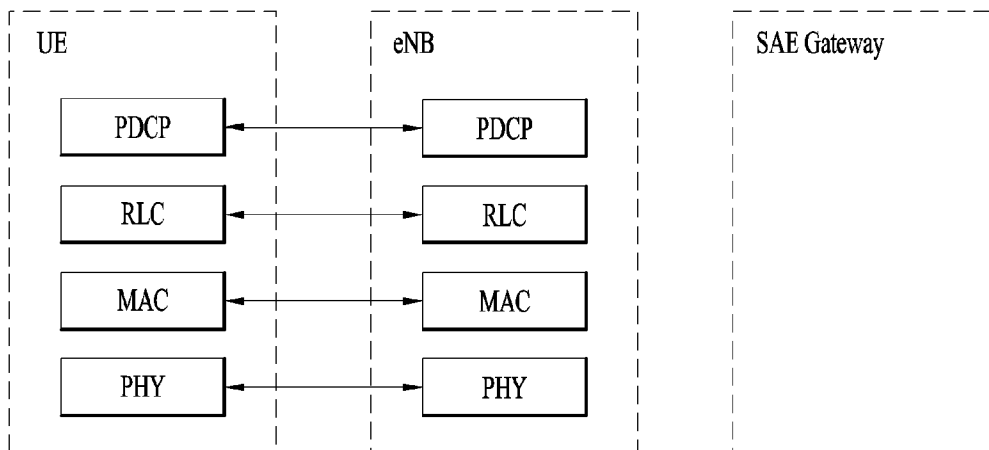


(b) User-Plane Protocol Stack


[Fig. 4]

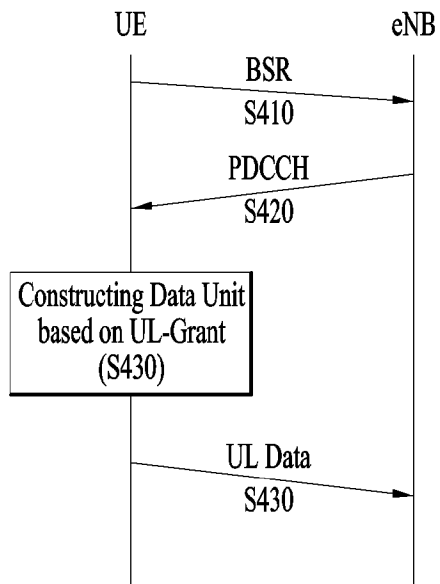


[Fig. 5]

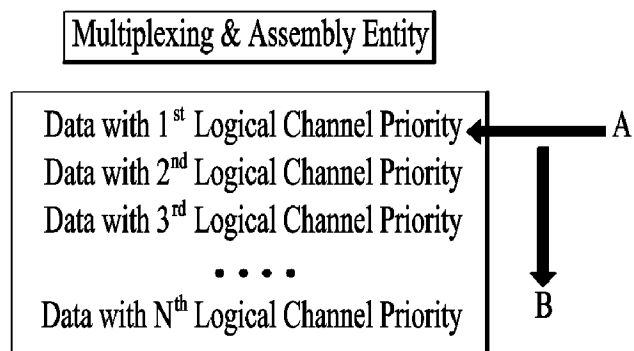


[Fig. 6]

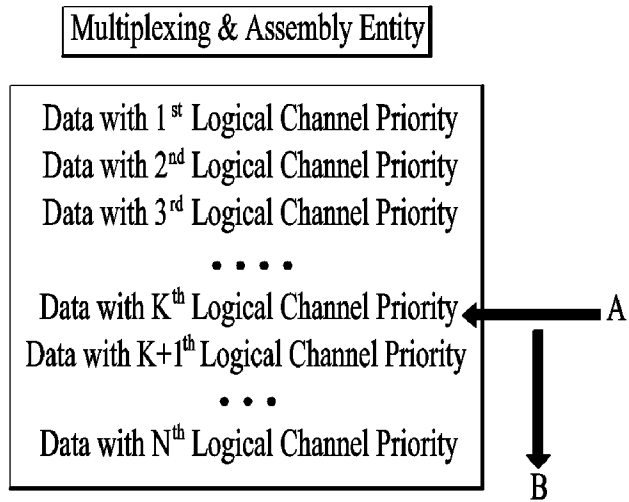


[Fig. 7]

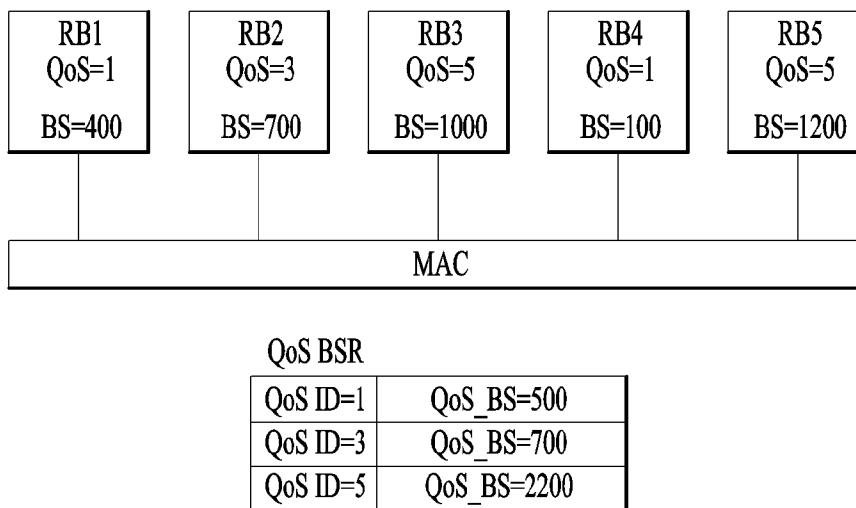

[Fig. 8]

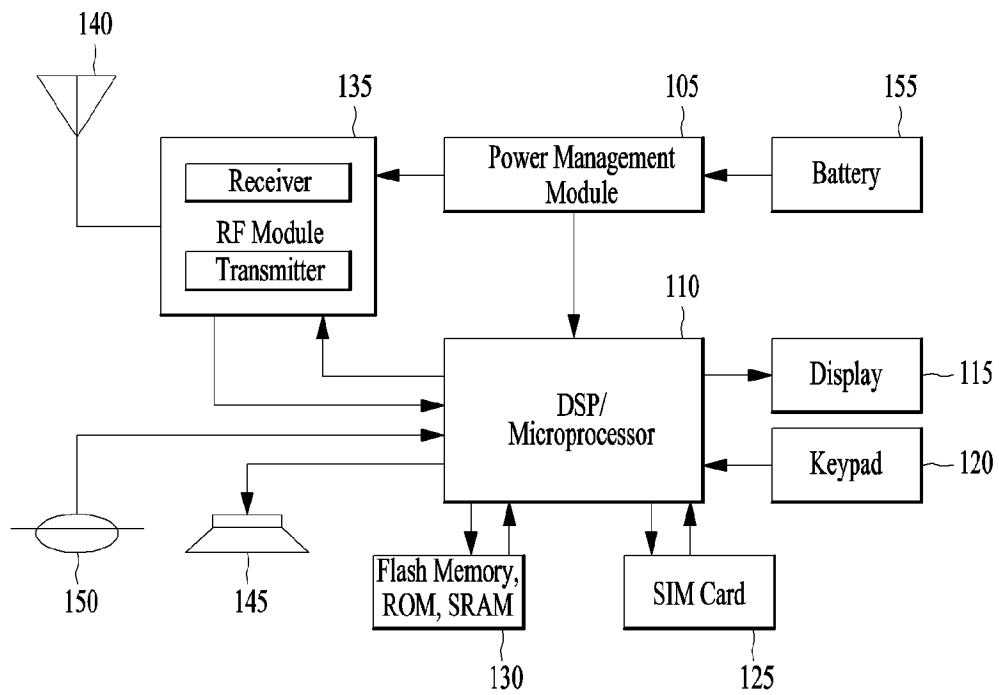

[Fig. 9]

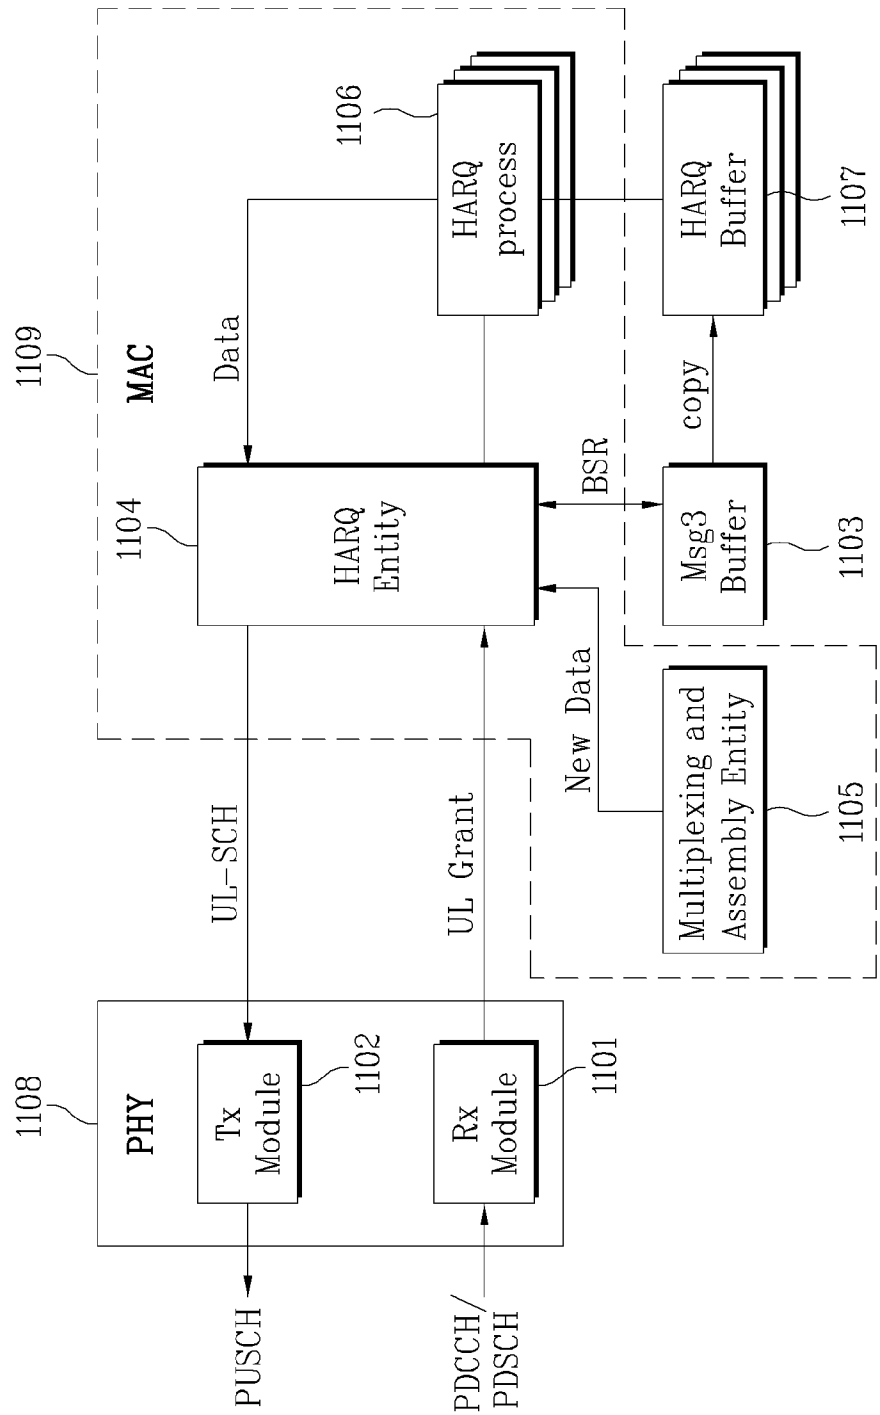

A. CLASSIFICATION OF SUBJECT MATTER**H04W 72/14(2009.01)i, H04W 72/12(2009.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHEDMinimum documentation searched (classification system followed by classification symbols)
H04W 72/14; H04L 5/00; H04W 72/12; H04B 7/26; H04L 1/18; H04W 72/04; H04W 72/10Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models
Japanese utility models and applications for utility modelsElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & Keywords: uplink, grant, logical channel, and priority**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2016-0037510 A1 (LG ELECTRONICS INC.) 04 February 2016 See paragraphs [0074]–[0098]; and claims 1–7.	1–14
Y	EP 2343946 A2 (RESEARCH IN MOTION LIMITED) 13 July 2011 See paragraphs [0031]–[0090]; and claims 1–13.	1–14
A	US 8488540 B2 (SEUNG JUNE YI et al.) 16 July 2013 See column 7, lines 33–63; and claims 1–5.	1–14
A	US 8774114 B2 (MOHAMMED SAMMOUR et al.) 08 July 2014 See column 7, line 7 – column 8, line 51; and claims 1–10.	1–14
A	KR 10-1630909 B1 (INTERDIGITAL TECHNOLOGY CORPORATION) 15 June 2016 See paragraphs [0013]–[0020]; and claims 1–10.	1–14



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

15 January 2018 (15.01.2018)

Date of mailing of the international search report

15 January 2018 (15.01.2018)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

KIM, Jin Ho

Telephone No. +82-42-481-8699



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2017/010722

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2016-0037510 A1	04/02/2016	CN 104919846 A	16/09/2015
		EP 2944114 A1	18/11/2015
		JP 2016-502381 A	21/01/2016
		KR 10-1692657 B1	03/01/2017
		KR 10-2015-0106401 A	21/09/2015
		KR 10-2017-0003714 A	09/01/2017
		RU 2015125777 A	17/02/2017
		RU 2627296 C2	07/08/2017
		US 2015-0304966 A1	22/10/2015
		US 2015-0327115 A1	12/11/2015
		US 2015-0334763 A1	19/11/2015
		US 2016-0044734 A1	11/02/2016
		US 9681483 B2	13/06/2017
		US 9706593 B2	11/07/2017
		US 9826488 B2	21/11/2017
		WO 2014-109558 A1	17/07/2014
		WO 2014-109559 A1	17/07/2014
		WO 2014-163287 A1	09/10/2014
		WO 2014-163288 A1	09/10/2014
		WO 2014-163289 A1	09/10/2014
EP 2343946 A2	13/07/2011	CN 102123512 A	13/07/2011
		EP 2343945 A2	13/07/2011
		EP 2343945 A3	04/12/2013
		EP 2343946 A3	11/12/2013
		JP 05243561 B2	24/07/2013
		JP 2011-142638 A	21/07/2011
		JP 2013-059050 A	28/03/2013
		US 2011-0170495 A1	14/07/2011
		US 8638815 B2	28/01/2014
US 8488540 B2	16/07/2013	CN 102474874 A	23/05/2012
		CN 102474874 B	04/05/2016
		EP 2465319 A2	20/06/2012
		JP 05543598 B2	09/07/2014
		JP 2013-502132 A	17/01/2013
		KR 10-1335869 B1	02/12/2013
		KR 10-2011-0016829 A	18/02/2011
		US 2011-0038333 A1	17/02/2011
		US 2011-0039558 A1	17/02/2011
		US 2013-0286984 A1	31/10/2013
		US 2015-0201426 A1	16/07/2015
		US 8200232 B2	12/06/2012
		US 9019926 B2	28/04/2015
		US 9839043 B2	05/12/2017
		WO 2011-019204 A2	17/02/2011
		WO 2011-019204 A3	23/06/2011
US 8774114 B2	08/07/2014	AR 070548 A1	21/04/2010

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2017/010722

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		AT 543365 T	15/02/2012
		BR PI0905839 A2	13/10/2015
		CN 101933385 A	29/12/2010
		CN 101933385 B	13/11/2013
		CN 103607775 A	26/02/2014
		CN 103607775 B	07/12/2016
		CN 201398241 Y	03/02/2010
		DK 2248385 T3	14/05/2012
		DK 2670204 T3	09/01/2017
		EP 2248385 A1	10/11/2010
		EP 2248385 B1	25/01/2012
		EP 2429251 A1	14/03/2012
		EP 2429251 B1	04/09/2013
		EP 2670204 A1	04/12/2013
		EP 2670204 B1	05/10/2016
		EP 2670205 A1	04/12/2013
		ES 2436651 T3	03/01/2014
		ES 2609808 T3	24/04/2017
		HK 1150707 A1	25/07/2014
		JP 05346959 B2	20/11/2013
		JP 05639696 B2	10/12/2014
		JP 05957506 B2	27/07/2016
		JP 06197073 B2	13/09/2017
		JP 2011-511565 A	07/04/2011
		JP 2014-030201 A	13/02/2014
		JP 2015-039230 A	26/02/2015
		JP 2016-184969 A	20/10/2016
		JP 2017-201843 A	09/11/2017
		KR 10-1292994 B1	02/08/2013
		KR 10-1468269 B1	02/12/2014
		KR 10-1524420 B1	02/06/2015
		KR 10-1601010 B1	08/03/2016
		KR 10-2010-0113606 A	21/10/2010
		KR 10-2011-0084335 A	21/07/2011
		KR 10-2014-0031986 A	13/03/2014
		KR 10-2014-0069292 A	09/06/2014
		KR 10-2015-0014537 A	06/02/2015
		PL 2670204 T3	31/07/2017
		RU 2010136659 A	10/03/2012
		RU 2476026 C2	20/02/2013
		TW 200939848 A	16/09/2009
		TW 201246846 A	16/11/2012
		TW 201519604 A	16/05/2015
		TW I488461 B	11/06/2015
		TW I489888 B	21/06/2015
		TW I549459 B	11/09/2016
		TW M358487 A	01/06/2009
		TW M358487 U	01/06/2009
		US 2009-0225711 A1	10/09/2009
		US 2013-0051334 A1	28/02/2013

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2017/010722

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
KR 10-1630909 B1	15/06/2016	US 2014-0286266 A1	25/09/2014
		US 2017-041933 A1	09/02/2017
		US 8165152 B2	24/04/2012
		US 9603161 B2	21/03/2017
		WO 2009-097273 A1	06/08/2009
		AR 049167A1	05/07/2006
		AU 2005-246720 A1	01/12/2005
		AU 2005-246720 B2	30/10/2008
		AU 2005-246720 B8	26/03/2009
		AU 2005-246720 B8	30/10/2008
		AU 2009-200349 A1	26/02/2009
		AU 2009-200349 B2	05/08/2010
		AU 2009-200349 C1	07/04/2011
		BR PI0510228 A	23/10/2007
		CA 2566341 A1	01/12/2005
		CA 2566341 C	19/01/2016
		CA 2848984 A1	01/12/2005
		CA 2848984 C	14/06/2016
		CN 102710379 A	03/10/2012
		CN 102710379 B	27/01/2016
		CN 102710380 A	03/10/2012
		CN 102710380 B	07/10/2015
		CN 1951029 A	18/04/2007
		CN 1951029 B	05/09/2012
		CN 1951029 C	18/04/2007
		CN 200983594 Y	28/11/2007
		DE 202005007247 U1	22/12/2005
		DK 1756968 T3	14/07/2014
		DK 2276301 T3	18/09/2017
		EP 1756968 A2	28/02/2007
		EP 1756968 B1	30/04/2014
		EP 2276301 A1	19/01/2011
		EP 2276301 B1	07/06/2017
		EP 3249989 A1	29/11/2017
		ES 2639749 T3	30/10/2017
		GE P20125575 B	25/07/2012
		HK 1102723 A1	28/03/2013
		IL 178835 A	27/02/2014
		IL 178835 B	27/02/2014
		IL 178835 D0	08/03/2007
		IL 230780 A	31/03/2014
		IL 230780 D0	31/03/2014
		IN 2012DEN2012 A	24/07/2015
		JP 05193536 B2	08/05/2013
		JP 05193596 B2	08/05/2013
		JP 05193965 B2	08/05/2013
		JP 05992362 B2	14/09/2016
		JP 2007-536809 A	13/12/2007
		JP 2008-005548 A	10/01/2008

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2017/010722

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		JP 2009-260991 A	05/11/2009
		JP 2011-172282 A	01/09/2011
		JP 2013-153542 A	08/08/2013
		JP 2014-158280 A	28/08/2014
		JP 2016-001917 A	07/01/2016
		KR 10-1135862 B1	16/04/2012
		KR 10-1213361 B1	17/12/2012
		KR 10-1288768 B1	23/07/2013
		KR 10-1365791 B1	20/02/2014
		KR 10-1498123 B1	04/03/2015
		KR 10-2006-0045961 A	17/05/2006
		KR 10-2006-0092883 A	23/08/2006
		KR 10-2012-0016602 A	24/02/2012
		KR 10-2012-0094883 A	27/08/2012
		KR 10-2013-0031873 A	29/03/2013
		KR 10-2014-0094495 A	30/07/2014
		KR 20-0391830 Y1	10/08/2005
		MX PA06012883 A	26/01/2007
		MY 163041 A	31/07/2017
		MY 163279 A	30/08/2017
		NO 20065555 A	26/01/2007
		NO 334503 B1	24/03/2014
		SG 152246 A1	29/05/2009
		SG 188884 A1	30/04/2013
		TW 200601765 A	01/01/2006
		TW 200642401 A	01/12/2006
		TW 201246872 A	16/11/2012
		TW 201503649 A	16/01/2015
		TW 283441 U	11/12/2005
		TW 283441 Y	11/12/2005
		TW I404388 B	01/08/2013
		TW I416919 B	21/11/2013
		TW I462555 B	21/11/2014
		TW I561041 B	01/12/2016
		TW M283441 U	11/12/2005
		US 2005-0249133 A1	10/11/2005
		US 2012-0320866 A1	20/12/2012
		US 2014-0328291 A1	06/11/2014
		US 2017-026959 A1	26/01/2017
		US 8259752 B2	04/09/2012
		US 8805354 B2	12/08/2014
		US 9467983 B2	11/10/2016
		WO 2005-115021 A2	01/12/2005
		WO 2005-115021 A3	27/07/2006