




(86) Date de dépôt PCT/PCT Filing Date: 2002/06/13
(87) Date publication PCT/PCT Publication Date: 2002/12/19
(85) Entrée phase nationale/National Entry: 2003/12/12
(86) N° demande PCT/PCT Application No.: US 2002/018877
(87) N° publication PCT/PCT Publication No.: 2002/102098
(30) Priorités/Priorities: 2001/06/13 (60/297,925) US;
2001/06/13 (60/297,987) US; 2001/11/29 (09/997,621) US;
2002/05/07 (60/378,903) US; 2002/06/12 (10/171,378) US

(51) Cl.Int.⁷/Int.Cl.⁷ H04Q 7/20, G06F 13/42
(71) Demandeur/Applicant:
INTERDIGITAL TECHNOLOGY CORPORATION, US
(72) Inventeur/Inventor:
PROCTOR, JAMES A., JR., US
(74) Agent: BORDEN LADNER GERVAIS LLP

(54) Titre : MULTIDETECTION DE BATTEMENTS DE COEUR SERVANT A REDUIRE LA PROBABILITE D'ERREURS
(54) Title: MULTI-DETECTION OF HEARTBEAT TO REDUCE ERROR PROBABILITY

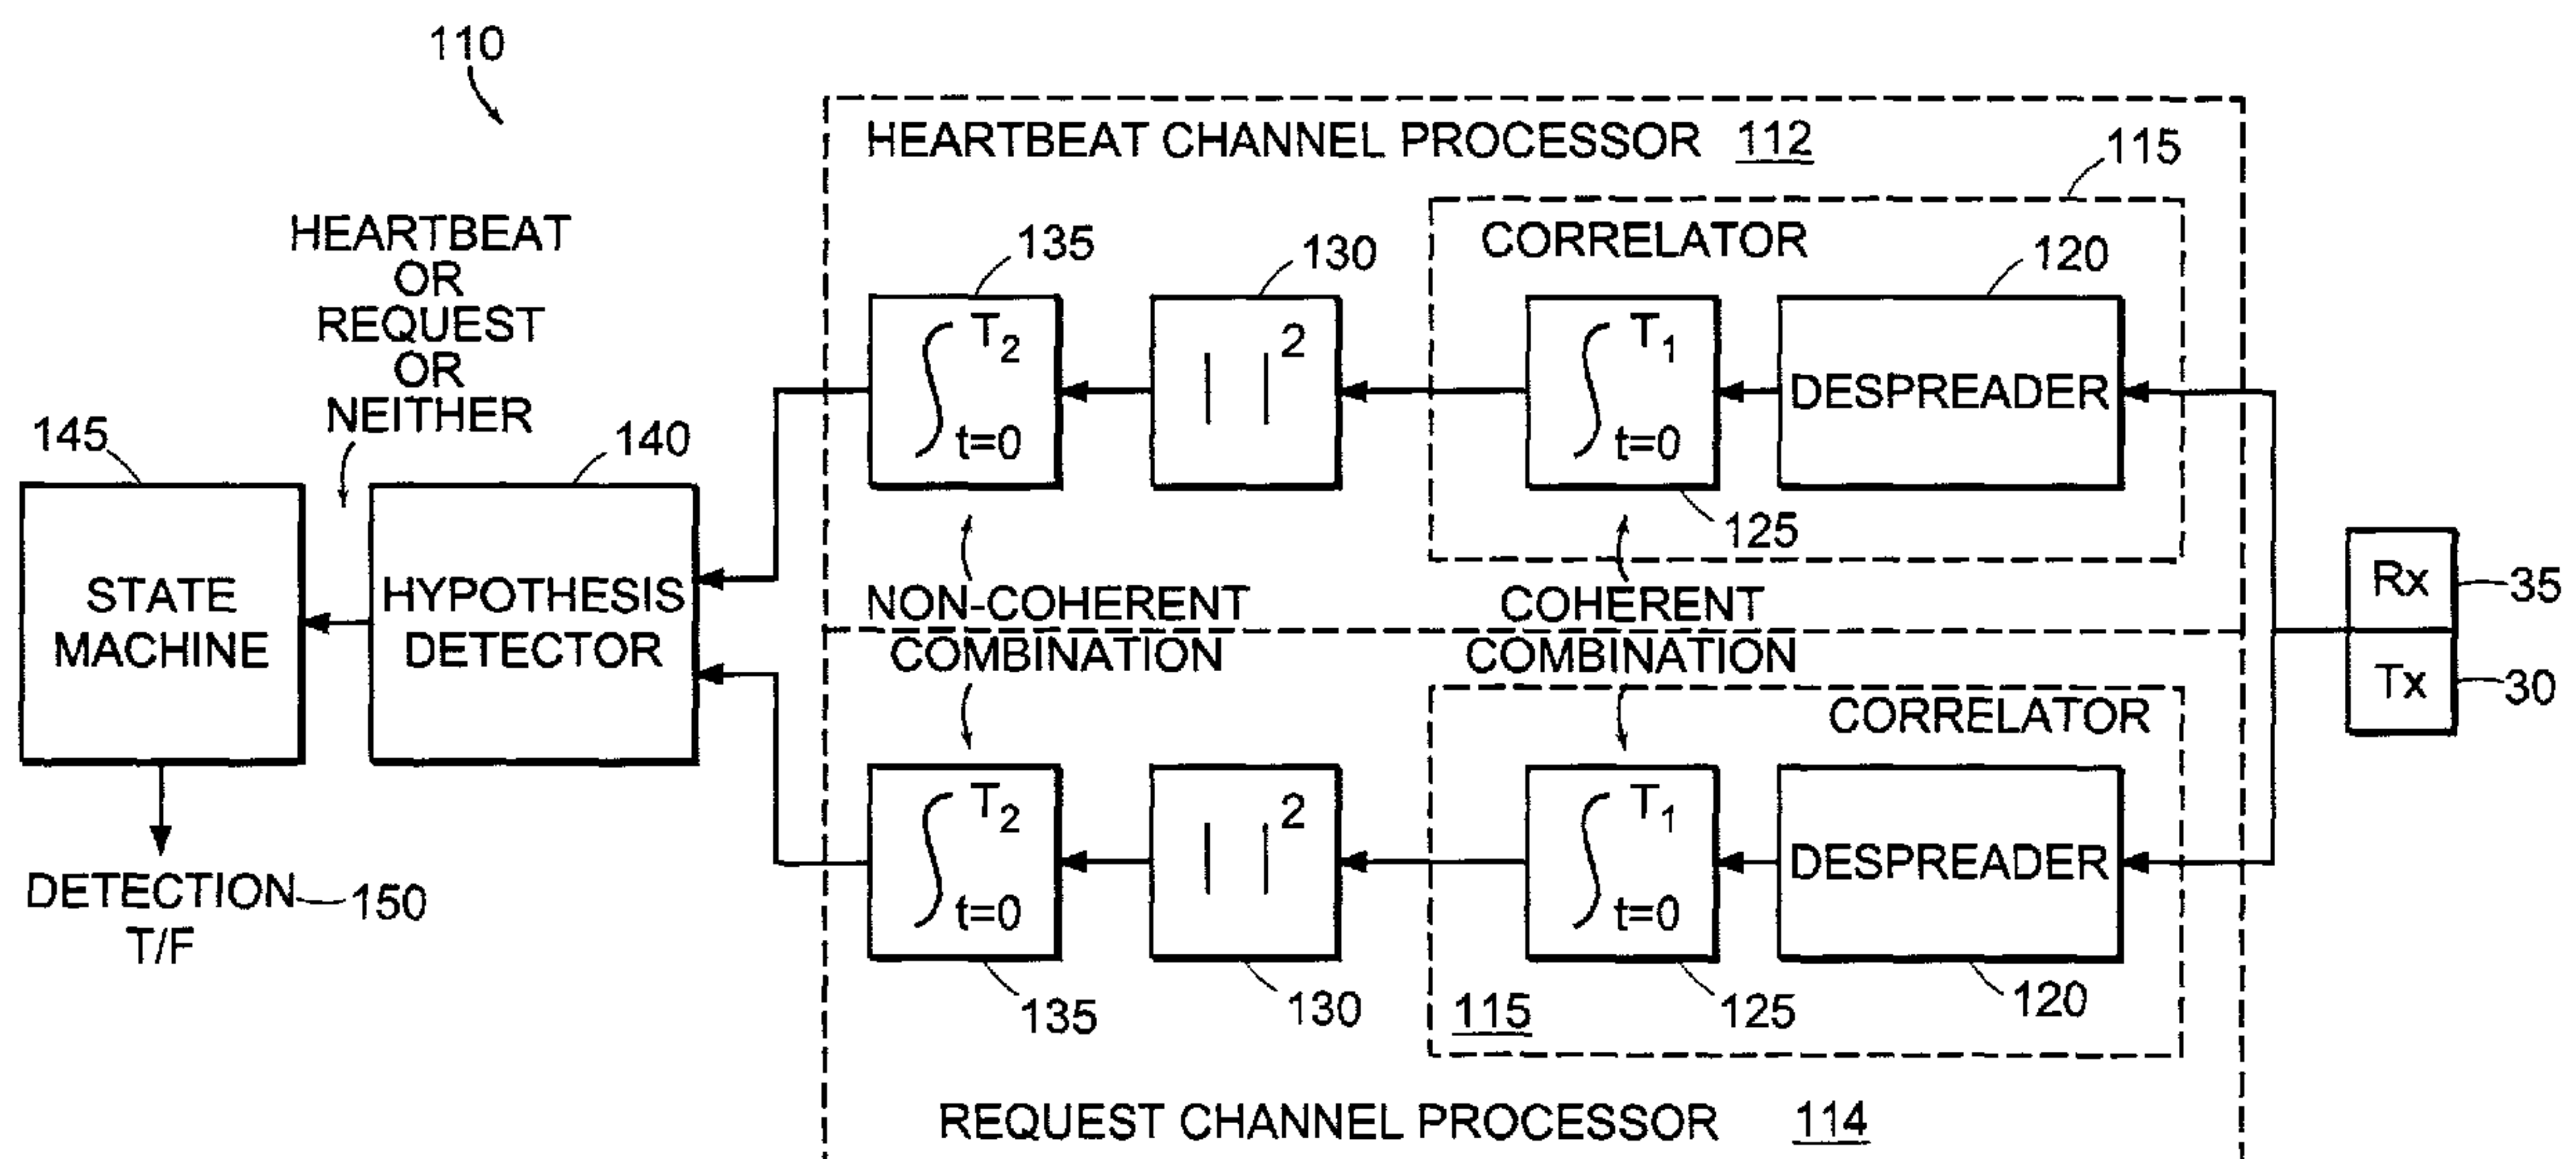

(57) **Abrégé/Abstract:**

A communications system (100) improves performance of detecting a signal (Fig. 2A) having indication of a request to change communications states by making at least two positive identifications of the request in a given time frame. In one particular application, a base station (25) determines a request to change communications states with reasonably high probability of detection and a reasonably low probability of false detection. The system (100) has a reduced number of erroneous communications states, such as erroneous traffic channel allocations (55).



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
19 December 2002 (19.12.2002)

PCT

(10) International Publication Number
WO 02/102098 A1(51) International Patent Classification⁷: **H04Q 7/20,**
G06F 13/42(74) Agents: **THIBODEAU, David, J., Jr.** et al.; Hamilton,
Brook, Smith & Reynolds, P.C., 530 Virginia Road, P.O.
Box 9133, Concord, MA 01742-9133 (US).

(21) International Application Number: PCT/US02/18877

(22) International Filing Date: 13 June 2002 (13.06.2002)

(25) Filing Language: English

(26) Publication Language: English


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN,
YU, ZA, ZM, ZW.(30) Priority Data:
60/297,925 13 June 2001 (13.06.2001) US
60/297,987 13 June 2001 (13.06.2001) US
09/997,621 29 November 2001 (29.11.2001) US
60/378,903 7 May 2002 (07.05.2002) US
10/171,378 12 June 2002 (12.06.2002) US(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,
NE, SN, TD, TG).(71) Applicant: **TANTIVY COMMUNICATIONS, INC.**
[US/US]; 1450 South Babcock Street, Melbourne, FL
32901 (US).**Published:**

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

(72) Inventor: **PROCTOR, James, A., Jr.**; 258 Sea View
Street, Melbourne Beach, FL 32951 (US).

[Continued on next page]

(54) Title: MULTI-DETECTION OF HEARTBEAT TO REDUCE ERROR PROBABILITY

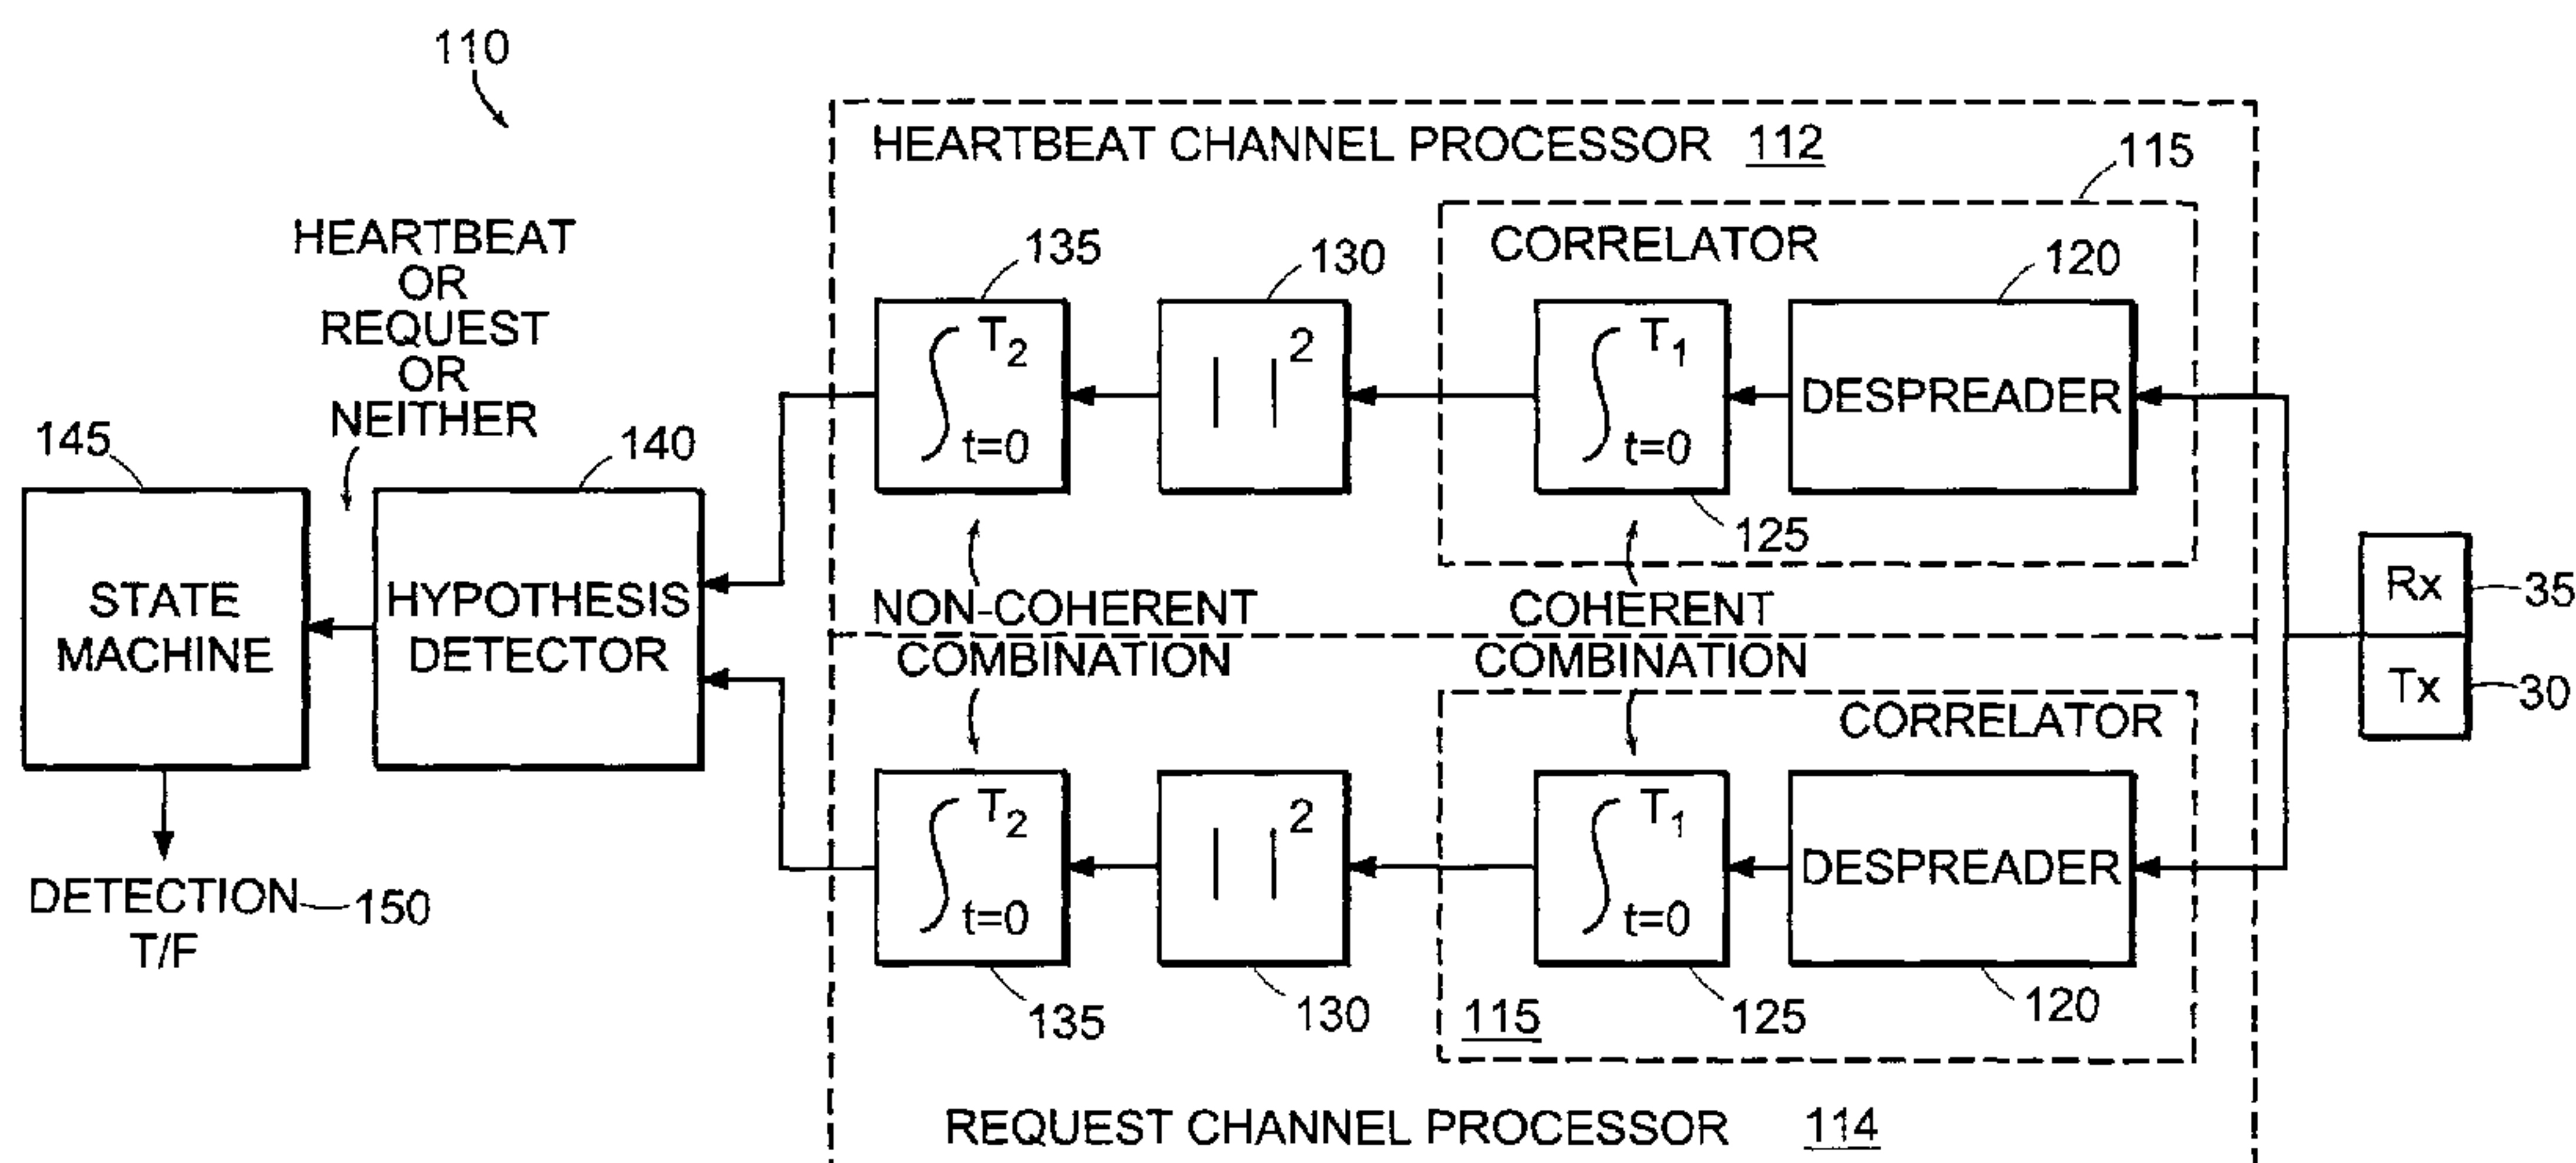

(57) Abstract: A communications system (100) improves performance of detecting a signal (Fig. 2A) having indication of a request to change communications states by making at least two positive identifications of the request in a given time frame. In one particular application, a base station (25) determines a request to change communications states with reasonably high probability of detection and a reasonably low probability of false detection. The system (100) has a reduced number of erroneous communications states, such as erroneous traffic channel allocations (55).

WO 02/102098 A1

WO 02/102098 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

MULTI-DETECTION OF HEARTBEAT TO REDUCE ERROR PROBABILITY

BACKGROUND OF THE INVENTION

Increasing use of wireless telephones and personal computers has led to a corresponding increase in demand for advanced telecommunication services that were once thought practical only for specialized applications. In the 1980s, wireless voice communications became widely available through cellular telephone networks. Such services were thought at first to be for the exclusive province of businessmen because of expected high subscriber costs. The same was also true for access to remotely distributed computer networks, whereby until very recently, only business people and large institutions could afford the necessary computers and wireline access equipment.

As a result of the widespread availability of affordable new technologies, the general population now increasingly desires to have not only wireline access to networks such as the Internet and private intranets, but also wireless access as well. Wireless technology is particularly useful to users of portable computers, laptop computers, hand-held personal digital assistants and the like who prefer access to such networks without being tethered to a telephone line.

There still is no widely available satisfactory solution for providing low cost, high speed access to the Internet, private intranets, and other networks using the existing wireless infrastructure. This is most likely an artifact of several unfortunate circumstances. First, the typical manner of providing high speed data service in the business environment over a wireline network is not readily adaptable to the voice grade service available in most homes or offices. For example, such standard high speed data services do not necessarily lend themselves to efficient transmission over

-2-

standard cellular wireless handsets because wireless networks were originally designed only to provide voice services. As a result, present day digital wireless communications systems are optimized for voice transmissions, although certain schemes such as CDMA do provide some measure of asymmetrical behavior for the accommodation of data transmissions. For example, the data rate specified by the Telecommunication Industry Association (TIA) for IS-95 on the forward traffic channel is adjustable in increments from 1.2 kbps up to 9.6 kbps for so-called Rate Set 1, and increments from 1.8 kbps up to 14.4 kbps for Rate Set 2. On the reverse link traffic channel, however, the data rate is fixed at 4.8 kbps.

At best, existing wireless systems therefore typically provide a radio channel that can accommodate maximum data rate transfers of 14.4 kilobits per second (kbps) over a forward link direction. Such a low data rate channel does not lend itself directly to transmitting data at rates of 28.8 or even 56.6 kbps that are now commonly available using inexpensive wireline modems, not to mention even higher rates such as the 128 kbps that are available with Integrated Services Digital Network (ISDN) type equipment. Data rates at these levels are rapidly becoming the minimum acceptable rates for activities such as browsing web pages.

Although wireline networks were known at the time when cellular systems were initially developed, for the most part, there was no provision made for such wireless systems to provide higher speed ISDN- or ADSL-grade data services over cellular network topologies.

In most wireless systems, there are many more potential users than radio channel resources. Some type of demand-based multiple access system is therefore required.

Whether the multiple access is provided by the traditional Frequency Division Multiple Access (FDMA) using analog modulation on a group of radio frequency carrier signals, or by schemes that permit sharing of a radio carrier frequency using Time Division Multiple Access (TDMA), or Code Division Multiple Access (CDMA), the nature of the radio spectrum is such that it is expected to be shared. This is quite dissimilar to the traditional environment supporting data

-3-

transmissions in which the wireline medium is relatively inexpensive and is not typically intended to be shared.

Other factors to consider in the design of a wireless system are the characteristics of the data itself. For example, consider that access to web pages
5 generally is burst-oriented, with asymmetrical data rate transmission requirements in a reverse and forward direction. In a common application, a user of a remote client computer first specifies the address of a web page to a browser program. The browser program then sends the web page address data, which is usually 100 bytes or less in length, over the network to a server computer. The server computer then
10 responds with the content of the requested web page, which may include anywhere from 10 kilobytes to several megabytes of text, image, audio, or even video data. The user thereafter may spend several seconds or even several minutes reading the content of the page before downloading another web page.

In an office environment, the nature of most employees' computer work
15 habits is typically to check a few web pages and then to do something else for an extended period of time, such as accessing locally stored data or even terminating use of the computer altogether. Therefore, even though such users may remain connected to the Internet or private intranet continuously during an entire day, actual use of the high speed data link is usually quite sporadic.

20 If wireless data transfer services supporting Internet connectivity are to coexist with wireless voice communication, it is becoming increasingly important to optimize the use of available resources in wireless CDMA systems. Frequency re-use and dynamic traffic channel allocation address some aspects of increasing the efficiency of high performance wireless CDMA communication systems, but there is
25 still a need for more efficient utilization of available resources.

SUMMARY OF THE INVENTION

One way of making more efficient utilization of available resources is to ensure the resources are allocated in an error-free manner. For example, a base station should not allocate traffic channels to a field unit when a request for traffic
30 channels has not been made. Similarly, the base station should allocate traffic

-4-

channels to a field unit when a request has been made. Such a request is made by the field unit when the field unit is employed by a user to send traffic data to a remote network node.

5 In one application, a transmission of a marker in a time slot over one channel indicates a request by the corresponding field unit to go active. That is, transmission of a marker in an assigned time slot indicates that the field unit is requesting that reverse link traffic channels be assigned to the user for transmitting a data payload from the field unit to the base station. This presumes that the field unit is presently in the standby mode. Alternatively, a field unit transmits a marker over a second
10 channel of the pair of reverse link channels to indicate that the field unit is not requesting to be placed in the active mode. For example, the field unit does not want to transmit data on a reverse link channel. Rather, the field unit requests to remain inactive but synchronized with the base station so that the field unit can immediately go active again at any moment.

15 In either case, the present invention improves performance for detecting a signal having a marker, or indication, of a request to change communications states, for example, by making a measurement of the indications to determine that a request to change communications states has been made. In one particular embodiment, the measurement includes at least two positive identifications of the request in a given
20 time span. The system may further improve performance by applying a difference in power levels for a non-request state (i.e., steady state or 'control hold' state) versus a request state (i.e., 'request to change' communications state). The result may include a reduced number of erroneous communications states, such as erroneously assigned or allocated traffic channels.

25 In one particular application, a subscriber unit provides a heartbeat channel using a first code in a CDMA system in a heartbeat with request channel using a second code in the reverse link to a base station. The subscriber unit provides the signal(s) with a repetition and, optionally, different power levels in a manner that a base station employing the principles of the present invention determines a request
30 to change communications states with a reasonably high probability of detection and a reasonably low probability of false detection.

- 5 -

The teachings of the present invention are compatible with 1xEV-DV systems and I-CDMA systems, but general enough to support systems employing various other communications protocols used in wired and wireless communications systems. Code Division Multiple Access (CDMA) systems, such as IS-2000, and
5 Orthogonal Frequency Division Multiplexing (OFDM) systems, such as IEEE 802.11 a wireless local area network (LAN), may employ an embodiment of the present invention.

BRIEF DESCRIPTION OF THE DRAWINGS

10 The foregoing and other objects, features and advantages of the invention will be apparent from the following more particular description of preferred embodiments of the invention, as illustrated in the accompanying drawings in which like reference characters refer to the same parts throughout the different views. The drawings are not necessarily to scale, emphasis instead being placed upon
15 illustrating the principles of the invention.

Fig. 1 is a schematic diagram of a communications system in which an embodiment of the present invention may be deployed;

Fig. 2A is a schematic diagram of a subsystem employed by a base station in the communications system of Fig. 1 used to determine whether a reverse link signal
20 includes an indication for a request to change communications states;

Fig. 2B is a flow diagram of a process executed by a state machine in the subsystem of Fig. 2A;

Fig. 3A is a signal diagram of a 1xEV-DV signal with a first marker indicating 'control hold' and a second marker indicating a 'request to go active';

25 Fig. 3B is a signal diagram of a code division multiple access (CDMA) set of code channels having a marker in an assigned time slot that indicates that the field unit is requesting a change in communications states;

Fig. 3C is a signal diagram of an alternative embodiment of a reverse link signal having the indications; and

AMENDED SHEET

- 6 -

Fig. 4 is a plot of signal-to-noise ratio versus probability of detection that may be used in determining energy levels of the indications in the signals of Figs. 3A-3C.

5 DETAILED DESCRIPTION OF THE INVENTION

A description of preferred embodiments of the invention follows.

The cost of missed or erroneous detection of Heartbeat (HB) and Heartbeat with Request to Go Active (HB/RQST) signals is costly. If a false detection occurs for HB, power control commands and timing commands used between a base station and field terminal may be generated based on a received code phase that is not correct. Thus, the power control can be erroneous and not based on the actual received power from the terminal. For the request message, resources will be assigned to a user when the resources are not needed, which results in wasted capacity.

Traditionally, if a very low probability of false detection is important, a requirement of a very high E_b/N_0 (i. e., energy-per-bit per noise density) threshold at the Base Transceiver Station (BTS) is imposed. As an alternative, if the speed of detection is less important, as in the case of the HB signal, multiple successive detections may be useful. This allows the probability of false detection to be greatly reduced.

For instance, if the $P(fd) = 0.01$ and if three detections in a row is specified to be made before a "Valid Detection" is determined, the overall $P(fd) = (0.01)^3$ or 0.000001. This is less costly for detection as the probability is much higher to start with. For instance, if the single detection probability is 0.9, requiring three detections lowers the detection probability to 0.9^3 or 0.72, which is only a slight reduction. This technique is known in radar systems, but has not been used in this application for detecting HB and HB/RQST signals and other communications systems and applications. It should be understood that the HB and HB/RQST signals are examples of signals to which the teachings of the present invention may be applied and are not intended to be limiting in any way.

AMENDED SHEET

- 7 -

The signals to be detected and counted (i) may be successive-either in time or by a user allocated slot in a TDMA system, for example-or (ii) may have breaks between the signals but have a given number of pulses, bits, or other indicators in a given time interval. For a CDMA reverse link, multiple serial detections or non-serial detections may be used to qualify as a system level detection. Further, the system may set a different power control target versus a detection target, which means that for a lower transmission power, integration time is increased to increase energy for detection. For a system that uses time slots, the system may include intelligence to monitor successive or non-successive time slots for the given user. In addition, the system works on gated and non-gated signals.

The interference level of the heartbeats is derived as a classical RADAR detection problem. To this end, the benefits are made possible based on the heartbeat pulses being "detected" rather than being demodulated as in the case with the Dedicated Control Channel (DCCH) and Slotted Control Hold Mode (DCHM) in CDMA technology.

Fig. 1 is a diagram of an example communications system 100, similar to the system described above, employing an embodiment of the present invention. A base transceiver station (BTS) 25 with antenna tower 23 maintains wireless communications links with each of a plurality of field units 42a, 42b, 42b (collectively, field units 42) as shown. Such wireless links are established based upon assignment of resources on a forward link 70 and a reverse link 65 between the base station 25 and field units 42. Each link 65 or 70 is typically made up of several logical reverse link channels 55 and several logical forward link channels 60, respectively.

As shown, the communications system 100 supports wireless communications between an interface 50 and a network 20. Typically, the network 20 is a Public Switched Telephone Network (PSTN) or computer network, such as the Internet or intranet. The interface 50 is preferably coupled to a digital processing device, such as a portable computer 12, sometimes referred to as an access unit, to provide wireless access to the network 20. Consequently, the portable

AMENDED SHEET

-8-

computer 12 has access to the network 20 based on communications over a combination of both hard-wired and wireless data links.

In a preferred embodiment, the forward link channels 60 and reverse link channels 55 are defined in the communications system 100 as Code Division Multiple Access (CDMA) channels. That is, each CDMA channel is preferably defined by encoding and transmitting data over the channel with an augmented pseudo random noise (PN) code sequence. The PN coded data is then modulated onto a radio frequency carrier. This enables a receiver to decipher one CDMA channel from another knowing only the particular augmented PN code assigned for a given channel. In accordance with an embodiment, each channel preferably occupies a 1.25 MHZ band consistent with the IS-95 CDMA standard or 1xEV-DV standard and is capable of transmitting at 38.4 kbps.

A forward link 70 includes at least four, logical, forward link channels 60. As shown, this includes a Pilot Channel 60PL, Link Quality Management (LQM) channel 60L, paging channel 60PG and multiple traffic channels 60T.

The reverse link 65 includes at least five logical channels 55. As shown, this includes a heartbeat standby channel 55HS, heartbeat request active channel 55HRA, access channel 55A and multiple traffic channels 55T. Generally, the reverse link channels 55 are similar to the forward link channels 60 except that each reverse link traffic channel 60T can support variable data rates from 2.4 kbps to a maximum of 160 kbps.

Data transmitted between the base station 25 and field unit 42a typically include encoded digital information, such as web page data. Based on the allocation of multiple traffic channels in the reverse link 65 or forward link 70, higher data transfer rates can be achieved in a particular link between the base station 25 and field unit 42a. However, since the field units 42 compete for bandwidth allocation, a field unit 42a may have to wait until resources are free to be assigned traffic channels to transmit a data payload.

Before discussing an example detector system (Fig. 2) that can be used to distinguish a heartbeat from a heartbeat-with-request signal, a brief discussion of example signals will be discussed in reference to Figs. 3A-3C.

-9-

In Fig. 3A, a 1xEV-DV signal 160 that may be transmitted by the field unit is shown having three distinct states: a 'control hold' state 165, a 'request to go active' state 170, and a data traffic state 175. In the 'control hold' state 165, the signal 160 does not include a 'request to go active' indication. In other words, the signal 160 remains in an 'idle' or 'control hold' state, which indicates that the field unit 42a is not requesting traffic channels. The 'request to go active' state 170 is an indication that the field unit is requesting to transmit data on a traffic channel over a reverse link to the BTS 25. In the traffic state 175, traffic data is transmitted by the field unit to the BTS. Following transmission of the traffic data over the reverse link, the signal 160 reverts back to the 'control hold' state 165 following a transmission of a 'data transmission complete' state (not shown).

Although shown as a single signal 160, it should be understood that the signal may be multiple signals, optionally coded with orthogonal or non-orthogonal codes into mutually exclusive channels. For example, the 'control hold' state 165 may be transmitted on a different channel from the 'request to go active' state 170. Similarly, the traffic data transmitted in a transmit state 175 may be on a separate channel from the other two states 165, 170. An example of multiple channel is discussed in reference to Figs. 3B and 3C.

Fig. 3B is an example of an Internet code division multiple access (I-CDMA) signaling diagram that has assigned time slots for users 1, 2, 3, ..., N repeating in epoch i 177a, epoch $i+1$ 177b, and so forth. The channels are composed of the heartbeat channel 55H, request channel 55R, and traffic channels 55T. Each of these channels has an associated code $C_1, C_2, C_3, C_4, \dots, C_N$, which allow signals to be transmitted on mutually exclusive code channels. Both the transmitting and receiving systems process the information in the channels by using the codes to separate the information respectively included therein in a typical CDMA manner.

In the example shown, users 1, 2, 4, 5, 6, ..., N are requesting to remain in an idle state, indicated by the presence of a signal 180 in the heartbeat channel 55H. User 3, however, is requesting to transmit data over a reverse link based on a signal 185 in the request channel 55R in the first epoch 177a, a signal 185b in the request channel 55R in the second epoch 177b, and possibly additional epochs. In the third

-10-

epoch 177c, the BTS 25 has detected the request to transmit data based on the two consecutive indications 185a and 185b. Following receipt of an acknowledgment, user 3 begins to transmit traffic data 190 in an associated traffic channel using code C5. In an alternative embodiment, the BTS 25 may require three consecutive
5 indications 185a through 185c before determining that a request is being made and acknowledging same.

Fig. 3C is a more detailed signal diagram of the 1xEV-DV signal of Fig. 3A that is used to indicate a 'request to go active' to the base station 25 from the field unit 42a. In this embodiment, the 1xEV-DV signal is composed of multiple signals
10 on different logical channels: a heartbeat channel 55H and a request channel 55R. The heartbeat channel 55H provides continuous timing and other information (e.g., power level, synchronization, etc.) from the field unit 42a to the base station 25. The field unit 42a uses the request channel 55R to make a request (e.g., digital "1") of the base station 25 to request a traffic channel on the reverse link 65 for
15 transmitting data.

Sampling times 195a, 195b, ..., 195f (collectively 195) denoted by arrows indicate times or intervals at which the BTS 25 samples the time slots of the request signal 55R and, optionally, the heartbeat channel 55H to determine whether a request for a traffic channel is being made. It should be understood that the
20 sampling may occur over the entire time slot or a subset thereof. Also, the heartbeat channel 55H and request channel 55R use mutually exclusive codes, in this particular embodiment, so the sampling is performed on their mutually exclusive code channels 55H, 55R in all or a subset of time slots. In one particular embodiment, the base station 25 samples mutually exclusive code channels 55H,
25 55R in time slots designated for request indications, such as in time slots at sampling times 195b, 195d, and 195f. During these time slots, the heartbeat channel 55H is "inactive", but the request channel 55R is "active".

As discussed above, the signals in the "active" request time slots may be modulated messages or simply coded pilot signals with no "bits". Thus, detection
30 may be based solely on the respective energy levels of the heartbeat and heartbeat-

- 11 -

with-request signals in respective time slots over a given time interval or spanning several time intervals.

In one particular embodiment, the 'control hold' state 165 indication has a first energy level, and the 'request to go active' state 170 has a second energy level.

5 The base station 25 may take advantage of the difference in power levels in addition to the repetition of the pulses used to indicate a request to go active. For example, in this particular embodiment, distinguishing the two states may be a matter of measuring energy levels of the signals(s) and (i) comparing the energy levels against at least one threshold or (ii) determining that a request is present, optionally in a

10 mutually exclusive code channel in time slots when the heartbeat signal is at a logical zero. The different energy levels of the indications may be provided by the duty cycle of the signals, frequency of the signals, power of the signals, signaling structure, and so forth.

To understand how the energy levels of the signals can be used to improve

15 system performance, one can refer to Fig. 4, which provides a chart for selecting signaling requirements based on the following parameters or factors: (i) probability of detection, $P(d)$ (x-axis), (ii) signal-to-noise ratio in decibels (y-axis), and (iii) probability of false detection, $P(fd)$ (curves in the chart). This chart shows a required signal-to-noise ratio at the input terminals of a linear-rectifier detector as a function

20 of probability of detection for a single pulse, with the false-alarm probability $P(fd)$ as a parameter, calculated for a non-fluctuating signal. It should be understood that alternative parameters or factors may be used to establish or define the transmitted power levels of the indications.

At the circled point 200, the signal-to-noise ratio is 3 dB, $P(d) = 20\%$, and

25 $P(fd) = 1\%$. To increase the probability of detection for the same probability of false detection, one simply needs to slide the circled point 200 upward along the same probability-of false detection curve, which suggests that an increase in the signal-to-noise ratio is used to improve system performance and, thus, improving the likelihood that the request signal will be detected quickly.

30 Before providing an example model and discussion regarding example Heartbeat standby 55HS and Heartbeat Request Active 55HRA energy levels for the

AMENDED SHEET

- 12 -

example communications system 100 (Fig. 1), a brief discussion of a processor and detector that may be used in the system is now provided.

Fig. 2A is a schematic diagram of a request detection processor 110 used to determine whether the field unit 42a has requested to send data to the BTS 25. The receiver Rx 35 receives signals 55, which includes the maintenance channel 55M, traffic channels 55T, access channel 55A, heartbeat standby channel 55HS, and heartbeat request active channel 55HRA. The signal 55 is processed such that a heartbeat channel processor 112 receives the heartbeat standby channel 55HS and a request channel processor 114 receives the Heartbeat Request Active channel 55HRA.

The heartbeat channel processor 112 and request channel processor 114 include the same processing elements, in this particular embodiment, so a discussion of just the heartbeat channel processor 112 will be provided for brevity.

The heartbeat channel processor 112 receives the heartbeat standby channel 55HS. A correlator 115 uses a despreader 120 to despread the heartbeat standby channel 55HS. An integrator 125 is used to coherently combine the heartbeat signal. By coherently combining the signal, an integration of I, Q and its phase causes the phase of the signal to be removed and output the power of the signal.

Following the correlator 115, a rectifier 130 (i. e., absolute value of the signal squared) rectifies the power of the signal, which is then integrated by a second integrator 135 to calculate the energy of the received heartbeat signal. The second integrator 135 provides a non-coherent combination of the signal, which is calculated over short time intervals. The non-coherent integration provides just magnitudes if the terminal is moving too fast, thus causing a cross-over of the 180-degree phase point, which can cause ambiguities in determining the energy of the signal in the absence of the non-coherent combination.

The output from the heartbeat channel processor 112 is a heartbeat energy level, and the output from the request channel processor 114 is a request energy level. Each of these energy levels, in this particular embodiment, is fed to a hypothesis detector 140, which determines whether a heartbeat signal, request signal, or neither signal is in the signal 55 received by the base station 25.

AMENDED SHEET

-13-

The output from the hypothesis detector 140 is provided to a state machine 145. The state machine is used to determine whether the field unit is making a 'request to go active' according to a given criteria, where, in one particular embodiment, is a measurement of the output from the hypothesis detector 140.

5 Example measurements include counting the number of consecutive request signals, measuring a ratio of heartbeat standby channel signals and heartbeat request active channel signals, counting heartbeat request active signals in a given time span, and so forth. Further, the hypothesis detector 140 and the difference in energy levels of the indications improves system performance, but are not required for the present
10 invention. In other words, the heartbeat standby channel 55HS and heartbeat request active channel 55HRA may be processed directly by the state machine 145 to determine whether the field unit 42a is requesting to go active. More detail is provided following a description of an embodiment of the state machine 145.

In this particular embodiment, the state machine 145 outputs a Boolean true
15 or false signal. An example of a process executed by the state machine is depicted in Fig. 2B.

Fig. 2B is an example flow diagram of the state machine 145. The example state machine 145 starts in step 205 when the detection processor 110 "boots up." In step 210, the state machine 145 initializes counters that are used to determine if a
20 detection has occurred. In step 215, the state machine 145 receives the output from the hypothesis detector 140. After boot up, the state machine 145 may act as an 'interrupt service routine', beginning in step 215, upon receipt of any output from the hypothesis detector 140. The counters are cleared (i.e., set to zero) upon a determination of a detection or a non-detection to reset the measurement process
25 without a re-boot of the detection processor 110, as discussed below.

Following receipt of the output from the hypothesis detector 140 in step 215, the state machine 145 determines whether the output of the hypothesis detector 145 is a request (i.e., 'request to go active'). If yes, then the state machine 145 continues in step 240 in which a detection counter is incremented. In step 245, the detection
30 counter is compared against a threshold. If the detection counter exceeds the threshold, then, in step 250, the state machine 145 reports a detection of a 'request to

-14-

go active' from the field unit 42a. If the detection counter does not exceed the threshold, then the state machine 145 returns to step 215 and waits to receive another output from the hypothesis detector 140.

Continuing to refer to Fig. 2B, if, in step 220, the output of the hypothesis
5 detector 140 is determined not to be a 'request', then the state machine 145 continues in step 225. In step 225, the state machine 145 increments a non-detection counter. In step 230, a determination is made as to whether the non-detection counter exceeds a threshold. If yes, then the state machine 145 continues in step
235, in which the state machine 145 reports a non-detection of a 'request to go
10 active' by the field unit 42a. If the non-detection counter does not exceed the threshold, then the state machine 145 continues in step 215.

Following steps 235 and 250, the state machine 145 clears the counters in step 255, allowing the state machine 145 to detect future 'requests to go active' by the field unit 42a. In step 260, the state machine 145 ends.

15 The detection counter is used by the state machine 145 to determine how many indications of a 'request to go active' have been received by the detection processor 110 according to a given criteria. The criteria can be of any form, including a given number of consecutive detections, a given number of detections in a given time span, or a ratio of detections to non-detections. Alternative non-
20 counting based measurements may be employed to determine whether a request is being made to go active, such as measuring the phase of the request signals.

It should be understood that alternative embodiments of using counters or other criteria may be used by the state machine 145. For example, the state machine 145 may use other process flows, non-counter variables, or other standard or non-
25 standard techniques for determining a detection. Further, rather than receiving the output from the hypothesis detector 140, the input to the state machine 145 may be raw data from the heartbeat channel processor 112 or request channel processor 114. Further, in an alternative embodiment, the state machine 145 may be included in combination with the hypothesis detector 140.

- 15 -

Referring again to Fig. 2A, in addition to using the state machine 145 to ascertain with high probability whether the field unit 42a is making a 'request to go active', the hypothesis detector 140 is also employed.

To determine which signal (s) is/are present, the hypothesis detector 140 includes logical functions. For example, in this particular embodiment, the hypothesis detector 140 compares a first energy level threshold against the first energy level (i. e., heartbeat energy level) and compares a second energy level threshold against the second energy level (i. e., request energy level).

Example energy level thresholds against which to compare the heartbeat energy level and the request energy level are 9 dB and 11 dB, respectively. The energy level thresholds may be dynamically selected, predetermined, or applied in another manner, such as based on a transmitted power level, which may be reported by the field unit to the base station over the heartbeat standby channel 55HS, for instance. In the case of the energy level calculation and comparison, the first and second energy levels may be dependent on occupancy of time slots in the signaling channel(s) used by the signal 55, so the energy level thresholds can be based on an expected or specified number of "1" bits used to indicate a 'request to go active' or to indicate a request to remain in idle mode. Use of the energy level thresholds is discussed in related U. S. Patent Application entitled "Transmittal of Heartbeat Signal At A Lower Than Heartbeat Request," by Proctor, J., filed concurrently herewith, the entire teachings of which are incorporated herein by reference.

As discussed above, the output of the hypothesis detector 140 is measured by the state machine 145 to determine whether to change the state of the communications system, which is the state of reverse link traffic channels between the field unit 42a and the base station 25. For example, if the hypothesis detector 140 determines that a 'request to go active' (i. e., send a data transmission on the reverse link) is being made by the field unit 42a, then the state machine 145 outputs a signal to a processor (not shown) in the BTS 25 that is responsible for providing the portable computer 12 with a traffic channel 55T. In one particular embodiment, the BTS 25 allocates the traffic channel 55T if the number of consecutive request signals is determined to be two or more consecutively. Alternative criteria have been discussed above.

AMENDED SHEET

-16-

As described in reference to Fig. 3C, the heartbeat channel processor 112, request channel processor 114, and hypothesis detector 140 may be configured or designed in a manner that monitors an occupancy of time slots used to indicate the request to change communications states. In one embodiment, the detecting
5 includes monitoring occupancy of mutually exclusive code channels, such as shown in Figs. 3B and 3C.

A feedback loop (not shown) may be employed to cause the heartbeat channel processor 112 and request channel processor 114 to be “adaptive”. For example, based on the received energy level of the heartbeat channel 55H, the
10 integration time of the integrators 125, 135 may be adjusted, and the energy level thresholds used by the hypothesis detector 140 for comparison of the energy levels of the heartbeat and request signals may also be adjusted by the feedback loop. Other feedback may cause (i) the number of consecutive pulses required for a detection to be increased or decreased or (ii) the number of transmitted request
15 signals to be increased or decreased. Such a feedback loop may use a command or message to transfer information between the BTS 25 and field unit 42a that includes information regarding the pulse repetitions or power levels of the heartbeat and heartbeat-with-request signals transmitted by the field unit 42a.

As discussed above, the first communications state may be a standby state
20 and the second communications state may be a payload state. In other systems or even the same system, the communications states may refer to other communications states, such as a request to change base stations, power control signaling, and so forth. The use of different signal repetitions or energy levels in signaling as described herein is applicable to wireless, wired, or optical communications systems.
25 In either case, the communications states may be used in voice or data communications systems.

As also discussed above, the second energy level may be based on a target probability of detection, false detection, or combination of both as discussed in reference to Fig. 4. In other words, the field unit may transmit the request signal at a
30 given power level or a given number of pulses per given time period to achieve a

- 17 -

corresponding signal-to-noise ratio for a given target probability of detection, false detection, or both as discussed in reference to Fig. 4.

An analysis may be used to set the transmission power or number of transmitted indications, or the feedback mechanism discussed above may be employed in the communications system for causing the field unit to change its behavior so as to have the received energy levels of the indications achieve a predetermined signal-to-noise ratio, thus providing the desired probability of detection and false detection parameters.

SIMULATION

A simulation for a reverse link was conducted where the reverse link is assumed to have power control and a heartbeat channel of any of the example types shown in Figs. 3A-3C or another type of communications link signaling.

First, there are two assumptions that have been made for this simulation. First, power control is used on a combination of detected paths or in a single path. Power control is performed even when a positive detection is not achieved. Second, the probability of detection was set to achieve detection at a high enough rate to ensure that power control is performed on the correct signal. To clarify, detection is required to track the received signal.

Table 1 shows the rate of detection required for a single path channel from a vehicle moving away from the base station at 60mph. This table requires that there is at least one detection per slew of a chip due to movement.

TABLE 1

Slew Distance for 1 chip	814	ft
Handset Velocity	60	mph
Handset Velocity	88	ft/s
Chip Slew Rate	9.2	chips/s
Heartbeat Rate	50	HB/s
Heartbeats/Td	462	—

AMENDED SHEET

- 18 -

In Table 1, the time period T_d is defined as the period over which a single heartbeat pulse must be detected to ensure the signal is tracked as the time of arrival of the signal is skewed due to movement of the vehicle. Table 1 shows that one out of every 462 pulses must be received with a very high probability or there is a risk of losing the tracking of the signal.

Based on this calculation, the threshold of detection was set from a table of detection/false detection probabilities (e. g., Fig. 4). While Table 1 is defined for Additive White Gaussian Noise (AWGN), it is expected that the probabilities of detection are not greatly affected over a relatively short amount of time. This is due to the statistical independence of the fading from heartbeat pulse to heartbeat pulse.

While the individual pulse probabilities of detection varied significantly, the overall results were not seen to vary significantly by more than a factor of roughly 50% in the latency of detection. Specifically, the average detection latency for the request message in AWGN was 11ms as compared to roughly 15ms for 30km/hr. Again, this result is due to requiring a detection process rather than a more difficult demodulation process.

Based on this analysis, a probability of detection of 20% and false detection of 1% was selected. This requires an average E_b/N_0 of 3dB. This is shown and discussed in reference to Fig. 4.

Table 2 shows a calculation of the probability of detection and false detection during the time T_d defined above.

TABLE 2

Target E/I_0 (entire energy/interference density)	3dB
Probability of detection	0.2
Probability of false detection	0.01
Probability of detection for 3 Sequential HB	8.00E-03
Number of trials in T_d	462
Probability of no detection in T_d	2.44E-02
Probability of false detection for 3 sequential	1.00E-06
Required no false detection trials	462
Probability of false detection for T_d	4.62E-04

AMENDED SHEET

- 19 -

To reduce the probability of false detection, three sequential detections were required to validate a single detection. Since the probability of false detections is multiplicative in this case, the probability of a single false detection is cubed.

5 Table 3 below calculates the average E_c/I_o (energy-per-chip per the interference density, which is the SNR integrated over the entire chip) required to achieve the statistics of Table 2.

TABLE 3

Target E/I_o	3	dB
Processing Gain	256	—
10 Burst E_c/I_o	-21.08	dB
Average E_c/I_o	-40.9	dB

Since the heartbeat channel is time division multiplexed (TDM) in structure, the interference to all other users due to heartbeat users increases as follows:

15 Effective average E_c/I_o (all HB users) = $10 * \log_{10}(N) - 40.9$, where N is the number of users.

Thus, for 96 users of a given base station, the average total interference will equal the burst E_c/I_o or -21.08dB.

20 While this invention has been particularly shown and described with references to preferred embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the scope of the invention encompassed by the appended claims.

AMENDED SHEET

- 20 -

CLAIMS

What is claimed is:

1. A method for determining a request to change communications state in a wireless communications system, the method comprising:
 - 5 receiving at least one signal having a first indication of a first communications state, and a second indication for a request to change to a second communications state;
 - monitoring at least one first time slot for detecting the first indication, and at least one second time slot for detecting the second indication;
 - 10 counting at least one of the detected first and second indications; and
 - determining whether the request to change communications states has been made based on the counting.
2. The method according to Claim 1 wherein the determining comprises
 - 15 comparing a number of counted detected second indications against a threshold of at least two detected second indications.
3. The method according to Claim 2 wherein the counting resets if non-consecutively detected first indications or non-consecutively detected second
 - 20 indications are received in the at least one signal.
4. The method according to Claim 2 wherein the counting resets if the threshold of at least two detected second indications is not achieved in a given timespan.
 - 25
5. The method according to Claim 1 wherein the monitoring comprises applying independent thresholds to the at least one first and second time slots for detecting to the first and second indications.

AMENDED SHEET

- 21 -

6. The method according to Claim 1 wherein the first and second time slots are mutually exclusive.
7. The method according to Claim 6 wherein the request to change
5 communications states is caused by detecting a repetition of the detected first and second indications above a given threshold, and a request not to change communications states is caused by detecting a repetition of fewer than both the detected first and second indications above a given threshold.
- 10 8. The method according to Claim 1 further comprising changing a present communications state in response to determining that the request to change communications states has been made.
- 15 9. The method according to Claim 1 wherein the first indication has a first power level and the second indication has a second power level, and wherein detecting the first and second indications is based on the respective first and second power levels according to alternative criteria.
- 20 10. The method according to Claim 9 wherein detecting the first indication includes comparing the first energy level to a first power level threshold, and wherein detecting the second indication includes comparing the second energy level to a second power level threshold.
- 25 11. The method according to Claim 10 wherein the at least one signal is received in a single channel, with the at least one first and second time slots being integrated in the single channel, and with the first and second power levels being dependent on occupancy of the respective first and second time slots.
- 30 12. The method according to Claim 10 wherein the alternative criteria comprises at least one of the following: the first power level exceeding the first power level threshold, the second energy level exceeding the second power level threshold, the second indication occupying the second time slots, the first

AMENDED SHEET

- 22 -

and second indications occupying first and second time slots in mutually exclusive code channels, and the first and second indications occupy mutually exclusive first and second time slots.

- 5 13. The method according to Claim 12 wherein counting the first and second indications is only based on the respective first and second power levels according to at least one of the alternative criteria.
- 10 14. The method according to Claim 13 further comprising adjusting the second power level based on a target probability of detection.
- 15 15. The method according to Claim 13 further comprising adjusting the second power level based on a target probability of false detection.
- 15 16. The method according to Claim 1 wherein the first communications state is a standby state and the second communications state is a payload state.
- 20 17. The method according to Claim 1 wherein the first and second communications states are data communications states.
- 25 18. The method according to Claim 1 wherein the communications system comprises a code division multiple access (CDMA) or orthogonal frequency division multiplexing (OFDM) wireless communications system.
- 30 19. In a communications system, an apparatus for determining a request for changing communications state, the apparatus comprising:
 a receiver for receiving at least one signal having (i) a first indication of a first communications state, and (ii) a second indication for a request to change to a second communications state;
 at least one monitor for monitoring at least one first time slot for detecting the first indication, and at least one second time slot for detecting the second indication;

AMENDED SHEET

- 23 -

a counter coupled to said at least one monitor for counting at least one of the detected first or second indications; and

a logic unit coupled to said counter for determining whether the request to change communications states has been made based on the counting.

5

20. The apparatus according to Claim 19 wherein said logic unit compares a number of counted detected second indications against a threshold of at least two detected second indications.

10

21. The apparatus according to Claim 20 wherein said counter resets if non-consecutively detected first indications or non-consecutively detected second indications are received in the at least one signal.

15

22. The apparatus according to Claim 20 wherein said counter resets if the threshold of at least two detected second indications is not achieved in a given timespan.

20

23. The apparatus according to Claim 19 wherein said at least one monitor applies independent thresholds to the at least one first and second time slots for detecting to the first and second indications.

24. The apparatus according to Claim 19 wherein the first and second time slots are mutually exclusive.

25

25. The apparatus according to Claim 24 wherein said logic unit determines that the request to change communications states has been made by detecting a repetition of the detected first and second indications above a given threshold, and a request not to change communications states has been made by detecting a repetition of fewer than both the detected first and second indications above a given threshold.

30

AMENDED SHEET

- 24 -

26. The apparatus according to Claim 19 further comprising a state control unit coupled to said logic unit for changing a present communications state in response to determining that the request to change communications states has been made.
- 5
27. The apparatus according to Claim 19 wherein the first indication has a first power level and the second indication has a second power level, and wherein said at least one monitor detects the first and second indications based on the respective first and second power levels according to alternative criteria.
- 10
28. The apparatus according to Claim 27 wherein detecting the first indication includes comparing the first energy level to a first power level threshold, and wherein detecting the second indication includes comparing the second energy level to a second power level threshold.
- 15
29. The apparatus according to Claim 27 wherein the at least one signal is received in a single channel, with the at least one first and second time slots being integrated in the single channel, and with the first and second power levels being dependent on occupancy of the respective first and second time slots.
- 20
30. The apparatus according to Claim 27 wherein the alternative criteria comprises at least one of the following: the first power level exceeding the first power level threshold, the second energy level exceeding the second power level threshold, the second indication occupying the second time slots, the first and second indications occupying first and second time slots in mutually exclusive code channels, and the first and second indications occupy mutually exclusive first and second time slots.
- 25
- 30 31. The apparatus according to Claim 27 wherein said counter counting the first and second indications is only based on the respective first and second power levels according to at least one of the alternative criteria.

AMENDED SHEET

- 25 -

32. The apparatus according to Claim 31 wherein the second power level is adjusted based on a target probability of detection.
33. The apparatus according to Claim 31 wherein the second power level is
5 adjusted based on a target probability of false detection.
34. The apparatus according to Claim 19 wherein the first communications state is a standby state and the second communications state is a payload state.
- 10 35. The apparatus according to Claim 19 wherein the first and second communications states are data communications states.
36. The apparatus according to Claim 19 wherein the communications system is a code division multiple access (CDMA) or orthogonal frequency division
15 multiplexing (OFDM) wireless communications system.
37. A method for making a request to change communications state in a communications system, the method comprising:
selecting indications associated with data communications states, the
20 selecting being based on respective power levels of the indications; and
transmitting a signal including at least one of the selected indications to a receiving system, the at least one selected indication being counted by the receiving system for determining whether the request to change communications states has been made.
25
38. The method according to Claim 37 wherein the at least one selected indication being transmitted comprises a plurality of selected indications, and wherein the plurality of selected indications are transmitted consecutively in expectation of being counted as consecutive indications by the receiving
30 system.

AMENDED SHEET

- 26 -

39. The method according to Claim 37 wherein the at least one selected indication being transmitted comprises a plurality of selected indications, and wherein the plurality of selected indications are transmitted in a given time span.
- 5
40. The method according to Claim 37 wherein the at least one selected indication being transmitted comprises a plurality of selected indications, and wherein transmitting the signal comprises multiplexing the plurality of indications in time slots in a signal channel.
- 10
41. The method according to Claim 37 wherein the at least one selected indication being transmitted comprises a plurality of selected indications, and wherein transmitting the selected indications is performed in at least one of the following manners: in mutually exclusive code channels, in mutually exclusive time slots, in vacant time slots, with respective power levels, with a given repetition rate, and as a non-coded carrier signal.
- 15
42. The method according to Claim 37 wherein the communications states comprise at least one of a standby state and a payload state.
- 20
43. The method according to Claim 37 wherein the communications states are data communications states.
44. The method according to Claim 37 wherein the respective power levels are based on a target probability of detection.
- 25
45. The method according to Claim 37 wherein the respective power levels are based on a target probability of false detection.
- 30
46. The method according to Claim 37 wherein the communications system comprises a code division multiple access (CDMA) or orthogonal frequency division multiplexing (OFDM) wireless communications system.

AMENDED SHEET

- 27 -

47. In a communications system, an apparatus for making a request to change communications state, said apparatus comprising:
- 5 a selector to select indications associated with data communications states, the selecting being based on respective power levels of the indications; and
- 10 a transmitter coupled to said selector to transmit a signal including at least one of the selected indications to a receiving system, the at least one selected indication being counted by the receiving system for determining whether the request to change communications states has been made.
48. The apparatus according to Claim 47 wherein said selector selects a plurality of indications, and wherein the plurality of selected indications are transmitted consecutively in expectation of being counted as consecutive indications by the receiving system.
- 15 49. The apparatus according to Claim 47 wherein said selector selects a plurality of indications, and wherein the plurality of selected indications are transmitted in a given time span.
- 20 50. The apparatus according to Claim 47 wherein the at least one selected indication being transmitted comprises a plurality of selected indications; and further comprising a multiplexer coupled to said selector and to said transmitter for multiplexing the plurality of indications in time slots in a signal channel.
- 25 51. The apparatus according to Claim 47 wherein the at least one selected indication being transmitted comprises a plurality of selected indications, and wherein transmitting the selected indications is performed in at least one of the following manners: in mutually exclusive code channels, in mutually exclusive time slots, in vacant time slots, with respective power levels, with a
- 30 given repetition rate, and as a non-coded carrier signal.

AMENDED SHEET

- 28 -

52. The apparatus according to Claim 47 wherein the communications states
comprise at least one of a standby state and a payload state.
53. The apparatus according to Claim 47 wherein the communications states are
5 data communications states.
54. The apparatus according to Claim 47 wherein said selector also selects the
indications based on a target probability of detection.
- 10 55. The apparatus according to Claim 47 wherein said selector also selects the
indications based on a target probability of false detection.
56. The apparatus according to Claim 47 wherein the communications system is
a code division multiple access (CDMA) or orthogonal frequency division
15 multiplexing (OFDM) wireless communications system.

AMENDED SHEET

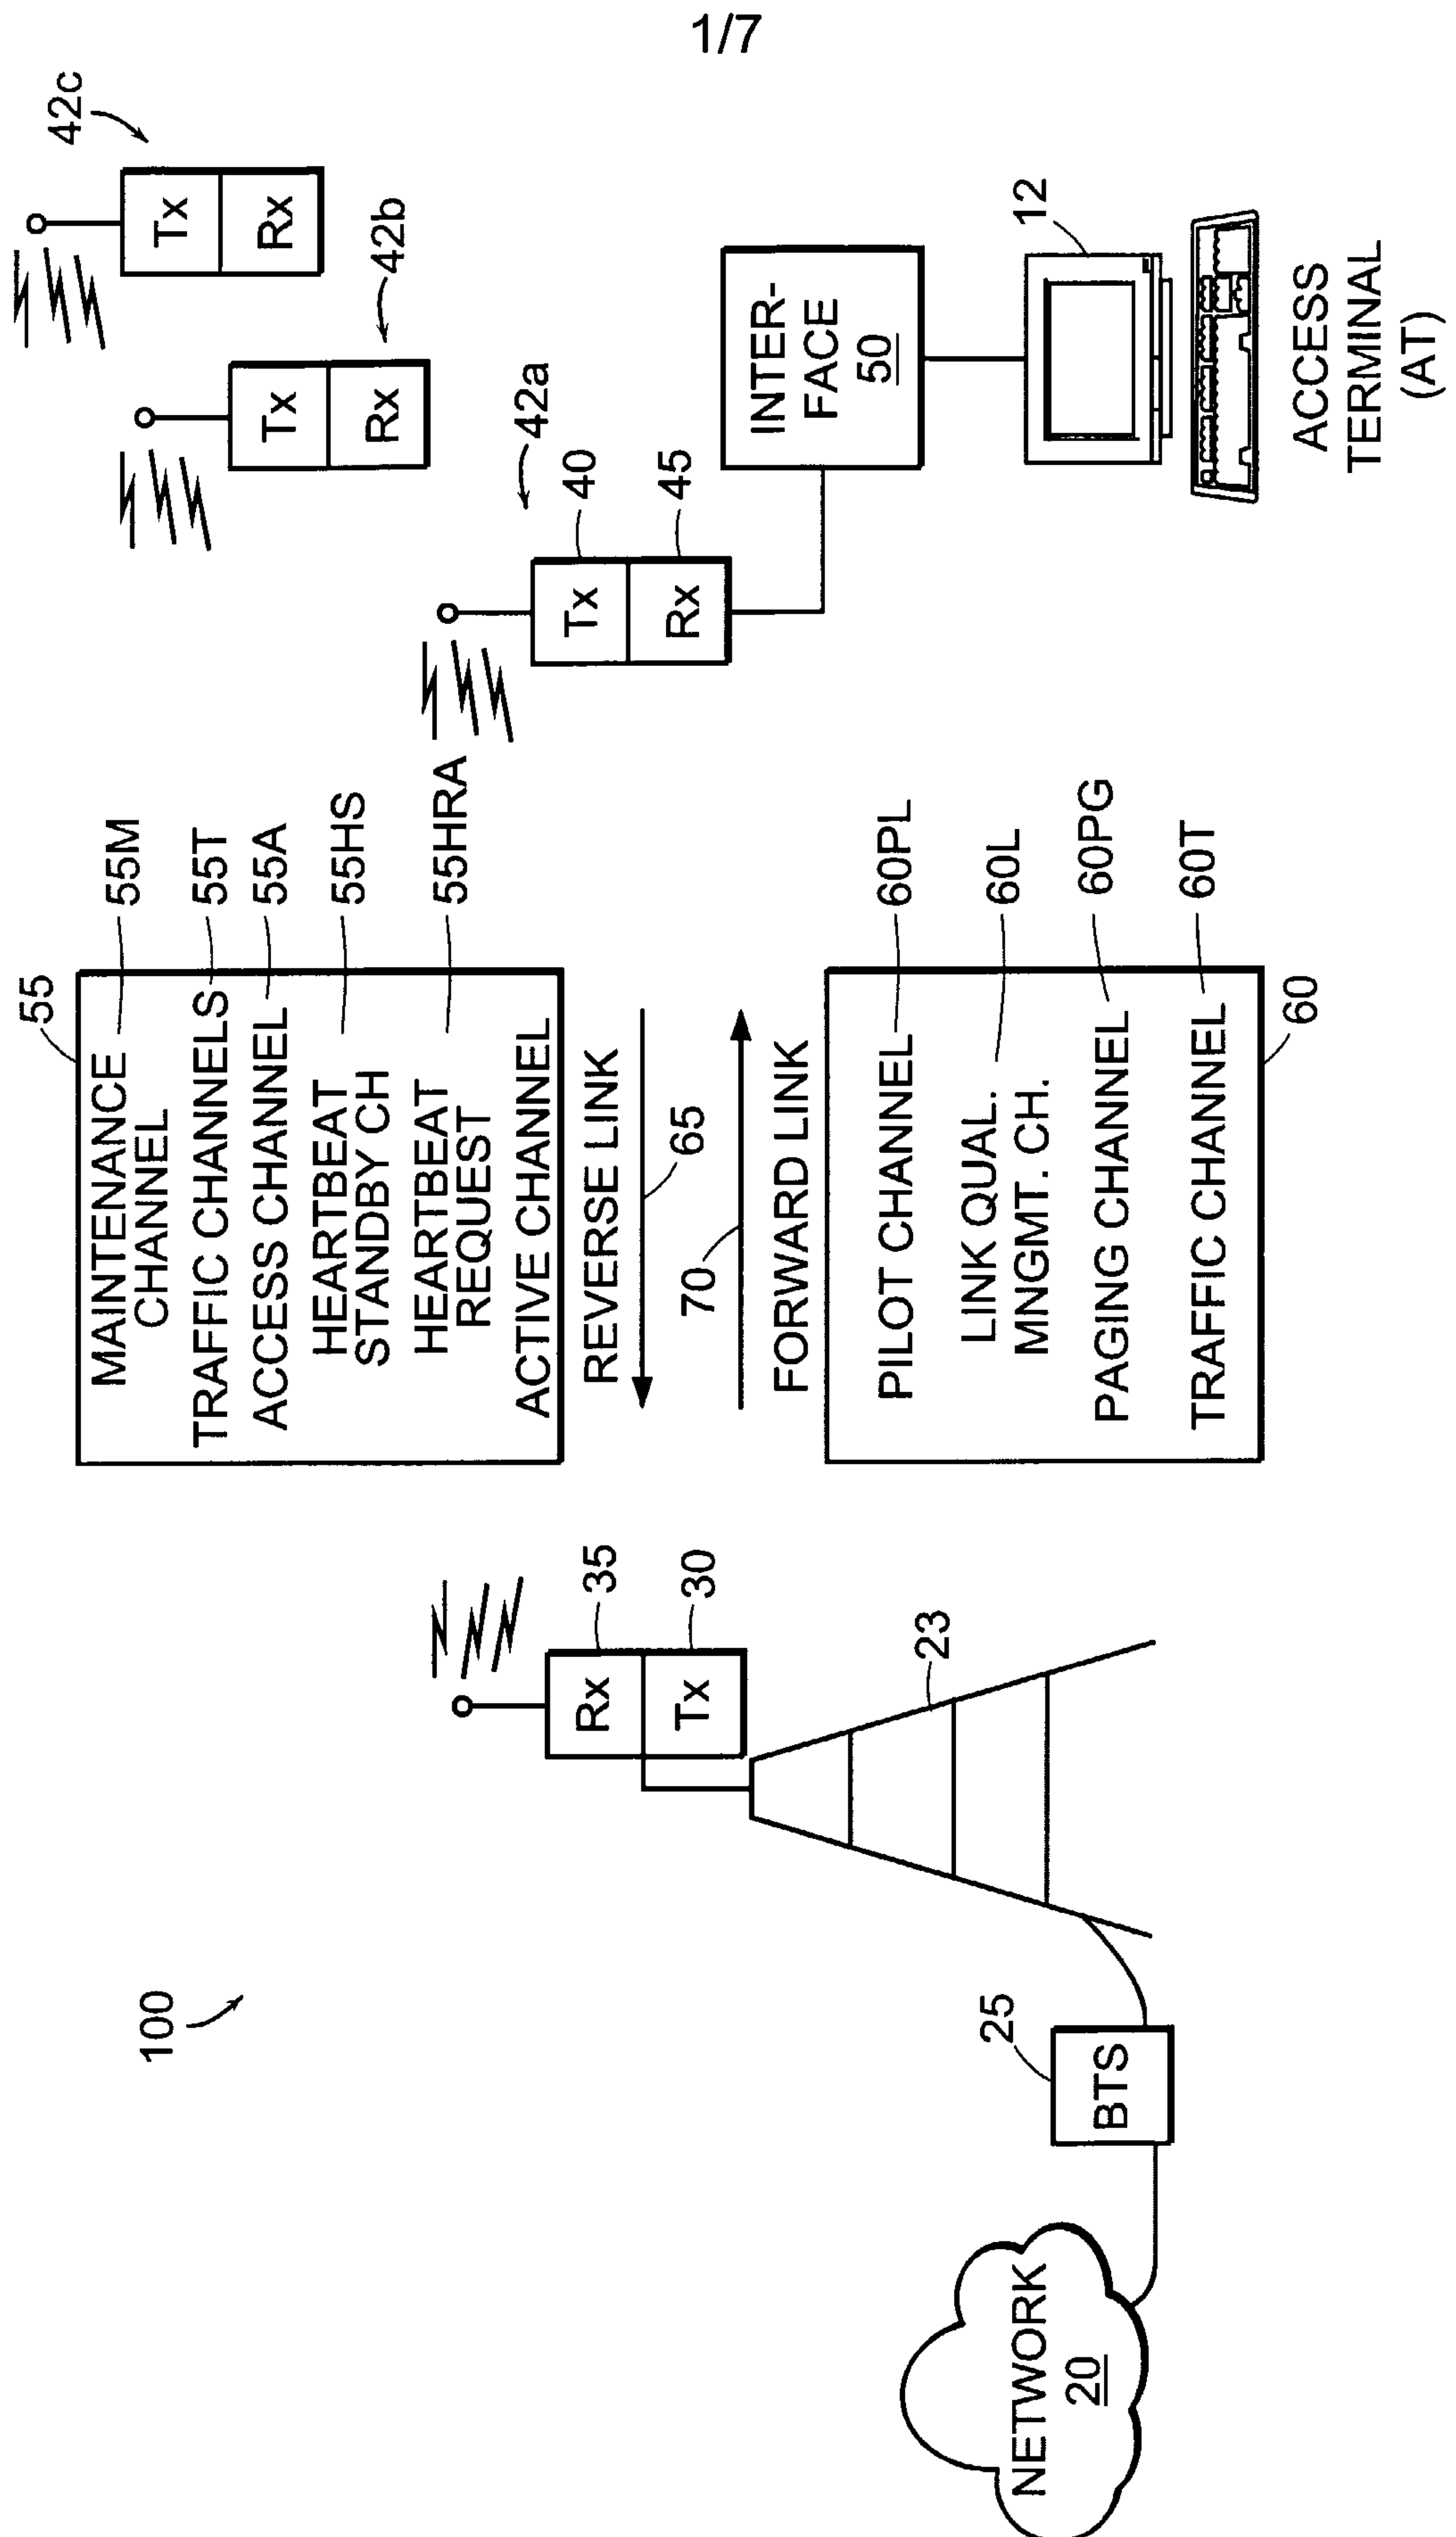


FIG. 1

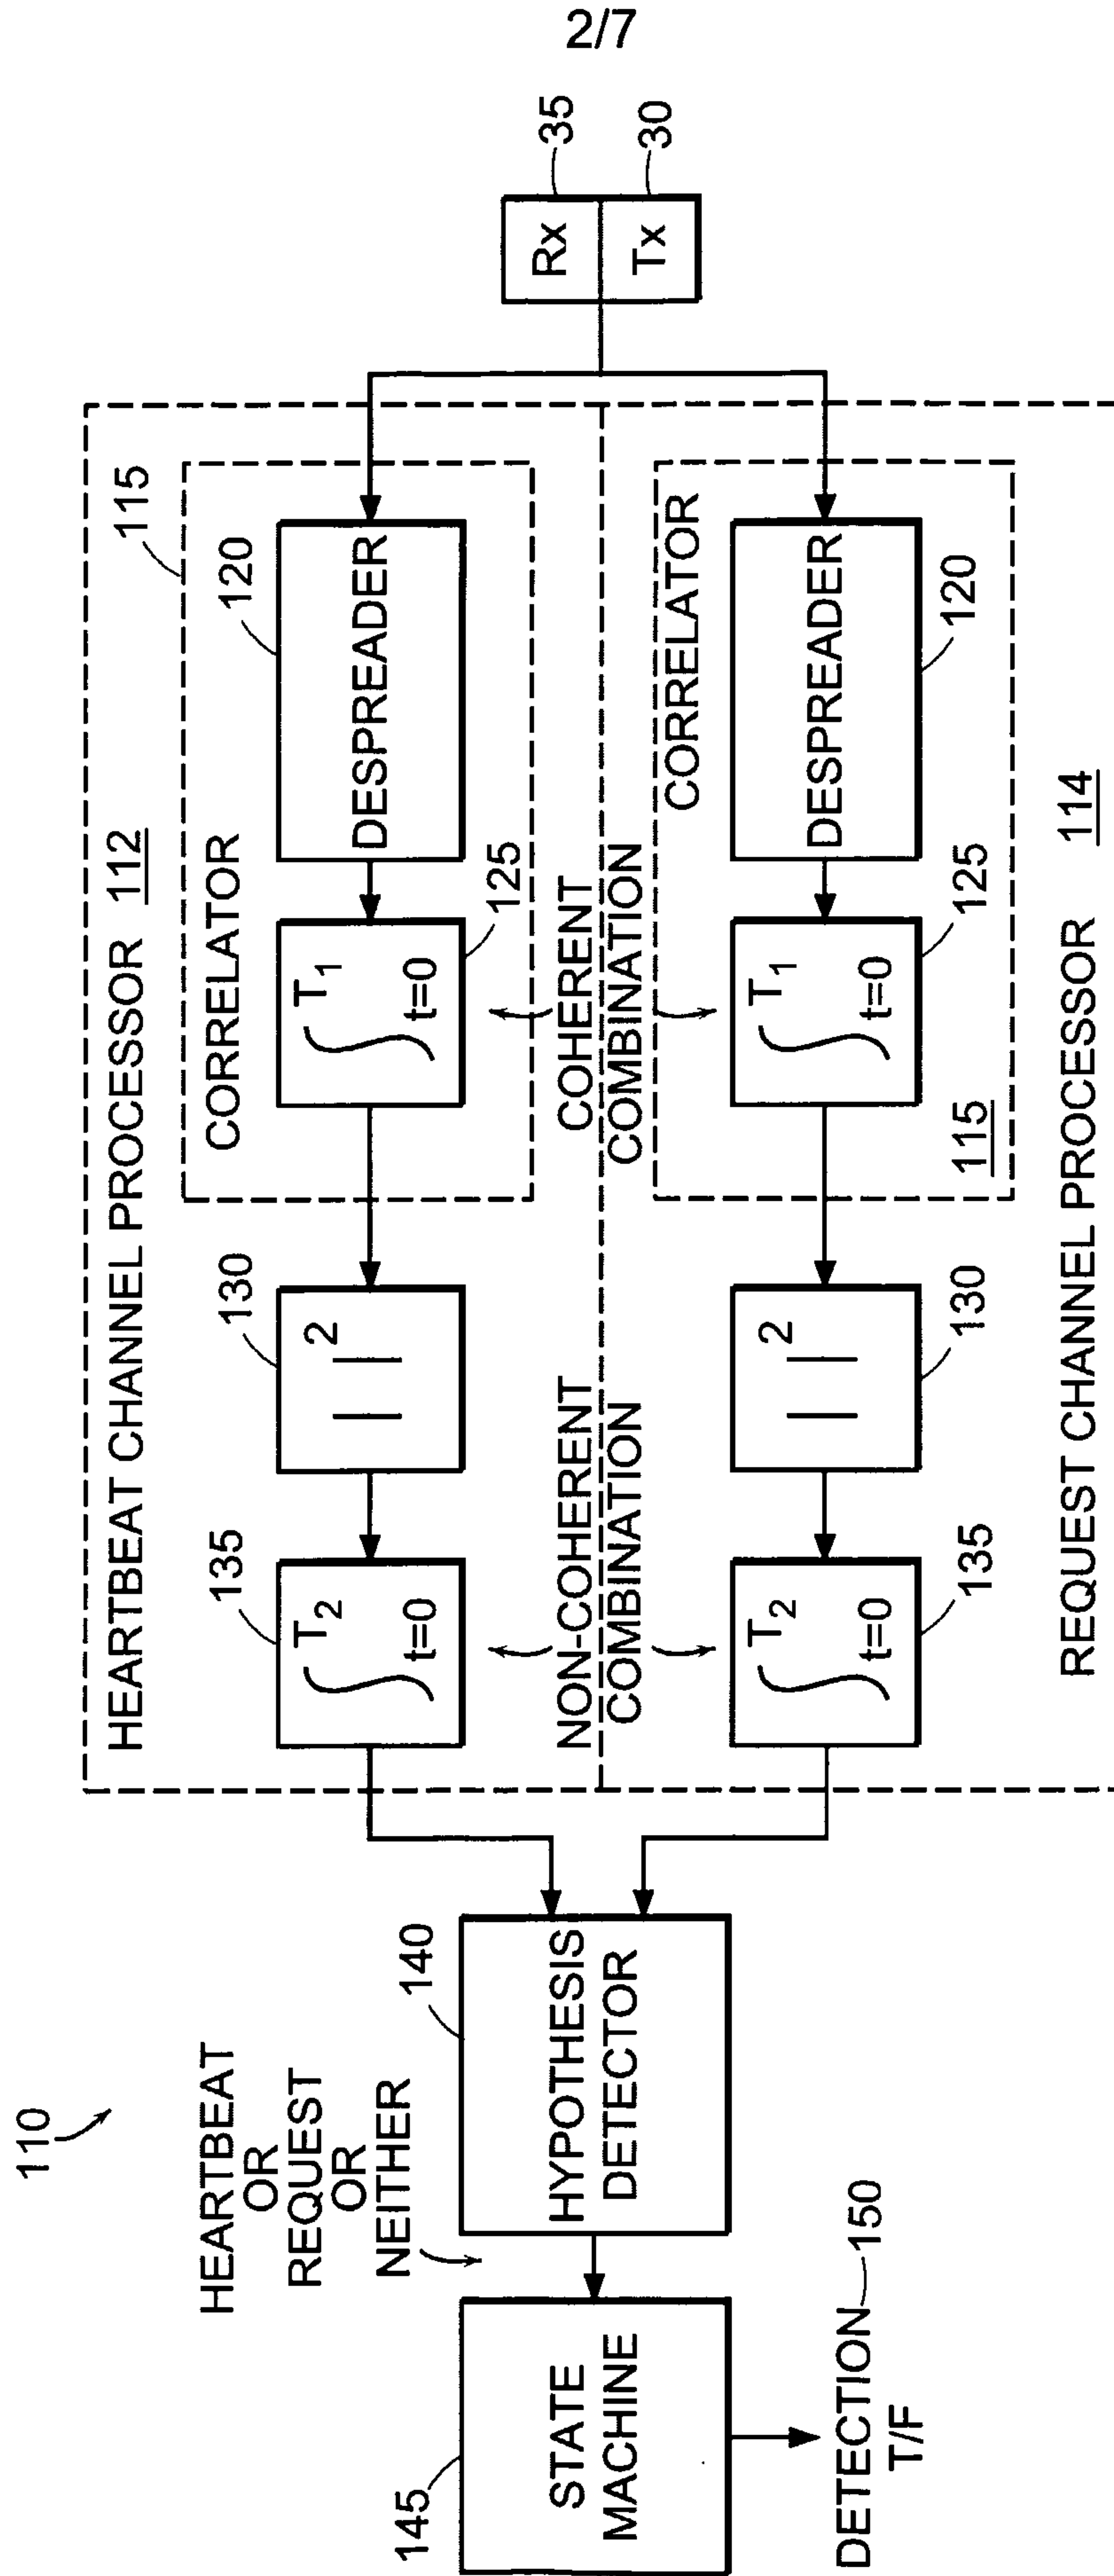
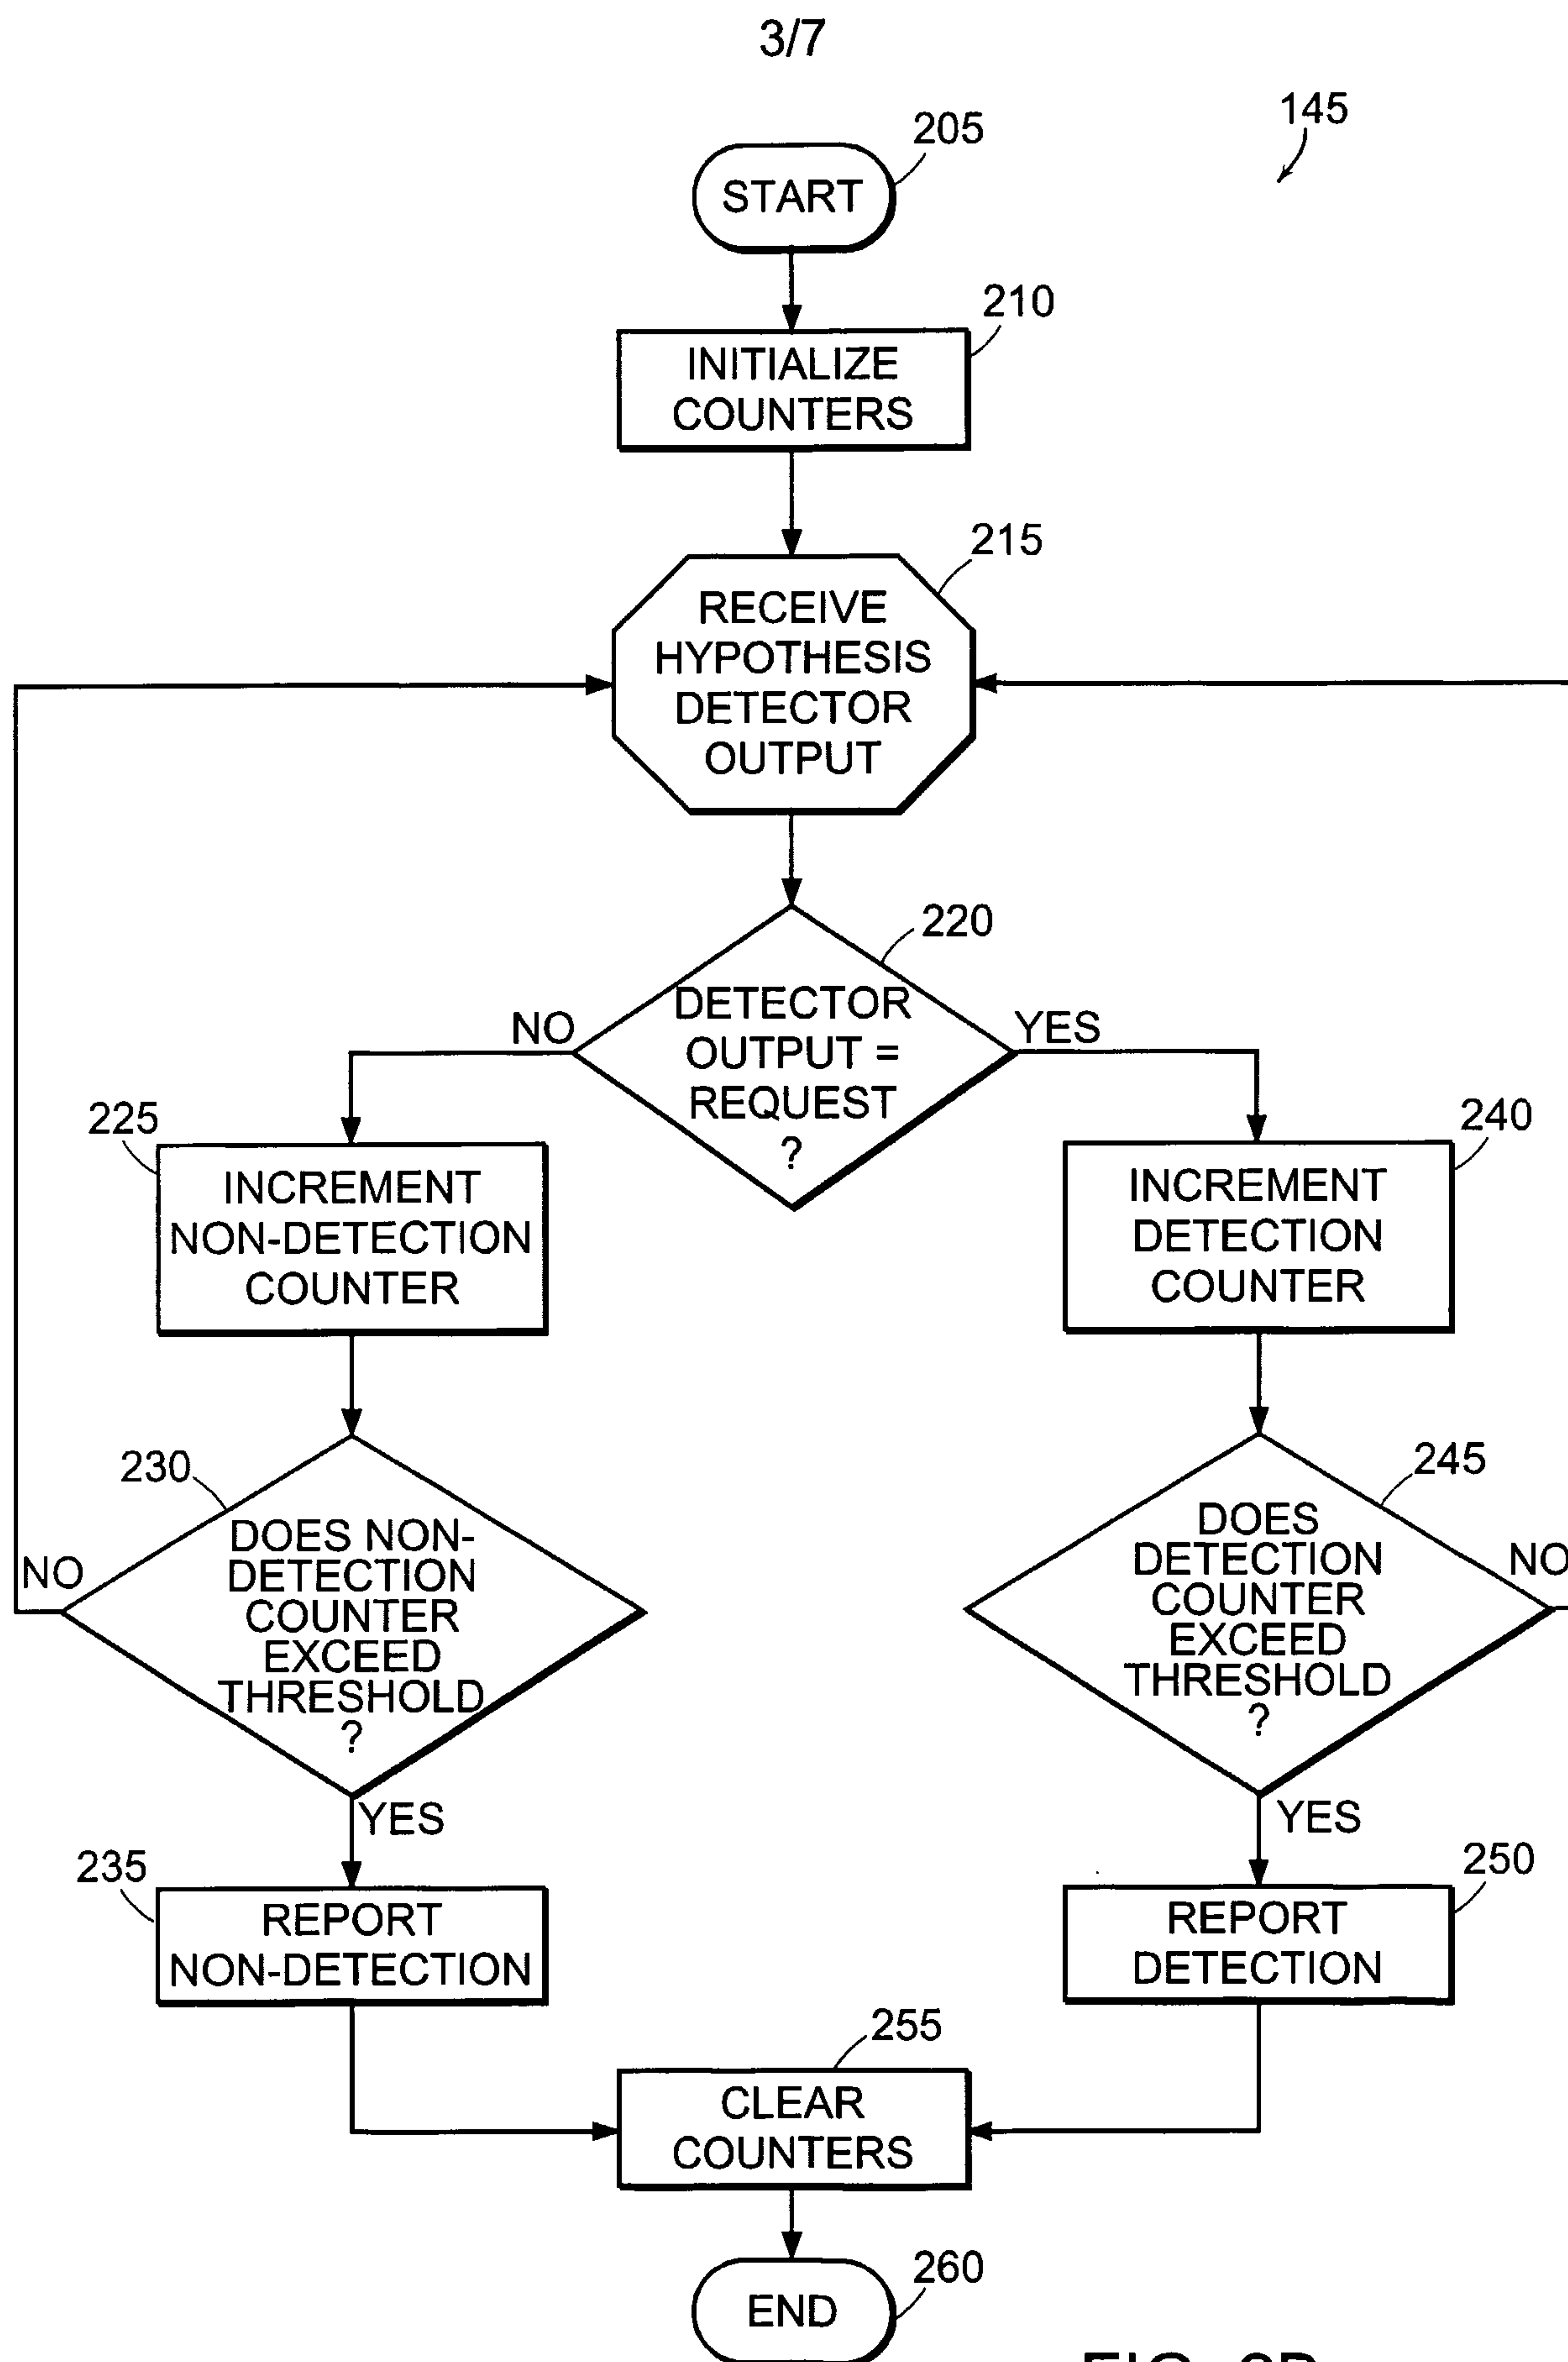


FIG. 2A



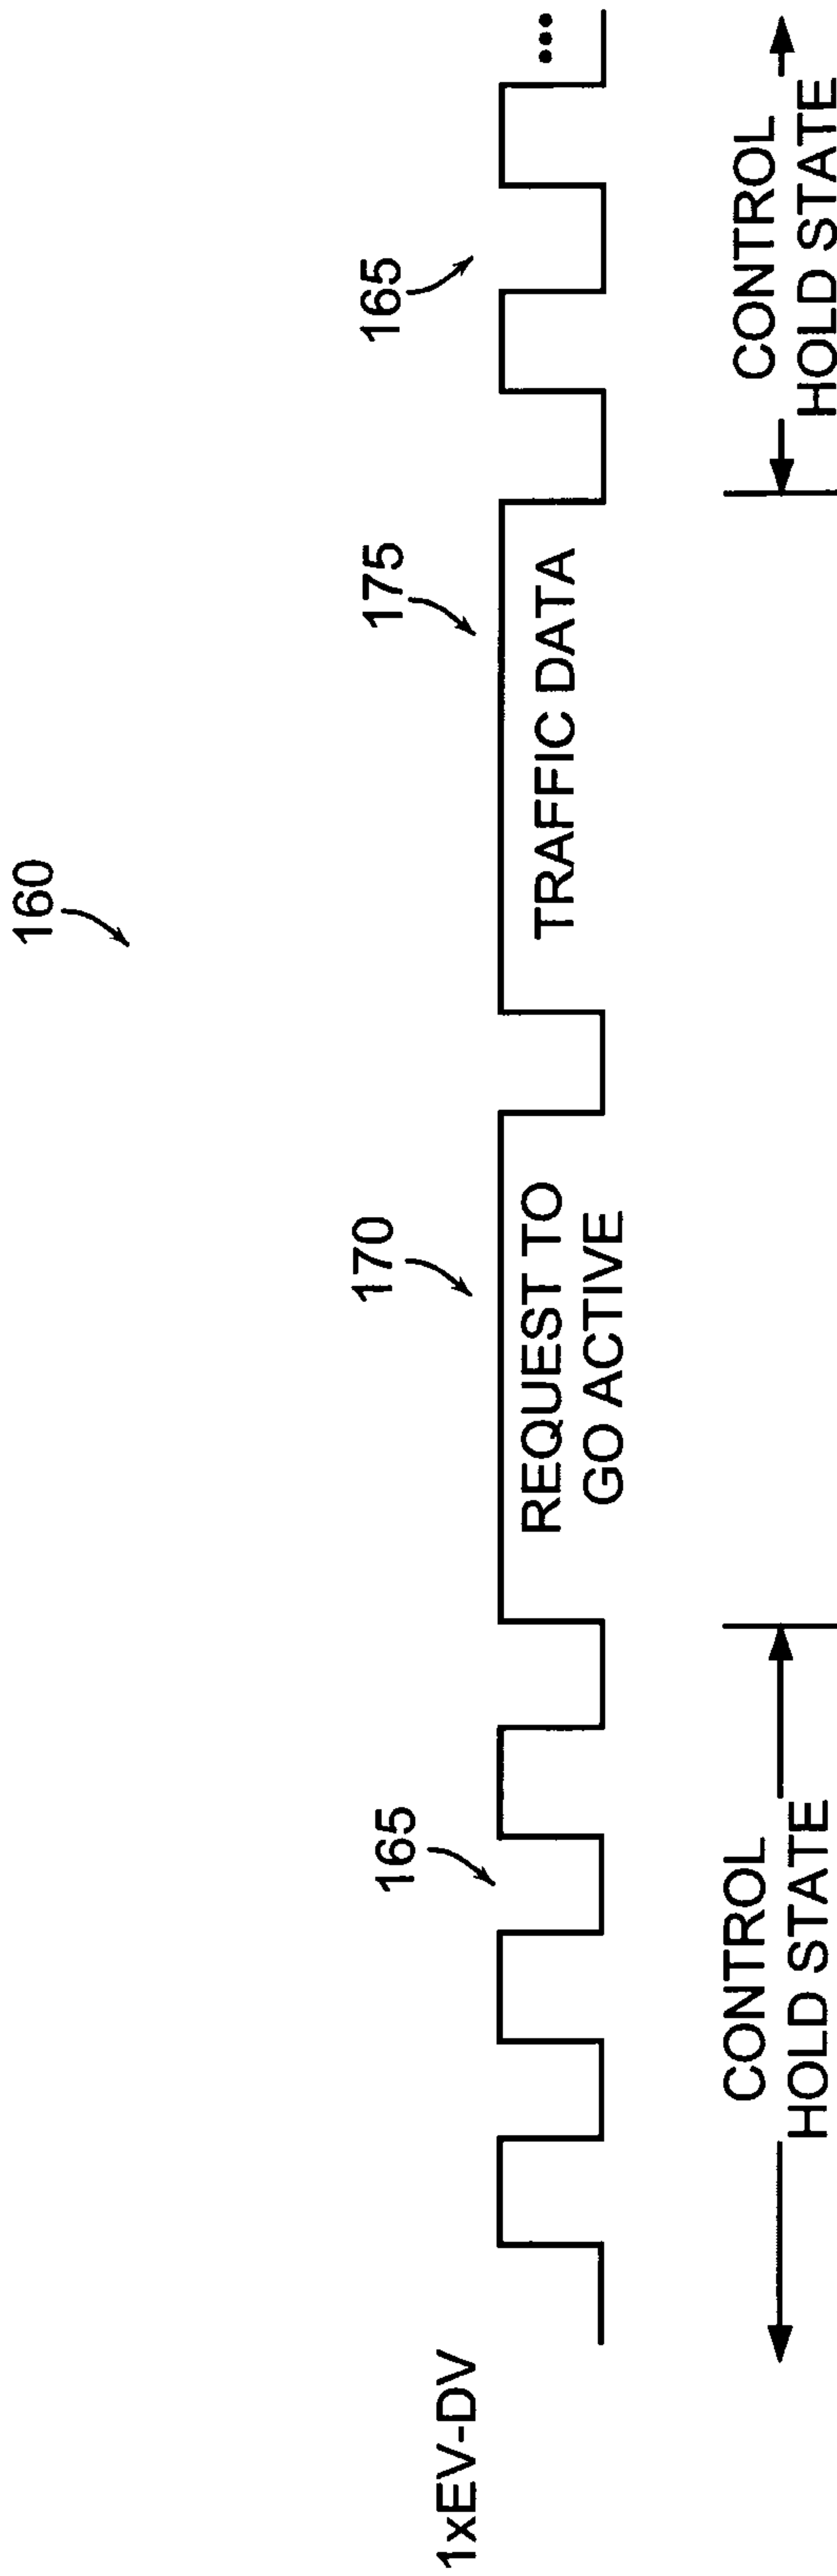


FIG. 3A

5/7

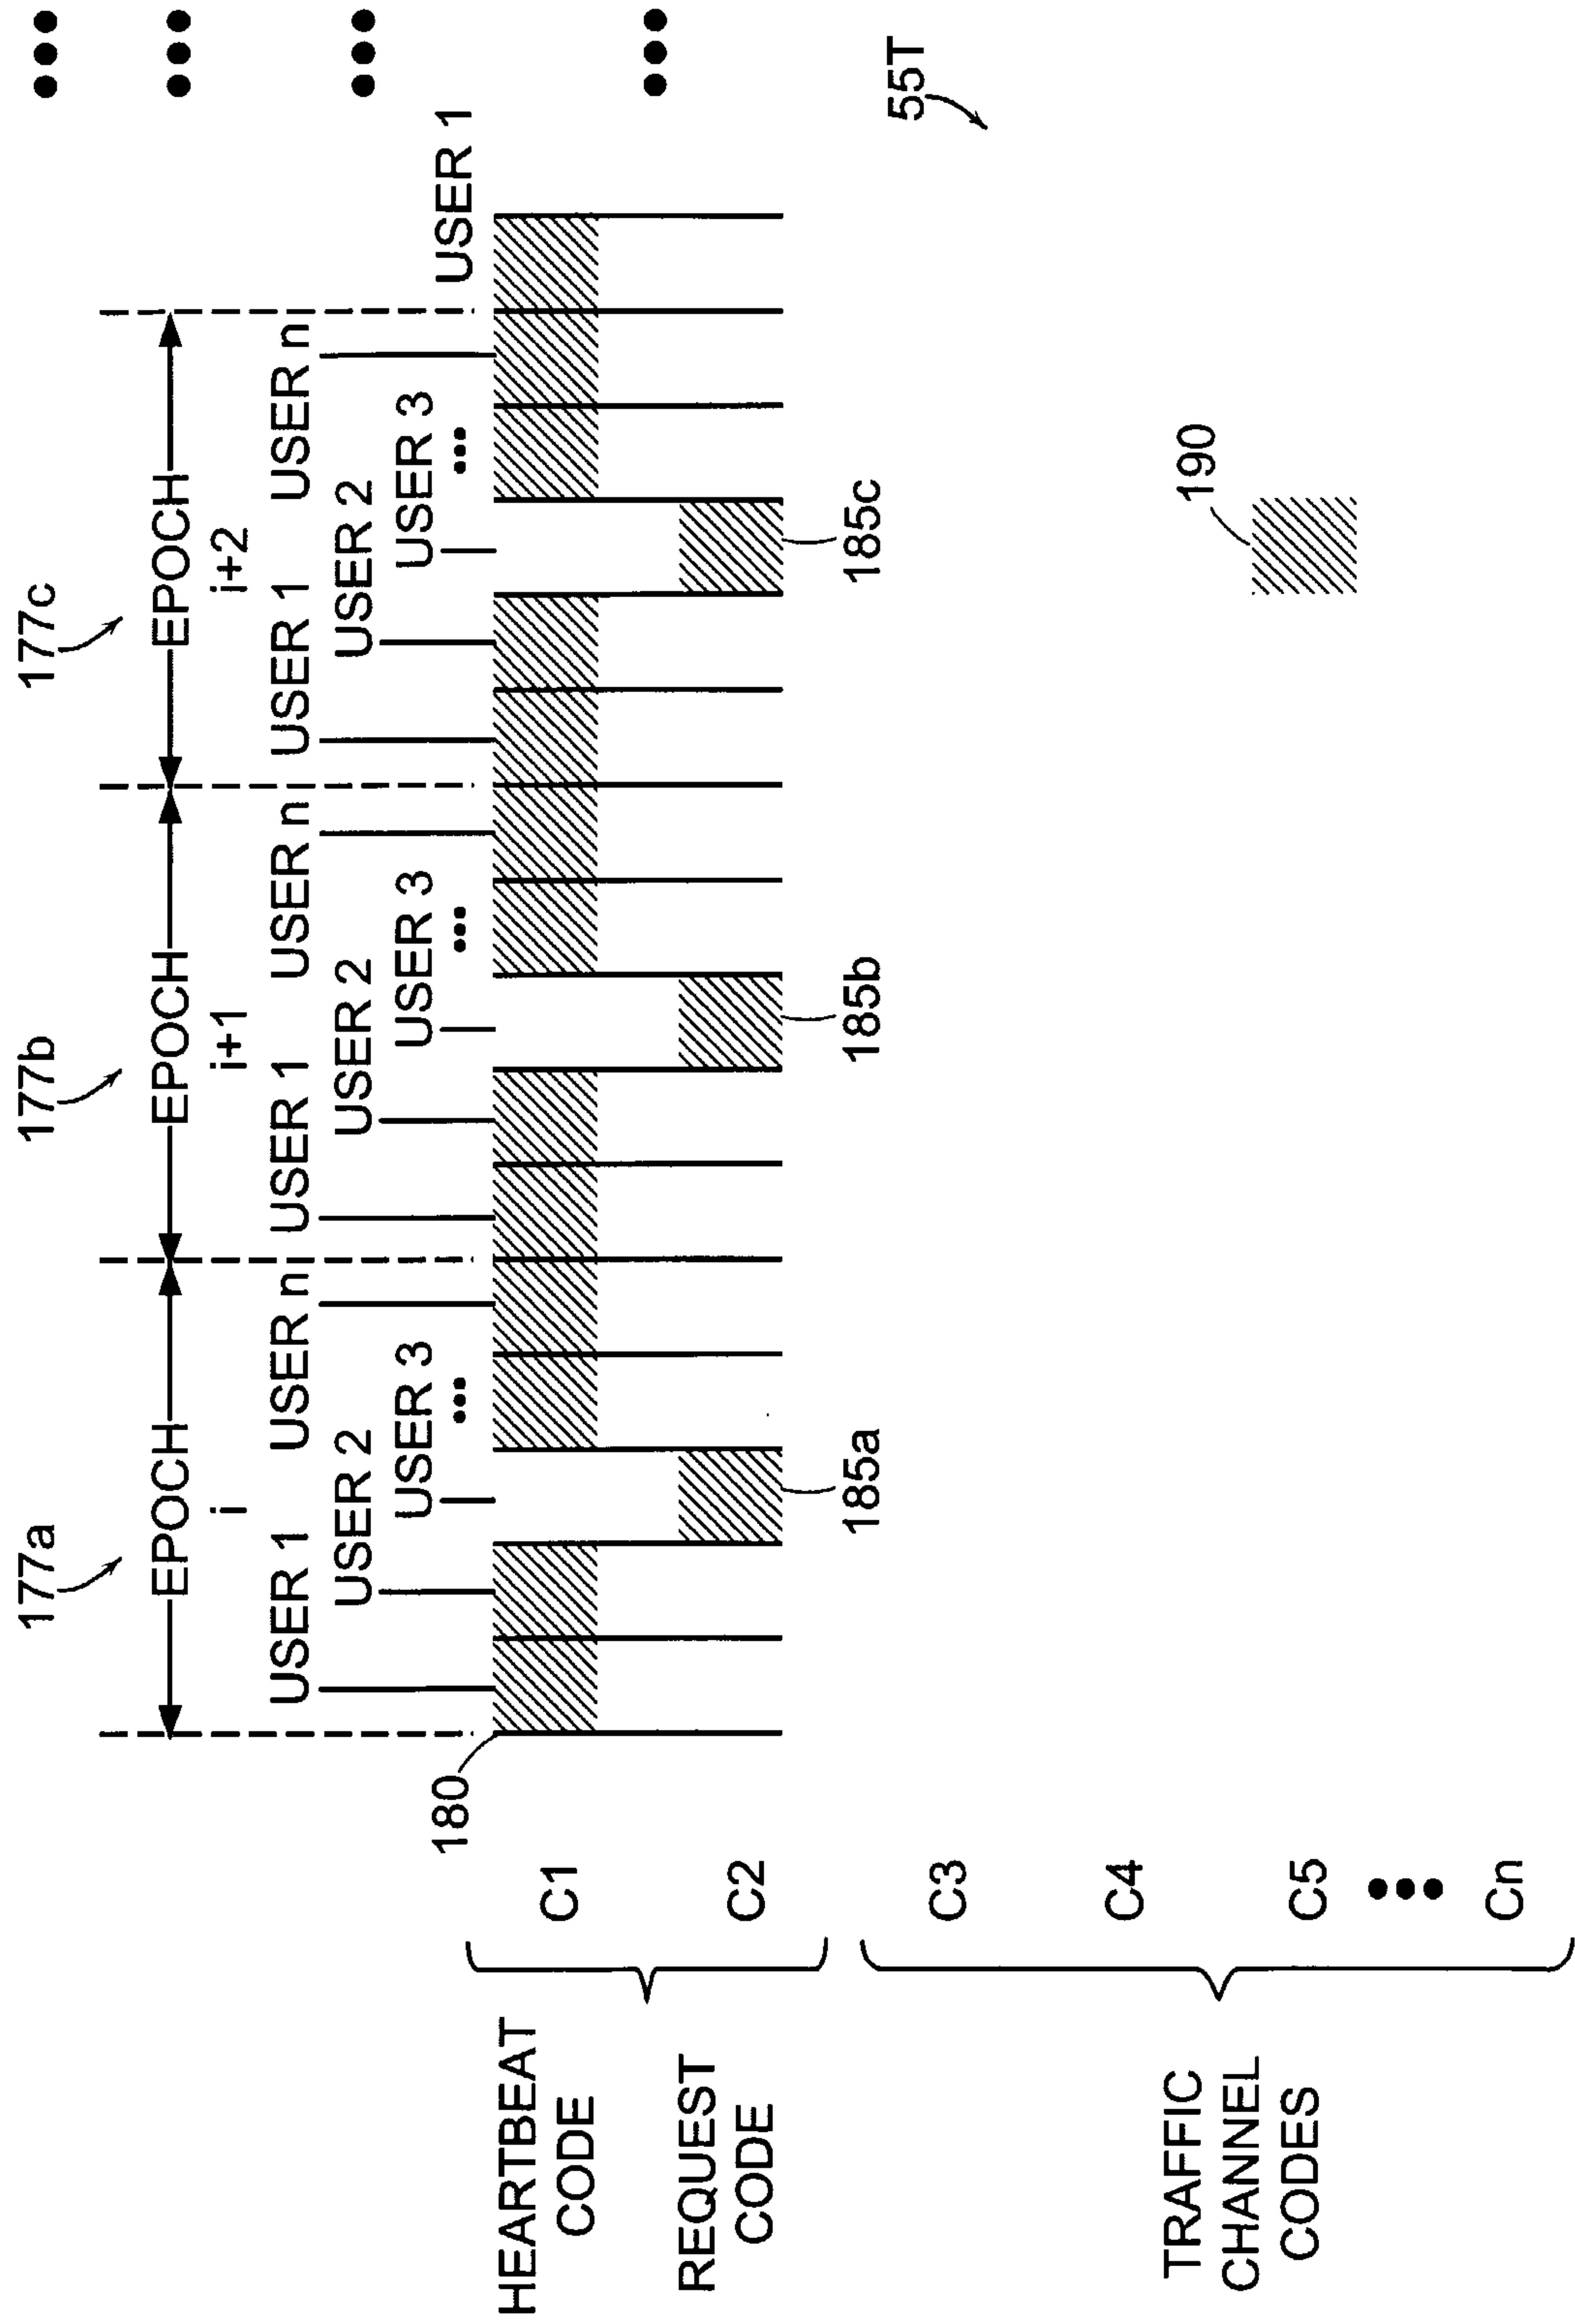


FIG. 3B

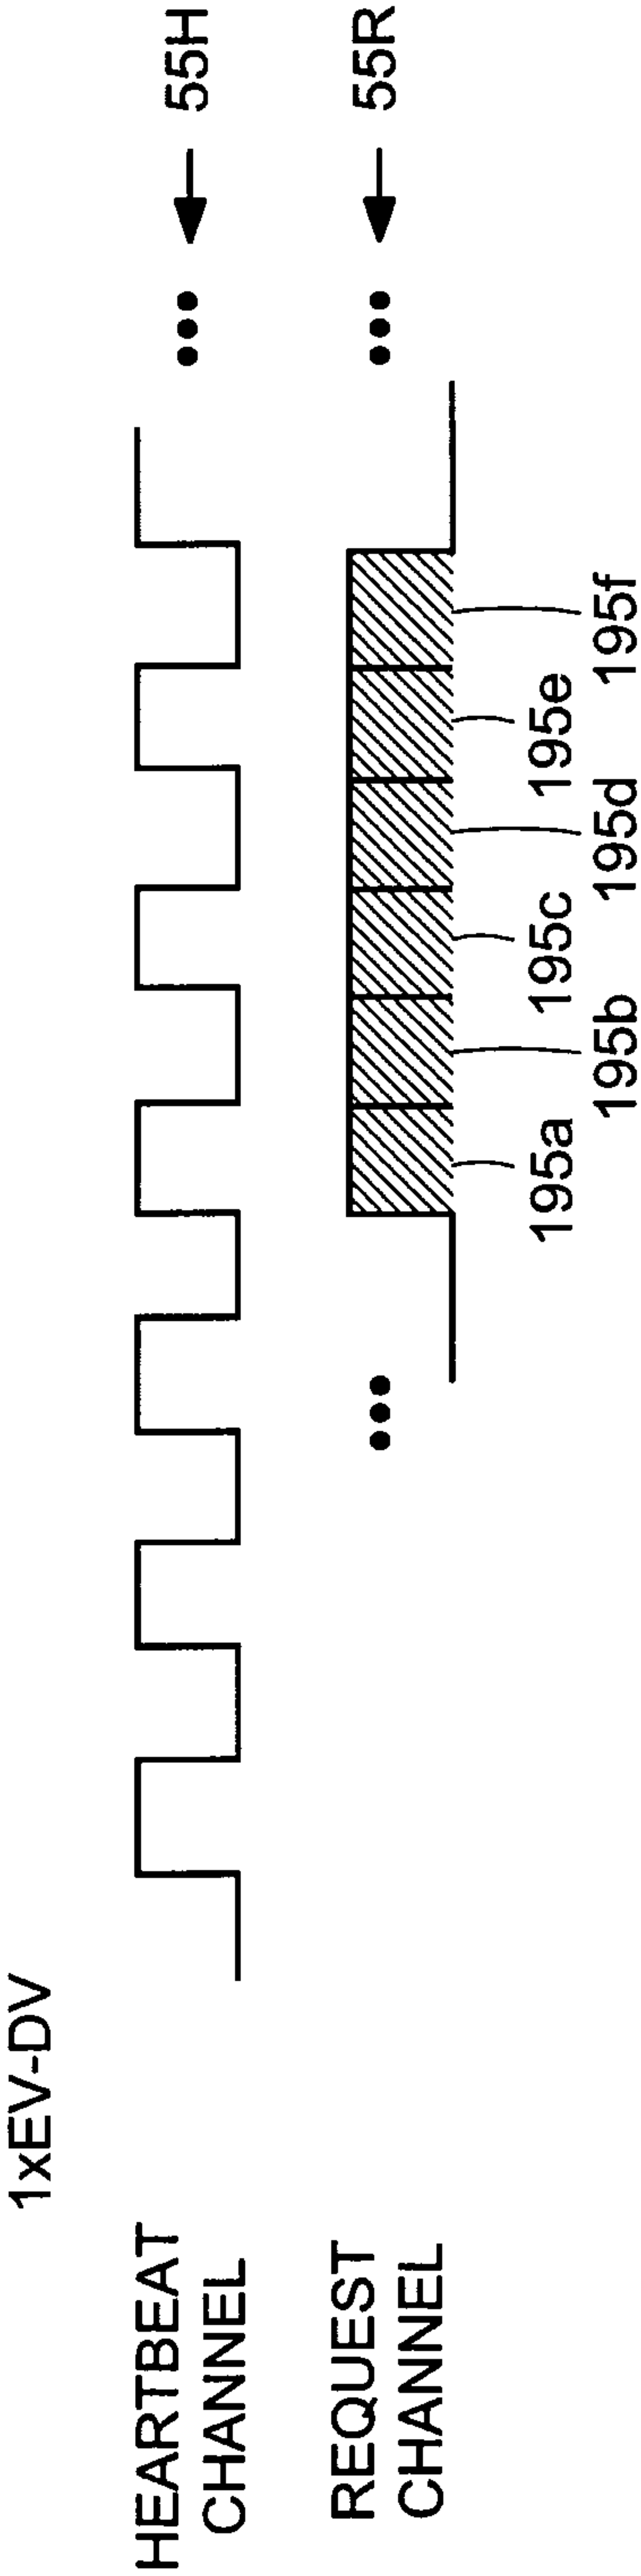


FIG. 3C

7/7

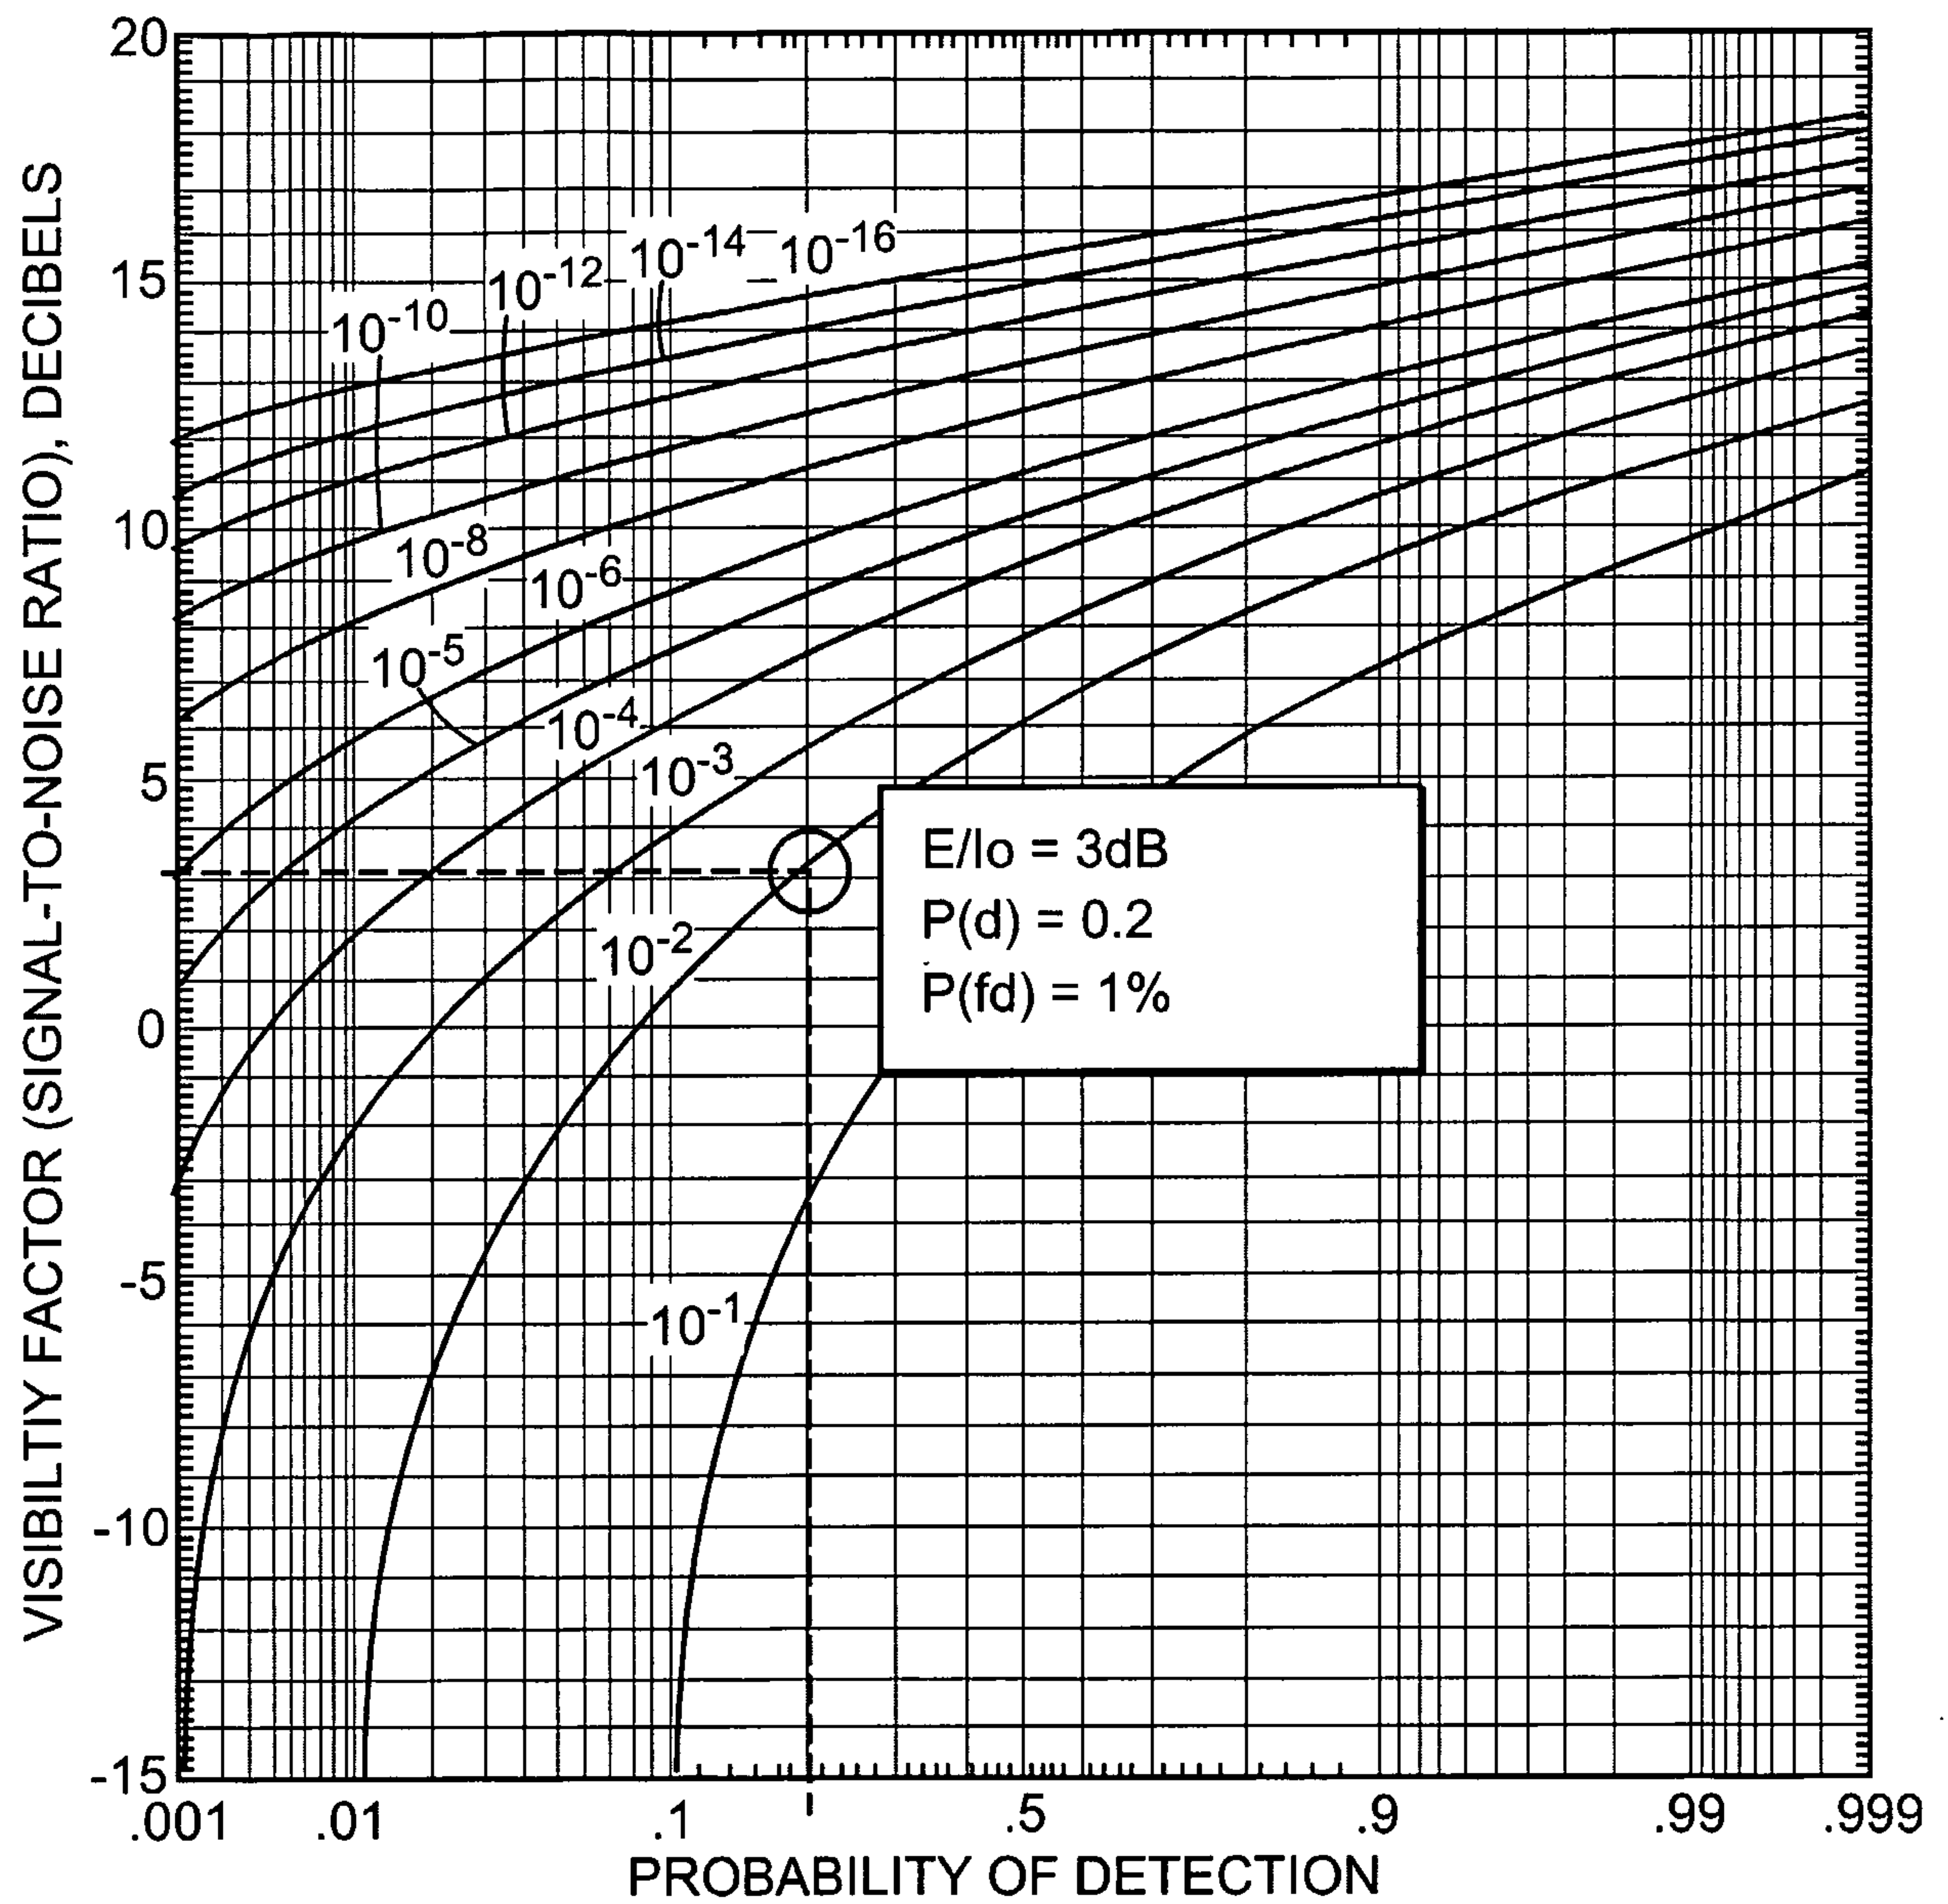


FIG. 4

