



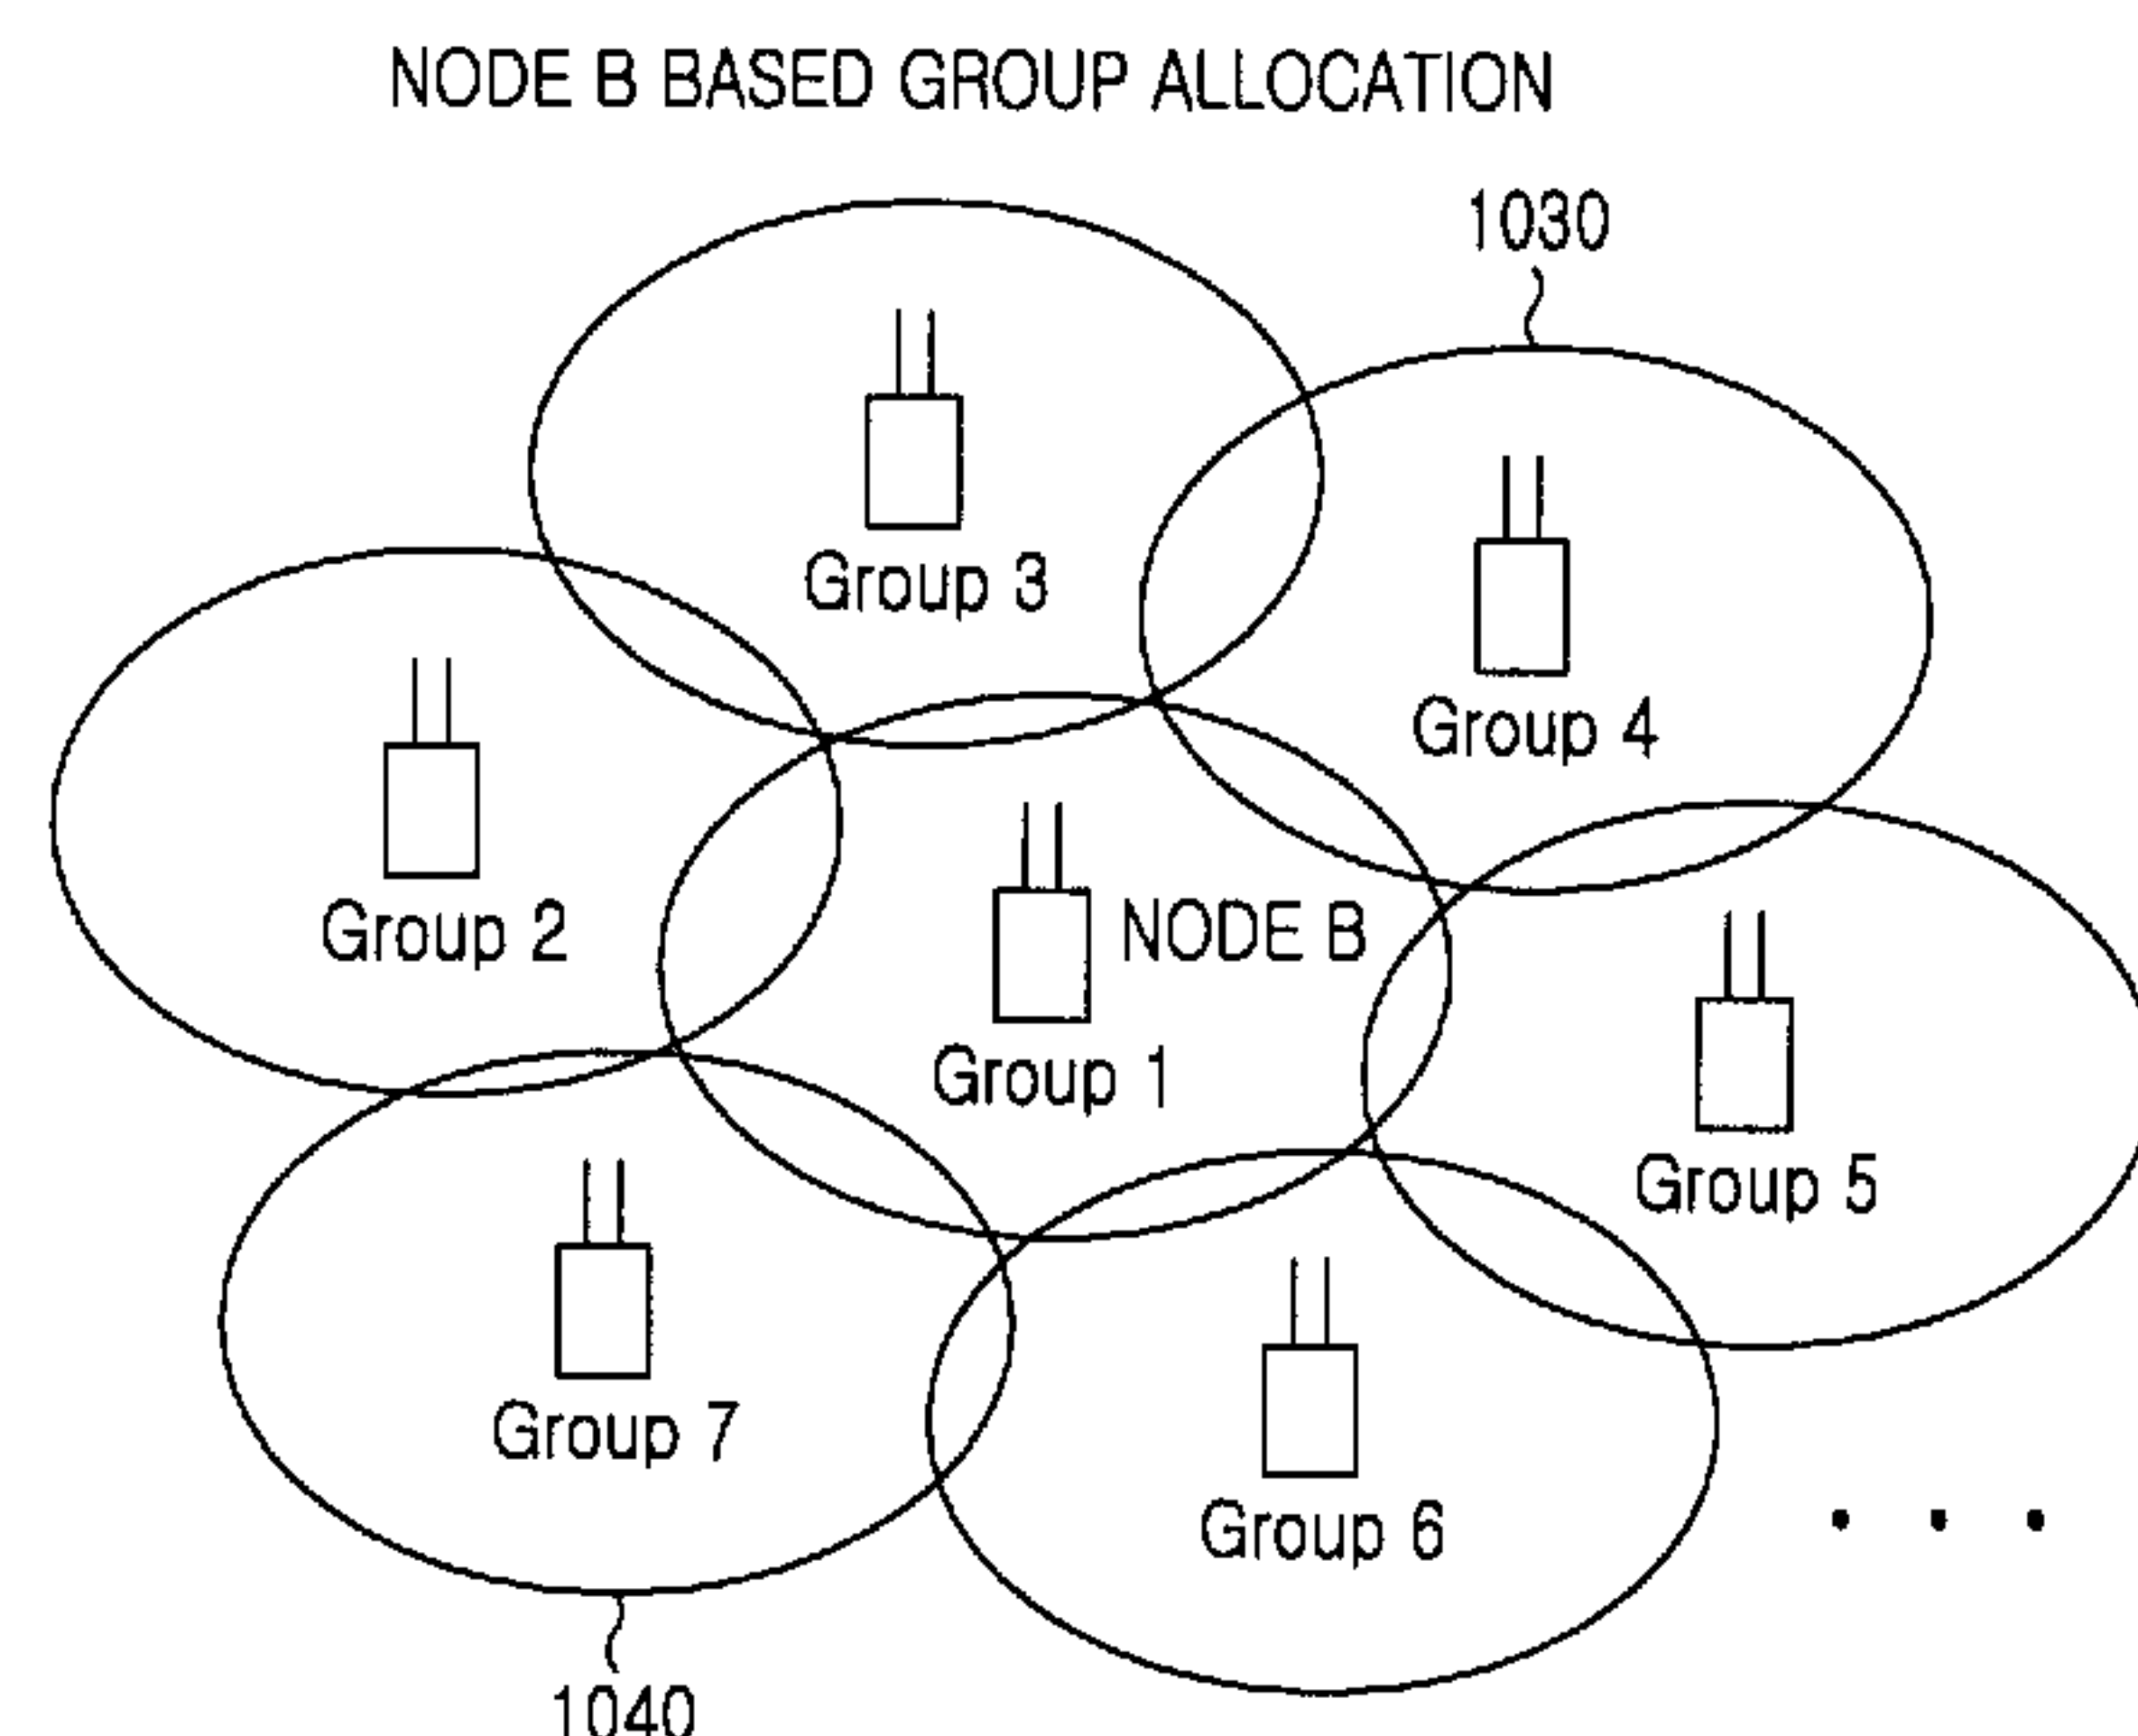

(86) Date de dépôt PCT/PCT Filing Date: 2008/09/03
(87) Date publication PCT/PCT Publication Date: 2009/03/12
(45) Date de délivrance/Issue Date: 2015/11/10
(85) Entrée phase nationale/National Entry: 2010/03/03
(86) N° demande PCT/PCT Application No.: KR 2008/005188
(87) N° publication PCT/PCT Publication No.: 2009/031816
(30) Priorité/Priority: 2007/09/03 (US60/969,659)

(51) Cl.Int./Int.Cl. *H04B 7/26* (2006.01)
(72) Inventeurs/Inventors:
PAPASAKELLARIOU, ARIS, US;
CHO, JOON-YOUNG, KR
(73) Propriétaire/Owner:
SAMSUNG ELECTRONICS CO., LTD., KR
(74) Agent: MARKS & CLERK

(54) Titre : SAUT DE SEQUENCE DANS DES SYSTEMES DE COMMUNICATION AMRF MONOPORTEUSE
(54) Title: SEQUENCE HOPPING IN SC-FDMA COMMUNICATION SYSTEMS

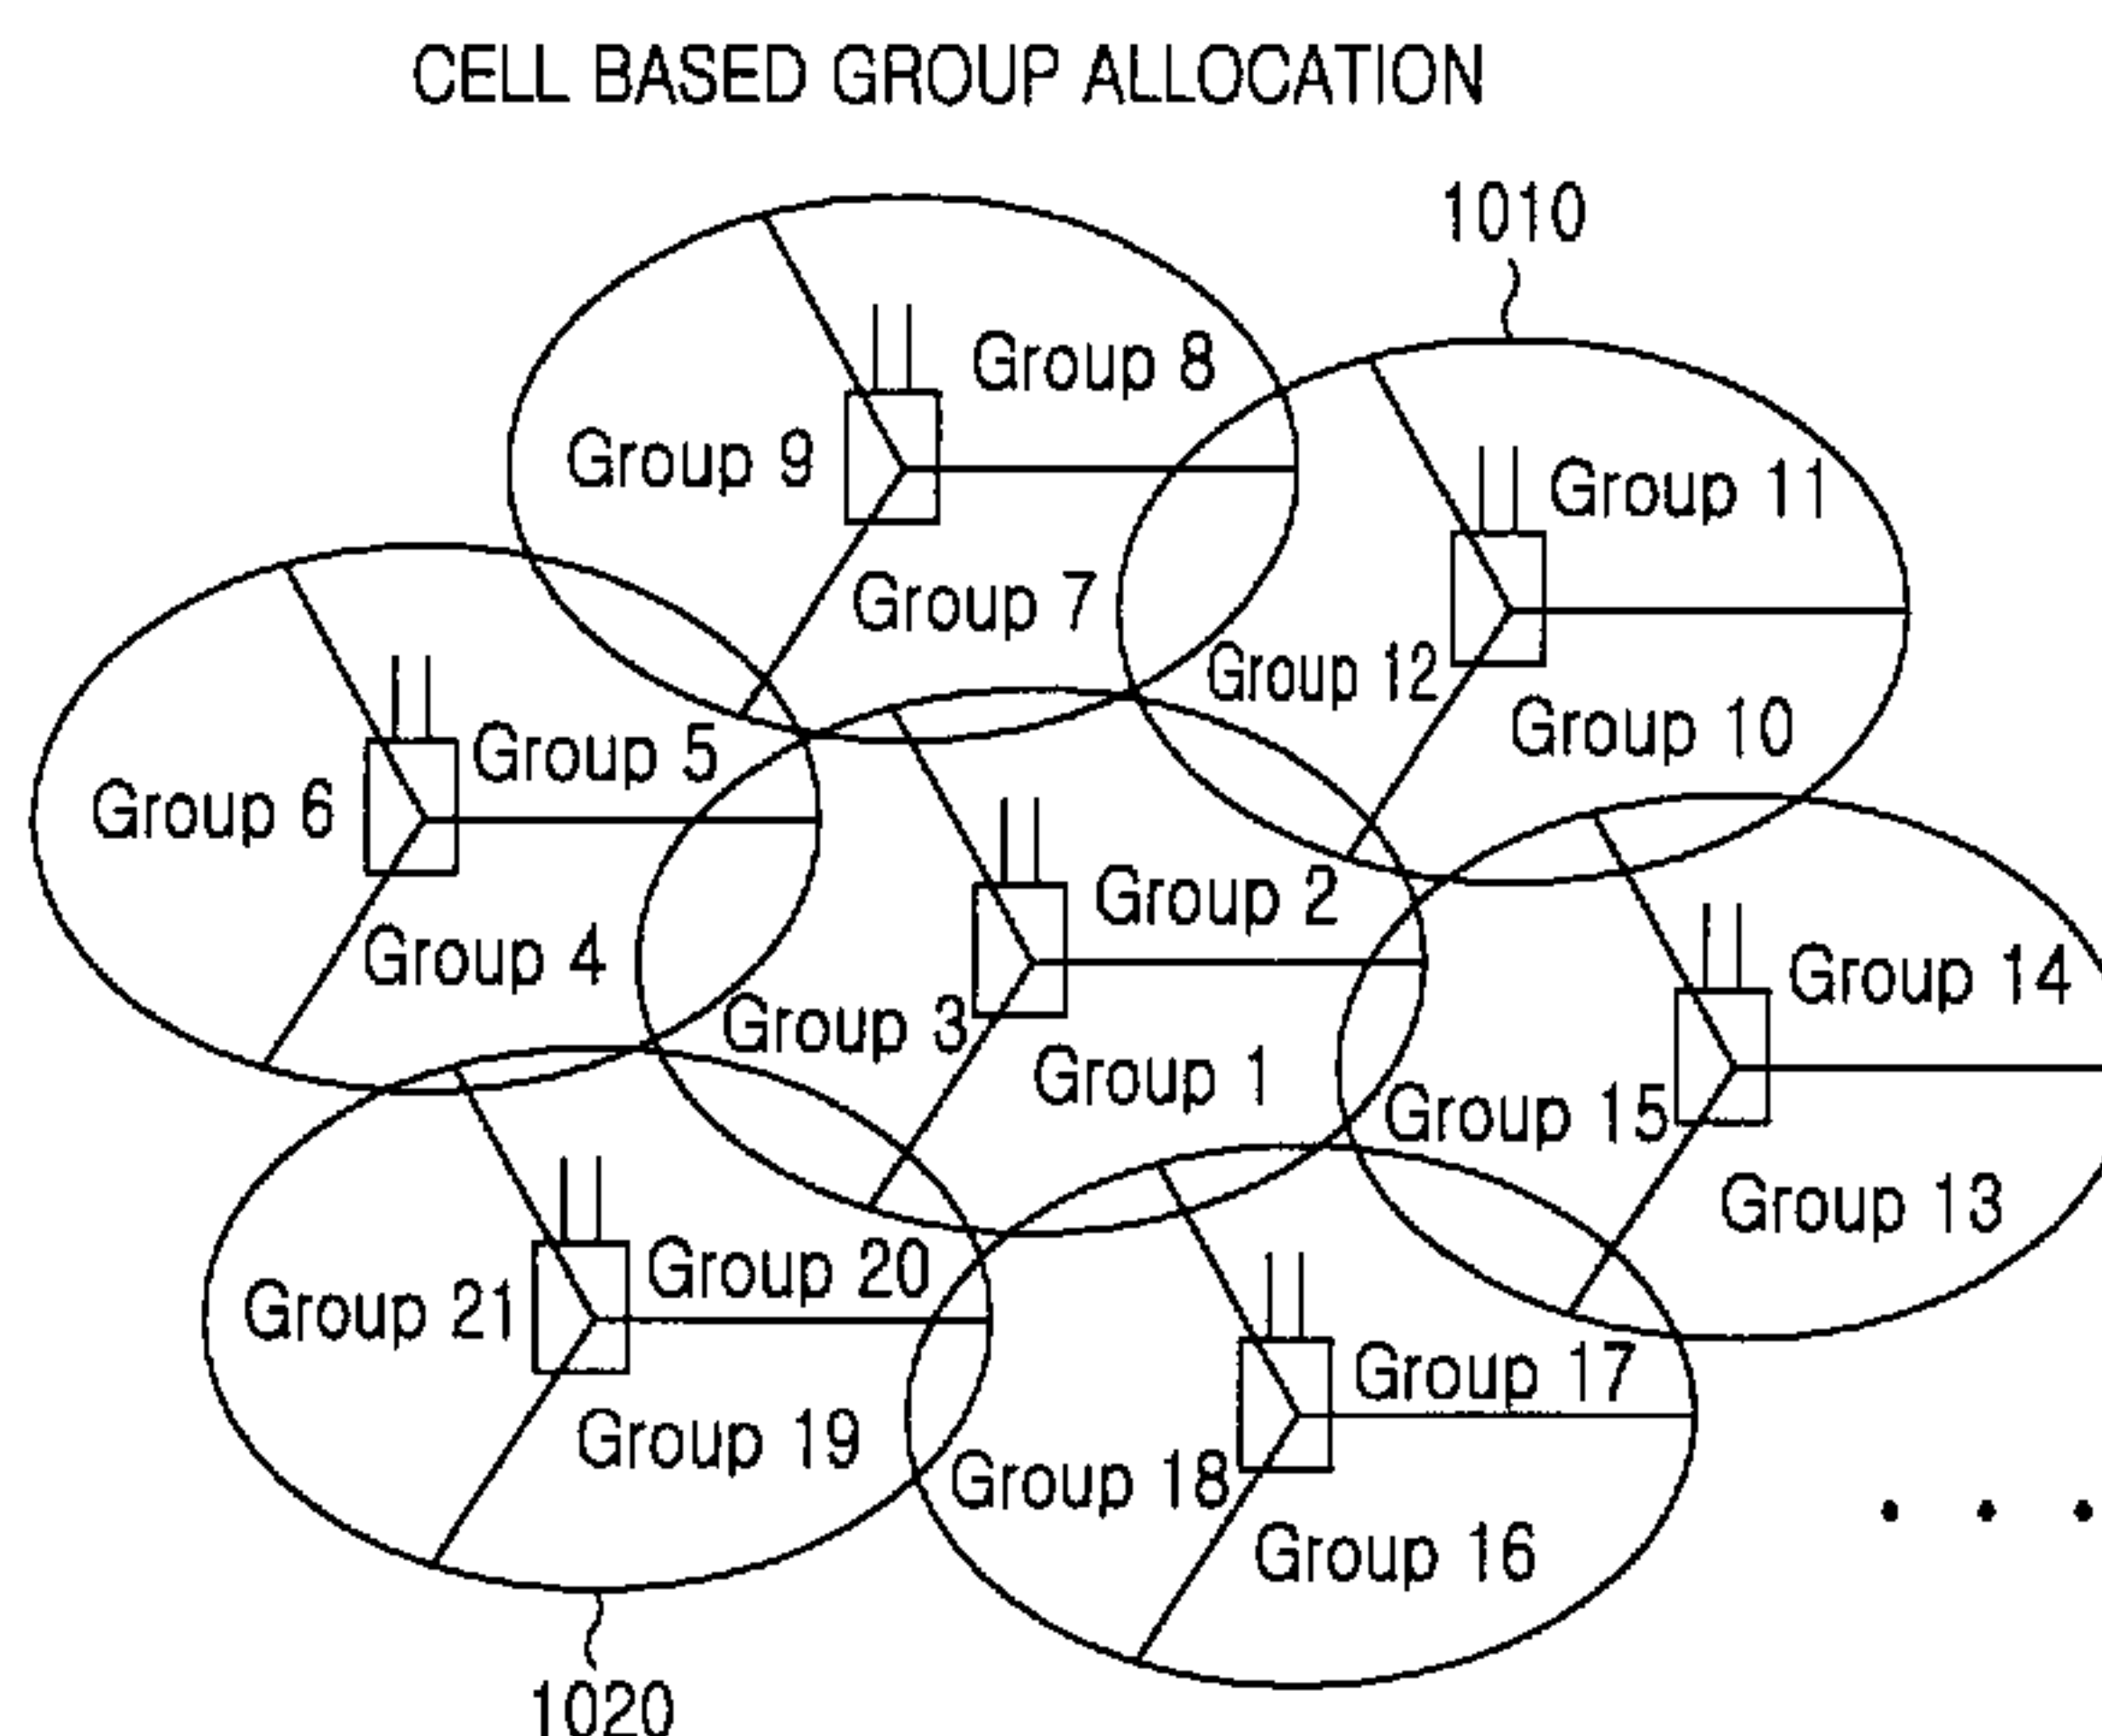

(57) **Abrégé/Abstract:**

A method and apparatus are provided for the selection of sequences used for the transmission of signals from user equipments in a cellular communication system. The sequences can be selected either through planning or through pseudo-random hopping among a set of sequences. With planning, the serving Node B signals the sequence assignment for each cell, which remains invariable in time. With pseudo-random sequence hopping, the serving Node B signals the initial sequence, from a set of sequences, which can be different among cells. The initial sequence used in the control (or data) channel is signaled by the serving Node B. The initial sequence used in the data (or control) channel is selected to be the sequence in a set of sequences with number equal to a shift value relative to the first sequence as signaled by the serving Node B for the control (or data) channel.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



PCT



(43) International Publication Date
12 March 2009 (12.03.2009)

(10) International Publication Number
WO 2009/031816 A1

(51) International Patent Classification:
H04B 7/26 (2006.01)

(21) International Application Number:
PCT/KR2008/005188

(22) International Filing Date:
3 September 2008 (03.09.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/969,659 3 September 2007 (03.09.2007) US

(71) Applicant (for all designated States except US): **SAM-SUNG ELECTRONICS CO., LTD.** [KR/KR]; 416, Mae-tan-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do 442-742 (KR).

(72) Inventors: **PAPASAKELLARIOU, Aris**; 2128 Harold Street Unit B, Houston, TX 77098 (US).
CHO, Joon-Young; #224-101, Hwanggolmaeul 2-danji APT. Yeongtong-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do 443-744 (KR).

(74) Agent: **LEE, Keon-Joo**; Mihwa Building 110-2, Myongryun-dong 4-ga, Chongro-gu, Seoul 110-524 (KR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(54) Title: SEQUENCE HOPPING IN SC-FDMA COMMUNICATION SYSTEMS

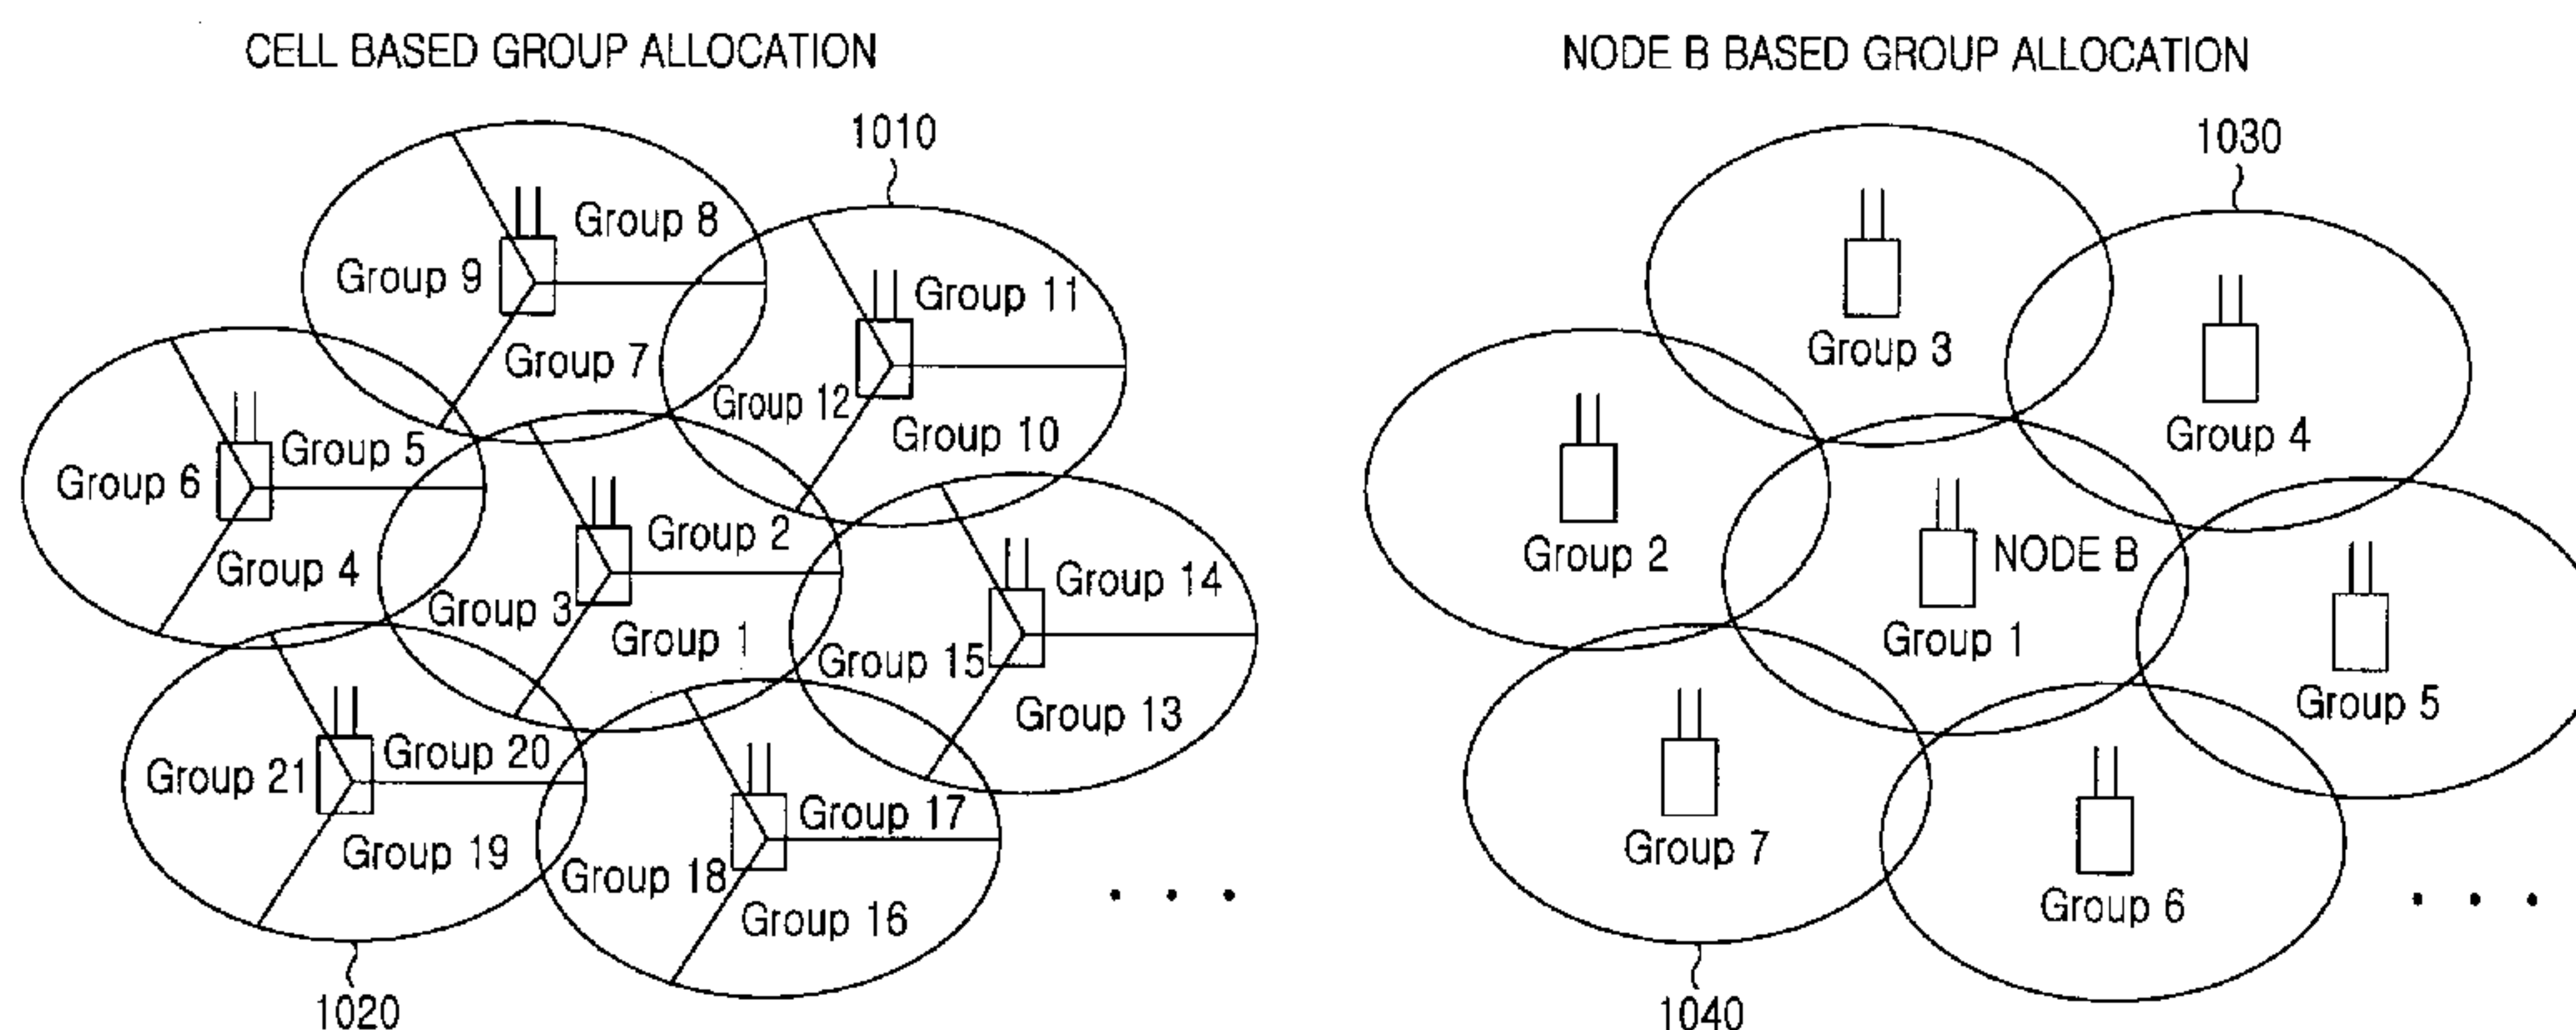


FIG.10

(57) Abstract: A method and apparatus are provided for the selection of sequences used for the transmission of signals from user equipments in a cellular communication system. The sequences can be selected either through planning or through pseudo-random hopping among a set of sequences. With planning, the serving Node B signals the sequence assignment for each cell, which remains invariable in time. With pseudo-random sequence hopping, the serving Node B signals the initial sequence, from a set of sequences, which can be different among cells. The initial sequence used in the control (or data) channel is signaled by the serving Node B. The initial sequence used in the data (or control) channel is selected to be the sequence in a set of sequences with number equal to a shift value relative to the first sequence as signaled by the serving Node B for the control (or data) channel.

WO 2009/031816 A1

SEQUENCE HOPPING IN SC-FDMA COMMUNICATION SYSTEMS

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates generally to wireless communication systems and, more particularly, to a Single-Carrier Frequency Division Multiple Access (SC-FDMA) communication system that is further considered in the development of the 3rd Generation Partnership Project (3GPP) Evolved Universal Terrestrial Radio Access (E-UTRA) long term evolution (LTE).

2. Description of the Art

Methods and apparatus are considered for the functionality and implementation of hopping for sequences used in the construction of Reference Signals (RS) or control signals transmitted in SC-FDMA communication systems.

The Uplink (UL) of the communication system is assumed, which corresponds to signal transmissions from mobile User Equipments (UEs) to a serving base station (Node B). A UE, also commonly referred to as terminal or mobile station, may be fixed or mobile and may be a wireless device, a cellular phone, a personal computer device, a wireless modem card, etc. A Node B is generally a fixed station and may also be called a Base Transceiver System (BTS), an access point, or some other terminology. A Node B may control multiple cells in a cellular communication system, as it is known in the art.

Several types of signals need to be supported for the proper functionality of the communication system. In addition to data signals, which convey the information content of the communication, control signals also need to be transmitted from UEs to their serving Node B in the UL and from the serving Node B to UEs in the downlink (DL) of the communication system. The DL refers to the communication from the Node B to UEs. Additionally, a UE having data or control transmission also transmits RSs, also known as pilots. These RSs primarily serve to provide coherent demodulation for the transmitted data or control signals by a UE.

-2-

The UEs are assumed to transmit data or control signals over a Transmission Time Interval (TTI), which is assumed to correspond to a sub-frame. The sub-frame is the time unit of a frame, which may consist of ten sub-frames. **FIG. 1** illustrates a block diagram of the sub-frame structure **110**. The sub-frame **110** includes two slots. Each slot **120** further includes seven symbols used for transmission of data or control signals. Each symbol **130** further includes a Cyclic Prefix (CP) in order to mitigate interference due to channel propagation effects. The signal transmission in one slot may be in the same or at a different part of the operating bandwidth (BW) than the signal transmission in the second slot. In addition to symbols carrying data or control information, some symbols are used for Reference Signal (RS) transmission **140**.

The transmission BW is assumed to include frequency resource units, which will be referred to herein as resource blocks (RBs). Each RB may consist of 12 sub-carriers and UEs are allocated a multiple N of consecutive RBs **150** for Physical Uplink Shared Channel (PUSCH) transmission and 1 RB for Physical Uplink Control Channel (PUCCH) transmission.

As the data or control signal transmission is over a BW that can be (orthogonally) shared by multiple UEs, the corresponding physical layer channel may be respectively referred to as PUSCH or as PUCCH. **FIG. 1** illustrates a structure for the PUSCH sub-frame while respective ones for the PUCCH will be subsequently described.

The UEs are also assumed to transmit control signals in the absence of any data signals. The control signals include, but are not limited to, positive or negative acknowledgment signals (ACK or NAK, respectively) and Channel Quality Indication (CQI) signals. The ACK/NAK signals are in response to the correct or incorrect, respectively, data packet reception by a UE in the DL of the communication system. The CQI signals are sent by a UE to inform its serving Node B of its Signal-to-Interference and Noise Ratio (SINR) conditions in order for the serving Node B to perform channel dependent scheduling in the DL of the communication system. Both ACK/NAK and CQI signals are accompanied by RS signals in order to enable their coherent demodulation at the Node B receiver. The

-3-

physical layer channel conveying ACK/NAK or CQI control signaling may be referred as the PUCCH.

The ACK/NAK, CQI and associated RS signals are assumed to be transmitted by UEs in one RB using CAZAC sequences as it is known in the art and is subsequently described.

FIG. 2 shows a structure for the ACK/NAK transmission during one slot **210** in a SC-FDMA communication system. The ACK/NAK information bits **220** modulate **230** a “Constant Amplitude Zero Auto-Correlation (CAZAC)” sequence **240**, for example with QPSK or 16QAM modulation, which is then transmitted by the UE after performing an Inverse Fast Fourier Transform (IFFT) operation as it is further subsequently described. In addition to the ACK/NAK, RS is transmitted to enable the coherent demodulation of the ACK/NAK signal at the Node B receiver. The third, fourth, and fifth SC-FDMA symbols in each slot may carry an RS **250**.

FIG. 3 shows a structure for the CQI transmission during one slot **310** in a SC-FDMA communication system. Similar to the ACK/NAK transmission, the CQI information bits **320** modulate **330** a CAZAC sequence **340**, for example with QPSK or 16QAM modulation, which is then transmitted by the UE after performing the IFFT operation as it is further subsequently described. In addition to the CQI, RS is transmitted to enable the coherent demodulation at the Node B receiver of the CQI signal. In the embodiment, the second and sixth SC-FDMA symbols in each slot carry an RS **350**.

As it was previously mentioned, the ACK/NAK, CQI, and RS signals are assumed to be constructed from CAZAC sequences. An example of such sequences is the Zadoff-Chu (ZC) sequences whose elements are given by Equation (1) below:

$$c_k(n) = \exp \left[\frac{j2\pi k}{L} \left(n + n \frac{n+1}{2} \right) \right]. \quad \dots\dots(1)$$

L is the length of the CAZAC sequence, n is the index of an element of the sequence $n = \{0, 1, 2 \dots, L - 1\}$, and k is the index of the sequence itself. For a given length L , there are $L - 1$ distinct sequences, if L is prime. Therefore, the

-4-

entire family of sequences is defined as k ranges in $\{1, 2, \dots, L - 1\}$. However, it should be noted that the CAZAC sequences used for the ACK/NAK, CQI, and RS transmission need not be generated using the exact above expression as it is further discussed below.

For CAZAC sequences of prime length L , the number of sequences is $L-1$. As the RBs are assumed to consist of an even number of sub-carriers, with 1 RB consisting of 12 sub-carriers, the sequences used to transmit the ACK/NAK, CQI, and RS can be generated, in the frequency or time domain, by either truncating a longer prime length (such as length 13) CAZAC sequence or by extending a shorter prime length (such as length 11) CAZAC sequence by repeating its first element(s) at the end (cyclic extension), although the resulting sequences do not fulfill the definition of a CAZAC sequence. Alternatively, the CAZAC sequences can be directly generated through a computer search for sequences satisfying the CAZAC properties.

A block diagram for the transmission through SC-FDMA signaling of a CAZAC-based sequence in the time domain is shown in **FIG. 4**. The selected CAZAC-based sequence **410** is generated through one of the previously described methods (modulated by the respective bits in case of ACK/NAK or CQI transmission), it is then cyclically shifted **420** as it is subsequently described, the Discrete Fourier Transform (DFT) of the resulting sequence is obtained **430**, the sub-carriers **440** corresponding to the assigned transmission bandwidth are selected **450**, the Inverse Fast Fourier Transform (IFFT) is performed **460**, and finally the CP **470** and filtering **480** are applied to the transmitted signal **490**. Zero padding is assumed to be performed by a UE in sub-carriers used for signal transmission by another UE and in guard sub-carriers (not shown). Moreover, for brevity, additional transmitter circuitry such as digital-to-analog converter, analog filters, amplifiers, and transmitter antennas, as they are known in the art, are not shown in **FIG. 4**. Similarly, for the PUCCH, the modulation of a CAZAC sequence with ACK/NAK or CQI bits is well known in the art, such as for example QPSK modulation, and is omitted for brevity.

At the receiver, the inverse (complementary) transmitter functions are performed. This is conceptually illustrated in **FIG. 5** where the reverse operations

-5-

of those in **FIG. 4** apply. As it is known in the art (not shown for brevity), an antenna receives the RF analog signal and after further processing units (such as filters, amplifiers, frequency down-converters, and analog-to-digital converters) the digital received signal **510** passes through a time windowing unit **520** and the CP is removed **530**. Subsequently, the receiver unit applies an FFT **540**, selects **550** the sub-carriers **560** used by the transmitter, applies an Inverse DFT (IDFT) **570**, de-multiplexes (in time) the RS and CQI signal **580**, and after obtaining a channel estimate based on the RS (not shown) it extracts the CQI bits **590**. As for the transmitter, well known receiver functionalities such as channel estimation, demodulation, and decoding are not shown for brevity.

An alternative generation method for the transmitted CAZAC sequence is in the frequency domain. This is depicted in **FIG. 6**. The generation of the transmitted CAZAC sequence in the frequency domain follows the same steps as the one in the time domain with two exceptions. The frequency domain version of the CAZAC sequence is used **610** (that is the DFT of the CAZAC sequence is pre-computed and not included in the transmission chain) and the cyclic shift **650** is applied after the IFFT **640**. The selection **620** of the sub-carriers **630** corresponding to the assigned transmission BW, and the application of CP **660** and filtering **670** to the transmitted signal **680**, as well as other conventional functionalities (not shown), are as previously described for **FIG. 4**.

The reverse functions are again performed for the reception of the CAZAC-based sequence transmitted as in **FIG. 6**. This is illustrated in **FIG. 7**. The received signal **710** passes through a time windowing unit **720** and the CP is removed **730**. Subsequently, the cyclic shift is restored **740**, an FFT **750** is applied, and the transmitted sub-carriers **760** are selected **765**. **FIG. 7** also shows the subsequent correlation **770** with the replica **780** of the CAZAC-based sequence. Finally, the output **790** is obtained which can then be passed to a channel estimation unit, such as a time-frequency interpolator, in case of a RS, or can be used for detecting the transmitted information, in case the CAZAC-based sequence is modulated by ACK/NAK or CQI information bits.

The transmitted CAZAC-based sequence in **FIG. 4** or **FIG. 6** may not be modulated by any information (data or control) and can then serve as the RS, as shown, for example, in **FIG. 2** and **FIG. 3**.

Different cyclic shifts of the same CAZAC sequence provide orthogonal CAZAC sequences. Therefore, different cyclic shifts of the same CAZAC sequence can be allocated to different UEs in the same RB for their RS or ACK/NAK, or CQI transmission and achieve orthogonal UE multiplexing. This principle is illustrated in **FIG. 8**.

Referring to **FIG. 8**, in order for the multiple CAZAC sequences **810, 830, 850, 870** generated correspondingly from multiple cyclic shifts **820, 840, 860, 880** of the same root CAZAC sequence to be orthogonal, the cyclic shift value **890** should exceed the channel propagation delay spread D (including a time uncertainty error and filter spillover effects). If T_s is the duration of one symbol, the number of cyclic shifts is equal to the mathematical floor of the ratio T_s/D . For a CAZAC sequence of length 12, the number of possible cyclic shifts is 12 and for symbol duration of about 66 microseconds (14 symbols in a 1 millisecond sub-frame), the time separation of consecutive cyclic shifts is about 5.5 microseconds. Alternatively, to provide better protection against multipath propagation, only every other (6 of the 12) cyclic shift may be used providing time separation of about 11 microseconds.

CAZAC-based sequences of the same length typically have good cross-correlation properties (low cross-correlation values), which is important in order to minimize the impact of mutual interference in synchronous communication system and improve their reception performance. It is well known that ZC sequences of length L have optimal cross-correlation of \sqrt{L} . However, this property does not hold when truncation or extension is applied to ZC sequences or when CAZAC-based sequences are generated through computer search. Moreover, CAZAC-based sequences of different lengths have a wide distribution of cross-correlation values and large values can frequently occur leading to increased interference.

-7-

FIG. 9 illustrates the Cumulative Density Function (CDF) of cross-correlation values for length-12 CAZAC-based sequence resulting from cyclically extending a length-11 ZC sequence, truncating a length-13 ZC sequence and generating length-12 CAZAC-based sequences through a computer search method. Variations in cross-correlation values can be easily observed. These variations have even wider distribution for cross-correlations between CAZAC-based sequences with different lengths.

The impact of large cross-correlations on the reception reliability of signals constructed from CAZAC-based sequences can be mitigated through sequence hopping. Pseudo-random hopping patterns are well known in the art and are used for a variety of applications. Any such generic pseudo-random hopping pattern can serve as a reference for sequence hopping. In this manner, the CAZAC-based sequence used between consecutive transmissions of ACK/NAK, CQI, or RS signals in different SC-FDMA symbols, can change in a pseudo-random pattern and this reduces the probability that CAZAC-based generated signals will be subjected to large mutual cross-correlations and correspondingly experience large interference over their transmission symbols.

There is therefore a need for supporting hopping of CAZAC-based sequences with minimum implementation complexity in order to reduce the average interference among CAZAC-based sequences.

There is another need for assigning CAZAC-based sequences through planning in different Node Bs and different cells of the same Node B in a communication system.

Finally, there is a need for minimizing the signaling overhead for communicating sequence hopping parameters or the sequence assignment (planning) from the serving Node B to the UEs.

SUMMARY OF THE INVENTION

The present invention has been made to address at least the above-mentioned problems and/or disadvantages and to provide at least the advantages

described below. Accordingly, an aspect of the present invention provides an apparatus and method for supporting CAZAC-based sequence hopping or sequence planning.

Another aspect of the present invention enables CAZAC-based sequence hopping with minimum implementation complexity at a UE transmitter and a Node B receiver by applying the same hopping pattern to the sequences used for signal transmission in all possible channels.

Additionally, an aspect of the present invention enables CAZAC-based sequence hopping with minimum implementation complexity at a UE transmitter and a Node B receiver by limiting the total number of sequences in the sets of sequences for the possible resource block allocations to be equal to the smallest number of sequences obtained for one of the possible resource block allocations.

A further aspect of the present invention enables CAZAC-based sequence hopping and planning with minimum signaling overhead for communicating the sequence allocation parameters from the serving Node B to UEs.

According to one aspect of the present invention, an apparatus and a method are provided for a user equipment to transmit a signal using one sequence in all symbols of a sub-frame where the signal is transmitted if the resource block allocation is smaller than or equal to a predetermined value and to transmit a signal using, respectively, a first sequence and a second sequence in a first symbol and a second symbol of a sub-frame where the signal is transmitted if the resource block allocation is larger than a predetermined value.

According to another aspect of the present invention, an apparatus and a method are provided for a user equipment to transmit a signal using a sequence from a full set of sequences in a symbol of a sub-frame where the signal is transmitted if the resource block allocation is smaller than or equal to a predetermined value and to transmit a signal using a sequence from a sub-set of sequences in a symbol of a sub-frame where the signal is transmitted if the resource block allocation is larger than a predetermined value.

According to an additional embodiment of the present invention, an apparatus and a method are provided for a user equipment to transmit a signal in a data channel using a sequence from a set of sequences wherein the sequence at each symbol of a sub-frame where the signal is transmitted is determined according to a pseudo-random hopping pattern and to transmit a signal in a control channel using a sequence from a set of sequences wherein the sequence at each symbol of a sub-frame where the signal is transmitted is determined according to same pseudo-random hopping pattern. The signal and the number of symbols where the signal is transmitted may be different between the data and control channels but the sequence hopping pattern remains the same by adjusting the rate of its application (slower rate applies for the channel having the larger number of symbols for the signal transmission using sequence hopping).

According to a further embodiment of the present invention, an apparatus and a method are provided for a user equipment to transmit a signal in a control channel using one or more sequences from a set of sequences wherein the first sequence is signaled by the serving Node B, and to transmit a signal in a data channel using one or more sequences from a set of sequences wherein the first sequence is determined from the set of sequences by applying a shift relative to the first sequence in the respective set of sequences used for the control channel as signaled by the serving Node B. The reverse relation may apply in determining the first sequence in the control and data channels.

According to an aspect of the present invention, there is provided a method for transmitting a reference-signal and a data signal by a user equipment in a communication system, the method comprising:

- generating the data signal;
- determining a sequence for the reference-signal; and
- transmitting the reference-signal based on the sequence and the data signal through at least one resource blocks,

wherein the sequence is determined based on sequence-hopping if the number of resource blocks is equal to or greater than a predetermined value,

wherein the sequence is determined without sequence-hopping if the number of resource blocks is less than the predetermined value.

-9a-

According to another aspect of the present invention, there is provided an apparatus for transmitting a reference-signal and a data signal by a user equipment in a communication system, the apparatus comprising:

a transmitter for transmitting the reference-signal and the data signal, and

a controller for controlling operations of generating the data signal, determining a sequence for the reference-signal, and transmitting the reference-signal based on the sequence and the data signal through at least one resource blocks,

wherein the sequence is capable of being determined based on sequence-hopping if the number of resource blocks is equal to or greater than a predetermined value,

wherein the sequence is capable of being determined without sequence-hopping if the number of resource blocks is less than the predetermined value.

According to a further aspect of the present invention, there is provided a method for transmitting a reference-signal and a data signal by a user equipment in a communication system, the method comprising:

receiving information indicating whether sequence-hopping is enabled or not;

generating the data signal;

determining a sequence for the reference-signal; and

transmitting the reference-signal based on the sequence and the data signal through at least one resource blocks,

wherein the sequence is determined based on the sequence-hopping if the received information indicates that the sequence-hopping is enabled, and if the number of resource blocks is equal to or greater than a predetermined value,

wherein the sequence is determined without sequence-hopping if the number of resource blocks is less than the predetermined value.

According to a further aspect of the present invention, there is provided an apparatus for transmitting a reference-signal and a data signal by a user equipment in a communication system, the apparatus comprising:

a receiver for receiving information indicating whether sequence-hopping is enabled or not;

a transmitter for transmitting the reference-signal and the data signal, and

a controller for controlling operations of receiving the information, generating the data signal, determining a sequence for the reference-signal, and transmitting the

-9b-

reference-signal based on the sequence and the data signal through at least one resource blocks,

wherein the sequence is capable of being determined based on the sequence-hopping if the received information indicates that the sequence-hopping is enabled, and if the number of resource blocks is equal to or greater than a predetermined value,

wherein the sequence is capable of being determined without sequence-hopping if the number of resource blocks is less than the predetermined value.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other aspects, features and advantages of the present invention will be more apparent from the following detailed description when taken in conjunction with the accompanying drawings, in which:

FIG. 1 is a diagram illustrating a sub-frame structure for the SC-FDMA communication system;

FIG. 2 is a diagram illustrating a partitioning of a slot structure for the transmission of ACK/NAK bits;

-10-

FIG. 3 is a diagram illustrating a partitioning of a slot structure for the transmission of CQI bits;

FIG. 4 is a block diagram illustrating an SC-FDMA transmitter for transmitting an ACK/NAK signal, or a CQI signal, or a reference signal using a CAZAC-based sequence in the time domain;

FIG. 5 is a block diagram illustrating an SC-FDMA receiver for receiving an ACK/NAK signal, or a CQI signal, or a reference signal using a CAZAC-based sequence in the time domain;

FIG. 6 is a block diagram illustrating an SC-FDMA transmitter for transmitting an ACK/NAK signal, or a CQI signal, or a reference signal using a CAZAC-based sequence in the frequency domain;

FIG. 7 is a block diagram illustrating an SC-FDMA receiver for receiving an ACK/NAK signal, or a CQI signal, or a reference signal using a CAZAC-based sequence in the frequency domain;

FIG. 8 is a block diagram illustrating a construction of orthogonal CAZAC-based sequences through the application of different cyclic shifts on a root CAZAC-based sequence;

FIG. 9 is a diagram illustrating the CDF of cross-correlation values for CAZAC-based sequences of length 12;

FIG. 10 is a diagram illustrating the allocation of sequence groups to different cells or different Node Bs through group sequence planning, according to an embodiment of the present invention;

FIG. 11 is a diagram illustrating sequence hopping within a sub-frame for allocation larger than 6 RBs when group sequence planning is used, according to an embodiment of the present invention;

-11-

FIG. 12 is a diagram illustrating the allocation of sequence groups to different cells or different Node Bs through group sequence hopping, according to an embodiment of the present invention;

FIG. 13 is a diagram illustrating sequence hopping within a sub-frame when group sequence hopping is used, according to an embodiment of the present invention;

FIG. 14 is a diagram illustrating allocating different sequences with different cyclic shifts to cells of the same Node B, according to an embodiment of the present invention;

FIG. 15 is a diagram illustrating determining the PUCCH sequence from the PUSCH sequence, according to an embodiment of the present invention; and

FIG. 16 is a diagram illustrating determining the PUCCH sequence from the PUSCH sequence by applying a shift, according to an embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments of the present invention are described in detail with reference to the accompanying drawings. The same or similar components are designated by the same or similar reference numerals although they are illustrated in different drawings. Detailed descriptions of constructions or processes known in the art may be omitted to avoid obscuring the subject matter of the present invention.

Additionally, although the present invention assumes a SC-FDMA communication system, it also applies to all Frequency Division Multiplexing (FDM) systems in general and to Orthogonal Frequency Division Multiple Access (OFDMA), Orthogonal Frequency Division Multiplexing (OFDM), Frequency Division Multiple Access (FDMA), Discrete Fourier Transform (DFT)-spread OFDM, DFT-spread OFDMA, Single-Carrier OFDMA (SC-OFDMA), and Single-Carrier OFDM in particular.

-12-

Methods of the embodiments of the invention solve problems related to the need for enabling sequence planning or sequence hopping for CAZAC-based sequences while minimizing the respective implementation complexity at a UE transmitter and at a Node B receiver and minimizing the signaling overhead required for configuring the sequence planning or the sequence hopping patterns.

As discussed in the foregoing background, the construction of CAZAC-based sequences may be through various methods. The number of sequences provided with cyclic extension or truncation of Zadoff-Chu (ZC) sequences depends on the sequence length. Some indicative values for corresponding RB allocations are shown in **Table 1** where one RB is assumed to consist of 12 sub-carriers.

Table 1: Number of CAZAC-based Sequences from Cyclic Extension of ZC Sequences

Number of RBs	Number of Sub-Carriers	Number of Sequences from ZC Extension
1	12	10 (prime is 11)
2	24	22 (prime is 23)
3	36	30 (prime is 31)
4	48	46 (prime is 47)
5	60	58 (prime is 59)
6	72	70 (prime is 71)
8	96	88 (prime is 89)
9	108	106 (prime is 107)
10	120	112 (prime is 113)

Since the number of CAZAC-based sequences depend on the corresponding sequence length, a number of sequences of larger length can be associated with each sequence of smaller length. For example, referring to **Table 1**, for cyclic extension of ZC sequences, each of the 10 sequences of length 12 can be associated (one-to-one mapping) with a set of 7 sequences of length 72 (since there are 70 sequences of length 72). Moreover, the number of sequences for small RB allocations, such as 1 RB or 2 RBs, is the smallest and defines the

-13-

constraints in allocating different sequences in neighboring cells and Node Bs (a Node B may comprise of multiple cells). For these sequences, if a pseudo-random hopping pattern applies for their transmission, the same sequence may often be used in neighboring cells resulting to full interference of transmissions and associated degradation in the reception reliability of signals transmitted through the use of CAZAC-based sequences.

To mitigate the sequence allocation problem resulting from the small number of available CAZAC-based sequences for the smaller RB allocations, CAZAC sequences constructed through computer searches can be used as a larger number of sequences can be obtained in this manner. However, unlike CAZAC-based sequences obtained from cyclic extension or truncation of ZC sequences, a closed form expression for computer generated CAZAC sequences does not exist and such sequences need to be stored in memory. For this reason, their use is typically confined to small RB allocations where the shortage of CAZAC-based sequences is most acute. For the larger RB allocations, CAZAC-based sequences are generated through the implementation of a formula such as the one described for the generation of ZC sequences. About 30 computer generated CAZAC sequences can be obtained for 1 RB allocations and by obtaining the same number of sequences for 2 RB allocations, sequence planning and sequence hopping is then constrained by the number of sequences for 1, 2, or 3 RB allocations. In a preferred embodiment this number is 30.

The invention considers cyclic extension of ZC sequences for the generation of CAZAC-based sequences for allocations equal to or larger than 3 RBs and computer generated CAZAC sequences for allocations of 1 RB or 2 RBs.

An embodiment of the invention assumes that PUCCH transmissions from a UE occupy one RB and allocations larger than 1 RB are used only for the PUSCH, which, in the embodiment, contains 2 RS transmission symbols per sub-frame. Therefore, only one sequence hopping opportunity exists within a PUSCH sub-frame.

For packet retransmissions based on Hybrid Automatic Repeat reQuest (HARQ), as it is known in the art, the interference experienced by the CAZAC-

-14-

based sequence used for RS transmission will be different among retransmissions as different RB allocations (different size or different BW position leading to partial overlapping between two CAZAC sequences) are likely to be used for UEs in interfering cells during a packet retransmission. Moreover, the channel characteristics are likely to be different between retransmissions and this also leads to different cross-correlation characteristics among interfering CAZAC sequences. Therefore, extending the number of sequences for each RB allocation to more than 2 is of little or no benefit to the PUSCH reception quality.

For the above reasons, the invention considers the use of only a sub-set of sequences from the total set of available ones. These sequences may be fixed and selected according to their cross-correlation and/or according to their cubic metric values where small values are desired in both cases. Limiting the number of sequences that can be used for hopping for the larger RB allocations, reduces the number of sequence groups and corresponding hopping patterns that need to be supported and therefore reduces the complexity and signaling overhead to support sequence hopping.

Considering that the limitation of sequences, and therefore the limitation in hopping patterns, occurs for the smaller RB allocations and that an embodiment of the invention assumes 2 RS per PUSCH sub-frame, one sequence for small RB allocations can be associated with two sequences for the larger RB allocations. As the embodiment assumes 30 computer generated CAZAC sequences for 1 RB and 2 RB allocations, the grouping of sequences for different RB allocations results in 30 groups where each group includes one CAZAC-based sequence for allocations up to 5 RBs and two CAZAC sequences for allocations larger than 5 RBs (**Table 1**). The sequences in each group are different.

The grouping principle is summarized in **Table 2**. In an embodiment of the present invention, there are 30 sequence groups (one-to-one mapping is assumed between each sequence group and each sequence in a set of 30 sequences). Considering the number of available sequences from **Table 1**, it becomes apparent that only a sub-set of sequences is used for allocations of 4 RBs (30 out of set of 46 sequences are used), 5 RBs (30 out of set of 58 sequences are used), and 6 RBs or larger (60 out of a set of 70 or more sequences are used). As

-15-

previously mentioned, the sub-set of these sequences may be fixed and selected for its cross-correlation and/or cubic metric properties. Therefore, the number of sequence groups is equal to the smallest sequence set size, which in the embodiment is equal to 30, with each group containing one sequence for allocations up to 5 RBs and two sequences for allocations larger than 5 RBs, and each set containing 30 sequences for allocations smaller than or equal to 5 RBs and 60 sequences for allocations larger than 5 RBs.

Table 2: Number of Sequences per Sequence Group.

Number of RBs	Number of Sequences per group
1	1
2	1
3	1
4	1
5	1
6	2
8	2
9	2
10 or larger	2

The invention considers that the CAZAC sequence allocation to cells or Node Bs is either through planning or hopping. If both sequence planning and sequence hopping could supported in a communication system, the UEs are informed of the selection for planning or hopping through a respective indicator broadcasted by the Node B (one bit is needed to indicate whether sequence planning or sequence hopping is used).

Sequence planning assigns each of the 30 groups of sequences, with each group containing 1 sequence for allocations up to 5 RBs and 2 sequences for allocations larger than 5 RBs, to neighboring cells and Node Bs so that the geographical separation between cells using the same group of sequences is preferably maximized. The assignment may be explicit through broadcasting of group sequence number, which in an embodiment having 30 sequence groups can be communicated through the broadcasting of 5 bits, or it can be implicit by

-16-

associating the group sequence number to the cell identity. This is equivalent to specifying one sequence from the set of sequences with the smallest size (because a one-to-one mapping between each of these sequences and each group of sequences is assumed). In the embodiment this can be either of the sets of 30 sequences corresponding to 1, 2, or 3 RB allocations.

This principle is illustrated in **FIG. 10** for cell based and Node B based sequence group allocation (a Node B is assumed to serve 3 cells). For cell based sequence group assignment, different cells, such as, for example cells **1010** and **1020**, are assumed to be allocated different sequence groups. For Node B based sequence group assignment, different cells, such as, for example Node Bs **1030** and **1040**, are assumed to be allocated different sequence groups. Obviously, after exhausting all sequence groups, having the same sequence group in cells or Node Bs cannot be avoided but the objective is to have large geographical separation among such cells or Node Bs so that the interference caused from using the same sequences is negligible.

Sequence hopping may still apply between the pair of sequences for allocations of 6 RBs or larger during the two RS transmission symbols of the PUSCH sub-frame as illustrated in **FIG. 11**. This provides additional randomization of the cross-correlations among sequences transmitted from UEs in different cells and thereby provides more robust reception reliability than the one achieved purely through sequence planning. No hopping applies for the sequences with length smaller than 6 RBs assuming that all sequence groups are used for planning. Therefore, if the PUSCH allocation to a UE is smaller than 6 RBs, the same CAZAC sequence is used for the RS transmission symbols **1110** and **1120** while if the PUSCH allocation is 6 RBs or larger, a different CAZAC sequence, among 2 possible CAZAC sequences, is used for the RS transmission in each of the symbols **1110** and **1120**.

If sequence planning is not used, the invention assumes that sequence hopping applies instead for the sequences used for RS transmission between successive transmission instances for any possible RB allocation. The RS transmission in the two symbols of the PUSCH sub-frame in **FIG. 1** is based on sequences from two typically different groups of sequences. However, in order to

-17-

limit the complexity and signaling required to define the sequence hopping patterns and since there is no additional benefit from having more than one sequence per group for allocations larger than 5 RBs when sequence hopping is used, only one sequence for each RB allocation exists for any of the 30 groups of sequences. In other words, only one sequence is selected to be used for each of the possible RB allocations (all entries in **Table 2** contain 1 sequence) and all sets of sequences contain the same number of sequences, which is the same as the number of sequence groups. **FIG. 12** and **FIG. 13** further illustrate this concept. In **FIG. 12**, different sequence groups such as 1210 and 1230 or 1220 and 1240 are used during different transmission periods in each cell.

In **FIG. 13**, the sequence used by a UE during successive RS transmissions 1310 and 1320 varies according to a sequence hopping pattern which is initialized either explicitly through broadcast signaling in each cell or implicitly through the broadcasted cell identity. The sequence hopping pattern may be the same for all cells and only its initialization may be cell dependent by specifying the initial sequence group or, equivalently, by specifying the initial sequence for an RB allocation since one-to-one mapping between each sequence in a set and each sequence group is assumed. The first transmission period may correspond to the first slot of the first sub-frame in a period of one frame (for example, a frame may comprise of 10 sub-frames) or to any other predetermined transmission instance. The same concept can be trivially extended to Node B specific sequence hopping.

Sequence hopping for both PUCCH signals (ACK/NAK, CQI, and RS) and the PUSCH RS can also be supported and the respective signaling is subsequently considered.

In order to maximize the PUCCH UE multiplexing capacity, all cyclic shifts (CS) of a CAZAC sequence are assumed to be used for the PUCCH transmission within a cell thereby necessitating the use of different CAZAC sequences in different cells (**FIG. 10** with cell based group allocation). However, for the PUSCH, this depends on the extent of the application of Spatial Domain Multiple Access (SDMA) as it is known in the art. With SDMA, multiple UEs share the same RBs for their PUSCH transmission (no SDMA applies for the PUCCH as all CS are assumed to be used in each cell).

-18-

Without SDMA or with SDMA applied to a maximum of 4 UEs per cell, assuming that 12 CS can be used, the same CAZAC sequence may be used among the adjacent cells of the same Node B with different CS used to discriminate the PUSCH RS in each cell as shown in **FIG. 14** which is combined with **FIG. 10** for the case of Node B based sequence group allocation. Cells **1410**, **1420**, and **1430** use the same sequence group, that is the same CAZAC-based sequence for any given PUSCH RB allocation, but use different CS in order to separate the sequences.

With SDMA applied to more than 4 UEs per cell (with 3 cells per Node B), it may not be possible to rely on the use of different CS to separate the PUSCH RS from UEs in different cells. Then, a different CAZAC-based sequence needs to be used per cell as is the case for the PUCCH (**FIG. 10** with cell based group allocation). Regardless of the separation method for the PUSCH RS from UEs in different cells of a Node B (through different CS of the same CAZAC-based sequence or through different CAZAC-based sequences), the present invention considers that the sequence hopping pattern for the PUCCH is derived from the signaled sequence hopping pattern for the PUSCH (the reverse may also apply).

If different CAZAC-based sequences are used for the PUSCH RS transmission in the cells of a Node B (**FIG. 10** with cell based group allocation), for example through sequence planning, the invention considers that the same CAZAC sequence can be used for 1 RB allocations of the PUSCH RS and for the PUCCH (for which the signal transmissions are assumed to be always over 1 RB). Therefore, the initial sequence group assignment for the PUSCH, either through explicit signaling in a broadcast channel in the serving cell or through implicit mapping to the broadcasted cell identity, determines the sequence used for the PUCCH transmission. This concept is illustrated in **FIG. 15**.

It should be noted that PUCCH signals (RS and/or ACK/NAK and/or CQI) may allow for more sequence hopping instances within a sub-frame (symbol-based sequence hopping), but the same hopping pattern can still apply as it only needs to have a longer time scale for the PUSCH RS. If the sequence hopping for PUCCH signals is slot based and not symbol based, the PUSCH and PUCCH use the same sequence hopping patterns.

-19-

If the same CAZAC sequence is used for the PUSCH RS transmission in different cells of the same Node B (**FIG. 10** with Node B based sequence group allocation), the sequence hopping pattern for the PUCCH transmission may still be determined by the sequence hopping pattern of the PUSCH RS transmission even though different CAZAC sequences are used in each cell of the same Node B for the PUCCH transmission. This is achieved by the Node B signaling only a shift of the initial sequence applied to the PUSCH RS transmission, with this shift corresponding to initializing the sequence hopping pattern with a different CAZAC sequence in the set of CAZAC sequences over 1 RB for the PUCCH. Clearly, as it is subsequently illustrated in **FIG. 16**, the addition of a shift value S is cyclical over the set of sequences, meaning that the shift value S is applied modulo the size of the sequence set K , wherein the modulo operation is as known in the art. Therefore, in mathematical terms, if the hopping pattern for the PUSCH is initialized with sequence number N , the hopping pattern for the PUCCH is initialized, in the respective sequence set, with sequence number $M = (N + S) \bmod(K)$ where $(N + S) \bmod(K) = (N + S) - \text{floor}((N + S)/K) \cdot K$ and the “floor” operation rounds a number to its lower integer as it is known in the art.

The shift can be specified by a number of bits equal to the number of sequences for the RB allocation of PUCCH signals. If the PUCCH RB allocation is the smallest one corresponding to 1 RB, this number is identical to the number of sequence groups (in the embodiment, 5 bits are needed to specify one of the 30 sequences in a set of sequences or, equivalently, one of the 30 sequence groups). Alternatively, such signaling overhead can be reduced by limiting the range of the shift to only the sequences with indexes adjacent to the ones used for the by the first sequence in the hopping pattern applied to the RS transmission for the data channel. In that case, only 2 bits are needed to indicate the previous, same, or next sequence.

The above are illustrated in **FIG. 16** where in an embodiment, a shift of 0 **1610**, 1 **1620**, and -1 **1630** is applied to the sequence hopping pattern of the PUCCH transmission in three different cells relative to the sequence hopping pattern for the PUSCH RS transmission **1640**. The different sequence hopping patterns simply correspond to a cyclical shift (the addition of the shift value is modulo the sequence set size) of the same sequence hopping pattern **1640**, or equivalently, the different sequence hopping patterns correspond to different

-20-

initialization of the same hopping pattern. The initialization of the hopping pattern for the PUSCH may be explicitly or implicitly signaled, as previously described, and the shift for the initialization pattern for the PUCCH is determined relative to the initial sequence for the PUSCH (which may be different than the first sequence in the set of sequences). The above roles of the PUSCH and PUCCH may be reversed and the shift may instead define the initialization of the PUSCH, instead of the PUCCH, hopping pattern in a cell. The start of the hopping pattern in time may be defined relative to the first slot in the first sub-frame in a frame or a super-frame (both comprising of multiple sub-frames) as these notions are typically referred to in the art.

While the present invention has been shown and described with reference to certain preferred embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the scope of the present invention as defined by the appended claims.

-21-

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A method for transmitting a reference-signal and a data signal by a user equipment in a communication system, the method comprising:
generating the data signal;
determining a sequence for the reference-signal; and
transmitting the reference-signal based on the sequence and the data signal through at least one resource blocks,
wherein the sequence is determined based on sequence-hopping if the number of resource blocks is equal to or greater than a predetermined value,
wherein the sequence is determined without sequence-hopping if the number of resource blocks is less than the predetermined value.
2. The method of claim 1, wherein the sequence hopping is performed using a pseudo-random function.
3. The method of claim 1 or 2, wherein the predetermined value is 6.
4. The method of claim 1, wherein the sequence hopping is performed on slot basis.
5. The method of claim 1, wherein the sequence comprises a Constant Amplitude Zero Auto-Correlation (CAZAC)-based sequence.
6. An apparatus for transmitting a reference-signal and a data signal by a user equipment in a communication system, the apparatus comprising:
a transmitter for transmitting the reference-signal and the data signal, and
a controller for controlling operations of generating the data signal, determining a sequence for the reference-signal, and transmitting the reference-signal based on the sequence and the data signal through at least one resource blocks,
wherein the sequence is capable of being determined based on sequence-hopping if the number of resource blocks is equal to or greater than a predetermined value,

-22-

wherein the sequence is capable of being determined without sequence-hopping if the number of resource blocks is less than the predetermined value.

7. The apparatus of claim 6, wherein the sequence hopping is performed using a pseudo-random function.

8. The apparatus of claim 6 or 7, wherein the predetermined value is 6.

9. The apparatus of claim 6, wherein the sequence hopping is performed on slot basis.

10. The apparatus of claim 6, wherein the sequence comprises a Constant Amplitude Zero Auto-Correlation (CAZAC)-based sequence.

11. A method for transmitting a reference-signal and a data signal by a user equipment in a communication system, the method comprising:

receiving information indicating whether sequence-hopping is enabled or not;

generating the data signal;

determining a sequence for the reference-signal; and

transmitting the reference-signal based on the sequence and the data signal through at least one resource blocks,

wherein the sequence is determined based on the sequence-hopping if the received information indicates that the sequence-hopping is enabled, and if the number of resource blocks is equal to or greater than a predetermined value,

wherein the sequence is determined without sequence-hopping if the number of resource blocks is less than the predetermined value.

12. The method of claim 11, wherein the sequence hopping is performed using a pseudo-random function.

13. The method of claim 11 or 12, wherein the predetermined value is 6.

-23-

14. The method of claim 11, wherein the sequence hopping is performed on slot basis.

15. The method of claim 11, wherein the sequence comprises a Constant Amplitude Zero Auto-Correlation (CAZAC)-based sequence.

16. An apparatus for transmitting a reference-signal and a data signal by a user equipment in a communication system, the apparatus comprising:

a receiver for receiving information indicating whether sequence-hopping is enabled or not;

a transmitter for transmitting the reference-signal and the data signal, and

a controller for controlling operations of receiving the information, generating the data signal, determining a sequence for the reference-signal, and transmitting the reference-signal based on the sequence and the data signal through at least one resource blocks,

wherein the sequence is capable of being determined based on the sequence-hopping if the received information indicates that the sequence-hopping is enabled, and if the number of resource blocks is equal to or greater than a predetermined value,


wherein the sequence is capable of being determined without sequence-hopping if the number of resource blocks is less than the predetermined value.

17. The apparatus of claim 16, wherein the sequence hopping is performed using a pseudo-random function.

18. The apparatus of claim 16 or 17, wherein the predetermined value is 6.

19. The apparatus of claim 16, wherein the sequence hopping is performed on slot basis.

20. The apparatus of claim 16, wherein the sequence comprises a Constant Amplitude Zero Auto-Correlation (CAZAC)-based sequence.

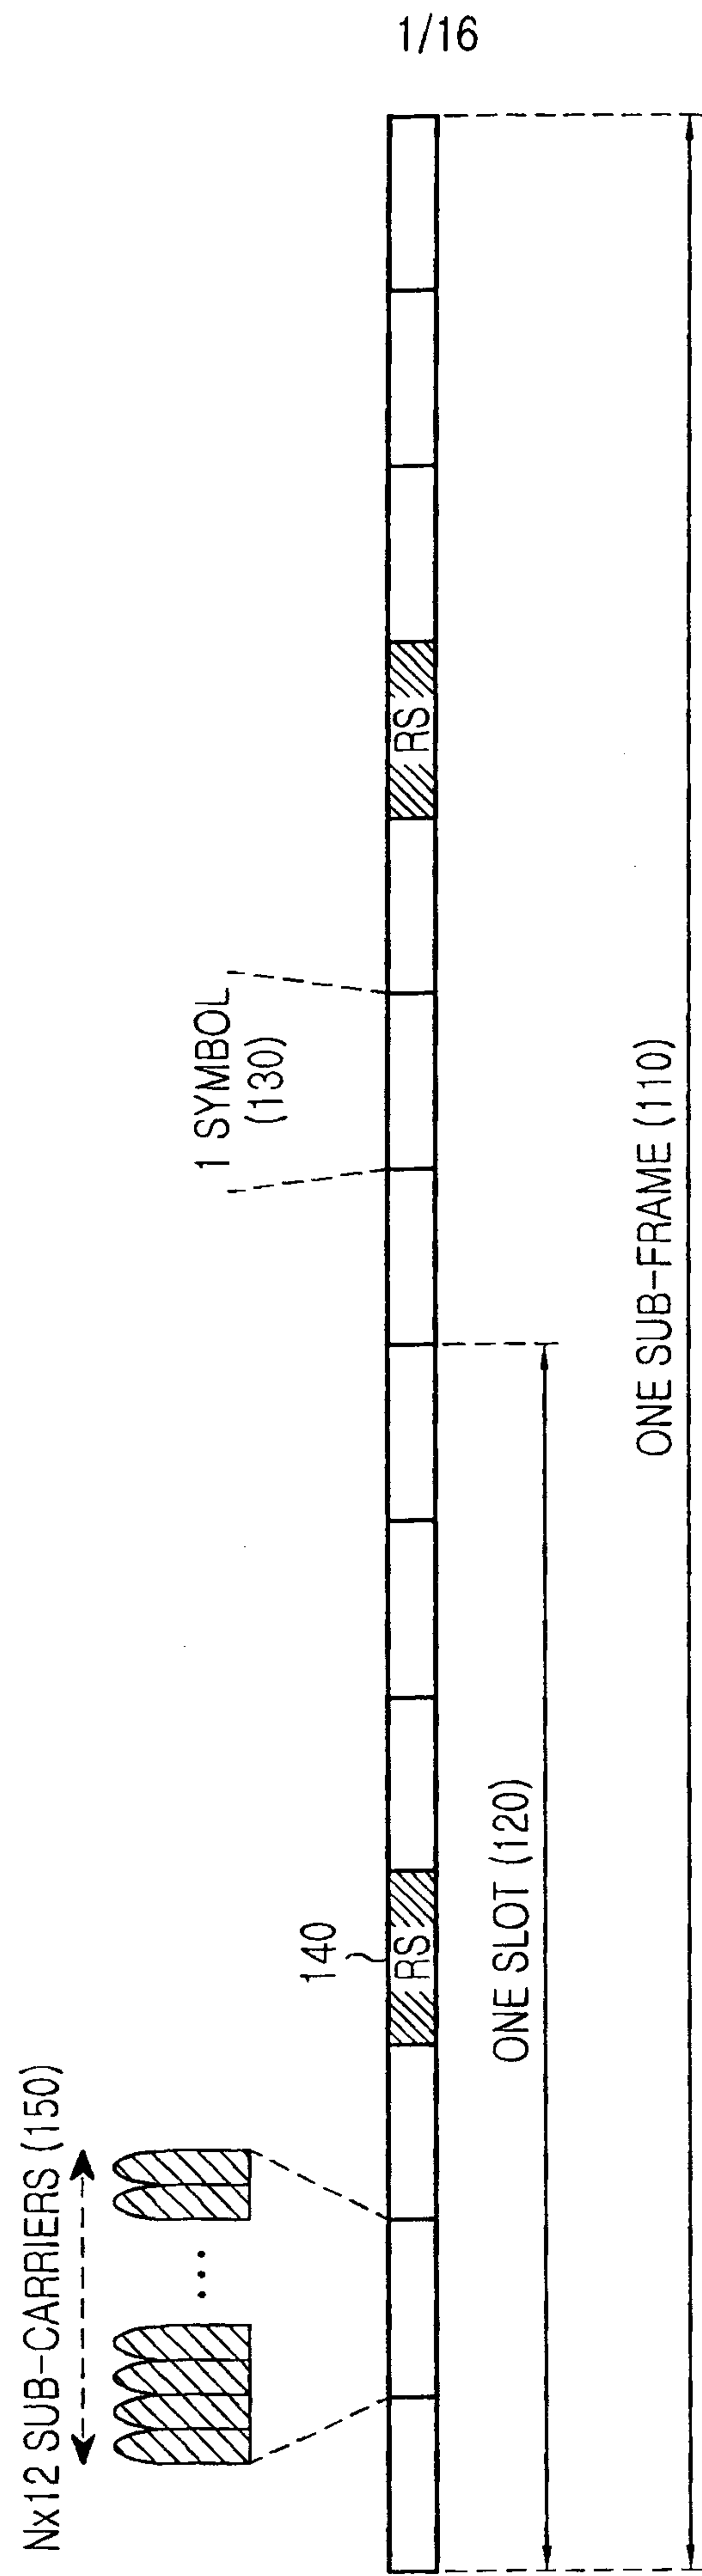

1/16

FIG.1

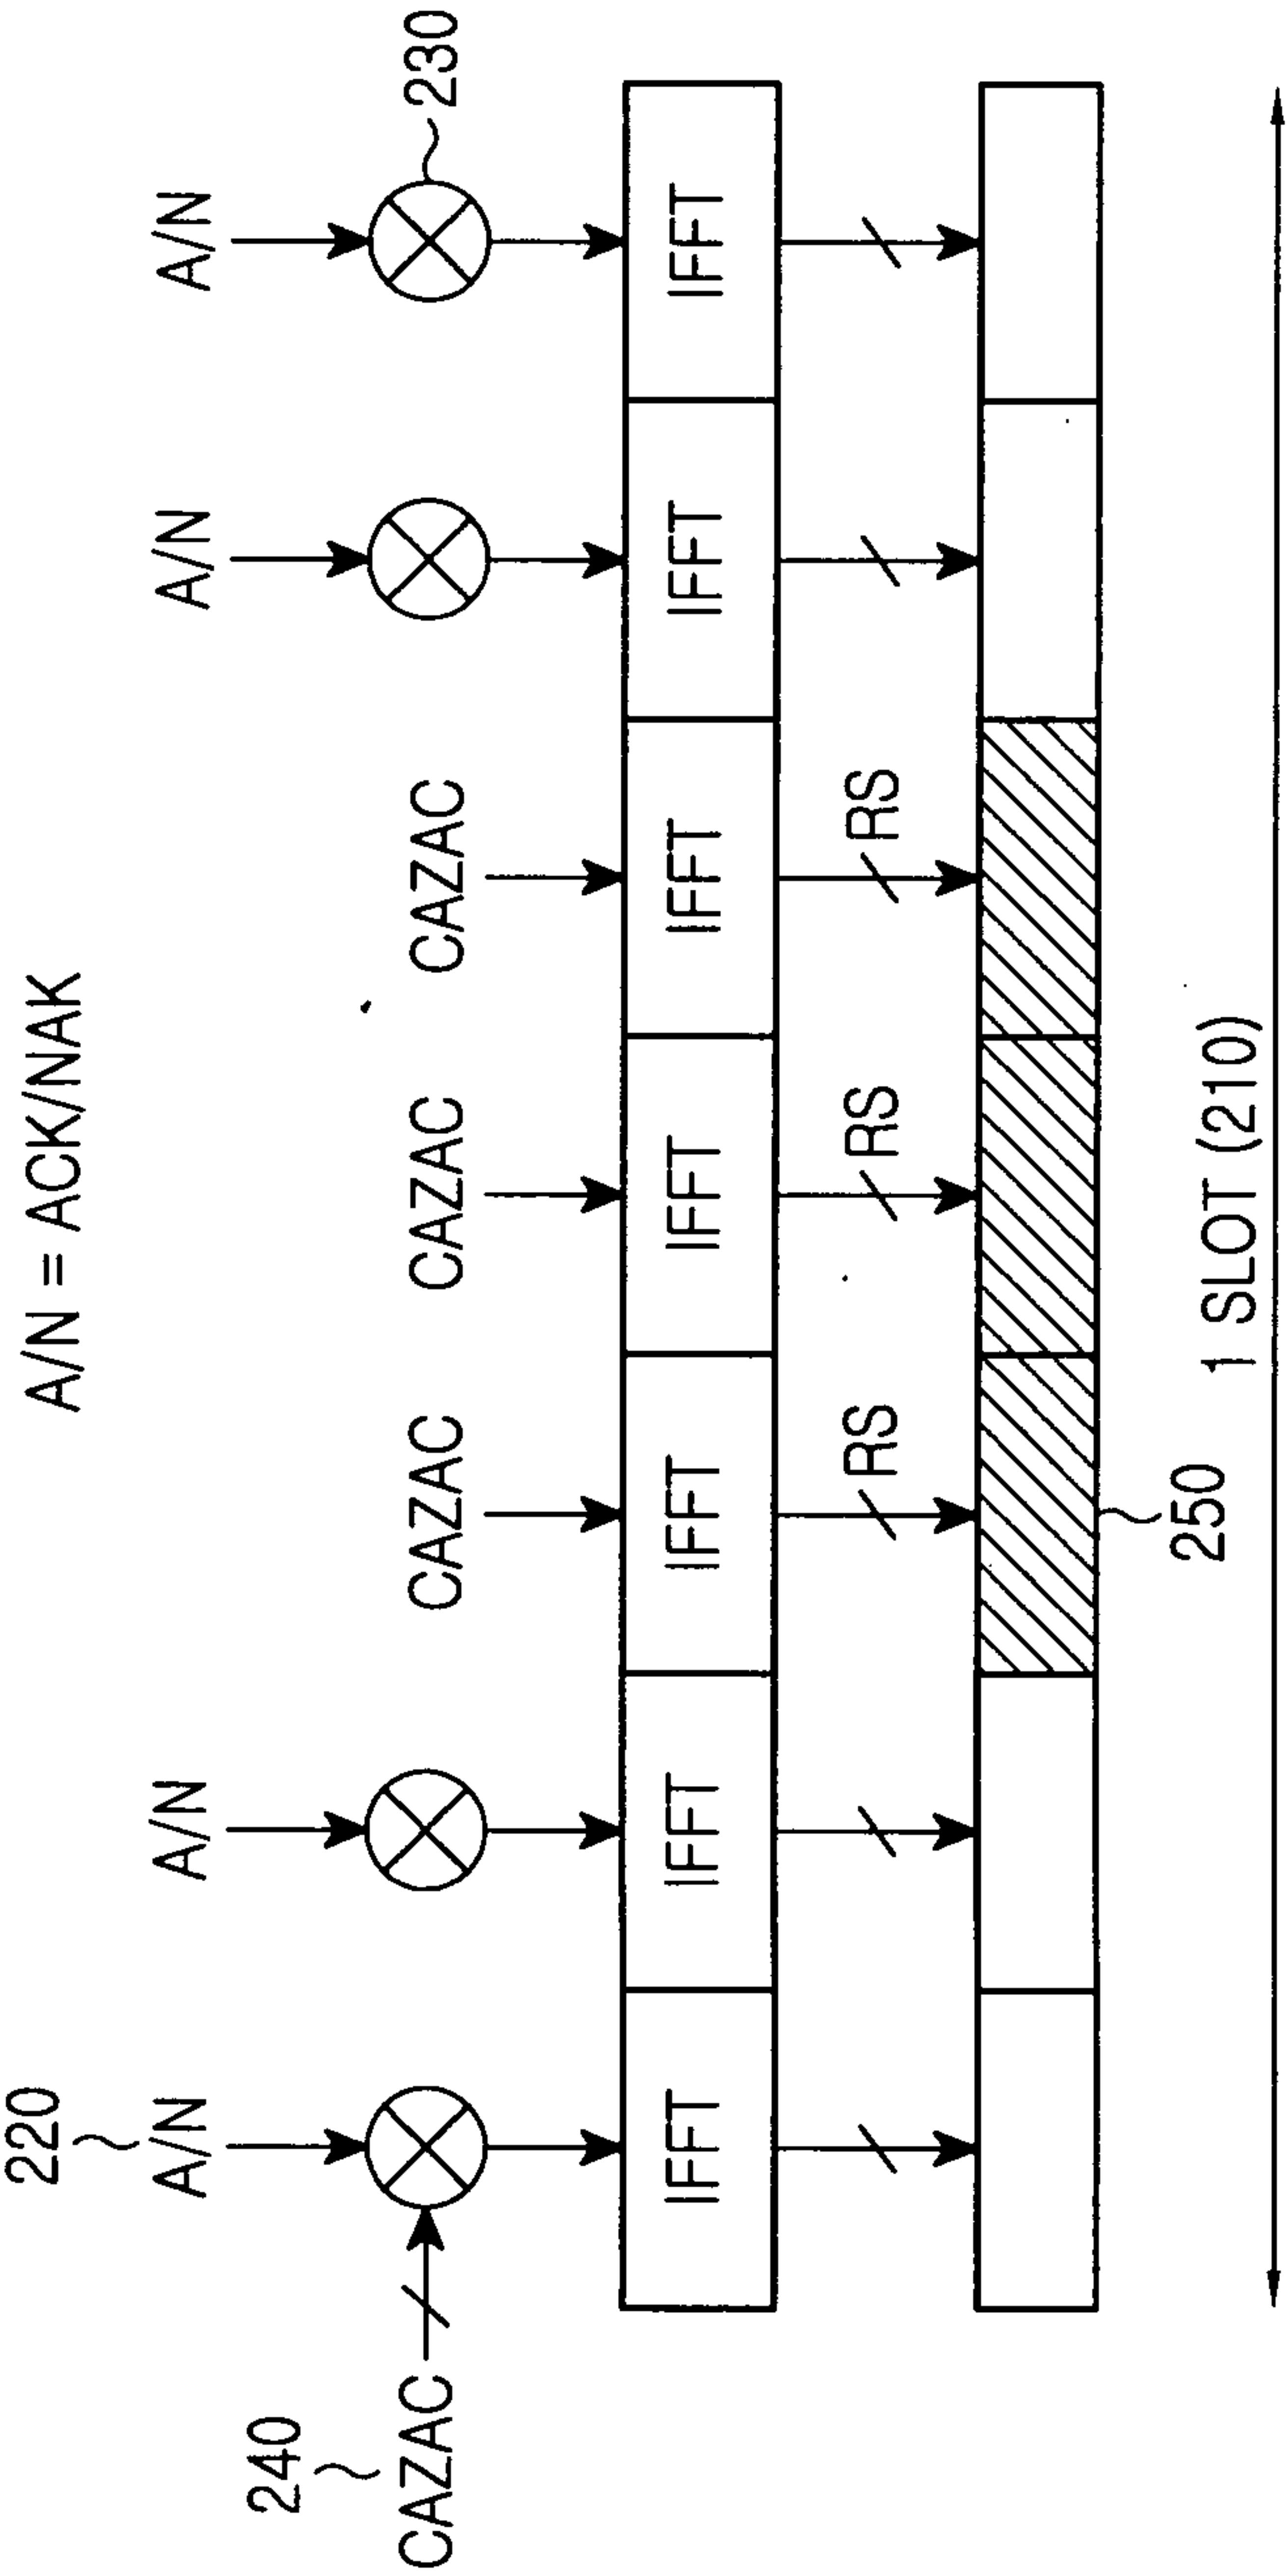


FIG.2

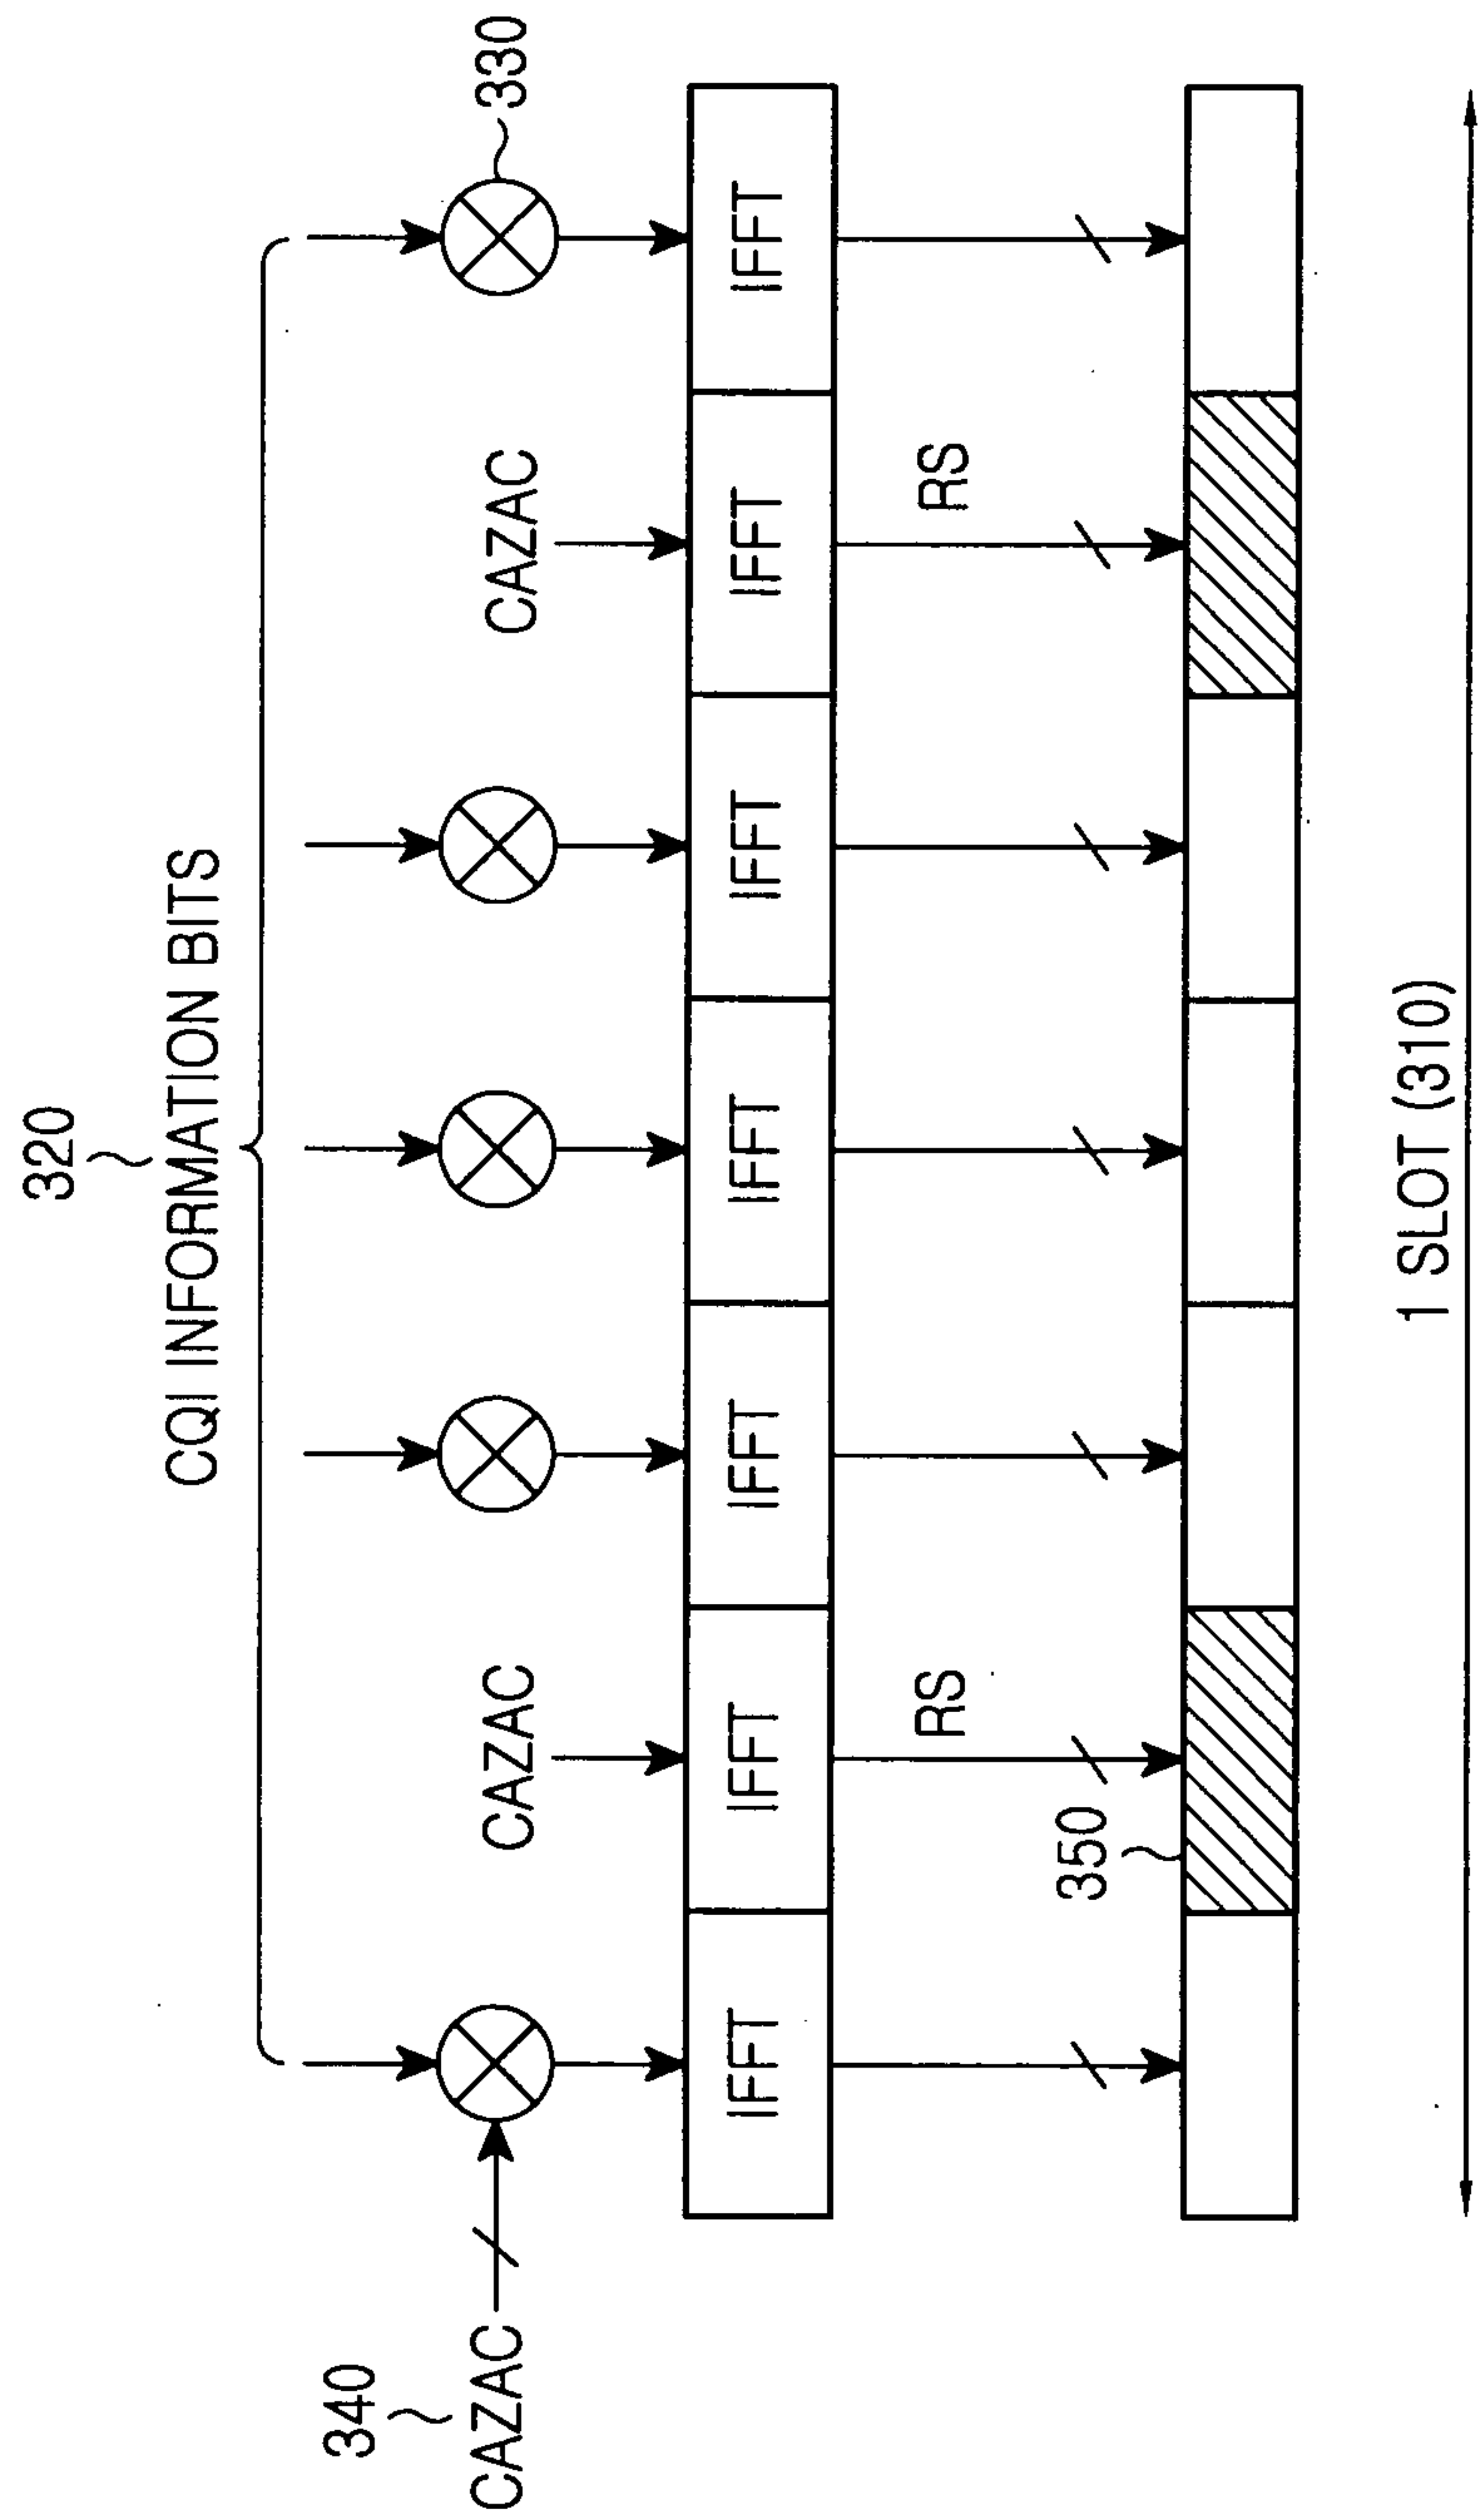


FIG.3

4/16

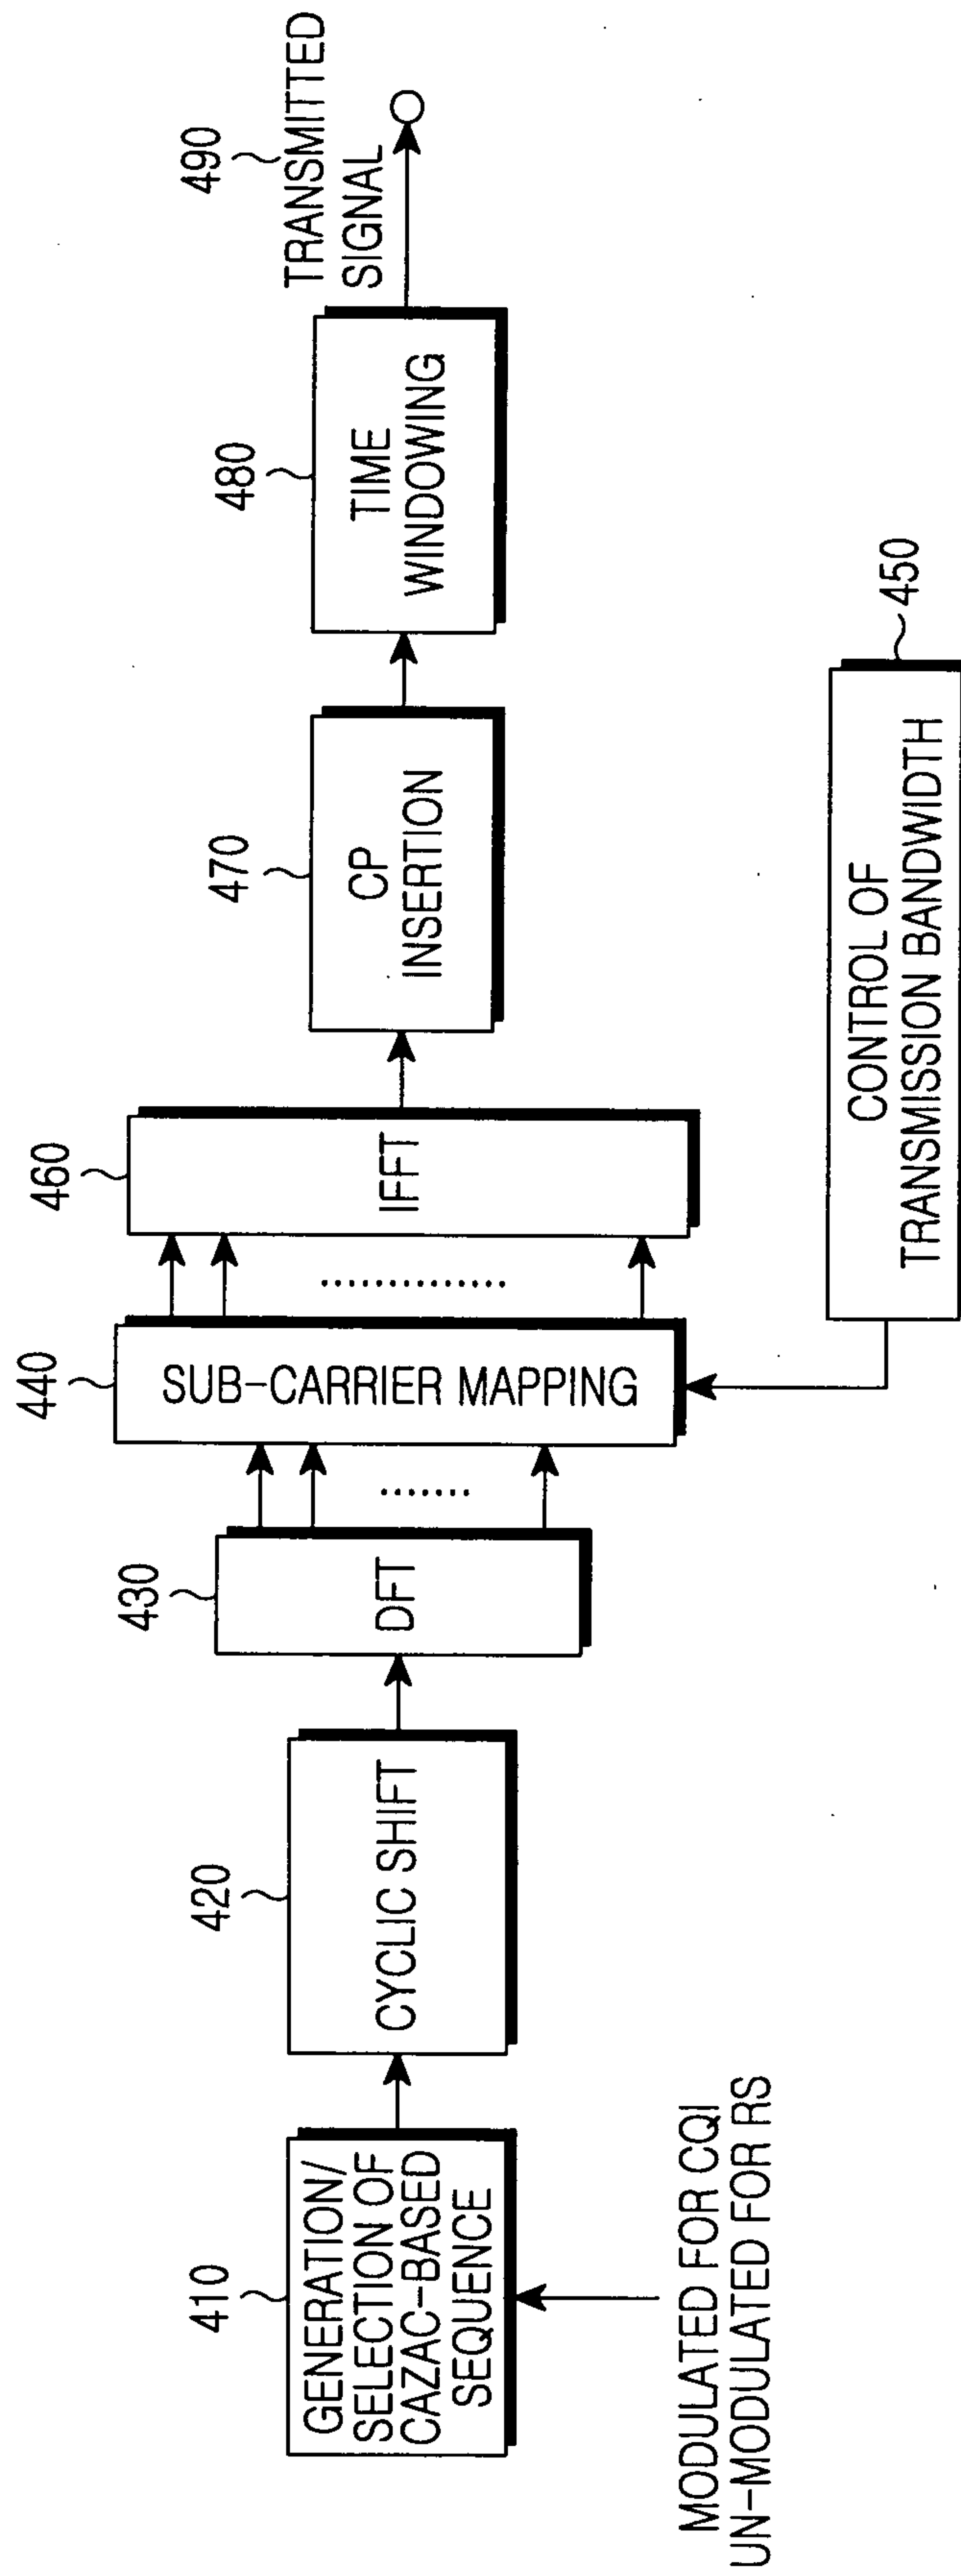


FIG. 4

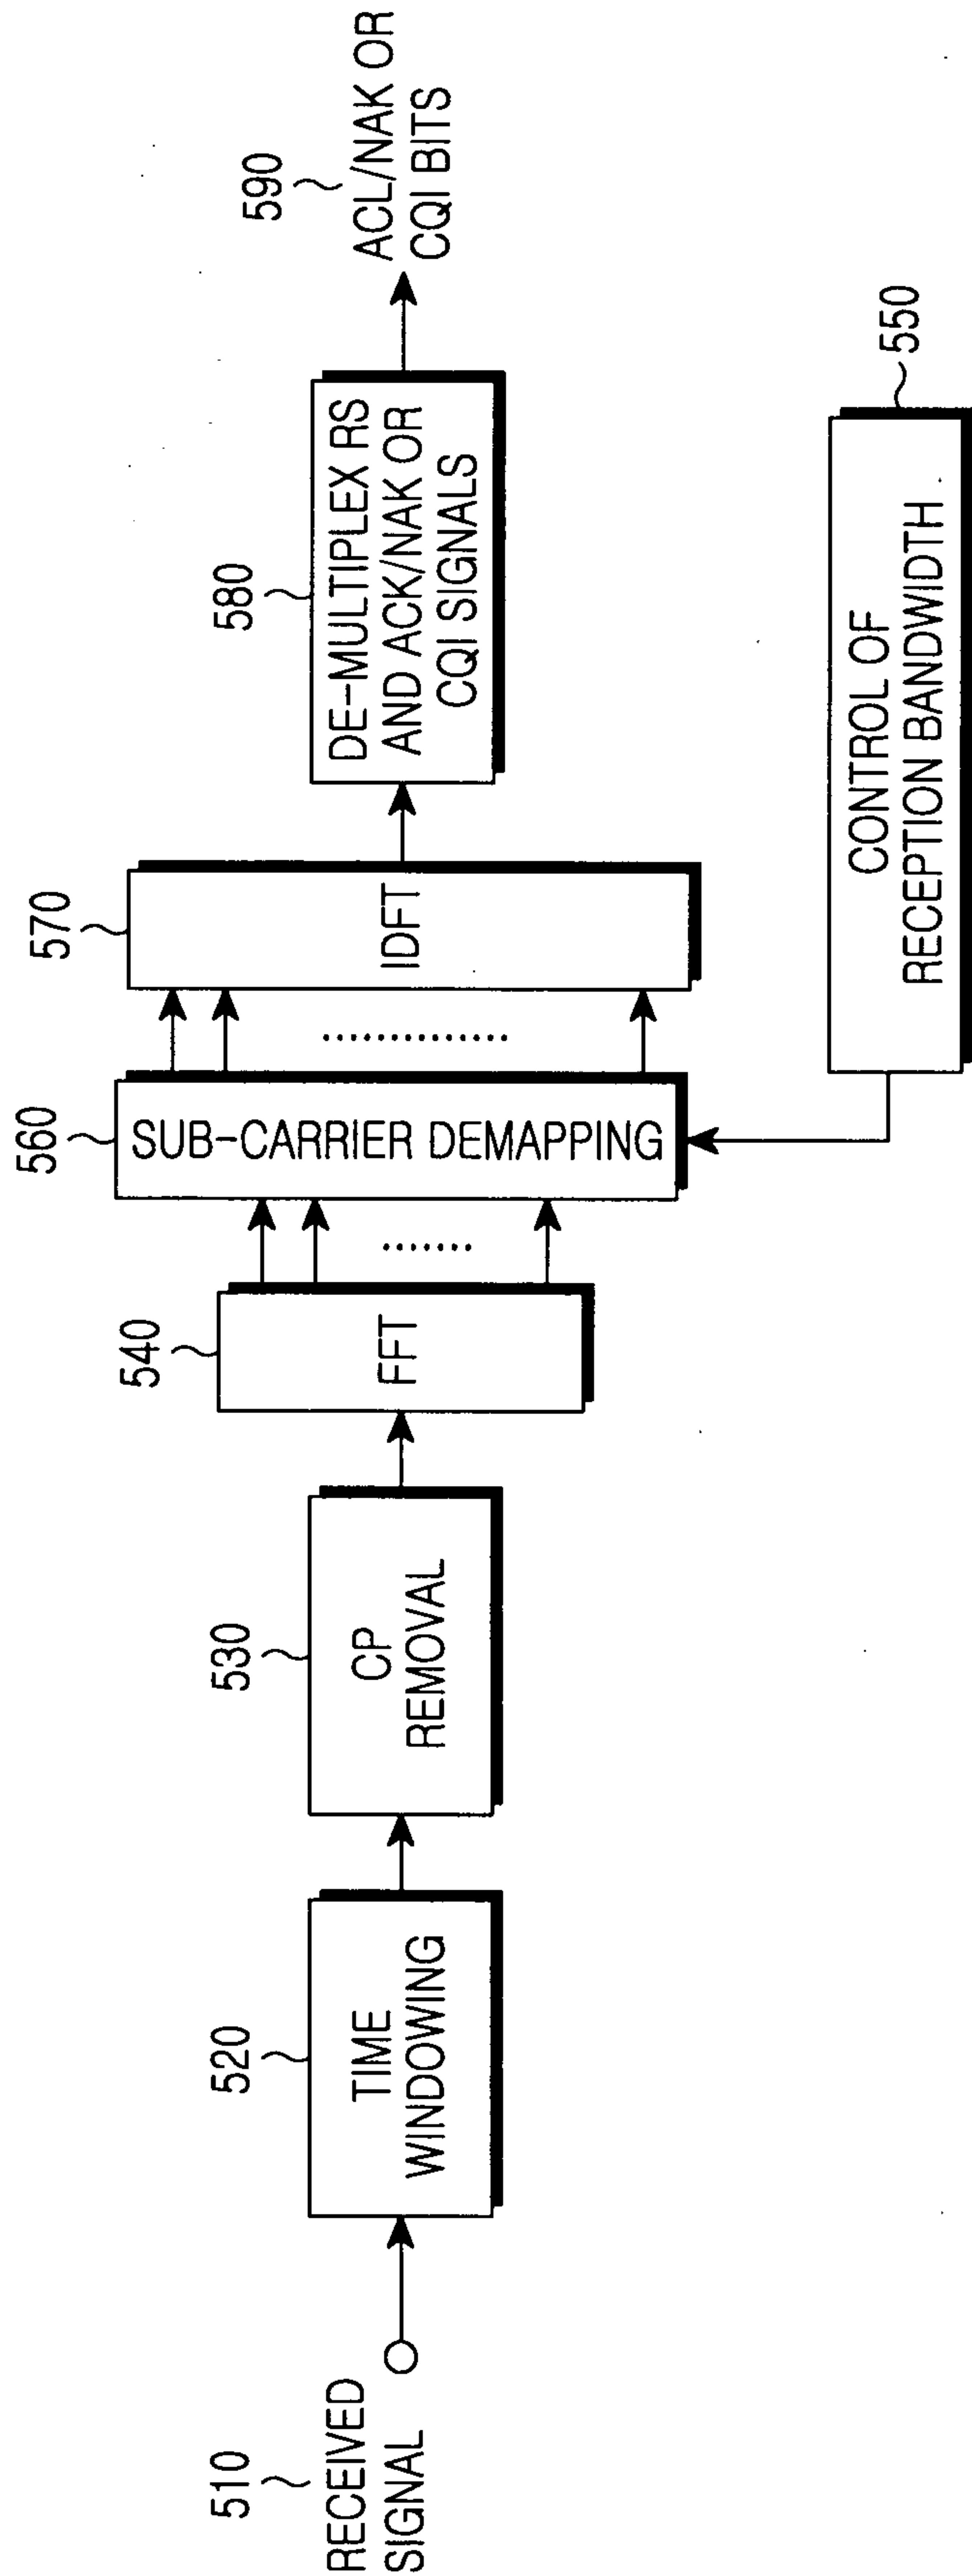


FIG.5

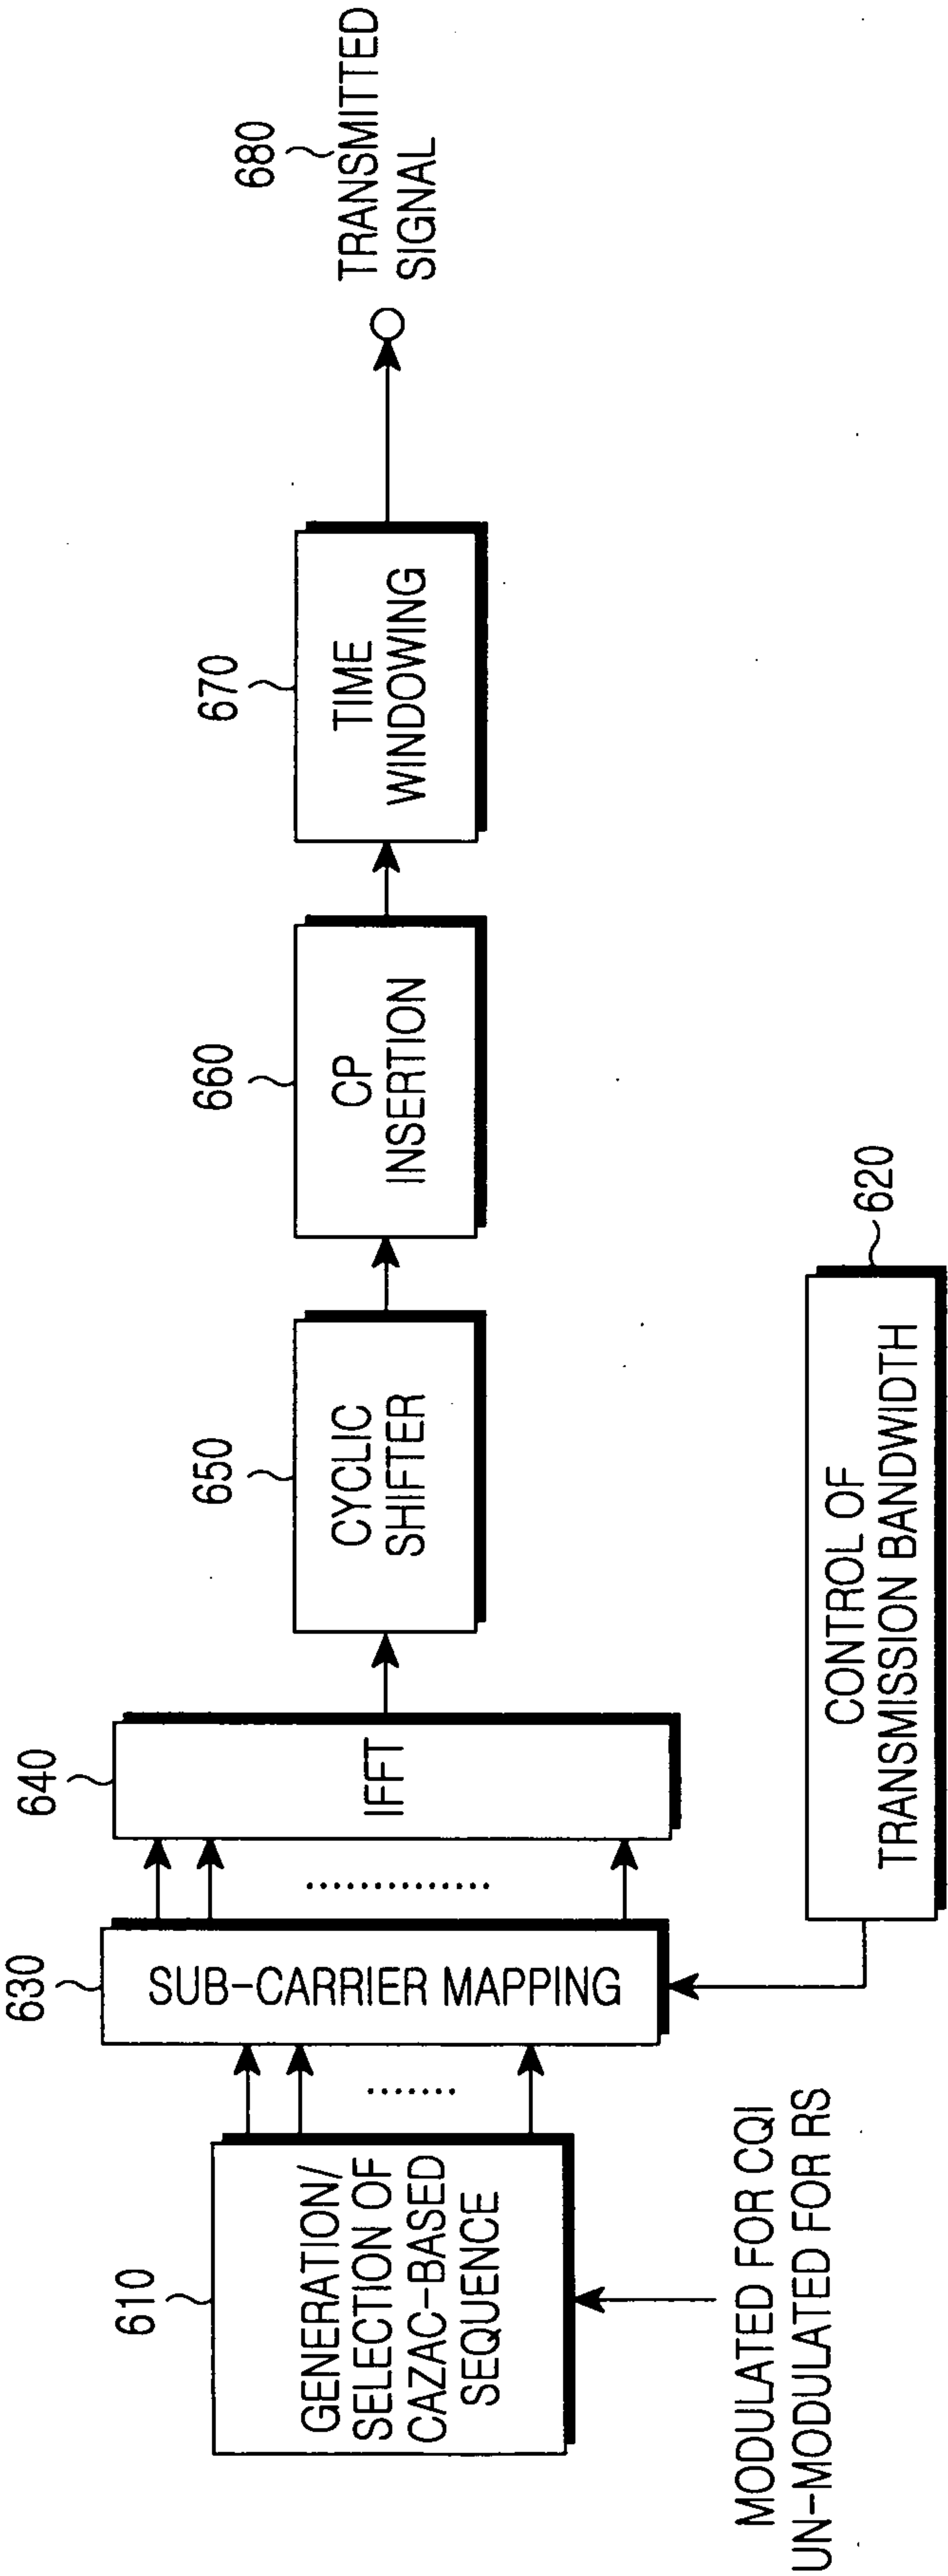


FIG. 6

7/16

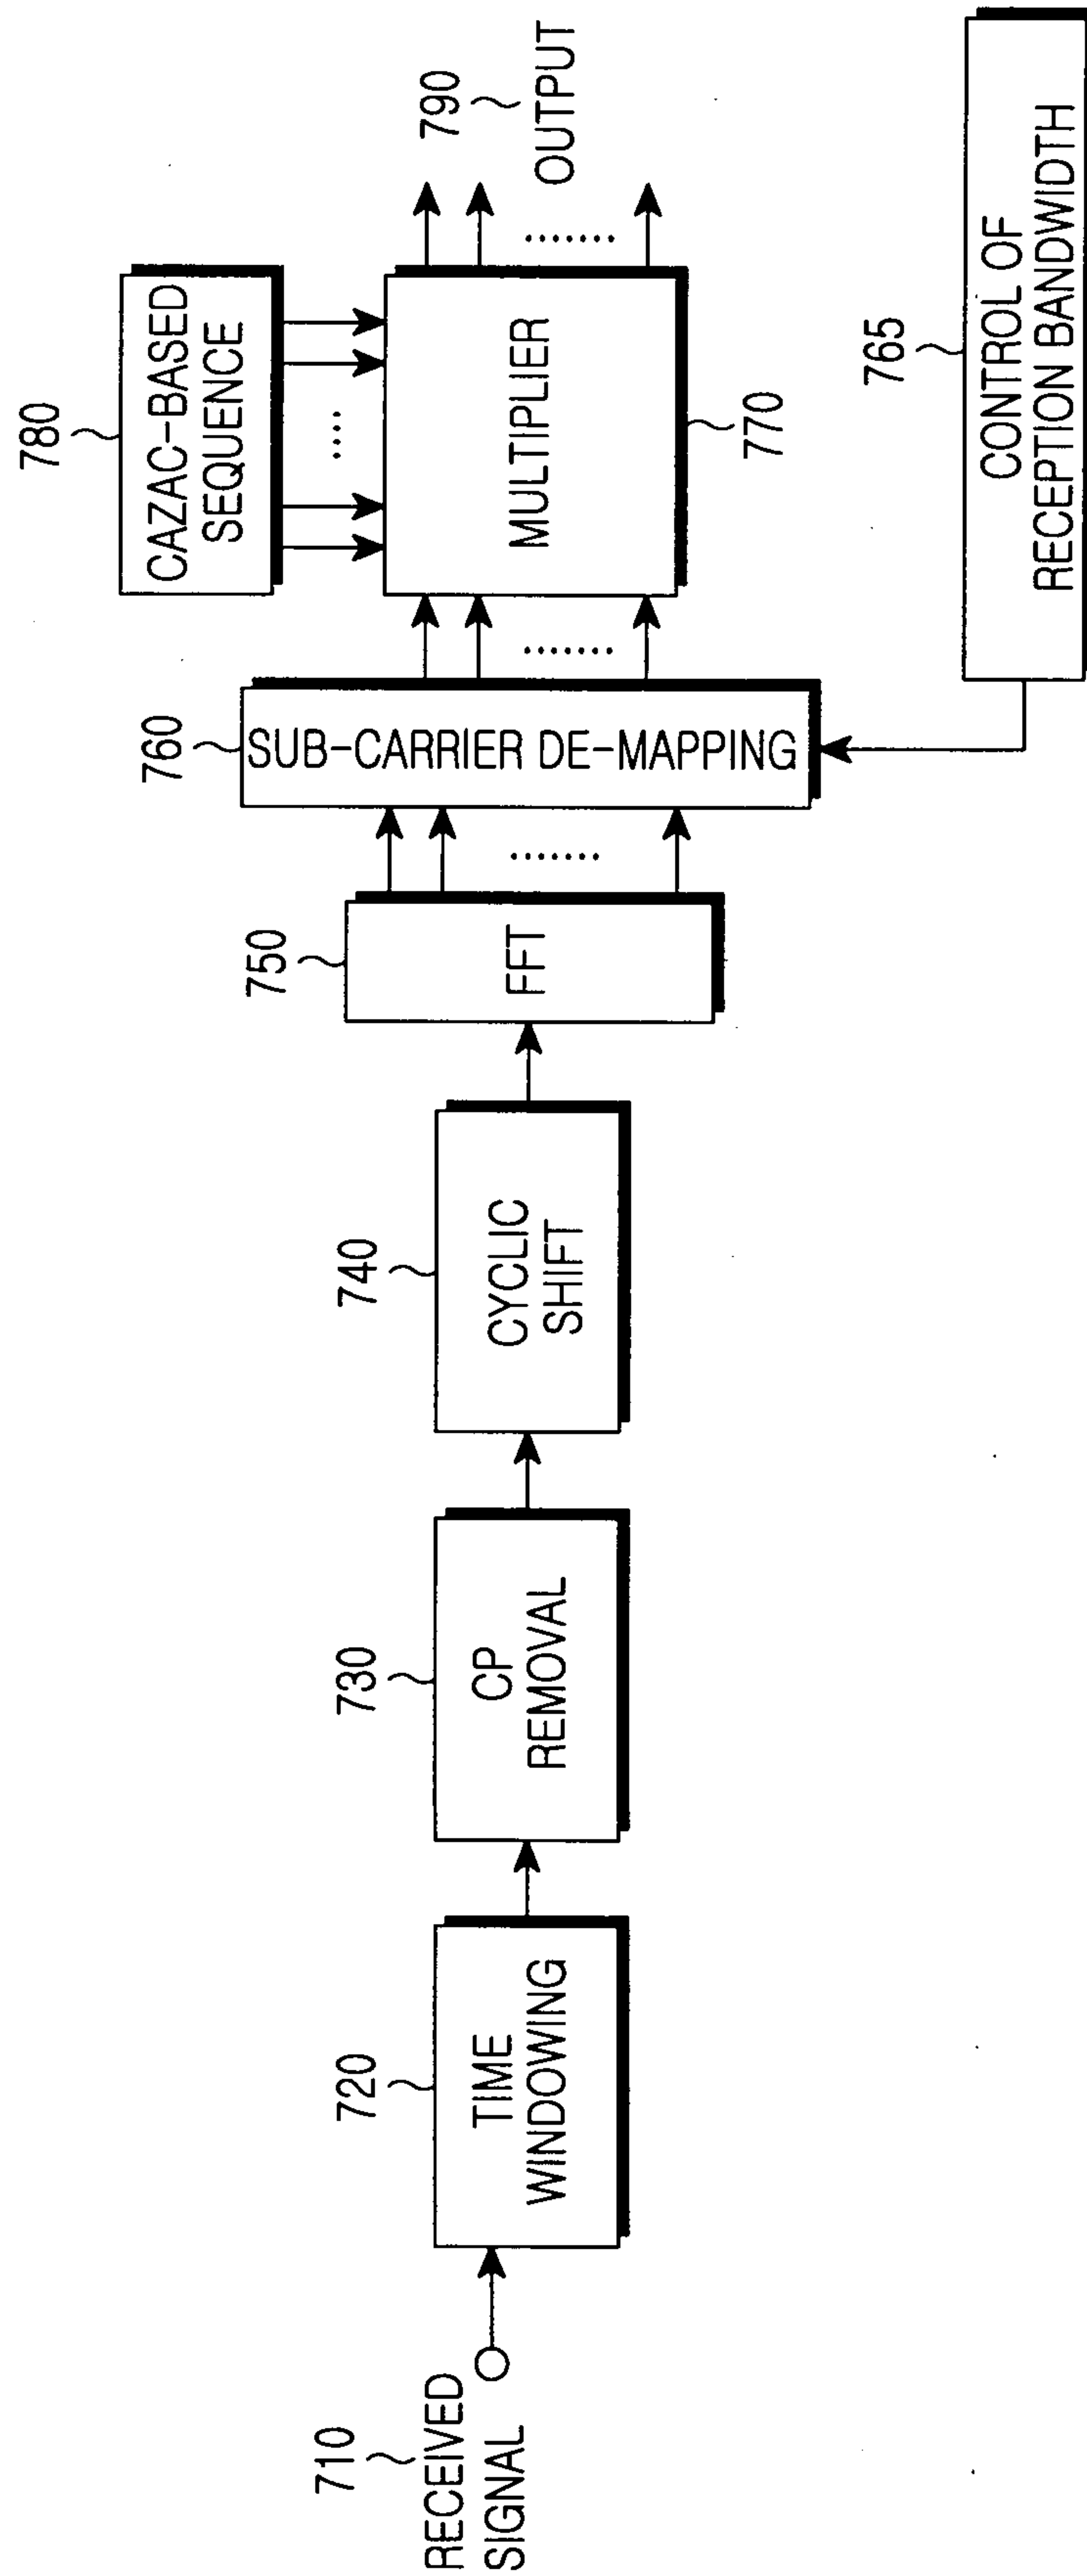


FIG. 7

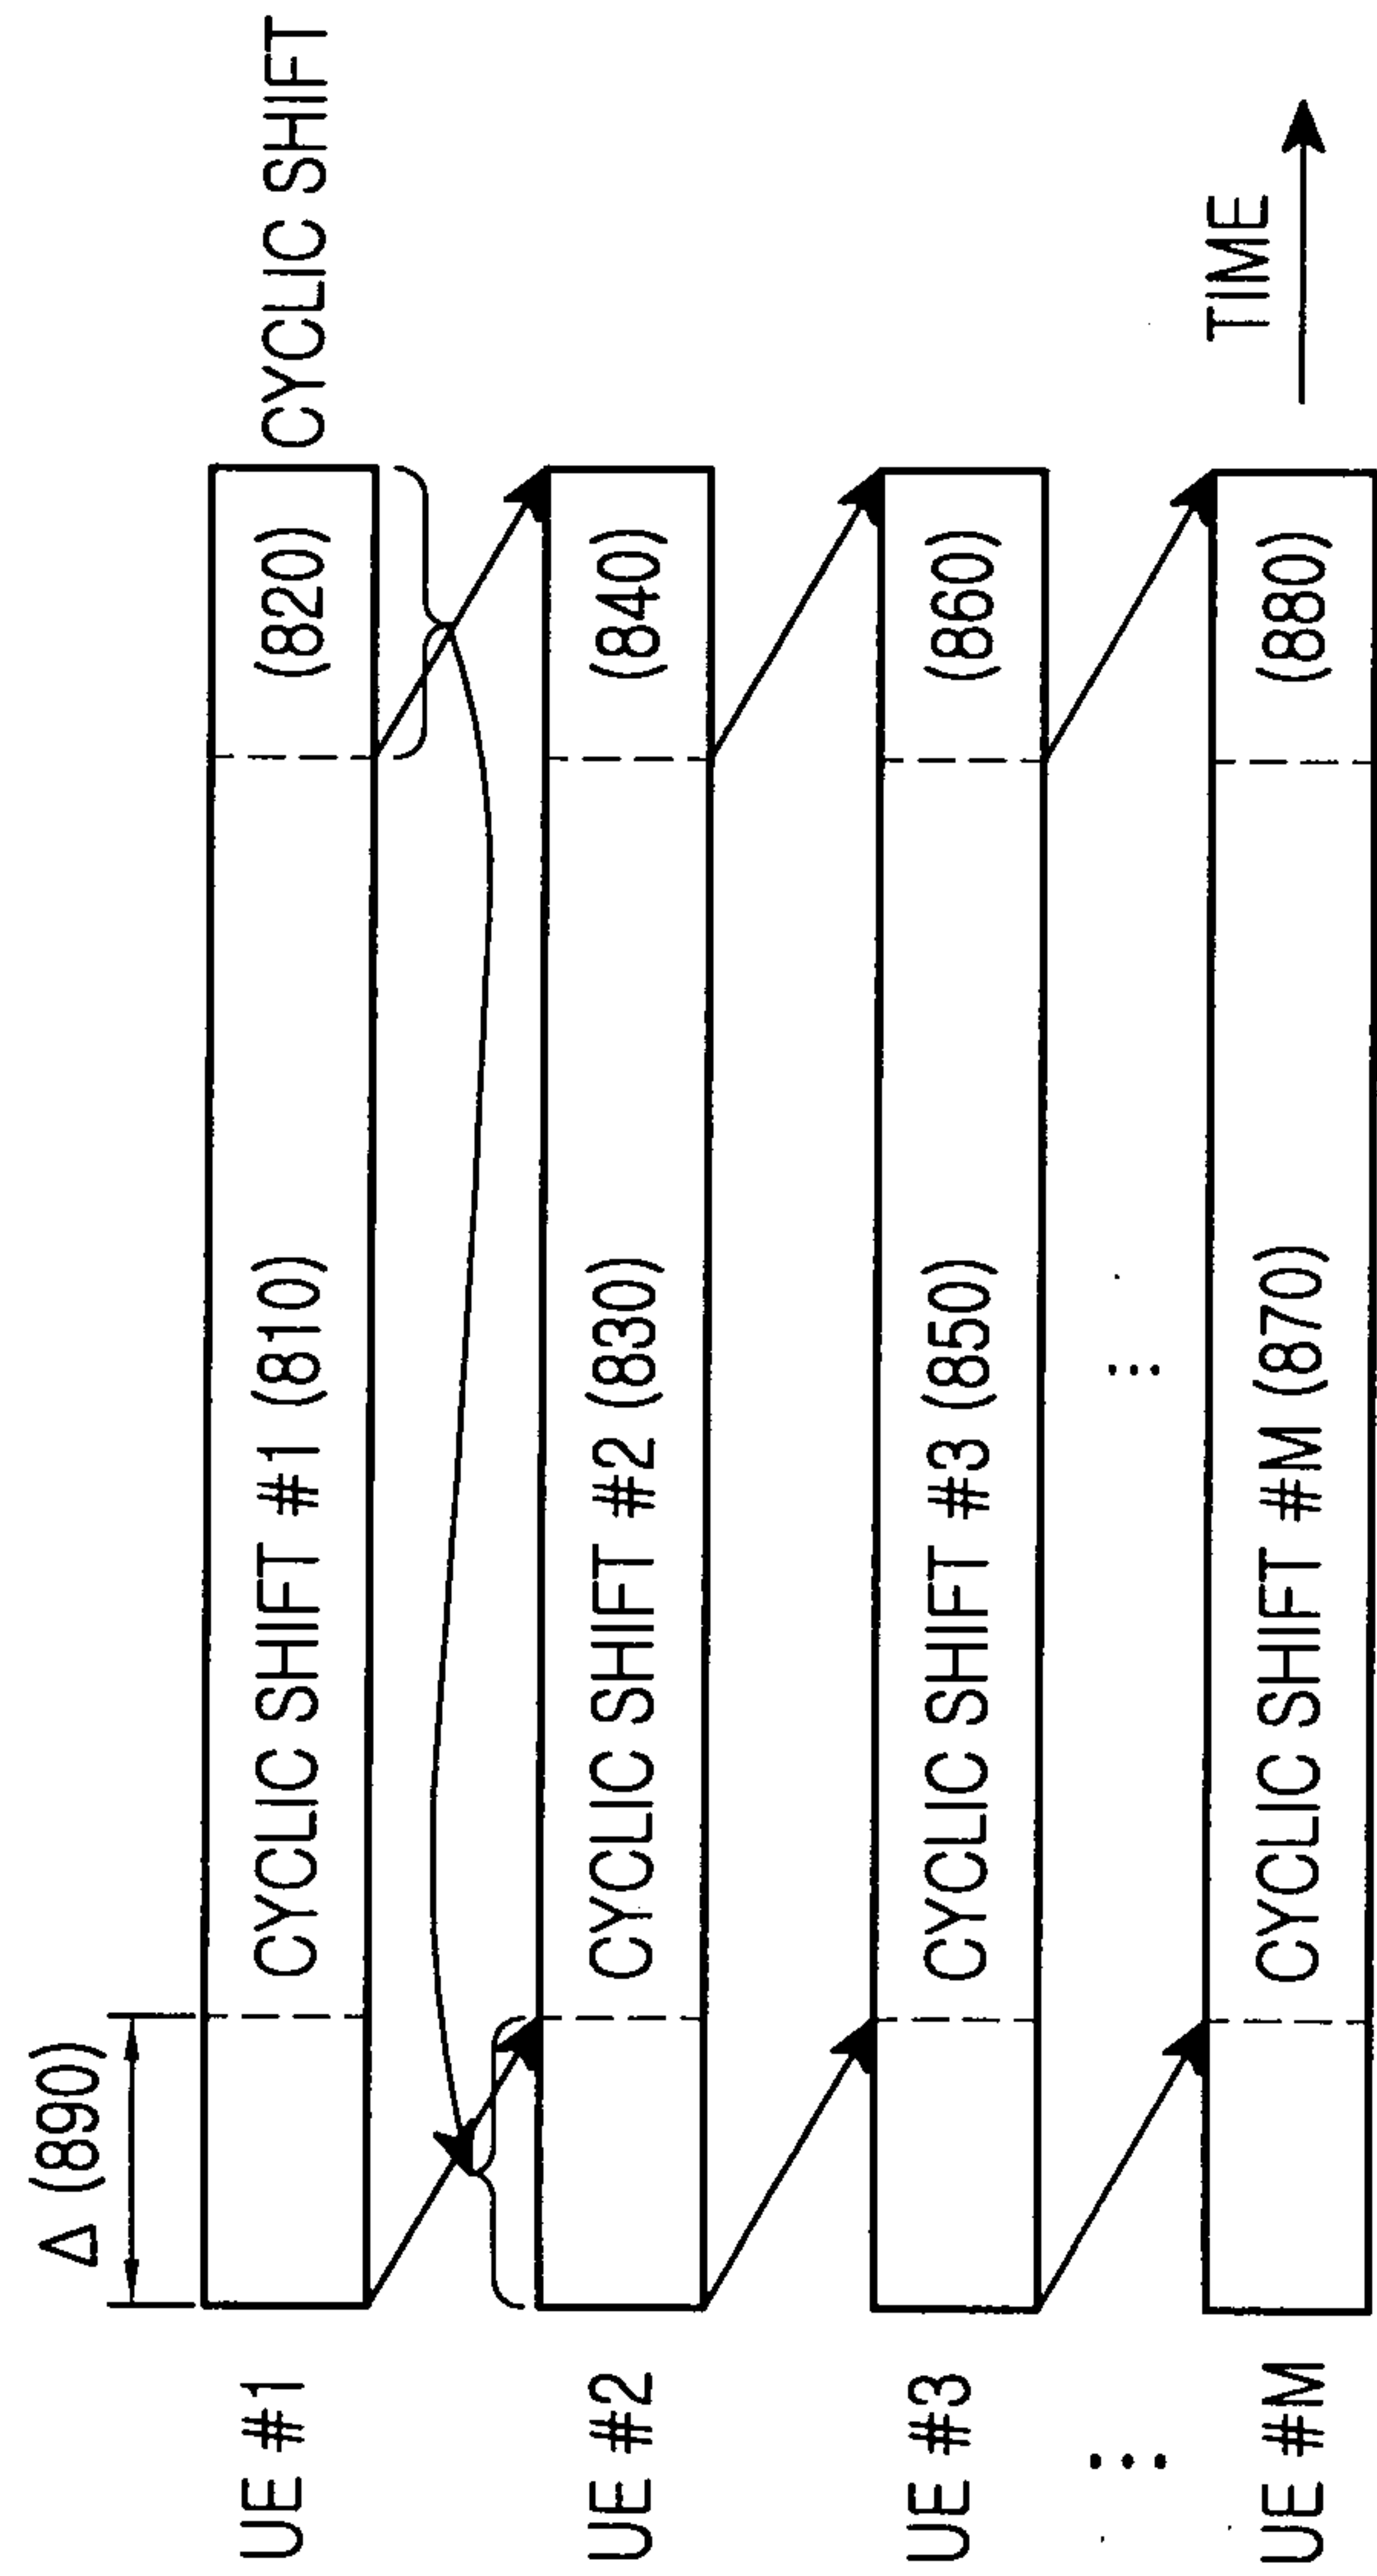


FIG.8

9/16

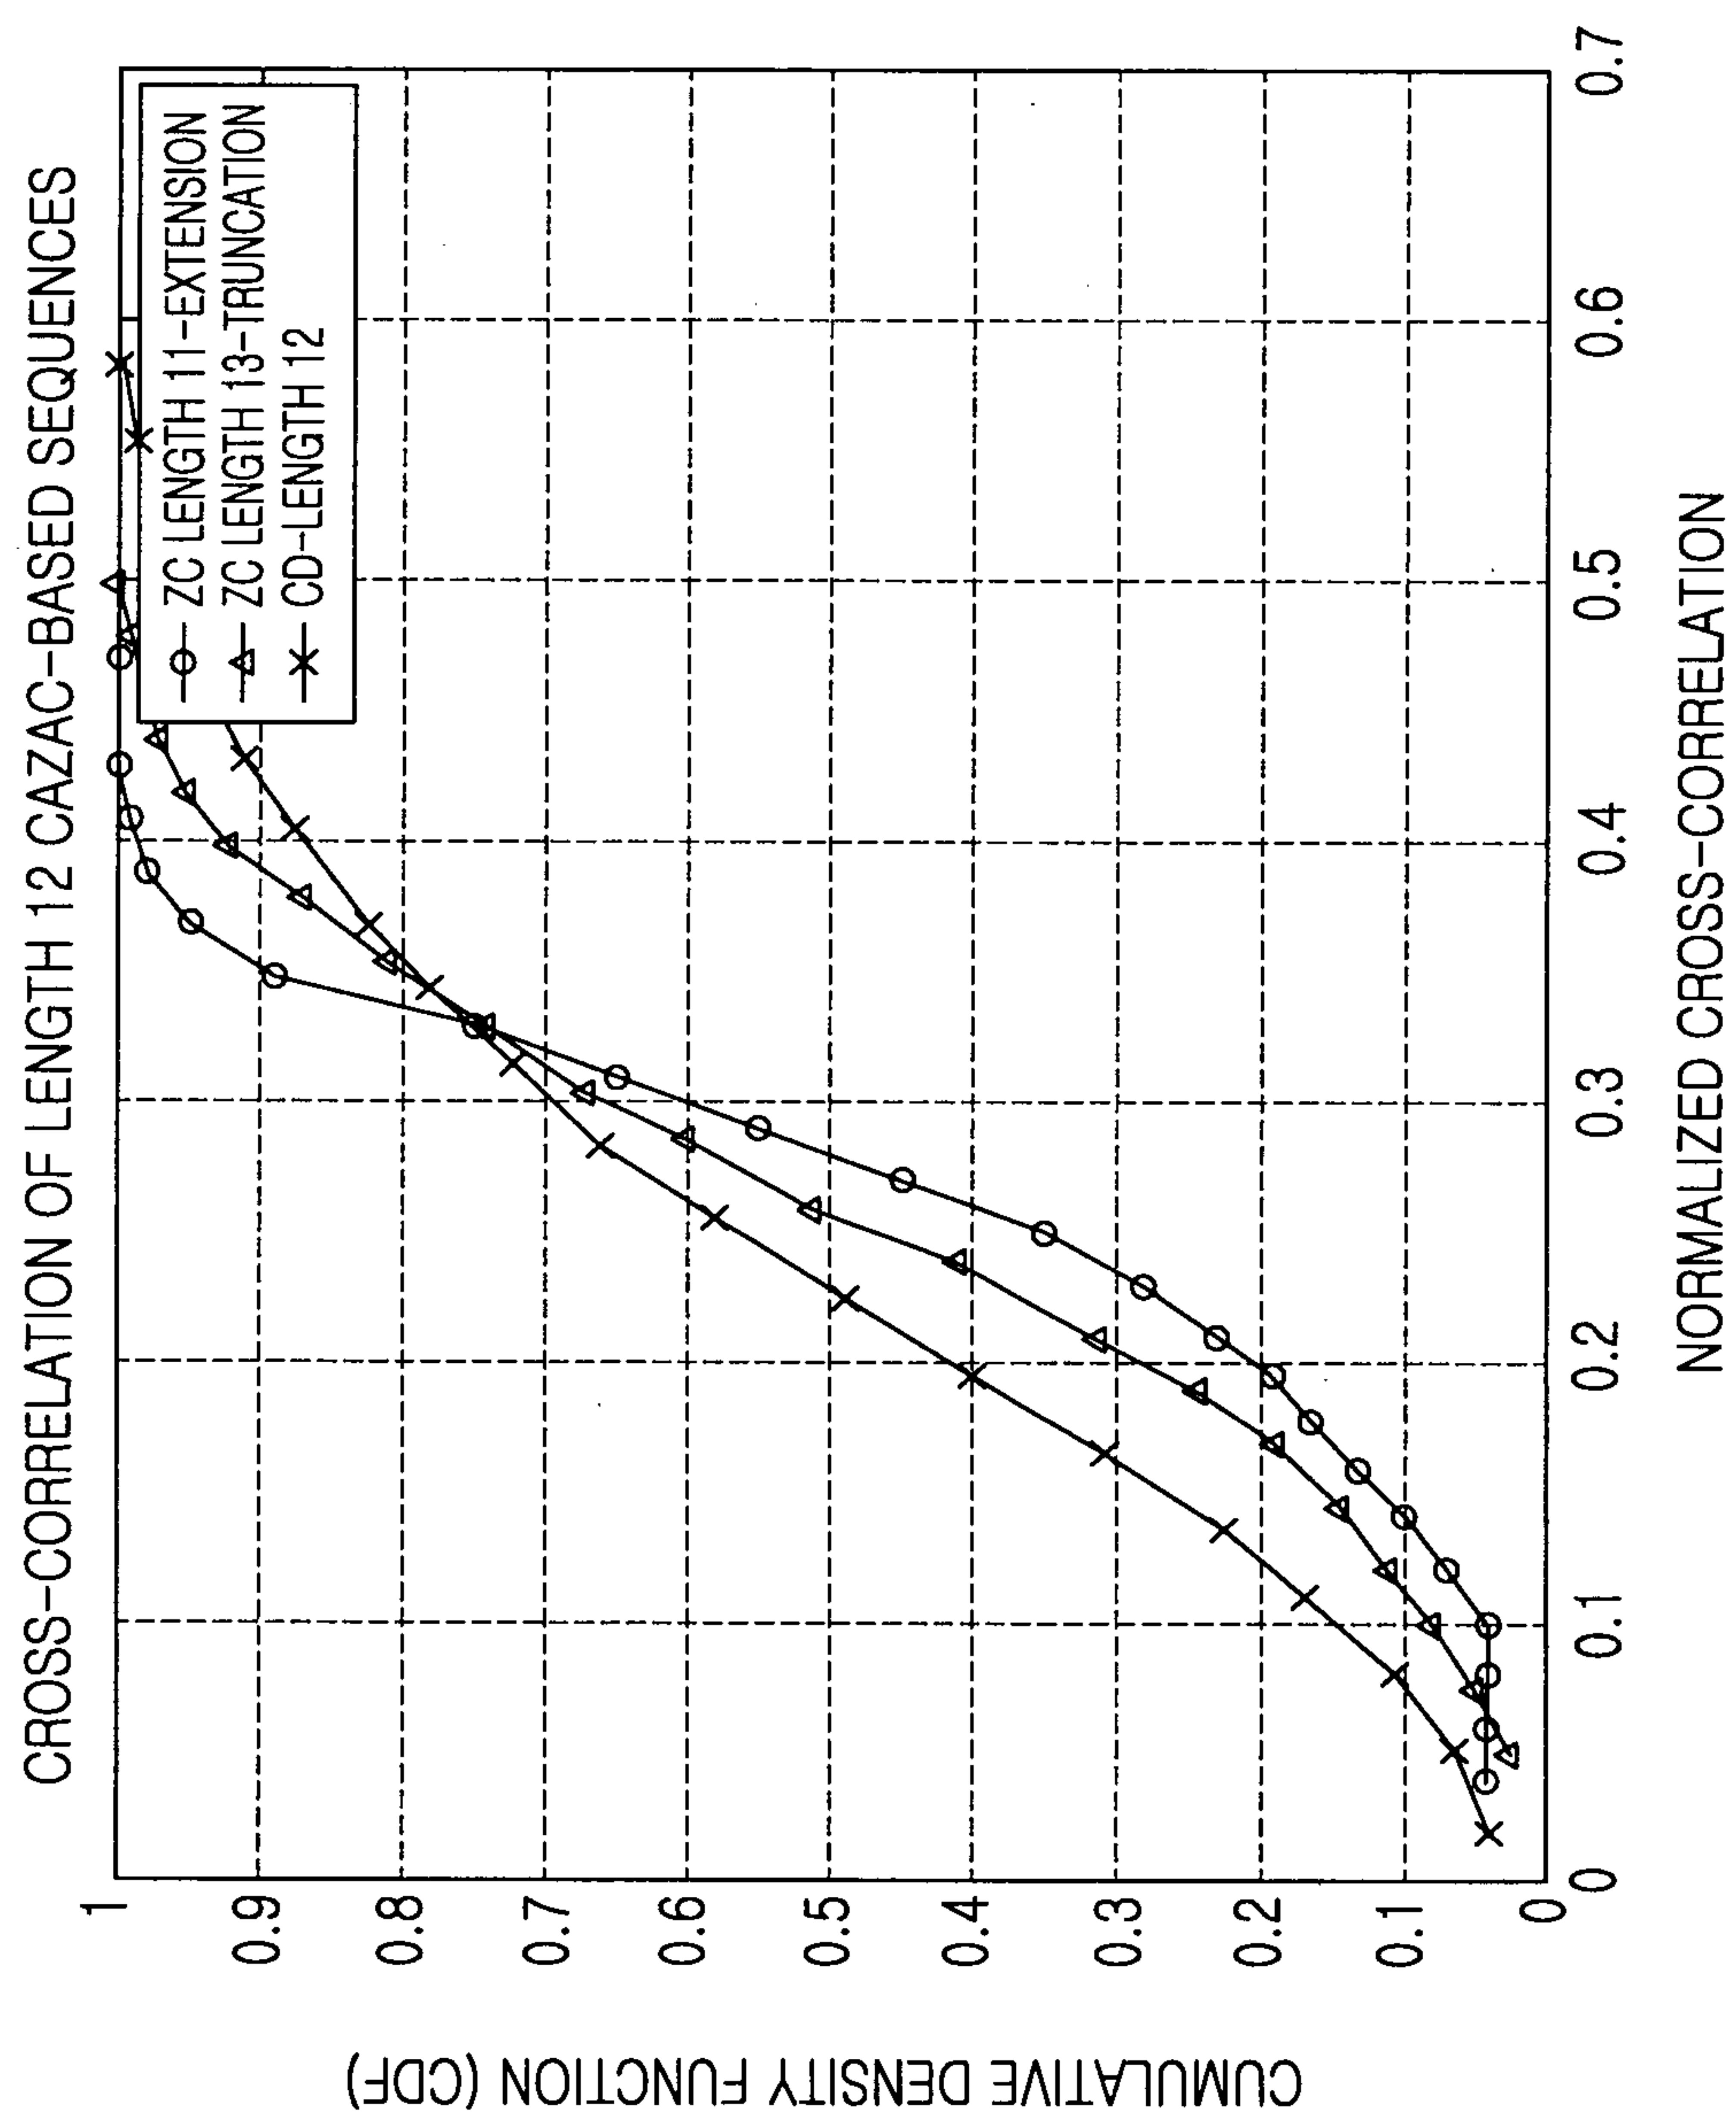


FIG.9

10/16

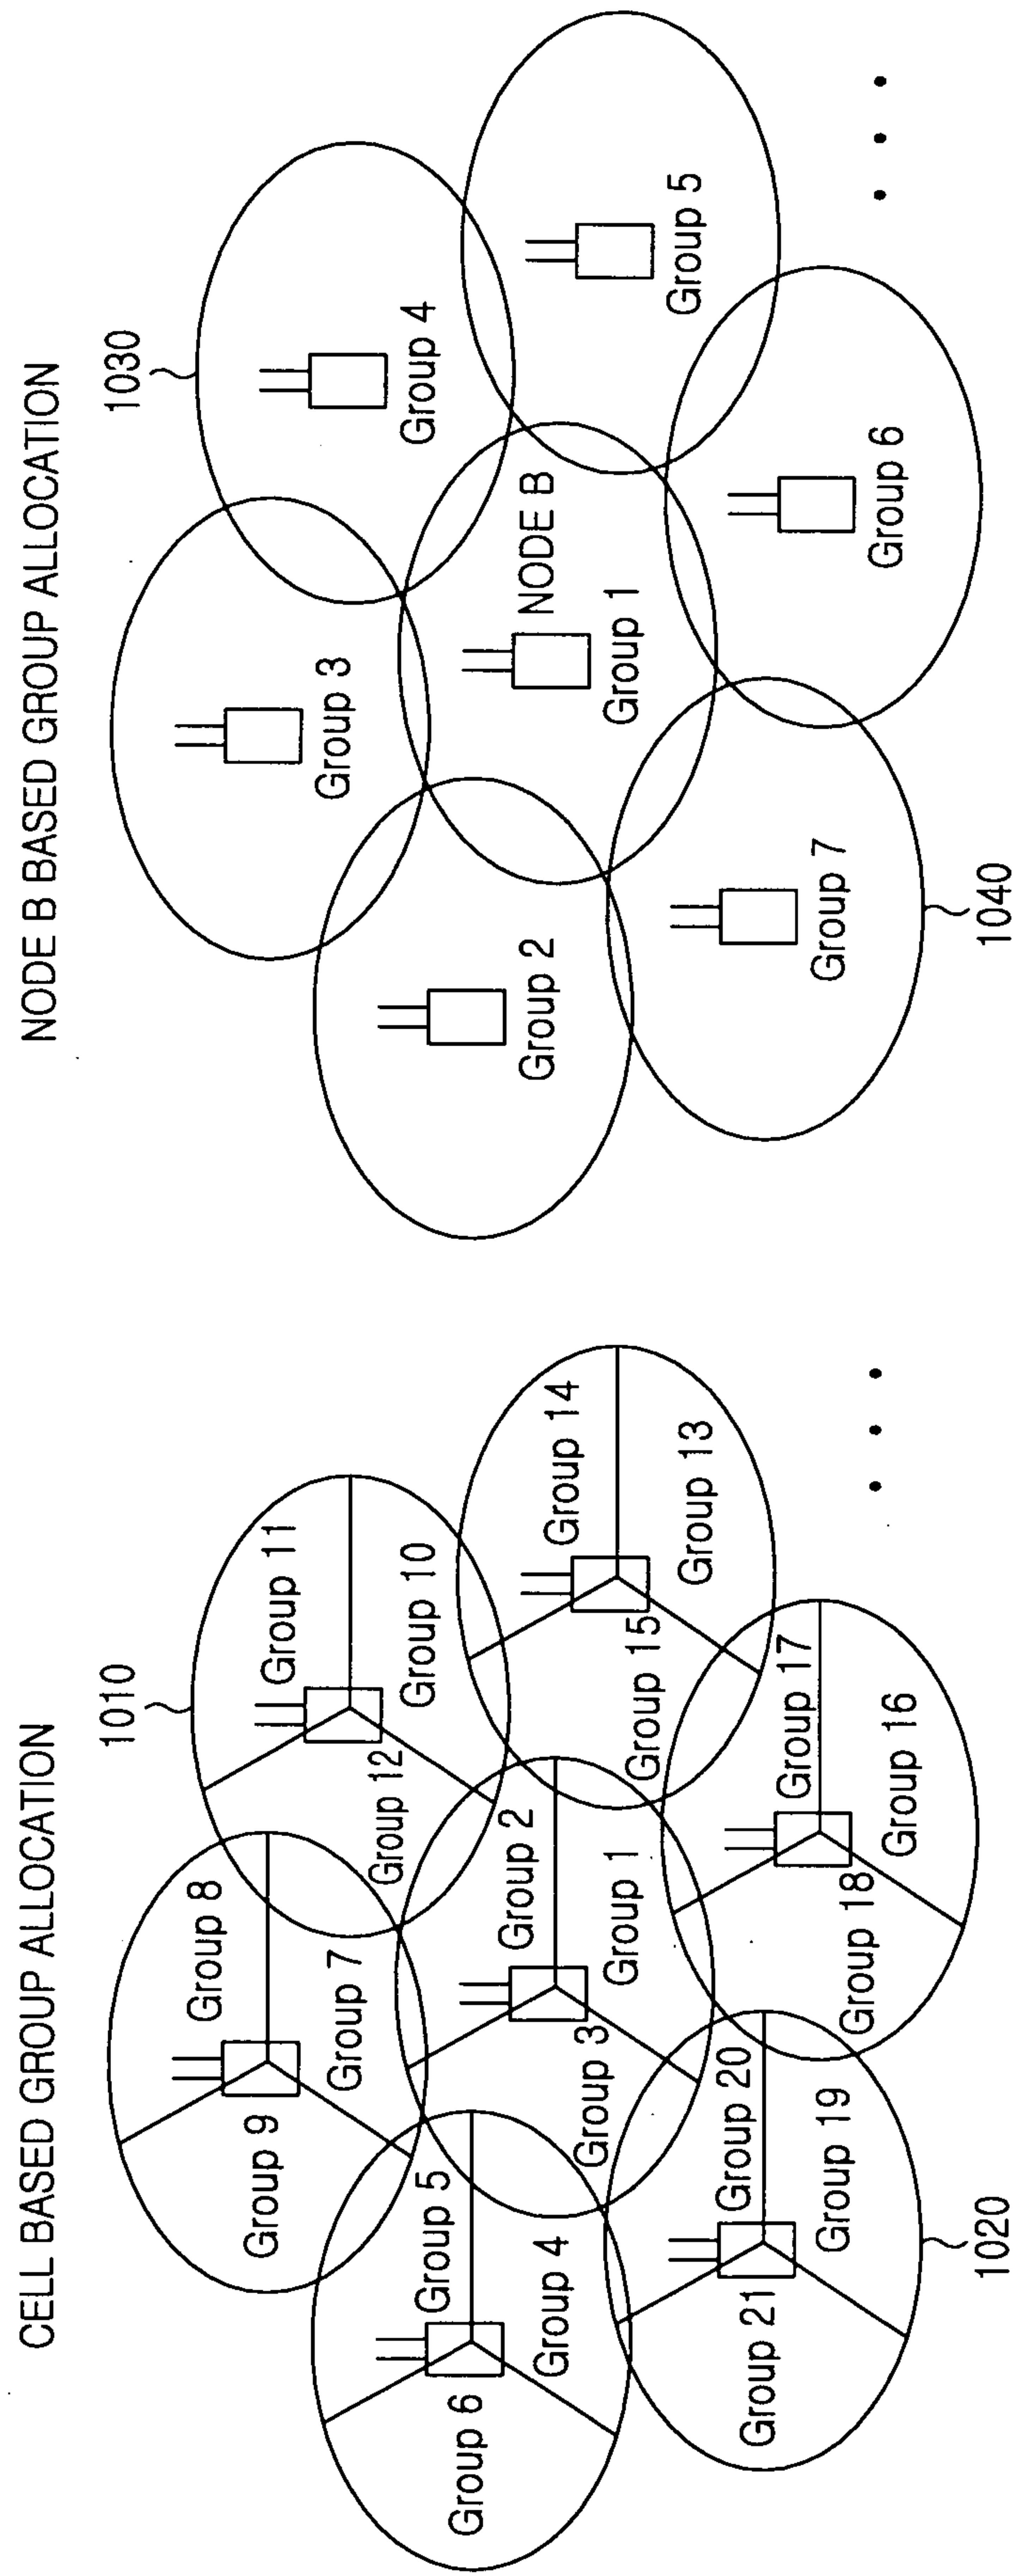


FIG. 10

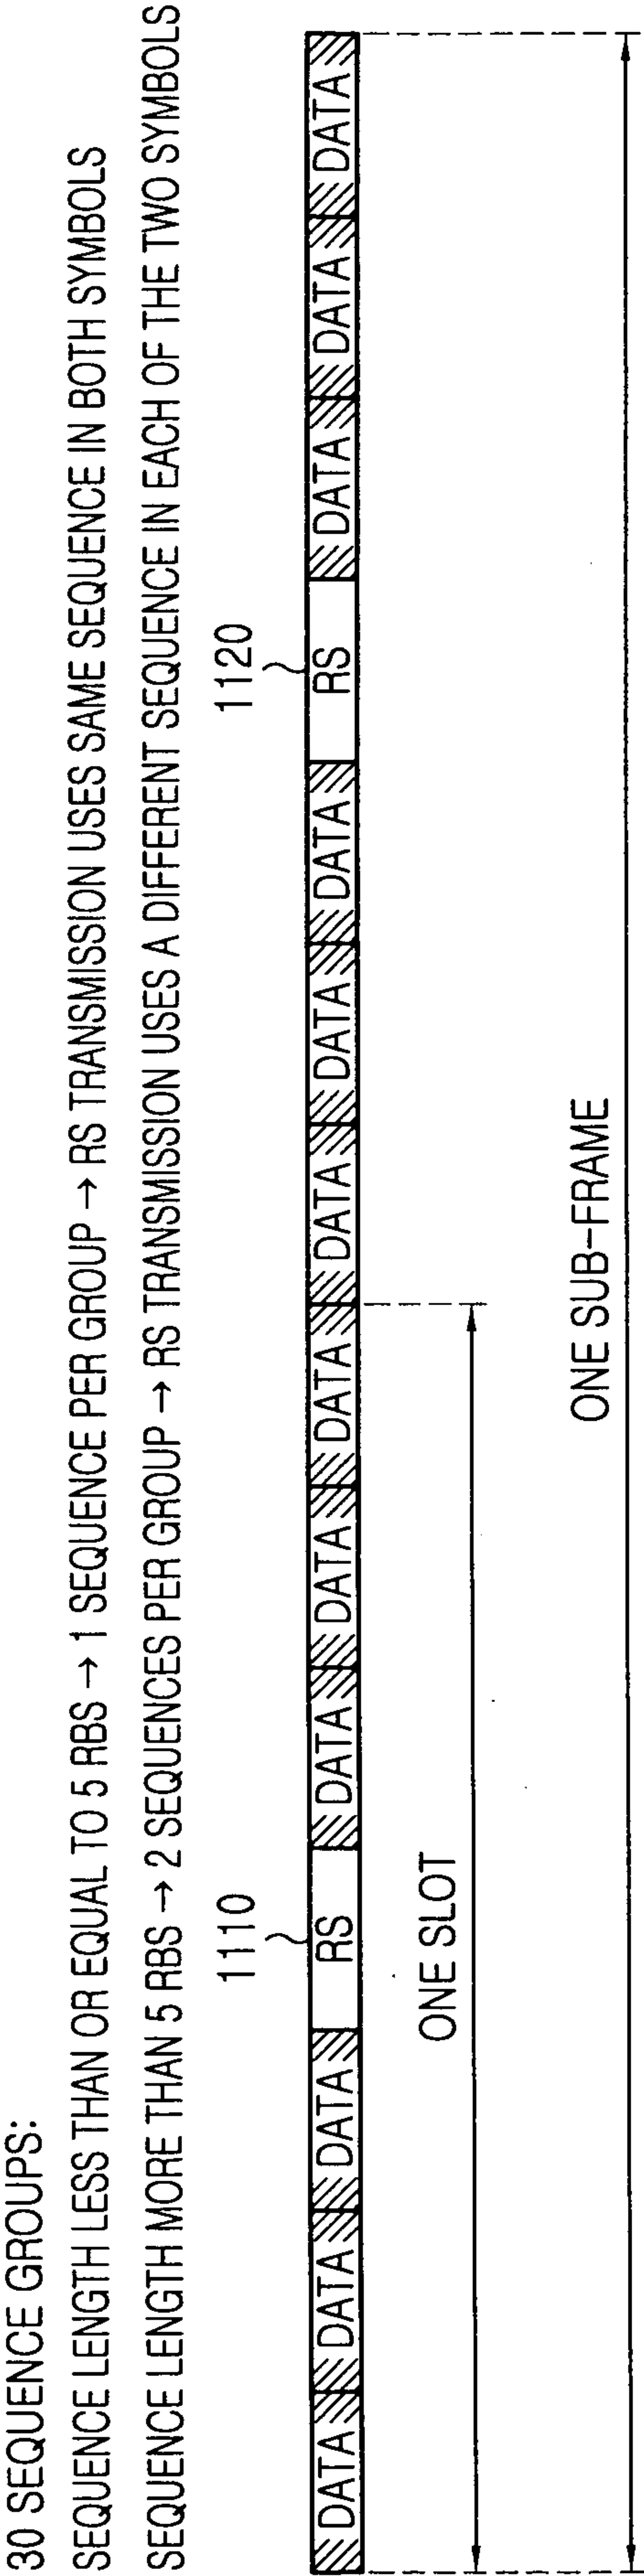


FIG.11

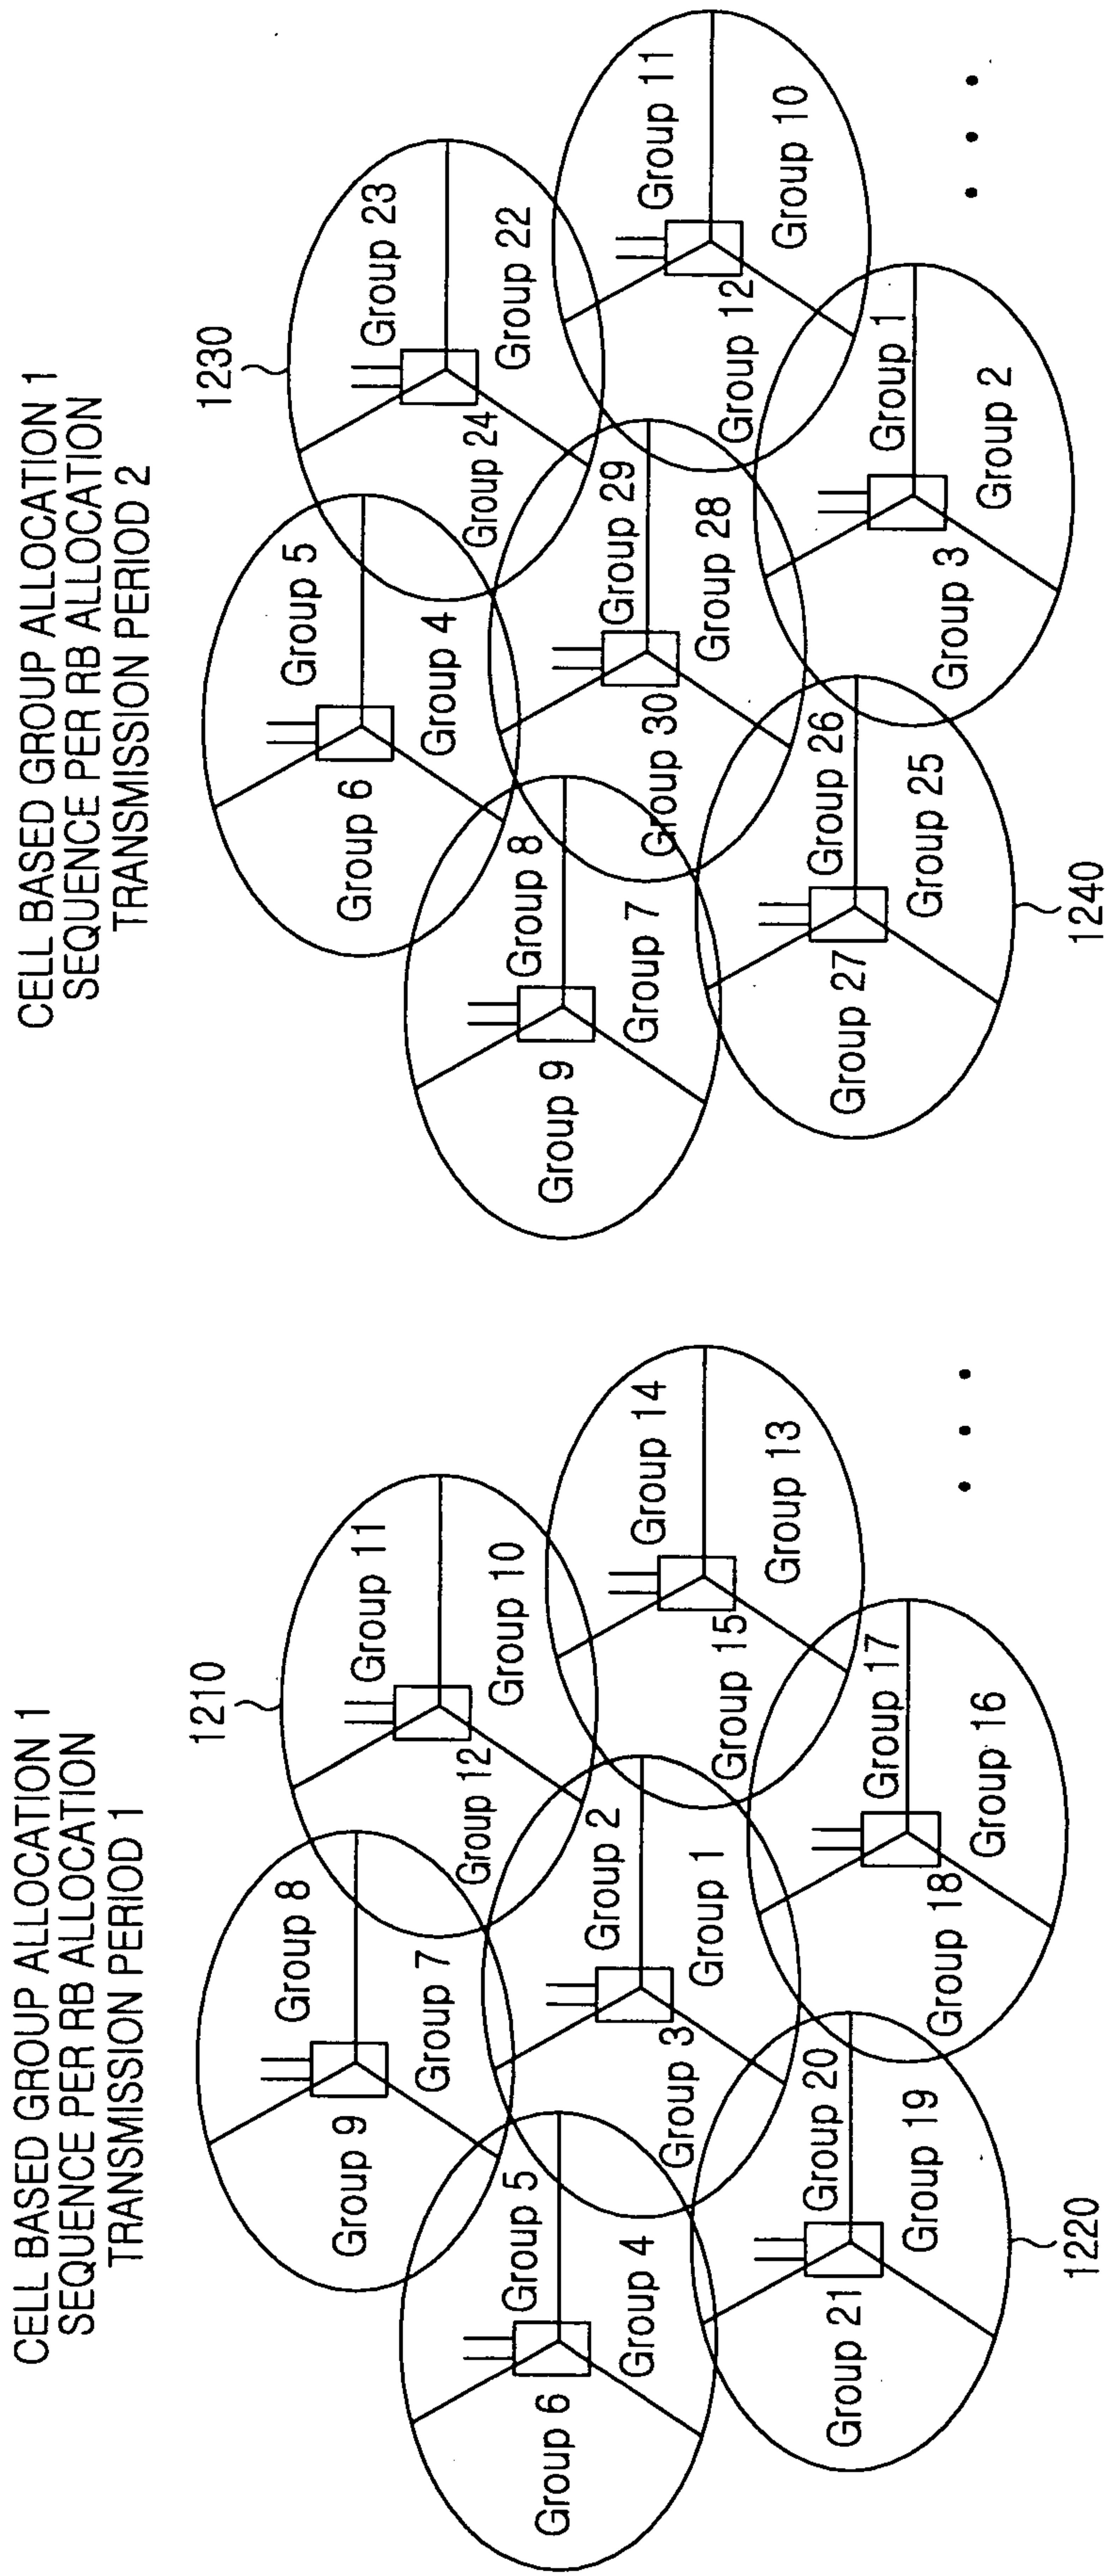


FIG.12

30 SEQUENCE GROUPS: SEQUENCE GROUP HOPPING APPLIES BETWEEN RS TRANSMISSION SYMBOLS (BETWEEN SLOTS AND SUB-FRAMES)
EACH SEQUENCE GROUP CONTAINS ONE SEQUENCE FOR EACH POSSIBLE RB ALLOCATION
RS TRANSMISSION USES THE SEQUENCE FROM THE SEQUENCE GROUP CORRESPONDING TO THE SAME RB ALLOCATION

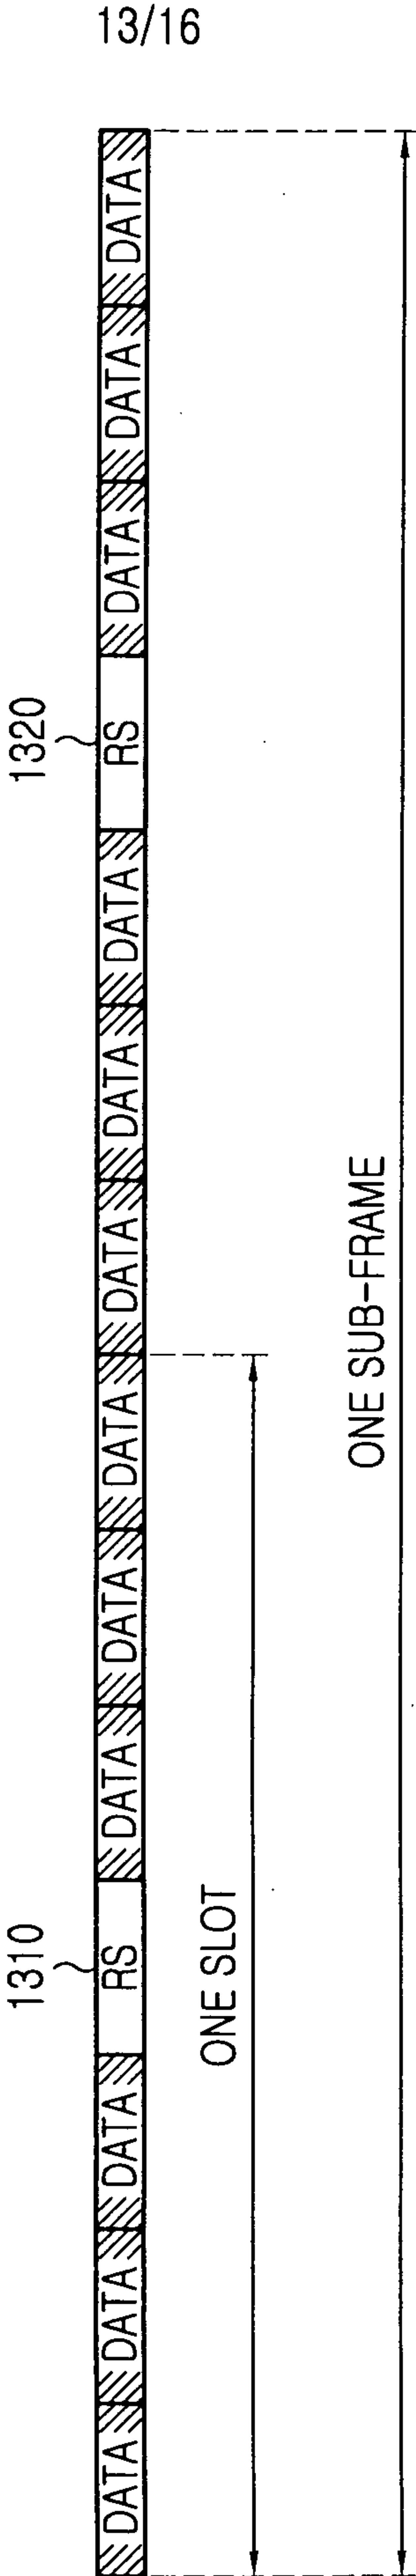


FIG.13

14/16

NODE B BASED GROUP ALLOCATION: SAME SEQUENCE IS USED IN CELLS OF SAME NODE B
RS IN CELLS OF SAME NODE B ARE SEPARATED THROUGH CYCLIC SHIFTS (CS) OF SAME SEQUENCE

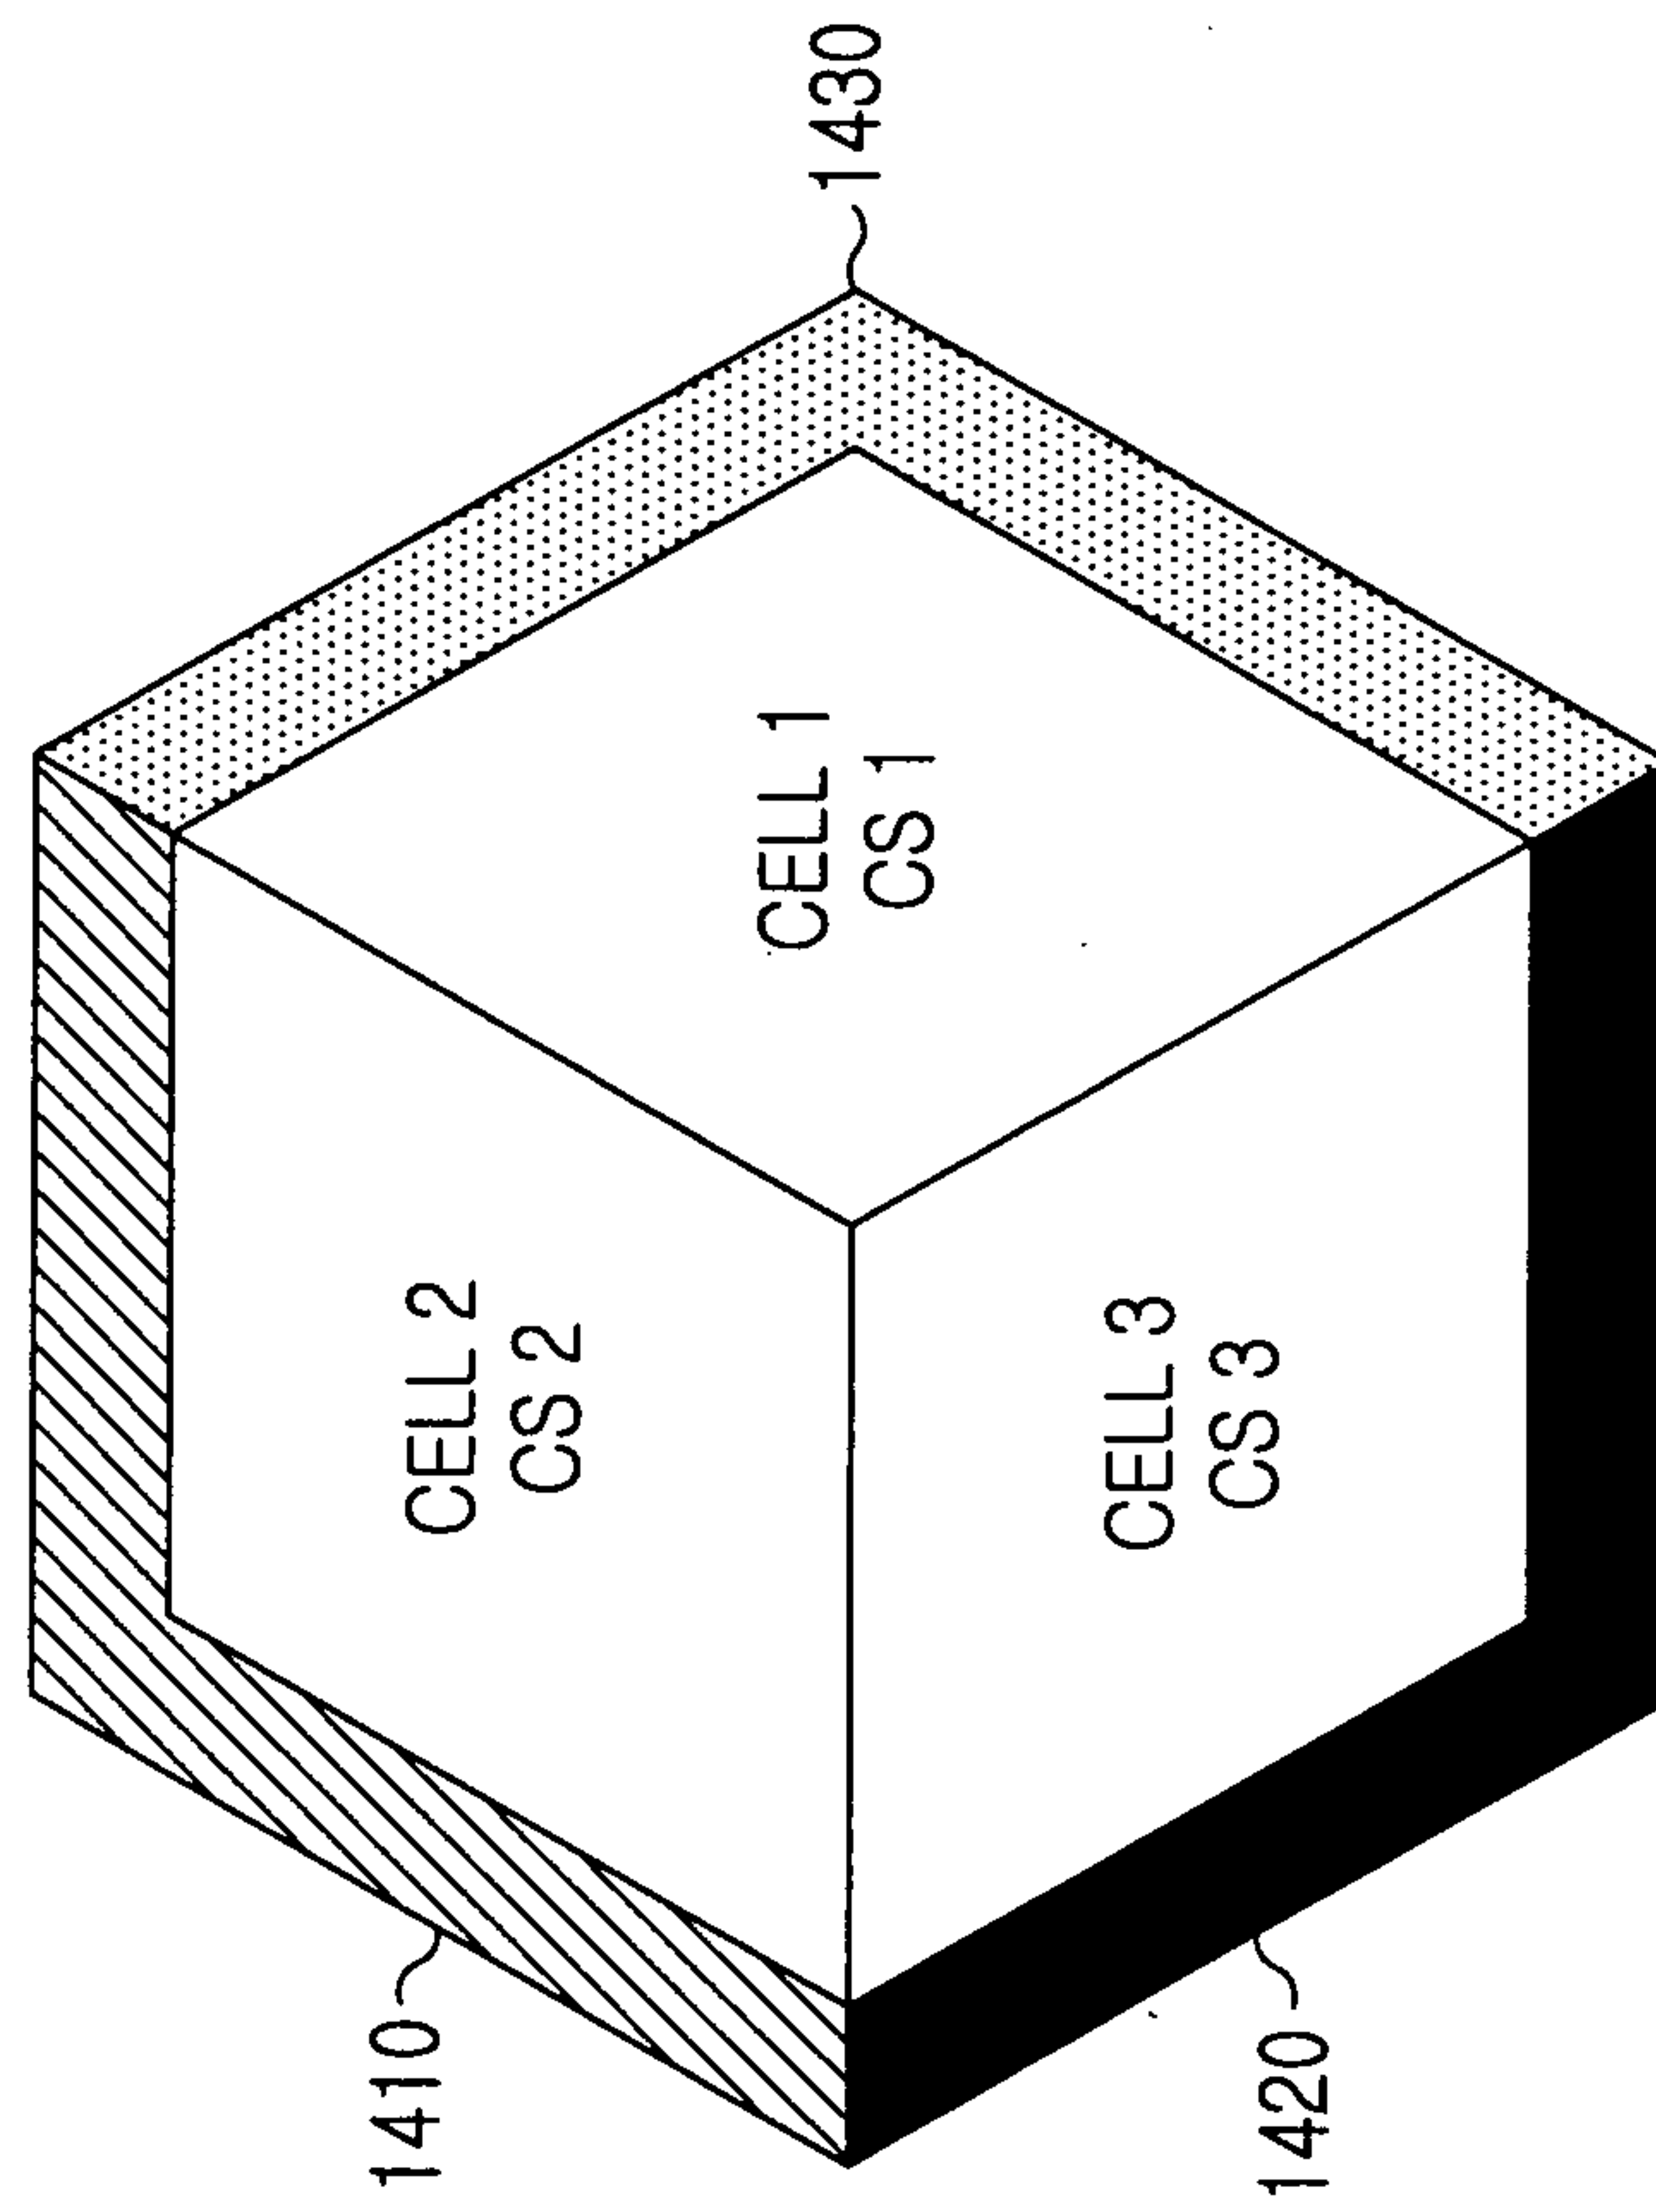


FIG.14

SEQUENCE GROUP PLANNING: PUCCH SEQUENCE DETERMINED BY SEQUENCE IN PUSCH GROUP FOR 1 RB ALLOCATION – FIGURE 10, CELL BASED GROUP ALLOCATION
SEQUENCE GROUP HOPPING: PUCCH SEQUENCE DETERMINED BY SEQUENCE IN PUSCH GROUP FOR 1 RB ALLOCATION – FIGURE 12, CELL BASED GROUP ALLOCATION

IF BOTH PLANNING AND HOPPING CAN BE SUPPORTED, SERVING CELL BROADCASTS (THROUGH THE VALUE OF 1 BIT) THE METHOD USED (PLANNING OR HOPPING)
UE DETERMINES THE PUCCH SEQUENCE FOR BROADCAST PUSCH SEQUENCE GROUP (PLANNING) OR PUSCH SEQUENCE GROUP HOPPING PATTERN (HOPPING)

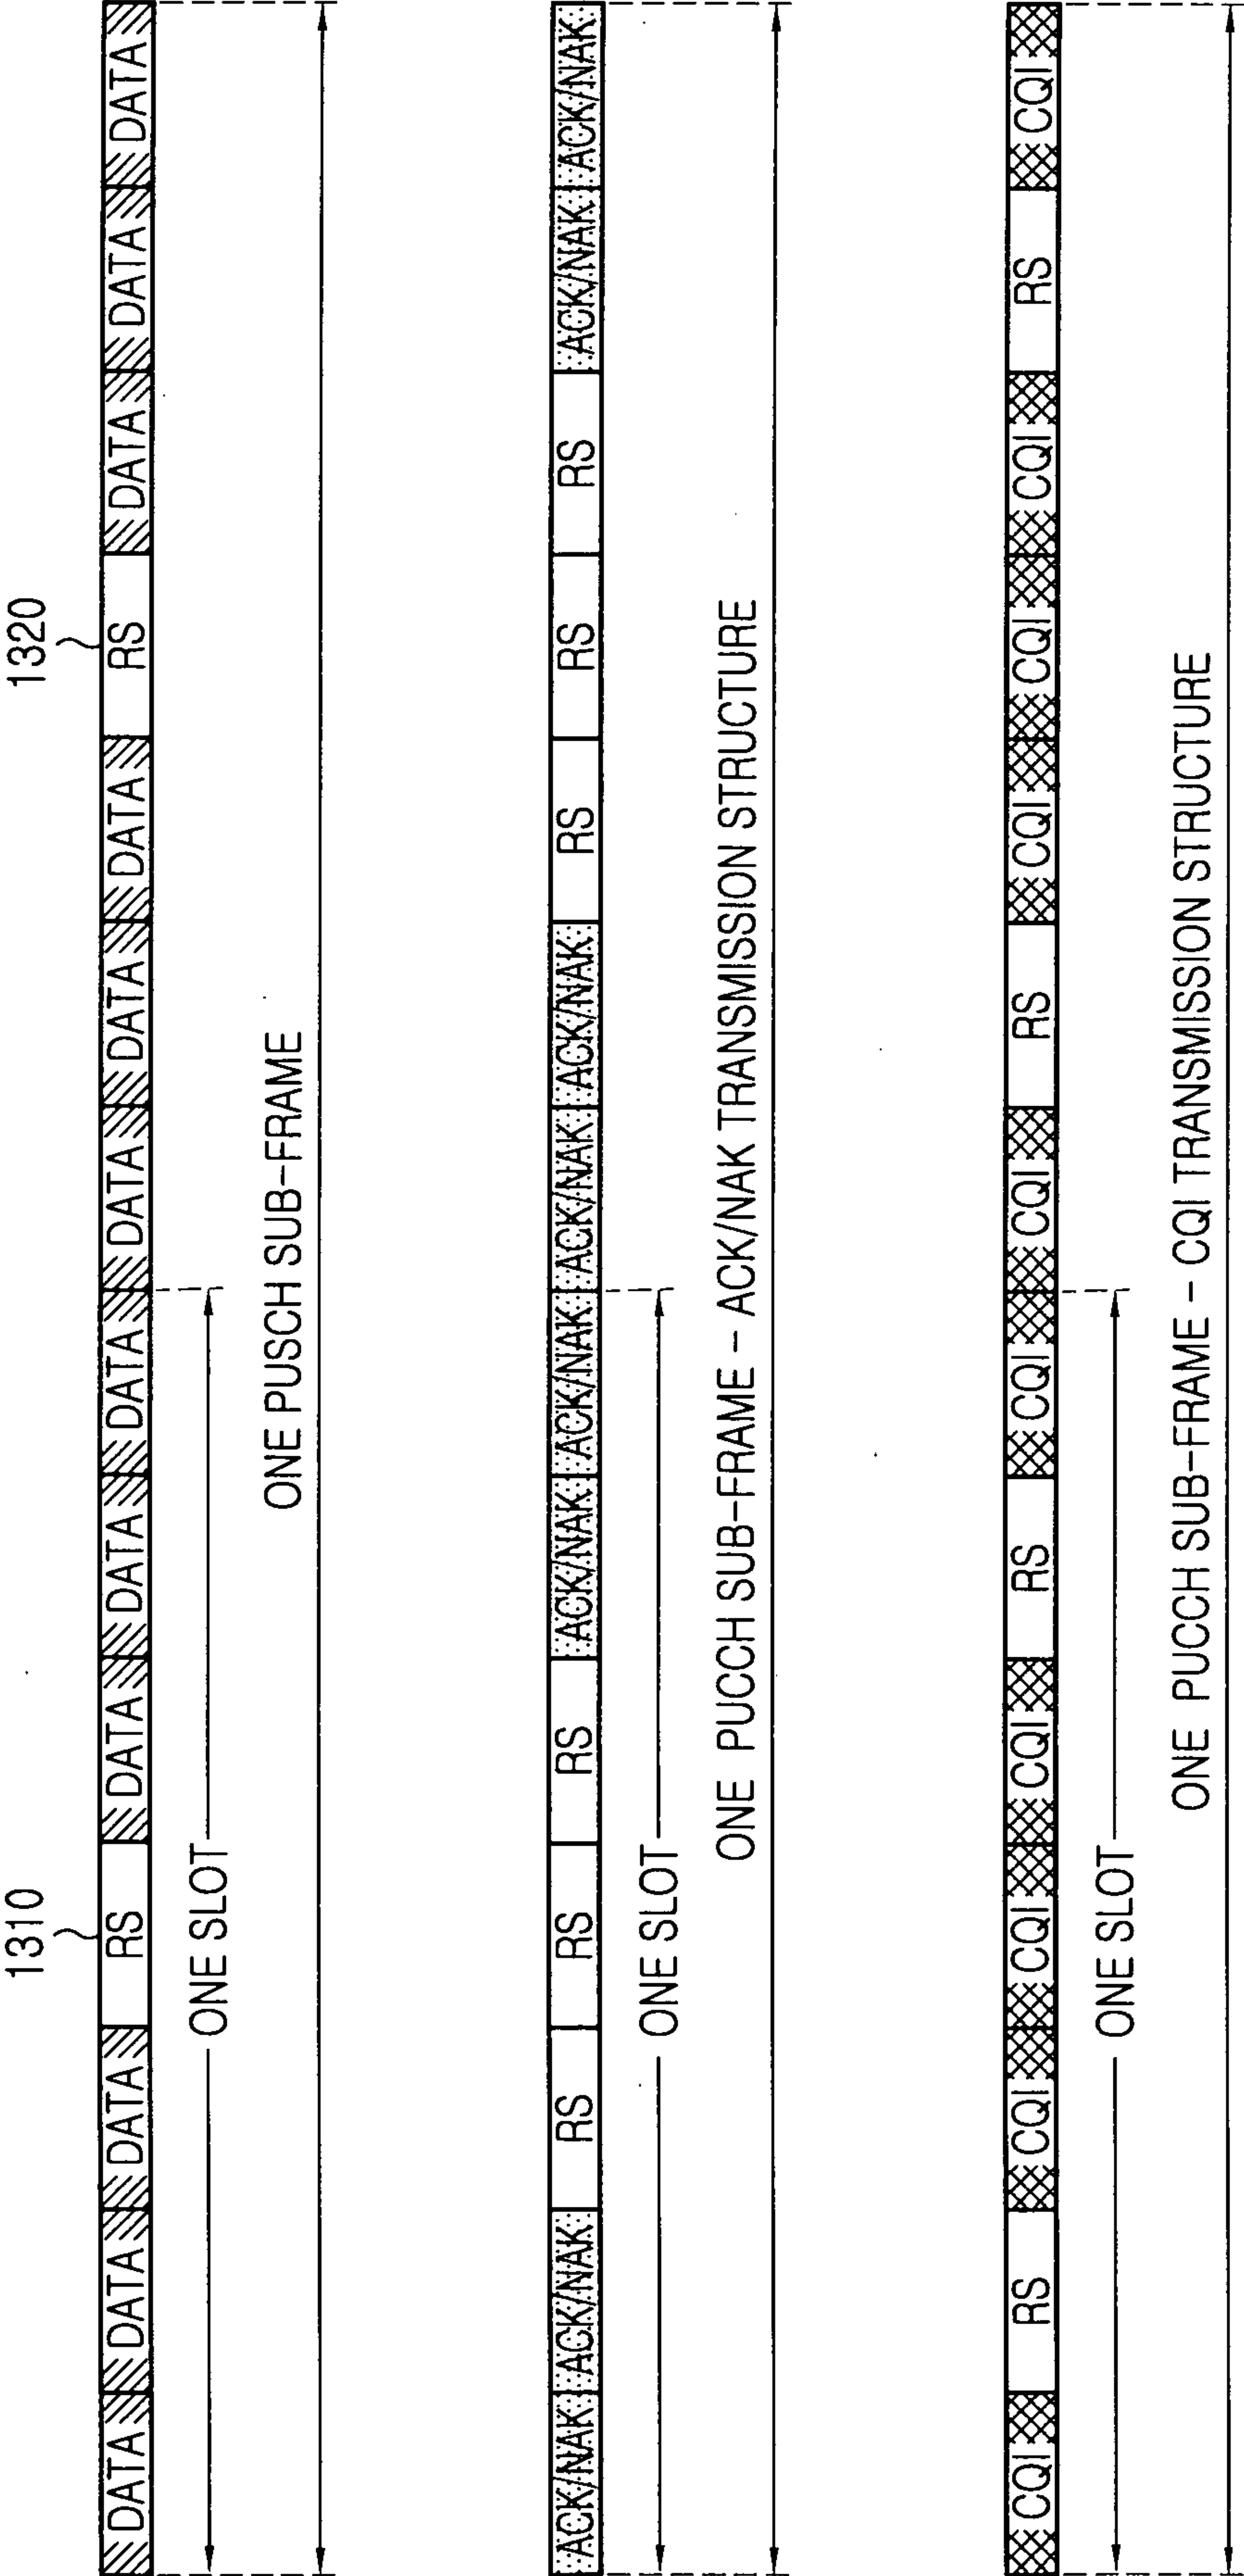


FIG.15


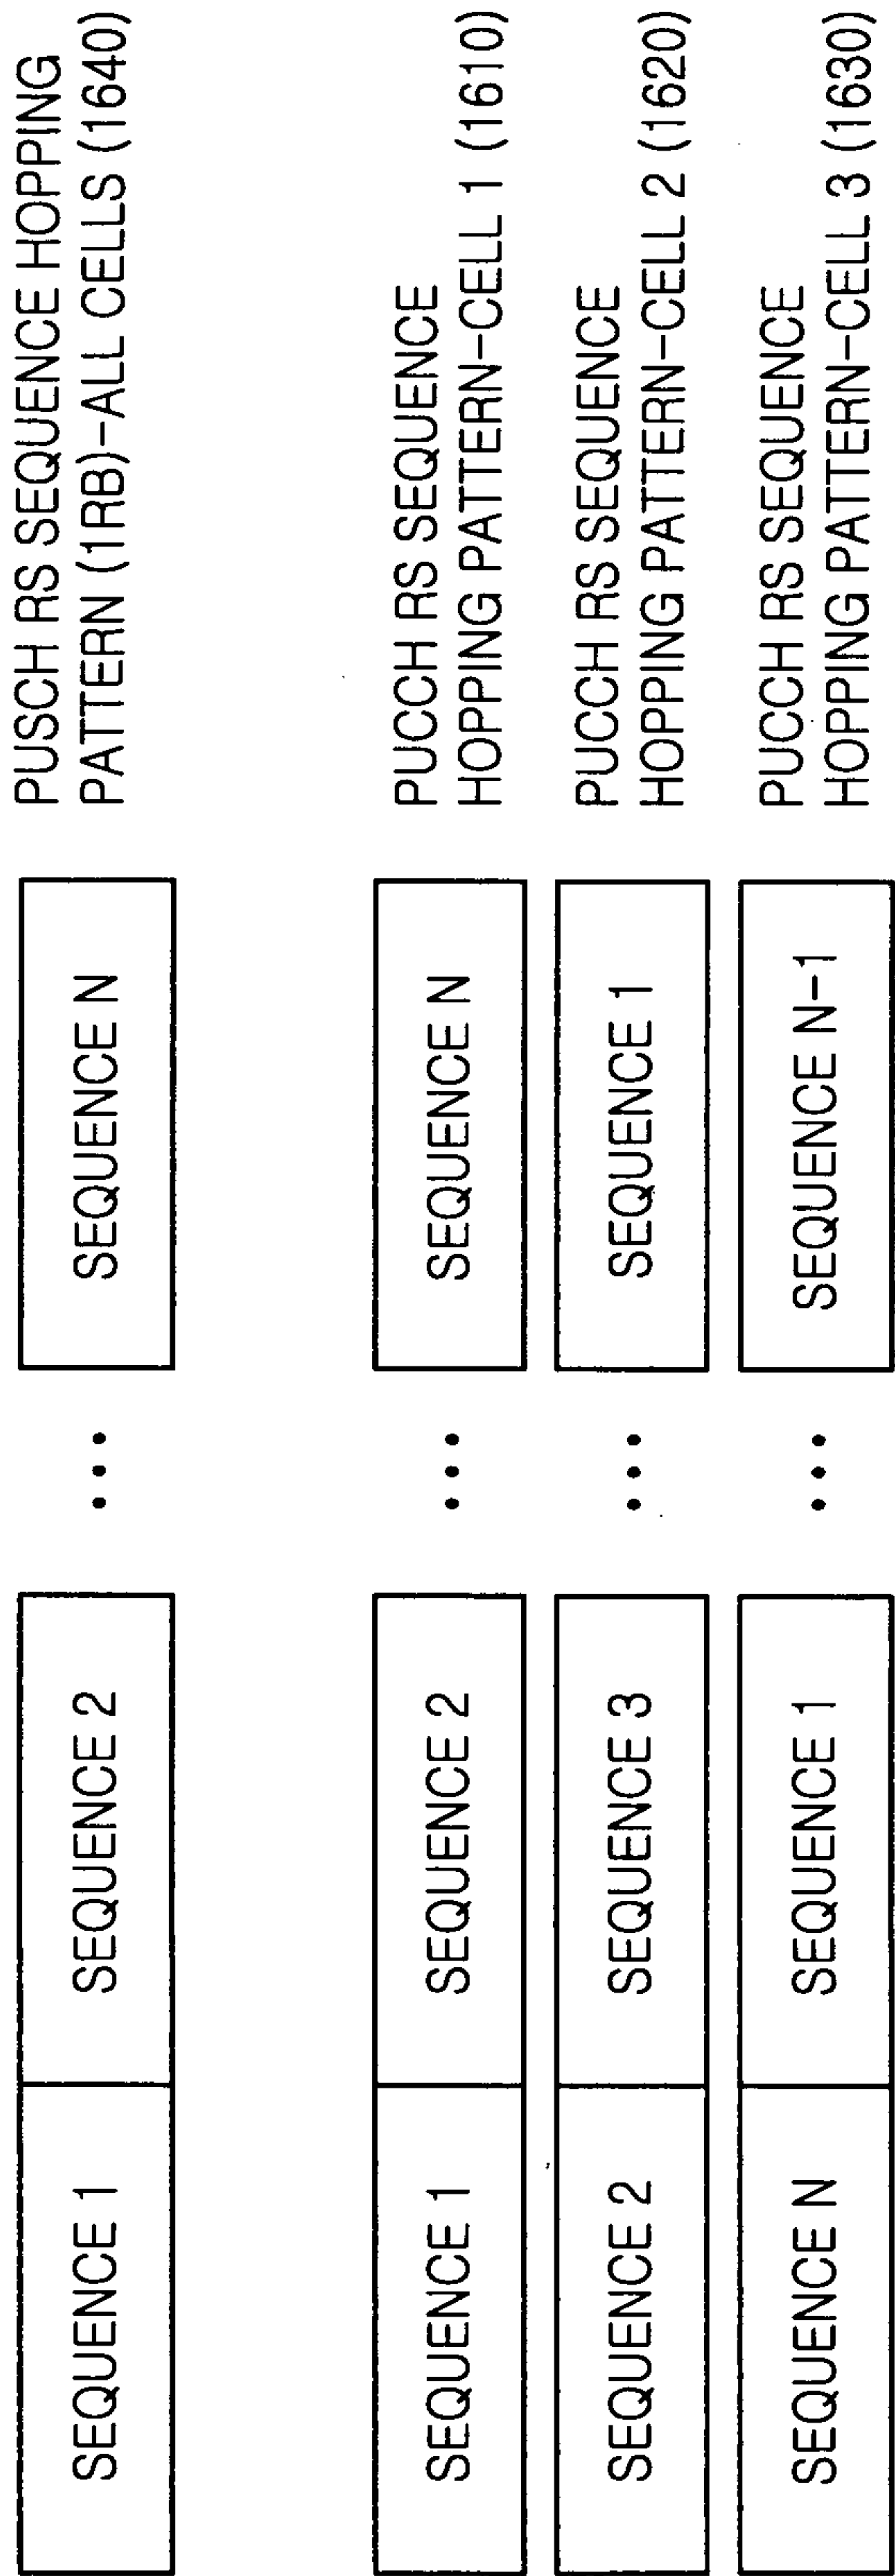


FIG.16

CELL BASED GROUP ALLOCATION



NODE B BASED GROUP ALLOCATION

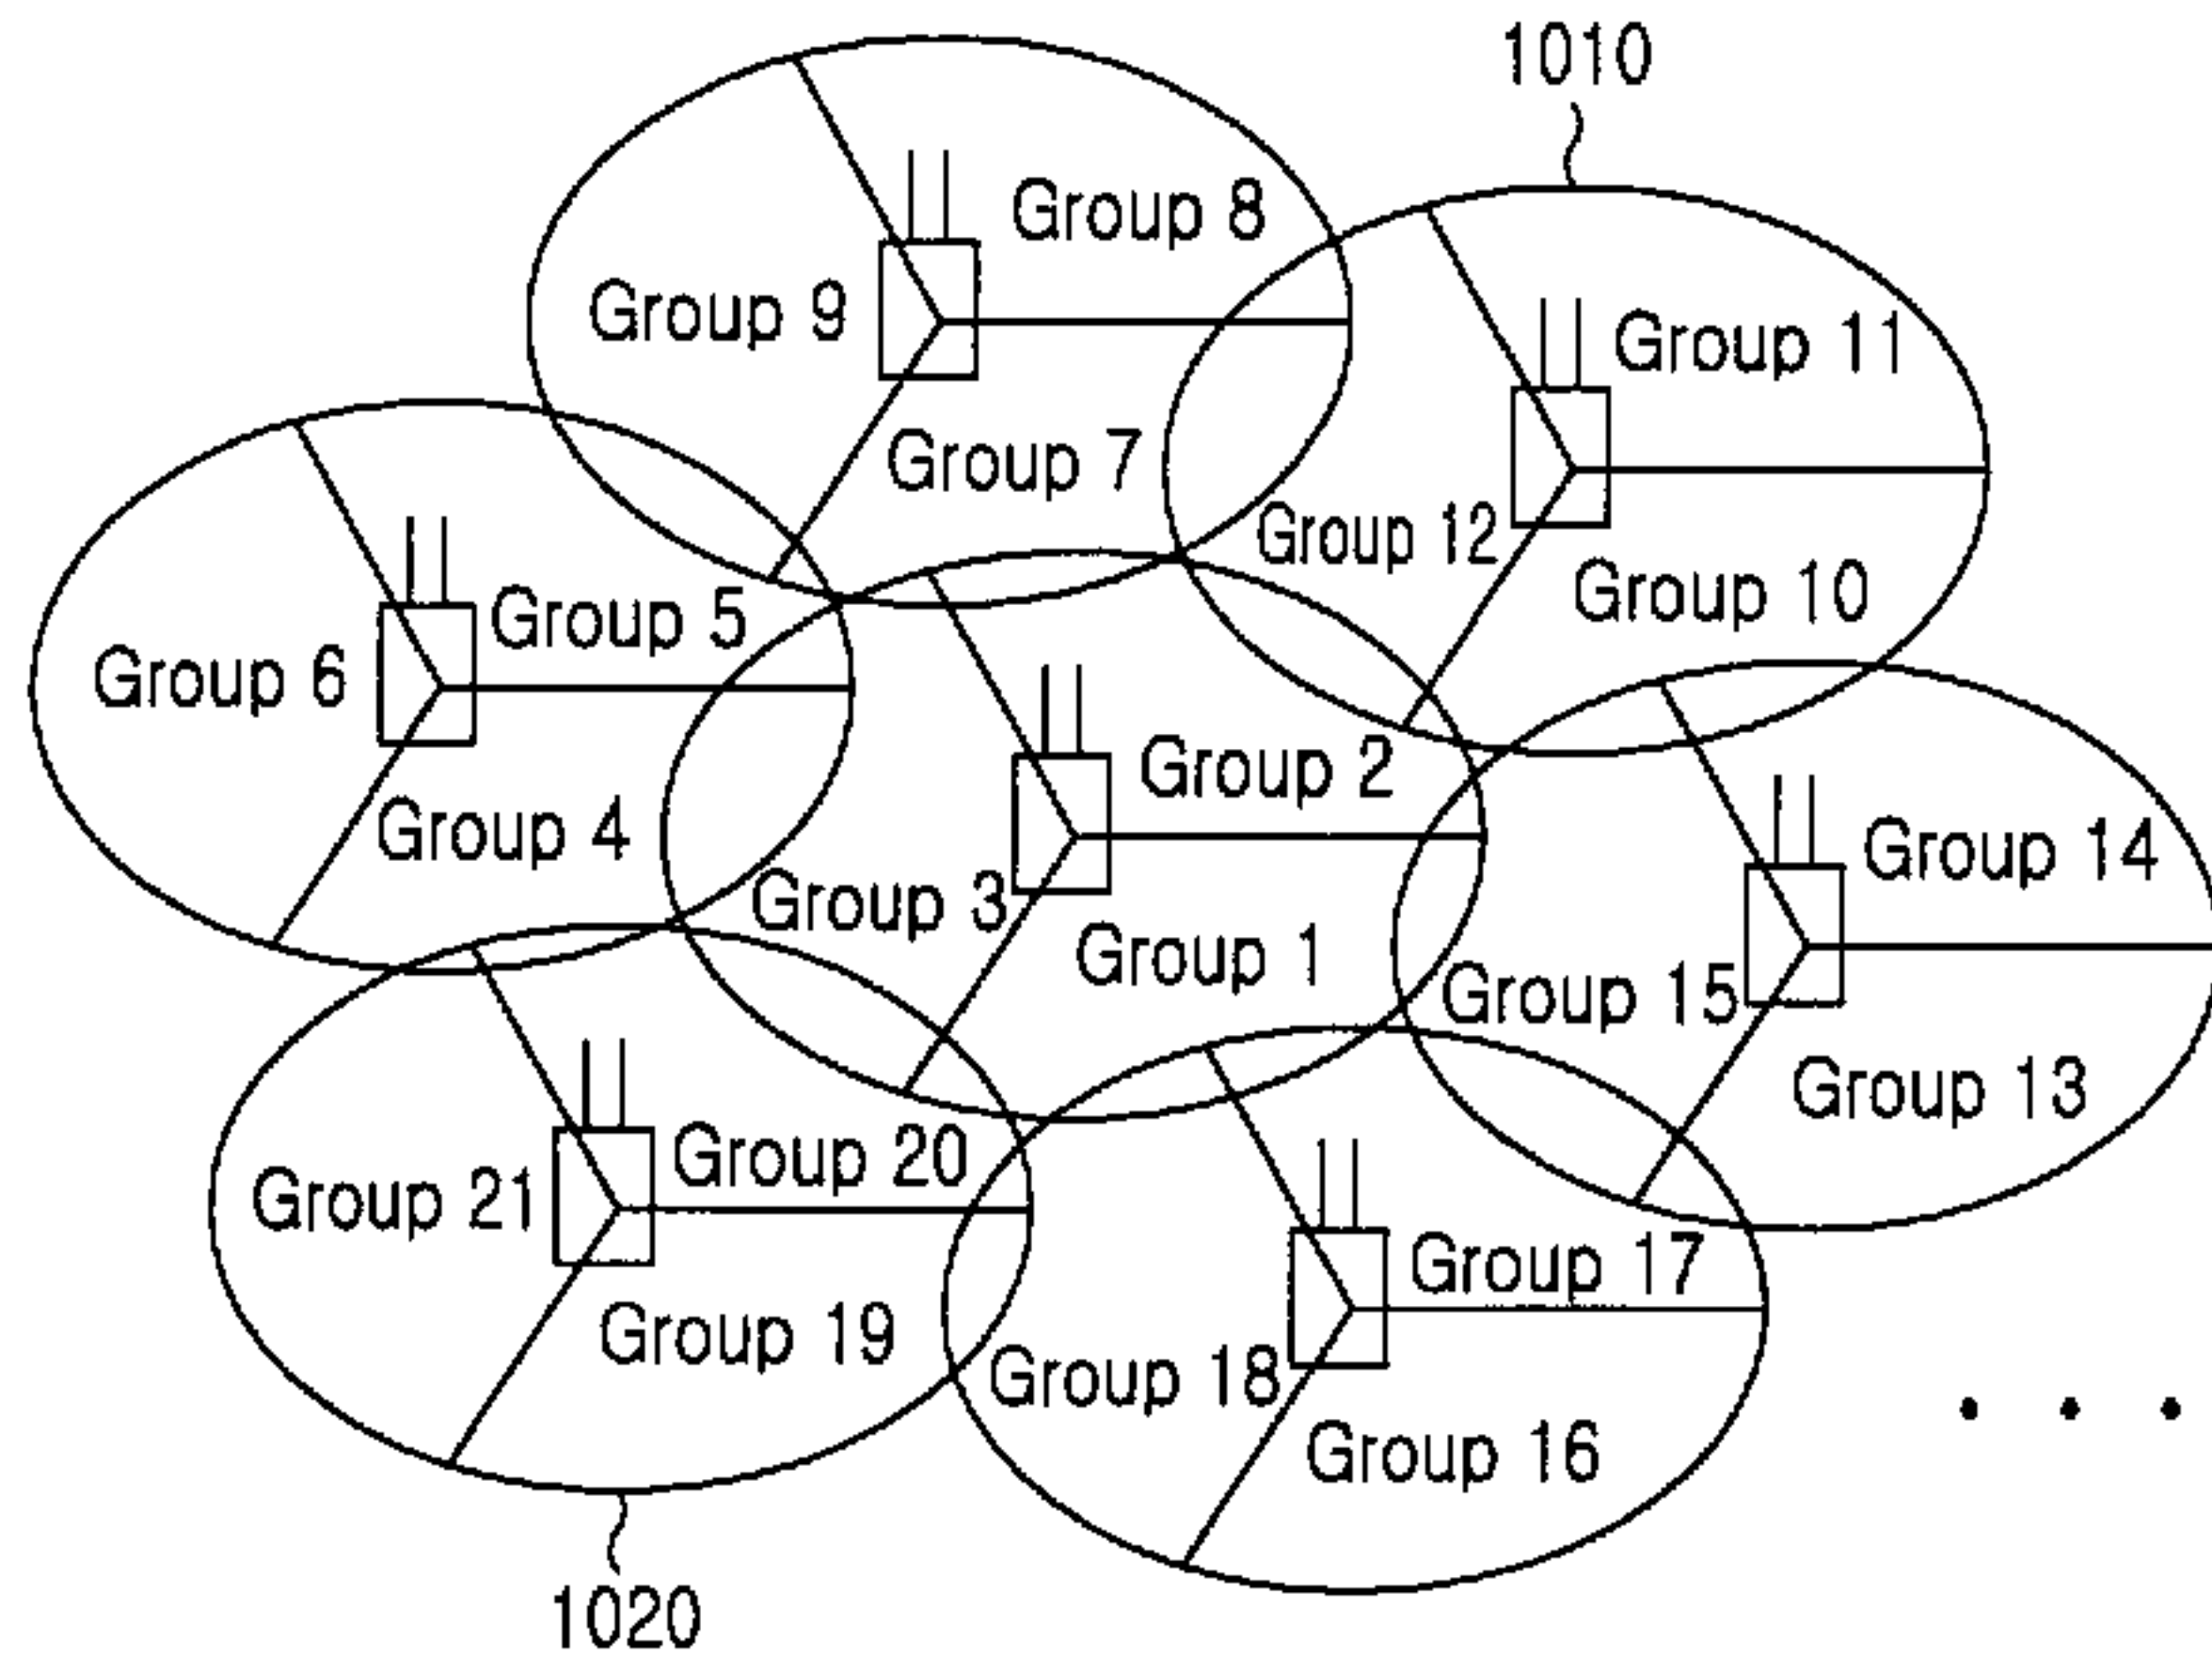