



- (51) International Patent Classification:
B65H 45/24 (2006.01)
- (21) International Application Number:
PCT/IB2017/000316
- (22) International Filing Date:
28 March 2017 (28.03.2017)
- (25) Filing Language: Italian
- (26) Publication Language: English
- (30) Priority Data:
102016000031981 29 March 2016 (29.03.2016) IT
- (71) Applicant: UNITED CONVERTING S.R.L. [IT/IT]; Via Di Coreglia 9, 55025 Piano Di Coreglia, Coreglia Antelminelli - Lucca (IT).
- (72) Inventors: LUPI, Giuseppe; Via Roma, 65, 55027 Galliciano - Lucca (IT). TORRI, Angelo; Via IV Novembre, 12, 55027 Galliciano - Lucca (IT). GIOMETTI, Gianluca; Via di Carraia, 83/4, Fraz. Parezzana - Capannori - Lucca (IT).
- (74) Agents: NESTI, Antonio et al.; Studio Ferrario S.R.L., Via Arnolfo, 27, 50122 Firenze (IT).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

- (54) Title: A SUCTION-ROLLER STRUCTURE FOR AN INTERLEAVING MACHINE

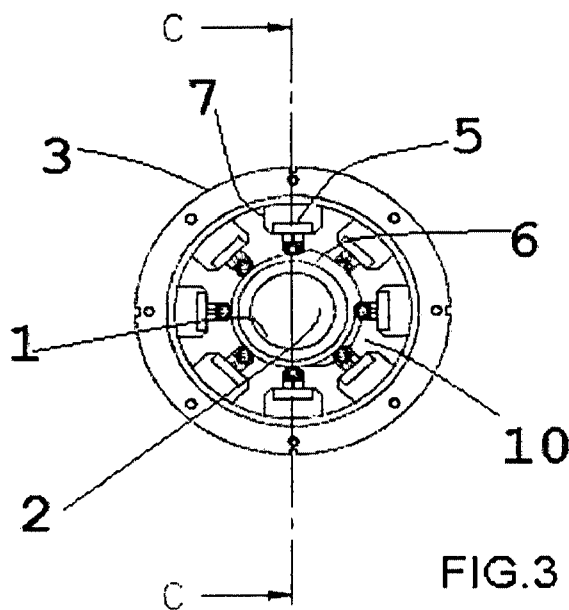

(57) Abstract: Suction roller structure for the pneumatic transport of sheets inside an interfolding unit, comprising a suction source, an external roller (3) rotating with respect to the cylinder (1) and provided with longitudinal rows of bores (4) angularly spaced and selectively communicating with said internal cavity (2) during the angular rotation of the roller (3), a distribution of pneumatic valves (5) that are normally closed, inserted between said internal cavity (2) and at least one bore (4), cam means (6) operatively associated with the rotation of the roller (3) and arranged to open one or more of said valves (5) at one or more angular positions taken by the roller (3).

“A SUCTION ROLLER STRUCTURE FOR AN INTERLEAVING MACHINE”

Technical Field of the Invention

The invention relates to a suction roller to pneumatically transport sheets of paper, especially the type of suction roller used in operating units intended for cutting and/or folding interfolded sheets of paper, i.e. stacked folded sheets, in such a way as to obtain a partial overlapping of the adjacent edges of the sheets. This kind of arrangement is used, for example, to manufacture packs of stacked napkins in such a way that upon extracting the napkin in the extraction position, one edge of the underlying napkin is automatically lifted, in such a way as to ease the extraction of the following napkin.

This type of arrangement may be used for toilet paper, face tissues and more.

State of the Art

It is known that interfolders are equipped with a couple of juxtaposed and counter-rotating rollers, through which the sheets of paper to be folded/cut are fed.

Depending on the task that must be performed, cutting blades or projections may be present on the surfaces of one of the rollers and, on the opposite roller, there are corresponding slots which rotate in line with the blades/projections so as to have the processed sheet of paper cut or folded.

Once folding is performed, the sheets of paper are moved to an underlying device, which is known as a “stacker”, which forms numerical stacks of sheets and works in line with the rotation of rollers.

During the operations, rollers must also perform the task of keeping the sheets adhering to the external surface.

To this end, the rollers of the interfolding units are equipped with bores connected to a suction system, which can be laterally or centrally mounted with respect to the roller.

A central suction system is known from EP1457444, which envisages a central vacuum source, comprising a fixed hollow cylinder, which through partial suction chambers is transferred to bores on the external surface of the rotating suction roller, so as to selectively activate the communication of the external bores distributed on the section of the cylinder that corresponds to the partial suction chamber, with the machine's suction system during the relative rotation of the two bodies.

The solution known from EP1457444 has some drawbacks though, since the

communication selection between the internal cylinder and the external bores is ensured by sliding seals that are in contact with the internal surface of the suction roller, and are thus worn out and drawn, and subjected to high friction since the seals are subject to high wear (and thus to regular maintenance), which is also due to the
5 relatively high vacuum that must be created in order to achieve the desired suction effect on the surface.

Moreover, this system, when applied to the folding rollers of interfolders, needs them to be fed by also using a side suction system, or else it is not possible to switch between the suction phase and the release phase of the sheets of paper in the
10 operation area of the rollers, according to the angular position of the folding rollers.

Moreover, the system disclosed by EP1457444 is relatively rigid if the format of the transported sheets of paper must be changed, and thus the angular distance between the suction bores that are activated one after the other must be adjusted.

The need is thus felt for a suction roller, especially for interfolding units for sheets of
15 paper, based on a reliable and efficient structure, and characterized by a suction system able to flexibly adjust to any possible change to the format of the sheets of paper.

Object of the Invention

The present invention is intended to provide a suction roller to be used with
20 interfolding units, which allows to overcome the drawbacks of the already known solutions.

According to the invention, the object is achieved by using a suction roller for interfolding units according to the main claim.

Further technical objects and advantages are achieved by units according to the
25 dependent claims.

Summary of the Invention

A first advantage is that the suction roller of the invention allows the operator to select the arrangement and succession of the external suction bores in a simple and reliable way.

30 A second advantage is that the suction system can be adapted if the format of the processed sheets of paper is changed.

List of the Drawings

These and other advantages will be better understood by anyone skilled in the art thanks to the following specification and the accompanying drawings, given as a non-

limiting example, wherein:

- Fig. 1 schematically shows an axonometric view of a suction roller for an interfolding unit according to the invention;
- Fig. 2 shows the roller of Fig. 1 in a longitudinal front view;
- 5 - Fig. 3 shows the roller of Fig. 1 in a side view;
- Fig. 4 shows the roller of Fig. 3 in a longitudinal C-C section;
- Fig. 5 shows the roller of Fig. 2 in a diagonal F-F section;
- Fig. 6 shows the roller of Fig. 2 in a diagonal A-A section and a detail D;
- Fig. 7 shows the detail pertaining to a valve used in the roller of the invention;
- 10 - Fig. 8 shows the valve of Fig 7 in a B-B section;
- Fig. 9 shows an isometric view of a valve used in the roller of the invention, a few pieces of which have been removed for a better understanding;
- Fig. 10 shows a detail G of Fig. 8;
- Fig. 11 shows the internal hollow cylinder of the roller of Fig. 1 in a longitudinal front
15 view;
- Fig. 12 shows the cylinder of Fig. 11 in a side view;
- Fig. 13 shows the cylinder of Fig. 11 in a top view;
- Fig. 14 shows a longitudinal suction chamber of the roller of Fig. 1 in a longitudinal front view;
- 20 - Fig.15 shows the detail G of Fig. 14;
- Fig. 16 shows the top view of the chamber of Fig. 14;
- Fig. 17 shows an isometric view of the chamber of Fig. 14;
- Fig. 18 schematically shows an interfolder equipped with suction rollers according to the invention;
- 25 - Fig. 19 shows a preferred embodiment of the longitudinal suction chamber of the roller of Fig. 1 in an isometric view;
- Fig. 20 shows the detail A of Fig. 19;
- Fig. 21 schematically shows two suction rollers while the interfolding unit is running;
- Fig. 22 schematically shows the functioning of the machine in Fig. 21.

30 Detailed Description

With reference to the attached drawings, described herein is a preferred embodiment of a structure, according to the invention, of a suction roller for pneumatically transporting sheets, which is especially used in a U-shaped interfolding unit.

The structure comprises a hollow cylinder 1 equipped with an internal cavity 2, which

is preferably fixedly mounted onto a pair of sides F so that the cavity 2 is constantly connected to a suction source V (Fig. 2).

Moreover, an external roller 3 is mounted onto cylinder 1, rotatable with respect to cylinder 1, for instance on side bearings 32, and is provided with longitudinal rows of bores 4 angularly spaced (for example eight equally spaced rows) and selectively communicating with said internal cavity 2 during the angular rotation of the roller 3.

Preferably, the roller 3 is a folding roller of the type used in pairs in interfolders to fold successions of sheets 7a, 7b at a common tangency point Z, in order to create stacks of interfolded sheets S (Fig. 18) in combination with detachment elements M that detach the sheet from the rollers.

To this end, the roller 3 may be equipped with an external grooved surface 22 that transports the sheets and towards which the bores 4 are faced.

The functioning of an interfolder is generally known, for example from the Italian patent application BO2008A000167 in the name of the same inventors and is thus not described in further detail.

According to the invention, the structure of the roller comprises an arrangement of pneumatic valves 5 that are normally closed and inserted between the internal cavity 2 of the hollow cylinder 1 and at least one bore 4 of the roller 3, preferably a longitudinal row of bores 4.

In order to achieve the selective communication of bores 4 with the vacuum cavity 2, cam means 6 are envisaged and operatively associated to rotation of the roller 3 and arranged to be able to open one or more of said valves 5 at one or more angular positions taken by the roller 3.

In the described embodiment, the hollow cylinder 1 comprises an arrangement of bores 9 to establish a pneumatic communication between the internal cavity 2 and a ring gap 10 that is generally defined by the external surface 11 of the internal cylinder 1 and the internal surface 12 of the roller 3 and towards which valves 5 are faced, normally closed.

Preferably, valves 5 comprise a shutter 13 that is normally closed, equipped with a sealing head 23 and a stem 24, interposed between a vacuum volume 14 communicating with the gap 10 and the bores 4 of the roller 3. Valves 5 are also equipped with an actuation element 8, for instance a small wheel connected to the stem 24, that can be activated by the cam means 6 against the thrust of an elastic return element 16 as a reaction to the rotation of the roller 3.

In the described example, cam means 6 comprise at least an external ring profile of the hollow cylinder 1 arranged in correspondence to at least one actuation element 8 of at least one valve 5.

What is understood, however, is that various embodiments of the cam means will be possible, as well as various technical solutions for actuating the valves 5.

In particular, cam means 6 may be fixed or adjustable (for example, by providing cam profiles that can be replaced or adjusted in an angular position with respect to cylinder 1) in order to be able to change the angular phase of the opening/closing of the valves 5.

With particular reference to Figures 14 to 20, the valves 5 are mounted along at least one longitudinal chamber 7 placed in the space of the gap 10 and secured by means of a pneumatic seal with respect to the internal surface of the roller 3 by at least one longitudinal row of bores 4.

Thanks to this solution, the chamber 7 is pneumatically isolated with respect to the gap 10 and the vacuum volume 14 constantly communicates with the gap 10 by means of transverse bores 15 of the longitudinal chamber 7.

Particularly, the pneumatic seal of chamber 7 is obtained by seal-applying the peripheral edges 24 of the chamber 7 to the internal surface 12 of the roller and by fixing the chamber 7 to the roller, for example by means of screws.

Preferably, moreover, the longitudinal chamber 7 is in the shape of a longitudinal profile made of linear modules or segments 17, alternating with valve-holding blocks 18.

In this way, it is possible to compose chambers 7 of the correct length for the roller 3, to be put in suction, and to place the valves in the desired position.

Figures 19, 20 show a preferred embodiment of the chamber 7.

In this embodiment, the chamber 7 comprises one or more sealing buffers 25 that can be placed at predetermined positions along the chamber 7 at the sides of the valves 5. In different embodiments, the buffers 25 may be securely positioned by means of screws or by means of adjusting means, such as a threaded rod 26 that is accessible and operable from the outside, at the ends of the chamber 7.

Advantageously, this solution allows to adjust, and possibly section into several sectors, the transverse width of the volume of the chamber that is subject to the suction phase, thus increasing the flexibility of the system for the transport of sheets of different transverse format, without having to plug the bores 4 and without

reducing the efficiency and speed of the suction and release phases.

What is specified is that in a different embodiment, the chamber 7 can be obtained directly in the thickness of the roller 3 itself instead of being taken back.

With particular reference to Figure 21, the functioning of two folding rollers according to the invention is shown, upon the exchange of the sheet from a roller 3s (shown on the left in the representation) to the other roller 3d.

In order to achieve the exchange, the valves 5 of the roller 3s are closed and do not create vacuum in the bores 4, while the valves 5 of the roller 3d enters the vacuum state and hold the sheet.

In the figure, "a" indicates the angular position of the cams 6 of the roller that hold the valves 5 open, and thus in the vacuum state, such valves holding the head and tail edges of the sheets to be folded, and "b" indicates the angular position of the cams 6 of the roller (indicated by a dotted line) that hold the valves open, such valves holding the central portion of the same sheets.

During the rotation of the suction rollers 3s, 3d, cams 6 in the "a" position cause the valves 5 to open at the point "t" of the exchange of the sheet between the cutting roller 31 - placed above (and only schematically shown in the figure) - and the folding roller 3s and let the valves close at the tangency point "z" between the left and right folding rollers 3s, 3d.

Cams corresponding to the angle "b" cause instead the valves to open at the tangency point z and close them at the point S, where the sheet must be detached from the underlying detachment elements M.

As a result of the succession of the hold and release phases of the sheet and of the rotation of the folding roller, the cut sheet is then transported, folded by the two rollers at the tangency point "z" and then released at the bottom.

As it is known in the sector, in order to obtain interfolding, the succession of the suction and release states as described above keeps going in an alternate way in the two rollers 3s, 3d in order to transport, fold and release the two successions of sheets fed to the two left and right rollers and staggered in the longitudinal direction.

Figure 22 schematically shows phases f1-f5 of interfolding of two successions of sheets 7a, 7b, performed with a pair of folding rollers 3s, 3d according to the present invention.

phase f1

- During this phase, a first fold P between the first and the second face of a

sheet 7a wrapped on the first roller 3s is created, the sheets 7a and 7b are coupled starting from the tangency point Z;

- the valves 5 of the first roller 3s immediately upstream and downstream of the tangency point z are in suction and rotatively drag the tail edge of the first face and the second face of the sheet 7a,
- the valves 5 of the second roller 3d, immediately downstream of the tangency point, are closed,
- the element M of the second roller 3d has started the detachment of the head edge of the first face of sheet 7a,

10 phase f2

- the valves 5 of the first roller 3s, immediately downstream of the tangency point z, are still in suction mode and rotatively drag the second face of the sheet 7a and the first face, coupled to it, of the second sheet 7b;
- the valves 5 of the second roller 3d, upstream of the tangency point, are open and drag the second sheet 7b;
- the element M of the second roller 3d has performed the detachment of the head edge of the first face of sheet 7a;

phase f3

- during this phase, the succession of foldings of the interfolded (that is partially overlapped) sheets 7a, 7b begins,
- the valves 5 of the first roller 3s, immediately upstream of the tangency point z, are open and feed a sheet 7a towards the tangency point Z,
- the valves 5 of the first roller 3s, immediately downstream of the tangency point z, are closed, and they do not hold the coupled sheets 7a/7b;
- the valves 5 of the second roller 3d, upstream of the tangency point, are open and drag the second sheet 7b;
- the valves 5 of the second roller 3d, downstream of the tangency point, are open and drag the coupled sheets 7a/7b, thus forming a further fold P,
- the element M of the first roller 3s has started the detachment of the coupled sheets 7a/7b.

phase f4

- at this phase, the first interfolding of two staggered sheets 7a, 7b has been already obtained,

- the valves 5 of the first roller 3s immediately upstream of the tangency point z are open and drag a sheet 7a to the tangency point Z,
- the valves 5 of the first roller 3s, immediately downstream of the tangency point z, are closed, and they do not hold the coupled sheets 7a/7b;
- 5 • the valves 5 of the second roller 3d, upstream of the tangency point, are open and drag the second sheet 7b;
- the valves 5 of the second roller 3d, downstream of the tangency point, are open and drag the coupled sheets 7a/7b, thus completing the further fold P,
- the element M of the first roller 3s has completed the detachment of the
- 10 coupled sheets 7a/7b;
- the element M of the second roller 3d is about to start the detachment of the coupled sheets 7a/7b upstream of the further fold p;

phase f5

- in this phase, the second interfolding of two staggered sheets 7a, 7b has been
- 15 obtained,
- the valves 5 of the first roller 3s immediately upstream of the tangency point z are open and drag a sheet 7a to the tangency point Z,
- the valves 5 of the first roller 3s, immediately downstream of the tangency point z, are open and drag the coupled sheets 7a/7b, starting to form another
- 20 further fold P;
- the valves 5 of the second roller 3d upstream of the tangency point are open and drag the second sheet 7b towards the tangency point;
- the valves 5 of the second roller 3d, downstream of the tangency point, are closed, and do not hold the coupled sheets 7a/7b,
- 25 • the element M of the second roller 3d has started the detachment of the coupled sheets 7a/7b upstream of the fold P that had been previously created.

The described phases are repeated in succession and the interfolded sheets 7a/7b are stacked at the bottom, forming a stack of interfolded sheets.

The invention presents important advantages in that the provided seals are tight,

30 there is no drawing or dragging, friction is low and allows energy saving and reduced pollution, and furthermore, they can independently enter the suction mode and, when valves are activated, the vacuum does not affect the friction inside the roller.

A further advantageous aspect is that a single suction system feeds all the rollers of

the interfolder.

A further advantageous aspect is that the valves may change in number, but they are all the same regardless of the number of sheets to be processed.

5 A further advantageous aspect is that the roller can be equipped with different sectors, and each sector can be provided with an internal buffer, which may have different positions with respect to the valves and can thus close selected bores by reducing the suction chamber.

A further advantageous aspect is that the shutter valves are long-lived over the years and they can be changed without disassembling the roller.

10 A further advantageous aspect is that the adjustment of the transport and transfer suction of sheets is made easier, with the possibility of installing an automatic suction variation system, that might be advanced or delayed.

The present invention has been described according to preferred embodiments, but equivalent variants can be designed without departing from the agreed scope of
15 protection.

CLAIMS

1. Suction roller structure to pneumatically transport sheets, for example into an interfolding unit, comprising

a suction source (2),

5 a rotating external roller (3) characterized by longitudinal rows of bores (4) angularly spaced and selectively communicating with said suction source during the angular rotation of the roller (3),

characterized in that it comprises

10 a distribution of intermediate suction chambers (7) that communicate and are associated with corresponding longitudinal rows of bores,

a distribution of pneumatic valves (5), each interposed between said suction source (2) and one of said intermediate suction chambers (7),

15 actuation means (6) operatively associated with the rotation of the roller (3) and arranged to open one or more of said valves (5) at one or more angular positions taken by the roller (3).

2. Structure according to claim 1, wherein said suction source comprises an internal cavity (2) of an inner hollow cylinder (1) and said external roller is rotatable with respect to the cylinder (1).

20 3. Structure according to claim 2, wherein said hollow cylinder (1) comprises an arrangement of bores (9) to establish a pneumatic communication between said internal cavity (2) and a ring gap (10) that is defined by the external surface (1) of the internal cylinder (1) and the internal surface (12) of the roller (3).

4. Structure according to at least one of the preceding claims, wherein said valves (5) comprise

25 a shutter (13) that is normally closed, interposed between a vacuum volume (14) communicating with said gap (10) and said bores (4) of the roller (3),

an actuation element (8) that can be actuated by said actuation means (6) against the thrust of an elastic return element (16) as a reaction to the rotation of the roller (3).

30 5. Structure according to at least one of the preceding claims, wherein said valves (5) are mounted along at least one longitudinal chamber (7), arranged in said gap (10) and seal-secured with respect to the inner surface of the roller (3), in correspondence to at least one row of longitudinal bores (4), and wherein said vacuum volume (14) comprises a volume communicating with the gap (10) by means of transverse bores

(15) of the longitudinal chamber (7).

6. Structure according to at least one of the preceding claims, wherein said longitudinal chamber (7) is formed by a modular composition of linear segments (17) and valve-holding blocks (18).

5 7. Structure according to at least one of the preceding claims, wherein said longitudinal chamber (7) is integrally made with said outer roller (3).

8. Structure according to at least one of the preceding claims, wherein said chamber (7) comprises one or more pneumatically sealing sectioning buffers (25) that can be placed at predetermined positions along the chamber (7).



10 9. Structure according to claim 8, comprising means for adjusting the position of said buffers (25).



10. Structure according to at least one of the preceding claims, wherein said actuation means comprise cam means (6).

11. Structure according to claim 10, wherein said cam means comprise at least an
15 outer ring profile arranged in correspondence to at least one actuation element (8) of at least one valve (5).

12. Structure according to at least one of the preceding claims, comprising means for adjusting or replacing said cam means.

13. Interfolding unit comprising a pair of folding rollers (3s, 3d) arranged side by side
20 and counter-rotating to operate at a common tangency point (z) on successions of sheets fed according to a staggered position between the two rollers, characterized in that it comprises at least one roller (3) according to one or more of the preceding claims.

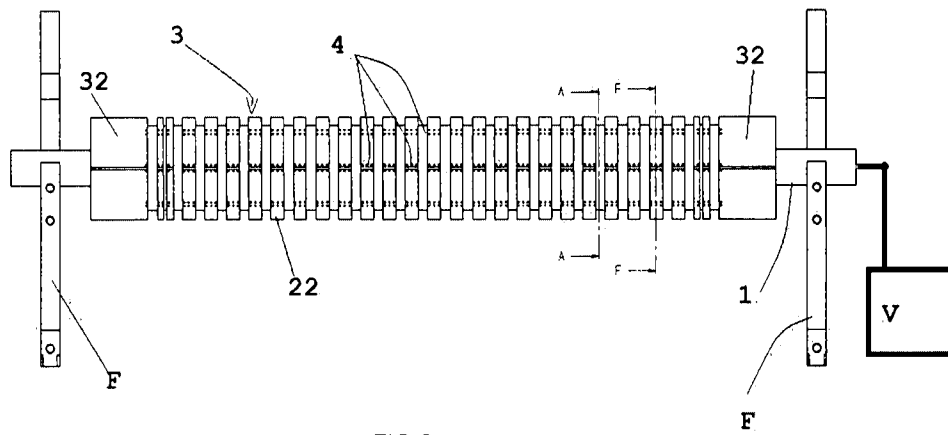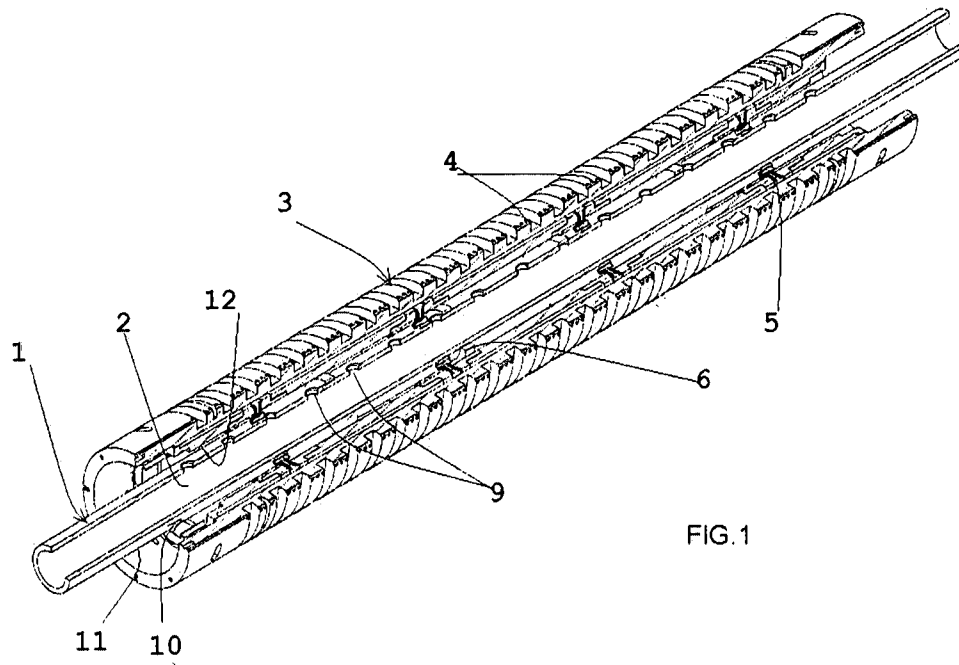

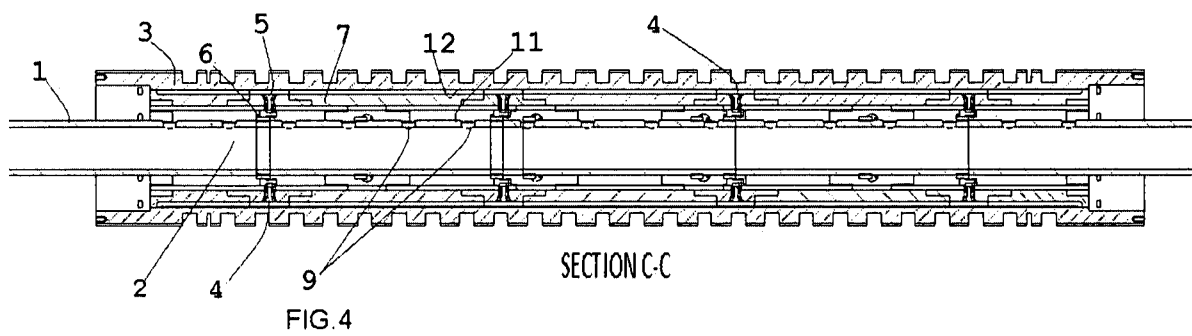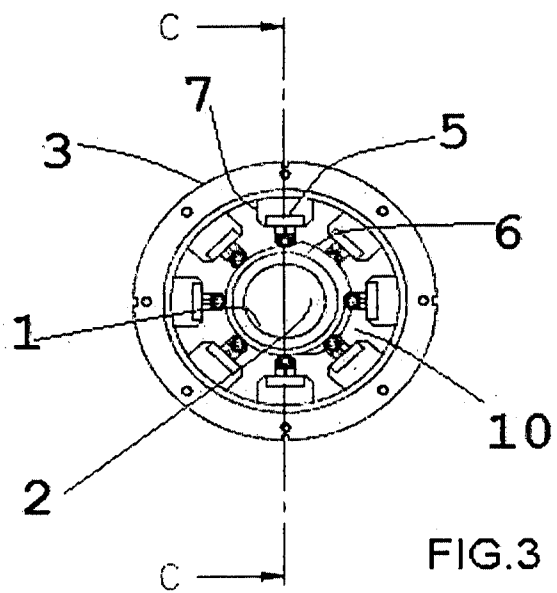

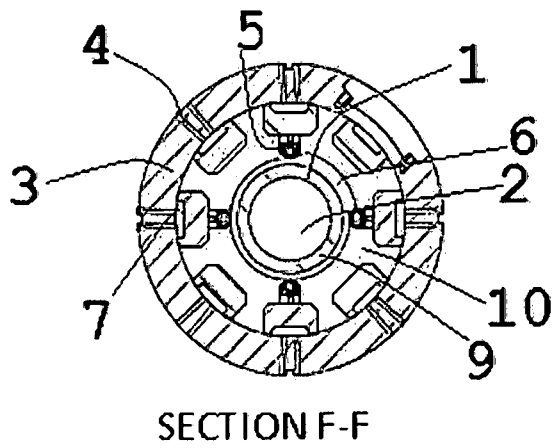


FIG. 5

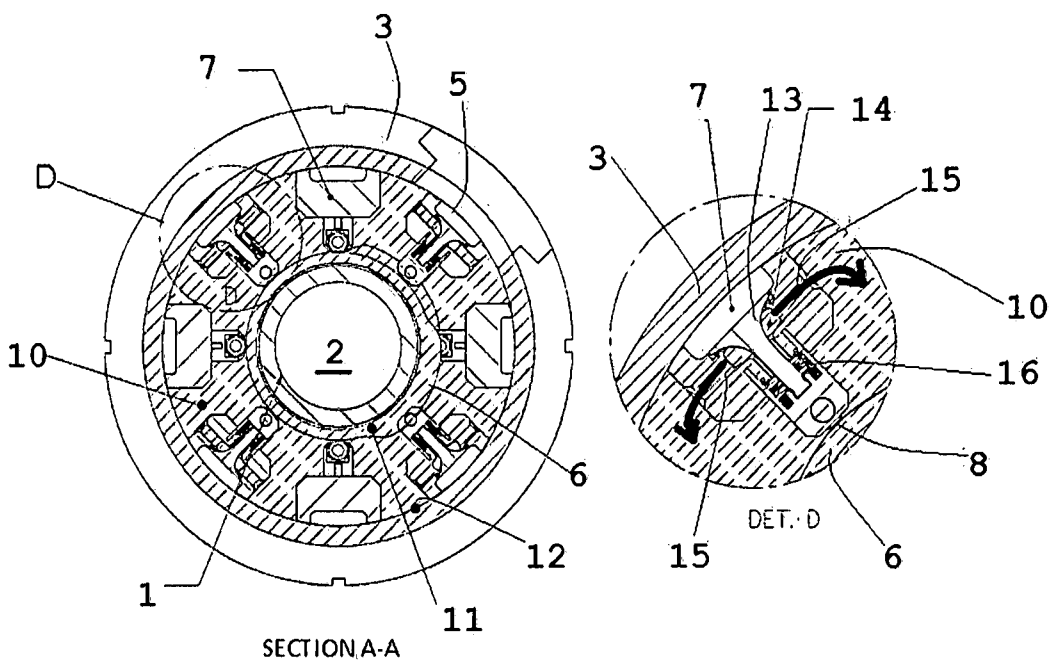
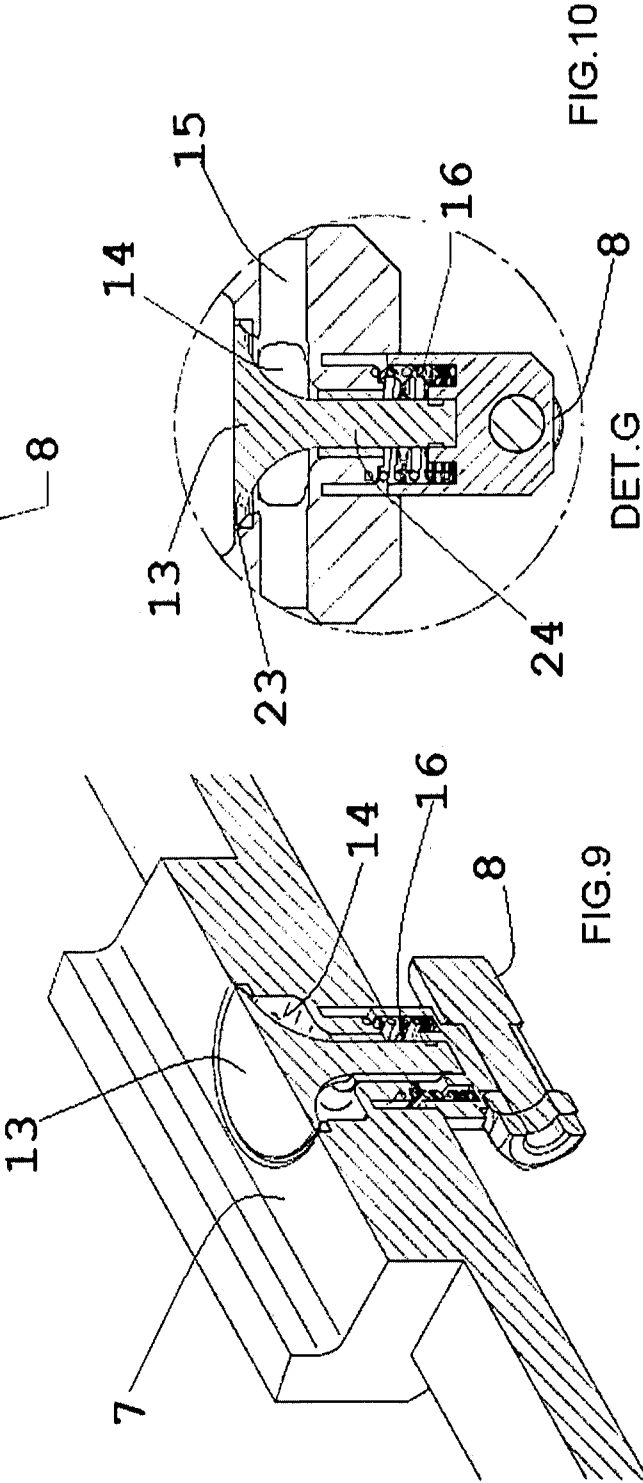
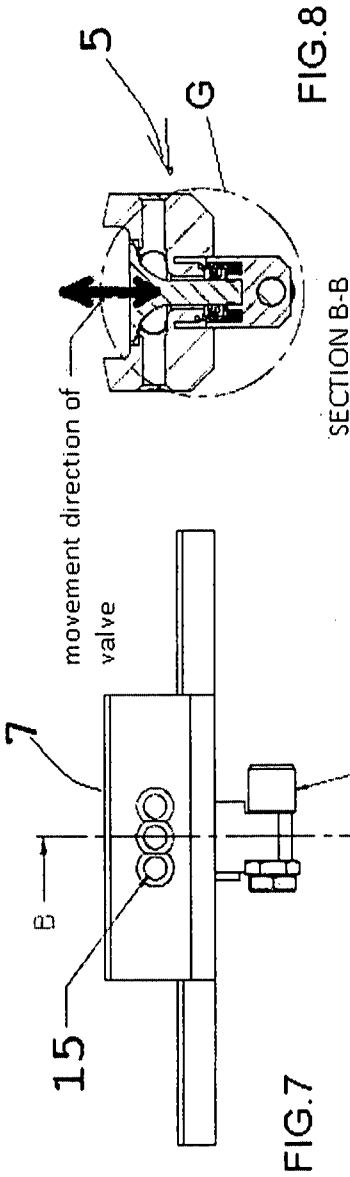


FIG. 6






FIG.12

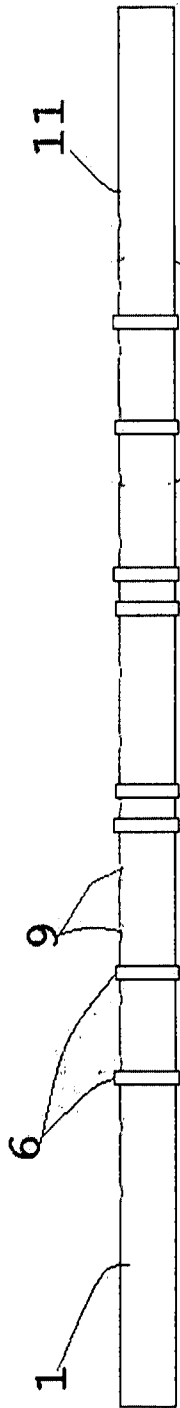


FIG.11


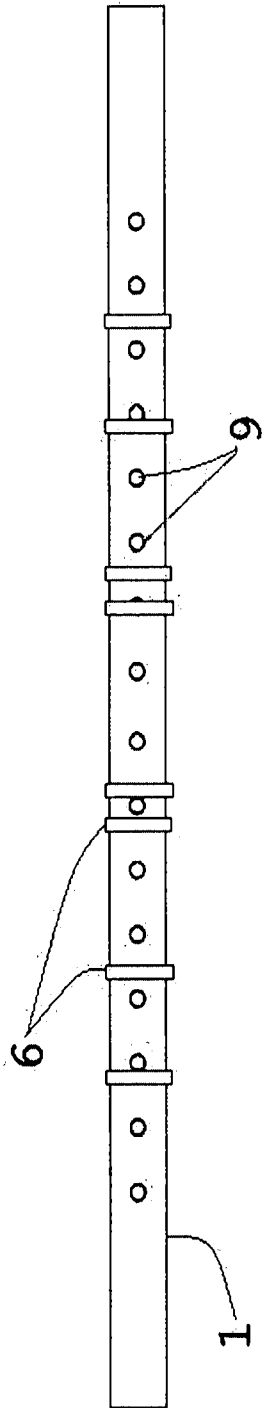


FIG.13

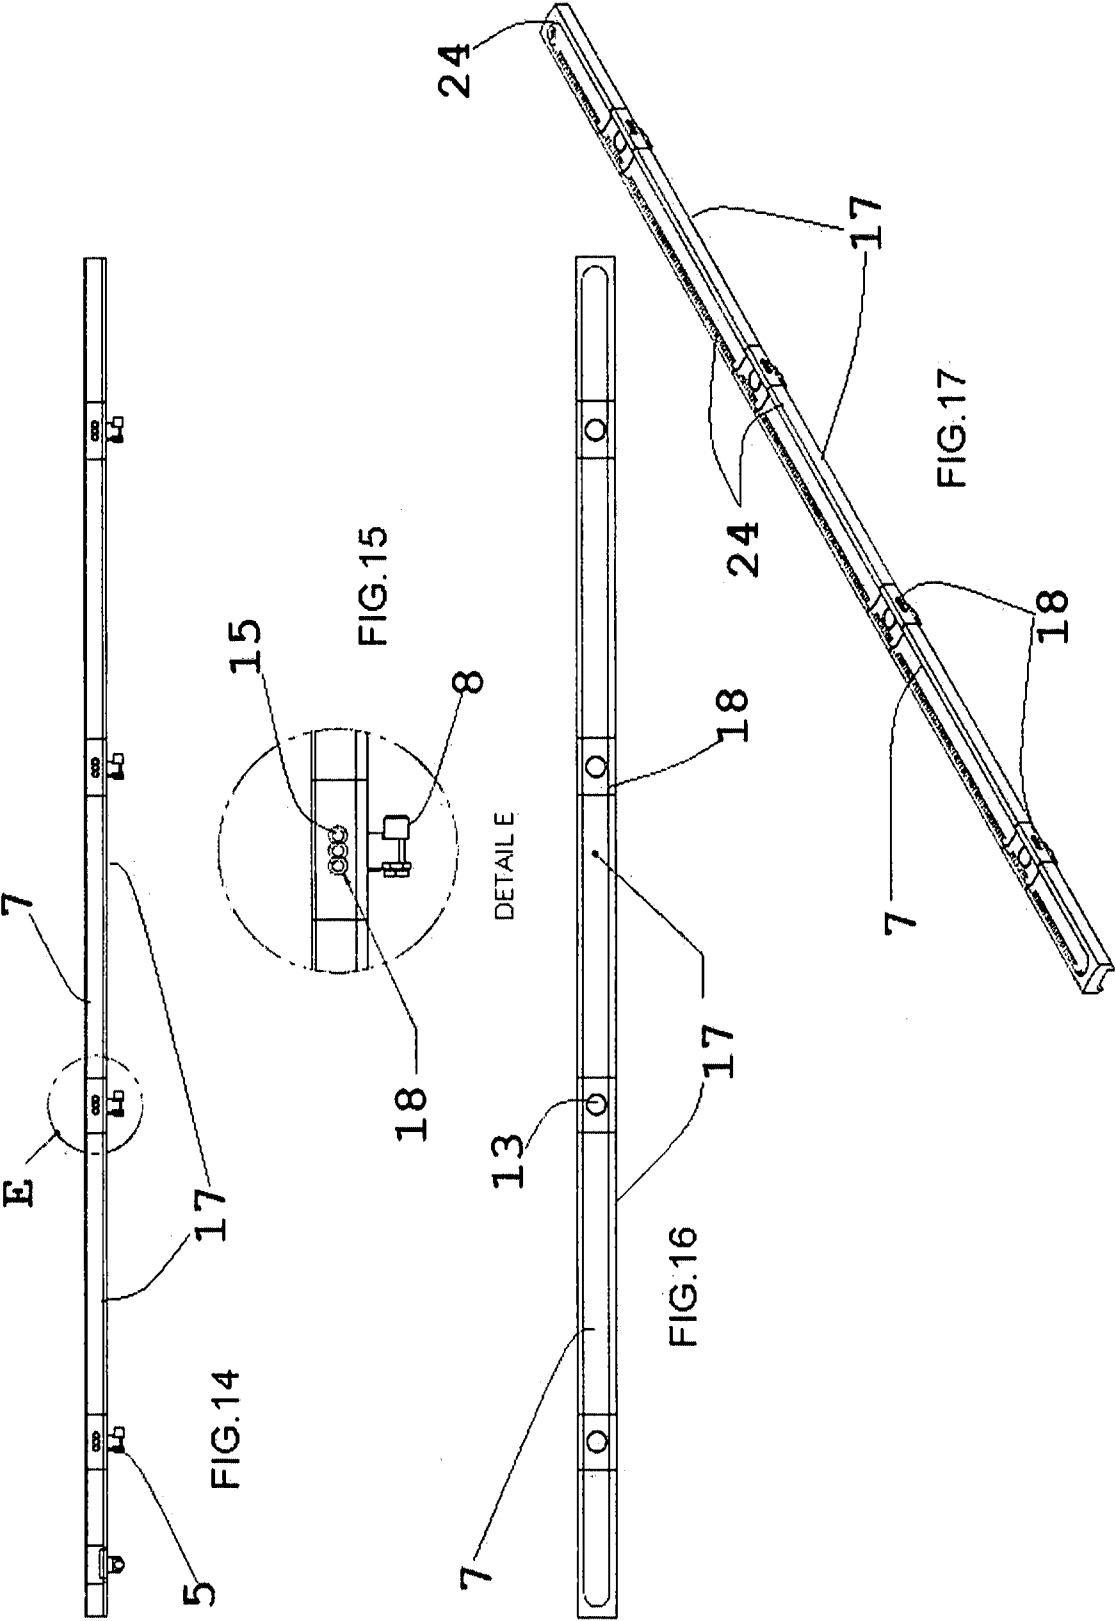

7/9

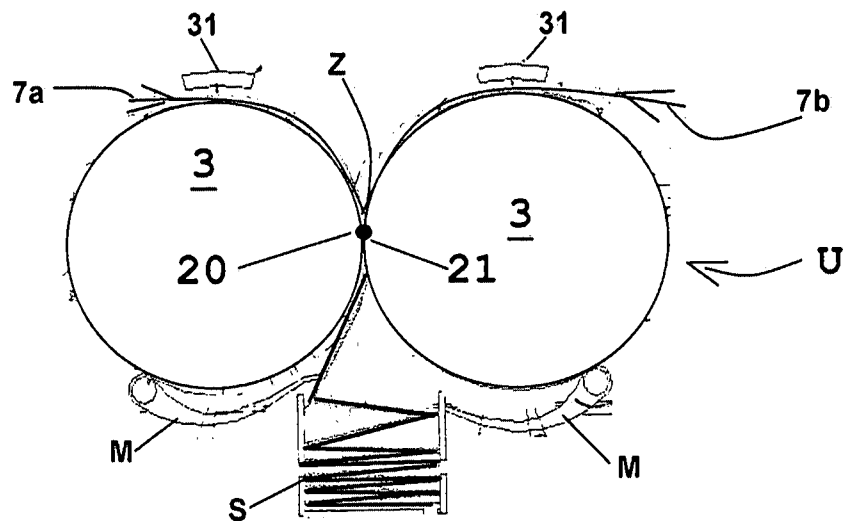


FIG. 18

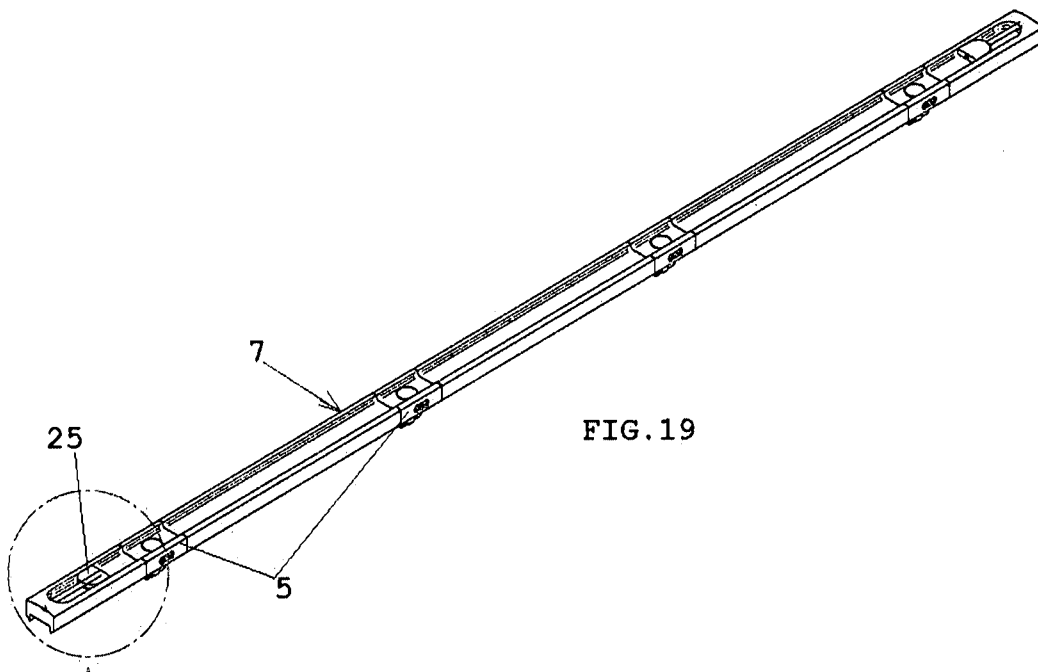
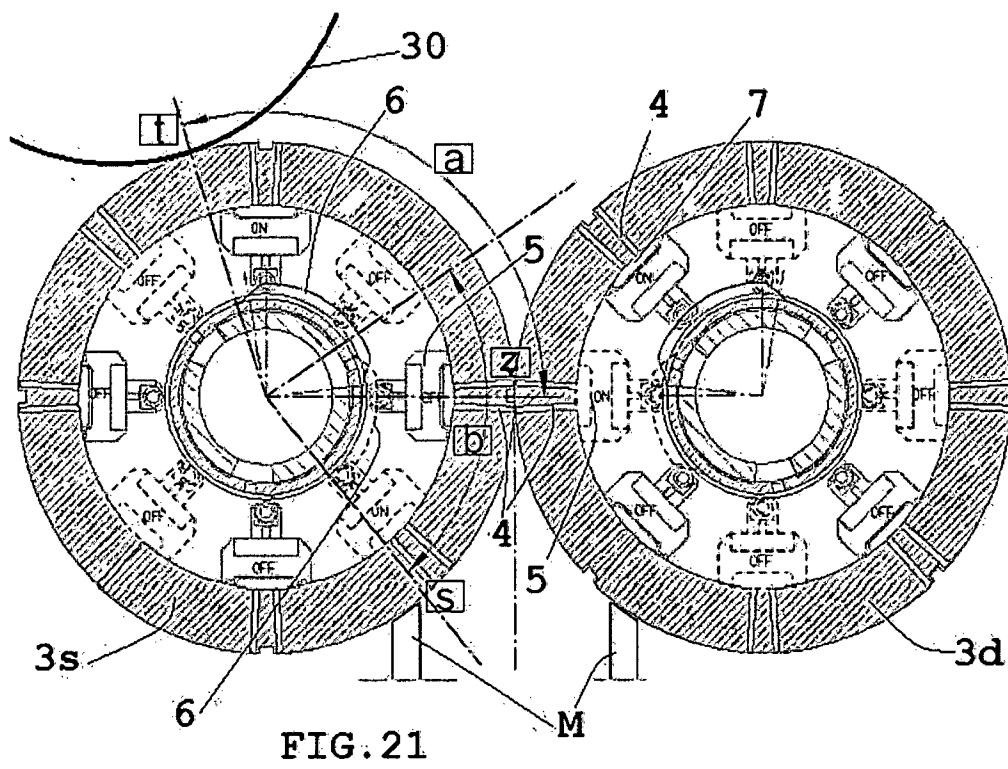
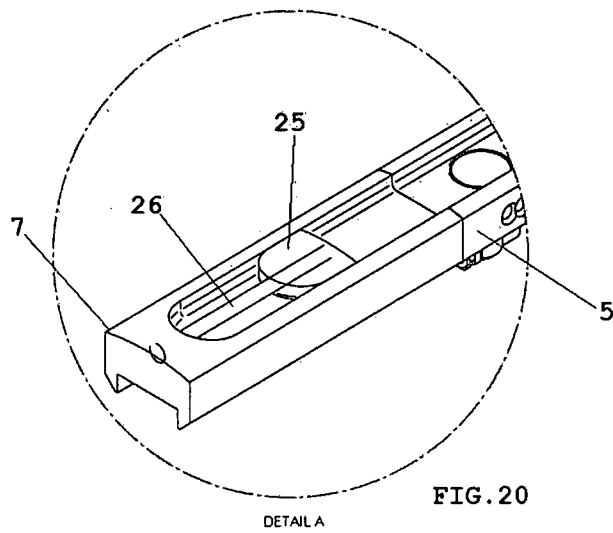


FIG. 19



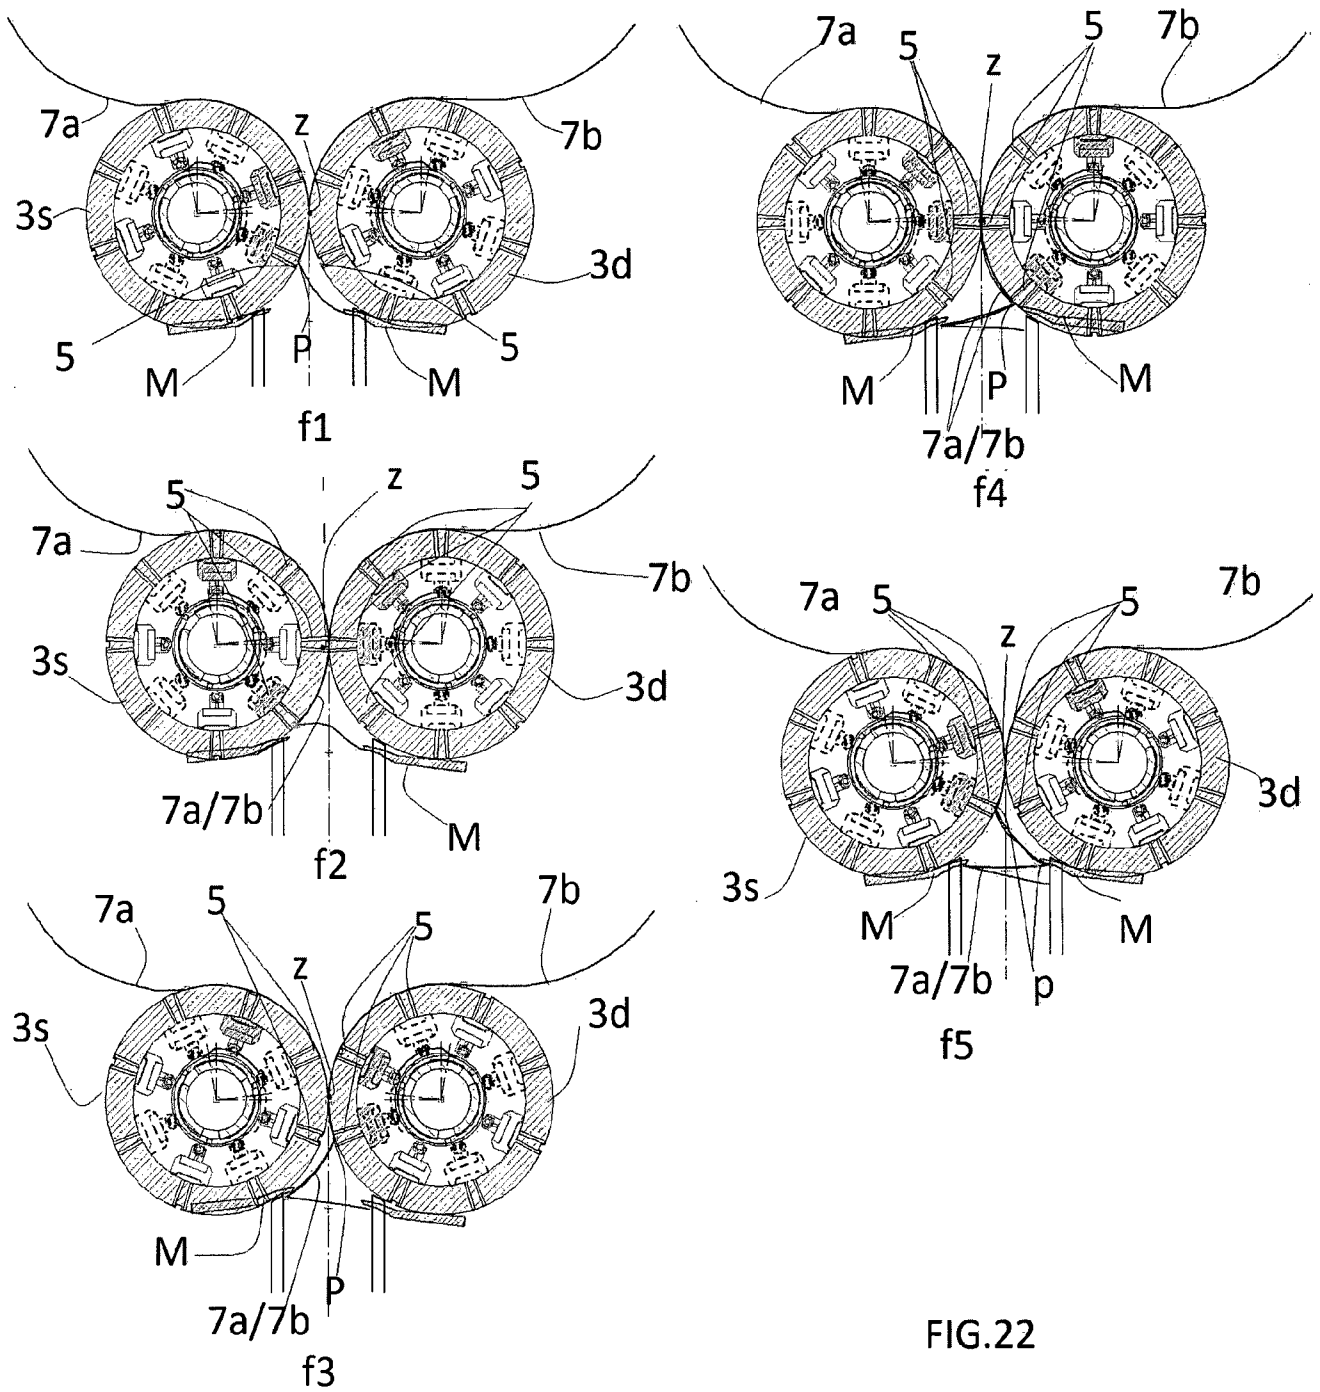


FIG.22

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2017/000316

A. CLASSIFICATION OF SUBJECT MATTER

INV. B65H45/24
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B65H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 457 444 A2 (MTC MACCHINE TRASFORMAZIONE [IT]) 15 September 2004 (2004-09-15) cited in the application	1-3, 10-13
A	the whole document	4-9
X	DE 40 42 168 A1 (GOEBEL GMBH MASCHF [DE]) 9 July 1992 (1992-07-09)	1,6,7, 10-12
A	the whole document	2-5,8,9, 13
A	EP 2 955 140 A2 (BRETTEING C G MFG CO INC [US]) 16 December 2015 (2015-12-16) the whole document	1
A	GB 965 217 A (HEDWIG GAMBLE) 29 July 1964 (1964-07-29) the whole document	1

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

19 June 2017

Date of mailing of the international search report

27/06/2017

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Athanasiadis, A

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2017/000316

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 1457444	A2	15-09-2004	NONE
DE 4042168	A1	09-07-1992	NONE
EP 2955140	A2	16-12-2015	EP 2955140 A2 16-12-2015
		US 2015360901 A1	17-12-2015
GB 965217	A	29-07-1964	NONE