

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 September 2002 (19.09.2002)

PCT

(10) International Publication Number
WO 02/073768 A2

(51) International Patent Classification⁷: **H02J 3/42**

(21) International Application Number: PCT/NL02/00166

(22) International Filing Date: 12 March 2002 (12.03.2002)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
1017565 12 March 2001 (12.03.2001) NL

(71) Applicant (for all designated States except US): **ENATEC MICRO-COGEN B.V.** [NL/NL]; Galileistraat 27, NL-7131 PE Lichtenvoorde (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BECKERS, Gerardus, Jacobus, Josephine** [NL/NL]; Dorpstraat 54A, NL-1744 KL St. Maarten (NL). **BEKKERING, Dirk, Lucas** [NL/NL]; Elswede 51, NL-6903 AB Zevenaar (NL). **VAN KAMPEN, Willem, Antoon** [NL/NL];

Wijenburgsestraat 11, NL-4054 JE Echteld (NL). **VAN KAMPEN, Berend, Jan** [NL/NL]; Kruisstraat 38, NL-2312 BJ Leiden (NL). **RIBBERDINK, Johannes, Sjoerd** [NL/NL]; Blaer 46, NL-1831 AB Koedijk (NL).


(74) Agent: **LAND, Addick, Adrianus, Gosling**; Arnold & Siedsma, Sweelinckplein 1, NL-2517 GK The Hague (NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: CONNECTING CIRCUIT AND METHOD FOR CONNECTING A GENERATOR TO THE ELECTRICITY GRID MAKING USE THEREOF

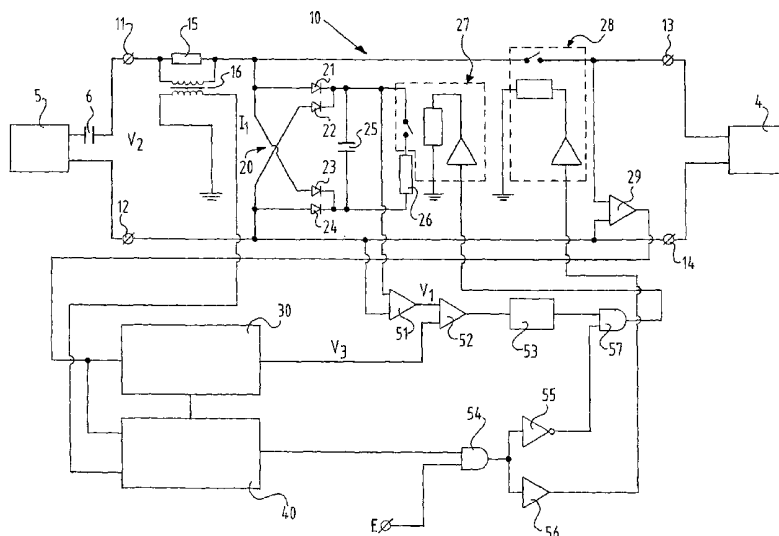

(57) Abstract: The present invention relates to a connecting circuit for connecting to an electricity grid an electric generator for generating electrical energy, comprising: a measuring circuit for measuring the current through the connecting circuit; a storage element for storing charge supplied by the generator for at least some period of time; a second measuring circuit for measuring the amount of stored charge, which circuit is connected to a storage element; and a first controllable switch for connecting the generator to the electricity grid subject to the measured current intensity, voltage and stored charge.



WO 02/073768 A2



Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

CONNECTING CIRCUIT AND METHOD FOR CONNECTING A GENERATOR
TO THE ELECTRICITY GRID MAKING USE THEREOF

As a result of the liberalization of electricity supply, wherein it has also become possible to supply electricity to the electricity grid, local generation of electricity, i.e. in homes or other buildings where for
5 instance a heating installation is also present, becomes efficient. An example of such a coupling is described in the non-prepublished Netherlands patent application 1015319, a copy of which is enclosed and the content of which should be deemed as interpolated herein.

10 In the central generation of electricity a synchronous generator is connected to the electricity grid by varying the rotation speed of the generator until the phase difference between the generator and the voltage of the electricity grid is sufficiently small.
15 This procedure will generally not suffice at local level, and certainly not in the above described combination wherein a Stirling generator is applied as (linear) generator.

If the electric generator is connected to the
20 electricity grid when phase and frequency differ considerably from each other, a large current will begin to flow, which is either not permissible in the electricity grid or which will cause damage to the (Stirling) generator within a short time.

25 The present invention has the object of enabling a reliable connection of generator and electricity grid with relatively simple means and of obviating the above stated problems.

The present invention provides a connecting circuit
30 for connecting to an electricity grid an electric generator for generating electrical energy, comprising:

- a measuring circuit for measuring the current through the connecting circuit;

- a storage element for storing charge supplied by the generator for at least some period of time;
- a second measuring circuit for measuring the amount of stored charge, which circuit is connected to a
- 5 storage element; and
- a first controllable switch for connecting the generator to the electricity grid subject to the measured current intensity, voltage and stored charge.

During synchronization an electric load on the

10 generator will be present which acts in damping manner. In the case of a Stirling generator the mechanical amplitude of the generator will be limited and mechanical damage avoided; in the case of a rotating electric generator excessive angular velocity of the

15 generator is avoided. As soon as phase-locking has taken place it will continue to be maintained within certain limits.

Preferably arranged parallel to the storage element is a dissipative element and a second controllable

20 switch which is closed as long as the generator is not coupled to the grid, and whereby rapid synchronization can take place using a storage element with relatively small capacitance (order of magnitude: μF).

Further advantages, features and details of the

25 present invention will be elucidated on the basis of the following description of a preferred embodiment of a circuit and method according to the present invention with reference to the annexed drawings, in which:

Fig. 1 shows a diagram of a first preferred

30 embodiment of a circuit according to the present invention;

Fig. 2 shows a preferred embodiment of a part of the circuit diagram of fig. 1;

Fig. 3 shows a preferred embodiment of another part

35 of the circuit diagram of fig. 1;

fig. 4A-4C show respectively graphs of signals occurring in the circuit diagram of fig. 1-3;

fig. 5A-5C show respectively graphs of signals occurring in the circuit diagram of fig. 1-3.

A preferred embodiment of a circuit 10 according to the present invention is connected between terminals 11 and 12 of an electric Stirling generator 5 (for instance 350-5000 W power at 230 V and 50 Hz, respectively 110 V and 60 Hz) with matching capacitor 6 for the purpose of providing the correct match for resistance load, for instance a power factor of about 0.9-1.0, and terminals 13 and 14 of a schematically shown electricity grid 4. A first, schematically shown controllable switch 28 is further arranged between terminals 11 and 13. Circuit 10 comprises a shunt resistance 15 so that the current generated by the generator can be measured via a transformer 16. Circuit 10 further comprises a diode bridge circuit 20 comprising four diodes 21, 22, 23 and 24, the outputs of which are connected to the poles of a storage capacitor 25. Connected in parallel to storage capacitor 25 is a resistance 26 as well as a schematically shown second controllable switch 27. A differential amplifier 29 is also connected between terminals 13 and 14.

The output of differential amplifier 29 is connected to the input of a circuit 30 for generating a bias voltage of a predetermined value. The output of differential amplifier 29 is likewise connected to the input of a phase circuit 40 for determining and shifting the phase to which the output of transformer 16 is also connected. Connected to the poles of capacitor 25 is a differential amplifier 51, to the outputs of which is connected a second differential amplifier 52 which has as other input the output of circuit 30. A Schmitt trigger circuit 53 is connected to the output of differential amplifier 52. Connected to the output of phase circuit 40 is an AND-gate 54, the other input of which is formed by a "Logic Enable Signal" E. Amplifiers 55 (with inverter) and 56 are connected to the output of

AND-gate 54. The output of amplifier 56 is connected to the input of the controllable switch 27. The inverting output of amplifier 55 is connected to an AND-gate 57, the output of which is connected to controllable switch 28.

Circuit 30 (fig. 2) comprises a converter 31 for converting the output signal from differential amplifier 29 into a block-shaped signal, a frequency multiplier 32 which is connected to the output of converter 31 and to the second input of which is connected a signal A from phase circuit 40. A counter 34 is further connected to the output of the OR-gate 33, while the reset input is connected to the output of converter 31. Circuit 30 also comprises an EPROM 35 connected to eight parallel outputs (D0-D7) of counter 34. A DA-converter 36 is connected to the eight parallel outputs of EPROM 35.

A preferred embodiment of a phase circuit 40 (fig. 3) comprises a phase comparator 41 for comparing the phase of the two inputs, i.e. the current from terminals 11 on the one hand and the voltage between terminals 13 and 14 on the other. The phase difference is sent to a schematically shown microprocessor 42-44 in which a return loop is active as long as the phase difference does not equal zero. When the phase difference is (roughly) equal to zero, a logic signal is generated to the AND-gate 54 (fig. 1). The logic signal A is generated via a pulse generator 45 to circuit 30 as long as the phase difference as designated schematically in block 44 does not equal zero.

In another embodiment of circuits 30 and 40 the functions of these circuits are wholly or partially implemented in a microprocessor or a digital signal processor with a view to being able, among other things, to intervene in the case of exceptional operating conditions, this being possible because, using the output signal from AND-gate 54, it is possible within a time which is short compared to the period time of the

grid, for instance within 0.2 millisecond, to switch from grid coupling to the load formed by capacitor 25 and the variable load in which resistance 26 is included.

5 The operation of the above stated circuit will be further explained on the basis of the graphs of fig. 4A-5C.

10 The circuit according to the present invention was tested with a Stirling generator for 350 W at 110 V and 60 Hz such as manufactured by the company STC of the USA. The circuit can however be used for all types of synchronous, linear or rotating electric generators. In such generators phase-locking will be maintained as long as the phase variation between machine and electricity grid is small enough.

15 At switch-on, i.e. connection of generator 5 to electricity grid 4 via switch 28, frequency and phase must be sufficiently equal to avoid too large a current beginning to flow, which is either not permissible in electricity grid 4 or which will cause damage to generator 5.

20 Stirling generator 5 produces a substantially sine-shaped current if it is connected to a resistance load. The current I_1 measured using transformer 16 is shown in fig. 4A. The current rectified by means of diode circuit 20 charges capacitor 25. The voltage V_1 which would result therefrom at the output of differential amplifier 51 is shown in fig. 4B. The voltage V_1 is compared in differential amplifier 52 with the output of circuit 30.

25 Switch 27 is controlled by the output of AND-gate 57 which is connected to the Schmitt trigger 53. If inverter 55 provides a logical "true" signal, the control loop consisting of components 51, 52, 53, 57 and 27 will be active; at constant bias voltage V_3 charge is 30 alternatingly either taken from the capacitor or not, wherein the voltage on the capacitor will display the form as shown in fig. 4B. The voltage between terminals

11 and 12 will take the form in fig. 4C. The positive and negative values will be roughly equal in magnitude to the electrical voltage on capacitor 25. In a practical circuit the current through the measuring
 5 resistance and the amplitude of the voltage between terminals 11 and 12 respectively have for instance roughly the values as in grid-coupled operation.

Fig. 5A shows a possible wave shape for the voltage V_3 to enable synchronization of the generator with the
 10 grid.

In the present embodiment voltage V_3 has a period which equals half the period of the electricity grid, while the phase is locked with the grid. The value varies for instance between a maximum value $V_{\max}$ and a
 15 value of $0.8 V_{\max}$ with half the period of the average period of the grid.

For V_3 the following formula can for instance apply:

$$V_3 = V_{\max} - 4 \cdot (V_{\max} - 0.8V_{\max}) T^{-2} \cdot P^2,$$

wherein T is the period of the electricity grid and
 20 $-T/2 \leq P \leq T/2$ applies for the variable P .

An example of the variable P is for instance shown in fig. 5B, while the resulting voltage V_1' at varying V_3 is shown in fig. 5C.

As long as the bias voltage V_3 is constant the
 25 generator will idle and no phase-locking will take place. However, when the voltage varies, for instance with a period $T/2$ as shown in fig. 5A, phase-locking will then occur rapidly.

In circuit 30 (fig. 2) the signal obtained via
 30 differential amplifier 29 from the grid is first converted to a block-shaped signal in converter 31. In multiplier 32 the frequency is multiplied by for instance 128. Counter 34 is reset by the block-shaped signal. Signal A will influence the count of counter 34.
 35 The output data lines of counter 34 are connected to EPROM 35 which generates for instance the wave form of fig. 5A via converter 36.

In circuit 40 (fig. 3) the phase difference between current I_1 and voltage of the grid is measured in 41. As long as the phase difference is not equal to zero a return loop is active. Each time the return loop is completed an additional count A is generated via pulse generator 45 and fed to counter 34 via OR-gate 33, whereby voltage V_1 is shifted in phase until the generator is finally synchronized with the electricity grid. At that moment switch 25 can be opened and switch 28 closed. The generator will then supply energy to the grid in phase-locking with the grid.

The invention is not limited to the above described preferred embodiment thereof; the rights sought are rather defined by the following claims, within the scope of which many modifications can be envisaged.

CLAIMS

1. Connecting circuit for connecting to an electricity grid an electric generator for generating electrical energy, comprising:

- 5 - a measuring circuit for measuring the current through the connecting circuit;
- a storage element for storing charge supplied by the generator for at least some period of time;
- a second measuring circuit for measuring the amount of stored charge, which circuit is connected to a
10 storage element; and
- a first controllable switch for connecting the generator to the electricity grid subject to the measured current intensity, voltage and stored charge.

2. Connecting circuit as claimed in claim 1,
15 wherein the first measuring circuit comprises a transformer.

3. Connecting circuit as claimed in claim 1 or 2, wherein the second measuring circuit comprises a differential amplifier.

20 4. Connecting circuit as claimed in claim 1, 2 or 3, further comprising a circuit for generating a voltage of a predetermined value.

25 5. Connecting circuit as claimed in any of the claims 1-4, further comprising a phase circuit for determining and shifting the phase of the measured signals.

30 6. Connecting circuit as claimed in claim 4, wherein the circuit comprises a microprocessor, an EPROM in which the signal of predetermined value is stored in digital form, and a DA-converter.

7. Connecting circuit as claimed in claim 6, wherein a counter is connected to the EPROM for phase-shifting of the output of the EPROM.

8. Connecting circuit as claimed in claim 5, wherein the phase circuit comprises a phase comparator, a phase-locking and a return loop.

5 9. Connecting circuit as claimed in one or more of the claims 1-8, wherein a dissipative element and a second controllable switch are arranged parallel to the storage element.

10 10. Method for connecting an electric generator to an electricity grid, wherein using a connecting circuit wherein the current through the connecting circuit is measured, the amount of stored charge in a storage element of the measuring circuit is measured, and wherein the generator is connected to the electricity grid as soon as measurement shows that the phase of the
15 voltage generated by the generator and the voltage of the electricity grid are roughly equal.

11. Method as claimed in claim 9, wherein a connecting circuit according to one or more of the claims 1-8 is applied.

20 12. Method as claimed in claim 10 or 11, wherein the measured values according to claims 1-10 are used to postpone or cause the connection to the electricity grid not to take place or to interrupt an existing connection and to return to dissipation of the generated electric
25 power in such a short time that mechanical, electromechanical or electrical damage will be avoided.

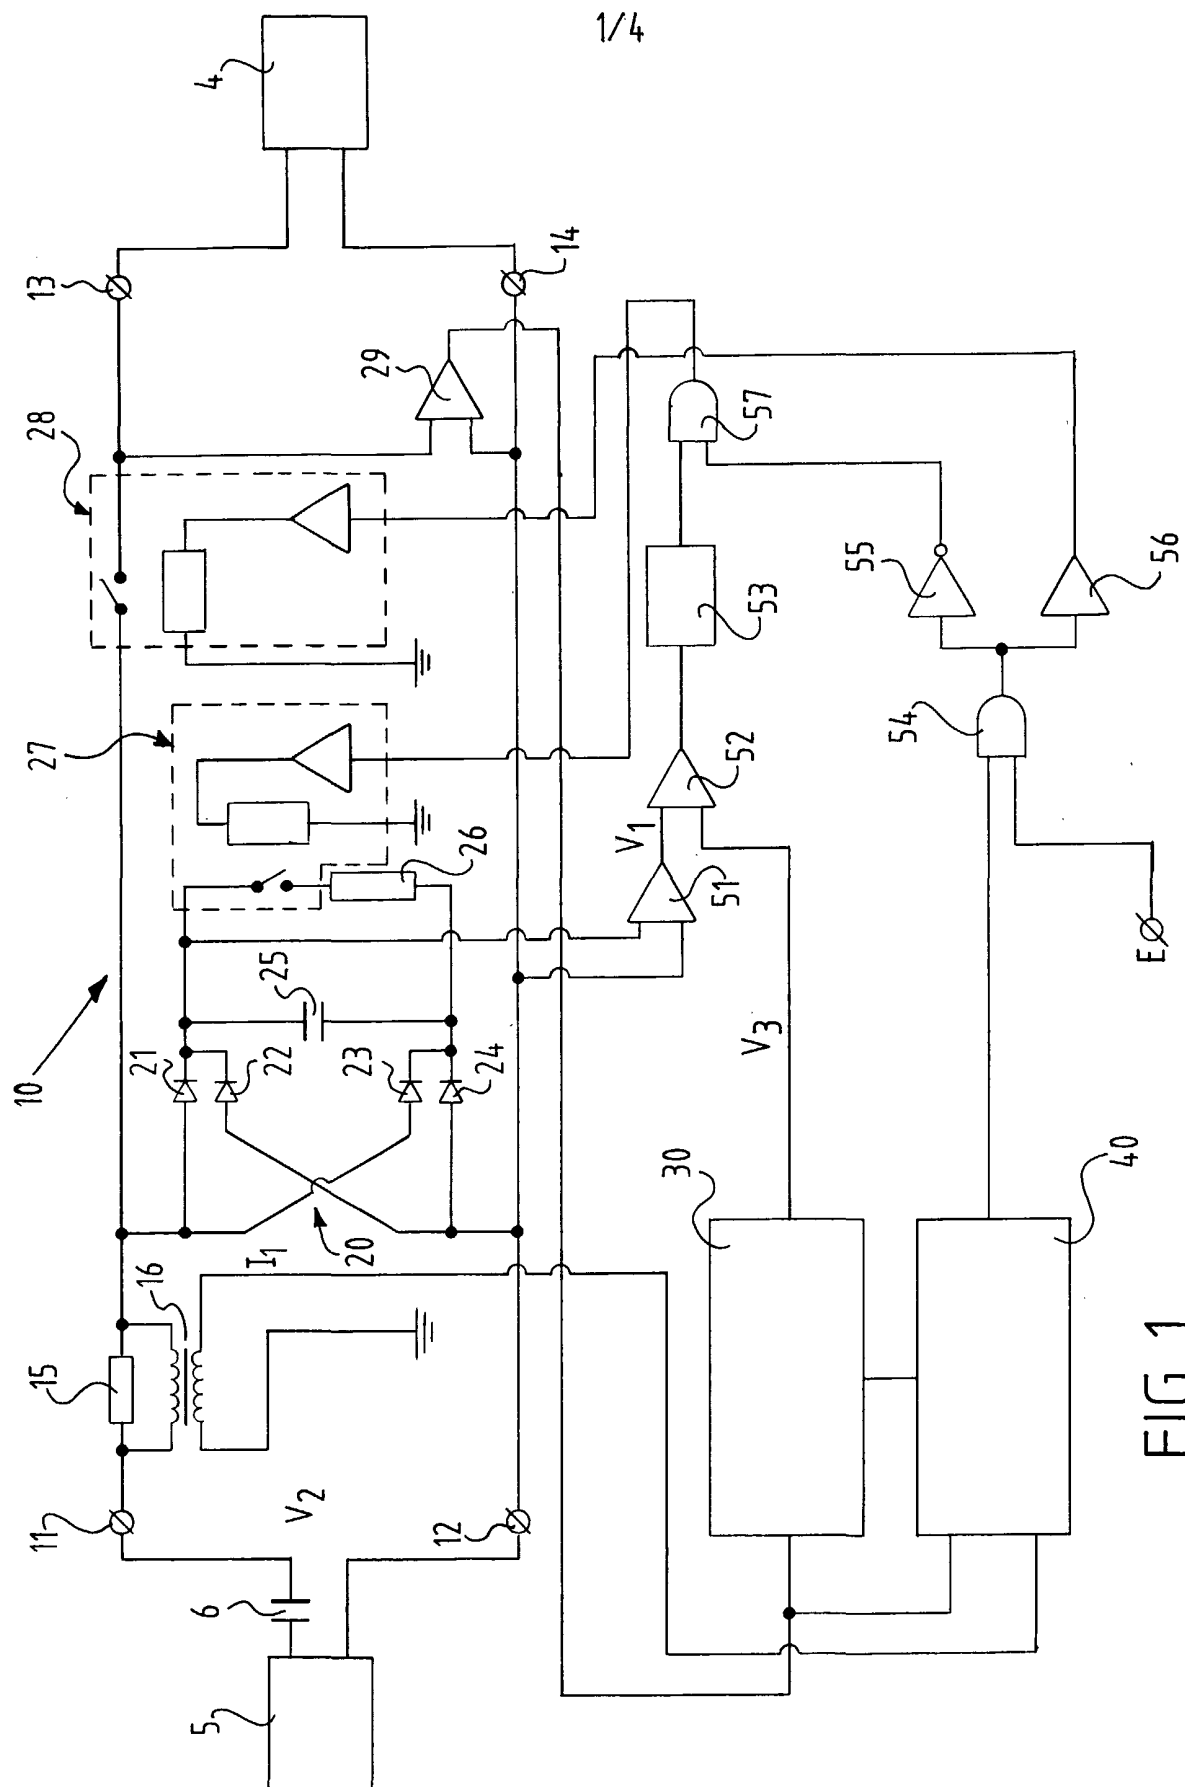


FIG. 1

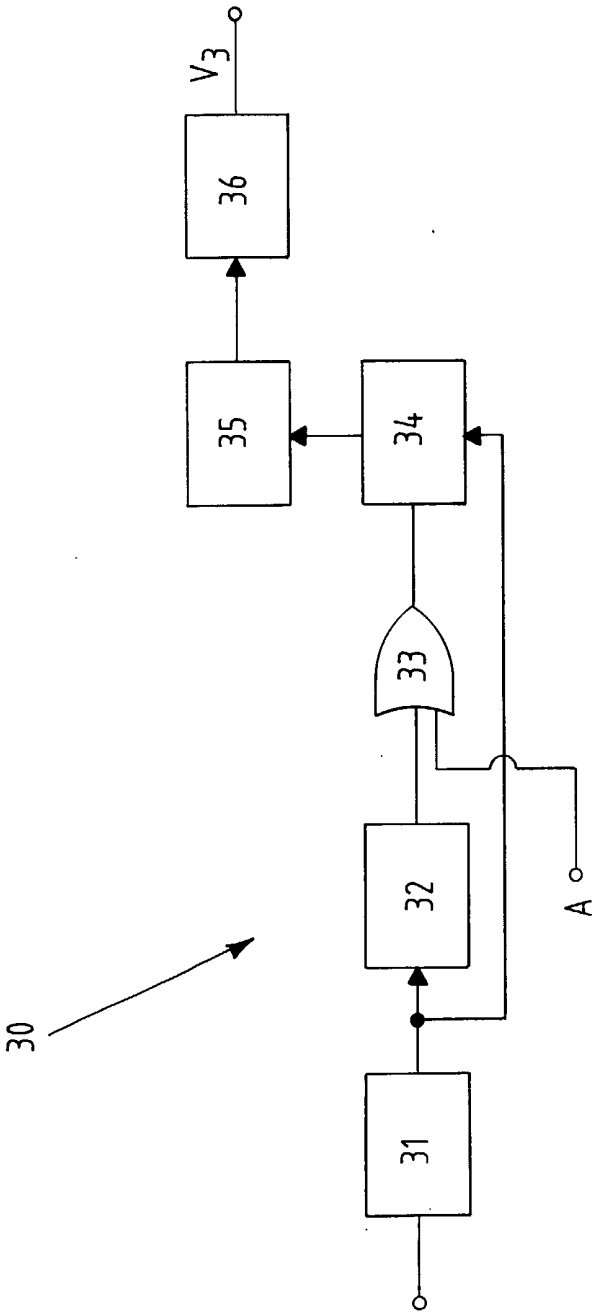


FIG. 2

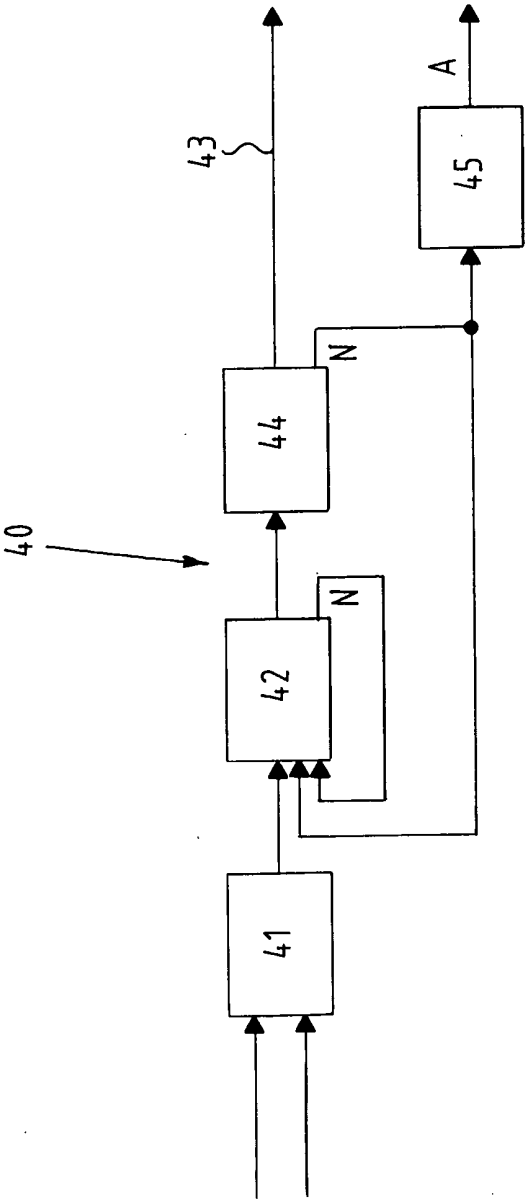


FIG. 3

