



(22) Date de dépôt/Filing Date: 1993/01/27

(41) Mise à la disp. pub./Open to Public Insp.: 1993/08/01

(45) Date de délivrance/Issue Date: 2002/06/25

(30) Priorités/Priorities: 1992/01/31 (P04-016968) JP;  
1992/03/19 (P04-063905) JP

(51) Cl.Int.<sup>5</sup>/Int.Cl.<sup>5</sup> G03B 5/00, G03B 17/00, H04N 5/76

(72) Inventeurs/Inventors:

Ishizuka, Shigeki, JP;  
Sato, Koichi, JP;  
Nikami, Akira, JP;  
Sato, Mitsuru, JP


(73) Propriétaire/Owner:

SONY CORPORATION, JP

(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : APPAREIL AMORTISSEUR DE VIBRATION POUR CAMERA

(54) Title: CAMERA APPARATUS

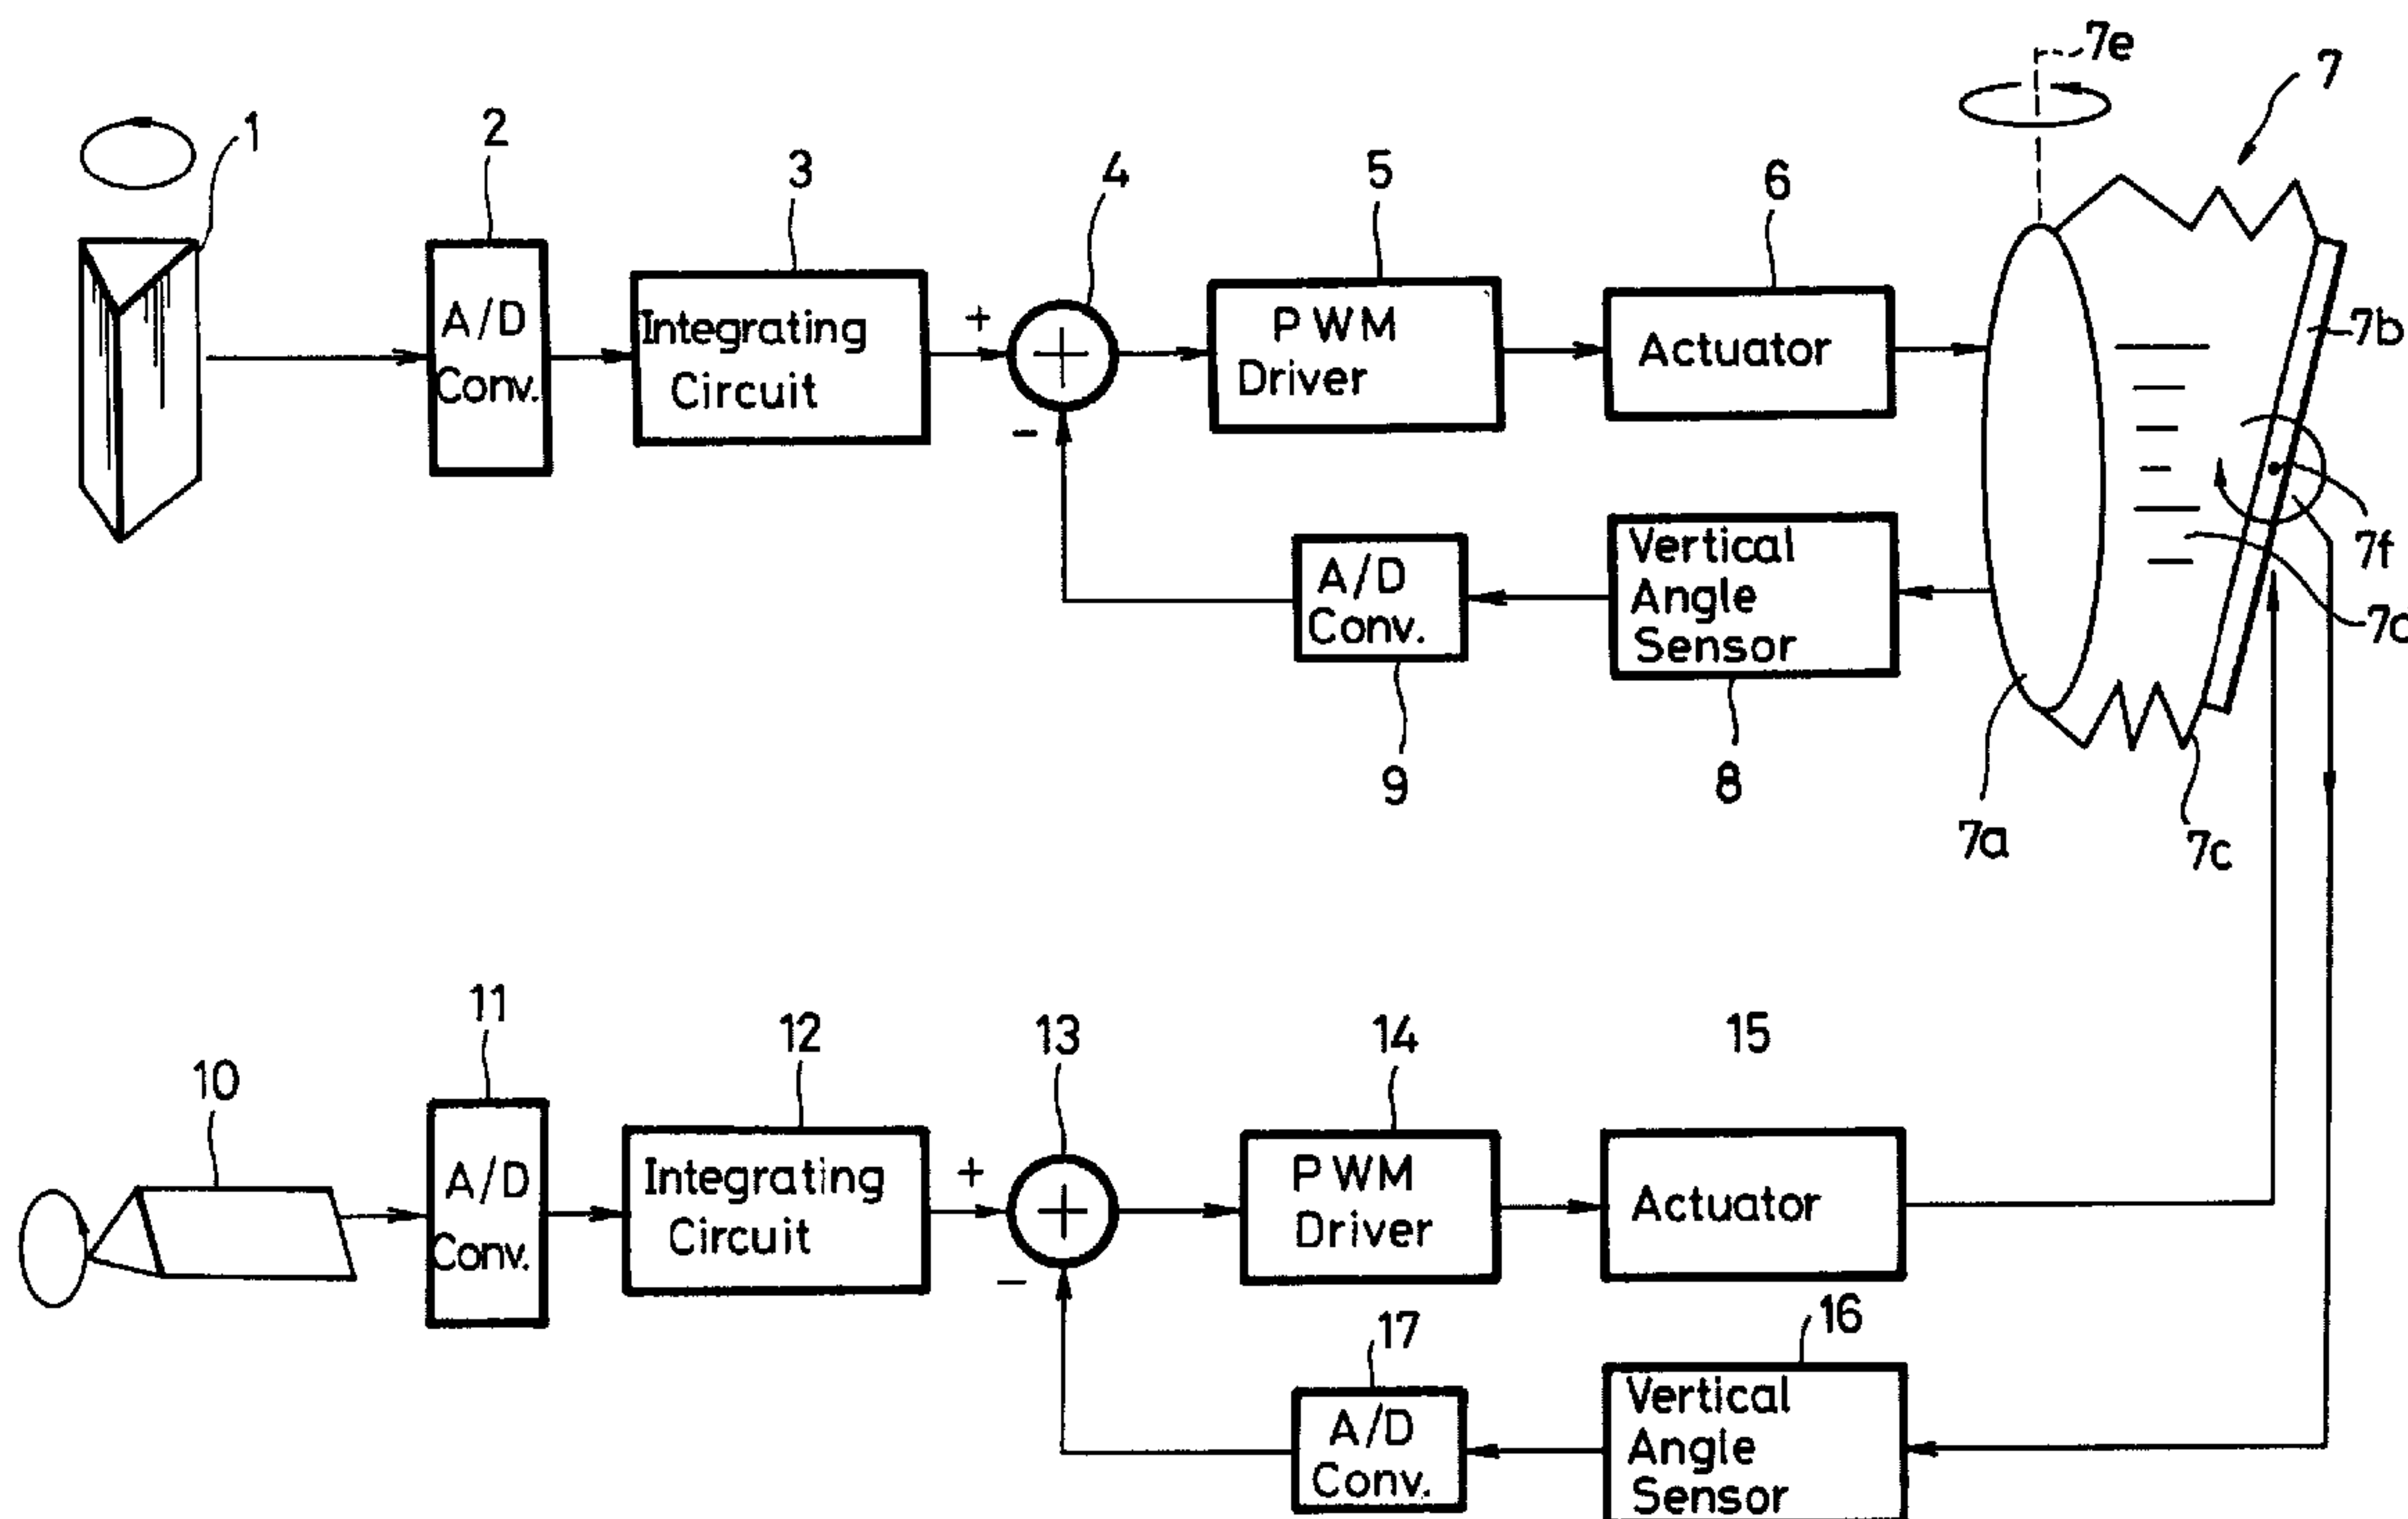

(57) Abrégé/Abstract:

A camera shake correcting apparatus includes a variable angular prism assembly, a microcomputer to produce signals for driving the variable angular prism assembly, prism actuators, vertical angle sensors, angular velocity sensors for detecting an angular velocity caused by the camera shaking, and damping coils. The variable angular prism assembly is driven by a signal obtained by subtracting detected results of the vertical angle sensors from detected results of the angular velocity sensors. A damping coil is used to produce rotational angular velocity signals so that a nonlinearity of the prism can be alleviated. The phase margin of the servo characteristic of the prism drive system is increased, so that the camera shake correcting apparatus can be generally independent of variations in values and dimensions that occur in mass-production manufacturing operations and free of dependency on temperature characteristics.

## ABSTRACT

A camera shake correcting apparatus includes a variable angular prism assembly, a microcomputer to produce signals for driving the variable angular prism assembly, prism actuators, vertical angle sensors, angular velocity sensors for detecting an angular velocity caused by the camera shaking, and damping coils. The variable angular prism assembly is driven by a signal obtained by subtracting detected results of the vertical angle sensors from detected results of the angular velocity sensors. A damping coil is used to produce rotational angular velocity signals so that a nonlinearity of the prism can be alleviated. The phase margin of the servo characteristic of the prism drive system is increased, so that the camera shake correcting apparatus can be generally independent of variations in values and dimensions that occur in mass-production manufacturing operations and free of dependency on temperature characteristics.

CAMERA SHAKE CORRECTING APPARATUS HAVING  
DAMPING COILS FOR YAW AND PITCH

BACKGROUND OF THE INVENTION

Field of the Invention:

The present invention relates to a camera shake correcting apparatus for use in a video tape recorder (VTR) or the like.

Description of the Prior Art:

U.S. Patent Nos. 5,016,112 and 4,998,162 describe video cameras and U.S. Patent No. 4,542,419 describes a recording and reproducing apparatus for a video camera.

Conventional video cameras need a camera shake correction. U.S. Patent No. 5,210,559 describes a camera shake correcting processing for video cameras, for example.

The camera shake is such one that, when the cameraman takes a picture of an object with a video camera, a picked-up image is moved in the upper, lower, right or left direction by the unintentional action of cameraman's hands or body. The picked-up image may, of course, be moved in a complex fashion such as when it is moved in the oblique directions or the like.

More specifically, if the video camera is moved delicately (or moved badly depending on a difference among individuals), then a light from an object is moved on a target screen of a charge coupled device (CCD) in its various directions such as upper, lower, right and left directions or the like. Thus, when the picked-up image is reproduced on a

picture screen of a television monitor or the like, a reproduced picture is constantly moved in the upper, lower, right or left direction.

FIG. 1 of the accompanying drawings shows an arrangement of a conventional video tape recorder having a built-in camera of a camera shake correction system. As shown in FIG. 1, a motion vector of a picture that is moved by a camera shake is detected and an address of a cut-out frame of the CCD image is changed, thereby correcting the camera shake. The picture is cut out from the CCD scanning area by changing the cut-out frame so that an area in which the cut-out frame is moved in response to the camera shake must be prepared within the CCD scanning area. As a result, the scanning area is reduced in area substantially. To solve this problem, the picture area whose picture frame is reduced is zoomed up by a digital signal processing and extended to the normal picture frame. There are then the disadvantages such that a picture size is changed and that a resolution of a reproduced picture is lowered.

#### OBJECTS AND SUMMARY OF THE INVENTION

In view of the aforesaid shortcomings and disadvantages encountered with the prior art, it is an object of the present invention to provide a camera shake correcting apparatus which can increase a phase margin of servo characteristic.

It is another object of the present invention to provide a camera shake correcting apparatus which can correct a camera shake optically.

It is still another object of the present invention to

provide a camera shake correcting apparatus which can be prevented from being affected by a fluctuation of elements upon mass-production.

It is a further object of the present invention to provide a camera shake correcting apparatus which can be prevented from being affected by a dependency of temperature characteristic.

According to a first aspect of the present invention, there is provided a camera shake correcting apparatus which comprises a variable angular prism for changing a vertical angle by changing a rotational angle of a plate glass thereof in response to a drive signal to thereby refract an incident light, a vertical angle prism position detecting circuit for detecting a rotational angle position of the plate glass, a camera shake amount detecting circuit for detecting an amount of camera shake, a calculating circuit for calculating the camera shake amount and the rotational angle position of the plate glass to generate and output a vertical angle prism drive signal, and a variable angular prism drive circuit for driving the vertical angle prism in response to the vertical angle prism drive signal.

According to a second aspect of the present invention, there is provided a camera apparatus which comprises a variable angular prism for changing a vertical angle by changing a rotational angle of a plate glass thereof in response to a drive signal to thereby refract an incident light, a vertical angle prism position detecting circuit for detecting a rotational angle position of the plate glass, a

camera shake amount detecting circuit for detecting an amount of camera shake, a calculating circuit for calculating the camera shake amount and the rotational angle position of the plate glass to generate and output a vertical angle prism drive signal, a variable angular prism drive circuit for driving the vertical angle prism in response to the vertical angle prism drive signal, and an image-pickup device for focusing a light traveling through the variable angular prism from an object to convert the same into a video signal.

According to a third aspect of the present invention, there is provided a recording apparatus having a built-in camera which comprises a variable angular prism for changing a vertical angle by changing a rotational angle of a plate glass thereof in response to a drive signal to thereby refract an incident light, a vertical angle prism position detecting circuit for detecting a rotational angle position of the plate glass, a camera shake amount detecting circuit for detecting an amount of camera shake, a calculating circuit for calculating the camera shake amount and the rotational angle position of the plate glass to generate and output a vertical angle prism drive signal, a variable angular prism drive circuit for driving the vertical angle prism in response to the vertical angle prism drive signal, an image-pickup device for focusing a light traveling through the variable angular prism from an object to convert the same into a video signal, and a recording circuit for converting an output video signal from the image-pickup device into a signal format on a recording medium and recording the same.

The above and other objects, features, and advantages of the present invention will become apparent from the following detailed description of illustrative embodiments thereof to be read in conjunction with the accompanying drawings, in which like reference numerals are used to identify the same or similar parts in the several views.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram showing a video tape recorder (VTR) having a built-in camera of a conventional camera shake correction system;

FIG. 2 is a block diagram showing a circuit arrangement of a camera shake correcting apparatus according to a first embodiment of the present invention;

FIG. 3 is a graph used to explain the camera shake correcting apparatus according to the first embodiment of the present invention;

FIG. 4 is a signal flow diagram used to explain the camera shake correcting apparatus according to the first embodiment of the present invention;

FIG. 5 is a graph used to explain the camera shake correcting apparatus according to the first embodiment of the present invention;

FIGS. 6A and 6B are respectively graphs used to explain the camera shake correcting apparatus according to the first embodiment of the present invention;

FIG. 7 is a signal flow diagram used to explain the camera shake correcting apparatus according to the first embodiment of the present invention;

FIGS. 8A and 8B are respectively graphs used to explain the camera shake correcting apparatus according to the first embodiment of the present invention;

FIG. 9 is a block diagram showing a circuit arrangement of the camera shake correcting apparatus according to a second embodiment of the present invention;

FIG. 10 is a diagram showing a structure of a main portion of the camera shake correcting apparatus according to the second embodiment of the present invention;

FIG. 11 is a diagram showing a structure of a main portion of the camera shake correcting apparatus according to the second embodiment of the present invention;

FIG. 12 is a cross-sectional view showing a main portion of the camera shake correcting apparatus according to the second embodiment of the present invention;

FIG. 13 is a cross-sectional view showing a main portion of the camera shake correcting apparatus according to the second embodiment of the present invention;

FIG. 14 is a cross-sectional view showing a main portion of the camera shake correcting apparatus according to the present invention;

FIG. 15 is a block diagram showing a main portion of the camera shake correcting apparatus according to the second embodiment of the present invention;

FIG. 16 is a diagram showing a circuit arrangement of a main portion of the camera shake correcting apparatus according to the second embodiment of the present invention;

FIG. 17 is a signal flow diagram used to explain the

camera shake correcting apparatus according to the second embodiment of the present invention;

FIG. 18 is a signal flow diagram used to explain the camera shake correcting apparatus according to the second embodiment of the present invention;

FIG. 19 is a signal flow diagram used to explain the camera shake correcting apparatus according to the second embodiment of the present invention;

FIG. 20 is a signal flow diagram used to explain the camera shake correcting apparatus according to the second embodiment of the present invention;

FIG. 21 is a graph used to explain the camera shake correcting apparatus according to the second embodiment of the present invention;

FIG. 22 is a graph used to explain the camera shake correcting apparatus according to the second embodiment of the present invention;

FIG. 23 is a graph used to explain the camera shake correcting apparatus according to the second embodiment of the present invention;

FIG. 24 is a diagram showing a main portion of a camera shake correcting apparatus according to a third embodiment of the present invention;

FIG. 25 is a diagram showing a circuit arrangement of a main portion of the camera shake correcting apparatus according to the third embodiment of the present invention;

FIG. 26 is a diagram showing a circuit arrangement of a main portion of a modified example of the circuit arrangement

shown in FIG. 25;

FIG. 27 is a signal flow diagram used to explain the camera shake correcting apparatus according to the third embodiment of the present invention;

FIG. 28 is a signal flow diagram used to explain the camera shake correcting apparatus according to the third embodiment of the present invention;

FIG. 29 is a graph used to explain the camera shake correcting apparatus according to the third embodiment of the present invention; and

FIG. 30 is a graph used to explain the camera shake correcting apparatus according to the third embodiment of the present invention.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention will now be described in detail with reference to the accompanying drawings.

In order to eliminate the aforesaid drawbacks, according to the present invention, the camera shake is optically corrected before an image is focused on the CCD image sensing element. As a means for optically correcting a camera shake, there is utilized a prism that is what might be called a VAP (variable angular prism) element.

As will be described later on, this variable angular prism element comprises two circular plate glasses bonded by a cylindrical transparent spring portion of bellows configuration whose diameter is substantially equal to those of the two plate glasses. A viscous liquid is filled into the spring portion and a vertical angle of this prism is changed

by changing the angle of the two plate glasses, thereby refracting a light.

Then, by moving the prism in the horizontal or vertical direction in response to an amount in which the angular velocity is changed due to the camera shake, a light is refracted and prevented from being moved on the target screen of the CCD device, thereby correcting the camera shake.

FIG. 2 of the accompanying drawings shows a camera shake correcting apparatus using the aforesaid VAP element according to a first embodiment of the present invention. This camera shake correcting apparatus will be described below.

Referring to FIG. 2, there is provide a horizontal direction angular velocity sensor that detects an angular velocity at which the video camera is moved in the horizontal direction by the camera shake. An the angular velocity sensor, there may be used a piezoelectric vibratory gyro, for example.

As shown in FIG. 2, a detected signal from the angular velocity sensor 1 is supplied through an analog-to-digital (A/D) converter 2 to an integrating circuit 3. The integrating circuit 3 performs the integrating processing such as the addition of a preceding detected signal of the detected signal from the angular velocity sensor 1 to a signal attenuated by a predetermined gain or the like. An integrated output from the integrating circuit 3 is supplied to an adding circuit 4. An output from the adding circuit 4 is supplied to a PWM (pulse width modulation) driver 5, in which it is processed as a PWM signal and then fed to an actuator 6. The

actuator 6 actuates a prism 7 in the horizontal direction.

The prism 7 is what might be called the VAP (variable angular prism) element. As described above, the prism 7 comprises two circular plate glasses 7a, 7b bonded by a cylindrical transparent spring portion 7c of bellows configuration whose diameter is substantially the same as those of the two plate glasses 7a, 7b. A viscous liquid is filled into the spring portion 7c. A horizontal axis 7e provided on the plate glass 7a of the prism 7 is connected with the actuator 6 that actuates the prism 7 in the horizontal direction. A vertical axis 7f provided on the plate glass 7b of the prism 7 is connected with an actuator 15 that actuates the prism 7 in the vertical direction. Therefore, the plate glass 7a is rotated in the horizontal direction and the plate glass 7b is rotated in the vertical direction.

A position (i.e., rotational angle of the prism 7 in the horizontal direction) of the plate glass 7a rotated by the actuator 6 in the horizontal direction is detected by a vertical angle sensor 8 serving as a position detecting means. A detected signal from the vertical angle sensor 8 is supplied through an A/D converter 9 to the adding circuit 4. Accordingly, the adding circuit 4 subtracts from the integrated output of the integrating circuit 3 the detected signal representative of the rotational angle of the prism 7 in the horizontal direction. A subtracted output of the adding circuit 4 is supplied to the PWM driver 5.

There is shown an angular velocity sensor 10 that detects

an angular velocity in response to a motion of the video camera when the video camera is moved in the vertical direction by the camera shake. As the angular velocity sensor 10, there may be utilized a piezoelectric vibratory gyro.

A detected signal from the angular velocity sensor 10 is supplied through an A/D converter 11 to an integrating circuit 12 which processes the detected signal supplied thereto in an integrating fashion such as the addition of a preceding detected signal of the detected signal from the angular velocity sensor 10 to a signal attenuated by a predetermined gain to thereby provide an integrated output. The integrated output from the integrating circuit 12 is supplied to an adding circuit 13. An output from the adding circuit 13 is supplied to a PWM (pulse width modulation) driver 14, in which it is processed as a PWM signal and then fed to an actuator 15.

The actuator 15 is coupled to the vertical axis 7f of the plate glass 7b of the prism 7 to rotate the plate glass 7b in the vertical direction. A position (rotational angle of the prism 7 in the vertical direction) at which the plate glass 7b is rotated in the vertical direction by the actuator 15 is detected by a vertical angle sensor 16 serving as a position detecting means. A detected signal from the vertical angle sensor 16 is supplied through an A/D converter 17 to the adding circuit 13. Therefore, the adding circuit 13 subtracts from the integrated output of the integrating circuit 12 the detected signal representative of the rotational angle of the prism 7 in the vertical direction. The subtracted output is

supplied to the PWM driver 14.

More specifically, the angular velocities of the horizontal and vertical directions generated when the camera shake occurs are detected. The actuators 6 and 15 rotate the prism 7 in the horizontal and vertical directions based on the detected angular velocities to refract a light so that the light can be prevented from being moved on the target screen of the CCD element (not shown) disposed at the rear stage of the prism 7 in the upper, lower, right and left directions. Also, the positions of the prism 7 (rotational angles of the horizontal and vertical directions) are respectively detected and then fed back to the actuators 6 and 15.

FIG. 3 of the accompanying drawings is graph graphing a driving curve of the prism 7 wherein an axis of ordinate represents a deflection angle ( $\theta$ ) and an axis of abscissa represents a drive voltage ( $V$ ). As shown in FIG. 3, a relationship between the deflection angle and the drive voltage of the prism 7 has a hysteresis characteristic.

FIG. 4 of the accompanying drawings shows a signal flow diagram of the camera shake correcting apparatus shown in FIG. 2. A signal flow of the camera shake correcting apparatus will hereinafter be described with reference to FIG. 4.

In FIG. 4, reference symbol R depicts a winding resistance ( $V/A$ ) of the actuator 6 or 15,  $K_t$  a torque constant ( $700g \cdot cm/A$ ),  $J$  an inertia ( $g \cdot cm/sec^2$ ),  $D$  a viscosity resistance ( $g \cdot cm/sec$ ) of the liquid filled into the prism 7,  $K_\theta$  a spring constant ( $g \cdot cm/deg$ ) of the spring portion 7c and  $e_i$  an alternating drive voltage ( $V$ ), respectively.

A gain (open loop gain) in this case can be expressed by the equation (1) below:

$$G(S)_{\text{open}} = \frac{2K^t K\theta}{R} \cdot \frac{1}{JS^2 + DS + K_y}$$

Expressing the equation (1) by a retarded general expression of second order yields the following equation (2):

$$G(j\omega) = \frac{K}{1 - \left(\frac{\omega}{\omega_n}\right)^2 + j2\zeta\left(\frac{\omega}{\omega_n}\right)}$$

where  $n$  represents a normalization and  $\zeta$  represents an attenuation coefficient.

A phase and a gain in the aforesaid open loop are illustrated in FIG. 5 of the accompanying drawings. FIG. 5 shows a phase curve  $\rho_01$  and a gain curve  $g_01$  wherein an axis of ordinate represents a phase (degree) and a gain (dB) and an axis of abscissa represents a frequency (Hz).

FIGS. 6A and 6B of the accompanying drawings are Bode diagrams showing characteristics such that  $K$  is normalized to 1 ( $K = 1$ ). FIG. 6A shows gain characteristics plotted to the frequency and FIGS. 6B shows phase characteristics plotted to the frequency. FIG. 6A shows gain characteristics when the attenuation coefficient  $\zeta$  is 0.05, 0.1, 0.2, 0.3, 0.5, 0.7, 1.0 and 2.0. FIG. 6B shows phase characteristics when the attenuation coefficient  $\zeta$  is 0.1, 0.2, 0.3, 0.5, 0.7, 0.9 and 1.0.

As shown in FIGS. 6A and 6B, when the attenuation

coefficient  $\zeta$  is 0.7, the phase and gain characteristics are satisfactorily matched with the frequencies. Further, although the phase and gain characteristics are disturbed by disturbances such as a resonance characteristic appearing near 100 Hz, they are satisfactorily matched at frequencies of 50 Hz or below.

FIG. 7 of the accompanying drawings is a signal flow diagram showing the signal flow when a closed loop is formed of the PWM drivers 5, 14, the actuators 6, 15 and the vertical angle sensors 8, 16 where the integrated results by the integrating circuits 3 and 12 are assumed to be reference values  $\text{ref}$  depending on the open loop characteristic of the aforesaid camera shake correcting apparatus.

The gain in this closed loop can be expressed by the following equation (3):

$$\begin{aligned}
 G_{\text{close}}(S) &= \frac{G_o / K\theta}{1 + G_o} \\
 &= \frac{1}{\frac{K\theta}{G_o} + K\theta} \\
 &= \frac{1}{\frac{R}{2K_t} (JS^2 + DS + K_y) + K\theta} \\
 &= \frac{1}{\frac{RJ}{2K_t} S^2 + \frac{RD}{2K_t} S + (\frac{RK_y}{2K_t} + K\theta)}
 \end{aligned}$$

FIGS. 8A and 8B of the accompanying drawings are graphs showing measured results of the gain in the closed loop. FIG. 8A shows the change of gain relative to the input level wherein an axis of ordinate represents the gain (dB) and an axis of abscissa represents the frequency (Hz). FIG. 8B shows the change of phase relative to the input level wherein an

axis of ordinate represents the phase (degree) and an axis of abscissa represents the frequency (Hz).

In the graphs of FIGS. 8A and 8B, a characteristic curve go2 represents a measured gain when the input level falls within a range of  $\pm 200$  mV, a characteristic curve go3 represents a measured gain when the input level falls within a range of  $\pm 50$  mV, a characteristic curve go4 represents a measured gain when the input level falls within a range of  $\pm 25$  mV, a characteristic curve go5 represents a measured gain when the input level falls within a range of  $\pm 10$  mV, a characteristic curve po2 represents a measured phase when the input level falls within a range of  $\pm 200$  mV, a characteristic curve po3 represents a measured phase when the input level falls within a range of  $\pm 50$  mV, a characteristic curve po4 represents a measured phase when the input level falls within a range of  $\pm 25$  mV and a characteristic curve po5 represents a measured phase when the input level falls within a range of  $\pm 10$  mV, respectively.

Study of the graphs shown in FIGS. 8A, 8B reveals that the gain and the phase also are changed relative to the input level in the closed loop characteristic similarly to the open loop characteristic.

The aforesaid camera shake correcting apparatus is not free from some disadvantages that will be described below.

As is clear from the equation (1), the input and output characteristics of the prism 7 are made nonlinear due to the viscosity resistance D and the spring constant  $K_y$  of the prism 7, in particular, the gain is decreased for a small signal.

There is then the disadvantage that a small camera shake cannot be suppressed.

As is clear from the graph of FIG. 3 showing the relationship between the drive voltage of the prism 7 and the deflection angle, such relationship includes the hysteresis characteristic. There is then the disadvantage that the prism 7 cannot be moved as it is instructed.

Further, as is clear from the graphs of FIGS. 6A, 6B showing the gain and phase characteristics, the characteristic like the resonance characteristic appears at the frequency near 100 Hz, thereby causing a frequency disturbance.

The aforesaid characteristics are determined depending on the inertia  $J$ , the viscosity resistance  $D$  and the spring constant  $K$ , of the prism 7. Therefore, there will be no other way than improving the prism 7-system mechanical arrangement if these characteristics are improved.

As is clear from the respective graphs of FIG. 5 and FIGS. 8A, 8B, there are the disadvantages such that the gain of the low band component does not become 0 dB and hence the frequency position becomes unstable (i.e., there is no phase margin at the gain of 0 dB so that an oscillation tends to occur, the gain of the low band component depends much on the level, an oscillation tends to occur at the frequency near 100 Hz due to the fluctuation of peak level (this is also true in FIGS. 6A and 6B) and a temperature dependency is large.

The bellows-like spring portion 7c is formed by folding a material whose strength is affected by a temperature. Hence, the spring constant thereof is changed with a temperature.

Also, the viscosity of the liquid 7 filled into the spring portion 7c is changed with a temperature. In addition, the input and output transfer function of the prism 7 is the system of second-order or larger (because of spring term, friction term or the like). There is then the disadvantage such that an oscillation margin is reduced when the feedback servo is effected.

According to a second embodiment of the present invention, there is provided a camera shake correcting apparatus which can remove the aforesaid disadvantages and in which characteristics can be improved more.

As shown in FIGS. 9 to 23, the camera shake correcting apparatus according to a second embodiment of the present invention comprises the variable angular prism 7, the driving means 29, 6, 15 for driving the variable angular prism 7, the position detecting means 8, 16 and 20 for detecting the position of the variable angular prism 7 and velocity detecting means 1, 10, 26, 32 and 20 for detecting a velocity. The driving means 6, 15, 20 drive the variable angular prism 7 in response to detected results of the position detecting means 8, 16, 20 and the velocity detecting means 1, 10, 26, 32 and 20.

According to the second embodiment of the present invention, since the variable angular prism 7 is driven in response to the detected results from the position detecting means 8, 16, 20 and the velocity detecting means 1, 10, 26, 32 and 20, a nonlinearity of the variable angular prism 7 can be alleviated and the variable angular prism 7 can be driven

smoothly. Therefore, a phase margin serving as a servo characteristic can be increased, whereby a fluctuation of elements in the mass-production can be reduced. Thus, the camera shake correcting apparatus of the present invention can be made strong to a temperature characteristic.

The camera shake correcting apparatus according to the second embodiment of the present invention will hereinafter be described in detail with reference to FIG. 9.

In FIG. 9, like parts corresponding to those of FIG. 2 are marked with the same references and therefore need not be described in detail.

As shown in FIG. 9, the detected signal from the angular velocity sensor (horizontal direction angular velocity sensor) 1 is supplied through an A/D converter 21 to a digital integrating circuit 22. The angular velocity sensor 1 detects a yawing angle or the like, for example. The digital integrating circuit 22 effects the integration by adding the digital detected signal from the A/D converter 21 with an attenuated preceding detected signal. An integrated output from the digital integrating circuit 22 is converted into an analog signal by a digital-to-analog (D/A) converter 23 and then fed to an adding circuit 24.

The adding circuit 24 subtracts from the detected signal of the D/A converter 23 a position signal that is obtained when the vertical angle sensor (i.e., PID: potentio • integral • differential sensor) 8 detects the position of the variable angular prism (VAP element) 7 in the horizontal direction. An output of the adding circuit 24 is supplied to an adding

circuit 25 of the next stage.

The adding circuit 25 subtracts a signal of a damping coil 26 from the output of the adding circuit 24. A resultant subtracted signal is supplied to the actuator 6 as a drive signal, whereby the prism 7 is moved in the horizontal direction.

The detected signal from the angular velocity sensor (vertical direction angular velocity sensor) 10 is supplied through an A/D converter 27 to a digital integrating circuit 28. The angular velocity sensor 10 detects a pitching angle of the like, for example.

The digital integrating circuit 28 effects the integration by adding the digital detected signal from the A/D converter 27 to the attenuated preceding detected signal similarly as described above. An integrated output from the digital integrating circuit 28 is converted into an analog signal by a D/A converter 29 and then fed to an adding circuit 30. The adding circuit 30 subtracts from the detected signal of the D/A converter 29 a position signal that is obtained when the vertical angle sensor (i.e., PID sensor) 16 detects the position of the variable angular prism (VAP element) 7 in the vertical direction. An output of the adding circuit 30 is supplied to an adding circuit of the next stage. The adding circuit 31 subtracts a signal of a damping coil 32 from the output of the adding circuit 30. A resultant subtracted signal is supplied to the actuator 15 as the drive signal, whereby the prism 7 is moved in the vertical direction.

As described above, according to the camera shake

correcting apparatus of the first embodiment of the present invention, by controlling the vertical angle sensors 8 and 16, it is impossible to suppress a variety of disadvantages caused by the viscosity of the liquid 7d in the prism 7, the spring resistance of the spring portion 7c, fluctuations caused by various factors such as axial friction or the like, temperature dependency characteristics, etc.

In order to suppress various disadvantages by using the vertical angle sensors 8 and 16, it is proposed to form a so-called D loop such that the output  $e_0$  (see FIG. 4) is differentiated and fed back to obtain the phase margin. The D loop cannot be utilized in this case because a signal-to-noise (S/N) ratio of the vertical angle sensors 8, 16 is poor in the high band, in particular. Further, if a P loop gain is increased in order to obtain a DC gain, then an oscillation margin is lost. Furthermore, although the integrating loop (I) is effective for increasing the DC gain, the integrating loop becomes useless unless the D loop is utilized together therewith because the integrating loop, when used alone, deteriorates the phase margin.

According to the second embodiment of the present invention, there is employed, instead of the differential D loop, a velocity loop, i.e., a feedback loop of the damping coils 26 and 32.

FIGS. 10 and 11 of the accompanying drawings shows structures of the plate glass 7a or 7b of the prism 7, the actuator 6 or 15, the damping coil 26 or 32, a stator or the like.

As shown in FIGS. 10 and 11, there is provided a bobbin 41 which has an axial hole defined at the position slightly higher than the intermediate portion thereof for accepting the horizontal axis (or vertical axis 7f) 7e. A detecting portion 41a is formed above this axial hole and a slit 41b is formed on the top portion of the detecting portion 41a of the bobbin 41.

On the left of the slit 41a and also at the so-called prism center, there is disposed a photo-diode 44 so that an optical axis thereof passes the slit 41b. On the right of the slit 41b and also at the so-called prism center, a photo-sensor 45 is disposed so as to become able to receive a light emitted from the photo-diode 44.

Thus, the light emitted from the photo-diode 44 is focused on the photo-sensor (PSD: photo-sensitive device) 45. That is, the position at which the light emitted from the photo-diode 44 is focused on the photo-sensor 45 is moved in response to the condition that the bobbin 41 is rotated by the actuators 6, 15, which is obtained as a voltage.

Around the lower portion of the bobbin 41, there are wound drive coil (actuator) wires 42 and damping coil wires 43 in parallel to each other.

The bobbin 41 having the drive coil wires 42 and the damping coil wires 43 wound therearound is disposed within a stator 41 as shown in FIG. 12 of the accompanying drawings. A horizontal axis shaft rod 53 or vertical axis shaft rod 54 is attached to the horizontal axis 7e or vertical axis 7f of the bobbin 41. One end of the shaft rod 53 or 54 is attached to

the plate glass 7a or 7b of the prism 7 and the other end thereof is attached to the inner wall portion of a housing 55.

FIG. 12 shows the condition that the drive coil wires 42 and the damping coil wires 43 are wound around the bobbin 41. As shown in FIG. 12, the drive coil wires 42 are wound around the left portion of the bobbin 41 (not shown) to construct the actuator 6 or 15 and the damping coil wires 43 are wound around the right portion of the bobbin 41 (not shown) to construct the damping coil 26 or 32.

FIG. 13 of the accompanying drawings shows other example of the structure of the coil shown in FIG. 12.

As shown in FIG. 13, a spacer 56 is disposed at substantially a central portion of the bobbin 41. The drive coil (actuator 6 or 15) wires 42 are wound around the left portion (on the left side of the bobbin 41) of the spacer 56 to construct the actuator 6 or 15. Also, the damping coil wires 43 are wound around the right portion (on the right side of the bobbin 41) of the spacer 56 to construct the damping coil 26 or 32.

According to this structure, a high frequency crosstalk between the two coils (actuator 6, damping coil 26; and actuator 15, damping coil 32) can be removed. Hence, the characteristics can be prevented from being affected.

While there is provided the single bobbin 41 as described above, the present invention is not limited thereto and two bobbins 41 may be attached to the left and right sides of the spacer 56, for example.

FIG. 14 of the accompanying drawing shows a further

example of the structure of the coils shown in FIGS. 12 and 13.

As shown in FIG. 14, damping coil wires 43 are wound around the bobbin 41 (not shown) to construct the damping coil 26 or 32. Further, drive coil (actuator 6 or 15) wires 42 are wound around the damping coil wires 43 to construct the actuator 6 or 15. With this arrangement, the whole thickness of the coil is reduced to increase the torque of the motor because the spacing of the stator is increased with the increase of the thickness (length of the bobbin 41 around which the drive coil wires 42 and the damping coil wires 43 are wound) of the coil, resulting in the torque of the motor being decreased.

The bobbin 41 is rotated in response to a current flowing through the drive coil, i.e., actuator 6 or 15, or the plate glass 7a or 7b is rotated so that the damping coil 26 or 32 generates a voltage proportional to the rotational angular velocity, i.e.,  $E \propto d\theta/dt \propto d/dt$  (magnetic flux).

FIG. 15 of the accompanying drawings shows in block form a main portion of the camera shake correcting apparatus in detail.

As shown in FIG. 15, an instruction signal (detected signal) from the microcomputer 20 is supplied to an input terminal 46 and the instruction signal is supplied to an adding circuit 47.

The adding circuit 47 subtracts the detected signal of the photo-sensor 45 from the instruction signal, and a subtracted result is supplied through an amplifying circuit 48

to an adding circuit 49.

The adding circuit 49 subtracts the signal (i.e., voltage proportional to the rotational angular velocity) supplied thereto from the damping coil 26 or 32 through an amplifying circuit 52 from the signal supplied thereto from the adding circuit 47 through the amplifying circuit 48. A subtracted result is supplied to the actuator 6 or 15 and an inverting circuit 50.

The drive signal from the adding circuit 49 is supplied to one end of the actuator 6 or 15 and the signal from the inverting circuit 50 is supplied to the other end of the actuator 6 or 15, whereby a current is flowed through the actuator 6 or 15 to generate a magnetic flux to rotate the bobbin 41, i.e., the plate glass 7a or 7b.

An example of a circuit arrangement of the camera shake correcting apparatus shown in FIG. 14 will be described with reference to FIG. 16 of the accompanying drawings. In FIG. 16, like parts corresponding to those of FIG. 14 are marked with the same references and therefore need not be described in detail.

As shown in FIG. 16, an output terminal of the photo-sensor 45 is connected through a resistor 62 to an inverting input terminal (-) of an operational amplifier circuit 60. The inverting input terminal (-) of the operational amplifier circuit 60 and the output terminal of the operational amplifier circuit 60 are connected together via a parallel circuit of a resistor 63 and a capacitor 64. The inverting input terminal (-) of the operational amplifier circuit 60 is

connected to the input terminal 46 through a resistor 61. A non-inverting input terminal (+) of the operational amplifier circuit 60 is connected to a positive side of the power supply 51. Thus, the adding circuit 47 and the amplifying circuit 48 are formed as shown by a one-dot chain line block in FIG. 16. Then, the output terminal of the operational amplifier circuit 60, i.e., the output terminal of the amplifying circuit 48 is connected through a resistor 66 to an inverting input terminal (-) of an operational amplifier circuit 65. The inverting input terminal (-) of the operational amplifier circuit 65 and the output terminal of the operational amplifier circuit 65 are connected together to a parallel circuit of a resistor 67 and a capacitor 68. The inverting input terminal (-) of the operational amplifier circuit 65 is connected through a resistor 72 and the damping coil 26 or 32 to the positive side of the power supply 51. Thus, the adding circuit 49 and the amplifying circuit 52 are formed as shown by a one-dot chain line block in FIG. 16. Then, the output terminal of the operational amplifier circuit 65, i.e., the output terminal of the amplifying circuit 52 is connected through a resistor 70 to an inverting input terminal (-) of an operational amplifier circuit 69. The output terminal of the operational amplifier circuit 65 is connected through the actuator 6 or 15 to the output terminal of the operational amplifier circuit 69. A non-inverting input terminal (+) of the operational amplifier circuit 69 is connected to the positive side of the power supply 51. Thus, the inverting circuit 50 is formed as shown by a one-dot chain line block in FIG. 16.

The resistors 61, 62 and the resistors 66, 72 are used to determine adding ratios of the adding circuits 47, 49, respectively. The resistors 63, 67 are used to determine the gains of the amplifying circuits 48, 52, respectively. The capacitors 64, 68 construct active low-pass filters, respectively. The resistors 70, 71 are used to determine the gain of the inverting circuit 50.

A servo of the prism 7 in the camera shake correcting apparatus according to this embodiment will be described.

The servo of the prism 7 in the open loop according to this embodiment can be demonstrated in a signal flow diagram forming FIG. 17 of the accompanying drawings.

In FIG. 17, reference symbol R depicts a winding resistance ( $V/A$ ) of the actuator 6 or 15,  $K_t$  a torque constant ( $700g \cdot cm/A$ ), J an inertia ( $g \cdot cm/sec^2$ ), D a viscosity resistance ( $g \cdot cm/sec$ ) of the liquid in the prism 7,  $K_\theta$  a detection gain ( $V/deg$ ) of the vertical angle sensor 8 or 16,  $K_y$  a spring constant ( $g \cdot cm/deg$ ) of the spring portion 7c,  $K_r$  gains of the adding circuits 24, 25 and the adding circuits 30, 31 (adding circuits 47, 49 in FIG. 15),  $K_p$  a position, i.e., an amplifying gain of the photo-sensor 45, and  $K_s$  a velocity feedback, i.e., gain of the damping coil 26 or 32 (amplifying circuit 52 in FIG. 15), respectively.

In the signal flow diagram of FIG. 17, the spring constant  $K_y$  can be set to  $-K_y/S$  as shown in FIG. 18.

Collecting respective parameters in the velocity feedback gain  $K_s$ , we have  $K_t/R \cdot \{1/JS + D + (K_y/S)\}$  as shown in FIG.

19. Collecting respective parameters in the detection gain  $K_\theta$

of the vertical angle sensors 8, 16, we have  $K_r / [(R/K_t) \cdot \{JS + D + (K_y/S)\} + K_s] \cdot 1/S$  as shown in FIG. 20.

Therefore, gain  $G_{\text{OPEN(PHASE)}}$  in the open loop can be expressed by the following equation (4):

$$\begin{aligned} G_{\text{open(PHASE)}} &= - \frac{K_r K \theta}{\frac{R}{K_t} (JS + D + \frac{K_y}{S}) + K_s} \cdot \frac{1}{S} \\ &= - \frac{K_r K \theta}{\frac{RJ}{K_t} S^2 + (\frac{RD}{K_t} + K_s) S + \frac{RK_y}{K_t}} \end{aligned}$$

Further, when  $RD/D_t < K_s$  and  $RK_y/K_t = 0$ , gain  $G_{\text{OPEN(PHASE)}}$  can be expressed by the following equation (5):

$$\begin{aligned} G_{\text{open(PHASE)}} &= - \frac{K_r K \theta}{S (\frac{RJ}{K_t} S + K_s)} \\ &= - \frac{\frac{K_r K \theta}{K_s}}{S (1 + \frac{RJ}{K_t K_s} S)} \end{aligned}$$

FIG. 21 of the accompanying drawings shows a gain in the open loop where an axis of ordinate represents a gain (dB) and an axis of abscissa represents a frequency ( $\omega$ ). As shown in FIG. 21, when the gain is 0 dB and the frequency  $\omega$  is  $K_t K_s / RJ$ , the gain in the open loop becomes substantially - 6 dB/oct.

Therefore, a gain in the closed loop can be expressed by the following equation (6):

Comparison of the equation (6) with the equation (3) that expresses the gain in the closed loop of the servo in the

$$\begin{aligned}
G_{close}(S) &= \frac{G_o/K\theta}{1+G_o} \\
&= \frac{1}{\frac{1}{K_r} \left[ \frac{RJ}{K_t} S^2 + \left( \frac{RD}{K_t} + K_s \right) S + \frac{RK_y}{K_t} \right] + K\theta} \\
&= \frac{1}{\frac{RJ}{K_r K_t} S^2 + \frac{1}{K_r} \left( \frac{RD}{K_t} + K_s \right) S + \left( \frac{RK_y}{K_r K_t} + K\theta \right)}
\end{aligned}$$

prism 7 of the camera shake correcting apparatus according to the first embodiment reveals the following fact. That is, in the closed loop of the servo of the prism 7 in the camera shake correcting apparatus of this embodiment expressed in the equation (6), because of the addition of the velocity feedback gain  $K_s$ , a first-order term becomes larger than a zero-order term relatively so that  $1/aS^2 + bS + c$  can be approximated to  $1/S(aS + b)$  more accurately. Also, in the low band, a first-order characteristic of - 6 dB/oct can be presented as shown in FIG. 21.

Further,  $D$  (viscosity) and  $K_y$  (spring constant) that are causes of the nonlinearity and temperature dependency can be improved. That is, if the velocity feedback gain  $K_s$  is increased, i.e.,  $RD/K_t < K_s$ , then the influence of the viscosity  $D$  can be reduced. If  $(RD/K_t) S > (RK_y/K_r K_t)$ , then the influence of the spring constant  $K_y$  can be reduced.

Therefore, in the open loop of the servo of the prism 7 in the camera shake correcting apparatus according to the second embodiment, a phase curve pc2 and a gain curve gc2 are presented as shown in FIG. 22. Hence, the phase margin can be increased.

In the close loop of the servo of the prism 7 in the

camera shake correcting apparatus according to the second embodiment of the present invention, a phase curve pc3 and a gain curve gc3 are presented as shown in FIG. 23. Hence, the phase margin is decreased.

As described above, according to the second embodiment of present invention, the damping coils 26 and 32 are disposed in parallel to the prism driving actuators 6 and 15, and the position signals from the vertical angle sensors 8, 15 are subtracted from the detected signals that are obtained by the angular velocity sensors 1 and 10 when the camera is shaken. Further, the rotational angular velocity signals detected by the damping coils 26, 32 are subtracted from these subtracted results and the actuators 6, 15 are respectively driven by these subtracted results serving as the drive signals. Therefore, the nonlinearity of the prism 7 can be alleviated, or the prism 7 can be moved smoothly and the phase margin of the servo characteristic can be increased. Thus, the camera shake correcting apparatus can be prevented from being affected by the fluctuation of elements in the mass-production and also can be prevented from being affected by the temperature characteristic dependency.

The camera shake correcting apparatus according to a third embodiment of the present invention will be described with reference to FIGS. 24 to 26.

Although the control characteristic of the damping coil 26 or 32 in the camera shake correcting apparatus according to the first and second embodiments of the invention is improved, the actuator 6 or 15 interferes with the damping coil 26 or 32

so that a gain margin cannot be obtained sufficiently in the open loop characteristic of the position (angle) control loop. The gain margin tends to be decreased much more with the fluctuation of temperature. If the gain margin is decreased so much, there is then the risk that an oscillation will occur.

To remove the above-mentioned drawbacks, it is proposed that the actuator 6 or 15 and the damping coil 26 or 32 are electromagnetically shielded. From a structure standpoint, however, it is impossible to electromagnetically shield the actuator 6 or 15 and the damping coil 26 or 32 from each other.

According to the third embodiment of the present invention, a voltage proportional to a current flowing through the actuator 6 or 15 is differentiated and a voltage signal induced by the interference of the damping coil 26 or 32 is generated. A differentiated signal that is obtained by differentiating the voltage proportional to the current flowing through the actuator 6 or 15 is subtracted from the voltage induced when the actuator 6 or 15 interferes with the damping coil 26 or 32, thereby effecting the neutralization processing. Therefore, the characteristics can be prevented from being deteriorated when the actuator 6 or 15 interferes with the damping coil 26 or 32. Thus, the inherent characteristics of the camera shake correcting apparatus can be effectively utilized at maximum. Also, the damping efficiency of the damping coil 26 or 32 can be increased and can be controlled satisfactorily regardless of the fluctuation

factors such as the change of temperature or the like.

The third embodiment of the present invention will be described below. In FIGS. 24 to 26, like parts corresponding to those of FIGS. 15 and 16 are marked with the same references and therefore need not be described in detail.

As shown in FIG. 24, unlike the example of the circuit arrangement of the main portion of the camera shake correcting apparatus shown in FIG. 15, the output of the actuator 6 or 15 is differentiated by a differentiating circuit 57 and a differentiated signal is supplied through the amplifying circuit 58 to the adding circuit 59. The adding circuit 59 subtracts the differentiated signal from the signal supplied thereto from the damping coil 26 or 32 through the amplifying circuit 52. A resultant subtracted signal is supplied to the adding circuit 49.

The instruction signal (detected signal) from the microcomputer 20 is supplied to the input terminal 46 and this signal is supplied to the adding circuit 47.

The adding circuit 47 subtracts the detected signal of the photo-sensor 45 from the instruction signal and a subtracted result is supplied through the amplifying circuit 48 to the adding circuit 49.

The output of the actuator 6 or 15 is differentiated by the differentiating circuit 57, thereby being produced as a differentiated signal. This differentiated signal is supplied through the amplifying circuit 58 to the adding circuit 59. The adding circuit 59 is supplied with the output (voltage proportional to the rotational angular velocity) from the

damping coil 26 or 32 through the amplifying circuit 52. The adding circuit 59 subtracts from the signal supplied thereto from the damping coil 26 or 32 through the amplifying circuit 52 the output, which is output from the actuator 6 or 15 and differentiated by the differentiating circuit 57 through the amplifying circuit 58, i.e., the voltage induced by the damping coil 26 or 32 upon interference. A subtracted signal is supplied to the adding circuit 49. The subtraction in the adding circuit 49 is equal to the so-called neutralization processing where the control efficiency deteriorated when the actuator 6 or 15 interferes with the damping coil 26 or 32 can be alleviated.

The adding circuit 49 subtracts from the signal supplied thereto from the adding circuit 47 through the amplifying circuit 48 the subtracted signal supplied thereto from the actuator 6 or 15 through the differentiating circuit 57 and the amplifying circuit 58. A subtracted signal is supplied to the actuator 6 or 15 and the inverting circuit 50.

Therefore, the drive signal from the adding circuit 49 is supplied to one end of the actuator 6 or 15 and the signal from the inverting circuit 50 is supplied to the other end of the actuator 6 or 15, whereby a current is flowed through the actuator 6 or 15 to generate a magnetic flux, thereby rotating the bobbin 41, i.e., the plate glass 7a or 7b.

An example of a circuit arrangement of a main portion of the camera shake correcting apparatus shown in FIG. 24 will be described with reference to FIG. 25 of the accompanying drawings. In FIG. 25, parts and elements identical to those

of FIG. 16 are marked with the same references and therefore need not be described in detail.

As shown in FIG. 25, the output terminal of the operational amplifier circuit 65 is connected through a capacitor 74 to an inverting input terminal (-) of an operational amplifier circuit 77 constructing the differentiating circuit 57, additionally provided in this embodiment, and the amplifying circuit 58. The inverting input terminal (-) of the operational amplifier circuit 77 and the output terminal of the operational amplifier circuit 77 are connected together via a parallel circuit of a resistor 75 and a capacitor 76. The output terminal of the operational amplifier circuit 77 is connected through a resistor 73 to a junction between the inverting input terminal (-) of the operational amplifier circuit 65 and a resistor 72. The capacitor 74 and the resistor 75 constitute the differentiating circuit 57, and the capacitor 76 constructs the active low-pass filter. The resistor 73 determines an adding ratio and constructs the adding circuit 59.

According to the above-mentioned circuit arrangement, the output of the operational amplifier circuit 65, i.e., the voltage proportional to the current flowing through the actuator 6 or 15 is differentiated by the capacitor 74 and the resistor 75 and then amplified by the operational amplifier circuit 77. Thereafter, the above differentiated signal is subtracted from the signal of the damping coil 26 or 32 by the resistor 73 constructing the adding circuit 59 to thereby prevent the characteristics from being deteriorated when the

actuator 6 or 15 interferes with the damping coil 26 or 32.

FIG. 26 of the accompanying drawings shows a further example of the circuit arrangement shown in FIG. 25. As shown in FIG. 26, one end of a capacitor 78 which constructs the differentiating circuit 57 and the amplifying circuit 58. The other end of the capacitor 78 is connected to a junction between the inverting input terminal (-) of the operational amplifier circuit 65 and the resistor 72 via the resistor 73 which is used to determine the adding ratio and which constructs the adding circuit 59.

Also in the case of the above circuit arrangement, similarly to the circuit shown in FIG. 25, the output of the operational amplifier circuit 71, i.e., the voltage proportional to the current flowing through the actuator 6 or 15 is differentiated by the capacitor 74 and then amplified. Thereafter, the differentiated signal is subtracted from the signal of the damping coil 26 or 32 by the resistor 73 constructing the adding circuit 59 to thereby prevent the characteristics from being deteriorated when the actuator 6 or 15 interferes with the damping coil 26 or 32.

FIG. 27 of the accompanying drawings is a signal flow diagram showing the condition that the so-called neutralization processing described with reference to FIGS. 24 to 26 is not effected. As shown by an interference magnitude coefficient -  $K_{IS}$  in FIG. 27, the actuator 6 or 15 interferes with the damping coil 26 or 32, which causes the characteristics to be deteriorated.

FIG. 28 of the accompanying drawings is a signal flow

diagram showing the condition that the so-called neutralization processing described with reference to FIGS. 24 to 26 is effected. Although the actuator 6 or 15 interferes with the damping coil 26 or 32 as shown by an interference magnitude coefficient -  $K_{is}$  in FIG. 28, the neutralization processing (described in FIGS. 24 to 26) shown by a neutralization magnitude coefficient  $K_{cs}$  can prevent the characteristics from being deteriorated when the actuator 6 or 15 interferes with the damping coil 26 or 32.

At that time, a relationship between the interference coefficient  $K_{is}$  and the neutralization coefficient  $K_{cs}$  must be set as  $K_{is} \leq K_{cs}$ . If the above-mentioned relationship is set as  $K_{is} > K_{cs}$ , then the local positive feedback is effected and an oscillation occurs.

FIG. 29 of the accompanying drawings shows a characteristic of the open loop under the condition that the neutralization processing is effected. When the neutralization processing is effected, as will be clear from a phase curve pc4 and a gain curve gc4, the gain margin can be increased remarkably as compared with the phase curve pc2 and the gain curve gc2 shown in FIG. 22 where the neutralization processing is not effected.

FIG. 30 of the accompanying drawings shows a characteristic of the closed loop under the condition that the neutralization processing is effected. As shown in FIG. 30, as will be clear from a phase curve pc5 and a gain curve gc5, the phase margin is not deteriorated considerably as compared with the phase curve pc3 and the gain curve gc3 shown in FIG.

23 where the neutralization processing is not effected.

Since the differentiated signal, which results from differentiating the voltage proportional to the current flowing through the actuator 6 or 15, is subtracted from the voltage induced when the actuator 6 or 15 interferes with the damping coil 26 or 32 to thereby effect the so-called neutralization processing as described above, the characteristics can be prevented from being deteriorated when the actuator 6 or 15 interferes with the damping coil 26 or 32. The inherent characteristics can be utilized effectively at maximum and the damping efficiency of the damping coil 26 or 32 can be improved. Also, the camera shake correcting apparatus can be controlled satisfactorily regardless of the fluctuation factors such as the change of temperature or the like.

As set forth, according to the present invention, the camera shake that takes place when the cameraman takes a picture by the video camera can be corrected optically. Further, since the variable angular prism is driven in response to the detected results from the position detecting means and the velocity detecting means, the nonlinearity of the variable angular prism can be driven smoothly and the phase margin serving as the servo characteristic can be increased. Therefore, the fluctuation of the elements in the mass-production can be reduced. Thus, the camera shake correcting apparatus can be made strong to temperature characteristics.

Having described preferred embodiments of the invention

2088205

with reference to the accompanying drawings, it is to be understood that the invention is not limited to those precise embodiments and that various changes and modifications could be effected by one skilled in the art without departing from the spirit or scope of the invention as defined in the appended claims.

**The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:**

1. A camera shake correcting apparatus comprising:

a variable angular prism including yaw and pitch glass plates in spaced relation with a light transmission medium sealingly arranged therebetween for changing a refracting angle of said prism by changing a relative angle between said glass plates in response to yaw and pitch angular prism drive signals to thereby change a refraction angle of light passing through said prism;

prism angle position detecting means for detecting a horizontal angular position of said yaw glass plate and producing a yaw position signal and a vertical angular position of said pitch glass plate and producing a pitch position signal;

camera shake amount detecting means for detecting an amount of camera shake of at least a horizontal and a vertical motion of a camera and producing yaw and pitch motion signals;

damping coil means attached respectively to said yaw and pitch glass plates for producing yaw and pitch damping signals;

calculating means for calculating said yaw and pitch angular prism drive signals based on said yaw and pitch motion signals produced by said camera shake detecting means, said yaw and pitch position signals produced by said prism angle position detecting means, and said yaw and pitch damping signals produced by said damping coil means, and generating said yaw and pitch angular prism drive signals;

variable angular prism drive means for driving said prism by rotationally driving said yaw and pitch glass plates in response to said yaw and pitch angular prism drive signals; and

a differentiating loop connect between an an output and an input of said variable angular prism drive means for reducing interference between said variable angular prism drive means and said damping coils, said differentiating loop including a differentiating circuit and an amplifying circuit.

2. A camera shake correcting apparatus according to claim 1, wherein

said damping coil means includes a yaw damping coil circuit for detecting a rotational angular velocity of said yaw glass plate attached thereto, and a pitch damping coil circuit for detecting a rotational angular velocity of said pitch glass plate attached thereto,

said camera shake amount detecting means includes a horizontal angular velocity sensor for detecting a yaw angle and producing a yaw motion signal, a vertical angular velocity sensor for detecting a pitch angle and producing a pitch motion signal, and integrating means for integrating said yaw and pitch motion signals fed to said calculating means, and

said differentiating loop further includes an adding circuit and wherein said output of said variable angular prism drive means is differentiated by said differential circuit to produce a differentiated signal that is supplied through said amplifying circuit to said adding circuit to be added to said yaw and pitch angular prism drive signals.

3. A camera shake correcting apparatus according to claim 2, wherein said integrating means includes:

a first yaw adding circuit;

a yaw integrating circuit for integrating said yaw signal and supplying an integrated yaw signal to said first yaw adding circuit, said first yaw adding circuit subtracting said yaw position signal from said integrated yaw signal and producing a subtracted yaw signal;

a second yaw adding circuit for subtracting said yaw damping signal produced by said yaw damping coil circuit from said subtracted yaw signal produced by said first yaw adding circuit and producing said yaw angular prism drive signal to control said yaw glass plate;

a first pitch adding circuit;

a pitch integrating circuit for integrating said pitch signal and supplying an integrated pitch signal to said first pitch adding circuit,

said first pitch adding circuit subtracting said pitch position signal from said integrated pitch signal and producing a subtracted pitch signal; and

a second pitch adding circuit for subtracting said pitch damping signal produced by said pitch damping coil circuit from said subtracted pitch signal produced by said first pitch adding circuit and producing said pitch angular prism drive signal to control said pitch glass plate.

5

4. A camera shake correcting apparatus according to claim 3, wherein said horizontal and vertical angular velocity sensors are comprised of piezoelectric vibratory gyros.

5. A camera apparatus comprising:

10 a variable angular prism including yaw and pitch glass plates in spaced relation with a light transmission medium sealingly arranged therebetween for changing a refracting angle of said prism by changing a relative angle between said glass plates in response to yaw and pitch angular prism drive signals to thereby change a refraction angle of light passing through said prism;

15 prism angle position detecting means for detecting a horizontal angular position of said yaw glass plate and producing a yaw position signal and a vertical angular position of said pitch glass plate and producing a pitch position signal;

camera shake amount detecting means for detecting an amount of camera shake of at least a horizontal and a vertical motion of a camera and producing yaw and pitch motion signals;

20 damping coil means attached respectively to said yaw and pitch glass plates for producing yaw and pitch damping signals;

calculating means for calculating said yaw and pitch angular prism drive signals based on said yaw and pitch motion signals produced by said camera shake detecting means, said yaw and pitch position signals produced by said prism angle position detecting means, and said yaw and pitch damping signals produced by said damping coil means, and generating said yaw and pitch angular prism drive signals;

25 variable angular prism drive means for driving said prism by rotationally driving said yaw and pitch glass plates in response to said yaw and pitch angular prism drive signals;

30

a differentiating loop connected between an output and an input of said variable angular prism drive means for reducing interference between said variable angular prism drive means and said damping coils, said differentiating loop including a differentiating circuit and an amplifying circuit; and

5 image pickup means for focusing and converting said light passing through said variable angular prism into a video signal.

6. A camera apparatus according to claim 5, wherein

10 said damping coil means includes a yaw damping coil circuit for detecting a rotational angular velocity of said yaw glass plate attached thereto, and a pitch damping coil circuit for detecting a rotational angular velocity of said pitch glass plate attached thereto,

15 said camera shake amount detecting means includes a horizontal angular velocity sensor for detecting a yaw angle and producing a yaw motion signal, a vertical angular velocity sensor for detecting a pitch angle and producing a pitch motion signal, and integrating means for integrating said yaw and pitch motion signals fed to said calculating means, and

20 said differentiating loop further inclines an adding circuit and wherein said output of said variable angular prism drive means is differentiated by said differentiating circuit to produce a differentiated sign that is supplied through said amplifying circuit to said adding circuit to be added to said yaw and pitch angular prism drive signals.

7. A camera apparatus according to claim 5, wherein said calculating means includes:

a first yaw adding circuit;

25 a yaw integrating circuit for integrating said yaw motion signal and supplying an integrated yaw motion signal to said first yaw adding circuit, said first yaw adding circuit subtracting said yaw position signal from said integrated yaw signal and producing a subtracted yaw motion signal;

30 a second yaw adding circuit for subtracting said yaw damping signal produced by said yaw damping coil circuit from said subtracted yaw motion signal produced by

said first yaw adding circuit and producing said yaw angular prism drive signal to control said yaw glass plate;

a first pitch adding circuit;

5 a pitch integrating circuit for integrating said pitch motion signal and supplying an integrated pitch motion signal to said first pitch adding circuit, said first pitch adding circuit subtracting said pitch position signal from said integrated pitch motion signal and producing a subtracted pitch motion signal; and

10 a second pitch adding circuit for subtracting said pitch damping signal produced by said pitch damping coil circuit from said subtracted pitch signal produced by said first pitch adding circuit and producing said pitch angular prism drive signal to control said pitch glass plate.

8. A recording apparatus having a built-in camera comprising:

15 a variable angular prism including yaw and pitch glass plates in spaced relation with a light transmission medium sealingly arranged therebetween for changing a refracting angle of said prism by changing a relative angle between said glass plates in response to yaw and pitch angular prism drive signals to thereby change a refraction angle of light passing through said prism;

20 prism angle position detecting means for detecting a horizontal angular position of said yaw glass plate and producing a yaw position signal and a vertical angular position of said pitch glass plate and producing a pitch position signal;

25 camera shake amount detecting means for detecting an amount of camera shake of at least a horizontal and a vertical motion of a camera and producing yaw and pitch motion signals;

damping coil means attached respectively to said yaw and pitch glass plates for producing yaw and pitch damping signals;

30 calculating means for calculating said yaw and pitch angular prism drive signals based on said yaw and pitch motion signals produced by said camera shake detecting means, said yaw and pitch position signals produced by said prism angle position

detecting means, and said yaw and pitch damping signals produced by said damping coil means, and generating said yaw and pitch angular prism drive signals;

variable angular prism drive means for driving said prism by rotationally driving said yaw and pitch glass plates in response to said yaw and pitch angular prism drive signals;

a differentiating loop connected between an output and an output of said variable angular prism drive means for reducing interference between said variable angular prism drive means and said damping coils, said differentiating loop including a differentiating circuit and an amplifying circuit;

image pickup means for focusing and converting said light passing through said variable angular prism into a video signal; and

recording means for converting said video signal output from said image-pickup means into a recording signal and recording said recording signal onto a recording medium.

9. A recording apparatus having a built-in camera according to claim 8, wherein

said damping coil means includes a yaw damping coil circuit for detecting a rotational angular velocity of said yaw glass plate attached thereto, and a pitch damping coil circuit for detecting a rotational angular velocity of said pitch glass plate attached thereto,

said camera shake amount detecting means includes a horizontal angular velocity sensor for detecting a yaw angle and producing a yaw motion signal, a vertical angular velocity sensor for detecting a pitch angle and producing a pitch motion signal, and integrating means for integrating said yaw and pitch motion signals, and

said differentiating loop further includes an adding circuit and wherein said output of said variable angular prism drive means is differentiated by signal differentiating circuit to produce a differentiated signal that is supplied through said amplifying circuit said adding circuit to be added to said yaw and pitch angular prism drive signals.

10. A recording apparatus having a built-in camera according to claim 8, wherein said calculating means includes:

a first yaw adding circuit;

a yaw integrating circuit for integrating said yaw motion signal and supplying an integrated yaw motion signal to said first yaw adding circuit, said first yaw adding circuit subtracting said yaw position signal from said integrated yaw motion signal and producing a subtracted yaw signal;

a second yaw adding circuit for subtracting said yaw damping signal produced by said yaw damping coil circuit from said subtracted yaw signal produced by said first yaw adding circuit and producing said yaw angular prism drive signal to control said yaw glass plate;

a first pitch adding circuit;

a pitch integrating circuit for integrating said pitch motion signal and supplying an integrated pitch motion signal to said first pitch adding circuit, said first pitch adding circuit subtracting said pitch position signal from said integrated pitch signal and producing a subtracted pitch signal; and

a second pitch adding circuit for subtracting said pitch damping signal produced by said pitch damping coil circuit from said subtracted pitch signal produced by said first pitch adding circuit and producing said pitch angular prism drive signal to control said pitch glass plate.

11. A camera shake correcting apparatus comprising:

a variable angular prism including yaw and pitch glass plates in spaced relation with a viscous light transmission medium sealingly arranged therebetween for changing a refracting angle of said prism by changing a relative angle between said glass plates in response to yaw and pitch angular prism drive signals to thereby change a refraction angle of light passing through said prism, wherein said glass plates are sealingly bonded to a bellows-like spring portion filled with the viscous light transmission medium;

prism angle position detecting means for detecting a horizontal angular position of said yaw glass plate and producing a yaw position signal and a vertical angular position of said pitch glass plate and producing a pitch position signal;

camera shake amount detecting means for detecting an amount of camera shake of at least a horizontal and a vertical motion of a camera and producing yaw and pitch motion signals;

damping coil means attached respectively to said yaw and pitch glass plates for producing yaw and pitch damping signals;

calculating means for calculating said yaw and pitch angular prism drive signals based on said yaw and pitch motion signals produced by said camera shake detecting means, said yaw and pitch position signals produced by said prism angle position detecting means, and said yaw and pitch damping signals produced by said damping coil means, and generating said yaw and pitch angular prism drive signals;

variable angular prism drive means for driving said prism by rotationally driving said yaw and pitch glass plates in response to said yaw and pitch angular prism drive signals; and

a differentiating loop connected between an output and an input of said variable angular prism drive means for reducing interference between said variable angular prism drive means and said damping coils, said differentiating loop including a differentiating circuit and an amplifying circuit.

12. A camera shake correcting apparatus according to claim 11, wherein

said damping coil means includes a yaw damping coil circuit for detecting a rotational angular velocity of said yaw glass plate attached thereto, and a pitch damping coil circuit for detecting a rotational angular velocity of said pitch glass plate attached thereto,

said camera shake amount detecting means includes a horizontal angular velocity sensor for detecting a yaw angle and producing a yaw motion signal, a vertical angular velocity sensor for detecting a pitch angle and producing a pitch motion signal, and integrating means for integrating said yaw and pitch motion signals fed to said calculating means, and

said differentiating loop further includes an adding circuit and wherein said output of said variable angular prism drive means is differentiated by said differentiating circuit

to produce a differentiated signal that is supplied through said amplifying circuit to said adding circuit to be added to said yaw and pitch angular prism drive signals.

13. A camera apparatus comprising:

5 a variable angular prism including yaw and pitch glass plates in spaced relation with a light transmission medium sealingly arranged therebetween for changing a refracting angle of said prism by changing a relative angle between said glass plates in response to yaw and pitch angular prism drive signals to thereby change a refraction angle of light passing through said prism;

10 prism angle position detecting means for detecting a horizontal angular position of said yaw glass plate and producing a yaw position signal and a vertical angular position of said pitch glass plate and producing a pitch position signal;

camera shake amount detecting means for detecting an amount of camera shake of at least a horizontal and a vertical motion of a camera and producing yaw and pitch motion signals;

15 a velocity feedback loop comprising damping coils attached respectively to said yaw and pitch glass plates for producing yaw and pitch damping signals, each of said damping coils being wound on respective bobbins;

calculating means for calculating said yaw and pitch angular prism drive signals based on said yaw and pitch motion signals produced by said camera shake detecting means, said yaw and pitch position signals produced by said prism angle position detecting means, and said yaw and pitch damping signals produced by said damping coil means, and generating said yaw and pitch angular prism drive signals;

25 variable angular prism drive coils attached respectively to said yaw and pitch glass plates for driving said prism by rotationally driving said yaw and pitch glass plates in response to said yaw and pitch angular prism drive signals, each of said drive coils being wound on said respective bobbins along with said damping coils; and

image pickup means for focusing and converting said light passing through said variable angular prism into a video signal,

30

wherein each of said damping coils of said velocity feedback loop has associated therewith a photodiode and a photosensor, and each of said bobbins has an arm extending therefrom, said arm having a position detecting hole formed therein and positioned between said photodiode and said photosensor such that light emitted from said photodiode passes through said hole to said photosensor, and a position of said emitted light on said photosensor depends on a position of said bobbins, said photosensor providing an output signal to said camera shake amount detecting means.

14. A camera apparatus according to claim 13, wherein each of said bobbins have spacers separating said damping coils and said drive coils wound thereon to prevent crosstalk between said damping coils and said drive coils.

FIG. 1 (PRIOR ART)

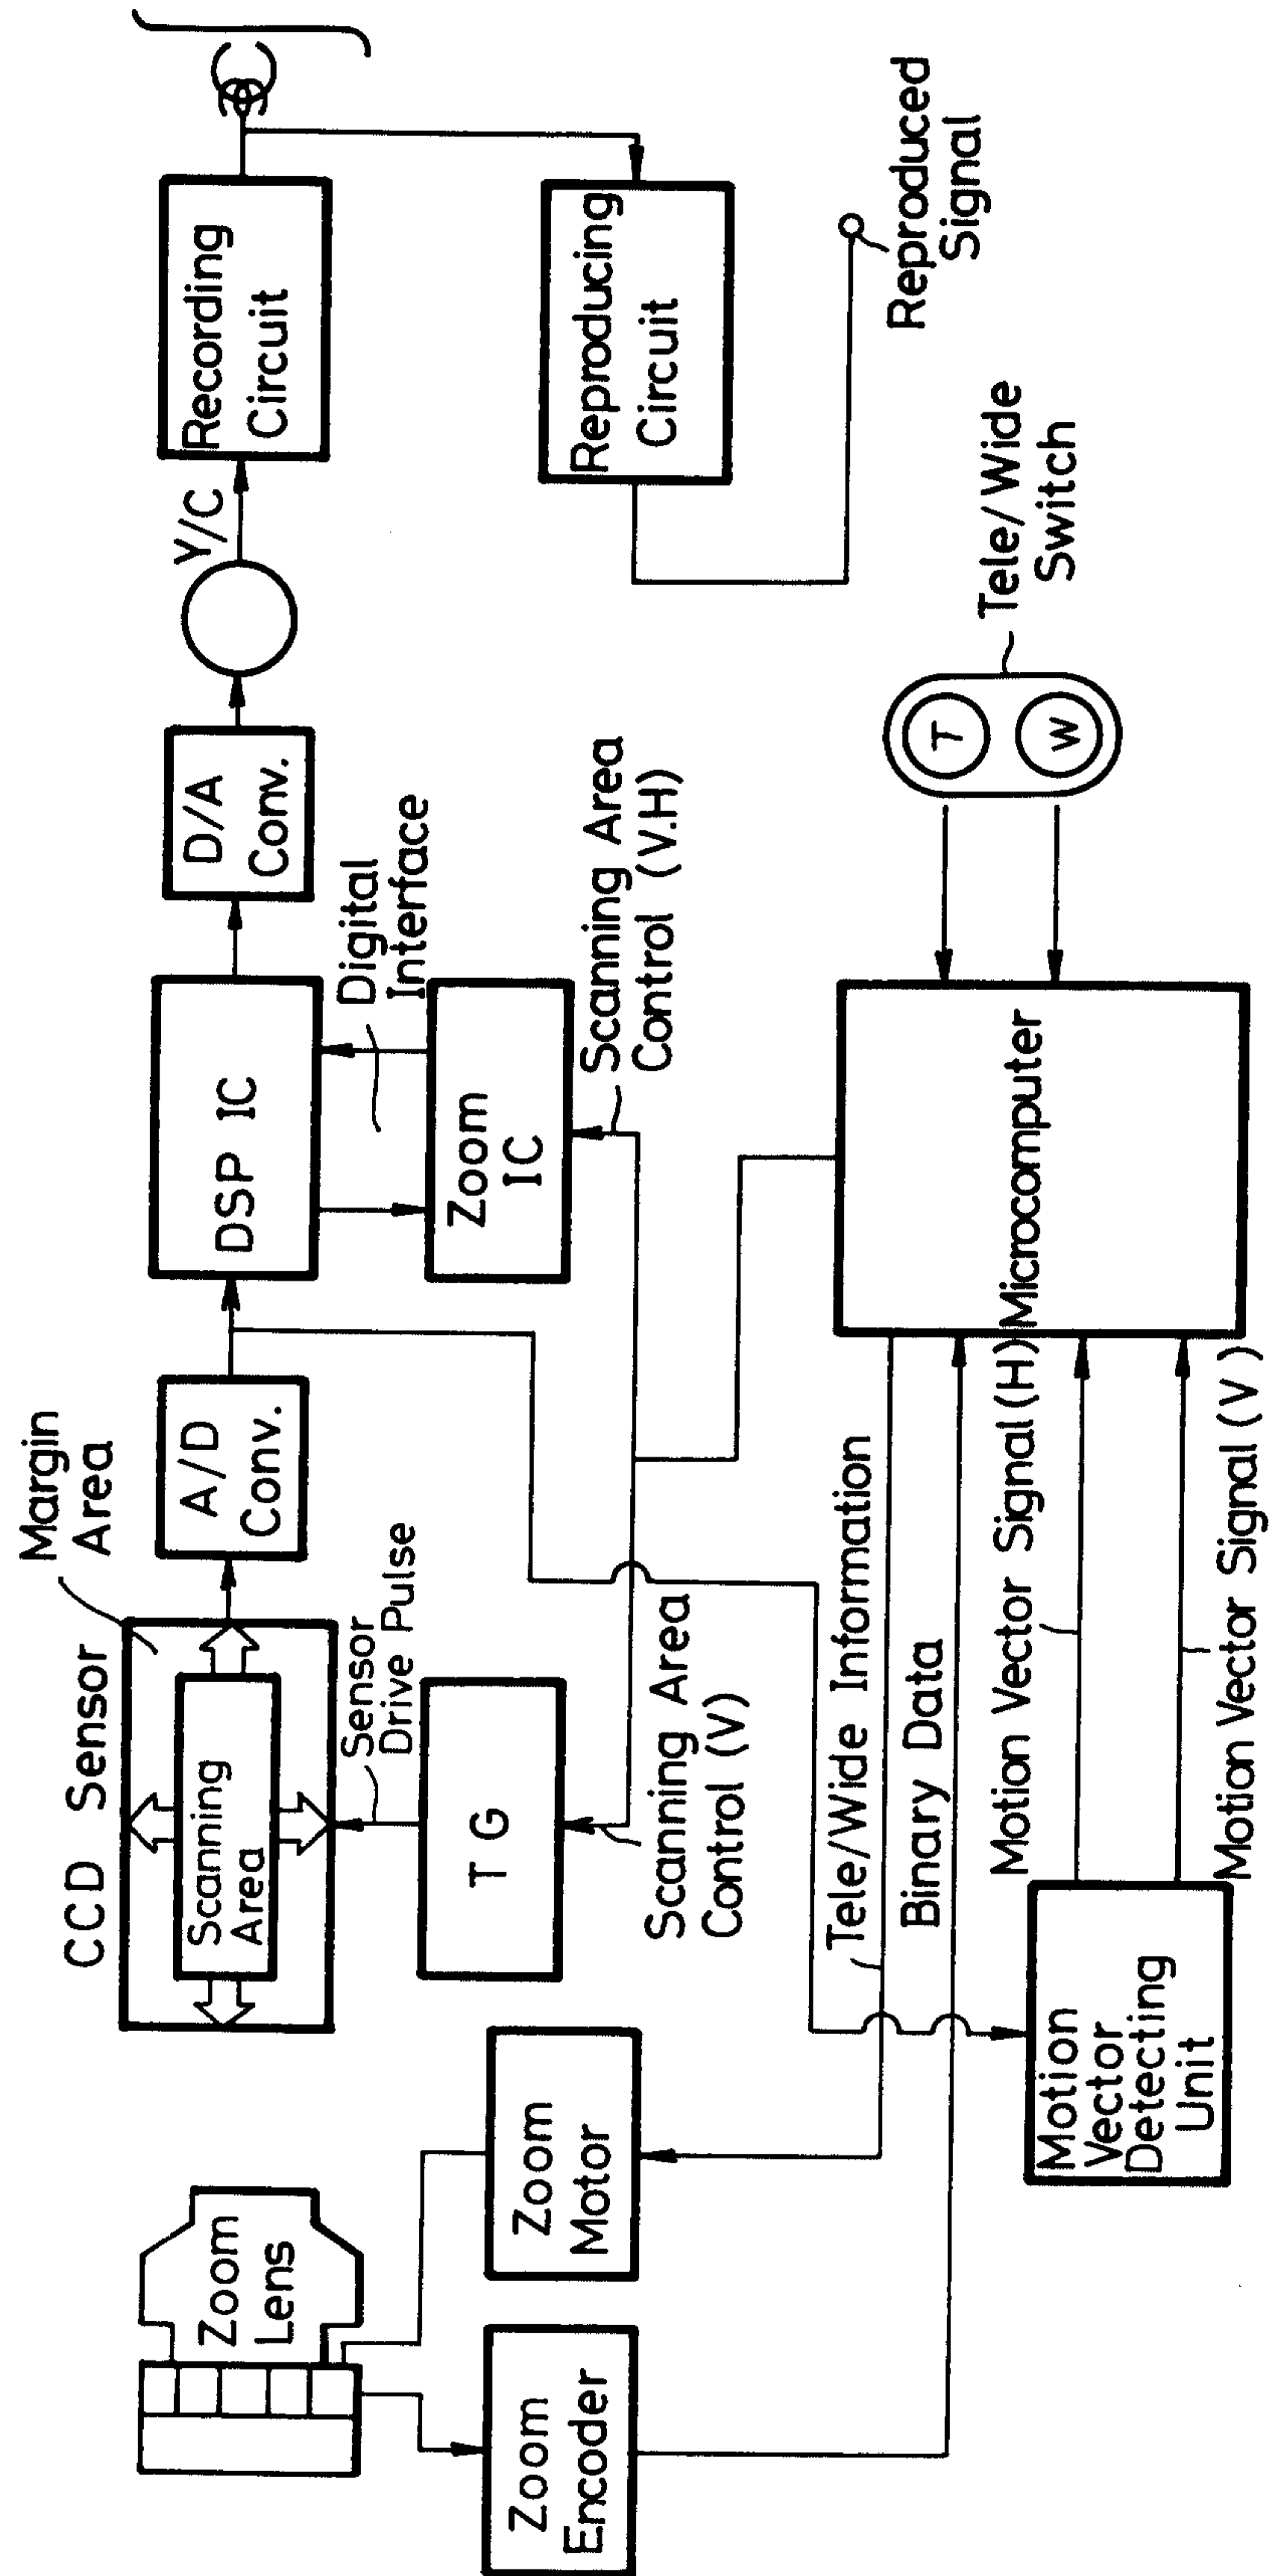


FIG. 2

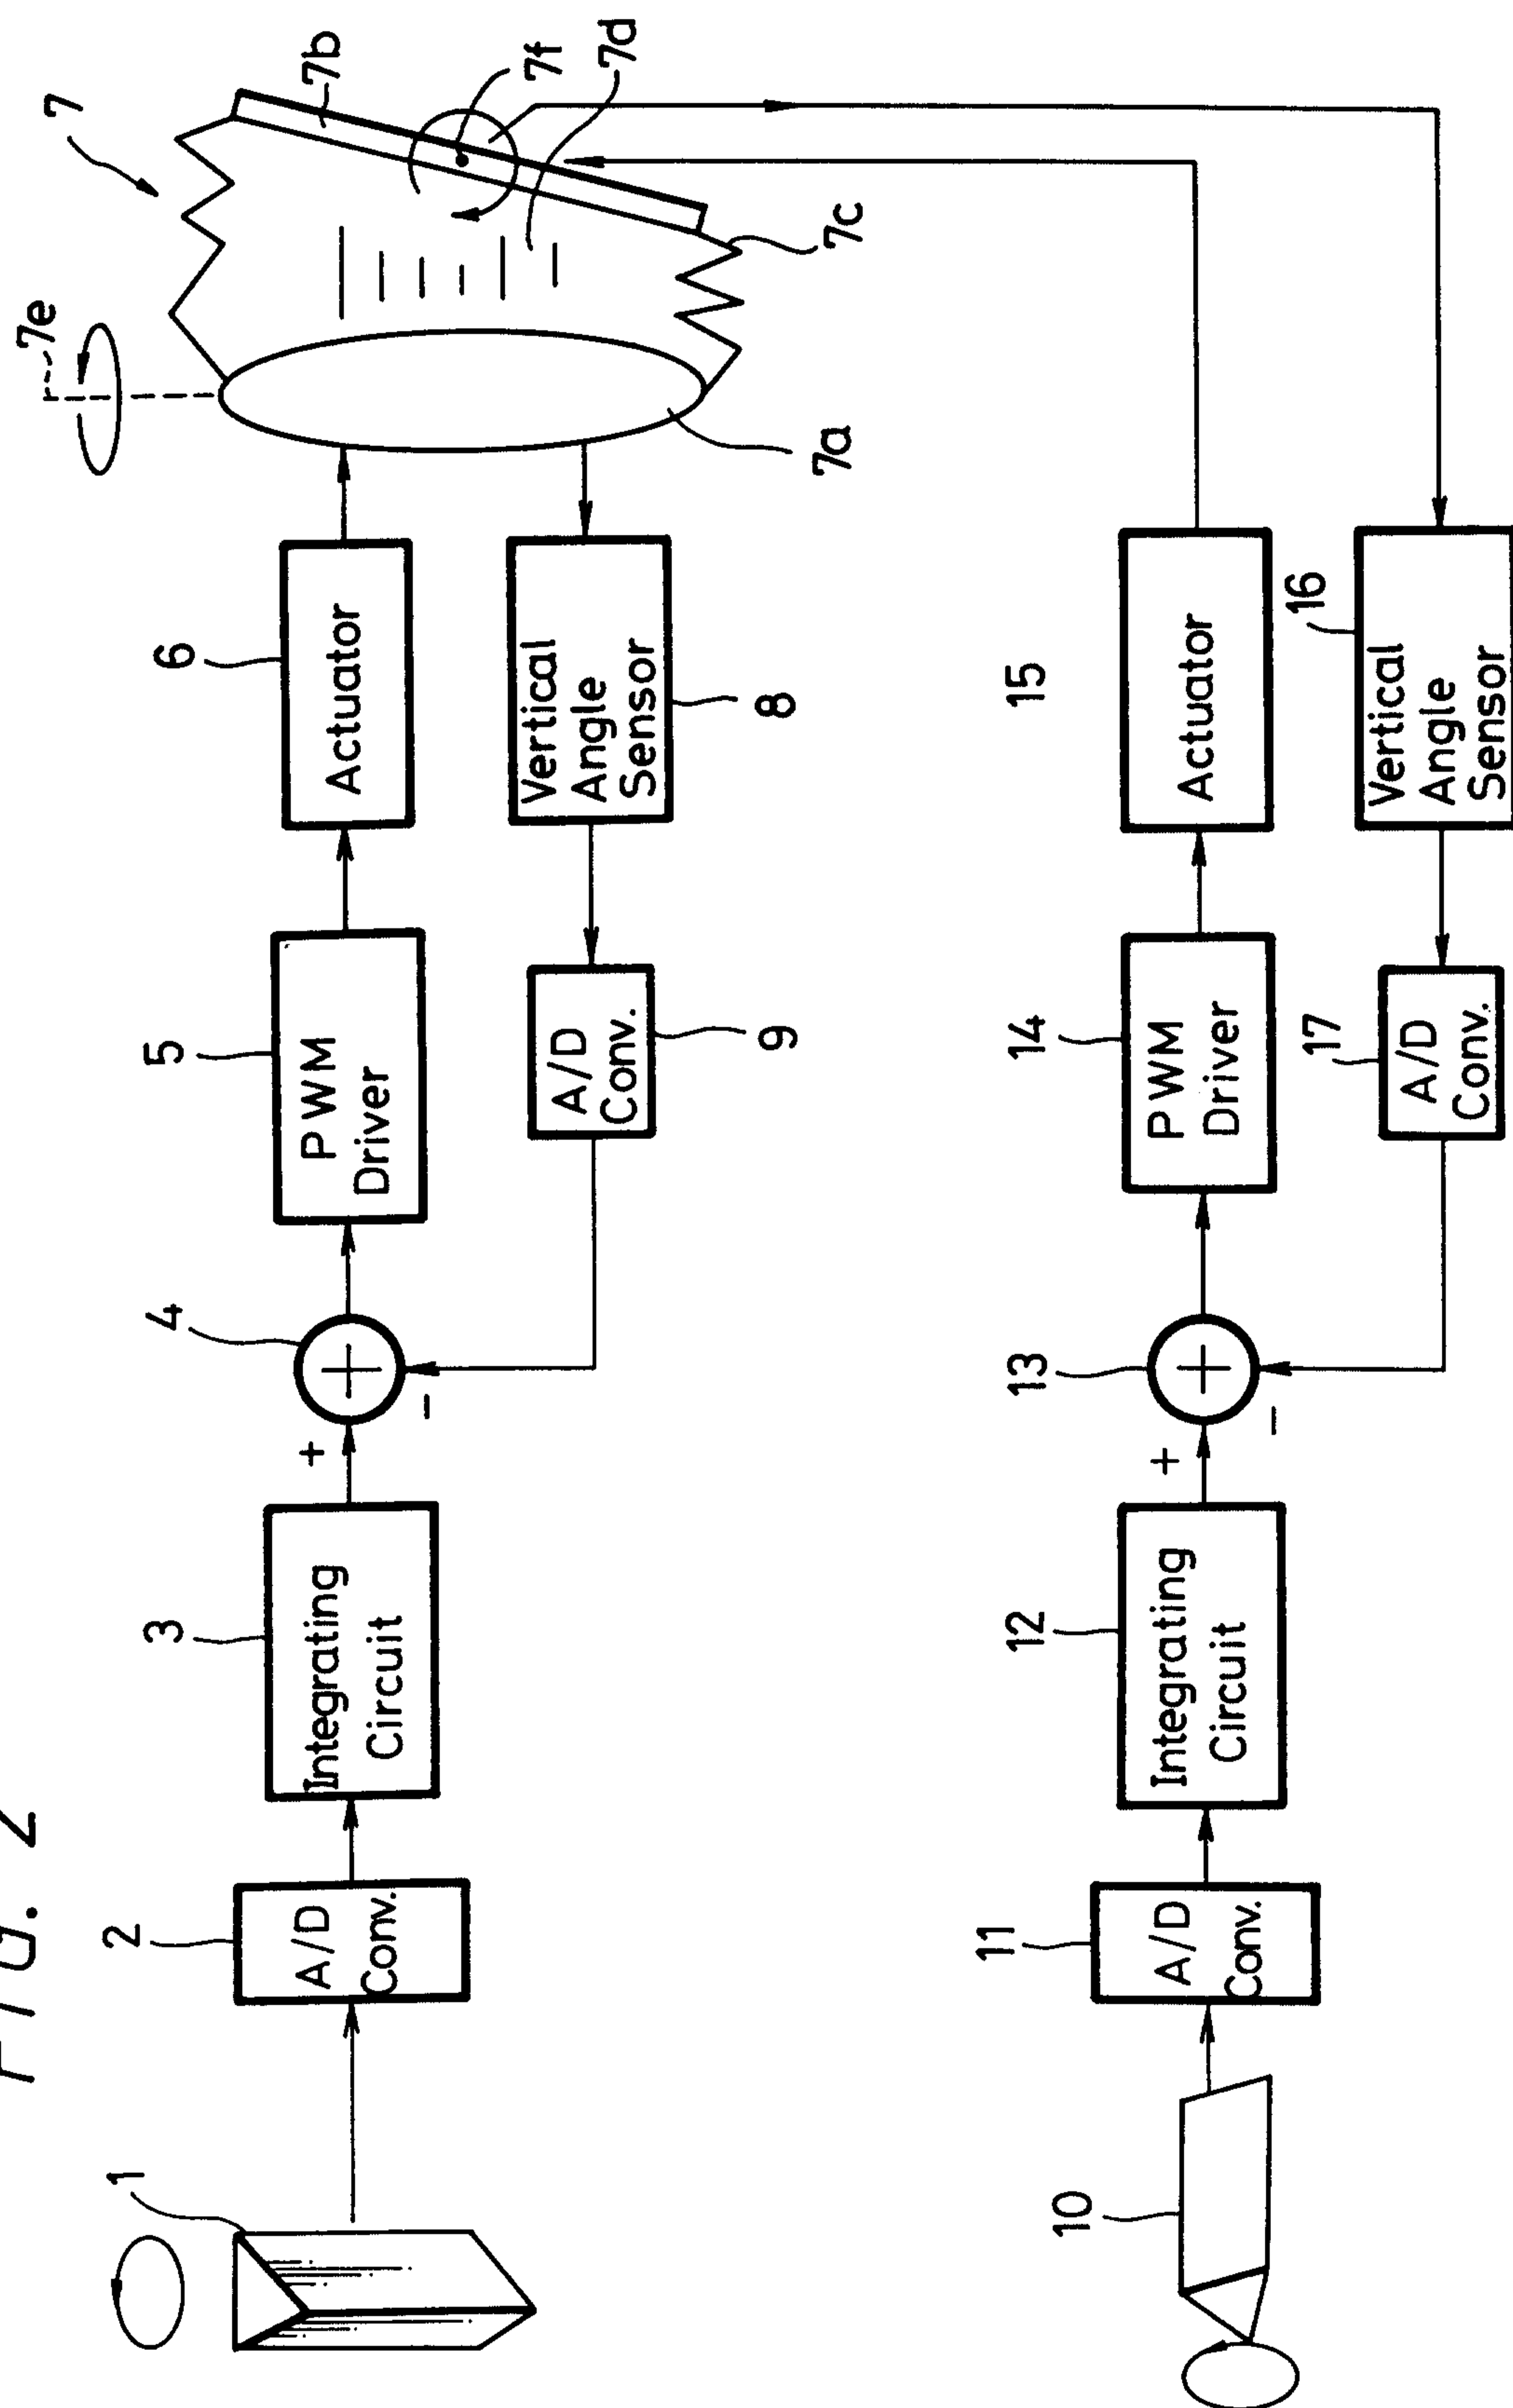


FIG. 3

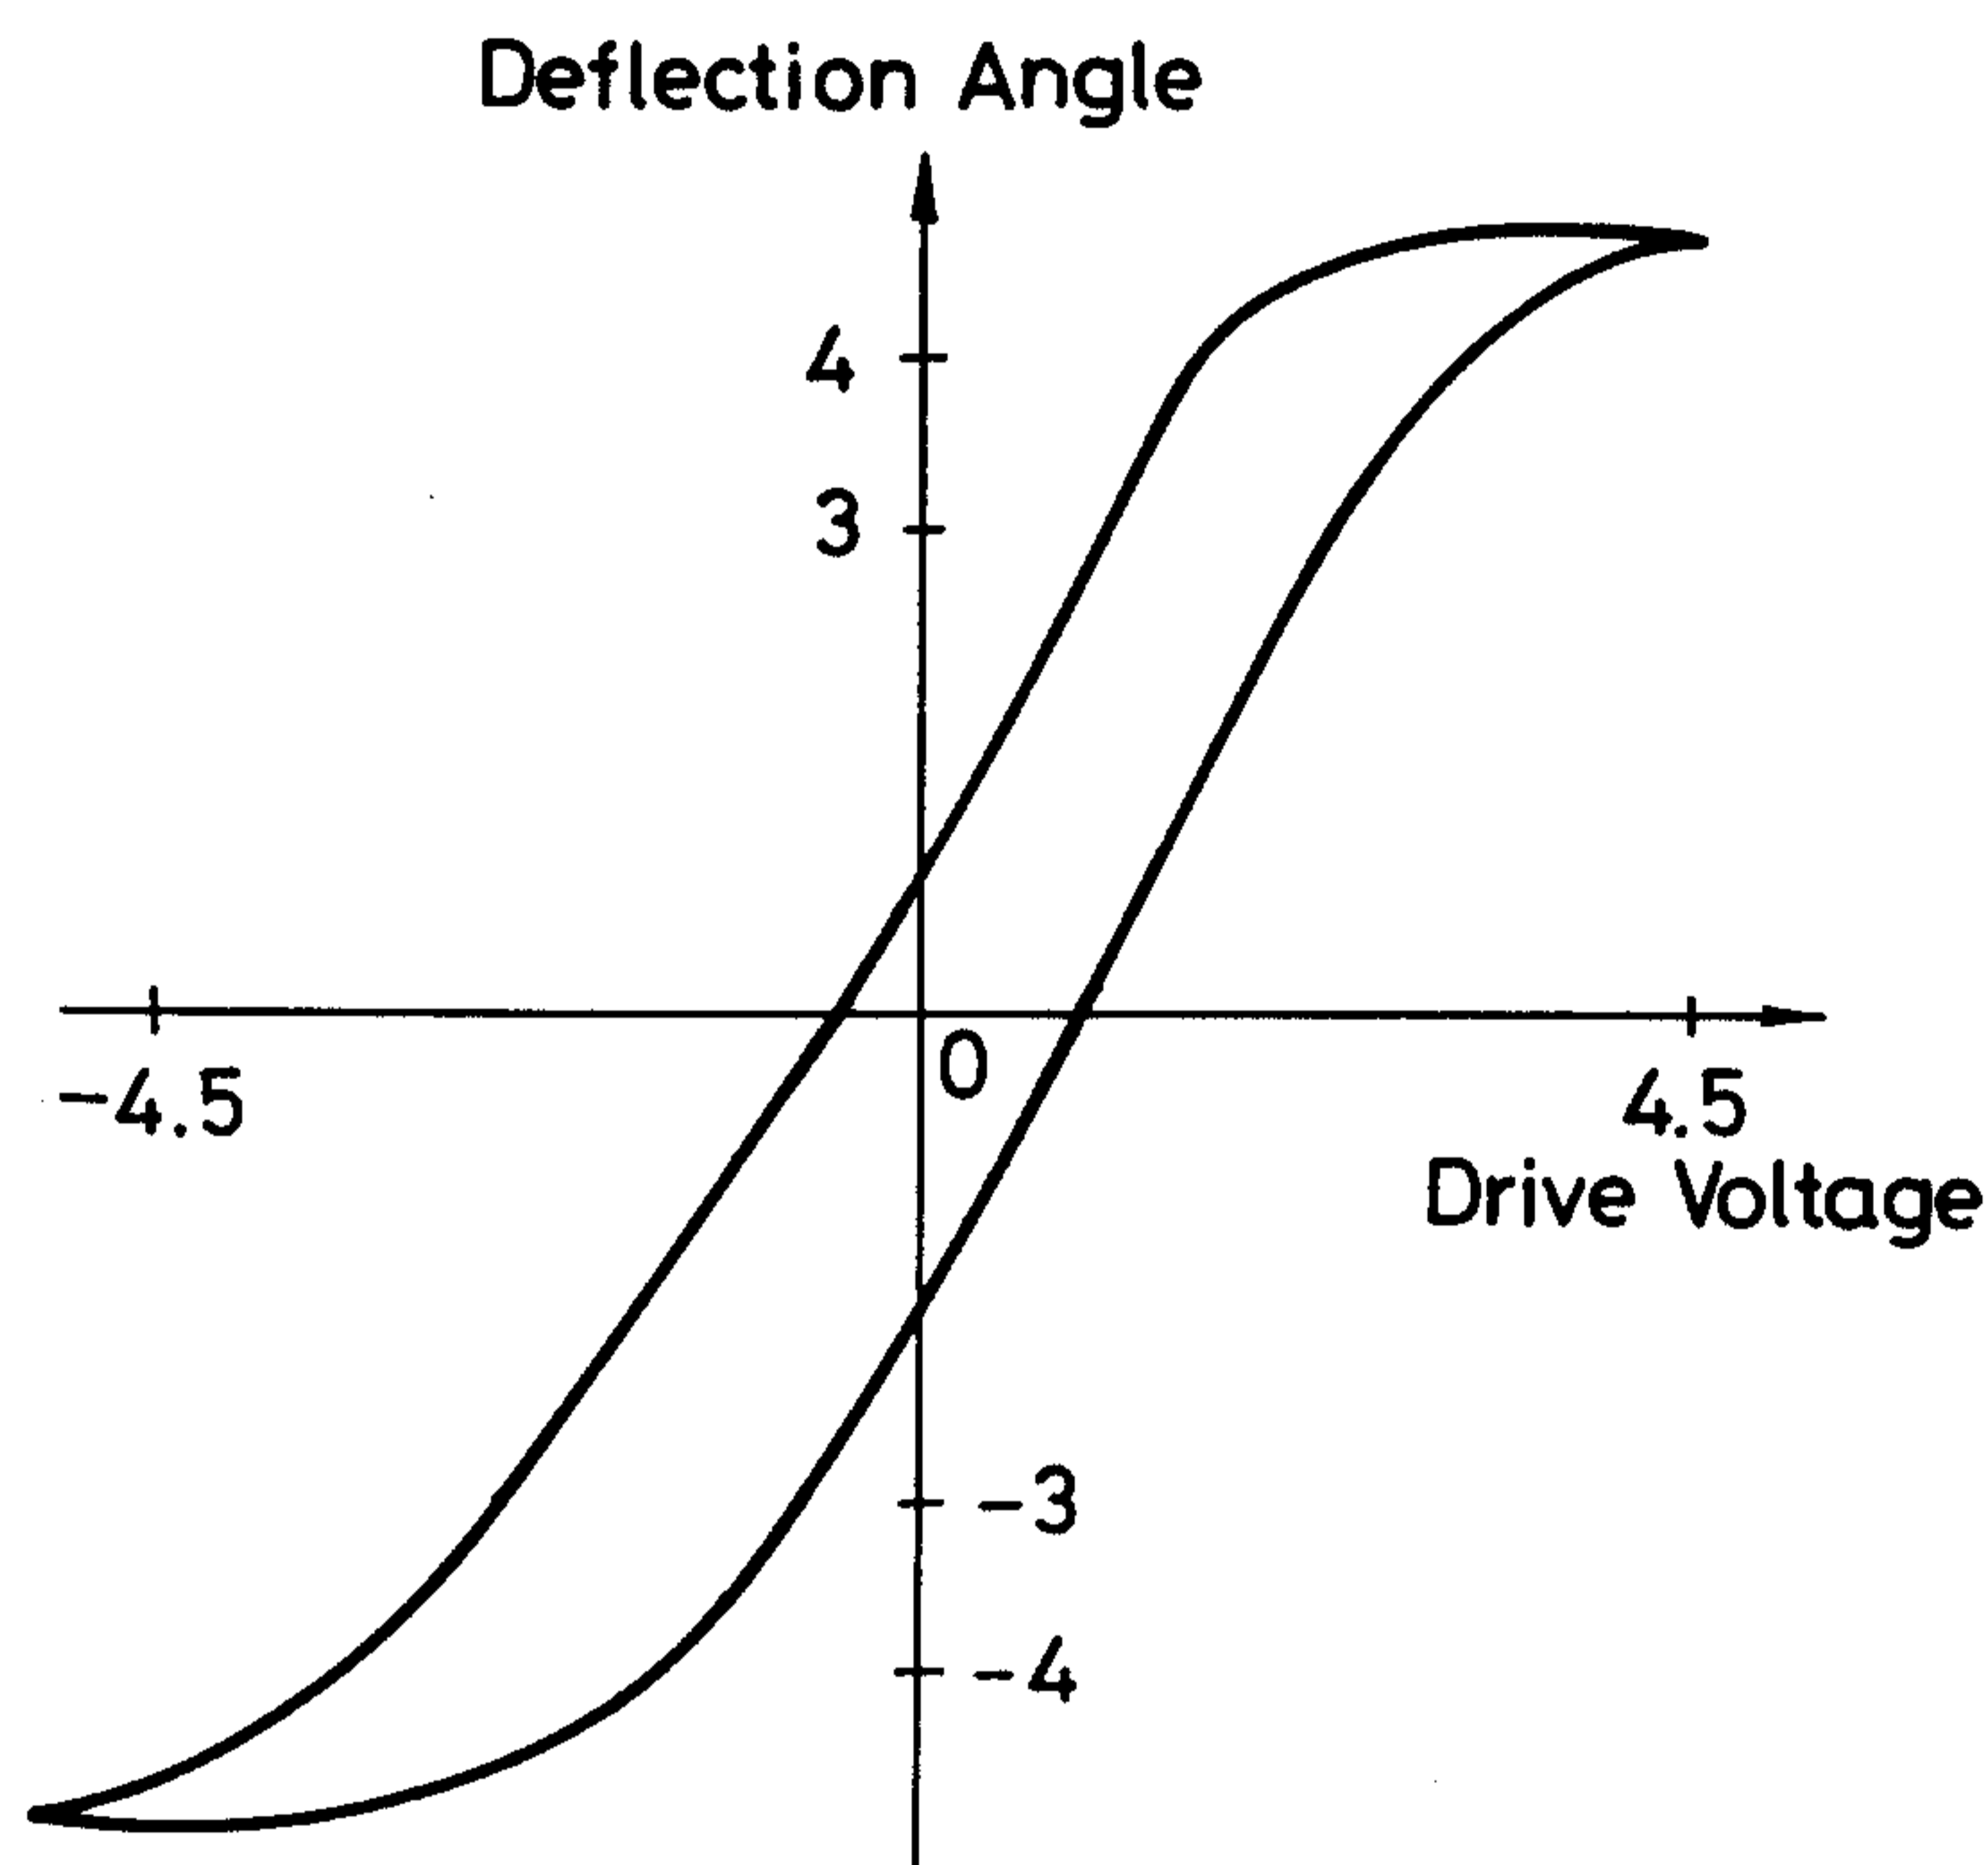


FIG. 4

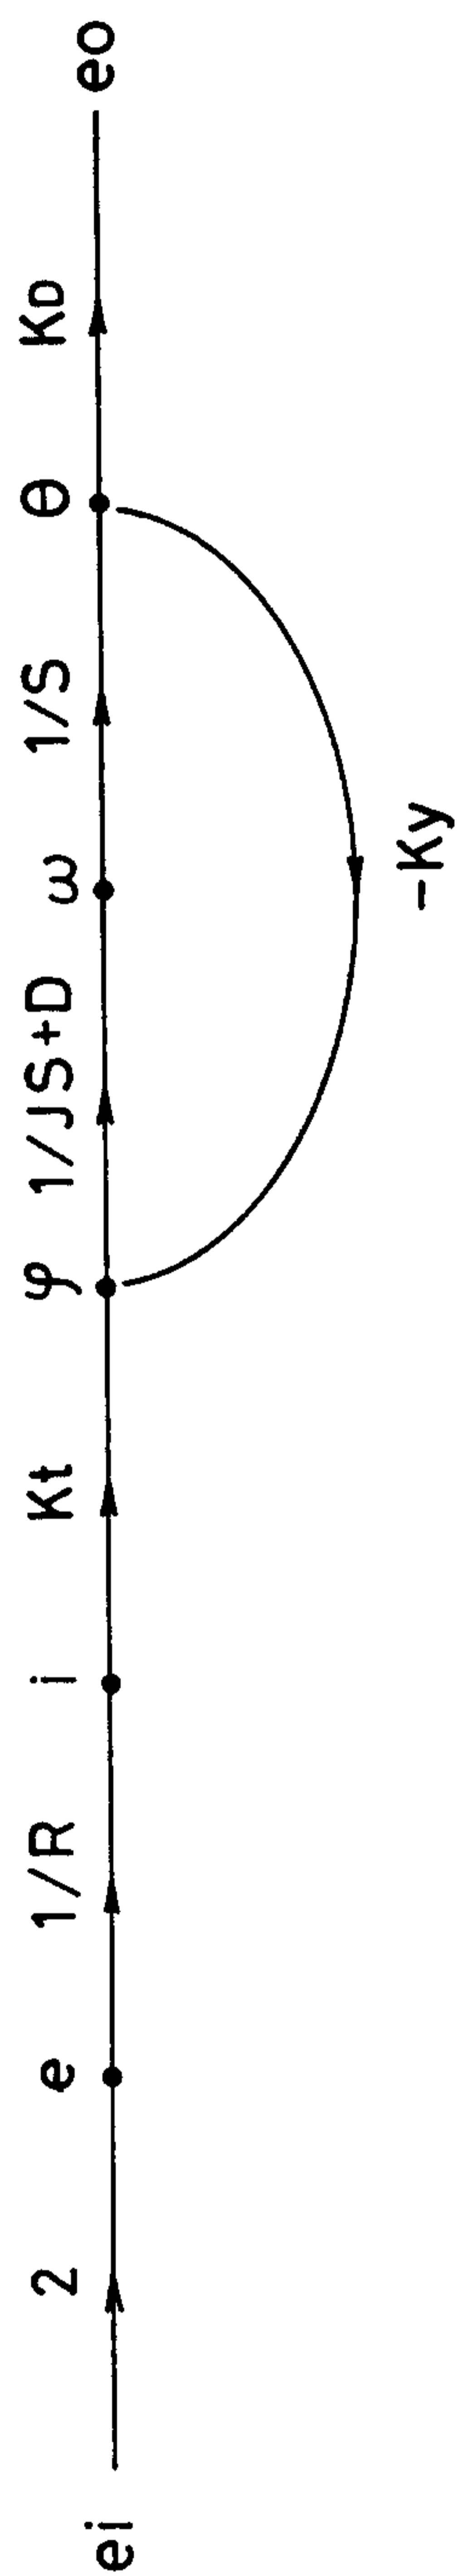


FIG. 5

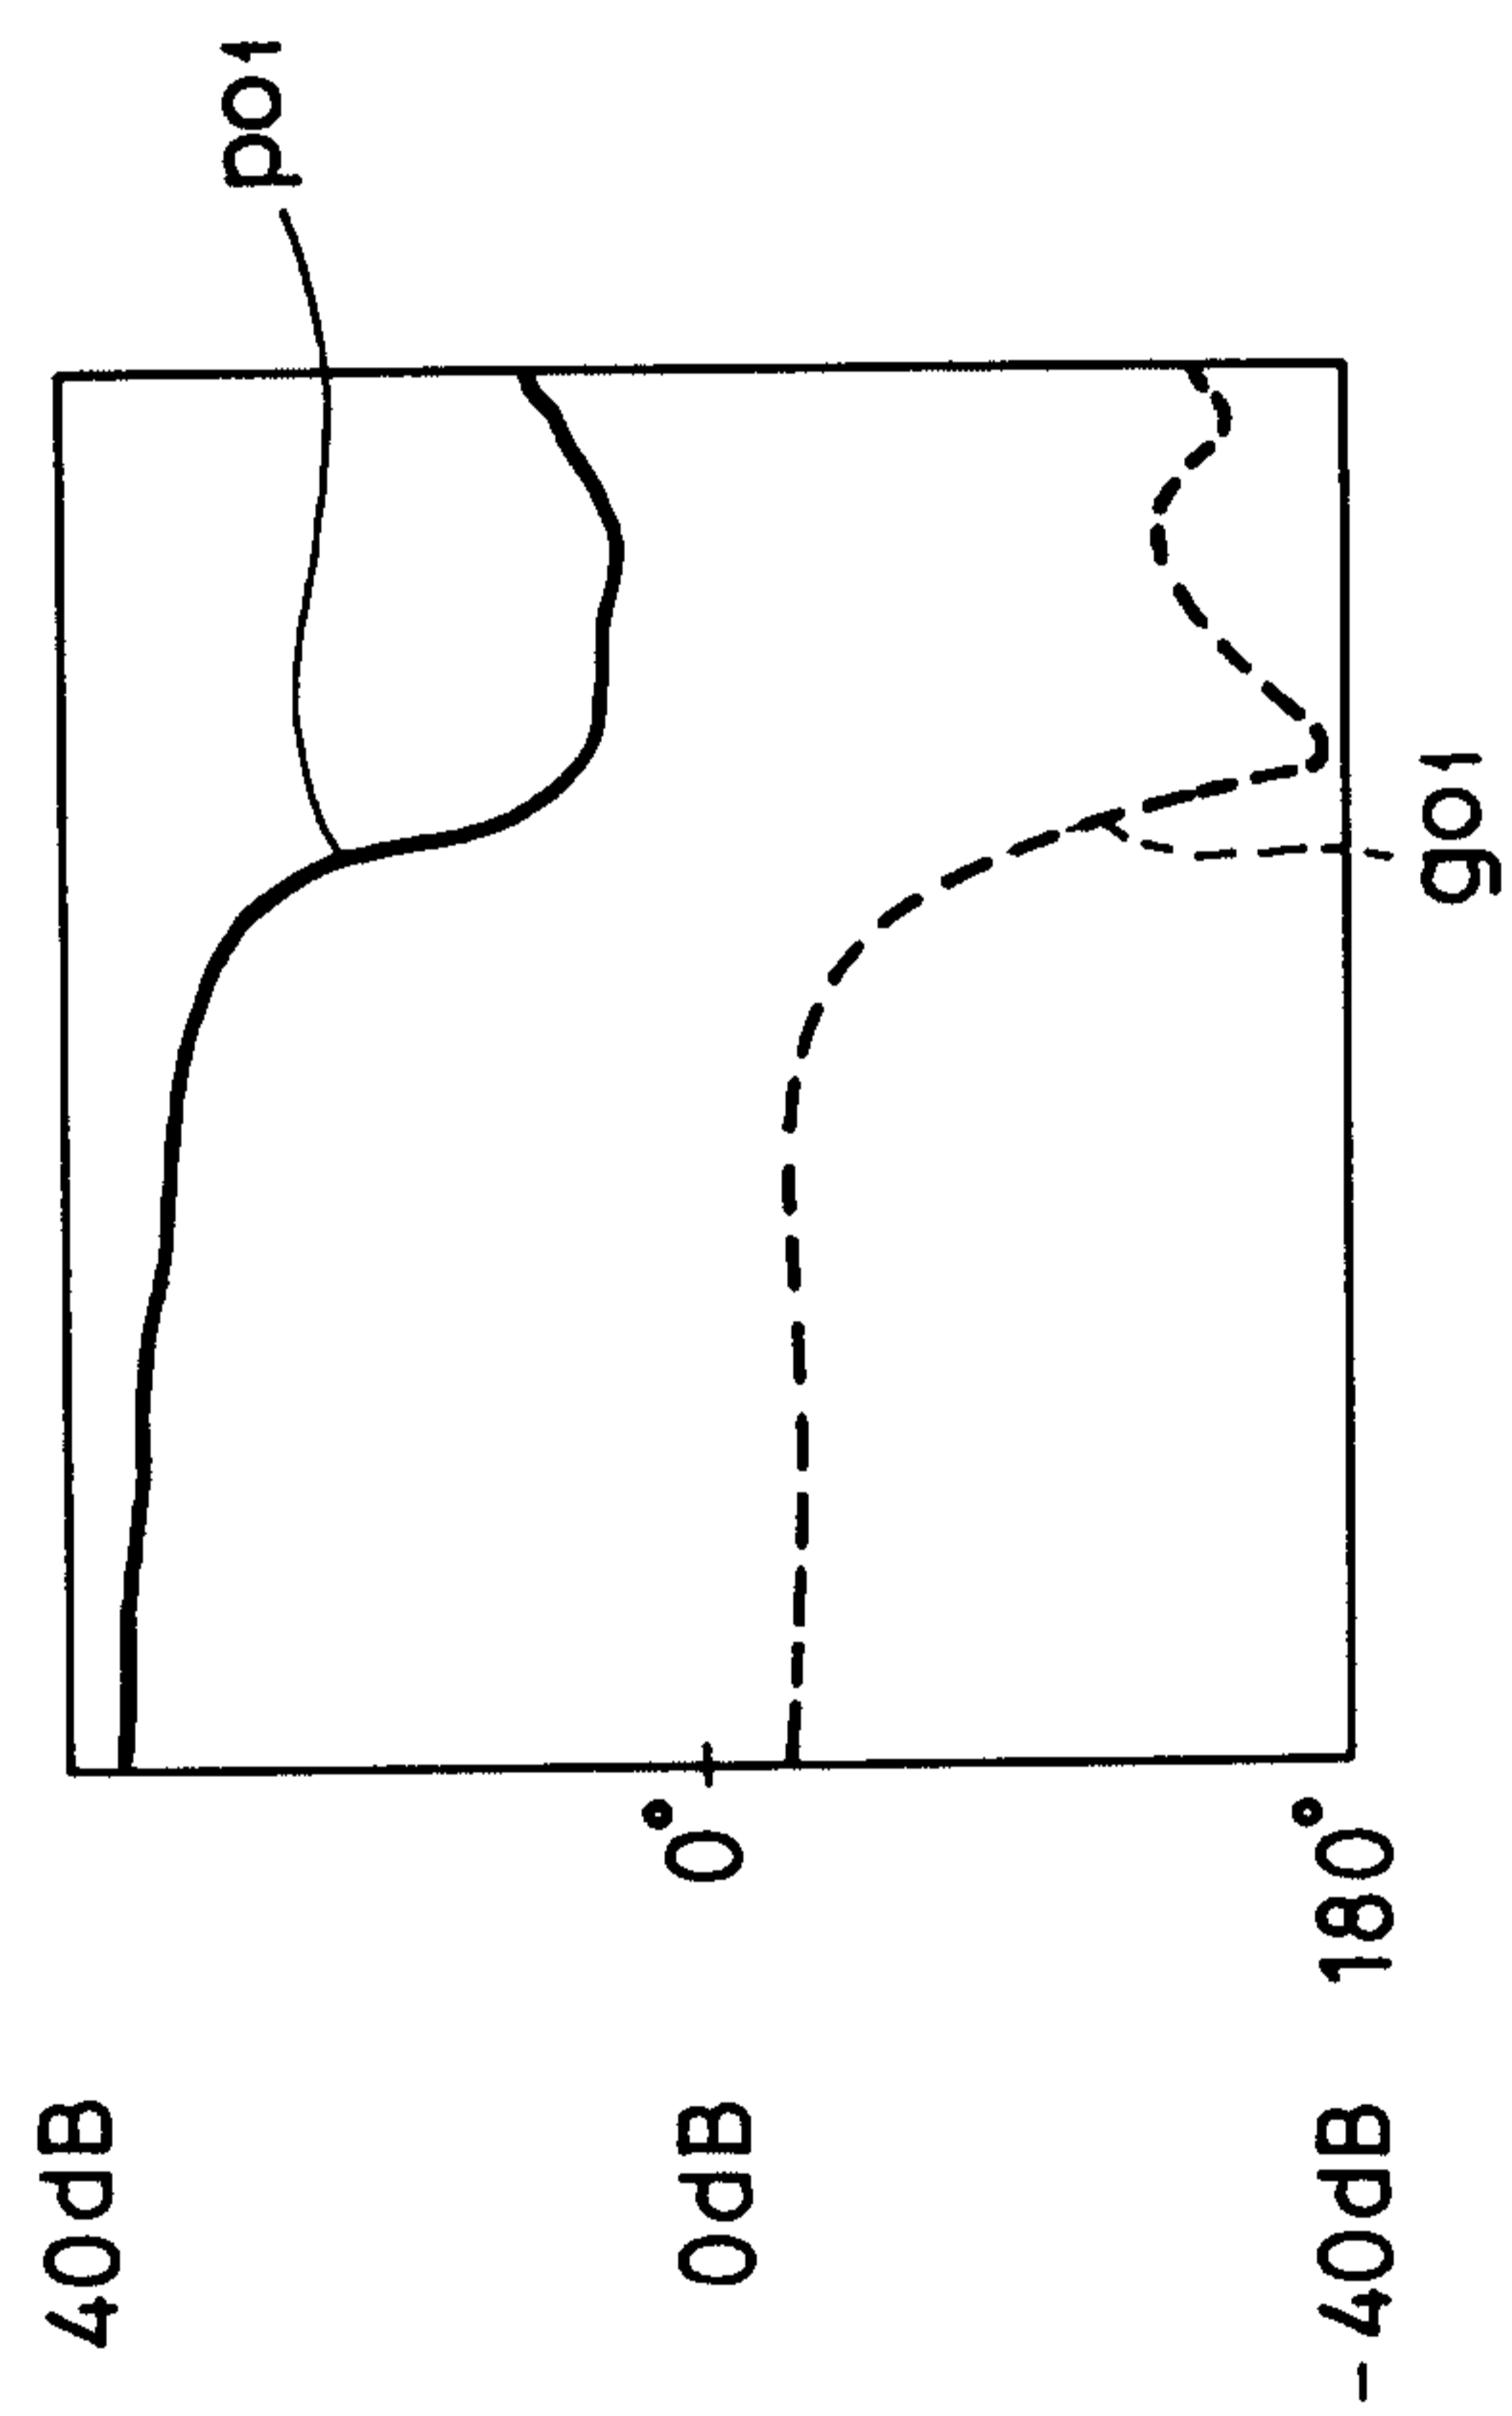


FIG. 6A

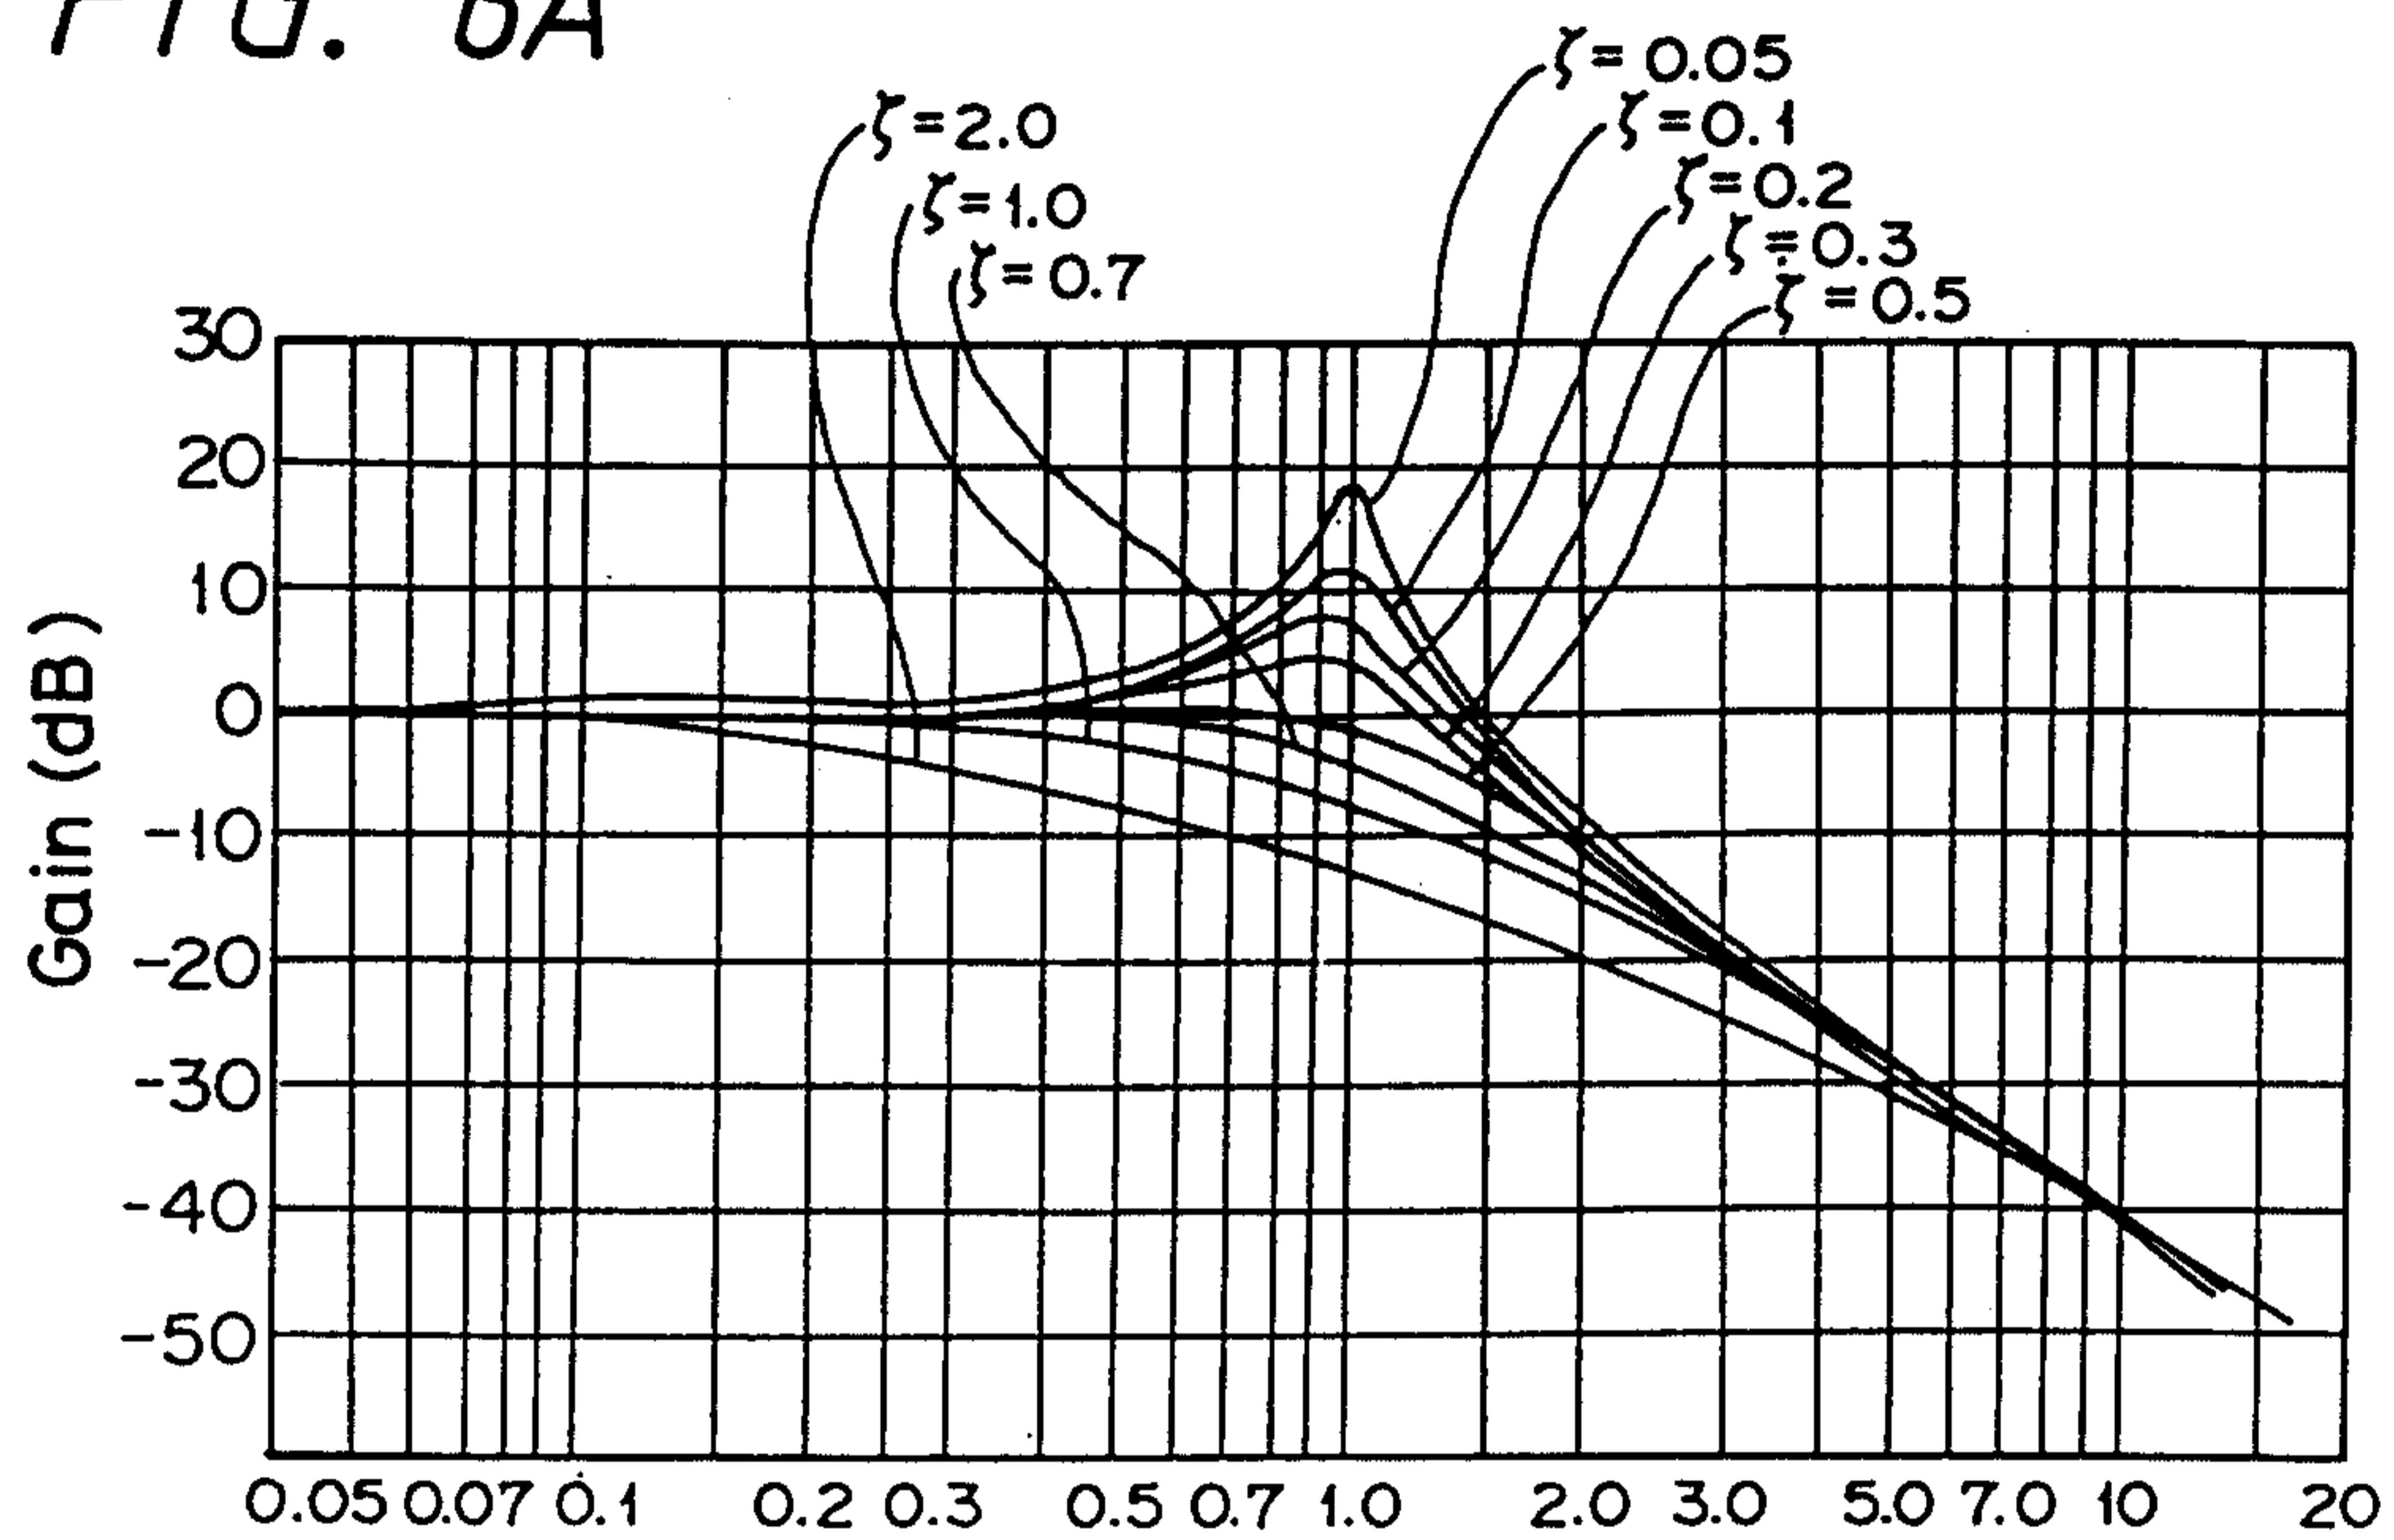


FIG. 6B

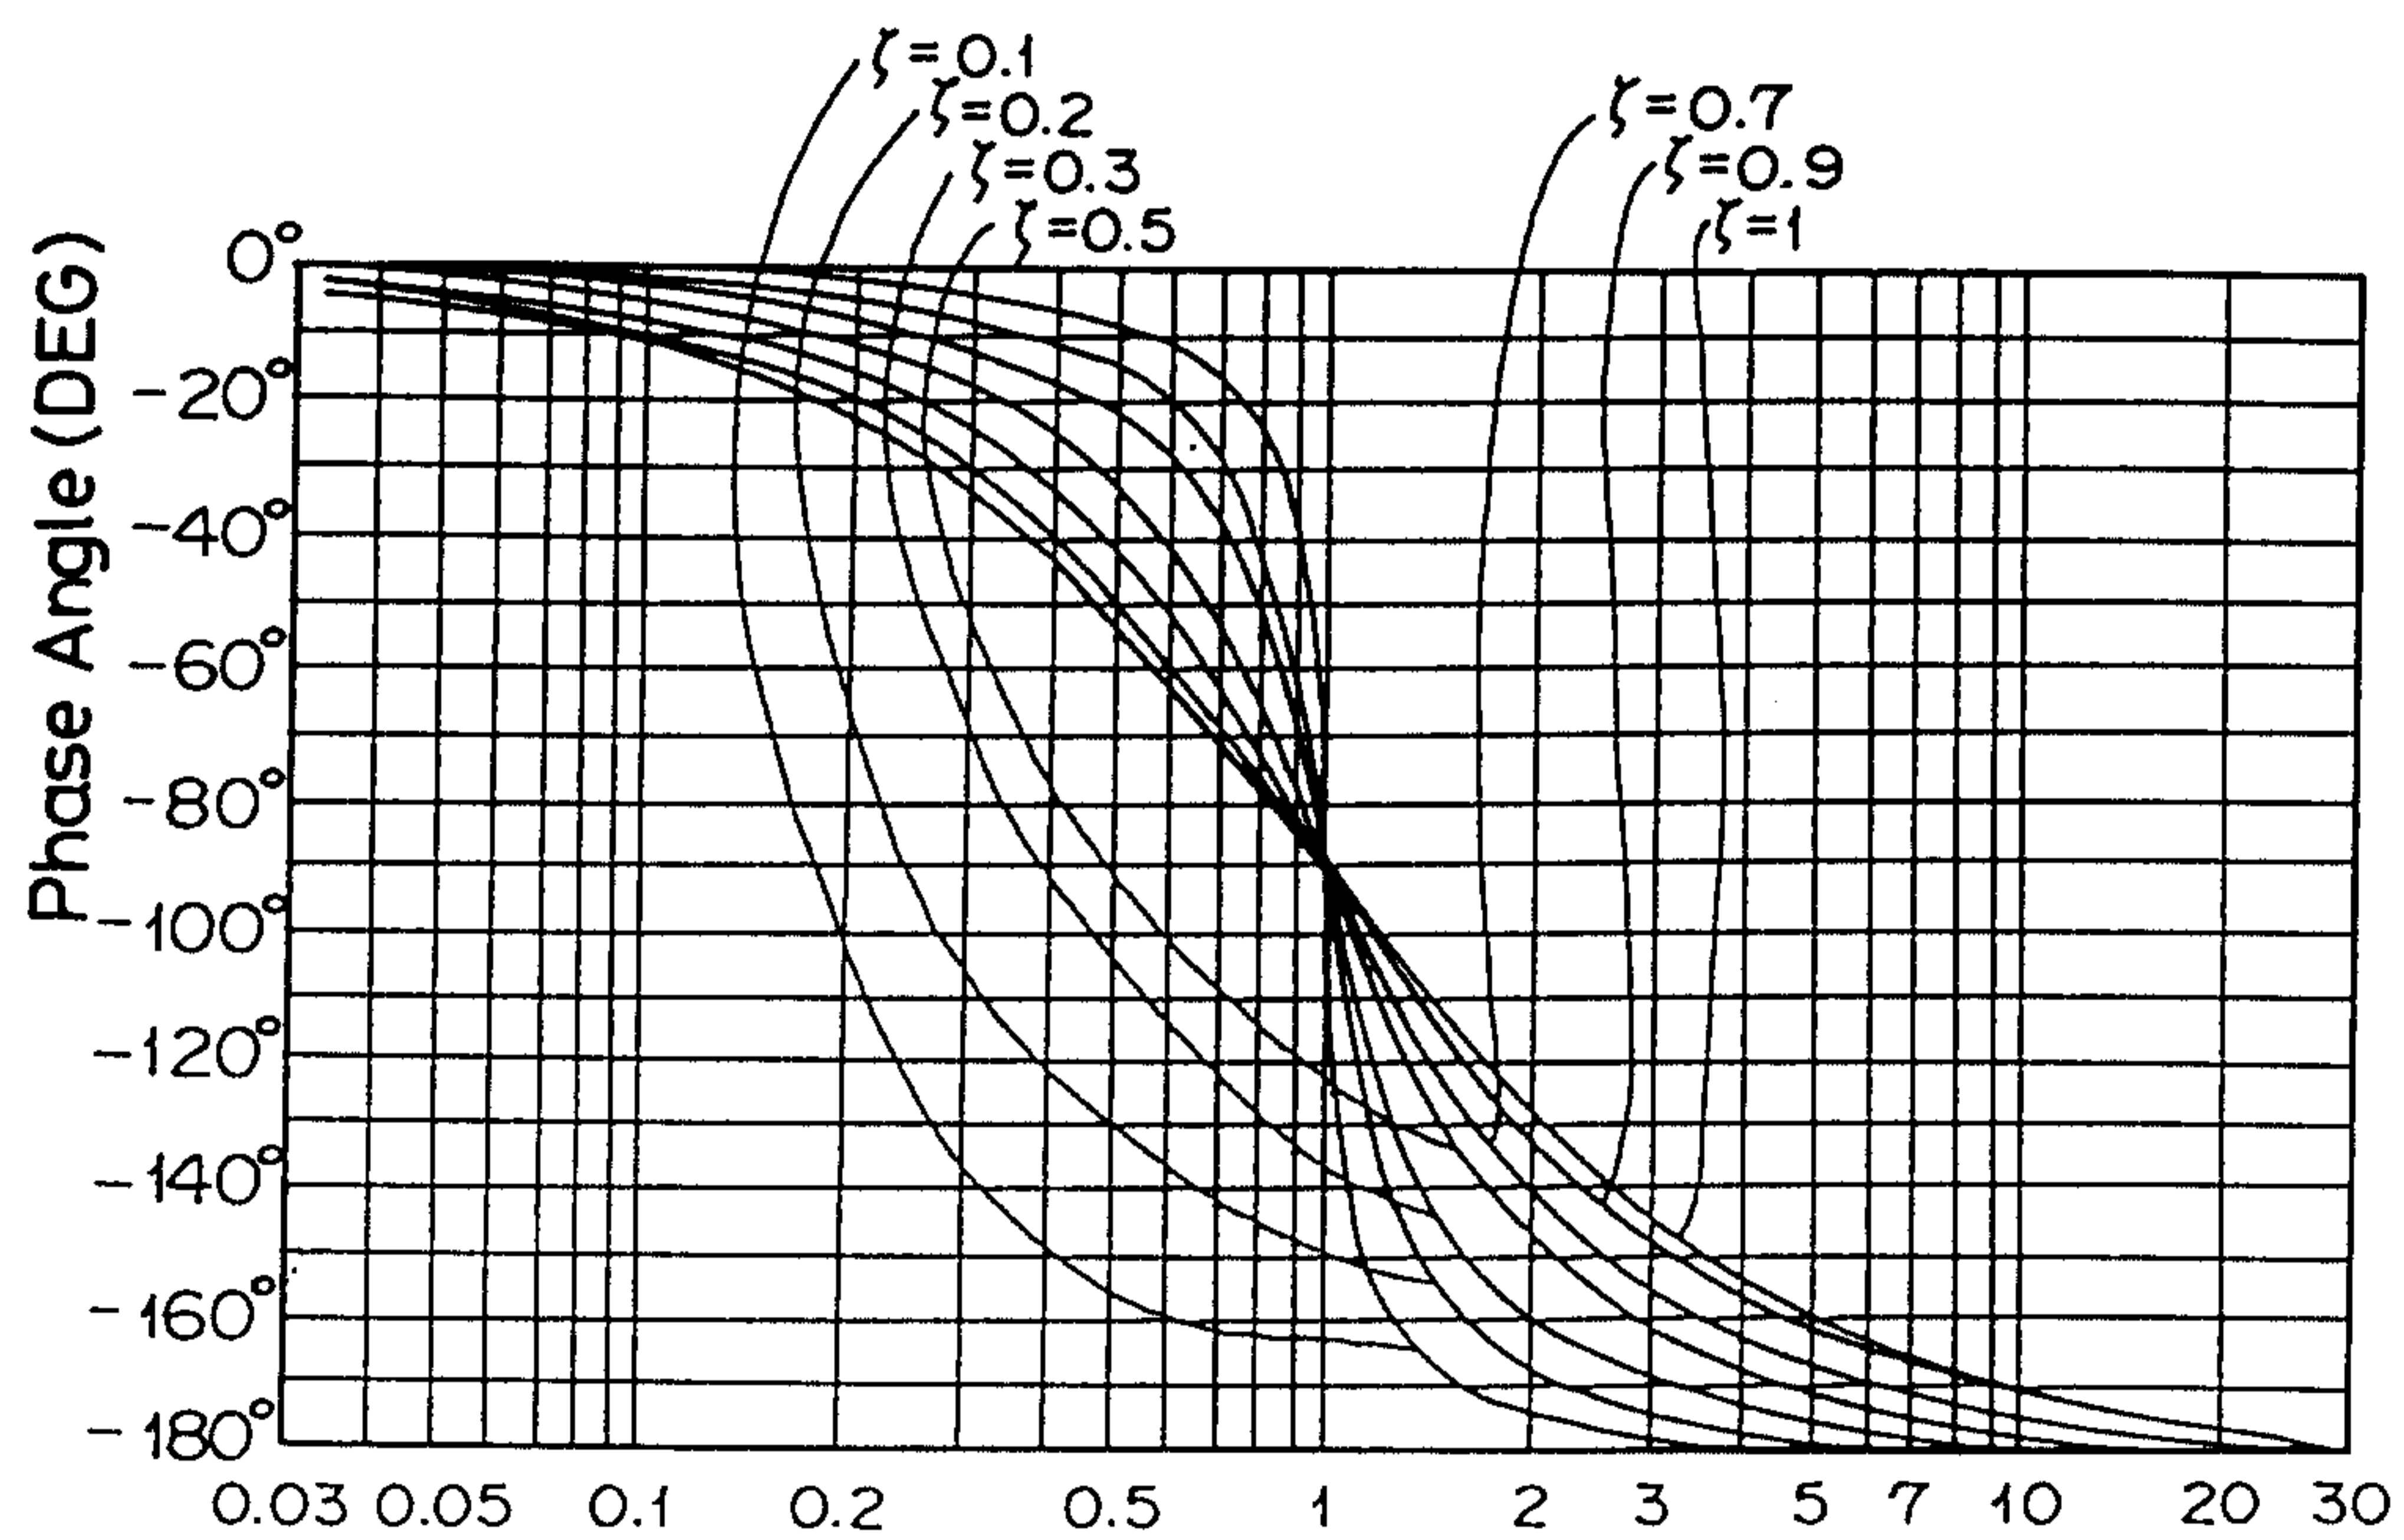


FIG. 7

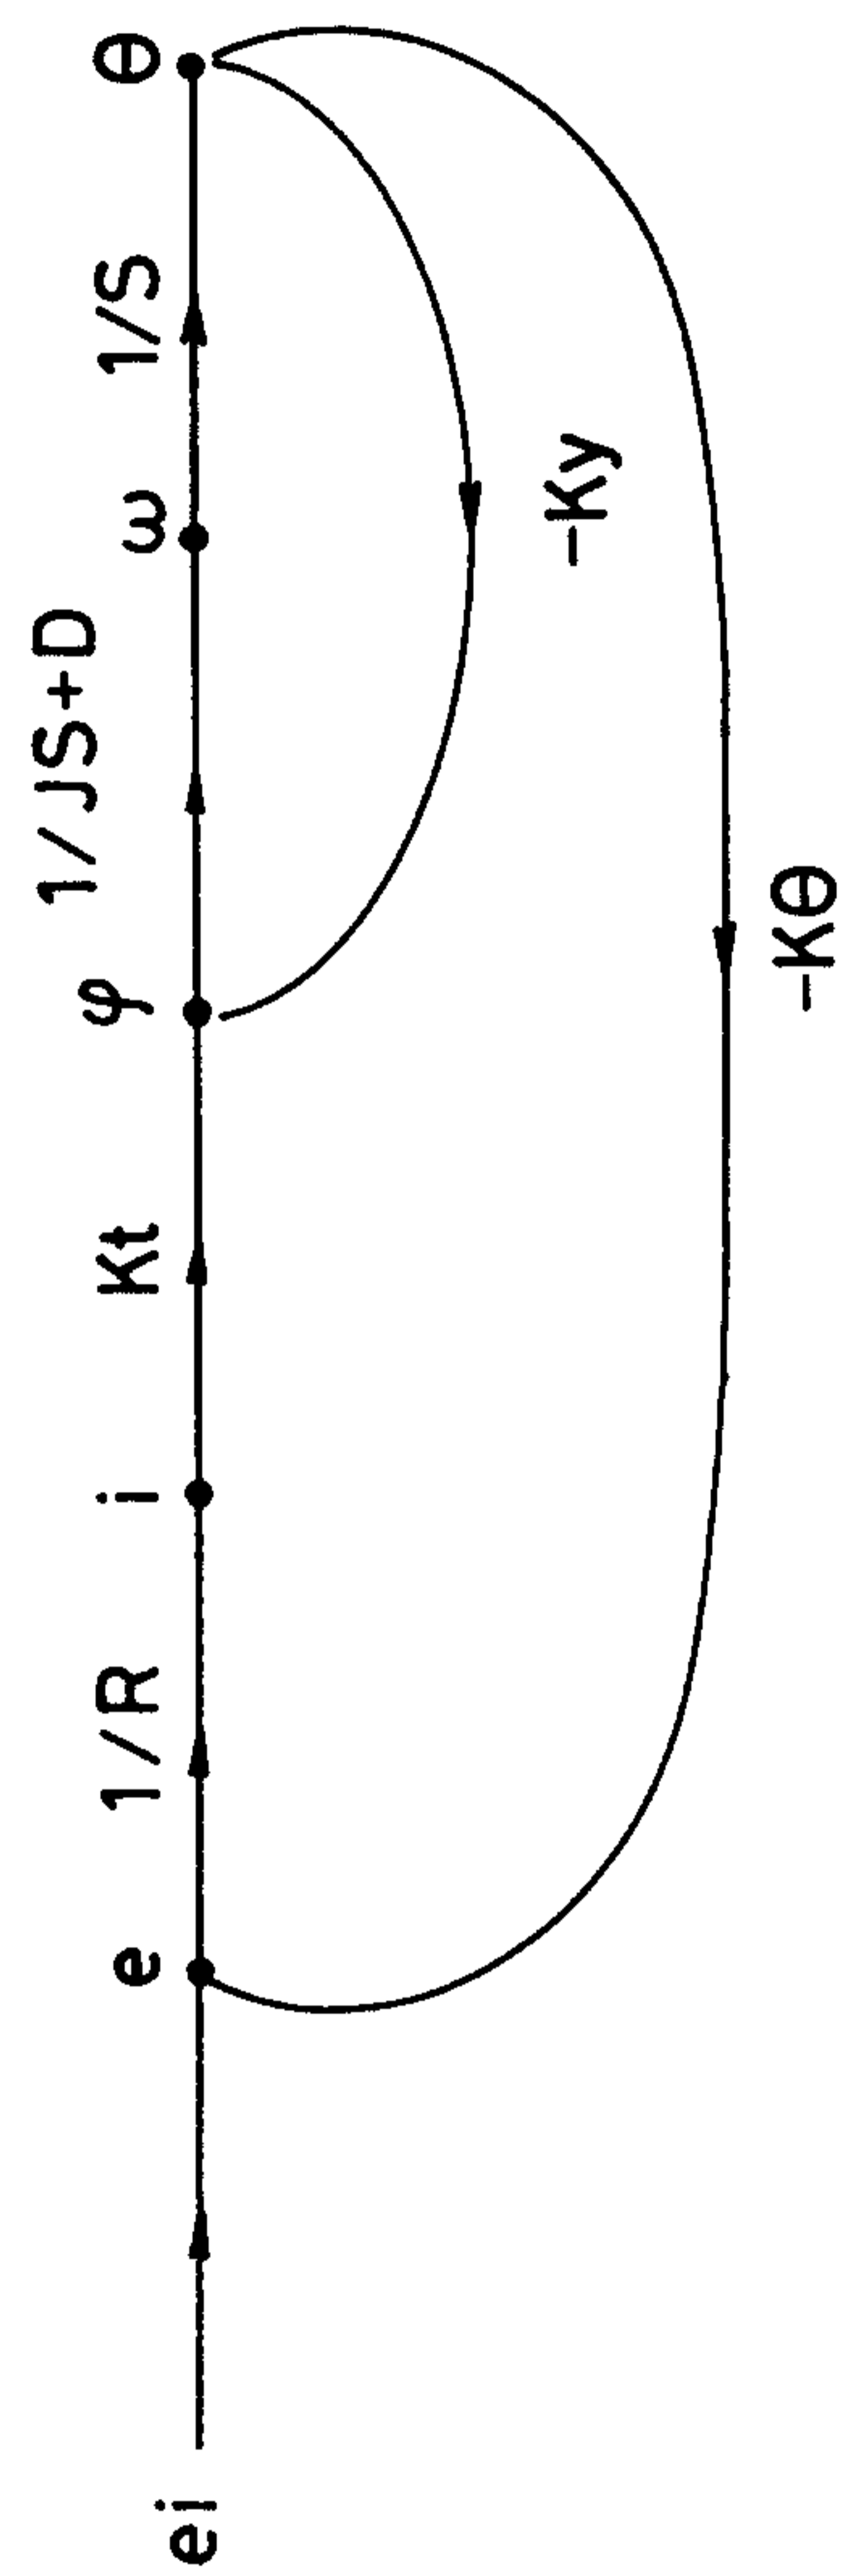


FIG. 8A

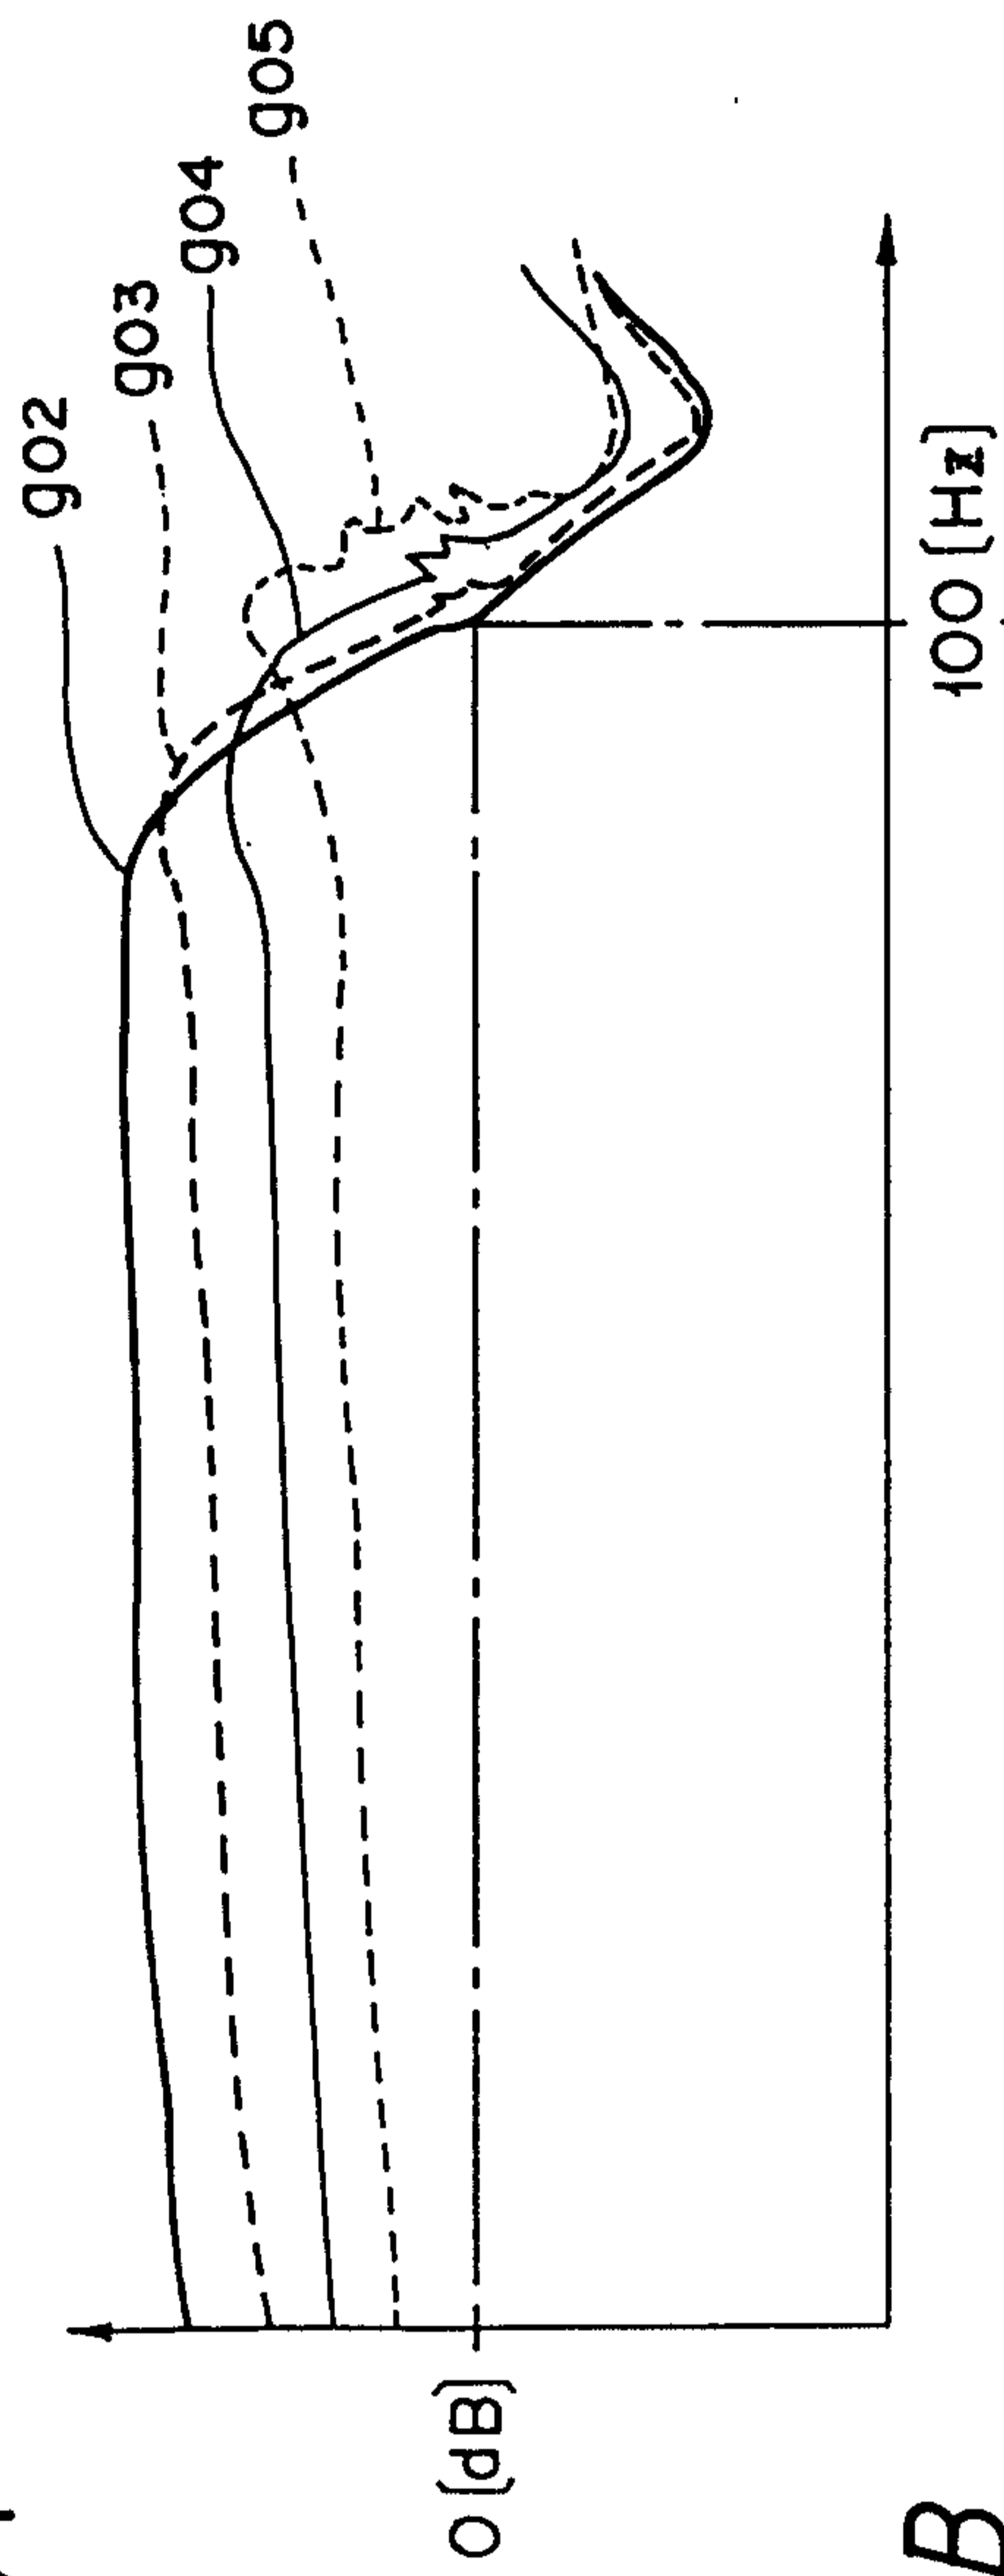


FIG. 8B

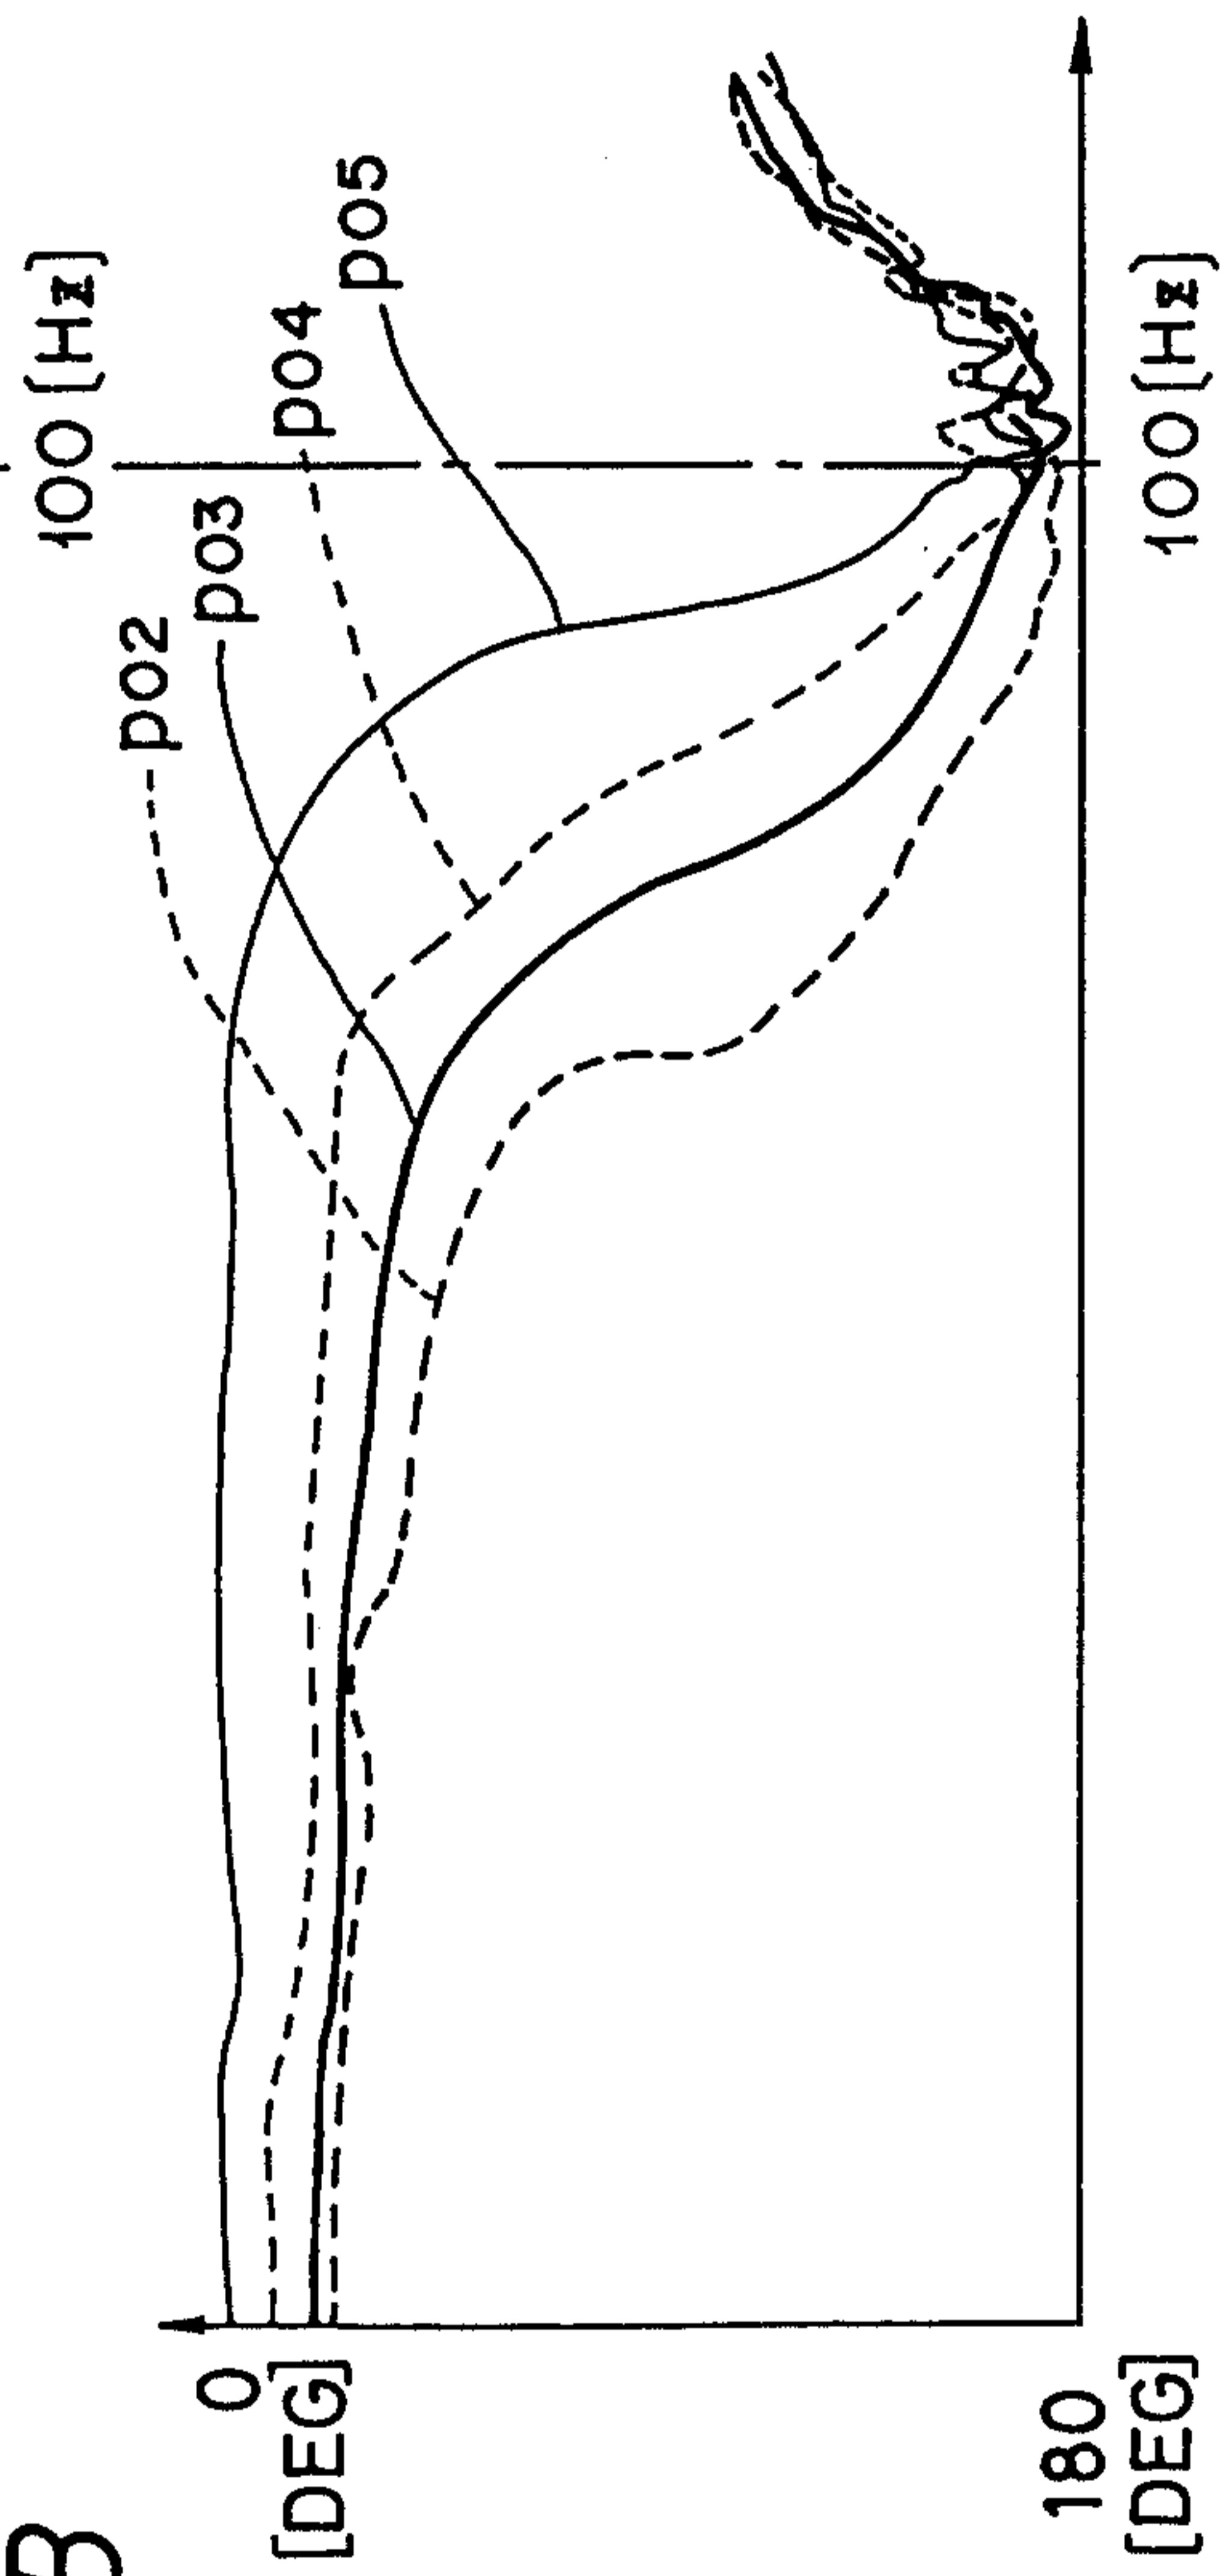


FIG. 9

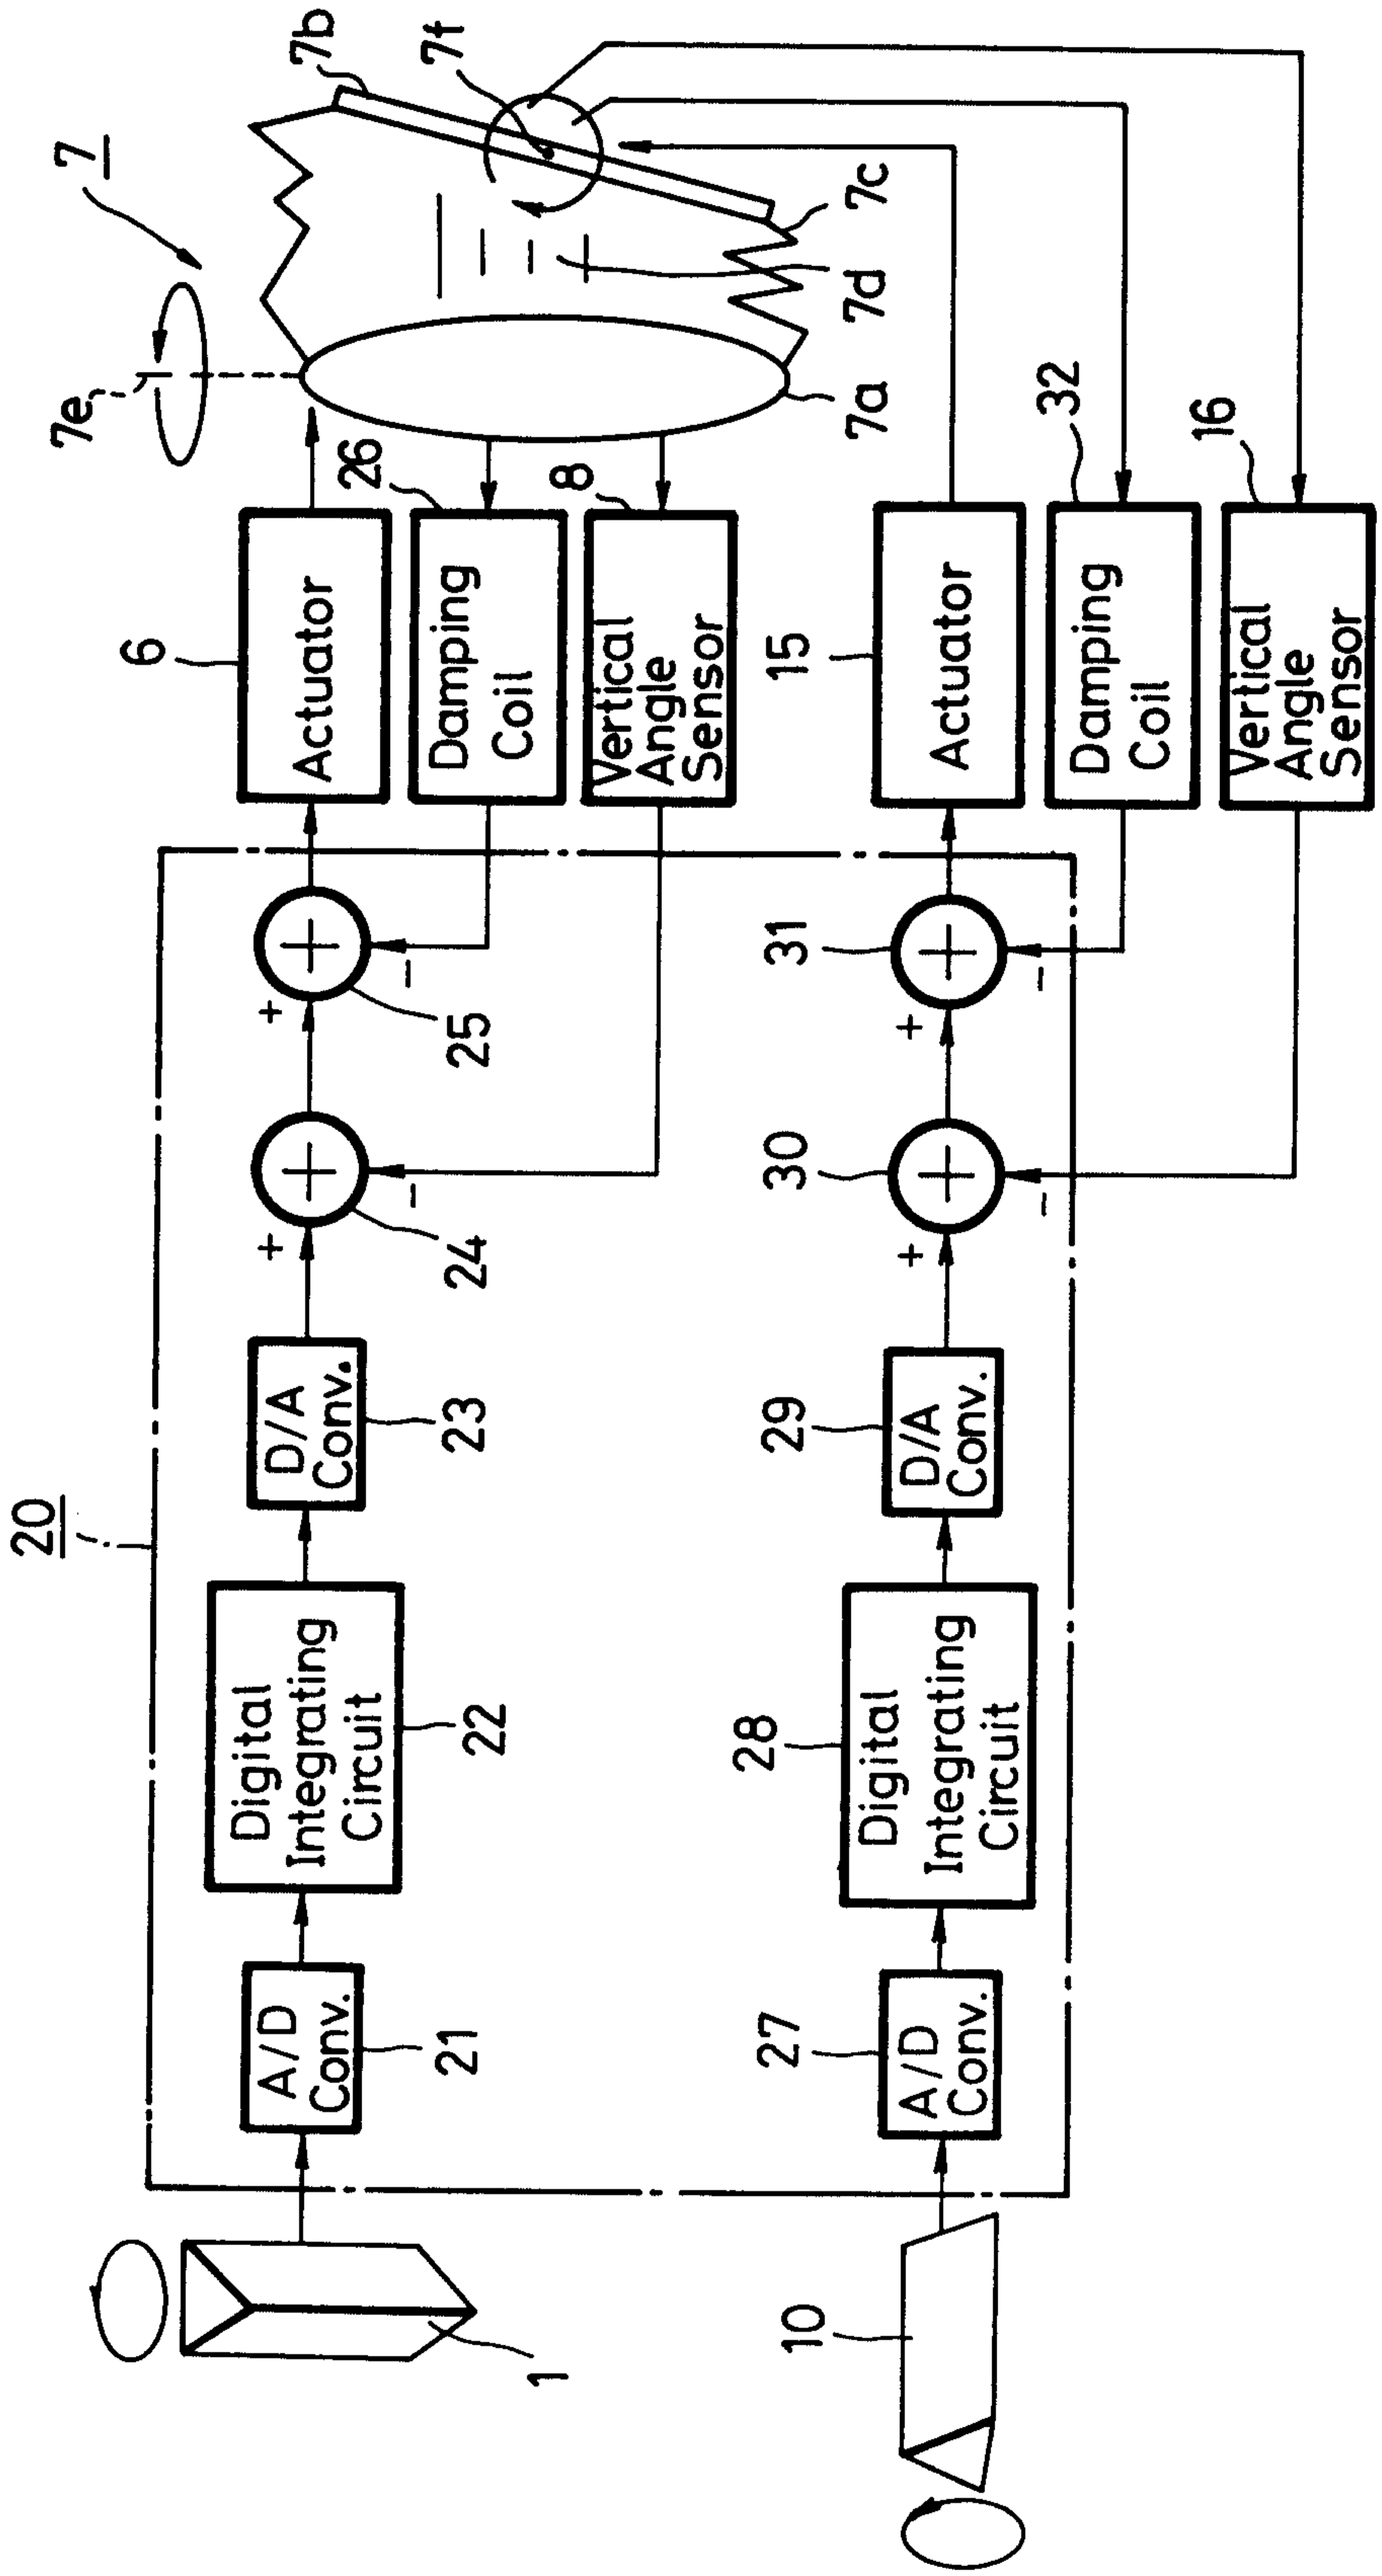


FIG. 10

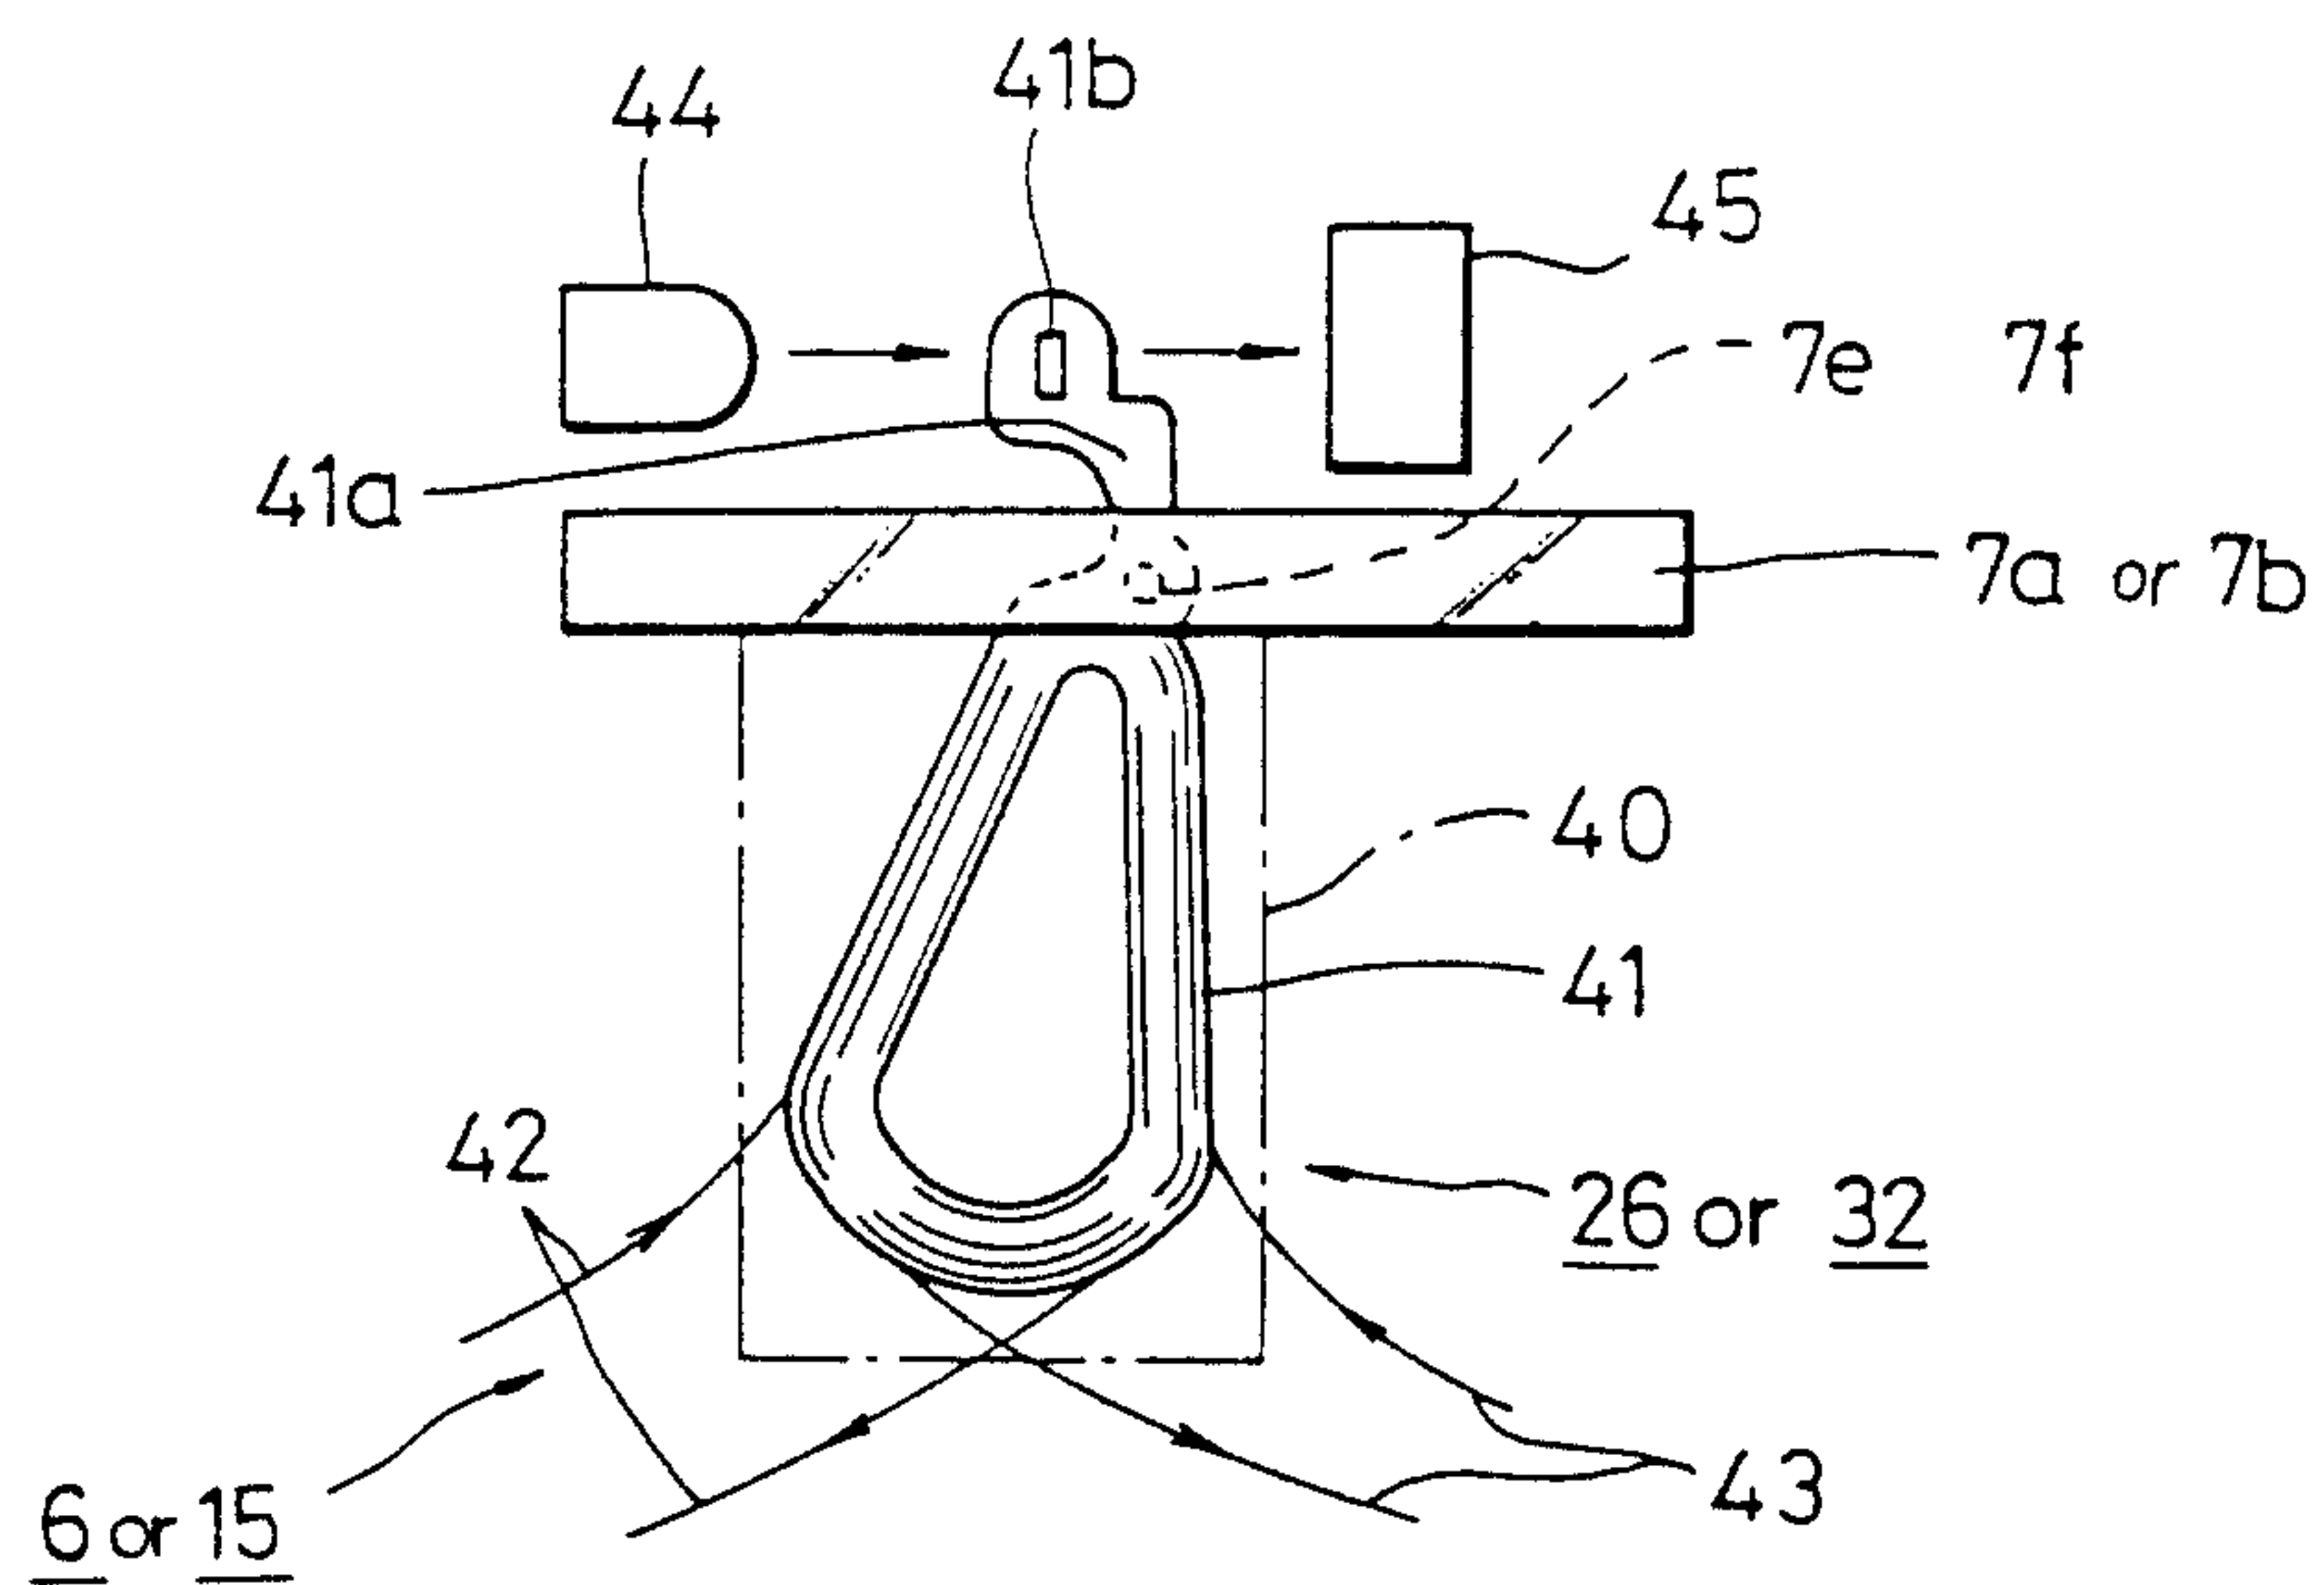


FIG. 11

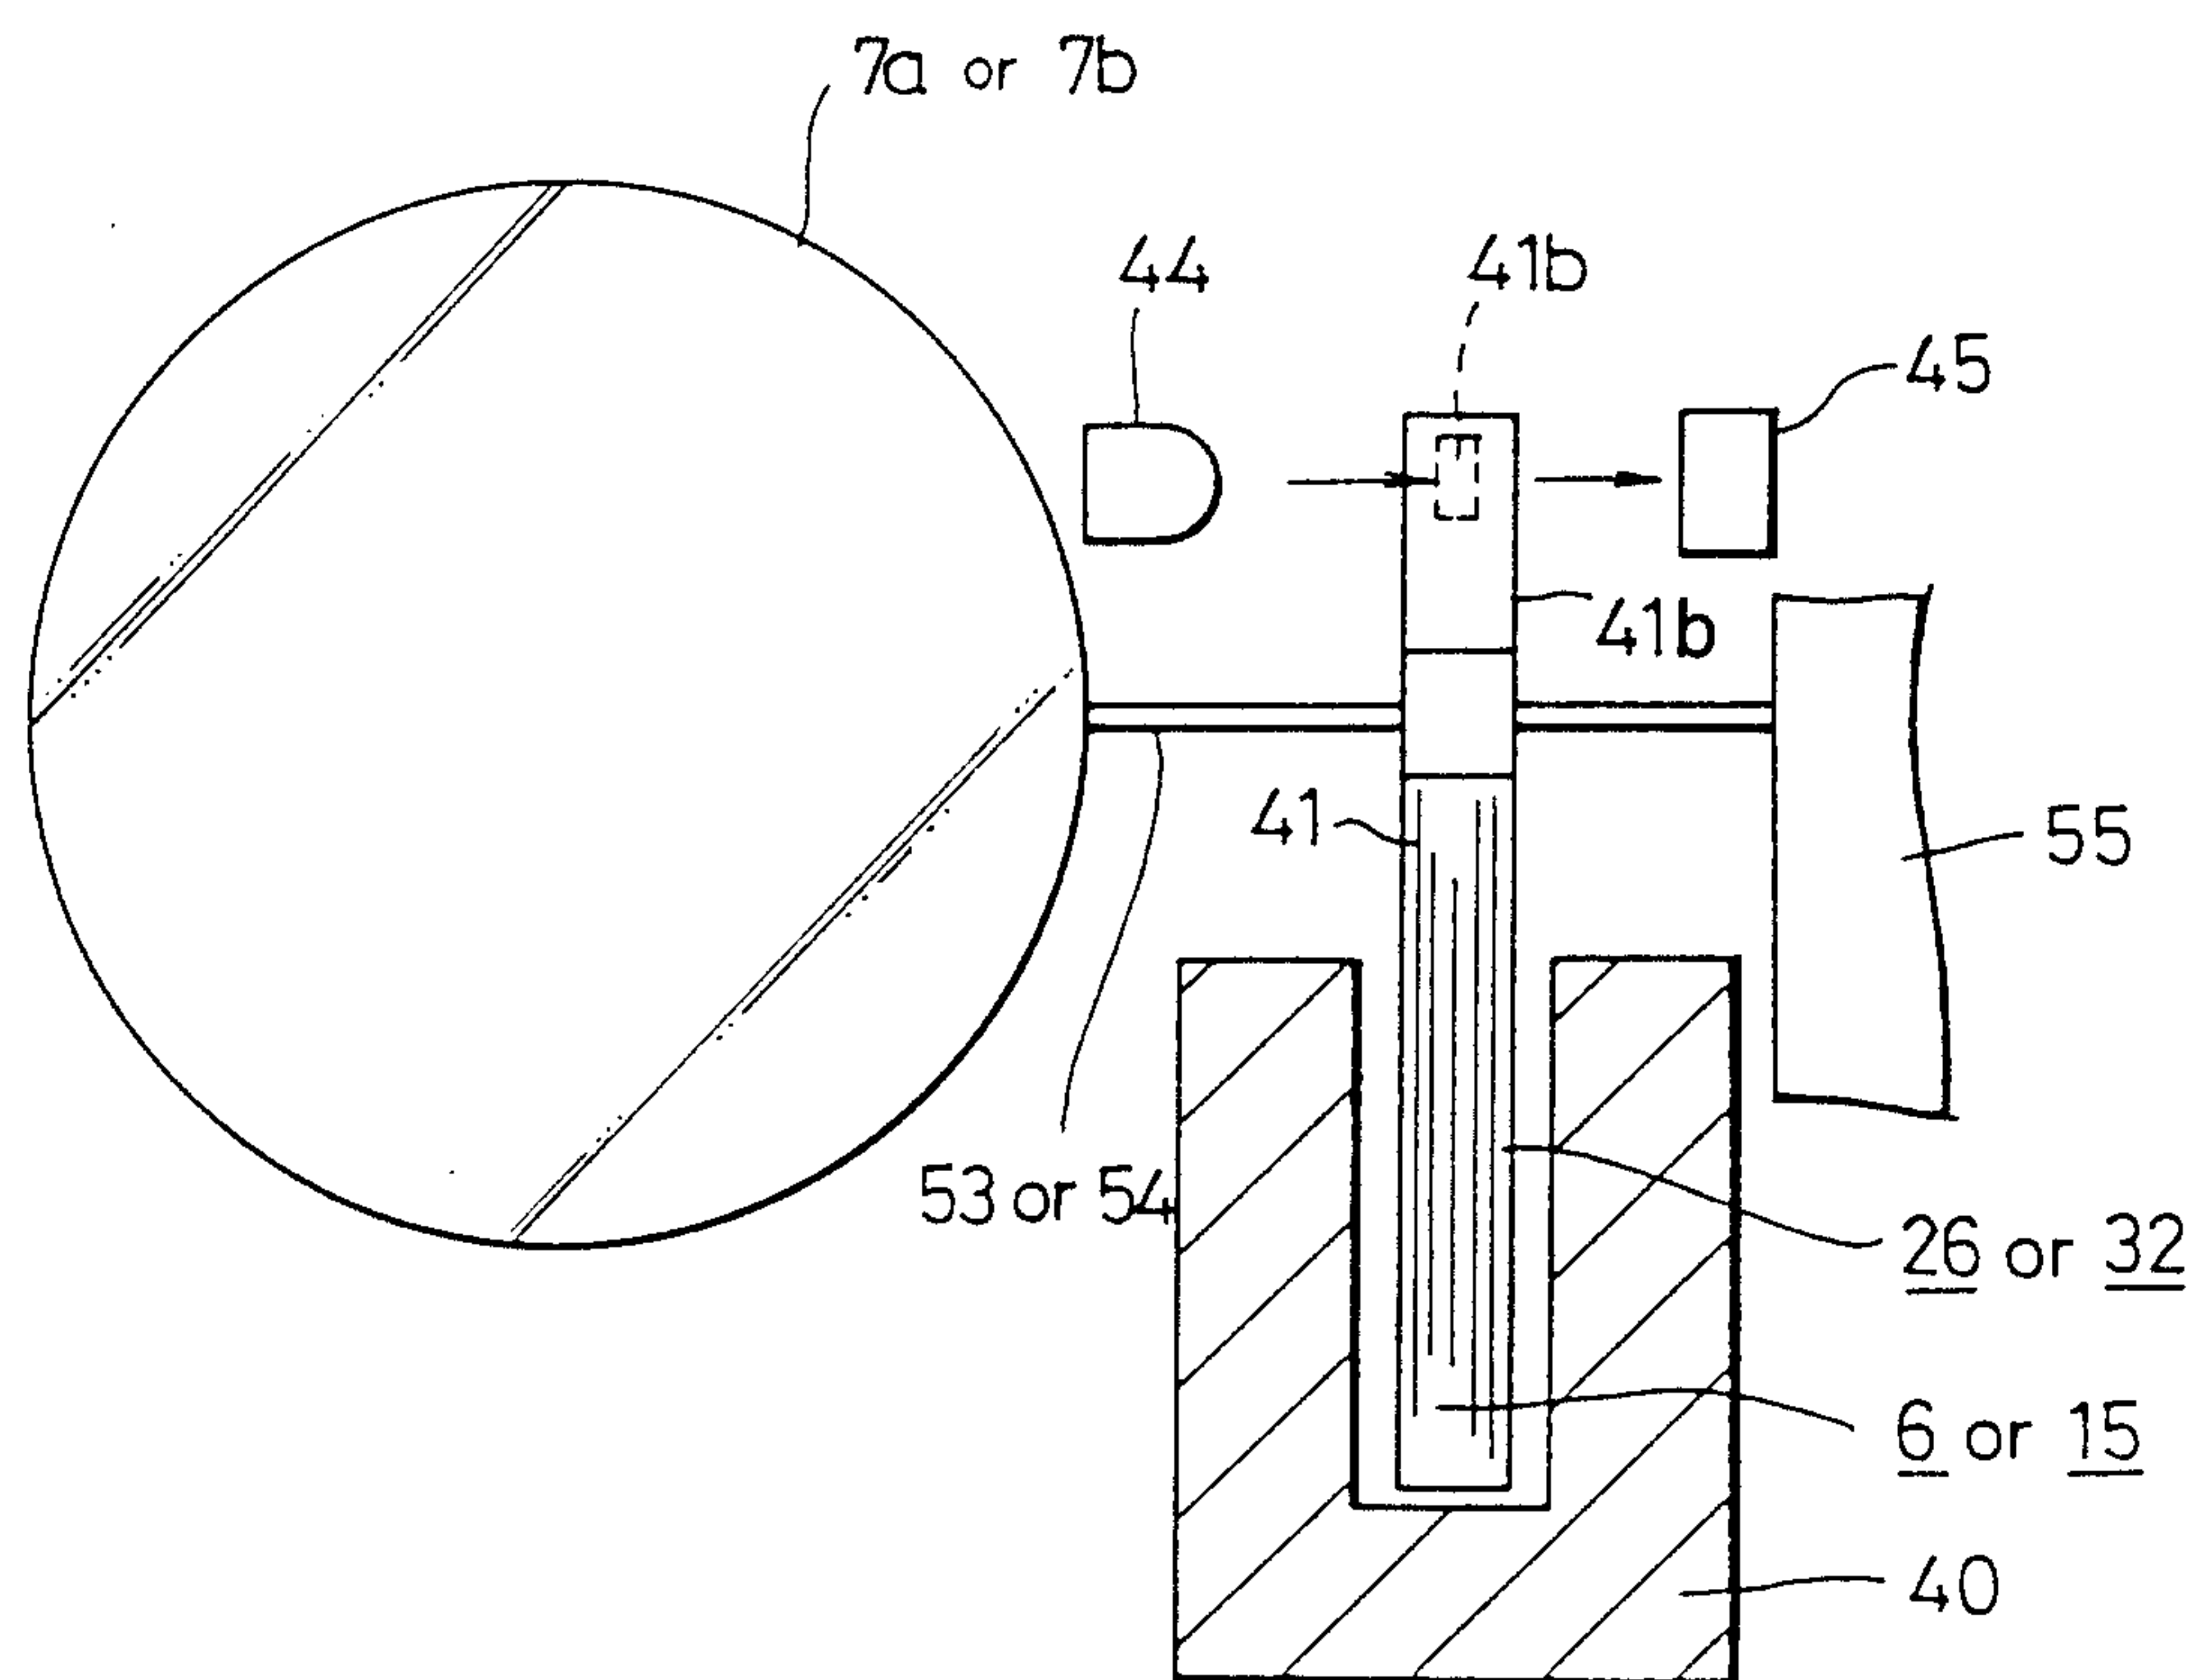


FIG. 12

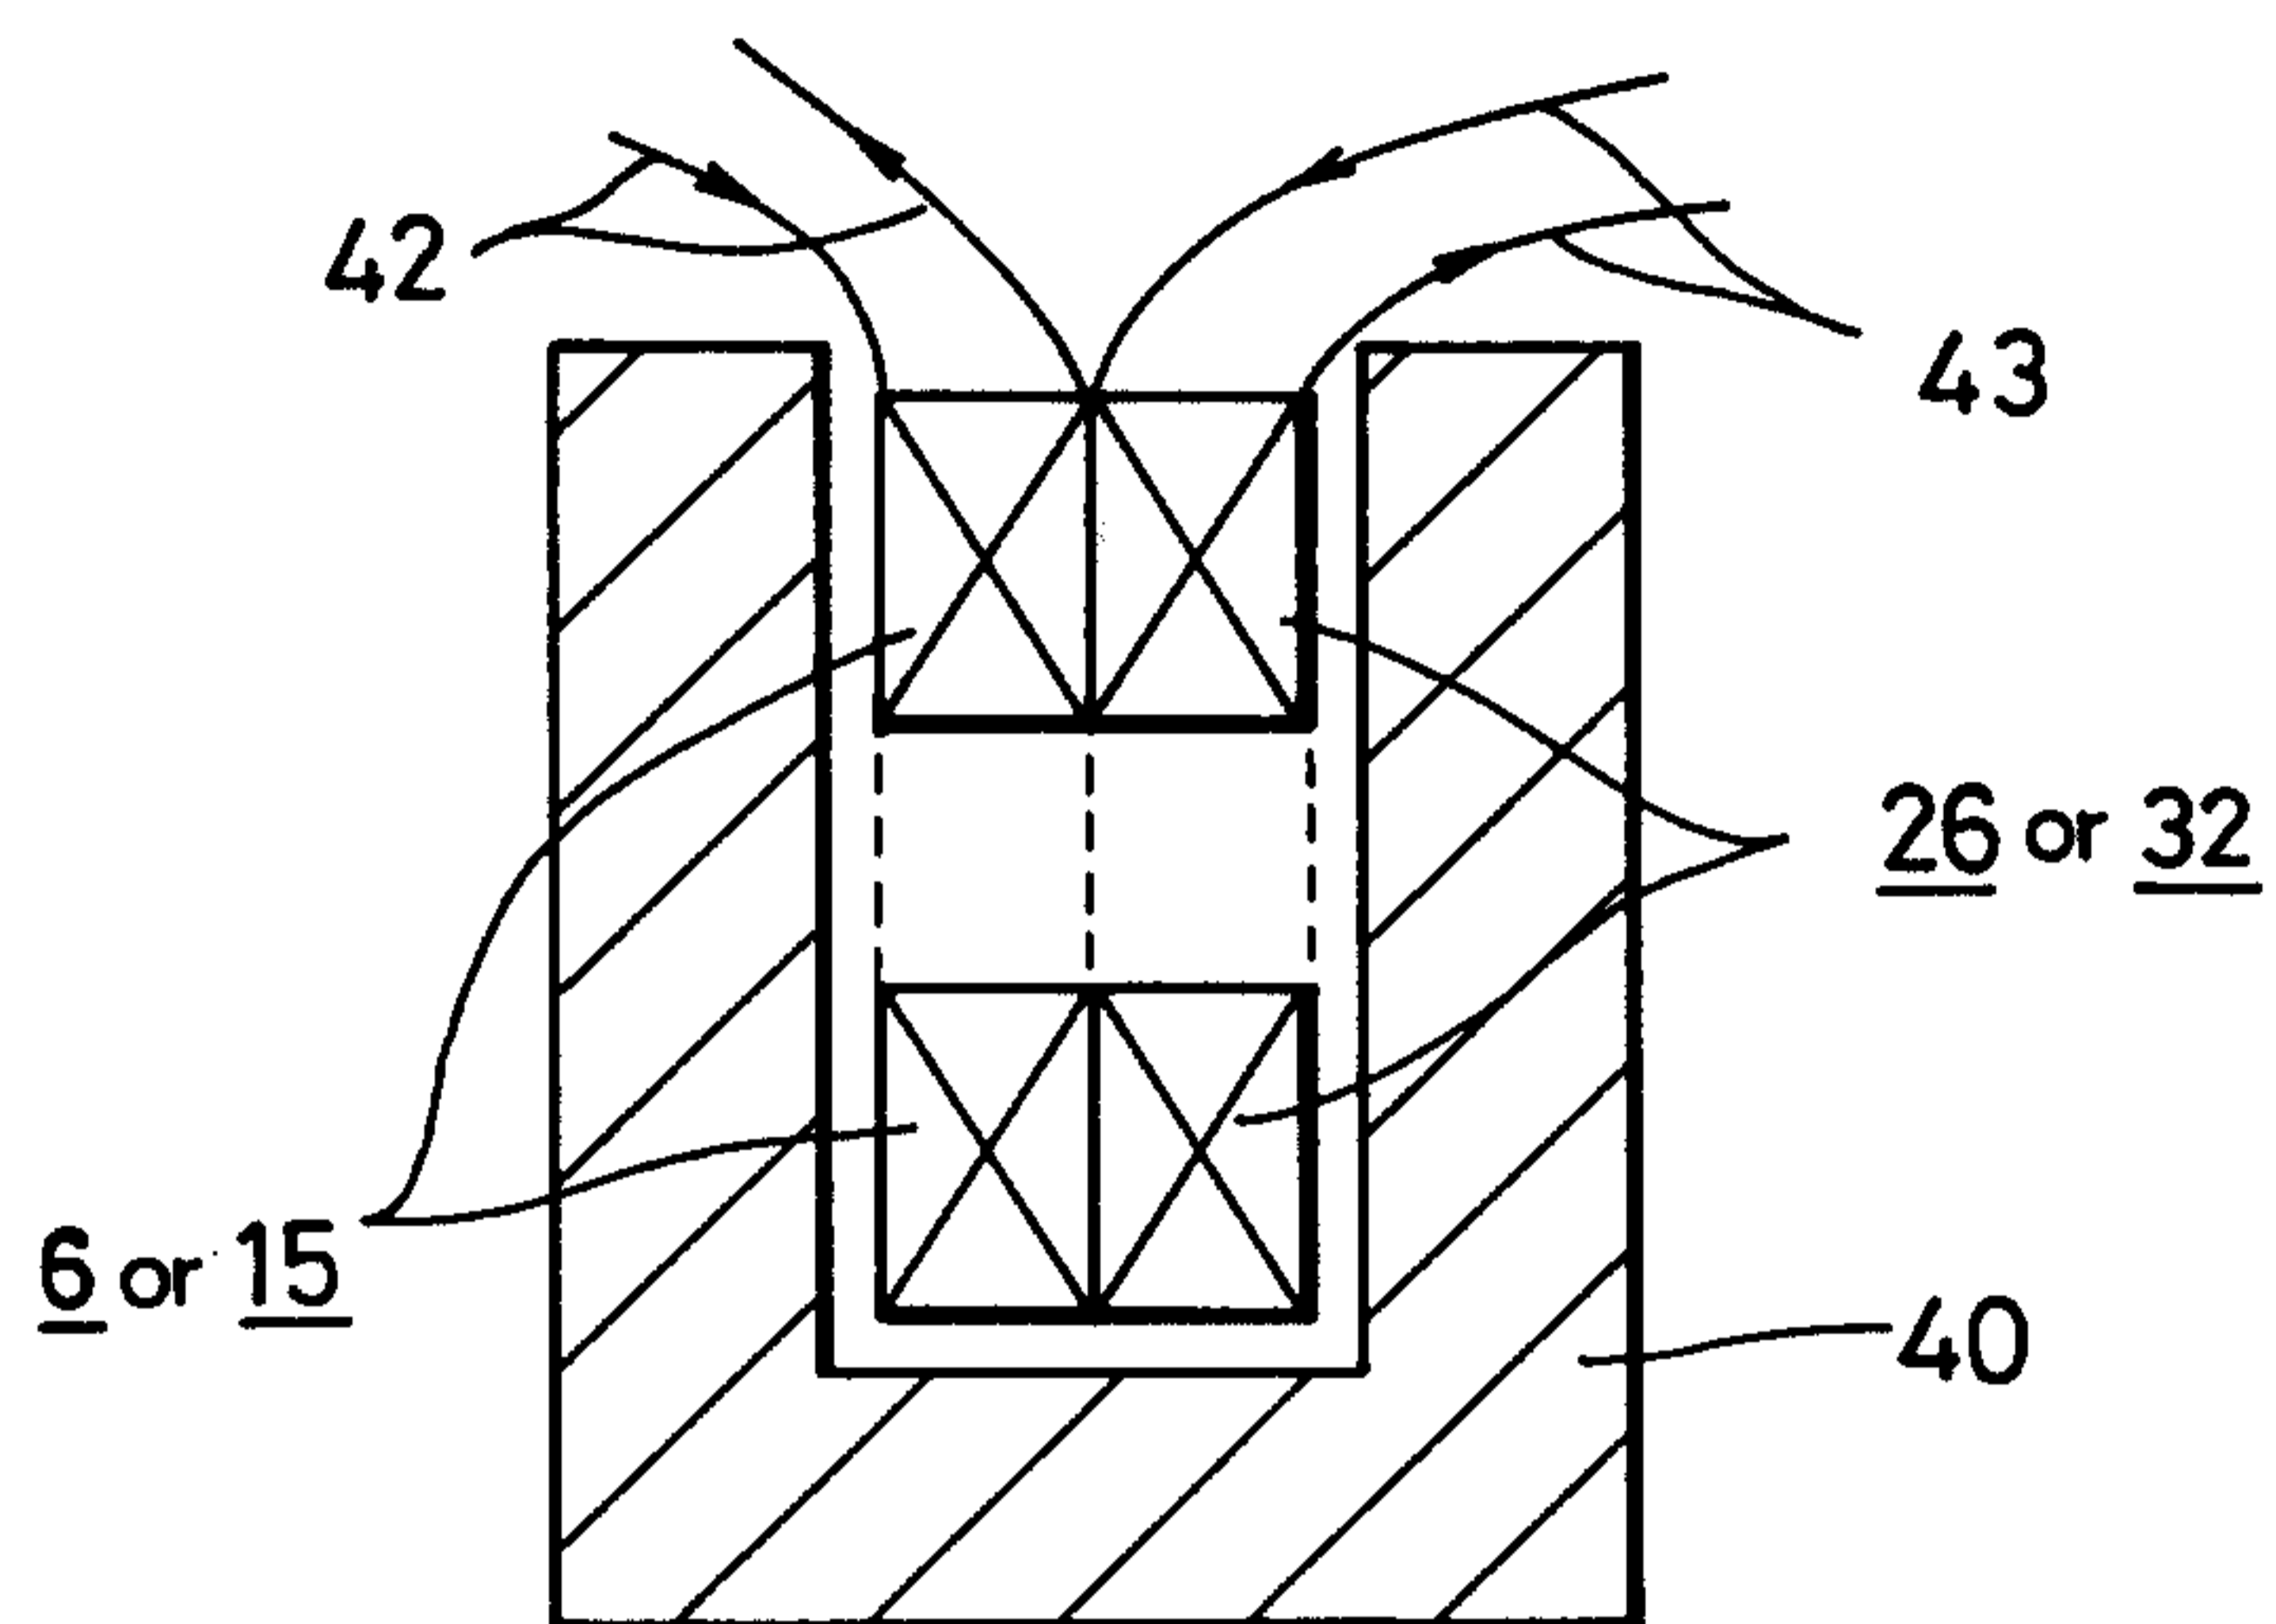


FIG. 13

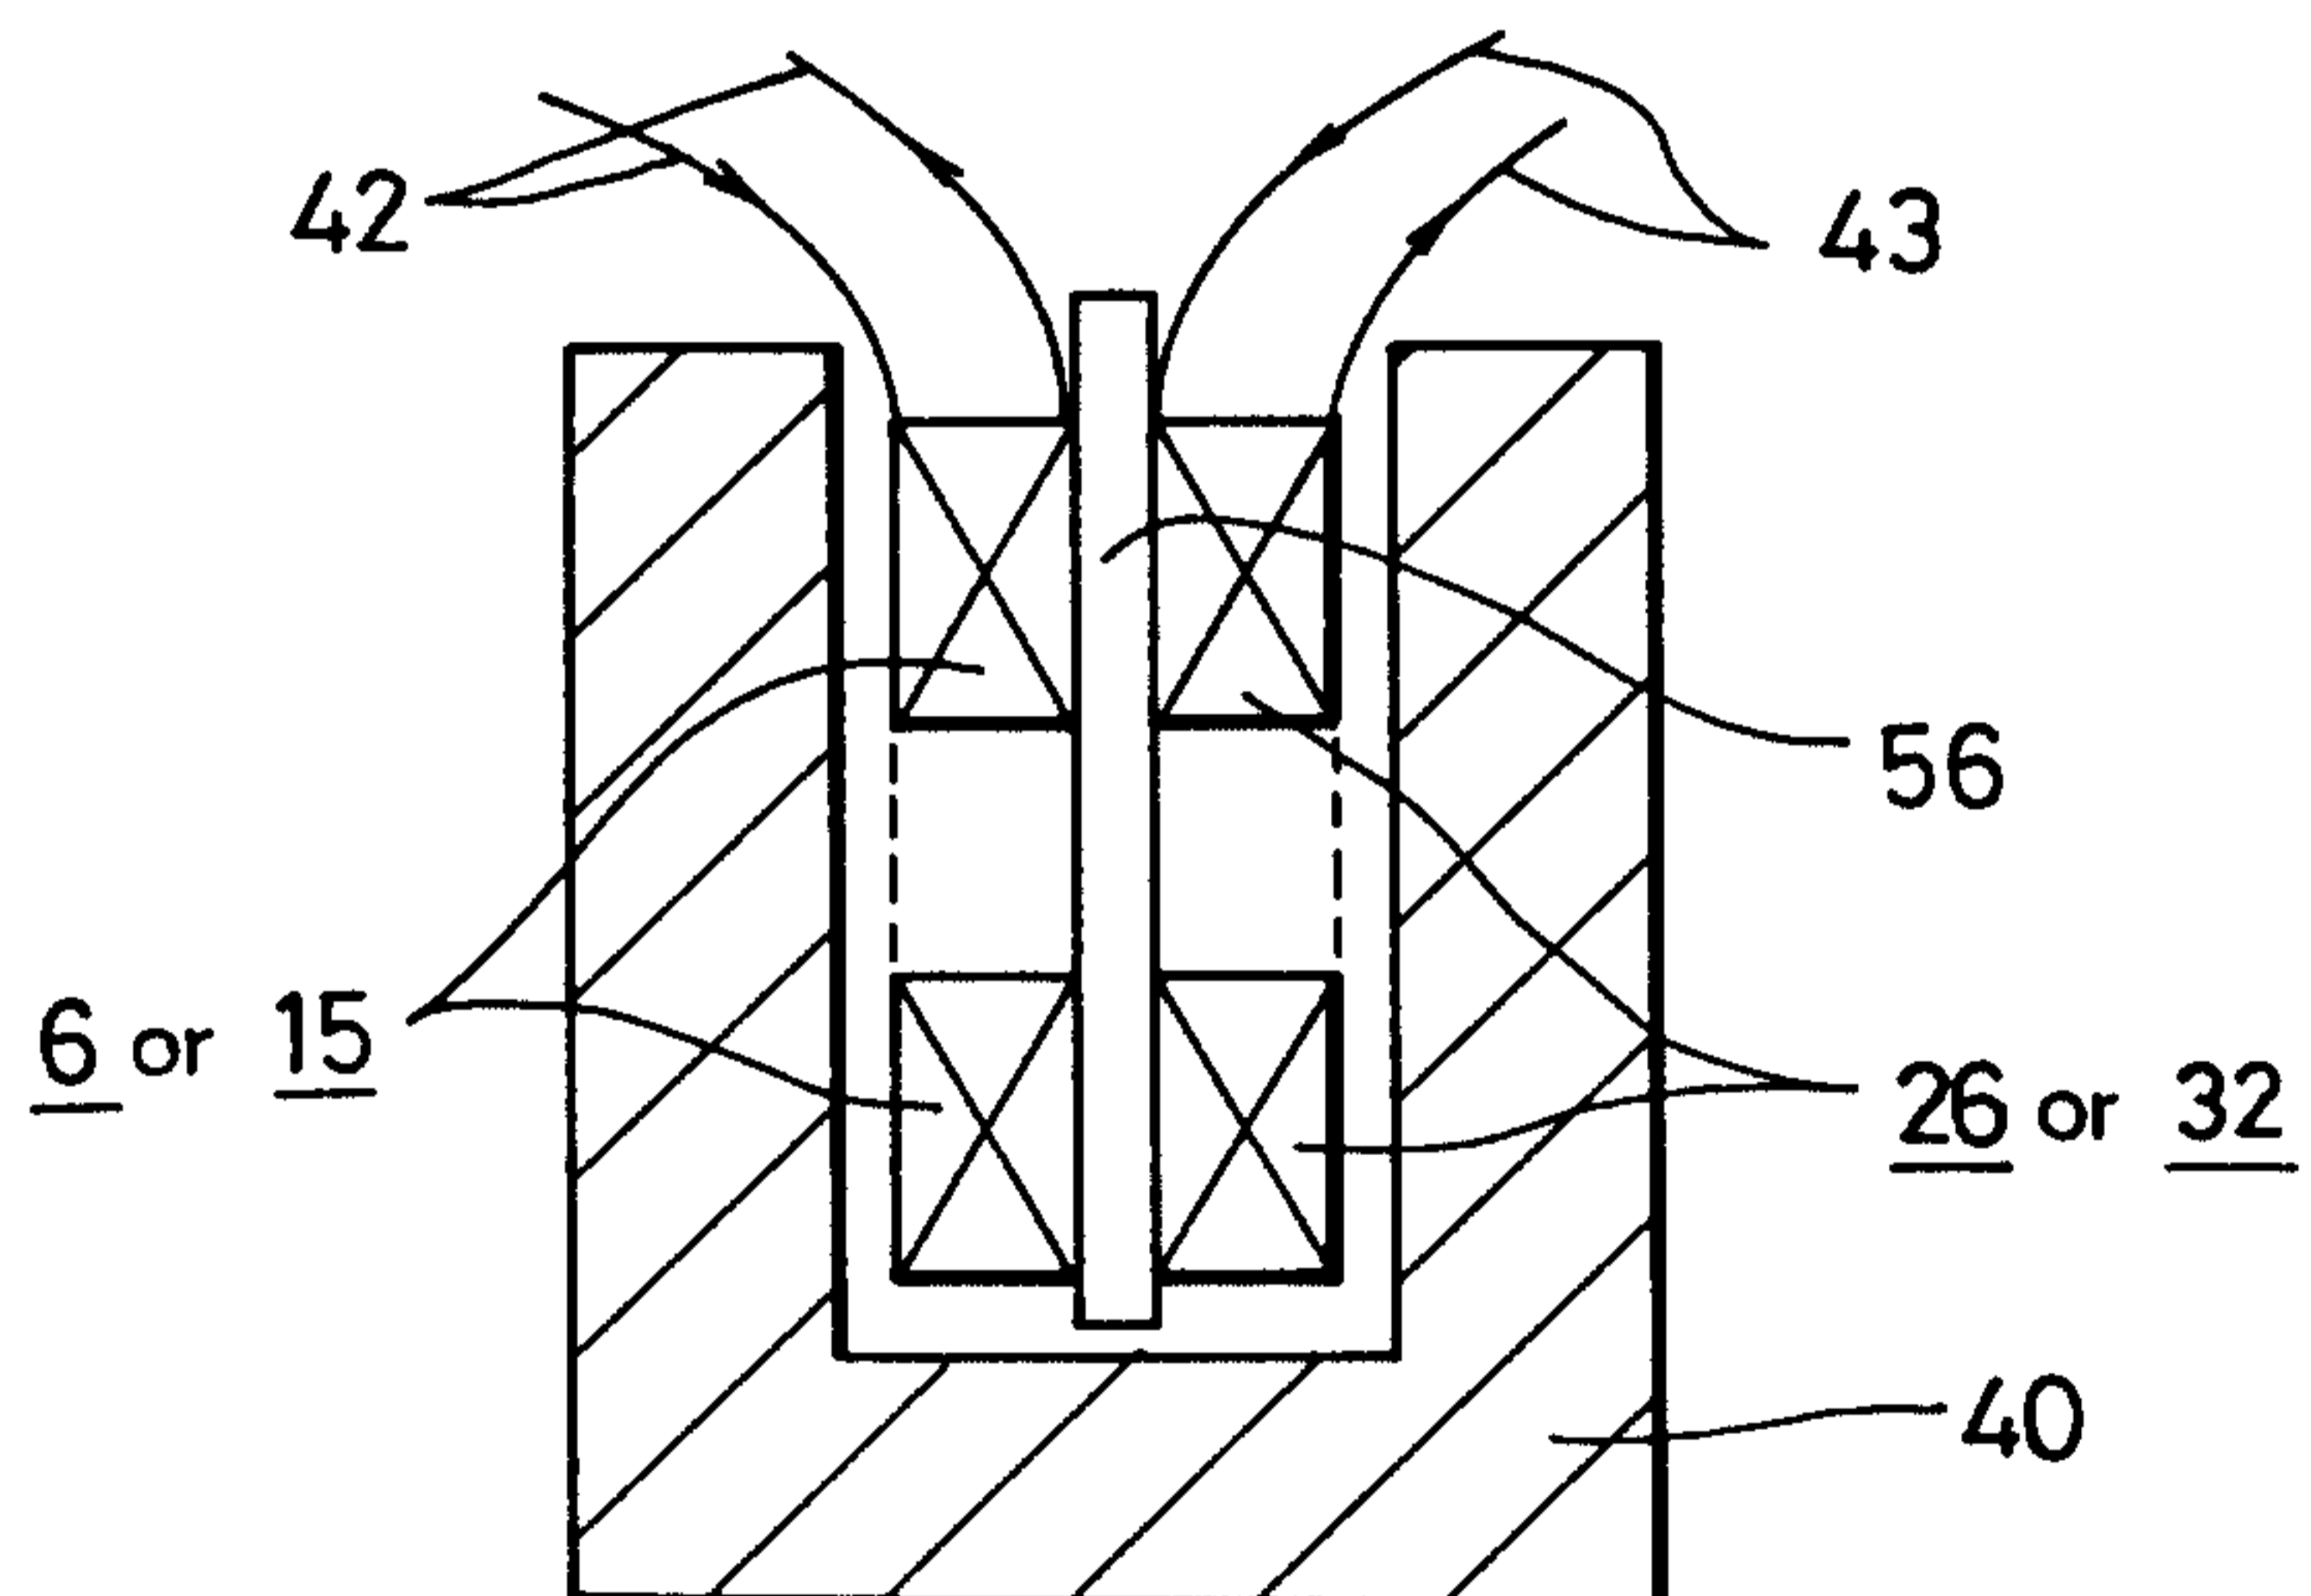


FIG. 14

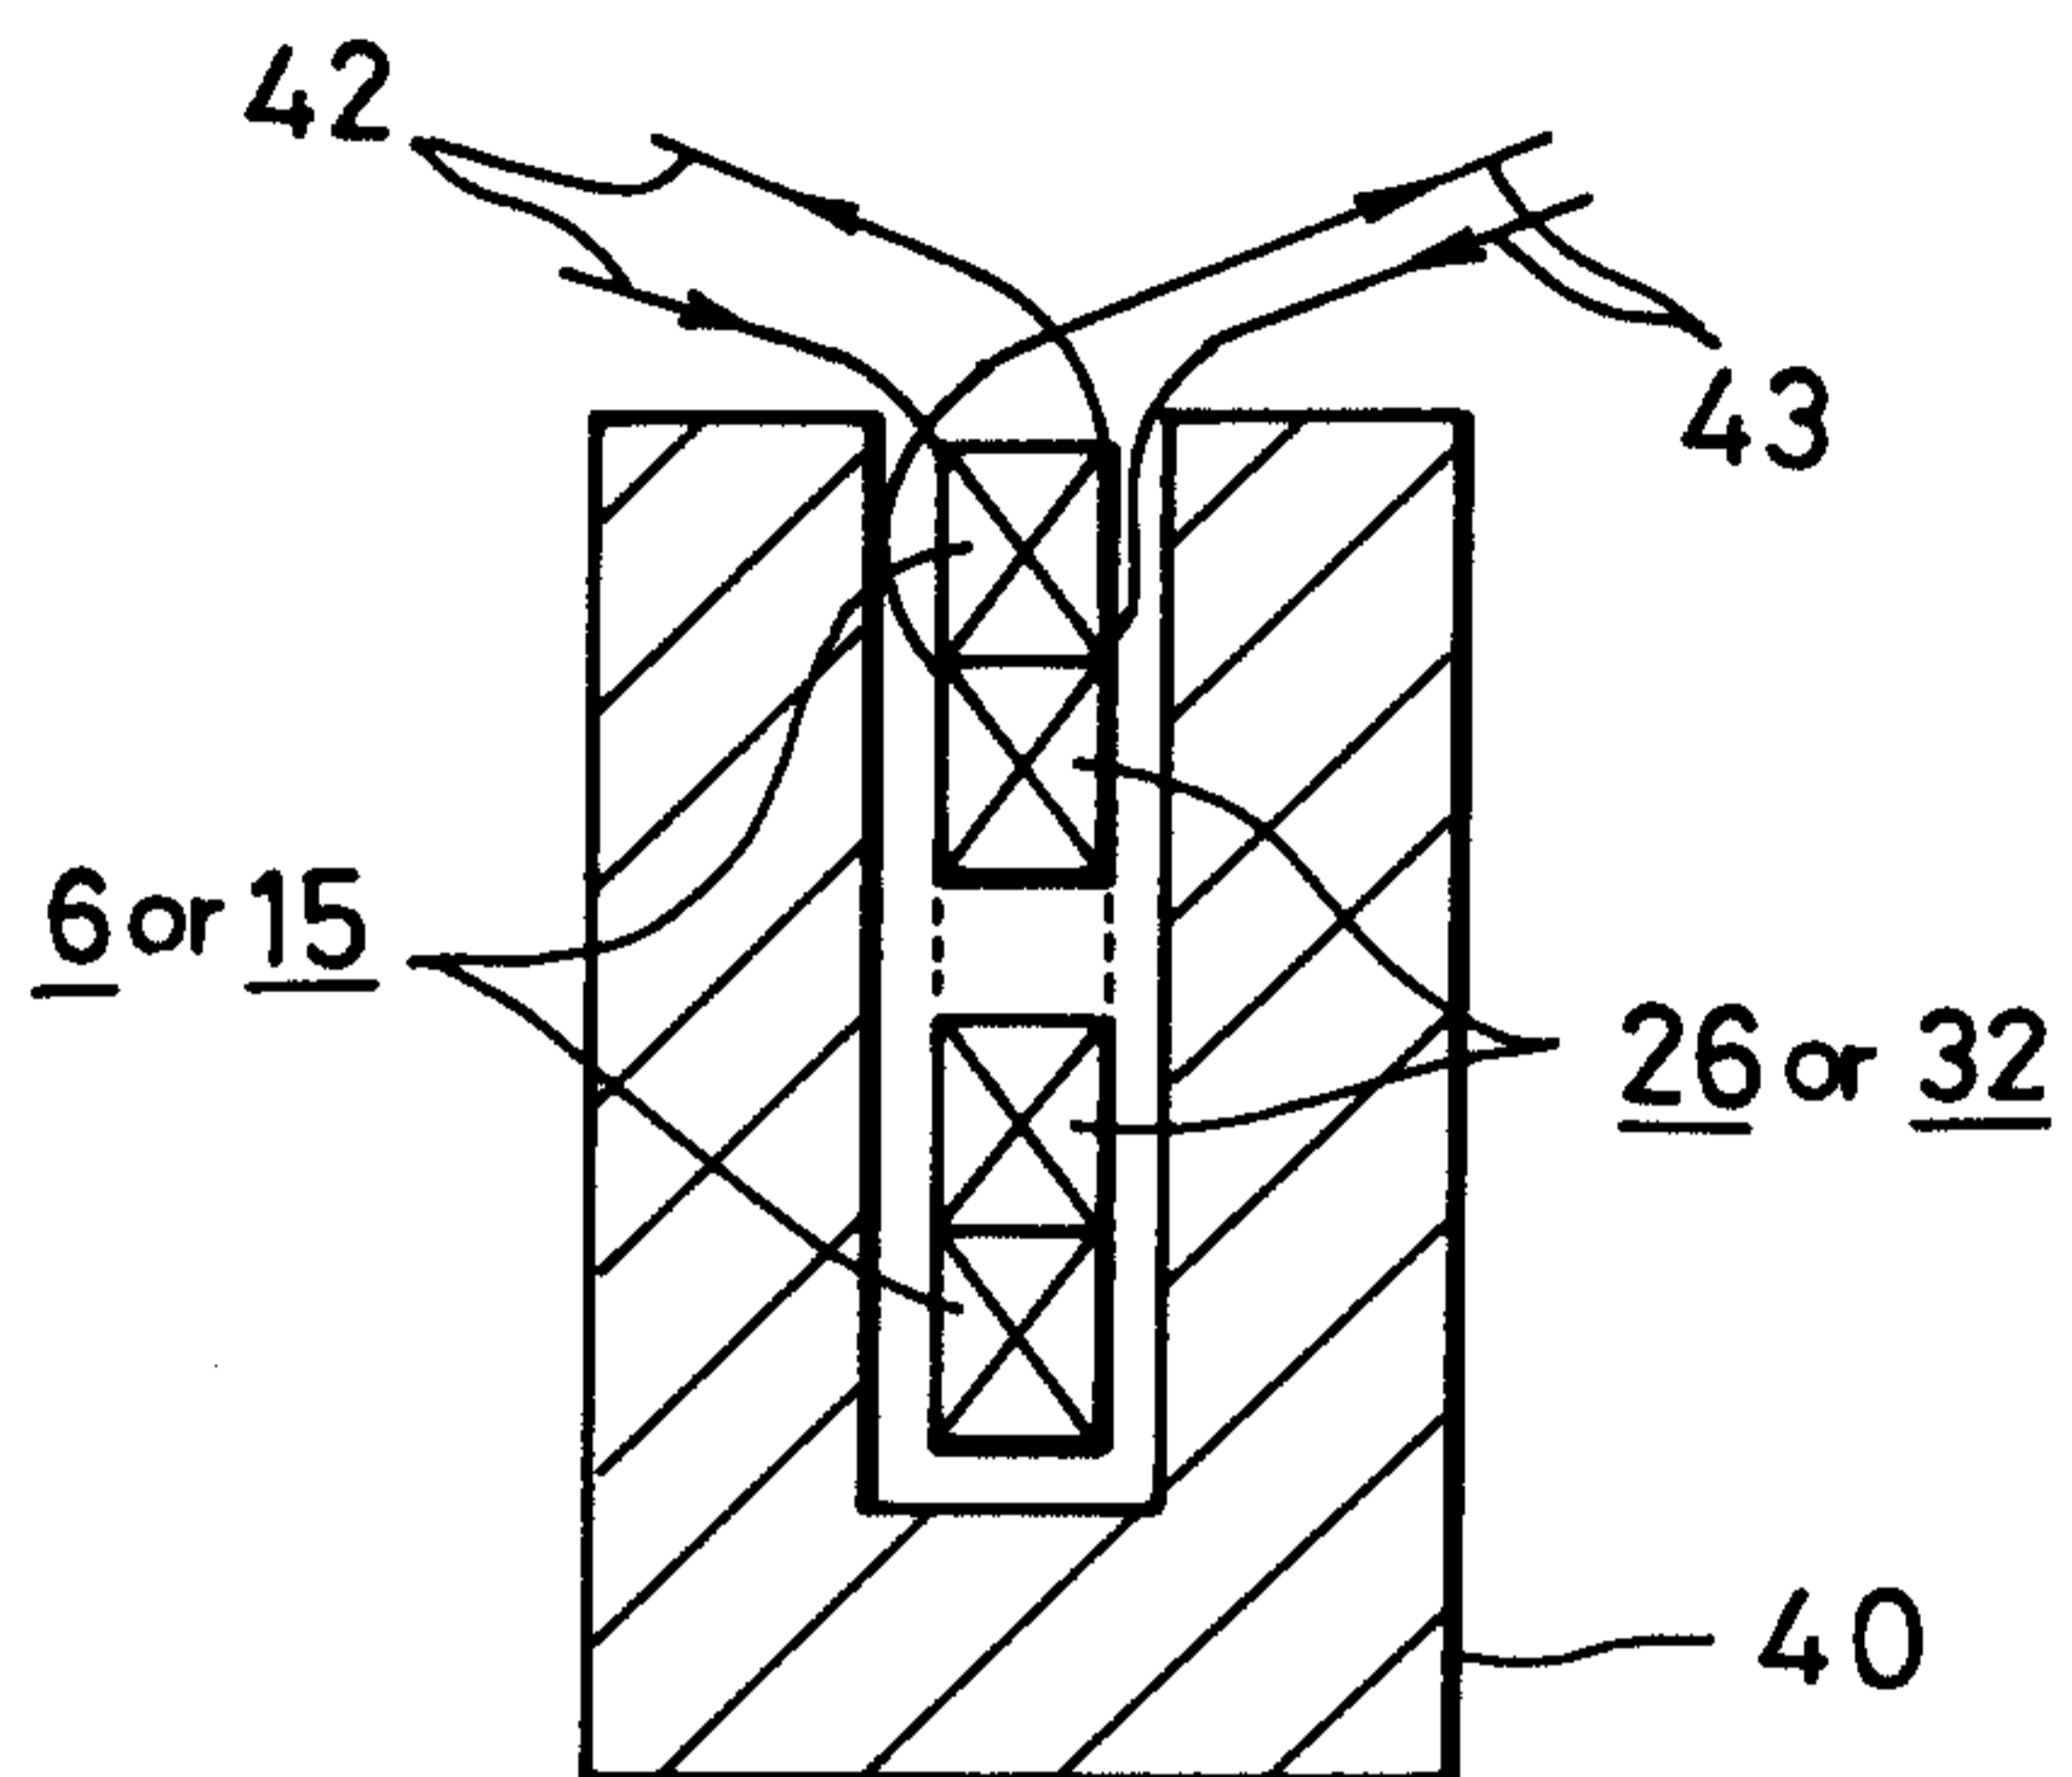


FIG. 15

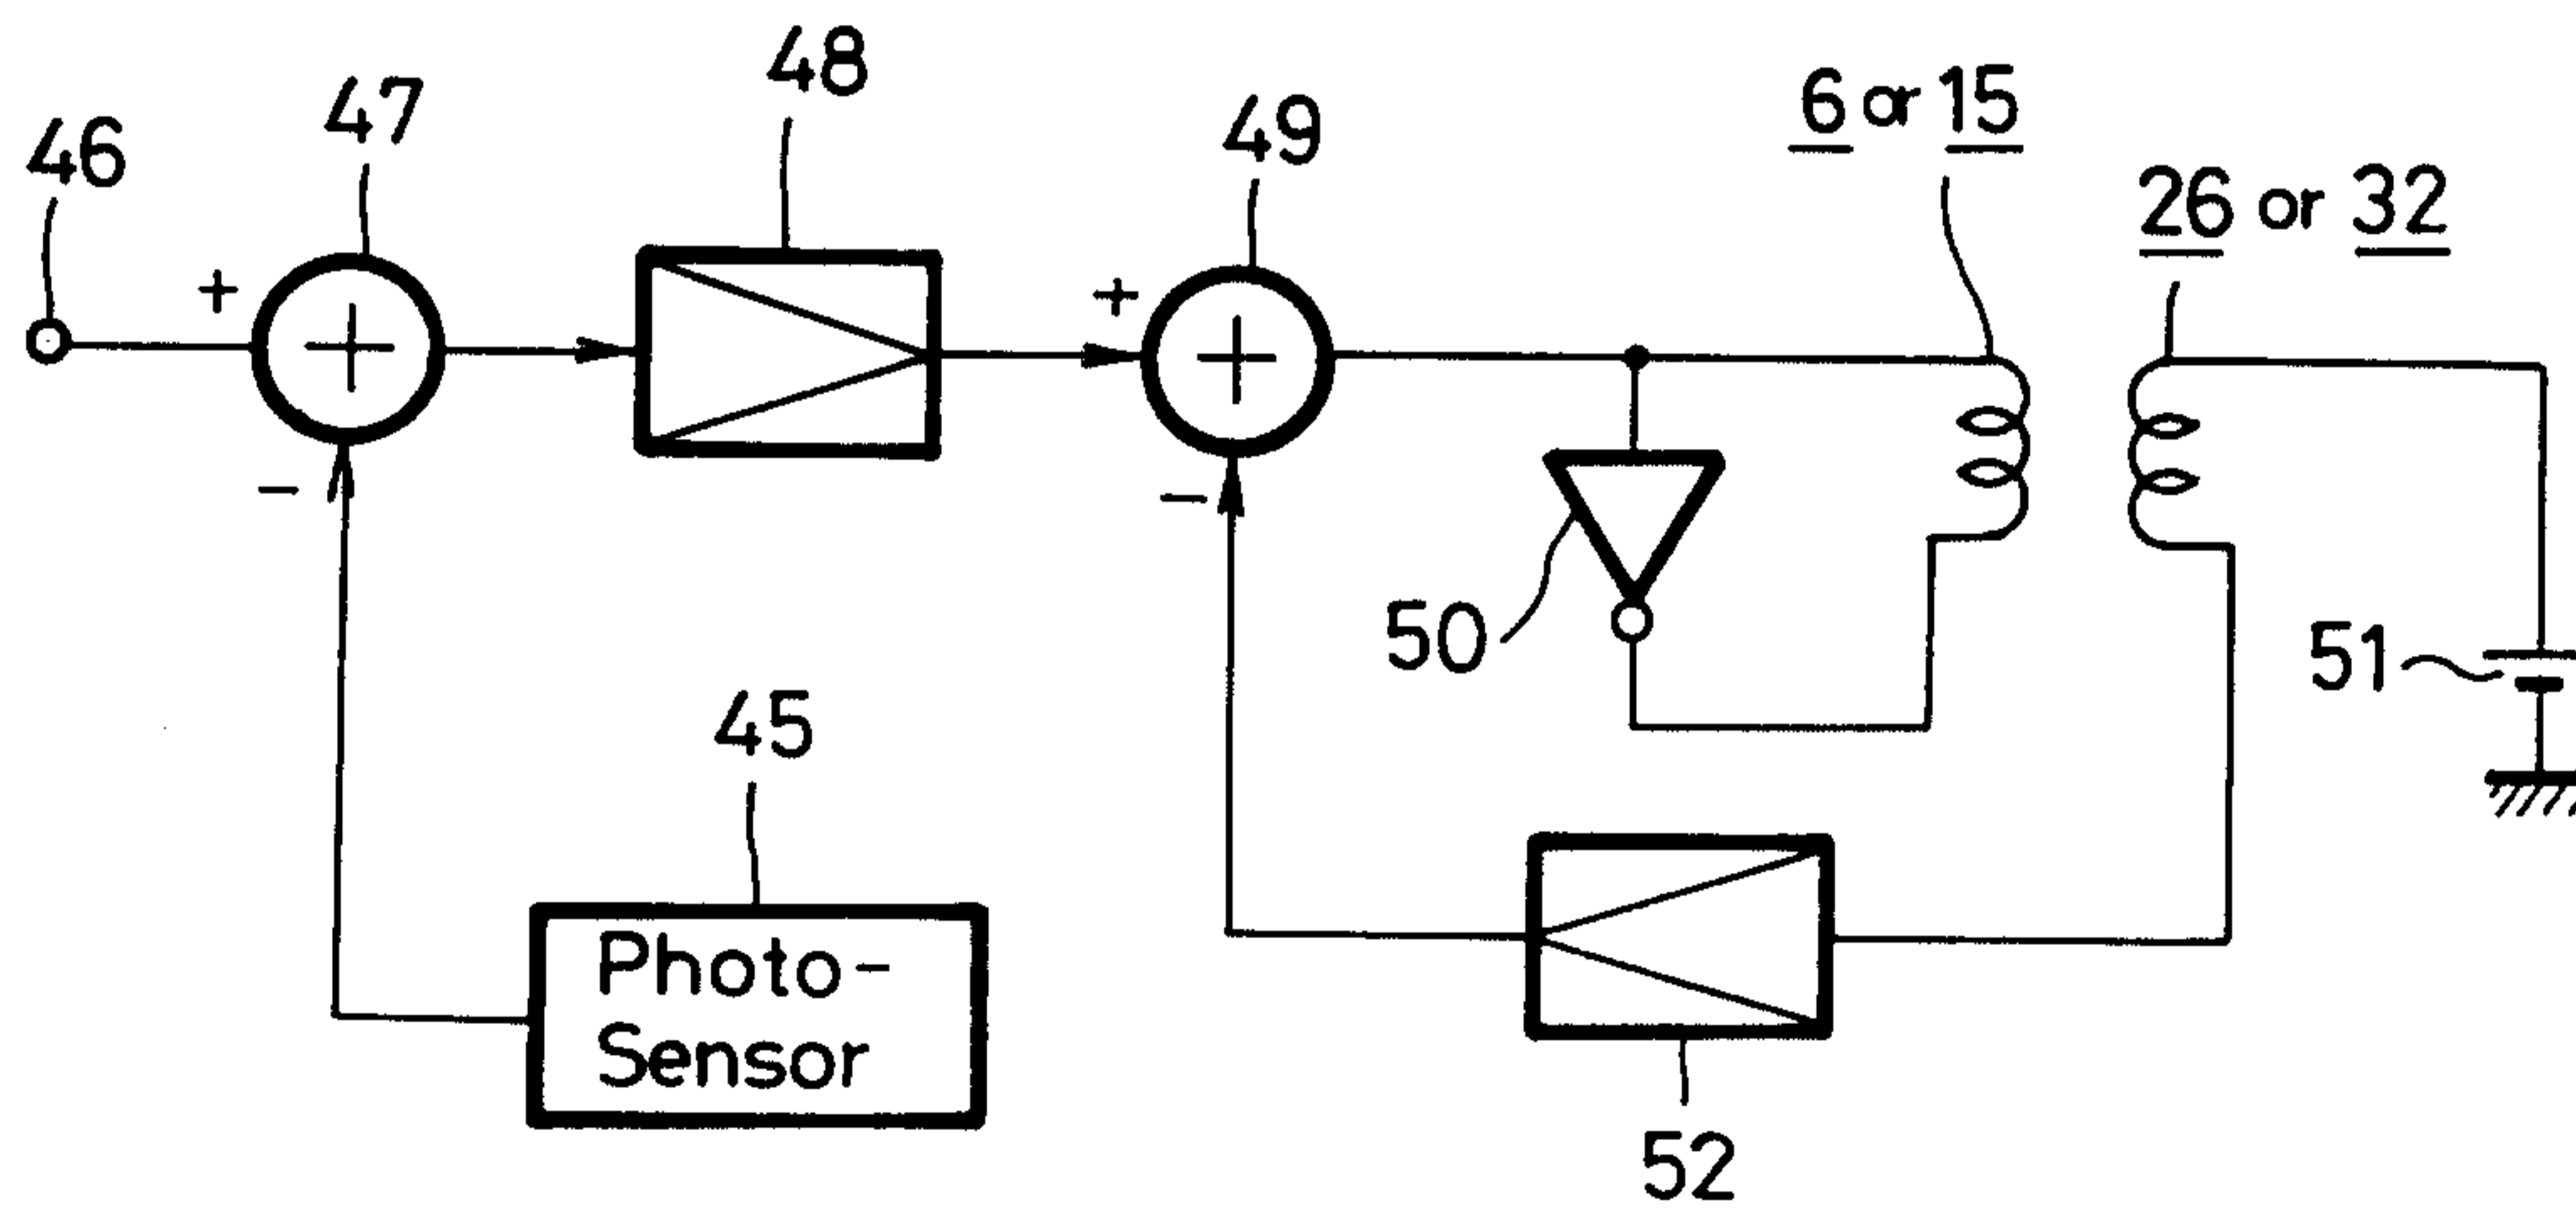


FIG. 16

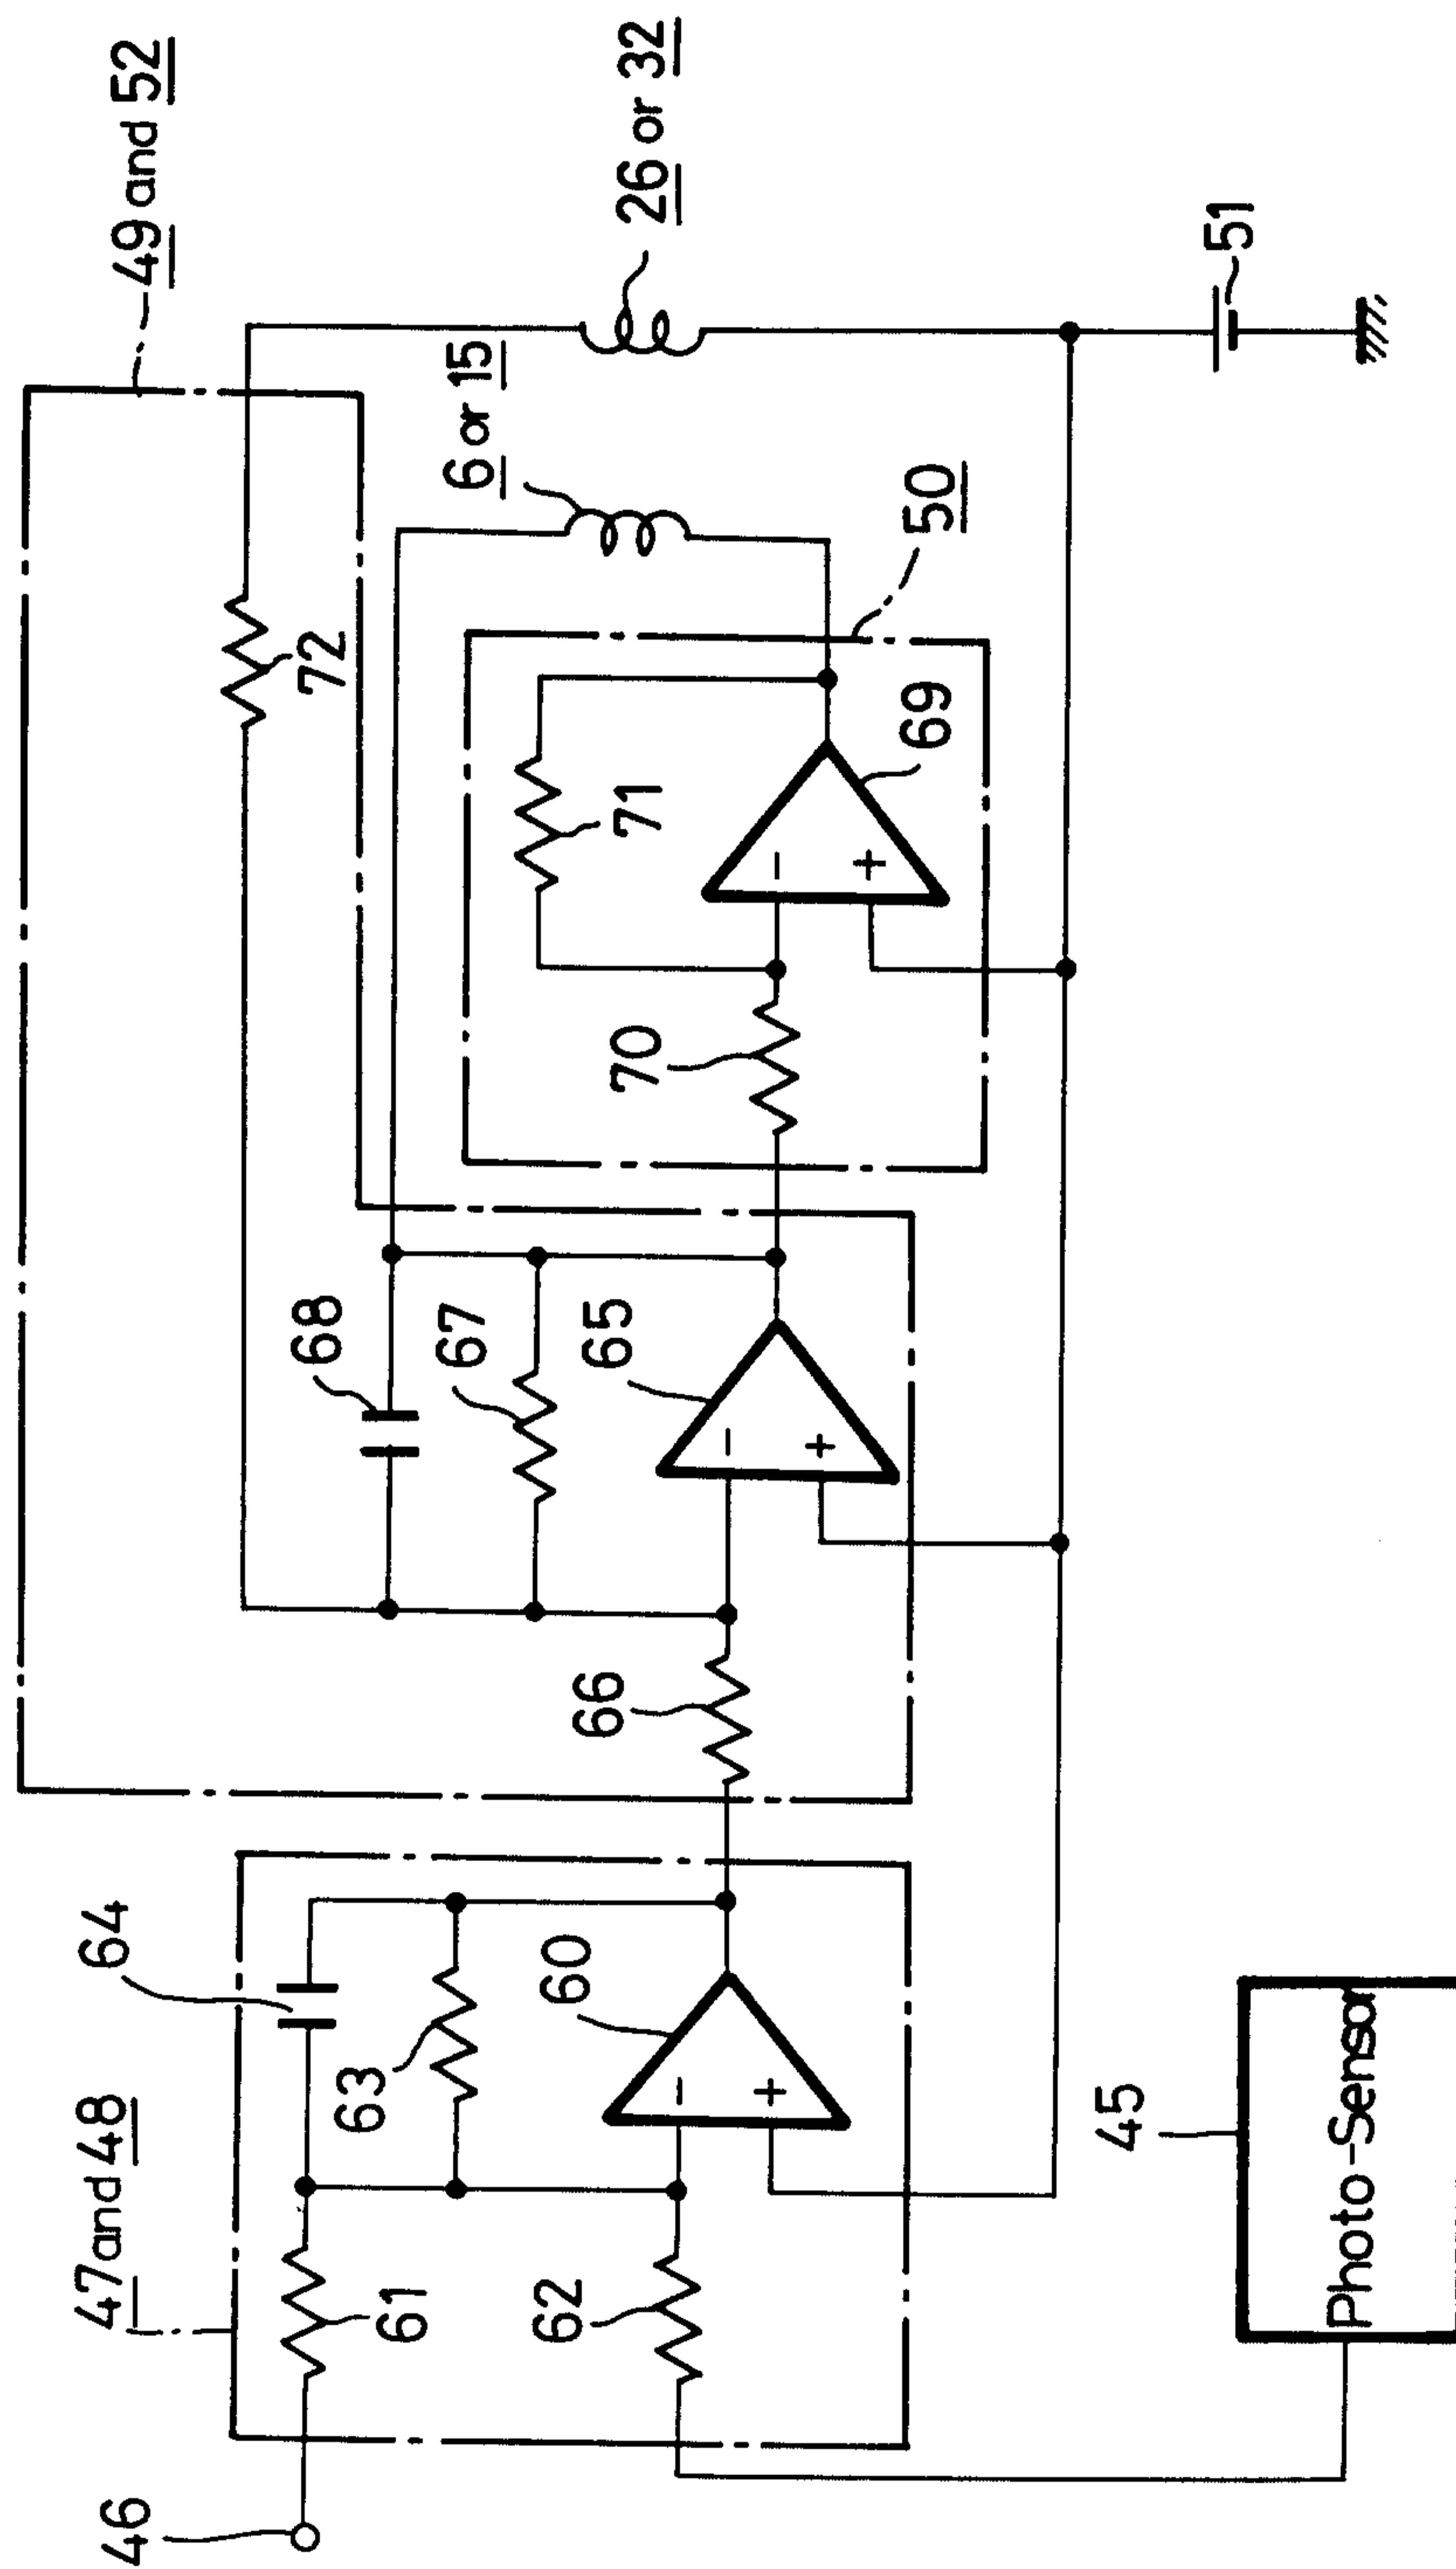


FIG. 17

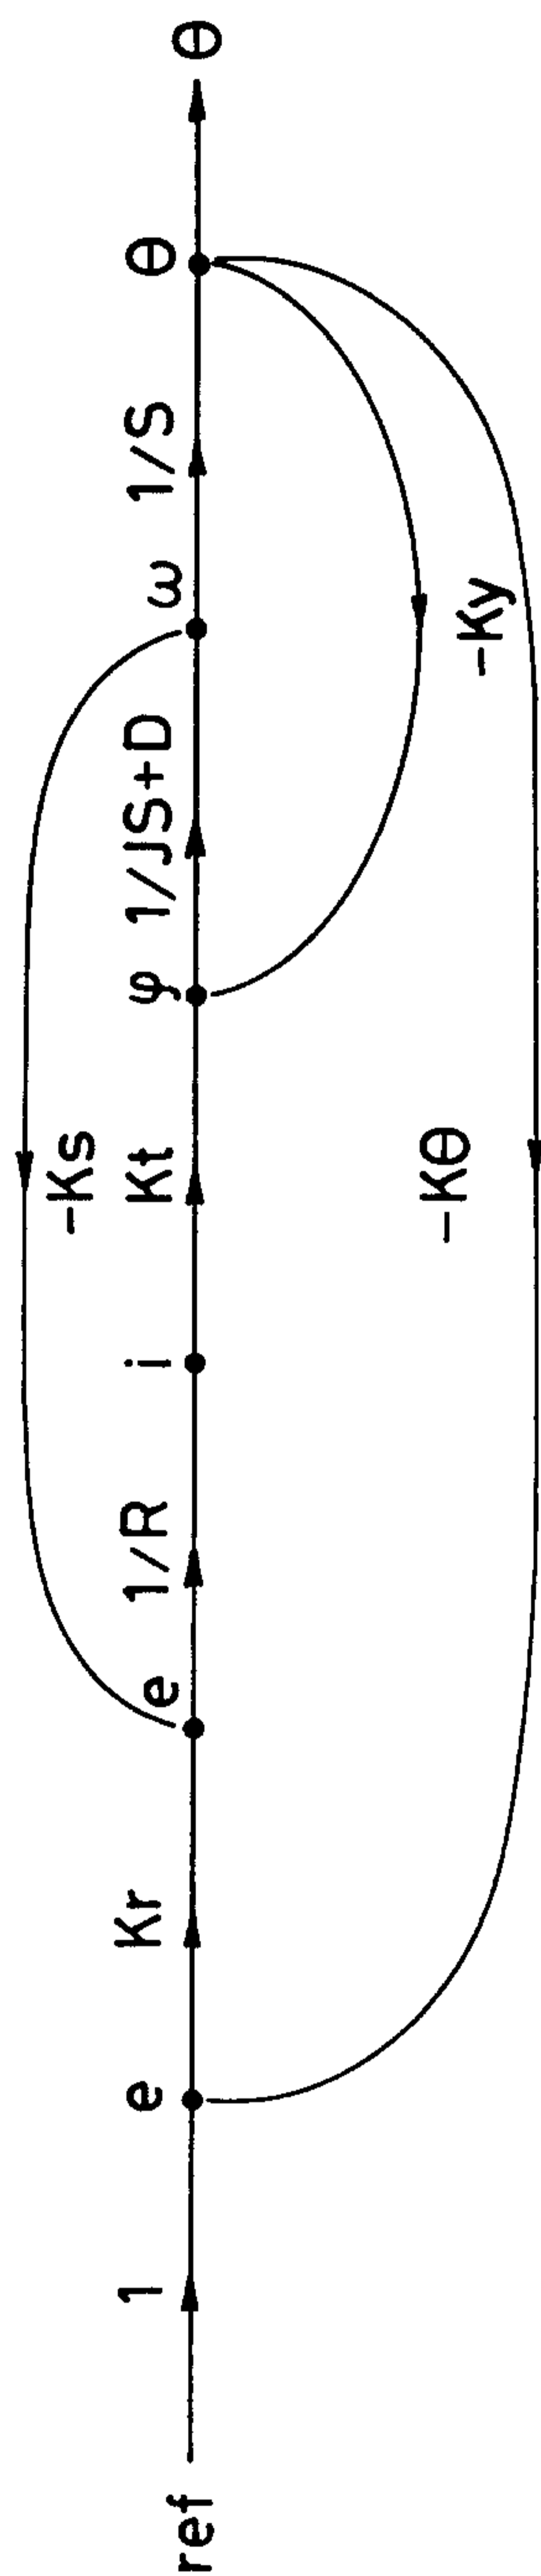


FIG. 18

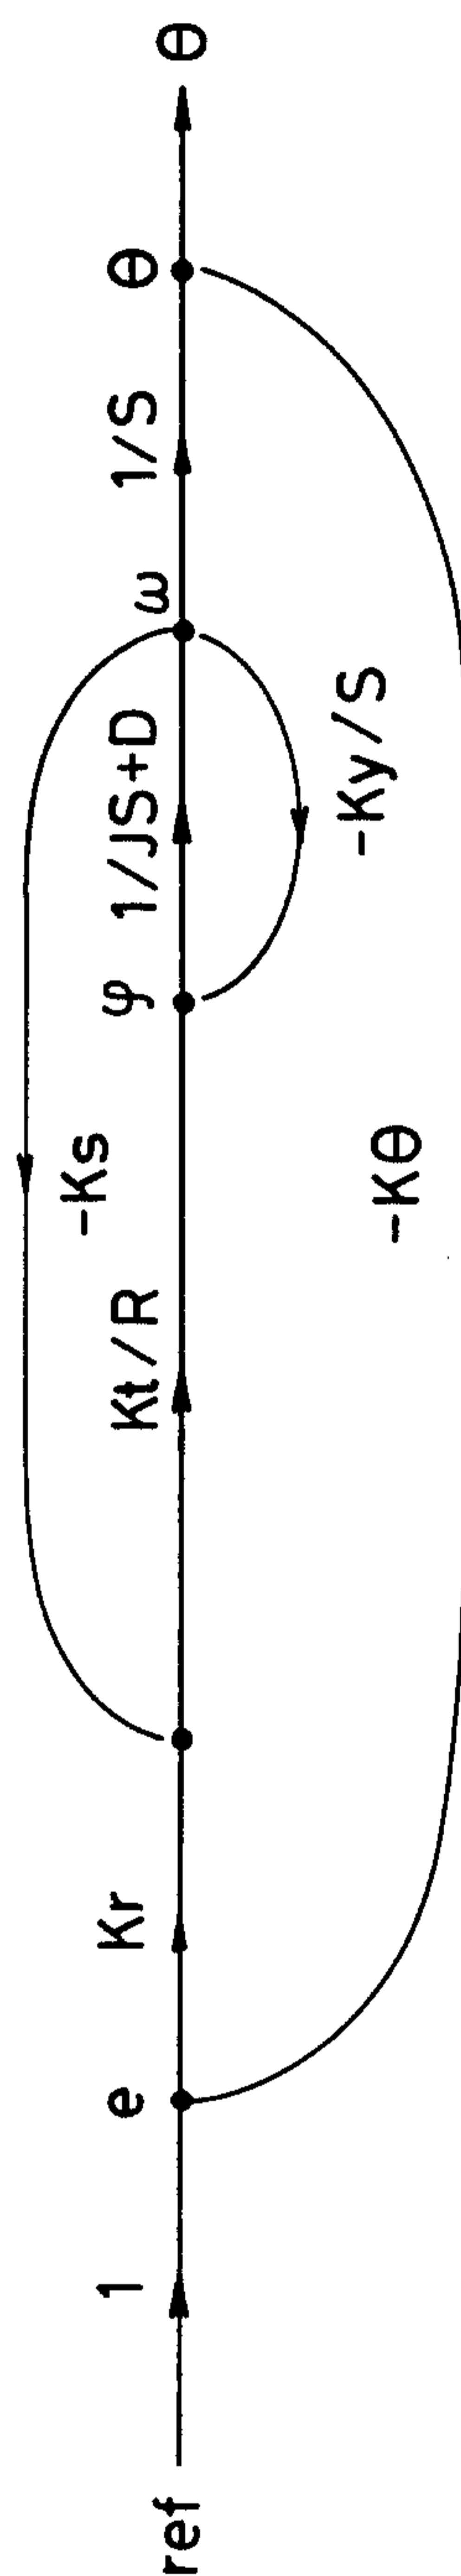


FIG. 19

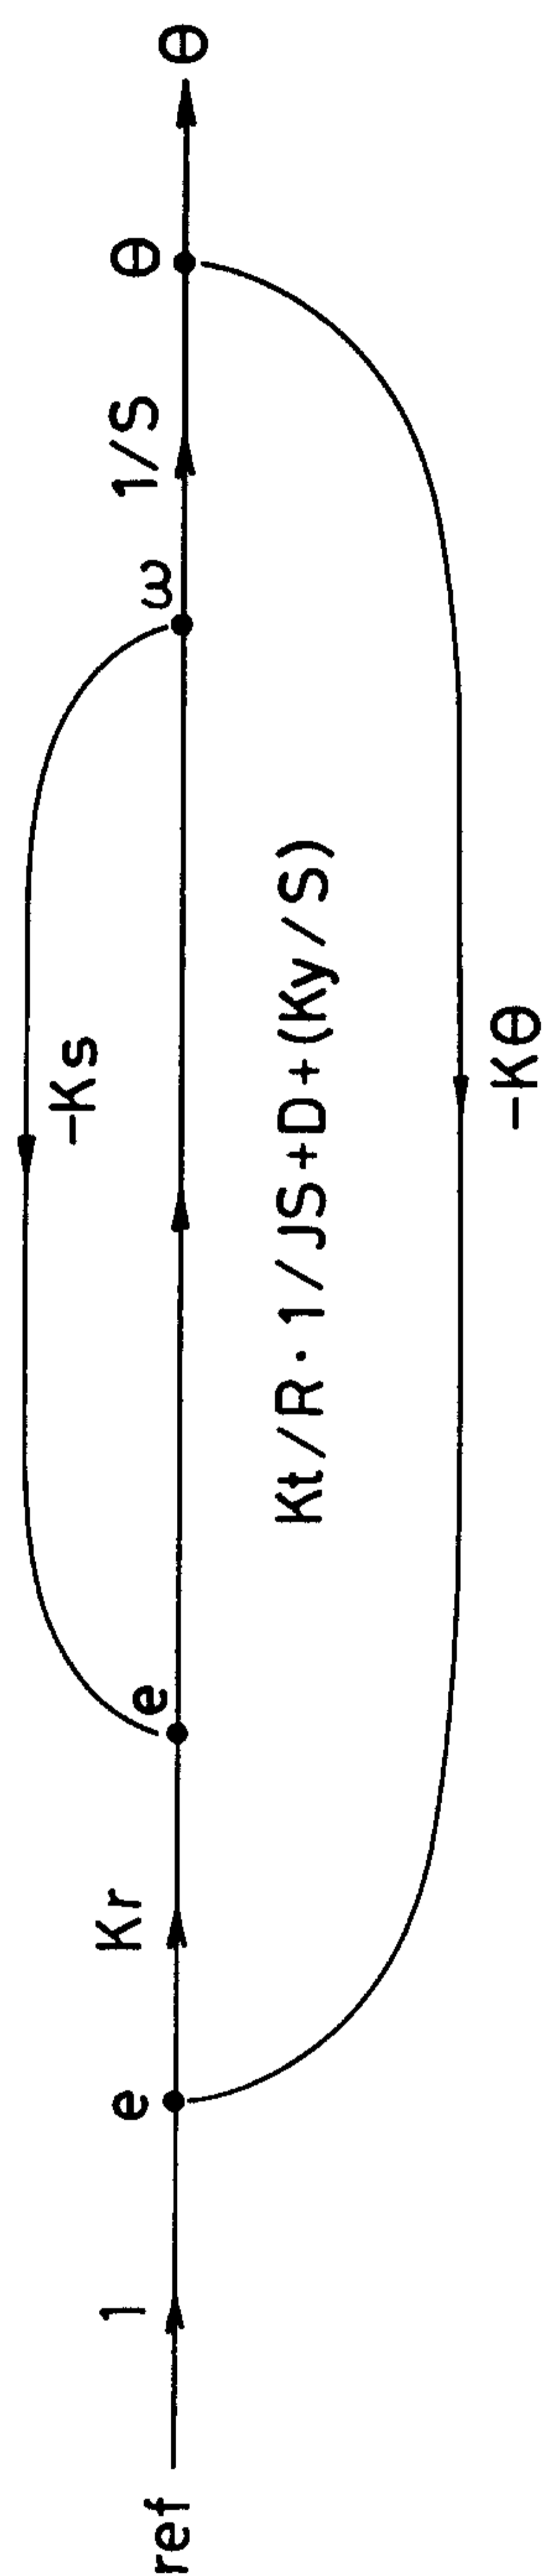


FIG. 20

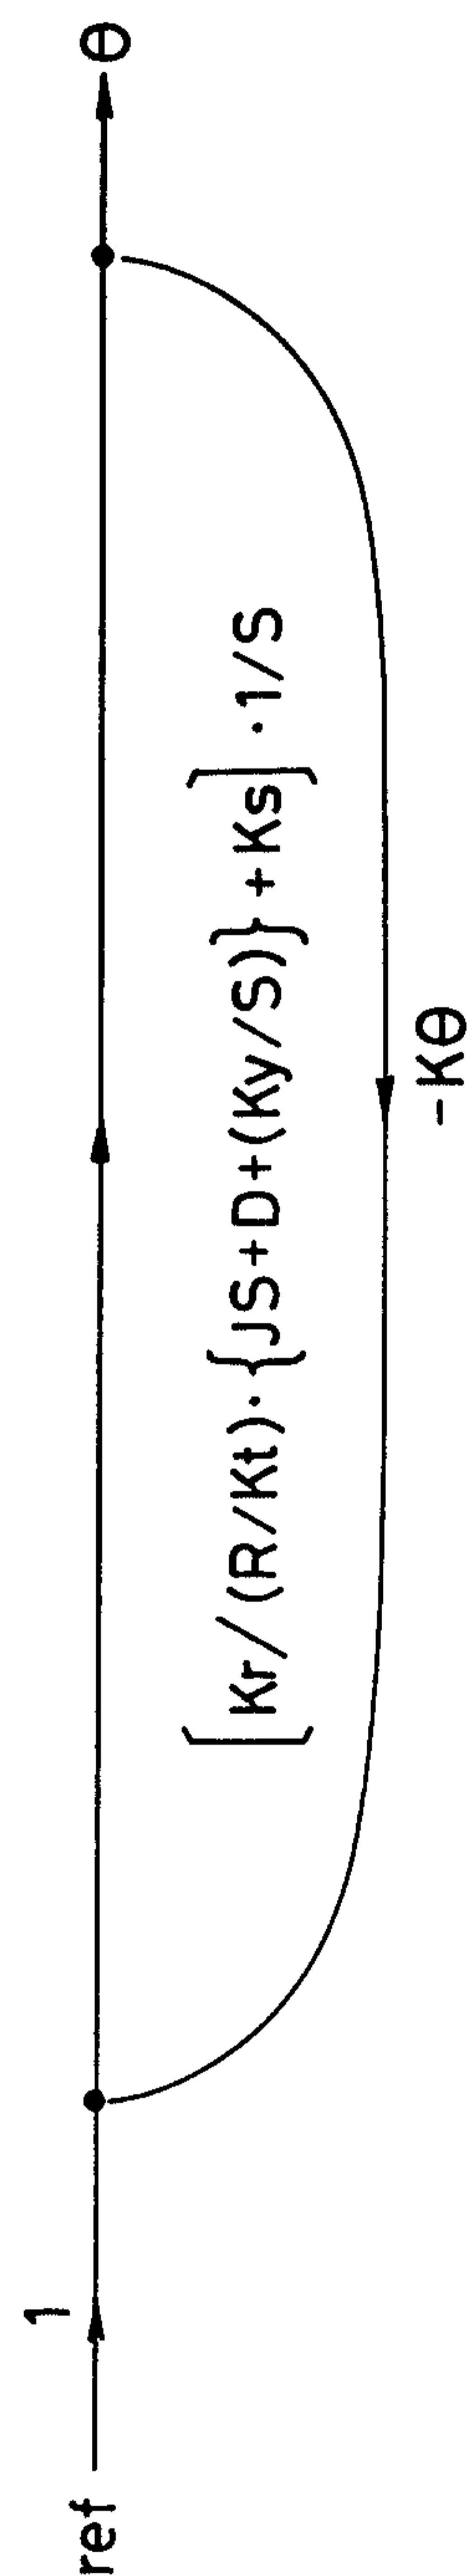


FIG. 21

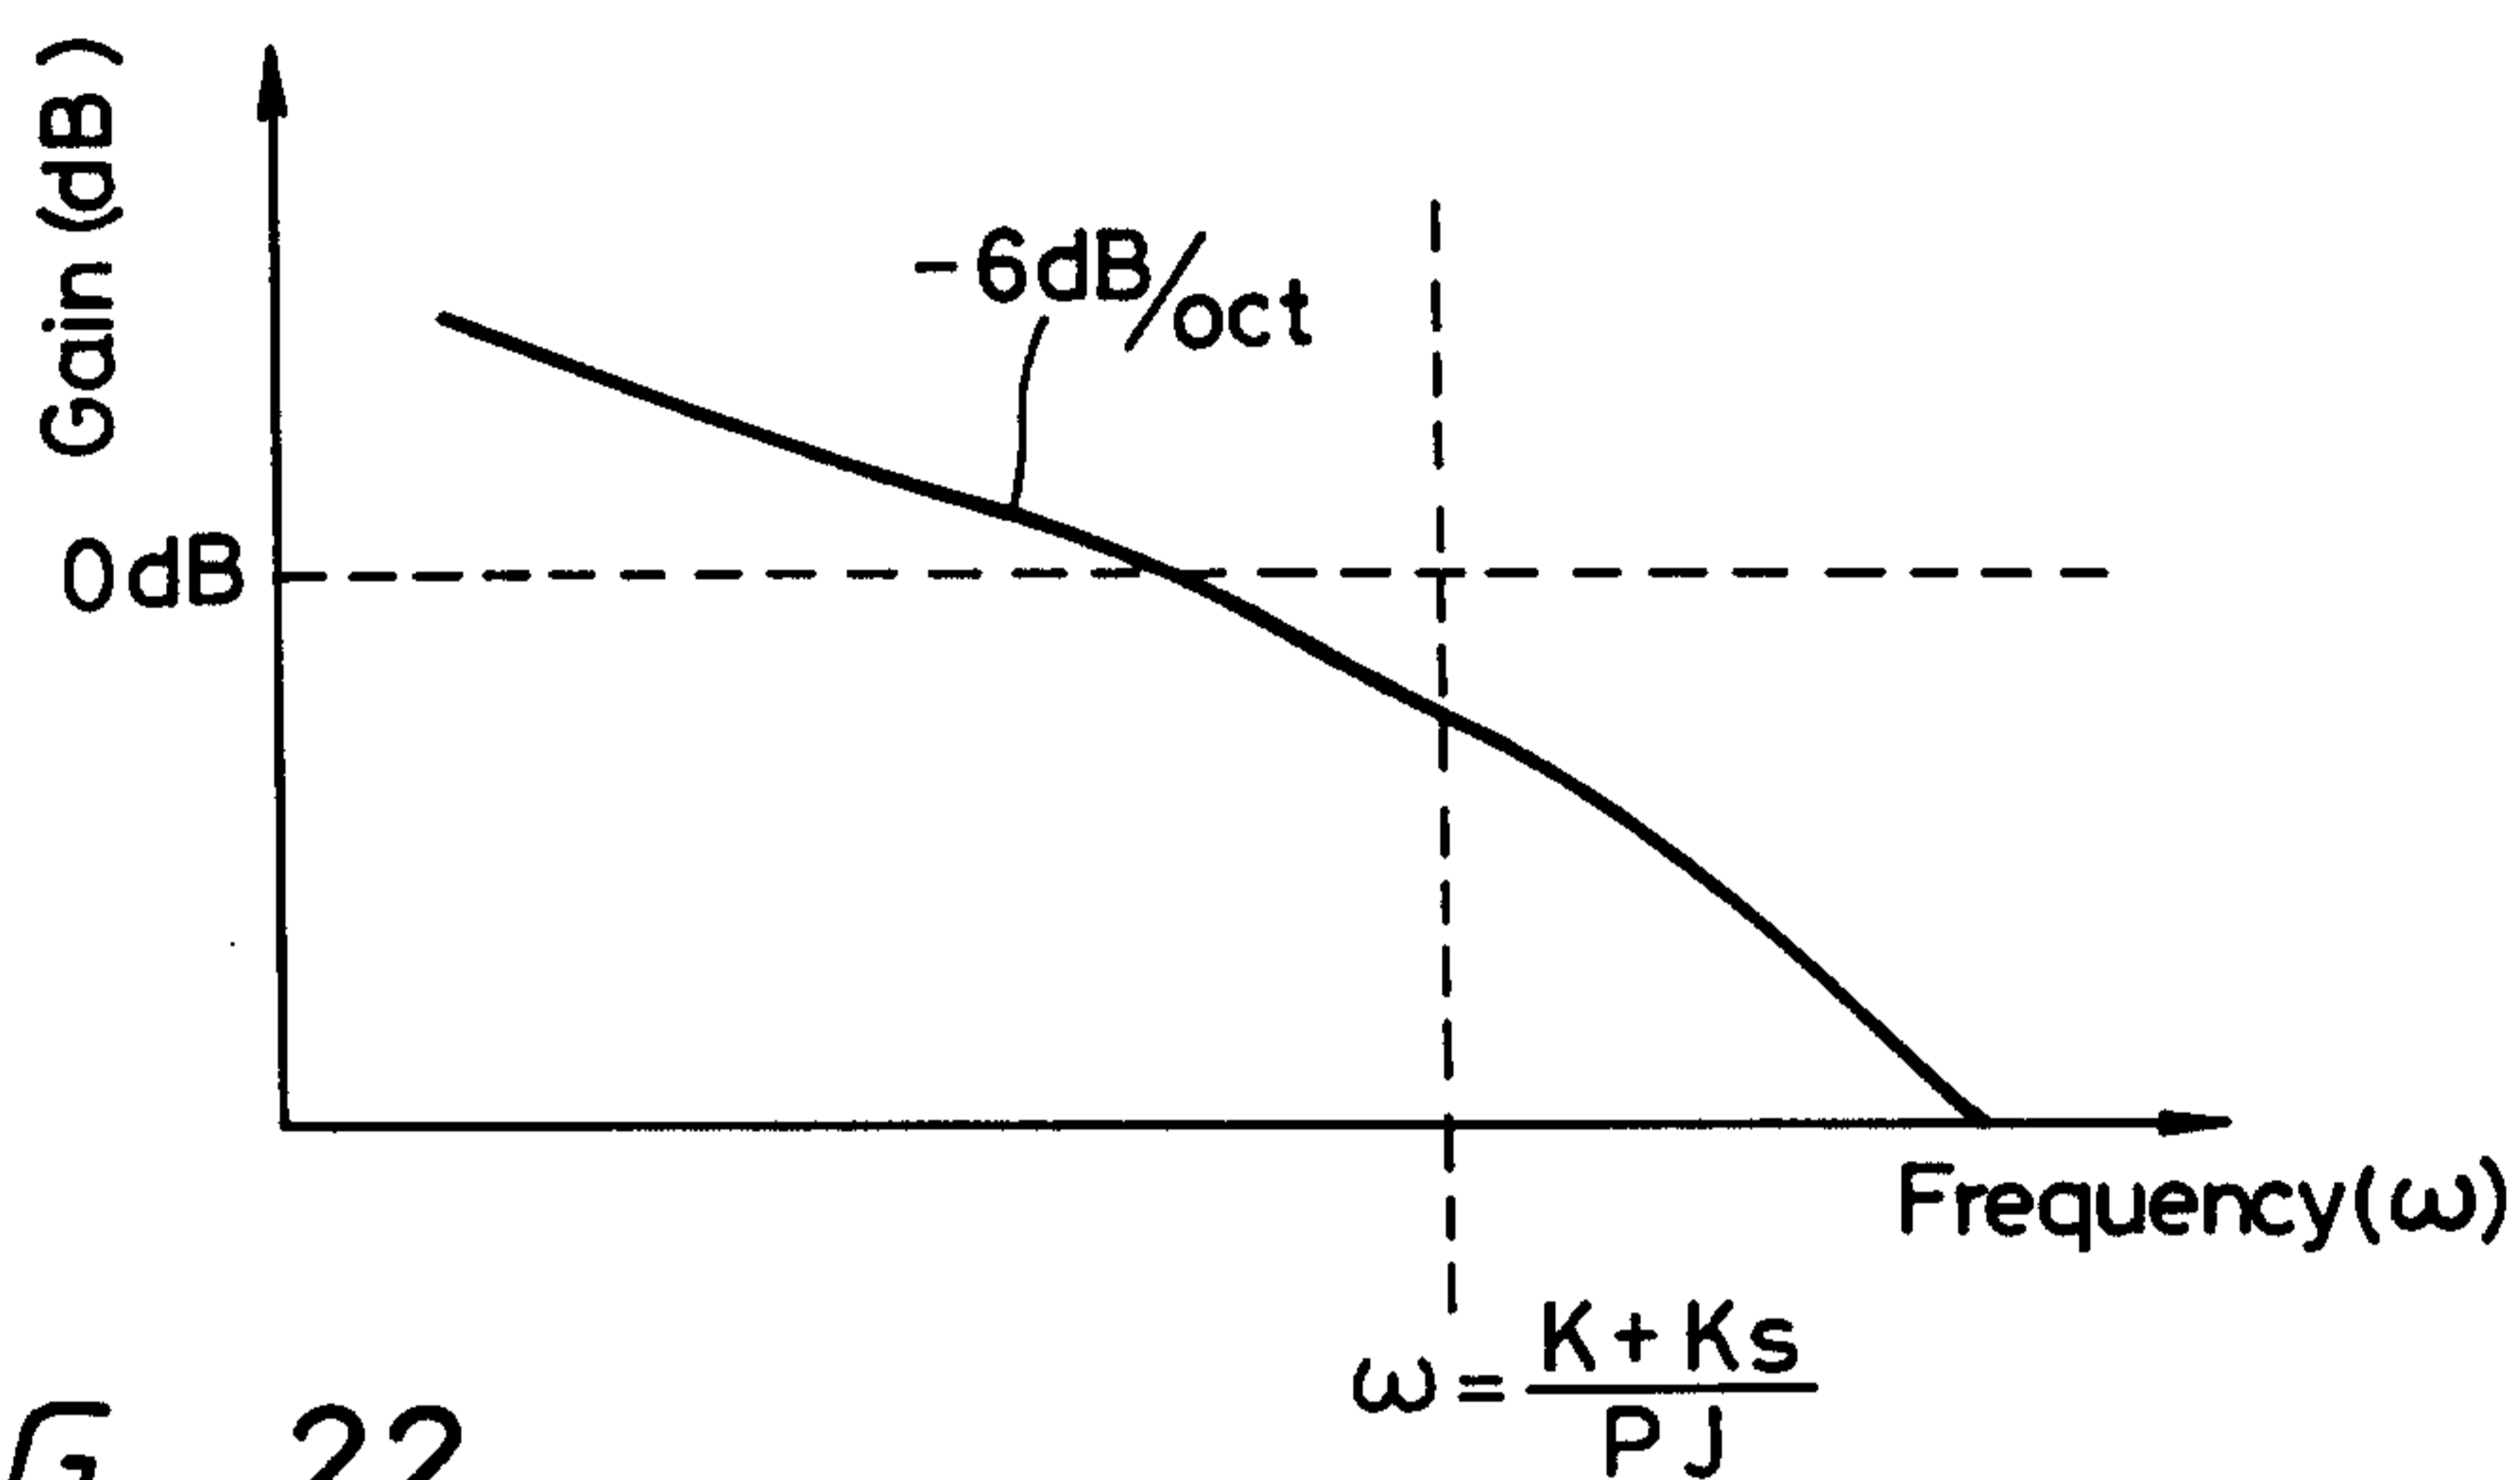


FIG. 22

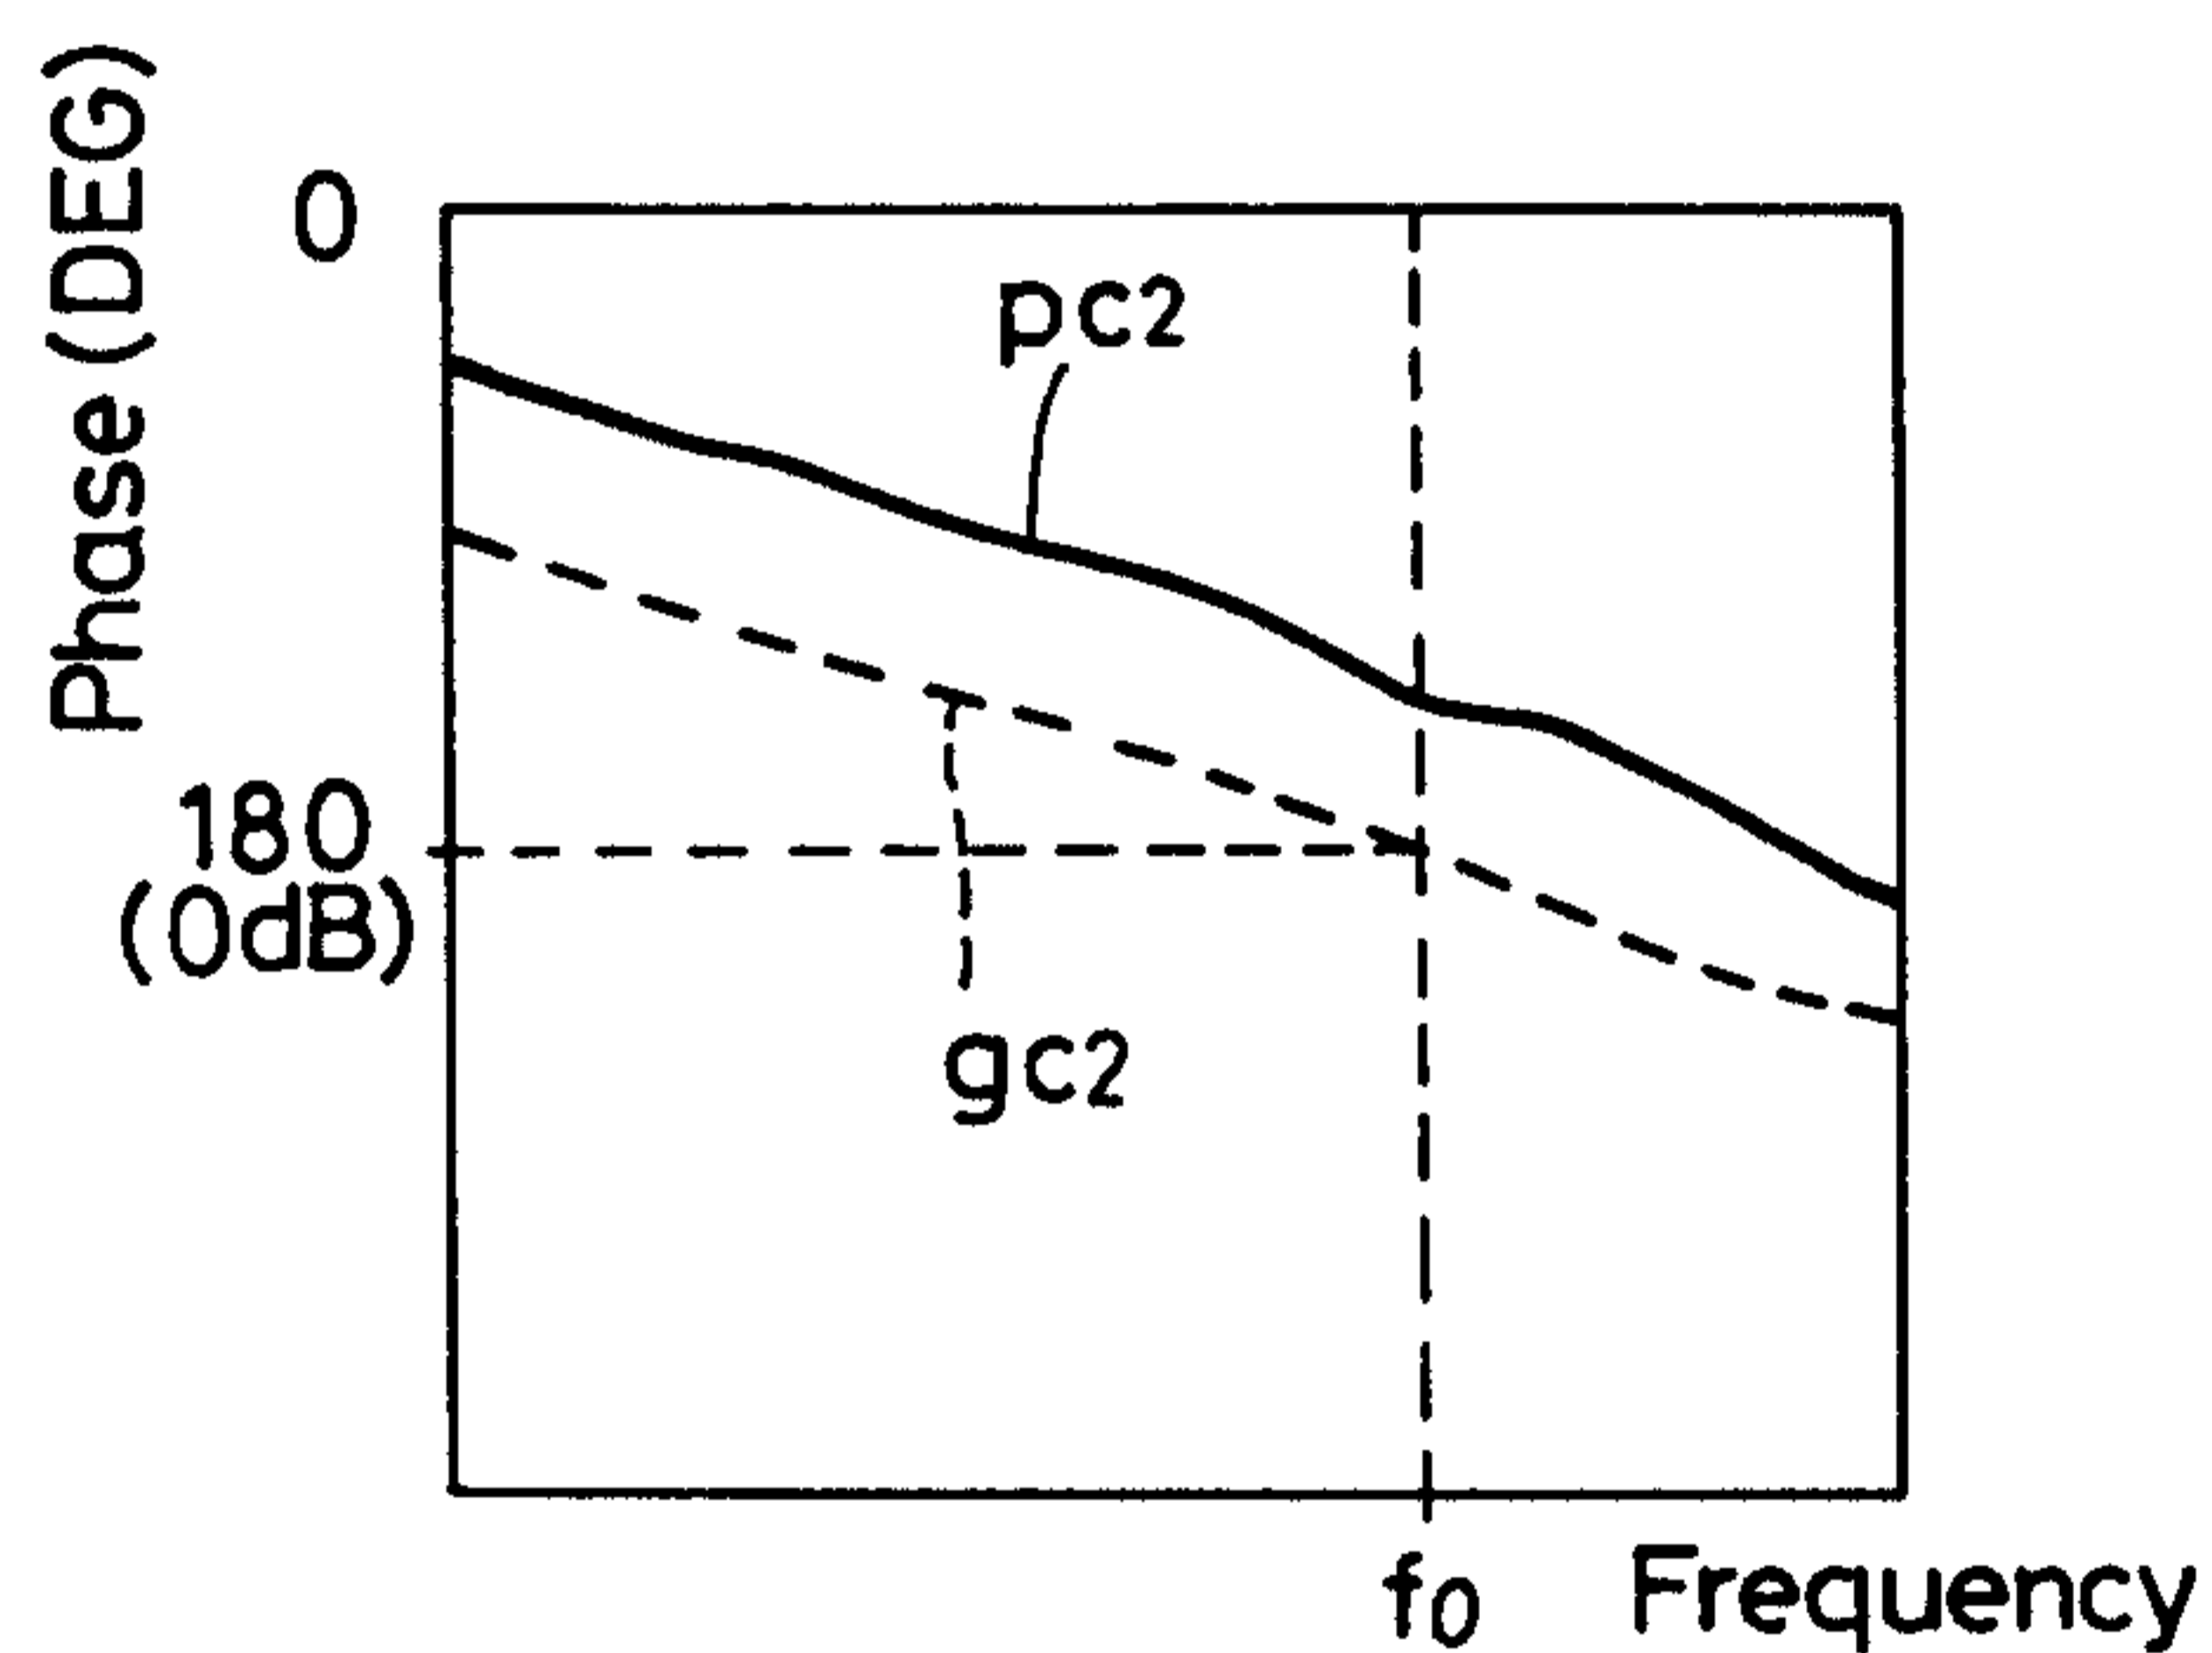


FIG. 23

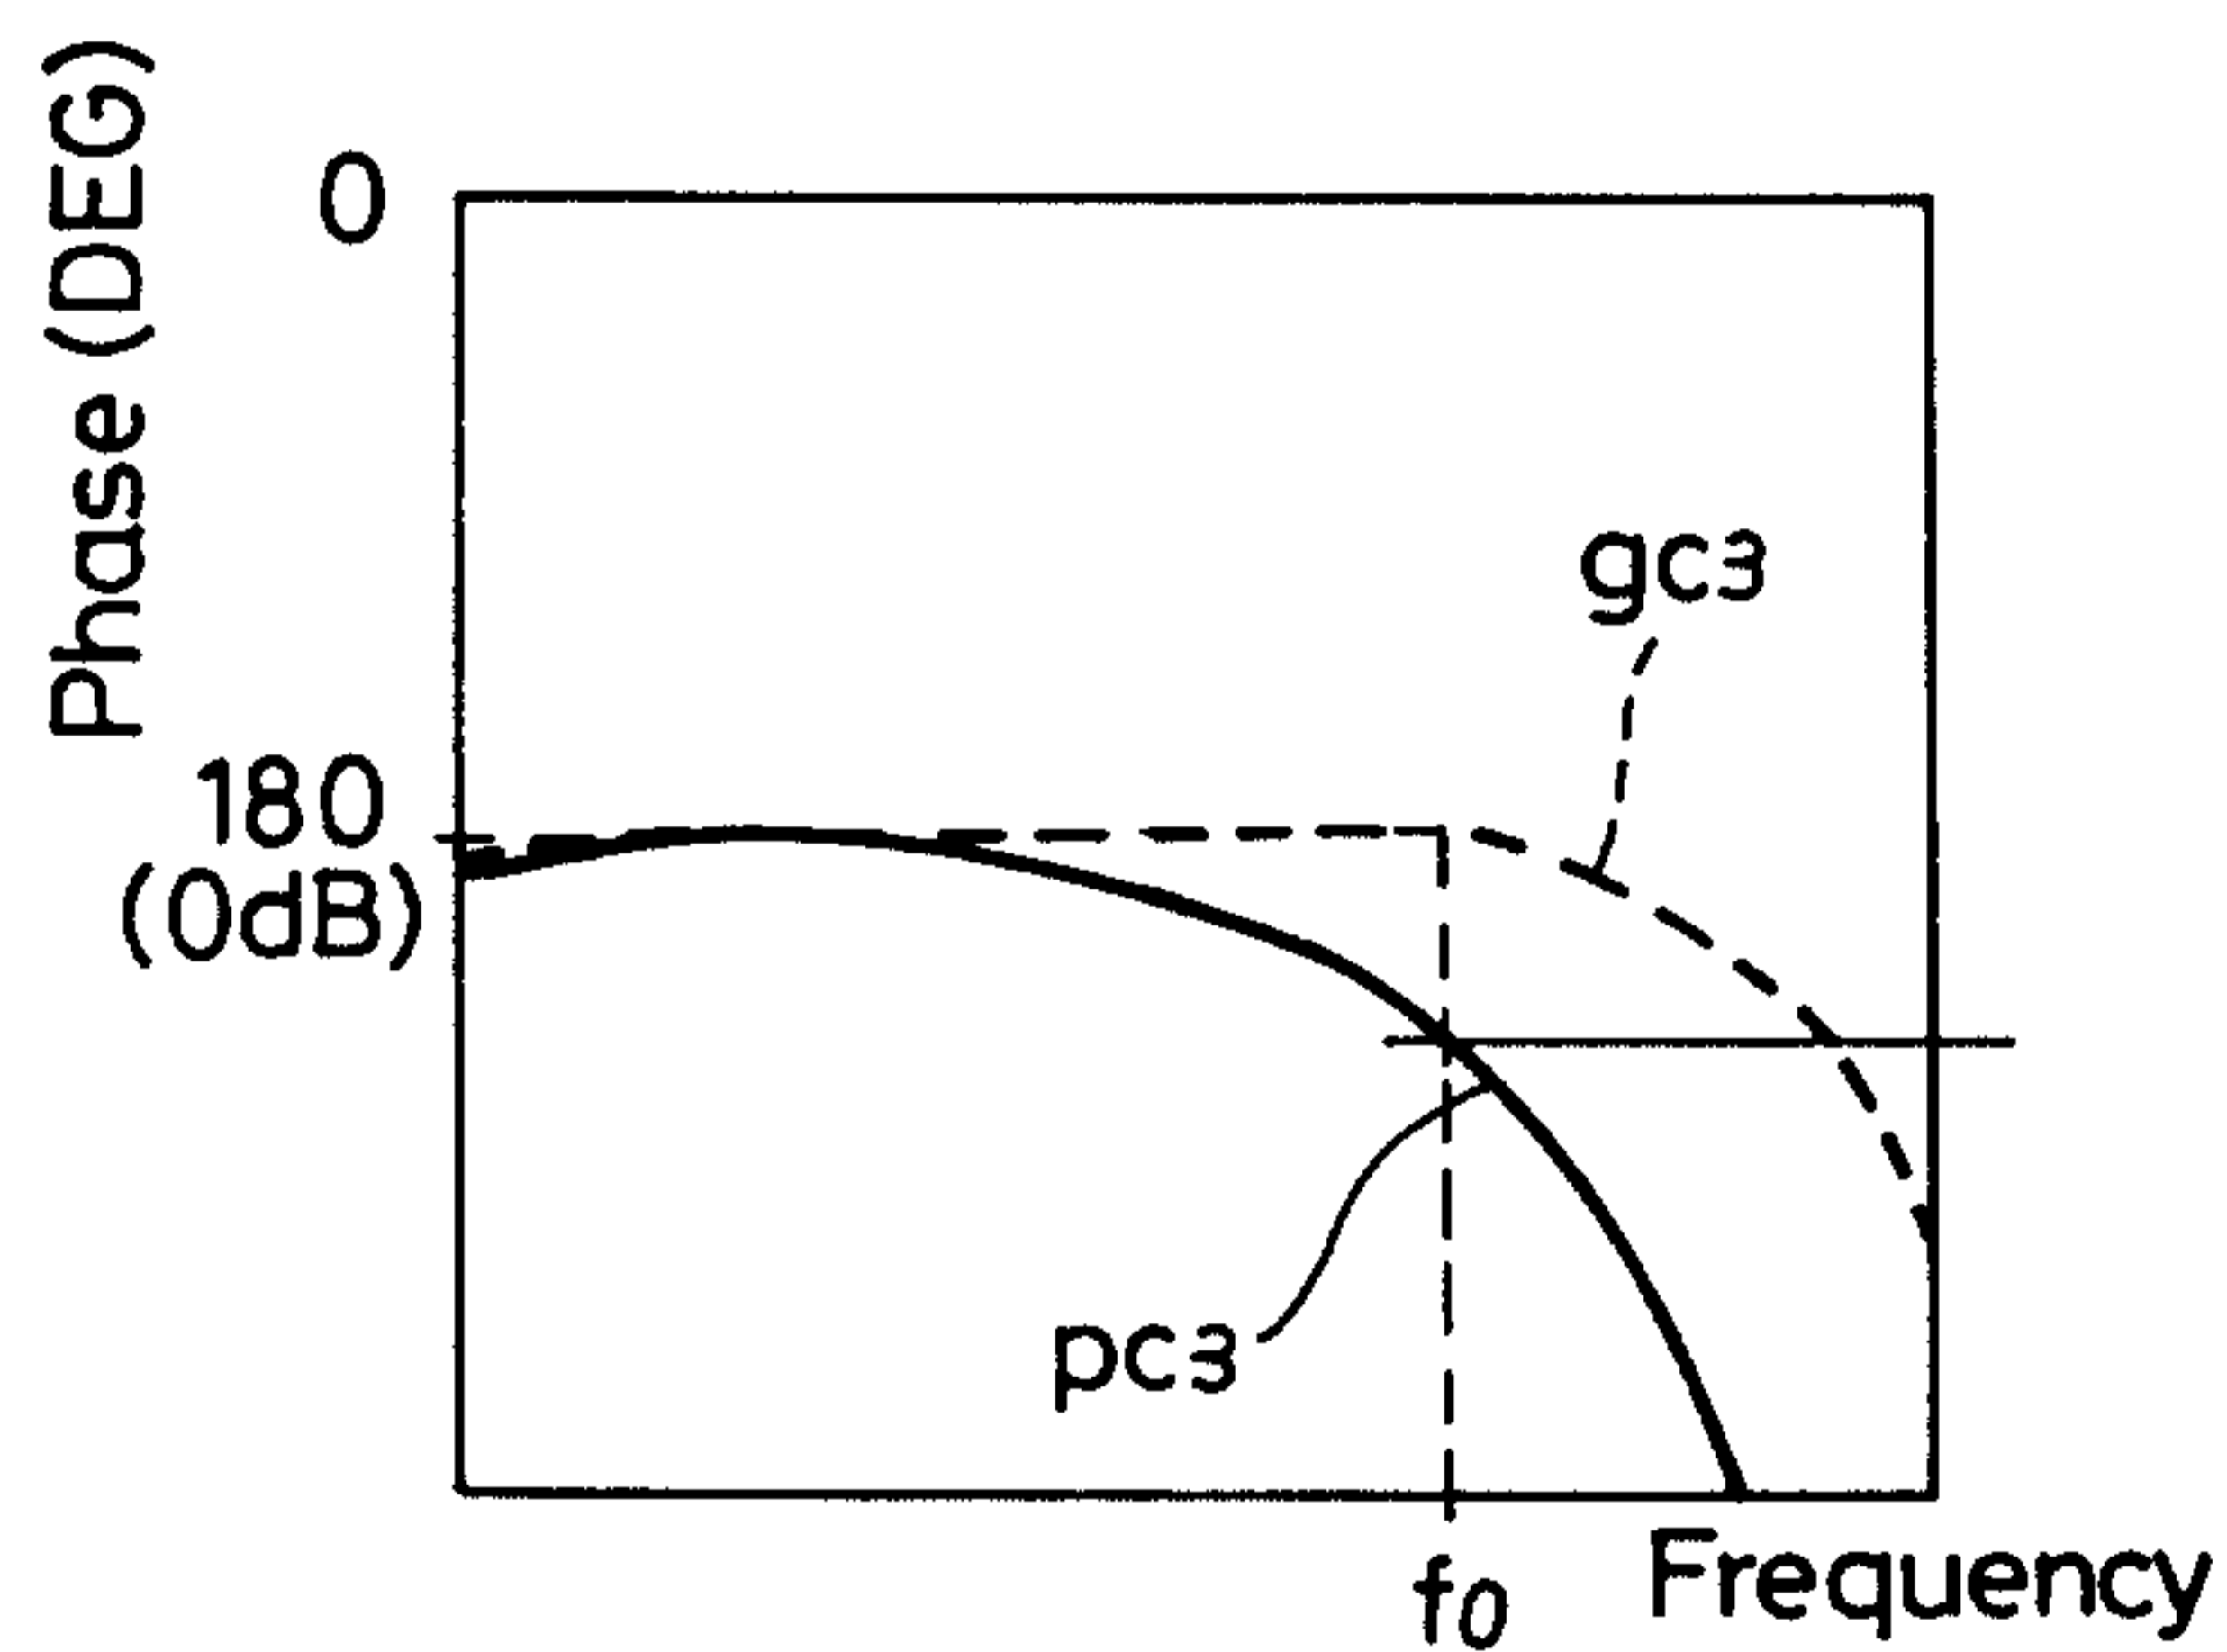


FIG. 24

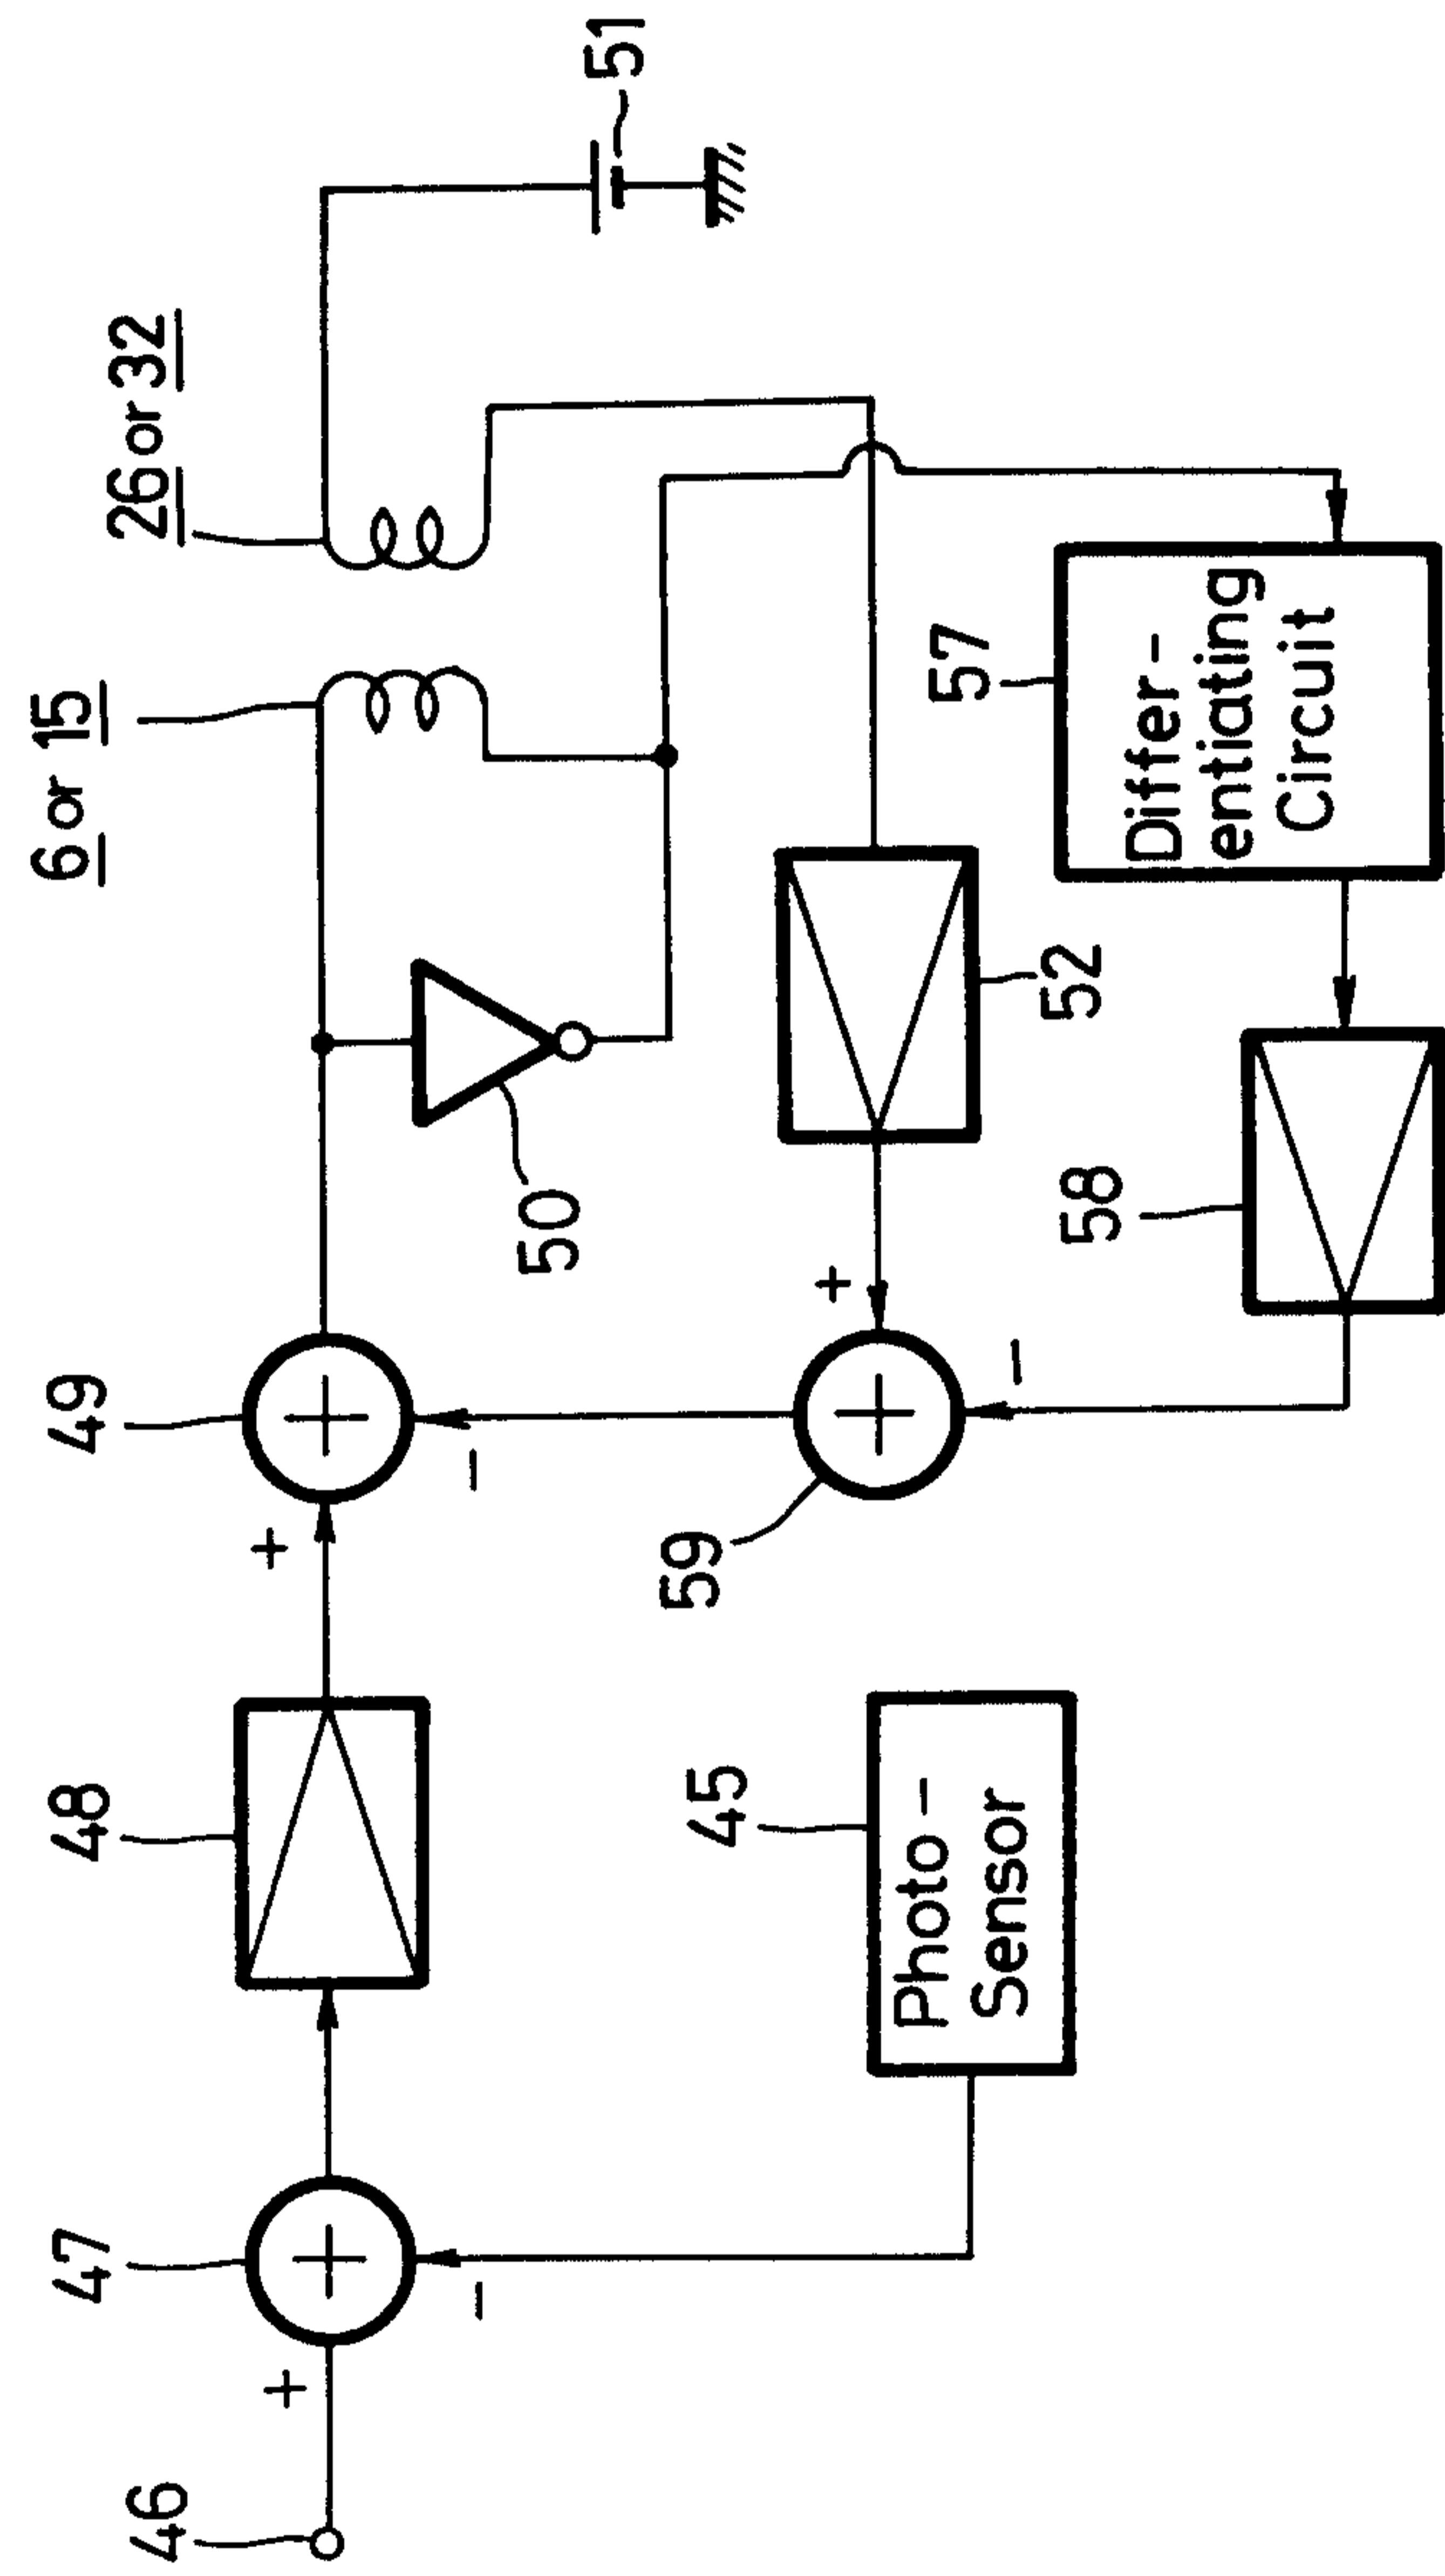


FIG. 25

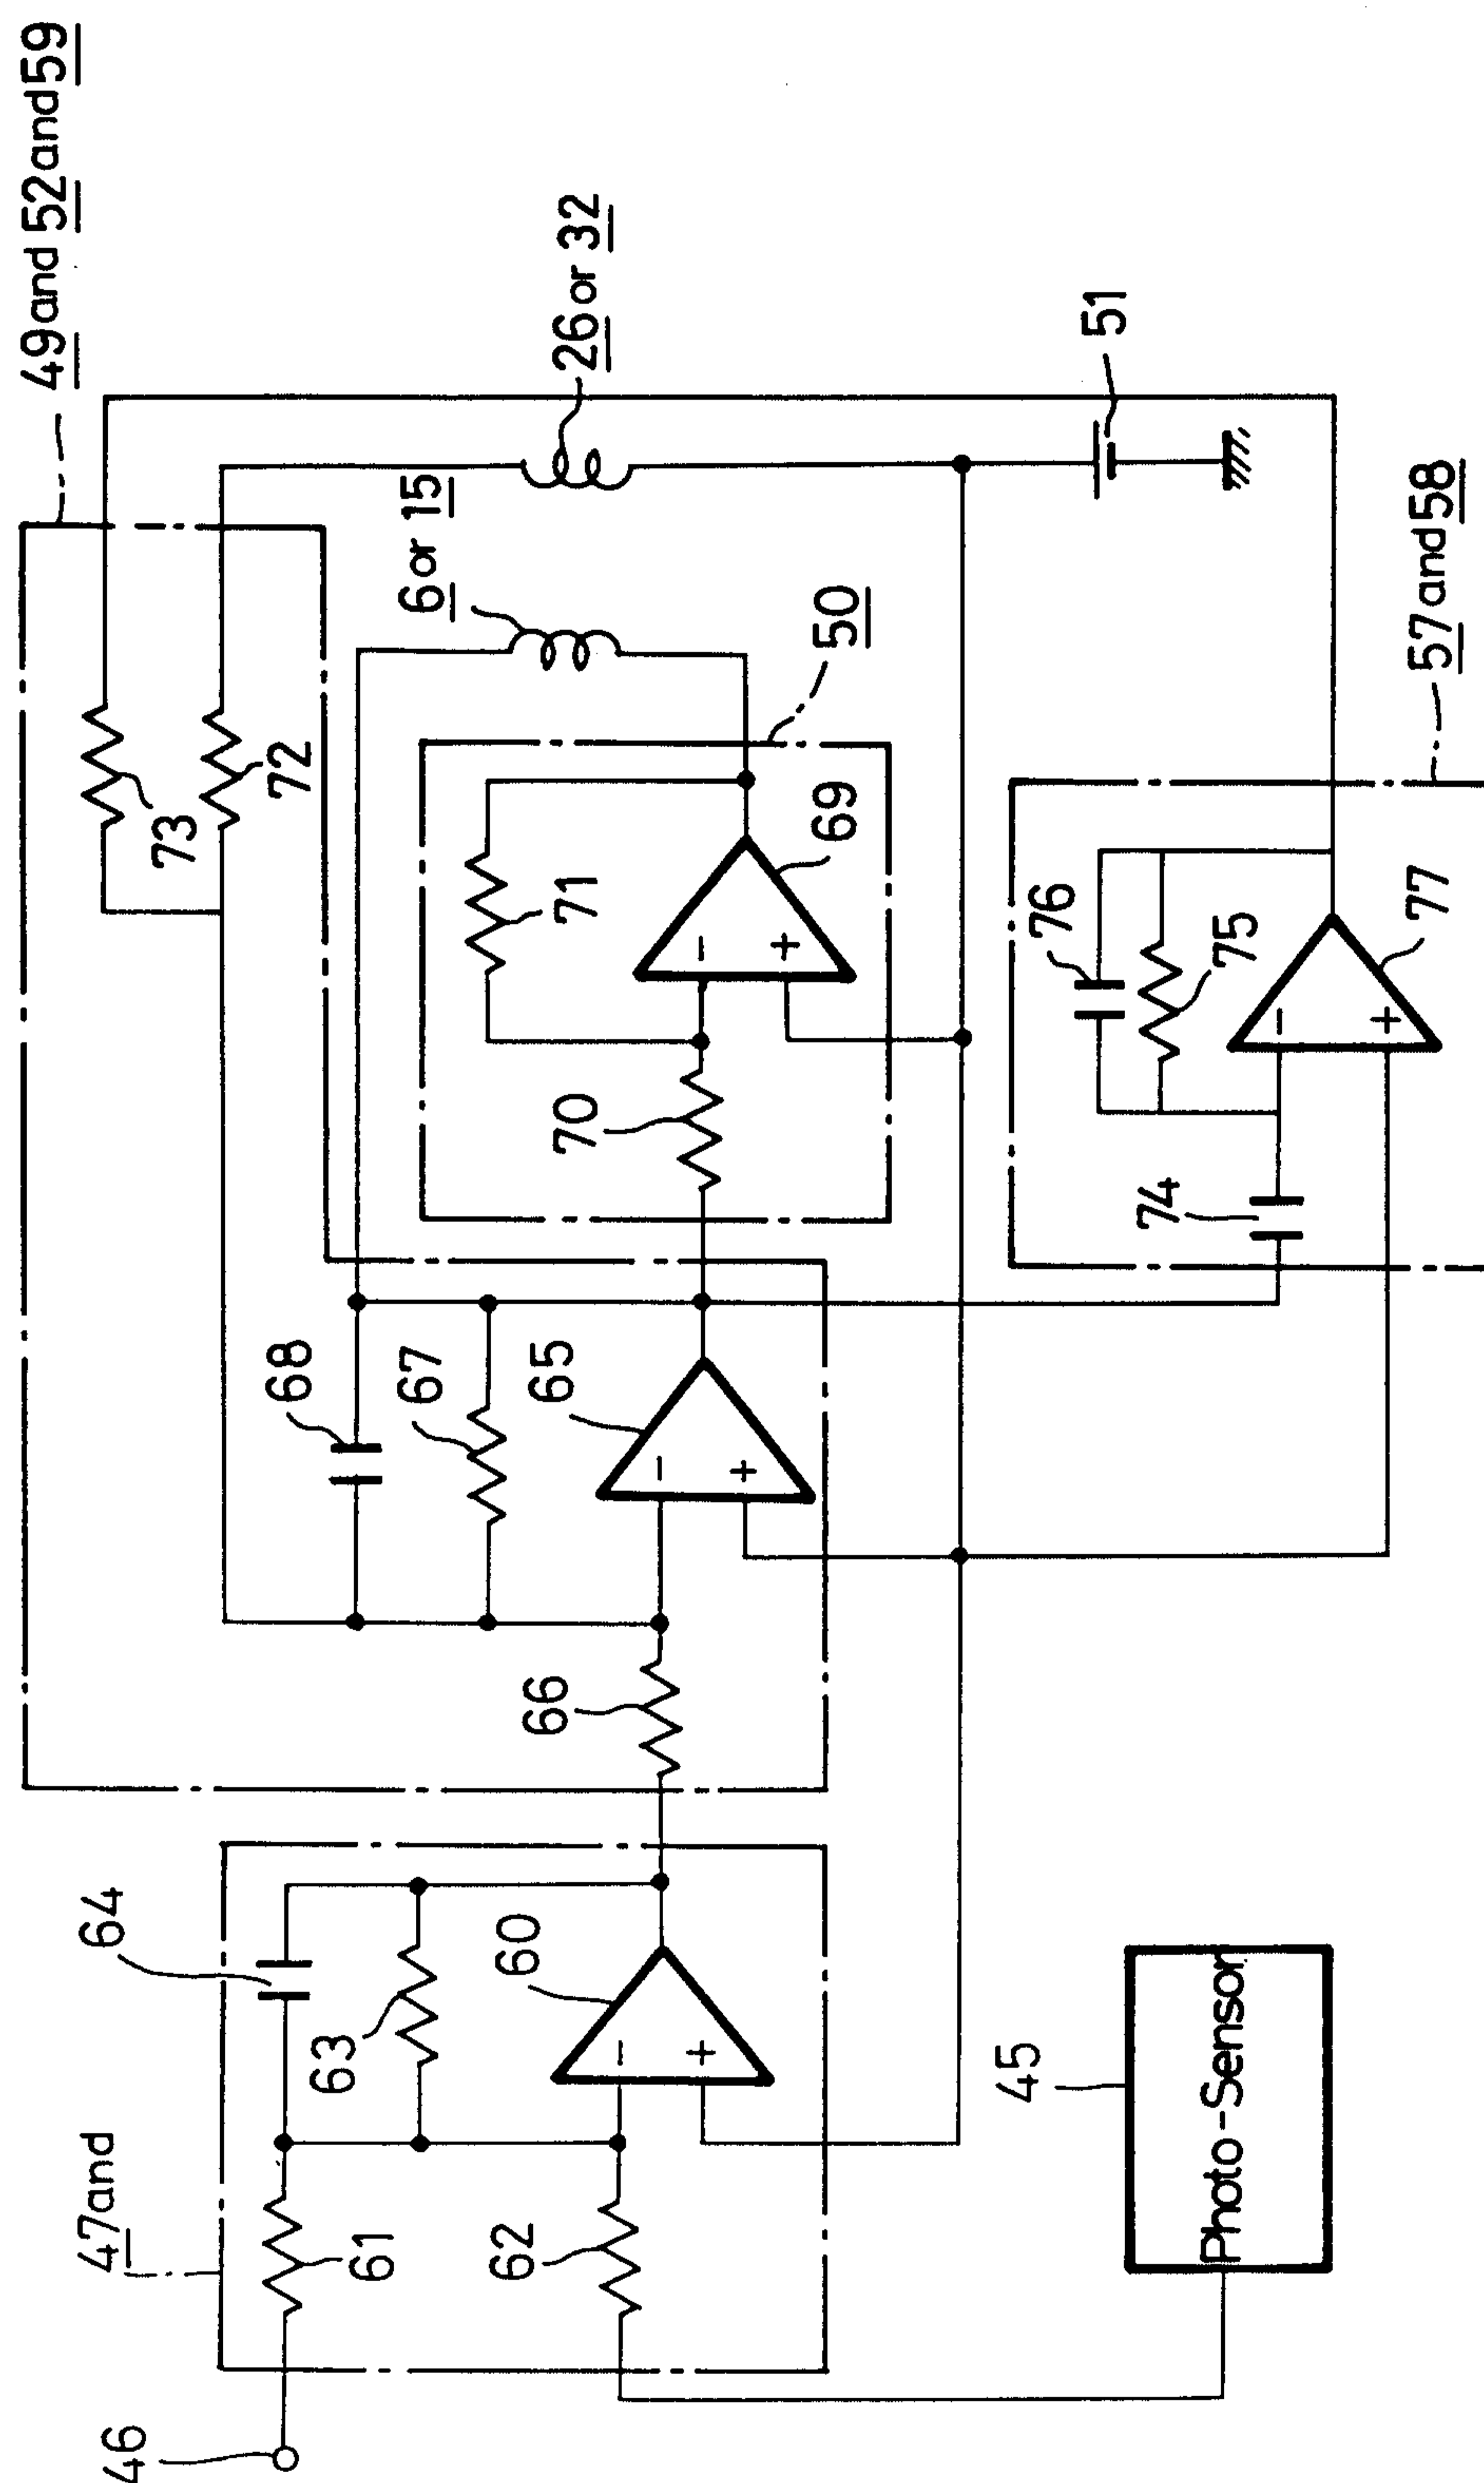


FIG. 26

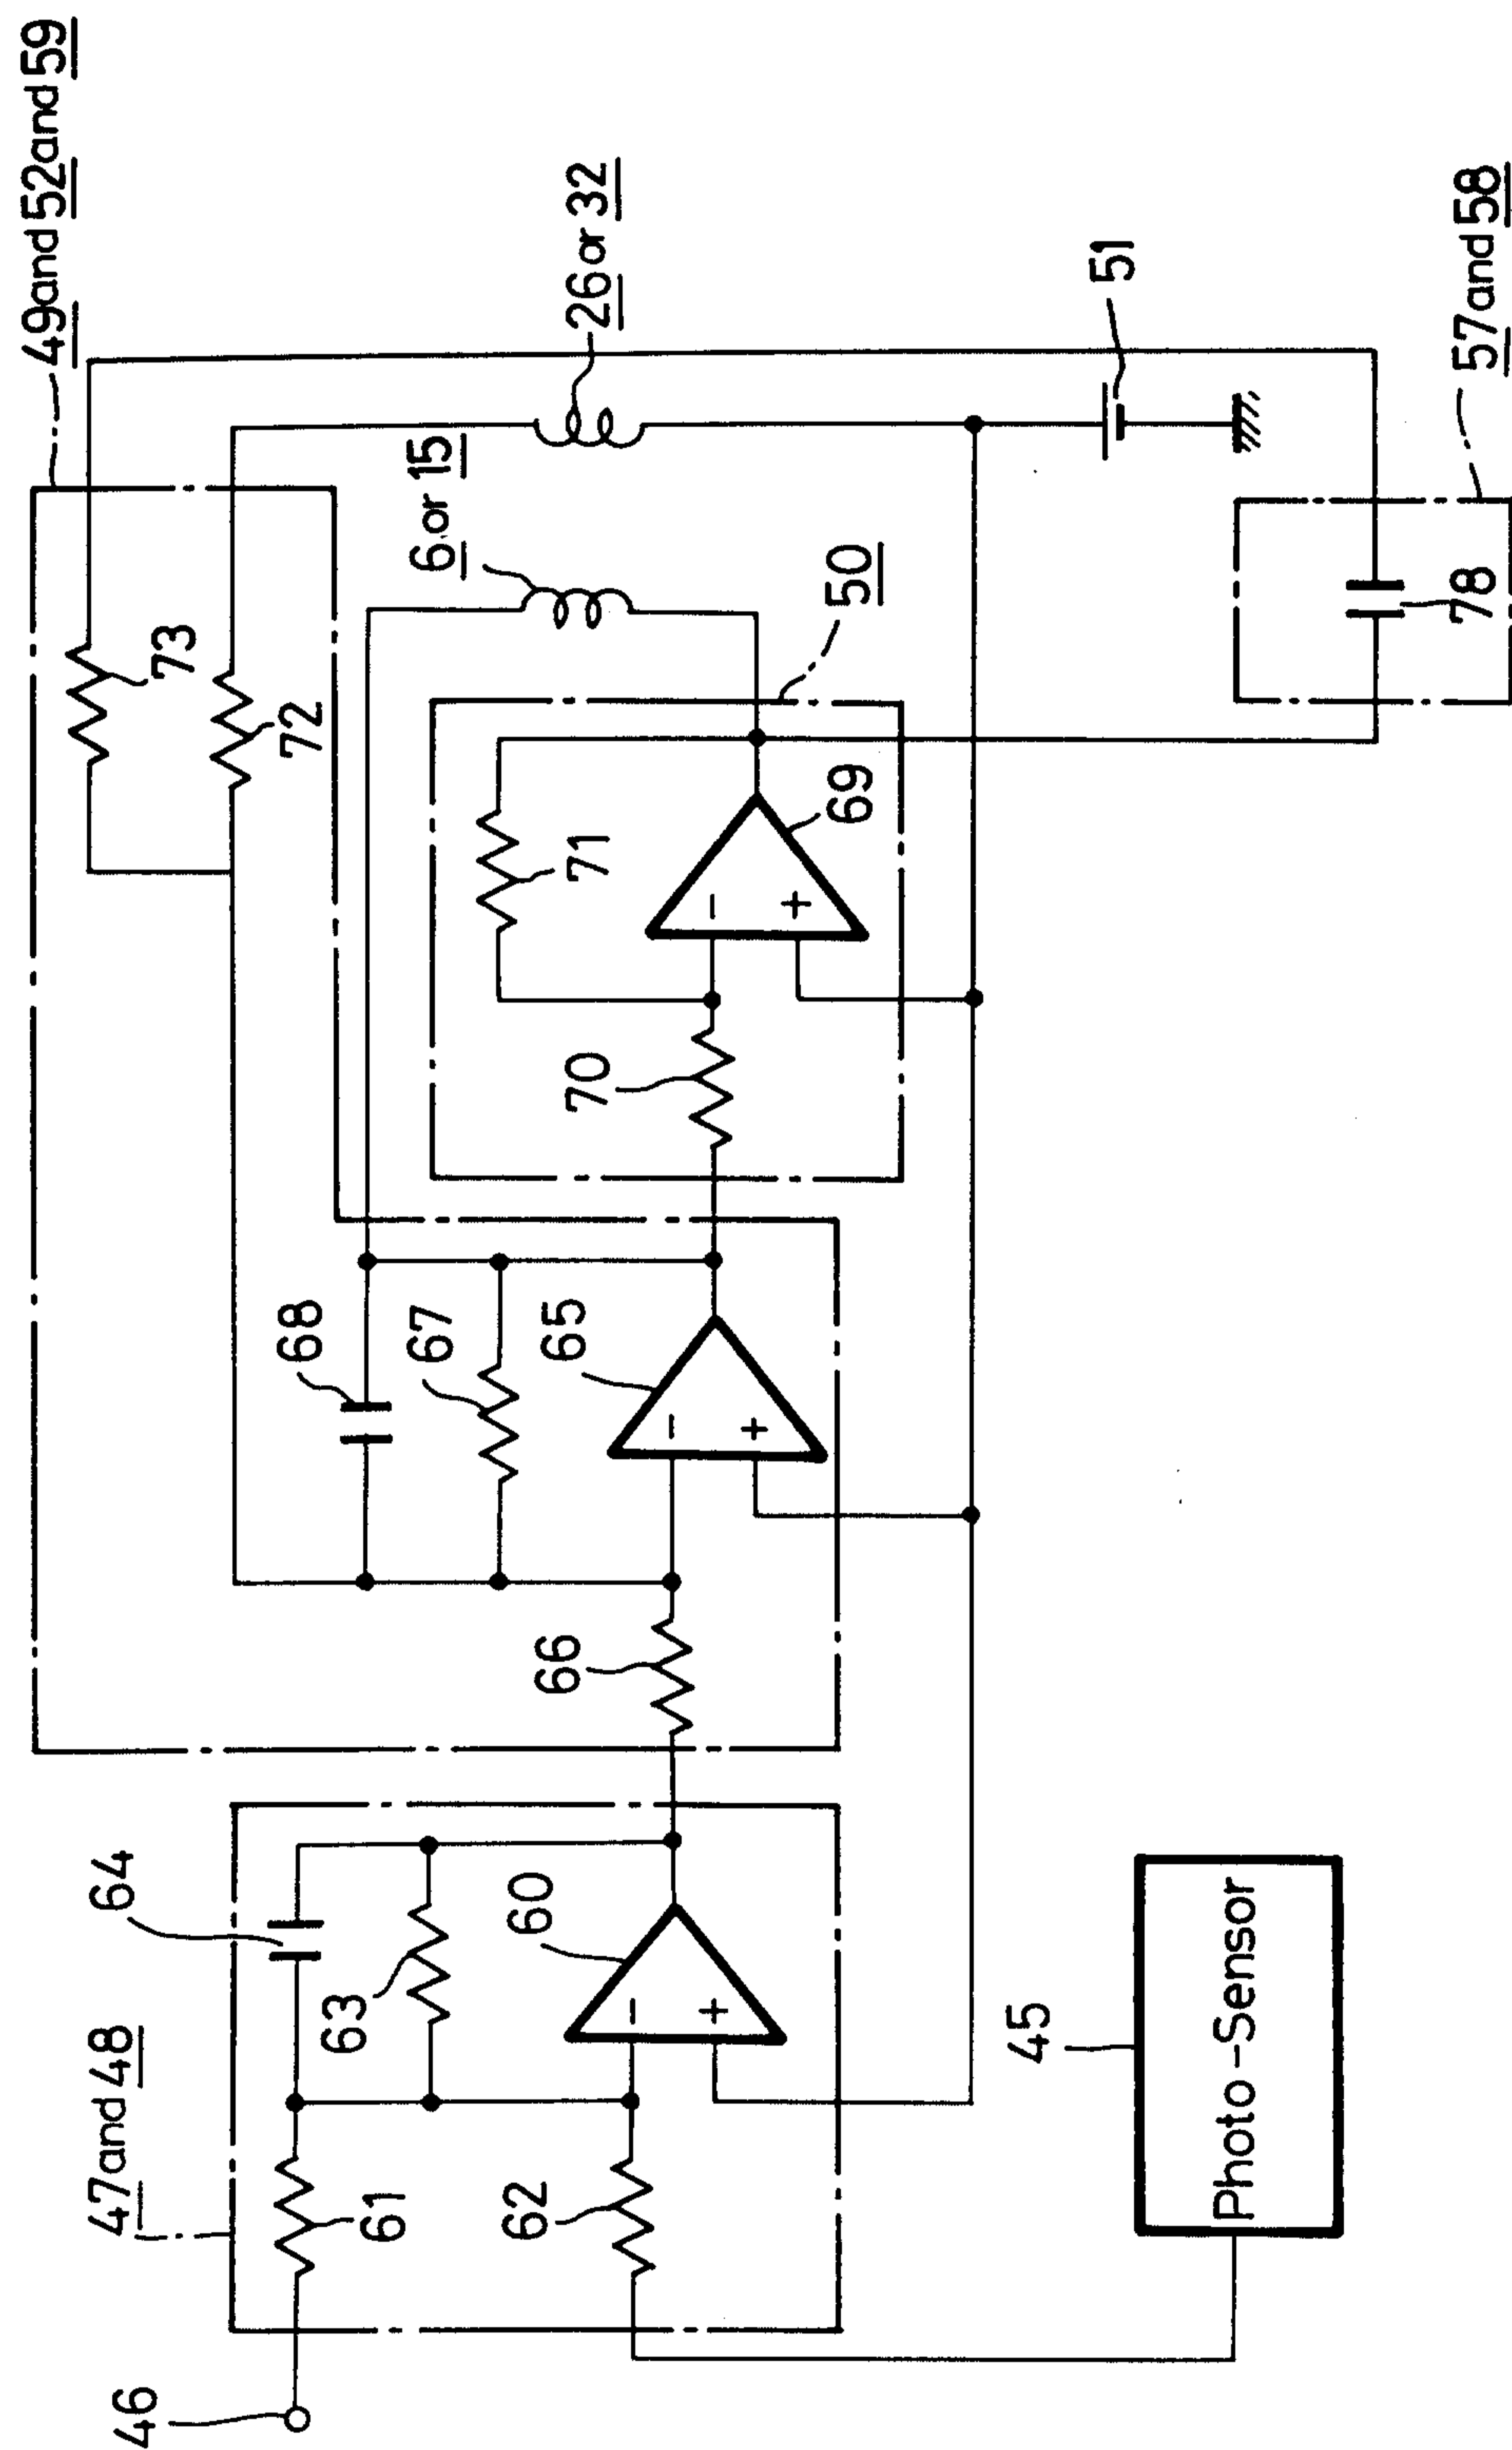


FIG. 27

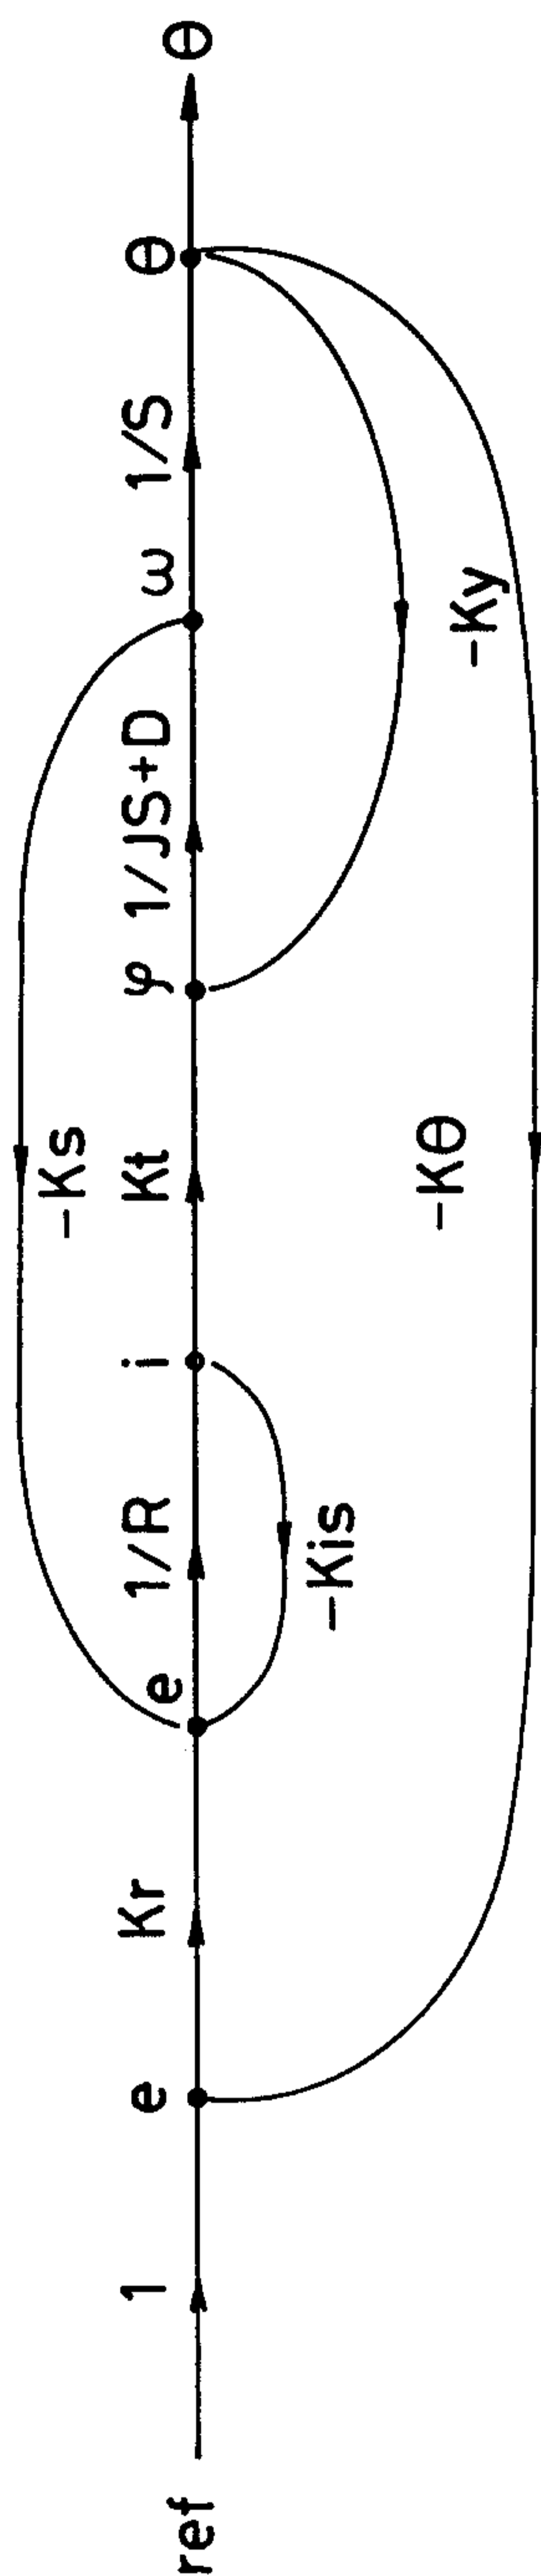


FIG. 28

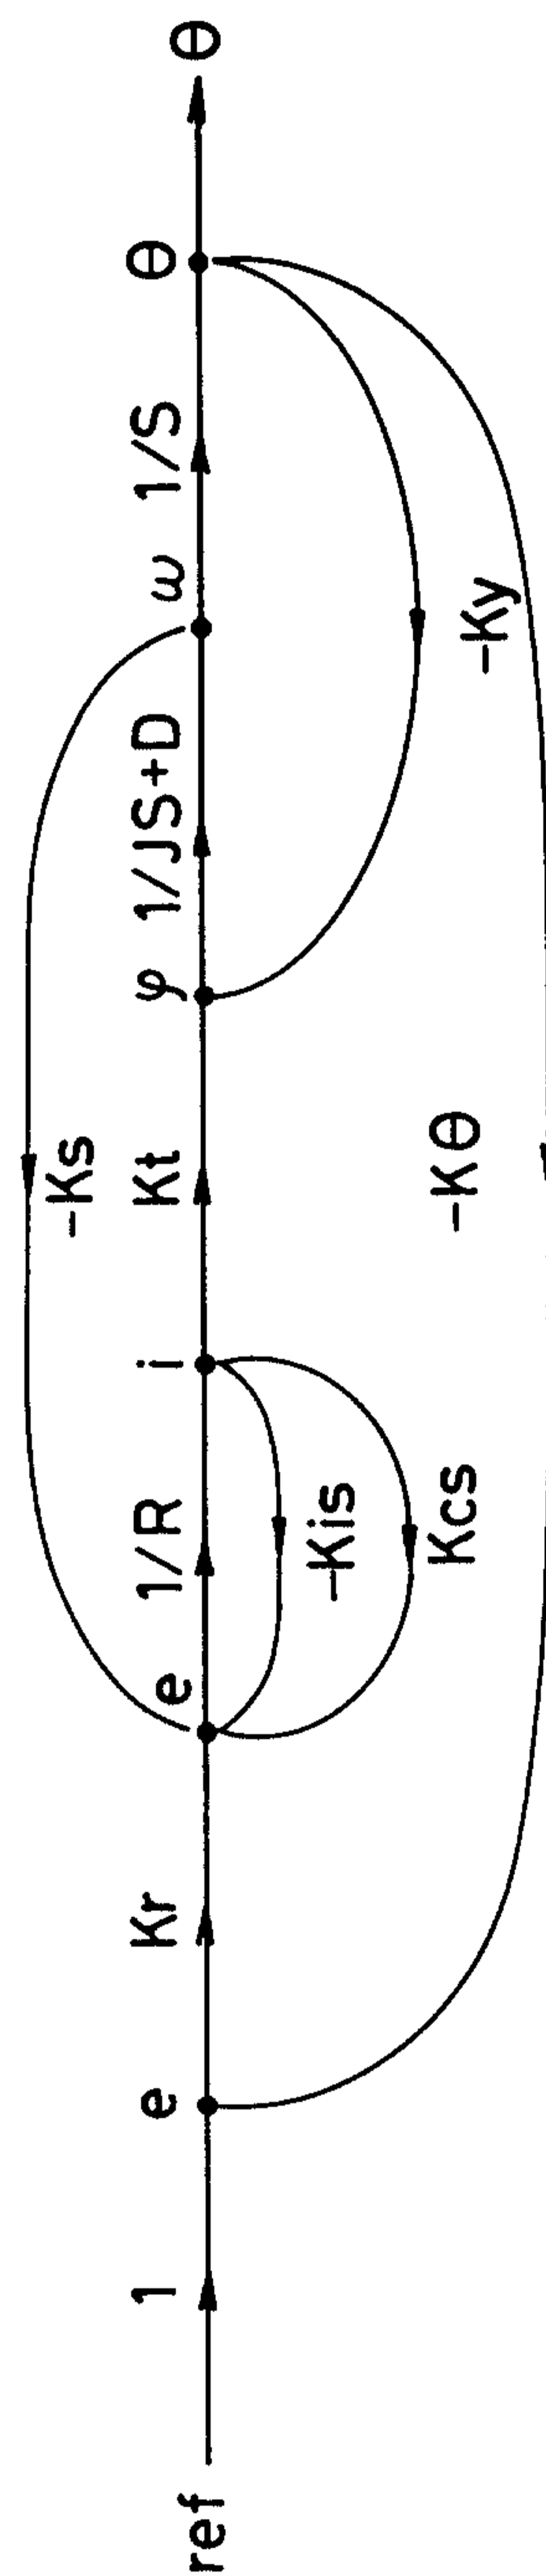


FIG. 29

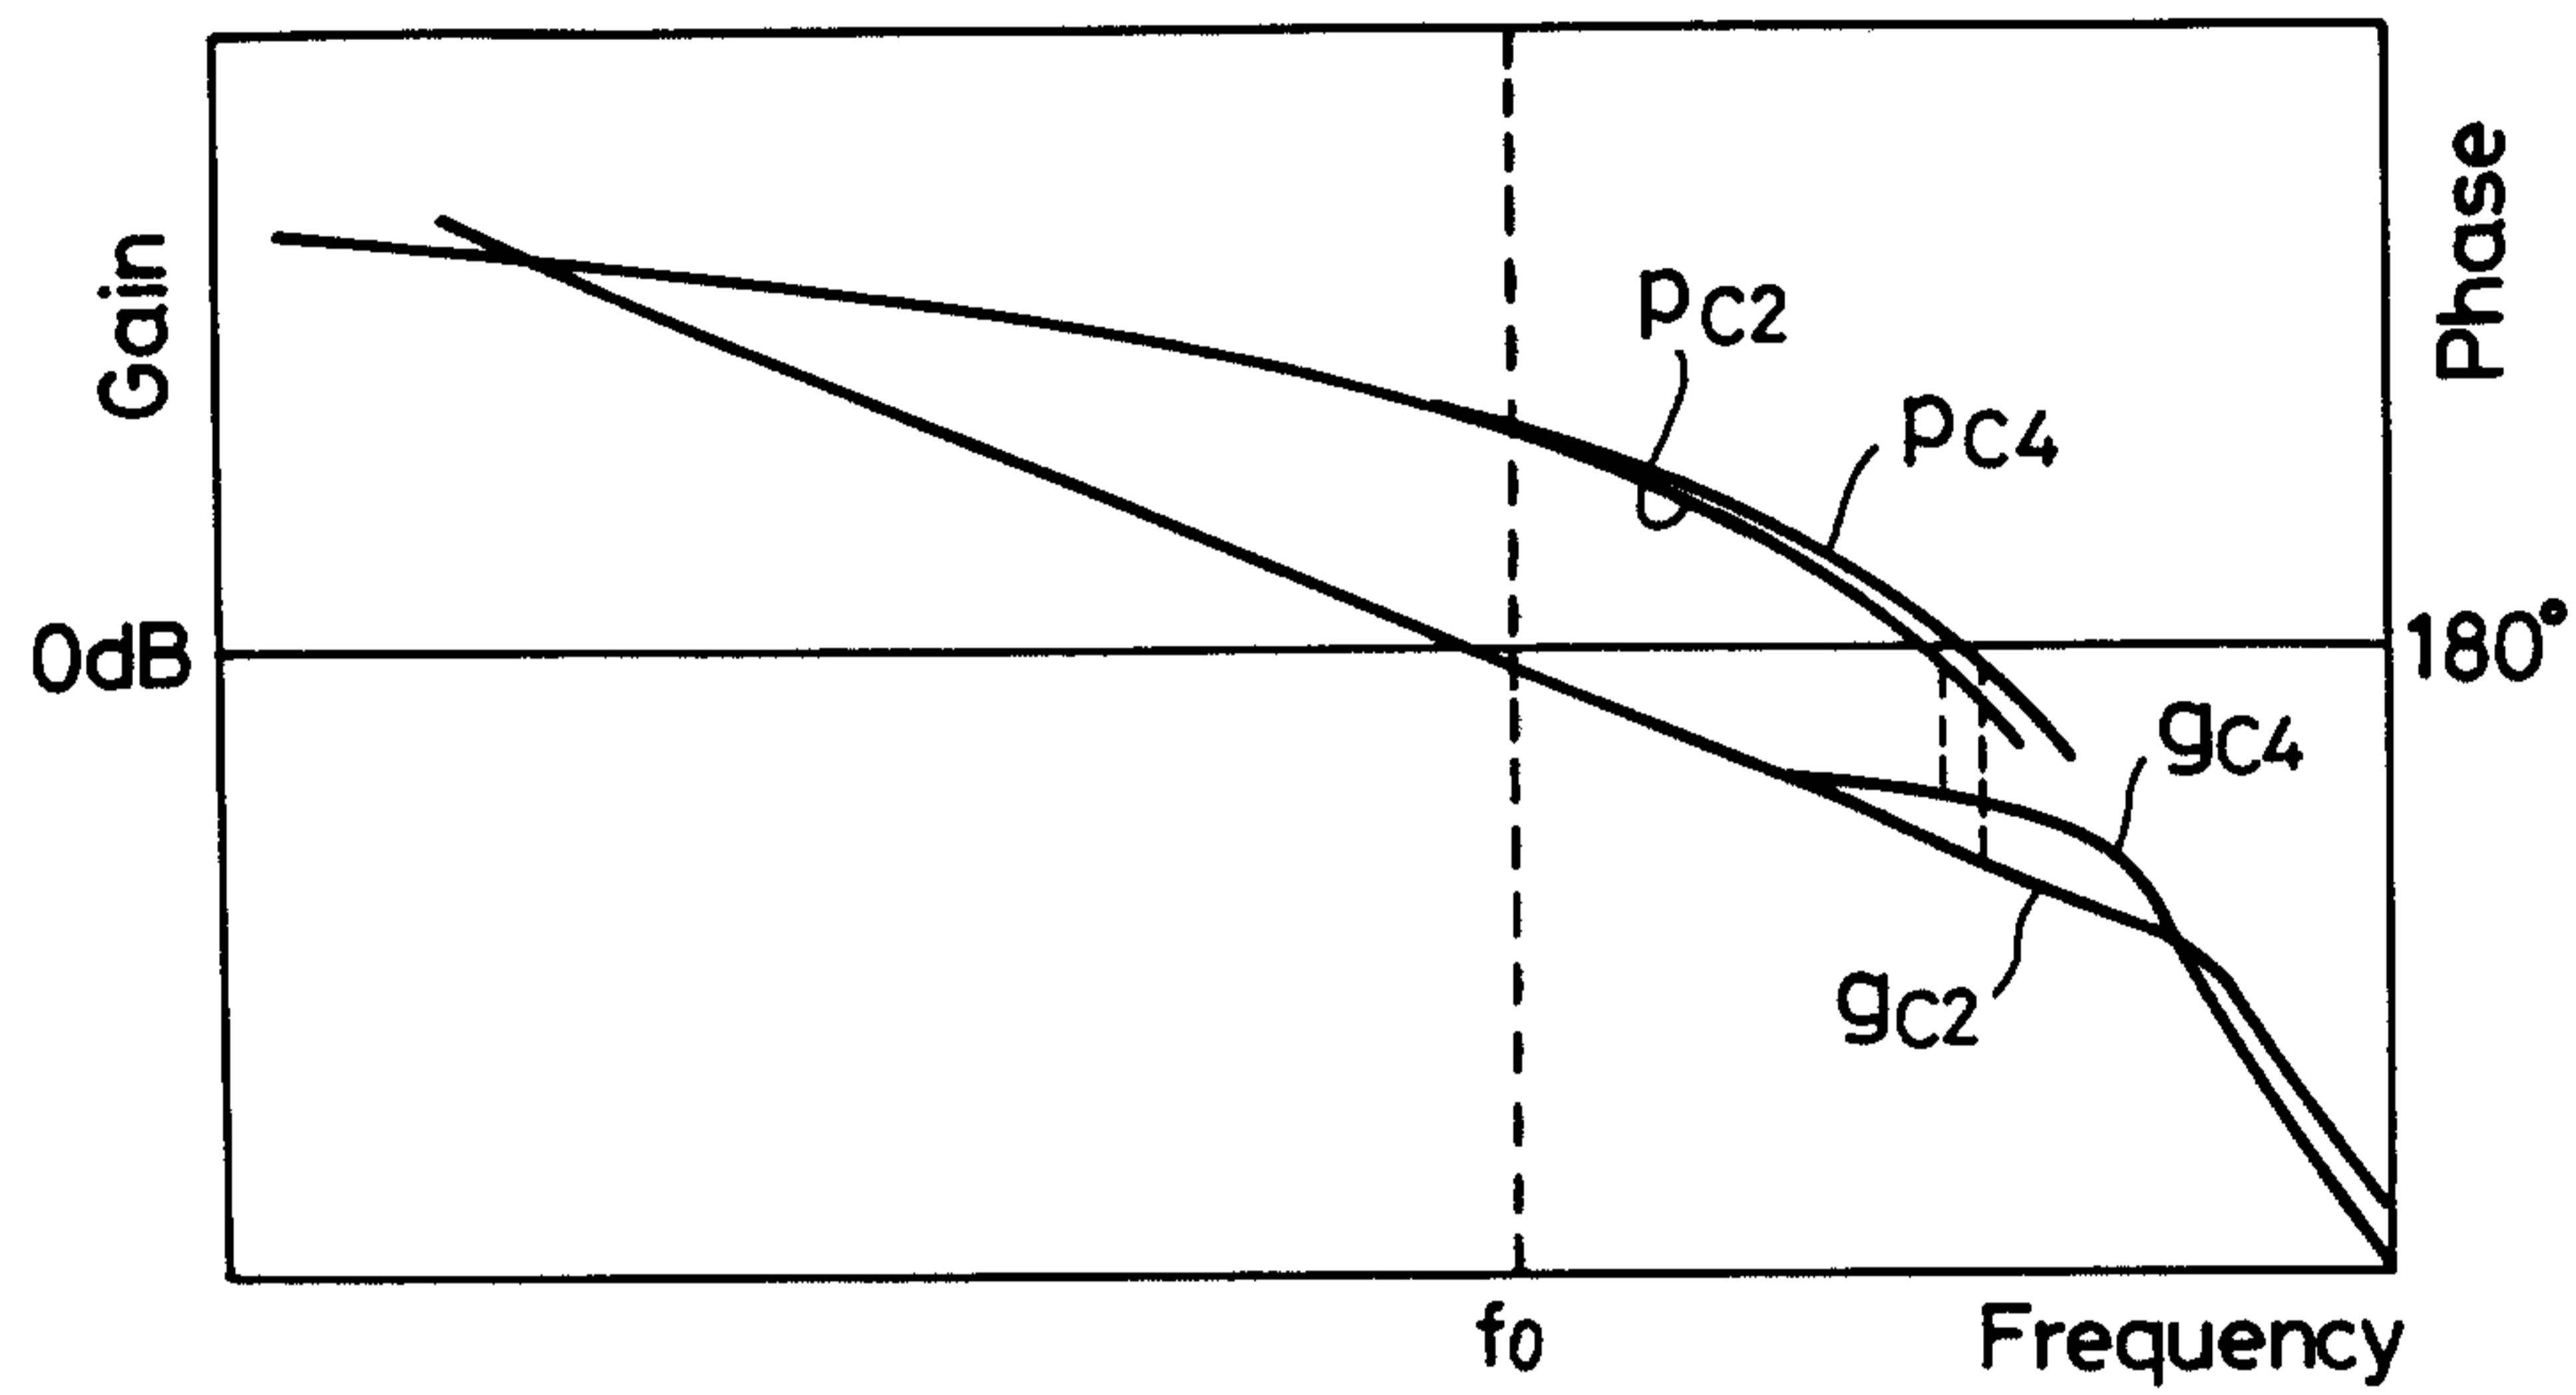


FIG. 30

