

(43) International Publication Date
19 January 2012 (19.01.2012)(10) International Publication Number
WO 2012/009652 A2(51) International Patent Classification:
H02J 7/00 (2006.01)(21) International Application Number:
PCT/US2011/044212(22) International Filing Date:
15 July 2011 (15.07.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/364,563 15 July 2010 (15.07.2010) US
61/417,037 24 November 2010 (24.11.2010) US(71) Applicant (for all designated States except US): **ZPOWER, LLC** [US/US]; 4765 Calle Quetzal, Camarillo, CA 93012 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **RENKEN, Troy** [US/US]; 3711 Fountain Street, Camarillo, CA 93012 (US). **POWERS, Tim** [US/US]; 3646 Summer Shore Lane, Westlake Village, CA 91361 (US).(74) Agent: **WEBER, Andrew N.**; Honigman, Miller, Schwartz and Cohn, 350 East Michigan Avenue, Suite 300, Kalamazoo, MI 49007 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: METHOD AND APPARATUS FOR RECHARGING A BATTERY

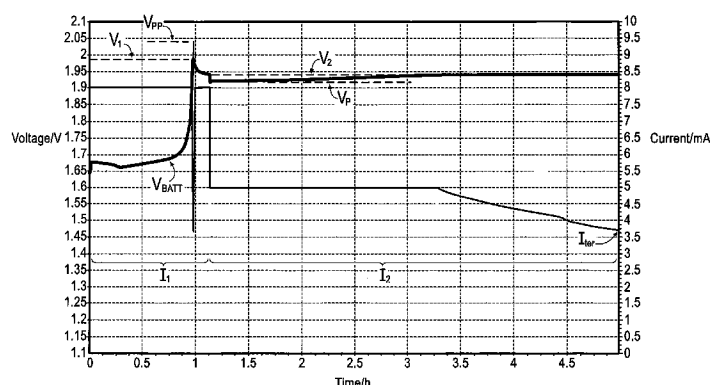


FIG. 2

(57) Abstract: The present invention provides a novel method for charging silver-zinc rechargeable batteries and an apparatus for practicing the charging method. The recharging apparatus includes recharging management circuitry; and one or more of a silver-zinc cell, a host device or a charging base that includes the recharging management circuitry. The recharging management circuitry provides means for regulating recharging of the silver-zinc cell, diagnostics for evaluating battery function, and safety measures that prevent damage to the apparatus caused by charging batteries composed of materials that are not suited for the charging method (e.g., non-silver-zinc batteries).

METHOD AND APPARATUS FOR RECHARGING A BATTERY

CROSS REFERENCE TO RELATED APPLICATION

[0001] This PCT application claims the benefit of U.S. provisional application serial nos. 61/364,563, filed on July 15, 2010, and 61/417,037, filed on Nov. 24, 2010. These applications are hereby incorporated by reference in their entireties.

FIELD OF THE INVENTION

[0002] The disclosure relates to systems, apparatuses, and methods for recharging a battery. Specifically, the methods and apparatus of the present invention are useful for recharging silver-zinc batteries.

BACKGROUND

[0003] Rechargeable batteries are known in the art and commonly used, for example, in portable electronic devices. Although conventional rechargeable batteries are useful, the systems and method used to recharge the batteries are nevertheless susceptible to improvements that may enhance or improve their service life, shelf life, and/or performance. Therefore, a need exists in the art for the development of an improved apparatus for recharging batteries and a method for charging the same.

SUMMARY OF THE INVENTION

[0004] The present invention provides a novel method for charging rechargeable batteries. Methods of the present invention reduce capacity fade that is typically observed when rechargeable silver-zinc batteries are subject to asymmetric cycling during usage. The method of the present invention may be used for charging a battery wherein the charge profile of the battery comprises one or more voltage plateaus that are separated by one or more polarization peaks, such as those profiles observed for silver-zinc rechargeable batteries.

[0005] One aspect of the present invention provides a method of charging a rechargeable battery having multiple voltage plateaus wherein the battery has a voltage, V_{Batt} , that is less than its highest voltage plateau comprising charging the battery with a first charging current, I_1 , wherein the first charging current, I_1 , is applied until the battery is charged to a voltage, V_1 ; and controlling the first charging current, I_1 , when the voltage of the battery is V_1 , so that the voltage of the battery is maintained at V_1 with a deviation of no more than about $\pm 20\%$ of V_1 , wherein voltage, V_1 , is less than the voltage of a natural polarization peak, V_{PP} , associated with a voltage plateau, V_{P} , that is higher than V_{Batt} , and V_1 is greater than the voltage plateau, V_{P} .

[0006] In some embodiments, the first charging current, I_1 , is sufficient to charge the battery to voltage, V_1 , in a period of from about 1 min to about 300 min (e.g., from about 5 min to about 300 min, or from about 10 min to about 90 min) when the battery's initial SOC is less than 40% (e.g., less than 30%) of its rated capacity. In some examples, the first charging current, I_1 , is sufficient to charge the battery to a voltage of V_1 in a period of from about 10 min to about 260 min (e.g., about 10 min to about 180 min), when the battery's initial SOC is less than 40% of its rated capacity, i.e., the battery has a DOD of more than 60%. In other examples, the first charging current, I_1 , is sufficient to charge the battery to a voltage of V_1 in a period of about 75 min or less (e.g., from about 5 min to about 75 min), when the battery's initial SOC is less than 40% of its rated capacity. In other examples, the first charging current, I_1 , is sufficient to charge the battery to a voltage of V_1 in a period of from about 15 min to about 75 min, when the battery's initial SOC is less than 40% of its rated capacity. In alternative examples, the first charging current, I_1 , is sufficient to charge the battery from a SOC of less than 30% of its rated capacity to an SOC of from about 30% to about 40% of its rated capacity in about 240 min or less. And in some examples, the first charging current, I_1 , is sufficient to charge the battery from an SOC of less than 30% of its rated capacity to a SOC of about 40% its rated capacity in less than about 240 min. In some embodiments, the first charge current I_1 is substantially constant when V_{Batt} is less than V_1 .

[0007] In some embodiments, the first charging current, I_1 , is controlled when the voltage of the battery is V_1 , so that the voltage of the battery is maintained at V_1 with a deviation of no more than about $\pm 20\%$ (e.g., $\pm 10\%$) of V_1 , for a period of from about 6 s to about 1500 s (e.g., from about 6 s to about 1200 s or from about 5 s to about 600 s).

[0008] Some implementations of this method further comprise charging the battery with a second charging current, I_2 , wherein the second charging current, I_2 , is applied after the first charging current, I_1 , until the battery voltage reaches a voltage, V_2 , wherein the voltage, V_2 , is greater than V_P , and less than V_{PP} ; and controlling the second charging current, I_2 , when the voltage of the battery reaches the voltage, V_2 , so that the voltage of the battery is maintained at V_2 with a deviation of no more than about $\pm 20\%$ of V_2 . Some embodiments of this implementation further comprise terminating the first charging current, I_1 , after the voltage of the battery is maintained at V_1 with a deviation of no more than about $\pm 20\%$ of V_1 , for a period of from about 6 s to about 1200 s (e.g., about 6 s to about 900 s); and applying a second charging current, I_2 , when the first charging current, I_1 , terminates. In some examples, I_2 is substantially constant until the battery is charged to a voltage, V_2 . In other

examples, the charge current I_2 is substantially constant when V_{Batt} is greater than or equal to V_P and less than V_2 .

[0009] In some embodiments, the second charging current, I_2 , is applied at least until the battery is charged to a SOC of from about 80% to about 110% of the battery's rated capacity.

[0010] In other embodiments, I_1 is greater than or equal to I_2 during the period before the battery is charged to a voltage of V_1 . For example, I_1 is greater than I_2 during the period before the battery is charged to a voltage of V_1 . In other examples, I_1 is equal to I_2 during the period before the battery is charged to a voltage of V_1 .

[0011] In some embodiments, V_1 is greater than or equal to V_2 . For example, V_1 is greater than V_2 . In other examples, V_1 is equal to V_2 .

[0012] In alternative embodiments, V_{Batt} is from about 50% to about 87% of the voltage, V_1 .

[0013] Some implementations further comprise controlling the first charging current, I_1 , when the voltage of the battery reaches a voltage, V_1 , so that the voltage of the battery is maintained at V_1 with a deviation of no more than about $\pm 10\%$ of V_1 for a period of from about 6 s to about 1200 s (e.g., from about 6 s to about 900 s or from about 5 s to about 600 s). Others comprise controlling the first charging current, I_1 , when the voltage of the battery reaches V_1 , so that the voltage of the battery is maintained at V_1 with a deviation of no more than about $\pm 10\%$ of V_1 for a period of from about 550 s to about 650 s.

[0014] In some embodiments, I_1 is about 50 mA or less. For example, I_1 is from about 5 mA to about 50 mA. In other embodiments, I_2 is less than about 50 mA. For example, I_2 is from less than about 50 mA to about 1 mA. And in some of these embodiments, the battery has a rated capacity of from about 1 Ah to about 4 Ah.

[0015] In some embodiments, I_1 is about 1 Amp or less. For example, I_1 is from about 80 mA to about 1 Amps (e.g., from about 80 mA to about 0.99 Amps). In other embodiments, I_2 is less than 1 Amp. For example, I_2 is from about 80 mA to about 0.99 Amps. In some of these embodiments, the battery has a rated capacity of from about 100 mAh to about 1000 mAh.

[0016] In some embodiments, I_1 is about 300 mA or less. For example, I_1 is from about 8 mA to about 299.99 mA. In some embodiments, I_2 is less than 300 mA. For example, I_2 is from about 4 mA to about 299.99 mA. In some of these embodiments, the battery has a rated capacity of from about 15 mAh to about 150 mAh.

[0017] In some embodiments, I_1 is about 150 mA or less. For example, I_1 is from about 3 mA to about 60 mA. In some embodiments, I_2 is less than 150 mA. For example, I_2 is from

about 2 mA to about 149.00 mA (e.g., from about 2 mA to about 59.99 mA). In some of these embodiments, the battery has a rated capacity of from about 4 mAh to about 150 mAh.

[0018] In some embodiments, I_1 is about 15 mA or less. For example, I_1 is from about 0.1 mA to about 14.99 mA. In some embodiments, I_2 is less than 15 mA. For example, I_2 is from about 0.1 mA to about 14.99 mA.

[0019] In some embodiments, the voltage, V_2 , is from about 90% to about 99% of V_1 . For example, the voltage, V_2 , is from about 96% to about 98% of V_1 .

[0020] In other embodiments, V_1 is about 2.04 V or less. For example, V_1 is from about 2.04 V to about 1.96 V. In other examples, V_1 is from about 1.99 V to about 1.96 V.

[0021] In some embodiments, V_2 is about 2.03 V or less. For example, V_2 is from about 2.03 V to about 1.93 V. In other examples, V_2 is from about 1.93 V to about 1.95 V.

[0022] Some implementations exclude counting Coulombs.

[0023] Other implementations further comprise generating an electrical signal when the DOD of the battery reaches about 80% or less (e.g., the DOD is about 20% or less, or the DOD is about 10% or less).

[0024] Some implementations further comprise generating an electrical signal if the voltage of the battery is lower than V_P for a period of 2 seconds or more.

[0025] And, some implementations further comprise charging the battery with a diagnostic charge current, I_{Diag} , for a period of less than about 60 seconds (e.g., less than about 30 s, less than about 20 s, or less than about 10 s, or less than about 7 s), detecting the voltage of the battery, and terminating charging of the battery if the voltage of the battery, V_{Batt} , is less than the initial voltage of the battery prior to being charged with the diagnostic charge current, I_{Diag} . Some examples further comprise charging the battery with a diagnostic charge current, I_{Diag} , for a period of less than about 60 seconds (e.g., less than about 20 s or less than about 10 s, less than about 7 s, or less than about 5 s), detecting the voltage of the battery, and terminating charging of the battery if the voltage of the battery, V_{Batt} , is less than about 1.65 V (e.g., less than about 1.60 V or about 1.55 V or less). Some examples comprise charging the battery with a diagnostic charge current of less than about 10 mA (e.g., about 8 mA) for a period of about 60 s or less (e.g., about 30 s or less, about 20 s or less, about 10 s or less, or about 3 s), detecting the voltage of the battery, and terminating charging of the battery if the voltage of the battery is less than or equal to 1.55V. And, some examples comprise charging the battery with a diagnostic charge current of less than about 10 mA (e.g., about 8 mA) for a period of about 3 seconds, detecting the voltage of the battery, and terminating charging of the battery if the increase in the SOC of the battery is less than 0.02%. Some of these

embodiments optionally comprise generating an electrical signal that may activate a visual alarm, audio alarm, vibrational alarm, or any combination thereof when the charging of the battery with I_{Diag} is terminated, as discussed above.

[0026] In some embodiments, I_{Diag} is from about 5 mA to about 25 mA.

[0027] Some implementations comprise charging the battery with a diagnostic charge current of less than about 10 mA (e.g., about 8 mA) for a period of less than about 10 s (e.g., less than about 5s, or about 3 seconds), detecting the voltage of the battery, and terminating charging of the battery if the increase in the SOC of the battery is less than about 0.02%.

[0028] Another aspect of the present invention provides a method of detecting a rechargeable silver-zinc battery comprising charging the battery with a current of less than about 10 mA (e.g., about 8mA) for a period of about 7 seconds or less, detecting the voltage of the battery, and generating an electrical signal if the voltage of the cell is less than about 1.65 V.

[0029] In some embodiments, the electrical signal activates an audio alarm or a visual alarm.

[0030] Other embodiments further comprise charging the battery with a current of about 8mA for a period of about 3 seconds.

[0031] Another aspect of the present invention provides a method of detecting a rechargeable silver-zinc battery comprising charging the battery such that the SOC of the battery is increased by about 0.02%, detecting the voltage of the battery, and generating an electrical signal if the voltage of the battery is less than about 1.65 V.

[0032] Another aspect of the present invention provides a method of charging a rechargeable battery having multiple voltage plateaus wherein the battery has a voltage (e.g., OCV), V_{Batt} , that is less than about 80% (e.g., less than about 70%) of the voltage of a first sequential voltage plateau, V_{P1} , comprising charging the battery with a recovery charging current, I_{recov} , that is substantially constant for a period of no more than 30 min after the voltage of charging battery reaches the first sequential voltage plateau, V_{P1} that is greater than V_{Batt} ; charging the battery with a first charging current, I_1 , wherein the first charging current, I_1 , is substantially constant until the battery is charged to a voltage, V_1 ; and controlling the first charging current, I_1 , when the voltage of the battery reaches the voltage, V_1 , so that the voltage of the battery is maintained at V_1 with a deviation of no more than about $\pm 20\%$ of V_1 , for a period of from about 6 s to about 900 s, wherein voltage, V_1 , is less than the voltage of the natural polarization peak, V_{PP} , for a voltage plateau, V_{P} , that is higher than V_{P1} , and V_1 is greater than the voltage plateau, V_{P} .

[0033] Some embodiments further comprise charging the battery with a recovery charging current, I_{recov} , that is substantially constant for a period of no more than 15 min after the voltage of the battery reaches the first sequential voltage plateau, V_{P1} that is greater than V_{Batt} .

[0034] Some embodiments further comprise generating an electrical signal if the voltage of the battery, V_{Batt} , fails to reach the first sequential voltage plateau, V_{P1} , that is greater than V_{Batt} after being charged with I_{recov} for a period of from about 30 min to about 2 hr (e.g., from about 1 hr to about 2 hrs).

[0035] Some embodiments comprise charging the battery with a second charging current, I_2 , wherein the second charging current, I_2 , is substantially constant until the battery voltage reaches a voltage, V_2 , wherein the voltage, V_2 , is less than the voltage, V_1 , and greater than the first sequential voltage plateau, V_{P1} ; and controlling the second charging current, I_2 , when the voltage of the battery reaches the voltage, V_2 , so that the voltage of the battery is maintained at V_2 with a deviation of no more than about $\pm 20\%$ of the voltage V_2 .

[0036] Alternative embodiments comprise terminating the second charging current, I_2 , after a period of about 10 minutes or less from the point when the battery is charged to a capacity of from about 80% to about 150% of the battery's rated capacity.

[0037] Some embodiments exclude counting Coulombs.

[0038] And, in some embodiments, the rechargeable battery comprises an anode comprising a zinc material. In others, the rechargeable battery comprises a cathode comprising a silver material. In some embodiments, the rechargeable battery comprises a button cell, a coin cell, a cylinder cell, or a prismatic cell.

[0039] Some embodiments further comprise generating an electrical signal when the second charging current, I_2 , terminates.

[0040] Some embodiments further comprise activating a visual signal when the second charging current, I_2 , terminates.

[0041] Another aspect of the present invention provides a method of charging a rechargeable button cell having multiple voltage plateaus wherein the cell has a voltage greater than about 1.10 V and less than about 1.70 V comprising charging the cell with a first charging current, I_1 , wherein the first charging current, I_1 , is substantially constant until the cell is charged to a voltage, V_1 , that is greater than 1.70 V and less than 2.04 V; and controlling the first charging current, I_1 , when the voltage of the cell reaches the voltage, V_1 , so that the voltage of the cell is maintained at V_1 with a deviation of no more than about $\pm 10\%$ of V_1 for a period of from about 6 s to about 900 s.

[0042] Some embodiments further comprise charging the cell with a second charging current, I_2 , wherein the second charging current, I_2 , is substantially constant until the cell voltage reaches a voltage, V_2 , wherein the voltage, V_2 , is less than the voltage, V_1 , and greater than 1.7 V, and controlling the second charging current, I_2 , when the voltage of the cell reaches the voltage, V_2 , so that the voltage of the cell is maintained at V_2 with a deviation of no more than about $\pm 10\%$ of the voltage V_2 .

[0043] Other embodiments comprise terminating the second charging current, I_2 , after no more than 5 minutes from the point when the cell is charged to a capacity of from about 80% to about 150% (e.g., from about 80% to about 110%) of the cell's rated capacity.

[0044] In some embodiments, the first charging current, I_1 , is sufficient to charge the battery to the voltage, V_1 , in a period of from about 30 min to about 180 min.

[0045] Some embodiments further comprise controlling the first charging current, I_1 , when the voltage of the cell reaches the voltage, V_1 , so that the voltage of the battery is maintained at V_1 with a deviation of no more than about $\pm 10\%$ of V_1 for a period of from about 550 s to about 650 s.

[0046] In some embodiments, I_1 is about 50 mA or less. For example, I_1 is from about 5 mA to about 50 mA. In other embodiments, I_2 is less than about 50 mA. For example, I_2 is from less than about 50 mA to about 1 mA. And in some of these embodiments, the battery has a rated capacity of from about 1 Ah to about 4 Ah.

[0047] In some embodiments, I_1 is about 1 Amp or less. For example, I_1 is from about 80 mA to about 1 Amps (e.g., from about 80 mA to about 0.99 Amps). In other embodiments, I_2 is less than 1 Amp. For example, I_2 is from about 80 mA to about 0.99 Amps. In some of these embodiments, the battery has a rated capacity of from about 100 mAh to about 1000 mAh.

[0048] In some embodiments, I_1 is about 300 mA or less. For example, I_1 is from about 8 mA to about 299.99 mA. In some embodiments, I_2 is less than 300 mA. For example, I_2 is from about 4 mA to about 299.99 mA. In some of these embodiments, the battery has a rated capacity of from about 15 mAh to about 150 mAh.

[0049] In some embodiments, I_1 is about 150 mA or less. For example, I_1 is from about 3 mA to about 60 mA. In some embodiments, I_2 is less than 150 mA. For example, I_2 is from about 2 mA to about 149.00 mA (e.g., from about 2 mA to about 59.99 mA). In some of these embodiments, the battery has a rated capacity of from about 4 mAh to about 150 mAh.

[0050] In some embodiments, I_1 is about 15 mA or less. For example, I_1 is from about 0.1 mA to about 14.99 mA. In some embodiments, I_2 is less than 15 mA. For example, I_2 is from about 0.1 mA to about 14.99 mA.

[0051] In some embodiments, the voltage, V_2 , is from about 90% to about 99% of V_1 . For example, the voltage, V_2 , is from about 96% to about 98% of V_1 .

[0052] In other embodiments, V_1 is about 2.04 V or less. For example, V_1 is from about 2.04 V to about 1.96 V. In other examples, V_1 is from about 1.99 V to about 1.96 V.

[0053] In some embodiments, V_2 is about 2.03 V or less. For example, V_2 is from about 2.03 V to about 1.93 V. In other examples, V_2 is from about 1.93 V to about 1.95 V.

[0054] In some embodiments, the first charging current, I_1 , is modulated for a period of about 550 s to about 650 s.

[0055] Other embodiments exclude counting Coulombs.

[0056] In some embodiments, the cell comprises an anode comprising a zinc material.

[0057] In other embodiments, the cell comprises a cathode comprising a silver material

[0058] Some embodiments further comprise generating an electrical signal when the second charging current, I_2 , is terminated.

[0059] Some embodiments further comprise activating a visual signal when the second charging current, I_2 , is terminated.

[0060] Another aspect of the present invention provides a method of charging a rechargeable battery having multiple voltage plateaus and an initial SOC of greater than 50% of its rated capacity, wherein the battery has a voltage, V_{Batt} , that is less than or equal to its highest voltage plateau comprising charging the battery with a substantially constant charging current, I_2 , until the battery is charged to a voltage, V_2 ; and controlling I_2 so that the voltage of the battery is maintained at V_2 with a deviation of no more than about $\pm 20\%$ of V_2 , wherein voltage, V_2 , is greater than or equal to (e.g., greater than) the voltage of a voltage plateau, V_P , and less than the voltage of a natural polarization peak, V_{PP} .

[0061] Some embodiments further comprise terminating the charging current, I_2 , when I_2 reaches a minimum threshold current, I_{ter} . In some instances, I_{ter} is about 95% or less (e.g., about 85% or less) of I_2 during the period when the battery being charged to V_2 . For example, terminating the charging current, I_2 reaches I_{ter} , and I_{ter} is about 80% to about 95% of I_2 , when the temperature is higher than about 25 °C.

[0062] Other embodiments further comprise terminating the charging current, I_2 , when I_2 reaches I_{ter} , and I_{ter} is about 75% or less of I_2 during the period when the battery is charged to V_2 .

[0063] In some embodiments, V_2 is about 2.03 V or less (e.g., about 2 V or less).

[0064] In some embodiments, I_2 is about 6 mA.

[0065] In some embodiments, I_{ter} is about 4.5 mA.

[0066] Another aspect of the present invention provides a method of charging a rechargeable 2.0 V silver-zinc battery comprising charging the battery with a charge current, I_2 , having a maximum amperage, I_{max} , of about 10 mA or less (e.g., about 6 mA or less) wherein the charge current I_2 is modulated so that the voltage of the battery is restricted to about 2.03 V or less; clocking time 60 seconds after charging with second charge current, I_2 , begins; measuring the lowest amperage, I_{low} , of charge current I_2 when time is being clocked; and arresting charge current I_2 once the battery is charged with from about 40% to about 60% (e.g., about 50%) of its rated capacity with charge current, I_2 , wherein the capacity charged to the battery is determined by integrating the charge current, I_2 , while time is being clocked; and the voltages have a deviation of $\pm 0.5\%$, the current amperages have deviations of $\pm 2\%$, and clocked times have a deviation of $\pm 2\%$.

[0067] In some embodiments, the battery has an OCV of greater than about 1.6 V (e.g., greater than about 1.65 V) in its discharged state, i.e., immediately before charging.

[0068] Another aspect of the present invention provides a method of charging a rechargeable 2.0 V silver-zinc battery comprising charging the battery with a charge current, I_2 , having a maximum amperage, I_{max} , of about 10 mA or less (e.g., about 6 mA or less) wherein the charge current I_2 is modulated so that the voltage of the battery is restricted to about 2.03 V or less; clocking time 60 seconds after charging with second charge current, I_2 , begins; measuring the lowest amperage, I_{low} , of charge current I_2 when time is being clocked; and arresting charge current I_2 when the amperage of I_2 is below I_{end} for a period of 60 continuous seconds if the amperage of I_2 is I_{max} for a period of 2 continuous seconds while time is being clocked; or arresting charge current I_2 once the battery is charged with from about 40% to about 60% (e.g., about 50%) of its rated capacity with charge current I_2 , if I_{low} is less than the amperage of charge current I_2 after 20 minutes has been clocked, wherein the capacity charged to the battery is determined by integrating the charge current, I_2 , while time is being clocked; or arresting charge current I_2 when the amperage of I_2 is below I_{end} for a period of 60 continuous seconds, if I_{low} is greater than or equal to the amperage of I_2 after 20 minutes has been clocked; or arresting charge current I_2 when the amperage of I_2 is below 1.0 V, for a period of about 5 min or less; wherein $I_{end} = I_{Chg} + I_{Temp}$, $I_{Chg} = (T_2 \times I_{max})/T_{Chg}$, I_{Temp} is the temperature compensation current, T_2 is the time necessary to charge the battery from a voltage of about 1.9 V to a voltage of about 2.0 V, I_{max} is the maximum current charged to the

battery, and T_{Chg} is the cell time constant; and the voltages have a deviation of $\pm 0.5\%$, the current amperages have deviations of $\pm 2\%$, and clocked times have a deviation of $\pm 2\%$.

[0069] In some embodiments, the battery has an OCV of greater than about 1.6 V (e.g., greater than about 1.65 V) in its discharged state.

[0070] Some embodiments further comprise measuring the temperature, wherein the temperature measurement has accuracy of about $\pm 5^\circ\text{C}$ (e.g., $\pm 2^\circ\text{C}$).

[0071] Another aspect of the present invention provides a method of charging a rechargeable 2.0 V silver-zinc battery comprising charging the battery with first charge current, I_1 , having a maximum amperage, I_{max} , of about 10 mA or less (e.g., about 6 mA or less); clocking time once the battery is charged to a voltage of 1.90 V; modulating the first charge current, I_1 , so that the voltage of the battery is restricted to about 2.03 V or less; arresting the first charge current, I_1 , once from between about 10 min to about 30 min (e.g., about 20 min) has been clocked; charging the battery with second charge current, I_2 , having a maximum amperage, I_{max} , of about 10 mA or less (e.g., about 6 mA or less) wherein the second charge current I_2 is modulated so that the voltage of the battery is restricted to about 2.0 V or less; clocking time 60 seconds after charging with second charge current, I_2 , begins; measuring the lowest amperage, I_{low} , of charge current I_2 when time is being clocked; and arresting charge current I_2 when the amperage of I_2 is below I_{end} for a period of 60 continuous seconds if the amperage of I_2 is I_{max} for a period of 2 continuous seconds while time is being clocked; or arresting charge current I_2 once the battery is charged with from about 40% to about 60% (e.g., about 50%) of its rated capacity with charge current I_2 , if I_{low} is less than the amperage of charge current I_2 after 20 minutes has been clocked, wherein the capacity charged to the battery is determined by integrating the charge current, I_2 , while time is being clocked; or arresting charge current I_2 when the amperage of I_2 is below I_{end} for a period of 60 continuous seconds, if I_{low} is greater than or equal to the amperage of I_2 after 20 minutes has been clocked; or arresting charge current I_2 when the amperage of I_2 is below 1.0 V, for a period of about 5 min or less; wherein $I_{\text{end}} = I_{\text{Chg}} + I_{\text{Temp}}$, $I_{\text{Chg}} = (T_2 \times I_{\text{max}})/T_{\text{Chg}}$, I_{Temp} is the temperature compensation current, T_2 is the time necessary to charge the battery from a voltage of about 1.9 V to a voltage of about 2.0 V, I_{max} is the maximum current charged to the battery, and T_{Chg} is the cell time constant; and the voltages have a deviation of $\pm 0.5\%$, the current amperages have deviations of $\pm 2\%$, and clocked times have a deviation of $\pm 2\%$.

[0072] Another method of the present invention provides charging a rechargeable 2.0 V silver-zinc battery having an OCV of less than 1.65 V comprising charging the battery with first charge current, I_1 , having an amperage of 10 mA or less; clocking time once the battery

is charged to a voltage of 1.90 V; modulating the first charge current, I_1 , so that the voltage of the battery is restricted to 2.03 V or less, and the first charge current has a maximum amperage of about 10.0 mA or less; arresting the first charge current, I_1 , once 20 minutes has been clocked; charging the battery with second charge current, I_2 , wherein the charge current I_2 is modulated so that the voltage of the battery is restricted to 2.0 V or less, and the second charge current has a maximum amperage, $I_{\max}$, of about 10.0 mA or less; arresting charge current I_2 when the amperage of I_2 is below I_{end} for a period of 60 continuous seconds or less, wherein $I_{\text{end}} = I_{\text{Chg}} + I_{\text{Temp}}$, I_{Chg} is the charge compensation current, I_{Temp} is the temperature compensation current, and $I_{\text{Chg}} = (T_2 \times I_{\max})/T_{\text{Chg}}$, T_2 is the time period beginning when the battery voltage is about 1.9 V and ending when I_2 is less than $I_{\max}$, and T_{Chg} is the cell time constant; or arresting charge current I_2 when the amperage of I_2 is below 1.0 V, for a period of about 5 min or less; and wherein the voltages have a deviation of $\pm 0.5\%$, the current amperages have deviations of $\pm 2\%$, the temperature measurement accuracy has a deviation of no more than $\pm 5^\circ\text{C}$, and clocked times have a deviation of $\pm 2\%$.

[0073] Some of these methods further comprise measuring the temperature, wherein the temperature measurement has an accuracy of about $\pm 2^\circ\text{C}$.

[0074] In some embodiments, the maximum amperage, $I_{\max}$, is about 6 mA or less. For example, $I_{\max}$ is about 5.5 mA or less.

[0075] In other embodiments, the battery has an OCV of less than about 1.70 V (e.g., about 1.65 V or less) in its discharged state.

[0076] In some embodiments, the OCV of the battery is greater than 1.25 V prior to charging.

[0077] In other embodiments, the OCV of the battery is less than 1.25 V prior to charging.

[0078] Some embodiments further comprise charging the battery with a recovery charge current of 1.0 mA for a period of at least 20 minutes (e.g., at least 30 minutes); and arresting the recovery charge current when the battery is charged to a voltage of about 1.50 V or more (e.g., about 1.6 V).

BRIEF DESCRIPTION OF THE DRAWINGS

[0079] Certain aspects of the present invention are described, by way of example, with reference to the accompanying drawings, wherein:

[0080] Figure 1 is a circuit diagram for battery charging circuitry that is capable of performing an exemplary method for charging a rechargeable battery or button cell according to one embodiment of the present invention.

[0081] Figure 2 is a plot of a charge curve of a rechargeable battery having at least one voltage plateau, wherein the battery voltage, V_{Batt} , and charging current are plotted as the battery is charged with a first charge current, I_1 , and a second charge current, I_2 , according to one method of the present invention.

[0082] Figure 3A is an exemplary plot of a charge curve of a rechargeable battery having multiple voltage plateaus, wherein the battery voltage is plotted as the battery is charged with an unclamped charging current to illustrate the natural polarization peaks of the battery, V_{PP1} and V_{PP2} , and the voltage plateaus, V_{P1} , V_{P2} , and V_{P3} , observed during charging.

[0083] Figure 3B is a magnified view of one voltage plateau shown in Figure 3A showing a representation of the relationships between the voltage plateau voltage, V_{P1} , the voltage, V_1 , and the voltage of the natural polarization peak, V_{PP1} .

[0084] Figure 4 is a plot of a charge curve of a rechargeable battery having at least one voltage plateau, wherein the battery voltage and charging current are plotted as the battery is charged until the charge current, I_2 , reaches a terminal charge current, I_{ter} , according to one method of the present invention where $V_{\text{Batt}} > V_1 > V_{\text{P1}}$.

[0085] Figure 5 is a plot of a charge curve of a rechargeable battery having at least one voltage plateau, wherein the battery is charged according to a multiple zone charging method of the present invention wherein the battery is charged to a first voltage V_1 with charge current I_1 , then battery is charged to voltage V_2 with charge current I_2 , and voltage V_1 is about equal to voltage V_2 .

[0086] Figure 6 is a plot of a charge curve of a rechargeable battery having at least one voltage plateau, wherein the battery is charged according to a multiple zone charging method of the present invention wherein the battery is charged from a low SOC with a recovery charge current, I_{recov} , until the voltage of the battery reaches a recovery voltage, V_{recov} , then the battery is charged with a first charge current, I_1 , until the voltage reaches V_1 , and finally the battery is charged with a second charge current, I_2 , until the second charge current reaches I_{ter} .

[0087] Figure 7A is a plot of a charge curve for recharging a battery in accordance with an exemplary embodiment of the invention.

[0088] Figure 7B is a plot of a charge curve for recharging a battery experiencing a soft-short in accordance with an exemplary embodiment of the invention.

[0089] Figure 8A is a step-diagram representing one exemplary method for recharging a rechargeable battery having at least one voltage plateau according to one embodiment of the invention.

[0090] Figure 8B is a step-diagram representing another exemplary method for recharging a rechargeable battery having at least one voltage plateau according to one embodiment of the invention.

[0091] Figure 8C is a step-diagram representing another exemplary method for recharging a rechargeable battery having at least one voltage plateau according to one embodiment of the invention.

[0092] Figure 8D is a step-diagram representing another exemplary method for recharging a rechargeable battery having at least one voltage plateau according to one embodiment of the invention.

[0093] Figure 9 is a step-diagram representing another exemplary method for recharging a rechargeable battery.

[0094] Figure 10 is a plot of a charge curve for a battery being charged with a multi-zone charge method in accordance with an exemplary embodiment of the invention.

[0095] Figure 11 is a plot of a charge curve for a battery being charged with a multi-zone charge method in accordance with an exemplary embodiment of the invention.

[0096] Figure 12 is a plot of a charge curve for a battery being charged with a multi-zone charge method in accordance with an exemplary embodiment of the invention.

[0097] Figure 13 is a plot of a charge curve for a battery having an SOC of about 50% or more being charged in accordance with an exemplary embodiment of the invention.

[0098] Figure 14 is a plot of a charge curve for a battery having an SOC of about 50% or more being charged in accordance with an exemplary embodiment of the invention.

[0099] Figure 15 is a plot of a charge curve for a battery having an SOC of about 50% or more being charged in accordance with an exemplary embodiment of the invention.

[0100] Figure 16 is a plot of a charge curve for a battery having an SOC of about 50% or more being charged in accordance with an exemplary embodiment of the invention.

[0101] Figure 17 is a plot of a charge curve for a battery having an OCV of about 1.25 V or less being charged in accordance with an exemplary embodiment of the invention.

[0102] Figure 18 is a plot of a charge-discharge curve for a battery being discharged to an SOC of less than about 40% and then being charged with a substantially constant charge current that does not clamp the battery's voltage until the battery voltage reaches the polarization peak, and then being charged according to a method of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0103] The Figures illustrate exemplary embodiments of battery rechargers and methods of recharging batteries according to the present invention. Based on the foregoing, it is to be

generally understood that the nomenclature used herein is simply for convenience and the terms used to describe the invention should be given the broadest meaning understood by one of ordinary skill in the art.

[0104] I. DEFINITIONS

[0105] As used herein "polarization peak" or "natural polarization peak" refers to a peak voltage value of a sharp spike in battery voltage that precedes a voltage plateau, which is observed when a rechargeable battery having a plurality of voltage plateaus, e.g., at least 2 voltage plateaus, is charged from a voltage of a first plateau to a voltage of a higher plateau with a charge current that is not controlled to clamp the battery's voltage. Exemplary voltage plateaus are illustrated in Figure 2, as V_P , and Figures 3A and 3B, as V_{P1} , V_{P2} , and V_{P3} .

Exemplary polarization peaks are illustrated in Figure 2, as V_{PP} , in Figures 3A and 3B, as V_{PP1} and V_{PP2} , and in Figure 18. Note that in Figures 3A and 3B, the exemplary polarization peaks are observed when the charging current is substantially constant and unclamped.

Without limiting the scope of the present invention, it is believed that the polarization peak occurs when the state of flux in the internal chemistry (e.g., the oxidation state of the cathode material, the anode material, or both) of a rechargeable battery is maximized while the battery is being charged with an uncontrolled current. This phenomenon is observed for silver-zinc batteries and others when a voltage plot is generated for a recharging battery when the charge current is substantially constant but not controlled to clamp the battery voltage. An example of this voltage plot is provided in Figure 18, wherein the polarization peak is identified in the charge section of the plot. Note that when a rechargeable battery is charged according some methods of the present invention, one or more polarization peaks will not be observed because the one or more charging currents (e.g., the first charge current, the second charge current, or both) is controlled to clamp the battery's voltage.

[0106] The term "voltage plateau", refers to a range of battery capacities wherein the battery's voltage remains substantially unchanged, e.g., having a variance of $\pm 10\%$ or less or having a variance of $\pm 5\%$ or less, when the battery is being charged with a substantially constant charge current. Although the voltage range for a voltage plateau is generally narrow, e.g., having a variance of $\pm 10\%$ or less or having a variance of $\pm 5\%$ or less, voltage plateaus are characterized or identified by the lowest voltage on the plateau, e.g., V_P . This is exemplified in Figure 2, as V_P , and in Figures 3A and 3B, as V_{P1} and V_{P2} . Without limiting the scope of the invention, it is believed that voltage plateaus occur when the internal chemistry (e.g., oxidation state of the cathode or anode or both) of a battery's electrochemical cell or cells stabilizes during charging and the modest variance in the battery's voltage along

the plateau is governed by kinetic effects rather than nucleation, which is believed to be prominent at voltages between plateaus. The voltage plateau phenomenon may be observed when a voltage plot is generated for a recharging battery.

[0107] The terms "control", "controlling", "modulate", or "modulating", are used interchangeably herein and refer to raising, lowering, or maintaining a charge current so that the voltage of the rechargeable battery being charged is restricted or "clamped".

[0108] The terms "rechargeable battery", "battery", "electrochemical cell" and "cell" are used interchangeably herein and refer to a device capable of either deriving electrical energy from chemical reactions, or facilitating chemical reactions through the introduction of electrical energy. A battery may have one or more electrochemical cells depending on its design. For example a button cell or a coin cell is a battery having one electrochemical cell.

[0109] As used herein, "depth of discharge" and "DOD" are used interchangeably to refer to the measure of how much energy has been withdrawn from a battery or cell, often expressed as a percentage of capacity, e.g., rated capacity. For example, a 100 Ah battery from which 30 Ah has been withdrawn has undergone a 30% depth of discharge (DOD).

[0110] As used herein, "state of charge" and "SOC" are used interchangeably to refer to the available capacity remaining in a battery, expressed as a percentage of the cell or battery's rated capacity. A battery's "initial SOC" refers to the state of charge of the battery before the battery undergoes charging or recharging.

[0111] As used herein, the terms "silver" or "silver material" refer to any silver compound such as Ag, AgO, Ag₂O, Ag₂O₃, AgOH, AgOOH, AgONa, AgCuO₂, AgFeO₂, AgMnO₂, Ag(OH)₂, hydrates thereof, or any combination thereof. Note that 'hydrates' of silver include hydroxides of silver. Because it is believed that the coordination sphere surrounding a silver atom is dynamic during charging and discharging of the cell wherein the silver serves as a cathode, or when the oxidation state of the silver atom is in a state of flux, it is intended that the term 'silver' or 'silver material' encompass any of these silver oxides and hydrates (e.g., hydroxides). Terms 'silver' or 'silver material' also includes any of the abovementioned species that are doped and/or coated with dopants and/or coatings that enhance one or more properties of the silver. Exemplary dopants and coatings are provided below. In some examples, silver or silver material includes a silver oxide further comprising a first row transition metal dopant or coating. For example, silver includes silver-copper-oxide, silver-iron-oxide, silver-manganese-oxide (e.g., AgMnO₂), silver-chromium-oxide, silver-scandium-oxide, silver-cobalt-oxide, silver-titanium-oxide, silver-vanadium-oxide, hydrates thereof, or any combination thereof. Note that the term "oxide" used herein does not, in each

instance, describe the number of oxygen atoms present in the silver or silver material. For example, a silver oxide may have a chemical formula of AgO, Ag₂O₃, or a combination thereof. Furthermore, silver can comprise a bulk material or silver can comprise a powder having any suitable mean particle diameter.

[0112] As used herein, an "electrolyte" refers to a substance that behaves as an electrically conductive medium. For example, the electrolyte facilitates the mobilization of electrons and cations in the cell. Electrolytes include mixtures of materials such as aqueous solutions of alkaline agents. Some electrolytes also comprise additives such as buffers. For example, an electrolyte comprises a buffer comprising a borate or a phosphate. Exemplary electrolytes include, without limitation, aqueous KOH, aqueous NaOH, or the liquid mixture of KOH in a polymer.

[0113] As used herein, "alkaline agent" refers to a base or ionic salt of an alkali metal (e.g., an aqueous hydroxide of an alkali metal). Furthermore, an alkaline agent forms hydroxide ions when dissolved in water or other polar solvents. Exemplary alkaline electrolytes include without limitation LiOH, NaOH, KOH, CsOH, RbOH, or combinations thereof. Electrolytes can optionally include other salts to modify the total ionic strength of the electrolyte, for example KF or Ca(OH)₂.

[0114] As used herein, "Ah" refers to Ampere (Amp) Hour and is a scientific unit for the capacity of a battery or electrochemical cell. A derivative unit, "mAh" represents a milliamp hour and is 1/1000 of an Ah.

[0115] As used herein, "maximum voltage" or "rated voltage" refers to the maximum voltage an electrochemical cell can be charged without interfering with the cell's intended utility. For example, in several zinc-silver electrochemical cells that are useful in portable electronic devices, the maximum voltage is less than about 2.3 V or less, or about 2.0 V. In other batteries, such as lithium ion batteries that are useful in portable electronic devices, the maximum voltage is less than about 15.0 V (e.g., less than about 13.0 V, or about 12.6 V or less). The maximum voltage for a battery can vary depending on the number of charge cycles constituting the battery's useful life, the shelf-life of the battery, the power demands of the battery, the configuration of the electrodes in the battery, and the amount of active materials used in the battery.

[0116] As used herein, an "anode" is an electrode through which (positive) electric current flows into a polarized electrical device. In a battery or galvanic cell, the anode is the negative electrode from which electrons flow during the discharging phase in the battery. The anode is also the electrode that undergoes chemical oxidation during the discharging phase.

However, in secondary, or rechargeable, cells, the anode is the electrode that undergoes chemical reduction during the cell's charging phase. Anodes are formed from electrically conductive or semiconductive materials, e.g., metals, metal oxides, metal alloys, metal composites, semiconductors, or the like. Common anode materials include Si, Sn, Al, Ti, Mg, Fe, Bi, Zn, Sb, Ni, Pb, Li, Zr, Hg, Cd, Cu, LiC_6 , mischmetals, alloys thereof, oxides thereof, or composites thereof. Anode materials such as zinc may even be sintered.

[0117] Anodes may have many configurations. For example, an anode may be configured from a conductive mesh or grid that is coated with one or more anode materials. In another example, an anode may be a solid sheet or bar of anode material.

[0118] As used herein, a "cathode" is an electrode from which (positive) electric current flows out of a polarized electrical device. In a battery or galvanic cell, the cathode is the positive electrode into which electrons flow during the discharging phase in the battery. The cathode is also the electrode that undergoes chemical reduction during the discharging phase. However, in secondary or rechargeable cells, the cathode is the electrode that undergoes chemical oxidation during the cell's charging phase. Cathodes are formed from electrically conductive or semiconductive materials, e.g., metals, metal oxides, metal alloys, metal composites, semiconductors, or the like. Common cathode materials include Ag, AgO, Ag_2O_3 , Ag_2O , HgO, Hg_2O , CuO, CdO, NiOOH, Pb_2O_4 , PbO_2 , LiFePO_4 , $\text{Li}_3\text{V}_2(\text{PO}_4)_3$, V_6O_{13} , V_2O_5 , Fe_3O_4 , Fe_2O_3 , MnO_2 , LiCoO_2 , LiNiO_2 , LiMn_2O_4 , or composites thereof. Cathode materials such as Ag, AgO, Ag_2O_3 may even be sintered.

[0119] Cathodes may also have many configurations. For example, a cathode may be configured from a conductive mesh that is coated with one or more cathode materials. In another example, a cathode may be a solid sheet or bar of cathode material.

[0120] Batteries and battery electrodes are denoted with respect to the active materials in the fully-charged state. For example, a zinc-silver battery comprises an anode comprising zinc and a cathode comprising a silver powder (e.g., Ag_2O_3). Nonetheless, more than one species is present at a battery electrode under most conditions. For example, a zinc electrode generally comprises zinc metal and zinc oxide (except when fully charged), and a silver powder electrode usually comprises AgO, Ag_2O_3 and/or Ag_2O and silver metal (except when fully discharged).

[0121] As used herein, the term "oxide" applied to alkaline batteries and alkaline battery electrodes encompasses corresponding "hydroxide" species, which are typically present, at least under some conditions.

[0122] As used herein, "resistivity" or "impedance" refers to the internal resistance of a cathode in an electrochemical cell. This property is typically expressed in units of Ohms or micro-Ohms.

[0123] As used herein, the terms "first" and/or "second" do not refer to order or denote relative positions in space or time, but these terms are used to distinguish between two different elements or components. For example, a first separator does not necessarily proceed a second separator in time or space; however, the first separator is not the second separator and vice versa. Although it is possible for a first separator to precede a second separator in space or time, it is equally possible that a second separator precedes a first separator in space or time.

[0124] As used herein, the term "capacity" refers to the mathematical product of a cell's discharge current and the time (in hours) during which the current is discharged until the cell reaches a terminal voltage.

[0125] Similarly, the terms "actual capacity" or "theoretical capacity" refer to the capacity that a battery or electrochemical cell should theoretically discharge at 100% SOC based on the amounts of electrode materials present in the cell, the amount of electrolyte present in the cell, and the surface area of the electrodes. In general terms, the capacity of a cell/battery is the amount of charge available expressed in ampere-hours (Ah) or milliampere-hours (mAh). An ampere is the unit of measurement used for electrical current and is defined as a Coulomb of charge passing through an electrical conductor in one second. The capacity of a cell or battery is related to the quantity of active materials present, the amount of electrolyte present, and the surface area of the electrodes. The capacity of a battery/cell can be measured by discharging at a constant current until it reaches its terminal voltage, which depends on the cell's intended usage.

[0126] A cell's "rated capacity" is the average capacity delivered by a cell or battery on a specified load and temperature to a voltage cutoff point, as designated by the manufacturer for the cell's intended usage. For many types of cells, industry standards establish a cell's rated capacity, which is based on the cell's intended usage. It is noted that silver-zinc cells typically have a rated capacity that is about 70% or less (e.g., about 50 % or less) of the cell's actual capacity.

[0127] As used herein, "A" and "Amps" are used interchangeably and refer to a unit of electrical current, e.g., charge current.

[0128] As used herein, "s", "sec" and "seconds" are used interchangeably and refer to a unit of time.

[0129] As used herein, "min" and "minutes" are used interchangeably and refer to a unit of time.

[0130] II. METHODS OF CHARGING A RECHARGEABLE CELL

[0131] A. Charging Method 1:

[0132] Referring to Figures 2, 3A, 3B, 5, 7A, and 7B, one aspect of the present invention provides a method of charging a rechargeable battery having multiple voltage plateaus wherein the battery has a voltage, V_{Batt} , that is less than its highest voltage plateau comprising:

- a. Charging the battery with a first charging current, I_1 , wherein the first charging current, I_1 , is applied until the battery is charged to a voltage, V_1 ; and
- b. Controlling/Modulating the first charging current, I_1 , when the voltage of the battery is V_1 , so that the voltage of the battery is maintained at V_1 with a deviation of no more than about $\pm 20\%$ (e.g., $\pm 10\%$, $\pm 5\%$) of V_1 , wherein voltage, V_1 , is less than the voltage of a natural polarization peak, V_{PP} , associated with a voltage plateau, V_P , that is higher than V_{Batt} , and V_1 is greater than the voltage plateau, V_P .

[0133] Several methods comprise additional steps such as

- c. Charging the battery with a second charging current, I_2 , wherein the second charging current, I_2 , is applied until the battery voltage reaches a voltage, V_2 , wherein the voltage, V_2 , is greater than V_P , and less than V_{PP} ; and
- d. Controlling/Modulating the second charging current, I_2 , when the voltage of the battery reaches the voltage, V_2 , so that the voltage of the battery is maintained at V_2 with a deviation of no more than about $\pm 20\%$ of V_2 .

[0134] Several methods optionally comprise terminating the charging current, I_2 , when I_2 is controlled to be about 95% or less of the charge current during the period when the battery was being charged to V_2 .

[0135] In some methods, charge current I_1 is substantially constant during the period wherein V_{Batt} is less than or equal to V_1 . And, in some methods, charge current I_2 is substantially constant during the period wherein V_{Batt} is less than or equal to V_2 . In these methods, charge current I_1 is greater than or equal to charge current I_2 before the battery is charged to V_1 . For instance, I_1 is greater than charge current I_2 before the battery is charged to V_1 . In other instances, I_1 is equal to charge current I_2 before the battery is charged to V_1 .

[0136] In some methods, the second charging current, I_2 , is applied at least until the battery is charged to a SOC of from about 80% to about 150% (e.g., from about 80% to about 110%) of the battery's rated capacity.

[0137] In other methods, the first charging current, I_1 , is sufficient to charge the battery to voltage, V_1 , in a period of from about 1 min to about 300 min (e.g., from about 5 min to about 300 min, from about 5 min to about 240 min, or from about 10 min to about 90 min) when the battery's initial SOC is less than 40% (e.g., less than 30%) of its rated capacity. In some methods, the first charging current, I_1 , is sufficient to charge the battery to a voltage of V_1 in a period of from about 10 min to about 260 min (e.g., about 10 min to about 180 min), when the battery's initial SOC is less than 40% (e.g., less than 30%) of its rated capacity. In other methods, the first charging current, I_1 , is sufficient to charge the battery to voltage, V_1 , in a period of about 75 min or less (e.g., from about 5 min to about 75 min or from about 15 min to about 75 min) when the battery's initial SOC is less than 40% (e.g., less than 30%) of its rated capacity.

[0138] In other methods, the first charging current, I_1 , is sufficient to charge the battery from a SOC of less than 30% (e.g., less than 20%) of its rated capacity to a SOC of from about 30% to about 40% of its rated capacity in about 240 min or less (e.g., about 180 min or less). For example, the first charging current, I_1 , is sufficient to charge the battery from a SOC of less than 30% (e.g., less than 20%) of its rated capacity to a SOC of about 40% its rated capacity in less than about 240 min (e.g., less than about 180 min).

[0139] In other methods, the first charging current, I_1 , is controlled when the voltage of the battery is V_1 , so that the voltage of the battery is maintained at V_1 with a deviation of no more than about $\pm 20\%$ of V_1 , for a period of from about 1 s to about 1500 s (e.g., from about 6 s to about 1500 s, from about 6 s to about 1200 s, or from about 6 s to about 900 s). For example, some methods include controlling the first charging current, I_1 , when the voltage of the battery reaches a voltage, V_1 , so that the voltage of the battery is maintained at V_1 with a deviation of no more than about $\pm 10\%$ of V_1 for a period of from about 6 s to about 1200 s (e.g., from about 6 s to about 900 s). Other examples include controlling the first charging current, I_1 , when the voltage of the battery reaches V_1 , so that the voltage of the battery is maintained at V_1 with a deviation of no more than about $\pm 10\%$ of V_1 for a period of from about 6 s to about 600 s.

[0140] Some methods further comprise:

e. terminating the first charging current, I_1 , after the voltage of the battery is maintained at V_1 with a deviation of no more than about $\pm 20\%$ of V_1 , for a period of from about 6 s to about 1500 s (e.g., from about 6 s to about 1200 s or from about 6 s to about 900 s); and

f. applying the second charging current, I_2 , when the first charging current, I_1 , terminates.

[0141] In other methods, V_1 is greater than or equal to V_2 . For instance, in some methods, V_1 is greater than V_2 . In another instance, V_1 is equal to V_2 .

[0142] In some methods, V_{Batt} is from about 50% to about 87% of the voltage, V_1 .

[0143] In some methods, I_1 is about 500 Amps or less. For example, I_1 is from about 100 mA to about 500 Amps. In some of these examples, I_2 is about 500 Amps or less. For instance, I_2 is from about 100 mA to about 500 Amps. In some of these examples, the battery has a rated capacity of from about 1 Ah to about 1000 Ah.

[0144] In some methods, I_1 is about 500 mA or less. For example, I_1 is from about 20 mA to about 500 mA. In some of these examples, I_2 is about 500 mA or less. For instance, I_2 is from about 20 mA to about 500 mA. In some of these examples, the battery has a rated capacity of from about 200 mAh to about 1 Ah.

[0145] In some methods, I_1 is about 50 mA or less. For example, I_1 is from about 5 mA to about 50 mA. In some of these examples, I_2 is about 50 mA or less. For instance, I_2 is from about 5 mA to about 50 mA. In some of these examples, the battery has a rated capacity of from about 50 mAh to about 200 mAh.

[0146] In some methods, I_1 is about 25 mA or less. For example, I_1 is from about 400 μA to about 25 mA. In some of these examples, I_2 is about 25 mA or less. For instance, I_2 is from about 400 μA to about 25 mA. In some of these examples, the battery has a rated capacity of from about 4 mAh to about 50 mAh.

[0147] In some methods, I_1 is about 2 mA or less. For example, I_1 is from about 10 μA to about 2 mA. In some of these examples, I_2 is about 2 mA or less. For instance, I_2 is from about 10 μA to about 2 mA. In some of these examples, the battery has a rated capacity of from about 1 mAh to about 4 mAh.

[0148] In some methods, I_1 is about 50 mA or less. For example, I_1 is from about 500 mA to greater than 8 mA. In other examples, I_1 is from about 5 mA to about 500 mA. In some of these examples, I_2 is less than 500 mA. For instance, I_2 is from less than about 500 mA to about 1 mA. In some of these examples, the battery has a rated capacity of from about 1 Ah to about 4 Ah.

[0149] In some methods, I_1 is about 1 Amp or less. For example, I_1 is from about 1 Amps to greater than 10 mA. In other examples, I_1 is from about 10 mA to about 1 A (e.g., from about 10 mA to about 0.99 A). In some of these methods, I_2 is less than 1 Amp. For example, I_2 is less than 1 Amp to about 10 mA. In other examples, I_2 is from about 10 mA to about

0.99 A. In other examples, the battery has a rated capacity of from about 100 mAh to about 1000 mAh.

[0150] In some methods, I_1 is about 100 mA or less. For example, I_1 is from about 100 mA to about greater than 1.0 mA. In other examples, I_1 is from about 1.0 mA to about 99.99 mA. In some of these methods, I_2 is less than 100 mA (e.g., less than 75 mA). For example, I_2 is from less than 75 mA to about 5 mA. In other examples, I_2 is from about 5 mA to about 99.99 mA. In some of these methods, the battery has a rated capacity of from about 15 mAh to about 150 mAh (e.g., from about 50 mAh to about 100 mAh).

[0151] In some methods, I_1 is about 150 mA or less. For example, I_1 is from about 0.3 mA to about 60 mA. In some of these methods, I_2 is less than about 150 mA. For example, I_2 is from about 0.2 mA to about 149.99 mA. In some of these methods, the battery has a rated capacity of from about 4 mAh to about 150 mAh.

[0152] In some methods, I_1 is about 25 mA or less. For example, I_1 is from about 25 mA to greater than 0.4 mA. In some of these methods, I_2 is less than 25 mA. For example, I_2 is from less than 25 mA to about 0.2 mA. In some of these methods, the battery has a rated capacity of from about 4 mAh to about 50 mAh.

[0153] In some methods, I_1 is about 15 mA or less. For example, I_1 is from about 15 mA to greater than 0.1 mA. In some of these methods, I_2 is less than 15 mA. For example, I_2 is from less than 15 mA to about 0.1 mA. In some of these methods, the battery has a rated capacity of from about 1.0 mAh to about 15 mAh.

[0154] In some methods, I_1 is from about 3.0 mA to about 3.5 mA. In some of these methods, the battery has a theoretical capacity of from about 40 mAh to about 50 mAh (e.g., about 44 mAh). In others, the battery has a rated capacity of from about 15 mAh to about 20 mAh (e.g., about 18 mAh). And, in some embodiments, the battery stores from about 25 mWh to about 30 mWh (e.g., about 29 mWh).

[0155] In some methods, I_1 is from about 4.7 mA to about 5.6 mA. In some of these methods, the battery has a theoretical capacity of from about 50 mAh to about 60 mAh (e.g., about 57 mAh). In others, the battery has a rated capacity of from about 20 mAh to about 30 mAh (e.g., about 28 mAh). And, in some embodiments, the battery stores from about 40 mWh to about 50 mWh (e.g., about 45 mWh).

[0156] In some methods, I_1 is from about 5.4 mA to about 6.4 mA. In some of these methods, the battery has a theoretical capacity of from about 60 mAh to about 80 mAh (e.g., about 70 mA to about 80 mA or about 78 mAh). In others, the battery has a rated capacity of

from about 30 mAh to about 40 mAh (e.g., about 32 mAh). And, in some embodiments, the battery stores from about 50 mWh to about 60 mWh (e.g., about 51 mWh).

[0157] In some methods, I_1 is from about 15 mA to about 24 mA. In some of these methods, the battery has a theoretical capacity of from about 250 mAh to about 275 mAh (e.g., about 269 mAh). In others, the battery has a rated capacity of from about 100 mAh to about 140 mAh (e.g., about 120 mAh). And, in some embodiments, the battery stores from about 175 mWh to about 225 mWh (e.g., about 192 mWh).

[0158] In some methods, the voltage, V_2 , is from about 85% to about 100% (e.g., from about 90% to about 100% or from about 90% to about 99%) of V_1 . For example, the voltage, V_2 , is from about 96% to about 99.5% of V_1 .

[0159] In some methods, V_1 is about 2.04 V or less. For example, V_1 is from about 1.96 V to about 2.04 V. In other examples, V_1 is from about 1.96 V to about 1.99 V.

[0160] In some methods, V_2 is about 2.03 V or less. For example, V_2 is from about 1.93 V to about 2.03 V. In other examples, V_2 is from about 1.93 V to about 1.98 V.

[0161] Several methods of recharging a rechargeable battery according to the present invention exclude Coulomb counting as a method of determining the capacity that has been charged to the battery.

[0162] Another aspect of the present invention provides a method of charging a rechargeable battery having multiple voltage plateaus, wherein the battery has a voltage, V_{Batt} , that is less than its highest voltage plateau comprising: charging the battery with a first charging current, I_1 , wherein the first charging current, I_1 , is substantially constant until the battery is charged to a voltage, V_1 ; and controlling the first charging current, I_1 , when the voltage of the battery is V_1 , so that the voltage of the battery is maintained at V_1 with a deviation of no more than about $\pm 20\%$ of V_1 for a period of from about 6 s to about 1200 s (e.g., from about 6 s to about 900 s), wherein voltage, V_1 , is less than the voltage of the natural polarization peak, V_{PP} , for a voltage plateau, V_P , that is higher than V_{Batt} , and V_1 is greater than the voltage plateau, V_P .

[0163] Some methods further comprise charging the battery with a second charging current, I_2 , that is less than or equal to the first charging current, I_1 , when the battery has a voltage of less than V_1 , wherein the second charging current, I_2 , is substantially constant until the battery voltage reaches a voltage, V_2 , wherein the voltage, V_2 , is less than or equal to the voltage, V_1 , and greater than V_{Batt} , and controlling the second charging current, I_2 , when the voltage of the battery reaches the voltage, V_2 , so that the voltage of the battery is maintained at V_2 with a deviation of no more than about $\pm 20\%$ of V_2 . Also, some methods also

comprise terminating the second charging current, I_2 , after a period of about 10 min or less (e.g., about 5 min or less) from the point when the battery is charged to a SOC of from about 80% to about 150% (e.g., from about 80% to about 110%) of the battery's rated capacity.

[0164] In some methods, the first charging current, I_1 , is sufficient to charge the battery to voltage, V_1 , in a period of from about 5 min to about 240 min when the battery's initial SOC is less than 40% (e.g., less than 30%) of its rated capacity. In other methods, the first charging current, I_1 , is sufficient to charge the battery to a voltage of V_1 in a period of from about 10 min to about 180 min, when the battery's initial SOC is less than 40% (e.g., less than 30%) of its rated capacity. In other methods, the first charging current, I_1 , is sufficient to charge the battery to a voltage of V_1 in a period of from about 15 min to about 75 min, when the battery's initial SOC is less than 40% (e.g., less than 30%) of its rated capacity. Or, the first charging current, I_1 , is sufficient to charge the battery from a SOC of less than 30% (e.g., less than 20%) of its rated capacity to a SOC of from about 30% to about 40% of its rated capacity in about 240 min or less (e.g., about 180 min or less). For example, the first charging current, I_1 , is sufficient to charge the battery from a SOC of less than 40% (e.g., less than 30%) of its rated capacity to a SOC of about 40% its rated capacity in less than about 240 min. In other methods, the first charging current, I_1 , is sufficient to charge the battery to a voltage of V_1 in a period of about 75 min or less, when the battery's initial SOC is less than 40% (e.g., less than 30%) of its rated capacity.

[0165] In some methods, V_{Batt} is from about 50% to about 87% of the voltage, V_1 .

[0166] Other methods further comprise controlling the first charging current, I_1 , when the voltage of the battery reaches a voltage, V_1 , so that the voltage of the battery is maintained at V_1 with a deviation of no more than about $\pm 10\%$ of V_1 for a period of from about 6 s to about 1200 s (e.g., from about 6 s to about 900 s or from about 550 s to about 650 s).

[0167] Optionally, some of these methods further comprise generating an electrical signal that indicates a soft short in the battery if V_{Batt} is lower than V_P (e.g. 1.90 V) for a period of more than 1 second after the battery has been charged to a voltage of V_2 .

[0168] Optionally, some of these methods further comprise charging the battery with a diagnostic charge current, I_{Diag} , to determine whether the battery is compatible with some steps of the present charging method. One embodiment comprises charging the battery with a diagnostic charge current, I_{Diag} , for a period of less than about 30 s, detecting the voltage of the battery, V_{Batt} , and terminating charging of the battery if V_{Batt} is about 1.65 V or less (e.g., less than about 1.65 V). In some methods, I_{Diag} is greater than or equal to I_1 . In other methods, I_{Diag} is from about 5% to about 200% greater than I_1 . In some methods, I_{Diag} is from

about 30% to about 100% greater than I_1 . And in some methods, I_{Diag} is about equal to I_1 . Other embodiments comprise charging the battery with a diagnostic charge current, I_{Diag} that is about 10% to about 200% higher than I_1 for a period of less than about 10 s, detecting the voltage of the battery, V_{Batt} , and terminating charging of the battery if V_{Batt} is about 1.60 V or less. Some methods comprise charging the battery with a diagnostic charge current, I_{Diag} that is about 30% to about 100% higher than I_1 for a period of less than about 5 s, detecting the voltage of the battery, V_{Batt} , and terminating charging of the battery if V_{Batt} is about 1.55 V or less.

[0169] In some methods, the voltage, V_2 , is from about 90% to about 100% of V_1 . For example, the voltage, V_2 , is from about 96% to about 99.5% of V_1 . In other methods, V_1 is about 2.04 V or less. For example, V_1 is from about 2.04 V to about 1.96 V. Or, V_1 is from about 1.99 V to about 1.96 V.

[0170] In other methods, V_2 is about 2.03 V or less. For example, V_2 is from about 2.03 V to about 1.93 V. In other examples, V_2 is from about 1.93 V to about 1.98 V.

[0171] One aspect of the present invention provides a method of detecting a rechargeable silver-zinc battery comprising charging the battery with a diagnostic charge current, I_{Diag} , for a period of less than about 60 s, detecting the voltage of the battery, V_{Batt} , and terminating charging of the battery if V_{Batt} is about 1.60 V or less (e.g., about 1.55 V or less); wherein I_{Diag} is about 25 mA or less. In some embodiments, the battery is charged with I_{Diag} for a period of about 7 s or less, detecting the voltage of the battery, V_{Batt} , and generating an electrical signal if V_{Batt} is about 1.60 V or less, wherein I_{Diag} is from about 20 mA to about 25 mA or about 10 mA or less. In some embodiments, the electrical signal activates an audio alarm, a visual alarm, a vibrational alarm, or any combination thereof.

[0172] Referring generally to Figure 6, another aspect of the present invention provides a method of charging a rechargeable battery having multiple voltage plateaus wherein the battery has a voltage, V_{Batt} , that is less than about 80% (e.g., less than about 70%) of the voltage of a first sequential voltage plateau, V_{P1} , comprising:

- a. charging the battery with a recovery charging current, I_{recov} , that is substantially constant for a period of no more than about 120 min (e.g., no more than 30 min, no more than about 20 min, or no more than about 15 min) after the voltage of charging battery reaches the first sequential voltage plateau, V_{P1} that is greater than V_{Batt} ;
- b. charging the battery with a first charging current, I_1 , wherein the first charging current, I_1 , is substantially constant until the battery is charged to a voltage, V_1 ; and

c. controlling the first charging current, I_1 , when the voltage of the battery reaches the voltage, V_1 , so that the voltage of the battery is maintained at V_1 with a deviation of no more than about $\pm 20\%$ of V_1 , for a period of from about 6s to about 1200s (e.g., from about 6s to about 900s),

wherein voltage, V_1 , is less than the voltage of the natural polarization peak, V_{PP} , for a voltage plateau, V_P , that is higher than V_{P1} , and V_1 is greater than the voltage plateau, V_P .

[0173] In some methods, I_{recov} is from about 5% to about 90% of I_1 . For example, I_{recov} is from about 10% to about 30% of I_1 .

[0174] Some methods further comprise:

d. charging the battery with a second charging current, I_2 , that is less than the first charging current, I_1 , wherein the second charging current, I_2 , is substantially constant until the battery voltage reaches a voltage, V_2 , wherein the voltage, V_2 , is less than the voltage, V_1 , and greater than the first sequential voltage plateau, V_{P1} ; and

e. controlling the second charging current, I_2 , when the voltage of the battery reaches the voltage, V_2 , so that the voltage of the battery is maintained at V_2 with a deviation of no more than about $\pm 20\%$ of the voltage V_2 .

[0175] Other methods further comprise:

f. terminating the second charging current, I_2 , after a period of about 10 minutes or less from the point when the battery is charged to a capacity of from about 80% to about 150% (e.g., from about 80% to about 110%) of the battery's rated capacity.

[0176] And some methods further comprise generating an electrical signal that indicates that the battery is experiencing a short (e.g., a soft short or a hard short) if the voltage of the battery, V_{Batt} , fails to reach the first sequential voltage plateau, V_{P1} , that is greater than V_{Batt} after being charged with I_{recov} for a period of from about 15 minutes to 2 hours (e.g., from about 30 min to about 120 min).

[0177] Some methods of this aspect also exclude counting Coulombs to assess the capacity that is charged to a battery.

[0178] In some methods, the rechargeable battery comprises an anode comprising a zinc material.

[0179] In other methods, the rechargeable battery comprises a cathode comprising a silver material.

[0180] Exemplary batteries that may be recharged using methods of the present invention include button cells, coin cells, cylinder cells, or prismatic cells.

[0181] The methods above may optionally include additional steps such as generating an electrical signal when the second charging current, I_2 , terminates. Some methods further include activating a visual signal, activating an audio signal, activating a vibrational signal, or any combination thereof when the second charging current, I_2 , terminates.

[0182] Referring to Figures 7A, 7B, and 8A, another aspect of the present invention provides a method of charging a rechargeable button cell having multiple voltage plateaus wherein the cell has a voltage greater than about 1.10 V and less than about 1.70 V (e.g., greater than 1.20 V and 1.70 V) comprising:

- a. charging the cell with a first charging current, I_1 , wherein the first charging current, I_1 , is substantially constant until the cell is charged to a voltage, V_1 , that is greater than 1.70 V and less than 2.04 V; and
- b. controlling the first charging current, I_1 , when the voltage of the cell reaches the voltage, V_1 , so that the voltage of the cell is maintained at V_1 with a deviation of no more than about $\pm 10\%$ of V_1 for a period of from about 6 s to about 1500 s (e.g., from about 6 s to about 1200 s).

[0183] Some methods further comprise:

- c. charging the cell with a second charging current, I_2 , that is less than or equal to the first charging current, I_1 , when the battery has a voltage of less than V_1 , wherein the second charging current, I_2 , is substantially constant until the cell voltage reaches a voltage, V_2 , wherein the voltage, V_2 , is less than or equal to the voltage, V_1 , and greater than 1.7 V; and
- d. controlling the second charging current, I_2 , when the voltage of the cell reaches the voltage, V_2 , so that the voltage of the cell is maintained at V_2 with a deviation of no more than about $\pm 10\%$ of the voltage V_2 .

[0184] And, other methods further comprise:

- e. terminating the second charging current, I_2 , after no more than 5 minutes from the point when the cell is charged to a capacity of from about 80% to about 150% (e.g., from about 80% to about 110%) of the cell's rated capacity.

[0185] In some methods, the first charging current, I_1 , is sufficient to charge the battery to the voltage, V_1 , in a period of from about 1 min to about 180 min (e.g., from about 30 min to about 180 min).

[0186] Other methods further comprise controlling the first charging current, I_1 , when the voltage of the cell reaches the voltage, V_1 , so that the voltage of the battery is maintained at

V_1 with a deviation of no more than about $\pm 10\%$ of V_1 for a period of from about 550 s to about 650 s.

[0187] In some methods, the voltage, V_2 , is from about 90% to about 100% of V_1 . For example, the voltage, V_2 , is from about 96% to about 99.5% of V_1 .

[0188] In some methods, I_1 is about 1 Amp or less. For example, I_1 is from about 1 Amps to greater than 80 mA. In other examples, I_1 is from about 80 mA to about 1 A (e.g., from about 8 mA to about 0.99 A). In some of these methods, I_2 is less than 1 Amp. For example, I_2 is less than 1 Amp to about 80 mA. In other examples, I_2 is from about 80 mA to about 0.99 A. In other examples, the battery has a rated capacity of from about 100 mAh to about 1000 mAh.

[0189] In some methods, I_1 is about 300 mA or less. For example, I_1 is from about 250 mA to about greater than 8 mA. In other examples, I_1 is from about 8 mA to about 299.99 mA. In some of these methods, I_2 is less than 300 mA (e.g., less than 250 mA). For example, I_2 is from less than 250 mA to about 4 mA. In other examples, I_2 is from about 4 mA to about 299.99 mA. In some of these methods, the battery has a rated capacity of from about 15 mAh to about 150 mAh (e.g., from about 50 mAh to about 100 mAh).

[0190] In some methods, the voltage, V_2 , is from about 1.93 V to about 1.98 V.

[0191] In some methods, I_1 is about 25 mA or less. For example, I_1 is from about 25 mA to greater than 4 mA. In some of these methods, I_2 is less than 25 mA. For example, I_2 is from less than 25 mA to about 2 mA. In some of these methods, the battery has a rated capacity of from about 4 mAh to about 50 mAh.

[0192] In some methods, I_1 is about 15 mA or less. For example, I_1 is from about 15 mA to greater than 0.1 mA. In some of these methods, I_2 is less than 15 mA. For example, I_2 is from less than 15 mA to about 0.1 mA.

[0193] In some methods, I_1 is from about 3.0 mA to about 3.5 mA. In some of these methods, the battery has a theoretical capacity of from about 40 mAh to about 50 mAh (e.g., about 44 mAh). In others, the battery has a rated capacity of from about 15 mAh to about 20 mAh (e.g., about 18 mAh). And, in some embodiments, the battery stores from about 25 mWh to about 30 mWh (e.g., about 29 mWh).

[0194] In some methods, I_1 is from about 4.7 mA to about 5.6 mA. In some of these methods, the battery has a theoretical capacity of from about 50 mAh to about 60 mAh (e.g., about 57 mAh). In others, the battery has a rated capacity of from about 20 mAh to about 30 mAh (e.g., about 28 mAh). And, in some embodiments, the battery stores from about 40 mWh to about 50 mWh (e.g., about 45 mWh).

[0195] In some methods, I_1 is from about 5.4 mA to about 6.4 mA. In some of these methods, the battery has a theoretical capacity of from about 70 mAh to about 80 mAh (e.g., about 78 mAh). In others, the battery has a rated capacity of from about 30 mAh to about 40 mAh (e.g., about 32 mAh). And, in some embodiments, the battery stores from about 50 mWh to about 60 mWh (e.g., about 51 mWh).

[0196] In some methods, I_1 is from about 15 mA to about 24 mA. In some of these methods, the battery has a theoretical capacity of from about 250 mAh to about 275 mAh (e.g., about 269 mAh). In others, the battery has a rated capacity of from about 100 mAh to about 140 mAh (e.g., about 120 mAh). And, in some embodiments, the battery stores from about 175 mWh to about 225 mWh (e.g., about 192 mWh).

[0197] In some methods, the voltage, V_2 , is from about 90% to about 100% of V_1 . For example, the voltage, V_2 , is from about 96% to about 99.5% of V_1 .

[0198] In some methods, the voltage, V_1 , is from about 1.95 V to about 1.99 V.

[0199] In other methods, the first charging current, I_1 , is modulated for a period of about 550 s to about 650 s.

[0200] In some methods, the voltage, V_2 , is from about 1.93 V to about 1.98 V.

[0201] Other methods exclude counting Coulombs as described above.

[0202] In some methods, the battery comprises an anode comprising a zinc material.

[0203] In other methods, the battery comprises a cathode comprising a silver material.

[0204] Some methods further comprise generating an electrical signal when the second charging current, I_2 , is terminated. And, other methods further comprise activating a signal (e.g., a visual signal, an audio signal, a vibrational signal, or any combination thereof) when the second charging current, I_2 , is terminated.

[0205] Some methods of the present invention are useful for recharging a battery having a relatively high initial SOC. Referring to Figure 4, the present invention provides a method of charging a rechargeable battery having multiple voltage plateaus and an initial SOC of greater than 50% of its rated capacity, wherein the battery has a voltage, V_{Batt} , that is less than or equal to its highest voltage plateau comprising:

a. charging the battery with a substantially constant charging current, I_2 , until the battery is charged to a voltage, V_2 ; and

b. controlling the charging current, I_2 , so that the voltage of the battery is maintained at V_2 with a deviation of no more than about $\pm 20\%$ of V_2 ,

wherein voltage, V_2 , is greater than or equal the voltage of a voltage plateau, V_P , that is less than the voltage of a natural polarization peak, V_{PP} .

[0206] Some methods further comprise:

c. terminating the charging current, I_2 , when I_2 reaches I_{ter} , wherein I_{ter} is about 85% or less of I_2 during the period when the battery was being charged at V_2 .

[0207] Other methods further comprise further comprise:

d. terminating the charging current, I_2 , when I_2 reaches I_{ter} , wherein I_{ter} is about 75% or less of I_2 during the period when the battery was being charged at V_2 .

[0208] And in other methods, V_2 is about 2.0 V or less.

[0209] In some methods, I_2 is about 6 mA. In other methods, I_{ter} is about 4.5 mA.

[0210] Other aspects of the present invention incorporate one or more of the methods above into a charge method that is useful for recharging a rechargeable cell and that operates to maximize the rechargeable cell's cycle life.

[0211] Examples of additional methods of the present invention are presented in the Figures 8A-8D.

[0212] One method includes the following steps:

[0213] Step 1: Measuring the SOC of the cell.

[0214] Step 2A: If the SOC of the cell is greater than about 0.0% and less than or equal to about 40% (e.g., the open circuit voltage (OCV) is greater than about 1.2 V and less than or equal to about 1.6 V), then charging the cell according to a multi-stage charge process (starting at step 3A, below).

[0215] Step 2B: If the SOC is greater than about 50% (e.g., the OCV is greater than about 1.6 V (e.g., about 1.85 V or greater)), then charging the cell according to a single stage charge process (starting at step 3B, below).

[0216] Step 2C: If the SOC is less than 30% (e.g., the OCV is about 1.2 V or less), then charging the cell according to an over-discharge recovery process (starting at step 3C, below).

[0217] Multi-zone Charge Process

[0218] Step 3A (Zone 1 of Multi-zone Charge Process): Charging the cell with a substantially constant charge current, I_1 , having sufficient amperage to charge the cell to a SOC of from about less than 30% to about 40% of its rated capacity within about 1 hour of charging, wherein the charge current, I_1 , is controlled such that the cell is charged to a voltage, V_1 , that is less than its natural polarization peak voltage, V_{pp} , for a period of time ending from about 6 s to about 1500 s (e.g., from about 6 s to about 1200 s, from about 6 s to about 900 s, or from about 6 s to about 600 s) after the cell is charged to a voltage of V_1 , then charging the cell according to stage 2 of the multi-zone charge process.

[0219] Step 4A (Zone 2 of Multi-zone Charge Process): Charging the cell with a substantially constant charge current, I_2 , wherein the charge current is controlled such that the voltage of the cell does not rise above a maximum voltage, V_2 that is less than its natural polarization peak voltage, V_{PP} ; and greater than the voltage of the voltage plateau; clocking the time that the cell is charged with a charge current of I_2 , and terminating the charge current about 60 s after the battery is charged to an SOC of 85% or higher (e.g., from about 85% to about 150% or from about 85% to about 130%) of its rated capacity.

[0220] **1. Single Zone Charge Process**

[0221] Step 3B: Charging the cell with a charge current, I_2 , wherein the charge current is controlled such that the voltage of the cell does not rise above a maximum voltage, V_2 that is less than its natural polarization peak voltage, V_{PP} ; and greater than the voltage of the voltage plateau; clocking the time that the cell is charged with a charge current of I_2 to a voltage of V_2 , and terminating the charge current about 60 s after the cell is charged to an SOC of 85% or higher (e.g., from about 80% to about 150% or from about 80% to about 110%) of its rated capacity.

[0222] **2. Over-Discharge Recovery Process**

[0223] Step 3C: Charging the cell with a constant charge current, I_{recov} , until the cell is charged to a voltage, V_{P1} , of the first sequential voltage plateau (e.g., an SOC of about less than about 30% or an SOC of less than about 5% of the cell's rated capacity), followed by charging the cell according to the multi-stage charge method described above.

[0224] Each of the abovementioned charging methods (e.g., the multi-stage charge process, the single-stage charge process, or the over-discharge recovery charge process) is exemplified in Figures 2, 4, 5, 6, and 8A-8D.

[0225] Referring now to Figure 2, a charge curve that is related to the "multi-zone charge mode" of a silver-zinc cell is shown according to an embodiment of the invention. In an embodiment, the charge curve includes two corresponding curves, which are plotted against time and read left-to-right. In an embodiment, the first curve, starting at about 1.65 V, is the voltage of the silver-zinc cell after charging has commenced, and, in an embodiment, the second curve, starting at about 8.5 mA is the charge current of the silver-zinc cell.

[0226] In view of what is described above, in an embodiment, recharging management circuitry, such as the circuitry illustrated in Figure 1, useful for practicing the method of the present invention may be located within a charging base, which may be described as a current-limited voltage source. In other embodiments, the management circuitry may be split between the charging base, the battery, an electronic device powered by the battery, or any

combination thereof. Accordingly, the recharging management circuitry may include the hardware for implementing the charge method and cause the charging base to deliver the first charge current, I_1 , when the SOC of the silver-zinc cell is less than about 40%, wherein the first charge current, I_1 , is controlled so that the voltage of the battery does not exceed V_1 . When the battery is charged to voltage V_1 , and for a period of no more than 1500 s (e.g., about 1200 s, about 900 s, or about 600 s), the recharging management circuitry may cause the charging base to deliver a second charge current, I_2 , wherein the second charge current is controlled so that the cell is not charged above a second maximum voltage level, V_2 , wherein V_2 is less than or equal to V_1 . Further, in an embodiment, the charging method for charging of the silver-zinc cell may be terminated when the controlled charge current, I_2 , is less than or equal to a minimum charge current, I_{ter} , for a period of about 60 s (e.g., from about 30 s to about 90 s, or from about 50 s to about 70 s).

[0227] Prior to describing further aspects of the method, some aspects of one or more embodiments of the system are provided. In an embodiment, the charge voltage accuracy may be within about ± 2 mV between 1.900-2.000 V. In an embodiment, the voltage accuracy may be within about ± 25 mV between 1.900-1.200 V. Further, in an embodiment, the charge current accuracy may be within about ± 0.1 mA. Further, in an embodiment, the temperature measurement accuracy may be within about ± 5 °C (e.g., ± 2 °C) and be a measure of the ambient temperature; further, in an embodiment, the temperature measurement does not have to measure the cell case temperature.

[0228] In an embodiment, the following limits may also be considered in the design of one or more of the silver-zinc cell, system, and charge methods. In an embodiment, the voltage of the silver-zinc cell may not exceed 2.00 V for more than one (1) second continuously. Further, in an embodiment, any voltage excursion above the 2.00 V limit may result from a charge voltage/current transition while the charging base is stabilizing the charge voltage on the silver-zinc cell. Further, in an embodiment, the charge current, I_2 or I_{ter} , may not fall below a "trickle" charge level of about 1mA for more than thirty (30) minutes continuously. Further, in an embodiment, the maximum charge time (at about room temperature) of a silver-zinc cell may be about six (6) hours. Further, in an embodiment, a silver-zinc cell may be charged when ambient temperature conditions are between about approximately about 0 °C and about approximately about 40 °C. Further, in an embodiment, the cell current may be integrated during charging and may not exceed 27 mAh in a single charge.

[0229] In some methods of the present invention, a discharge warning signal triggers a Coulomb count terminated cycle.

[0230] B. Charging Method 2:

[0231] Referring to Figures 10-17, another aspect of the present invention provides a method of charging a rechargeable battery having multiple voltage plateaus comprising:

1) Continuously charging the battery with a modulated charge current, I_1 , wherein the charge current, I_1 , has a maximum amperage, I_{max} , and is modulated so that the voltage of the battery is restricted to V_{max} , which is less than the voltage of the next sequentially higher natural polarization peak, V_{PP} , and higher than the next sequentially higher voltage plateau; and

2) Arresting the charge current, I_1 , when the charge current reaches a minimum threshold amperage for a given period of time (e.g., I_{lend} in Figure 12 or I_{2end} in Figures 13-16).

[0232] In some embodiments, the minimum threshold amperage, I_{end} , is calculated as follows:

$$I_{end} = I_{Chg} + I_{Temp}, I_{Chg} = (T_2 \times I_{max})/T_{Chg}, \text{ wherein}$$

I_{Temp} is the temperature compensation current, T_2 is the time necessary to charge the battery from a voltage of from about 87% to about 96% (e.g., about 95.9%) of V_{max} , prior to the polarization peak, to a voltage of V_{max} (e.g., from 1.9 V to a voltage of about 2.0 V or about 2.03 V in a 2 V battery) after the polarization peak. I_{max} is the maximum current charged to the battery, and T_{Chg} is the cell time constant; and the voltages have a deviation of $\pm 0.5\%$, the current amperages have deviations of $\pm 2\%$, and clocked times have a deviation of $\pm 2\%$. This calculation is discussed in detail below.

[0233] In some methods, I_{end} is I_{lend} . In others, I_{end} is I_{2end} .

[0234] In other embodiments, the charge current is arrested when the charge current, I_1 , has an amperage less than or equal to I_{end} for a period of from about 30 s to about 90 s (e.g., 60 s).

[0235] In some embodiments, the charge current is arrested when the cell experiences a hard short.

[0236] In some embodiments, the charge current is arrested when the cell is determined to be other than a silver zinc cell.

[0237] In several methods, V_{max} is 2.03 V or 2.0 V. In other methods, the charge current has a maximum amperage, I_{max} , of about 10 mA or less (e.g., about 6 mA or less). For example, the charge current has a maximum amperage, I_{max} , of 5.5 mA or less.

[0238] And, some methods include measuring the temperature, wherein the temperature measurement accuracy has a deviation of $\pm 5^\circ\text{C}$.

[0239] Another aspect of the present invention provides a method of charging a rechargeable battery having multiple voltage plateaus comprising:

1) Charging the battery with a modulated charge current, I_1 , wherein the charge current, I_1 , has a maximum amperage, $I_{\max}$, and is modulated so that the voltage of the battery is restricted to $V_{\max}$, which is less than the voltage of the next sequentially higher natural polarization peak, V_{pp} , and higher than the next sequentially higher voltage plateau;

2) Arresting charge current I_1 after a period of from about 10 min to about 30 min (e.g., about 20 min) has elapsed starting from the point when the battery has a voltage of from about 87% to about 97% of $V_{\max}$; and

3) Charging the battery with a modulated charge current, I_2 , wherein the charge current, I_2 , has a maximum amperage, $I_{\max}$, and is modulated so that the voltage of the battery is restricted to $V_{\max}$.

[0240] Some embodiments further comprise arresting charge current I_2 when the amperage of I_2 is below $I_{2\text{end}}$ for a period of from about 30 to about 90 (e.g., about 60) continuous seconds.

[0241] Some embodiments further comprise arresting charge current I_2 once the battery is charged to an SOC of about 50%, if the lowest amperage of I_2 , $I_{2\text{low}}$, is less than the amperage of charge current I_2 after 20 minutes has been clocked, wherein the SOC of the battery is determined by integrating the charge current while time is being clocked.

[0242] Some embodiments further comprise arresting charge current I_1 when the amperage of I_1 is below $I_{1\text{min}}$, e.g., 1.0 V, for a period of about 5 min or less.

[0243] In some embodiments, the voltages have a deviation of $\pm 0.5\%$; the charge current amperages have deviations of $\pm 2\%$; and clocked time has a deviation of $\pm 2\%$.

[0244] Another aspect of the present invention provides a method of charging a 2.0 V rechargeable battery comprising:

1) Charging the battery with a modulated charge current I_2 , wherein the charge current, I_2 , is modulated so that the voltage of the battery is restricted to 2.0 V or less (e.g., 1.98 V), and the charge current has a maximum amperage, $I_{\max}$, of 6.0 mA or less (e.g., 5.5 mA or 5.0 mA);

2) Clocking time 15 seconds after charging begins (shown in Figure 11 as T_1);

3) Measuring the amperage of charge current, I_2 , when time is being clocked; and

4A) Arresting charge current I_2 when the amperage of I_2 is below $I_{2\text{end}}$ for a period of 60 continuous seconds if the amperage of I_2 is $I_{\max}$ for a period of 5 or more continuous seconds when time is being clocked, wherein $I_{2\text{end}}$ is the temperature dependent

minimum charge current necessary to maintain a voltage of 2.0 V in the battery when the battery is charged to an SOC of about 100% of its rated capacity; or

4B) Arresting charge current I_2 once the battery is charged to an SOC of about 100% to about 150%, if the amperage of I_2 is $I_{\max}$ for a period of less than 5 continuous seconds when time is being clocked, wherein the SOC of the battery is determined by integrating the charge current while time is being clocked; or

4C) Arresting charge current I_1 when the amperage of I_1 is below $I_{\min}$ (e.g., 1.0 mA), for a period of about 5 min or less,

wherein the voltages have a deviation of $\pm 0.5\%$; the charge current amperages have deviations of $\pm 2\%$; and clocked time has a deviation of $\pm 2\%$.

[0245] Some methods further comprise charging the battery with a second modulated charge current I_2 , wherein the second charge current I_2 is modulated so that the voltage of the battery is restricted to 2.0 V or less, and the charge current amperage is restricted to a maximum amperage, $I_{\max}$, of 5.0 mA; clocking time when the voltage of the battery is 1.9 V; and continuously charging the battery with charge current I_2 until 20 minutes has been clocked.

[0246] In some instances, the battery being charged is a size 10, 13, 312, or 675 rechargeable silver-zinc button cell.

[0247] Another aspect of the present invention provides a method of charging a rechargeable 2.0 V silver-zinc battery comprising charging the battery with a charge current, I_2 , having a maximum amperage, $I_{\max}$, of about 10 mA or less (e.g., about 6 mA or less) wherein the charge current I_2 is modulated so that the voltage of the battery is restricted to about 2.03 V or less; clocking time 60 seconds after charging with second charge current, I_2 , begins; measuring the lowest amperage, I_{low} , of charge current I_2 when time is being clocked; and arresting charge current I_2 once the battery is charged with from about 40% to about 60% (e.g., about 50%) of its rated capacity with charge current, I_2 , wherein the capacity charged to the battery is determined by integrating the charge current, I_2 , while time is being clocked; and the voltages have a deviation of $\pm 0.5\%$, the current amperages have deviations of $\pm 2\%$, and clocked times have a deviation of $\pm 2\%$.

[0248] In some embodiments, the battery has an OCV of greater than about 1.6 V (e.g., greater than about 1.65 V) in its discharged state, i.e., immediately before charging.

[0249] Another aspect of the present invention provides a method of charging a rechargeable 2.0 V silver-zinc battery comprising charging the battery with a charge current, I_2 , having a maximum amperage, $I_{\max}$, of about 10 mA or less (e.g., about 6 mA or less)

wherein the charge current I_2 is modulated so that the voltage of the battery is restricted to about 2.03 V or less; clocking time 60 seconds after charging with second charge current, I_2 , begins; measuring the lowest amperage, I_{low} , of charge current I_2 when time is being clocked; and arresting charge current I_2 when the amperage of I_2 is below I_{end} for a period of 60 continuous seconds if the amperage of I_2 is I_{max} for a period of 2 continuous seconds while time is being clocked; or arresting charge current I_2 once the battery is charged with from about 40% to about 60% (e.g., about 50%) of its rated capacity with charge current I_2 , if I_{low} is less than the amperage of charge current I_2 after 20 minutes has been clocked, wherein the capacity charged to the battery is determined by integrating the charge current, I_2 , while time is being clocked; or arresting charge current I_2 when the amperage of I_2 is below I_{end} for a period of 60 continuous seconds, if I_{low} is greater than or equal to the amperage of I_2 after 20 minutes has been clocked; or arresting charge current I_2 when the amperage of I_2 is below 1.0 V, for a period of about 5 min or less; wherein $I_{end} = I_{Chg} + I_{Temp}$, $I_{Chg} = (T_2 \times I_{max})/T_{Chg}$, I_{Temp} is the temperature compensation current, T_2 is the time necessary to charge the battery from a voltage of about 1.9 V to a voltage of about 2.0 V, I_{max} is the maximum current charged to the battery, and T_{Chg} is the cell time constant; and the voltages have a deviation of $\pm 0.5\%$, the current amperages have deviations of $\pm 2\%$, and clocked times have a deviation of $\pm 2\%$.

[0250] In some embodiments, the battery has an OCV of greater than about 1.6 V (e.g., greater than about 1.65 V) in its discharged state.

[0251] Some embodiments further comprise measuring the temperature, wherein the temperature measurement has accuracy of about $\pm 5^\circ\text{C}$ (e.g., $\pm 2^\circ\text{C}$).

[0252] Another aspect of the present invention provides a method of charging a rechargeable 2.0 V silver-zinc battery comprising charging the battery with first charge current, I_1 , having a maximum amperage, I_{max} , of about 10 mA or less (e.g., about 6 mA or less); clocking time once the battery is charged to a voltage of 1.90 V; modulating the first charge current, I_1 , so that the voltage of the battery is restricted to about 2.03 V or less; arresting the first charge current, I_1 , once from between about 10 min to about 30 min (e.g., about 20 min) has been clocked; charging the battery with second charge current, I_2 , having a maximum amperage, I_{max} , of about 10 mA or less (e.g., about 6 mA or less) wherein the second charge current I_2 is modulated so that the voltage of the battery is restricted to about 2.0 V or less; clocking time 60 seconds after charging with second charge current, I_2 , begins; measuring the lowest amperage, I_{low} , of charge current I_2 when time is being clocked; and arresting charge current I_2 when the amperage of I_2 is below I_{end} for a period of 60 continuous seconds if the amperage of I_2 is I_{max} for a period of 2 continuous seconds while time is being

clocked; or arresting charge current I_2 once the battery is charged with from about 40% to about 60% (e.g., about 50%) of its rated capacity with charge current I_2 , if I_{low} is less than the amperage of charge current I_2 after 20 minutes has been clocked, wherein the capacity charged to the battery is determined by integrating the charge current, I_2 , while time is being clocked; or arresting charge current I_2 when the amperage of I_2 is below I_{end} for a period of 60 continuous seconds, if I_{low} is greater than or equal to the amperage of I_2 after 20 minutes has been clocked; or arresting charge current I_2 when the amperage of I_2 is below 1.0 V, for a period of about 5 min or less; wherein $I_{end} = I_{Chg} + I_{Temp}$, $I_{Chg} = (T_2 \times I_{max})/T_{Chg}$, I_{Temp} is the temperature compensation current, T_2 is the time necessary to charge the battery from a voltage of about 1.9 V to a voltage of about 2.0 V, I_{max} is the maximum current charged to the battery, and T_{Chg} is the cell time constant; and the voltages have a deviation of $\pm 0.5\%$, the current amperages have deviations of $\pm 2\%$, and clocked times have a deviation of $\pm 2\%$.

[0253] Some of these methods further comprise measuring the temperature, wherein the temperature measurement has an accuracy of about $\pm 5^\circ\text{C}$ (e.g., $\pm 2^\circ\text{C}$).

[0254] In some embodiments, the maximum amperage, I_{max} , is about 6 mA or less. For example, I_{max} is about 5.5 mA or less.

[0255] In other embodiments, the battery has an OCV of less than about 1.70 V (e.g., about 1.65 V or less) in its discharged state.

[0256] In some embodiments, the OCV of the battery is greater than 1.25 V prior to charging.

[0257] In other embodiments, the OCV of the battery is less than 1.25 V prior to charging.

[0258] Some embodiments further comprise charging the battery with a recovery charge current of 1.0 mA for a period of at least 20 minutes (e.g., at least 30 minutes); and arresting the recovery charge current when the battery is charged to a voltage of about 1.50 V or more (e.g., about 1.6 V).

[0259] Other exemplary methods are provided, as a step-diagrams, in Figures 8A-9.

[0260] In some methods, the battery charger is a current limited voltage source. When cell impedance is low the charger delivers maximum allowed current as set by the charge method. As cell impedance increases, cell voltage rises to the maximum allowed voltage, and the charge current is modulated, i.e., reduced, to maintain the battery's voltage at the maximum allowed voltage.

[0261] In some methods, the charge voltage accuracy has a deviation of $\pm 0.5\%$ (e.g., $\pm 10\text{mV}$ between 1.200-2.000 V). In other methods, the charge current accuracy has a deviation of $\pm 2\%$ (e.g., $\pm 0.1\text{ mA}$ between 1-5 mA). In some methods, time is measured or

clocked with an accuracy of $\pm 2\%$ (e.g., for a 5 hour time period, the accuracy is ± 0.1 hours). And, in some methods, the temperature measurement accuracy has a deviation of $\pm 5^\circ\text{C}$ (e.g., $\pm 2^\circ\text{C}$). The temperature measurement does not have to measure the cell case temperature, only the ambient temperature.

[0262] In some methods, the cell voltage does not exceed 2.00 V for more than 1 second continuously. Voltage excursions above this voltage limit should be due to a charge voltage/current transition while the charger is stabilizing the charge voltage on the cell. In Figures 10 and 13-17, the maximum charge voltage for the cell is labeled as $V_{\max}$. Voltage ripple is allowed in these charge methods, but the peak should not exceed 2.0V.

[0263] In some methods, $V_{\max}$ is 1.98 V.

[0264] In some methods, the cell charge current does not fall below a minimum level, $I_{\min}$ for more than 5 minutes continuously. The maximum charge current for the cell is $I_{\max}$. Current ripple is allowed but the voltage peak should not exceed 2.0 V. In some methods, $I_{\min}$ is 1.0 mA. In other methods, $I_{\max}$ is 5.0 mA (e.g., $I_{\max}$ is 5.0 mA when the rated capacity of the battery is 31 mAh). In some methods, $I_{\max}$ is 5.5 mA (e.g., $I_{\max}$ is 5.5 mA when the rated capacity of the battery is 35 mAh).

[0265] *1. Deep Discharge (Zone 1)*

[0266] Another aspect of the present invention provides a method of charging a rechargeable 2.0 V silver-zinc battery having an voltage (e.g., OCV) of less than 1.65 V comprising

- 1) Charging the battery with first charge current, I_1 , having an amperage of 6.0 mA or less (e.g., 5.5 mA or 5.0 mA);
- 2) Clocking time once the battery is charged to a voltage of 1.90 V;
- 3) Modulating the first charge current so that the voltage of the battery is restricted to 2.0 V or less, and the first charge current has a maximum amperage, $I_{\max}$, of about 10 mA or less (e.g., about 6.0 mA or less, about 5.5 mA or about 5.0 mA);
- 4) Continuously charging the battery with the first charge current until 20 minutes has been clocked and arresting the first charge current;
- 5) Charging the battery with second charge current I_2 , wherein the charge current I_2 is modulated so that the voltage of the battery is restricted to 2.0 V or less, and the second charge current has a maximum amperage, $I_{\max}$, of about 10 mA or less (e.g., about 6.0 mA or less, about 5.5 mA or about 5.0 mA);
- 6) Arresting charge current I_2 when the amperage of I_2 is below $I_{2\text{end}}$ for a period of 60 continuous seconds, wherein $I_{2\text{end}} = I_{\text{Chg}} + I_{\text{Temp}}$, I_{Chg} is the charge compensation current,

I_{Temp} is the temperature compensation current, and $I_{Chg} = (T_2 \times 5.0 \text{ mA})/T_{Chg}$, wherein T_2 is the time necessary to charge the battery to a voltage of about 2.0 V with the second charge current, I_2 , and T_{Chg} is the cell time constant; or

7) Arresting charge current I_2 when the amperage of I_2 is below 1.0mA, for a period of about 5 min or less,

wherein the voltages have a deviation of $\pm 0.5\%$; the current amperages have deviations of $\pm 2\%$; and clocked times have a deviation of $\pm 2\%$.

[0267] In some methods, a two zone approach is utilized for charging. Referring to Figures 11 and 12, zone 1 includes the steps of the charge method starting from the initial steps through the steps charging the battery to a voltage, V_{max} , that is less than the natural polarization peak. Zone 2 includes the steps of the charge method starting from about 30 s to about 90 s after the battery is charged to V_{max} (e.g., at the end of T_1 in Figure 11) and continues until the charge current is terminated. Charging is terminated when the charge current drops to a termination current level in Zone 2. The termination current level depends on which zone the cell started charging.

[0268] In some methods, as illustrated in Figure 11, when the battery voltage (e.g., OCV) is less than or equal to 1.65 V prior to charge, the cell is deeply discharged, typically to a SOC of less than 50% of its rated capacity. If allowed to settle, the battery's open circuit voltage (OCV) will settle at 1.60 V. The cell is charged at I_{max} (e.g., 5.0 mA or 5.5 mA) to a maximum voltage of V_{max} (e.g., 1.98 V or 2.0 V). When the cell voltage reaches 1.90 V, the battery voltage is near the polarization peak, and a Polarization Peak timer, T_1 , is started. The Polarization Peak timer clocks about 20 minutes of time. While this timer is active, the charge current will rapidly drop and recover. While the T_1 timer is active, the charge current is not terminated even if the charge current falls below I_{min} . Zone 2 is entered when T_1 timer is complete, i.e., the timer has clocked 20 minutes. After the T_1 timer is complete, the charge set points are maintained at V_{max} (e.g., 1.98 V or 2.0 V) and I_{max} (e.g., 5.0 mA or 5.5 mA). The charge current continues until the charge current is less than I_{end} for 60 seconds continuously. I_{end} is the calculated charge termination current in mA, which compensates for state of charge, cell aging, and ambient temperature. The calculation for I_{end} is expressed in equation (1):

$$I_{end} = I_{Chg} + I_{Temp} \quad (1)$$

where I_{Chg} is the charge compensation current, in mA, and I_{Temp} is the temperature compensation current in mA that are provided in Tables 1A and 1B:

Table 1A: T_{Temp} and I_{end} values for 31 mAh capacity batteries.

Temperature	Maximum Charge Time	I_{Temp}	I_{2end}
$\geq 25^{\circ}\text{C}$	0.0hr	0.6	4.0
15°C	+1.0hr	0.4	3.5
5°C	+2.0hr	0.2	3.0
0°C	+2.5hr	0.0	2.5

Table 1B: T_{Temp} and I_{end} values for 35 mAh capacity batteries

Temperature	Maximum Charge Time	I_{Temp}	I_{2end}
$\geq 25^{\circ}\text{C}$	0.0hr	1.0	4.5
15°C	+1.0hr	0.6	4.0
5°C	+2.0hr	0.3	3.5
0°C	+2.5hr	0.0	3.0

[0269] I_{Chg} is a calculated value based on a constant current timer, T_2 , the measured length of time the cell is charged under constant current in Zone 2, e.g., when I_2 is substantially constant. When timer T_1 starts, timer T_2 also starts. Timer T_2 ends when charge current falls below I_{max} after T_1 ends. The minimum value for T_2 is T_1 . I_{Chg} is determined with equation (2):

$$I_{Chg} = (T_2 \times I_{max}) / T_{Chg} \quad (2)$$

where T_{Chg} is the cell time constant in hours. Note that T_{Chg} is empirically determined for a specific cell design such as the 31 mAh button cell or the 35 mAh button cell. Some values for T_{Chg} for 31 and 35 mAh button cells above are provided in Table 2:

Table 2: T_{Chg} values for two types of rechargeable button cells.

Capacity	T_{chg}
31 mAh	5.0 hours
35 mAh	5.5 hours

[0270] Note that a battery that is in its early stages of cycle life will have a lower impedance and will accept charge more easily, which results in a longer measured T_2 . A longer T_2 results in a larger I_{chg} which terminates charge sooner while the charge current is higher. A battery that is in its later stages of life will have a higher impedance and more difficulty in accepting charge, which results in a shorter T_2 . A shorter T_2 results in a smaller I_{chg} which terminates charge later when the charge current is lower.

[0271] 2. Temperature Dependence

[0272] Higher ambient temperatures increase the conductivity of the cell which allows the battery to charge faster. Lower ambient temperatures decrease the conductivity of the battery and require more time to charge the battery to the same capacity. As a result, the value for maximum charge time may be modified to compensate for the effect temperature has on conductivity.

[0273] Tables 1A and 1B, above, detail the offsets to use with the maximum charge time based on ambient temperature. For temperatures in between the specific values indicated below, scale the offset proportionally. Regardless of temperature, the minimum charge current value remains the lowest acceptable charge current.

[0274] Some methods of the present invention further comprise measuring the temperature, wherein the temperature measurement accuracy has a deviation of $\pm 5^\circ\text{C}$ (e.g., $\pm 2^\circ\text{C}$).

[0275] 3. Shallow Discharge (Zone 2)

[0276] Another aspect of the present invention provides a method of charging a rechargeable silver-zinc battery having a rated voltage of about 2.0 V comprising:

- 1) Charging the battery with a modulated charge current I_1 , wherein the charge current I_1 is modulated so that the voltage of the battery is restricted to 2.0 V or less, and the charge current has a maximum amperage, I_{max} , of 5.0 mA;
- 2) Clocking time 60 seconds after charging begins;
- 3) Measuring the lowest amperage, I_{low} , of charge current I_1 when time is being clocked; and

4A) Arresting charge current I_1 when the amperage of I_1 is below I_{end} for a period of 60 continuous seconds if the amperage of I_1 is I_{max} for a period of 2 continuous seconds when time is being clocked, wherein I_{end} is the temperature dependent minimum charge current necessary to maintain a voltage of 2.0V in the battery when the battery is charged to an SOC of about 100%; or

4B) Arresting charge current I_1 once the battery is charged to an SOC of about 50%, if I_{low} is less than the amperage of charge current I_1 after 20 minutes has been clocked, wherein the SOC of the battery is determined by integrating the charge current while time is being clocked; or

4C) Arresting charge current I_1 when the amperage of I_1 is below I_{end} for a period of 60 continuous seconds, if I_{low} is greater than or equal to the amperage of I_1 after 20 minutes has been clocked; or

4D) Arresting charge current I_1 when the amperage of I_1 is below I_{1min} , 1.0V, for a period of about 5 min or less; and

the voltages have a deviation of $\pm 0.5\%$; the charge current amperages have deviations of $\pm 2\%$; and clocked time has a deviation of $\pm 2\%$.

[0277] Some methods further comprise charging the battery with a second modulated charge current I_2 , wherein the second charge current I_2 is modulated so that the voltage of the battery is restricted to 2.0 V or less, and the charge current amperage is restricted to a maximum amperage, I_{max} , of 5.0 mA; clocking time when the voltage of the battery is 1.9V; and continuously charging the battery with charge current I_2 until 20 minutes has been clocked.

[0278] Some methods further comprise charging the battery with a second modulated charge current I_2 , wherein the second charge current I_2 is modulated so that the voltage of the battery is restricted to 2.0 V or less, and the charge current amperage is restricted to a maximum amperage, I_{max} , of 5.0 mA; clocking time when the voltage of the battery is 1.9 V; and continuously charging the battery with charge current I_2 until 20 minutes has been clocked.

[0279] If the battery OCV is greater than 1.65 V prior to charge, the battery has a relatively high state of charge. If allowed to settle, the battery's open circuit voltage (OCV) will be at 1.86 V. In this case a fixed termination charge current, I_{2end} , is used.

[0280] There is a wide variation in battery impedance when charge is started in Zone 2. If the battery is nearly fully charged at the start of charge, the cell impedance is significantly lower than if the battery is near the transition zone. Figure 13 shows a battery starting charge with a high state of charge versus the battery in Figure 14 starting charge near the transition zone.

[0281] Because of this impedance variation, the Zone 2 filter timer, T_3 , is used. Timer T_3 starts 60 seconds after the start of charging. While T_3 is active, if the charge current reaches I_{max} for 2 seconds continuously, I_{2end} (see Tables 1A and 1B) is used to terminate charge. Figure 13 shows an example of this since the charge current reached I_{max} during T_3 . Charge terminated when the charge current fell below I_{2end} . Charging can terminate while T_3 is active if charge current has reached I_{max} and then falls below I_{2end} before T_3 is complete (refer to Figure 15) or any time charge current falls below I_{min} .

[0282] Once T_3 starts, the minimum charge current, I_{low} , is recorded and compared to the charge current when T_3 has ended. If I_{low} is less than the charge current at the end of T_3 , 50% of C_{max} , i.e., 50 % of the SOC, is charged into the cell by integrating the charge current.

Charging terminates when 50% of $C_{\max}$ has been charged into the cell or if the charge current falls below $I_{\min}$. Figure 16 shows this as the charge current never reaches $I_{\max}$ during T_3 and charge current is less than $I_{2\text{end}}$ when 50% of $C_{\max}$ has been charged into the cell.

[0283] If I_{low} is equal to or greater than the charge current at the end of T_3 , charging may terminate when charge current falls below $I_{2\text{end}}$. For this case, if the charge current is already below $I_{2\text{end}}$, charging may terminate immediately.

[0284] 4. Over-Discharge Recovery

[0285] Another aspect of the present invention provides a method for charging a rechargeable battery having an OCV of less than 1.25 V comprising:

- 1) Charging the battery with a recovery charge current of 1.0 mA for a period of at least 30 minutes; and
- 2) Arresting the recovery charge current when the battery is charged to a voltage of 1.60 V.

[0286] When the battery OCV is less than 1.25 V, the battery has been over-discharged. In this condition, the battery may be gently charged to a minimum condition before the normal charge method can be used. The battery is charged at I_{recov} for a minimum of 30 minutes and until the charge voltage reaches V_{recov} . Once the charge voltage has exceeded V_{recov} , charging may transition to normal charging. The battery may not be charged for more than 1 hour at the I_{recov} charge rate. Sample V_{recov} and I_{recov} values are presented in Table 3 for both 31 mAh and 35 mAh button cells.

Table 3: V_{recov} and I_{recov} values for two rechargeable batteries.

Capacity	V_{recov}	I_{recov}
31 mAh, 35 mAh	1.60 V	1mA

[0287] After the cell voltage reaches V_{recov} , the charge current may be integrated until the maximum capacity, $C_{\max}$, is charged into the cell, then charging may be terminated.

Subsequent charge cycles will revert back to the normal charge method. Referring to Figure 17. The estimated charge time is 7-8 hours at room temperature due to the slower start of charge and the maximum capacity charge target.

[0288] 5. Diagnostics

[0289] a. Diagnostics – Soft Shorting

[0290] In an embodiment, one or more of the methods may also take into account a "soft short," which is an internal short circuit caused by a zinc dendrite that momentarily pierces the separator stack but is burned back by the short circuit current. For comparative purposes,

a charge curve that does not include a soft short is shown in Figure 7A whereas a charge curve including a soft short is shown in Figure 7B. It is noted that soft shorts are an expected failure mode for silver-zinc batteries.

[0291] Soft shorts typically occur during charging in the upper plateau at the highest voltage level across the electrodes. After each burn-back event, the zinc dendrite grows larger and is able to carry more short circuit current until the dendrite vaporizes or dissolves. A soft short progressively gets worse until it ultimately forms a "hard short," which is described in greater detail below.

[0292] Typically, soft shorts will occur in one charge cycle and not reappear until several cycles later as it takes time for the dendrite to grow back. Initially, the soft shorts will slightly reduce the rated charge capacity of the silver-zinc cell, and, as the zinc dendrite is able to carry more current, the rated charge capacity of the silver-zinc cell will be even further reduced. Accordingly, early detection of soft shorts may allow one or more of the methods associated with the system to communicate to the user that the silver-zinc battery may have to be replaced at some point in the future.

[0293] To account for battery shorting, some methods of the present invention optionally comprise generating an electrical signal if the voltage of the battery is lower than V_P for a period of 2 seconds or more, which may be indicative of a soft short in the battery.

[0294] In a multi-zone charge method, a soft short first appears in the Zone 2 charging step since the potential is highest and is most favorable to drawing current through the dendrite. If the charge voltage in Zone 2 is less than or equal to the voltage plateau, V_P , (e.g., 1.90 V) for a period of more than 1 second, (e.g., about 2 seconds or more) continuously, once the battery has been charged to a voltage of V_2 , the soft short diagnostic may be confirmed. Some methods of the present invention include generating an electrical signal when the soft short is confirmed.

[0295] *b. Diagnostics – Hard Shorting*

[0296] In an embodiment, one or more of the methods may also take into account a "hard short," which renders the silver-zinc cell as being inoperable as a result of the hard short completely discharging the silver-zinc cell, causing the voltage of the cell to drop to nearly 0.00V. Typically, hard shorts are caused by dendrite shorts through the separators, which are internal structures that compromise the insulating barrier between the can and lid resulting in zinc dendrite growth under or around the gasket and external conductive bridges from can to lid. Separators are typically designed to withstand dendrite growth, but at the end of life of

the battery, the separators will become weaker and eventually may allow dendrites to grow through, causing a 'hard short'.

[0297] A silver-zinc cell with a hard short can be distinguished from an over-discharged silver-zinc cell during an over-discharge recovery event (see, e.g., steps S.302, S.303' of the charge method 300). For example, if the voltage of the cell, V , does not reach the V_{recov} within the specified time limit (e.g., within about one (1) hour, which is seen, e.g., at step S.302), the charge method 300 may determine that the silver-zinc cell has a hard short and may be advanced from step S.302 to step S.303'. In an embodiment, when determining if the silver-zinc cell includes a hard short, the charge method 300 may consider a minimum OCV detection level of about 0.100V to about 0.300V.

[0298] A hard short renders the cell inoperable due to its completely discharging the cell and causing the cell voltage to drop to nearly zero (0) V.

[0299] Hard shorts are caused by dendrite shorts through the separators, internal mechanical issues that compromise the insulating barrier between the can and lid, zinc dendrites that grow under or around the gasket, and external conductive bridges from can to lid.

[0300] A cell with a hard short can be distinguished from an over-discharged cell during the Over-Discharge Recovery charge. If the cell voltage does not reach the V_{recov} within the specified time limit, i.e., 1 hr, the cell has a hard short.

[0301] *c. Detection*

[0302] A high impedance cell has difficulty getting the charge capacity back into electrodes. A cell with this condition gradually requires more time to become fully charged. This results in longer charge times and lower current thresholds. Eventually, as the impedance rises, the cell will no longer charge to full capacity within 6 hours at room temperature. The capacity tends to gradually drop with each successive cycle when less charge is put back into the cell.

[0303] High impedance cells are caused by the zinc anode gradually densifying and becoming more difficult to charge, aging of the cell which affects how efficiently the electrodes accept charge and electrolyte imbalance which can occur when the separators are blocked and do not allow water transfer to efficiently occur.

[0304] In an embodiment, one or more of the methods may also take into account a silver-zinc cell having a relatively high impedance, which may result in the silver-zinc cell having difficulty in getting the charge back into electrodes. Typically, a high impedance silver-zinc cell is usually caused by the zinc anode gradually densifying and becoming more difficult to charge, thereby aging silver-zinc cell, which may affect (a) how efficiently the electrodes

accept charge, and (b) electrolyte imbalance, which may occur when the separators are blocked and do not allow water transfer to efficiently occur.

[0305] In one embodiment, when $I_{\min}$ terminates charge, the high impedance/capacity fade diagnostic is confirmed. Multiple high impedance/capacity fade warnings may be confirmed before warning the user.

[0306] *d. Incorrect Battery Chemistry*

[0307] As noted above, the methods of recharging batteries according to the present invention are not compatible for all types of batteries. It is appreciated that many cells having a non-silver-zinc chemistry may share the same casing geometry as that of the silver-zinc cell; as such, when designing the one or more methods, the different chemistries should be kept in mind and considered in order to prevent a user from attempting to recharge a cell having a non-compliant chemistry. For example, in an embodiment, similar cell casing may not include a silver-zinc chemistry, but rather, for example: zinc-air (ZnO_2), nickel-metal hydride (NiMH) or the like.

[0308] Zinc-air batteries or manganese-oxide batteries may undergo gassing or explode when some charging methods of this invention are applied to the cell. To avoid this, some charging methods of the present invention further comprise a step or series of steps that assess the chemistry of the battery being charged, and if battery is assessed to have incompatible charging characteristics, the charge method is terminated. These steps may occur upon charging the battery or upon discharging the battery.

[0309] Zinc-air and NiMH cells tend to have a slower charge voltage rise than AgZn when charged at I_{Diag} . The rise in charge voltage can be measured and the zinc-air and NiMH cells identified. If the cell voltage before charge is between 1.25 V and 1.65 V and the cell voltage has not exceeded 1.55 V after 3 seconds of being charged at I_{Diag} , the cell is zinc-air or NiMH. For zinc-air and NiMH cells where the cell voltage before charge is less than 1.25 V, the over-discharge recovery method is used for detection. Over-discharged zinc-air and NiMH cells will not reach V_{recov} when charged at I_{recov} for 1 hour. I_{Diag} values for two batteries are provided in Table 4:

Table 4: I_{Diag} values for 2 batteries.

Capacity	I_{Diag}
31 mAh	8 mA
35 mAh	10 mA

[0310] A partially discharged Ag_2O or silver-oxide cell looks nearly identical to AgZn during charge because the anode and cathode are the same chemistry. As a result, the Ag_2O cell may be charged up to V_1 . When V_1 is reached, the charge current in an Ag_2O cell will drop similar to AgZn . The differentiator is that the charge current for Ag_2O typically drops below 1.0 mA and never recovers to a higher level. The AgZn cell also has a charge current drop when V_1 is reached, but the charge current drop is only momentary before the current rises back up again before the polarization peak timer is complete. The inflection point of the charge current is used to identify AgZn . An inflection is defined as a rise of 0.5 mA or more. A fully discharged Ag_2O cell has a fairly slow voltage rise during charge. This is detected by measuring the voltage rise after the charge voltage has exceeded 1.80 V. The AgZn cell will reach V_1 within 5 minutes after reaching 1.80 V, but the Ag_2O cell will take much longer. The silver-oxide chemistry may take as long as 1 hour to detect but the cell is not damaged and will take charge during this time.

[0311] A deeply discharged alkaline cell also has a slower charge voltage rise than AgZn and can be detected similar to zinc-air and NiMH. A fresh alkaline cell has an open circuit voltage closer to AgZn and Ag_2O . As a result, it may be charged up to V_1 and then the charge current may be monitored like Ag_2O during the polarization peak timer.

[0312] Referring to Figure 8D, the above-mentioned charging method 400 is described in accordance with an embodiment of the invention. In an embodiment, the charging method 400 includes several branches, each including a different outcome in determining if charging of a cell interfaced with / connected to the system should or should not proceed. In circumstances where charging should not proceed, the reason may include any of the following, such as, for example: (a) an attempt to charge a cell having a non-compliant chemistry, or, for example: (b) the cell includes a compliant chemistry, but, for example, includes an impermissibly high impedance.

[0313] However, if the cell to be charged by the system includes an appropriate OCV criteria (e.g., the OCV, V , at the outset of the charging period is greater than or equal to about, for example, 1.65V) the method 400 may be advanced from step S.401 to step S.402 (i.e., at step S.402, the method 400 may be advanced to one of the "multi-stage charge mode" at step S.102' or the "single-stage charge mode" at step S.202). Conversely, if, however, the cell to be charged by the system 50 does not include an appropriate OCV criteria (e.g., the OCV, V , at the outset of the charging period is less than 1.65V), the method 400 may be advanced from step S.401 to step S.402' in order to further investigate the OCV of the cell to be charged by the system 50.

[0314] 1. Branch S.402'-S.405'

[0315] At step S.402', for example, the method determines if the OCV of the cell is greater than or equal to about approximately 1.2V and less than or equal to about approximately 1.45V. If the above condition at step S.402' is true, the method 400 is advanced from step S.402' to step S.403' where the cell is charged at 8 mA until the voltage of the cell is equal to about approximately 1.55V or the time of charging is about equal to three (3) seconds. The method 400 is then advanced from step S.403' to step S.404' to determine if the voltage of the cell is less than 1.55V within three (3) seconds of being charged at 8mA. If the above condition at step S.404' is not true, then the method 400 is advanced to step S.405' where charging is ceased due to the cell potentially having a non-compliant chemistry of one of ZnO₂, NiMH, alkaline or the like. If, however, the condition at step S.404' is true, then the method 400 is advanced from step S.404' to step S.404'', which is discussed in greater detail in the foregoing disclosure.

[0316] 2. Branch S.402' and S.403''-S.407''

[0317] Referring back to step S.402', another branch of the method 400 is discussed. At step S.402', it may be determined that the condition is not true (i.e., the OCV may be greater than or equal to 1.2V but less than or equal to 1.45V), and, as such, the method 400 is advanced from step S.402' to S.403''. At step S.403'', for example, the method 400 determines if the OCV of the cell is greater than about approximately 1.45 V and less than about approximately 1.65 V.

[0318] If the above condition at step S.403'' is true, the method 400 is advanced from step S.403'' to step S.404'' where the cell is charged at 8mA until the voltage of the cell is equal to about approximately 1.98 V or until the charge current, I, drops. The method 400 is then advanced from step S.404'' to S.405'' where it is determined if the cell reaches $V_{\max}$ within five (5) minutes in reference to period of time when the cell voltage was 1.8 V.

[0319] If the above condition at step S.405'' is true, then the method 400 is advanced from step S.405'' to step S.406'' to determine if the charge current, I, is less than 1mA during the polarization peak timer, T_1 . If the above condition at step S.405'' is true, then the method 400 is advanced from step S.406'' to step S.407'' where charging is ceased due to the cell potentially having a non-compliant chemistry (e.g., the cell is an alkaline cell) or the cell includes a compliant chemistry (e.g., Ag₂O / AgZn), but, however, includes an impermissibly high impedance. Similarly, if the condition at step S.405'' is not true, then the method 400 is advanced from S.405'' to step S.407'' where charging is ceased. Further, if the condition at

step S.406" is not true, then the method is advanced from step S.406" to step S.407"', which is discussed in greater detail in the foregoing disclosure.

[0320] When considering step S.406" described above, it will be appreciated that an Ag₂O or "silver I oxide" cell behaves nearly identical to an AgZn or "silver II oxide" cell during charging because the anode and cathode are the same chemistry; as a result, the Ag₂O cell may be charged up to $V_{\max}$; when $V_{\max}$ is reached, the charge current in an Ag₂O cell will drop similarly with respect to an AgZn cell. The differentiator, however, is that the charge current for an Ag₂O cell typically drops below 1mA and usually does not recover to a higher level. Further, the AgZn cell also has a charge current drop when $V_{\max}$ is reached, but, however, the charge current drop is only momentary before the current rises back up again before the polarization peak timer is complete. Yet, even further, an empty Ag₂O cell has a fairly slow voltage rise during charge, which may be detected by measuring the voltage rise after the charge voltage has exceeded 1.8 V. Further, an AgZn cell will quickly reach $V_{\max}$ after reaching 1.8 V, but, however, the Ag₂O cell will take much longer.

[0321] 3. Branch S.402', S.403" and S.403'''-S.405'''

[0322] Referring back to step S.402', another branch of the method 400 is discussed. At step S.402', it may be determined that the condition is not true (i.e., the OCV may be less than 1.2 V or greater than 1.45 V), and, as such, the method 400 is advanced from step S.402' to S.403". At step S.403", for example, the method 400 determines if the OCV of the cell is greater than about approximately 1.45 V and less than about approximately 1.65 V. At step S.403", it may be determined that the condition is not true (i.e., the OCV may be less than 1.2 V), and, as such, the method 400 is advanced from step S.403" to S.403'''.

[0323] At step S.403''', the cell is charged 1mA until the cell reaches 1.6 V. The method 400 is then advanced from step S.403''' to S.404''' where it is determined if the voltage of the cell reaches 1.6 V within one (1) hour. If the above condition at step S.404''' is not true, then the method 400 is advanced to step S.405''' where charging is ceased due to the cell potentially having a non-compliant chemistry of one of ZnO₂, NiMH, alkaline or the like. If, however, the condition at step S.404''' is true, the method is advanced to step S.404'', which has been discussed above and is not repeated here for brevity purposes.

[0324] 4. Branch S.402', S.403"-S.406" and S.407'''

[0325] Attention is now drawn to step S.407'''. Step S.407''' is arrived at if the condition described above at step S.406" is not true. At step S.407''', the method 400 determines if the charge current, I , exhibits an inflection (i.e., an inflection is defined as a rise of 0.5mA or more) during the polarization peak timer, T_1 . If the above condition at step S.407''' is true, the

inflection may indicate that the cell is a silver-zinc cell and that the silver-state of the silver zinc cell is AgZn or "silver II oxide"; as such, the method 400 is advanced from step S.407'" to step S.402 (i.e., at step S.402, the method 400 may be advanced to one of the "multi-stage charge mode" at step S.102' or the "single-stage charge mode" at step S.202). Conversely, if, however, the condition at step S.407'" is not true, the method 400 is advanced from S.407'" to step S.407'" where charging is ceased.

[0326] In some methods of the present invention, the battery assessment occurs during charging and comprises charging the battery with a charge current for a set period of time and determining whether the initial voltage rise rate meets a threshold value, and if the voltage rise rate fails to meet the threshold value, charging is terminated. For example, when a battery is discharged to an SOC of about 50% or less of the rated capacity, the battery is initially charged with a diagnostic charge current, I_{Diag} , for a short period of time (e.g., less than 10 seconds), and the voltage of the battery is measured. If the voltage of the battery fails to meet a threshold value (e.g., about 1.65 V), then charging is terminated.

[0327] In some embodiments, any of the charging methods above further comprise charging a battery with a diagnostic charge current, I_{Diag} , of about 8 mA for a period of less than about 7 seconds (e.g., less than about 5 seconds, or about 3 seconds), and if V_{Batt} is less than or equal to about 1.65 V (e.g., less than or equal to about 1.55 V), then terminating the charge method.

[0328] In other embodiments, any of the charging methods above further comprise charging a battery with a diagnostic charge current, I_{Diag} , of about 8 mA for a period of less than about 7 seconds (e.g., less than about 5 seconds, or about 3 seconds), and if the increase in SOC of the battery is not at least 0.02 %, then terminating the charge method.

[0329] In one example, the assessment occurs upon discharge of the battery. For instance, at the end of discharging the battery, the change in the average battery voltage per unit time is measured when V_{Batt} is between 1.4 V and 1.15 V (e.g., between 1.4 V and 1.2 V), and if the change is not greater than or equal to 60 mV during a period of 30 minutes or less (e.g., 15 minutes or less, 10 minutes or less, or 5 minutes or less), then an electrical signal is generated that alerts the user that the battery should not be charged according to the methods of the present invention.

[0330] One embodiment comprises determining the change in the average battery voltage per unit capacity at the end of discharging a battery, e.g., when DOD is about 70% or less, when DOD is about 90% or less, or when DOD is about 95% or less, and if the change in battery voltage per unit time is not greater than or equal to 60mV over a 3% change in the

DOD, then generating a signal, e.g., an audio signal, a visual signal, a vibration signal, or any combination thereof, that alerts the user that the battery should not be recharged according to the present invention. Or, if the change in battery voltage per unit time is greater than or equal to 60mV over a 3% change in the DOD, then generating a signal, e.g., an audio signal, a visual signal, a vibration signal, or any combination thereof, that alerts the user that the battery should be recharged according to the present invention. Other embodiments comprise generating a signal that communicates with the charge management system and enables or disables the charging of the battery according to the methods of the present invention depending on the results of the assessment.

[0331] 6. Assessing the SOC of a Recharging Battery

[0332] The capacity of a battery that is recharged according to a method of the present invention, and the associated SOC, may be calculated using equation (3), below:

$$Capacity = \int_0^{T_{cc}} I_{cc} dT + \int_{T_{cc}}^{T_{final}} I_{cv}(T) dT \quad (3)$$

wherein T_{cc} is constant current time, I_{cc} is the substantially constant current, I_{cv} is the controlled current, which maintains a constant voltage in the battery, and T_{final} is the time at which the charging terminates. The capacity may be approximated using mathematical approximation methods to determine the capacities of each of the integrals in equation (3).

[0333] In some methods of the present invention, Coulomb counting may be used to determine capacity of electrical energy that is charged to a rechargeable battery.

[0334] Other methods approximate the electrical capacity based on the time necessary to charge the battery to a certain voltage.

[0335] One exemplary method of approximating a battery's capacity or determining when a battery is charged to a SOC of about 80% or more of its rated capacity for a battery that is charged to V_1 and V_2 according to several methods of the present invention is to measure the time required for the voltage of the battery to reach V_2 from the voltage V_1 . This time is then used to determine I_{ter} by use of the equation (4), below:

$$I_{ter} = I_{comp} + m(T_{V_2} - T_{V_1})^Y \quad (4)$$

where I_{comp} is the minimum charge current for a given temperature, the term $(T_{V_2} - T_{V_1})$ represents the amount of time required for the battery to charge from V_1 to V_2 , and m and Y are constants. If equation (4) gives a value for I_{ter} that is less than I_2 then, $I_{ter} = I_2$. One way of determining Y and m is to test a population of batteries of the same general design as the batteries intended to be charged using the present method using various values for m and Y (e.g., Y is 1, Y is between 0.25 and 4.0, or Y is between 0.3 and 3) and selecting the m and Y

values from batteries that demonstrate the longest cycle life. One way to determine I_{comp} is to test a population of batteries of the same general design as the batteries intended to be charged using the present method using various values for I_{comp} at several temperatures and choose the value I_{comp} at each temperature such that shorting of the cell does not occur. I_{comp} is typically a current that would fully charge a cell from 0% SOC to 100% SOC in a time period of between 5 to 200 hours (e.g. I_{comp} is 1 mA, I_{comp} is 10mA to 0.01mA, I_{comp} is 7mA to 0.1mA at a temperature of 23 °C). In some examples, such as for some button cells, I_{comp} is 1 mA at a temperature of about 23 °C, m is 1 mA/hour and Y is 1.

[0336] When the battery is charged to V_2 and the charge current I_2 is controlled, the controlled I_2 charge current is terminated when I_2 equals I_{ter} , which occurs when the battery is charged to a SOC of 80% or more (e.g., 90% or more, 95% or more, 99% or more, or about 100%) of its rated capacity.

[0337] Another exemplary method of approximating a battery's capacity or determining when a battery is charged to a SOC of about 80% or more of its rated capacity for a battery that is charged to V_1 and V_2 according to several methods of the present invention is to measure the time required for the voltage of the battery to reach V_2 from the voltage V_1 for the current charge cycle and the time to reach V_2 and V_1 from previous charge cycles. These times are then used to determine I_{ter} by use of a piece-wise continuous equation similar in form to the equation (5) , below:

$$I_{ter} = I_{comp} + m(T_{V_2} - T_{V_1})^Y + \sum_{i=1}^n m_i (T_{V_{2,i}} - T_{V_{1,i}})^{Y_i} \quad (5)$$

where I_{comp} is the minimum charge current for a given temperature, the term $(T_{V_2} - T_{V_1})$ represents the amount of time required for the battery to charge from V_1 to V_2 , and m and Y are constants. If equation (5) gives a value for I_{ter} that is less than I_2 , then $I_{ter} = I_2$. One way of determining Y and m is to test a population of batteries of the same general design as the batteries intended to be charged using the present method using various values for m and Y (e.g., Y is 1, Y is between 0.25 and 4.0, or Y is between 0.3 and 3) and selecting the m and Y values from batteries that demonstrate the longest cycle life. One way to determine I_{comp} is to test a population of batteries of the same general design as the batteries intended to be charged using the present method using various values for I_{comp} at several temperatures and choose the value I_{comp} at each temperature such that shorting of the cell does not occur. I_{comp} is typically a current that would fully charge a cell from 0% SOC to 100% SOC in a time period of between 5 to 200 hours (e.g. I_{comp} is 1 mA, I_{comp} is 10mA to 0.01mA, I_{comp} is 7mA to 0.1mA at a temperature of 23 °C). In some examples, such as for some button cells, I_{comp}

is 1 mA at a temperature of about 23 °C, m is 1 mA/hour and Y is 1. The subscript, i , in the sum of equation (5) ranges from the previous cycle to the present one, $i = 1$, and $i = n$, a number further previous to the current cycle. The number n is typically less than 10 or less than 5. One way of determining Y_i and m_i is to test a population of batteries of the same general design as the batteries intended to be charged using the present method using various values for m_i and Y_i (e.g., Y_i is 1, Y_i is between 0.0 and 4.0, or Y_i is between 0.3 and 3) and selecting the m_i and Y_i values from batteries that demonstrate the longest cycle life. The sum in equation (5) could also be replaced by a term that is a function of the time derivative or difference of $(T_{V_2} - T_{V_1})$, i.e., equation (6), where Δ denotes the difference operation and x denotes the first, second, or third difference.

$$I_{ter} = I_{comp} + m(T_{V_2} - T_{V_1})^Y + \sum_{i=1}^n m_i \frac{\Delta^x (T_{V_2,i} - T_{V_1,i})^{Y_i}}{\Delta^x i} \quad (6)$$

when the battery is charged to V_2 and the charge current I_2 is controlled, the controlled I_2 charge current is terminated when I_2 equals I_{ter} , which occurs when the battery is charged to a SOC of 80% or more (e.g., 90% or more, 95% or more, 99% or more, or about 100%) of its rated capacity.

[0338] Another exemplary method of approximating a battery's capacity or determining when a battery is charged to a SOC of about 80% or more of its rated capacity for a battery that is charged to V_1 and V_2 according to several methods of the present invention is to measure the time required for the voltage of the battery to reach V_2 from the voltage V_1 for the current charge cycle and the time to reach V_2 and V_1 from previous charge cycles. These times are then used to determine I_{ter} by use of any of the known delayed feedback control methods or extended time-delay autosynchronization methods.

[0339] **7. Dynamic Modulation of V_1 , V_2 , I_1 , I_2 and I_{ter}**

[0340] The charge parameters V_1 , V_2 , I_1 , I_2 and I_{ter} are not necessarily constant from cycle to cycle but can be modulated to optimize various performance characteristics. Examples of these performance characteristics are: providing constant discharge capacity over a number of cycles, maintaining constant charge time over the life of the battery, increasing the number of cycles to a minimum capacity, healing soft shorts, and recovering performance after an over discharge event. The charge parameters, V_1 , V_2 , I_1 , I_2 and I_{ter} , can be modulated by use of any of the known delayed feedback control methods or extended time-delay autosynchronization methods such as those described in I. Kiss, Z. Kazsu and V. Gaspar; Chaos 16 033109 (2006), which is hereby incorporated by reference in its entirety, where different performance characteristic from previous charge and/or discharge cycles are used

with current charge parameter to modulate one or more of the charge parameters for the current charge cycle. Each of the charge parameters can be modulated by different methods at the same time. Examples of performance characteristics that can be used in the control methods are end of discharge voltage, open circuit voltage, time on standby, total charge time, average discharge voltage, I_{ter} or $T_{V2}-T_{V1}$.

[0341] III. CHARGING APPARATUS

[0342] In some embodiments, a rechargeable battery is coupled to a host device (e.g., an electronic device such as a cell phone, PDA, laptop computer, flashlight, portable audio device, and/or portable video device) that comprises a charging management system (e.g., hardware, firmware, and/or software). In other embodiments, the rechargeable battery comprises a charging management system, wherein the rechargeable battery couples to a host device, such as a cellular phone, laptop computer, portable audio device (e.g., mp3 player), or the like, that includes the battery charging management system. One such system is described in U.S. Pat. No. 6,191,522. And, in some embodiments, the charging management system or circuitry is divided among the host device (e.g., electronic device powered by the battery), the battery itself, a charging base, or any combination thereof. Although some of the foregoing disclosure is directed to a battery and a host device, it will be appreciated that the terms "battery" and "host device" are directed to an embodiment of the claimed invention and that the application-specific description of a "battery" and a "host device" should not be used to limit the scope of the claims.

[0343] In an embodiment, the battery has a rated charge capacity of about 50% or less of the cell's actual capacity. When the battery is said to be "fully charged", the cell has a SOC of about 100% of the battery's rated capacity. When the battery powers a host device, such as an electronic device, the SOC of the battery decreases. A rechargeable battery is recharged when electrical energy is delivered to the rechargeable battery. One or more methods for recharging the rechargeable battery is described above and shown generally at 100, 200, 300 and 400 in Figures 8A-8D, respectively.

[0344] In an embodiment, the system may include, for example, a charging dock or charging base such as the charging dock or base described in U.S. Pat. No. 6,337,557. In other embodiments, the system may include recharging hardware comprising a circuit, as depicted in Figure 1. The rechargeable battery may be directly docked with or otherwise placed upon a charging base such that the charging base is able to directly or indirectly recharge the battery. In another example, the battery may be coupled to the electronic device, and, in an embodiment, the electronic device may be directly docked with or otherwise

placed upon the charging base such that charging base is able to directly or indirectly recharge the rechargeable battery. In one embodiment, the charging base may be connected to a mains power system, which is shown generally at AC, in order to permit the rechargeable battery to be recharged.

[0345] In an embodiment, a "direct" charging method may include, for example, a "direct wired contact" including, for example, one or more electrical contacts / leads extending from, for example, one or more of the rechargeable battery, electrical device, and charging base such that the electrical contacts / leads permit power to be delivered from, for example, the mains power system to the rechargeable battery. In an embodiment, an "indirect" charging method may include, for example, "inductive charging" such that a electromagnetic field may transfer energy from, for example, the charging base that is connected to the main power system, and one or more of the rechargeable battery and electronic device.

[0346] In an embodiment, the rechargeable battery is a button battery; however, other embodiments of the present invention comprise a rechargeable battery comprising a plurality of electrochemical cells that are arranged electrically in series, and methods of charging such batteries. Other rechargeable batteries useful in the present invention also include cylindrical cells and prismatic cells.

[0347] In some embodiments, the rechargeable battery comprises two electrodes (i.e., an anode and a cathode) and an electrolyte (i.e., a substance that behaves as an electrically-conductive medium for facilitating mobilization of electrons and cations). Electrolytes may include mixtures of materials such as, for example, aqueous solutions of alkaline agents (e.g., aqueous NaOH, aqueous KOH, or a combination thereof). Some electrolytes may also comprise additives, such as buffers including a borate, phosphate, or the like. Some exemplary cathodes in batteries of the present invention comprise a silver material. And, some exemplary anodes in batteries of the present invention comprise zinc.

[0348] In an embodiment, the cathode of the rechargeable battery comprises a silver material. In an embodiment, the anode of the rechargeable battery may comprise zinc (Zn). Accordingly, in view of the potential chemistry of electrodes of the rechargeable electrochemical battery described above, the rechargeable electrochemical battery may be referred to as a "silver-zinc battery."

[0349] In an embodiment, the silver-zinc battery includes an alkaline electrolyte comprising an aqueous hydroxide of an alkali metal. In an embodiment, the electrolyte may comprise lithium hydroxide (LiOH), sodium hydroxide (NaOH), potassium hydroxide (KOH), cesium hydroxide (CsOH), rubidium hydroxide (RbOH), or any combination thereof. Although

several electrolytes are described above, it will be appreciated that the silver-zinc battery is not limited to a particular electrolyte and that the silver-zinc battery may include any desirable electrolyte.

[0350] In an embodiment, the silver-zinc battery may be recharged in a controlled manner. In an embodiment, the system for recharging the silver-zinc battery may include recharging management circuitry, that is illustrated as a circuit diagram in Figure 1.

[0351] In an embodiment, the recharging management circuitry permits recharging of the silver-zinc battery in a controlled manner. In an embodiment, the recharging management circuitry may be included within one or more of the silver-zinc battery, such as the battery described in U.S. Pat. No. 7,375,494, the electronic device and the charging base. In an embodiment, the recharging management circuitry may be provided as a processor, logic circuitry or a combination thereof. Some aspects of other recharging systems useful for performing the charging methods of the present invention include those described in U.S. Pat. Nos. 7,018,737; 6,181,107; 6,215,276; 6,040,684; and 6,931,266; and U.S. Patent Application Publication Nos. 20050029989; 20030040255.

[0352] In an embodiment, the recharging management circuitry, as exemplified in Figure 1, permits recharging of the silver-zinc battery in a controlled manner. In an embodiment, the recharging management circuitry may be included within one or more of the silver-zinc battery, the electronic device and the charging base. In an embodiment, the recharging management circuitry may be provided as a processor, logic circuitry or a combination thereof.

[0353] In an embodiment, the charge methods 100-400, which may be accomplished by the recharging management circuitry for the rechargeable battery may employ one or more modulated charge currents (e.g., I_1 and/or I_2) that, in some embodiments, is described as constant-current, constant-voltage (CC-CV) charge currents. As seen in the charge curve plots in Figures 2, 4, 5, 6, 7A, and 7B, the controlled charge currents employed in the charge methods 100-400 charge the battery with a maximum charge current up to a charge current ceiling (e.g., $I_{\max}$ or $I_{2\max}$) until the battery is charged to a maximum voltage (e.g., V_1 or V_2) at which point the charge current is continued at the maximum current or reduced, so that the voltage of the charging battery does not rise above the maximum voltage. And, when the voltage of the battery drops below the maximum voltage, the charge current is increased up to a maximum charge current until the voltage of the battery reaches the maximum voltage, the charge current is arrested, or the charging process/method enters another zone, such as in the multi-stage charge process.

[0354] Further, in an embodiment, one of, or, a communication of two or more of the charge methods 100-400, which may be provided by the recharging management circuitry, for battery may include at least two different modes of charging, which may be dependent upon, for example, the capacity of the silver-zinc battery. In an embodiment, the modes of charging comprise a multi-stage charge mode (see, e.g., method 100) and a single-stage charge mode (see, e.g., method 200). Other embodiments further comprise an optional "over-discharge recovery charge mode" (see, e.g., method 300) and/or a "battery diagnostic investigation charge mode" (see, e.g., method 400).

[0355] Accordingly, it will be appreciated that because a user may utilize an electronic device for about eighteen (18) hours, the remaining balance (in time) of a twenty-four (24) hour period only leaves about six (6) hours to recharge the silver-zinc battery. As such, in designing one or more of the charge methods 100-400, an embodiment of a maximum charge time of the silver-zinc battery may be about six (6) hours. Thus, it will be appreciated that, if, for example, the user operates the electronic device for about eighteen (18) hours, the user may be permitted to recharge the silver-zinc battery to about full capacity in about six (6) hours when, for example, the user is not using the electronic device and may, for example, be sleeping. In other words, a six (6) hour charging period may be referred to as an embodiment of the above-mentioned single stage charge mode.

[0356] However, in an embodiment, it will also be appreciated that, if, for example, the user operates the electronic device for a period of time (e.g., the user operates the electronic device for about eighteen (18) hours) and forgets to recharge the silver-zinc battery, the silver-zinc battery may have to be quickly recharged in order to input electrical capacity into the battery and render the electronic device operable for at least a shortened period. In such a circumstance, the recharging of the silver-zinc battery may have to be expedited in a manner such that the battery's SOC is at least partially restored over an abbreviated charging time; thereby, rendering the electronic device operable for a period of time. Accordingly, in an embodiment, one or more of the charging methods 100-400 may also be designed in a manner that charges a battery having an SOC of less than 40% to a SOC of about 40% within about 1 hour of charging. In other words, a one hour charging period may be referred to as an embodiment of the above-mentioned multi-stage charge mode.

OTHER EMBODIMENTS

[0357] The embodiments disclosed herein have been discussed for the purpose of familiarizing the reader with novel aspects of the invention. Although preferred embodiments of the invention have been shown and described, many changes, modifications

and substitutions may be made by one having ordinary skill in the art without necessarily departing from the spirit and scope of the invention as described in the following claims.

WHAT IS CLAIMED IS:

1. A method of charging a rechargeable battery having multiple voltage plateaus wherein the battery has a voltage, V_{Batt} , that is less than its highest voltage plateau comprising:
 - charging the battery with a first charging current, I_1 , wherein the first charging current, I_1 , is applied until the battery is charged to a voltage, V_1 ; and
 - controlling the first charging current, I_1 , when the voltage of the battery is V_1 , so that the voltage of the battery is maintained at V_1 with a deviation of no more than about $\pm 20\%$ of V_1 ,
 - wherein voltage, V_1 , is less than the voltage of a natural polarization peak, V_{PP} , associated with a voltage plateau, V_{P} , that is higher than V_{Batt} , and V_1 is greater than the voltage plateau, V_{P} .
2. The method of claim 1, further comprising:
 - charging the battery with a second charging current, I_2 , wherein the second charging current, I_2 , is applied after the first charging current, I_1 , until the battery voltage reaches a voltage, V_2 , wherein the voltage, V_2 , is greater than V_{P} , and less than V_{PP} ; and
 - controlling the second charging current, I_2 , when the voltage of the battery reaches the voltage, V_2 , so that the voltage of the battery is maintained at V_2 with a deviation of no more than about $\pm 20\%$ of V_2 .
3. The method of claim 2, wherein the second charging current, I_2 , is applied at least until the battery is charged to a SOC of from about 80% to about 150% of the battery's rated capacity.
4. The method of any one of claims 1-3, wherein I_1 is substantially constant until the battery is charged to a voltage, V_1 .
5. The method of claim 4, wherein I_2 is substantially constant until the battery is charged to a voltage, V_2 .

6. The method of any one of claims 1-5, wherein the first charging current, I_1 , is sufficient to charge the battery to voltage, V_1 , in a period of from about 1 min to about 300 min when the battery's initial SOC is less than 40% of its rated capacity.
7. The method of any one of claims 1-6, wherein the first charging current, I_1 , is sufficient to charge the battery to a voltage of V_1 in a period of from about 5 min to about 240 min, when the battery's initial SOC is less than 40% of its rated capacity.
8. The method of any one of claims 1-7, wherein the first charging current, I_1 , is sufficient to charge the battery to a voltage of V_1 in a period of from about 10 min to about 90 min, when the battery's initial SOC is less than 40% of its rated capacity.
9. The method of any one of claims 1-5, wherein the first charging current, I_1 , is sufficient to charge the battery to a voltage of V_1 in a period of about 75 min or less, when the battery's initial SOC is less than 40% of its rated capacity.
10. The method of any one of claims 1-5, wherein the first charging current, I_1 , is sufficient to charge the battery from a SOC of less than 30% of its rated capacity to an SOC of from about 30% to about 40% of its rated capacity in about 240 min or less.
11. The method of any one of claims 1-5 or 10, wherein the first charging current, I_1 , is sufficient to charge the battery from an SOC of less than about 30% of its rated capacity to a SOC of about 40% its rated capacity in less than about 240 min.
12. The method of any one of claims 1-11, wherein the first charging current, I_1 , is controlled when the voltage of the battery is V_1 , so that the voltage of the battery is maintained at V_1 with a deviation of no more than about $\pm 20\%$ of V_1 , for a period of from about 6 s to about 1500 s.
13. The method of any one of claims 2-12, further comprising:
terminating the first charging current, I_1 , after the voltage of the battery is maintained at V_1 with a deviation of no more than about $\pm 20\%$ of V_1 , for a period of from about 6 s to about 1200 s; and

applying the second charging current, I_2 , when the first charging current, I_1 , terminates.

14. The method of claim 13, further comprising:

controlling the first charging current, I_1 , when the voltage of the battery reaches a voltage, V_1 , so that the voltage of the battery is maintained at V_1 with a deviation of no more than about $\pm 10\%$ of V_1 for a period of from about 5 s to about 600 s.

15. The method of claim 5, wherein I_1 is greater than or equal to I_2 during the period before the battery is charged to a voltage of V_1 .

16. The method of any one of claims 2-15, wherein V_1 is greater than or equal to V_2 .

17. The method of any one of claims 1-16, wherein V_{Batt} is from about 50% to about 87% of the voltage, V_1 .

18. The method of any one of claims 1-17, wherein I_1 is about 500 Amps or less.

19. The method of any one of claims 1-18, wherein I_1 is from about 100 mA to about 500 Amps.

20. The method of any one of claims 2-19, wherein I_2 is about 500 Amps or less.

21. The method of any one of claims 2-20, wherein I_2 is from about 100 mA to about 500 Amps.

22. The method of any one of claims 1-21, wherein the battery has a rated capacity of from about 1 Ah to about 1000 Ah.

23. The method of any one of claims 1-17, wherein I_1 is about 500 mA or less.

24. The method of any one of claims 1-17 or 23, wherein I_1 is from about 20 mA to about 500 mA.

25. The method of any one of claims 2-17, 23, or 24, wherein I_2 is about 500 mA or less.
26. The method of any one of claims 2-17 or 23-25, wherein I_2 is from about 20 mA to about 500 mA.
27. The method of any one of claims 1-17 or 23-26, wherein the battery has a rated capacity of from about 200 mAh to about 1 Ah.
28. The method of any one of claims 1-17, wherein I_1 is about 50 mA or less.
29. The method of any one of claims 1-17 or 28, wherein I_1 is from about 5 mA to about 50 mA.
30. The method of any one of claims 2-17, 28, or 29, wherein I_2 is about 50 mA or less.
31. The method of any one of claims 2-17 or 28-30, wherein I_2 is from about 5 mA to about 50 mA.
32. The method of any one of claims 1-17 or 28-31, wherein the battery has a rated capacity of from about 50 mAh to about 200 mAh.
33. The method of any one of claims 1-17, wherein I_1 is about 25 mA or less.
34. The method of any one of claims 1-17 or 33, wherein I_1 is from about 4 mA to about 25 mA.
35. The method of any one of claims 2-17, 33, or 34, wherein I_2 is about 25 mA or less.
36. The method of any one of claims 2-17 or 33-35, wherein I_2 is from about 4 mA to about 25 mA.
37. The method of any one of claims 1-17 or 33-36, wherein the battery has a rated capacity of from about 4 mAh to about 50 mAh.

38. The method of any one of claims 1-17, wherein I_1 is about 2 mA or less.
39. The method of any one of claims 1-17 or 38, wherein I_1 is from about 10 μ A to about 2 mA.
40. The method of any one of claims 2-17, 38, or 39, wherein I_2 is about 2 mA or less.
41. The method of any one of claims 2-17 or 38-40, wherein I_2 is from about 10 μ A to about 2 mA.
42. The method of any one of claims 2-17 or 38-41, wherein the battery has a rated capacity of from about 1 mAh to about 4 mAh.
43. The method of any one of claims 1-42, wherein the voltage, V_2 , is from about 90% to about 100% of V_1 .
44. The method of any one of claims 1-43, wherein V_1 is about 2.04 V or less.
45. The method of any one of claims 1-44, wherein V_1 is from about 1.96 V to about 2.04 V.
46. The method of any one of claims 2-44, wherein V_2 is about 2.03 V or less.
47. The method of any one of claims 2-44 or 46, wherein V_2 is from about 1.93 V to about 2.03 V.
48. The method of any one of claims 1-47, wherein the method excludes counting Coulombs.
49. The method of any one of claims 1-48, further comprising generating an electrical signal that indicates a soft short in the battery if V_{Batt} is lower than V_P for a period of more than 1 second after the battery has been charged to a voltage of V_2 .

50. The method of any one of claims 1-49, further comprising charging the battery with a diagnostic charge current, I_{Diag} , for a period of less than about 30 s, detecting the voltage of the battery, V_{Batt} , and terminating charging of the battery if V_{Batt} is about 1.65 V or less.
51. The method of claim 50, wherein I_{Diag} is greater than or equal to I_1 .
52. The method of claim 51, wherein I_{Diag} is from about 5% to about 200% greater than I_1 .
53. The method of claim 52, wherein I_{Diag} is from about 30% to about 100% greater than I_1 .
54. The method of claim 51, wherein I_{Diag} is about equal to I_1 .
55. The method of any one of claims 1-51, further comprising charging the battery with a diagnostic charge current, I_{Diag} that is about 10% to about 200% higher than I_1 for a period of less than about 10 s, detecting the voltage of the battery, V_{Batt} , and terminating charging of the battery if V_{Batt} is about 1.60 V or less.
56. The method of any one of claims 1-51 or 55, further comprising charging the battery with a diagnostic charge current, I_{Diag} that is about 30% to about 100% higher than I_1 for a period of less than about 5 s, detecting the voltage of the battery, V_{Batt} , and terminating charging of the battery if V_{Batt} is about 1.55 V or less.
57. A method of detecting a rechargeable silver-zinc battery comprising charging the battery with a diagnostic charge current, I_{Diag} , for a period of less than about 60 s, detecting the voltage of the battery, V_{Batt} , and terminating charging of the battery if V_{Batt} is about 1.60 V or less; wherein I_{Diag} is about 25 mA or less.
58. The method of claim 57, wherein the battery is charged with I_{Diag} for a period of about 7 s or less, detecting the voltage of the battery, V_{Batt} , and generating an electrical signal if V_{Batt} is about 1.60 V or less, wherein I_{Diag} is from about 20 mA to about 25 mA or about 10 mA or less.

59. The method of claim 58, wherein the electrical signal activates an audio alarm, a visual alarm, a vibrational alarm, or any combination thereof.

60. A method of charging a rechargeable battery having multiple voltage plateaus wherein the battery has an OCV that is less than about 80% of the voltage of a first sequential voltage plateau, V_{P1} , comprising:

charging the battery with a recovery charging current, I_{recov} , that is substantially constant for a period of no more than about 120 min after the voltage of charging battery reaches the first sequential voltage plateau, V_{P1} that is greater than V_{Batt} ;

charging the battery with a first charging current, I_1 , wherein the first charging current, I_1 , is substantially constant until the battery is charged to a voltage, V_1 ; and

controlling the first charging current, I_1 , when the voltage of the battery reaches the voltage, V_1 , so that the voltage of the battery is maintained at V_1 with a deviation of no more than about $\pm 20\%$ of V_1 , for a period of from about 6s to about 900s,

wherein voltage, V_1 , is less than the voltage of the natural polarization peak, V_{PP} , for a voltage plateau, V_P , that is higher than V_{P1} , and V_1 is greater than the voltage plateau, V_P .

61. The method of claim 60, wherein I_{recov} is from about 5% to about 90% of I_1 .

62. The method of claim 61, further comprising charging the battery with a recovery charging current, I_{recov} , that is substantially constant for a period of no more than about 30 min after the voltage of charging battery, V_{Batt} , reaches the first sequential voltage plateau, V_{P1} , that is greater than V_{Batt} , and

arresting the modulated second charge current when the battery is charged to a SOC of about 100-120% of the battery's rated capacity; or

arresting charge current I_2 when the charging current is below 1.0 mA, for a period of about 5 min or less; wherein the voltages have a deviation of $\pm 1\%$, the current amperages have deviations of $\pm 2\%$, the temperature measurement accuracy has a deviation of no more than $\pm 5^\circ\text{C}$, and clocked times have a deviation of $\pm 2\%$.

63. The method of claim 62, further comprising generating an electrical signal if the voltage of the battery, V_{Batt} , fails to reach the first sequential voltage plateau, V_{P1} , that is greater than V_{Batt} after being charged with I_{recov} for a period of from about 30 min to about 2 hours.

64. The method of claim 62, further comprising charging the battery according to any one of claims 2-53.

65. The method of any one of claims 1-64, wherein the rechargeable battery comprises a button cell, a coin cell, a cylinder cell, or a prismatic cell.

66. The method of any of claims 2-65, further comprising:
generating an electrical signal when the second charging current, I_2 , terminates.

67. The method of claim 66, further comprising:
activating a visual signal, activating an audio signal, activating a vibrational signal, or any combination thereof when the second charging current, I_2 , terminates.

68. A method of charging a rechargeable battery having multiple voltage plateaus and an initial SOC of greater than 50% of its rated capacity, wherein the battery has a voltage, V_{Batt} , that is less than or equal to its highest voltage plateau comprising:
charging the battery with a substantially constant charging current, I_2 , until the battery is charged to a voltage, V_2 ; and
controlling charging current, I_2 , so that the voltage of the battery is maintained at V_2 with a deviation of no more than about $\pm 20\%$ of V_2 ,
wherein voltage, V_2 , is greater than the voltage of a voltage plateau, V_P , and less than the voltage of a natural polarization peak, V_{PP} .

69. The method of claim 68, further comprising:
terminating the charging current, I_2 , when I_2 reaches I_{ter} , wherein I_{ter} is about 85% or less of I_2 during the period when the battery was being charged to V_2 .

70. The method of claim 69, further comprising:
terminating the charging current, I_2 , when I_2 reaches I_{ter} , wherein I_{ter} is about 75% or less of I_2 during the period when the battery was being charged to V_2 .

71. The method of claim 68, wherein V_2 is about 2.0 V or less.

72. The method of claim 71, wherein the charge current, I_2 , is about 6 mA when the battery is being charged to V_2 .

73. The method of claim 72, further comprising terminating the charging current, I_2 , when I_2 is about 4.5 mA.

74. A method of charging a rechargeable 2.0 V silver-zinc battery having an OCV of less than 1.65 V comprising:

charging the battery with first charge current, I_1 , having an amperage of 10 mA or less;

clocking time once the battery is charged to a voltage of 1.90 V;

modulating the first charge current, I_1 , so that the voltage of the battery is restricted to 2.03 V or less, and the first charge current, I_1 , has a maximum amperage of about 10.0 mA or less;

arresting the charging of the battery with the first charge current, I_1 , once 20 minutes has been clocked;

charging the battery with second charge current, I_2 , wherein the charge current, I_2 , is modulated so that the voltage of the battery is restricted to 2.0 V or less, and the second charge current has a maximum amperage of about 10.0 mA or less; and

arresting the modulated second charge current, I_2 , when the amperage of the charge current is less than the amperage of termination current, I_{2end} , for a continuous period of 60 seconds or less, wherein the battery is charged to a SOC of about 80-150% of the battery's rated capacity;

wherein

$$I_{2end} = I_{Chg} + I_{Temp}, \text{ and}$$

I_{Chg} is the charge compensation current, I_{Temp} is the temperature compensation current, $I_{Chg} = (T_2 \times I_1)/T_{Chg}$, wherein T_2 is the integrated time in hours starting when the charge current reaches 1.90V and ending when the charge current begins to modulate to a value less than I_2 ; and T_{chg} is the cell time constant, determined for each battery size and construction; or

arresting charge current I_2 when the charging current is below 1.0 mA, for a period of about 5 min or less; and

the voltages have a deviation of $\pm 1\%$, the current amperages have deviations of $\pm 2\%$, the temperature measurement accuracy has a deviation of no more than $\pm 5^\circ\text{C}$, and clocked times have a deviation of $\pm 2\%$.

75. The method of claim 74, further comprising measuring the temperature, wherein the temperature measurement accuracy has a deviation of $\pm 2^\circ\text{C}$.

76. The method of either of claims 74 or 75, wherein the voltage of the battery is greater than about 1.25 V prior to charging.

77. The method of either of claims 74 or 75, wherein the voltage of the battery is less than about 1.25 V prior to charging.

78. The method of claim 77, further comprising:

charging the battery with a recovery charge current, I_{recov} , of 1.0 mA for a period of at least 30 minutes; and

arresting the recovery charge current, I_{recov} , when the battery is charged to a voltage of 1.60 V.

79. A method of charging a rechargeable 2.0 V silver-zinc battery having an OCV of greater than 1.65 V comprising:

charging the battery with a modulated charge current I_2 , wherein the charge current I_2 is modulated so that the voltage of the battery is restricted to 2.0 V or less (e.g., 1.98 V), and the charge current has a maximum amperage, I_{max} , of about 6.0 mA or less;

clocking time 15 seconds after charging begins;

measuring the amperage of charge current I_2 when time is being clocked; and


arresting charge current I_2 when the amperage of I_2 is below $I_{2\text{end}}$ for a period of 60 continuous seconds if the amperage of I_2 is I_{max} for a period of 5 or more continuous seconds when time is being clocked, wherein $I_{2\text{end}}$ is the temperature dependent termination charge current level when the battery is charged to an SOC of about 100% to 150% of its rated capacity; or

arresting charge current I_2 once the battery is charged to an SOC of about 100% to 150%, if the amperage of I_2 is I_{max} for a period less than 5 continuous seconds when time is being clocked, wherein the charge current is integrated until 50% of the battery's rated

capacity is counted; or

arresting charge current I_2 when the amperage of I_2 is below 1.0 mA for a period of about 5 min or less after the clocking time is complete.

80. A method of detecting a rechargeable silver-zinc battery during discharge comprising: measuring the change in the average battery discharge voltage per unit time in a battery when the battery voltage, V_{Batt} , is between 1.4 V and 1.15 V, and if the change is not greater than or equal to 60 mV during a period of 30 minutes or less generating an electrical signal.

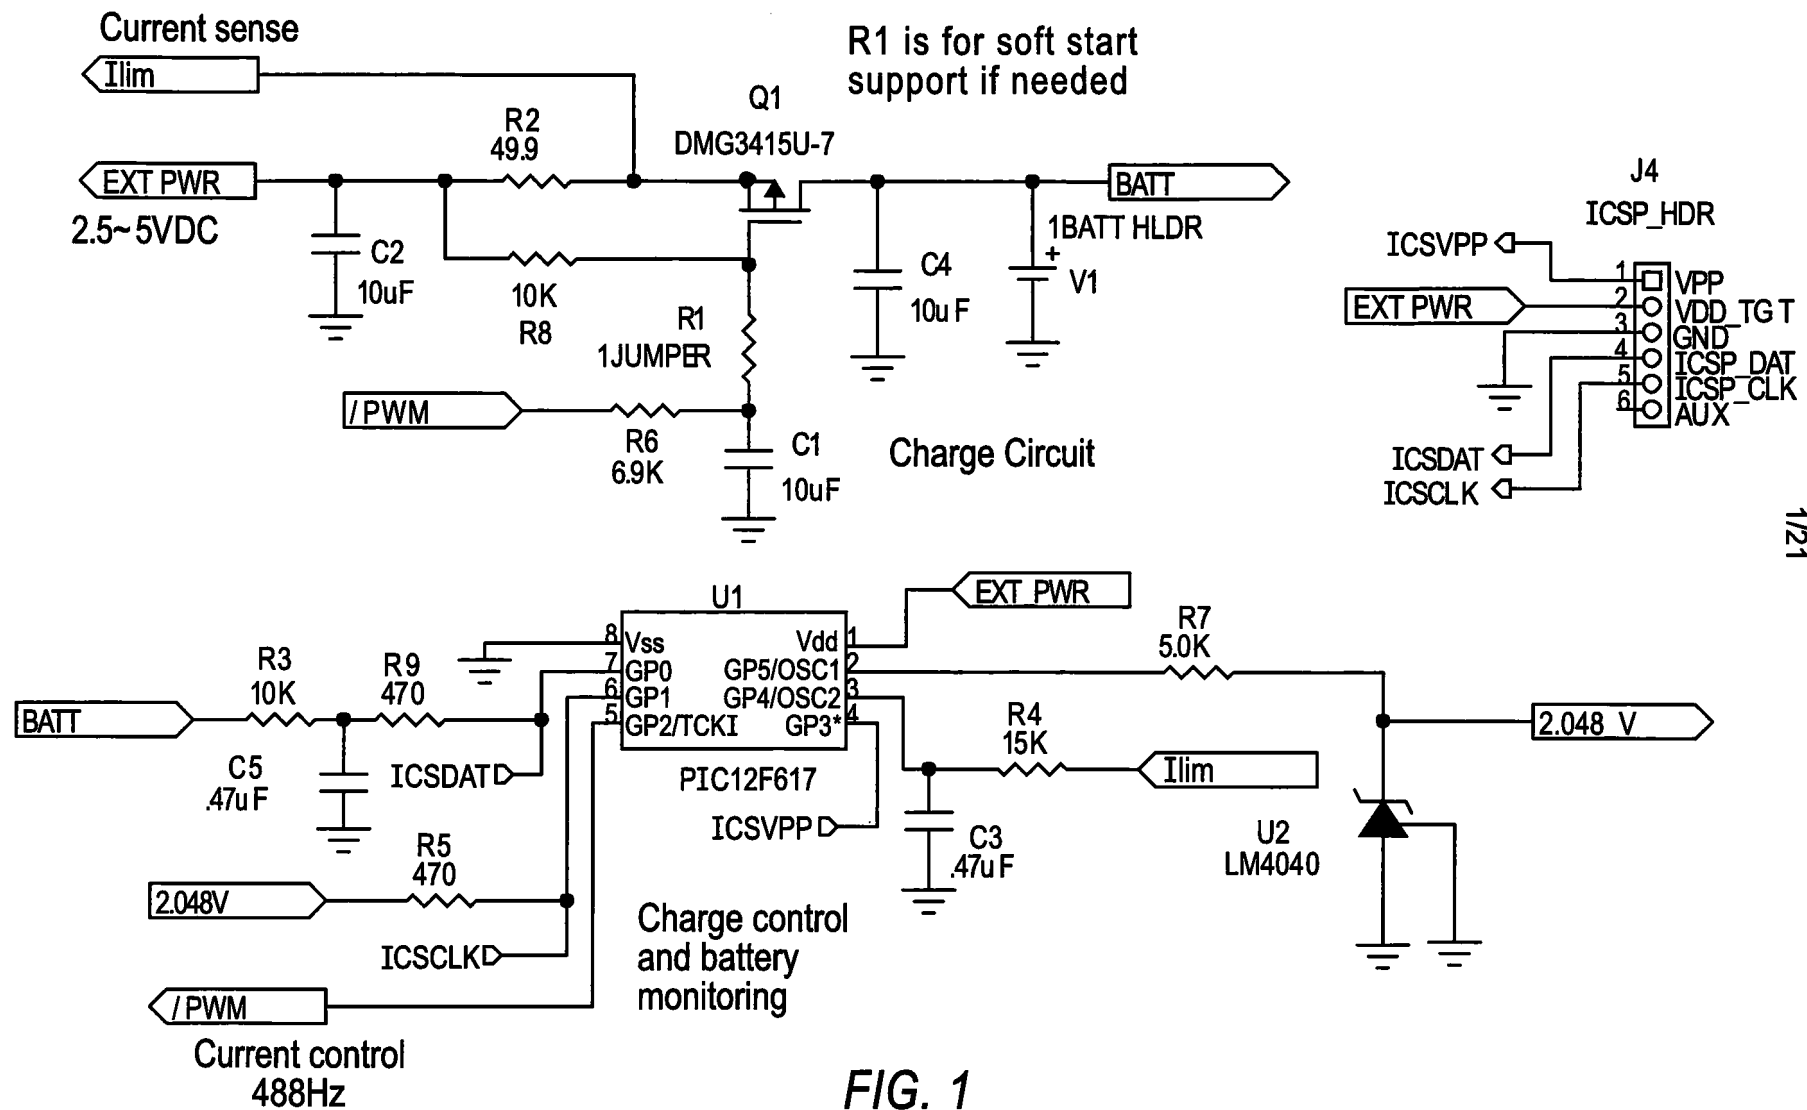

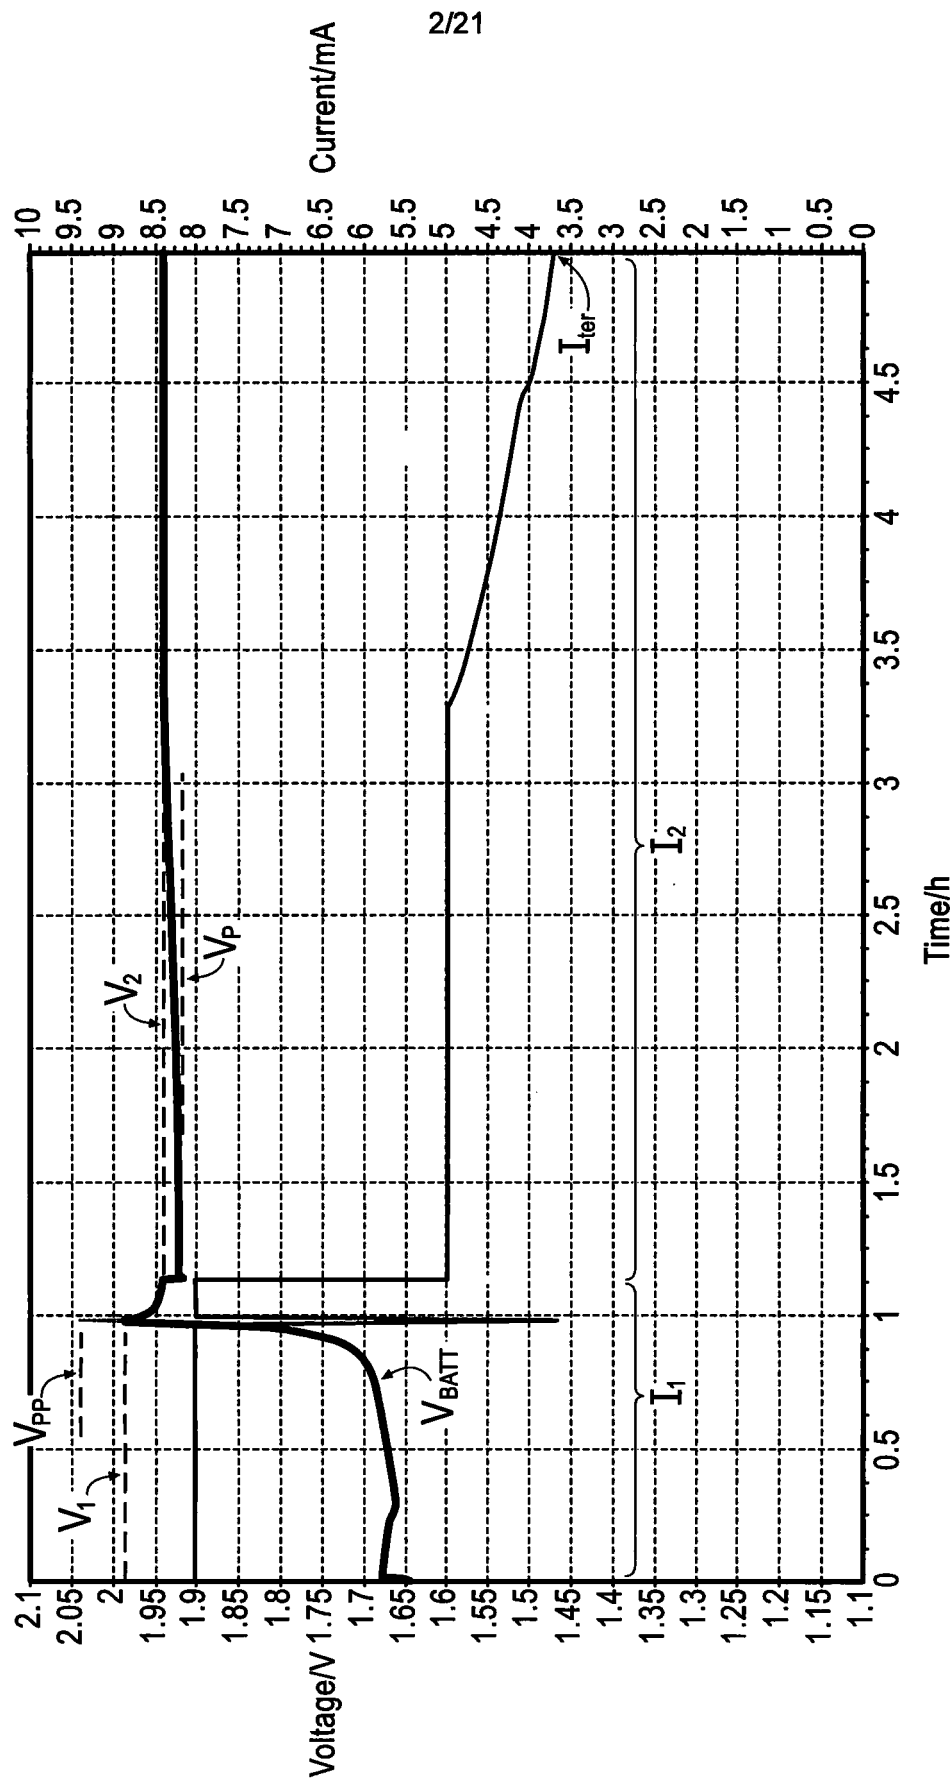


FIG. 2

3/21

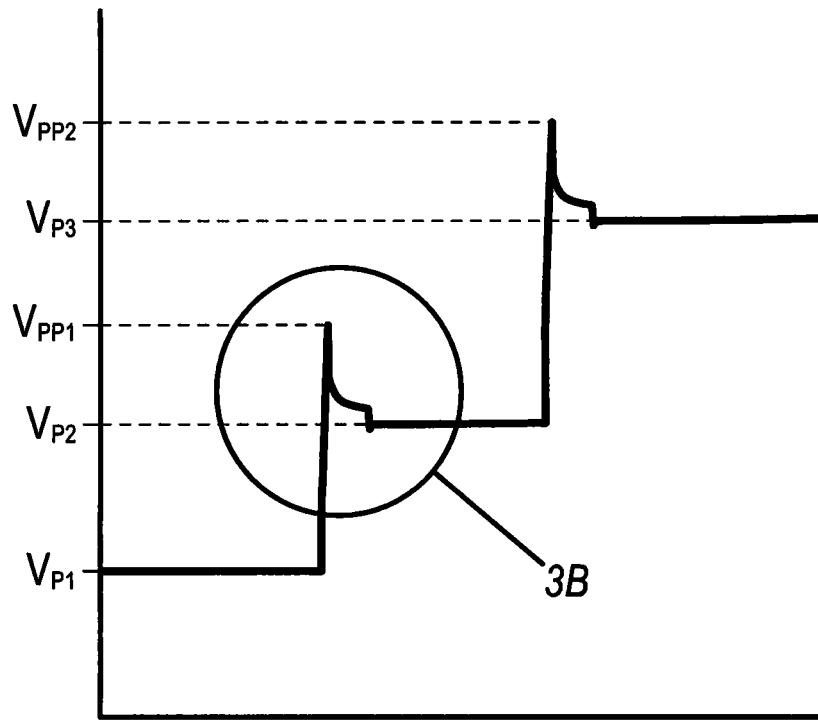


FIG. 3A

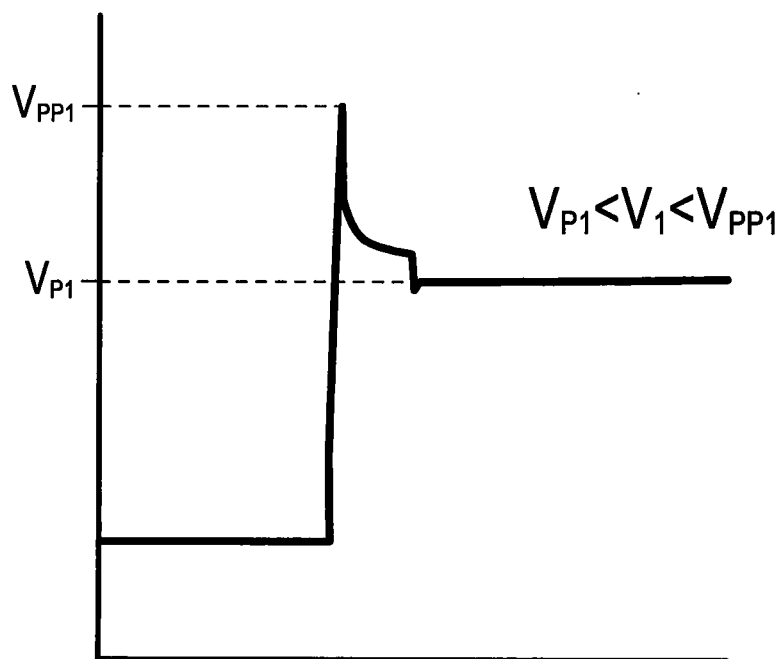


FIG. 3B

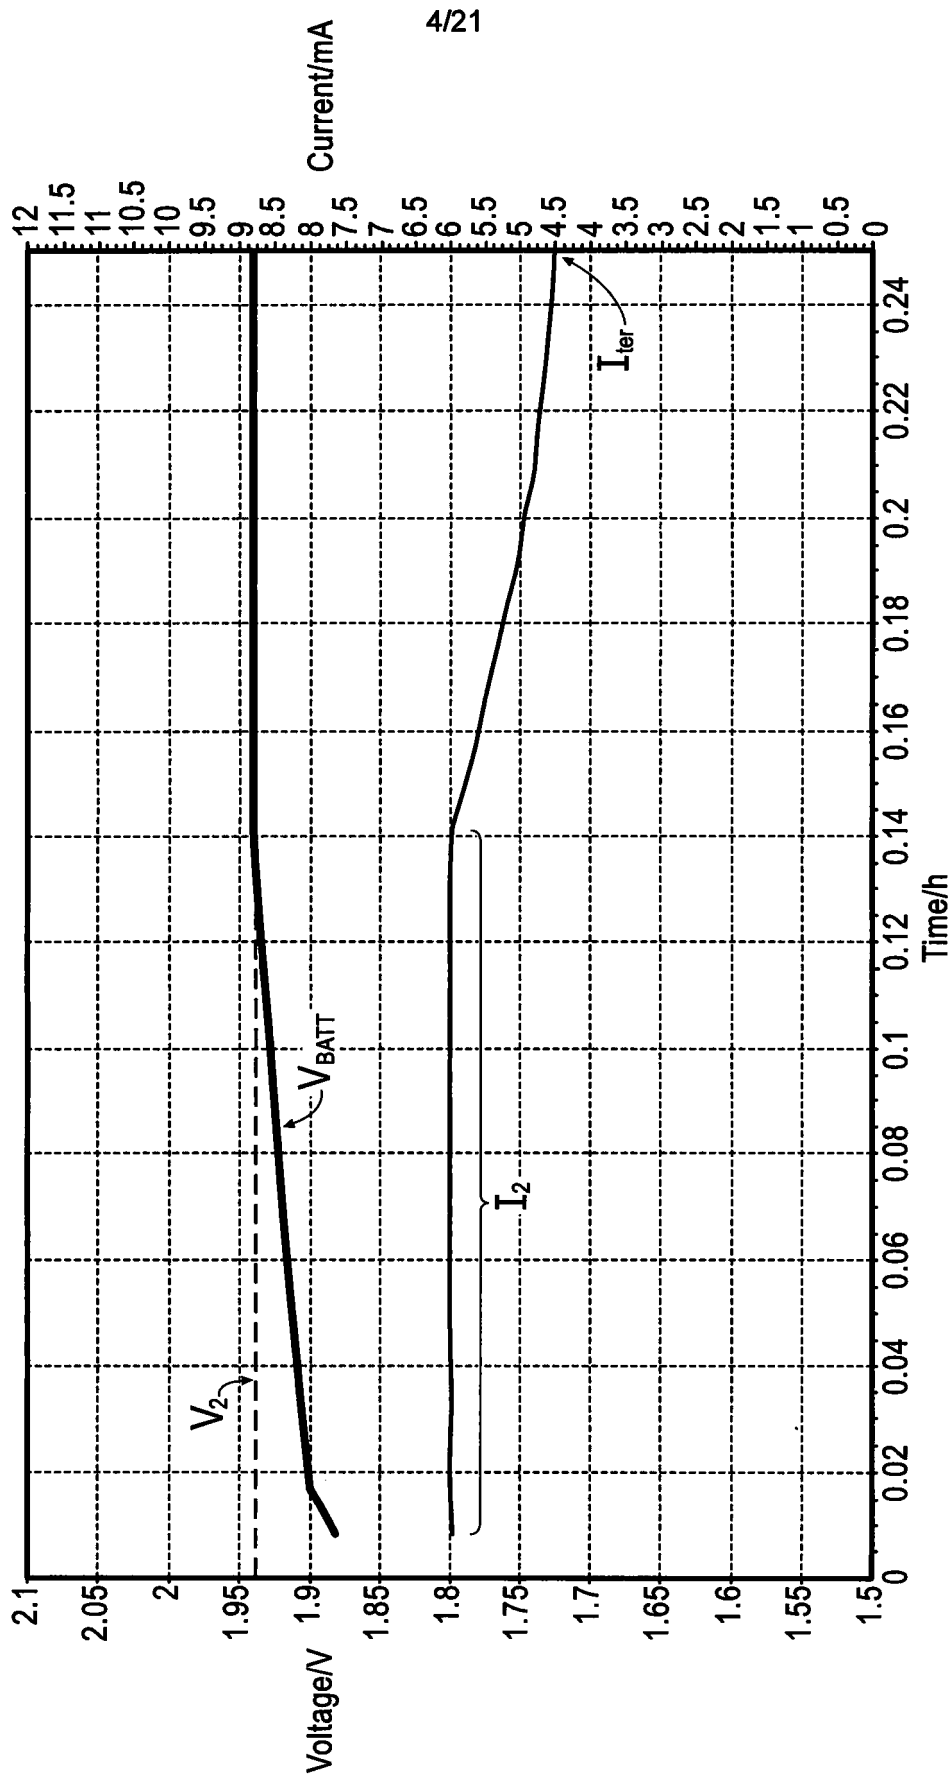


FIG. 4

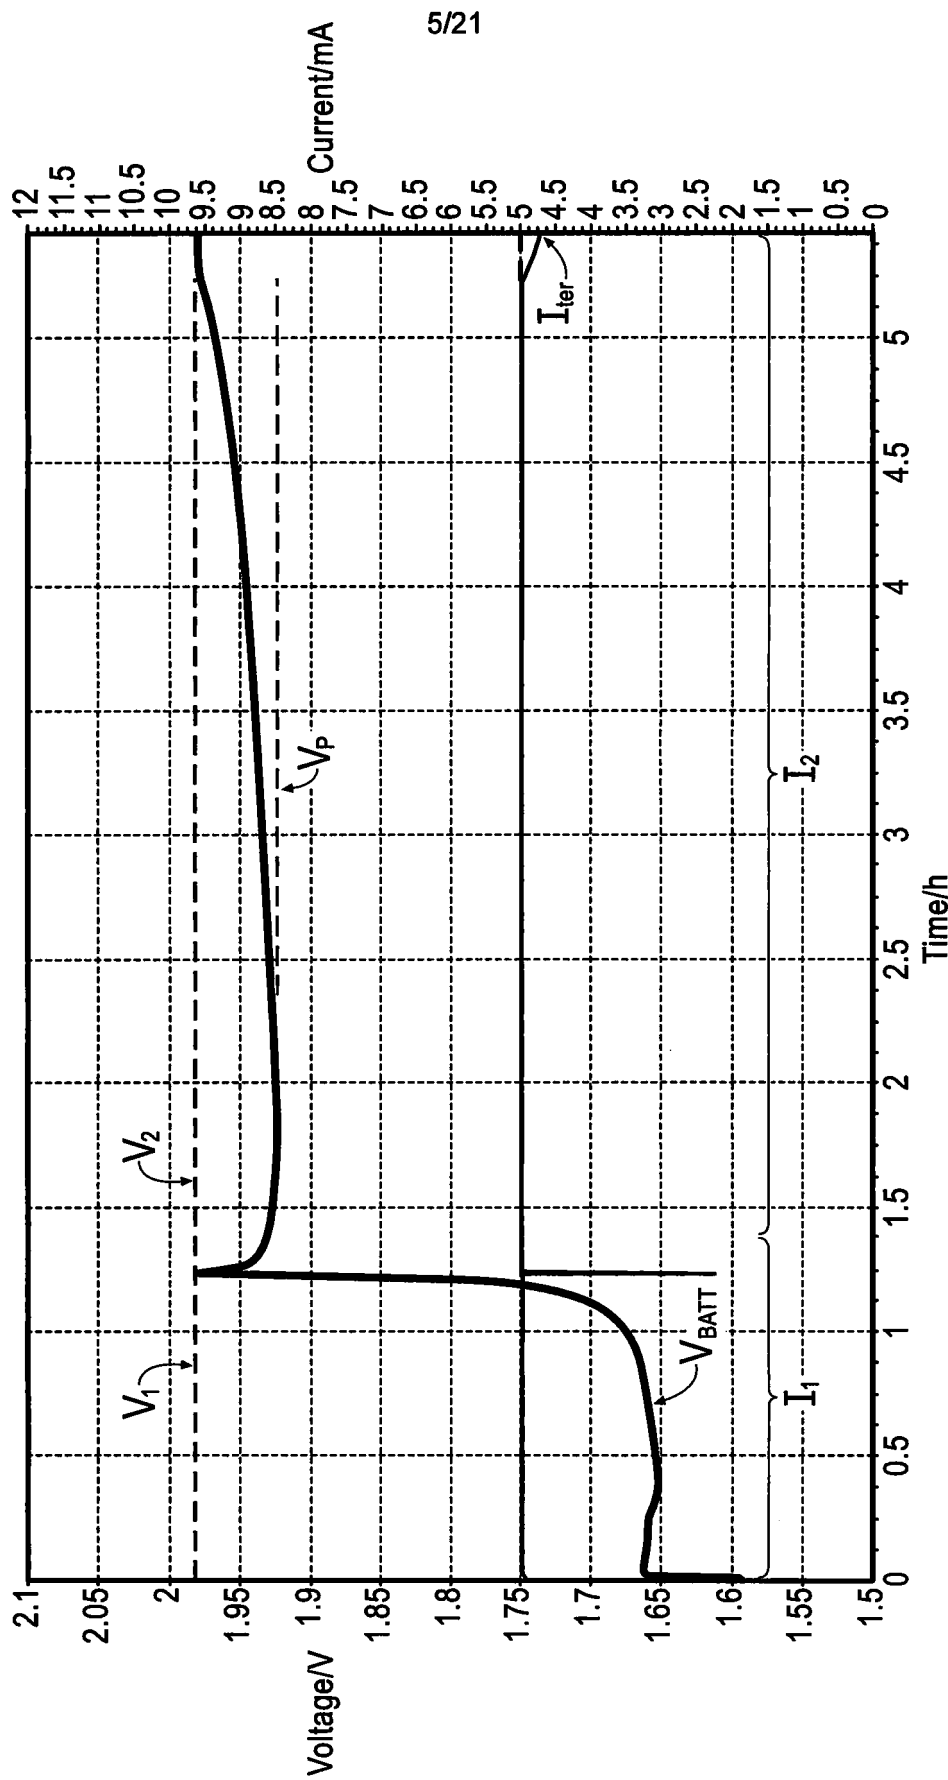


FIG. 5

6/21

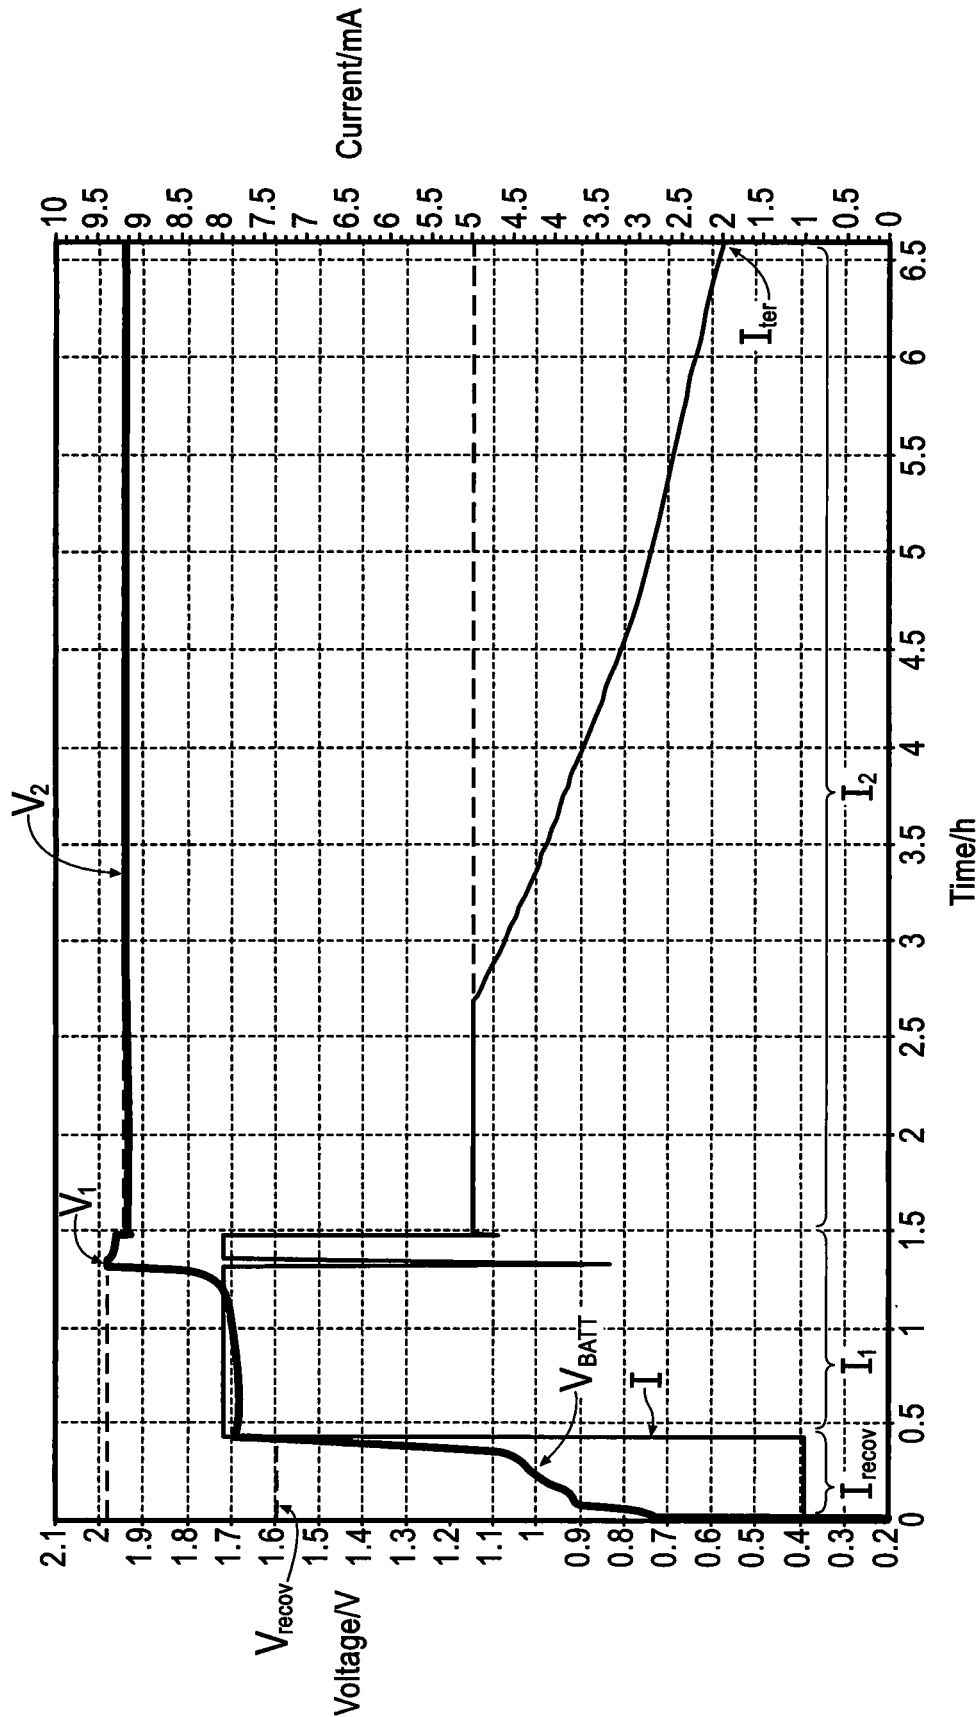


FIG. 6

7/21

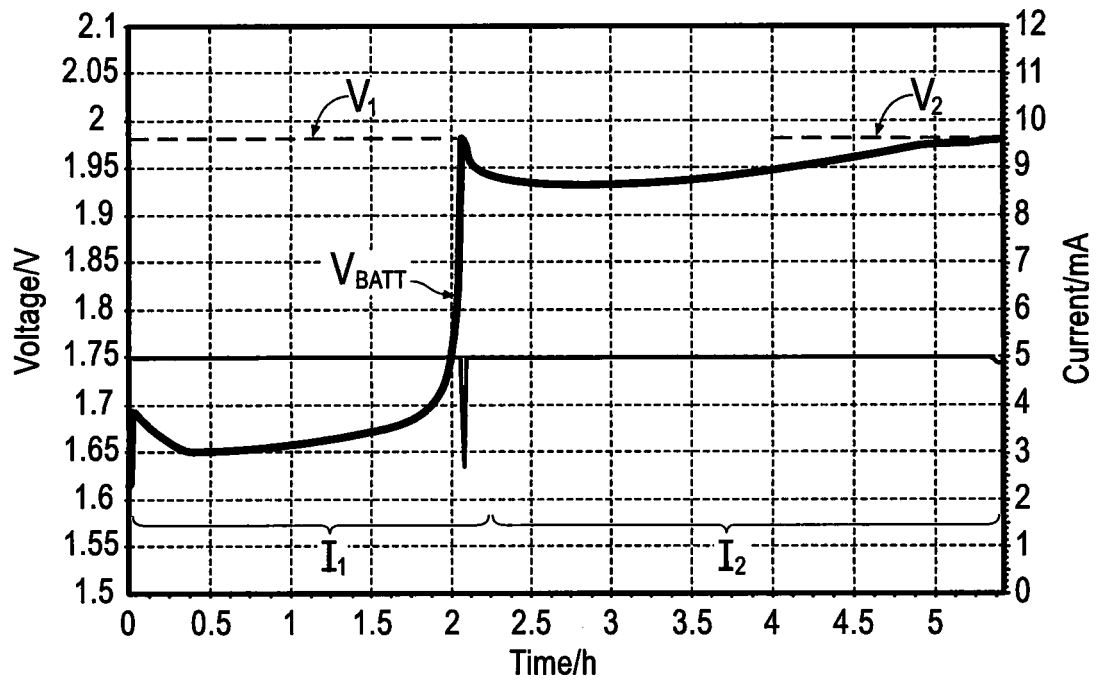


FIG. 7A

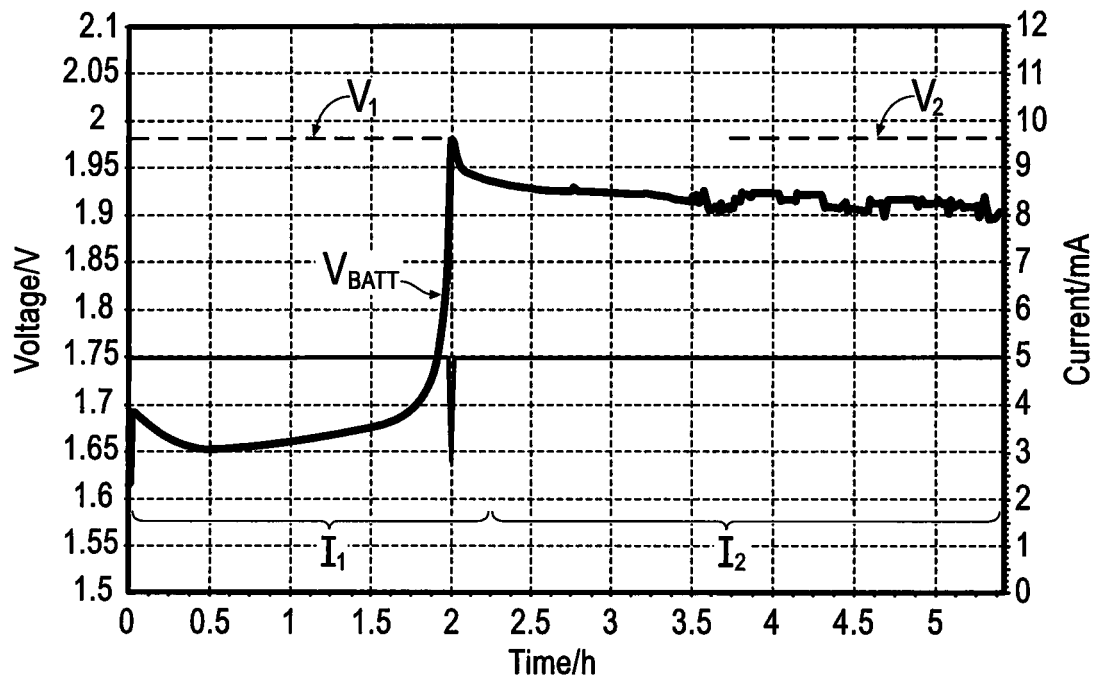


FIG. 7B

8/21

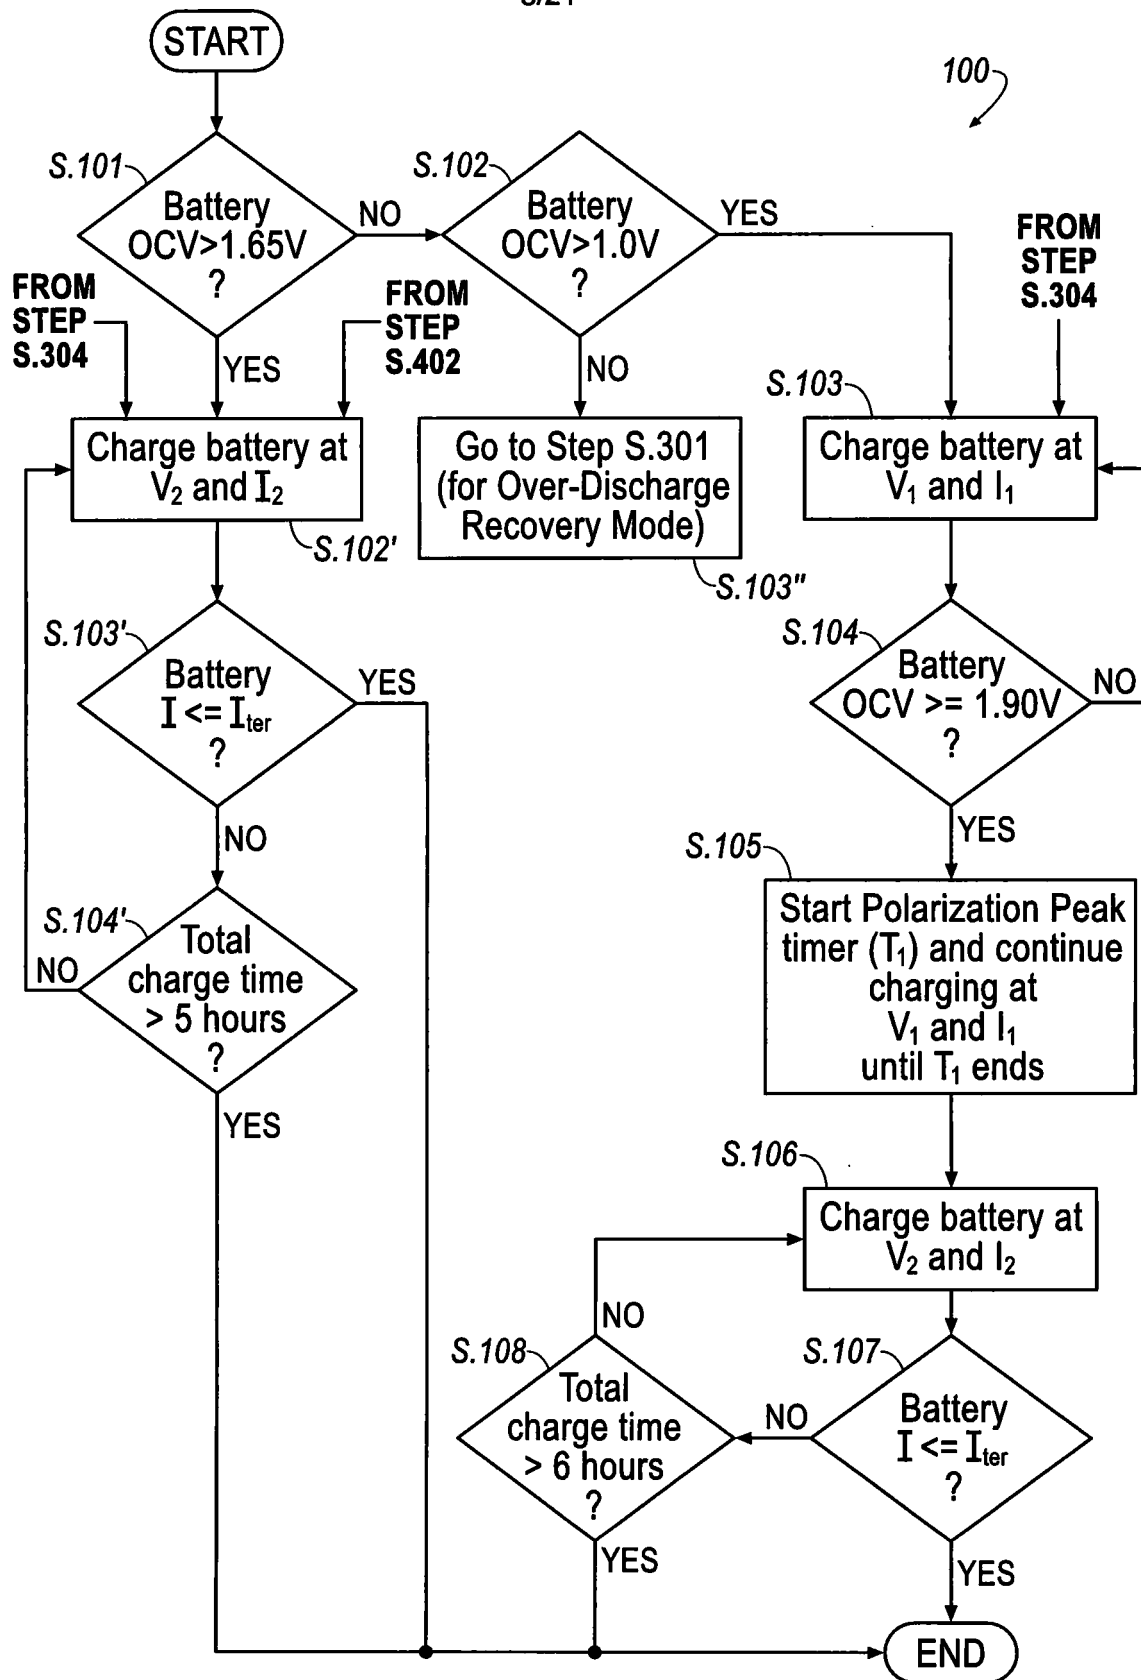


FIG. 8A

9/21

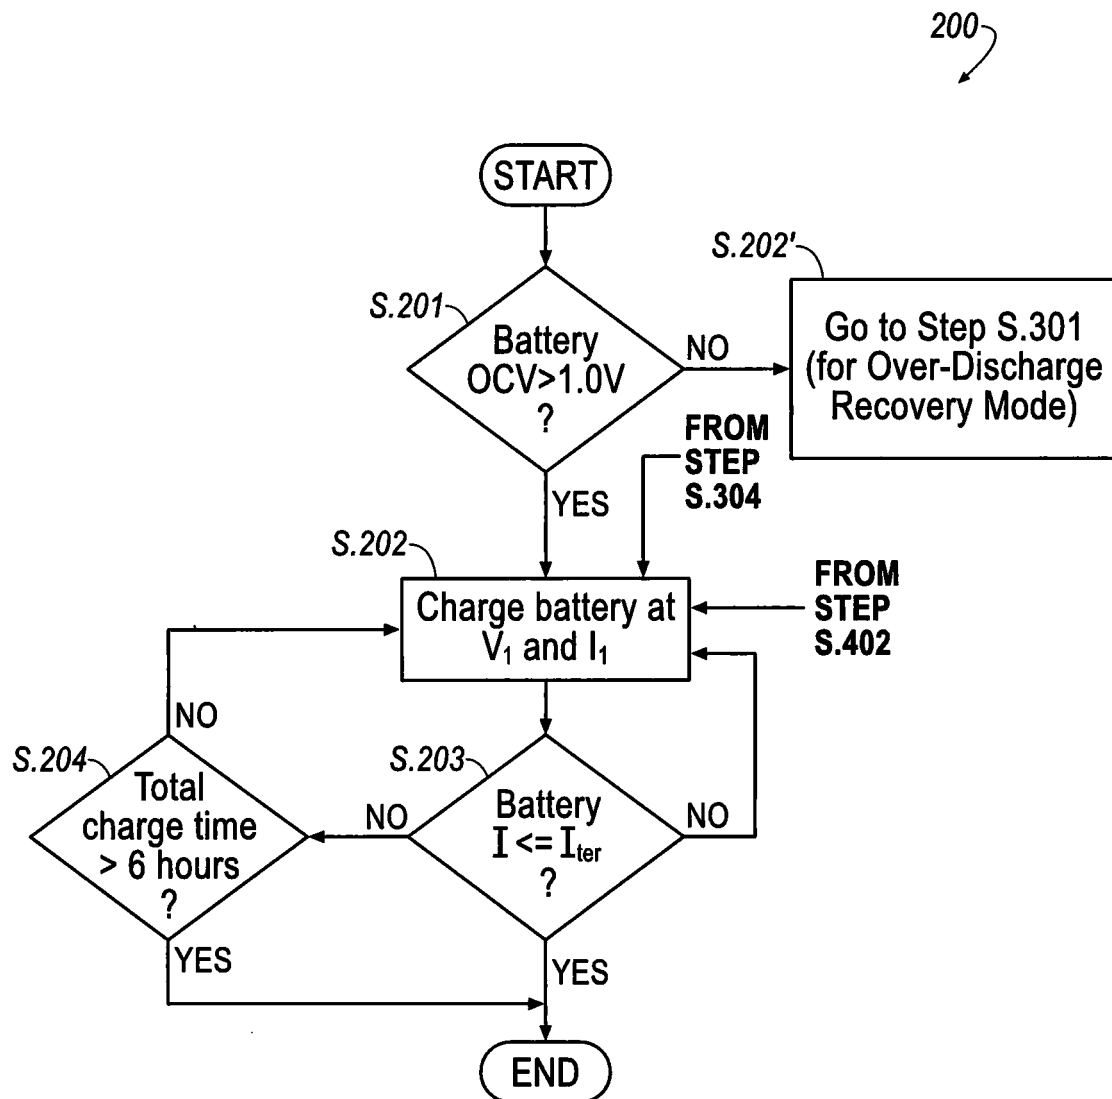


FIG. 8B

10/21


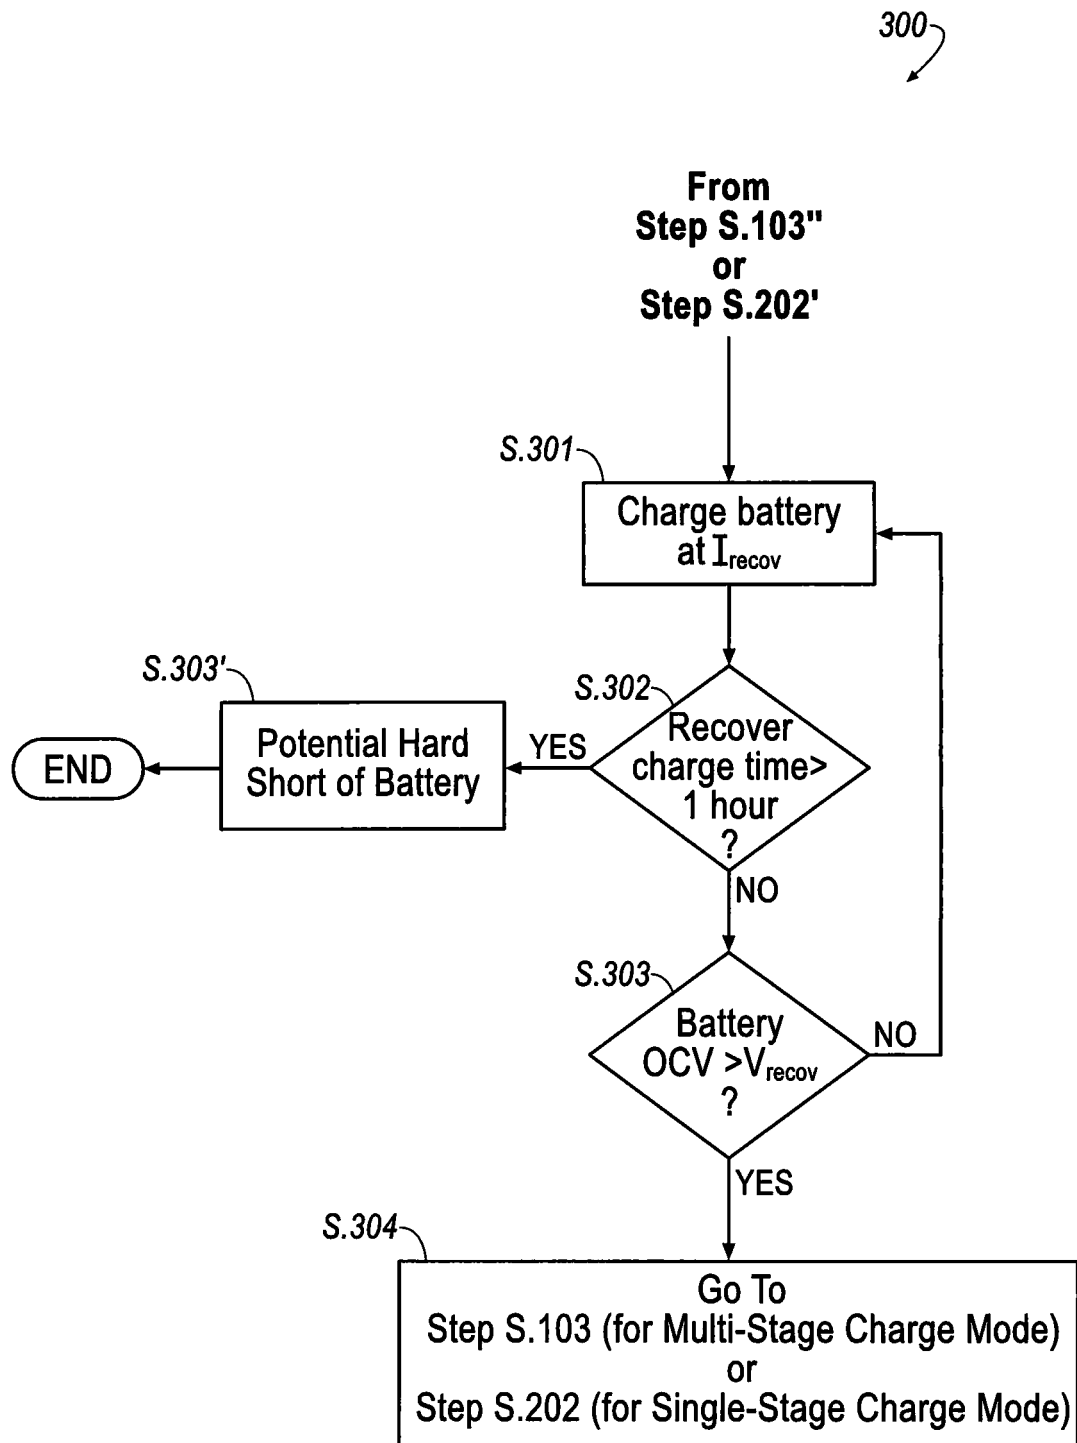


FIG. 8C

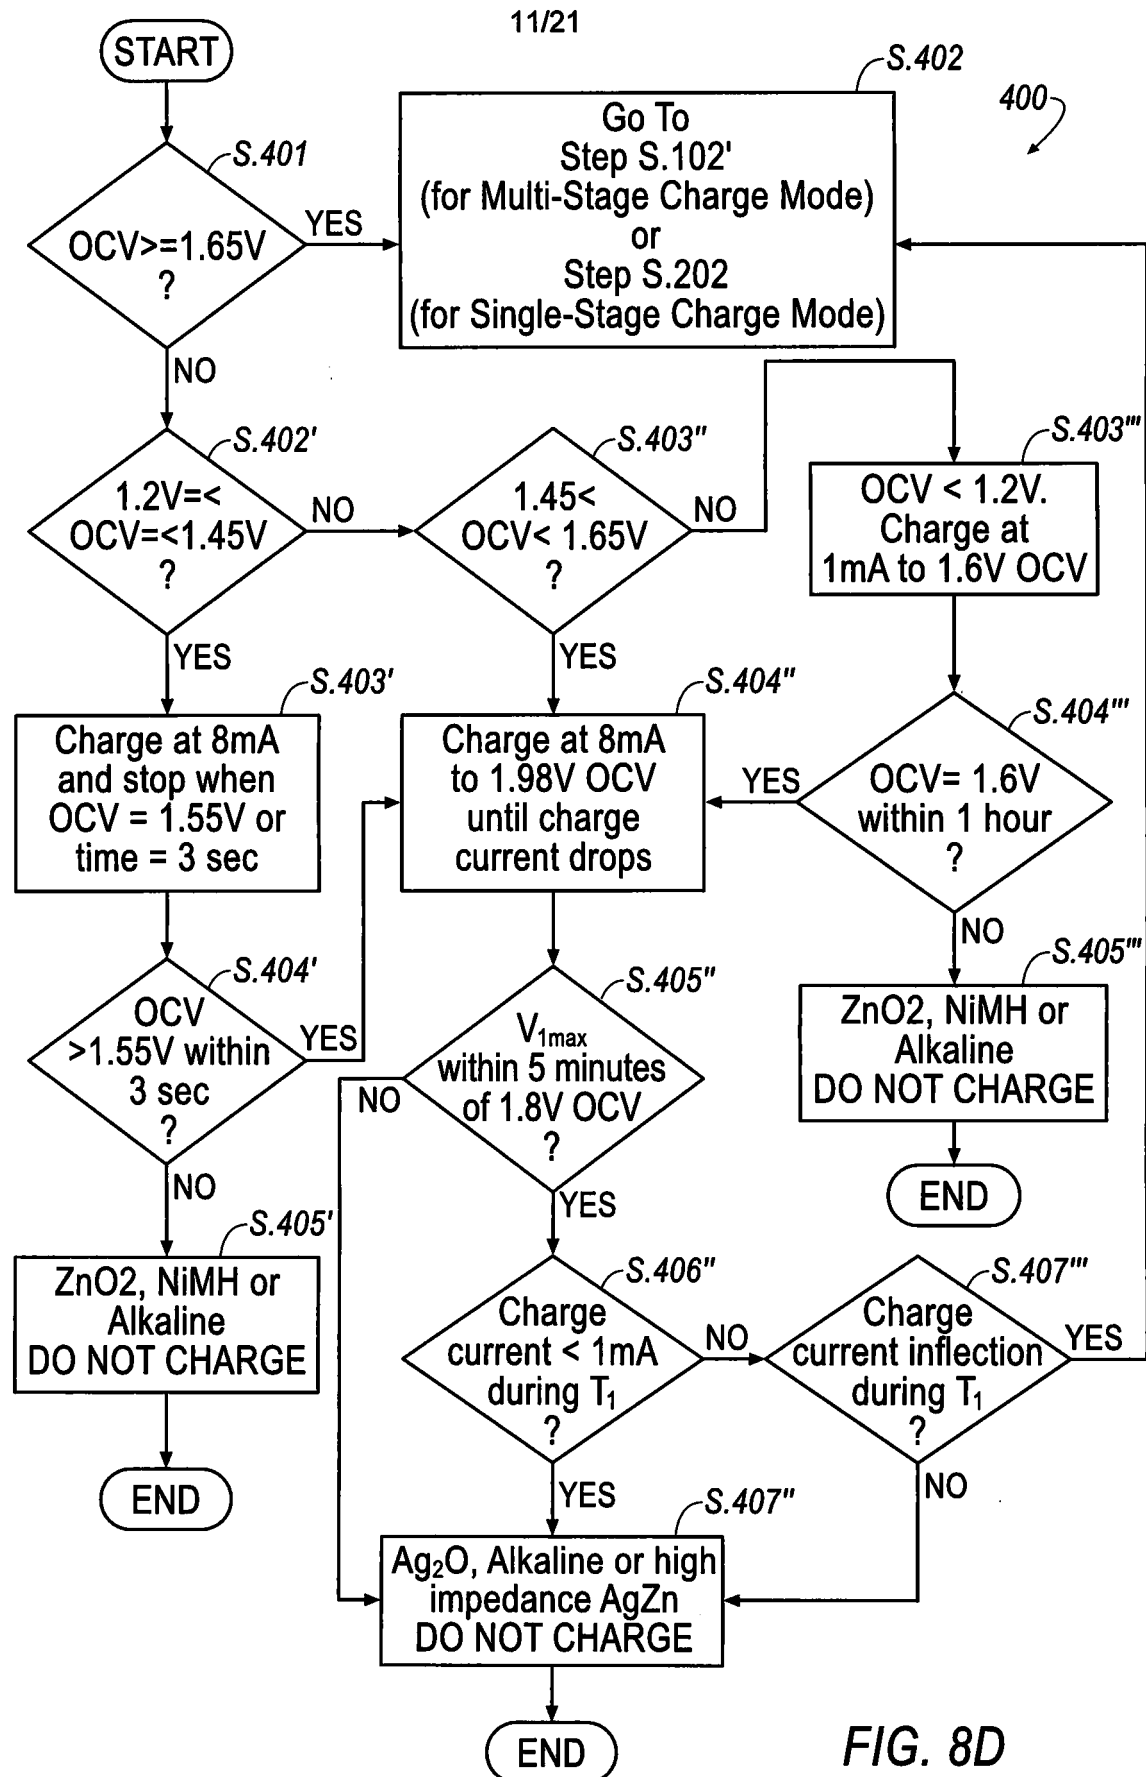

12/21

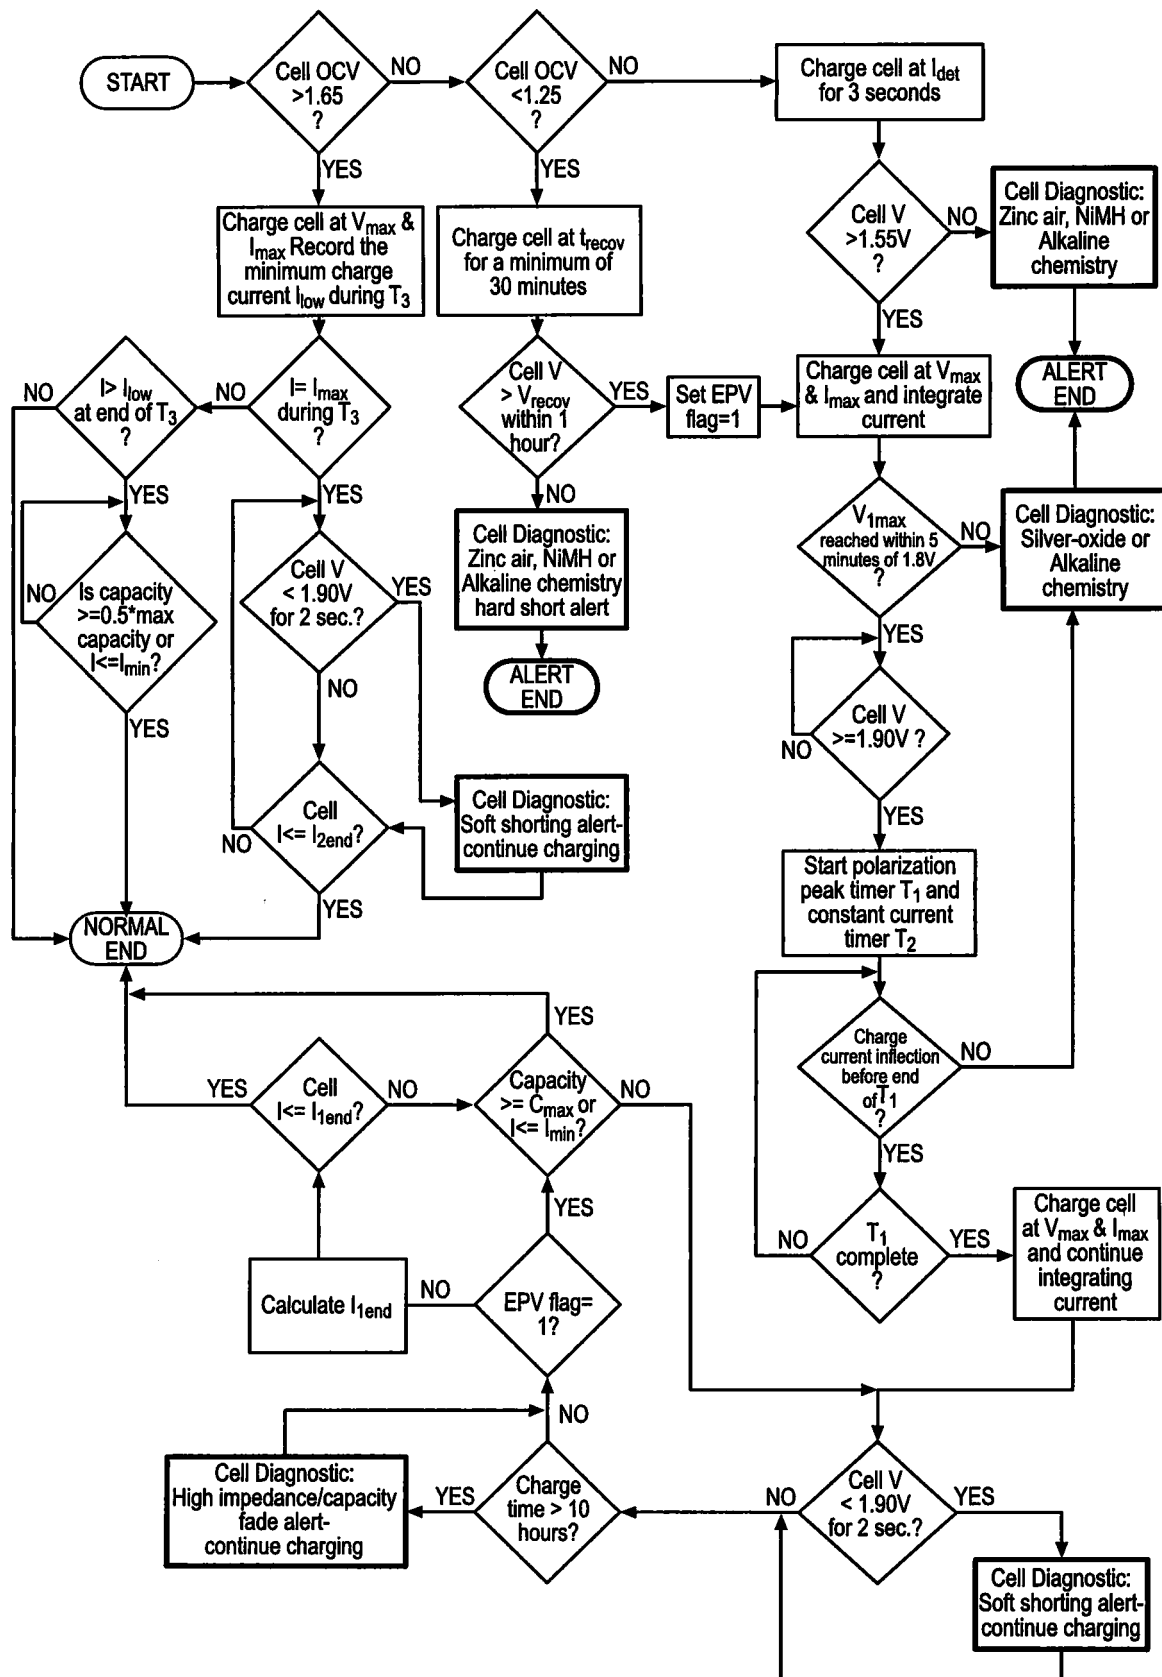


FIG. 9

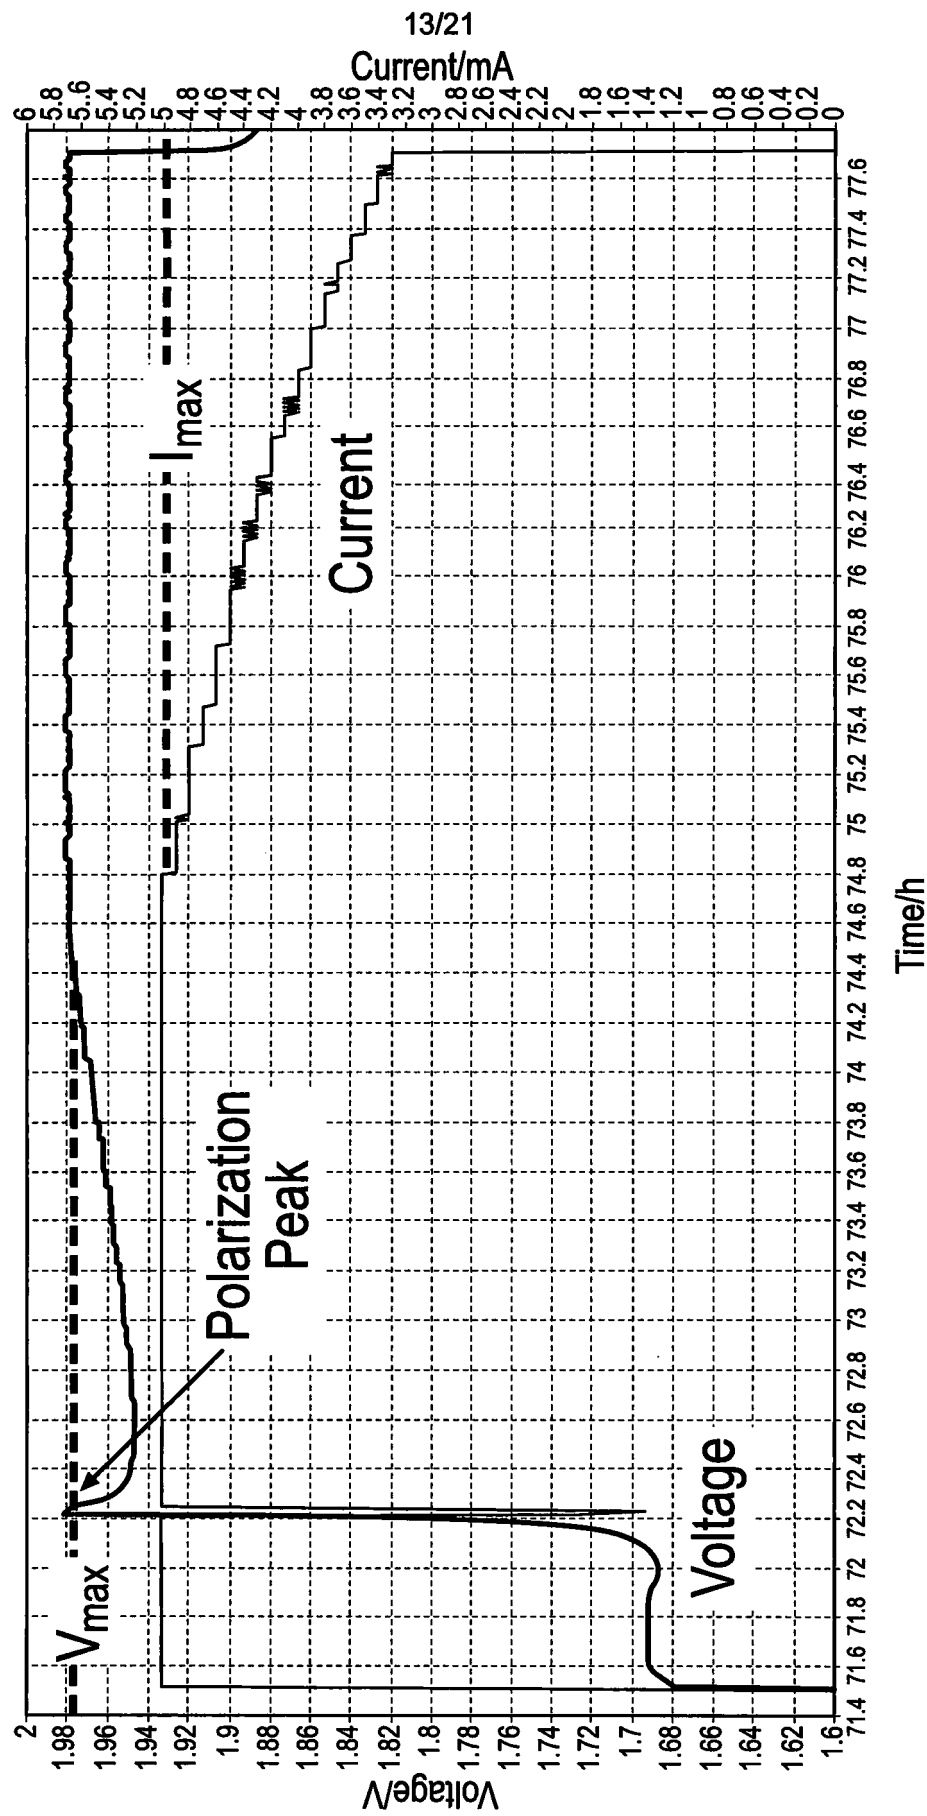


FIG. 10

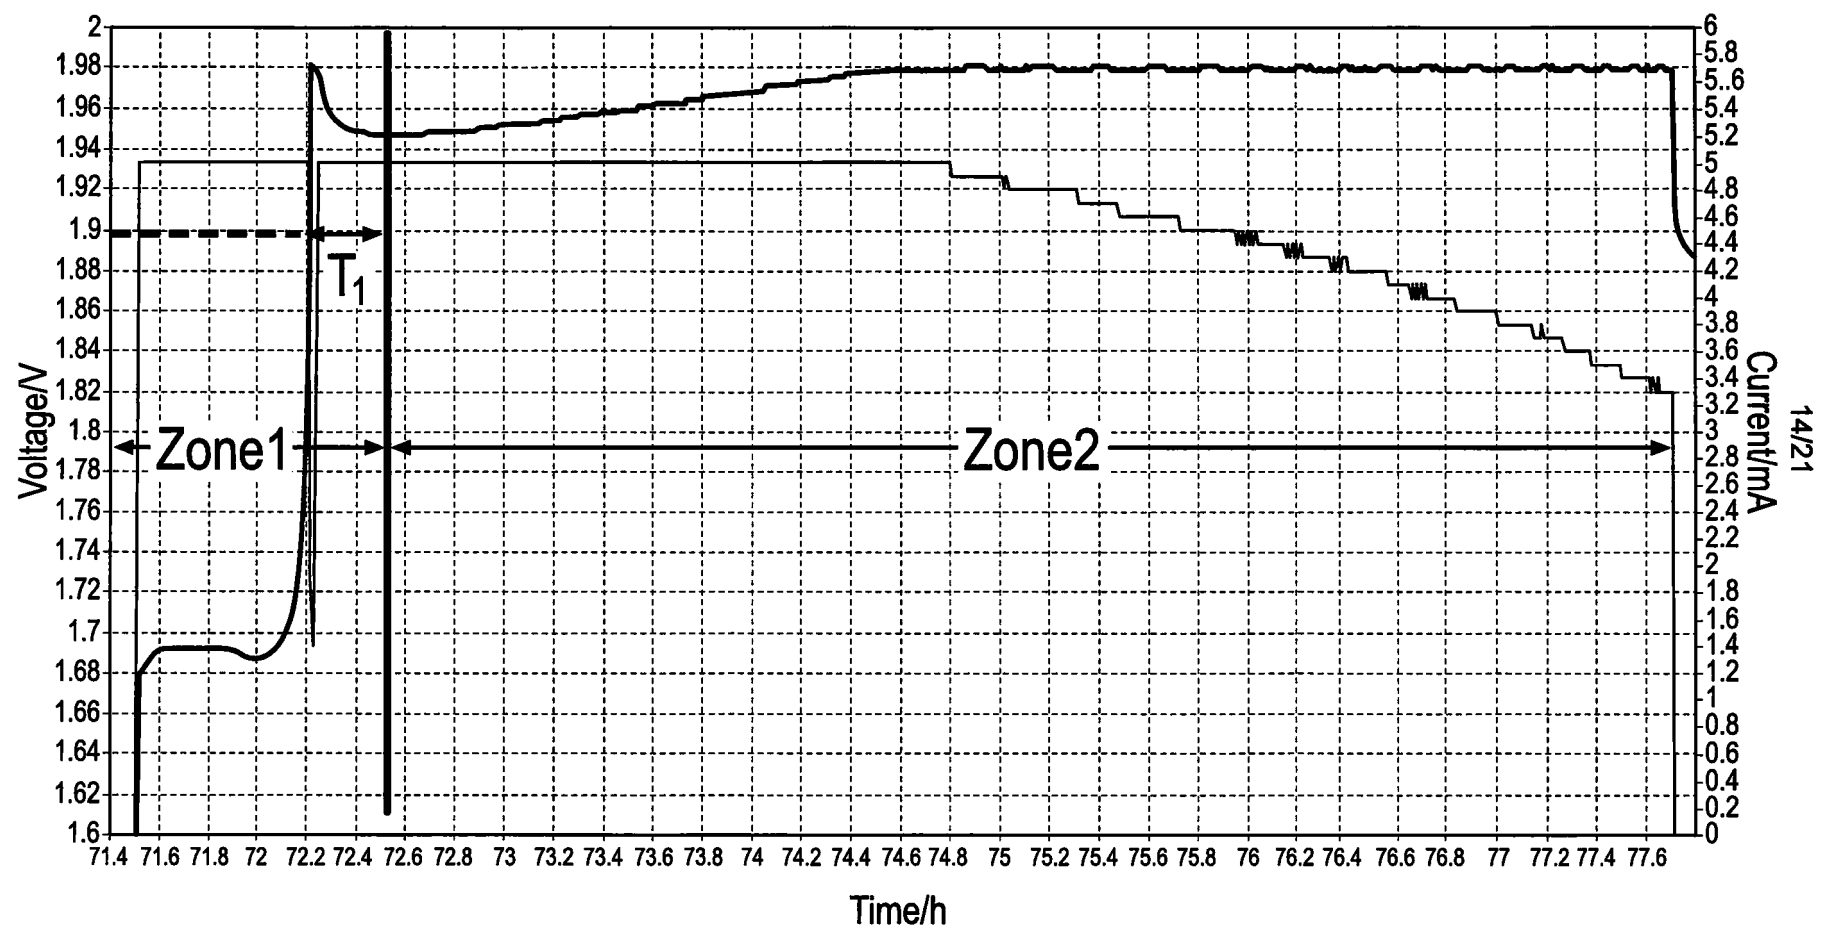


FIG. 11

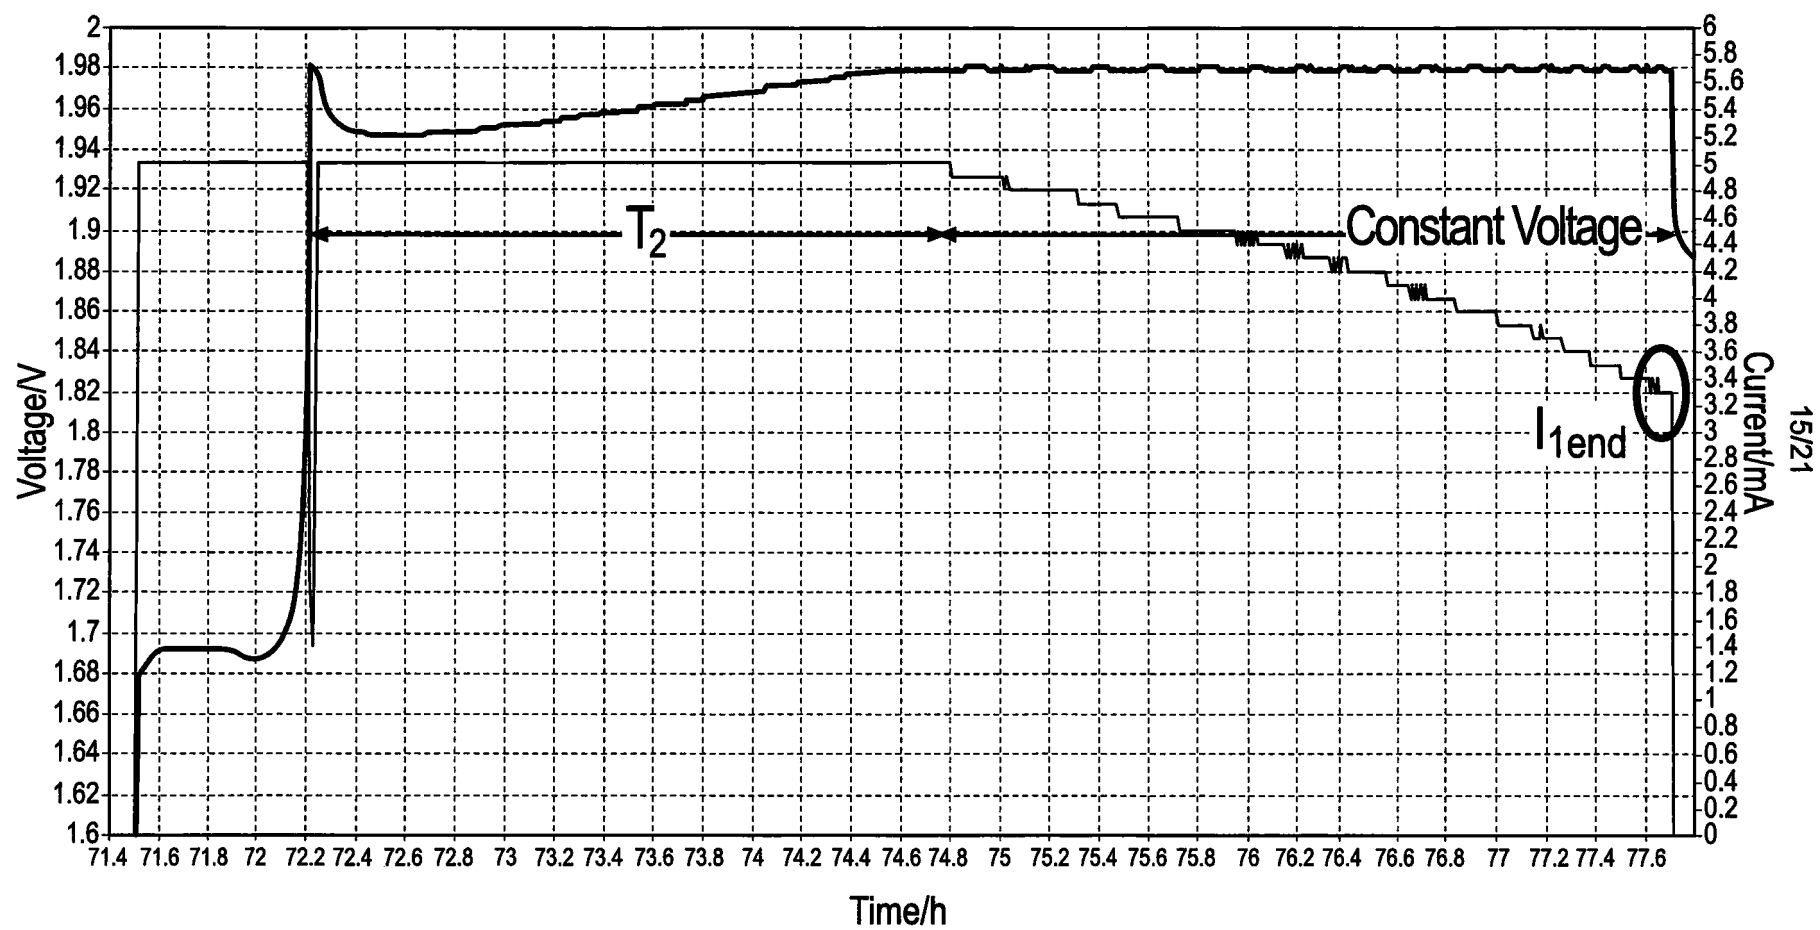


FIG. 12

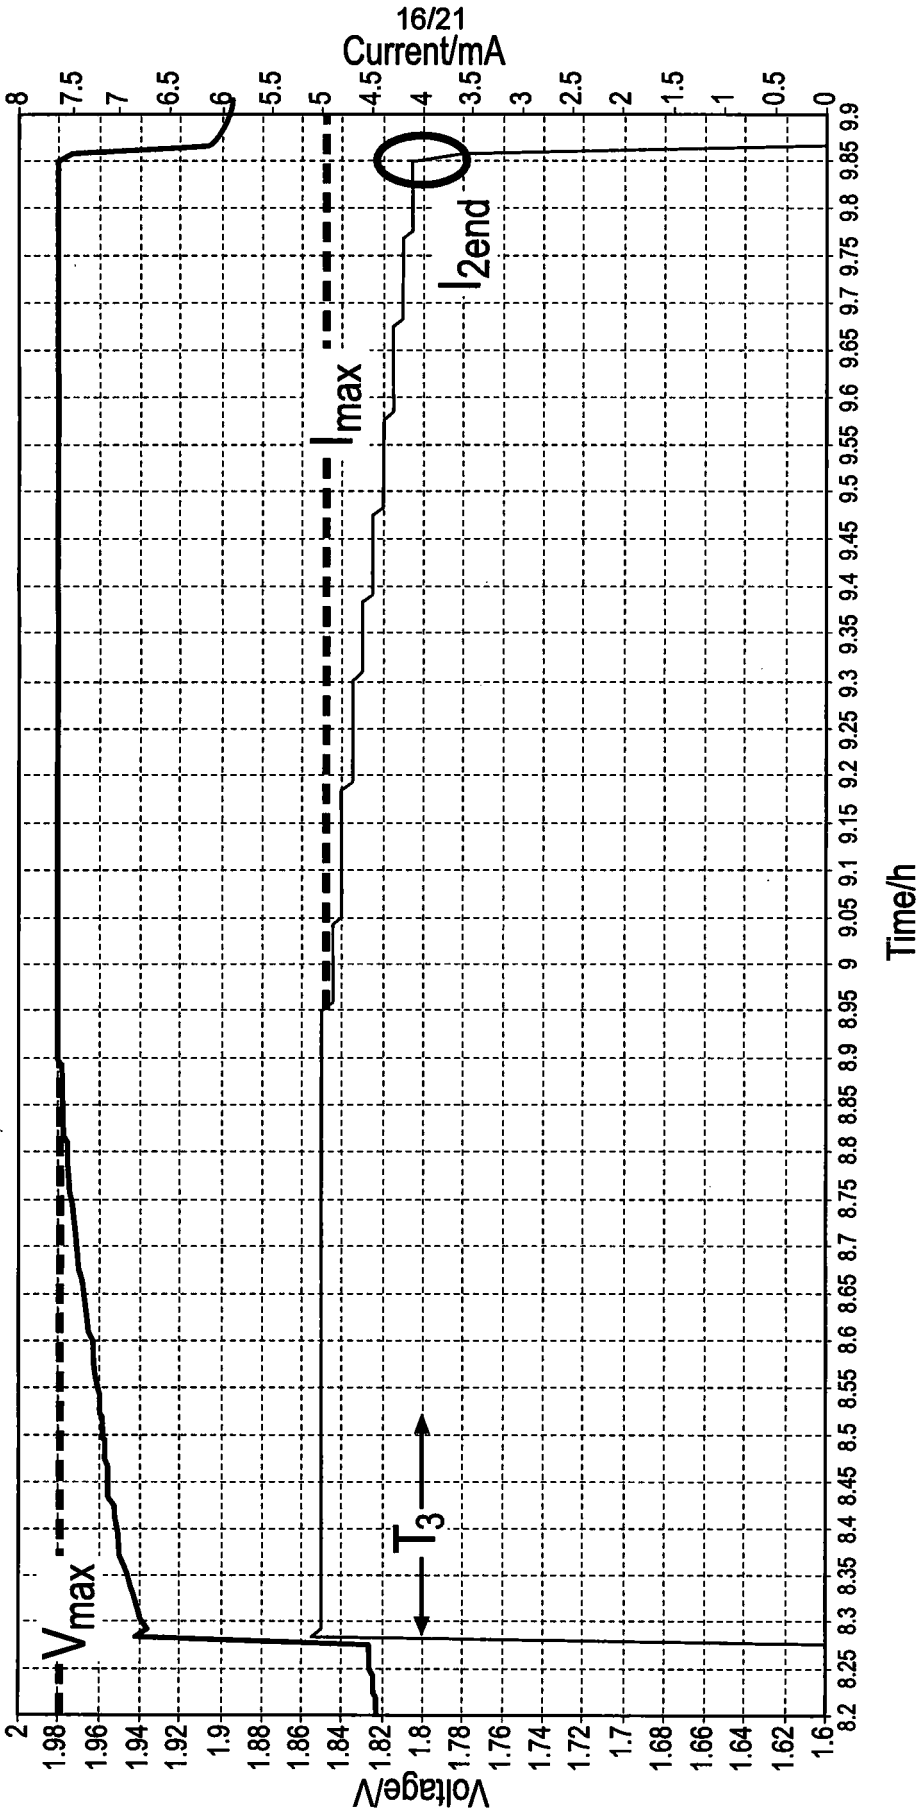


FIG. 13

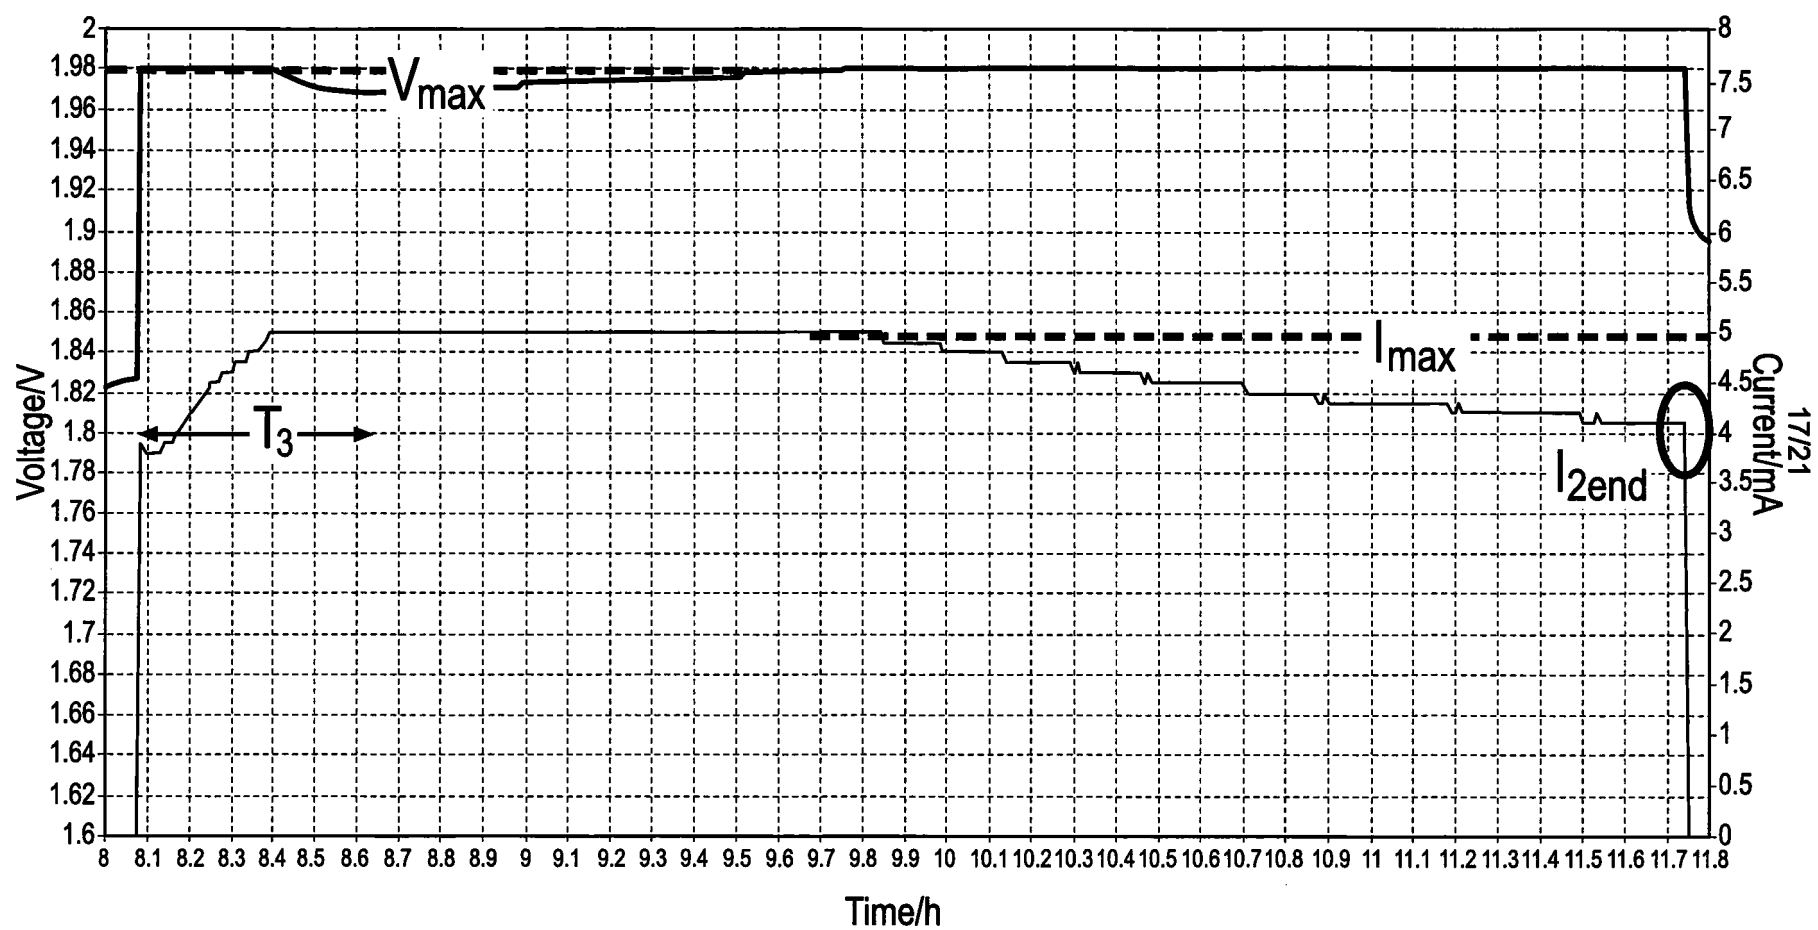


FIG. 14

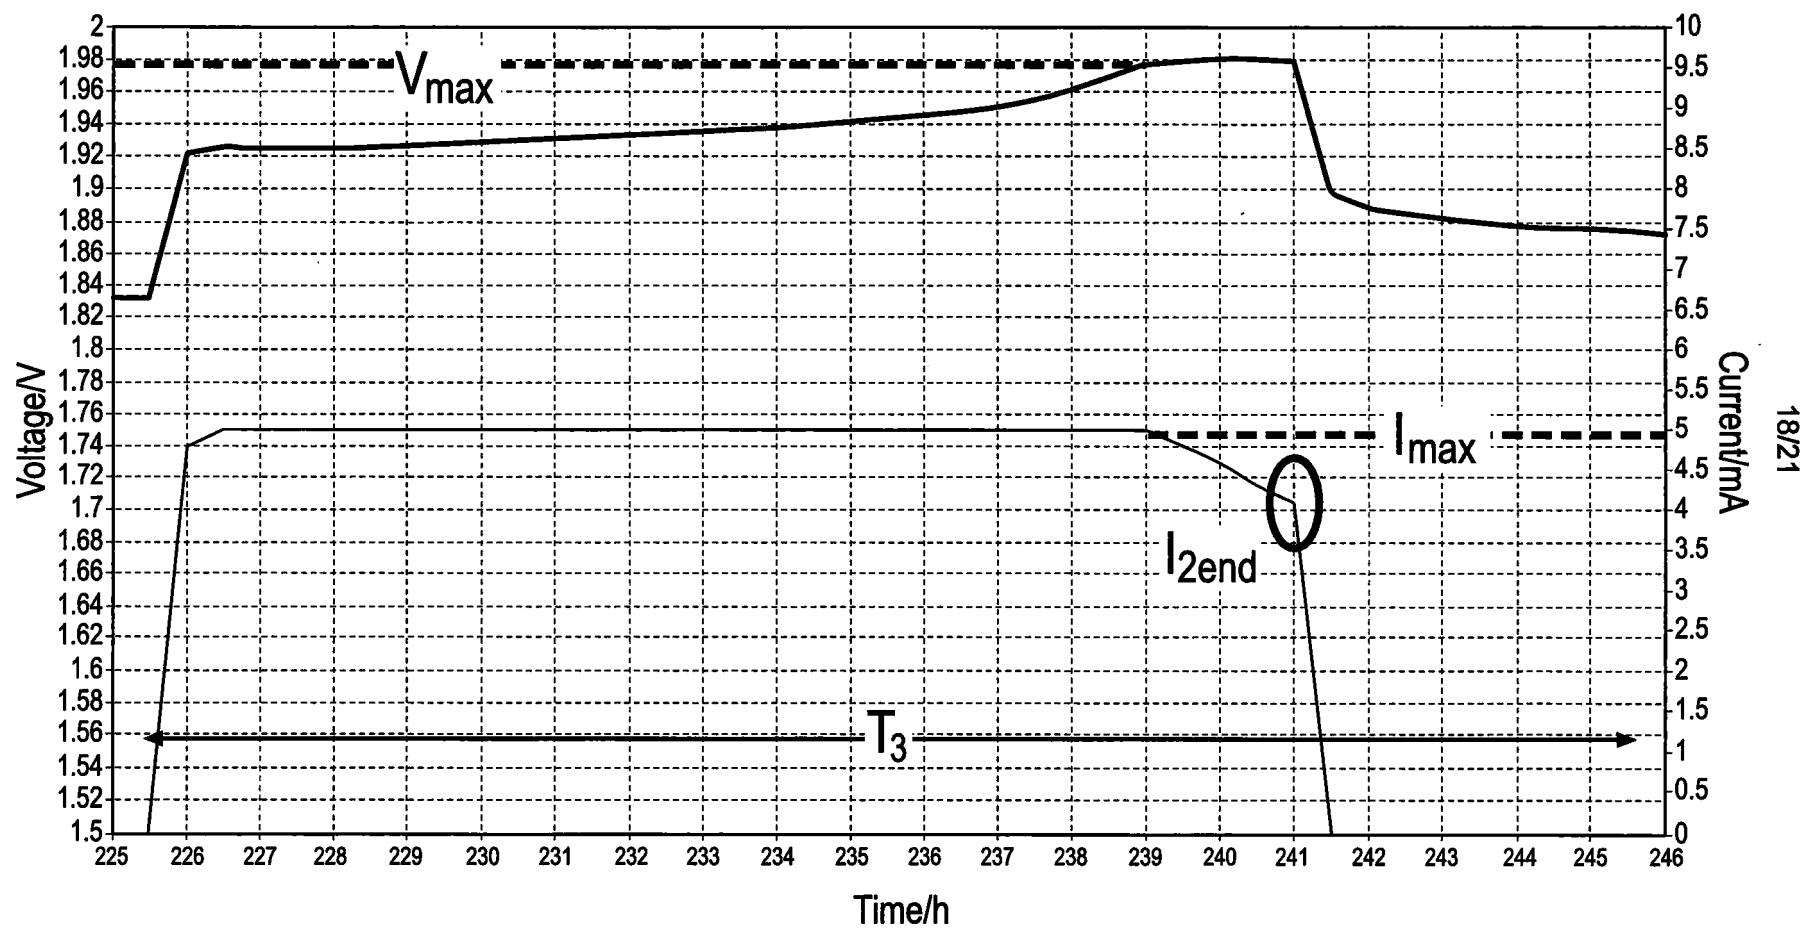


FIG. 15

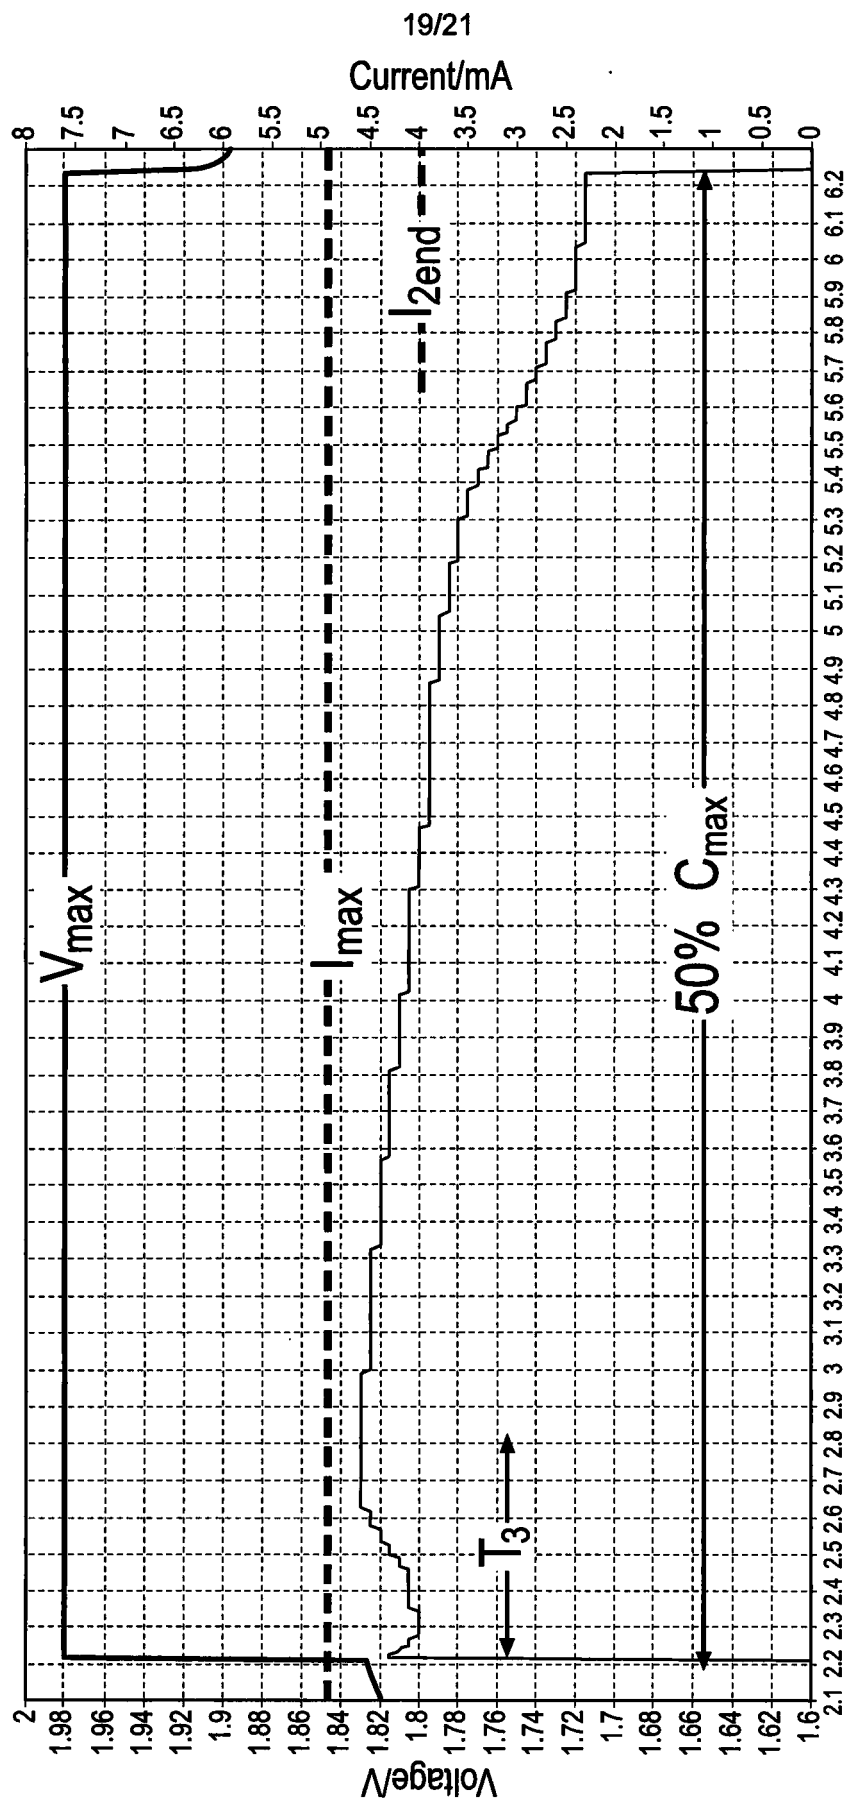


FIG. 16

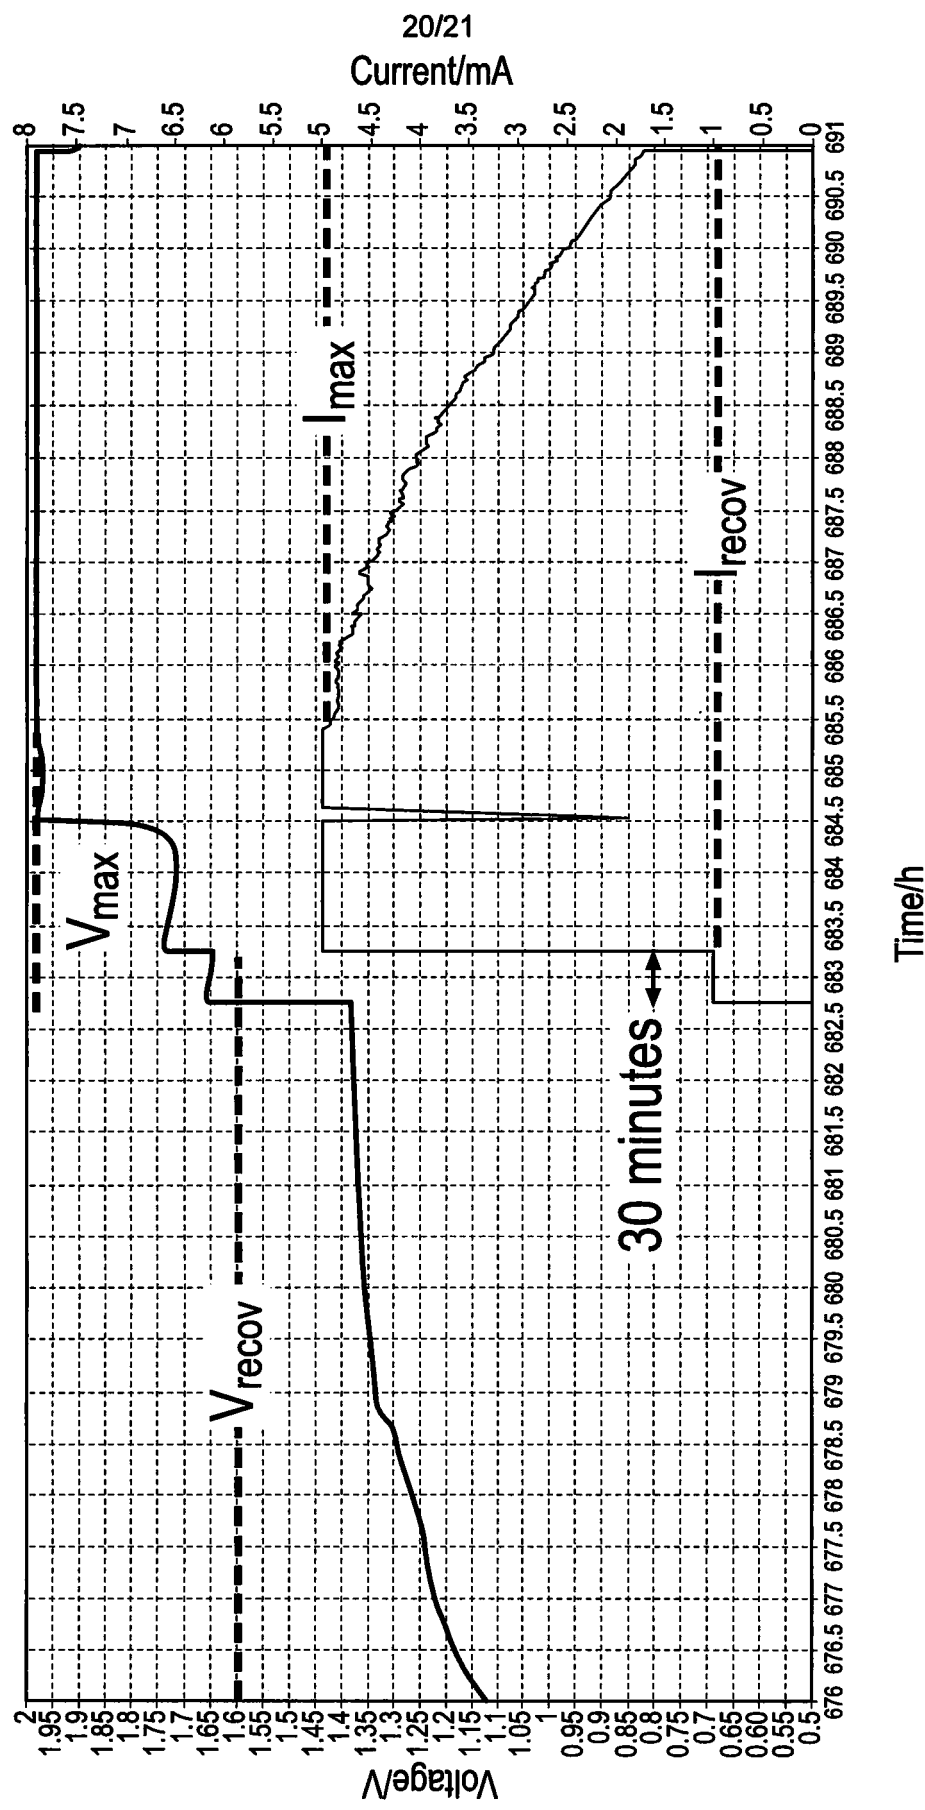


FIG. 17

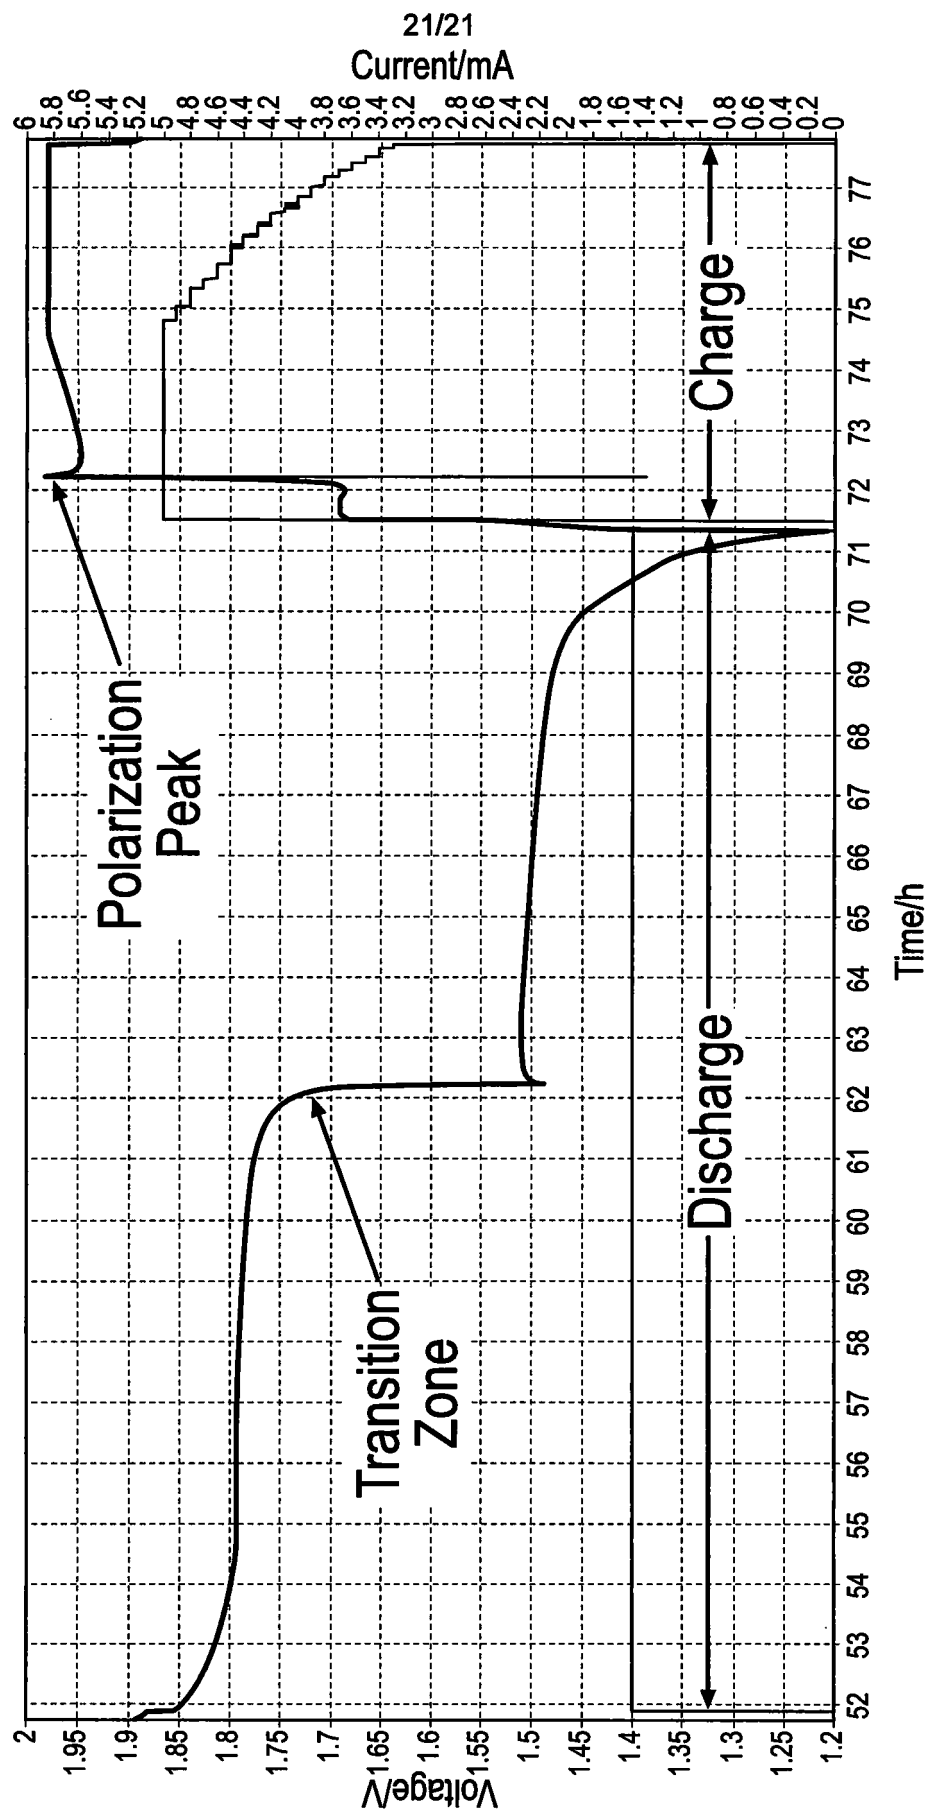


FIG. 18