



(51) International Patent Classification:

G01P 3/38 (2006.01) G05D 1/02 (2006.01)
G01P 3/68 (2006.01) G06T 7/20 (2006.01)
G01S 11/12 (2006.01)

(21) International Application Number:

PCT/EP2013/071738

(22) International Filing Date:

17 October 2013 (17.10.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

12306341.4 26 October 2012 (26.10.2012) EP

(71) Applicants: UNIVERSITÉ D'AIX-MARSEILLE [FR/FR]; Jardin du Pharo 58, boulevard Charles Livon, F-13007 Marseille (FR). CENTRE NATIONAL DE LA RECHERCHE SCIENTIFIQUE (C.N.R.S) [FR/FR]; 3, rue Michel Ange, F-75016 Paris (FR).

(72) Inventors: RUFFIER, Franck; 81 rue de la palud, F-13006 Marseille (FR). EXPERT, Fabien; Résidence les Castors Bâtiment B2 rue Renarde, F-13400 Aubagne (FR).

(74) Agents: BLOT, Philippe et al.; Cabinet LAVOIX, 2, place d'Estienne d'Orves, F-75009 Paris (FR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: MOTION SENSOR ASSEMBLY FOR DETERMINING THE ANGULAR VELOCITY OF A MOVING CONTRAST IN ITS FIELD OF VIEW WITH A HIGH ACCURACY

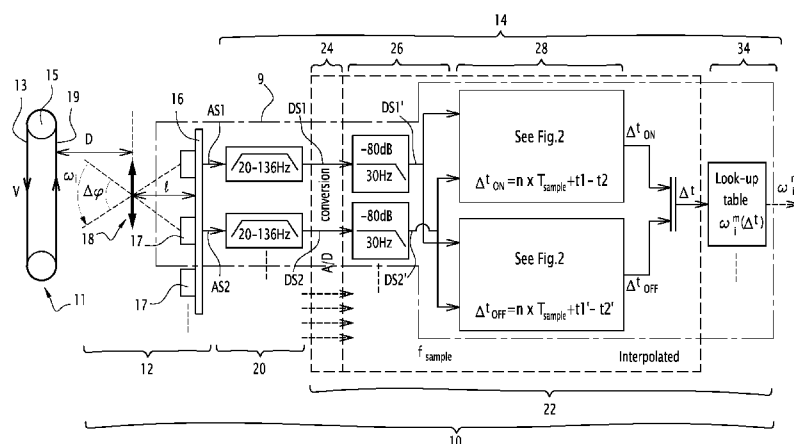


FIG.1

(57) Abstract: A motion sensor assembly for determining the angular velocity of a moving contrast in its field of view, comprising: - at least one motion sensor with a first and a second analog photoreceptor each adapted for observing said moving contrast, wherein said first and second photoreceptor are separated by a predetermined interreceptor angle ($\Delta\phi$); and - an angular velocity calculating unit connected to said photoreceptors for calculating the angular velocity of the moving contrast based on the first and second analog signal (AS1, AS2) delivered by said first and second photoreceptor respectively; wherein said angular velocity calculating unit comprises a means for temporally sampling the first and second analog signal (AS1, AS2) at a given sampling frequency (f_{sample}) to obtain a first and second digital signal (DS1, DS2) respectively; and means for performing an interpolation of said first and second digital signal (DS1, DS2) when they cross a predetermined threshold (S) between successive samples (C).

**Motion sensor assembly for determining the angular velocity of a moving contrast
in its field of view with a high accuracy**

The present invention relates to a motion sensor assembly adapted to determine
5 the angular velocity of a moving contrast in its field of view, said motion sensor assembly
comprising:

- at least one motion sensor with a first and a second analog photoreceptor
each adapted for observing said moving contrast, wherein said first and second
photoreceptor are separated by a predetermined interreceptor angle; and

- an angular velocity calculating unit connected to said photoreceptors for
10 calculating the angular velocity of the moving contrast based on the first and
second analog signal delivered by said first and second photoreceptor
respectively;

wherein said angular velocity calculating unit comprises a means for temporally
15 sampling the first and second analog signal delivered by said first and second
photoreceptor at a given sampling frequency to obtain a first and second digital signal
respectively.

The present invention also relates to a vehicle, such as a terrestrial, maritime or
aerial vehicle, a Micro Aerial Vehicle, motor vehicle, drone or space vehicle, equipped with
20 a motion sensor assembly.

The present invention also relates to a method for determining the angular velocity
of a moving contrast.

Such an assembly and method are known from the article "A novel 1-gram insect
based device measuring visual motion along 5 optical directions" by Frédéric L. Roubieu
25 et al, IEEE, 2011, which article is called "article A" in the following.

However, this known assembly and method are limited to a comparatively small
number of photoreceptors. Also, only the one-dimensional angular speed can be
measured.

Thus, an object of the present invention is to improve the above assembly and
30 method such that a multi-dimensional angular velocity can be measured and larger
photoreceptor arrays can be used, while keeping the desired measurement accuracy.

According to the invention, this object is achieved by a motion sensor assembly as
defined above wherein said angular velocity calculating unit further comprises a means for
performing an interpolation of said first and second digital signal when they cross a
35 predetermined threshold between successive samples.

The object of the present invention is also achieved by a method for determining the angular velocity of a moving contrast, the method comprising the steps of:

- obtaining a first and second analog signal by observing said moving contrast from two different photoreceptors separated by a predetermined interreceptor angle; and

- temporally sampling the first and second analog signal at a given sampling frequency to obtain a first and second digital signal,

the method being characterised by the step of performing an interpolation of said first and second digital signal when they cross a predetermined threshold between successive samples.

Thanks to the inventive interpolation step on the visual signals, the calculation charge decreases considerably with no noticeable loss in measurement precision. Hence, more photoreceptors can be used for a given calculation capacity.

Another advantage of the present invention is that the interpolation is done on visual signals with a sampling frequency which is much lower than the sampling frequency used in the state of the art.

According to preferred embodiments, the motion sensor assembly of the invention has one or several of the following features, taken in isolation or in all technically possible combinations:

- the interpolation means comprises :

- a means for detecting the crossing, by the first and second digital signal, of the predetermined threshold;

- a means for interpolating:

a) the time interval between threshold crossing by the first digital signal and the next sample of the first digital signal; and

b) the time interval between threshold crossing by the second digital signal and the next sample of the second digital signal; and

- a means for estimating the delay in threshold crossing between the first and second digital signal based on the interpolated time intervals; and

- the interpolation means comprises:

- a means for detecting the crossing, by the first and second digital signal, of a predetermined threshold;

- a means for interpolating the time of threshold crossing by the first digital signal and the time of threshold crossing by the second digital signal; and

- estimating the delay in threshold crossing between the first and second digital signal based on the interpolated times;

- said angular velocity calculating unit further includes a means for calculating the angular velocity by dividing said interreceptor angle by said estimated delay;

- said angular velocity calculating unit further comprises a filter, preferably low-pass, outputting a first and a second filtered digital signal from the first and the second digital signals;

- said sampling frequency is between 0.01 and 1000000 Hz, and preferably equal to about 200 Hz;

- the motion sensor assembly comprises a preferably 3 x 4 array of photoreceptors; and

- the calculating unit comprises a microcontroller.

According to preferred embodiments, the method of the invention has one or several of the following features, taken in isolation or in all technically possible combinations:

- the interpolation step comprises:

- detecting the crossing, by the first and second digital signal, of a predetermined threshold;

- interpolating:

a) the time interval between threshold crossing by the first digital signal and the next sample of the first digital signal; and

b) the time interval between threshold crossing by the second digital signal and the next sample of the second digital signal; and

- estimating the delay in threshold crossing between the first and second digital signal based on the interpolated time intervals; and

- the interpolation step comprises:

- detecting the crossing, by the first and second digital signal, of a predetermined threshold;

- interpolating the time of threshold crossing by the first digital signal and the time of threshold crossing by the second digital signal; and

- estimating the delay in threshold crossing between the first and second digital signal based on the interpolated times;

- a filtering step is provided outputting a first and a second filtered digital signal from the first and the second digital signals;

- the method further includes the step of calculating the angular velocity by dividing said interreceptor angle by said estimated delay;

- said sampling frequency is between 100 and 500 Hz, and preferably equal to about 200 Hz; and

- said interpolation is a linear interpolation.

The invention also pertains to a terrestrial, maritime or aerial vehicle, such as a Micro Aerial Vehicle, motor vehicle, drone or space vehicle, equipped with a motion sensor assembly as defined above.

5 The invention will be better understood when reading the following description of non-limiting examples of the invention, with reference to the accompanying figures, wherein:

Figure 1 is a block diagram of a motion sensor assembly according to the invention;

10 Figure 2 is a graph illustrating the interpolation according to the invention;

Figure 3 is a diagram illustrating the determination of the horizontal and vertical angular speed according to the invention; and

Figure 4 shows experimental results for different reduced sampling frequencies.

15 With reference to figure 1, there is shown a motion sensor assembly 10 and a moving object 11 placed at an orthogonal distance D from motion sensor assembly 10.

The moving object 11 is a printed and endless strip of wallpaper 13 that can be conveyed by two drums 15 at a speed V. The wallpaper print depicts natural contrasts, one of which is denoted by the number 19.

20 The motion sensor assembly 10 includes an optic assembly 12 and an angular velocity calculating unit 14 connected to the optic assembly 12.

25 The optic assembly 12 includes a photoreceptor array 16 having a plurality of photoreceptors 17 and a lens 18. The lens 18 is placed in front of the photoreceptor array 16 at a distance l such that the photoreceptors 17 have a Gaussian angular sensitivity function. Preferably, photoreceptors 17 are photodiodes. The interreceptor angle between two adjacent photoreceptors 17 is identified in Figure 1 as $\Delta\phi$. The photoreceptors 17 are each adapted to deliver an analog signal AS1, AS2, etc. to the angular velocity calculating unit 14.

The angular velocity calculating unit 14 is divided into an analog processing section 20 and a digital processing section 22.

30 The analog processing section 20, may be a 20 to 136 Hz bandpass filter. For example; an analog bandpass filter is provided comprising a high-pass filtering ($f_c=20\text{Hz}$) enhancing the contrast information and eliminating the DC component of the photoreceptor signals. This high pass filtering is followed by a low-pass filtering step (with $f_c=116$ or 136 Hz) to avoid the phenomena of aliasing.

The digital processing section 22 comprises a first analog-to-digital conversion means or stage 24, and a second low-pass filtering means or stage 26, in order to output a first and second filtered digital signals DS1' and DS2' respectively.

Said digital processing section 22 further includes a third means for processing signals DS1' and DS2' which comprises a delay determining thresholding and interpolating stage in order to compute the time delay Δt as illustrated by figure 2. The section 22 also includes a fourth means corresponding to an angular velocity calculating stage 34. The angular velocity calculating unit 14 is adapted to perform an angular velocity calculating algorithm.

The analog processing section 20 and the first, second and fourth means are similar to the corresponding elements described in article A. Article A's disclosure relating to these elements is hereby incorporated by reference.

However, the inventive angular velocity calculating algorithm is characterised by an additional step in between the digital filtering step 26 and the angular velocity calculating step 34. The additional step is carried out by the delay determining thresholding and interpolating the signals DS1' and DS2' stage 28 to compute the time delay Δt between the filtered digital signals DS1' and DS2'.

One motion sensor 9 (delimited by the dashed frame) of the motion sensor assembly 10 comprises two adjacent photoreceptors 17 and the associated processing part of the angular velocity calculating unit 14.

With reference to Figure 2, this additional stage/step will now be described in detail.

Figure 2 is a plot of photoreceptor digital signal amplitude versus time. It shows a first digital signal DS1' and a second digital signal DS2' obtained with the inventive algorithm. The two digital signals DS1', DS2' correspond to the signals after digitalization and filtering coming from the two adjacent photoreceptors 17. Each digital signal DS1', DS2' is represented by a series of four dots C.

Figure 2 also indicates a predetermined threshold S. This threshold S is determined by the delay determining step of the delay determining thresholding and interpolating stage 28. The crossing of threshold S by a signal is relative to the detection of a contrast.

For comparison, Figure 2 also shows the digital signals NS1 and NS2 obtained using the algorithm known from article A. Each dash d represents one sampling point. NS1 and NS2 correspond to a sampling frequency of 2 kHz.

As one can see, according to the invention, the analog photoreceptor signals AS1, AS2 are sampled at a much lower frequency than the sampling frequency of NS1 and NS2. The signal between successive sampling points is then determined via interpolation.

More precisely, Figure 2 illustrates how to calculate the delay Δt_{ON} in threshold crossing between signal DS1' and signal DS2' using linear interpolation. The equation used for calculating Δt_{ON} is:

$$\Delta t_{ON} = n \times T_{sample} + t1 - t2 \quad (1)$$

wherein n is the number of periods between the two signals DS1' and DS2', T_{sample} is the sampling period, t1 is the time interval between the time of DS1's threshold crossing and the next sampling time, and t2 is the time interval between the time of DS2's threshold crossing and the next sampling time.

In the example shown in Figure 2, n equals 1. More generally, the value of n is obtained via the delay determining stage 28.

The values of t1 and t2 are estimated by linear interpolation, i.e. with the following equation:

$$t1, t2 = a/b \times T_{sample} \quad (2)$$

wherein a is the difference between the signal amplitude at the next sampling time following the threshold crossing and the threshold S, and b is the difference in amplitude between the two sampling points surrounding the time of threshold crossing.

The additional step is added to the angular velocity calculating algorithm in order to be able to reduce the digital sampling frequency of the analog signals delivered by the photoreceptors 17 while essentially keeping the same measurement accuracy. In other words, according to the invention, when the visual signals are interpolated, the calculation of the optical flow is realized with a temporal accuracy superior than that of the previous art at the same frequency.

Experimental results

In order to determine the best sampling frequency for the new angular velocity calculating algorithm using interpolation, the experiment shown in Figure 3 was performed.

An array 16 of 4 x 3 auto-adaptive analog Very Large Scale Integration (aVLSI) pixels 17 called APIS (Adaptive Pixels for Insect-based Sensors) was used for determining the horizontal angular speed ω_{median}^H and the vertical angular speed ω_{median}^V of a moving contrast. The horizontal angular speed ω_{median}^H was computed by taking the maximum value between the median value of the angular speed measurements in the positive horizontal direction and the median value of the angular speed measurements in the negative horizontal direction. The vertical angular speed ω_{median}^V was computed by taking the maximum value between the median value of the angular speed measurements in the positive vertical direction and the median value of the angular speed measurements in the negative vertical direction. The moving contrast was travelling with a known angular velocity profile having a saw tooth shape M (cf. Figure 4) corresponding to an angular speed varying between 75°/s and 275°/s seen by the photoreceptors 17. The digital sampling was done at a frequency f_{sample} of 100, 200 and 500 Hz.

The results of the experiment for each of the three chosen sampling frequencies are shown in Figure 4. The upper half of Figure 4 shows the results for ω_{median}^H and the lower half the results for ω_{median}^V .

The horizontal output (ω_{median}^H) and the vertical output (ω_{median}^V) of the motion sensor assembly follow the saw tooth shape M. As expected, the data dispersion decreases when the sampling frequency increases, namely from a standard deviation of 27°/s at 100 Hz to a standard deviation of 12°/s at 500Hz.

Figure 4 also indicates the reduction in computational load compared to the 2 kHz sampling without linear interpolation known from article A. By decreasing the sampling frequency and by keeping the similar number of instructions, the computational load of the processing unit was decreased. The computational load is divided by 10, 5 and 2 at a sampling frequency of 100, 200 and 500 Hz respectively.

The experiments show that the inventive linear interpolation is best combined with a sampling frequency of 200 Hz. At 200 Hz, one has the best compromise between computational load and measurement precision. In this case, the standard deviation of the error is below 20°/s and the computational load is five times lower than the one of a photoreceptor array sampling at 2 kHz without interpolation. Despite the low sampling frequency used, thanks to the inventive linear interpolation, the Nyquist-Shannon sampling theorem is still respected due to the spatial (Gaussian angular sensitivity of the photoreceptors 17) and temporal low-pass filtering (analog and digital filtering stages 20 and 26).

First trials were performed on a dsPIC 33FJ128GP804 microcontroller at a 200 Hz sampling frequency with linear interpolation and 50 Million Instructions Per Second (MIPS). The following table shows the tested sampling frequencies, with the corresponding average and peak percentages of processor load.

5

Sampling frequency (Hz)	% processor load (average)	% processor load (peak)
2000	84	>100
500	21	32
200	10.5	16
100	5.25	8

10

Thanks to the decrease of the sampling frequency and the inventive delay determining - thresholding and interpolating the signals DS1' and DS2' stage 28 to compute the time delay Δt on the visual signals, it becomes possible to implement 17 bidirectional motion sensors based on a 3x4 photosensors array on a single microcontroller with an average processor load of only 10,5%.

15

The above tests were carried out with an interreceptor angle $\Delta\phi$ of 4°. This corresponds to a motion sensor assembly able to measure angular speeds in the range of [30, 350°/s]. Such a range is typical of the stimulations received by an UAV flying at low altitude (around 1m above ground) with a speed in the order of 2 m/s.

20

However, an UAV flying at high altitude at around the same speed would experience smaller angular speeds. In this case, the measured temporal delays Δt would be greater. Accordingly, the sampling frequency could be reduced even further without loss in measurement accuracy.

The assembly according to the invention allows, with the help of a retina of some pixels and with limited calculation resources to determine the angular velocity of the scrolling of contrasts in its field of view.

25

This type of sensor has a major interest for the detection of the proximity of obstacles, especially in the automotive sector and in aerospace.

30

Because of their low cost, motion sensors according to the invention may be arranged around a motor vehicle. By reducing the computational load allowed by the interpolation, the number of pixels processed by the same calculation unit is multiplied, which allows the detection of obstacles in several directions simultaneously or to increase the accuracy of the sensor by multiplying the number of sensors covering the same area.

In addition, this type of sensor has the advantage that it can operate in a wide range of background illuminance.

Other types of applications are also possible with the motion sensor assembly according to the invention.

5

It will be understood that the above description of the present invention is susceptible to various modifications, changes and adaptations and the same are intended to be comprehended within the meaning and range of equivalents of the appended claims.

CLAIMS

1.- Motion sensor assembly (10) adapted to determine the angular velocity of a moving contrast (19) in its field of view, said motion sensor assembly comprising:

5 - at least one motion sensor (9) with a first and a second analog photoreceptor (17) each adapted for observing said moving contrast, wherein said first and second photoreceptor are separated by a predetermined interreceptor angle ($\Delta\phi$); and

10 - an angular velocity calculating unit (14) connected to said photoreceptors for calculating the angular velocity of the moving contrast based on the first and second analog signal (AS1, AS2) delivered by said first and second photoreceptor respectively;

15 wherein said angular velocity calculating unit (14) comprises a means for temporally sampling the first and second analog signal (AS1, AS2) delivered by said first and second photoreceptor at a given sampling frequency (f_{sample}) to obtain a first and second digital signal (DS1, DS2) respectively,

20 characterised in that said angular velocity calculating unit (14) further comprises a means (28) for performing an interpolation of said first and second digital signal (DS1, DS2) when they cross a predetermined threshold (S) between successive samples (C).

2.- The motion sensor assembly of claim 1, wherein the interpolation means comprises :

25 - a means for detecting the crossing, by the first and second digital signal (DS1, DS2), of the predetermined threshold (S);

 - a means for interpolating:
 a) the time interval (t_1) between threshold crossing by the first digital signal (DS1) and the next sample of the first digital signal (DS1); and
 b) the time interval (t_2) between threshold crossing by the second digital signal (DS2) and the next sample of the second digital signal (DS2);
30 and

 - a means for estimating the delay (Δt) in threshold crossing between the first and second digital signal based on the interpolated time intervals (t_1 , t_2).

35 3.- The motion sensor assembly of claim 1, wherein the interpolation means comprises:

- a means for detecting the crossing, by the first and second digital signal (DS1, DS2), of a predetermined threshold (S);
- a means for interpolating the time of threshold crossing by the first digital signal (DS1) and the time of threshold crossing by the second digital signal (DS2); and
- estimating the delay (Δt) in threshold crossing between the first and second digital signal based on the interpolated times.

4.- The motion sensor assembly of claim 2 or 3, wherein said angular velocity calculating unit (14) further includes a means for calculating the angular velocity (ω) by dividing said interreceptor angle ($\Delta\phi$) by said estimated delay (Δt).

5.- The motion sensor assembly of anyone of the previous claims, wherein said angular velocity calculating unit (14) further comprises a filter (26), preferably low-pass, outputting a first and a second filtered digital signal (DS1' and DS2') from the first and the second digital signals (DS1 and DS2).

6.- The motion sensor assembly of anyone of the previous claims, wherein said sampling frequency (f_{sample}) is between 0.01 and 1000000 Hz, and preferably equal to about 200 Hz.

7.- The motion sensor assembly of anyone of the previous claims, comprising a preferably 3 x 4 array (16) of photoreceptors.

8.- The motion sensor assembly of anyone of the previous claims, wherein the calculating unit (14) comprises a microcontroller.

9.- A vehicle, such as a terrestrial, maritime or aerial vehicle, a Micro Aerial Vehicle, motor vehicle, drone or space vehicle, equipped with a motion sensor assembly (10) of anyone of the previous claims.

10.- A method for determining the angular velocity of a moving contrast (19), the method comprising the steps of:

- obtaining a first and second analog signal (AS1, AS2) by observing said moving contrast from two different photoreceptors (17) separated by a predetermined interreceptor angle ($\Delta\phi$); and

- temporally sampling the first and second analog signal (AS1, AS2) at a given sampling frequency (f_{sample}) to obtain a first and second digital signal (DS1, DS2),

the method being characterised by the step of performing an interpolation of said first and second digital signal (DS1, DS2) when they cross a predetermined threshold (S) between successive samples (C).

11.- The method of claim 10, wherein the interpolation step comprises:

- detecting the crossing, by the first and second digital signal (DS1', DS2'), of a predetermined threshold (S);

- interpolating:

a) the time interval (t_1) between threshold crossing by the first digital signal (DS1) and the next sample of the first digital signal (DS1'); and

b) the time interval (t_2) between threshold crossing by the second digital signal (DS2) and the next sample of the second digital signal (DS2'); and

- estimating the delay (Δt) in threshold crossing between the first and second digital signal based on the interpolated time intervals (t_1 , t_2).

12.- The method of claim 10, wherein the interpolation step comprises:

- detecting the crossing, by the first and second digital signal (DS1, DS2), of a predetermined threshold (S);

- interpolating the time of threshold crossing by the first digital signal (DS1) and the time of threshold crossing by the second digital signal (DS2); and

- estimating the delay (Δt) in threshold crossing between the first and second digital signal based on the interpolated times.

13.- The method of anyone of claims 10 to 12, wherein a filtering step is provided outputting a first and a second filtered digital signal (DS1' and DS2') from the first and the second digital signals (DS1 and DS2).

14.- The method of claim 11 to 13, further including the step of calculating the angular velocity (ω) by dividing said interreceptor angle ($\Delta\phi$) by said estimated delay (Δt).

15.- The method of anyone of claims 10 to 14, wherein said sampling frequency (f_{sample}) is between 100 and 500 Hz, and preferably equal to about 200 Hz.

16.- The method of anyone of claims 10 to 15, wherein said interpolation is a linear interpolation.

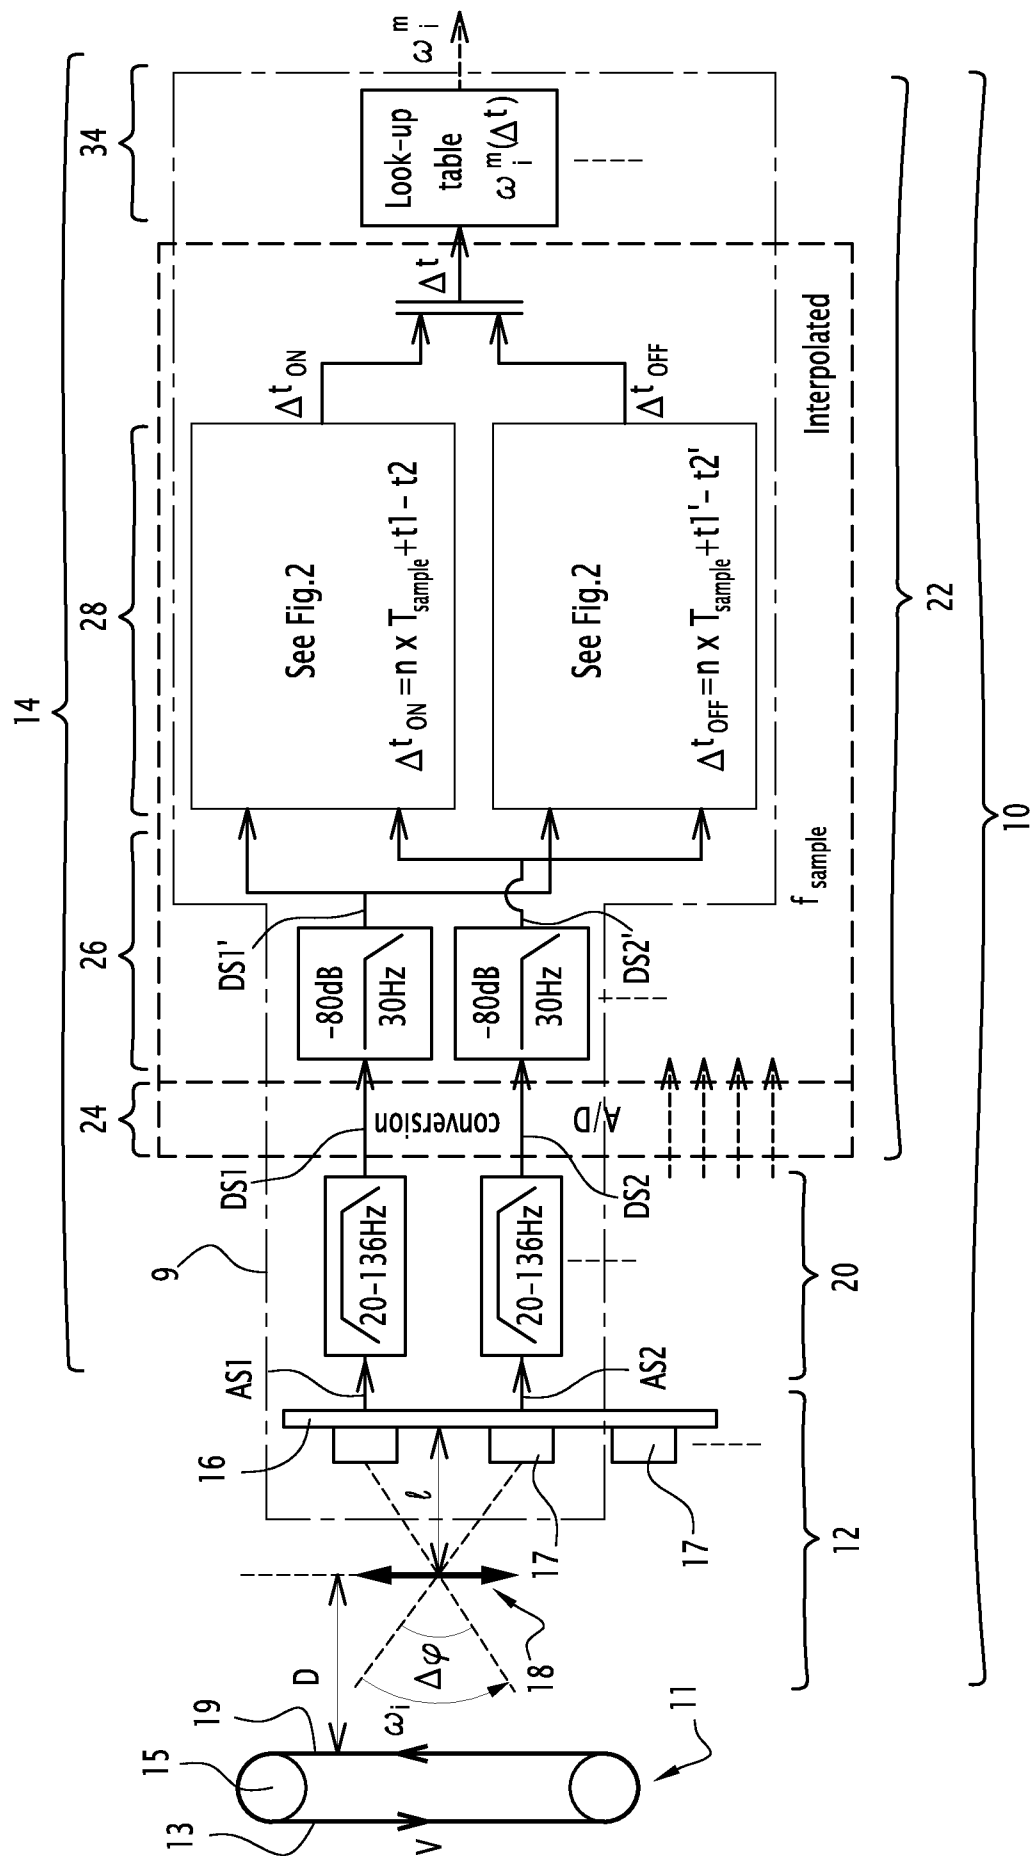


FIG.1

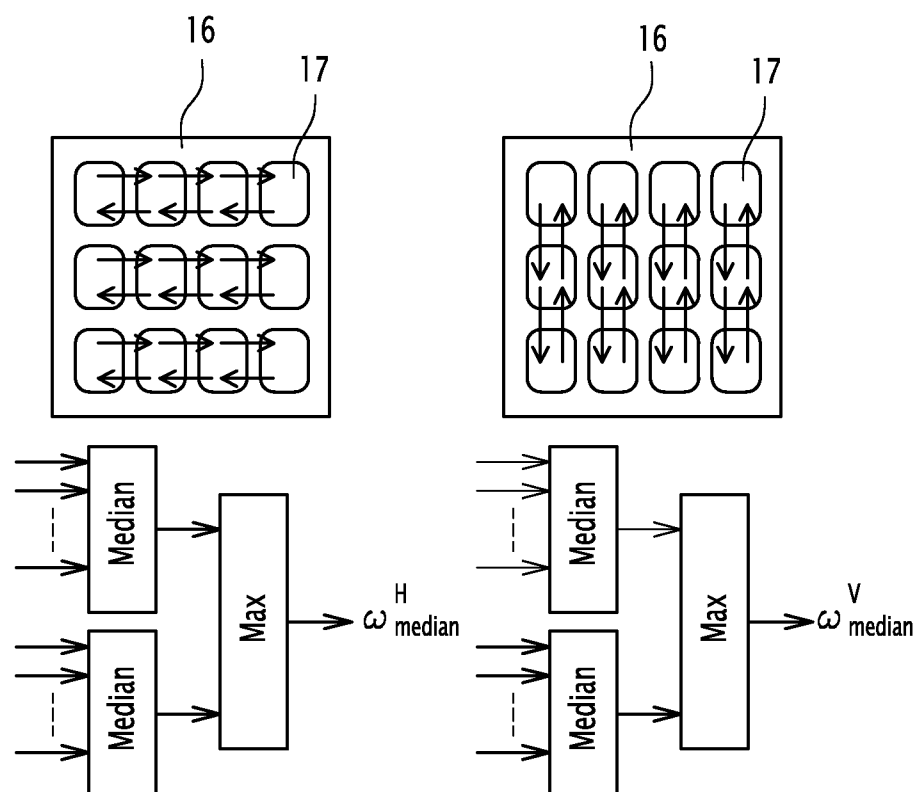
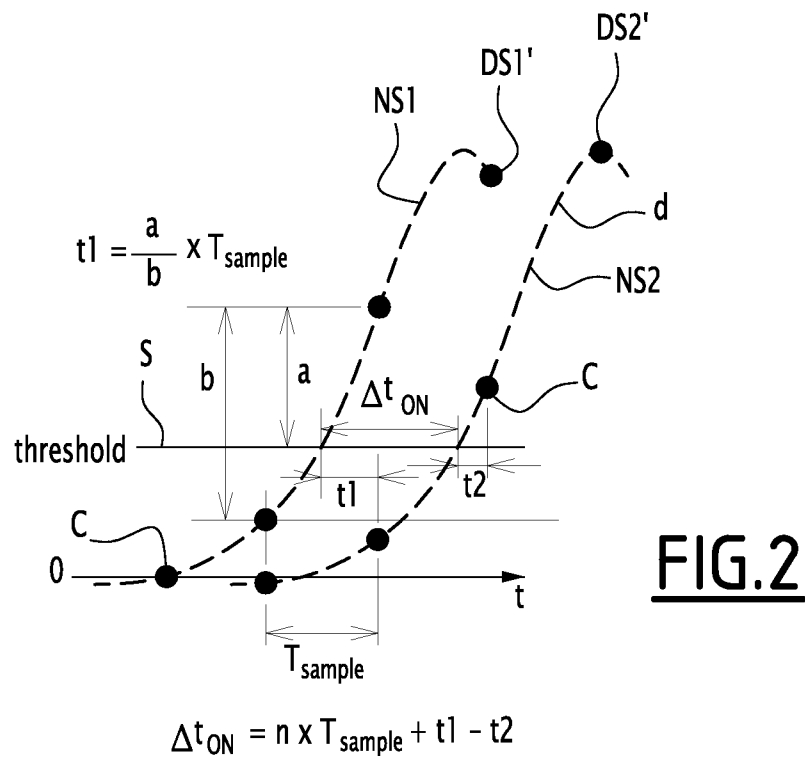


FIG.3

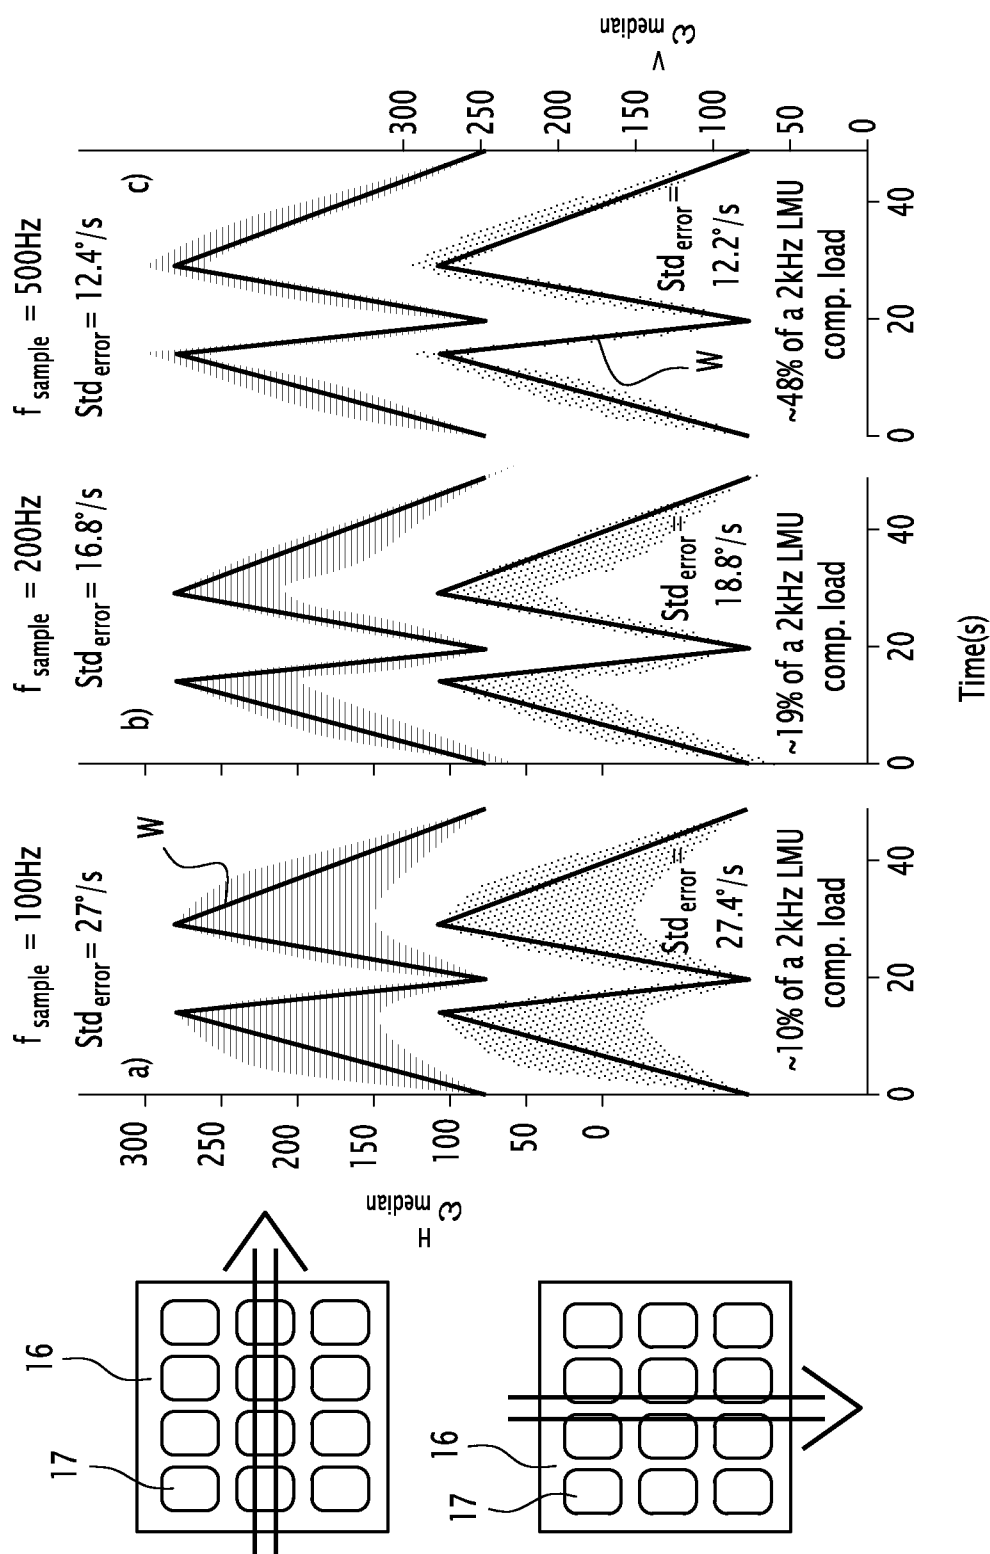


FIG.4

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2013/071738

A. CLASSIFICATION OF SUBJECT MATTER

INV. G01P3/38 G01P3/68 G01S11/12
ADD. G05D1/02 G06T7/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G01P G01S G05D G06T G01C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	FREDERIC L ROUBIEU ET AL: "A novel 1-gram insect based device measuring visual motion along 5 optical directions", 2011 IEEE SENSORS PROCEEDINGS : LIMERICK, IRELAND, 28 - 31 OCTOBER 2011, IEEE, PISCATAWAY, NJ, 28 October 2011 (2011-10-28), pages 687-690, XP032093358, DOI: 10.1109/ICSENS.2011.6127157 ISBN: 978-1-4244-9290-9 the whole document ----- -/--	1-16



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

5 November 2013

Date of mailing of the international search report

09/04/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Springer, Oliver

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2013/071738

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PUDAS ET AL: "A miniature bio-inspired optic flow sensor based on low temperature co-fired ceramics (LTCC) technology", SENSORS AND ACTUATORS A, ELSEVIER SEQUOIA S.A., LAUSANNE, CH, vol. 133, no. 1, 20 December 2006 (2006-12-20), pages 88-95, XP005809099, ISSN: 0924-4247, DOI: 10.1016/J.SNA.2006.03.013 the whole document -----	1-16
A	WO 2011/073085 A1 (UNIV AIX MARSEILLE II [FR]; CENTRE NAT RECH SCIENT [FR]; KERHUEL LUBIN) 23 June 2011 (2011-06-23) page 1, line 5 - line 9 page 9, line 5 - page 20, line 12; figures 1-12 -----	1-16
X,P	FABIEN EXPERT ET AL: "Interpolation based time of travel scheme in a Visual Motion Sensor using a small 2D retina", SENSORS, 2012 IEEE, IEEE, 28 October 2012 (2012-10-28), pages 1-4, XP032308815, DOI: 10.1109/ICSENS.2012.6411364 ISBN: 978-1-4577-1766-6 the whole document -----	1-16

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2013/071738

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2011073085 A1	23-06-2011	EP 2341352 A1	06-07-2011
		US 2012310451 A1	06-12-2012
		WO 2011073085 A1	23-06-2011
