

(22) Date de dépôt/Filing Date: 1999/12/15

(41) Mise à la disp. pub./Open to Public Insp.: 2001/06/15

(45) Date de délivrance/Issue Date: 2004/02/24

(51) Cl.Int.⁷/Int.Cl.⁷ H02M 7/217


(72) Inventeur/Inventor:
JAIN, PRAVEEN KUMAR, CA

(73) Propriétaire/Owner:
CHIPPOWER.COM, INC., CA

(74) **Agent:** OGILVY RENAULT

(54) Titre : CONVERTISSEUR AC/DC MONOPHASIQUE POUR SYSTEMES DE DISTRIBUTION AC HAUTE FREQUENCE

(54) Title: SINGLE STAGE AC/DC CONVERTER FOR HIGH FREQUENCY AC DISTRIBUTION SYSTEMS

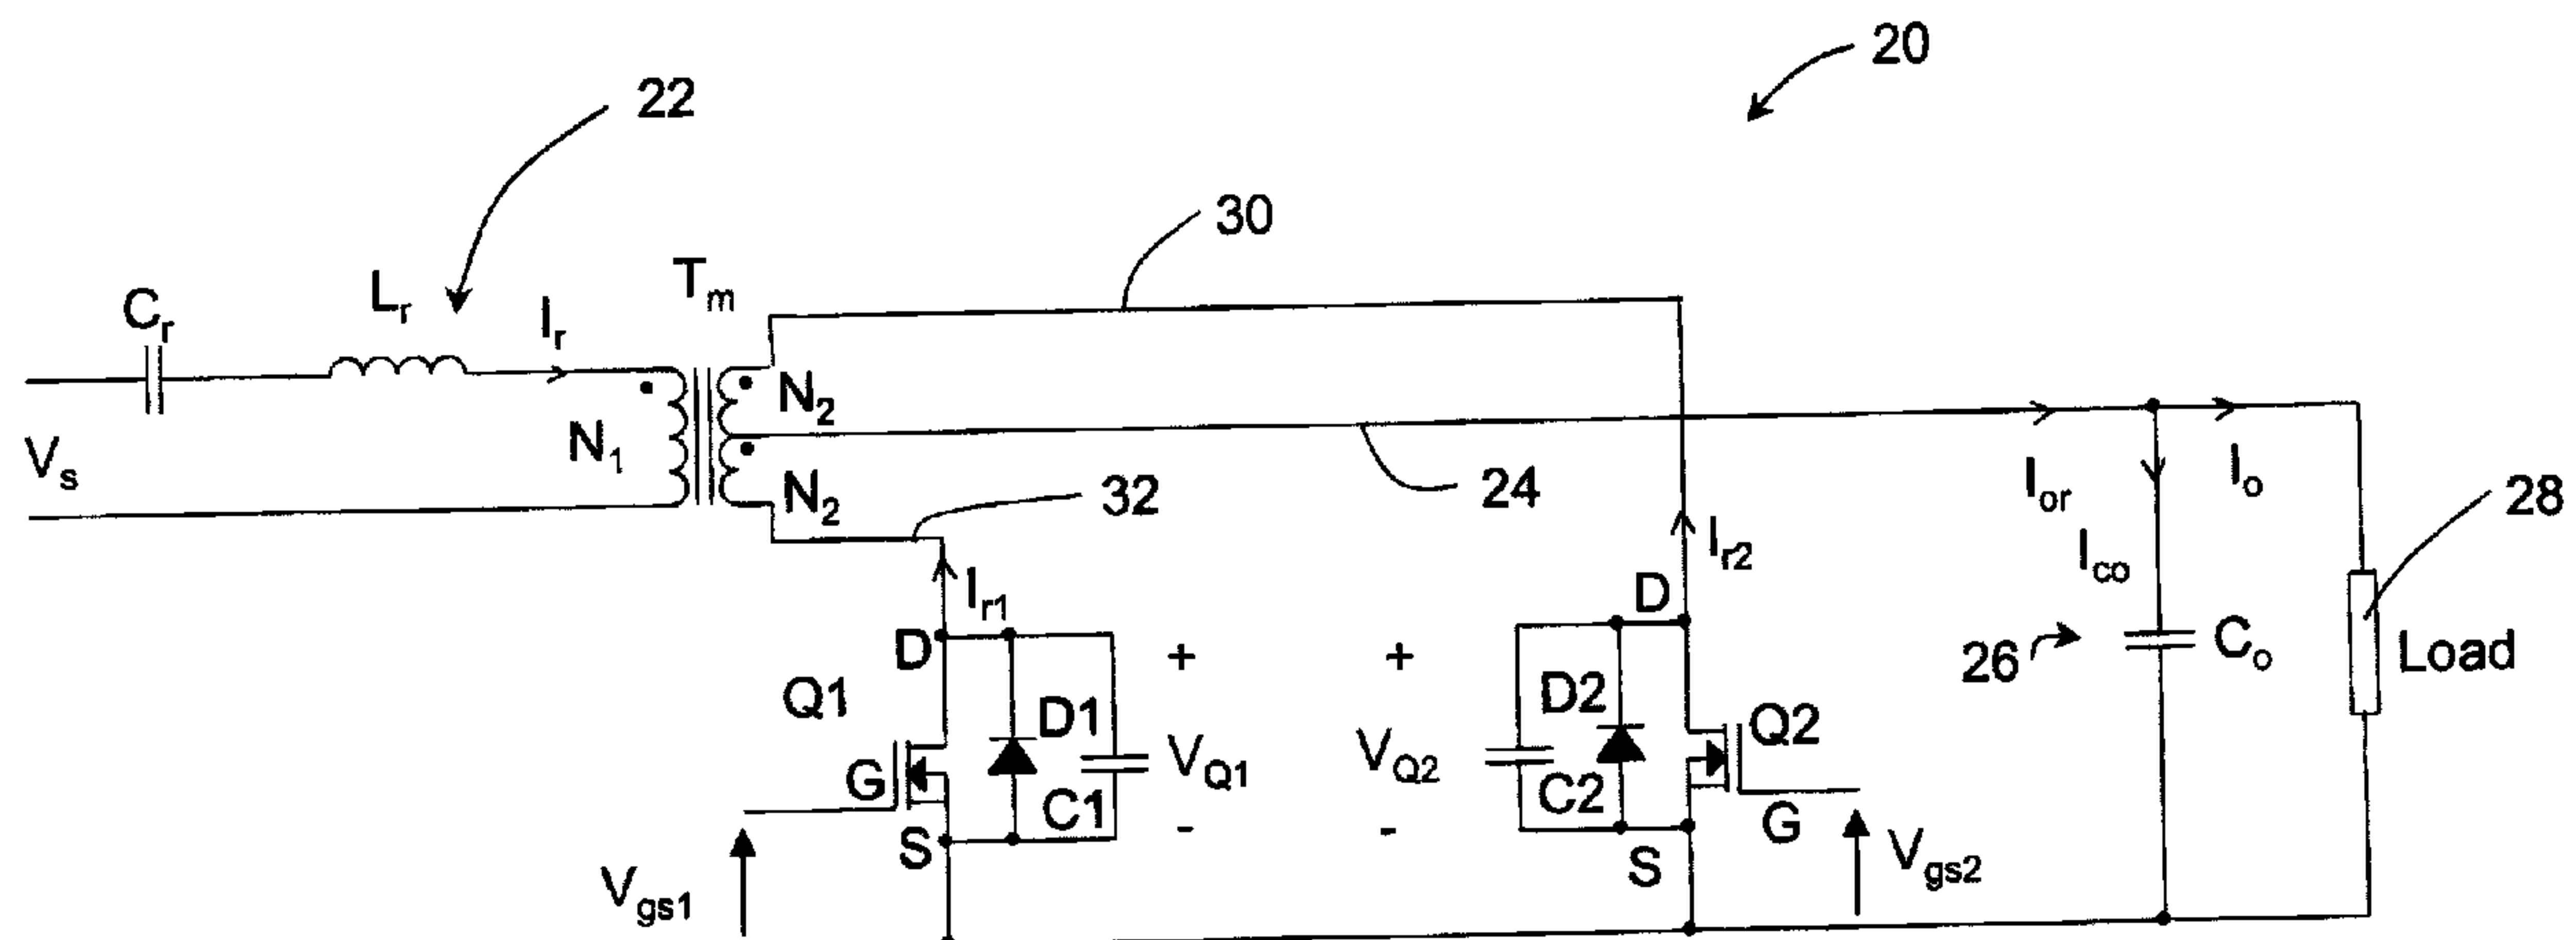

AC/DC converter topology

(57) Abrégé/Abstract:

An AC/DC converter for outputting high current, low voltage output from a high frequency AC source is described. The AC/DC converter includes two resonant components, a resonant circuit having a capacitor and an inductor. Both of the resonant components are connected in series and form a series resonant circuit. The converter further includes a transformer having a primary winding with a center tap to a secondary winding. The resonant circuit and the primary winding are connected in series. The center tap is connected to an output filter and a load, while the other two ends of the secondary winding are connected to two controlled switches, respectively. A drain of each of the two controlled switches is connected to opposite ends of the secondary winding, while each of the sources of the two controlled switches are interconnected. Two anti-parallel diodes are respectively connected across the two controlled switches. Two capacitors are also respectively connected across the two controlled switches. The on-time of the controlled switches is regulated to control the output voltage of the converter. The advantage is an inexpensive converter adapted to output high currents at low voltages with very little ripple and very low slew rate.

ABSTRACT OF THE DISCLOSURE

An AC/DC converter for outputting high current, low voltage output from a high frequency AC source is described. The AC/DC converter includes two resonant components, a resonant circuit having a capacitor and an inductor. Both of the resonant components are connected in series and form a series resonant circuit. The converter further includes a transformer having a primary winding with a center tap to a secondary winding. The resonant circuit and the primary winding are connected in series. The center tap is connected to an output filter and a load, while the other two ends of the secondary winding are connected to two controlled switches, respectively. A drain of each of the two controlled switches is connected to opposite ends of the secondary winding, while each of the sources of the two controlled switches are interconnected. Two anti-parallel diodes are respectively connected across the two controlled switches. Two capacitors are also respectively connected across the two controlled switches. The on-time of the controlled switches is regulated to control the output voltage of the converter. The advantage is an inexpensive converter adapted to output high currents at low voltages with very little ripple and very low slew rate.

- 1 -

SINGLE STAGE AC/DC CONVERTER FOR HIGH FREQUENCY AC DISTRIBUTION SYSTEMS

TECHNICAL FIELD

This invention relates to power supplies for
5 electronic equipment and, in particular, to converters
for power supplies for computer equipment requiring a
high current, low voltage power supply.

BACKGROUND OF THE INVENTION

Segments of the personal computer (PC) industry
10 have dramatically changed during the last decade. The
future is even more challenging. A dramatic increase in
the processor speeds of PCs has required an overwhelming
increase in current and associated dynamics (very high
slew rate). This already challenging technical
15 requirement is further complicated by a need for voltage
reduction, potentially to sub-volt levels.

In the past, there was virtually no challenge in
powering computers. A multiple output, very slow power
supply called a "Silver Box (SB)" was adapted to meet the
20 requirements of every power demand. However, as silicon
development progressed, multiple voltages of less than
3.3V were required. Voltage Regulator Modules (VRMs) on
the processor Mother Board (MB) were a logical solution
to that problem. Today, the number of VRMs required on
25 the Mother Board is increasing. In addition to the VRMs,
a large number of de-coupling capacitors are required in
proximity of the processor to meet the requirements of
very high slew rate of the current. This has resulted in

- 2 -

a rapid increase in the cost, as well as a large reduction in overall efficiency, of the power delivery system.

A number of options for improving this situation have been explored. For example, Advanced Voltage Regulator Module (AVRM) offers the capability to supply high di/dt and high current, however, at increased cost, and with low efficiency and moderately high capacity of the de-coupling capacitors. Replacing low voltage DC distribution with higher DC voltage, such as 48V, is more promising but has a drawback of higher cost. Recently a novel High Frequency Alternating Current (HFAC) power delivery architecture has been proposed for powering the future generation PCs in a reference entitled, "PC Platform Power Distribution System: *Past Application, Today's Challenge and Future Direction*" published in the conference proceedings of International Telecommunications Energy Conference, Copenhagen, Denmark, June 1999 by J. Drobnik, L. Huang, P. Jain and R. Steigerwald. In the HFAC architecture, the system power supply (silver box) generates high frequency and high voltage. The HFAC is then fed to an individual ac-dc converter (ACVRM) and converted into DC of specific parameters at the point of use. The HFAC brings the following advantages:

- Low cost;

- High efficiency;

- Better form factor;

- 3 -

-Better reliability; and

-Active energy steering.

HFAC is conceptually the simplest architecture proposed to date, which deals with all of the power
5 delivery issues defined above. This includes elimination of duplicated power conversions, and active energy steering without additional components.

The key to successful implementation of an HFAC power delivery system resides in the stage that converts
10 high frequency AC to dc. A number of conventional approaches for this conversion are discussed below.

FIGs. 1(a)-(d) show various known topologies for converting high frequency AC to dc.

FIG. 1(a) shows a converter topology that includes
15 a series resonant circuit, a transformer, diode rectifiers, an output capacitor, a switch operating in a linear range, and a second output capacitor. This circuit is a straightforward AC to DC converter but suffers from excessive conduction losses, due to the use
20 of the rectifying diodes and the linear output switch. The conduction losses are greatest at the low output voltages and high output currents.

A buck converter, shown in FIG. 1(b), can replace the linearly controlled output switch in FIG. 1(a). This
25 arrangement reduces the conduction losses to a certain extent, but increases the switching losses. It also increases control complexity and provides a sluggish

- 4 -

transient response due to the presence of an output inductor. A synchronous buck converter operating in a discontinuous mode, shown in FIG. 1(c), can also replace the linearly controlled output switch shown in FIG. 1(a).

5 The arrangements shown in FIGs. 1(a)-(c) improve the transient response but increase conduction losses significantly.

FIG. 1(d) shows a circuit diagram for converting AC to regulated DC that suffers from high conduction
10 losses due to the diode rectifying stage in the output. Besides, this circuit is unsuitable for high frequency operation because it uses thyristorized switches at the input to control the output voltage.

It is clear from the above discussion that the
15 conventional approaches to converting high frequency AC to regulated DC have low conversion efficiency due to high conduction and/or switching losses, sluggish transient response and complex control circuitry.

There therefore exists a need for a simple power
20 and control circuitry with high conversion efficiency and fast transient response.

SUMMARY OF THE INVENTION

It is an object of the invention to provide an AC/DC converter which outputs high current at low
25 voltages from a high frequency AC source.

- 5 -

It is a further object of the invention to provide an AC/DC converter that outputs high current at low voltages with a high efficiency.

It is a further object of the invention to provide
5 an AC/DC converter that regulates the output DC voltage.

It is another object of the invention to provide an AC/DC converter that outputs high current at low voltage but is inexpensive to construct and simple to control.

10 An AC/DC converter in accordance with the invention comprises two resonant components connected in series to form a series resonant circuit; a transformer having a primary winding with a first predetermined number of turns and a center tap to a secondary winding
15 with a second predetermined number of turns, the resonant circuit and the primary winding of the transformer being connected in series, and the center tap of the secondary winding being connected to an output filter and a load; two controlled switches, respectively connected to two
20 ends of the secondary winding, a drain of each of the two controlled switches being respectively connected to opposite ends of the secondary winding, and respective sources of the two controlled switches are interconnected; two anti-parallel diodes respectively
25 connected across the two controlled switches; and two capacitors respectively connected across the two controlled switches.

- 6 -

The two resonant components preferably comprise a first resonant component that includes an inductor and a second resonant component consisting of a capacitor connected in series with the resonant circuit.

5 The output filter is preferably a capacitor connected across the center tap of the transformer and the source of the two controlled switches.

 Depending on a turns-ratio of the transformer at the center tap, there are two distinct modes of operation
10 for the AC/DC converter in accordance with the invention. If the turns ratio of the transformer at the center tap is such that the two anti-parallel diodes are always reversed biased for any given output voltage, the AC/DC converter operates in a first mode of operation. If the
15 turns ratio of the transformer at the center tap is such that the two anti-parallel diodes are always forward biased whenever a primary voltage is either positive or negative, the AC/DC converter operates in a second mode of operation.

20 In the first mode of operation, gating pulses of the two controlled switches are synchronized with a high frequency AC source voltage so that leading edges of the gating pulses are synchronized with a zero crossing of the source voltage. In the second mode of operation,
25 gating pulses of the two controlled switches are synchronized with a high frequency AC source voltage so that the leading edge of the pulse is delayed by a given time duration from a zero crossing of the source voltage.

- 7 -

In an first alternate embodiment of the AC/DC converter in accordance with the invention, the two controlled switches are reversed and a diode is added in series with each controlled switch to block conduction of
5 body diodes of the controlled switches.

In a second alternate embodiment of the AC/DC converter in accordance with the invention, the diodes are respectively replaced by controlled switches.

In a third alternate embodiment of the AC/DC
10 converter in accordance with the invention, a source of each of the two controlled switches is connected to a source of an additional switch, and a drain of the additional switch is connected to a negative pole of a capacitor in the output filter, two additional diodes
15 being used to respectively connect gate signals to the gate and source of the additional switch.

In a fourth alternate embodiment of the AC/DC converter in accordance with the invention, the controlled switches do not have built-in anti-parallel
20 body diodes.

In a fifth alternate embodiment of the AC/DC converter in accordance with the invention, a controlled second stage inductance/capacitance filter at the output reduces ripple in an output voltage.

25 The invention thereby provides an AC/DC converter that is inexpensive to manufacture, highly efficient, has better form factor, is more reliable, and enables active energy steering.

- 8 -

BRIEF DESCRIPTION OF THE DRAWINGS

Further features and advantages of the present invention will become apparent from the following detailed description, taken in combination with the
5 appended drawings, in which:

FIGs. 1(a)-(d) are circuit diagrams of prior art circuits for converting high frequency AC to DC;

FIG. 2 is a circuit diagram of a preferred embodiment of an AC/DC converter in accordance with the
10 invention;

FIG. 2(a) is a circuit diagram of an AC/DC converter topology in which a resonant inductor shown in FIG. 2 is the same as a leakage inductor of the transformer;

15 FIG. 2(b) is a circuit diagram of an AC/DC converter topology in which anti-parallel diodes shown in FIG. 2 are integral parts of the controlled switches;

FIG. 2(c) is a circuit diagram of an AC/DC converter topology in which parallel capacitors shown in
20 FIG. 2 are integral parts of the controlled switches;

FIG. 2(d) is a circuit diagram of an AC/DC converter topology in which more than one controlled switches are connected in parallel;

FIG. 3 is a graph of operating waveforms showing
25 the output performance of the circuit shown in FIG. 2;

- 8a -

FIG. 4 is a graph showing output voltage as a function of time for the circuit shown in FIG. 2;

FIG. 5 is a graph of operating waveforms showing the output performance of the circuit shown in FIG. 2
5 when the circuit is operating in an alternate mode;

FIG. 6 is a graph showing output voltage as a function of output current for the circuit shown in FIG. 2 when the circuit is operating in the alternate mode;

10 FIG. 7 is a graph showing output voltage as a function of step change in output current of the circuit shown in FIG. 2;

- 9 -

FIG. 8 is an alternate embodiment of the invention with unidirectional current flow through synchronous rectifiers of the circuit;

FIG. 9 is an alternate embodiment of the invention with bi-directional current flow through synchronous rectifiers of the circuit;

FIG. 10 is yet a further embodiment of an AC/DC converter circuit in accordance with the invention;

FIG. 11 is another embodiment of an AC/DC converter circuit in accordance with the invention using controlled switches without built-in body diodes; and

FIG. 12 is yet another embodiment of an AC/DC converter in accordance with the invention with a second stage inductance/capacitance output filter.

It will be noted that throughout the appended drawings, like features are identified by like reference numerals.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The invention provides an AC/DC converter for efficiently converting high frequency AC to low voltage, high amperage DC current.

TOPOLOGY OF THE AC/DC CONVERTER

FIG. 2 is a circuit diagram of a preferred embodiment of the AC/DC converter 20 in accordance with the invention. The AC/DC converter 20 includes two

- 10 -

resonant components, a resonant circuit 22 having a capacitor C_r and an inductor L_r . Both of the resonant components are connected in series and form a series resonant circuit. As will be understood by those skilled
5 in the art, the series resonant inductor may be an integral part of a transformer T_m , as shown in FIG. 2(a). As will also be understood by those skilled in the art, a leakage inductor (not illustrated) of the transformer T_m may also be an integral part of the resonant circuit.

10 The transformer T_m has a primary winding with N_1 turns and a center tap 24 to a secondary winding with N_2 turns. The resonant circuit 22 and the primary winding N_1 of the transformer T_m are connected in series. The center tap 24 of the secondary winding is connected to an output
15 filter 26 and a load 28 while the other two ends 30, 32 of the secondary winding are connected to two controlled switches Q_1 and Q_2 , respectively. The two controlled switches are preferably MOSFETS or CHFETS, both of which are well known in the art.

20 A drain of each of the two controlled switches Q_1 and Q_2 , is connected to opposite ends of the secondary winding, while each of the sources of switches Q_1 and Q_2 are interconnected. Two anti-parallel diodes D_1 and D_2 are respectively connected across Q_1 and Q_2 . As an
25 alternative, the anti-parallel diodes across the controlled switches may be integral parts of the controlled switches, as shown in FIG. 2(b). Two capacitors C_1 and C_2 are respectively connected across Q_1 and Q_2 . It will also be understood that the capacitors C_1
30 and C_2 connected across the controlled switches may

- 11 -

alternatively be integral parts of the controlled switches Q_1 and Q_2 , as shown in FIG. 2(c). As an alternative, the controlled switches Q_1 and Q_2 do not include integral body diodes. As a further alternative, the controlled switches Q_1 and Q_2 include integral capacitors.

As shown in FIG. 2(d), in a further embodiment each of the two controlled switches include two or more switches connected in parallel.

10 The output filter 26 is a capacitor C_0 . The output filter capacitor is connected across the center tap 24 of the transformer T_m and the source of Q_1 & Q_2 .

OPERATION OF THE AC/DC CONVERTER

Depending on the turns-ratio (N_1/N_2) of the transformer T_m there are two distinct modes of operation for the converter circuit of FIG. 2.

In the first mode of operation (Mode 1), the diodes D_1 and D_2 are always reversed biased.

20 In the second mode of operation (Mode 2), the diodes D_1 and D_2 conduct whenever there is positive or a negative voltage at the primary winding of the transformer T_m .

Mode 1:

25 In this mode of operation the turns ratio of the transformer is such that both the diodes D_1 and D_2 are always reversed biased for any given output voltage. This mode of operation is enabled whenever the anode

- 11a -

voltage of the diode is lower than the output voltage V_0 minus the forward voltage drop of the diode.

FIG. 3 shows the operating waveforms of the converter of FIG. 2 operating in Mode 1. The gating

- 12 -

pulses V_{gs1} and V_{gs2} are synchronized with the high frequency AC source voltage V_s in such a way that a leading edge of the gate pulse is synchronized with the zero crossing of V_s . The source voltage V_s is a high
 5 frequency AC input voltage and may be a sinusoidal waveform, a trapezoidal waveform, a square waveform, a quasi-square waveform, or a unidirectional voltage waveform.

As shown in FIG. 3, at a position of the cycle
 10 where $t = 0$, a gating pulse (V_{gs1}) with duration t_{on} is applied at the gate of switch Q_1 . Application of this gate pulse causes a positive resonant current i_r to flow through the resonant circuit. The series inductor L_r and the series capacitor C_r determine the resonant frequency
 15 of the circuit. The resonant frequency is given by:

$$\omega_r = 1 / \sqrt{(L_r C_r)} \text{ rad/s.}$$

The values of L_r and C_r are selected in such a way that their resonant frequency is close to the frequency of high frequency AC source voltage V_s . The positive
 20 resonant current i_r also flows to the output load through the conduction of switch Q_1 . The resonant current i_{r1} flowing through Q_1 is equal to: $i_r (N_1 / N_2)$. The positive resonant current i_r continues to flow until $t = t_{on}$ at which instant the gating pulse V_{gs1} from the gate of
 25 switch Q_1 has been removed. At this point, switch Q_1 turns-off and a new resonant circuit which includes L_r , C_r and C_1 is formed together with the transformer T_m and output filter C_0 . The reflected value of C_1 at the primary side is:

- 13 -

$$C_{1p} = C_1 \times (N_2 / N_1)^2$$

and is very small compared to the value of series resonant capacitor C_r . A resonant current now flows through the series resonant circuit whose resonant frequency is now primarily determined by the resonant inductor L_r and reflected capacitor C_{1p} , and is given by:

$$\omega'_r = 1 / \sqrt{L_r C_{1p}}.$$

As the value of C_{1p} is very small compared to C_r , the resonant frequency ω'_r is very high compared to the resonant frequency ω_r . The substantially higher resonant frequency resonates the current i_r at a much higher frequency and brings it to zero very quickly (at $t = t_2$). At $t = t_2$, the resonant current i_r ceases to flow as both the diodes D_1 and D_2 are reversed biased and neither of the controlled switches Q_1 , Q_2 has a gating pulse.

At the position of the cycle where $t = T/2$, a gating pulse (V_{gs2}) with duration t_{on} is applied at the gate of switch Q_2 . Application of this gate pulse causes a negative resonant current i_r to flow through the resonant circuit. The resonant frequency of the resonant circuit is primarily determined by the series inductor L_r and the series capacitor C_r , and is given by:

$$\omega_r = 1 / \sqrt{L_r C_r} \text{ rad/s.}$$

The negative resonant current i_r also flows to the output load through the conduction of switch Q_2 . The resonant current i_{r2} flowing through Q_2 is equal to: $i_r (N_1 / N_2)$. The conduction of Q_2 changes the direction of

- 14 -

the flow of current from a negative to a positive direction at the output. The negative resonant current i_r continues to flow until $t = (T/2 + t_{on})$ at which instant the gating pulse V_{gs2} from the gate of switch Q_2 is removed. At this point, switch Q_2 turns-off and a new resonant circuit that includes L_r , C_r and C_1 is formed together with the transformer T_m and output filter C_0 . The reflected value of C_1 at the primary side is:

$$C_{1p} = C_1 \times (N_2 / N_1)^2$$

This is very small compared to the value of series resonant capacitor C_r . A resonant current now flows through the series resonant circuit whose resonant frequency is now primarily determined by the resonant inductor L_r and reflected capacitor C_{1p} , and is given by:

$$\omega'_r = 1 / \sqrt{L_r C_{1p}} .$$

As the value of C_{1p} is very small compared to C_r , the resonant frequency ω'_r is very high compared to the resonant frequency ω_r . The substantially higher resonant frequency resonates the current i_r at a much higher frequency and brings it to zero very quickly (at $t = t_3$). At $t = t_3$, the resonant current i_r ceases to flow as both the diodes D_1 and D_2 are reversed biased and neither of the controlled switch has a gating pulse.

The above description reveals that the resonant current i_r is rectified by the conduction of switches Q_1 and Q_2 at the output, which is filtered by the capacitor C_0 to provide output voltage with a small

- 15 -

ripple. Also, most of the energy from the input to the output flows during the on-time of switches Q_1 and Q_2 . Therefore, controlling the on-time of the switches controls the output voltage of the converter.

5 FIG. 4 shows the output voltage of the converter at the rated load as a function of the on-time (t_{on}).

Mode 2:

10 In this mode of operation the turns-ratio (N_1/N_2) of the transformer is such that both the diodes D_1 and D_2 are respectively forward biased whenever the primary voltage is either positive or negative. This mode of operation occurs whenever the anode voltage of the diode is greater than the output voltage V_0 minus the forward drop of the diode.

15 FIG. 5 shows the operating waveforms of the converter. The gating pulses V_{gs1} and V_{gs2} are synchronized with high frequency AC source voltage V_s in such a way that the leading edge of the pulse is delayed by a time duration equal to t_d from the zero crossing of V_s . This is used to obtain near zero voltage switching of the switches Q_1 and Q_2 . As noted above with respect to the description of Mode 1, the source voltage V_s may be a sinusoidal waveform, a trapezoidal waveform, a square waveform, a quasi-square waveform, or a unidirectional
20 voltage waveform.
25

As shown in FIG. 5, prior to a position in the cycle where $t = 0$, the capacitor C_1 across Q_1 has been charged at a voltage level sufficient to reverse bias the

- 16 -

diode D_1 . At the position of the cycle where $t = 0$, a resonant circuit is formed that includes L_r , C_r and C_1 . Positive source voltage V_s forces the positive resonant current i_r to flow through the resonant circuit and
5 discharge the capacitor C_1 .

Whenever, the capacitor voltage falls to a level equal to the forward voltage drop of D_1 , diode D_1 starts to conduct and carries the positive resonant current i_r through the primary winding N_1 and i_{r1} through the
10 secondary winding N_2 of T_m . At $t = t_a$, the positive gate to source voltage V_{gs1} turns on the switch Q_1 and a positive resonant current now flows through Q_1 . At $t = t_a + t_{on}$, the positive gate to source voltage V_{gs1} is removed from the gate of switch Q_1 , which turns-off Q_1 . The
15 resonant current is now diverted from Q_1 to C_1 which begins charging C_1 . Whenever the voltage across C_1 reaches a level of the forward voltage drop of D_1 , D_1 starts to conduct and carries the resonant current until the resonant current becomes zero, which turns off the
20 diode D_1 .

Prior to a position in the cycle where $t = T/2$, the capacitor C_2 across Q_2 has been charged to a voltage level sufficient to reverse bias the diode D_2 . At the position of the cycle where $t = T/2$, a resonant circuit
25 is formed that includes L_r , C_r and C_2 . Negative source voltage V_s forces the negative resonant current i_r to flow through the resonant circuit and discharges the capacitor C_2 .

- 17 -

Whenever the capacitor voltage falls to a level equal to the forward voltage drop of diode D_2 , diode D_2 starts to conduct and carries the resonant current i_r through the primary winding N_1 of T_m and i_{r2} through the secondary). At $t = (T/2 + t_d)$, the positive gate to source voltage V_{gs2} turns on the switch Q_2 and the resonant current now flows through Q_2 . At $t = (T/2 + t_d + t_{on})$, the positive gate to source voltage V_{gs2} is removed from the gate of switch Q_2 which turns-off Q_2 . The resonant current now diverted from Q_2 to C_2 which starts charging C_2 . Whenever the voltage across C_2 reaches to the level of forward voltage drop of D_2 , D_2 starts to conduct and carries the resonant current until the resonant current becomes zero to turn-off the diode D_2 .

It can be seen from the above description that the power from the input to the output flows through the anti-parallel diodes D_1 and D_2 for part of the cycle and through the switches Q_1 and Q_2 for remaining part of the cycle. The diodes D_1 and D_2 have a higher voltage drop across them in comparison to the voltage drop across Q_1 and Q_2 when they are conducting. This means that the output voltage of the converter can be controlled, by controlling the conduction of the switches Q_1, Q_2 and/or diodes D_1, D_2 .

The output voltage of the converter is given by:

$$V_o = (V_T - V_D) t_D / T + (V_T - I_o R_{on}) t_{on} / T \quad (1)$$

Where:

V_T = Transformer secondary voltage;

- 18 -

V_D = Forward voltage drop of the anti-parallel diodes;

I_o = Output current;

R_{on} = On resistance of the switch;

5 t_D = Anti-parallel diode conduction time;

t_{on} = Switch conduction time; and

T = Period of the supply frequency.

FIG. 6 shows the output voltage of the converter shown in FIG. 2 when operating in mode 2. Graph A shows
 10 the output voltage of the converter when both the switches Q1,Q2 are completely switched on during the half-cycle of the input voltage V_s . This graph illustrates that the output voltage increases as the output current decreases. Graph B shows that the output
 15 voltage of the converter when only the diodes D1,D2 are conducting. The output voltage of the converter, when only the diodes D1,D2 are conducting is much lower than when the switches Q1,Q2 are fully on during a half switching period. Therefore, if the switches can be kept
 20 on for a portion of the cycle and the diodes for the remaining portion of the cycle, the output voltage can be kept constant as shown by graphs C and D. The region between graphs C and D defines the range of control for which the output voltage can be controlled, and can be
 25 kept constant.

OUTPUT OF THE CONVERTER

The converter shown in FIG. 2 was constructed using component values as shown in Table 1 to convert 30V RMS, 500 kHz AC voltage to 2.0V output at 20A. The

- 19 -

converter demonstrated an overall efficiency of greater than 80% at the rated load.

Table 1

<u>Resonant capacitor</u>	<u>22 nanoFarads</u>
<u>Resonant inductor</u>	<u>4.6 micro Henery</u>
<u>Primary number of turns</u>	<u>14</u>
<u>Secondary number of turns</u>	<u>1</u>
<u>Controlled switch Q1</u>	<u>IRL 3803 two in parallel</u>
<u>Controlled switch Q2</u>	<u>IRL 3803 two in parallel</u>
<u>Output filter capacitance</u>	<u>600 micro Farads</u>

5 FIG. 7 shows the output voltage of the converter for a 2 Amperes (2A) to 20A and 20A to 2A step load ($di/dt = 500A/\mu s$). This figure shows that there is a relatively constant, steady state output voltage for both 2A and 20A load currents. Also, the under-shoot and
10 over-shoot in the output voltage are less than 5%, even though there is a significant step change in the output current.

ALTERNATE EMBODIMENTS OF THE AC/DC CONVERTER TOPOLOGY

15 The converter circuit of FIG. 2 is preferred for a low output voltage (about 5V or less). However, at higher output voltages the range of the output voltage control becomes more narrow and it becomes difficult to maintain constant output voltage for varying output load.

20 FIG. 8 shows another embodiment of an AC/DC converter in accordance with the invention, in which both the switches Q_1 and Q_2 have been reversed and a diode D_{B1}, D_{B2} has been added in series with each switch Q_1

- 20 -

and Q2. This blocks the conduction of the body diodes D of switches Q1, Q2. The operation of the converter of FIG. 8 is essentially the same as the operation of the converter circuit shown FIG. 2 when it operates in
5 Mode 1.

The series diodes D_{B1} and D_{B2} cause higher conduction loss and can be replaced by control switches Q_{B1} and Q_{B2} , respectively as shown in FIG. 9. The operation of the converter of FIG. 9 is essentially the
10 same as the operation of the converter circuit shown in FIG. 2, operating in Mode 1.

FIG. 10 shows yet another embodiment of AC/DC converter in accordance with the invention, in which the source of Q1 and Q2 are connected to the source of an
15 additional switch Q3. The drain of Q3 is connected to the negative pole of output capacitor C_o . Two additional diodes D_{g1} and D_{g2} are used to connect the gate signals V_{gs1} and V_{gs2} to the gate and source of the switch Q3, respectively. The operation of the AC/DC converter
20 circuit shown in FIG. 10 is similar to the operation of the converter circuit shown FIG. 2 when it operates in Mode 1.

FIG. 11 shows yet another embodiment of the AC/DC converter in accordance with the invention in which the
25 controlled switches do not have built-in anti-parallel body diodes. The operation of this converter is same as the operation of the AC/DC converter circuit shown in FIG. 2 when operating in Mode 1.

- 21 -

FIG. 12 shows a further AC/DC converter in accordance with the invention in which a second stage LC filter 40 is used at the output to further reduce the ripple in the output voltage. The operation of the circuit is essentially the same as the operation of the AC/DC converter shown in FIG. 2 operating in either Mode 1 or Mode 2.

The embodiments of the invention described above are intended to be exemplary only. The scope of the invention is therefore intended to be limited solely by the scope of the appended claims.

- 22 -

**THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**

1. An AC/DC converter, comprising:
 - a) resonant components connected in series to form a series resonant circuit;
 - b) a transformer having a primary winding with a first predetermined number of turns and a center tap to a secondary winding with a second predetermined number of turns, the resonant circuit and the primary winding of the transformer being connected in series, and the center tap of the secondary winding being connected to an output filter and a load;
 - c) two controlled switches regulated to control an output voltage of the AC/DC converter, the two controlled switches being respectively connected to two ends of the secondary winding, a drain of each of the two controlled switches being respectively connected to opposite ends of the secondary winding, and respective sources of the two controlled switches being interconnected; and
 - d) means respectively connected across the two controlled switches for providing a current path around the two controlled switches.
2. An AC/DC converter as claimed in claim 1 wherein the means connected across the two controlled

- 23 -

switches comprises an anti-parallel diode and a capacitor respectively connected across each of the two controlled switches.

3. An AC/DC converter as claimed in claim 1 wherein the series resonant circuit comprises two resonant components and a first of the resonant components comprises an inductor.
4. An AC/DC converter as claimed in claim 3 wherein a second resonant component comprises a capacitor connected in series with the inductor.
5. An AC/DC converter as claimed in claim 3 wherein the inductor is an integral part of the output transformer.
6. An AC/DC converter as claimed in claim 1 wherein a leakage inductor of the transformer is an integral part of the resonant circuit.
7. An AC/DC converter as claimed in claim 2 wherein the anti-parallel diodes connected across the controlled switches are integral parts of the controlled switches.
8. An AC/DC converter as claimed in claim 2 wherein the capacitors connected across the controlled switches are integral parts of the controlled switches.

- 24 -

9. An AC/DC converter as claimed in claim 1 wherein each controlled switch comprises several controlled switches connected in parallel.
10. An AC/DC converter as claimed in claim 1 wherein the output filter is a capacitor.
11. An AC/DC converter as claimed in claim 1 wherein the output filter capacitor is connected across the center tap of the transformer and the sources of the two controlled switches.
12. An AC/DC converter as claimed in claim 1 wherein depending on a turns-ratio of the transformer at the center tap, there are two distinct modes of operation for the AC/DC converter.
13. An AC/DC converter as claimed in claim 2 wherein the turns ratio of the transformer at the center tap is such that the two anti-parallel diodes are always reversed biased for any given output voltage.
14. An AC/DC converter as claimed in claim 2 wherein the turns ratio of the transformer at the center tap is such that the two anti-parallel diodes are always forward biased whenever a primary voltage is either positive or negative.
15. An AC/DC converter as claimed in claim 13 wherein gating pulses of the two controlled switches are

- 25 -

synchronized with a high frequency AC source voltage so that leading edges of the gating pulses are synchronized with a zero crossing of the source voltage.

16. An AC/DC converter as claimed in claim 14 wherein gating pulses of the two controlled switches are synchronized with a high frequency AC source voltage so that the leading edge of the pulse is delayed by a given time duration from a zero crossing of the source voltage.
17. An AC/DC converter as claimed in claim 1 wherein the two controlled switches are reversed and a diode is added in series with each controlled switch to block conduction of body diodes of the controlled switches.
18. An AC/DC converter as claimed in claim 17 wherein the two controlled switches are reversed, and another controlled switch is added in series with each of the two controlled switches to block conduction of body diodes of the respective two controlled switches.
19. An AC/DC converter as claimed in claim 1 wherein a source of each of the two controlled switches is connected to a source of an additional switch, and a drain of the additional switch is connected to a negative pole of a capacitor in the output filter, and two additional diodes respectively connect gate

- 26 -

signals to the gate and source of the additional switch.

20. An AC/DC converter as claimed in claim 1 wherein the controlled switches do not include integral anti-parallel body diodes.
21. An AC/DC converter as claimed in claim 20 wherein the controlled switches include integral capacitors.
22. An AC/DC converter as claimed in claim 1 wherein a second stage inductance/capacitance filter at the output reduces ripple in an output voltage.
23. An AC/DC converter as claimed in claim 1 wherein the controlled switches are the MOSFETs.
24. An AC/DC converter as claimed in claim 1 wherein the controlled switches are the CHFETs.
25. An AC/DC converter as claimed in claim 1 wherein the AC input voltage is a sinusoidal waveform.
26. An AC/DC converter as claimed in claim 1 wherein the AC input voltage is a trapezoidal waveform.
27. An AC/DC converter as claimed in claim 1 wherein the AC input voltage is a square waveform.
28. An AC/DC converter as claimed in claim 1 wherein the AC input voltage is a quasi-square waveform.

- 27 -

29. An AC/DC converter as claimed in claim 1 wherein the AC input voltage is a unidirectional voltage waveform.
30. A method of converting high frequency alternating current (AC) to high amperage, low voltage direct current (DC), comprising the steps of:
- a) supplying high frequency AC input voltage to a resonance circuit having a resonance frequency approximate the frequency of the input voltage, the resonance circuit being connected to a transformer having a primary winding with a first number of turns and a center tap to a secondary winding with a second, fewer number of turns;
 - b) rectifying a current output by the transformer by controlling at least two switches having respective drains connected to opposite ends of the secondary winding and interconnected sources, and means connected across the switches to provide a current path around the switches;
 - c) regulating an output voltage of the AC/DC converter by controlling an on-time of the at least two switches; and
 - d) filtering the output current using an output filter connected across the center tap of the transformer and the sources of the at least two switches to provide an output voltage with a small current ripple.

- 28 -

31. A method as claimed in claim 30 wherein the means connected across the switches to provide a current path around the switches comprises an anti-parallel diode and a capacitor connected across each of the at least two switches.
32. A method as claimed in claim 31 wherein the number of second turns in the secondary winding is such that the anti-parallel diodes are always back biased, and the output voltage of the converter is controlled by controlling an on-time of the at least two switches.
33. A method as claimed in claim 32 wherein gating pulses of the at least two switches are synchronized with a high frequency AC source voltage so that leading edges of the gating pulses are synchronized with a zero crossing of the source voltage.
34. A method as claimed in claim 31 wherein the number of second turns in the secondary winding is such that the anti-parallel diodes are always forward biased, and the output voltage of the converter is controlled by controlling conduction through the at least two switches and the anti-parallel diodes.
35. A method as claimed in claim 34 wherein gating pulses of the two controlled switches are synchronized with a high frequency AC source voltage so that the leading edge of the pulse is

- 29 -

delayed by a given time duration from a zero crossing of the source voltage.

36. A method as claimed in claim 31 wherein the resonance circuit comprises a series connected inductance and a capacitor to form a series resonant circuit.
37. A method as claimed in claim 30 wherein the output filter comprises a capacitor connected across the center tap of the transformer and the sources of the at least two switches.
38. A method as claimed in claim 30 wherein the at least two switches are the MOSFETs.
39. A method as claimed in claim 30 wherein the at least two switches are the CHFETs.
40. A method as claimed in claim 30 wherein the AC input voltage is a sinusoidal waveform.
41. A method as claimed in claim 30 wherein the AC input voltage is a trapezoidal waveform.
42. A method as claimed in claim 30 wherein the AC input voltage is a square waveform.
43. A method as claimed in claim 30 wherein the AC input voltage is a quasi-square waveform.

- 30 -

44. A method as claimed in claim 30 wherein the AC input voltage is a unidirectional voltage waveform.

45. A method as claimed in claim 31 wherein the output voltage V_o of the converter is characterized by:

$$V_o = (V_T - V_D) t_D / T + (V_T - I_o R_{on}) t_{on} / T$$

Where:

V_T = Transformer secondary winding output voltage;

V_D = Forward voltage drop of each of the anti-parallel diodes;

I_o = Output current;

R_{on} = On resistance of each of the at least two switches;

t_D = Conduction time of the respective anti-parallel diodes;

t_{on} = Conduction time of the respective at least two switches; and

T = Period of the AC input voltage frequency.

Ogilvy Renault
Suite 1600
1981 McGill College Avenue
Montreal, Quebec, Canada
H3A 2Y3

Patent Agents for the Applicant.

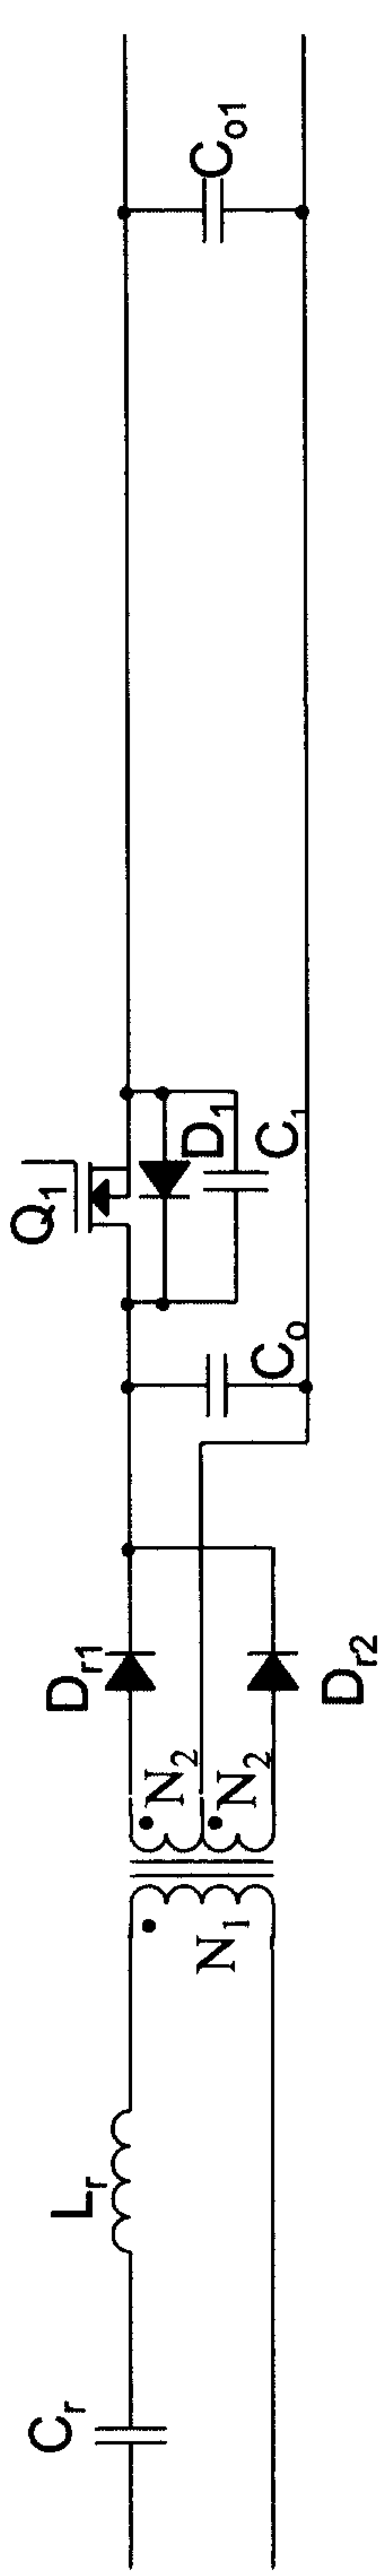


FIG. 1(a) Prior Art

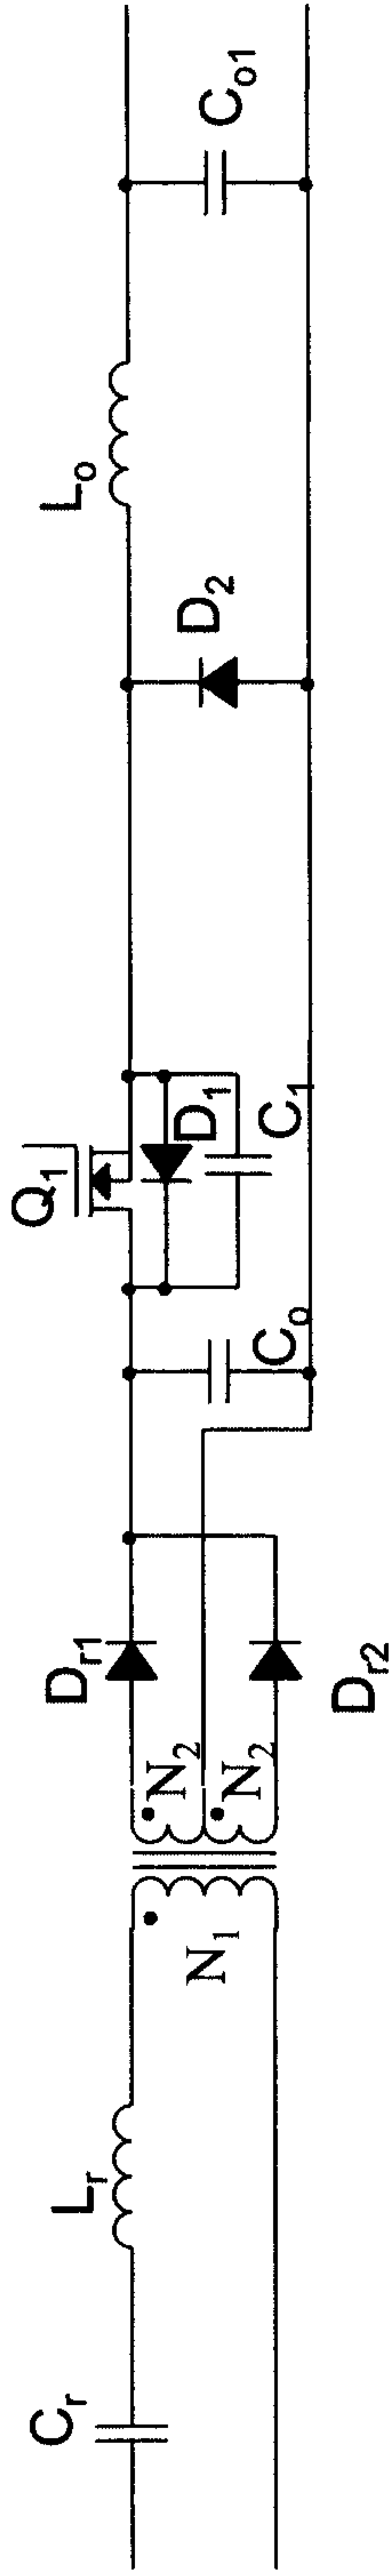


FIG. 1(b) Prior Art

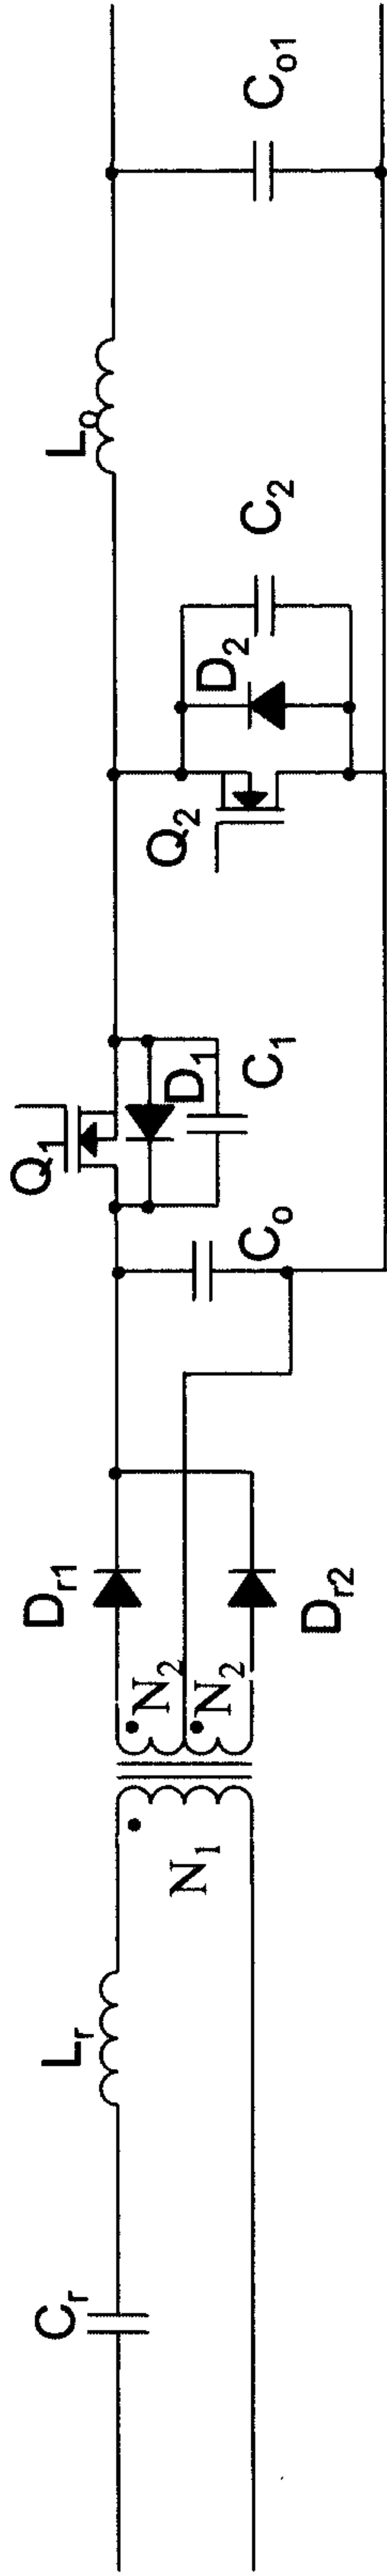


FIG. 1(c) Prior Art

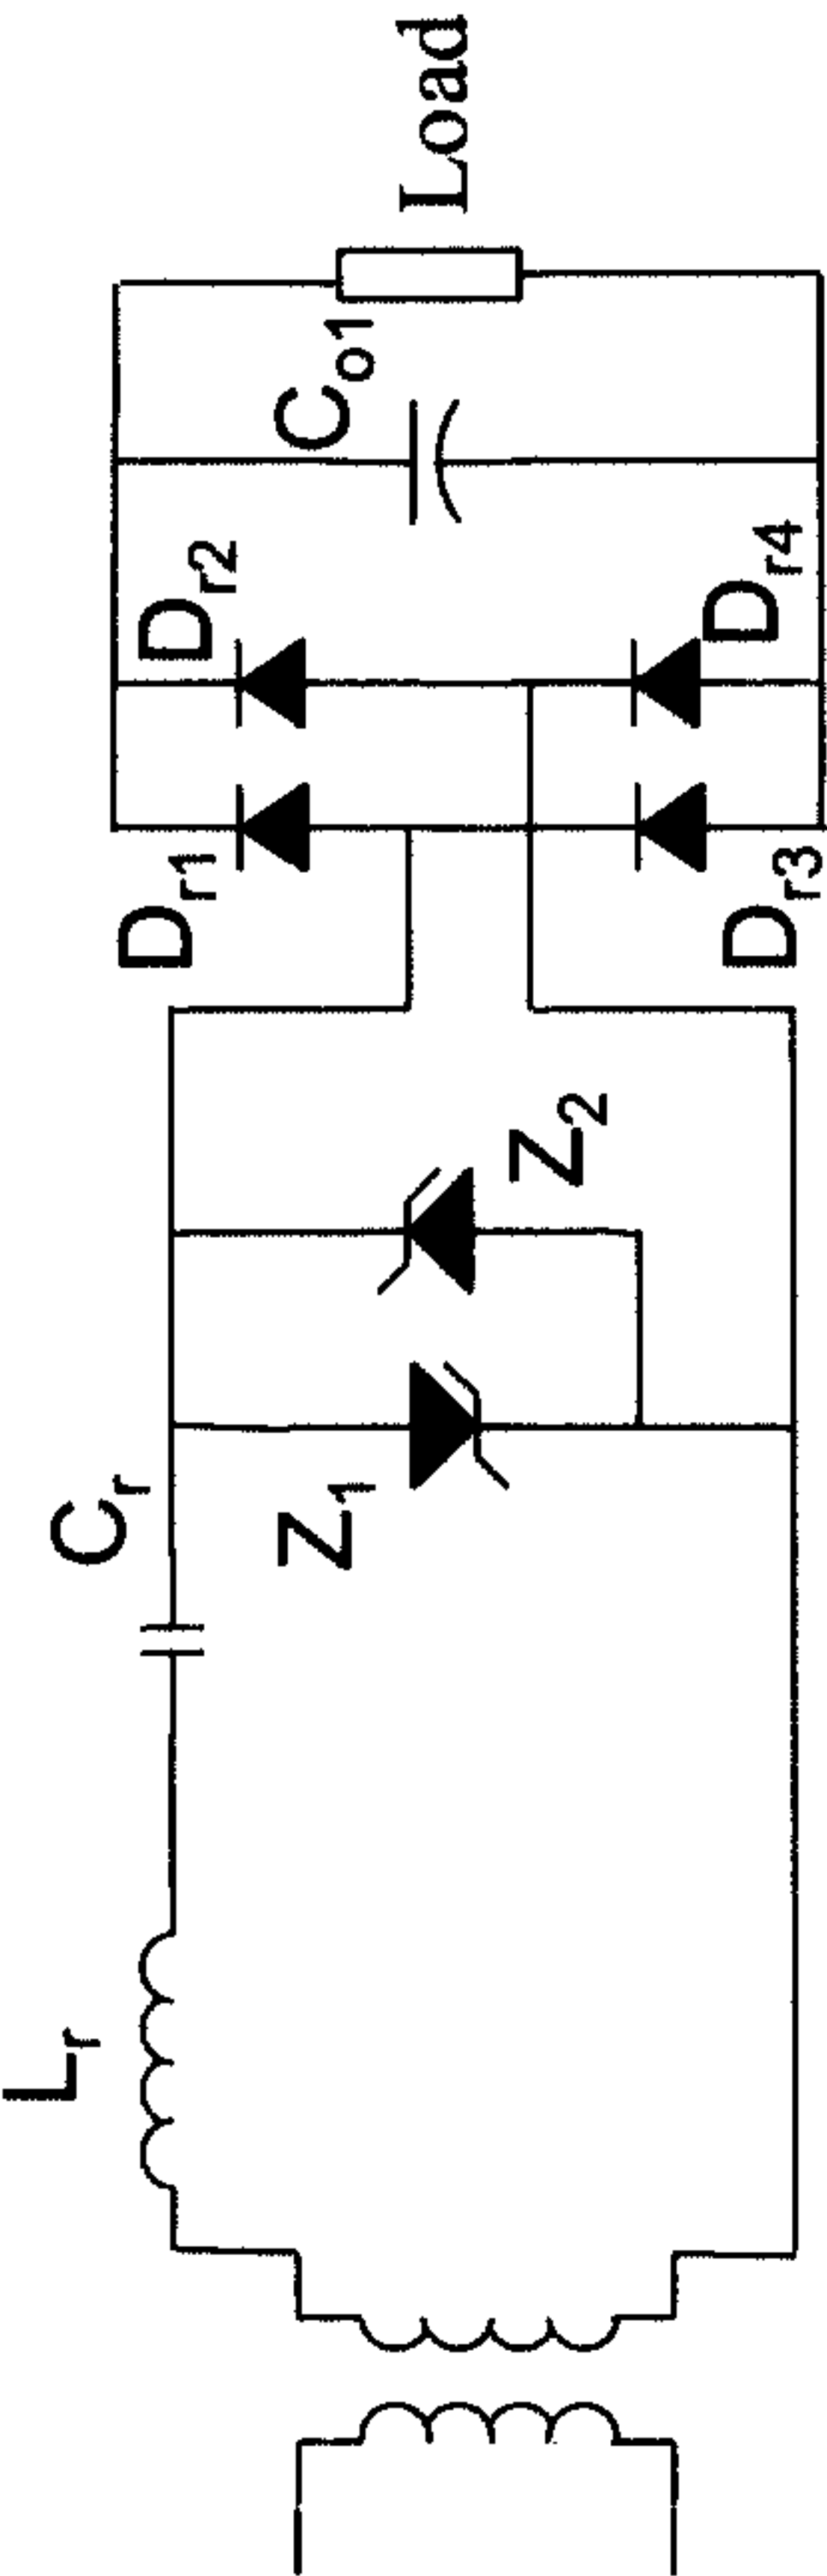


FIG. 1(d) Prior Art

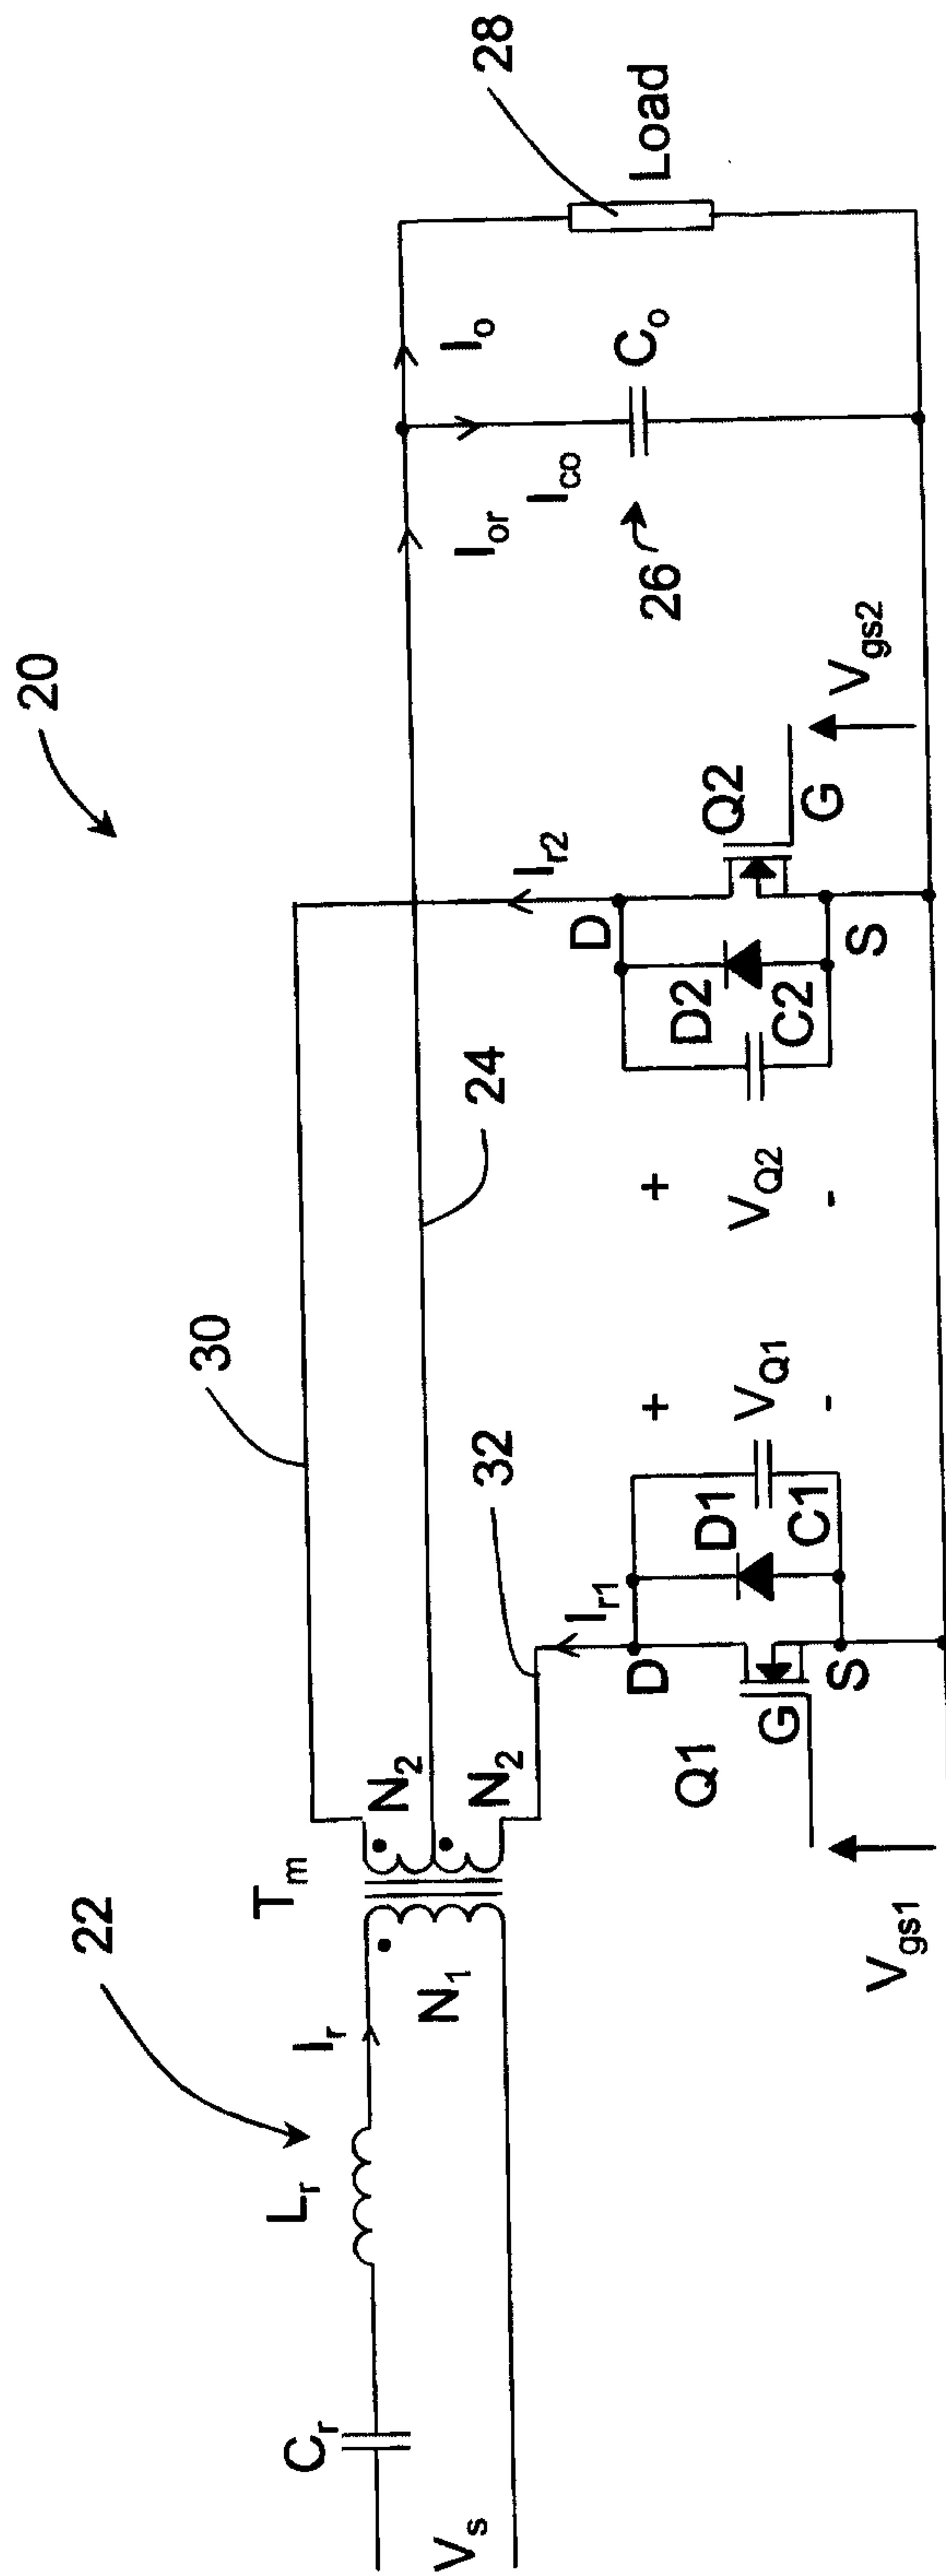


FIG.2: AC/DC converter topology

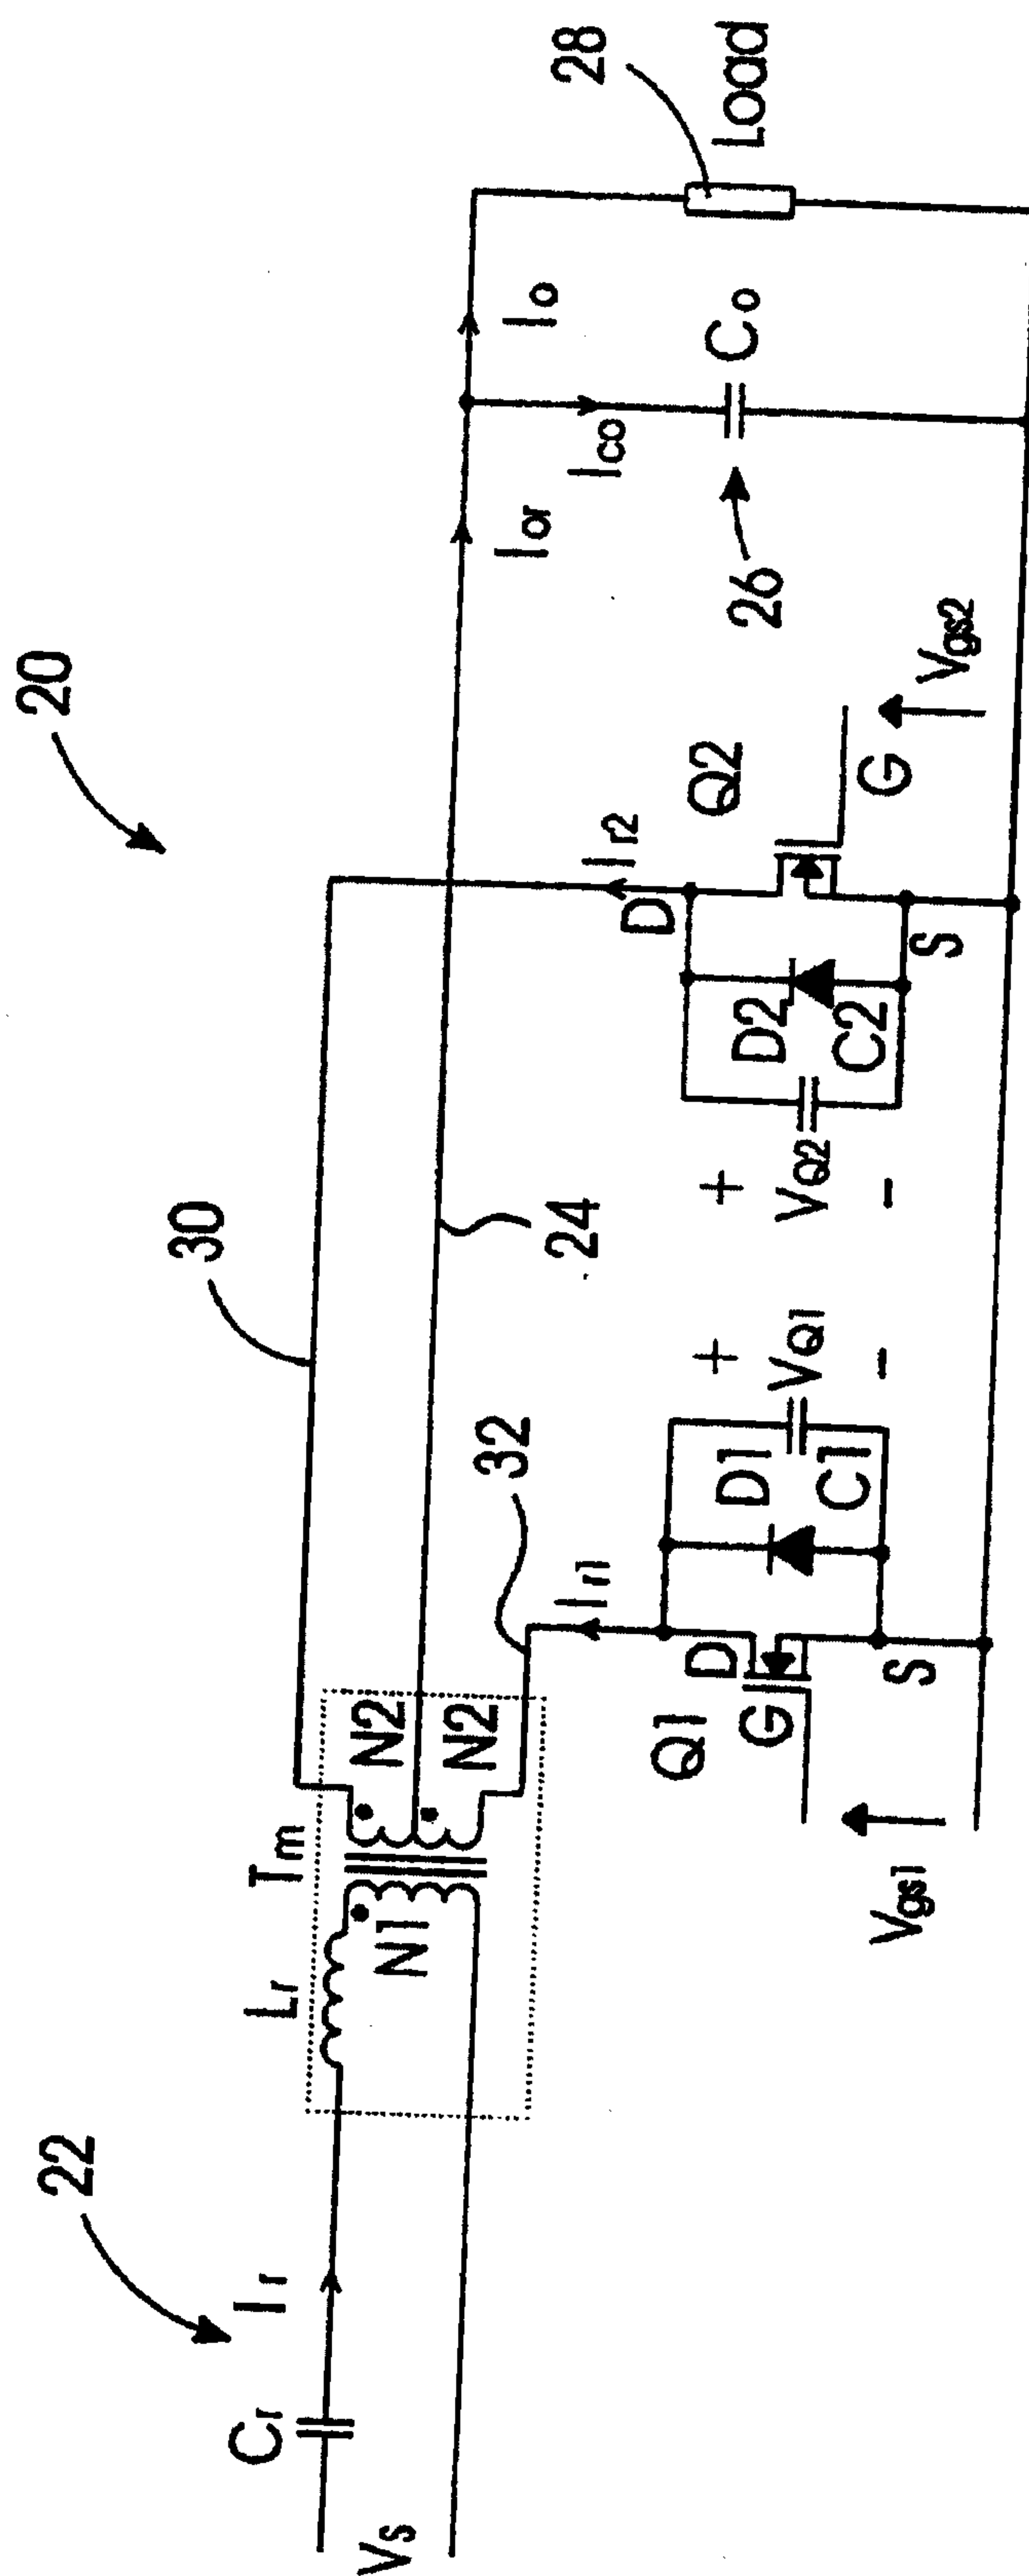


FIG. 2(a): AC/DC converter topology in which resonant inductor is same as the leakage inductance of the transformer

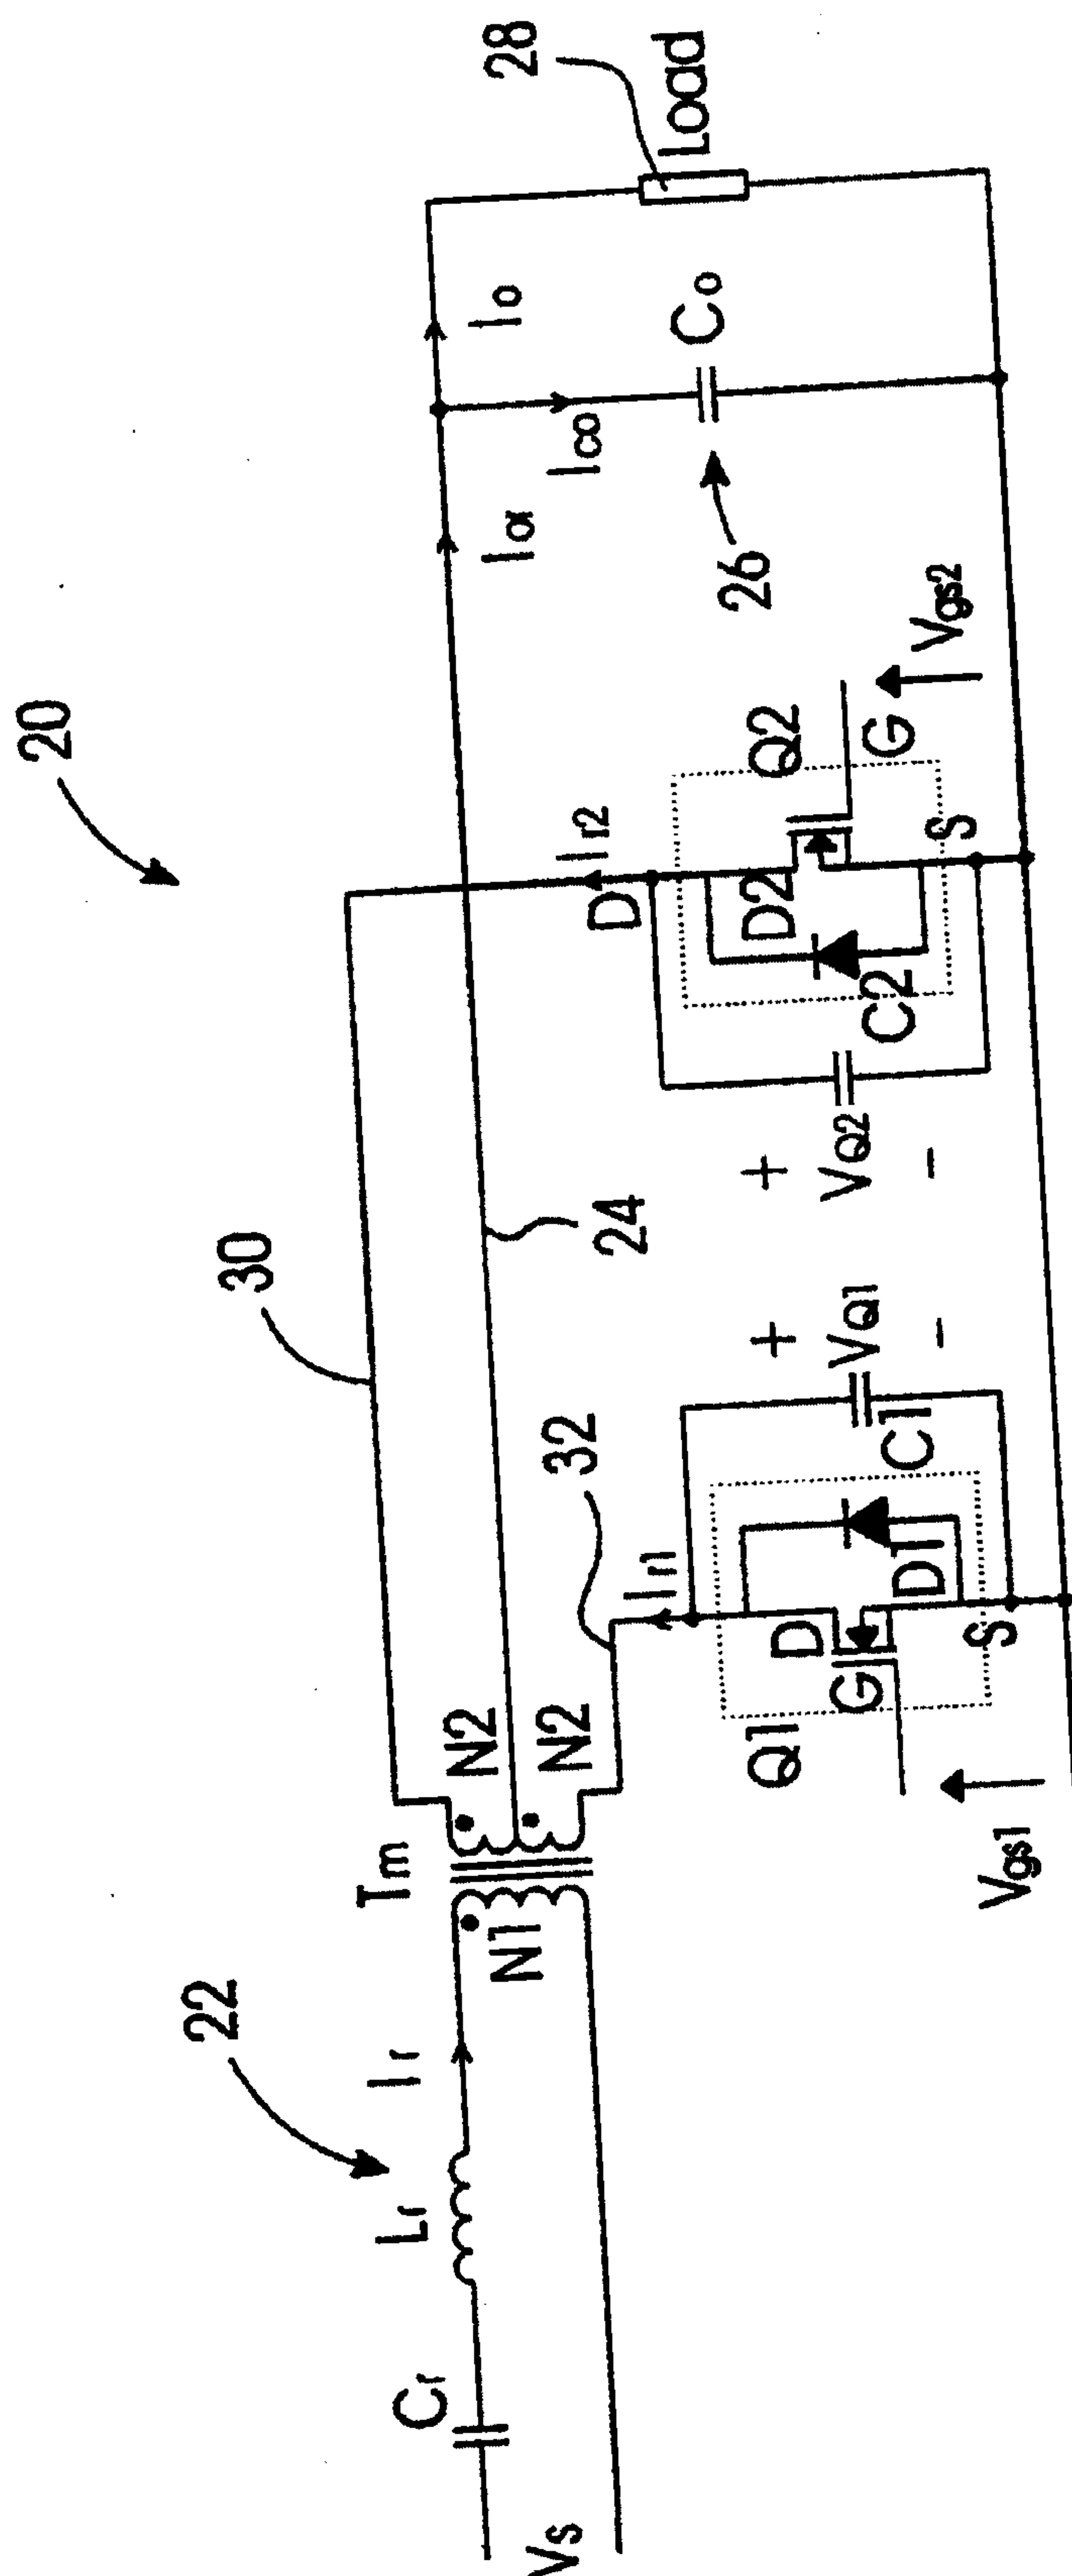


FIG. 2(b): AC/DC converter topology in which the anti-parallel diodes are the integral parts of the controlled switches.

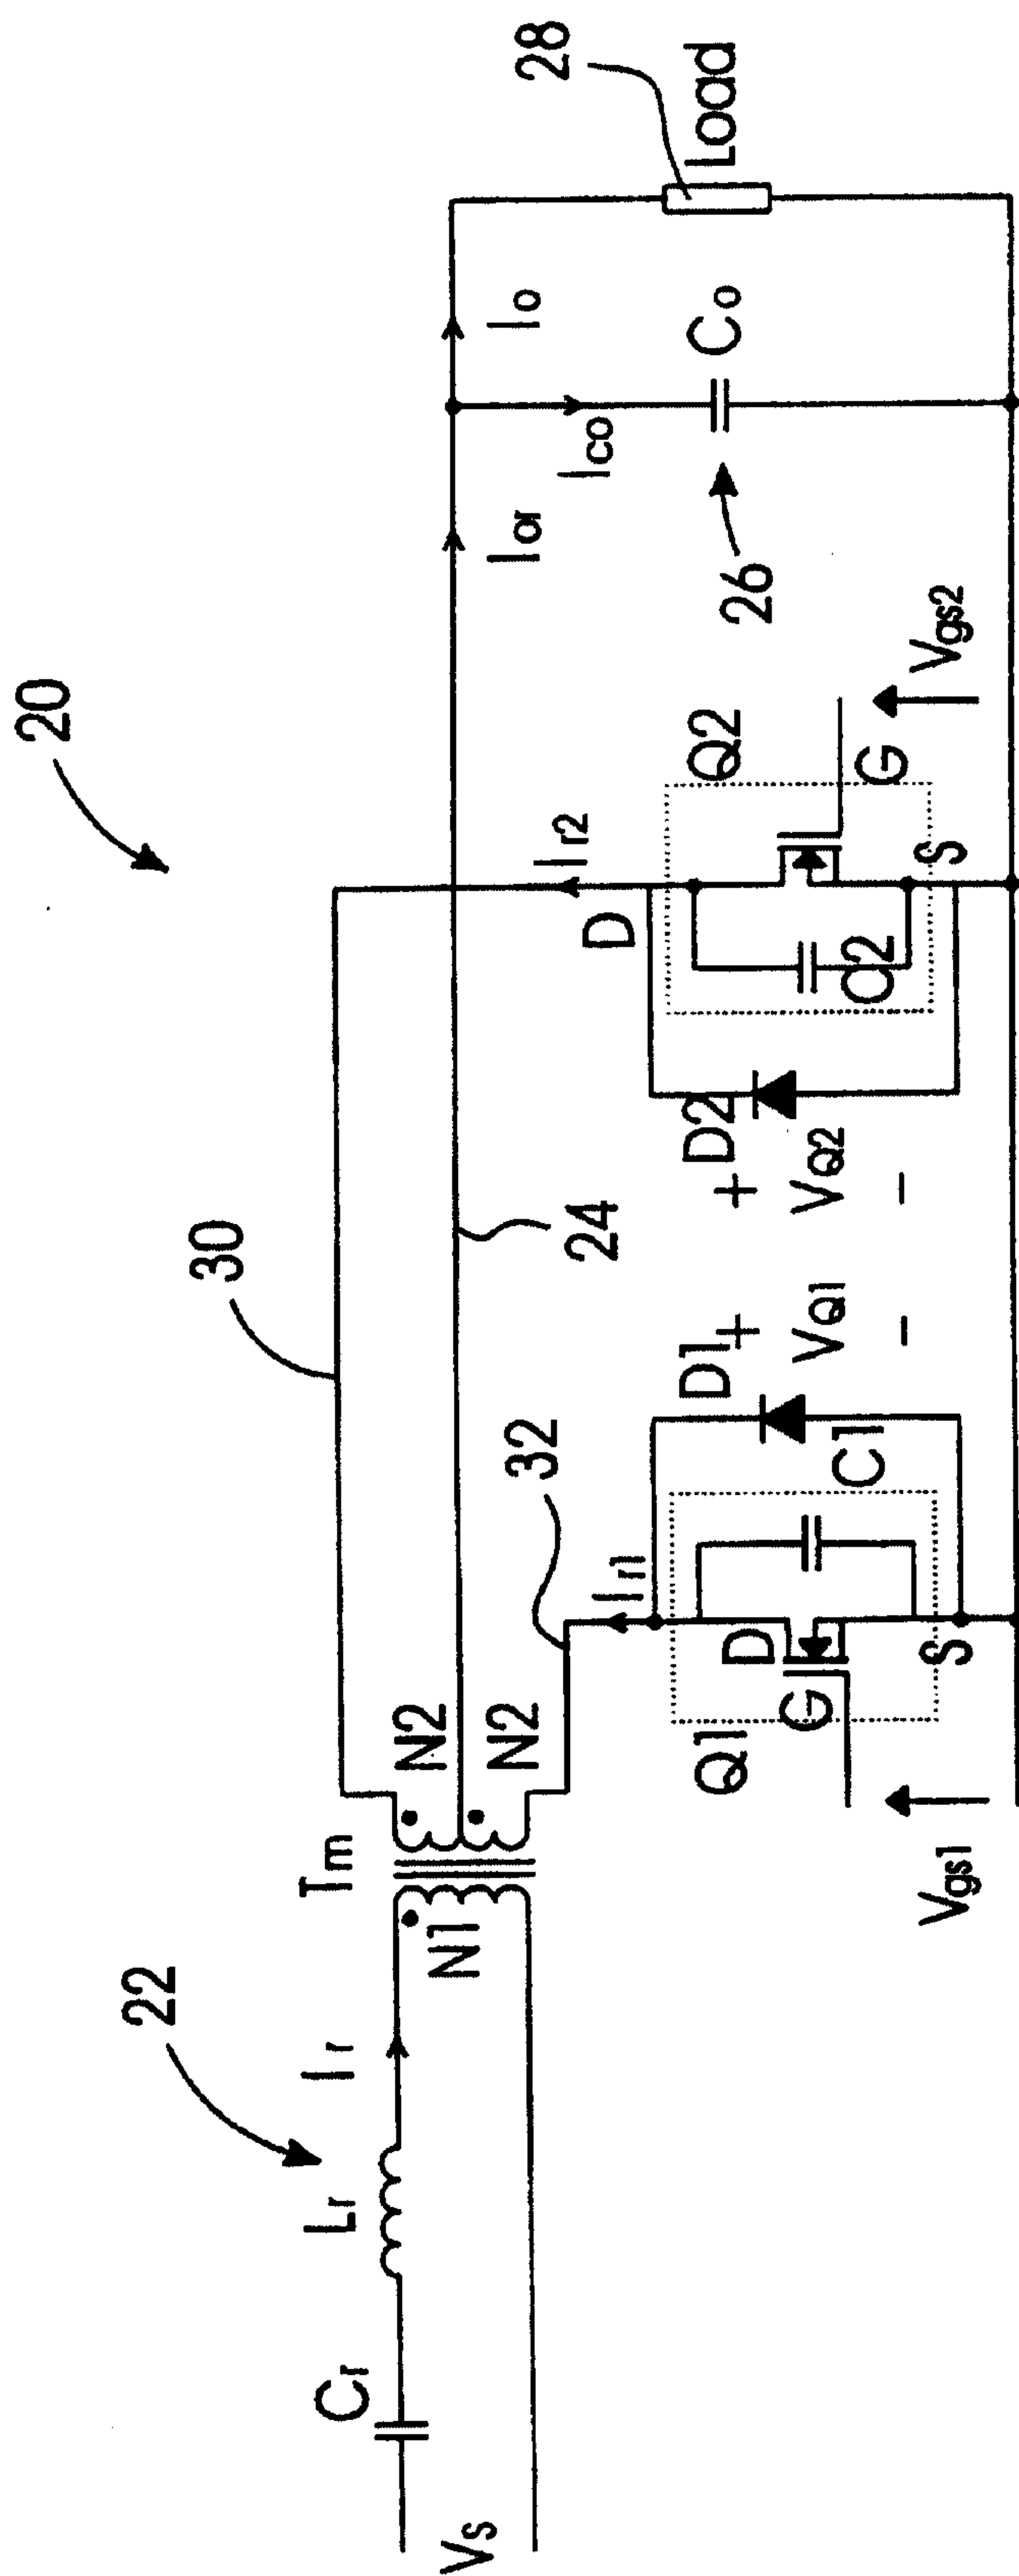


FIG. 2(c): AC/DC converter topology in which the parallel capacitors are the integral parts of the controlled switches.

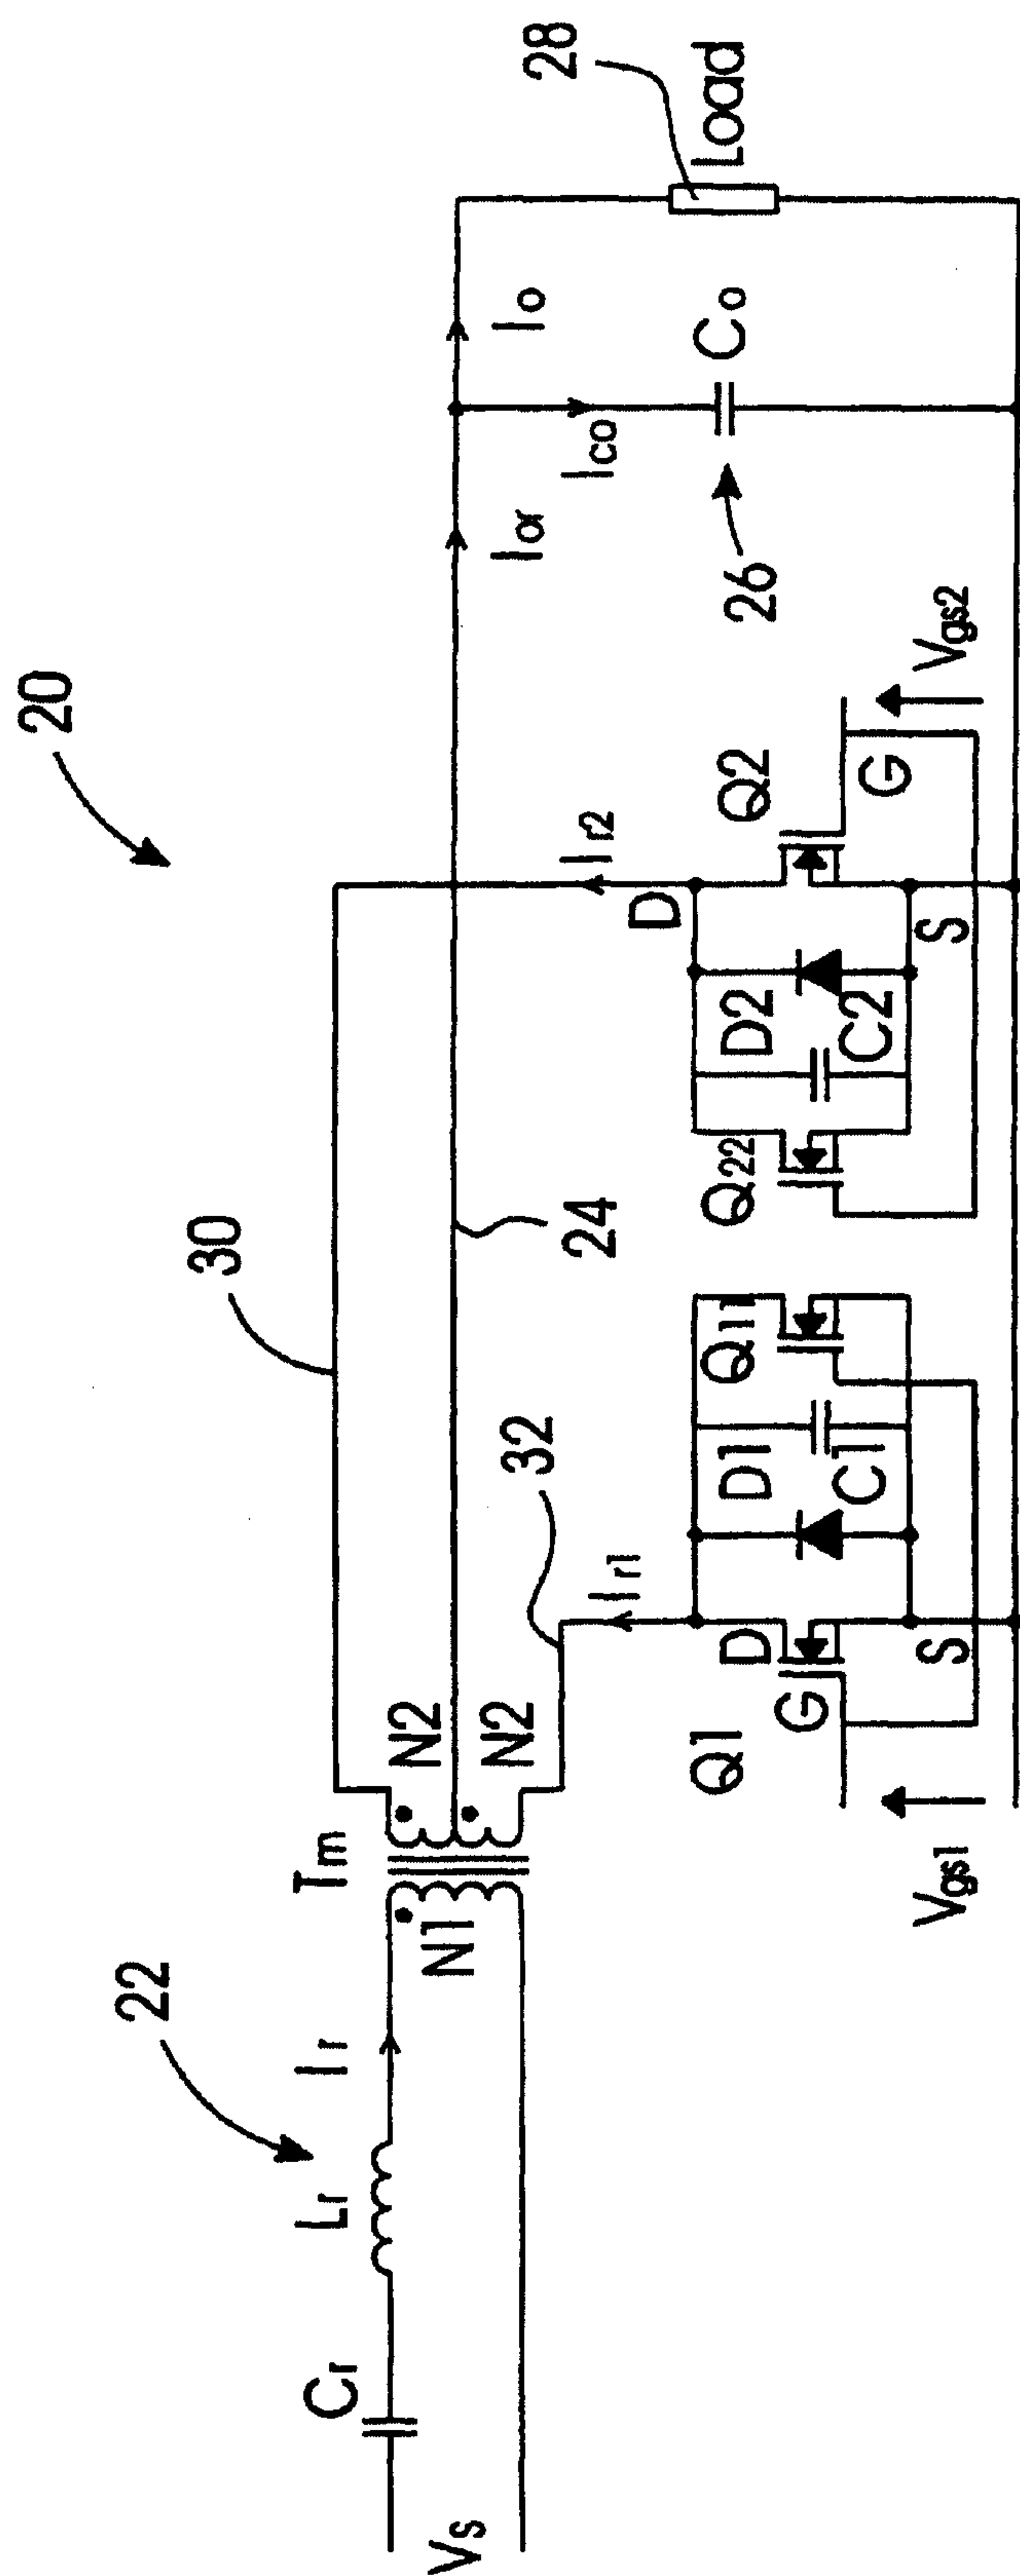
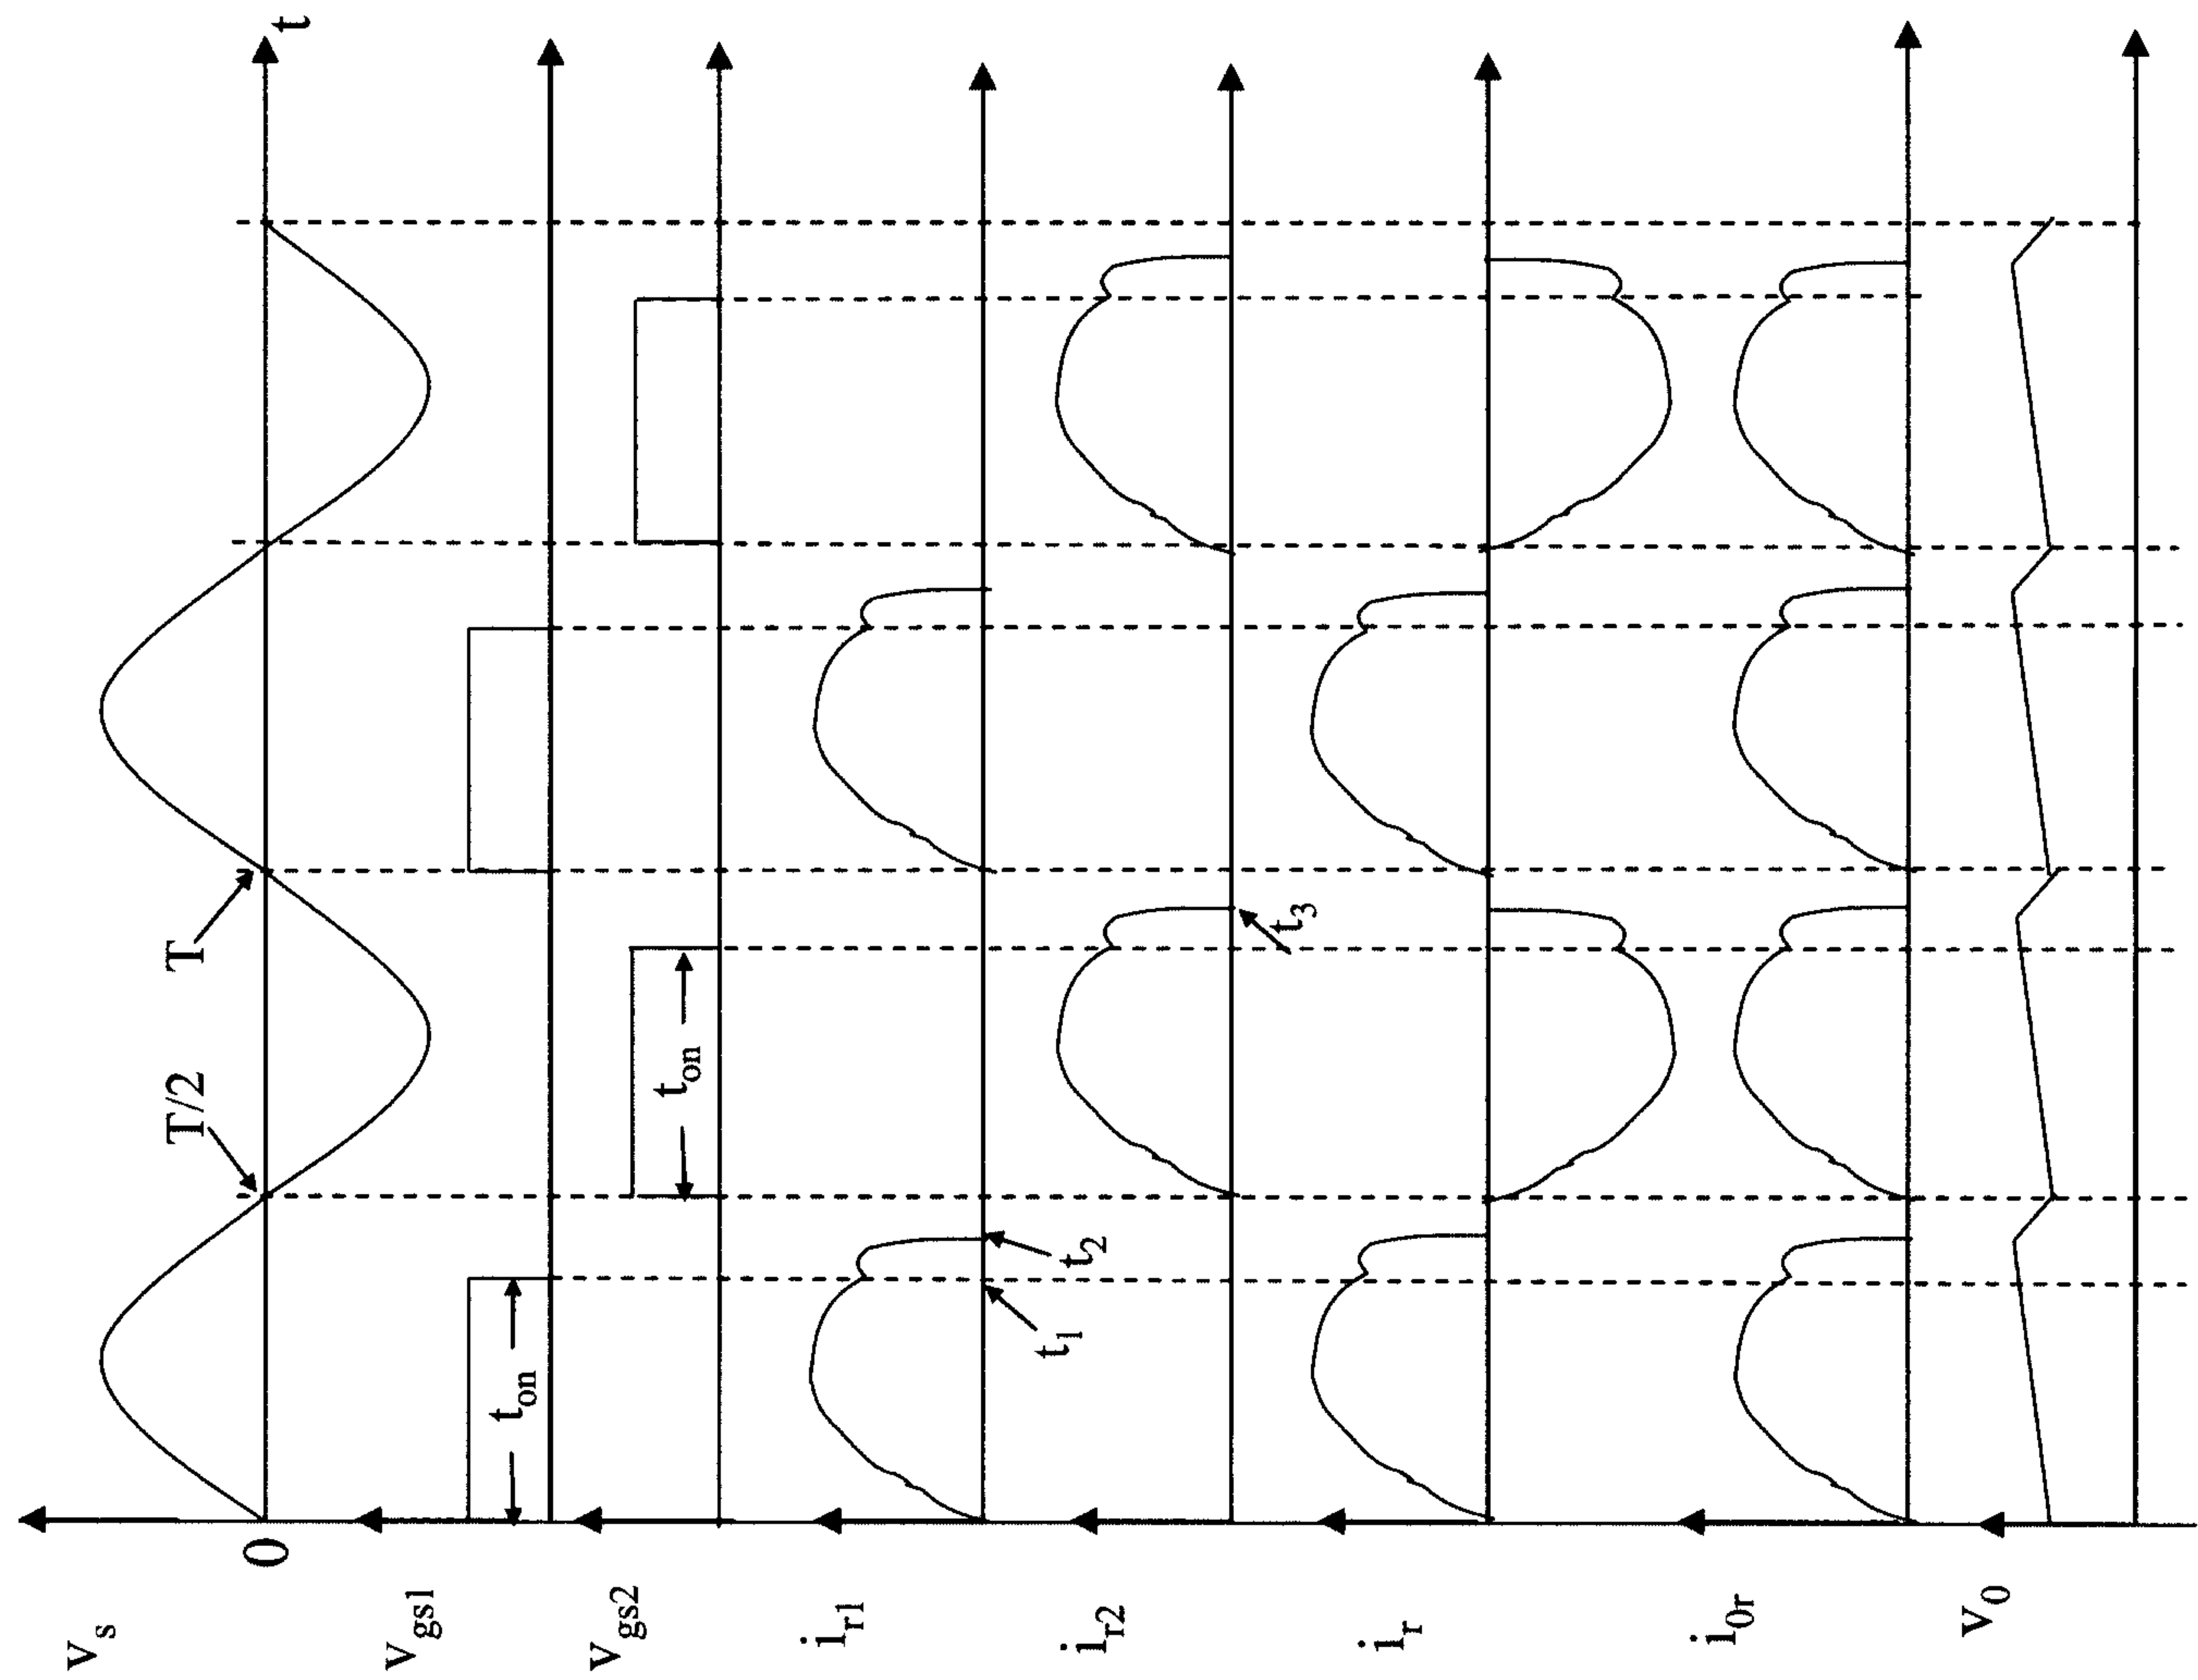


FIG. 2(d): AC/DC converter topology in which more than one control switch is connected in parallel.

FIG. 3: Operating
waveforms of converter
shown in FIG.2 operating in
Mode 1



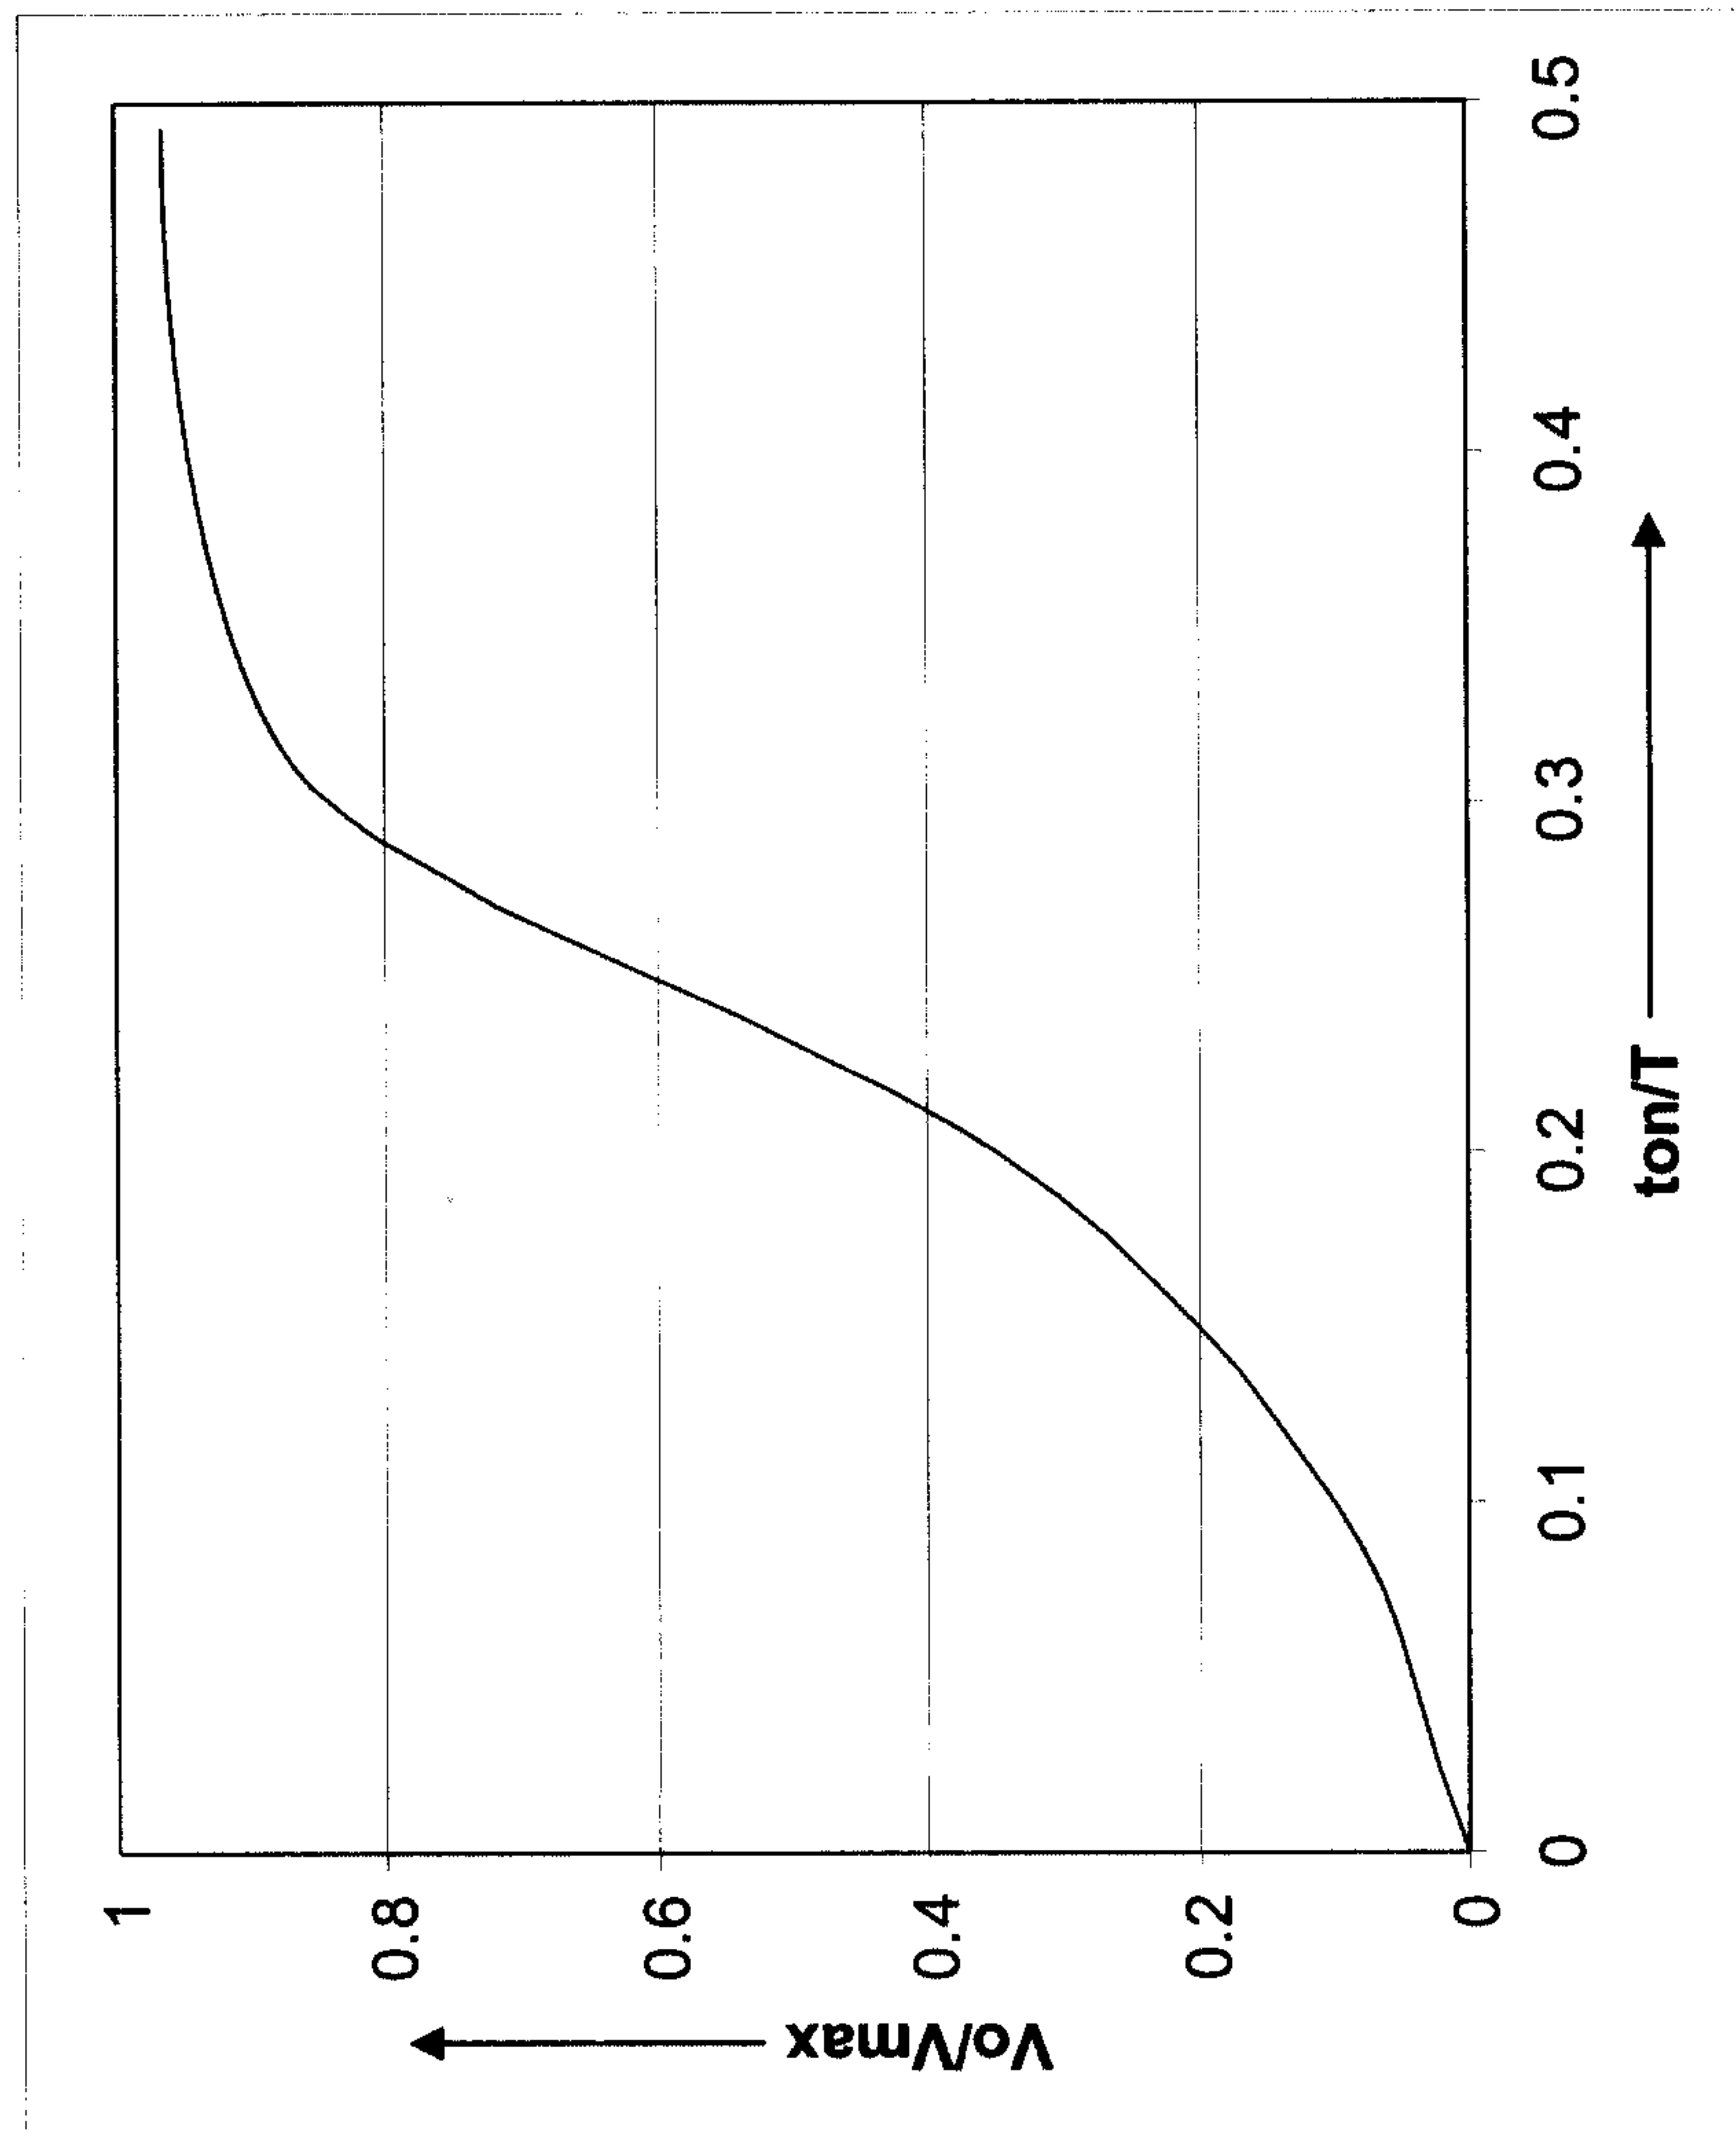


FIG. 4 Output Voltage as a function of t_{on}/T for the converter shown in FIG. 2 operating in Mode 1

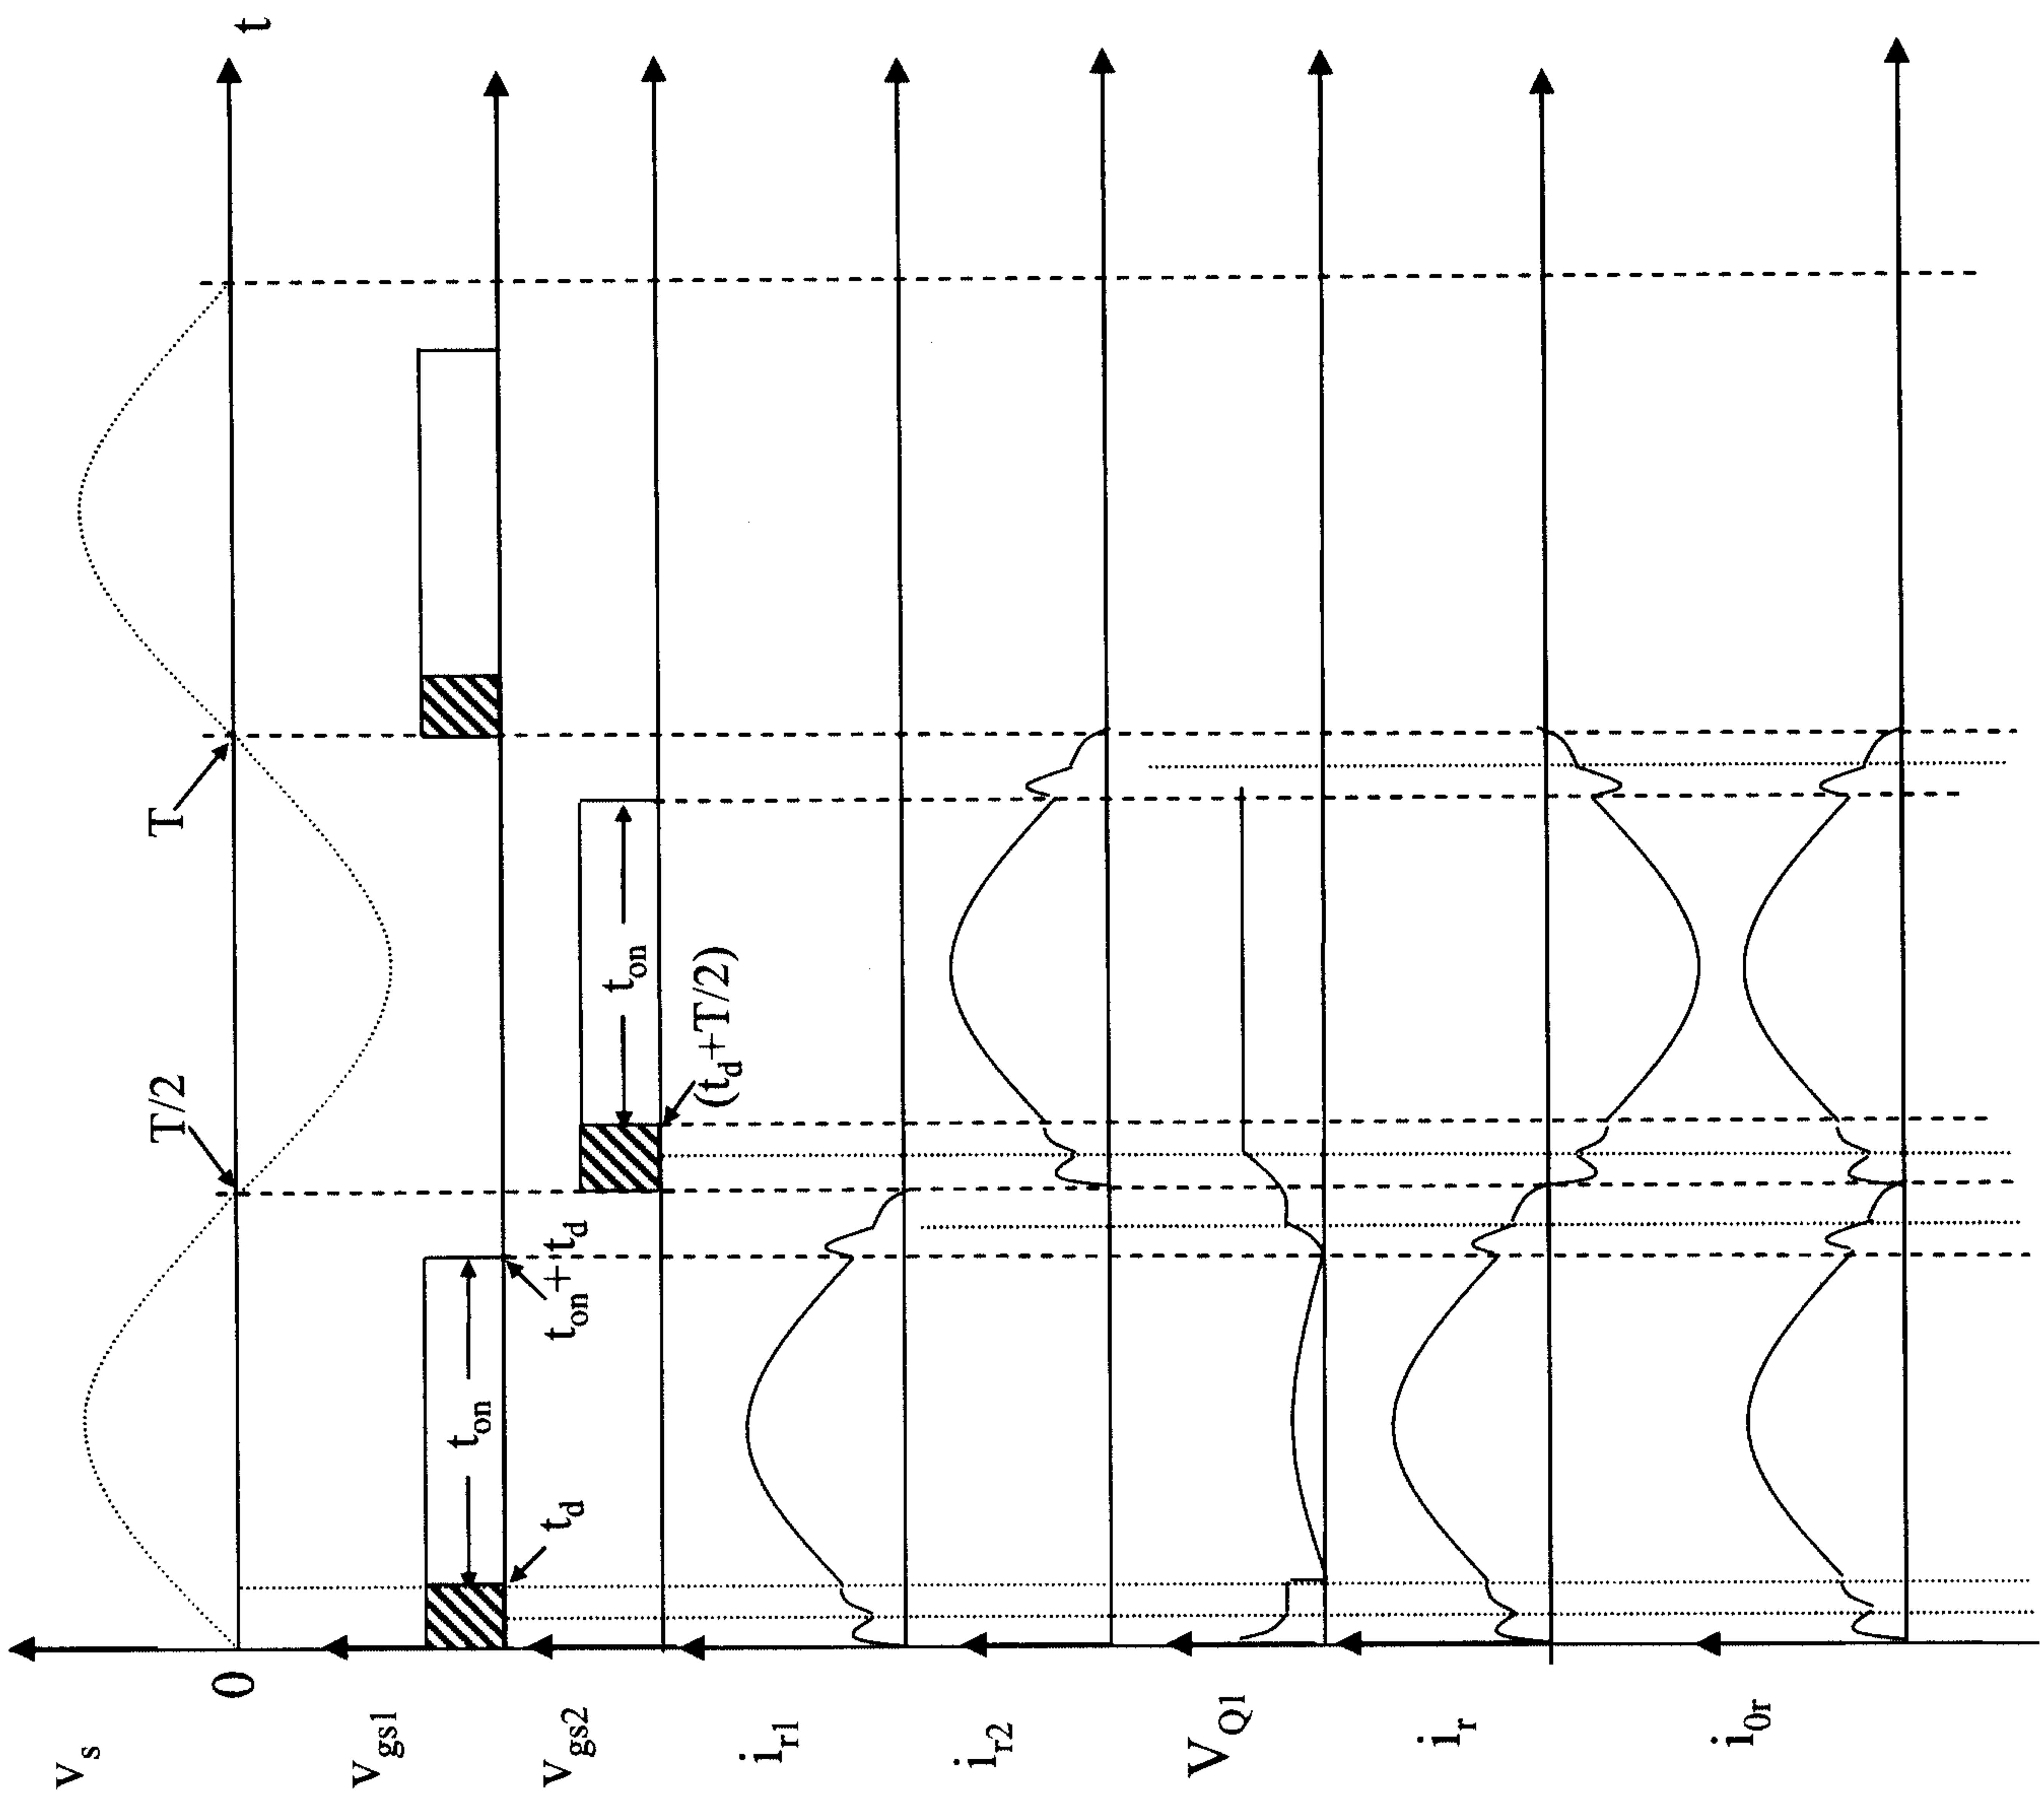


FIG. 5: Operating
waveforms of
converter shown in
FIG.2 operating in
Mode 2

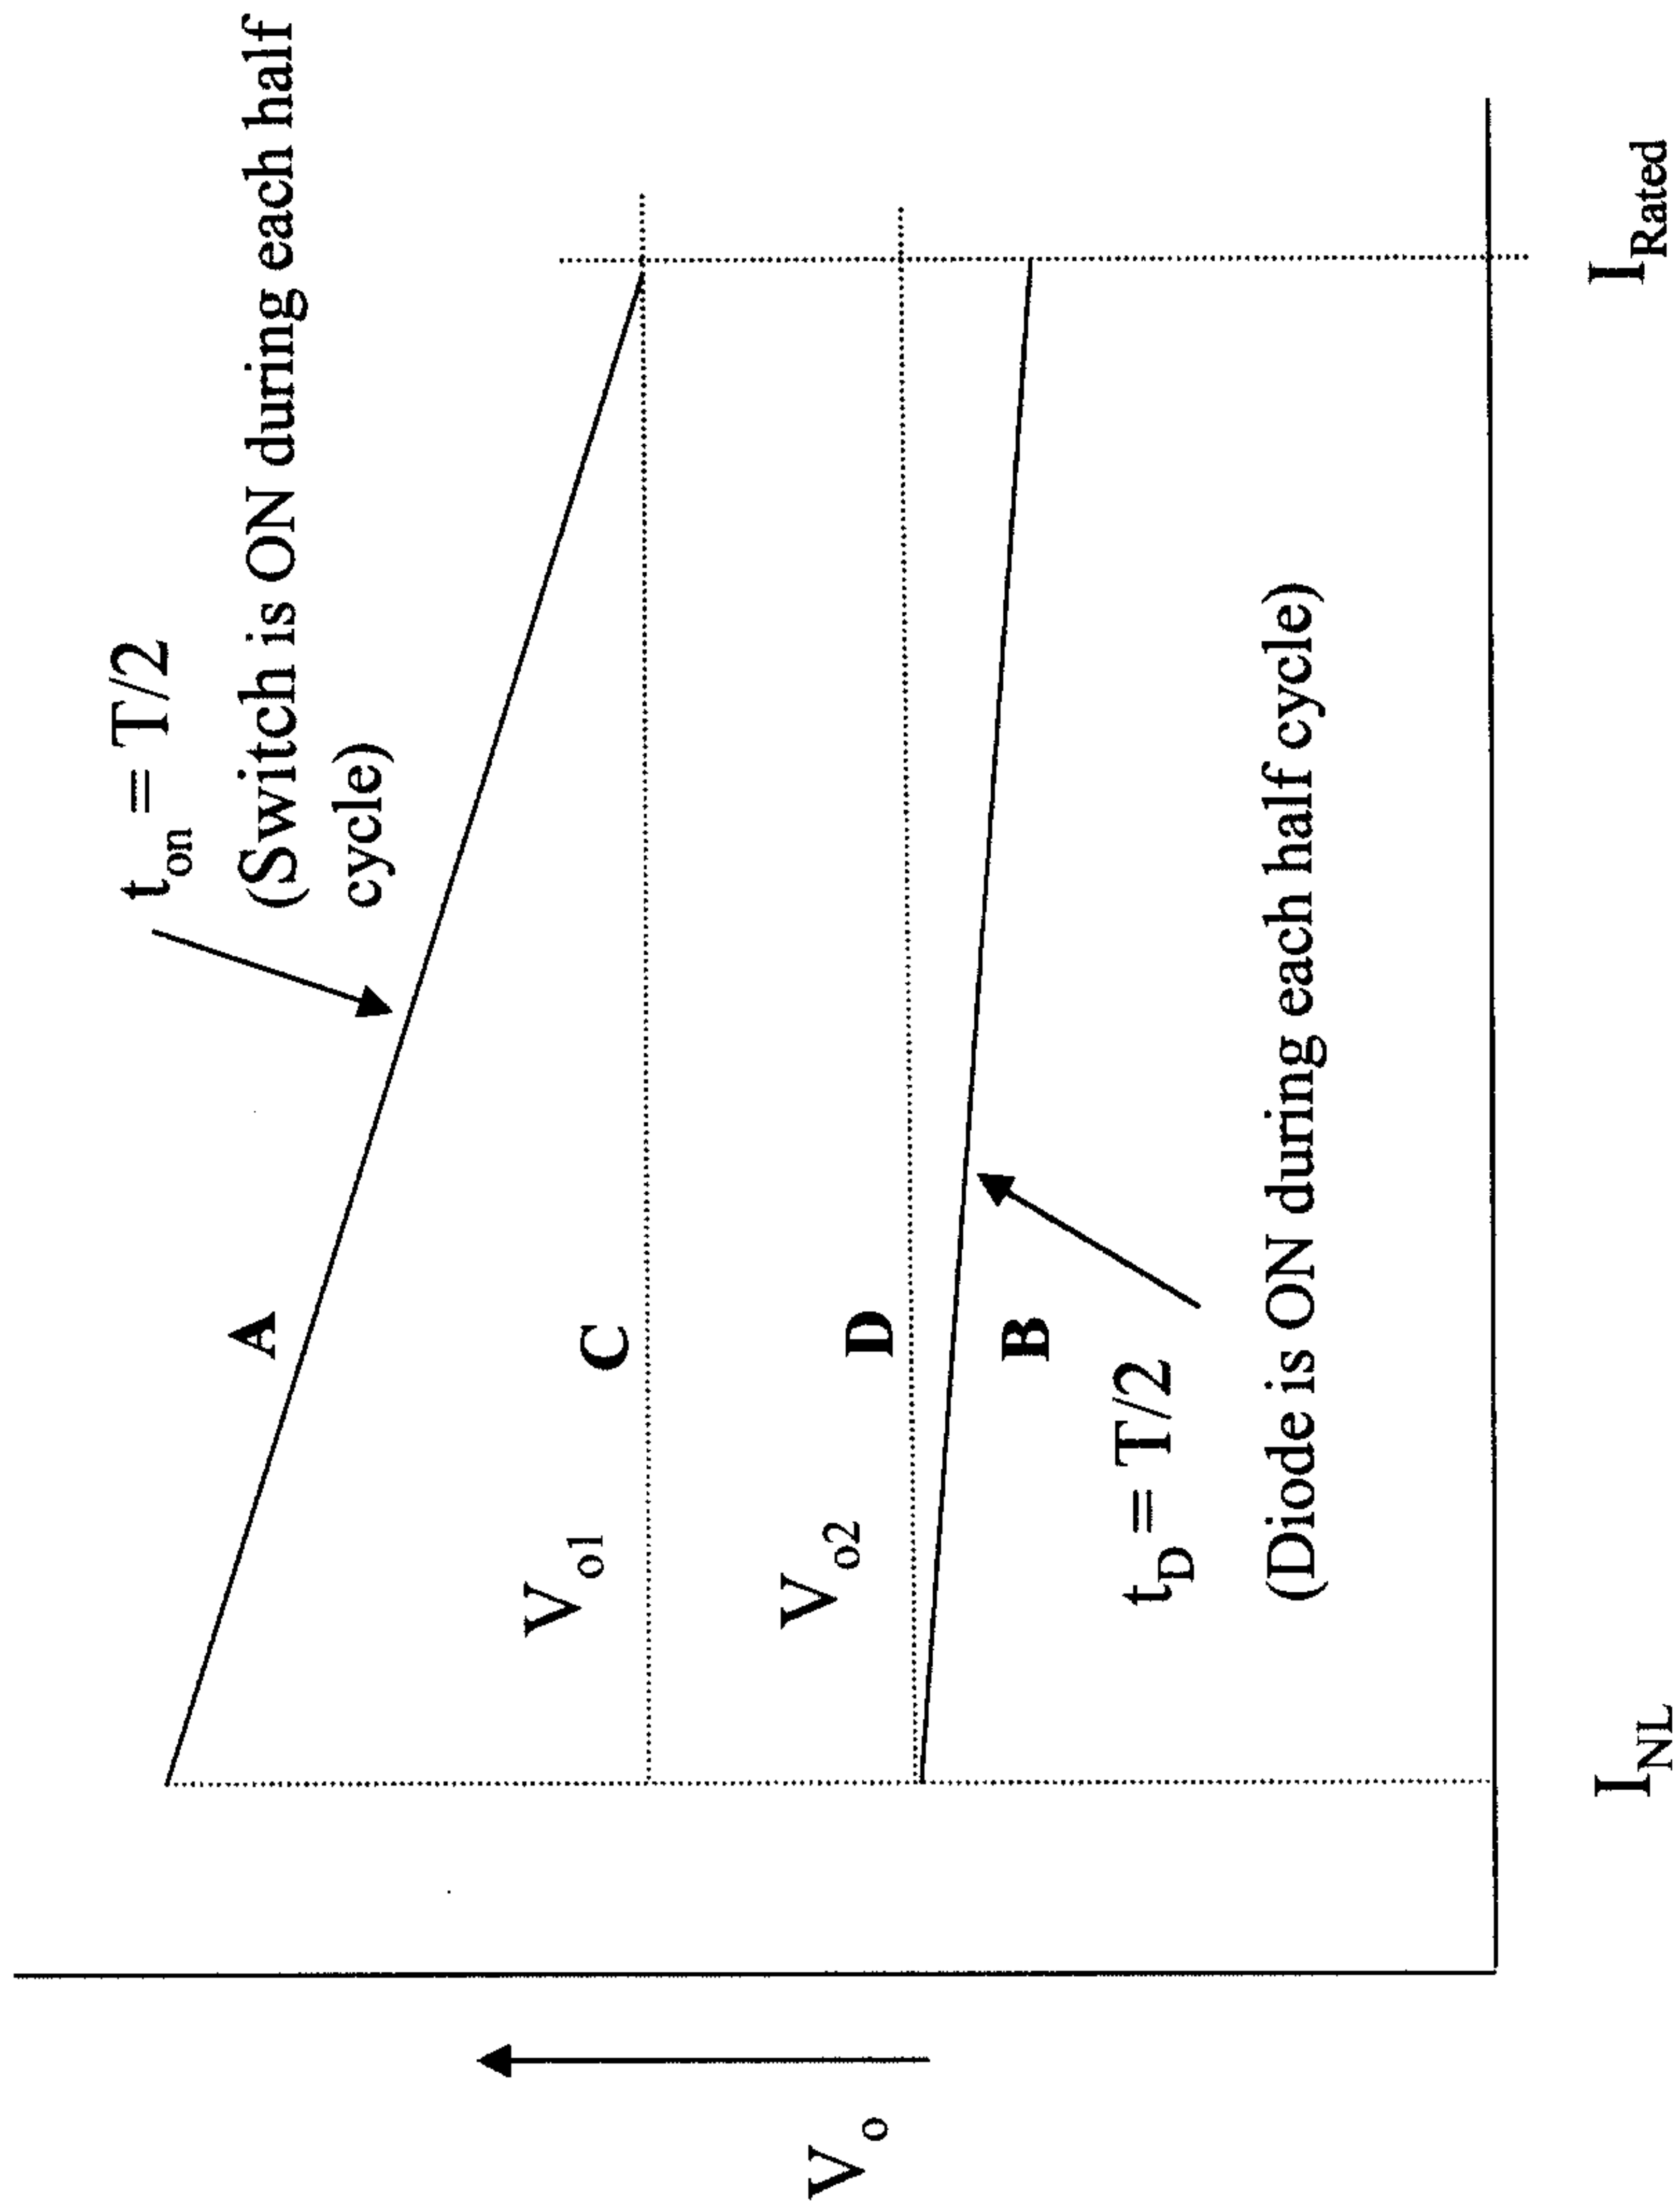


FIG. 6: Output Voltage as a function of output current for the converter shown in FIG.2
operating in Mode 2

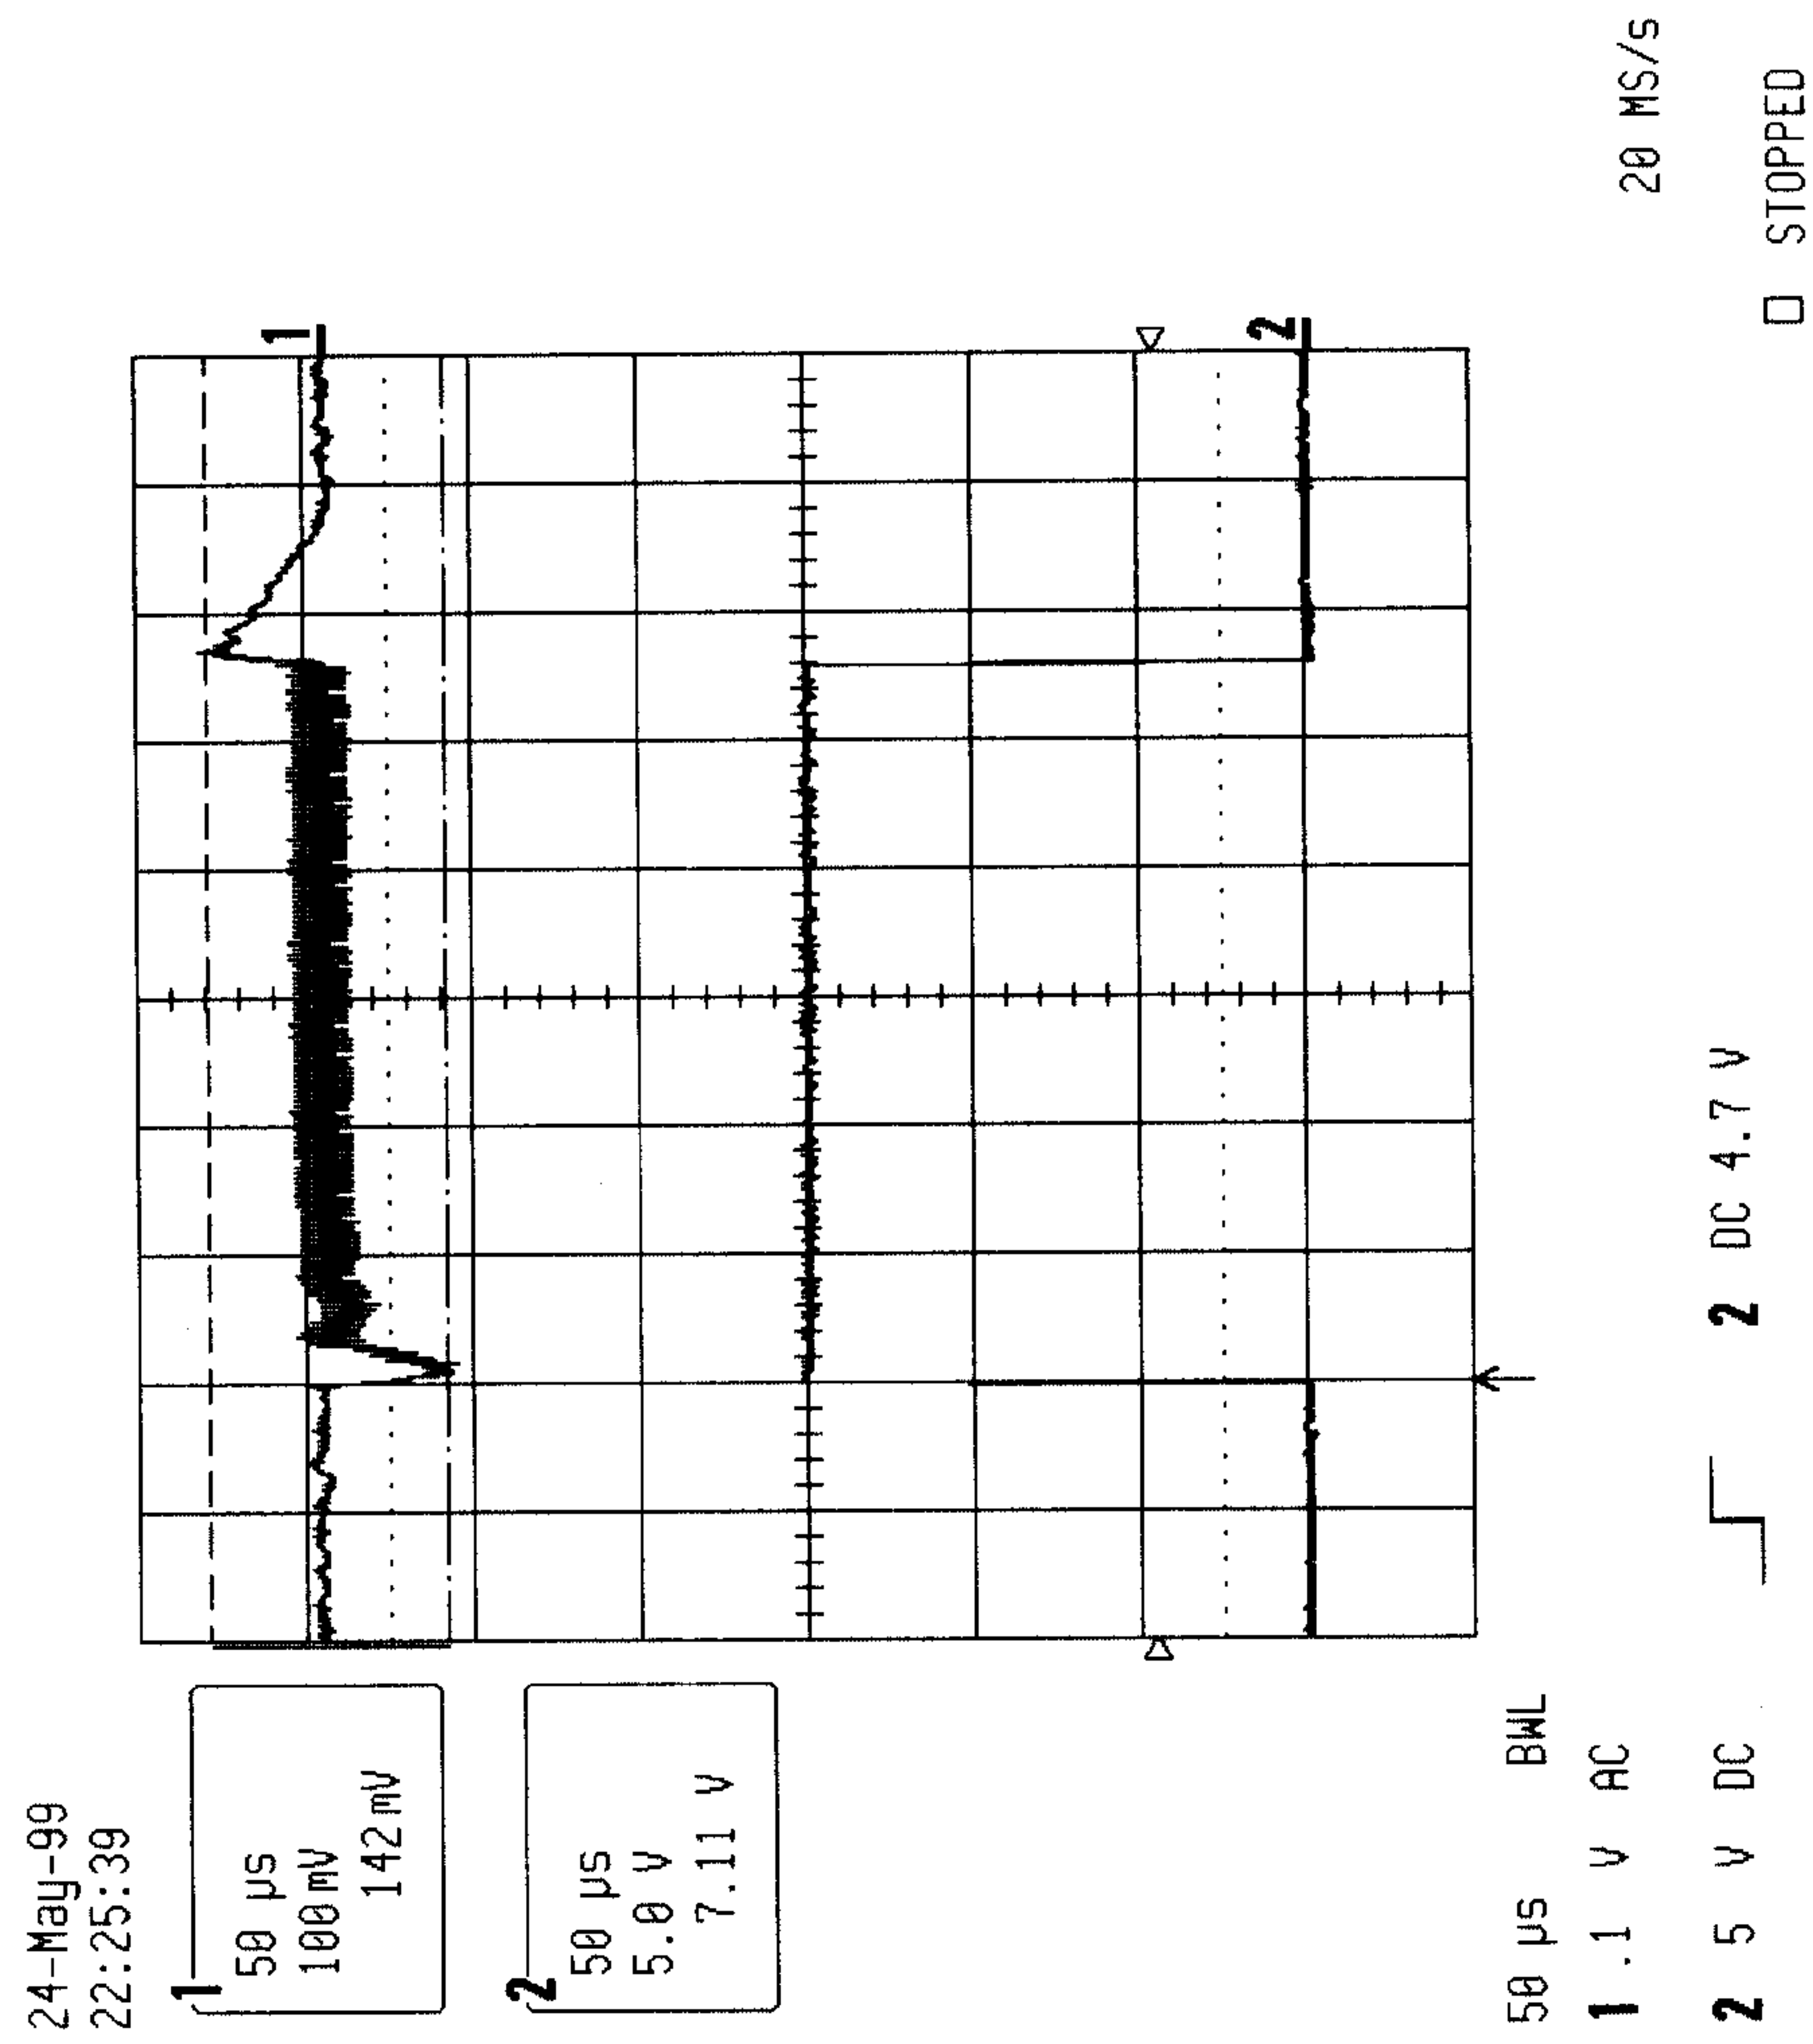


FIG. 7: Output voltage as a function of step change in the output current

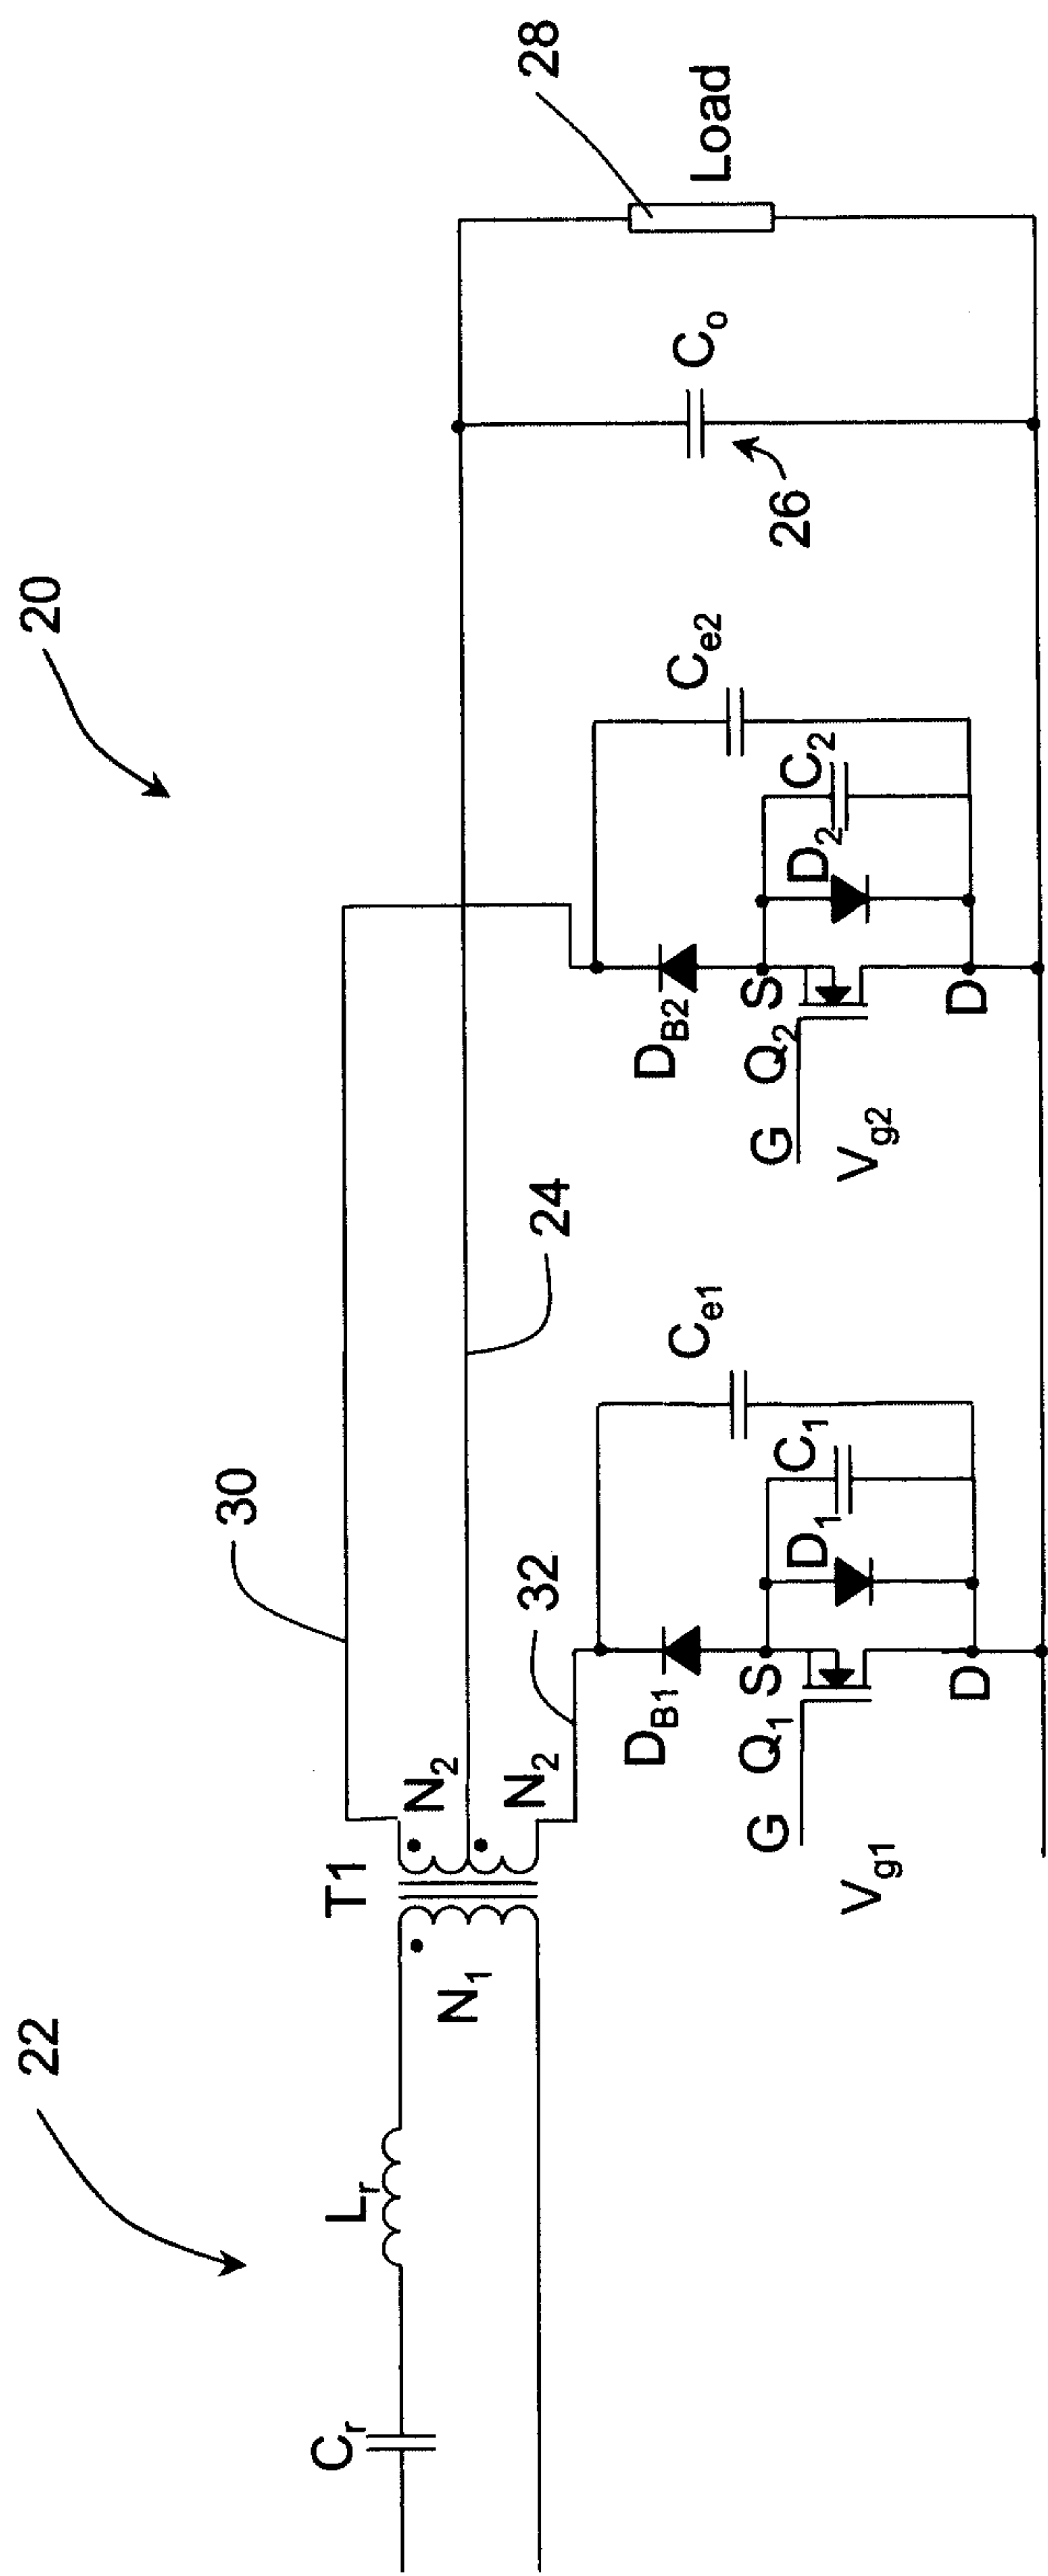


FIG. 8: AC/DC converter with unidirectional current flow in the synchronous rectifiers

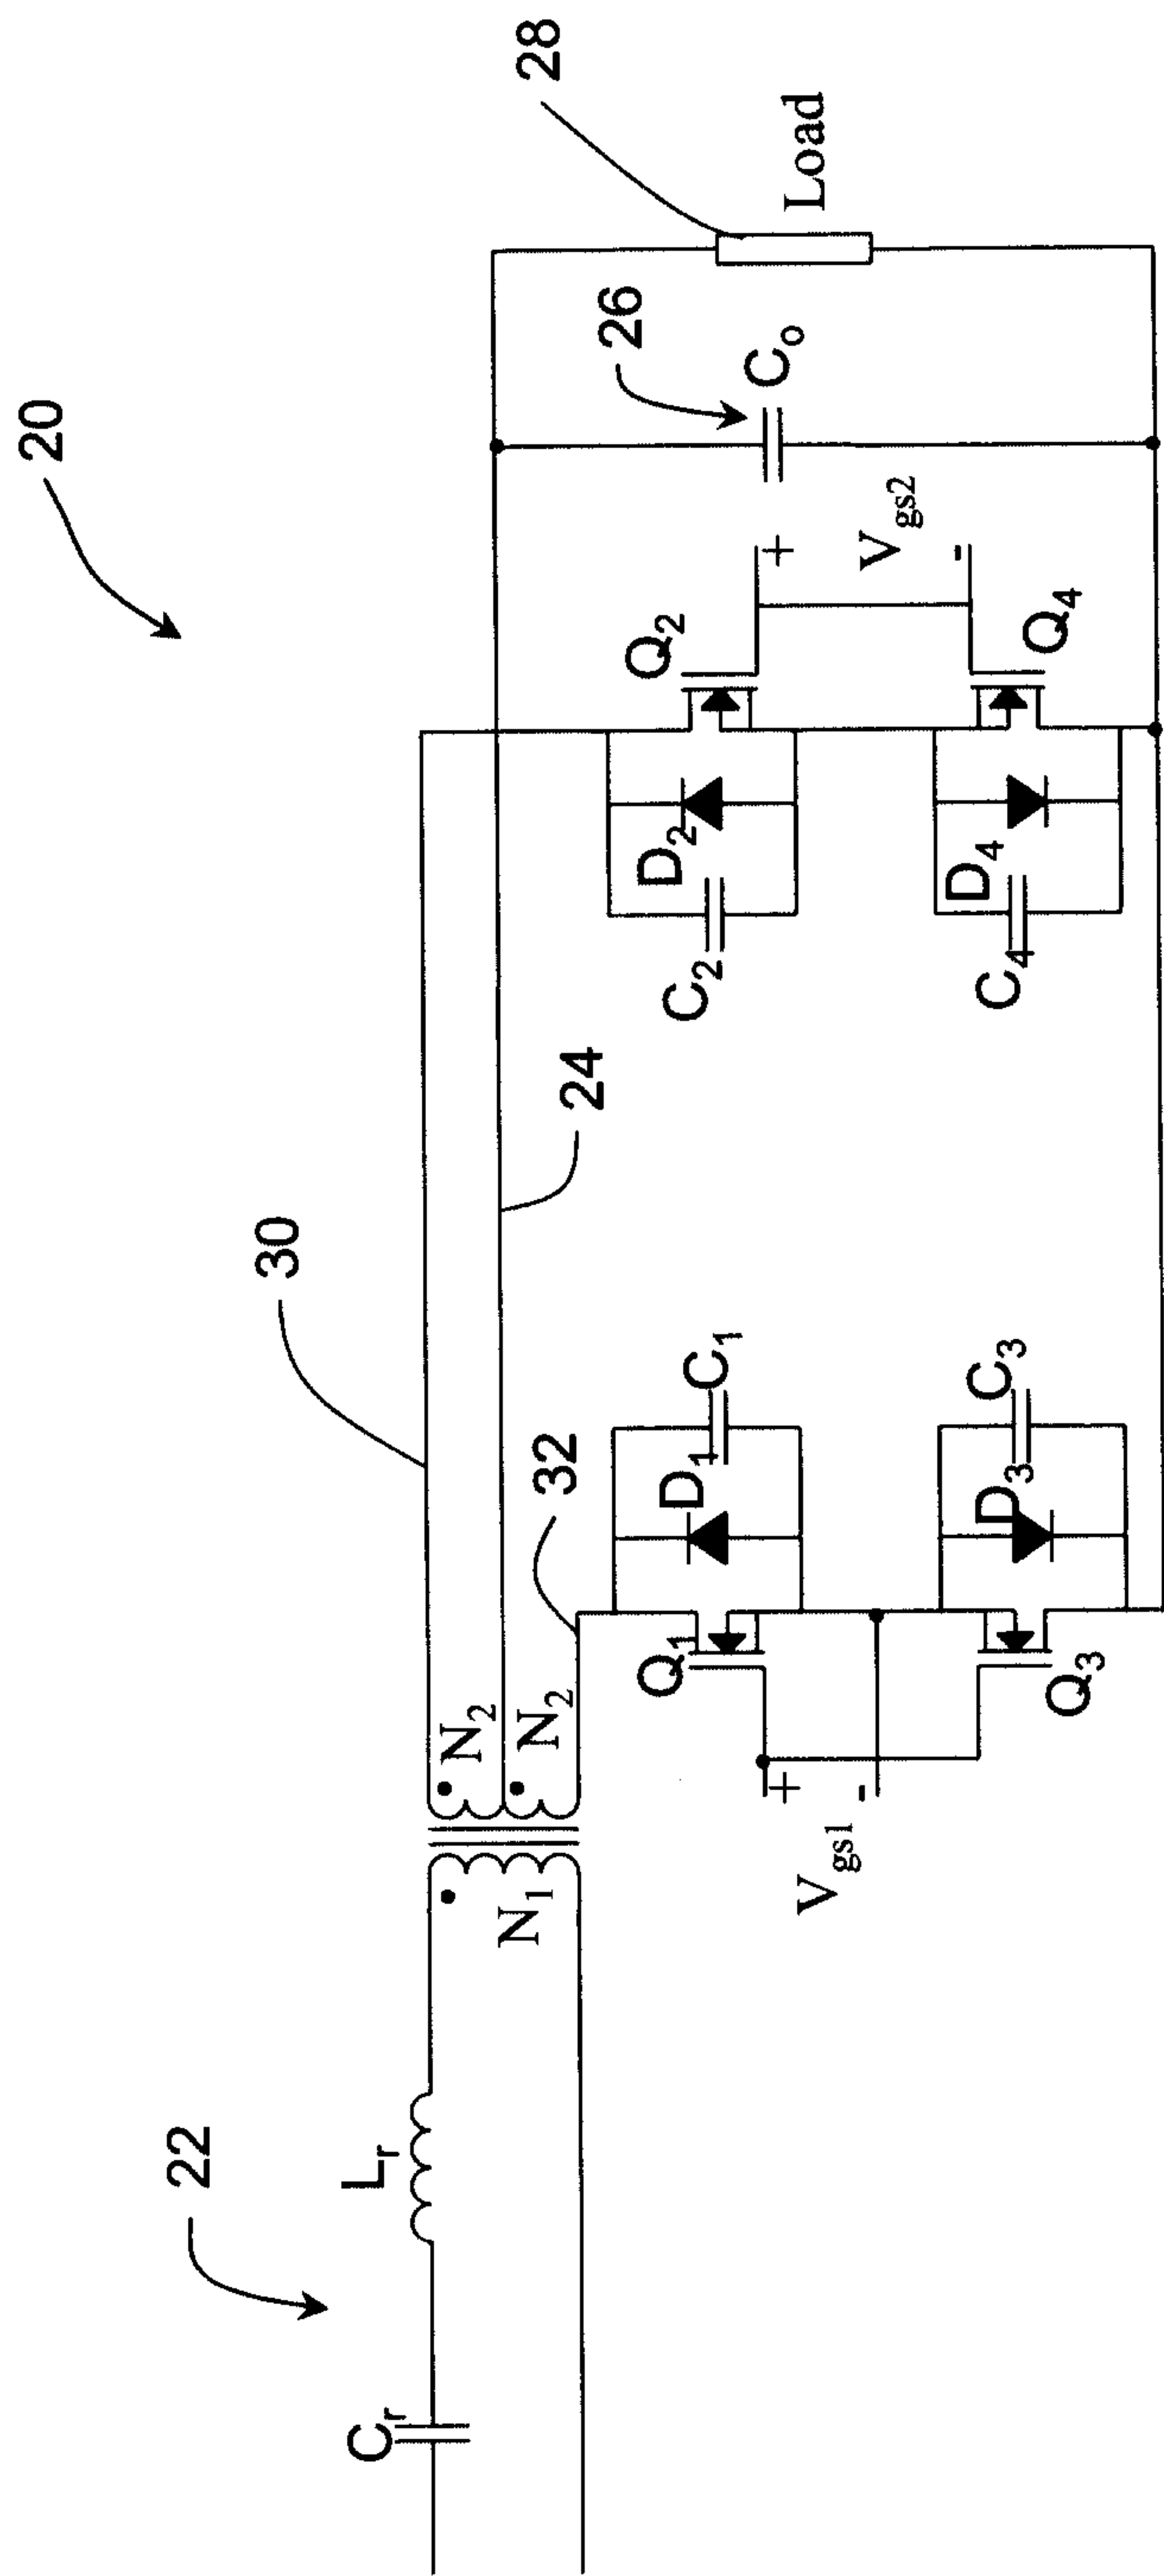


FIG. 9: AC/DC Converter with bi-directional synchronous rectifiers

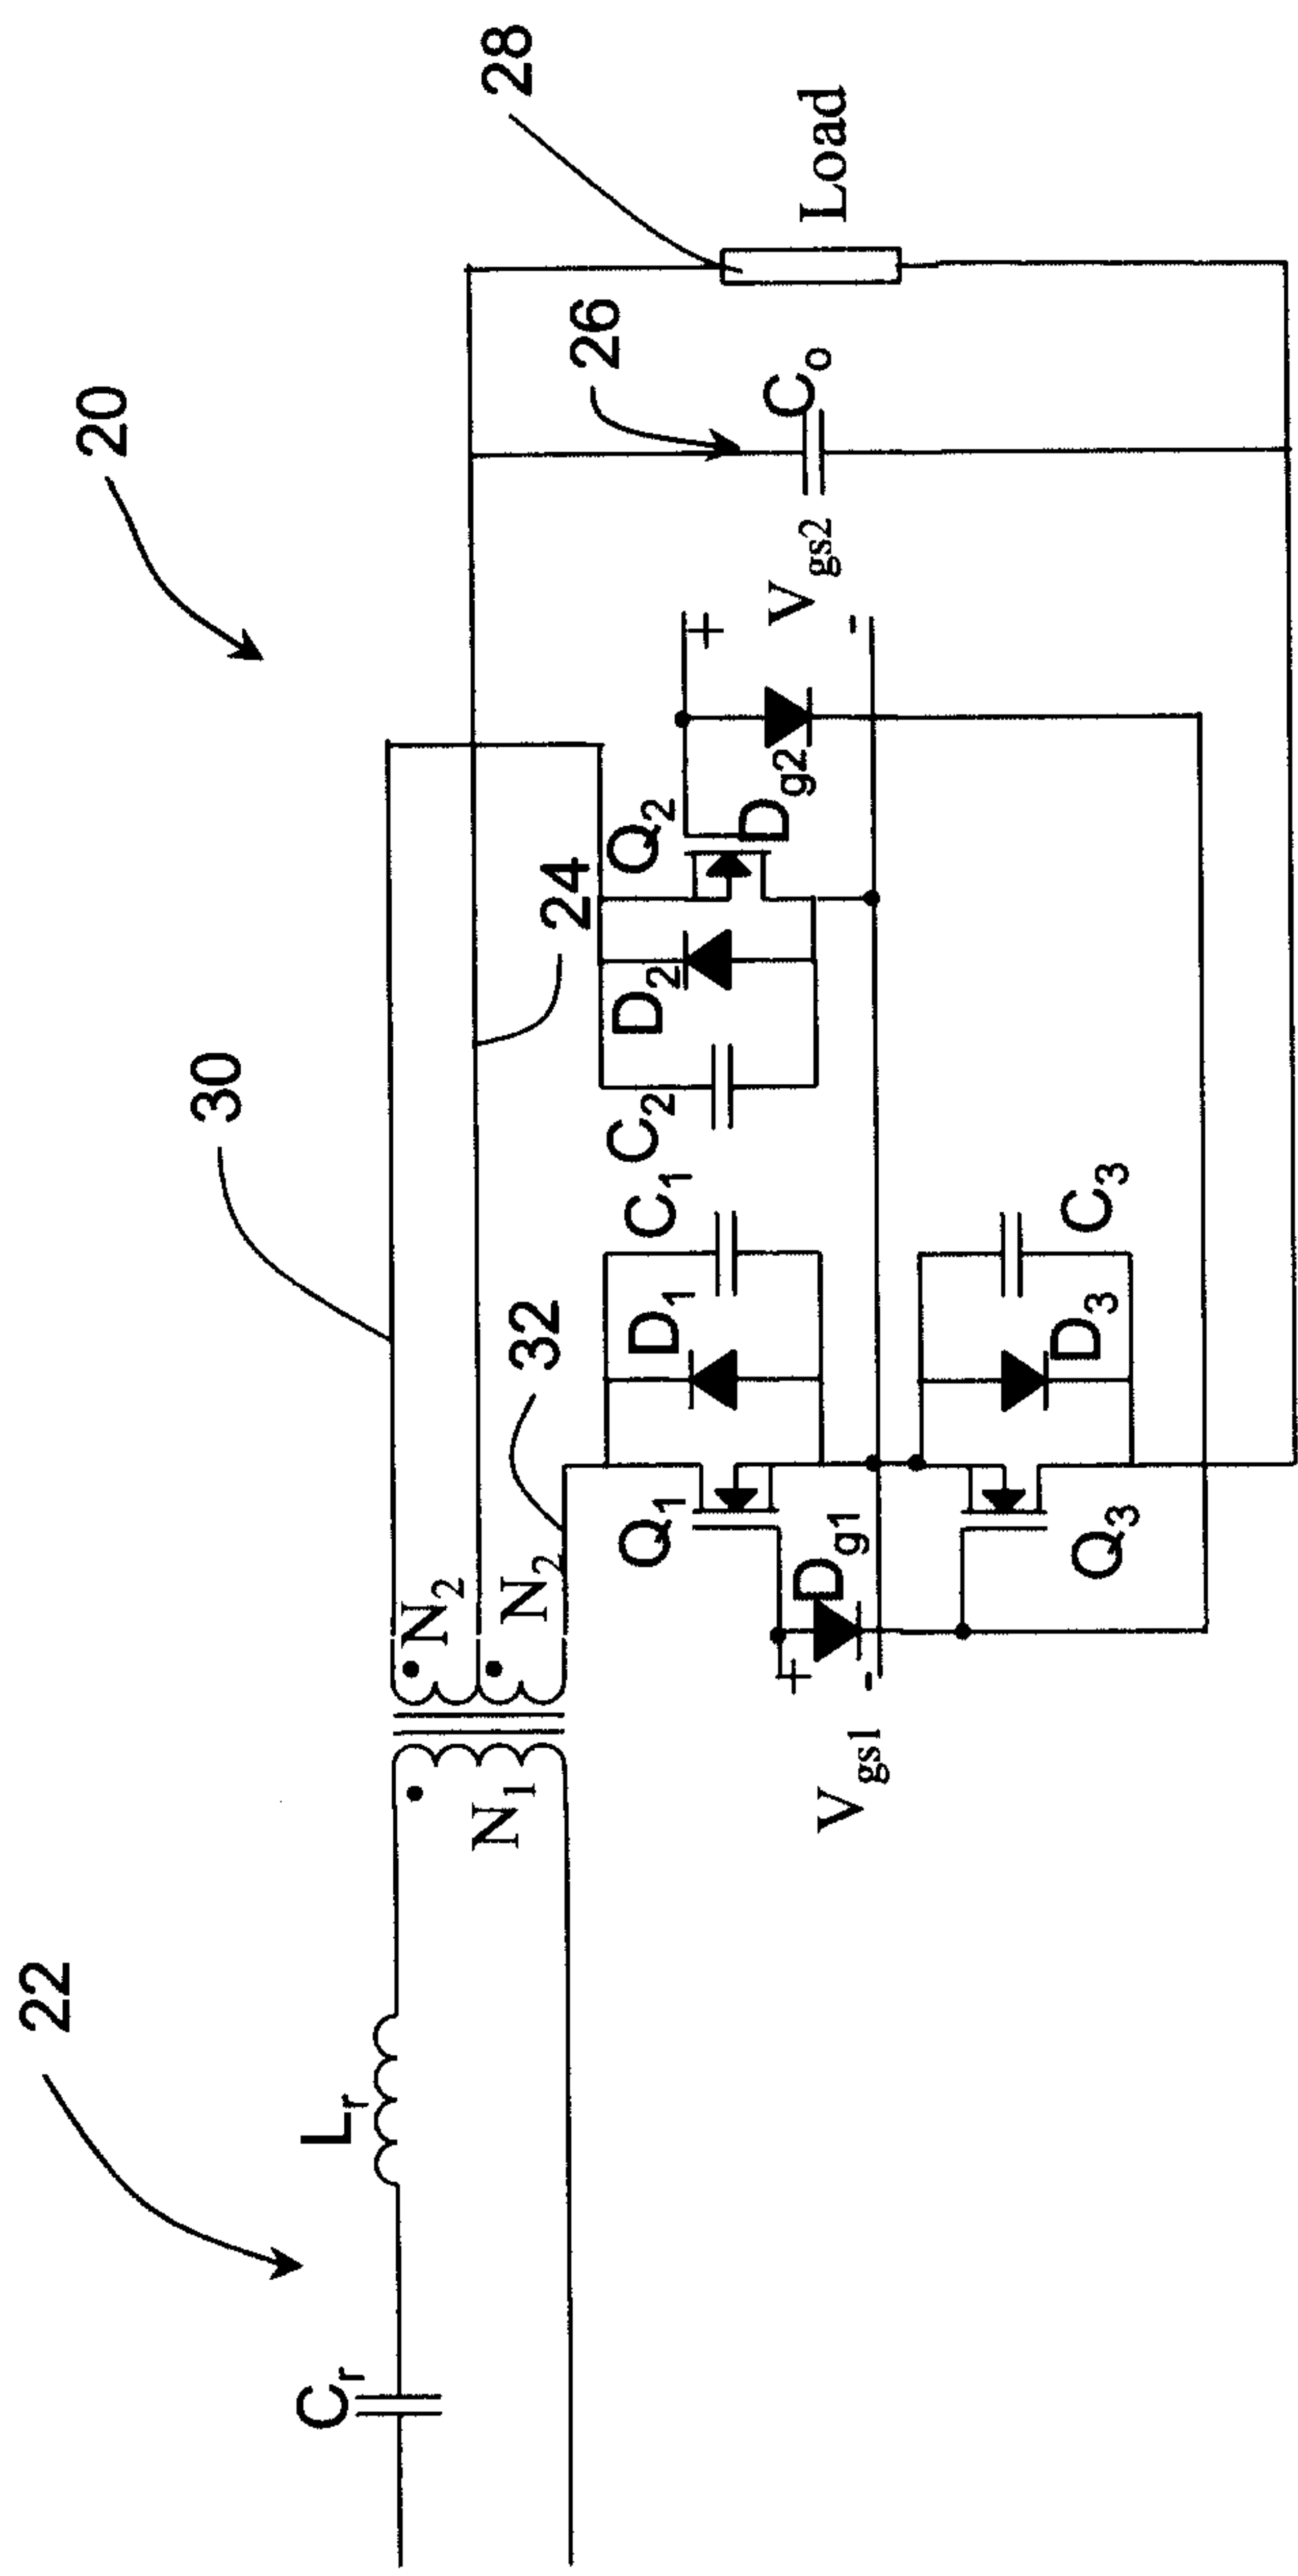


FIG. 10: AC/DC converter with gate signal control switch

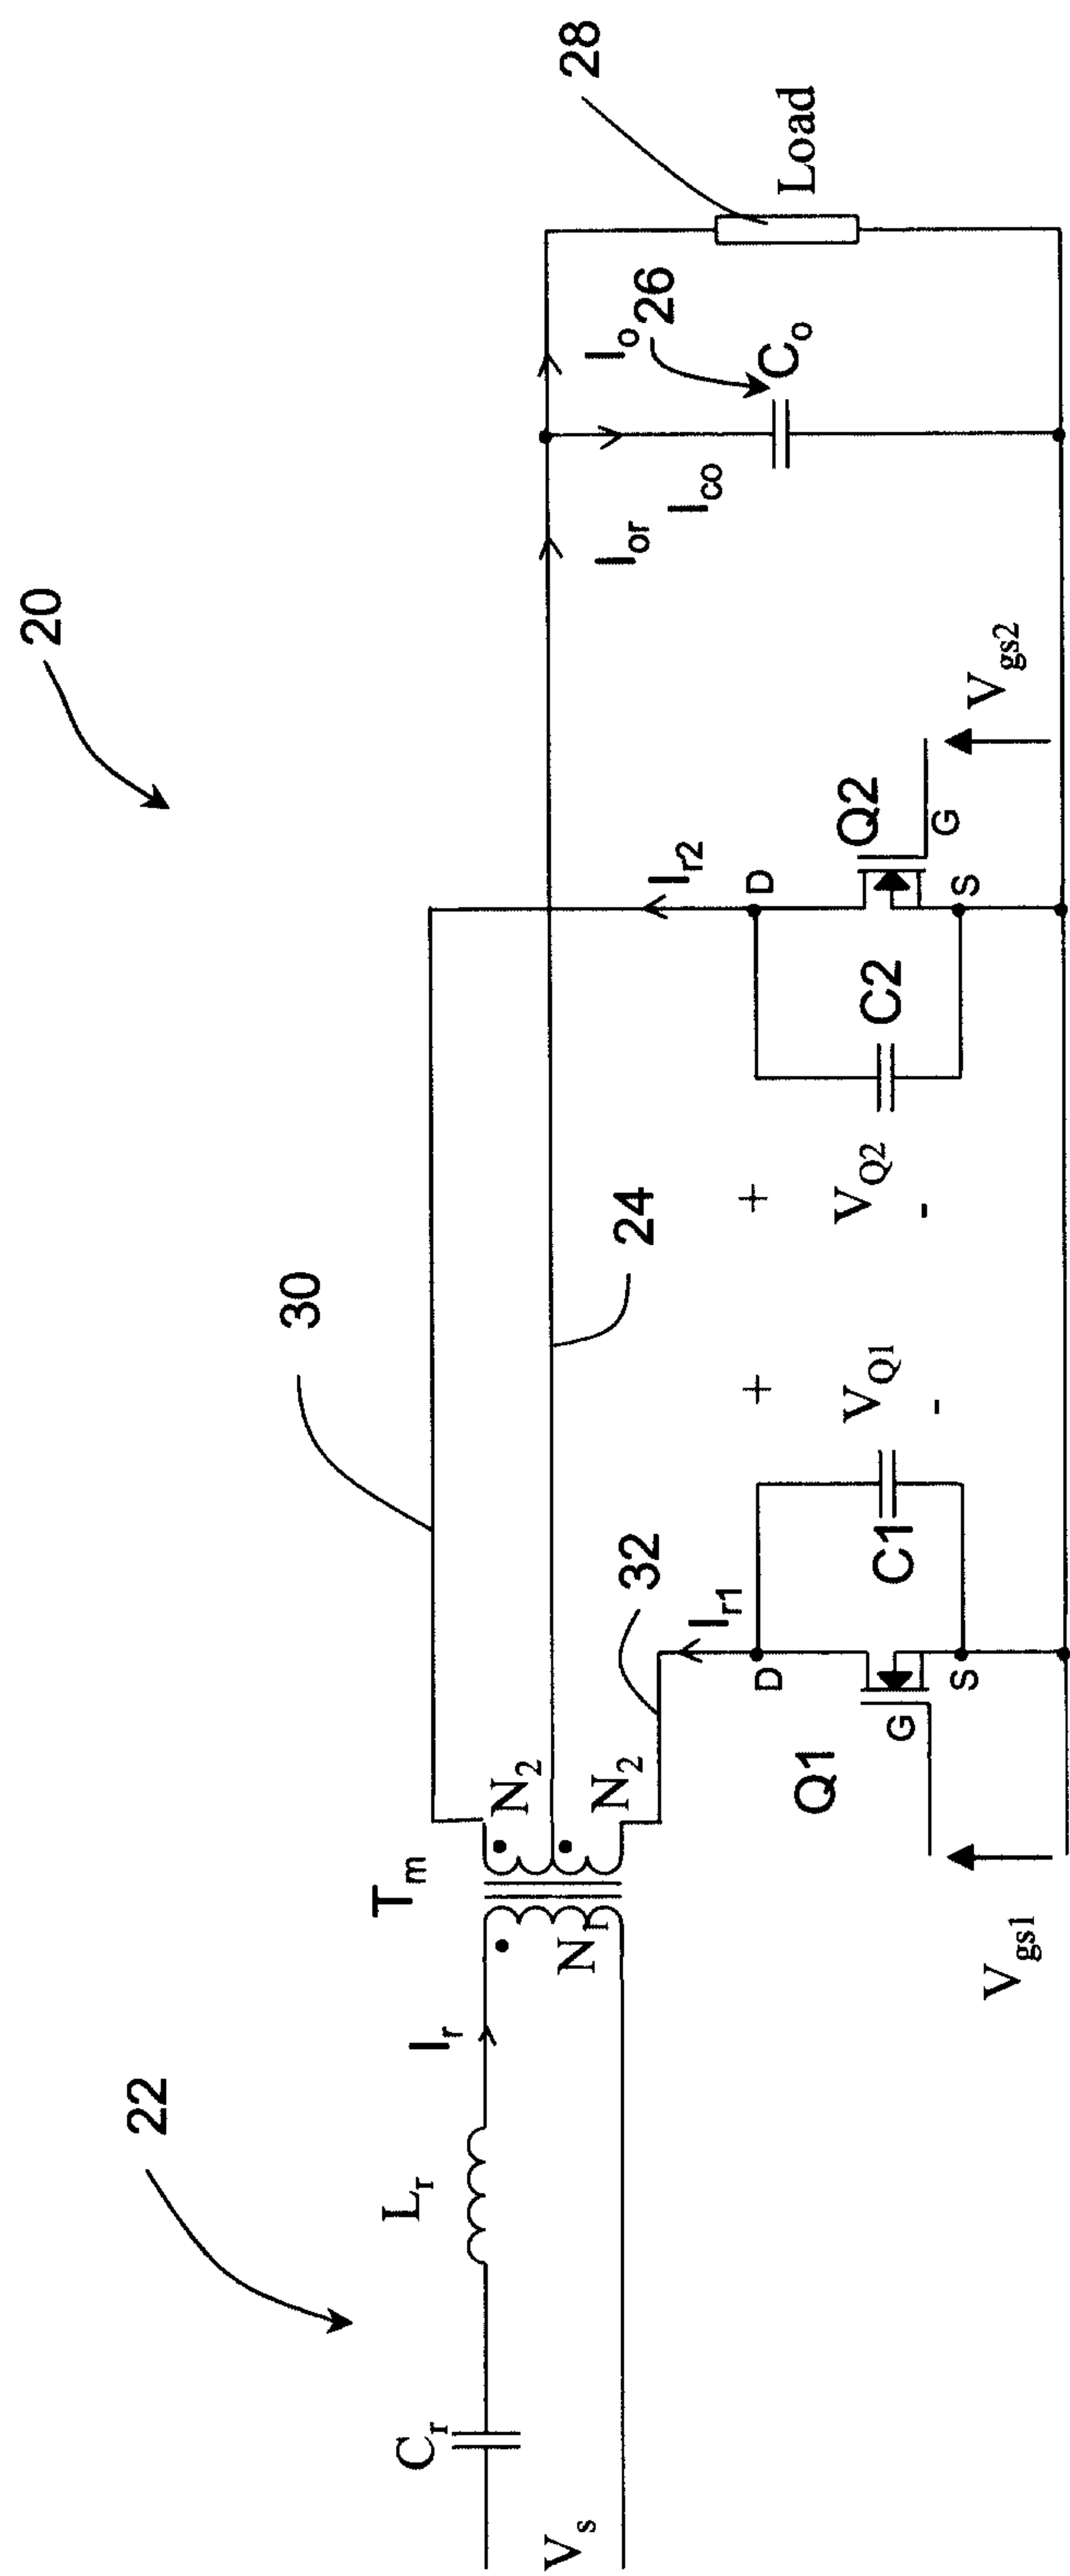


FIG.11: AC/DC Converter Using Controlled Switches Without Built-in Body Diodes


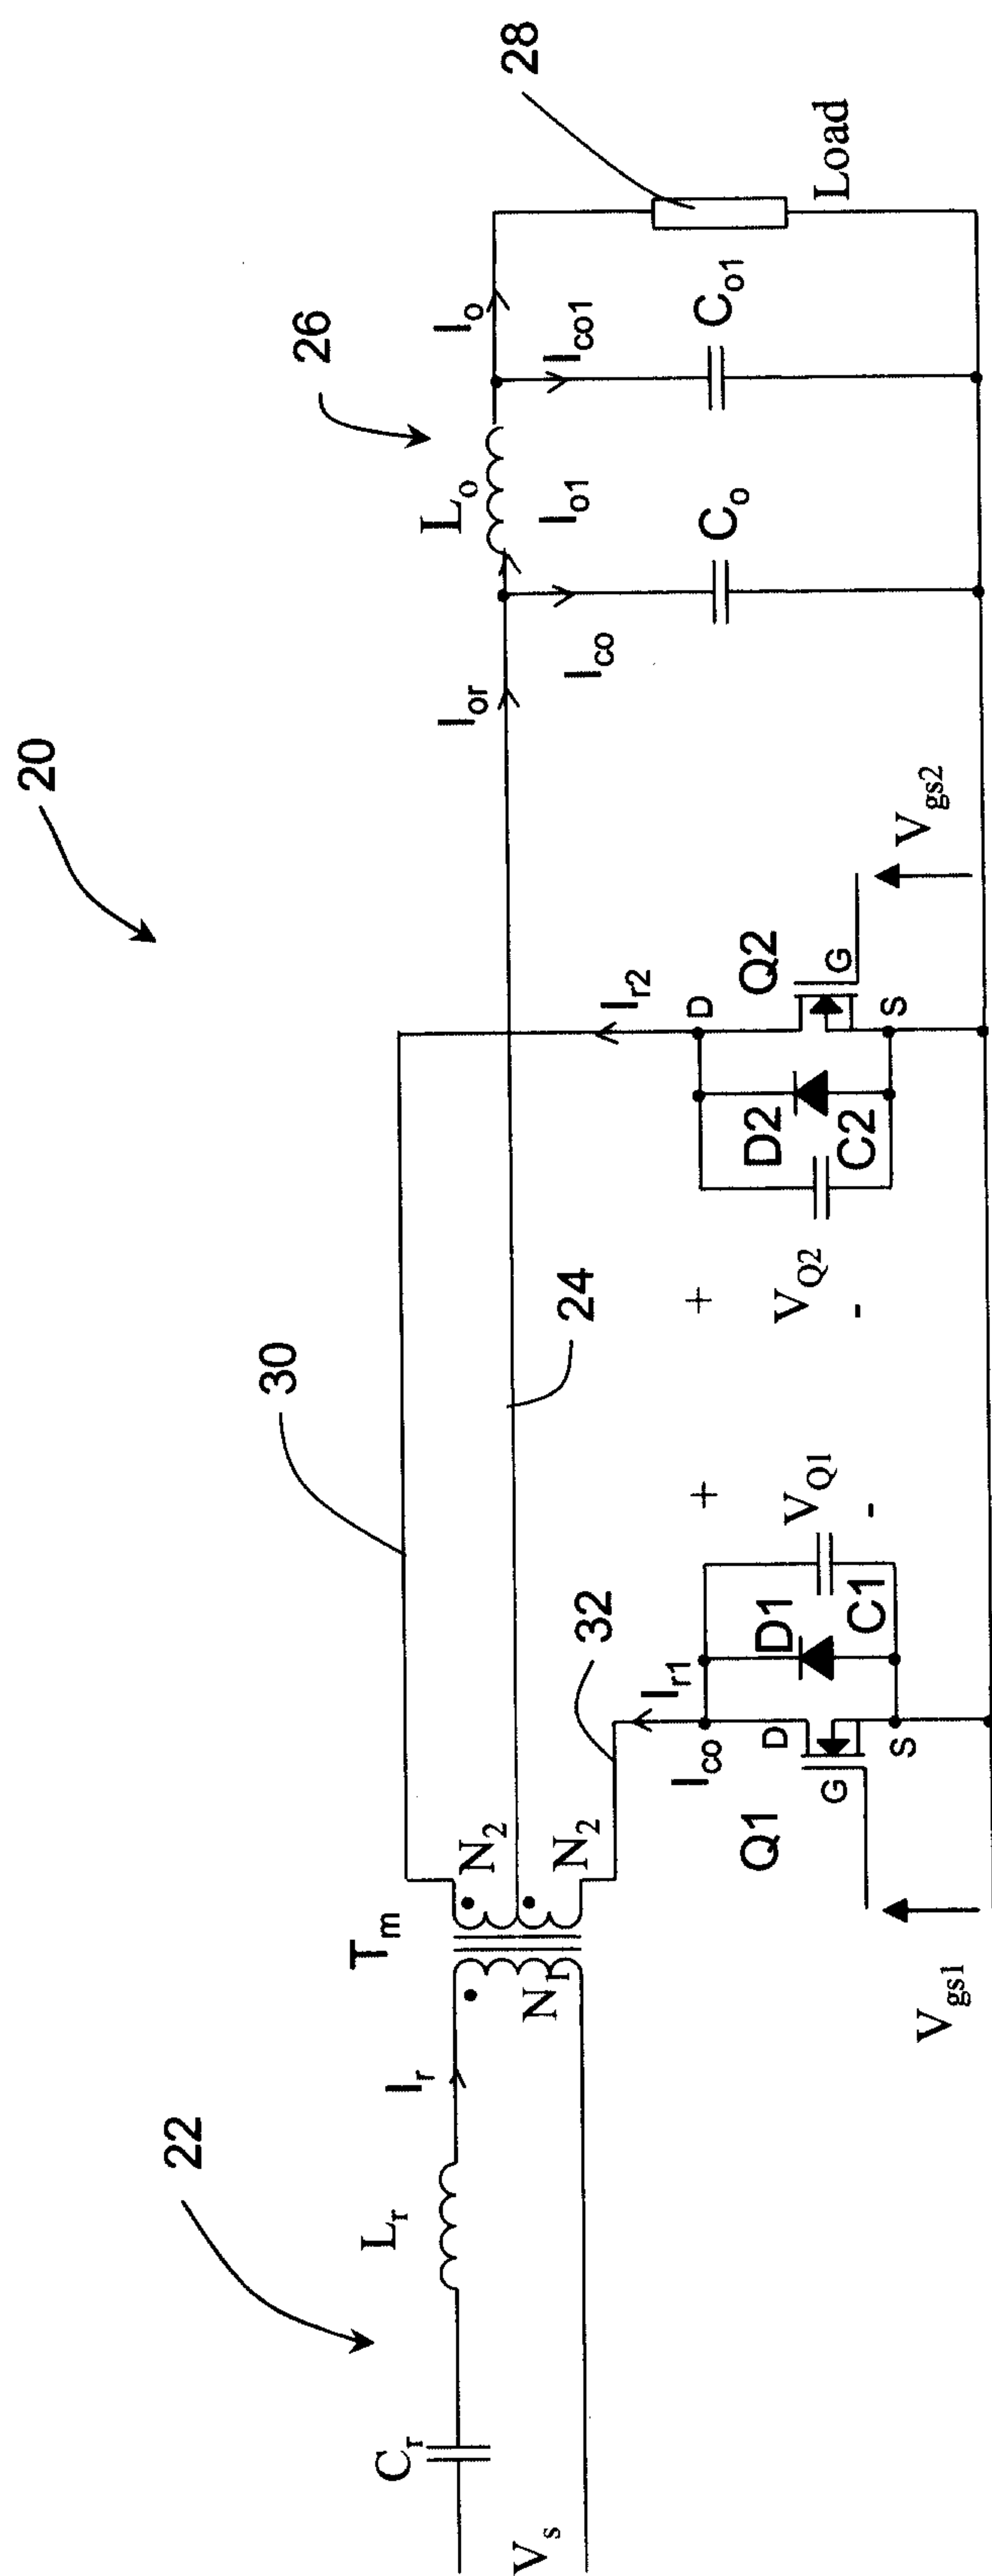


FIG. 12: AC/DC converter with a second stage LC output filter

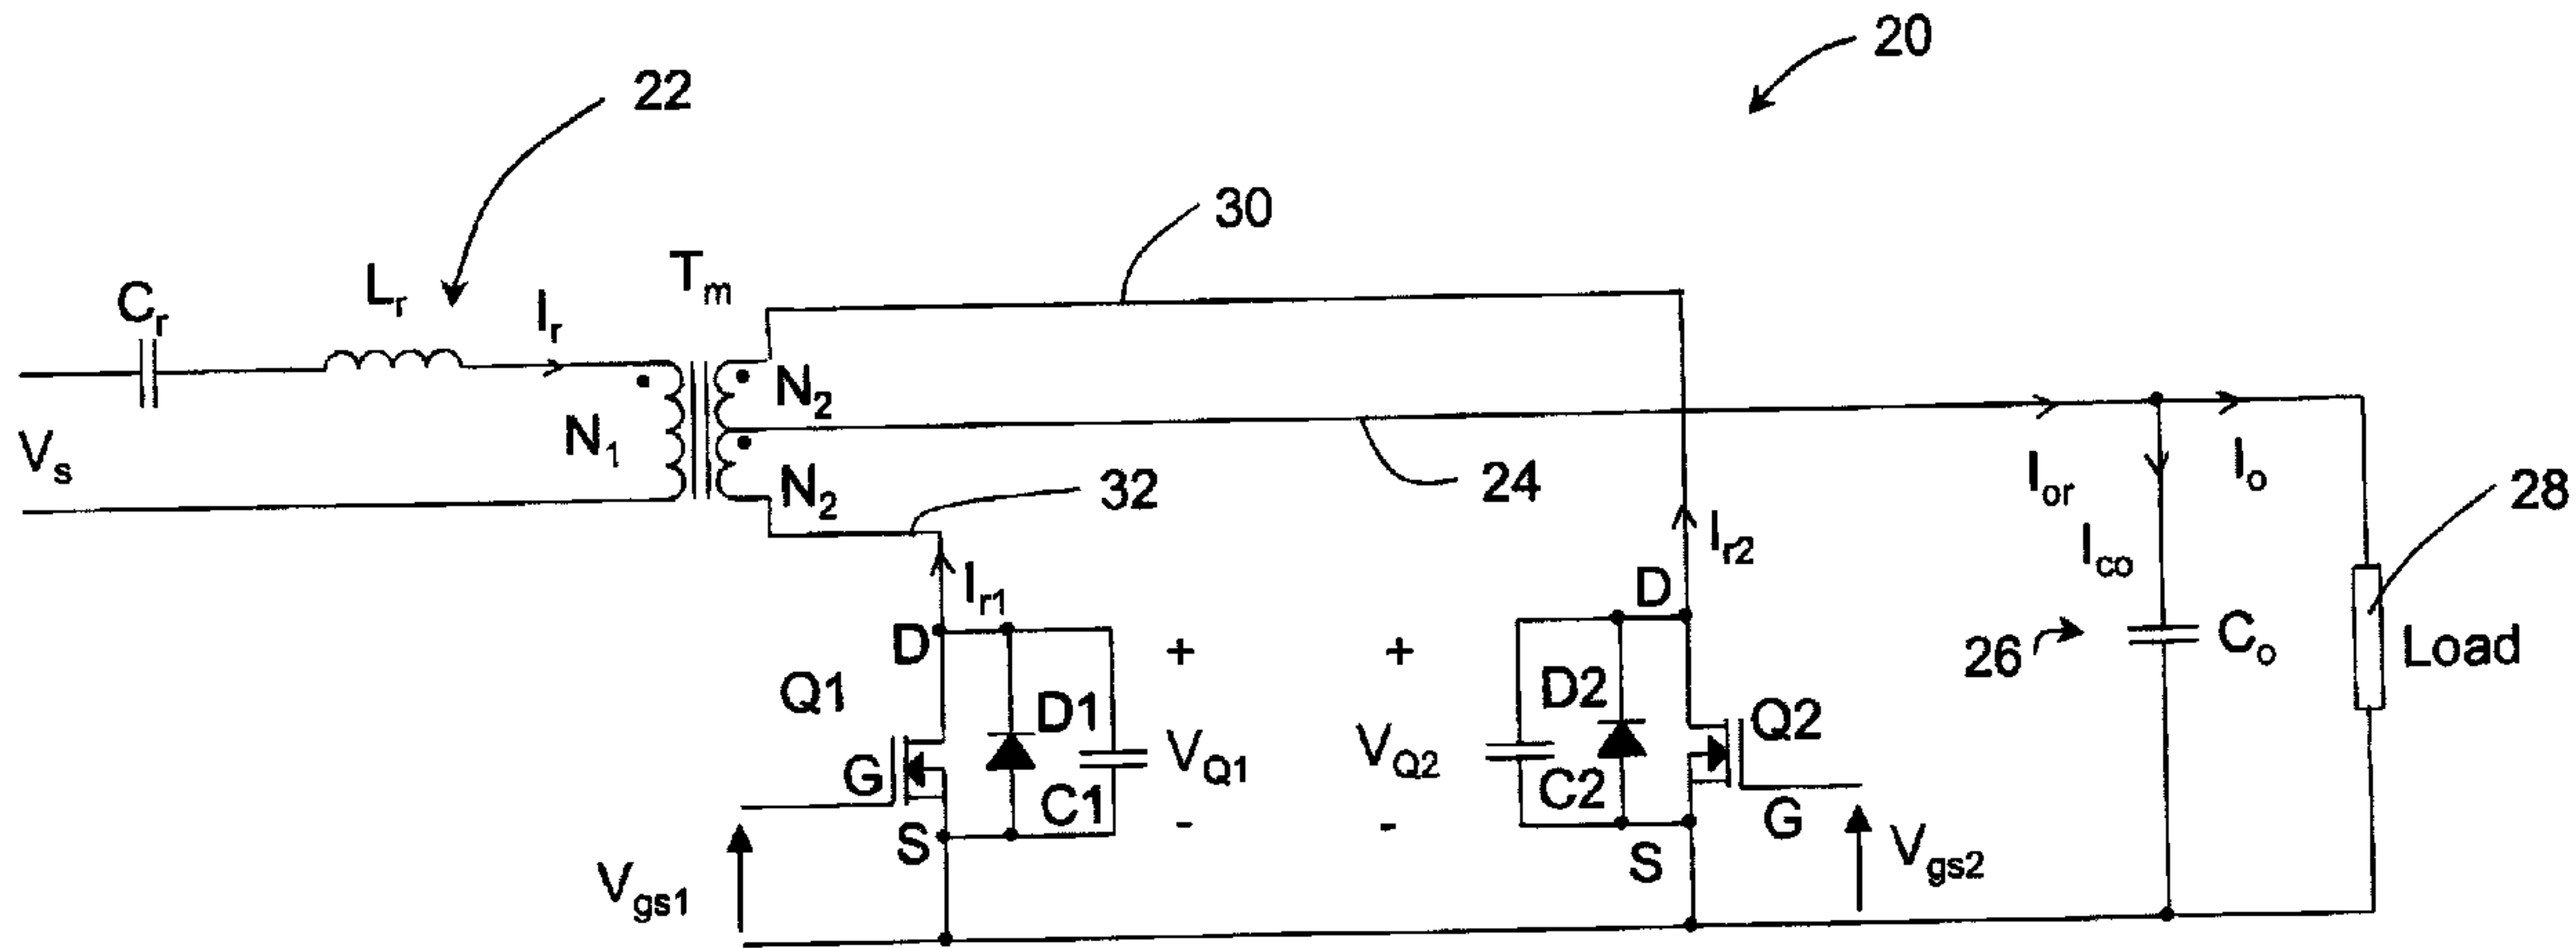

AC/DC converter topology