

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 October 2008 (30.10.2008)

PCT

(10) International Publication Number
WO 2008/129509 A1

(51) International Patent Classification:
H04B 7/185 (2006.01) **H04L 1/00** (2006.01)

(21) International Application Number:
PCT/IB2008/051537

(22) International Filing Date: 22 April 2008 (22.04.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/907,930 23 April 2007 (23.04.2007) US

(71) Applicant (for all designated States except US): **SHIRON SATELLITE COMMUNICATIONS (1996) LTD.**
[IL/IL]; 9 Bareket Street, 49517 Petach Tikva (IL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LAUFER, Shaul**
[IL/IL]; 27 Yud Daled HaBanim Street, 49377 Petach Tikva (IL).

(74) Agents: **G.E. EHRLICH (1995) LTD.** et al.; 11 Menachem Begin Street, 52521 Ramat-gan (IL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(54) Title: METHOD AND APPARATUS FOR COMPENSATION FOR WEATHER-BASED ATTENUATION IN A SATELLITE LINK

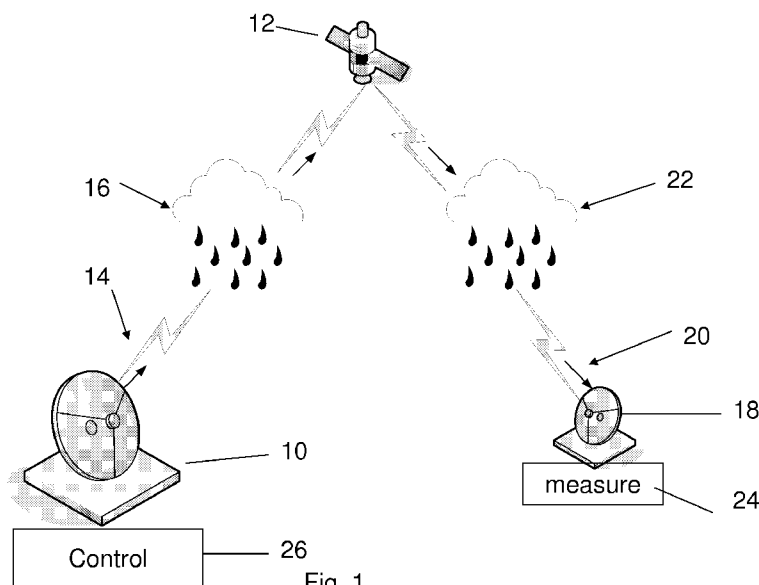


Fig. 1

(57) Abstract: A controlled satellite link comprising a first link and a second link, comprises: a reference unit for obtaining signal attenuation over said controlled satellite link, and a control unit for discriminating between first link attenuation and second link attenuation and accordingly controlling at least one link transmission parameter associated with the first link and at least one transmission parameter associated with the second link to dynamically adapt to changes in said obtained signal attenuation.

WO 2008/129509 A1

METHOD AND APPARATUS FOR COMPENSATION FOR WEATHER-BASED ATTENUATION IN A SATELLITE LINK

5

FIELD AND BACKGROUND OF THE INVENTION

The present invention relates to a system for compensation for weather-based attenuation in a satellite link and, more particularly, but not exclusively to such compensation using one or both of automatic uplink power control and adaptive coding and modulation for satellite communications. The present methods can be used in either one direction, that is forward or return links, or in both directions (forward and return links).

Weather can cause attenuation to the signal on a satellite communication link. Furthermore the ground to satellite leg may experience different weather conditions from the satellite to ground leg. Furthermore, in a broadcast system, different satellite to ground legs may experience different weather conditions, so that the overall attenuation in the link may not only change rapidly but may differ between different receiving stations at the same instant.

A number of solutions have been used in the past. One popular solution involves designing the satellite communication system at the outset for the worst case weather conditions. Such a solution is particularly wasteful of power although it rarely fails. Another solution involves using climatology to estimate weather parameters of concern, and then setting the transmission power for the estimated conditions. Further solutions use empirical models based on climatological data and long baseline observations of signal strength to model RF attenuation and compensate accordingly.

A recent proposal involves operating the link based on expected daily weather conditions for the specific geographical region in which the link operates. However even in this case transmission power is wasted since the system operates on the basis of the worst case within the time and geographical frame of the estimate.

It is known to provide automatic uplink power control (AUPC), that is, adjusting the output power on the uplink, with the general aim of maintaining a

constant signal to noise (SNR) ratio at the remote end. This is however inexact as the control over the downlink is indirect.

Adaptive coding and modulation (ACM) is known to keep the received signal quality (e.g. bit error rate) constant in the face of changing SNR levels. The modulation pattern is changed between a high capacity modulation at high SNR and a low capacity but highly robust modulation when the SNR decreases.

However attempts to dynamically change the modulation based on the requirements of the system as a whole lead to problems with individual links. Likewise attempts to dynamically change individual links lead to imbalances in the system as a whole.

The following documents are representative of the state of the art:

Thomas J. Saam, "Uplink Power Control Technique for VSAT Networks", in *Proceedings of Southeastcon 89*, pp. 96-101, April 89.

Thomas J. Saam, "Uplink power control mechanism for maintaining constant output power from satellite transponder", US Patent Number 4,941,199, Filed April 6, 89.

Lawrence W. Krebs et al., "Methods and Apparatus For Mitigating Rain Fading Over Satcom Links Via Information Throughput Adaptation, US Patent Number 7,174, 179, Filed February 6, 07.

ETSI EN 302 307 V1.1.1 (2004-01) : "Digital Video Broadcasting (DVB) Second generation framing structure, channel coding and modulation systems for Broadcasting, Interactive Services, News Gathering and other broadband satellite applications".

Alberto Morello, Vittoria Mignone, "DVB-S2: The Second Generation Standard for Satellite Broad-band Services", *Proceedings of the IEEE*, vol. 94, no. 1, pp. 210-227, January 2006

G. Maral, M. Bousquet, *Satellite Communications Systems*, Third Edition, John Wiley & Sons, Ltd., 1999.

SUMMARY OF THE INVENTION

The changing levels of attenuation in the system can be compensated for dynamically by changing the modulation level in the link between the hub and the end user. However over the system as a whole rules are set to ensure that the hub remains within its resources.

According to one aspect of the present invention there is provided a controlled satellite link comprising a first link and a second link, comprising:

at least one reference unit for obtaining at least signal attenuation over the controlled satellite link, and

a control unit, associated with the reference unit, configured for discriminating between first link attenuation and second link attenuation and accordingly controlling at least one link transmission parameter associated with the first link and at least one transmission parameter associated with the second link to dynamically adapt to changes in the obtained signal attenuation.

In an embodiment, the controlled transmission parameter is transmission power.

In an embodiment, the controlled transmission parameter comprises a coding parameter.

In an embodiment, the controlled transmission parameter comprises a modulation parameter.

In an embodiment, the controlled transmission parameter is transmission power in the first link and a coding parameter in the second link.

In an embodiment, the controlled transmission parameter is transmission power in the first link and a modulation parameter in the second link.

Additionally or alternatively, the controlled transmission parameter is transmission power in the first link and a combination of coding and modulation parameters in the second link.

In an embodiment, the second link comprises a plurality of links to respective receiving stations and wherein a plurality of the respective receiving stations comprise independent reference units, thereby to allow independent control of the plurality of links.

In an embodiment, the independent reference units are geographically substantially evenly distributed to allow independent control of the plurality of links on a geographical basis.

In an embodiment, measurements by the reference unit are made in a plurality
5 of cycles and the derivation unit is configured to obtain the first link attenuation in a first cycle and the second link attenuation in a second cycle.

In an embodiment, the first link is an uplink and the second link is a downlink and wherein the controlled transmission parameter is transmission power in the uplink and a combination of coding and modulation parameters in the downlink.

10 According to a second aspect of the present invention there is provided a method of controlling a satellite link, the satellite link transmitting according to transmission parameters, the method comprising:

measuring attenuation over the link, the link having two legs, a first leg to a satellite and a second leg to respective ones of a plurality of ground based receiver
15 stations, the measuring being carried out at some of the ground based receiver stations, each leg being associated with respective ones of the transmission parameters, the measuring discriminating between attenuation at the respective legs; and

dynamically adjusting at least one of the transmission parameters associated
20 with the first leg and at least one of the transmission parameters associated with the second leg to adapt for changes in the discriminated measured attenuation.

In an embodiment, the at least one transmission parameter adjusted is transmission power and the dynamically adjusting comprises increasing the transmission power at the first leg to compensate for increases in the measured
25 attenuation and decreasing the transmission power to compensate for decreases in the measured attenuation, and adjusting modulation levels over the second leg such that the error rate after decoding of the received signal at the plurality of ground based receiver stations is kept substantially constant.

In an embodiment, the at least one transmission parameter adjusted is a coding
30 parameter, and the dynamically adjusting comprises increasing coding complexity (decreasing code rate) to compensate for increases in the measured attenuation, and decreasing coding complexity (increasing code rate) to compensate for decreases in

the measured attenuation such that the error rate after decoding of the received signal is kept substantially constant.

In an embodiment, the at least one transmission parameter adjusted is a coding parameter, and the dynamically adjusting comprises decreasing code rate to
5 compensate for increases in the measured attenuation, and increasing code rate to compensate for decreases in the measured attenuation such that the error rate after decoding of the received signal is kept substantially constant.

In an embodiment, the at least one transmission parameter adjusted is a modulation parameter, and the dynamically adjusting comprises decreasing
10 modulation constellation size to compensate for increases in the measured attenuation, and increasing modulation constellation size to compensate for decreases in the measured attenuation such that the error rate after decoding of the received signal is kept substantially constant.

In an embodiment, the satellite link comprises a first link and a second link,
15 and wherein the dynamically adjusting is carried out independently for the first and second links respectively.

In an embodiment, the at least one parameter is transmission power for the first link and a coding or modulation parameter for the second link.

In an embodiment, the at least one parameter is transmission power for the
20 first link and a coding parameter and a modulation parameter for the second link.

In an embodiment, the first link is an uplink from a ground-based transmitting station to a satellite, and the second link is a downlink from the satellite to a ground-based receiving station.

In an embodiment, the satellite link is a broadcasting link, and there are a
25 plurality of ground-based receiving stations.

In an embodiment, at least some of the ground-based receiving systems carry out the measuring, and common attenuation is assigned to the uplink and differential attenuation is assigned to respective downlinks.

According to a third aspect of the present invention there is provided a method
30 of compensating for dynamic changes in attenuation in a satellite link having a first link and a second link and attenuation over the first link and attenuation over the second link, comprising:

measuring the dynamic changes in attenuation at a receiving station of the satellite link,

discriminating using the measurements between dynamic changes relating to attenuation at the first link and dynamic changes relating to changes at the second link;

feeding the measurements via a return link; and

using the measurements and the discrimination, modifying at least one transmission parameter associated with the first link and one transmission parameter associated with the second link to adapt to the dynamic changes.

According to a fourth aspect of the present invention there is provided a satellite receiving station for receiving a channel of a satellite communication link; comprising:

a measuring unit for obtaining measurements of dynamic changes in attenuation of the channel, the measurement including data to allow discrimination between attenuation in a first leg and attenuation in a second leg of the satellite link; and

an output unit for sending the measurements via a return channel to allow for channel compensation.

Unless otherwise defined, all technical and scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. The materials, methods, and examples provided herein are illustrative only and not intended to be limiting.

Implementation of the method and system of the present invention involves performing or completing certain selected tasks or steps manually, automatically, or a combination thereof. Moreover, according to actual instrumentation and equipment of preferred embodiments of the method and system of the present invention, several selected steps could be implemented by hardware or by software on any operating system of any firmware or a combination thereof. For example, as hardware, selected steps of the invention could be implemented as a chip or a circuit. As software, selected steps of the invention could be implemented as a plurality of software instructions being executed by a computer using any suitable operating system. In any case, selected steps of the method and system of the invention could be described as

being performed by a data processor, such as a computing platform for executing a plurality of instructions.

The changing levels of attenuation in the system can be compensated for by changing the modulation and coding level, the MOD COD in use. However over the
5 system as a whole, with links spread over a geographical area it is desirable to limit the overall number of MOD CODs in use.

Unless otherwise defined, all technical and/or scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which the invention pertains. Although methods and materials similar or equivalent to those
10 described herein can be used in the practice or testing of embodiments of the invention, exemplary methods and/or materials are described below. In case of conflict, the patent specification, including definitions, will control. In addition, the materials, methods, and examples are illustrative only and are not intended to be necessarily limiting.

15 Implementation of the method and/or system of embodiments of the invention can involve performing or completing selected tasks manually, automatically, or a combination thereof. Moreover, according to actual instrumentation and equipment of embodiments of the method and/or system of the invention, several selected tasks could be implemented by hardware, by software or by firmware or by a combination
20 thereof using an operating system.

For example, hardware for performing selected tasks according to embodiments of the invention could be implemented as a chip or a circuit. As software, selected tasks according to embodiments of the invention could be implemented as a plurality of software instructions being executed by a computer
25 using any suitable operating system. In an exemplary embodiment of the invention, one or more tasks according to exemplary embodiments of method and/or system as described herein are performed by a data processor, such as a computing platform for executing a plurality of instructions. Optionally, the data processor includes a volatile memory for storing instructions and/or data and/or a non-volatile storage, for example,
30 a magnetic hard-disk and/or removable media, for storing instructions and/or data. Optionally, a network connection is provided as well. A display and/or a user input device such as a keyboard or mouse are optionally provided as well.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is herein described, by way of example only, with reference to the accompanying drawings. With specific reference now to the drawings in detail, it is stressed that the particulars shown are by way of example and for purposes of illustrative discussion of the preferred embodiments of the present invention only, and are presented in order to provide what is believed to be the most useful and readily understood description of the principles and conceptual aspects of the invention. The description taken with the drawings makes apparent to those skilled in the art how the several forms of the invention may be embodied in practice.

10 In the drawings:

Fig. 1 is a simplified diagram illustrating a satellite link dynamically adjusted by AUPC & ACM mechanisms to overcome changing weather-based attenuation according to a first embodiment of the present invention.

15 Fig. 2 is a simplified diagram showing theoretical measuring of separate uplinks and downlinks for differential control of the links, according to a preferred embodiment of the present invention.

Fig. 3 is a simplified diagram showing the control of different parameters for the uplink and for the downlink according to a preferred embodiment of the present invention.

20 Fig. 4 is a simplified diagram showing an implementation of the system of Fig. 3, according to a preferred embodiment of the present invention.

Fig. 5 is a simplified flow chart illustrating a process of changing control parameters for each link in a respective stage following polling, according to a preferred embodiment of the present invention.

25 Fig. 6 is a simplified graph showing resource consumption, that is both bandwidth and power, for different MODCODS.

Fig. 7 is a simplified flow chart showing different MODCODS with different levels of availability.

Fig. 8 is a graph showing MODCOD distribution in percentages.

30 Fig. 9 is a schematic illustration showing different MODCODS with different percentage uses for a system.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present embodiments comprise an apparatus and a method which uses measured weather conditions or weather consequential attenuation on the link to modify the link parameters.

5 In an embodiment the weather-related attenuation on the uplink, meaning the link from the originating ground station to the satellite, is measured, or more accurately estimated from a measure of the overall attenuation, and the uplink power is controlled accordingly to achieve a substantially constant received uplink power. In the same embodiment the weather related attenuation on the downlink, meaning the
10 link from the satellite to the receiving station, is measured, or more accurately estimated from the same measurement as before, and the downlink modulation and coding parameters are modified to compensate for the attenuation and provide a substantially constant receive quality at the receiving station.

The present embodiments further modify the transmission on the link between
15 the hub and the home, not by modifying the transmission power since this is often not possible, but rather by modifying the MODCOD, that is to say modifying the modulation so that at low attenuation (good weather) high level modulation is used to obtain a high bandwidth channel. At greater attenuations lower level modulation is used to compensate for the greater attenuation and still provide correct reception, but
20 at the cost of bandwidth. The hub or part of the hub involved in the particular transmission however does not operate using endless MODCODS for all of its links. Rather, according to the present embodiments the total number of MODCODs in use at any given time is limited, and the limitation follows a scheme which looks for the best efficiency from the MODCODs chosen.

25 In the present embodiments, an ACM controller at the hub sends commands to the various terminals to control the transmission speed, transmission power, and MODCOD for Inbound links. The control is provided with the aim of achieving balanced resource consumption namely balancing Bandwidth and Power Equivalent Bandwidth, while taking into account the individual limitations of the terminals in
30 terms of EIRP, the individual instantaneous traffic load, and the individual climate conditions at the remote site of each terminal.

The estimation of the climate conditions can be based on the same measurements that are used for the Outbound link or separate measurements

performed by the return links receiver at the Hub. In other words, the ACM of the hub at the return link is concerned with balancing of resources. This contrasts with control at the terminal which has different aims and resources. At the terminal there is no issue of sharing fixed resources. The terminal's only limitation is transmission
5 power to the satellite. At the down link, that is to the earth station, the receiver antenna is so large that attenuation is not really an issue. The only issue for the terminal using the return link is to change the rate of transmission in accordance with the weather, and use the highest MODCOD that the weather based attenuation allows.

However from the point of view of the system, bandwidth relates to power,
10 and the power available at the satellite is limited. Thus it is desirable to use all available power over the system as a whole but no more. Individual terminals at times of low overall traffic may of course be assigned the highest MODCOD. However once power availability does not meet requirements a lower MODCOD is assigned even if the weather does not require it.

15 Also, for the system as a whole, even in the case of low traffic and good weather, the satellite may still wish to limit the user of high MODCODs, because of issues with the power equivalent bandwidth. The present embodiments provide a policy for all users, not just those in crisis due to weather etc to assign MODCODs.

More specifically, the present embodiments involve enhancing a VSAT star
20 network based on a single carrier time multiplexed outbound channel (e.g. DVB-S2), with combined AUPC (Automatic Uplink Power Control) and ACM (Adaptive Coding and Modulation) capabilities in order to optimize satellite resources utilization. The AUPC is designed to maintain constant satellite transmitted power in all weather conditions by dynamically adapting the transmitted carrier level to the
25 uplink rain attenuation. The ACM capability is designed to maintain constant received signal quality at each terminal by dynamically adapting the modulation and coding assigned to the packets transmitted to each terminal to the downlink rain degradation affecting this terminal.

The following abbreviations are used throughout this specification:

30 AUPC – Automatic Uplink Power Control

ACM – Adaptive Coding and Modulation

CNR – Carrier to Noise Ratio

SIGL – Signal Level

NBW – Noise Bandwidth

HPA – High Power Amplifier

LNB – Low Noise Block

SCPC – Single Channel Per Carrier

5 PEB - Power Equivalent Bandwidth

In the following description and claims, the terms adapt and compensate are used synonymously. In general the concept of compensation is used for power whereas the concept of adaptation is used for modulation and encoding. In the present embodiments however, modification of the power and of the modulation and
10 encoding parameters are carried out in an integrated fashion so that the two terms become synonymous.

The principles and operation of an apparatus and method according to the present invention may be better understood with reference to the drawings and accompanying description.

15 Before explaining at least one embodiment of the invention in detail, it is to be understood that the invention is not limited in its application to the details of construction and the arrangement of the components set forth in the following description or illustrated in the drawings. The invention is capable of other embodiments or of being practiced or carried out in various ways. Also, it is to be
20 understood that the phraseology and terminology employed herein is for the purpose of description and should not be regarded as limiting.

Reference is now made to Fig. 1 which illustrates a controlled satellite link, according to a first preferred embodiment of the present invention. A hub 10 transmits a signal to a satellite 12 over an uplink 14. The uplink encounters rain and
25 clouds 16 which cause weather-related attenuation of the signal. It will be appreciated that weather conditions can change rapidly so that the overall attenuation of the uplink is itself liable to change rapidly.

The satellite 12 relays the signal it has received on the uplink to one or more ground-based receiving stations 18 via a downlink 20. The downlink 20 is also liable
30 to weather based attenuation, which may be brought about by rain and clouds 22. It will be appreciated that the dynamic variation in attenuation on the downlink tends to add to any attenuation on the uplink and also tends to vary independently. It is noted

that the uplink attenuation is present in all received signals since there is only one uplink in the present embodiment, but the downlink attenuation varies.

Thus in a first embodiment of the present invention a reference unit 24 is inserted at a receiving station for measuring signal attenuation over the link. The measured attenuation is transmitted back to the hub 10 where a control unit 26, controls a link transmission parameter to dynamically compensate for changes in the measured signal attenuation. Thus as the signal attenuation increases the reference unit 24 informs the control unit, which then either strengthens the signal or makes the coding or modulation or both more robust so that the received signal remains readable.

In Fig. 1, only a single ground-based receiving station is shown, although it will be appreciated that most satellites relay to multiple ground stations. In fact the satellite link may be a broadcast link, and there may therefore be numerous ground-based receiving stations spread over a substantial region. In any event different weather conditions may apply to different receiving stations.

Reference is now made to Fig. 2, which illustrates a further embodiment of the present invention in which the link of Fig. 1 is modified to provide separate control over the uplink and the different down links. Parts shown in hashed lines may be regarded as theoretical since the ability to make modifications to the satellite 12 is limited and practical implementations are explained below. Specifically items shown in dashed lines indicate features which one would like to include at the satellite, but in practice this is not possible and a system of indirect measurement is discussed below. Separate reference units are provided for the uplink and all or some of the different down links. Reference unit 28 is theoretically provided at the satellite for independent measuring of attenuation at the uplink, and control unit 26 independently compensates for uplink attenuation. Reference unit 24 measures attenuation on the downlink and control unit 30 at the satellite independently compensates for changes in the measured attenuation at the downlink. In practice reference unit 24 is all that is available, so that uplink attenuation is derived from the measurements at reference unit 24, as will be described in greater detail hereinbelow.

It is noted that in satellite communication there is a beacon transmitted at a different frequency with constant power towards the earth. Based on received beacon

signal level the uplink attenuation can be estimated after taking into account the frequency difference between the beacon and the signal transmission.

In one embodiment a reference unit is provided at each receiving station and the signal to each ground-based receiving station is independently controlled.

5 However, in the case of television or like broadcasting there may be hundreds of thousands or even millions of receiving stations so, in an alternative embodiment, it is possible to aggregate the various downlinks on a regional basis. That is all downlinks in a certain geographical area may be compensated together based on local weather as measured at one or two of the receiving stations in the region. In an embodiment,

10 only certain receiving stations, judiciously distributed, are used as references. Certain variations in attenuation may be dealt with by attention to the uplink alone, whereas other variations may require changes to the downlink. Stations that are reference stations may report all attenuation changes, but those stations which are not reference stations need only report if the downlink needs attention. More particularly, in order

15 to reduce the number of interrupt signals, each individual VSAT can calculate the current downlink attenuation or an indicator for zero downlink attenuation and determine if variation that it measures in its CNR corresponds also to downlink attenuation variation or only to uplink attenuation variation. In the latter case a VSAT, which is not a reference terminal, need not issue an interrupt with a request for

20 MODCOD change but rather may simply wait for the AUPC to compensate for the uplink attenuation variation.

Parameters used in transmission channels are numerous and many such parameters can be adjusted to overcome attenuation. One such parameter is transmitted power. In case of severe attenuation the transmission power can be

25 increased. Increased transmission power is generally only available from the hub 10 however. The satellite has only limited power resources and thus increases in transmission power for the down link are not really practical. Other parameters that can be modified are coding and modulation parameters. The complexity or robustness of the coding and/or modulation of the signal can be adjusted to maintain

30 received signal quality.

Reference is now made to Fig. 3, which is a simplified diagram showing an uplink 32 in which the controlled transmission parameter is transmission power. A downlink 34 is shown in which adaptive coding and modulation are provided to

ensure the quality of the received signal is maintained. It will be appreciated that compensation for attenuation by modifying the coding and modulation parameters to make the coding and modulation more robust leads to a reduction in the signal rate. Thus picture quality may have to be degraded, and say high definition television HDTV quality may be lost over the duration of a bad weather episode. However as long as the degradation is restricted to the bad weather episode due to dynamic measuring of the signal then the disruption to the customer is minimized. Alternatively, if the satellite beam covers a large territory with many regions of independent climatic conditions, the throughput of a site can be maintained even in varying rain conditions and accordingly varying modulation and coding parameters. The network design may take into account a distribution of modulation and coding parameters according to climate statistics over the region. When a specific site uses more robust parameters it does not have to reduce throughput but it can consume a larger fraction of the total carrier, while other sites may use less robust parameters at the same time and therefore consume a smaller fraction of the carrier. For a large network the actual aggregated throughput may be similar to the calculated average throughput with very small variance.

Reference is now made to Fig. 4, which shows in greater detail how the invention may be applied in practice to a broadcast type satellite link with a single hub and multiple receiving stations in which modifications to the satellite are not possible. In Fig. 4 hub 10 broadcasts to satellite 12 which relays the signal to ground-based receiving stations 18.1 ... 18.n. Each ground-based receiving station has different weather conditions. The SNR at each receiving station is measured by a measurement unit 24.1...24.n. The measurements are then fed via return links, which are typically satellite links or ground links 38, say ADSL over a telephone network, to AUPC and ACM controller 40. The AUPC and ACM controller then interacts with ACM modulator 42 and both the controller 40 and modulator 42 interact with traffic shaper 44 to modify the signal that is sent over the link.

Two independent measurements of SNR and received signal level are performed by a reference ground station or alternatively measurements of forward link and return link SNR of a reference ground station. The two measurements are considered together and enable estimations of the uplink and the downlink attenuation separately. Thus the inability to measure at the satellite is compensated for. The

measurements from different ground stations are also considered together. Uplink attenuation can be used to average the uplink result and downlink attenuation is attributed to the different downlinks.

The present embodiments provide for coordination between the mechanisms that compensate for uplink and downlink variations in the attenuation. Compensation for the uplink by changing the transmitted power affects the measurements performed by the ground station and the selection of modulation and coding parameters. Thus lack of coordination may result in the repeating of transmissions of requests to change the current selection from any of the ground stations before and after uplink power compensation, so that the ground stations ask for a change that has already been provided. Furthermore the present embodiments require time for achieving stable selection of parameters. The object of the coordination is that different parts of the networks are not working against each other and therefore preventing stability from being attained. Failure to coordinate may lead to a need for increased margins, namely wasting satellite resources.

In summary there is provided a method of controlling a satellite link comprising: measuring attenuation over the link, and dynamically adjusting at least one of the transmission parameters to compensate for changes in the measured attenuation. In an embodiment attenuation may be treated per leg, that is per uplink and per downlink, but in such a case, because the satellite itself cannot be modified, the effects at each separate link have to be derived.

The presently derived approach may also be used for other ACM capable Outbound signals and also for point-to-point SCPC (Single Channel Per Carrier) satellite links. The embodiments use communication channel measurements, to allow location and beam independent, real time operation, of the combined AUPC and ACM processes. The channel measurements are used for estimating dependent or independent uplink and downlink rain attenuation and degradation. These estimations are then used for making the decisions on the compensations required in the uplink and in the downlink.

As will be explained in greater detail below, several principle implementations are discussed. A first implementation, hereinafter Case I, involves a reference terminal installed at the teleport. A second implementation, Case II involves reference terminals anywhere, namely either at the teleport or other locations in the same beam,

or at other locations in a different beam. A third implementation, Case III involves a return link via the satellite. This contrasts with Fig. 4 above, where the return link was terrestrial. In case III the return link provides measurements that are used together with forward link measurements for estimating the uplink and downlink attenuation.

- 5 In case II the return link can be either via satellite or terrestrial and is used for forwarding the measurements made by the ground station relating to the link from the ground station to the hub.

The present embodiments may be used for AUPC only, for example where ACM is not supported by terminals or not activated. Alternatively the embodiments
10 may be used for ACM only, for example where a beacon receiver is used for uplink power control, or uplink is transmitted via C band beam, or the transponder operates at ALC – Automatic Level Control mode. As a further alternative the embodiments may involve combined AUPC and ACM operating together to achieve optimal utilization of transponder resources.

- 15 The present embodiments provide a controller that compensates in real time for independent atmospheric and other variations in both uplink and downlink of a satellite communications link. Such a link may be either the multiplexed Outbound carrier of a star VSAT network, or a point-to-point SCPC satellite link. The compensation is performed for the uplink by controlling the transmitted power in
20 order to maintain constant satellite transmitted power at all weather conditions. For the downlink the compensation is based on assigning appropriate modulation constellation and code rate which can provide the maximal throughput for the actual weather conditions. The controller algorithm uses channel measurements performed by the receiving stations that are sent back to the controller. The receiving stations are
25 standard stations that provide service and can be anywhere, under any beam of the satellite. Measurements performed by several or all stations can be used for improving the channel estimations. The uplink control is designed to maintain constant satellite transmitted power at all weather conditions by adapting the transmitted carrier level to the uplink rain attenuation. The adaptation of coding and modulation is designed to
30 maintain constant received signal quality at each terminal according to the downlink rain degradation affecting this terminal. The adjustment for each terminal is implemented by the modulator by transmitting, using time-division multiplexing, a sequence of frames, where the coding and modulation format may change frame-by-

frame. Each frame may carry traffic to terminals that expect the coding and modulation levels assigned to that frame.

The uplink and down link adaptation are based on the same channel measurements. The present embodiments may separate the effects of the uplink and down link as reflected from the channel measurements performed by the receiving stations. As the uplink control influences the downlink performance, the present embodiments perform combined control of uplink and downlink by deducting the effect of the uplink control from the current channel measurements in order to allow for computing the downlink control stage using the same current measurements. Such a technique reduces the control cycle time and the number of modulation and coding corrections as there is no need to wait for the next updated measurements that would be affected by the uplink update for correctly updating the downlink modulation and coding.

The above approach avoids repeating transmissions from all ground stations requesting to change selection of modulation and coding before and after uplink power modification, and saves time for achieving stable selection. Consequently smaller margins are required and satellite resources are saved.

The channel estimations produced by the above process, namely uplink and down link attenuations can be used, after appropriate correction according to up/down frequency ratios, to additionally control the return links of a star VSAT network (or the return link of the SCPC link). The controller instructs each VSAT to increase/decrease its power level in order to compensate for changes in the estimates of the Return link uplink attenuation. If the VSAT EIRP is already fully exploited and the uplink rain-linked fading is not fully compensated, then compensation may be achieved by a reduction in transmission rate and/ or modulation and coding, and the spare power may then be assigned to other more powerful VSATs, so that the total power consumed from any transponder is maintained at a constant level. The controller may also instruct a modification of the transmission rate, modulation and coding in order to compensate the changes in downlink rain attenuation. Compensation may be based on either the already estimated downlink rain degradation or the measured return link signal to noise ratio. Compensation should be after deduction of the uplink power compensation.

Another consideration that may be taken into account by the controller is to

achieve balanced resource utilization, namely appropriate selection of modulation codes or MODCODs for the return links. That is to say the controller may wish to balance the consumed power and bandwidth resources from a transponder which contains the return links with or without the Outbound link. Balancing is based on

5 having a selection of a few MODCODs for the return links where the higher MODCODs consume more power equivalent bandwidth (PEB) than bandwidth, while the lower MODCODs consume more bandwidth than PEB. In the case that the Outbound link is in the same transponder it might be more efficient to make the Outbound unbalanced, to allow a higher Outbound MODCOD, and to balance it with

10 appropriate selection of MODCODs for the return links residing in the same transponder. In the case of a band (or full transponder) assigned only for return links the controller may assign MODCODs according to traffic requirements, weather conditions, satellite coverage, and balancing requirements so that overall balancing may be achieved. Such operation of the controller enables to use all available

15 resources in an efficient way. Figure 6 is a graph showing the result of such balancing. The controller takes into account that generally the return links are sensitive mainly to uplink fading and not to downlink fading as the CNR in the downlink is generally much larger than in the uplink due to the use of a large teleport antenna. Therefore in the design of the balanced operation the assignment of

20 MODCODs is mainly according to overall network traffic in the return links that may be delivered with specific MODCOD. The controller uses ACM and TRC (Transmission Rate Control) to compensate for the limitation of the remote terminal in terms of EIRP for severe rain conditions at the terminal site and for increasing the transmission rate beyond the committed rate to best effort based rates. Such a concept

25 not only optimizes the satellite transponder resources utilization but also allows minimizing of the required EIRP of the terminals and a reduction in their cost.

The concept is applicable to any form of modulation that the return channel may use. In particular it is applicable for both FDMA and TDMA type return channels, where for TDMA the terminals may have to be moved among carriers with

30 different MODCODs or instantaneous transmission rate when the controller decides to change their MODCOD or their instantaneous transmission rate. In some TDMA implementations the MODCOD can be changed in the same carrier. The controller algorithm is as follows for three active MODCODs, but can be extended to any

number of MODCODs:

1. Design in advance the ratios of overall network Inbound traffic that may use High MODCOD, Medium MODCOD, and Low MODCOD respectively to achieve balanced resource consumption.
5 Balance should be in terms of bandwidth and PEB in the frequency band assigned to all the network carriers within given a transponder, and may include the presence of an unbalanced Outbound carrier in the same transponder, or may not.
2. Assign the High MODCOD to all terminals with low data rates and good climate conditions until the maximum aggregated traffic
10 allowed to work in such MODCOD is reached, according to the designed balance.
3. Assign Medium MODCOD to the rest of the terminals. These are terminals which can survive at this time with the High MODCOD,
15 but are not far from exhausting their EIRP, add those terminals where the CNR is such that they cannot use the High MODCOD and thus could not otherwise deliver the actual required transmission rate in their climate conditions. Add also those terminals which can survive at this time with a higher MODCOD, but are not far from
20 exhausting their EIRP, until the designed aggregated traffic for this MODCOD is reached.
4. Assign Low MODCOD to the rest of the terminals.
5. When traffic requirements or climate conditions change the controller may change the assignments accordingly to maintain the
25 designed ratio for balanced resources consumption, while taking into account the terminal limitations in terms of EIRP.

At the individual control stage the terminal tries to maintain committed information rate (CIR) with its available EIRP resources through power
30 control, TRC (transmission Rate Control) and ACM. When rain fading starts the VSAT initially requests increasing its power. If all VSAT EIRP is exploited, and it is above CIR, and still need more power to achieve the desired Eb/No for its current MODCOD, it will reduce data rate down to CIR,

and then if further compensation is required it will reduce the MODCOD. Power adjustment is performed per all changes in data rate or MODCOD for achieving the desired Eb/No for such MODCOD. Further compensation can be done by further reduction of data rate below CIR, in order to maintain the link rather than let it to break, thus increasing availability significantly beyond the required availability, though with data rates below CIR. Generally the design supports CIR for the required availability with a certain MODCOD. When the rain fading decreases, if the data rate is below CIR and it requests to increase data rate, the controller will increase its data rate (TRC) until it reaches CIR and if there is still available EIRP to support a jump due to changing MODCOD, the MODCOD will be increased for saving bandwidth. If there is still available power the controller can either increase again the MODCOD or allow increasing the data rate above CIR based on best effort. After the individual stage where each VSAT adapts its power, data rate, and MODCOD to the traffic requirements, and actual rain conditions, the controller performs the system wise adjustments of MODCOD assignments in order to achieve balanced transponder resources utilization. At this stage VSATs that could use high MODCOD may be switched to a lower one for the purpose of balancing. Based on this higher level decision on MODCOD the VSAT then adjusts its power accordingly to achieve the desired Eb/No level. It might occur that an individual request to change MODCOD is allowed by the controller, since this is the only way to support CIR in requested availability, but then the controller will command one or few other VSATs to change their MODCODs in order to maintain balance.

We define the following parameters:

BW = Bandwidth in Hz

α = Roll Off Factor

COD = Code Rate of the FEC (Forward Error Correcting) Code

MOD = $\log_2()$ of modulation constellation size (e.g. 2 for QPSK, 3 for 8PSK)

R_s = Symbol Rate in sps (symbols per second)

R_b = Bit Rate in bps (bits per second), $R_b = R_s \cdot (MOD \cdot COD)$

C = Carrier Power in Watts [(C) in dBW], after the receiver matched filter

N = Noise Power in Watts [(N) in dBW], after the receiver matched filter

NBW = Noise Bandwidth in Hz

N_o = Noise Spectral Density in Watts/Hz, i.e. Noise Power per 1 Hz,

5 $N_o = N/NBW$

E_s = Energy per symbol in Joules, $E_s = C/R_s$

E_b = Energy per bit in Joules, $E_b = C/R_b$

CNR = Carrier to Noise Ratio [(CNR) in dB], $CNR = C/N$

$SIGL$ = Received Signal Level in Watts [($SIGL$) in dBW]

10 (G/T) (dB/K) is the figure of merit of a receiving terminal

$L_{fs, dn}$ (dB) is the free space loss between the satellite and the reference VSAT

at frequency f_{dn} (Hz)

A_{dn} (dB) is the downlink rain attenuation

A_{up} (dB) is the uplink rain attenuation

15 M_{CS} (dB) required clear sky margin

$(CNR)_{HMC}$ (dB) the lower CNR threshold for the highest MODCOD (see Table 3)

$T_{antenna}$ (K) Antenna noise temperature

T_{LNB} (K) LNB noise temperature

20 HMC highest MODCOD allowed for clear sky conditions

AUPC Case I

We describe the algorithm for maintaining constant satellite transmitted power $EIRP_{sat}$ at all weather conditions by adapting the transmitted Outbound carrier level

25 Tx_PWL to the uplink rain attenuation A_{up} , where a reference VSAT, with antenna diameter D_{ref} is installed at the teleport, and the same satellite beam covers both teleport and all other VSATs in the network, so that the carrier transmitted from the teleport may be received at the teleport. In Case I the reference terminal is installed at the uplink teleport, thus having dependent uplink and downlink rain attenuation.

30 CNR measurements and G/T corrections are used as proposed by Thomas J. Saam, "Uplink Power Control Technique for VSAT Networks", in *Proceedings of Southeastcon 89*, pp. 96-101, April 89, and Thomas J. Saam, "Uplink power control

mechanism for maintaining constant output power from satellite transponder", US Patent Number 4,941,199, Filed April 6, 89.

. However the mechanism of deriving the uplink power control gain is different as described in the following.

5 The received C/N_o can be expressed as follows:

$$\left(\frac{C}{N_o}\right) = EIRP_{sat} - L_{fs, dn} - A_{dn} + \left(\frac{G}{T}\right)_{ref} - k_B \text{ (dBHz)} \quad (1.1)$$

where $L_{fs, dn}$ (dB) is the free space loss between the satellite and the reference VSAT at frequency f_{dn} (Hz) transmitted from the satellite, A_{dn} (dB) is the downlink rain attenuation, $(G/T)_{ref}$ (dB/K) is the figure of merit of the receiving reference terminal, and $k_B = -228.6$ dBW/HzK is the Boltzmann constant. The rain attenuation in the uplink is related to the rain attenuation in the downlink as follows:

$$A_{up} = K + A_{dn} \text{ (dB)} \quad (1.2)$$

where for Ku band K is approximately 1.3 dB.

15 The relation between C/N_o and E_b/N_o is as follows:

$$\left(\frac{C}{N_o}\right) = \left(\frac{E_b}{N_o}\right) + 10 \cdot \log(R_s \cdot MOD \cdot COD) \text{ (dBHz)} \quad (1.3)$$

where R_s is the symbol rate, MOD is $\log_2(\)$ of the modulation constellation size, and COD is the code rate.

In the following algorithm, the term 'linkbudget' refers to the accounting of all of the gains and losses from the transmitter, through the medium (free space, cable, waveguide, fiber, etc.) to the receiver in a telecommunication system. It accounts for the attenuation of the transmitted signal due to propagation, as well as the antenna gains, feedline and miscellaneous losses.

A simple link budget equation may be as follows:

25 Received Power (dBm) = Transmitted Power (dBm) + Gains (dB) - Losses (dB)

It is noted that decibels are logarithmic measurements, so adding decibels is equivalent to multiplying the actual numeric ratios.

A more sophisticated listing of linkbudget components with exemplary

measurements is given in table 1 below:

Table 1 A LinkBudget for a typical Satellite link.

Link	Tx Location	Tx Antenna size (m)	BUC (Watt)	BUC OBO (dB)	Rx Antenna size (m)	Data Rate (Kbps)	Modulation	FEC	FEC TYPE	BER	Space Segment (KHz)	Rain Availability	Margin (dB)	% Power of transponder	% BW of transponder	Clear Sky Margin (dB)
Outbound Best MODCOD	Teleport	9.10	400.00	18.16	1.20	52000.00	16APSK	0.667	LDPC	1.E-08	23400.00	91.00%	2.03	71.68	65.00	2.46
Outbound Req. Avlbty	Teleport	9.10	400.00	18.16	1.20	26000.00	QPSK	0.667	LDPC	1.E-08	23400.00	99.70%	2.23	71.68	65.00	
Inbound R1A Best MODCOD	VSAT	1.20	2.00	3.54	9.10	32.00	8PSK	0.889	Turbo	1.E-08	14.64	99.70%	2.00	0.08	0.04	
Inbound R1B Req. Avlbty	VSAT	1.20	2.00	7.34	9.10	32.00	8PSK	0.667	Turbo	1.E-08	19.52	99.70%	2.00	0.03	0.05	

5 Algorithm steps for Case I.

(1) Determine from the linkbudget the highest MODCOD (denoted by HMC) allowed for clear sky conditions so that a predefined requirement for clear sky margin M_{CS} of e.g. 1 dB is met. The required (C/N_o) for clear sky conditions $(C/N_o)_{cs}$, at the reference terminal, is calculated as follows:

$$10 \quad (C/N_o)_{cs} = (CNR)_{HMC} + 10 \cdot \log(R_s) + M_{CS} + M_{ref} \quad (\text{dB Hz}), \quad \text{where}$$

$(CNR)_{HMC}$ is the lower CNR threshold for the highest MODCOD (see Table

3). If the diameter of the reference terminal is different from the diameter of a typical VSAT antenna in this network the difference M_{ref} in the clear sky margin obtained should be compensated accordingly. This value can be
15 obtained from linkbudget tool by calculating the margin for the standard antenna and for the reference antenna.

(2) Make calibration at clear sky conditions and determine the Tx_PWL required to obtain the desired $(C/N_o)_{cs}$. This is the Tx_PWL_{cs} that obtains the desired
20 $EIRP_{sat}$ at clear sky conditions. Calculate Tx_PWL_{max} by adding the uplink rain fade as found by linkbudget tool for the desired uplink availability. Measure the resulting $(C/N_o)_{cs}$ for this operating point and use the measured values in all calculations rather than the linkbudget calculated value. This reduces sensitivity to fixed measurement errors. (Note that calibration can be in any MODCOD lower or equal to HMC).

25 (3) Measure (C/N_o) at predefined time intervals and perform averaging over predefined number of measurements to obtain $(C/N_o)_i$ for the i -th interval. Search the solution for uplink power control gain required at the $i+1$ time interval $G_{upc,i+1}$ satisfying the following expression

$$G_{upc,i+1} = \frac{1}{2} \cdot \left\{ \left(\frac{C}{N_o} \right)_{cs} - \left(\frac{C}{N_o} \right)_{i+1} + K + G_{upc,i} - 10 \cdot \log \left[1 + \left(\frac{T_{rain}}{T_{ref}} \right) \left(1 - 10^{-(G_{upc,i+1}-K)/10} \right) \right] \right\}$$

Where typically $T_{rain}=278K$, and $T_{ref}=T_{antenna}/1.12+290*0.11+T_{LNB}$ (K) [6, pp.191-192]. This expression can be solved through numerical methods. It was found by simulation that five iterations provide good accuracy. The iterations can be started by substituting as initial guess $G_{upc,i}$ in $G_{upc,i+1}$, and generating through five iterations the $G_{upc,i+1}$ for the receiver quality $(C/No)_{i+1}$.

(4) The new power level will then be

$$Tx_PWL_{i+1} = Tx_PWL_{cs} + G_{upc,i+1} \text{ (dBW)} \quad (1.5)$$

A more detailed derivation is given hereinbelow.

AUPC Case II

In this Section we describe the algorithm for maintaining constant satellite transmitted power $EIRP_{sat}$ at all weather conditions by adapting the transmitted Outbound carrier level Tx_PWL to the uplink rain attenuation A_{up} , where a reference VSAT, with antenna diameter D_{ref} is installed either (1) at the teleport, and the same satellite beam covers both teleport and all other VSATs in the network, or (2) at another location, and the same satellite beam covers both teleport and all other VSATs in the network, or (3) at another location, and different satellite beams cover the teleport and all other VSATs in the network.

The solution for Case II is based on using measurements performed at the reference VSAT of both CNR (Carrier to Noise Ratio) and $SIGL$, the received signal level. The measurements can be reported either through a return link or any other communication link.

The instantaneous CNR and $SIGL$ can be read from the receiver chipset which is typically composed of a tuner (e.g. STB6100) and a demodulator (e.g. STB0900).

Typically the CNR is measured after the received signal is filtered by a square

root raised-cosine matched filter with equivalent noise bandwidth $NBW = R_s$, where R_s is the carrier symbol rate. Consequently

$$N_o = \frac{N}{NBW} = \frac{N}{R_s} \quad (\text{Watts/Hz}) \quad (1.6)$$

5 and

$$CNR = \frac{C}{N} = \frac{E_s}{N_o} = \frac{E_b}{N_o} \cdot MOD \cdot COD. \quad (1.7)$$

C/N_o can be expressed as a function of CNR and the symbol rate R_s

$$\boxed{\frac{C}{N_o} = CNR \cdot R_s \text{ (Hz)}}. \quad (1.8)$$

10 The received signal level $SIGL$ is measured at the tuner IF input with bandwidth $IFBW$ which is typically larger than the signal 3 dB bandwidth, R_s , in order to allow initial frequency error during acquisition stage. Consequently $SIGL$ can be expressed as follows:

$$15 \quad SIGL = C(1 + \beta) + N(IFBW / R_s) \quad (\text{Watts}) \quad (1.9)$$

where $(1 + \beta)$ is the ratio between signal power before and after the matched filter.

Equating N from (1.7) and (1.9) provides

$$20 \quad \frac{C}{CNR} = \frac{SIGL - C(1 + \beta)}{IFBW / R_s} \quad (\text{Watts}), \quad (1.10)$$

resulting in the following expression for the carrier power C as a function of the measured CNR and $SIGL$, the receiver filter bandwidth $IFBW$, and the matched filter factor $(1 + \beta)$

25

$$\boxed{C = \frac{SIGL}{\frac{IFBW}{R_s} \frac{1}{CNR} + (1 + \beta)}} \quad (\text{Watts}). \quad (1.11)$$

Algorithm steps for Case II

(1) Determine from the linkbudget the highest MODCOD (denoted by HMC) allowed for clear sky conditions so that a predefined requirement for clear sky margin M_{CS} of e.g. 1 dB is met. The required (C/N_o) for clear sky conditions $(C/N_o)_{cs}$, at the reference terminal, is calculated as follows:
 $(C/N_o)_{cs} = (CNR)_{HMC} + 10 \cdot \log(R_s) + M_{CS} + M_{ref}$ (dB Hz), where $(CNR)_{HMC}$ is the lower CNR threshold for the highest MODCOD (see Table 3). If the diameter of the reference terminal is different from the diameter of a typical VSAT antenna in this network the difference M_{ref} in the clear sky margin obtained should be compensated accordingly. This value can be obtained from linkbudget tool by calculating the margin for the standard antenna and for the reference antenna.

(2) Make calibration at clear sky conditions and determine the Tx_PWL required to obtain the desired $(C/N_o)_{cs}$. This is the Tx_PWL_{cs} that obtains the desired $EIRP_{sat}$ at clear sky conditions. Calculate Tx_PWL_{max} by adding the uplink rain fade as found by linkbudget tool for the desired uplink availability. Measure the resulting $(C/N_o)_{cs}$ and $(C)_{cs}$ for this operating point and use the measured values in all calculations rather than the linkbudget calculated value. This reduces sensitivity to fixed measurements errors. (Note that calibration can be in any MODCOD lower or equal to HMC).

(3) Measure (C/N_o) and (C) at predefined time intervals and perform averaging over predefined number of measurements to obtain $(C/N_o)_{i+1}$ and $(C)_{i+1}$. Solve the following expression for $G_{upc,i+1}$, the uplink power control gain required at the $i+1$ iteration

$$G_{upc,i+1} = G_{upc,i} + [C_{cs} - C_{i+1}] + 10 \log \left[1 + \frac{T_{ref,cs}}{T_{rain}} \left(1 - 10^{\left\{ \left[\left(\frac{C}{N_o} \right)_{cs} - \left(\frac{C}{N_o} \right)_{i+1} \right] - [C_{cs} - C_{i+1}] \right\} / 10} \right) \right] \text{ (dB)}.$$

(1.12)

Where typically $T_{rain}=278K$, and $T_{ref}= T_{antenna}/1.12+290*0.11+T_{LNB}$ (K). All

other values in this expression are in dB.

The new transmitter power level will then be

$$Tx_PWL_{i+1} = Tx_PWL_{cs} + G_{upc,i+1} \quad (\text{dBW}). \quad (1.13)$$

A detailed derivation is given hereinbelow.

- 5 (4) Optionally measurements can be performed by several reference terminals, or by all terminals, for achieving more reliable decision for the power control gain. Measurements that have large variance can be filtered out while the resulting power control gain per terminal from the other reference terminals can be averaged. Alternatively weighted average can be used where the weights are
10 proportional to the CNR. Therefore after Polling, that is after requesting measurements from all reference terminals, a weighted average calculation may be performed where the weights are proportional to the CNR

$$\bar{G}_{upc,i+1} = \frac{\sum_j G_{upc,i+1,j} CNR_j}{\sum_j CNR_j} \quad (\text{dB}). \quad (1.14)$$

- After Interrupt, that is after a terminal pushes its measurements when it
15 measures a significant change between Pollings, a weighted update of the last result may be performed

$$\bar{G}_{upc,i+1} = (1 - \gamma) \bar{G}_{upc,i} + \gamma G_{upc,i+1} \quad (\text{dB}), \quad 0 < \gamma < 1 \quad (1.15)$$

- The last step of the algorithm is useful also for reducing the effect of reference VSAT pointing loss. The algorithm cannot distinguish between rain and variations in
20 pointing loss. Therefore, such variations in pointing loss of the teleport antenna or the reference terminals may be interpreted erroneously as uplink rain attenuation as they do not affect the VSAT noise level. The weighted average step can reduce the VSAT pointing loss effect as the pointing loss varies independently from VSAT to VSAT.

- It is additionally noted that in order to reduce the number of interrupts, each
25 individual VSAT can calculate the current downlink attenuation or an indicator for zero downlink attenuation and to determine if variation it measured in its CNR corresponds also to downlink attenuation variation or only to uplink attenuation variation. In the latter case a VSAT, which is not a reference terminal, will not issue an interrupt with a request for MODCOD change but will wait for the AUPC to
30 compensate for the uplink attenuation variation.

AUPC Case III

In this Section we describe the algorithm for maintaining constant satellite transmitted power $EIRP_{sat}$ at all weather conditions by adapting the transmitted
 5 Outbound carrier level Tx_PWL to the uplink rain attenuation A_{up} , where a reference VSAT, with antenna diameter D_{ref} is installed either (1) at the teleport, and the same satellite beam covers both teleport and all other VSATs in the network, or (2) at another location, and the same satellite beam covers both teleport and all other VSATs in the network, or (3) at another location, and different satellite beams cover
 10 the teleport and all other VSATs in the network.

The solution for Case III is based on using measurements performed at both ends of the link, e.g. at the Teleport and at the reference VSAT (or at both ends of SCPC link) of received CNR (Carrier to Noise Ratio) for both Forward and Return links. The measurements can be reported either through the return link or any other
 15 communication link.

The CNR equation that is shown by (B.14) can be used for both Forward and Return links with appropriate indication of all parameters, where "F" stands for Forward link and "R" stands for Return link.. For the Forward link the expression is as follows:

20

$${}_F\left(\frac{C}{N_o}\right)_{i+1} = {}_F\left(\frac{C}{N_o}\right)_{cs} + {}_FG_{upc,i} - {}_FA_{up,i+1} - {}_FA_{dn,i+1} - 10\log\left[1 + \frac{T_{rain}}{{}_FT_{ref,cs}}\left(1 - 10^{-{}_FA_{dn,i+1}/10}\right)\right] \text{ (dBHz)}. \quad (2.16)$$

For the Return link the expression is as follows:

$$25 \quad {}_R\left(\frac{C}{N_o}\right)_{i+1} = {}_R\left(\frac{C}{N_o}\right)_{cs} + {}_RG_{upc,i} - {}_RA_{up,i+1} - {}_RA_{dn,i+1} - 10\log\left[1 + \frac{T_{rain}}{{}_RT_{ref,cs}}\left(1 - 10^{-{}_RA_{dn,i+1}/10}\right)\right] \text{ (dBHz)}. \quad (2.17)$$

The rain attenuation in the uplink is related to the rain attenuation in the downlink, with a factor K_T for the teleport side and a factor K_V for the VSAT side, as follows:

30

$${}_FA_{up} = K_T + {}_RA_{dn} \text{ (dB)} \quad (2.18)$$

$${}_R A_{up} = K_V + {}_F A_{dn} \text{ (dB)} \quad (2.19)$$

Substituting for A_{dn} in the above CNR equations produces the following two expressions for ${}_F A_{up}$ and ${}_R A_{up}$.

$${}_R A_{up,i+1} = K_V + \left\{ \left(\frac{C}{N_o} \right)_{cs} - \left(\frac{C}{N_o} \right)_{i+1} + {}_F G_{upc,i} - {}_F A_{up,i+1} - 10 \log \left[1 + \frac{T_{rain}}{T_{ref,cs}} \left(1 - 10^{-({}_R A_{up,i+1} - K_V)/10} \right) \right] \right\} \text{ (dBHz)} \quad (2.20)$$

$${}_F A_{up,i+1} = K_T + \left\{ \left(\frac{C}{N_o} \right)_{cs} - \left(\frac{C}{N_o} \right)_{i+1} + {}_R G_{upci} - {}_R A_{up,i+1} - 10 \log \left[1 + \frac{T_{rain}}{T_{ref,cs}} \left(1 - 10^{-({}_F A_{up,i+1} - K_T)/10} \right) \right] \right\} \text{ (dBHz)} \quad (2.21)$$

These two equations can be solved with cross iterations, namely initially substituting guesses for both ${}_F A_{up}$ and ${}_R A_{up}$ in the first equation. N iterations are then performed for ${}_R A_{up}$, and then the result is substituted in the second equation. Now N iterations are performed for ${}_F A_{up}$, and then the cross iterations are repeated N times.

Alternatively a look up table could be used.

Combined AUPC and ACM

The ACM mechanism can be operated to compensate for both uplink and down link fades, or for downlink compensation independently, see Lawrence W. Krebs et al., "Methods and Apparatus For Mitigating Rain Fading Over Satcom Links Via Information Throughput Adaptation", US Patent Application Publication 2003/0054816, Filed August 8, 02; ETSI EN 302 307 V1.1.1 (2004-01) : "Digital Video Broadcasting (DVB) Second generation framing structure, channel coding and modulation systems for Broadcasting, Interactive Services, News Gathering and other broadband satellite applications"; and Alberto Morello, Vittoria Mignone, "DVB-S2: The Second Generation Standard for Satellite Broad-band Services", *Proceedings of the IEEE*, vol. 94, no. 1, pp. 210-227, January 2006. In the latter a beacon receiver is used for uplink power control, or uplink is transmitted via a C band beam, or the transponder operates at ALC – Automatic Level Control mode. The ACM

mechanism can alternatively be combined with AUPC.

The present embodiments provide a combined AUPC and ACM controller designed to achieve overall optimization based on allowed usage of satellite resources. The controller algorithm uses channel measurements performed by the receiving stations that are sent back to the controller. The receiving stations are standard stations that provide service and can be located anywhere, under any beam of the satellite. Measurements performed by several or all stations can be used for improving the uplink channel estimations. The uplink control is designed to maintain constant satellite transmitted power at all weather conditions by adapting the transmitted carrier level to the uplink rain attenuation. The adaptation of coding and modulation is designed to maintain constant received signal quality at each terminal according to the downlink rain degradation affecting this terminal. The adjustment for each terminal is implemented by the modulator by transmitting, in time-division multiplex, a sequence of frames, where the coding and modulation format may change frame-by-frame. The traffic of a terminal that was assigned a specific MODOCD – see table 2 below, may be transmitted in the appropriate frame.

The uplink and down link adaptation are based on the same channel measurements. The present embodiments may separate the effects of the uplink and down link as reflected from the channel measurements performed by the receiving stations. As the uplink control influences the downlink performance, the present embodiments perform combined control of uplink and downlink by deducting the effect of the uplink control from the current channel measurements in order to allow for computing of the downlink control stage using the same current set of measurements. This reduces the control cycle time and the number of modulation and coding corrections as there is no need to wait for the next updated measurements that would be affected by the uplink update for correctly updating the downlink modulation and coding.

Fig. 4, already referred to above shows the scheme of an AUPC & ACM Management system, comprising the AUPC & ACM Controller 40, the ACM modulator 42, which includes the upconverter and the HPA – High Power Amplifier, the Earth station 10, and the satellite 12. The satellite terminals (VSAT) 18.1...18.n are connected to the AUPC & ACM Controller via return links. The terminals submit the CNR and SIGL measurements to the Controller. The ACM modulator operates at

constant symbol rate, since the available transponder bandwidth is assumed to be constant. ACM is implemented by the modulator by transmitting, in time-division multiplex, a sequence of frames, where the coding and modulation format may change frame-by-frame. Each frame can carry traffic to terminals that know to expect the coding and modulation levels assigned to that frame. Therefore, service continuity is achieved, during rain fades, by reducing user bits while increasing, at the same time, the FEC redundancy and/or modulation ruggedness. Physical layer adaptation is achieved as follows.

1) Each VSAT measures the channel status (CNR and SIGL) and reports it via the return link to the Controller.

2) The VSAT reports are taken into account by the Controller for deciding on updating the modulator Tx_PWL for compensating for uplink degradation and for selecting the MODCOD for data packets addressed to that VSAT.

3) In order to avoid information overflow during fades, traffic shaping may be implemented, using traffic shaper 44 to adapt the offered traffic to the available channel capacity. Thus for example during fades, television image quality may be degraded.

The AUPC and ACM update cycle is composed of the following stages:

- 1) Receiving updated channel status measurements,
- 2) Calculating uplink rain attenuation and updating the AUPC gain control
- 3) Adding the increment in AUPC gain control to correct the channel measurements
- 4) Using the corrected channel measurements for selecting the MODCOD

The importance of making the correction phase within a combined AUPC and ACM cycle is as follows: Both AUPC and ACM update can be performed on the same set of channel measurements thus reducing the cycle period. Shortening the cycle period allows the required margin to be decreased. That is more efficient use is made of the scarce satellite resources allocated for compensating for fast rain fading. Otherwise if only AUPC is performed initially, ACM may be performed on a later measurement of channel status taken after the AUPC update already affected the measurements.

The channel measurement correction can be expressed by

$$\overline{(CNR_{i+1})} = (CNR_{i+1}) + G_{upc,i+1} \text{ (dBHz)}. \quad (2.22)$$

- 5 See equations (2.7) and (2.8) above for the relations between (E_b/N_o) and (CNR) and between (C/N_o) and (CNR) .

A typical table with selection of MODCODs for DVB-S2 is shown as Table 2 below. A typical example for a MODCOD threshold table showing the upper and lower thresholds for selecting a MODCOD is given in Table 3 below. The (CNR) ranges for neighbor MODCODs are partly superposed in order to reduce number of MODCOD switching when (CNR) is near the border between two MODCODs. The combined process of AUPC and ACM is shown in the flow chart of Fig. 5. Periodic polling is carried out of all VSATs (receiving stations). On periodical Polling of all VSATs. Interrupts are generated by individual VSATs and occur between Polling events when the particular VSAT needs to correct its MODCOD for maintaining its received signal quality. In order to reduce the number of interrupts, each individual VSAT can calculate the current downlink attenuation based on expression (B.16) and determine if the variation it has measured in its CNR corresponds also to downlink attenuation variation or only to uplink attenuation variation. In the latter case a VSAT, which is not a reference terminal, will not issue an interrupt with a request for MODCOD change but will wait for the AUPC to compensate for the uplink attenuation variation. We can thus define the following expression

15

$$\left\{ \left[\left(\frac{C}{N_o} \right)_{cs} - \left(\frac{C}{N_o} \right)_{i+1} \right] - [(C_{cs}) - (C_{i+1})] \right\} \text{ dB}$$

20 as an indicator for downlink attenuation as if it equals zero (or close to zero with predefined accuracy) the downlink attenuation in expression (B.16) is also zero.

Mode	MOD COD	Mode	MOD COD	Mode	MOD COD	Mode	MOD COD
QPSK 1/4	1 _D	QPSK 5/6	9 _D	8PSK 8/10	17 _D	32APSK 4/5	25 _D
QPSK 1/3	2 _D	QPSK 8/9	10 _D	16APSK 2/3	18 _D	32APSK 5/6	26 _D
QPSK 2/5	3 _D	QPSK 9/10	11 _D	16APSK 3/4	19 _D	32APSK 8/9	27 _D
QPSK 1/2	4 _D	8PSK 3/5	12 _D	16APSK 4/5	20 _D	32APSK 9/10	28 _D
QPSK 3/5	5 _D	8PSK 2/3	13 _D	16APSK 5/6	21 _D	Reserved	29 _D
QPSK 2/3	6 _D	8PSK 3/4	14 _D	16APSK 8/9	22 _D	Reserved	30 _D
QPSK 3/4	7 _D	8PSK 5/6	15 _D	16APSK 9/10	23 _D	Reserved	31 _D
QPSK 4/5	8 _D	8PSK 8/9	16 _D	32APSK 3/4	24 _D	DUMMY PLFRAME	0 _D

MODCOD Table 2 from ETSI EN302307 reference above.

Recommended Allowed Lists

MODCOD	Modulation	MOD	Code Rate	Ideal ONR	Lower Threshold	Upper Threshold	Ideal Eb/Nb	Spectral Efficiency bps/Hz	Flots
1	QPSK	2	0.250	-2.35	-infinity	-0.44	0.7	0.42	Off
2	QPSK	2	0.333	-1.24	-0.64	0.50	0.5	0.56	Off
3	QPSK	2	0.400	-0.30	0.30	1.80	0.7	0.67	Off
4	QPSK	2	0.500	1.00	1.60	2.80	1.0	0.83	Off
5	QPSK	2	0.600	2.23	2.60	3.50	1.4	1.00	Off
6	QPSK	2	0.667	3.10	3.30	4.40	1.9	1.11	Off
7	QPSK	2	0.750	4.03	4.20	5.00	2.3	1.25	Off
8	QPSK	2	0.800	4.68	4.80	5.60	2.6	1.33	Off
9	QPSK	2	0.833	5.18	5.40	6.50	3.0	1.39	Off
10	QPSK	2	0.889	6.20	6.40	6.90	3.7	1.48	Off
11	QPSK	2	0.900	6.42	6.70	-infinity	3.9	1.50	Off
12	8PSK	3	0.600	5.50	6.00	7.10	2.9	1.50	On
13	8PSK	3	0.667	6.62	6.90	8.40	3.6	1.67	On
14	8PSK	3	0.750	7.91	8.20	9.80	4.4	1.88	On
15	8PSK	3	0.833	9.35	9.70	11.30	5.4	2.08	On
16	8PSK	3	0.889	10.69	11.10	11.60	6.4	2.22	On
17	8PSK	3	0.900	10.98	11.40	-infinity	6.7	2.25	On
18	16APSK	4	0.667	8.97	9.47	10.91	4.7	2.22	On
19	16APSK	4	0.750	10.21	10.71	11.73	5.4	2.50	On
20	16APSK	4	0.800	11.03	11.53	12.31	6.0	2.67	On
21	16APSK	4	0.833	11.61	12.11	13.50	6.4	2.78	On
22	16APSK	4	0.889	12.89	13.39	13.53	7.4	2.96	On
23	16APSK	4	0.900	13.13	13.63	-infinity	7.6	3.00	On
24	32APSK	5	0.750	12.73	13.23	14.34	7.0	3.13	On
25	32APSK	5	0.800	13.64	14.14	14.96	7.6	3.33	On
26	32APSK	5	0.833	14.28	14.78	16.39	8.1	3.47	On
27	32APSK	5	0.889	15.69	16.19	16.75	9.2	3.70	On
28	32APSK	5	0.900	16.05	16.55	-infinity	9.5	3.75	On

QPSK	Q8PSK	Q8/16	Q8/16/32
v	v	v	v
v	v	v	v
v	v	v	v
v	v	v	v
v	v	v	v
v	v	v	v
v	v	v	v
v	v	v	v
v			
v			
	v	v	v
	v	v	v
	v	v	v
	v		
		v	v
		v	v
			v
			v
			v
			v

5

Note if the lower threshold is crossed going downward, the MODCOD will be reduced
If the upper threshold is crossed going upward, the MODCOD will be increased

Table 3. Example for MODCOD Thresholds Table

In other words the combined process of AUPC and ACM, as shown in Fig. 5 is based on periodical Polling of all VSATs and obtaining interrupts generated by individual VSATs between Polling events when the VSAT needs to correct its MODCOD for maintaining its received signal quality.

5

Selection of MODCODs for analysis and efficient Operation

Reference is now made to Fig. 7, which is a simplified diagram illustrating MODCOD and bandwidth relationships. For the purpose of analysis and efficient operation it is desirable to simplify the scenario. We propose here two stages of reducing the number of operational MODCODs.

Stage 1: Partition the service territory into regions characterized by significantly different satellite coverage strength and/or climate conditions. Select two MODCODs per each such region by assuming two modes of operation, Mode 1: "Highest MODCOD" (HMC) which can be used in the region based on the satellite EIRP and earth stations capabilities, for near to clear sky conditions, and the availability that corresponds to such a MODCOD, called "Derived Availability" (A_{HMC}). Typically the availability that reflects near to clear sky conditions will be about 95%. Mode 2: "Required Availability" (A_{RQ}) and the corresponding "Derived MODCOD" (DMC) that can satisfy such availability. Such two modes with appropriate MODCODs prevail in each region.

We can use efficiency in terms of bps/Hz (bps stands for bit per second) as an indication of the achieved throughput or consumed bandwidth per each MODCOD. The efficiency per MODCOD is give by

$$g = MOD * COD / (1 + \alpha)$$

The total efficiency per region is defined by

$$g_i = g_{HMC} \cdot A_{HMC} + g_{DMC} \cdot (A_{RQ} - A_{HMC})$$

The system efficiency G is calculated using the traffic distribution as follows:

30

$$G = \frac{\sum_i Traffic_i \cdot g_i}{\sum_i Traffic_i}$$

Where $Traffic_i$ is the aggregate traffic for region i . The following table 4 describes a case study based on the above method. For example in Region 2, HMC is 16APSK 0.833 and is active $A_{HMC}=96.0\%$ of the time, and DMC is 8PSK 0.75 and is active $A_{RQ}-A_{HMC}=99.7\%-96.0\%=3.7\%$ of the time, achieving as result the required availability of 99.7%.

		Region 1	Region 2	Region 3	Region 4
Best MODCOD	Throughput, Mbps	105,000	100,000	80,000	105,000
	MOD	16APSK	16APSK	16APSK	16APSK
	COD	0.875	0.833	0.667	0.875
	Availability % A_{HMC}	99.30	96.00	94.00	98.45
	Efficiency bps/Hz	2.92	2.78	2.22	2.92
Req. Availability	Throughput, Mbps	90,000	67,500	36,000	80,000
	MOD	16APSK	8PSK	QPSK	16APSK
	COD	0.750	0.750	0.600	0.667
	Availability % A_{RQ}	99.70	99.70	99.70	99.70
	Delta Availability %	0.40	3.70	5.70	1.25
	Efficiency bps/Hz	2.50	1.88	1.00	2.22
Total Outbound performance	Total efficiency bps/Hz	2.91	2.74	2.15	2.90
	Traffic Distribution%	52.7	4.2	37.1	6.0
	System efficiency bps/Hz		2.62		
	ACM gain		162%		

Table 4 Case study for analysis based on partitioning to regions and two MODCODs per region.

For the purpose of operation it is also desirable to reduce the number of instantaneously operational MODCODs. The ACM based carrier (e.g. DVB-S2) is built from blocks of coded traffic. Each block has a fixed MODCOD for the traffic carried in it. The traffic that waits for transmission in the buffer is waiting for a block with the appropriate MODCOD. If the number of MODCODs is large there are many queues of traffic waiting for a turn to be transmitted. Traffic with a rarely used MODCOD may indeed have to wait a long time until their turn comes. There will be large variations in the delay which are not suitable for interactive applications. For the above case study, Figure 8 describes the distribution of MODCODs. This distribution is generated by weighing each MODCOD with its activity factor (availability for HMC or Delta availability for DMC) and with the traffic fraction using it, namely the

traffic per that region scaled by the total traffic. Actually we can reduce at this stage the number of MODCODs to those selected in the analysis described above and achieve the performance obtained by the analysis. In the case study shown here six different MODCODs are needed.

5

Stage 2: Further reduction of the number of MODCODs in order to eliminate MODCODs with low utilization.

A method for further reduction in the number of MODCODs can be based on using the set of MODCODs selected in Stage 1 and eliminating those of low utilization, e.g. less than 1% of the time. The rule is that traffic that needs a certain MODCOD may fall to the next low allowed MODCOD. In such a method the lowest MODCOD should be kept in the allowed list. In the case study shown here two of the six MODCODs that remained after Stage 1 may be eliminated with insignificant degradation in the system efficiency. Fig. 9 illustrates a series of MODCODs each with different levels of traffic.

15

Rules for adjusting the MODCOD table (Table 3):

When few of the MODCODs are disabled, the thresholds will be calculated as follows:

20

1. The lower Threshold of the lowest allowed MODCOD is unlimited (-infinity).
2. The lower thresholds of allowed MODCODs (other than the lowest allowed MODCOD) are in force.
3. The upper thresholds of allowed MODCODs are recalculated:

25

Upper_Threshold(Any_MODCOD)=
Lower_Threshold(NEXT_higher_allowed MODCOD)+Margin,
where the margin is typically 0.2 dB.

30

In the following we provide the detailed derivation of the expression for the uplink power control gain required at the $i+1$ iteration $G_{upc,i+1}$ for case 1 above.

The received C/N_o can be expressed as follows:

$$\left(\frac{C}{N_o} \right) = EIRP_{sat} - L_{fs,dn} - A_{dn} + \left(\frac{G}{T} \right)_{ref} - k_B \quad (\text{dBHz}) \quad (\text{A.1})$$

At the $i+1$ iteration the transmitted $EIRP$ becomes:

$$EIRP_{i+1} = EIRP_{sat} - A_{up,i+1} + G_{upc,i} \quad (\text{dBW}) \quad (\text{A.2})$$

- 5 Where $EIRP_{sat}$ is the EIRP that should be maintained constant, $A_{up,i+1}$ is the rain attenuation at the $i+1$ iteration, and $G_{upc,i}$ is the control gain applied at the i -th iteration. Consequently the received C/N_o will become:

$$\left(\frac{C}{N_o}\right)_{i+1} = EIRP_{i+1} - L_{fs,dn} - A_{dn,i+1} + \left(\frac{G}{T}\right)_{ref,i+1} - k_B \quad (\text{A.3})$$

10

Substituting (A.1) at clear sky ($A_{dn}=0$) into (A.2) and the result in (A.3), and also using the relation $A_{up} = K + A_{dn}$, the following expression is obtained

$$\left(\frac{C}{N_o}\right)_{i+1} = \left(\frac{C}{N_o}\right)_{cs} + L_{fs,dn} - \left(\frac{G}{T}\right)_{ref,cs} + k_B - A_{up,i+1} + G_{upc,i} - L_{fs,dn} - A_{up,i+1} + K + \left(\frac{G}{T}\right)_{ref,i+1} - k_B$$

After simplification it becomes

15

$$\left(\frac{C}{N_o}\right)_{i+1} = \left(\frac{C}{N_o}\right)_{cs} - \left(\frac{G}{T}\right)_{ref,cs} - 2A_{up,i+1} + K + G_{upc,i} + \left(\frac{G}{T}\right)_{ref,i+1} \quad (\text{dBHz}) \quad (\text{A.4})$$

20

Consequently the estimated uplink rain attenuation can be expressed as

$$A_{up,i+1} = \frac{1}{2} \left\{ \left(\frac{C}{N_o}\right)_{cs} - \left(\frac{C}{N_o}\right)_{i+1} + K + G_{upc,i} - \left[\left(\frac{G}{T}\right)_{ref,cs} - \left(\frac{G}{T}\right)_{ref,i+1} \right] \right\} \quad (\text{dB}) \quad (\text{A.5})$$

25

$$G_{upc,i} = Tx_PWL_i - Tx_PWL_{cs} \quad (\text{dB}) \quad (\text{A.6})$$

Finally the control gain for the $i+1$ iteration should be found from the following expression

$$G_{upci+1} = \frac{1}{2} \cdot \left\{ \left(\frac{C}{N_o} \right)_{cs} - \left(\frac{C}{N_o} \right)_{i+1} + K + G_{upci} - 10 \cdot \log \left[1 + \left(\frac{T_{rain}}{T_{ref}} \right) \left(1 - 10^{-(G_{upci+1}-K)/10} \right) \right] \right\} \text{ (dB)} \quad (\text{A.7})$$

- 5 Where typically $T_{rain}=278\text{K}$, and $T_{ref}=T_{antenna}/1.12+290*0.11+T_{LNB}$ (K) See Maral and Bousquet pp.191-192.

In the following we provide the detailed derivation of the expression for the uplink power control gain required at the $i+1$ iteration, using measurement of CNR and Signal Level, for CASE II above.

Development of the Received Carrier Power equation:

The received carrier power can be expressed by

$$(C) = EIRP_{sat} - L_{fs,dn} - A_{dn} + G_{ref} - A_{Rx} \text{ (dBW)} \quad (\text{B.1})$$

- 15 where $L_{fs,dn}$ (dB) is the free space loss between the satellite and the reference VSAT at frequency f_{dn} (Hz) transmitted from the satellite, A_{dn} (dB) is the downlink rain attenuation, G_{ref} (dB) is the gain of the reference terminal antenna, and A_{Rx} is the receiver RF/IF chain loss. It is assumed that the CNR at the uplink is high and all the $EIRP_{sat}$ transmitted by the satellite is used only by the desired signal.

- 20 At the $i+1$ iteration the transmitted EIRP becomes

$$EIRP_{i+1} = EIRP_{sat} - A_{up,i+1} + G_{upc,i} \text{ (dBW)}. \quad (\text{B.2})$$

- Where $EIRP_{sat}$ is the EIRP that should be maintained constant, $A_{up,i+1}$ is the rain attenuation at the $i+1$ iteration, and $G_{upc,i}$ is the control gain applied at the i -th iteration. Consequently the received carrier power (C) will become:

$$(C_{i+1}) = EIRP_{i+1} - L_{fs,dn} - A_{dn,i+1} + G_{ref} - A_{Rx} \text{ (dBW)}. \quad (\text{B.3})$$

Substituting (B.1) at clear sky ($A_{dn}=0$) into (B.2) and the result in (B.3), the

following expression is obtained:

$$(C_{i+1}) = (C_{cs}) + L_{fs,dn} - G_{ref} + A_{Rx} - A_{up,i+1} + G_{upc,i} - L_{fs,dn} - A_{dn,i+1} + G_{ref} - A_{Rx} \text{ (dBW)} \quad (\text{B.4})$$

5 where (C_{cs}) is the received carrier power at clear sky. After simplification it becomes the Carrier Power equation:

$$(C_{i+1}) = (C_{cs}) + G_{upc,i} - A_{up,i+1} - A_{dn,i+1} \text{ (dBW)}. \quad (\text{B.5})$$

Development of the CNR equation:

The received C/N_o can be expressed as follows:

$$10 \quad \left(\frac{C}{N_o} \right) = EIRP_{sat} - L_{fs,dn} - A_{dn} + \left(\frac{G}{T} \right)_{ref} - k_B \text{ (dBHz)}. \quad (\text{B.6})$$

At the $i+1$ iteration the transmitted EIRP becomes:

$$EIRP_{i+1} = EIRP_{sat} - A_{up,i+1} + G_{upc,i} \text{ (dBW)}. \quad (\text{B.7})$$

15 Where $EIRP_{sat}$ is the satellite EIRP that should be maintained constant, $A_{up,i+1}$ is the rain attenuation at the $i+1$ iteration, and $G_{upc,i}$ is the control gain applied at the i -th iteration. Consequently the received (C/N_o) will become:

$$\left(\frac{C}{N_o} \right)_{i+1} = EIRP_{i+1} - L_{fs,dn} - A_{dn,i+1} + \left(\frac{G}{T} \right)_{ref,i+1} - k_B \text{ (dBHz)}. \quad (\text{B.8})$$

20

Substituting (B.6) at clear sky ($A_{dn} = 0$) into (B.7) and the result in (B.8), the following expression is obtained:

$$\left(\frac{C}{N_o} \right)_{i+1} = \left(\frac{C}{N_o} \right)_{cs} + L_{fs,dn} - \left(\frac{G}{T} \right)_{ref,cs} + k_B - A_{up,i+1} + G_{upc,i} - L_{fs,dn} - A_{dn,i+1} + \left(\frac{G}{T} \right)_{ref,i+1} - k_B \text{ (dBHz)} \quad (\text{B.9})$$

25

After simplification it becomes

$$\left(\frac{C}{N_o}\right)_{i+1} = \left(\frac{C}{N_o}\right)_{cs} + G_{upc,i} - A_{up,i+1} - A_{dn,i+1} - \left[\left(\frac{G}{T}\right)_{ref,cs} - \left(\frac{G}{T}\right)_{ref,i+1}\right] \text{ (dBHz)}. \quad (\text{B.10})$$

- 5 As per Maral and Bousquet page 31, the difference in received noise temperature can be expressed by:

$$\Delta T = T_{ref,i+1} - T_{ref,cs} = T_{rain} \left(1 - 10^{-A_{dn,i+1}/10}\right) \text{ (K)}. \quad (\text{B.11})$$

- 10 The difference in the figure of merit G/T can be expressed by

$$\left[\left(\frac{G}{T}\right)_{ref,cs} - \left(\frac{G}{T}\right)_{ref,i+1}\right] = 10 \log \left(\frac{T_{ref,i+1}}{T_{ref,cs}}\right) = 10 \log \left(1 + \frac{\Delta T}{T_{ref,cs}}\right) \text{ (dB)}. \quad (\text{B.12})$$

By substituting ΔT from equation (B.11) the following expression is obtained

$$\left[\left(\frac{G}{T}\right)_{ref,cs} - \left(\frac{G}{T}\right)_{ref,i+1}\right] = 10 \log \left[1 + \frac{T_{rain}}{T_{ref,cs}} \left(1 - 10^{-A_{dn,i+1}/10}\right)\right] \text{ (dB)}. \quad (\text{B.13})$$

- 15 Finally the CNR equation is obtained by substituting (B.13) into (B.10):

$$\left(\frac{C}{N_o}\right)_{i+1} = \left(\frac{C}{N_o}\right)_{cs} + G_{upc,i} - A_{up,i+1} - A_{dn,i+1} - 10 \log \left[1 + \frac{T_{rain}}{T_{ref,cs}} \left(1 - 10^{-A_{dn,i+1}/10}\right)\right] \text{ (dBHz)}. \quad (\text{B.14})$$

- 20 Now by combining the Carrier Power Equation (B.5) and the CNR Equation (B.14) through equating $G_{upc,i} - A_{up,i+1} - A_{dn,i+1}$ the following expression is obtained

$$\left(\frac{C}{N_o}\right)_{i+1} = \left(\frac{C}{N_o}\right)_{cs} + (C_{i+1}) - (C_{cs}) - 10 \log \left[1 + \frac{T_{rain}}{T_{ref,cs}} \left(1 - 10^{-A_{dn,i+1}/10}\right)\right] \text{ (dBHz)} \quad (\text{B.15})$$

Which after simplification leads to the following expression for the down link attenuation

5

$$A_{dn,i+1} = -10 \log \left[1 + \frac{T_{ref,cs}}{T_{rain}} \left(1 - 10^{\left\{ \left[\left(\frac{C}{N_o} \right)_{cs} - \left(\frac{C}{N_o} \right)_{i+1} \right] - [(C_{cs}) - (C_{i+1})] \right\} / 10} \right) \right] \text{ (dB)}. \quad (\text{B.16})$$

Consequently by using the Carrier Power Equation (B.5) the uplink rain attenuation can be expressed by

10

$$A_{up,i+1} = (C_{cs}) - (C_{i+1}) + G_{upc,i} - A_{dn,i+1} \text{ (dB)} \quad (\text{B.17})$$

where the gain control $G_{upc,i}$ at the i -th iteration can be expressed by the transmitter power level at the i -th iteration with respect to power level at clear sky

15

$$G_{upc,i} = Tx_PWL_i - Tx_PWL_{cs} \text{ (dB)}. \quad (\text{B.18})$$

Finally the control gain applied at the $i+1$ iteration $G_{upc,i+1}$ should be equal to $A_{up,i+1}$ in order to maintain $EIPR_{sat}$ constant as required

20

$$G_{upc,i+1} = A_{up,i+1} = (C_{cs}) - (C_{i+1}) + G_{upc,i} - A_{dn,i+1} \text{ (dB)} \quad (\text{B.19})$$

where $A_{dn,i+1}$ is given by (B.16).

25

It is expected that during the life of this patent many relevant devices and systems will be developed and the scope of the terms herein, is intended to include all such new technologies *a priori*.

It is appreciated that certain features of the invention, which are, for clarity, described in the context of separate embodiments, may also be provided in combination in a single embodiment. Conversely, various features of the invention, which are, for brevity, described in the context of a single embodiment, may also be provided separately or in any suitable subcombination.

Although the invention has been described in conjunction with specific embodiments thereof, it is evident that many alternatives, modifications and variations will be apparent to those skilled in the art. Accordingly, it is intended to embrace all such alternatives, modifications and variations that fall within the spirit and broad scope of the appended claims. All publications, patents, and patent applications mentioned in this specification are herein incorporated in their entirety by reference into the specification, to the same extent as if each individual publication, patent or patent application was specifically and individually indicated to be incorporated herein by reference. In addition, citation or identification of any reference in this application shall not be construed as an admission that such reference is available as prior art to the present invention.

CLAIMS

WHAT IS CLAIMED IS:

1. A controlled satellite link comprising a first link and a second link, comprising:

at least one reference unit for obtaining at least signal attenuation over said controlled satellite link, and

a control unit, associated with said reference unit, configured for discriminating between first link attenuation and second link attenuation and accordingly controlling at least one link transmission parameter associated with said first link and at least one transmission parameter associated with said second link to dynamically adapt to changes in said obtained signal attenuation.

2. A controlled satellite link according to claim 1, comprising said first link and a plurality of second links and wherein said reference unit comprises respective reference units located at at least some of said second links, and wherein said satellite link further comprises a derivation unit for deducting common attenuation and assigning said common attenuation at least in part to said first link and assigning differential attenuation to respective second links, thereby to adapt independently to changes in said measured attenuation at each respective second link.

3. A controlled satellite link according to claim 1 or claim 2, wherein said controlled transmission parameter comprises any one of the group consisting of transmission power, a coding parameter, a modulation parameter, the combination of transmission power in said first link and a coding parameter in said second link, the combination of transmission power in said first link and a modulation parameter in said second link, the combination of transmission power in said first link and both coding and modulation parameters in said second link.

4. The apparatus of claim 1, 2 or 3, wherein said satellite link has a first end and a second end and said attenuation is obtained through measurements both at said first end and at said second end.

5. A controlled satellite link according to claim 2, wherein said independent reference units are distributed on a geographical basis to allow independent control of said plurality of links on said geographical basis.

6. A controlled satellite link according to claim 2, wherein measurements by said reference unit are processed in a plurality of stages and said derivation unit is configured to obtain said first link attenuation in a first stage and said second link attenuation in a second stage.

7. A controlled satellite link according to any one of claims 1, 2, 5 or 6, wherein said controlled transmission parameter is transmission power in said first link and a combination of coding and modulation parameters in said second link, said link further configured to optimize a total of said combinations operational within said satellite link at any given time.

8. A controlled satellite link according to any preceding claim, wherein said control is in order to balance between consumption of satellite resources.

9. A controlled satellite link according to claim 8, wherein said balancing between consumption of satellite resources comprises optimizing between bandwidth and power output.

10. A method of controlling a satellite link, said satellite link transmitting according to transmission parameters, the method comprising:

measuring attenuation over said link, said link having two legs, a first leg to a satellite and a second leg to respective ones of a plurality of ground based receiver stations, said measuring being carried out at some of said ground based receiver stations, each leg being associated with respective ones of said transmission parameters, said measuring discriminating between attenuation at said respective legs; and

dynamically adjusting at least one of said transmission parameters associated with said first leg and at least one of said transmission parameters associated with said second leg to adapt for changes in said discriminated measured attenuation.

11. The method of claim 10, wherein the at least one transmission parameter adjusted is transmission power and said dynamically adjusting comprises increasing said transmission power at said first leg to adapt for increases in said measured attenuation and decreasing said transmission power to adapt for decreases in said measured attenuation, and adjusting modulation levels for said second leg such that a signal quality after decoding of the received signal at said plurality of ground based receiver stations is kept substantially constant.

12. The method of claim 10, wherein the at least one transmission parameter adjusted is a coding parameter, and said dynamically adjusting comprises increasing coding complexity to compensate for increases in said measured attenuation, and decreasing coding complexity to compensate for decreases in said measured attenuation such that the signal quality after decoding of the received signal is kept substantially constant.

13. The method of claim 10, wherein the at least one transmission parameter adjusted is a coding parameter, and said dynamically adjusting comprises decreasing code rate to adapt for increases in said measured attenuation, and increasing code rate to adapt to decreases in said measured attenuation such that the signal quality after decoding of the received signal is kept substantially constant.

14. The method of claim 10, wherein the at least one transmission parameter adjusted is a modulation parameter, and said dynamically adjusting comprises decreasing modulation constellation size to adapt to increases in said measured attenuation, and increasing modulation constellation size to adapt to decreases in said measured attenuation such that the signal quality after decoding of the received signal is kept substantially constant.

15. The method of claim 10, wherein said at least one parameter comprises one member of the group consisting of:

a) transmission power for said first link and a coding or modulation parameter for said second link; and

b) transmission power for said first link and a coding parameter and a modulation parameter for said second link.

16. The method of any one of claims 10 to 15, wherein said first link is an uplink from a ground-based transmitting station to a satellite, and said second link is a downlink from said satellite to a ground-based receiving station.

17. The method of claim 16, wherein said satellite link is a broadcasting link, and there are a plurality of ground-based receiving stations.

18. The method of claim 17, wherein at least some of said ground-based receiving systems carry out said measuring, and common attenuation is assigned to the uplink and differential attenuation is assigned to respective downlinks.

19. A method of compensating for dynamic changes in attenuation in a satellite link having a first link and a second link and attenuation over said first link and attenuation over said second link, comprising:

measuring said dynamic changes in attenuation at a receiving station of said satellite link,

discriminating using said measurements between dynamic changes relating to attenuation at said first link and dynamic changes relating to changes at said second link;

feeding said measurements via a return link; and

using said measurements and said discrimination, modifying at least one transmission parameter associated with said first link and one transmission parameter associated with said second link to adapt to said dynamic changes.


20. A satellite receiving station for receiving a forward link channel of a satellite communication link; comprising:

a measuring unit for obtaining measurements of dynamic changes in attenuation of said channel, said measurement including data to allow discrimination

between attenuation in a first leg and attenuation in a second leg of said satellite link;
and

an output unit for sending said measurements via a return channel to allow for channel compensation.

21. The satellite receiving station of claim 20, wherein said output unit is configured to send measurements relating to attenuation in said forward link.

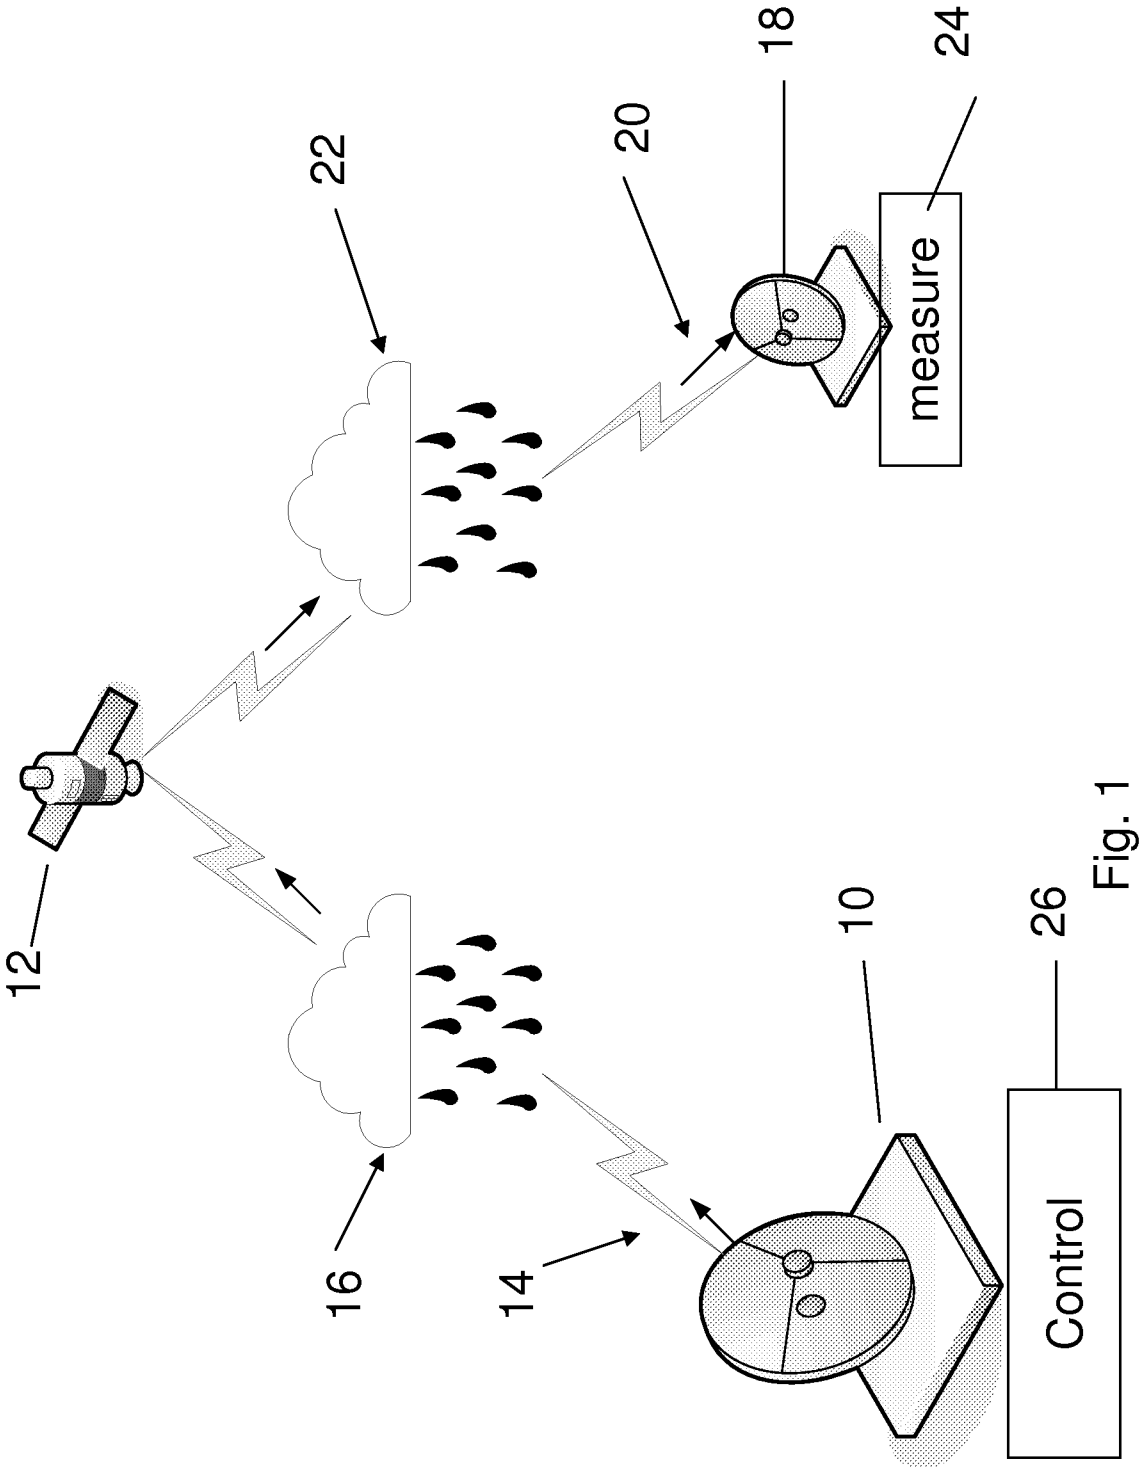

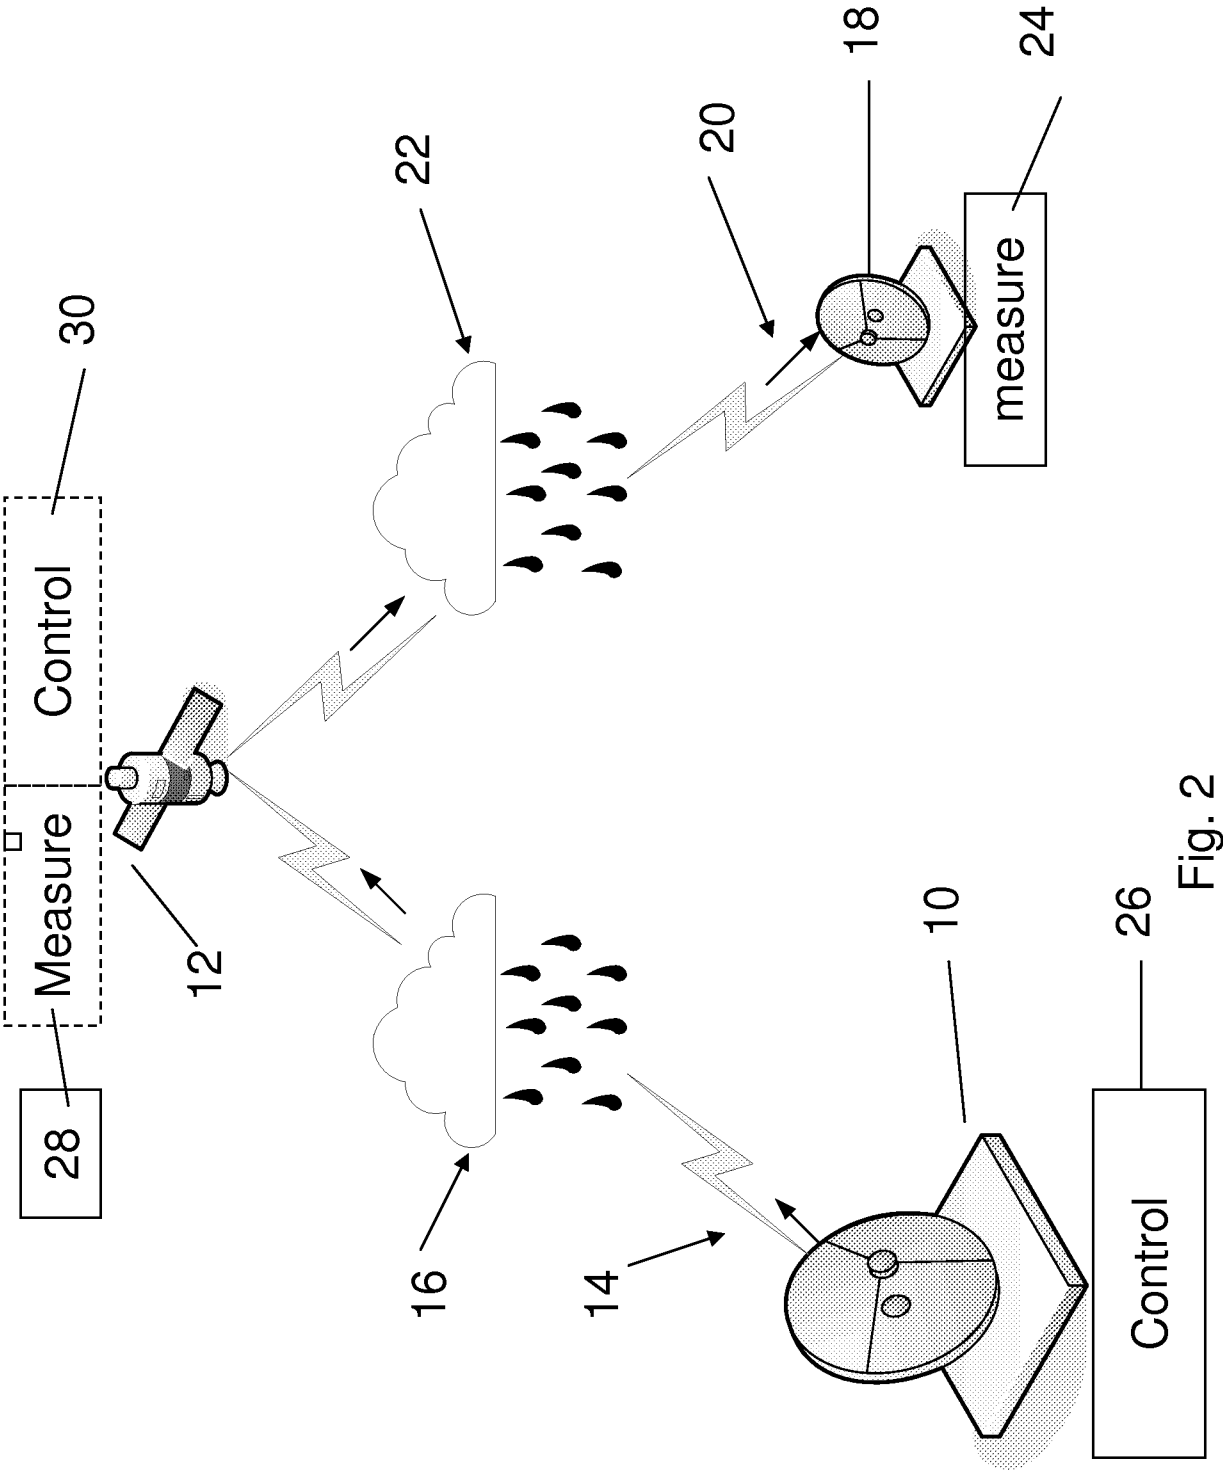


Fig. 2

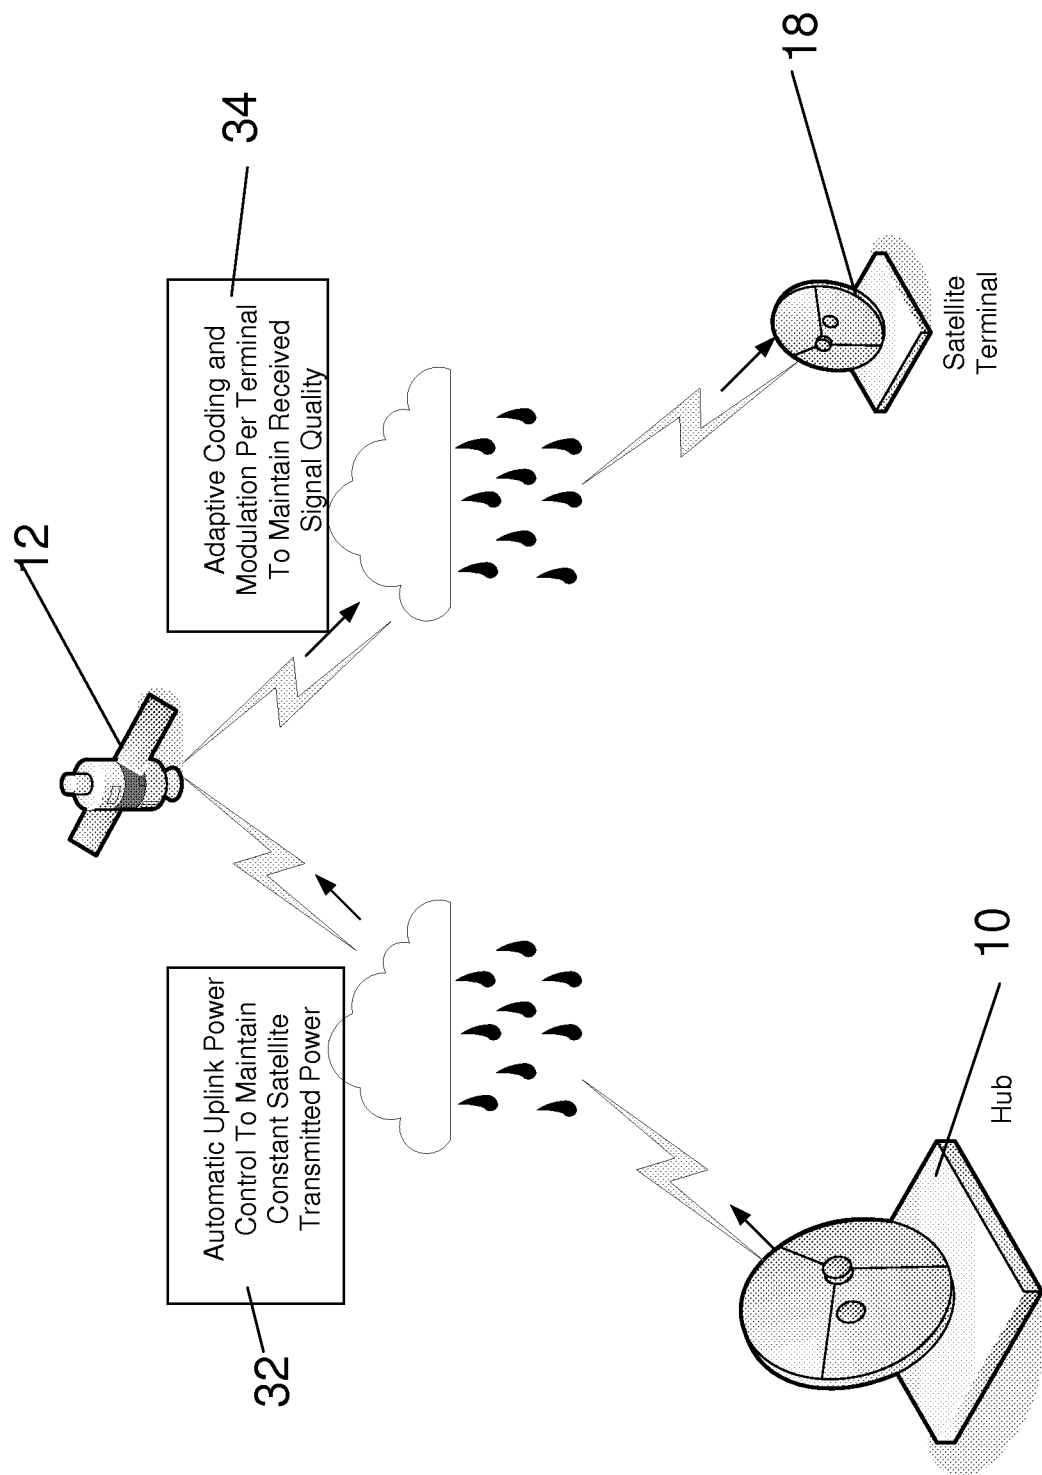


Fig. 3

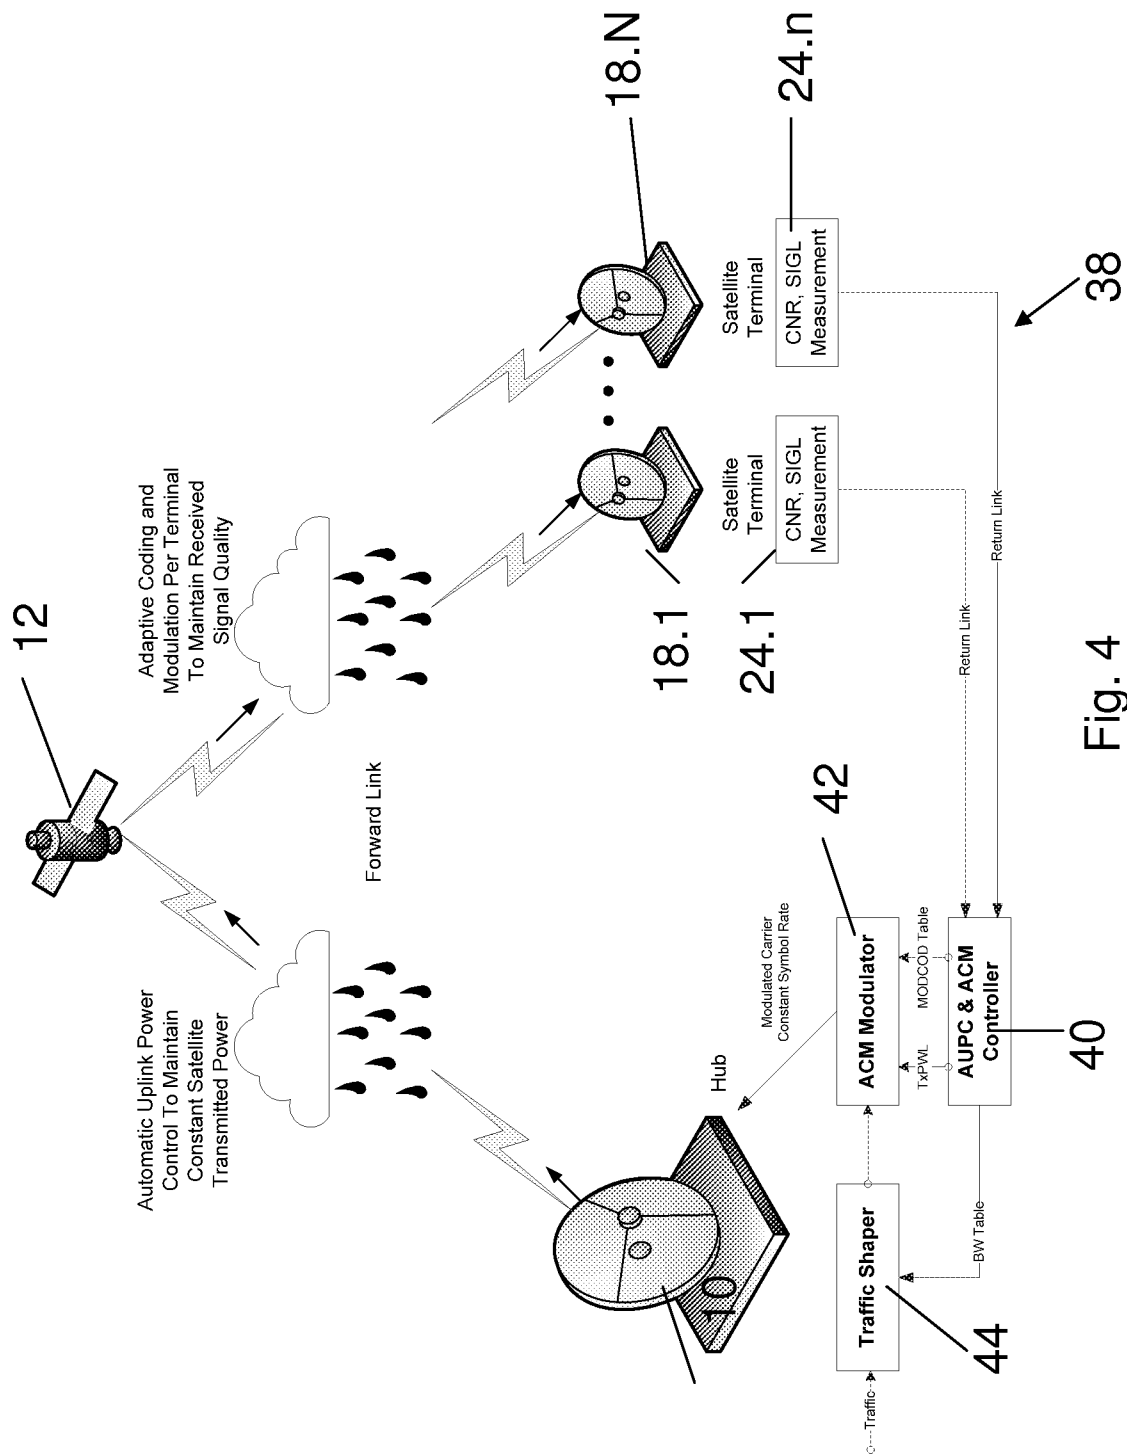


Fig. 4

5/8

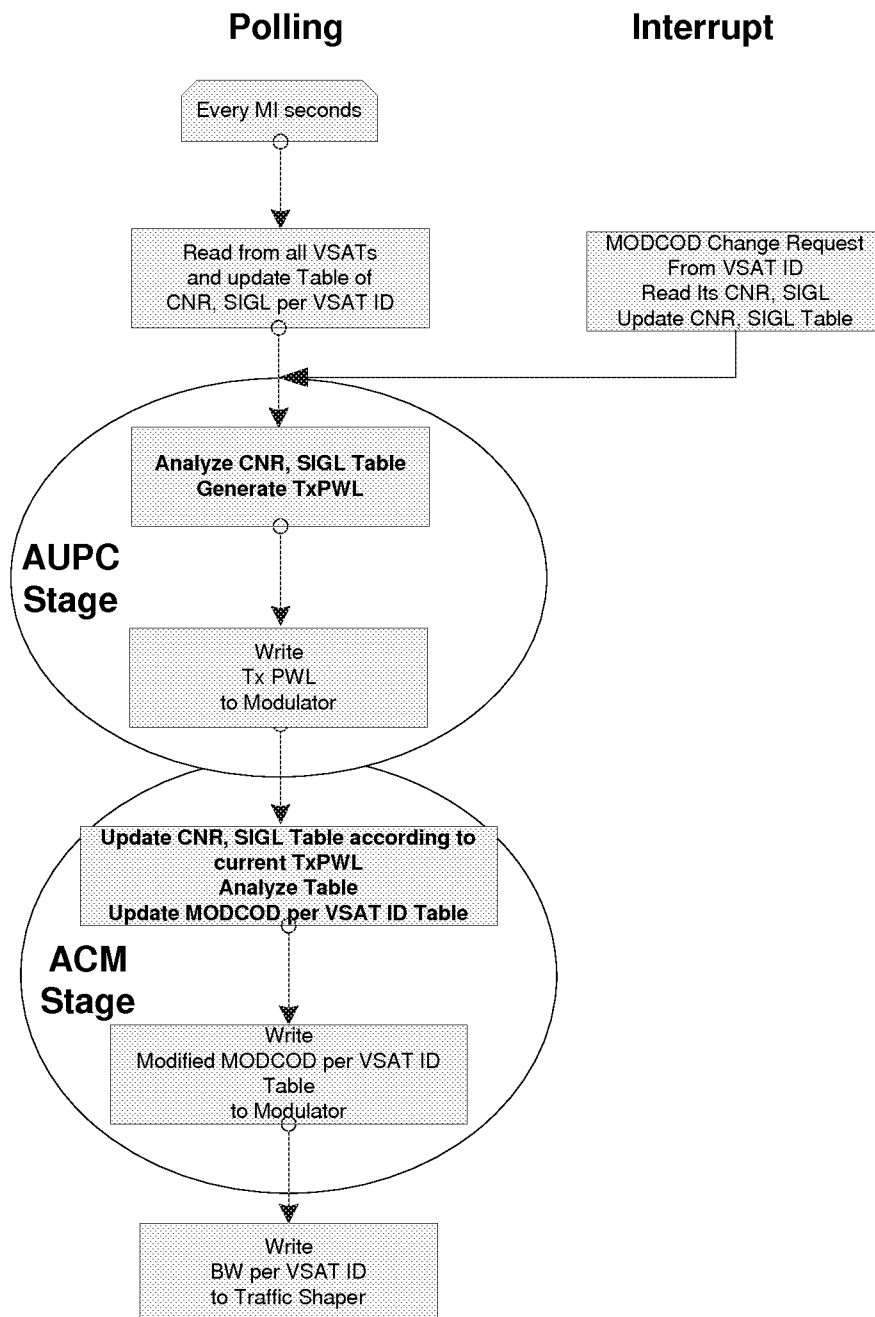


Fig. 5

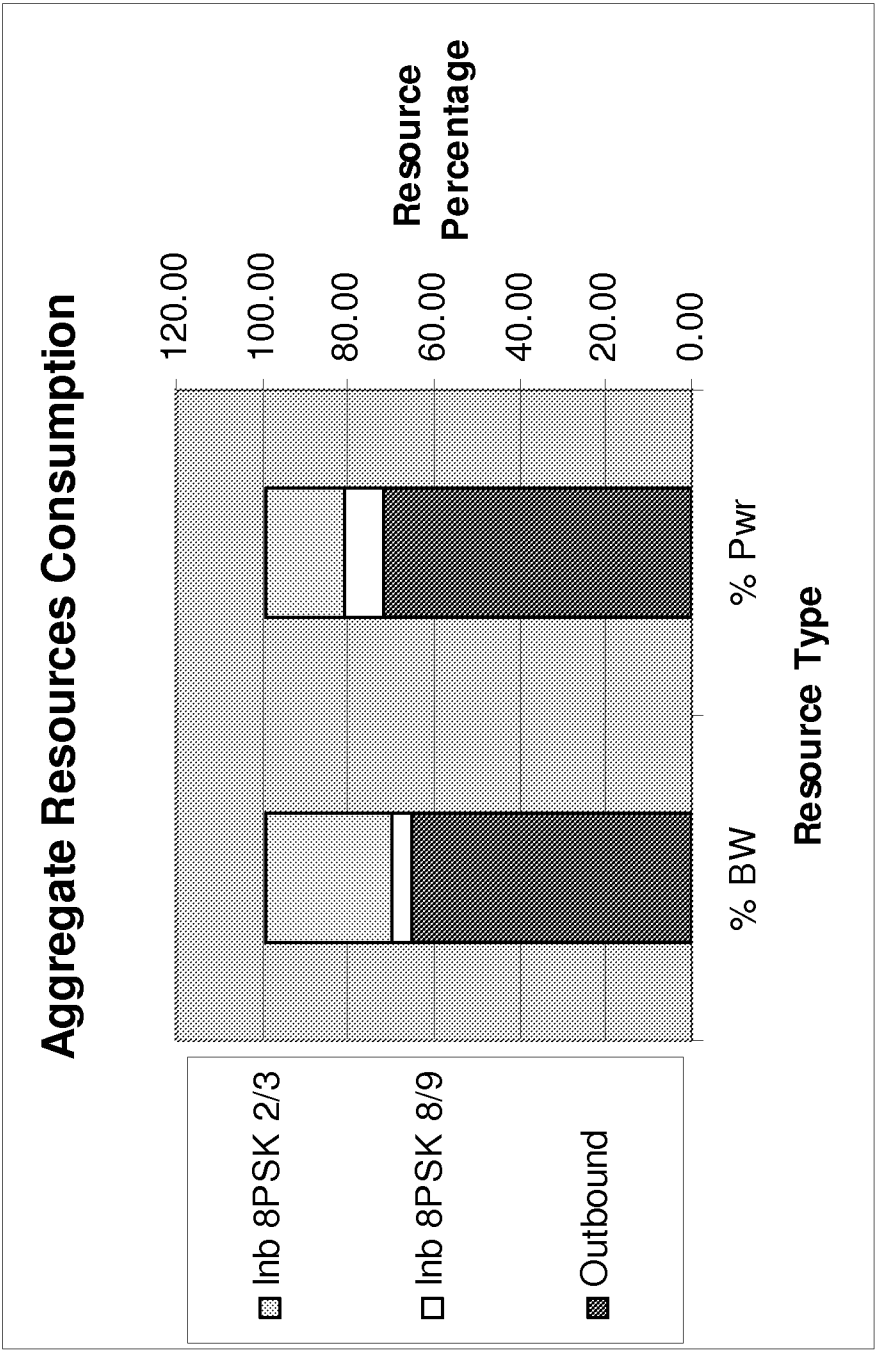


Fig. 6

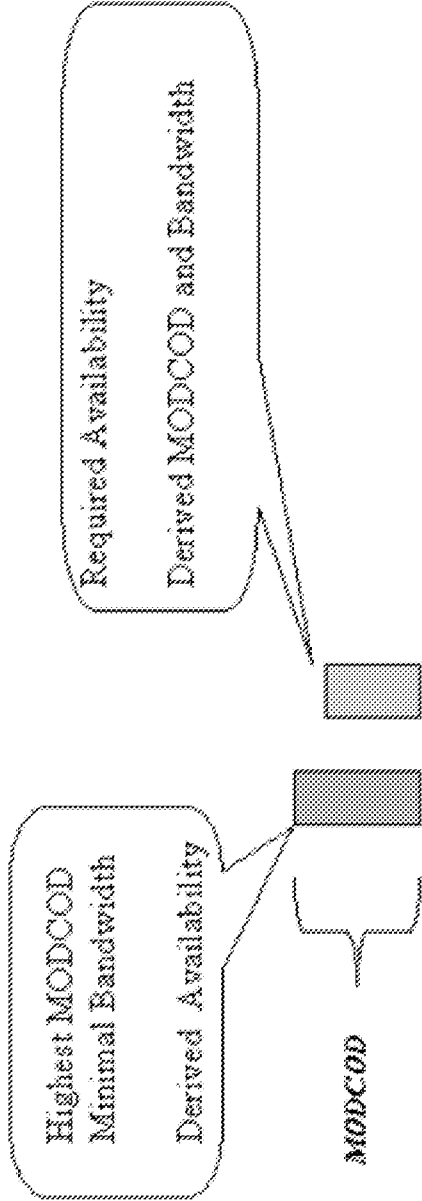


Fig. 7

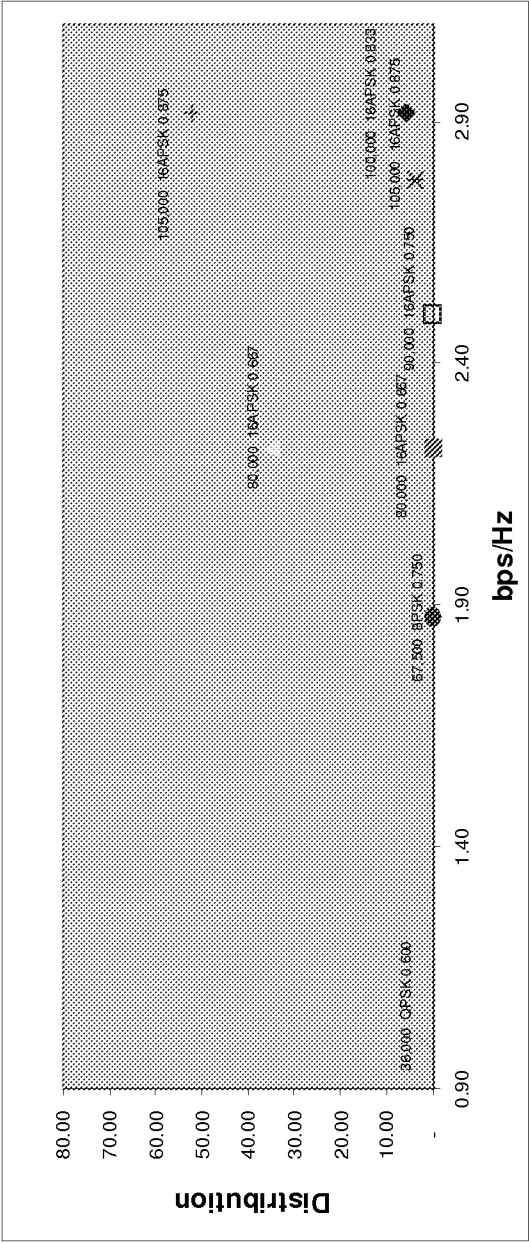


Fig. 8

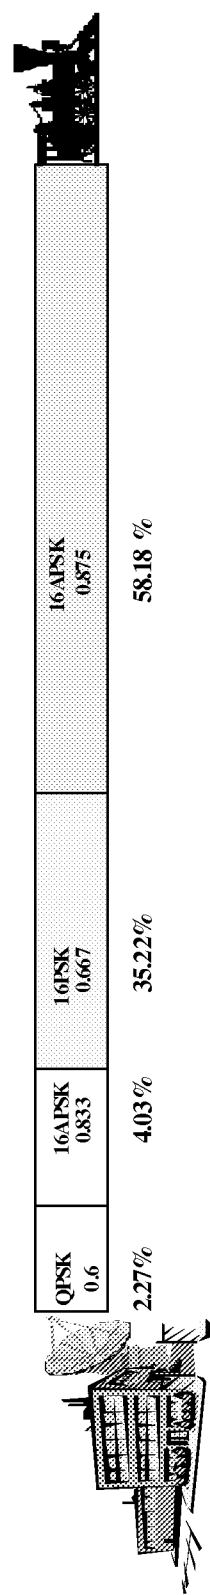


Fig. 9

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2008/051537

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04B7/185 H04L1/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04L H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2006/064726 A1 (LONER PATRICK J [US]) 23 March 2006 (2006-03-23) paragraph [0001] - paragraph [0005] paragraph [0014] - paragraph [0018] paragraph [0021] - paragraph [0023] -----	1, 3, 4, 8-10, 16-21
X	US 2003/054816 A1 (KREBS LAWRENCE W [US] ET AL KREBS LAWRENCE W [US] ET AL) 20 March 2003 (2003-03-20) paragraph [0003] paragraph [0047] - paragraph [0049] paragraph [0051] paragraph [0062] paragraph [0067] - paragraph [0072] paragraph [0079] - paragraph [0087] figures 1, 2, 6 ----- -/--	1-21

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

29 August 2008

Date of mailing of the international search report

04/09/2008

Name and mailing address of the ISA/

European Patent Office, P.B. 5318 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Larcinese, Annamaria

INTERNATIONAL SEARCH REPORT

International application No

PCT/IB2008/051537

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 137 198 A (HUGHES ELECTRONICS CORP [US]) 26 September 2001 (2001-09-26) paragraph [0001] - paragraph [0003] paragraph [0021] - paragraph [0027] paragraph [0037] - paragraph [0039] -----	1-21
A	SAAM T J ED - INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS: "UPLINK POWER CONTROL TECHNIQUE FOR VSAT NETWORKS" ENERGY AND INFORMATION TECHNOLOGIES IN THE SOUTHEAST. COLUMBIA, APRIL 9 - 12, 1989; [PROCEEDINGS OF THE SOUTHEAST CONFERENCE], NEW YORK, IEEE, US, vol. 1 OF 03, 9 April 1989 (1989-04-09), pages 96-100, XP000076782 cited in the application the whole document -----	1-21

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2008/051537

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2006064726	A1	23-03-2006	NONE
US 2003054816	A1	20-03-2003	NONE
EP 1137198	A	26-09-2001	NONE