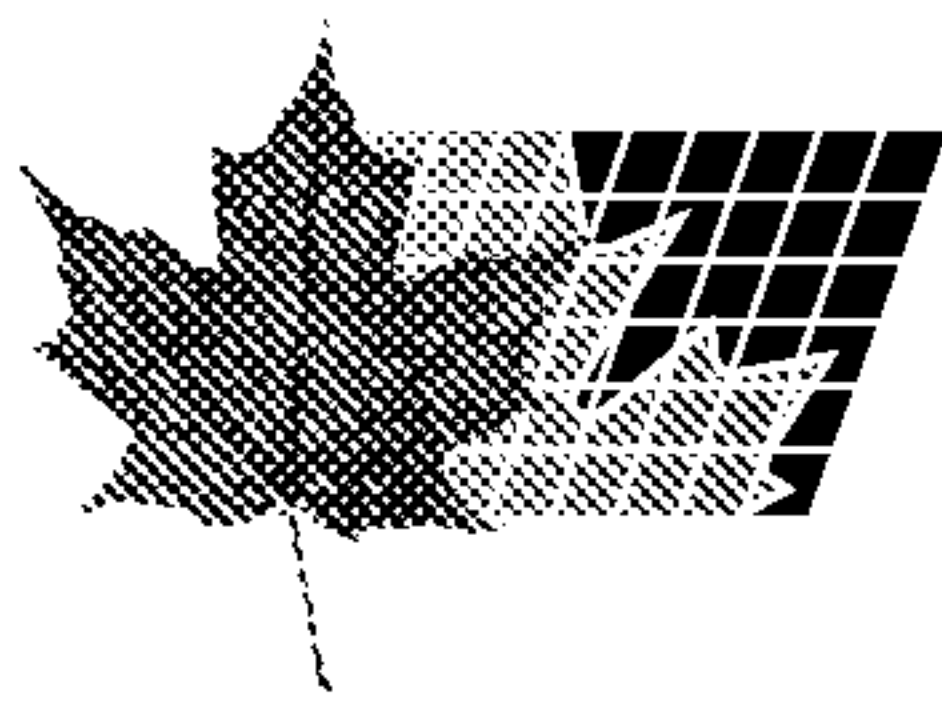




(11) (21) (C) **2,138,212**
(22) 1994/12/15
(43) 1995/06/17
(45) 2000/05/02

(72) Sato, Toshifumi, JP

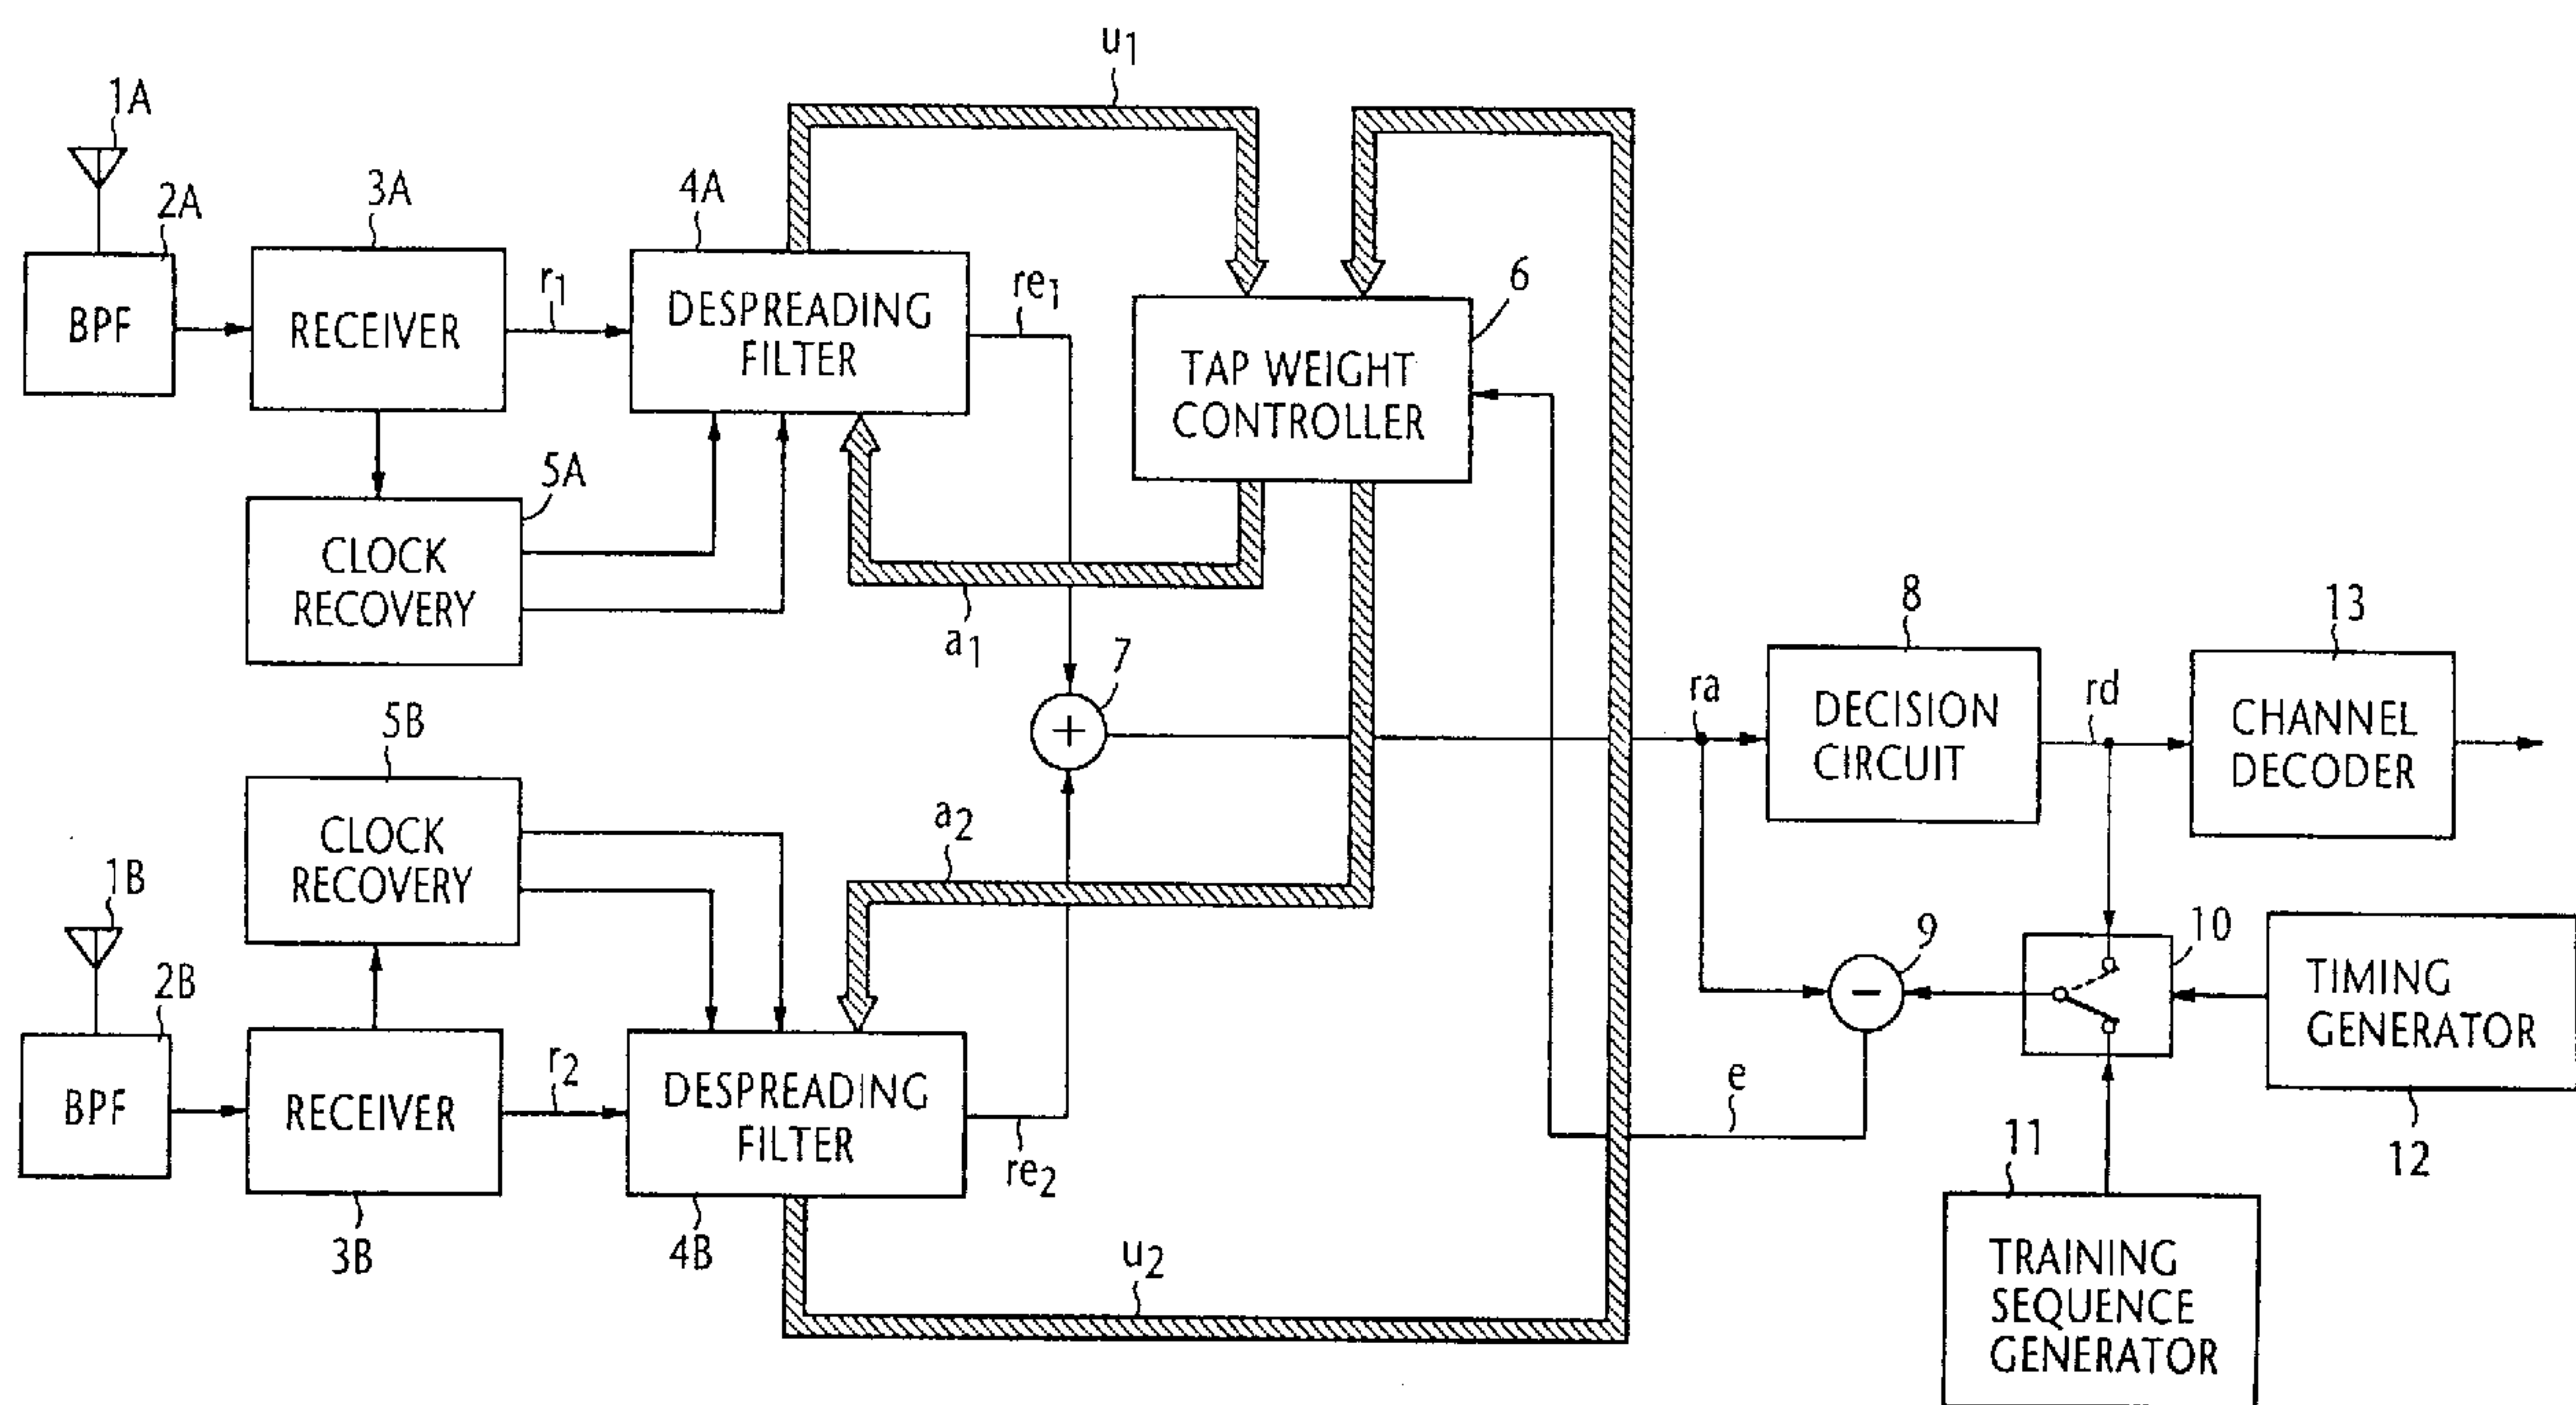
(73) NEC CORPORATION, JP

(51) Int.Cl.⁵ H04B 1/10, H04B 7/02

(30) 1993/12/16 (5-316173) JP

(54) **RECEPTEUR DE SIGNAUX DS-AMDC FONCTIONNANT EN
DIVERSITE DOTE DE FILTRES DE DESETALEMENT**

(54) **DS/CDMA DIVERSITY RECEIVER WITH DESPREADING
FILTERS**



(57) A DS/CDMA receiver includes first and second diversity branches each including an antenna, a receiver and a despreding filter. The output signals of the transversal despreding filters of both diversity branches are diversity-combined, and threshold decision is made on the combined signal to produce a decision output. A decision error is detected from the combined signal and the decision output. Interchannel interference is canceled in each despreding filter by controlling their tap weights so that the tap weight coefficient vectors of each filter are orthogonal to all the spread codes of signals from other sources and multipath fading related intersymbol interference is canceled when the decision error of the diversity-combined signal is reduced to a minimum.



ABSTRACT OF THE DISCLOSURE

1 A DS/CDMA receiver includes first and second diversity branches
2 each including an antenna, a receiver and a despreading filter. The
3 output signals of the transversal despreading filters of both diversity
4 branches are diversity-combined, and threshold decision is made on the
5 combined signal to produce a decision output. A decision error is
6 detected from the combined signal and the decision output. Interchannel
7 interference is canceled in each despreading filter by controlling their tap
8 weights so that the tap weight coefficient vectors of each filter are
9 orthogonal to all the spread codes of signals from other sources and
10 multipath fading related intersymbol interference is canceled when the
11 decision error of the diversity-combined signal is reduced to a minimum.

- 1 -

TITLE OF THE INVENTION

"DS/CDMA Diversity Receiver With Despreading Filters"

BACKGROUND OF THE INVENTIONField of the Invention

5 The present invention relates generally to spread spectrum communications systems, and more particularly to an intersymbol interference canceling technique for a direct sequence code division multiple access (DS/CDMA) receiver.

Description of the Related Art

10 Commercial interest in DS/CDMA communications systems has recently risen due to their potential ability to provide service to more users than is offered by other multiple access techniques. In the DS/CDMA system, each mobile station includes a channel encoder and a multiplier for multiplying
15 the output of the encoder with a distinct spread code. The output of the multiplier is modulated onto a carrier for transmission. Signals from mobile stations are code division multiplexed with other mobile-transmitted signals within the same frequency spectrum, so that the signal at the input of
20 each DS/CDMA cell-site receiver is a sum of the signals from the mobile stations. Each cell-site receiver multiplies a received bit sequence with a distinct spread code, which may be preassigned or assigned on an as-needed basis, so that signals from undesired mobile stations are "spread" over the
25 frequency spectrum of the system and become noise, while the components of the desired signal are "despread" into a signal having a significant amplitude. The noise resulting from the

- 1a -

spreading of undesired signals may be insignificant if the number of mobile stations is small. However, the noise level will affect the desired signal if the number of mobile stations increases.

5 While the DS/CDMA system allows the use of simple RAKE

1 receiver to obtain the benefit of the path diversity technique, it is
2 impossible to reduce interchannel interference to zero. Therefore,
3 precision power control technique is required to control the transmission
4 power of uplink signals from mobile stations. Multipath fading related
5 intersymbol interference is another problem for the DS/CDMA cellular
6 communications system.

7 Japanese Provisional Patent Publication Hei-4-185130 discloses a
8 diversity receiver for spread spectrum communications systems in which
9 a plurality of antenna branches and a delay circuit are used to reduce
10 multipath fading related intersymbol interference which arises when the
11 difference between the arrival times of the multipath signals are less than
12 two chip intervals. However, if the multipath time difference is an integral
13 multiple of the symbol interval, it is impossible to cancel the multipath
14 fading related intersymbol interference since they are spread with the
15 same spreading sequence.

16 SUMMARY OF THE INVENTION

17 It is therefore an object of the present invention to provide a
18 DS/CDMA diversity receiver capable of canceling interchannel
19 interference and multipath fading related intersymbol interference.

20 According to the present invention, there is provided a direct-
21 sequence code division multiple access receiver which comprises first and
22 second diversity branches. The first diversity branch includes a first
23 antenna, a first receiver connected thereto and a first despreading filter
24 comprising a tapped delay line for successively delaying an output signal
25 of the first receiver, a plurality of multipliers for weighting tap signals on
26 successive taps of the tapped delay line with a first vector of tap weight
27 coefficients and an adder for summing the weighted tap signals to
28 produce an output signal of the first despreading filter. Similarly, the
29 second diversity branch includes a second antenna, a second receiver
30 connected thereto and a second despreading filter comprising a tapped

1 delay line for successively delaying an output signal of the second
2 receiver, a plurality of multipliers for weighting tap signals on successive
3 taps of the tapped delay line with a second vector of tap weight
4 coefficients and an adder for summing the weighted tap signals to
5 produce an output signal of the second despreading filter. The output
6 signals of the first and second despreading filters are diversity-combined
7 to produce a combined signal. A decision circuit makes a threshold
8 decision on the combined signal to produce a decision output signal. A
9 decision error is detected from the combined signal and the decision
10 output signal. A tap weight controller controls the first and second
11 vectors of tap weight coefficients with the tap signals of the first and
12 second despreading filters and the decision error so that the decision
13 error is reduced to a minimum.

14 Interchannel interference is canceled in each of the despreading
15 filters by controlling the first and second vectors so that they are
16 orthogonal to all the spread codes of signals from other sources and
17 multipath fading related intersymbol interference is canceled when the
18 decision error of the diversity-combined signal is minimized.

19 BRIEF DESCRIPTION OF THE DRAWINGS

20 The present invention will be described in further detail with
21 reference to the accompanying drawings, in which:

22 Fig. 1 is a block diagram of a receiver at a cell-site station of a
23 DS/CDMA (direct-sequence code division multiple access) cellular
24 communication system according to the present invention;

25 Fig. 2 is a block diagram showing details of a despreading filter
26 and a tap weight controller using the LMS algorithm; and

27 Fig. 3 is a block diagram of a tap weight controller using the RLS
28 algorithm.

29 DETAILED DESCRIPTION

30 Referring now to Fig. 1, there is shown a receiver of the present

1 invention at a cell-site station for a DS/CDMA (direct-sequence code
2 division multiple access) communication system. At the cell-site station,
3 the DS/CDMA receiver for each mobile user comprises first and second
4 diversity branches of identical configuration. The first diversity branches
5 includes a diversity antenna 1A for receiving a delay-dispersed, spread
6 spectrum signal through a multipath fading channel from the mobile user
7 station, and a bandpass filter 2A for band-limiting the signal to the
8 frequency spectrum of the CDMA communication system. A receiver
9 3A, connected to the bandpass filter 2A, has radio frequency,
10 intermediate frequency and demodulation stages to produce a baseband
11 output signal r_1 . A despreading filter 4A, which is a finite impulse
12 response (FIR) filter, is connected to the receiver 3A to despread the
13 signal r_1 with a vector a_1 of tap weight coefficients from a tap weight
14 controller 6 to produce an output signal re_1 . A clock recovery circuit 5A is
15 provided to recover clock pulses at the chip- and symbol rates of the
16 transmitted signal and produces a first clock twice the transmitted chip-
17 rate and a second clock equal to the transmitted symbol rate.
18 Despreading filter 4A uses these recovered clock pulses for despreading
19 the input signal r_1 .

20 In the same manner, the second diversity branch includes a
21 diversity antenna 1B for receiving a delay-dispersed, spread spectrum
22 signal through another multipath fading channel from the same mobile
23 user station. Bandpass filter 2B limits the signal to the system's frequency
24 spectrum and receiver 3B produces a baseband output signal r_2 .
25 Despreading filter 4B produces an output signal re_2 by despreading the
26 baseband signal r_2 using a sequence a_2 of tap weight coefficients
27 produced by the tap weight controller 6. Clock recovery circuit 5B
28 recovers the necessary clock pulses for despreading filter 4B from the
29 signal obtained during the demodulation process of the receiver 3B.
30 Antennas 1A and 1B are spaced apart approximately ten times the

1 wavelength of the received carrier, typically at least 1.5 meters for a
2 carrier frequency of 2 GH.

3 In each of the despreading filters 4A and 4B, the tap weight
4 coefficients are adaptively controlled so that their vectors are orthogonal
5 to all the spread codes except for one used at the mobile station of
6 interest. Due to this orthogonality, multiple-access interchannel
7 interference is canceled.

8 The output signals re_1 and re_2 of the filters are diversity-
9 combined by an adder 7 to produce a sum "ra", the output of which is
10 applied to a decision circuit 8 where it is compared with a predetermined
11 threshold to produce a decision output "rd". The decision output "rd" is
12 applied to a channel decoder 13 where it is decoded in a process inverse
13 to that of the channel encoder at the mobile station transmitter.

14 A switch 10 has a first terminal connected to the output of
15 decision circuit 8 and a second terminal connected to a training sequence
16 generator 11 which produces a training sequence which is known by
17 both the cell site receiver and the corresponding mobile user. Between
18 the output terminal of switch 10 and the input of decision circuit 8 is
19 provided a subtractor 9 to produce a difference signal between signals
20 "ra" and "rd".

21 The moving contact of switch 10 is initially connected to the
22 second terminal when a CDMA burst is received from the mobile
23 transmitter. The decision error "e" during the initial period of the burst
24 represents the difference between the incoming and training sequences of
25 the same code pattern. The output of subtractor 9 is applied to the tap
26 weight controller 6 as a feedback correction signal to adaptively update
27 the tap weights of despreading filters 4A, 4B so that the decision error
28 reduces to a minimum. When this occurs, the tap weight coefficients are
29 said to be converged to the same spread sequence as that used at the
30 mobile station. Upon termination of the training sequence, the timing

1 generator 12 commands the switch 10 to connect the output of decision
2 circuit 8 to the subtractor 9 for tracking the transmitter's sequence under
3 the varying characteristics of the transmission medium using a decision
4 error that is derived from the difference between the input and output of
5 decision circuit 8.

6 The difference between the signals "ra" and "rd" represents the
7 decision error "e" which arises from a number of factors including
8 interchannel interference caused by uplink signals transmitted from other
9 mobile stations using other spreading codes, multipath-fading related
10 intersymbol interference, and receiver noise. Since each of the
11 despreading filters 4A, 4B has the ability to cancel such interchannel
12 interference, the error factors that must be taken into consideration are
13 the multipath-fading related intersymbol interference and receiver noise.

14 If a signal from a mobile station is propagated over multipath
15 fading channels and the difference between the arrival times of the
16 multipath signals (multipath time difference) is an integral multiple of the
17 symbol interval, it is impossible to cancel intersymbol interference if use is
18 made of only one despreading filter due to the fact that the multipath
19 signals are both spread at the mobile transmitter by the same spreading
20 sequence. Hence, the spreading sequence of each multipath signal fully
21 overlaps with that of the other multipath signal and cannot be
22 discriminated from it. However, due to the use of two diversity branches,
23 the respective input signals to the despreading filters 4A and 4B
24 advantageously differ in terms of their amplitudes and phases, and their
25 multipath time differences are of the same value. As a result, the CDMA
26 diversity receiver of the present invention has the ability to cancel such
27 interference factors by diversity combining the outputs of the
28 despreading filters, even if the multipath time difference is an integral
29 multiple of the symbol interval T_s .

30 A mathematical analysis is given for a simplified, but practical

1 model in which it is assumed that the receiver noise is negligible. Let $s(t)$
 2 denote a transmitted DS/CDMA signal and τ the time difference between
 3 the early arriving signal (direct wave) and the later arriving signal
 4 (reflected wave) at each antenna, and let g_{ij} denote the amplitude/phase
 5 characteristics of the signals, where $i = 1$ and $i = 2$ represent the outputs
 6 of antennas 1A and 1B, respectively, and $j = 1$ and $j = 2$ represent the
 7 early arriving signal and later arriving signal, respectively. Since the
 8 interchannel interference is canceled by each of the despreading filters
 9 4A, 4B due to the orthogonality of their tap weight coefficient vectors to
 10 the spread codes of undesired signals, their output signals $re_1(t)$ and
 11 $re_2(t)$ for multipath fading channels are given in the form:

$$12 \quad re_1(t) = g_{11} \times s(t) + g_{12} \times s(t - \tau) \quad (1)$$

$$13 \quad re_2(t) = g_{21} \times s(t) + g_{22} \times s(t - \tau) \quad (2)$$

14 Solving Equations (1) and (2) for $s(t)$ gives:

$$15 \quad g_{22} re_1(t) - g_{12} re_2(t) = g_{22} g_{11} \times s(t) - g_{12} g_{21} \times s(t) \quad (3)$$

16 By representing the left-hand terms of Equation (3) as,

$$17 \quad re_1'(t) = g_{22} \times re_1(t) \quad (4)$$

$$18 \quad re_2'(t) = -g_{12} \times re_2(t) \quad (5)$$

19 the output signal $ra(t)$ of diversity combiner 7 is given by Equation (6) as
 20 follows:

$$21 \quad ra(t) = re_1'(t) + re_2'(t) \\ 22 \quad = (g_{11} \times g_{22} - g_{21} \times g_{12}) s(t) \quad (6)$$

23 If the tap weight coefficient vectors a_1 and a_2 are controlled to
 24 minimize the decision error, Equation (6) will be satisfied, canceling the
 25 intersymbol interference $s(t - \tau)$.

26 Additionally, the DS/CDMA receiver of the present invention has
 27 the ability to compensate for interference for a complex model in which
 28 the interchannel interference is not completely canceled by each
 29 despreading filter by adaptively controlling the tap weight coefficient
 30 vectors a_1 and a_2 to reduce the decision error to a minimum.

1 Details of the despreading filters and the tap weight controller
2 are shown in Fig. 2. As illustrated, the despreading filter 4A has a
3 sampling gate 20 for sampling the output of receiver 3A at twice the chip
4 rate of the recovered clock and a tapped delay-line implemented with a
5 shift register, or a series of $6 \times M$ delay-line elements 21-1 through 21-6M
6 of delay time $T_c/2$ (where M is the spreading factor of the DS/CDMA
7 signal, i.e., the number of chips used to spread each symbol at a chip
8 rate, and T_c is the reciprocal of the chip rate). Tap signals on the
9 successive taps of the delay line of despreading filter 4A are supplied to
10 the tap weight controller as a "delay-line" vector u_1 on the one hand and
11 supplied to multipliers 22-1 to 22-6M, respectively, where they are
12 weighted by tap weight coefficients which are supplied as a "tap-weight"
13 vector a_1 from tap weight controller 6. The weighted tap signals are
14 summed by an adder 23, whose output is fed to a sampling gate 24
15 where it is sampled at the symbol-rate clock to produce an output signal
16 re_1 .

17 For adaptively updating the tap weights, tap weight controller 6
18 may use the LMS (least-mean-squares) algorithm which is characterized
19 by simple, but slow convergence speed, or the RLS (recursive-least-
20 squares) algorithm which is characterized by complex, but fast
21 convergence speed. If the LMS algorithm is employed, the tap weight
22 controller 6 includes a vector multiplier 30A which multiplies the delay-line
23 vector u_1 with the decision error e . The output of vector multiplier 30A is
24 scaled with an update coefficient μ by a scaler 31A to produce a vector
25 $\mu \cdot e \cdot u_1$ which is fed to a vector subtractor 32A where it is subtracted from
26 the output vector of a symbol delay circuit 33A which introduces a
27 symbol time delay T_s to the output of subtractor 32A. The output of
28 symbol delay circuit 33A is the tap weight vector a_1 whose tap weight
29 coefficients are respectively applied to the multipliers of despreading filter
30 4A. In like manner, the delay-line vector u_2 is multiplied by vector

- 9 -

1 multiplier 30B with the decision error and is scaled at scaler 31B with the
2 update coefficient μ to produce a vector $\mu \cdot e \cdot u_2$ which is fed to vector
3 subtractor 32B where it is subtracted from the output vector of symbol
4 delay circuit 33B. The output of symbol delay circuit 33B is the tap
5 weight vector a_2 whose tap weight coefficients are respectively applied to
6 the multipliers of despreading filter 4B.

7 If the RLS algorithm is used for tap weight control, the controller 6
8 is formed, as shown in Fig. 3, with a calculator 40 which calculates the
9 vectors u_1 and u_2 from the despreading filters 4A, 4B according to the
10 well-known RLS algorithm to produce a gain vector k , a symbol delay
11 element 41 which delays the $12M \times 12M$ matrix P by a symbol interval T_s
12 and feeds it back to the RLS calculator 40, a vector multiplier 42 for
13 multiplying the gain vector k with the decision error "e". The output of
14 multiplier 42 is scaled by the update coefficient μ . The scaled vector is
15 subtracted from the output of a symbol delay element 45 which
16 introduces a symbol delay to the output vector of the subtractor 44 to
17 produce vectors a_1 and a_2 .

What is claimed is:

- 1 1. A direct-sequence code division multiple access receiver
2 comprising:
3 a first diversity branch having a first antenna, a first receiver
4 connected thereto and a first despreading filter comprising a tapped
5 delay line for successively delaying an output signal of the first receiver, a
6 plurality of multipliers for weighting tap signals on successive taps of the
7 tapped delay line with a first vector of tap weight coefficients and an
8 adder for summing the weighted tap signals to produce an output signal
9 of the first despreading filter;
10 a second diversity branch having a second antenna, a second
11 receiver connected thereto and a second despreading filter comprising a
12 tapped delay line for successively delaying an output signal of the second
13 receiver, a plurality of multipliers for weighting tap signals on successive
14 taps of the tapped delay line with a second vector of tap weight
15 coefficients and an adder for summing the weighted tap signals to
16 produce an output signal of the second despreading filter;
17 a diversity combiner for combining the output signals of said first
18 and second despreading filters to produce a combined signal;
19 a decision circuit for making a threshold decision on said
20 combined signal to produce a decision output signal;
21 means for detecting a decision error from said combined signal
22 and said decision output signal; and
23 control means for controlling said first and second vectors of tap
24 weight coefficients with the tap signals of said first and second
25 despreading filters and said decision error so that the decision error is
26 reduced to a minimum.
- 1 2. A direct-sequence code division multiple access receiver as
2 claimed in claim 1, wherein said first and second vectors are controlled so

- 11 -

3 that said vectors are orthogonal to spread codes of signals other than a
4 spread code of a desired signal.

1 3. A direct-sequence code division multiple access receiver as
2 claimed in claim 1, wherein said control means includes means for
3 controlling said first and second vectors in accordance with least-mean-
4 squares algorithm.

1 4. A direct-sequence code division multiple access receiver as
2 claimed in claim 1, wherein said control means includes means for
3 controlling said first and second vectors in accordance with recursive-
4 least-squares algorithm.

1 5. A direct-sequence code division multiple access receiver as
2 claimed in claim 1, wherein said first despreading filter further comprises
3 means for sampling the output signal of the first receiver at twice a chip
4 rate at which a transmitted symbol is chipped with a spreading code and
5 producing a sampled signal and means for sampling said sum signal at
6 intervals of said symbol to produce the output signal of said first
7 despreading filter, wherein the tapped delay line of the first despreading
8 filter includes a series of delay elements for successively delaying said
9 sampled signal for a duration equal to $1/2$ of the reciprocal of said chip
10 rate, and

11 wherein said second despreading filter further comprises means
12 for sampling the output signal of the second receiver at twice said chip
13 rate to produce a sampled signal and means for sampling the sum signal
14 of the second despreading filter at intervals of said symbol to produce the
15 output signal of said second despreading filter, wherein the tapped delay
16 line of the second despreading filter includes a series of delay elements
17 for successively delaying the sampled signal of the second despreading
18 filter for a duration equal to $1/2$ of the reciprocal of said chip rate.

FIG. 1

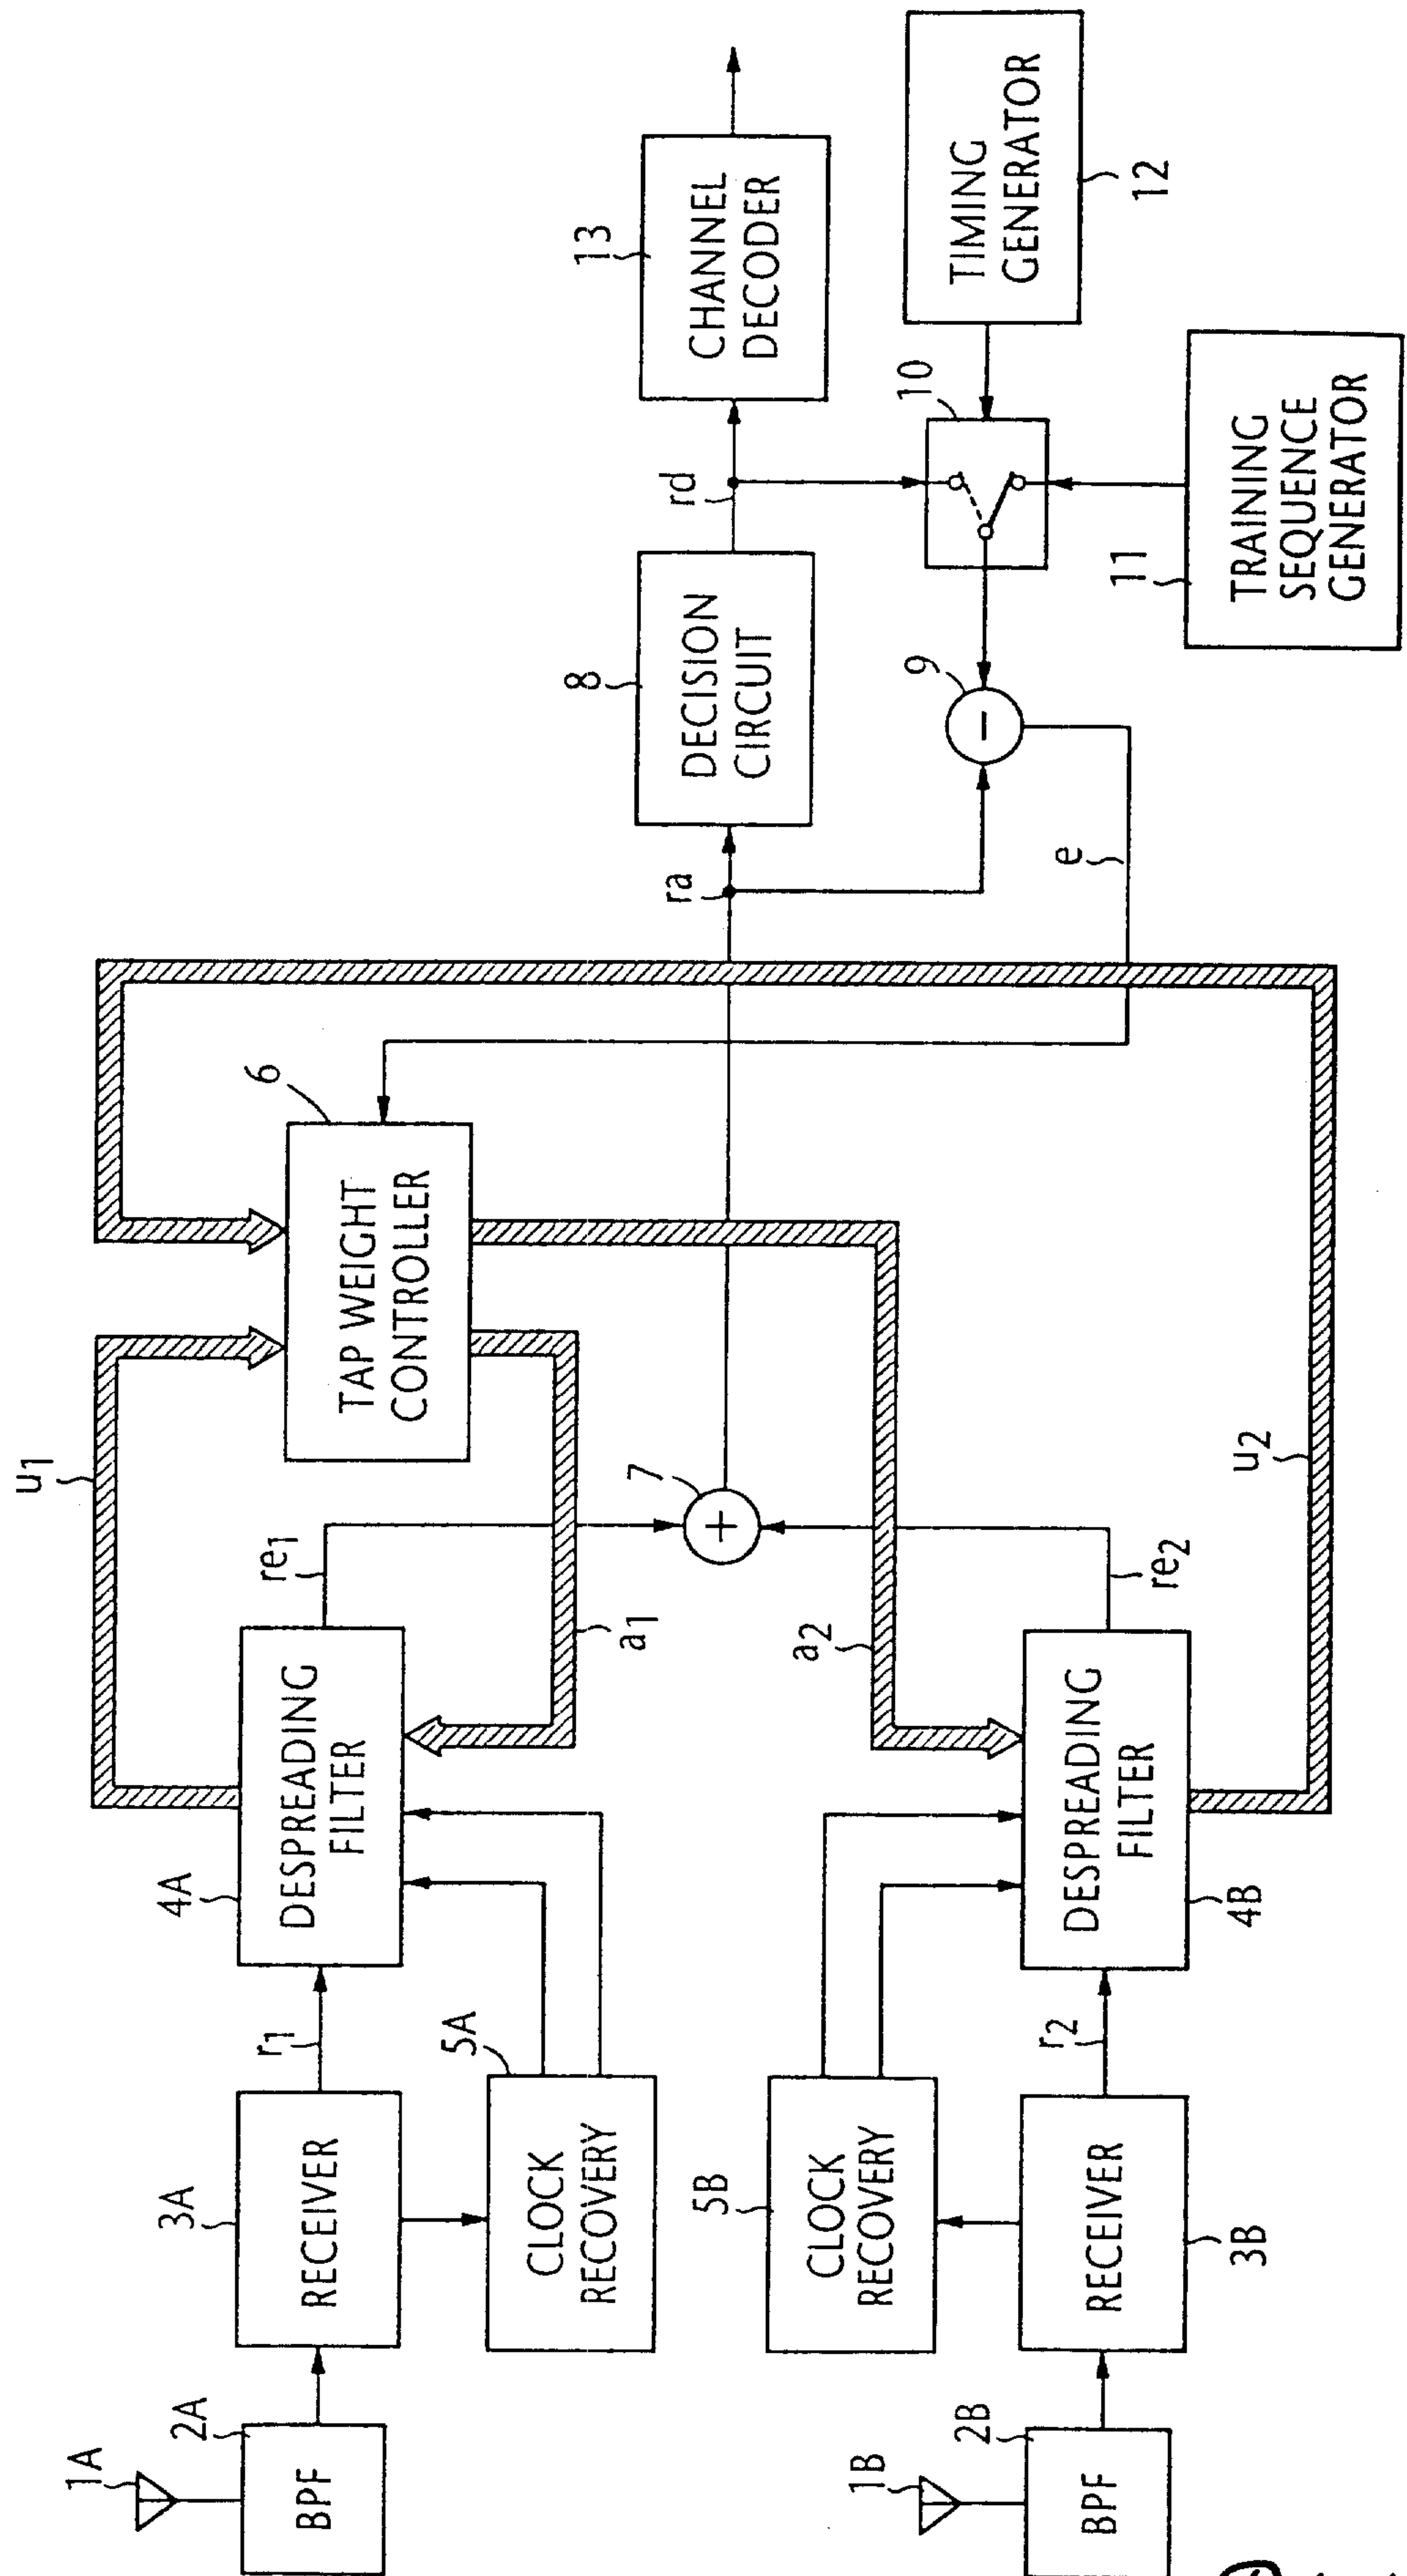


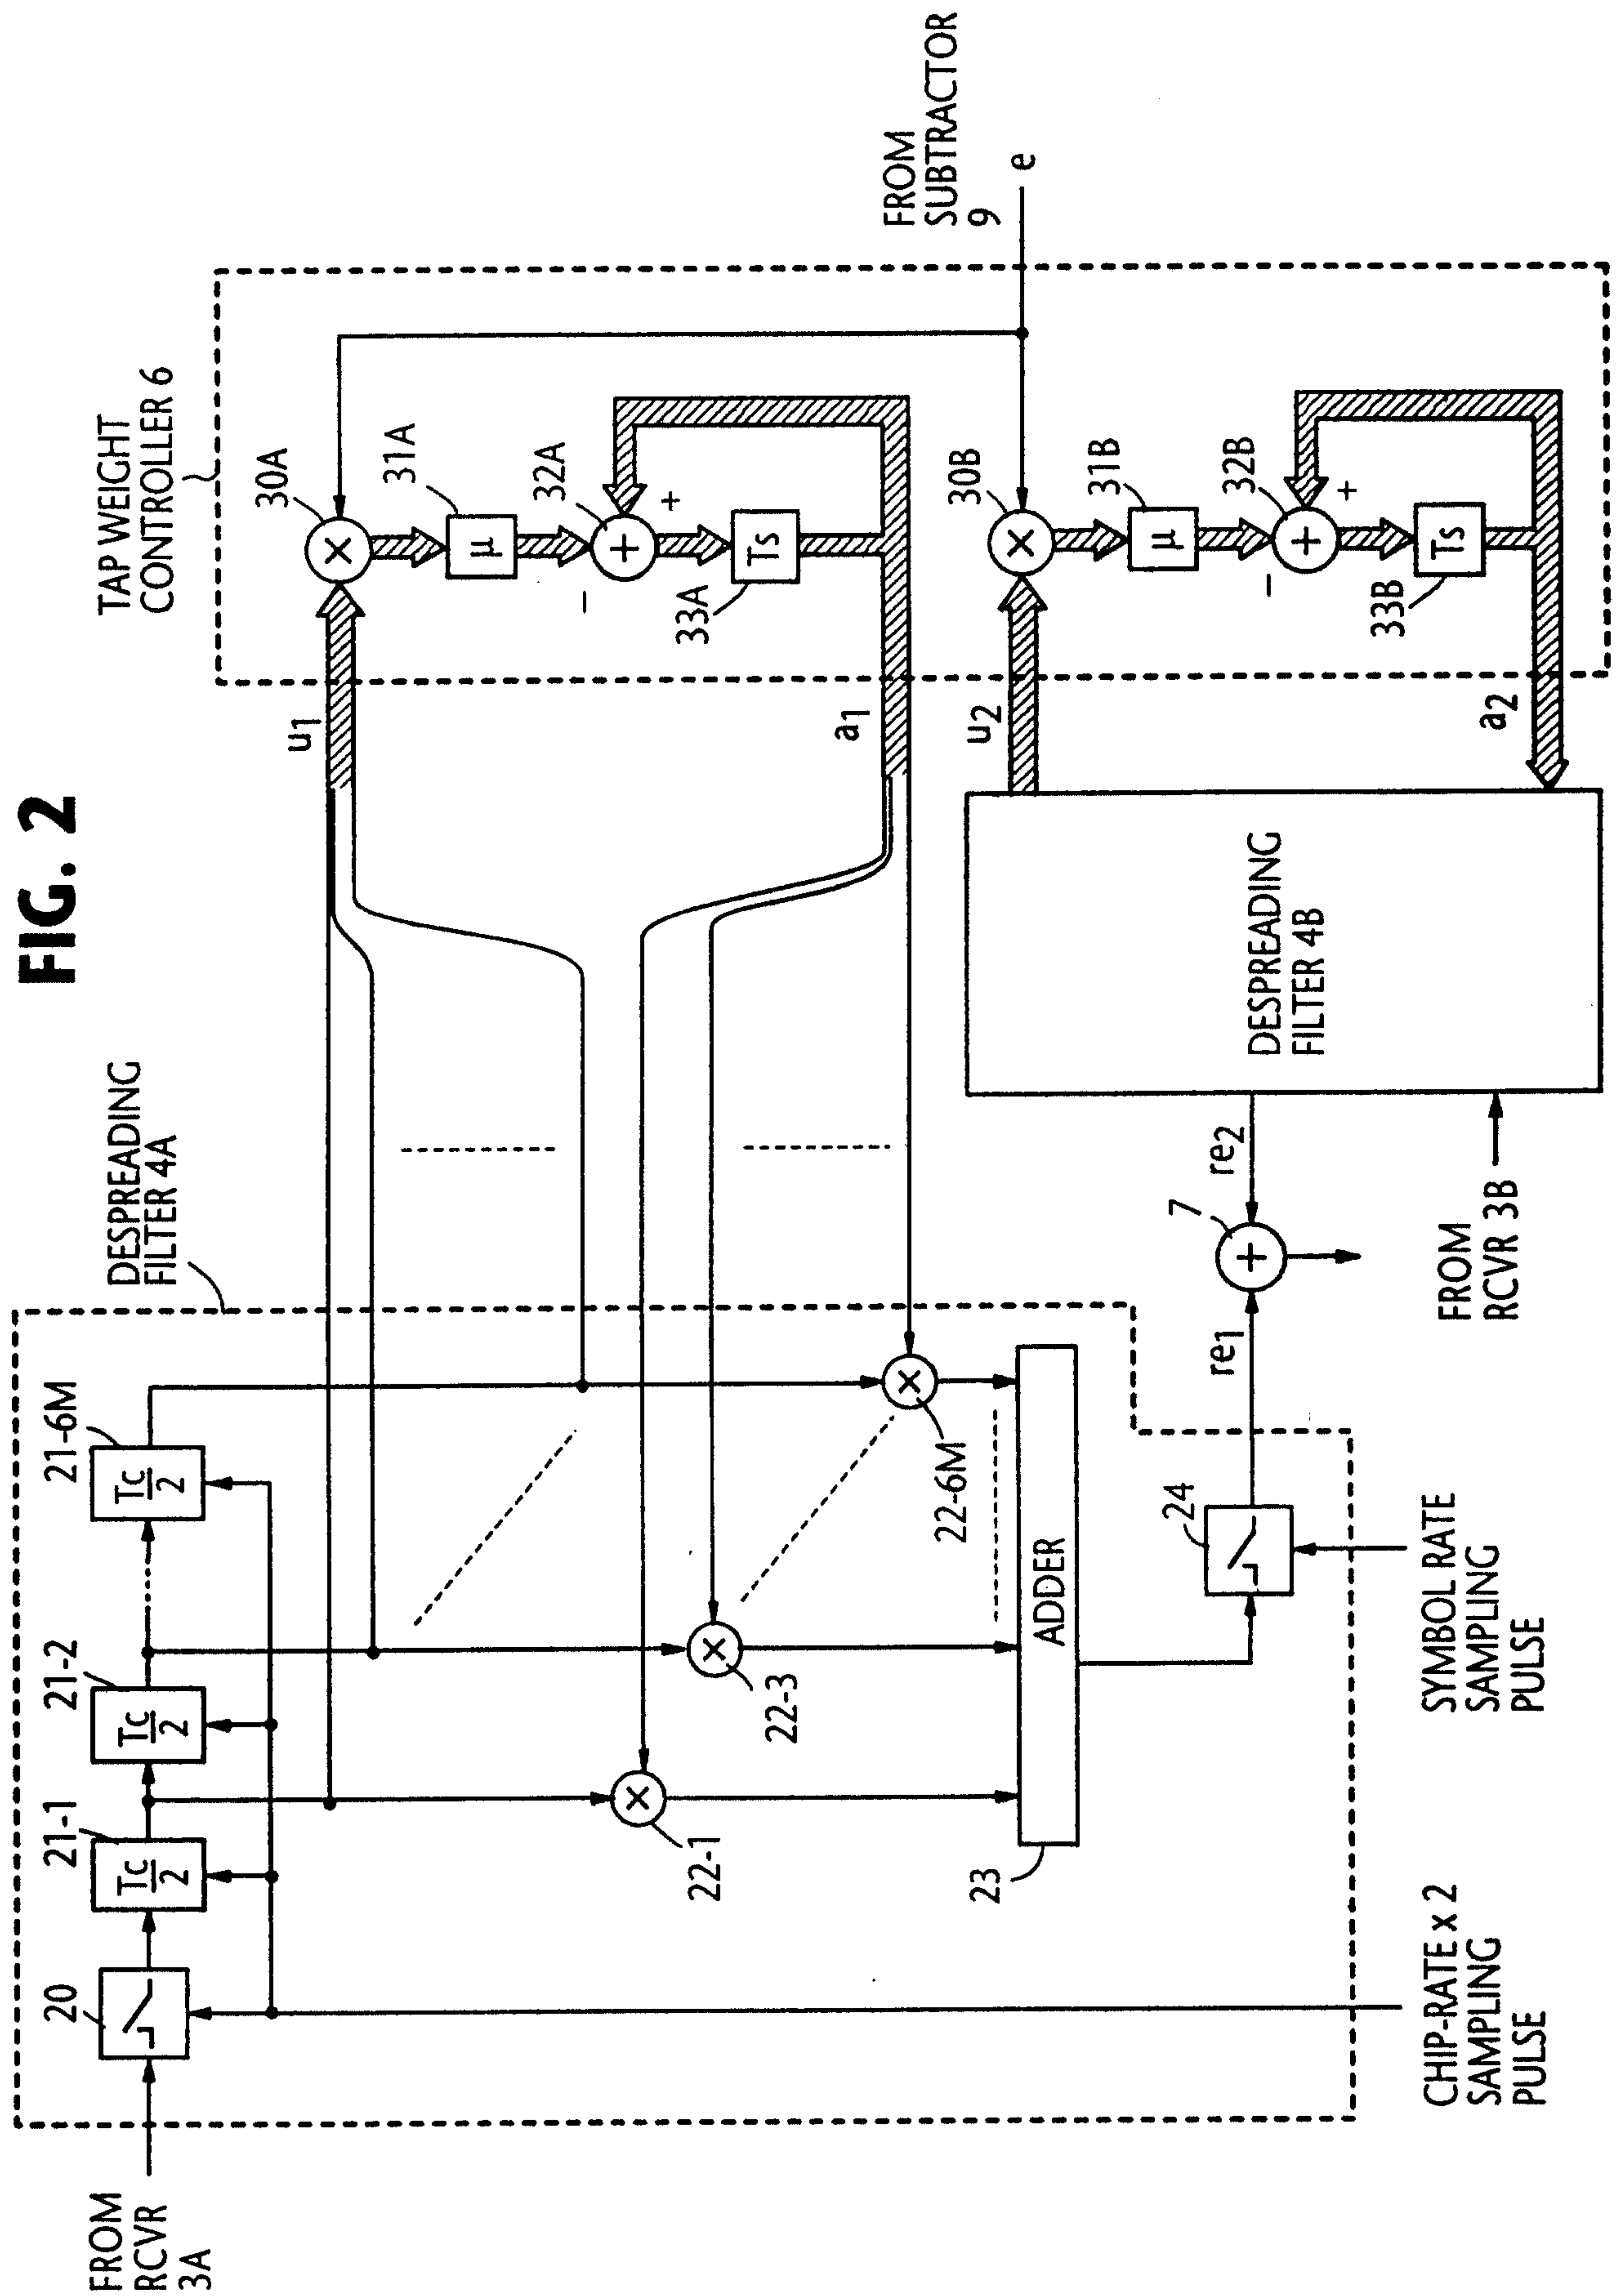
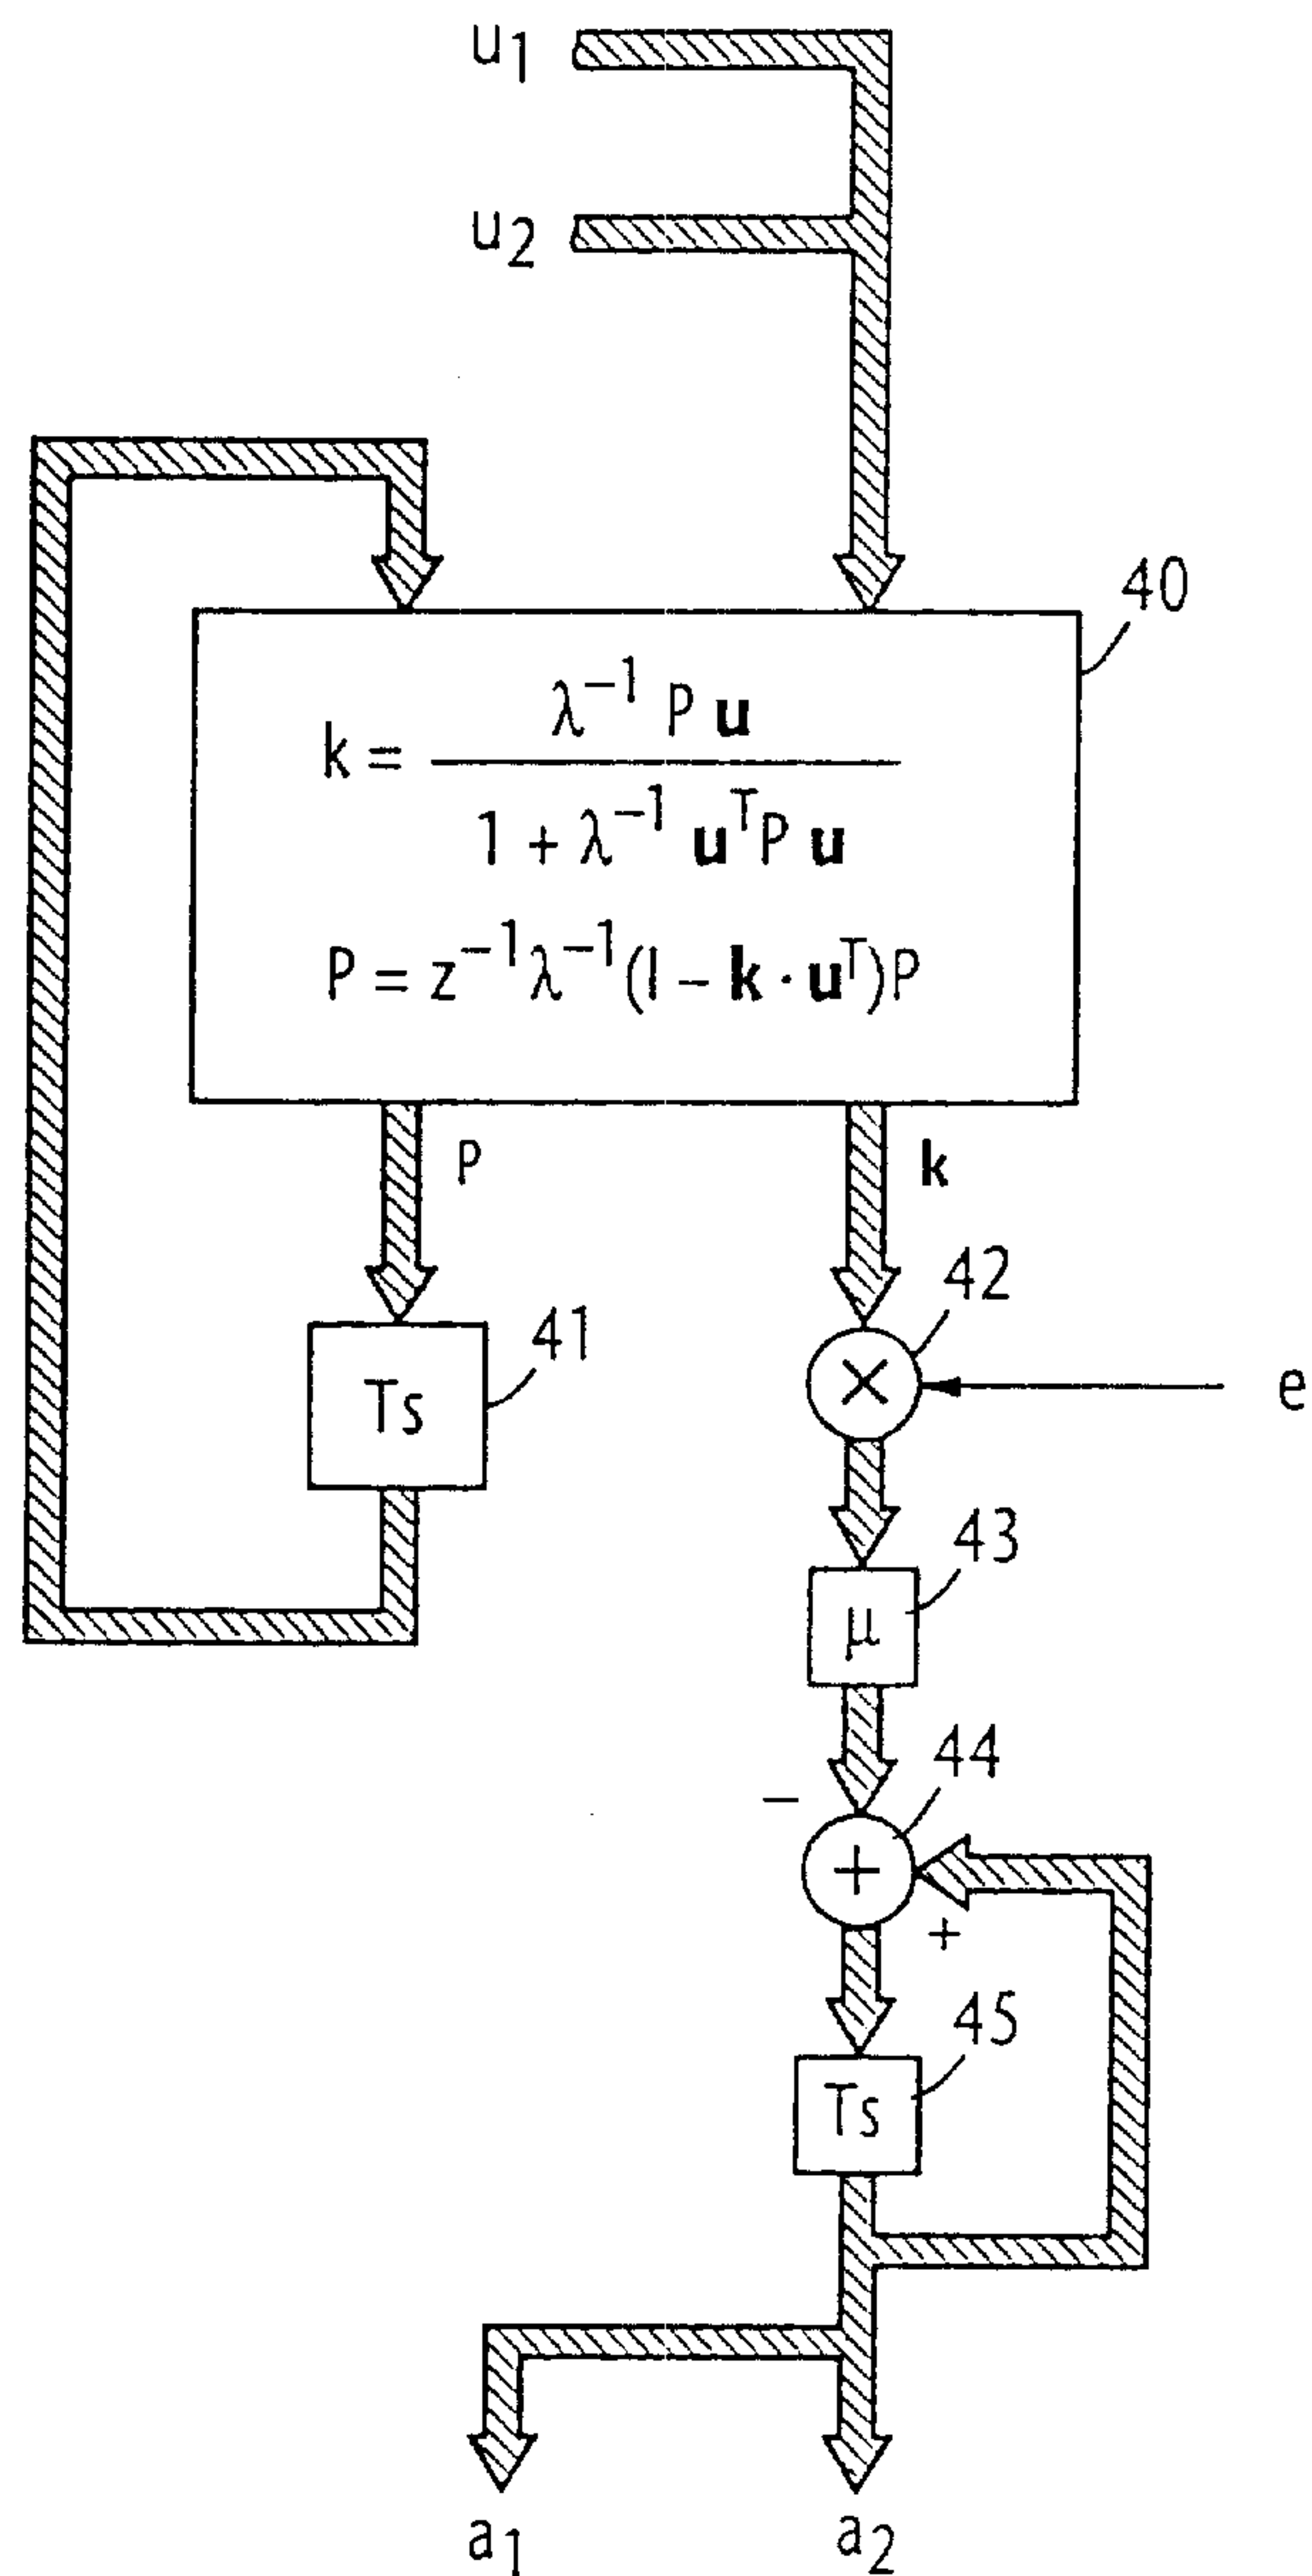
FIG. 2

FIG. 3TAP WEIGHT CONTROLLER 6

LEGEND:

 $u = \begin{pmatrix} u_1 \\ u_2 \end{pmatrix}$: 12M-DIMENSIONAL VECTOR

 $a = \begin{pmatrix} a_1 \\ a_2 \end{pmatrix}$: 12M-DIMENSIONAL VECTOR

 k : 12M-DIMENSIONAL VECTOR

 P : 12M x 12M MATRIX