

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
31 January 2008 (31.01.2008)

PCT

(10) International Publication Number  
**WO 2008/013789 A2**

(51) International Patent Classification: **Not classified**

(21) International Application Number:  
PCT/US2007/016607

(22) International Filing Date: 24 July 2007 (24.07.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
11/494,043 27 July 2006 (27.07.2006) US

(71) Applicant (for all designated States except US): **BAKER HUGHES INCORPORATED** [US/US]; P.O. Box 4740, Houston, TX 77027 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **REIDERMAN, Arcady** [US/US]; 1918 Baker Trail, Houston, TX 77059 (US).

(74) Agents: **RIDDLE, Albert, J.** et al.; Baker Hughes Incorporated, 3900 Essex Lane, Suite 1200, Houston, TX 77027 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: NUCLEAR MAGNETIC RESONANCE TOOL USING SWITCHABLE SOURCE OF STATIC MAGNETIC FIELD

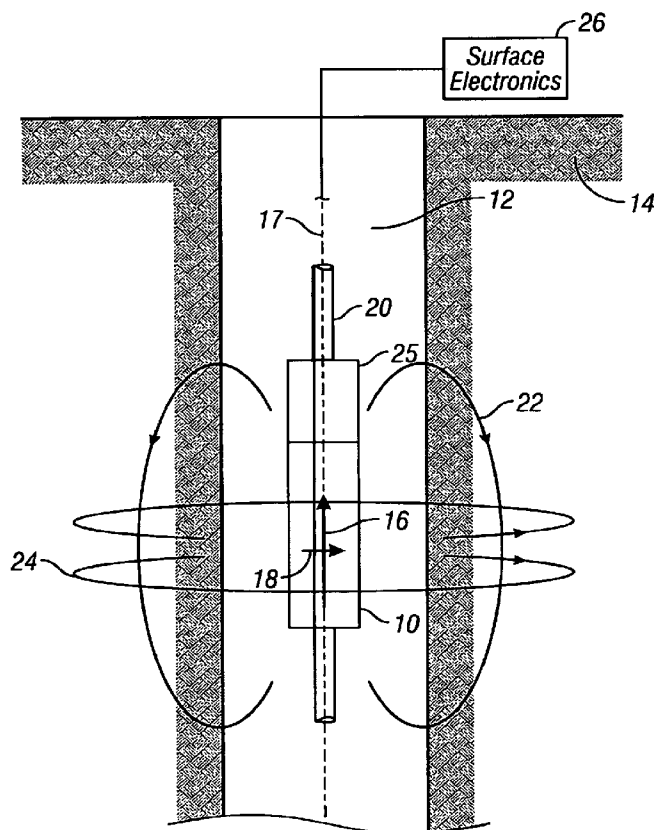

(57) Abstract: A nuclear magnetic resonance sensing apparatus and method for operating in an earth borehole comprises a source of switchable magnetic field to polarize nuclei in the region of interest, said source comprising a coil wound on a magnetic core having controllable residual magnetization. Maintaining the magnetization of the core during a polarization interval does not require steady current in the coil. Switching intensity and polarity of magnetization of the core causes precession of spin magnetic moments of the nuclei; the precession induces a signal indicative of nuclear magnetic resonance properties of earth formations.



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**NUCLEAR MAGNETIC RESONANCE TOOL USING SWITCHABLE  
SOURCE OF STATIC MAGNETIC FIELD**

**Inventor: Arcady Reiderman**

**BACKGROUND OF THE DISCLOSURE**

5 Field of the Disclosure

[0001] The disclosure relates generally to the field of measuring nuclear magnetic resonance properties of an earth formation traversed by a borehole. More particularly, the disclosure presents method and apparatus for increasing signal-to-noise ratio and depth of investigation of the nuclear magnetic resonance (NMR) measurements.

10

**Background Art**

[0002] A NMR well logging instrument uses a static magnetic field imposed on an earth formation to align nuclear spin magnetic moments of protons or other nuclei present in the earth formations. The static magnetic field may be naturally generated as in case of using the earth's magnetic field or produced by a permanent magnet or  
15 an electromagnet. The aligned spin magnetic moment is brought into excited state either by applying an RF magnetic field or switching the static magnetic field. RF voltages are induced in the receive antenna as a result of precessional rotation of nuclear spin axes of hydrogen protons or other nuclei about the static magnetic field with characteristic resonance or Larmor frequency corresponding to the static  
20 magnetic field strength.

[0003] Typical NMR tool using precession of the polarized nuclear magnetic moments about the earth's magnetic field comprises a source of static magnetic field polarizing nuclei. The field is turned off to allow free or driven precession about the  
25 earth's magnetic field. US patent 3,538,429 issued to *Baker*, and US patent 4,035,718 issued to *Chandler* give examples of the technique that uses abrupt (non-adiabatic) turning off the static magnetic field and detecting signal generated by free precession of nuclear spin magnetic moments. An improved technique is described in US patent 3,667,035 issued to *Slichter*. The polarizing field is terminated adiabatically within a  
30 predetermined time interval less than the characteristic thermal relaxation time of the selected nuclei. Prior to the termination an alternated magnetic field directed transversal to the earth's magnetic field at a frequency corresponding to the Larmor precession frequency is applied. As a result of application of the alternating magnetic

field and adiabatic termination of the polarizing magnetic field the nuclear spins are sweeping onto condition of driven resonance in the earth's magnetic field. Then the alternating field is abruptly terminated to facilitate free precession of the nuclei in the earth's magnetic field. US patent 6,366,086 issued to *Pabitra* addresses an issue of an undesirable signal acquired from borehole fluid. Drawbacks of the methods of this type are poorly defined excitation region as well as relatively low SNR due to power-consumption-limited intensity of switchable static magnetic field.

[0004] Another approach to the NMR measurement in the borehole is represented by and US Patent 4,717,878 issued to *Taicher* et al., US patent 5,055,787 issued to *Kleinberg* et al., and US Patent 6,452,388 issued to *Reiderman*, et al. The approach employs using a permanent magnet that generates polarizing magnetic field that aligns nuclear spin magnetic moment. The angle between the nuclear magnetization is then changed by applying a pulsed radio-frequency (RF) magnetic field at a frequency corresponding to the static magnetic field magnitude at a predetermined distance from the NMR tool. A sequence of RF pulses can be designed to manipulate the nuclear magnetization in order to acquire relaxation property of the earth formation. For the NMR well logging the most common sequence is the CPMG sequence that comprises one excitation pulse and a plurality of refocusing pulses. Due to an extremely inhomogeneous magnetic field the NMR excitation is constrained to a thin shell resulting in relatively shallow region of investigation and sensitivity to any lateral displacement of the logging instrument.

[0005] Yet another approach to NMR logging measurement is disclosed in US patent 6,166,543 issued to *Sezginer* et al. and US patent 6,133,753 issued to *Hurlimann* et al. The approach is based on non-resonant excitation and refocusing and has an advantage of having a relatively large excitation volume compared to resonant excitation methods described above. The method utilizes capability of generating first magnetic field and second magnetic field that is substantially orthogonal to the first magnetic field. Nuclear magnetization is polarized by the first magnetic field. Fast switching between the first and the second magnetic field causes free precession of the nuclear spin magnetic moments about the second magnetic field. A change in polarity of the second magnetic field reverses the direction of precession thereby generating a train of gradient echoes. Practical consideration of power consumption

related to fast switching between magnetic fields and maintaining first magnetic field during polarization phase place clear limitations on the strength of the first and the second magnetic fields. The limitations cause relatively low signal-to-noise ratio for measurements at a desired depth of investigation.

5

[0006] Known in the art are electrically or mechanically switchable magnets used in lifting magnetized objects. The magnets do not require a source of constant current. Consequently no energy losses are encountered to maintain magnetization of the magnet. A system representing switchable magnets is disclosed for example in US  
10 patent 6,229,422 issued to *Pignataro*. The magnet assembly comprises two magnets with coil around one of them. The magnets are typically connected with a magnetically permeable frame. Energizing the coil in one direction reverses the polarization one magnet, thereby effectively short circuiting flux produced by the second magnet. This terminates holding the object. Energizing the coil in the opposite  
15 direction causes parallel polarization of the magnets thereby switching the magnet assembly into holding mode. The known in the art switchable magnet systems are not suitable for fast switching the magnetic field. They also unable to provide complete reversal of the magnetic field as well as complete zeroing of the magnetic field.

20 [0007] Thus known in the art instruments do not give a satisfactory solution for effective generating of strong, fast switchable static magnetic field that would facilitate deep and high SNR NMR measurement in downhole environment.

### **SUMMARY OF THE DISCLOSURE**

25 [0008] One embodiment of the disclosure is a nuclear magnetic resonance (NMR) sensing apparatus for use in a borehole in an earth formation. The apparatus includes a magnetic core with a residual magnetization which polarizes nuclear spins in a specified direction in the earth formation. A coil provides adiabatic deviation of the nuclear spins from the specified direction. A polarizing coil produces a change of a  
30 static magnetic field in the specified direction and produces precession of the nuclear spins. A coil detects a signal resulting from the precession of the nuclear spins. The magnetic core may be made of a permeable material having magnetic properties related to a dimension of the core. The magnetic core may further have a coercive force which is substantially equal to the ratio of the saturation magnetization and an

effective permeability of the magnetic core in the direction of the magnetic field produced by the polarizing coil. The magnetic material has a substantially rectangular hysteresis loop in the direction of the magnetic field produced by the polarizing coil. The coercive force may be in the range of 1.5 – 8 kA/m. The magnetic material may  
5 be a ferrite, an electrically conducting crystalline magnetic metal ribbon, an electrically conductive magnetic tape and/or an amorphous metal magnetic ribbon. The magnetic material may be a tape or a ribbon with a thickness selected on the basis of a switching time of the magnetic field in the earth formation. The polarizing coil may have an inductance related to a switching time of the magnetic field in the  
10 formation.

[0009] Another embodiment of the disclosure is a nuclear magnetic resonance sensing apparatus for use in a borehole in an earth formation. The apparatus includes a magnetic core having a residual magnetization, the core polarizing nuclear spins in a  
15 specified direction in the earth formation, the direction being different from a direction of the earth's magnetic field. A polarizing coil carries a current which reduces the magnetic field due to the core to substantially zero. The apparatus includes a receiving coil which receives a signal resulting from precession of the nuclear spins about the direction of the earth's magnetic field, the precession resulting  
20 from the reduction of the magnetic field due to the core. The apparatus may further include an auxiliary coil which substantially eliminates a remainder of the static magnetic field in the earth formation. The apparatus may also include an additional coil which spoils a signal from a fluid in the borehole, the additional coil generating a multi-pole type magnetic field with fast spatial attenuation. The magnetic core may  
25 be made of a permeable magnetic material having a magnetic property related to a dimension of the magnetic core. The core material may have a substantially rectangular hysteresis loop in a direction of residual magnetization. The receiving coil may include a multi-turn coil and the polarizing coil may have a small number of coils. The magnetic material may be a ferrite, an electrically conducting crystalline  
30 magnetic metal ribbon, an electrically conductive magnetic tape and/or an amorphous metal magnetic ribbon.

[0010] Another embodiment of the disclosure is a method of measuring a nuclear magnetic resonance property in a region of interest of an earth formation. The

method includes producing a static magnetic field which polarizes nuclear spins in the region of interest using a source of switchable magnetic field. The source includes a magnetic core having a controllable residual magnetization. The method further comprises inducing and detecting a signal indicative of the NMR property. Inducing the signal may be done by simultaneously switching off the static magnetic field and applying a pulsed magnetic field to provide adiabatic deviation of a direction of polarization of nuclear spins from the direction of the switchable static magnetic field, replying the static magnetic field, and periodically reversing the polarity of the switchable static magnetic field to generate gradient spin echoes. Inducing the signal may be done by switching off the static magnetic field and generating precession of the nuclear spins around the earth's magnetic field. An auxiliary static magnetic field may be used to correct for a residual inhomogeneous magnetic field remaining after switching off the static magnetic field. An additional static magnetic field may be generated to spoil a signal from borehole fluids, the additional static magnetic field being a multi-pole field with fast spatial attenuation.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

[0011] This disclosure is best understood with reference to the accompanying figures in which like numerals refer to like elements and in which:

- FIG. 1 illustrates a NMR logging system showing directions of magnetic fields with respect to the borehole axis;
- FIG. 2 depicts a simplified layout of a source of switchable static magnetic field having substantially longitudinal orientation using a magnetic core;
- FIG. 3A, FIG. 3B and FIG. 3C show respectively magnetization of the magnetic core versus current in the coil, time diagram of the current in the coil and time diagram of the resultant magnetization of the magnetic core for the source of polarized magnetic field of prior art;
- FIG. 4A, FIG. 4B and FIG. 4C show respectively magnetization of the magnetic core versus current in the antenna coil, time diagram of the current in the antenna coil and time diagram of the resultant magnetization of the magnetic core used in an embodiment of logging tool of the present disclosure;
- FIG. 5 is a graph showing effective magnetic susceptibility of the magnetic core as a function of the core dimensions;

FIG. 6 is a diagram showing power consumption of the source of switchable static magnetic field of FIG. 2 as a function of magnetic dipole moment of the antenna, for the antenna embodiment of the present disclosure in comparison with that of prior art;

5        FIG. 7 shows a simplified layout of a magnetic core with the coil for a source of substantially transversal magnetic field in the region of interest.

FIG. 8 illustrates an embodiment of present disclosure that uses non-resonant excitation and gradient echo generation.

10       FIG. 9 represents time diagrams of the polarizing and pulsed magnetic field as well as NMR echo signal for the embodiment of FIG. 8; and

FIG. 10 illustrates an embodiment of present disclosure that uses earth's magnetic field to generate free precession of the nuclear spin magnetic moments.

## 15                    **DETAILED DESCRIPTION OF THE DISCLOSURE**

[0012] In most general terms, the disclosure provides an NMR logging tool having a high efficiency source of rapidly switchable static magnetic field. The switchable static magnetic field facilitates NMR measurement in earth's magnetic field as well as an efficient non-resonant excitation of NMR in order to acquire nuclear magnetic  
20       resonance properties of earth formations from relatively deep regions in the formations.

[0013] FIG. 1 represents an example of a nuclear magnetic sensing apparatus 10 placed in a borehole 12 surrounded by the earth formations 14. The apparatus can be  
25       used with an NMR wireline well logging instrument or an NMR instrument for measurement-while-drilling that is conveyed on a drilling tubular. The source of switchable static magnetic field can be a longitudinal dipole 16 directed along the borehole axis 17 or at least one transversal magnetic dipoles 18 in order to energize the earth formations 14. The dipoles typically comprise a magnetic core and a coil  
30       wound on the magnetic core. Either dipole can be also used as receiver antenna to receive NMR signal. Separate coils (not shown in FIG. 1) can be also used for receiving NMR signal. Examples of the magnetic flux density lines in the formations 14 surrounding the borehole 12 are shown at 22 and 24 for the longitudinal dipole 16 and a transversal dipole 18 respectively. A part of the source of switchable static

magnetic field is a metal support 20 that could be drill collar in case of performing measurements-while-drilling. The nuclear magnetic sensing apparatus further comprises downhole electronics 25 coupled with the coils of the source of switchable static magnetic field and receive coils and a surface electronics 26.

5

[0014] Turning now to FIG. 2, a more detailed layout of a simplified source of switchable static magnetic field is presented generating substantially longitudinal magnetic field. The source of switchable static magnetic field comprises a magnetic core 27 surrounding the metal support 20 and a coil 28 that wound around the magnetic core 27. The coil 28 generates magnetic field having direction substantially parallel to the axis 17 that coincides with the axis of the core. Typically the dominant part of the total magnetic flux of the source of the magnetic field is generated due to the core 27. The magnetic core typically ensures that no significant magnetic field passes from the coil 28 to the metal support 20.

15

[0015] FIG. 3A, FIG. 3B and FIG. 3C show respectively magnetization of the soft magnetic core versus current in the coil 28 (FIG. 2), time diagram of the current in the coil and time diagram of the resultant magnetization of the magnetic core that can represent an embodiment of prior art. The source of switchable static magnetic field known in the art uses conventional high permeability magnetic material with substantially no magnetic hysteresis. A simplified magnetization curve for the magnetic core of prior art is represented by substantially a straight line 30 in FIG. 3A. As will be readily appreciated by those skilled in the art, the slope of the line for a typical high magnetic-permeability magnetic material is mainly determined by the length-to-diameter ratio of the magnetic core. An explanation for this can be found, for example in E.C. Snelling, Soft Ferrites (Properties and Applications), London ILIFE BOOKS LTD or R.M. Bozorth, Ferromagnetism, IEEE PRESS, IEEE Inc, New York. The coil (28 in FIG. 2) is energized with the electric current according to the time diagram in FIG. 3B. In order to perform NMR measurements with non-resonant excitation the current can be supplied in the form of long pulses with relatively short rise and fall time as shown at 34. The switching time of the current limits the frequency of the non-resonant NMR excitation. For the excitation purposes the switching should be fast compared to the Larmor frequency determined by the magnitude of the local static magnetic field. In some practical cases it is desirable for

30

the switching time to be as short as 3-5  $\mu$ s (Larmor frequency starting from the earth's magnetic field NMR up to 20 kHz) and the duration of the pulse 300-3000 ms. The waveform of the current shown in **FIG. 3B** causes time variation of the magnetization of the magnetic core shown in **FIG. 3C** at 36. The magnetic field strength in the surrounding earth formations is proportional to the magnetization presented in **FIG. 3C**. Accordingly, after the current is turned off, nuclear spins in the earth formation will precess about the earth's magnetic field as long as it is different from the direction of the magnetic field produced by the magnet. For the magnet configuration in **Fig. 2**, this direction will be parallel to the longitudinal axis of the tool away from the borehole. This condition is usually satisfied.

[0016] As can be seen from the **FIGs. 3A, B, C** the transmitter antenna of prior art requires that in order to maintain a constant magnetic field in the formation it is required that a constant current flow in the antenna coil. As will be explained below in details the constant current is the main source of power losses related to generation of the magnetic field.

[0017] **FIG. 4A, FIG. 4B** and **FIG. 4C** show respectively magnetization of the magnetic core versus current in the coil, time diagrams of the current and the resultant magnetization of the magnetic core in accordance with an embodiment of the switchable source of static magnetic field of the present disclosure. The magnetic core (27 in **FIG. 2**) is made of a magnetic material having substantial magnetic hysteresis. A simplified major magnetic hysteresis loop representing magnetization and magnetization reversal process in such materials is shown at 40 in **FIG. 4A**. The waveform of the current driving the coil 28 (**FIG. 2**) is shown in **FIG. 4B** at 42. The magnetization states corresponding to the current waveform are represented by the points 39 and 41 on the major hysteresis loop, part of which is shown by solid line in **FIG. 4A**. Corresponding magnetization waveform is presented in **FIG. 4C** at 44. As can be seen from the **FIGs. 4A, B, and C** the current in the coil is present only during switching magnetization in the magnetic core. No current in the coil is required to maintain static magnetic field during polarizing nuclei in the formations. The magnetic core effectively stores magnetic energy in residual magnetization. The energy loss occurs only during switching the magnetization. As will be readily

appreciated by those skilled in the art the losses are proportional to the area enclosed in the hysteresis loop corresponding to driving current waveform in the coil **28** (FIG. 2). Since the switching phase of the nuclei polarization cycle is at least 1000 times shorter than the steady-state phase, the power consumption associated with operation of the switchable source of the present disclosure is much lower than that of the prior art.

[0018] Factors that put practical limits to the achievable strength of the switchable static magnetic field will be explained below to highlight the advantages of the present disclosure.

10

[0019] The dipole moment of the magnetic dipole antenna is calculated as follows:

$$p_m = M \cdot s \cdot l, \quad (1)$$

where  $M$  is the magnetization of the magnetic core **27** ( FIG. 2 ),  $s$  and  $l$  are respectively the effective cross-sectional area and the length of the magnetic core. A practical assumption is made here of that the main magnetic flux of the antenna is concentrated in the core. The magnetization  $M$  for the longitudinal dipole presented in FIG. 2 can be expressed as

15

$$M = \chi_{eff} \cdot H_e = \frac{\chi_{eff} \cdot I \cdot N}{l} \quad (2)$$

20 where  $\chi_{eff}$  is the effective magnetic susceptibility,  $H_e$  is the external magnetic field intensity produced by the antenna coil **28**;  $I$  is the current in the antenna coil during the pulse,  $l$  is the effective length of the antenna, and  $N$  is the number of turns in the antenna coil.

25 [0020] Then for the magnetic dipole moment we readily get

$$p_m = \chi_{eff} \cdot I \cdot N \cdot s. \quad (3)$$

The maximum voltage on the antenna coil **28** associated with switching polarity of the magnetic dipole moment is approximately

$$V_{\max} = L \cdot \left( \frac{dI}{dt} \right)_{\max} \approx \frac{2 \cdot I \cdot L}{\tau_{sw}}, \quad (4)$$

where  $\tau_{sw}$  is the required switching time, and  $L$  is the antenna inductance that can be estimated as follows

$$L \approx \mu_0 \cdot \chi_{eff} \frac{N^2 \cdot s}{l} \quad (5)$$

- 5 [0021] As can be seen from the **equation (4)**, a short switching time can cause unacceptably high voltage on the coil if the coil inductance is not chosen properly. Assume that the voltage is limited to a certain value  $V_{max}$  and the targeted dipole magnetic moment of the antenna and the switching time are respectively  $P_m$  and

- $\tau_{sw}$ . Then combining the **equation (1)-(5)** we readily arrive at the following equation  
10 for the current driving the antenna of prior art during the steady-state phase of the formation energizing cycle

$$I = \frac{\mu_0 \cdot P_m^2}{2 \cdot \chi_{eff} \cdot \tau_{sw} \cdot s \cdot l \cdot V_{max}} \quad (6)$$

- [0022] The power losses associated with the current presented by **equation (6)** are the  
15 loss in the antenna coil wire and the loss due to finite conductivity of the electronic switches in conductive state. The first type of losses can be neglected if a large cross-sectional area of the winding (correspondingly heavy coil) is acceptable. The power loss in the switches that may cause overheating the transmitter electronic can be estimated as follows

$$20 \quad P_{loss(prior\_art)} \approx V_{on} \cdot I, \quad (7)$$

where  $V_{on}$  is on-state voltage of the switch, and  $I$  is the current calculated according to **equation (6)**. As will be shown in the example below the power loss presented by the equations (6) and (7) place clear limit on the achievable target parameters  $P_m$  and

$\tau_{sw}$  in the methods and apparatuses of prior art.

[0023] According to the method of present disclosure the power losses exist only during switching the polarity of the magnetic dipole of the antenna while during the long steady-state phase the dipole moment is maintained by the residual magnetization of the magnetic core. The losses are caused by the irreversible processes (hysteresis) associated with magnetization reversal in magnetic core. It is well known in the art that energy lost during full cycle of magnetization changes can be presented as the area enclosed in the hysteresis loop in  $\mu_0 M - H_e$  coordinates multiplied by the volume of the core (see for example Chikazumi S, Physics of Magnetism, John Wiley and Sons, New York, 1964). An example of a simplified hysteresis loop with substantial hysteresis is presented in FIG. 4A (magnetic field intensity is proportional to the current in the antenna coil as explained at equation (2)). For the simplified shape of the hysteresis loop presented in FIG. 4A the energy loss due to hysteresis can be expressed as follows

$$W_h \approx \mu_0 \cdot 2 \cdot M_s \cdot H_c \cdot s \cdot l, \quad (8)$$

where  $M_s$  is the saturation magnetization presented in FIG. 4A at 39,  $H_c$  is the coercive force defined as the external magnetic field corresponding to zero magnetization on the hysteresis loop of the of the magnetic core. As was explained above, the external magnetic field that causes changes in magnetization of the magnetic core is generated by the current in the antenna coil 28 in FIG. 2.

20

[0024] The energy loss presented by equation (8) is associated with magnetization switching on and off. Then taking into account equation (1) for the magnetic dipole moment the average power loss over the cycle of measurement can be given as follows:

$$P_{loss} = \mu_0 \cdot \frac{2 \cdot p_m \cdot H_c}{T}. \quad (9)$$

where  $T$  is the duration the cycle.

In order for the saturation magnetization  $M_s$  to be substantially equal to residual magnetization of the core the following two conditions should be met. Firstly, the magnetic material itself should have almost rectangular hysteresis loop when measured in closed magnetic circuit configuration (no magnetic poles). Secondly the

30

following relationship between parameter of hysteresis loop as measured on the core (magnetic poles are located near the ends of the core and create so called demagnetizing field) must hold

$$\frac{M_s}{\chi_{effm}} \leq H_c \quad (10)$$

- 5 where  $\chi_{effm}$  is the maximum effective magnetic susceptibility defined as maximum slope on the ascending or descending parts of magnetic hysteresis loop and the other quantities are the same as in equation (8). As will be readily appreciated by those skilled in the art, said slope is mainly determined by the elongation ratio of the magnetic core, the maximum effective susceptibility can be controlled by varying the  
10 elongation ratio. In order to satisfy the inequality (10) the saturation magnetization  $M_s$  and coercive force  $H_c$  can be also controlled by choosing magnetic materials.

Yet another way to get a desired  $M_s$  is to make a layered core in which magnetic material is separated by a non-magnetic binding material in order to reduce packing density of magnetic material in the core and correspondingly reduce the net  
15 magnetization of the core. Examples of such material are given below. In case maximum possible dipole moment is the main objective in designing the transmitter antenna the product of magnetization and the effective cross-sectional area of the core should be kept possibly high. For a given length of the antenna this would result in

- high ratio  $\frac{M_s}{\chi_{effm}}$  and require material with higher coercive force  $H_c$  in order to  
20 satisfy the equation (10).

[0025] As was mentioned before the effective magnetic susceptibility is primarily determined by the elongation of the magnetic core that is by its geometric parameters  $s$  and  $l$ . The calculated numbers for rods with different elongation (length-to-  
25 diameter ratio) can be found, for example, in E.C. Snelling, Soft Ferrites (Properties and Applications), London ILIFE BOOKS LTD cited above. An example of the dependence of effective susceptibility on length-to-diameter ratio of a magnetic rod is presented in FIG.5. The curves 46, 47 and 48 in FIG. 5 corresponds to different magnetic susceptibilities of magnetic material of the rod: respectively to 10000, 4000

and 2000. As can be seen in **FIG. 6** for a practical range of length-to-diameter ratio of 20-60, the effective susceptibility is 150-800. Then assuming  $M_s=0.8$  MA/m (corresponds to the saturation flux density  $B_s = \mu_0 \cdot M_s=1$ T) and using condition described by (10) we determine the following desired range of coercive force:

- 5  $H_c=1.5-8$  kA/m. The dipole moment corresponding to  $M_s=0.8$  MA/m,  $l=1$ m and length-to-diameter ratio equal to 50 is  $700\text{A}\cdot\text{m}^2$ .

[0026] The preferable range 1.5-8 kA/m for the coercive force can be achieved for example by using magnetic materials such as rolled permalloy (magnetic properties of this type of materials can be found for example in cited above R.M. Bozorth, Ferromagnetism, IEEE PRESS, IEEE Inc, New York), some amorphous ribbons or some types of ferrites.

[0027] **FIG. 6** is a diagram showing power consumption as a function of magnetic dipole moment for the longitudinal dipole of **FIG. 2**. Data for the antenna of prior art in comparison with an embodiment of the present disclosure are shown at 50 and 52 in **FIG. 6**. The data was calculated according to **equations (6) and (7)** for prior art and **equation (9)** for the present disclosure. The following practical numbers were used for this example:  $\chi_{eff}=150$ ,  $\tau_{sw}=3\mu\text{s}$ ,  $s=0.002\text{m}^2$ ,  $l=1\text{m}$ ,  $V_{max}=1000\text{V}$ ,

20  $V_{on}=3.9\text{V}$  (the number for the on-state voltage of the switch is taken from Advanced Power Technology catalog for IGBT type switch APT75GP120B2),  $H_c=1\text{KA/m}$ ,  $T=100\text{ms}$ . The effective magnetic susceptibility  $\chi_{eff}$  was taken from the data presented in **FIG.5** at 48 for the length-to-diameter ratio calculated as follows:

$\frac{l}{\sqrt{4 \cdot s / \pi}}$ . As can be seen in **FIG.6** the power consumption for the source of magnetic

25 field of prior art and of the present disclosure while similar for small dipole moments (less than  $10\text{A}\cdot\text{m}^2$ ) dramatically differ at larger dipole moments. For example generating the dipole moment of  $1000\text{A}\cdot\text{m}^2$  would take as much as 10kW DC power for the source of the prior art and only about 50W of DC power for the source of magnetic field according to an embodiment of present disclosure. The greater dipole

30 moment of the transmitter antenna the deeper penetration into earth formations can be

achieved. It should be understood from the data presented in **FIG. 6** that high power dissipation and heat removal problems make it impractical for methods and apparatuses of prior art to achieve a dipole moment of more than  $100\text{A}\cdot\text{m}^2$ , while dipole moments in excess of  $1000\text{A}\cdot\text{m}^2$  look quite feasible for the source of  
5 switchable magnetic field of present disclosure.

[0028] It will be also readily understood by those skilled in the art that for the electro-magnets of prior art it is hard to achieve stability of the dipole magnetic moment because of heating problems. In the present disclosure the magnetic dipole of the  
10 antenna is determined primarily by the magnetization of the magnetic core.

[0029] Reference is now made to **FIG. 7** where a transversal magnetic dipole is presented as an embodiment for the switchable source of magnetic field. In some designs the transversal magnetic field could be a preferable configuration for NMR  
15 logging instrument implementation. The winding **54** and the magnetic core **56** are arranged to produce magnetic dipole moment **58** directed perpendicularly to the axis of the core (**17** in **FIG. 2**). Two magnetic flux lines are shown at **60** in **FIG. 7**. It will be readily understood by those skilled in the art that in order to achieve substantial residual magnetization in transversely magnetized magnetic core a higher coercive  
20 force of the core material is required as compared to that of the longitudinally magnetized core.

[0030] **FIG. 8** represents an embodiment of the present disclosure. A source of switchable magnetic field provides static magnetic field polarizing nuclear spin  
25 magnetic moments in the region of interest **67** in a predetermined direction. The source comprises polarizing coil **68** and magnetic core **64** coupled with the polarizing coil, said magnetic core having residual magnetization to remain magnetized without a steady current in the polarizing coil. A source of pulsed magnetic field presented by the coil **66** and the core **64** provides adiabatic deviation of the direction of polarization  
30 of the nuclear spin magnetic moments from said predetermined direction. The flux line of the polarizing magnetic field and the pulsed magnetic field are presented at **70** and **71** respectively. The time diagrams of the polarizing magnetic field  $B_{01}$  (at **72**) and pulsed magnetic field  $B_{02}$  (at **74**) are presented in **FIG. 9**. The initially

magnetized core of the source has a polarizing field which polarizes the nuclei in the volume of interest. Then simultaneously two events happen: the polarizing field is switched off and the pulsed magnetic field is built up. As noted above, the pulsed magnetic field, is orthogonal to the polarizing magnetic field. As a result the

5 magnetization of the nuclei rotates adiabatically by about  $90^\circ$ . The processes of switching off the polarizing field and building up the pulsed field are slow enough to provide adiabatic rotation and fast compared to the relaxation rate of the nuclear magnetization. Then the pulsed magnetic field is switched off abruptly while the polarizing magnetic field builds up opposite polarity with respect to initial direction of

10 polarization. This is referred to as alternations of the magnetization in the direction of initial polarization. This results in generating precession of the nuclear spin magnetic moments about the direction of the polarizing magnetic field. Changing polarity of the polarizing magnetic field generates gradient echoes (at 76 in FIG. 9) in a receiving coil. The coil 66 in FIG. 8 can serve as the receiving coil. Any other coil can be used

15 with sensitivity direction perpendicular to the polarizing magnetic field.

[0031] Using pulsed magnetic field in the above described technique can be omitted. In this case the adiabatic removal of the polarizing magnetic field will cause magnetization to align with the earth's magnetic field. Once the polarizing field is

20 non-adiabatically switched on, the magnetization will precess about the polarizing field direction.

[0032] FIG. 10 represent another embodiment of the present disclosure is a nuclear magnetic resonance (NMR) sensing apparatus utilizing earth's magnetic field. The

25 apparatus comprises a source of switchable magnetic field to provide a static magnetic field polarizing nuclei in the region of interest in a direction that is different from the direction of the earth's magnetic field 80. The polarizing source comprises a polarizing coil 82 connected to the source of current and a magnetic core 84 coupled with the polarizing coil. The residual magnetization of the magnetic core is controlled

30 by the magnetic field of the polarizing coil. The polarizing magnetic field is switched off abruptly (non-adiabatically) to allow for a free precession of the nuclei spin magnetic moments about the earth's magnetic field. The free precession induces an induction signal in the coil 86. The time diagrams of the polarizing magnetic field and the states of magnetization of the magnetic core 84 are the same as shown in FIG. 4.

- [0033] The polarizing magnetic field direction **88** in the embodiment of **FIG. 10** is chosen to be perpendicular to the elongation of the magnetic core. As was explained earlier above the material to be used in this configuration must have higher coercive force than that of the material used in the configuration with longitudinal magnetization. The higher coercive force is accompanied by lower magnetic susceptibility in the reversible part of the hysteresis loop. This will cause less distortion to the homogeneous earth's magnetic field. The undistorted homogeneity in the region of interest is required to ensure that the free precession decay represents nuclear relaxation properties. Some residual magnetization remaining after switching off the polarizing field as well as unwanted magnetization of the core caused by the earth's magnetic field can be eliminated by using orthogonal correcting coils principally of the same configuration as the coils **82, 88**. Some residual magnetization of the core may be intentionally left in order to spoil signal from the borehole fluids and from the shallow regions of the formations. In this case an excessive magnetic field due to residual magnetization of the core and magnetic fields of the correcting coils near the tool will result in generating NMR signal at a frequency away from the receiving bandwidth.
- [0034] The magnetic material that is preferably used for magnetic core is a layered material made of thin tapes of magnetic metal separated with non-conductive layers. The magnetic metal can be, rolled permalloy or magnetic amorphous tape. The core may be assembled from ribbon wound rings or from packs of tapes. The average magnetization of the core depends on the fraction of the magnetic material in the cross-sectional area of the core. The saturation magnetization of the core should preferably obey the condition presented by the **equation (10)**. It should be understood that during switching of the magnetic field of the antenna coil there will be eddy currents generated in magnetic layers. This will cause delay in building up the average magnetization of the core and affect the rate of switching of magnetic dipole of the antenna. To ensure that the delay does not exceed the switching time required to perform transient measurement the magnetic layers must be thin enough. In frequency spectrum terms this means that the thickness should be substantially smaller than the electromagnetic skin depth for the maximum frequency of the spectral band of the transient signal. If, for example, the required switching time is

less than 5 microseconds, then the thickness of the magnetic layers should not typically exceed 10 micrometers.

5 [0035] It should be also understood that other magnetic materials can be used in the antenna of the present disclosure. For example magnetic ferrite materials that are inherently non-conductive can be effectively employed if manufactured to have proper magnetic parameters discussed earlier above.

10 [0036] The operation of the logging tool may be controlled by the downhole processor and/or the surface processor. Implicit in the control and processing of the data is the use of a computer program implemented on a suitable machine readable medium that enables the processor to perform the control and processing. The machine readable medium may include ROMs, EPROMs, EAROMs, Flash Memories and Optical disks.

15 [0037] While the disclosure has been described with respect to a limited number of embodiments, those skilled in the art, having benefit of this disclosure, will appreciate that other embodiments can be devised which do not depart from the scope of the disclosure as disclosed herein. Accordingly, the scope of the disclosure should be  
20 limited only by the attached claims.

**CLAIMS**

What is claimed is

- 1 1. A nuclear magnetic resonance (NMR) sensing apparatus for use in a borehole  
2 in an earth formation, the apparatus comprising:
  - 3 (a) a magnetic core having a residual magnetization, the magnetic core  
4 polarizing nuclear spins in a specified direction in the earth formation;
  - 5 (b) a coil which provides adiabatic deviation of the nuclear spins from the  
6 specified direction;
  - 7 (c) a polarizing coil that produces a change of a static magnetic field in the  
8 specified direction and produces precession of the nuclear spins about  
9 the specified direction; and
  - 10 (d) a coil which detects a signal resulting from the precession of nuclear  
11 spins
- 12  
1 2. The apparatus of claim 1 wherein the magnetic core is made of a permeable  
2 magnetic material having a magnetic property related to a dimension of the  
3 magnetic core.  
4
- 1 3. The apparatus of claim 2 wherein the magnetic core further has a coercive  
2 force, which is substantially equal to the ratio of saturation magnetization and  
3 an effective permeability of the magnetic core in the direction of the magnetic  
4 field produced by the polarizing coil.  
5
- 1 4. The apparatus of claim 2 wherein the permeable magnetic material has a  
2 substantially rectangular hysteresis loop in the direction of magnetic field  
3 produced by the polarizing coil.  
4
- 1 5. The apparatus of claim 2 wherein said magnetic material has a coercive force  
2 in the range 1.5-8 kA/m  
3
- 1 6. The apparatus claim 2 wherein the permeable magnetic material is selected  
2 from the group consisting of (i) a ferrite, (ii) an electrically conductive  
3 crystalline magnetic metal ribbon, (iii) an electrically conductive magnetic  
4 tape, an (iv) an amorphous magnetic ribbon.

5

1 7. The apparatus of claim 6 wherein the magnetic field in the earth formation has  
2 a switching time, and wherein the permeable magnetic material comprises at  
3 least one of (i) a ribbon, and (ii) a tape having a thickness selected based on  
4 the switching time.

5

1 8. The apparatus of claim 1 wherein said static magnetic field in the earth  
2 formation has a switching time, and the polarizing coil has an inductance  
3 related to said switching time.

4

1 9. A nuclear magnetic resonance (NMR) sensing apparatus for use in a borehole  
2 in an earth formation, the apparatus comprising:

- 3 (a) a magnetic core which has a residual magnetization and polarizes  
4 nuclear spins in a specified direction in the earth formation, the  
5 specified direction being different from a direction of the earth's  
6 magnetic field;  
7 (b) a polarizing coil which carries a current which reduces the magnetic  
8 field due to the core to substantially zero; and  
9 (c) a receiving coil which receives a signal resulting from precession of  
10 the nuclear spins about the direction of the earth's magnetic field, the  
11 precession resulting from the reduction of the magnetic field due to the  
12 core.

13

1 10. The apparatus of claim 9 further comprising an auxiliary coil which  
2 substantially eliminates a remainder of the static magnetic field in the earth  
3 formation.

4

1 11. The apparatus of claim 9 further comprising an additional coil which spoils a  
2 signal from a fluid in the borehole, the additional coil generating a  
3 substantially multi-pole type magnetic field with fast spatial attenuation.

4

1 12. The apparatus of claim 9 wherein the magnetic core is made of a permeable  
2 magnetic material having a magnetic property related to a dimension of the  
3 magnetic core.

4

1 13. The apparatus of claim 9 wherein the magnetic core is made of a permeable  
2 magnetic material having a substantially rectangular magnetic hysteresis loop  
3 in a direction of residual magnetization.

4

1 14. The apparatus of claim 9 wherein the receiving coil includes a multi-turn  
2 receiving coil and the polarizing coil comprises a substantially small number  
3 of turns

4

1 15. The apparatus claim 13 wherein the permeable magnetic material is selected  
2 from the group consisting of (i) a ferrite, (ii) an electrically conductive  
3 crystalline magnetic metal ribbons, (iii) an electrically conductive crystalline  
4 tape, (iv) an magnetic amorphous ribbon, and (v) an amorphous tape.

5

1 16. A method for measuring a nuclear magnetic resonance property in a region of  
2 interest of an earth formation; the method comprising:

3 (a) producing a static magnetic field which polarizes nuclear spins in the  
4 region of interest using a source of switchable magnetic field, the  
5 source comprising a magnetic core having a controllable residual  
6 magnetization; and

7 (b) inducing and detecting a signal indicative of the nuclear magnetic  
8 resonance property.

9

1 17. The method of claim 16 wherein inducing the signal further comprises:

2 (i) simultaneously switching off the static magnetic field and applying a  
3 pulsed magnetic field to provide adiabatic deviation of polarization  
4 direction of the nuclei from direction of the switchable static magnetic  
5 field,


6 (ii) reapplying the static magnetic field, and

7 (iii) periodically reversing the polarity of the switchable static magnetic  
8 field to generate gradient spin echoes.

9


- 1 18. The method of claim 16 wherein inducing the signal further comprises  
2 switching off the static magnetic field and generating precession of the nuclear  
3 spins around the earth's magnetic field  
4
- 1 19. The method of claim 18 further comprising using an auxiliary static magnetic  
2 field in order to correct for a residual inhomogeneous magnetic field  
3 remaining after switching off the static magnetic field.  
4
- 1 20. The method of claim 18 further comprising generating an additional static  
2 magnetic field to spoil the signal from borehole fluids, said additional static  
3 magnetic field is a substantially multi-pole type magnetic field with fast  
4 spatial attenuation.

**1/9**

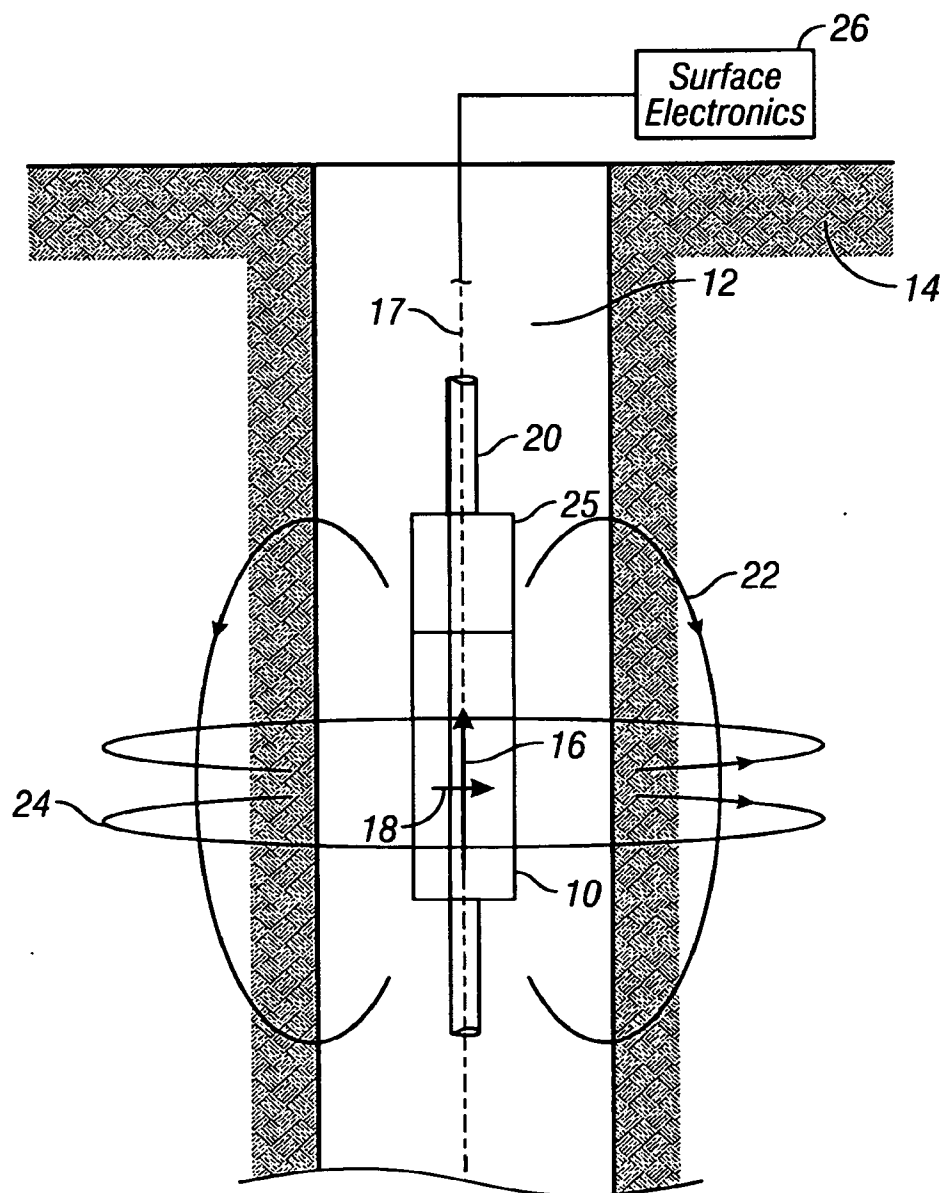

**FIG. 1**

**2/9**

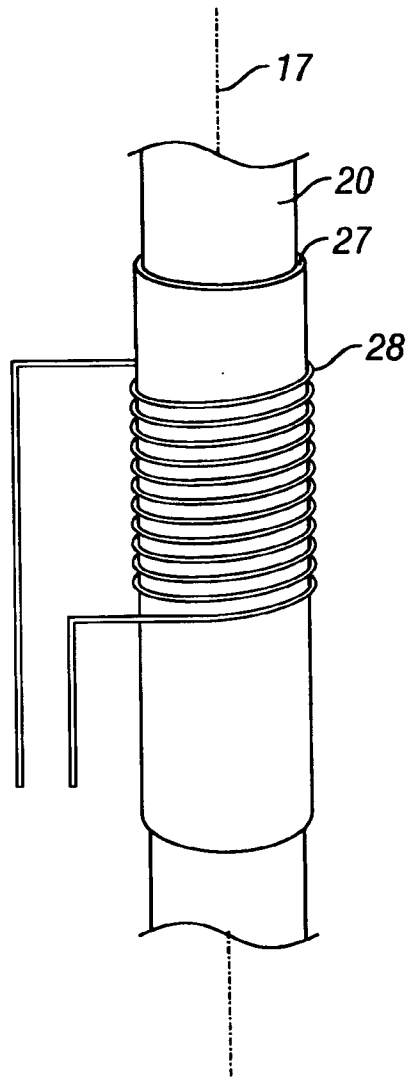

**FIG. 2**

3/9

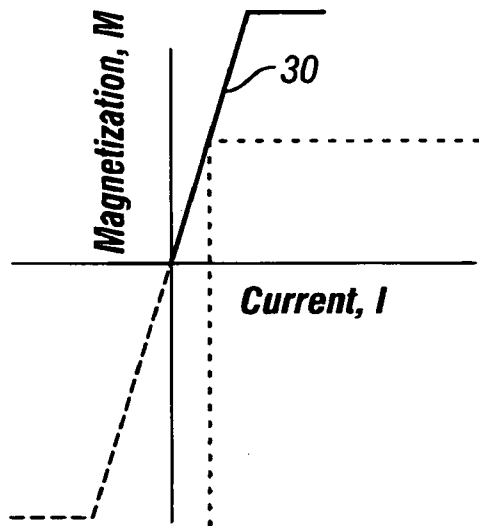


FIG. 3A

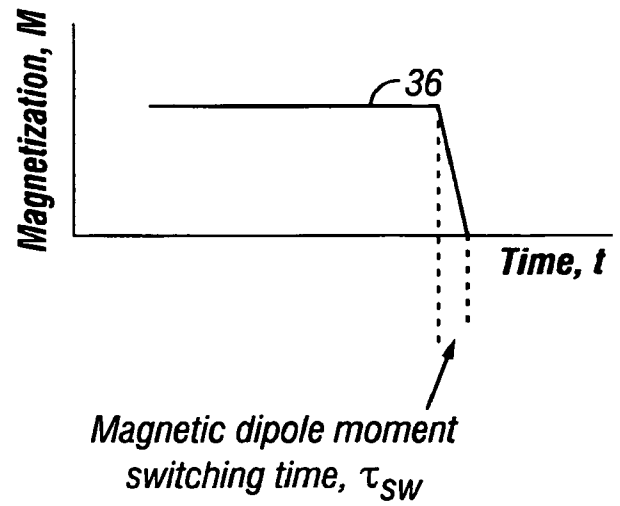


FIG. 3C

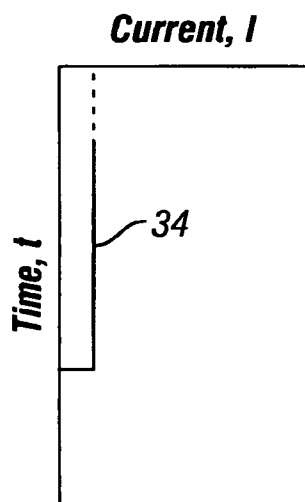


FIG. 3B

4/9

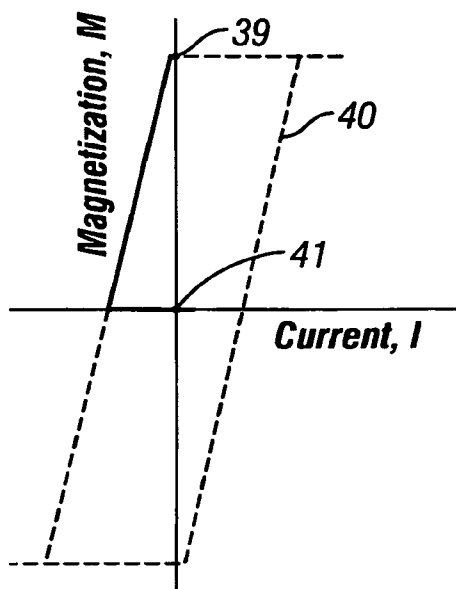


FIG. 4A

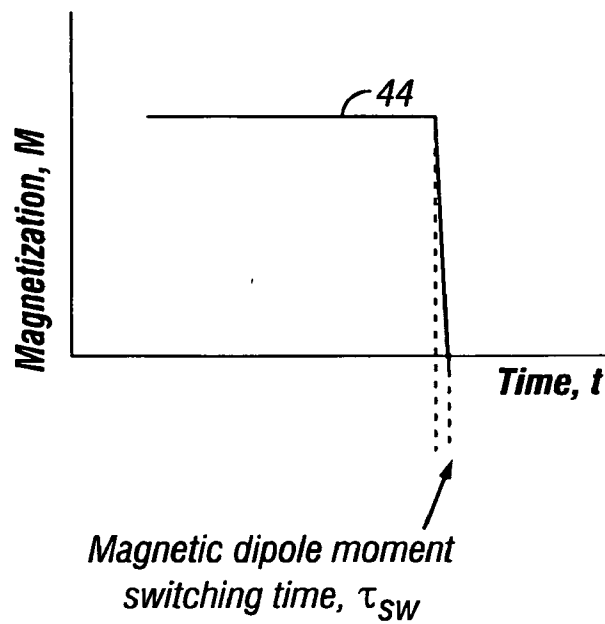


FIG. 4C

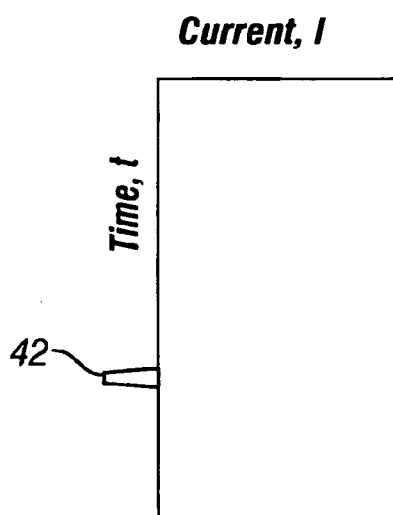


FIG. 4B

5/9

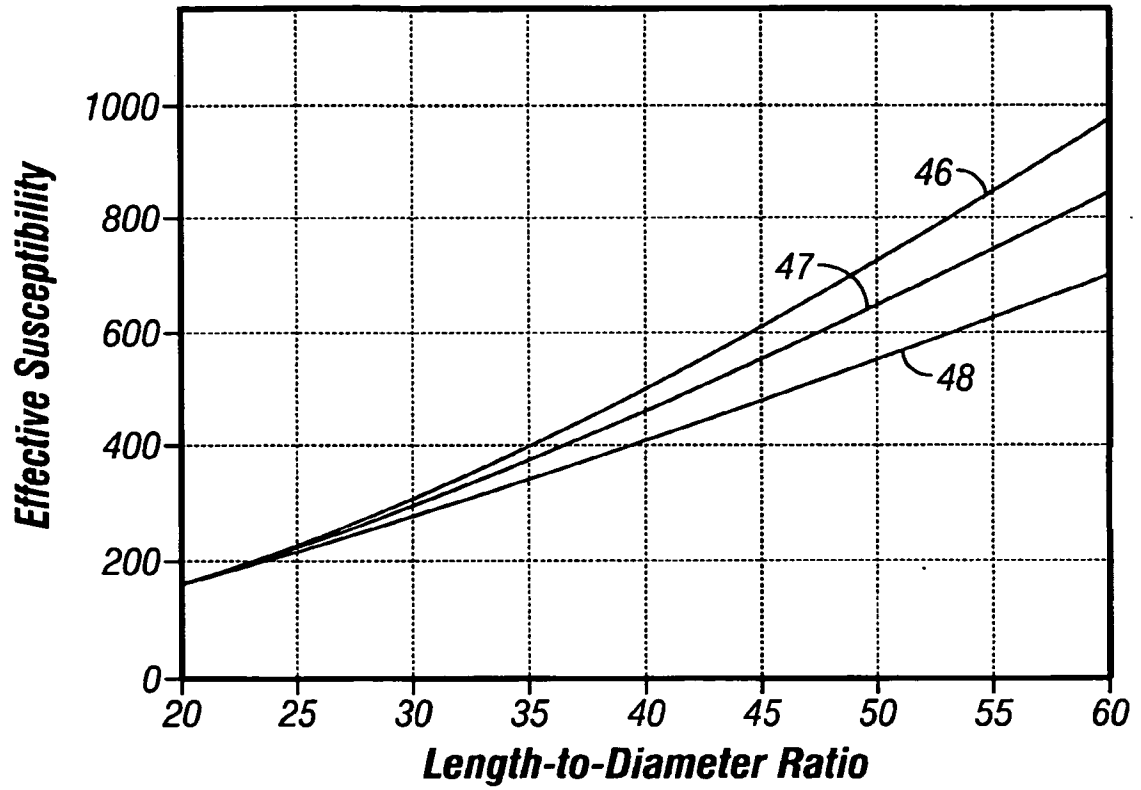


FIG. 5


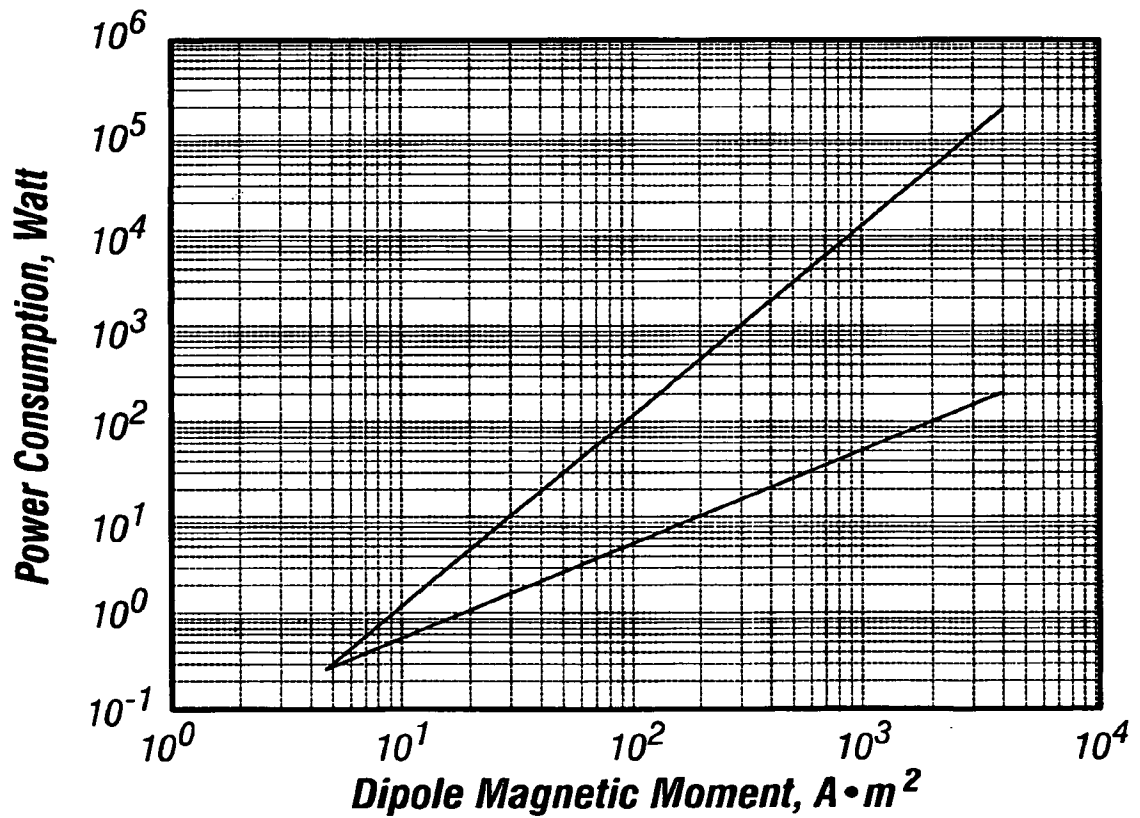


FIG. 6

6/9

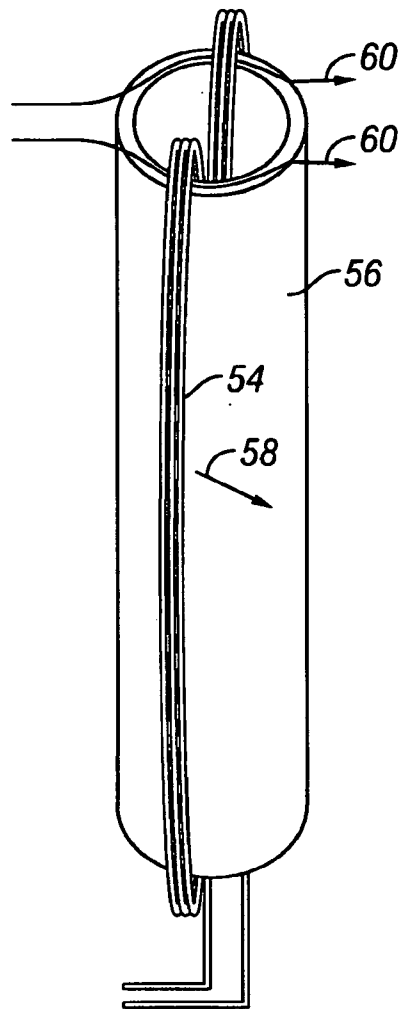

**FIG. 7**

7/9

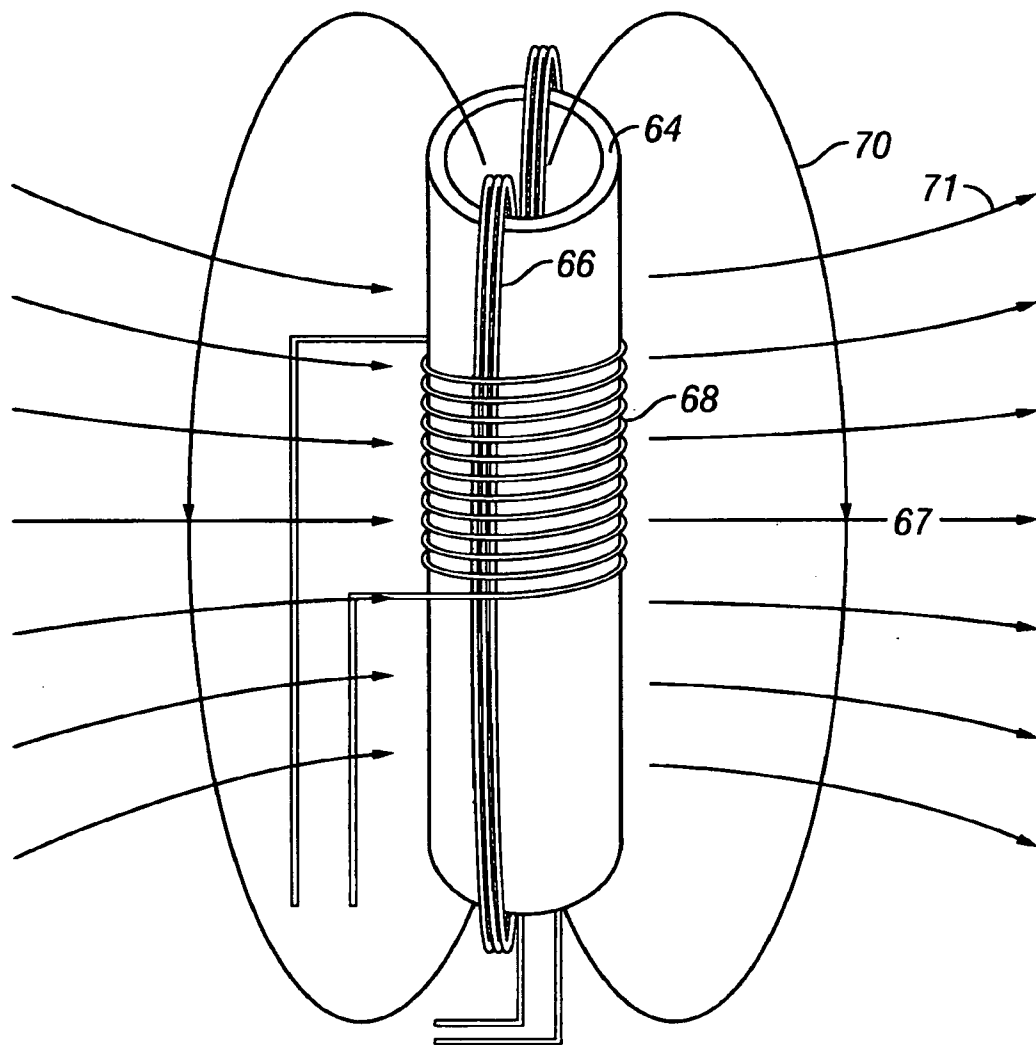


FIG. 8

8/9

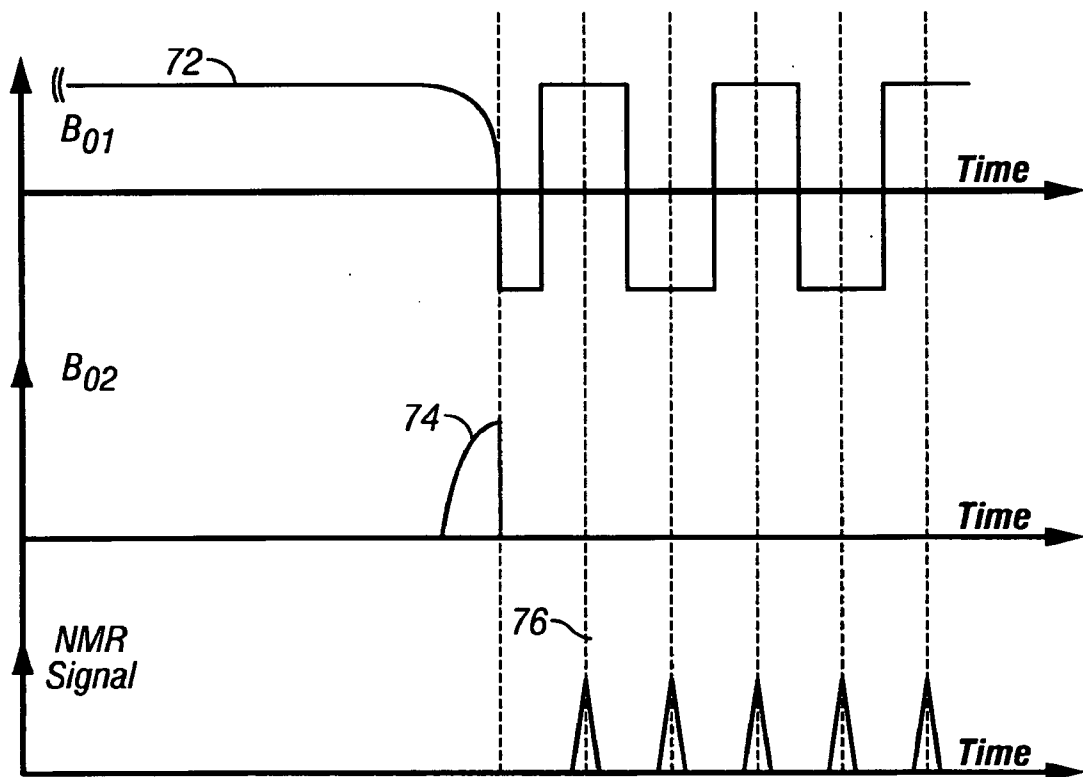


FIG. 9

9/9

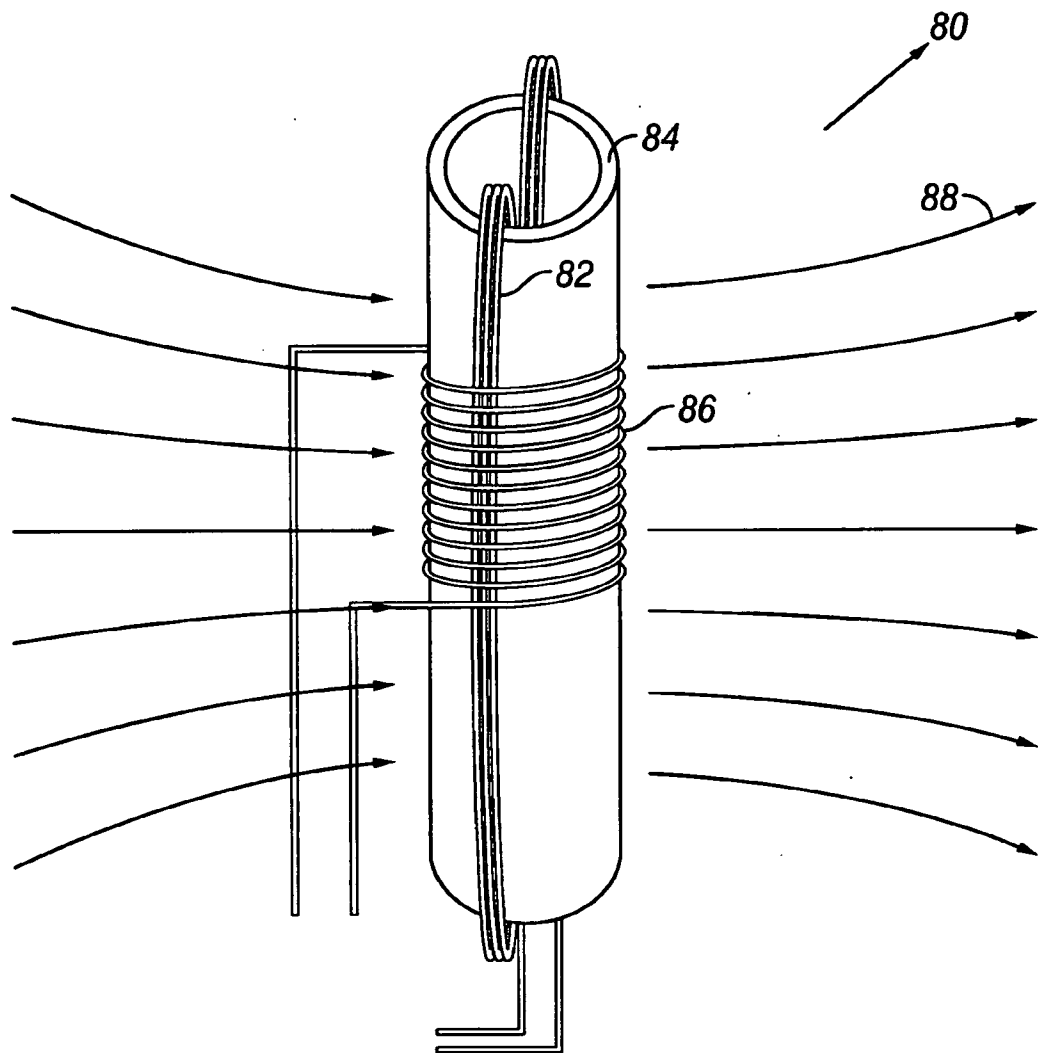


FIG. 10