


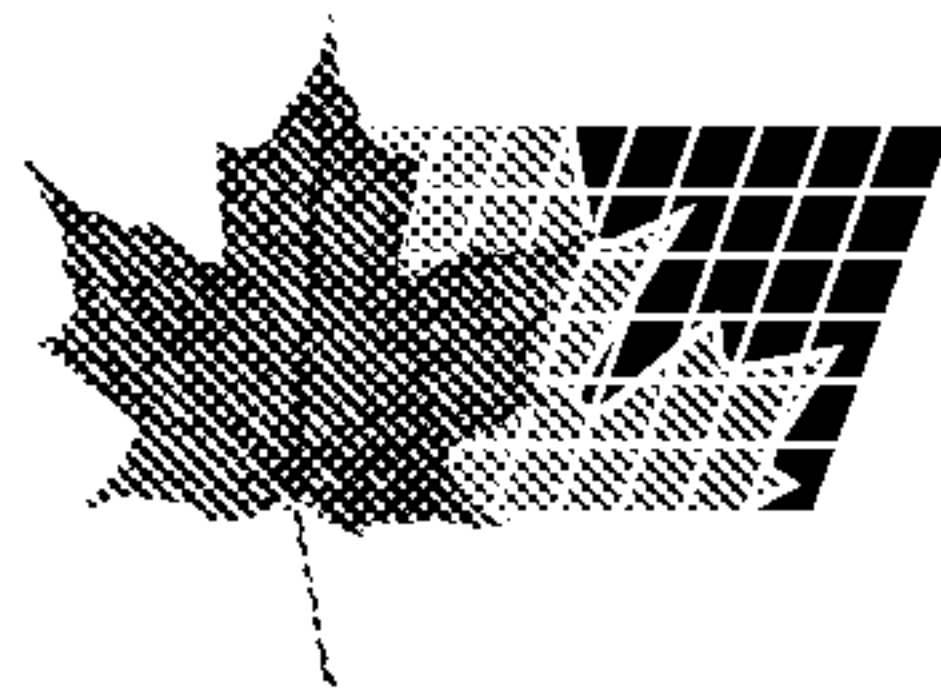

(86) 1991/06/14

(87) 1991/12/26

(45) 2001/05/15

(72) Aoki, Tomoyuki, JP

(72) Iino, Yasuo, JP

(72) Ono, Yoji, JP

(72) Asai, Shinichiro, JP

(73) HENKEL CORPORATION, JP

(51) Int.Cl.⁵ C23G 1/12

(30) 1990/06/19 (H2-160,442) JP

(54) **COMPOSITION LIQUIDE ACIDE POUR NETTOYER
L'ALUMINIUM**

(54) **GLYCOL-CONTAINING ACID LIQUID COMPOSITION AND
PROCESS FOR CLEANING ALUMINUM**

(57) The stability of an acidic liquid cleaner for aluminum comprising mineral acid, oxidant, polyvalent metal ions, and surfactant is substantially improved by the presence in the cleaner of from 0.05 to 5 g/l of a component selected from the group of glycols containing from 2 to 10 carbon atoms per molecule and mixtures of such glycols. The effectiveness of the cleaner for primary cleaning and desmutting of aluminum and its alloys is not impaired and may even be improved by the addition of the glycol component.

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau**2084302**

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : C23G 1/12	A1	(11) International Publication Number: WO 91/19830 (43) International Publication Date: 26 December 1991 (26.12.91)
(21) International Application Number: PCT/US91/04263 (22) International Filing Date: 14 June 1991 (14.06.91) (30) Priority data: 2/160442 19 June 1990 (19.06.90) JP (71) Applicant (for all designated States except US): HENKEL CORPORATION [US/US]; 300 Brookside Avenue; Ambler, PA 19002 (US). (72) Inventors; and (75) Inventors/Applicants (for US only) : AOKI, Tomoyuki [JP/JP]; 3-2-50, Higashi Kaigan Minami, Chigasaki-shi, Kanagawa-ken (JP). IINO, Yasuo [JP/JP]; 203, No. 2 Zuhden, 1-8-20, Nakahara, Hiratsuka-shi, Kanagawa-ken (JP). ONO, Yoji [JP/JP]; ASAI, Shinichiro [JP/JP]; Nihon Parkerizing Hiratsuka Dormitory, 2566, Shinomiya, Hiratsuka-shi, Kanagawa-ken (JP).		(74) Agent: WISDOM, Norvell, E., Jr.; Henkel Corporation, 140 Germantown Pike, Suite 150, Plymouth Meeting, PA 19462 (US). (81) Designated States: AT (European patent), AU, BE (European patent), BR, CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), LU (European patent), NL (European patent), SE (European patent), US. Published <i>With international search report.</i>
(54) Title: ACIDIC LIQUID COMPOSITION AND PROCESS FOR CLEANING ALUMINUM (57) Abstract The stability of an acidic liquid cleaner for aluminum comprising mineral acid, oxidant, polyvalent metal ions, and surfactant is substantially improved by the presence in the cleaner of from 0.05 to 5 g/l of a component selected from the group of glycols containing from 2 to 10 carbon atoms per molecule and mixtures of such glycols. The effectiveness of the cleaner for primary cleaning and desmutting of aluminum and its alloys is not impaired and may even be improved by the addition of the glycol component.		

29987-8

GLYCOL-CONTAINING ACIDIC LIQUID
COMPOSITION AND PROCESS FOR CLEANING ALUMINUM

TECHNICAL FIELD

The present invention relates to an acidic liquid
5 cleaner for articles, such as sheets, strips containers, and
the like, that are made of aluminum or of aluminum alloys that
are predominantly aluminum (both hereinafter designated briefly
as "aluminum", unless the context requires otherwise). The
cleaner is very effective in maintaining its etching capacity
10 and in removing the smut produced by the etching of an aluminum
surface as well as in general cleaning.

BACKGROUND ART

Due to problems with waste water treatment, acidic
liquid cleaners for aluminum are currently being converted from
15 the fluorine-based cleaners used heretofore to fluorine-free,
chromium-free cleaners.

The acidic liquid aluminum cleaners disclosed in
prior art references are examples of fluorine-free, chromium-
free cleaners. Liquid cleaners disclosed therein are sulfuric
20 acid-based acidic liquid cleaners for aluminum. In addition to
sulfuric acid, nitric acid, and surfactant, these also contain
ferric ion (etching accelerator) and an oxidant (stabilizer for
the ferric ion). These compositions are heated to 50 to 80°C
for use in cleaning. Other liquid cleaners disclosed therein
25 are phosphoric acid-based acidic liquid cleaner for aluminum.
In addition to phosphoric acid, sulfuric acid, and surfactant,
they contain small amounts of ferric ion (in order to inhibit
corrosion of the cleaning equipment) and an oxidant which acts
as a stabilizer for the ferric ion. It is heated to 50 to 80°C
30 for use in cleaning.

2084302

2

DESCRIPTION OF THE INVENTIONProblem to Be Solved by the Invention

5 These prior art examples are all acidic liquid aluminum cleaners composed of mineral acid, ferric ion, oxidant, and surfactant, and as such they suffer from common problems. Thus, because they are fluorine-free, chromium-free cleaners, their treatment temperatures are higher than for fluorine-based cleaners. Moreover, because they contain oxidant and metal ion, surfactant decomposition occurs to
10 a substantial extent. Not only does this increase consumption of the surfactant, but decomposition product remaining in the treatment bath impairs its degreasing performance. As a consequence, these cleaners lack a robust, durable cleaning activity.

Summary of the Invention

15 The present invention seeks to introduce a concrete means for solving the problems outlined hereinbefore for acidic liquid aluminum cleaners comprising mineral acid, oxidant, polyvalent metal ions, and surfactant. It has
20 been found that the problems observed with such cleaners in the prior art are largely or entirely avoided by addition to such an acidic liquid cleaner of 0.05 to 5 grams per liter (hereinafter "g/L") of a component selected from the group of C₂ to C₁₀ glycols.

Details of Preferred Embodiments of the Invention

25 In more specific terms, a preferred acidic liquid aluminum cleaner with a robust, durable cleaning activity can be obtained by preparing the acidic liquid aluminum cleaner as follows:

- 30 - the aforesaid mineral acid comprises at least one selection from phosphoric acid, sulfuric acid, and nitric acid; the concentrations of phosphoric acid and sulfuric acid do not exceed 20 g/L; and the nitric acid concentration does not exceed 10 g/L;
- 35 - the aforesaid oxidant is hydrogen peroxide or a nitrite, and its concentration is in the range from 0.02

to 3.0 g/L;

- the aforesaid polyvalent metal ion is ferric ion, and the ferric ion content is 0.02 to 5 g/L;
- the aforesaid surfactant is nonionic, and the surfac-
5 tant content is in the range from to 0.1 to 5 g/L;
- there is additionally present at least 1 selection from the C_2 to C_{10} glycols such as propylene glycol, ethylene glycol, diethylene glycol, and triethylene glycol; and
- 10 - the pH of this acidic liquid cleaner does not exceed 2.0.

The simultaneous presence of surfactant, polyvalent metal ion (for example, ferric ion), and oxidant in the acidic liquid aluminum cleaner according to the present
15 invention is essential for the effective maintenance of a degreasing capacity and aluminum etchability. In addition, the presence of such compounds also functions to inhibit corrosion of the cleaning equipment.

The mineral acid is exemplified by sulfuric acid, ni-
20 tric acid, phosphoric acid, and the like, and at least one selection therefrom should be added. The preferable concentrations are as follows: not more than 20 g/L for phosphoric acid, not more than 20 g/L for sulfuric acid, and not more than 10 g/L for nitric acid. This mineral acid
25 may take the form of a single acid or may comprise a combination of two or more acids which is freely selected within a range which does not adversely affect the surface cleaning performance. Such mixed acids are exemplified by tricomponent mixed acids of 3 to 10 g/L phosphoric acid, 5
30 to 15 g/L sulfuric acid, and 0.5 to 2 g/L nitric acid, and by bicomponent mixed acids of 10 to 20 g/L sulfuric acid and 0.5 to 2 g/L nitric acid.

Through the use of these mineral acids, the pH preferably does not exceed 2.0 and more preferably is 0.6 to 2.
35 When the pH exceeds 2, the aluminum etching rate is reduced and a satisfactory surface cleaning usually cannot be obtained. No particular restriction is placed on the lower

2084302

4

pH limit.

No specific restriction is placed on the polyvalent metal ion, this component being exemplified by Fe ions, Co ions, Sn ions, Ce ions, and the like. However, this component most preferably comprises, or more preferably consists essentially or, most preferably, entirely of, 0.02 to 5 g/L ferric ion (Fe^{+3}), which can be furnished, for example, by ferric sulfate or ferric nitrate. Moreover, ferrous ions (e.g., from ferrous sulfate or ferrous nitrate) may be added to the acidic liquid cleaner and then oxidized to ferric ions by the oxidant.

No particular limitation is placed on the oxidant, but it is preferably H_2O_2 or NO_2^- present at 0.02 to 3.0 g/L.

The surfactant component should be nonionic surfactants, as exemplified by hydrocarbon derivatives, abietic acid derivatives, ethoxylated primary alcohols, and modified polyethoxylated alcohols, and these may be used singly or in combinations of two or more. The preferable concentration is 0.1 to 10 g/L and more preferably 0.5 to 3 g/L.

With regard to the glycol which is used in order to inhibit surfactant decomposition, propylene glycol is effective in this regard, but ethylene glycol, diethylene glycol, triethylene glycol, etc., are also effective.

At least one of these or other glycols with 2 - 10 carbon atoms per molecule is used, suitably at 0.05 to 5 g/L and preferably at 0.2 to 2 g/L, referred to the treatment composition.

The C_2 to C_{10} glycol present in the acidic liquid aluminum cleaner according to the present invention substantially inhibits decomposition of the surfactant by the polyvalent metal ions and oxidant and thus improves the durability of the cleaning activity.

In addition, aluminum ions are eluted during cleaning with the acidic liquid cleaner according to the present invention, and this may reduce its cleaning efficiency. Accordingly, as a countermeasure in response to this, a chelating agent which sequesters the aluminum ions may also

be present.

Chelating agents useable for this purpose are exemplified by citric acid, oxalic acid, tartaric acid, gluconic acid, and the like.

5 The acidic liquid aluminum cleaner prepared according to the present invention is highly effective for the removal of smut and scale from aluminum and aluminum alloy as well as for the etching of same.

10 The practice of the invention may be further appreciated from the following working and comparison examples.

Examples

The following general conditions applied to all the examples, unless otherwise noted:

15 1. Test material: Container fabricated by the drawing and ironing (hereinafter "DI") of 3004 alloy aluminum sheet and carrying normal DI lubricating oil and smut.

20 2. Preparation of the test baths: Five cleaners in total were prepared as examples, and their compositions are reported in Table 1. The four surfactants identified by number in Table 1 had the following chemical characteristics:

nonionic (1): nonylphenol/EO (20 moles) adduct
(hydrocarbon derivative)

25 nonionic (2): higher alcohol/EO (5 moles)-PO (10 moles) adduct (hydrocarbon derivative)

nonionic (3): nonylphenol/EO (14 moles) adduct
(hydrocarbon derivative)

nonionic (4): higher alcohol/EO (5 moles)-PO (15 moles) adduct (hydrocarbon derivative)

30 Five test baths were also prepared by the omission of the C₂ to C₁₀ glycol from Examples 1 to 5, and these are reported in Table 2 as comparison examples 1 to 5 respectively.

2084302

Table 1.

(Examples)

5		phosphoric acid	sulfuric acid	nitric acid	ferric ion	
		as PO ₄	as SO ₄	as NO ₃	Fe ³⁺	counterion
10	1	6 g/L	9 g/L	1.0 g/L	0.05 g/L	SO ₄ ²⁻ : 0.13 g/L
	2	6 g/L	9 g/L	1.0 g/L	0.05 g/L	SO ₄ ²⁻ : 0.13 g/L
15	3	-	15 g/L	1.0 g/L	1.00 g/L	SO ₄ ²⁻ : 2.60 g/L
	4	9 g/L	-	-	0.05 g/L	SO ₄ ²⁻ : 0.13 g/L
20	5	-	15 g/L	-	1.00 g/L	SO ₄ ²⁻ : 2.60 g/L

(Continued below)

25

30		oxidant	C ₂ - C ₁₀ glycol	surfactant	
		H ₂ O ₂			
	1	0.5 g/L	propylene glycol 0.5 g/L	nonionic (1) nonionic (2)	0.5 g/L 1.5 g/L
35	2	0.5 g/L	propylene glycol 1.5 g/L	nonionic (1) nonionic (2)	0.5 g/L 1.5 g/L
	3	0.5 g/L	propylene glycol 0.5 g/L	nonionic (1) nonionic (2)	0.5 g/L 1.5 g/L
40	4	0.5 g/L	ethylene glycol 2.0 g/L	nonionic (3) nonionic (4)	1.0 g/L 2.0 g/L
45	5	0.5 g/L	ethylene glycol 2.0 g/L	nonionic (3) nonionic (4)	1.0 g/L 2.0 g/L

Table 2.

(Comparison Examples)

5		phosphoric acid	sulfuric acid	nitric acid	ferric ion	
		as PO ₄	as SO ₄	as NO ₃	Fe ³⁺	counterion
10	1	6 g/L	9 g/L	1.0 g/L	0.05 g/L	SO ₄ ²⁻ : 0.13 g/L
	2	6 g/L	9 g/L	1.0 g/L	0.05 g/L	SO ₄ ²⁻ : 0.13 g/L
15	3	-	15 g/L	1.0 g/L	1.00 g/L	SO ₄ ²⁻ : 2.60 g/L
	4	9 g/L	-	-	0.05 g/L	SO ₄ ²⁻ : 0.13 g/L
20	5	-	15 g/L	-	1.00 g/L	SO ₄ ²⁻ : 2.60 g/L

(Continued below)

25

30		oxidant	C ₂ - C ₁₀ glycol	surfactant	
		H ₂ O ₂			
	1	0.5 g/L	-	nonionic (1)	0.5 g/L
				nonionic (2)	1.5 g/L
35	2	0.5 g/L	-	nonionic (1)	0.5 g/L
				nonionic (2)	1.5 g/L
	3	0.5 g/L	-	nonionic (1)	0.5 g/L
				nonionic (2)	1.5 g/L
40	4	0.5 g/L	-	nonionic (3)	1.0 g/L
				nonionic (4)	2.0 g/L
45	5	0.5 g/L	-	nonionic (3)	1.0 g/L
				nonionic (4)	2.0 g/L

2084302

3. Test methods

(a) Comparison of the maintenance of the surfactant concentration in the acidic liquid cleaners

5 The test baths (Examples 1 to 5 from Table 1 and Comparison Examples 1 to 5 from Table 2) were maintained quiescent at 75 ± 1 ° C while replenishing the decomposed H₂O₂ in order to maintain the H₂O₂ content in the bath at 0.5 g/L. The quantity of residual surfactant under quiescent acidic bath conditions was measured every 24 hours for three 24-hour intervals. The results are reported in Table 3.

Table 3

15	Example Number	Surfactant Content After Time in Hours:				Percent Decomposition in 72 Hr
	0	24	48	72		
20	1	2.0 g/L	1.9 g/L	1.8 g/L	1.7 g/L	15%
	2	2.0 g/L	1.9 g/L	1.8 g/L	1.8 g/L	10%
	3	2.0 g/L	1.9 g/L	1.6 g/L	1.5 g/L	25%
	4	3.0 g/L	2.9 g/L	2.9 g/L	2.7 g/L	10%
	5	3.0 g/L	2.8 g/L	2.4 g/L	2.2 g/L	27%
<u>Comparison Examples</u>						
25	1	2.0 g/L	1.7 g/L	1.3 g/L	1.2 g/L	40%
	2	2.0 g/L	1.7 g/L	1.3 g/L	1.2 g/L	40%
	3	2.0 g/L	1.6 g/L	1.3 g/L	1.1 g/L	45%
	4	3.0 g/L	2.7 g/L	2.0 g/L	1.8 g/L	40%
	5	3.0 g/L	2.5 g/L	1.9 g/L	1.6 g/L	47%

(b) Comparison of the cleaning activity for aluminum can (water-wetting test)

30 The test baths (Examples 1 to 5 from Table 1 and Comparison Examples 1 to 5 from Table 2) were maintained quiescent at 75 ± 1 ° C while replenishing the decomposed H₂O₂ in order to maintain the H₂O₂ content in the bath at 0.5 g/L. A container as described above under the heading "Test material" was sprayed for 50

seconds at 75 ± 1 ° C using the test bath after standing for zero, 24, 48, or 72 hours. This was followed by a spray rinse for 10 seconds with tap water and standing for 30 seconds. The water-wetted area (%) was then visually evaluated. The results for this evaluation are reported in Table 4.

Table 4.

Elapsed Time: (Hours)	0	24	48	72
<u>Examples</u>				
1	100%	100%	100%	100%
2	100%	100%	100%	100%
3	100%	100%	100%	90%
4	100%	100%	100%	100%
5	100%	100%	100%	100%
<u>Comparison Examples</u>				
1	100%	100%	80%	30%
2	100%	100%	80%	30%
3	100%	100%	70%	30%
4	100%	100%	100%	80%
5	100%	100%	100%	90%

Considering the test results first as they relate to surfactant decomposition, the results reported in Table 3 show that it was possible to obtain an approximately 42 to 75% inhibition of surfactant decomposition. With regard to the maintenance of the cleaning activity, the results reported in Table 4 also show superior results obtained in the examples in all cases.

29987-8

10

CLAIMS:

1. An acidic liquid cleaner for aluminum comprising a mineral acid comprising at least one member of the group consisting of phosphoric acid, sulfuric acid, and nitric acid;
5 the concentrations of phosphoric acid and sulfuric acid being not more than 20 g/L each and the concentration of nitric acid being not more than 10 g/L; an oxidant selected from the group consisting of hydrogen peroxide and nitrite ions, at a concentration of from 0.02 to 3.0 g/L; ferric ions at a
10 concentration from 0.02 to 5 g/L; a non-ionic surfactant at a concentration from 0.1 to 5 g/L; and from 0.05 to 5 g/L of a component selected from the group of glycols containing from 2 to 10 carbon atoms per molecule and mixtures thereof, wherein the pH does not exceed 2.0.
- 15 2. The acidic liquid cleaner of claim 1, wherein the glycol component is present at a concentration of from 0.5 to 2.0 g/L.
3. An acidic liquid cleaner for aluminium as claimed in claim 1 or 2, wherein the surfactant concentration is from 0.5
20 to 3 g/L.
4. An acidic liquid cleaner for aluminium as claimed in any one of claims 1 to 3, wherein the glycol component comprises propylene glycol, ethylene glycol, diethylene glycol, or triethylene glycol, or mixtures thereof.
- 25 5. An acidic liquid cleaner for aluminium as claimed in any one of claims 1 to 4, wherein the pH is between 0.6 and 2.0.
6. An acidic liquid cleaner for aluminium as claimed in any one of claims 1 to 5, additionally comprising a chelating
30 agent which sequesters aluminium ions selected from the group

29987-8

11

consisting of citric acid, oxalic acid, tartaric acid, and gluconic acid.

7. A process for cleaning aluminium, comprising contacting the aluminium with a composition as claimed in any
5 one of claims 1-6.

FETHERSTONHAUGH & CO.

OTTAWA, CANADA

PATENT AGENTS