



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 : F42B 5/18		A1	(11) International Publication Number: WO 92/05397
			(43) International Publication Date: 2 April 1992 (02.04.92)

(21) International Application Number: PCT/US91/06796

(22) International Filing Date: 19 September 1991 (19.09.91)

(30) Priority data:
585,423 20 September 1990 (20.09.90) US

(71) Applicant: OLIN CORPORATION [US/US]; 350 Knotter Drive, P.O. Box 586, Cheshire, CT 06410-0586. (US).

(72) Inventors: SWARTOUT, Terry, Lee ; 10176 118th Way North, Seminole, FL 34642 (US). EHLLERS, Stephen, Brickett ; 2866 Westover Court, Clearwater, FL 34621 (US). FIELD, David, Ray ; P.O. Box 275, St. Marks, FL 32355 (US). CONNOLLY, Terence ; 24 Highland Avenue, Dover, NJ 07801 (US).

(74) Agents: BURDICK, Bruce, E. et al.; Olin Corporation, 350 Knotter Drive, P.O. Box 586, Cheshire, CT 06410-0586 (US).

(81) Designated States: AT (European patent), AU, BB, BE (European patent), BF (OAPI patent), BG, BJ (OAPI patent), BR, CA, CF (OAPI patent), CG (OAPI patent), CH (European patent), CI (OAPI patent), CM (OAPI patent), DE (European patent), DK (European patent), ES (European patent), FI, FR (European patent), GA (OAPI patent), GB (European patent), GN (OAPI patent), GR (European patent), HU, IT (European patent), JP, KP, KR, LK, LU (European patent), MC, MG, ML (OAPI patent), MR (OAPI patent), MW, NL (European patent), NO, PL, RO, SD, SE (European patent), SN (OAPI patent), SU⁺, TD (OAPI patent), TG (OAPI patent).

Published


With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: IMPROVED COMBUSTIBLE AMMUNITION CARTRIDGE CASE

(57) Abstract

An ammunition cartridge (50) is disclosed comprising a projectile (54) threadably attached to a combustible case body (64) via a threaded combustible case adapter (62). At least one of the adapter (62) ends has a uniform density of polyurethane resin to provide strength and sufficient support for the threads. The combustible case body (64) may also have a uniform resin density to support threads (70, 72) corresponding to those on the rear end of the adapter (62). The preferable uniform polyurethane density is about .75 grams per cubic centimeter.

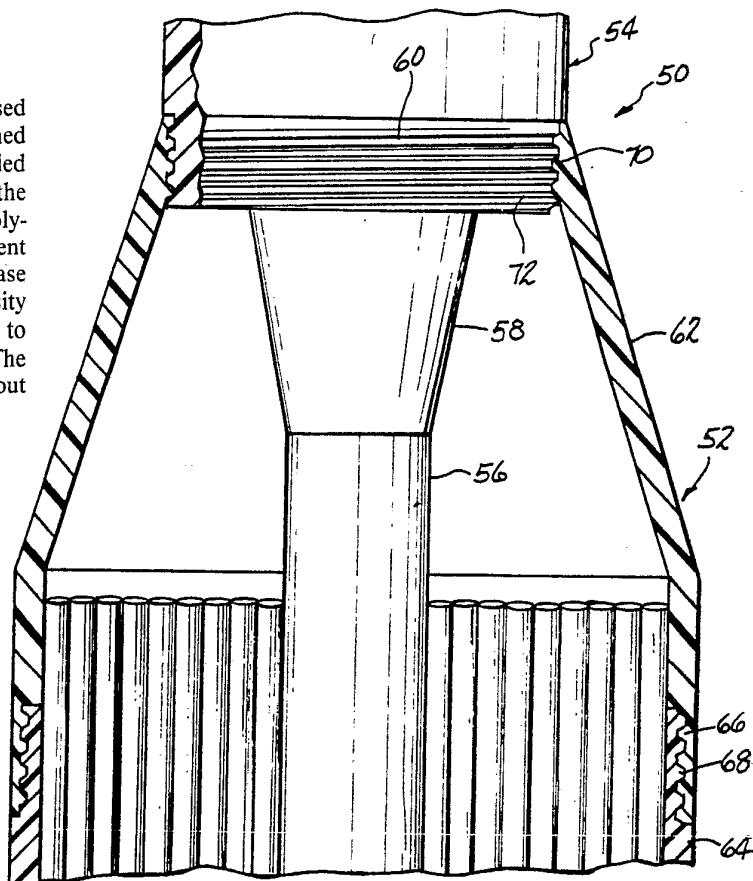

+ DESIGNATIONS OF "SU"

Any designation of "SU" has effect in the Russian Federation. It is not yet known whether any such designation has effect in other States of the former Soviet Union.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MN	Mongolia
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GN	Guinea	NL	Netherlands
BJ	Benin	GR	Greece	NO	Norway
BR	Brazil	HU	Hungary	PL	Poland
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LI	Liechtenstein	SU+	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark				

IMPROVED COMBUSTIBLE AMMUNITION CARTRIDGE CASE

This invention relates generally to combustible cartridges and more particularly to an improved case construction permitting the use of threaded case components.

Combustible cases for large caliber ammunition have been used for a number of years. The advantage of using such cases is especially apparent in tank ammunition where disposal of spent cartridge cases is constrained by the cramped confines within the fighting vehicle. The combustible cases used in such ammunition are designed to be consumed during propellant ignition, leaving behind only the short metal cartridge head containing the spent primer. Storage and handling of spent cartridge heads measuring about three inches in length and five inches in diameter is much more convenient than wrestling with two foot hot long metal cases.

Combustible cartridge cases have a tubular body made of a molded or wrapped cardboard type mixture of wood fiber, Kraft cellulose, nitrocellulose, and a stabilizer. The cases are formed by the conventional beater additive or post impregnation process. The outer surface of the case body is impregnated with a plastic resin such as polyurethane to protect the case from humidity and abrasion damage and add strength to the case. The case has a density gradient of resin across the wall thickness of the case. The resin content is minimum at the inside surface and maximum at the outside. This gradient is conventionally believed to be necessary in order to ensure complete case combustion since the resin is a combustion inhibitor.

-2-

The tubular body is conventionally glued to a combustible adapter which attaches to the obturator of a projectile having its rear end extending through the adapter into the combustible cartridge case body. The 5 adapter is a generally tubular cone which necks the case down to the bore diameter of the gun. The rear end of the adapter is glued to the case body and the front end of the adapter is bolted, glued or snap fit onto the obturator of the projectile.

10 The adapter is made of the same mixture as the case but usually without the nitrocellulose. The conventional adapter also has the same plastic resin gradient across its wall thickness.

15 The projectile is usually a shape charge warhead or a subcaliber kinetic energy long rod penetrator for defeating armor. It has its rear end extending into the forward end of the combustible case through the adapter. The opposite end of the combustible has a generally cup shaped mechanically metal head attached 20 to it which provides a gun breech seal and a support for the primer which extends into the propellant within the combustible case.

25 These rounds have historically been very susceptible to joint failures during normal handling, changes in extreme humidity/temperature conditions and most importantly, accidental dropping. Accordingly, many efforts have been made to find the best joint arrangement and to improve the strength of these joints.

Such attempts are exemplified in the following 30 patents. U.S. Patent No. 3,978,792 to Campoli et al discloses a cartridge case adapter which fits over a fin hub for a fin stabilized projectile. The adapter is designed for use in a polypropylene cartridge case. The adapter is made of a polycarbonate resin material 35 and engages the fins and rigidly supports them against the interior of the case. Thus, in this design, the

adapter fits down inside the case and radially supports the finned projectile from the rear. This prevents the balloting of the long rod penetrator projectile within the case minimizing the forces placed on the joint 5 between the projectile and the combustible case.

In U.S. Patents 4,187,783 and 4,444,113, the sabots are snap fit to the obturator of the sabot.

In U.S. Patent 4,444,115, the projectile is connected to the combustible casing via two axially 10 spaced supports. The body portion of the projectile is supported at the neck of the case. A second, rear radial support is provided by radial support elements within the case abutting the case wall at the rear of the projectile.

15 In U.S. Patent 4,487,131, a cartridge cover or adapter is disclosed which has a plurality of axial slots in its inverted conical forward end. These slots receive corresponding catches on the rear of the sabot on the subcaliber projectile as the projectile is 20 inserted into the case. Thus, the forward end of the adapter is snap fit into engagement with the sabot. In addition, a silicon rubber seal is disposed between the case adapter and the sabot to provide a form adapted 25 joint between the cartridge and the projectile. The rear portion of the cartridge cover or adapter has a conventional skive joint for gluing to the forward open end of the combustible case. This arrangement has the inherent disadvantage that the connection between the sabot of the projectile and the adapter is not 30 particularly rigid.

U.S. Patents 4,981,246 and 4,714,024 disclose conventional bolting methods between the combustible case adapter in the rear portion of the sabot. These bolted connections are strong but are relatively 35 complex and require substantial assembly time. In

addition, connection failures between the adapter and the sabot may not be readily apparent from a visual inspection.

Attempts to utilize threaded connections for combustible case components over twenty years ago met with dismal failure. Because of the resin density and thus a structural strength gradient across the wall thickness of the case, and the limited thickness of the case wall, machined threads simply disintegrated. Accordingly, threaded connections were believed to be unsuitable for use in combustible case components.

The preferred conventional joint between the adapter and the case body is a skive joint in which the case and the adapter are glued together. The skive joint presents an optimum glue surface area. The joints between the projectile and the adapter are either a snap fit, a compression fit between sabot components, a glued joint or a bolted connection between the adapter and the skirt of the obturator or the sabot.

One such conventional prior art connection scheme between the projectile and the combustible case is illustrated in Figure 2. Cartridge 1 comprises a projectile 2 mounted to a combustible case 3 via adapter 4. Adapter 4 has a skive joint glued to case 3 at its rear end and has a bolted connection 5 at its forward end 6 to the sabot 7 of the projectile 2. The forward end 6 of the adapter 4 is shaped as a reverse cone having an angle corresponding to the tapered rear of sabot 7. A plurality of bolts 8 extend through both the forward end 6 of the adapter 4 and the rear tapered portion of the sabot 7 to connect the two pieces together.

This type of connection between the projectile and the adapter is strong but particularly susceptible to hidden joint failures in the region of the bolted

-5-

connections. In addition, this type of connection is difficult and time consuming to assemble because of the recessed position of the bolts.

Both of these joints, the case to adapter and the adapter to projectile have frequently failed drop tests or have failed during field use over the years. This has thus been a long term problem with this particular type of cartridge. Accordingly, a need has existed for a better and more reliable method to fasten the combustible case components together.

It is therefore an object of the invention to provide an improved combustible case material into which threads can be machined.

It is another object of the present invention to provide an improved connection between combustible case components.

It is another object of the present invention to provide an improved connection between the projectile and the combustible case.

The present invention basically comprises a combustible case having a threaded joint between the adapter and at least one of either the case body or the obturator of the projectile. The threaded portion of the adapter has a uniform cross sectional density of plastic resin throughout its wall thickness to provide sufficient structural strength and machinability for the threads. This uniform density is critical to provide sufficient thread strength.

Although any thread type may be used in accordance with the invention, the threads are preferably of the helical modified stub type having a preferred pitch of about .10 (10 threads per inch). In addition, the threads preferably have a 60 degree thread angle and a flat thread root for ease of machining to allow for expansion and contraction of the connected components due to temperature and humidity changes.

-6-

The adapter preferably has its forward end threaded with internal threads for joining with corresponding external threads on the projectile obturator. The adapter may also have internal or external threads on its rear end for engaging corresponding external or internal threads on the forward end of the combustible case body.

These and other objects, features and advantages of the invention will become more readily apparent from the following description when taken in conjunction with the accompanying drawing and appended claims.

Figure 1 is an exploded perspective view of the major components of an ammunition cartridge in accordance with the present invention.

Figure 2 is a sectional view of a cartridge having a typical prior art adapter.

Figure 3 is a partial longitudinal sectional view of one embodiment of a cartridge having an adapter in accordance with the present invention.

Figure 4 is an enlarged partial sectional view of the threaded joint at the forward end of the adapter shown in Figure 3.

Figure 5 is a partial sectional view of an alternative preferred embodiment of the cartridge in accordance with the invention.

Figure 1 is an exploded view of a kinetic energy cartridge 10 in accordance with the invention having a combustible case 12. The cartridge case 12 basically includes a generally tubular body 14 and an adapter 16 secured to one end of the tubular body 14 for connecting a projectile 18 to the case 12. The other end of the case body has fastened thereto a metal head assembly 20 for receiving and supporting a primer 22 for igniting a propellant charge 24 (see Figure 3) contained within the case 12.

5 The adapter 16 is basically a combustible conical tube which connects the smaller diameter projectile 18 to the generally larger case body 14. The adapter 16 thus necks down from the diameter of the case to the diameter of the projectile.

10 The case body 14 is molded or otherwise conventionally formed via a felting process preferably from a mixture of nitrocellulose, wood pulp cellulose, N-methyl-N', N'diphenylurea or diphenylamine (a nitrocellulose stabilizer) and preferably a polyurethane resin. The adapter is preferably made of the same mixture as the case but without the nitrocellulose and N-methyl-N', N'diphenylurea. In some applications, the adapter also may contain these 15 materials, however.

20 Both the adapter 16 and the combustible case 14 each have a differential density gradient of polyurethane across the wall thickness along its length. Both the adapter and the case body of the present invention have a uniform cross sectional density of polyurethane resin throughout the wall thickness of the component at the ends.

25 The felt density is decreased near the ends of the adapter or the case tube during formation so that a greater proportion of polyurethane resin is absorbed giving a resultant high uniform cross sectional density at the ends.

30 The uniform density at the ends should be between about .45 and 1.00 grains/cubic centimeter to ensure that the combustible case performs satisfactorily. The density should be at least .45 or there will be insufficient mechanical strength to retain the threads. It should be less than about 1.00 or the material will not properly combust upon propellant 35 ignition. The resin density is preferably between about .55 and about .90 and has been found to be optimal at about .75 grams per cubic centimeter.

5 Projectile 18 typically includes a long rod shaped penetrator core 20 surrounded by a light weight sabot 22 which has an obturator 24 attached thereto or integral therewith. The rear portion of the projectile 18 is nested within case 12 and is attached thereto via a threaded connection between the adapter 16 and the obturator 24 in accordance with the invention.

10 One preferred embodiment of the adapter portion of the cartridge in accordance with the present invention is illustrated in partial section in Figure 3. Cartridge 50 comprises a combustible cartridge case 52 connected to a projectile assembly 54. In this case, the projectile assembly 54 is a long rod penetrator 56 supported by a sabot 58 having an obturator 60 which is 15 threaded into a combustible adapter 62.

20 The combustible case 52 consists of the adapter 62 and a case tubular body 64. The forward end of the tubular body has external threads 66 machined into its external surface. The rear portion of the adapter 62 has internal threads 68 which correspond and engage with external threads 66 to provide a strong joint between the tubular body 64 and the adapter 62. Similarly, the forward end of the adapter 62 has 25 internal threads 70 which engage corresponding threads 72 on the obturator 62.

30 The adapter 62 is preferably made of a molded or wrapped cardboard type mixture of wood fiber, craft cellulose, and optimally nitrocellulose and is impregnated to a uniform density with a polyurethane plastic resin at the threaded ends. The polyurethane resin has a uniform density distribution throughout the wall thickness of the adapter 62 at the ends to permit machining the threads and to provide adequate strength for the threads 70 and 68. Similarly, the forward end 35 of case body 64 has a uniform density of polyurethane resin to permit machining of and strength for the threads 66.

The threads are preferably machined after the case and the adapter are molded. The threads are preferably a 60° modified stub thread as illustrated in Figure 4. The threads preferably have a pitch of .10 and 5 preferably have a flat root for ease of machining and to optimally allow for expansion and contraction of the joined components without failure due to temperature and humidity changes of the components. As shown in 10 Figure 3, the forward end of the adapter 62 is threaded onto the obturator 60. The obturator 60 is preferably made of nylon but may also be of any other conventional 15 sabot or obturator construction supporting threads.

An alternative preferred embodiment of a combustible cased cartridge in accordance with the 20 present invention is illustrated in Figure 5. In this embodiment, the adapter 80 is joined to the combustible case body 82 via a skive joint 84 in a conventional manner. In this case the polyurethane resin density at 25 the joint 84 may be uniform or the components 80 and 82 may each have a conventional gradient across the wall thickness. The forward end 86 of the adapter 80 is threaded onto the obturator 60 as in the previous embodiment illustrated in Figures 3 and 4. Accordingly, the forward end 86 must have a uniform 30 resin density across its wall thickness as previously described.

While the invention has been described above with 35 reference to specific embodiments thereof, it is apparent that many changes, modifications and variations can be made without departing from the invention concept disclosed herein. For example, the obturator 60 may have internal threads and the forward end of the adapter 62 or 82 may have external threads so that the forward end of the adapter is threaded to the inside of the rear portion of the obturator 60.

-10-

Similarly, the combustible case body 64 or 82 may have internal threads machined into the open end to mate correspondingly with external threads on the rear end of the adapter 62 or 80. Finally, the use of other 5 plastic resins to provide a uniform strength within the wall of the combustible case body and the combustible adapter at the ends are envisioned. For example, a latex resin may also be used.

-11-

WHAT IS CLAIMED IS:

1. An ammunition cartridge 50 characterized by a combustible case body 64 having a tubular shape with at least one open end, said body 64 having a uniform cross sectional density of a plastic resin at said end.

2. The cartridge 50 according to claim 1 characterized in that said plastic resin is polyurethane.

3. The cartridge 50 according to claim 2 further characterized by a projectile 54 and a combustible adapter means 62 joining said projectile to said case 64.

4. The cartridge 50 according to claim 3 characterized in that said adapter means 62 is a hollow tube having at least one end having a uniform density to plastic resin at said end.

5. The cartridge 50 according to claim 4 characterized in that said one end is threadably engaged with said case 64.

6. The cartridge 50 according to claim 4 characterized in that said adapter tube 62 has a generally frustoconical shape and one end of said tube has threads 70 engaging corresponding threads 72 on said projectile 54 to fasten said projectile and said adapter together.

7. The cartridge 50 according to claim 6 characterized in that said adapter tube 62 has threads 66 on the other end engaging corresponding threads 68

-12-

5 on said one open end of said tubular body 64 so as to
tightly join said body 64, said adapter 62 and said
projectile 54 together.

8. The cartridge 50 according to claim 4
characterized in that said open end of said tubular
body 64 has corresponding threads 68 to said one
threaded end 66 of said adapter 62 joining said body
5 and said adapter ends together.

9. The cartridge 50 according to claim 7
characterized in that said threads are 60° stub threads.

10. The cartridge 50 according to claim 8
characterized in that said threads are 60° stub threads.

11. In an ammunition cartridge 50 having a
combustible case 52 containing a propellant charge 56
and a projectile 54 attached to said case 52, said case
characterized by:

5 a combustible tubular body 64 having an open end,
said body having a uniform cross-sectional density of a
plastic resin at said end; and

10 a threaded combustible adapter means 62 attached to
the open end of said body for joining said body 64 with
said projectile 54.

12. The cartridge case 52 according to claim 11
characterized in that said adapter means is a hollow
combustible adapter tube 62 having at least one
threaded end.

13. The cartridge case 52 according to claim 12
characterized in that said tube 62 has a generally
conical shape and one end of said tube has threads 70

-13-

engaging corresponding threads 72 on said projectile 54
5 to fasten said projectile 54 and said adapter 62
together.

14. The cartridge case 52 according to claim 13
characterized in that said adapter 62 has threads 66 on
the other end engaging corresponding threads 68 on the
open end of said tubular body 64 so as to tightly join
5 said body 64, said adapter 62 and said projectile 54
together.

15. The cartridge case 52 according to claim 12
characterized in that said opposite end of said tubular
body 64 has corresponding threads to said one threaded
end of said adapter joining said body and said adapter
5 ends together.

16. The cartridge case 52 according to claim 11
characterized in that said adapter means is a hollow
combustible adapter tube 62 having at least one
helically threaded end.

17. The cartridge case 52 according to claim 16
characterized in that said tube 62 has a generally
conical shape and one end of said tube 62 has helical
threads 70 engaging corresponding helical threads 72 on
5 said projectile 54 to fasten said projectile 54 and
said adapter 62 together.

18. The cartridge case 52 according to claim 17
characterized in that said adapter 62 has threads 66 on
the other end engaging corresponding threads 68 on the
opposite end of said tubular body 64 so as to tightly
5 join said body 64, said adapter 62 and said projectile
52 together.

-14-

19. The cartridge case 52 according to claim 16 characterized in that said opposite end of said tubular body 64 has corresponding helical threads 68 to said one threaded end of said adapter joining said body 64 and said adapter ends together.

5 20. The cartridge 50 according to claim 19 characterized in that said threads are 60° stub threads.

21. In an ammunition cartridge 50 having a combustible case 52 containing a propellant charge 56 and a projectile 54 attached to said case, said case characterized by:

5 a combustible tubular body 64 having opposite ends, said body including a uniform cross sectional density of a polyurethane resin;

10 a cup shaped head attached to one of said ends closing said end, said head adapted to retain and support a primer means for igniting said propellant charge; and

15 a threaded combustible adapter means 62 attached to the opposite end of said body 64 for joining said body with said projectile 54, said means 62 having a uniform cross sectional density of polyurethane resin.

22. The cartridge case 52 according to claim 21 characterized in that said adapter means 62 is a hollow combustible adapter tube having at least one threaded end.

23. The cartridge case 52 according to claim 22 characterized in that said tube has a generally conical shape and one end of said tube has threads 70 engaging corresponding threads 72 on said projectile to fasten said projectile and said adapter together.

-15-

24. The cartridge case 52 according to claim 23 characterized in that said adapter has threads 66 on the other end engaging corresponding threads 68 on the opposite end of said tubular body 64 so as to tightly 5 join said body, said adapter and said projectile together.

25. The cartridge case 52 according to claim 22 characterized in that said opposite end of said tubular body 64 has corresponding threads 68 to said one threaded end of said adapter joining said body and said 5 adapter ends together.

26. The cartridge case 52 according to claim 21 characterized in that said adapter means is a hollow combustible adapter tube 62 having at least one helically threaded end.

27. The cartridge case 52 according to claim 26 characterized in that said tube 62 has a generally conical shape and one end of said tube has helical threads 70 engaging corresponding helical threads 72 on 5 said projectile to fasten said projectile 54 and said adapter 62 together.

28. The cartridge case 52 according to claim 27 characterized in that said adapter 62 has threads 66 on the other end engaging corresponding threads 68 on the opposite end of said tubular body 64 so as to tightly 5 and threadably join said body 64, said adapter 62 and said projectile 54 together.

29. The cartridge case 52 according to claim 26 characterized in that said opposite end of said tubular body 64 has corresponding helical threads 68 to said one threaded end of said adapter 62 joining said body 5 64 and said adapter ends together.

-16-

30. The cartridge case 52 according to claim 29 characterized in that said threads are 60° stub threads.

31. In an improved ammunition cartridge 50 having a combustible case body 64 having an open end and containing a propellant charge 56 and a projectile 54 attached to said case 64, the improvement characterized by:

5 said open end of case body having a uniform density of polyurethane resin; and
a threaded combustible adapter means 62 attached to said one end of said case body for joining said body 52
10 with said projectile 54.

32. The cartridge 50 according to claim 31 characterized in that said adapter means is a hollow combustible adapter tube 62 having at least one threaded end having a uniform density of polyurethane
5 resin.

33. The cartridge 50 according to claim 32 characterized in that said tube has a generally conical shape and one end of said tube 62 has threads engaging corresponding threads on said projectile to fasten said
5 projectile and said adapter tube together.

34. The cartridge 50 according to claim 33 characterized in that said adapter 62 has threads 66 on the other end engaging corresponding threads 68 on the opposite end of said tubular body so as to tightly join
5 said body 64, said adapter 62 and said projectile 54 together.

35. The cartridge 50 according to claim 32 characterized in that said opposite end of said tubular

-17-

body has corresponding threads 68 to said one threaded end of said adapter 62 joining said body 64 and said adapter ends together.

36. The cartridge 50 according to claim 31 characterized in that said adapter means is a hollow combustible adapter tube 62 having at least one helically threaded end.

37. The cartridge 50 according to claim 36 characterized in that said tube 62 has a generally conical shape and one end of said tube has helical threads 70 engaging corresponding helical threads 72 on said projectile to fasten said projectile 54 and said adapter 62 together.

38. The cartridge 50 according to claim 37 characterized in that said adapter 68 has threads 66 on the other end engaging corresponding threads 68 on the opposite end of said tubular body 64 so as to tightly and threadably join said body 64, said adapter 62 and said projectile 54 together.

39. The cartridge 50 according to claim 36 characterized in that said opposite end of said tubular body 64 has corresponding helical threads 68 to said one threaded end of said adapter joining said body 64 and said adapter 62 ends together.

40. The cartridge 50 according to claim 39 characterized in that said threads are 60° stub threads.

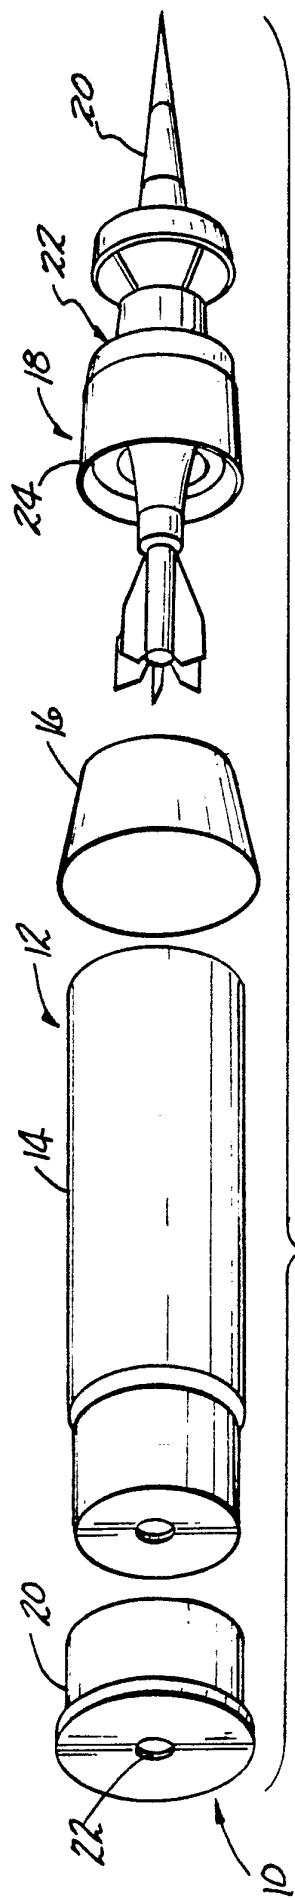


FIG. 1

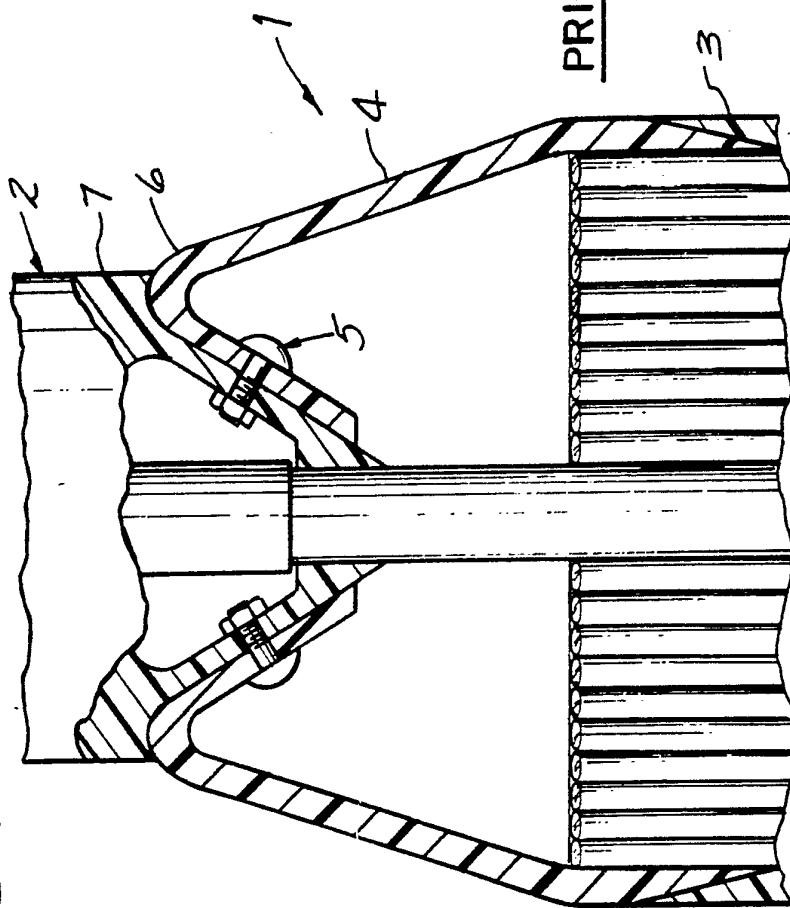


FIG. 2

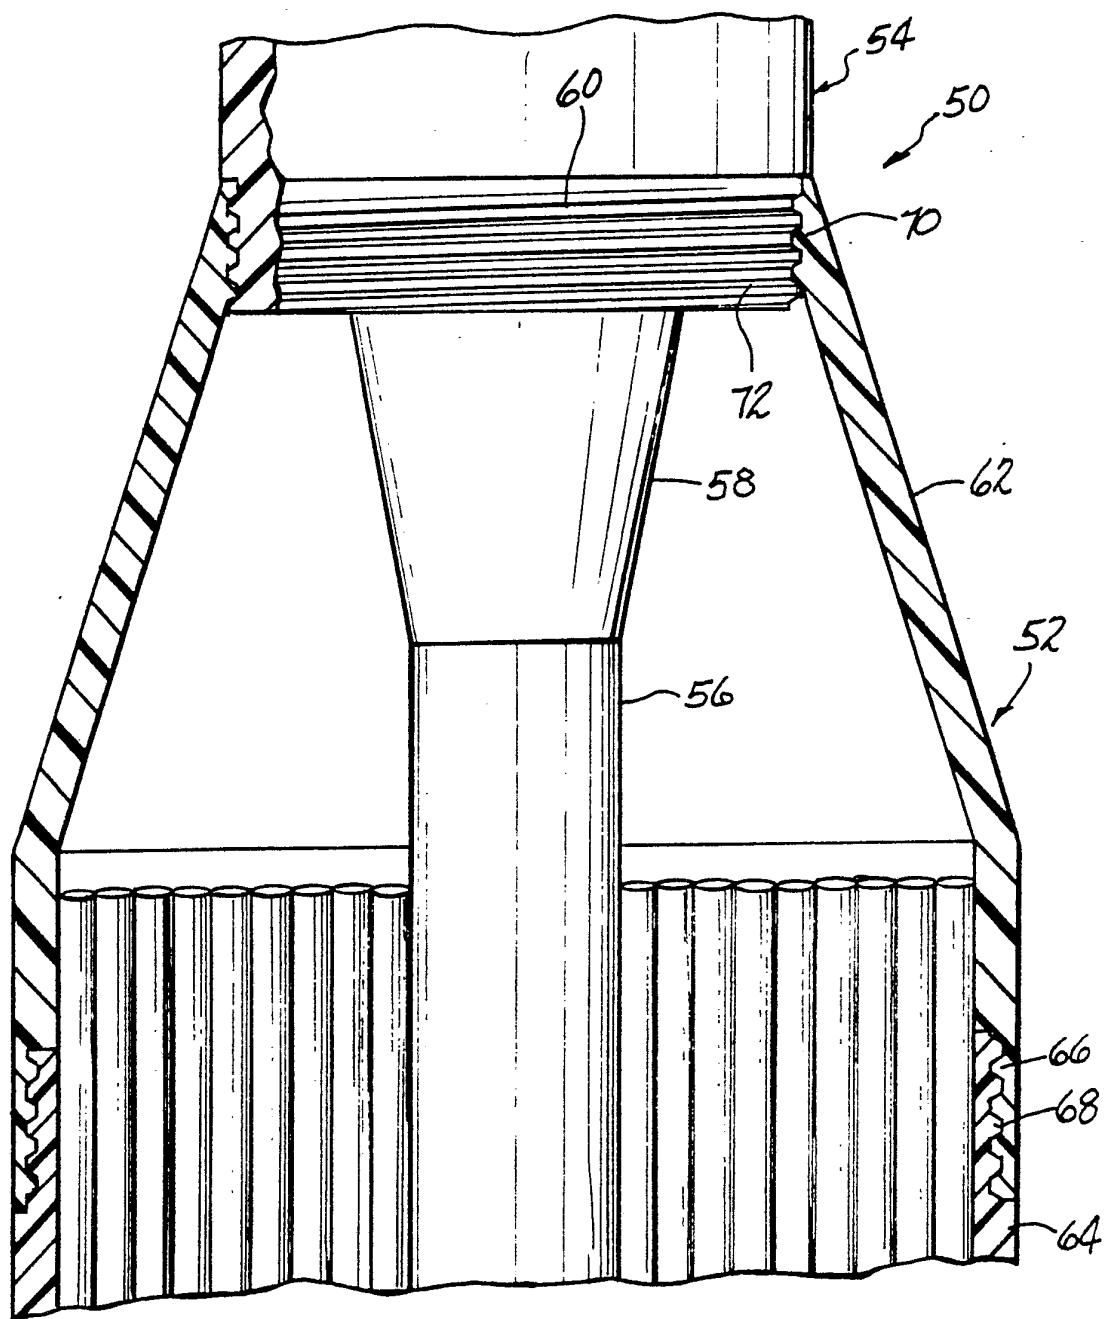


FIG-3

FIG - 5


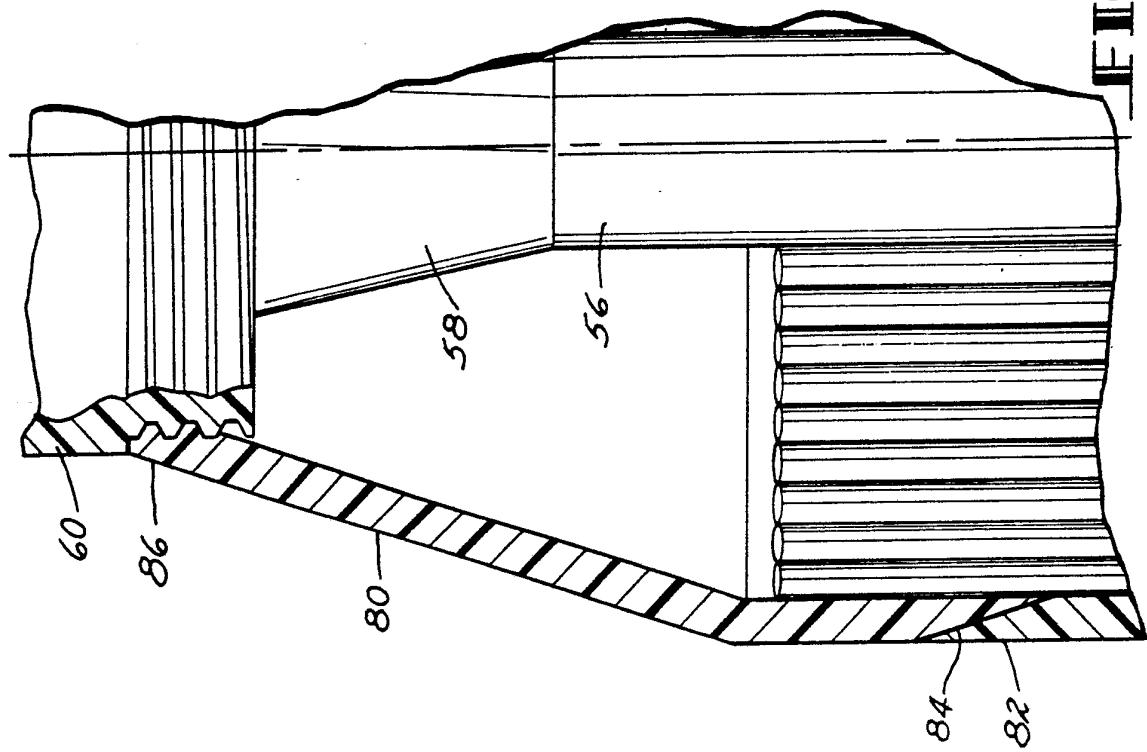


FIG - 4

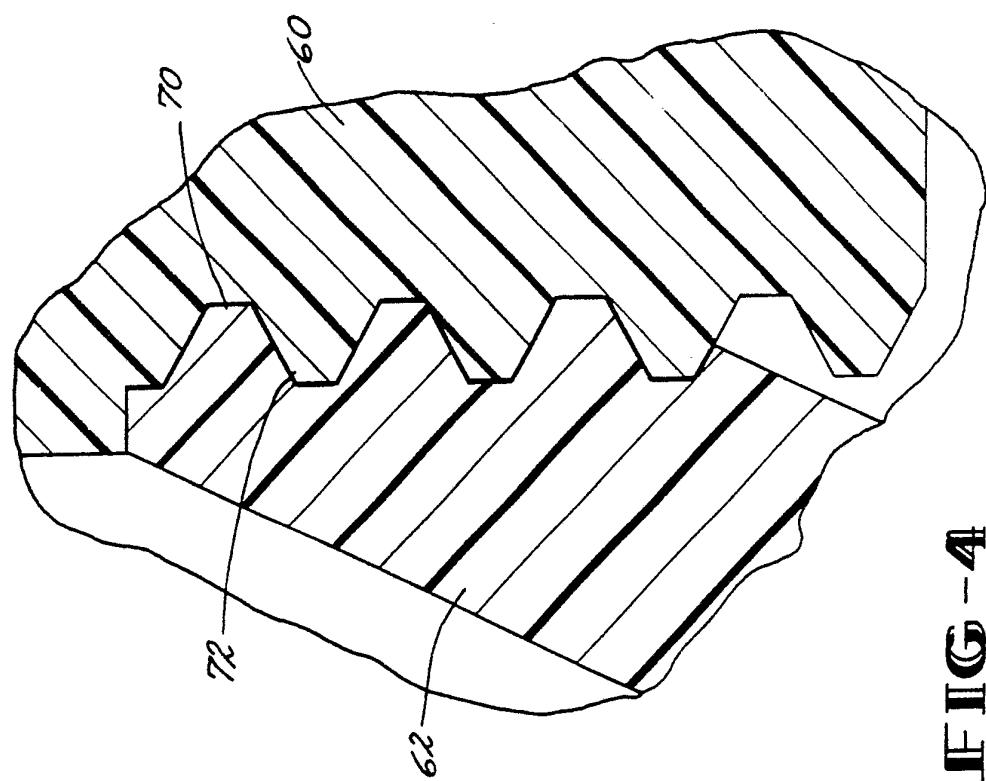

INTERNATIONAL SEARCH REPORT

International Application No. PCT/US91/06796

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶

According to International Patent Classification (IPC) or to both National Classification and IPC
 IPC(5): F42B 5/18
 US CL : 102/431

II. FIELDS SEARCHED

Minimum Documentation Searched ⁷

Classification System	Classification Symbols
U.S.	102/430,431,432,433,439,465,466,467 and 700
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸	

III. DOCUMENTS CONSIDERED TO BE RELEVANT ⁹

Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
X Y	US, A, 3,769,873 (Abel) 06 NOVEMBER 1973 See entire document.	1 1-40
Y	US, A, 3,981,246 (LUTHER ET AL.) 21 SEPTEMBER 1976 See figure 1 and lines 24-39 of col. 2.	1-40
Y	US, A, 4,068,589 (OVERSOHL) 17 JANUARY 1978 See lines 1-43 of col 1.	2-10,21-40
Y	US, A, 4,709,636 (MUELLER ET AL.) 01 DECEMBER 1987 See figure 1 and lines 58-66 of col. 2.	5-40
Y	US, A, 3,216,356 (KAUFMANN, JR.) 09 NOVEMBER 1965 See figures, see figures 2 and 3.	9,10,20,30,40
X,P Y,P	US, A, 5,048,421 (SWARTOUT) 17 September 1991, See entire document.	1,2 1-40
A	US, A, 4,770,099 (BREDE ET AL.) 13 SEPTEMBER 1988	

* Special categories of cited documents: ¹⁰

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

IV. CERTIFICATION

Date of the Actual Completion of the International Search

07 January 1992

Date of Mailing of this International Search Report

13 FEB 1992

International Searching Authority

ISA/US

Signature of Authorized Officer

Harold Tudor
Harold Tudor