



Office de la Propriété

Intellectuelle  
du Canada

Un organisme  
d'Industrie Canada

Canadian  
Intellectual Property  
Office

An agency of  
Industry Canada

CA 2805213 A1 1999/10/01

(21) **2 805 213**

(12) **DEMANDE DE BREVET CANADIEN**  
**CANADIAN PATENT APPLICATION**

(13) **A1**

(22) Date de dépôt/Filing Date: 1998/04/01

(41) Mise à la disp. pub./Open to Public Insp.: 1999/10/01

(62) Demande originale/Original Application: 2 233 789

(51) Cl.Int./Int.Cl. *G11C 11/401* (2006.01),  
*G11C 11/4076* (2006.01), *G11C 11/4093* (2006.01)


(71) Demandeur/Applicant:  
MOSAID TECHNOLOGIES INCORPORATED, CA

(72) Inventeur/Inventor:  
MES, IAN, CA

(74) Agent: AUERBACK, HARVEY

(54) Titre : PIPELINE ASYNCHRONE AVEC MEMOIRE A SEMI-CONDUCTEUR

(54) Title: SEMICONDUCTOR MEMORY ASYNCHRONOUS PIPELINE

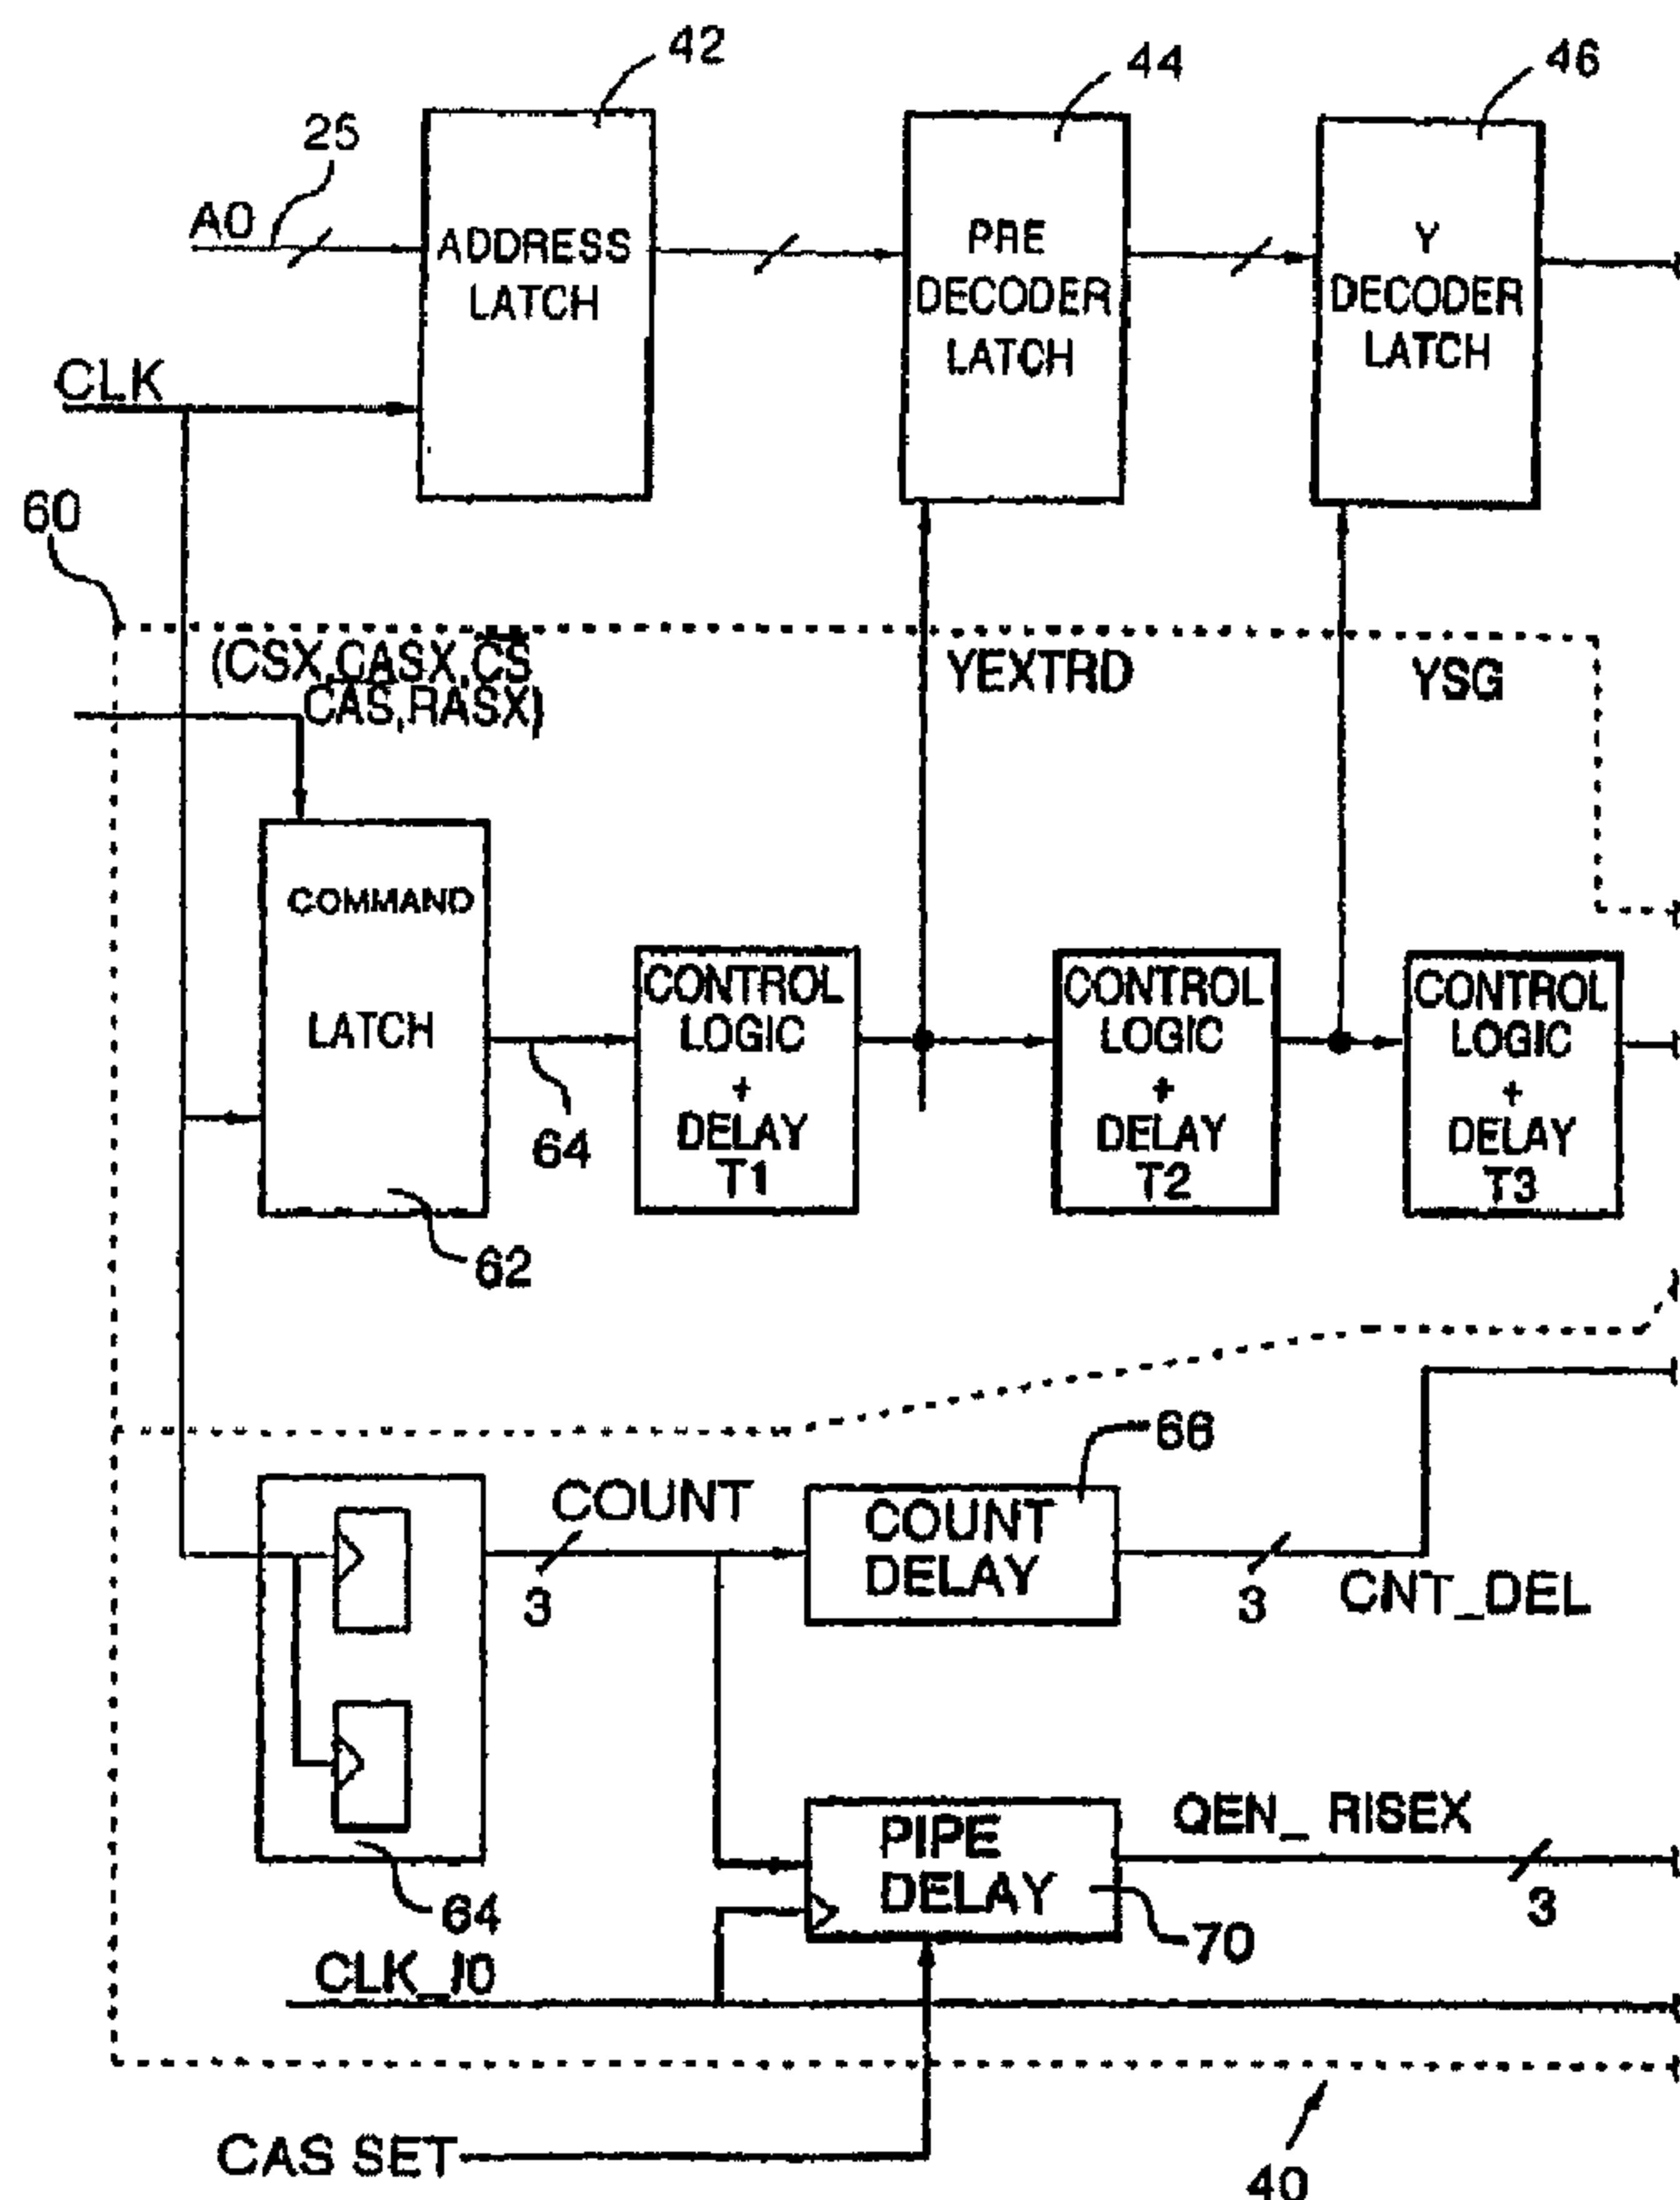

(57) Abrégé/Abstract:

An asynchronously pipelined SDRAM has separate pipeline stages that are controlled by asynchronous signals. Rather than using a clock signal to synchronize data at each stage; an asynchronous signal is used to latch data at every stage. The asynchronous

**(57) Abrégé(suite)/Abstract(continued):**

control signals are generated within the chip and are optimized to the different latency stages. Longer latency stages require larger delays elements, while shorter latency states require shorter delay elements. The data is synchronized to the clock at the end of the read data path before being read out of the chip. Because the data has been latched at each pipeline stage, it suffers from less skew than would be seen in a conventional wave pipeline architecture. Furthermore, since the stages are independent of the system clock, the read data path can be run at any CAS latency as long as the re-synchronizing output is built to support it.

## ABSTRACT

An asynchronously pipelined SDRAM has separate pipeline stages that are controlled by 5 asynchronous signals. Rather than using a clock signal to synchronize data at each stage, an asynchronous signal is used to latch data at every stage. The asynchronous control signals are generated within the chip and are optimized to the different latency stages. Longer latency stages require larger delays elements, while shorter latency states require 10 shorter delay elements. The data is synchronized to the clock at the end of the read data path before being read out of the chip. Because the data has been latched at each pipeline stage, it suffers from less skew than would be seen in a conventional wave pipeline architecture. Furthermore, since the stages are independent of the system clock, the read data path can be run at any CAS latency as long as the re-synchronizing output is built to support it.

## SEMICONDUCTOR MEMORY ASYNCHRONOUS PIPELINE

The present invention relates to semiconductor memories and, more particularly, to a pipelined data access in a dynamic random access memory.

5

### BACKGROUND OF THE INVENTION

In conventional non-pipelined dynamic random access memories (DRAMs) a data transfer to and from the memory is performed in sequence. That is, when a read or a write command is received and an address is made available, the data transfer according 10 to either a read or write command is performed in its entirety before another command is accepted by the memory. This results in subsequent commands being delayed by the time it takes for the current data transfer to complete.

Historically, DRAMs have been controlled asynchronously by the processor. This means that the processor puts addresses on the DRAM inputs and strobes them in 15 using the row address select signal (RAS) and column address select signal (CAS) pins. The addresses are held for a required minimum length of time. During this time, the DRAM accesses the addressed locations in memory and after a maximum delay (access time) either writes new data from the processor into its memory or provides data from the memory to its outputs for the processor to read.

20 During this time, the processor must wait for the DRAM to perform various internal functions such as precharging of the lines, decoding the addresses and such like. This creates a "wait state" during which the higher speed processor is waiting for the DRAM to respond thereby slowing down the entire system.

One solution to this problem is to make the memory circuit synchronous, that is, 25 add input and output latches on the DRAM which can hold the data. Input latches can store the addresses, data, and control signals on the inputs of the DRAM, freeing the processor for other tasks. After a preset number of clock cycles, the data can be available on the output latches of a DRAM with synchronous control for a read or be written into its memory for a write operation.

30 Synchronous control means that the DRAM latches information transferred between the processor and itself under the control of the system clock. Thus, an advantage of the synchronous DRAMs is that the system clock is the only timing edge

that must be provided to the memory. This reduces or eliminates propagating multiple timing strobes around the printed circuit board.

Alternatively, the DRAM may be made asynchronous. For example, suppose a DRAM with a 60ns delay from row addressing to data access is being used in a system 5 with 10 ns clock, then the processor must apply the row address and hold it active while strobing it in with the  $(\overline{RAS})$  pin. This is followed 30ns later by the column address which must be held valid and strobed in with the  $(\overline{CAS})$  pin. The processor must then wait for the data to appear on the outputs 30ns later, stabilize, and be read.

On the other hand, for a synchronous interface, the processor can lock the row and 10 column addresses (and control signals) into the input latches and do other tasks while waiting for the DRAM to perform the read operation under the control of the system clock. When the outputs of the DRAM are clocked six cycles (60ns) later, the desired data is in the output latches.

A synchronous DRAM architecture also makes it possible to speed up the average 15 access time of the DRAM by pipelining the addresses. In this case, it is possible to use the input latch to store the next address which the processor while the DRAM is operating on the previous address. Normally, the addresses to be accessed are known several cycles in advance by the processor. Therefore, the processor can send the second address to the input address latch of the DRAM to be available as soon as the first 20 address has moved on to the next stage of processing in the DRAM. This eliminates the need for the processor to wait a full access cycle before starting the next access to the DRAM.

An example of a three stage column address pipeline is shown in the schematic 25 diagram of figure 1(a). The column address-to-output part is a three stage pipeline. The address buffer is the first latch. The column switch is the second latch and the output buffer is the third latch. The latency inherent in the column access time is therefore divided up between these three stages.

The operation of pipelined read may be explained as follows: the column address 30 (1) is clocked into the address buffer on one clock cycle and is decoded. On the second clock cycle, the column switch transfers the corresponding data (D1) from the sense amplifier to the read bus and column address (A2) is clocked into the address buffer. On

a clock three, the data (D1) is clocked into the output buffer, (D2) is transferred to the read bus and A3 is clocked into the column address buffer. When D1 appears at the output, D2 and D3 are in the pipeline behind it. For a more detailed discussion of the present technology, the reader is referred to a book entitled "High Performance

5      *Memories*" by Betty Prince.

The delay in the number of clock cycles between the latching CAS in a SDRAM and the availability of the data bus is the "CAS latency" of the SDRAM. If the output data is available by the second leading edge of the clock following arrival of a column address, the device is described as having a CAS latency of two. Similarly, if the data is 10 available at the third leading edge of the clock following the arrival of the first read command, the device is known as having a "CAS latency" of three.

Synchronous DRAMs (SDRAM) come with programmable CAS latencies. As described above, the CAS latency determines at which clock edge cycle data will be available after a read command is initiated, regardless of the clock rate (CLK). The 15 programmable CAS latencies enable SDRAMs to be efficiently utilized in different memory systems having different system clock frequencies without affecting the CAS latency.

There are other ways to divide an SDRAM data path into latency stages. A wave pipeline is shown schematically in figure 1(b). A regular clocked pipeline has the 20 disadvantage that the read latency will be equal to the delay of the slowest pipeline stage (i.e. longest delay) multiplied by the number of pipeline stages. A clocked pipeline with adjusted clocks uses clock signals that have been adjusted to each pipeline stage so that longer pipeline stages may be accommodated without impacting the read latency. A longer pipeline stage will be ended with a clock that is more delayed than the clock that 25 starts the pipeline stage. A shorter pipeline stage will be started with a clock that is more delayed than the clock that ends the pipeline stage. A disadvantage of this scheme is that different adjustments to the clock are needed for each CAS latency supported by the chip. Also, architecture changes can have a large impact on the breakdown of the latency stages, requiring designers to readjust all the clocks to accommodate the new division of 30 latency stages.

Furthermore there are a limited number of places where a latency stage can be inserted without adding extra latency or chip area. Multiple latency stages have a disadvantage in that not all latency stages will be equal in the time needed for signals to propagate through the stage. Another complication is the need to enable or disable 5 latency stages depending on the CAS latency at which the chip has been programmed to operate.

In the wave pipeline of figure 1(b) runs pulses of data through the entire read data path. A wave pipeline relies on an ideal data path length, that is it assumes that all data paths are equal. However, data retrieved from certain memory cells in a memory array 10 will be inherently faster than data retrieval from other memory cells. This is primarily due to the physical location of the memory cells relative to both the read in and read out data path. Thus data must be resynchronized before being output from the chip. This data path skew makes it difficult to safely resynchronize the retrieved data in a wave pipeline implementation.

15 If address signals are applied to a data path with a cycle time which exceeds the memory access time, then the data which is read from the memory is not output during the inherent delay of the memory core. In other words, in the wave pipeline technique address input signals are applied with a period, which is less than the critical path of the memory core section.

20 Furthermore as illustrated in figures 2(a) and 2(b) with a slow clock it is necessary to store the output data of the wave pipeline until the data is needed.

#### SUMMARY OF THE INVENTION

The present invention thus seeks to mitigate at least some of the various 25 disadvantages described with respect to the current art.

In accordance with this invention there is provided pipelined SDRAM comprising:

(a) a memory core;  
 (b) a read path, defined between an address input port and an I/O data output 30 port;

- (c) a plurality of pipeline stages located in said read path, each controlled by a corresponding one of a plurality of asynchronous control signals;
- (d) a timing delay element for generating said asynchronous control signals;
- (e) latches associated with each of said plurality of pipeline stages responsive to said asynchronous control signal to latch data at each of said stages; whereby data is latched at every pipeline stage independent of said system clock.

5 In accordance with a further aspect of this invention the asynchronous control signals are generated within the chip and optimized to the different latency stages.

10 A still further aspect of the invention provides stages that are independent of the system clock thereby allowing the read data path to be run at any CAS latency which may be supported by a suitable resynchronizing output.

A still further aspect of the invention provides for a synchronization circuit coupled to the end of the read data path for synchronizing the output data to a system clock

In accordance with another aspect of the invention, there is provided a synchronous DRAM device comprising; a memory having addressable memory elements; a plurality of read amplifiers for sensing N bits of read data from the memory; a plurality of latches for receiving data from the read amplifiers, said latches organized in M groups of N latches each, each group latching the data from the read amplifiers at one time; a counter for enabling a single group of latches at one time; a delay locked loop for providing an output clock signal synchronized to a system clock input signal; and a plurality of data output buffers for latching outputs of the plurality of latches on edges of the output clock signal and providing output data synchronized with edges of the system clock input signal.

In accordance with another aspect of the invention, there is provided a method of providing a data output, comprising: sensing, via a plurality of read amplifiers, N bits of read data from a memory having addressable memory elements; receiving the data to a plurality of latches, said latches organized in M groups of N latches each, each group latching the data from the read amplifiers at one time; enabling, via a counter, a single group of latches at one time; providing an output clock signal synchronized to a system clock input signal; latching outputs of the plurality of latches on edges of the output clock signal; and providing output data synchronized with edges of the system clock input signal.

## BRIEF DESCRIPTION OF THE DRAWINGS

A better understanding of the invention will be obtained by reference to the detailed description below in conjunction with the following drawings in which:

Figure 1(a) is a schematic diagram of a conventional clocked pipeline memory circuit;

Figure 1(b) is a schematic diagram of a conventional wave pipeline memory circuit;

Figures 2(a) and 2(b) are timing waveforms for a SDRAM having a CAS latency of 3 running under fast and slow clock conditions respectively;

Figure 3 is a schematic diagram of a generalized embodiment of the present invention;

Figure 4 is a more detailed schematic diagram of the generalized embodiment of figure 3;

Figure 5 is a timing waveform diagram according to a first embodiment of the present invention;

Figures 6A, 6A', 6A'', 6A''', 6B and 6C show detailed circuit diagrams of a pipe control circuit according to an embodiment of the present invention;

Figures 7A, 7A', 7A'', 7B, 7B' and 7C show detailed circuit diagrams for a pipe latch and data output latch according to an embodiment of the present invention; and

5 Figure 8 is a schematic diagram of a data output control circuit according to an embodiment of the present invention.

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

In the following discussion, like numerals refer to like elements in the figures and signals asserted low are indicated interchangeably with an x or an overscore associated with the corresponding signal name. Referring now to Figure 3, a schematic diagram of a pipelined semiconductor memory according to a generalized embodiment of the invention is shown generally by numeral 20. The memory includes a core memory array 22 having a read path 24, defined between an address input port 25 and a data output 32.

10 The read path 24 is broken up into latency stages 27, each of which is latched by respective asynchronous control signals 28. A synchronizing circuit 30 is coupled to the last latency stage of the read path in order to resynchronize the data to the system clock CLK at output 32 of the read path. The data is synchronized to the system clock CLK a predetermined number of clock cycles after the application of an address signal A to the address input 25, i.e depending on the CAS latency of the system. The segmentation of the read path 23 into the three main latency stages, each controlled by respective control signals 28 illustrates, in general, the combining of clocked and wave pipeline techniques to achieve an asynchronous pipeline implementation according to the invention which exhibits less skew than a conventional wave pipeline but which allows for operation with

15 any CAS latency without having to adjust individual clocks in each stage as would be required in a clocked pipeline implementation. The description with respect to figure 3 serves to provide an overview of the detailed circuits discussed below.

20

25

Thus, referring to figures 4A and 4B a detailed schematic diagram of the generalized embodiment of figure 3 is shown by numeral 40. The latency stages 26 in figure 3 include an address input latch 42, for receiving an address signal  $A_i$  at the address input port 25, the output of which is coupled to an address pre-decoder latch 44 which is in turn

connected to a column address decoder latch 46. The column address decoder latch 46 decodes the address signal and is coupled to select memory cells 48 in the memory cell array 22. The column address decoder 46 activates relevant sense amplifiers (not shown) for detecting the data read out from a selected memory cell 48. The output of the sense amplifiers is coupled to a read main amplifier block 50 via a local databus DB, which is 32-bits wide in this embodiment. The output of the read main amplifier 50 is coupled to a global databus GDB. A multiplexer 52 multiplexes the GDB onto an I/O databus IODB, which is in turn coupled to a read databus amplifier RDBAMP latch block 54.

The synchronizing circuit 30 of figure 3 is comprised of pipe latches 56, an output buffer 58 and control circuitry shown by block 61. More specifically, the output from the RDBAMP latch is selectively coupled to the input of three pipe latches pipe\_latch0, pipe\_latch1 and pipe\_latch2 as will be described below. The outputs from the pipe latches are connected together and coupled to the input of the output buffer 58.

The memory also includes a command latch circuit 62 having a clock input terminal coupled to the system clock CLK and a command input terminal for receiving command signals such as  $\overline{\text{RAS}}$ ,  $\overline{\text{CAS}}$ ,  $\overline{\text{CS}}$ . The command latch 62 provides a first control signal 64, which is run through a series of control logic and delay elements T1 to T4. Each of the delay elements T1, T2, T3 and T4 produce respective delayed control signals that are fed to an input latch terminal of the pre-decoder latch 44, the Y decoder 46, the RMA 50 and the RDBAMP latch 54, respectively. These signals serve as individual asynchronous control signals for these circuits. On the other hand, the address latch clock input is derived directly from the system clock signal CLK.

Control of the pipe latches pipe\_latch0, pipe\_latch1 and pipe\_latch2 is provided by the pipe latch control circuitry 61. Each pipe latch is driven by a respective pipe latch enable signal, latch\_enx(0), latch\_enx(1) and latch\_enx(2) coupled to its latch input enable terminal. The pipe latch enable signals are derived from a pipe counter 64 which produces three count signals COUNT. The pipe counter is a free running counter which resets its count based on the total number of pipe latches. After a preset number of clock counts set by the system clock signal coupled to the pipe counter clock input terminal.

The output COUNT signals from the pipe counter are coupled via count delay elements 66 to count synchronization latches 68. The outputs from the three latches 68 provide the

pipe latch enable signal for clocking the appropriate pipe latch 56. The clock input enable terminal of the latches 68 are coupled to the asynchronous control signal of the latency stage in the read path, in this case, signal IODB\_READX of the RDBAMP 54 to ensure the pipe latch is latched at the appropriate time.

5        Alternatively, a more accurate synchronization of the data IODB\_READX and the CNT\_DEL signals in latch 68 can be achieved as follows:

      the count delay circuitry 66 could be segmented into multiple delay stages, each receiving control logic enable signals such as YSG or Y\_EXTRD. The timing relationship between the address propagation and data retrieval and the clock count delay  
10      would therefore be more closely matched.

      Additionally, the output COUNT of pipe counter 64 is connected to a pipe delay element 70 for generating a pipe latch output enable signal QEN\_RISEX which is connected to the respective output enable terminal of the pipe latches 56. A CLK\_IO signal which is DLL generated and slightly leads the system clock CLK, is coupled to an  
15      output enable terminal of the pipe delay and the output buffer 58. The DLL (delay locked loop) ensures that CLK\_IO will enable the output buffer to properly synchronize data with the system clock edge.

      The operation of the circuit will be explained as follows with reference to the timing diagram shown in Figure 5. At time  $t_0$  of the system clock signal CLK the  
20      address latch 42 latches the external address signal  $A_i$ , which is then free to propagate to pre-decoder latch 44 which latches the address after a delay  $T1$  set by the delay element  $T1$ . These address signals are decoded in the Y decoder 46 and latched by the signal YSG delayed from CLK by  $T1$  and  $T2$ . At this time the appropriate columns are activated and data is read out from the memory cells into column sense amplifiers and  
25      then latched in the RMA 50 by the IOREAD signal which is delayed from CLK by  $T1 + T2 + T3$ . Shortly thereafter, the data is available on the global data bus GDB. The RDBAMP 54 may now be latched at time  $t_1$  by signal IODB\_READ that is delayed from IOREAD by  $T4$ , to provide the DOUTE signal.

      In general as described above, these asynchronous control signals are used to  
30      control the pipeline stages. These signals control when data is read into the latch (usually a latched amplifier). Once read into the latch, data is free to propagate toward the next

stage. Each control signal is generated by delaying the control signal from the previous latency stage. The first stage is started by the external clock CLK. The next stage will latch data from the previous stage on the control signal that is delayed from the external clock. It may be noted that some of these delays are inherent in the circuits used to

5 control whether a read is to take place, while some of the delays are deliberately added using timing delay elements. These are usually comprised of buffers sized to run slowly and which may include additional resistive or capacitive elements.

Thus the delays T1 to T4 can be optimized to the particular memory independent of the external clock timing. The delay for each of these latches is selected to

10 accommodate the propagation delays between these blocks. Thus the clock signal applied to the read main amplifier latch is synchronized and delayed from the clock signal applied to the column decoder latch to accommodate the lag in retrieving data from different areas of the memory array 22 to the read main amplifier 50.

The data once latched in the RDBAMP 54 at time  $t_1$ , must as with the

15 conventional wave pipelines, be resynchronized to the system clock CLK at the output 32 of the memory. This is accomplished as follows. The pipe latches 56 allow data to be stored in the event of fast data or a slow clock. Generally, the number of latches needed is equivalent to the number of latency stages to be supported. Each time a read is performed, a COUNT signal, one of these is shown in figure 5, is delayed

20 asynchronously by the count delay element 66 and clocked by the control signal for the last stage in this case IODB\_READ into a clock synchronizing latch 68. This time delayed COUNT signal generates LATCH\_EN which determines which of the latches 56 the data from RDBAMP 54 is to be stored in. Furthermore the COUNT signal is also delayed by the appropriate number of clock cycles, as determined by the current CAS

25 latency to which the chip is programmed. This clock delayed COUNT signal shown as QEN\_RISE in figure 5 controls which of the latches 56 has its output enabled to output data to the output buffer 58. Once COUNT has been set, after the delay through count delay circuitry 66, a CNT\_DEL signal is generated which is combined in the clock synchronizing latch 68 with the IODB\_READX signal to generate the LATCH\_ENX signal. After the predetermined clock delay in the pipe delay circuit to QEN\_RISEX is

asserted allowing output from the latch containing the data for the appropriate clock cycle. The latches 56 work as a FIFO register, with the first data input to one of the set of latches 56, being the first data to be output from the set of latches.

Thus from the above description it may be seen that the latches in the read path, 5 segment the path into latency stages of an asynchronous pipeline. The chip architecture and the maximum operating frequency determine the number and placement of these stages. In general, a higher operating frequency will require a large number of shorter pipeline stages. Other techniques can be used such as doubling the number of data paths in a stage and alternating between the data paths. For example, a read output from the 10 sense amplifiers is alternated between two data buses. This is described in Mosaid Patent No. 5,416,743. The placement of the stages will generally be dictated by the position of amplifiers or buffers, which may be converted into latches without resulting in extensive area penalty. For clarity, in the previous and following discussion latency stages refer to any circuit element capable of introducing a delay in the signal or data path.

15 Turning now to figures 6 to 8, a detailed implementation of the generalized embodiment of figure 4 is shown. Accordingly, referring to figures 6A, 6A', 6A" and 6A'', the pipe control circuitry 61 includes a pipe counter 90, a detailed schematic of which is shown in figure 6b, for producing a two digit binary count, COUNT 0 and COUNT 1, determined by the input system clock frequency at its clock input terminal CLK. Each of the count lines, 20 COUNT 1 and COUNT 0 are connected to respective count delay elements 92 and 94. The delayed count signals are connected to a count decoder 96 which decodes the input binary count to activate one of the three count delay lines 98, CNT0\_DEL, CNT1\_DEL, CNT2\_DEL. The signals on these delayed count lines 98 correspond to the COUNT signal as shown in figure 5. In figure 5, all elements were shown with only one of the 25 three components for simplicity with the exception of the three pipe latches. The delayed COUNT signals 98 are coupled to the inputs of respective clocked latches 100, the outputs of which are buffered and provide the respective latch enable signal referred to in figure 5, LATCH\_ENX(0), LATCH\_ENX(1), LATCH\_EN(2). The clock input terminal of these latches 100 is coupled to the IODEB\_READ asynchronous control signal from 30 the last latency stage via an inverter.

The pipe counter 90 also has its output connected to a second decoder 102 also providing respective count signals, CNT 0, CNT 1 and CNT 2, which are coupled to respective pipe delay elements 104, 106 and 108. A detailed circuit diagram of the pipe delay circuit implementation is shown in figure 6c. The output of the pipe delay is

5 controlled by a CLK\_IO signal and generates the QEN\_RISE signal referred to in figure 5 connected to the output latch enable of the pipe latches 56. Corresponding QEN\_FALL signals are generated for the falling edge of the system clock whereas QEN\_RISE corresponds to the rising edge of the system clock.

Referring to figures 7A, 7A', 7A'', 7B and 7B', a detailed schematic of the pipe latches 56 and 10 the output buffer circuitry is shown. As may be seen in figures 7A, 7A' and 7A'', the data bits from the IODB databus are received at the input of the RDB amplifiers 110. Two RDBAMPS are shown in this implementation because of the double data rate (DDR) where data is clocked on both the rise and fall edges of the system clock. The outputs from the RDBAMPS are connected to a series of six pipe latches 112 to 122. Six latches are 15 required instead of three due to the DDR implementation. The enable inputs of the pipe latches 112 to 122 are coupled to the respective latch enable signals derived from the circuit of figure 6a. The top three pipe latches 112 to 116 have their outputs connected to inputs of a 3 OR 2 NAND gate 124. Similarly, the bottom three latches 118 to 122 have the outputs connected to a 3 OR 2 NAND gates 126. The QEN\_RISE signal is 20 connected to the inputs of the 3 OR 2 NAND gate 124, the output of which, when enabled, couples data to the DOUT\_RISE, DOUT\_RISEX input of the output buffer shown in figures 7B and 7B'. As may also be seen in figures 7A, 7A' and 7A'', a system clock control signal EDGE is provided for directing data to the top three or bottom three latches, once again a DDR feature. Also, for a fast system clock relative to the speed of the data path the 3 OR 25 2 NAND gates 124 or 126 will be already on thus allowing data to pass through to the output buffer from the pipe latches. In the alternative, with a slow clock, the system receives the data and waits for the clock, thus utilizing the 3 OR 2 NAND gates 124 or 126. Turning back to figures 7B and 7B', the data output buffer 58 as shown in figures 4A, 4B is 30 comprised of data output latches 130 to 136. The input enable terminals of the data output latches 130 to 136 are coupled to the CLK\_IO signal for synchronizing to the

correct system clock edge. A detailed circuit implementation of the pipe latches 112 to 122 is shown in figure 7c.

Thus, it may be seen that the present invention provides a flexible method for implementing a pipelined semiconductor memory, which can easily accommodate both a 5 fast and slow system clock. Furthermore, the flexible design allows further segmentation of the read path for more precise matching of internal signals. Furthermore, various CAS latencies may be accommodated by simply delaying the output from the pipe delay element 70 to wait a specific number of clock cycles before clocking the data out.

Although the invention has been described with reference to certain specific 10 embodiments, various modifications thereof will be apparent to those skilled in the art without departing from the scope of the invention as outlined in the claims appended hereto.

**CLAIMS:**

1. A pipelined synchronous dynamic random access memory comprising:
  - (a) a memory core having addressable memory elements;
  - 5 (b) a read path, defined between an address input port and an I/O data output port; said memory core being included in said read path, and said read path including one or more pipeline stages, each of said pipeline stages including a latch responsive to a corresponding asynchronous control signal;
  - (c) delay elements associated with each of said pipeline stages for generating said 10 asynchronous control signals, which are delayed versions of a system clock, each of said delay elements having a latency corresponding to a latency of its associated one of said pipeline stages, such that each of said pipeline stages may be controlled independently of said system clock.
- 15 2. A memory as defined in claim 1, including synchronization circuit coupled to said I/O data output port for synchronizing the output data to a system clock.
3. A memory as defined in claim 2, said synchronization circuit including a plurality of 20 pipe latches coupled in parallel, and each responsive to respective pipe control signals for sequentially inputting data into successive latches.
4. A memory as defined in claim 3, said pipe control signals being generated by a pipe counter, said counter including pipe delay elements coupled to an output thereof.
- 25 5. A memory as defined in claim 2, said synchronization circuit including:
  - (a) a plurality of output latches for latching said output data;
  - (b) a latch signal generator for sequentially generating from said system clock:
    - i. a set of latch input enable signals, each having a predetermined delay with respect to said system clock; and

ii. a set of latch output enable signals, wherein each of said output enable signals is delayed in accordance with a column address select latency of said pipelined memory; and

5 (c) a delay latch circuit for coupling said latch output enable signals to said output latches synchronous with said system clock.

6. A method for pipelining a synchronous a synchronous dynamic random access memory, said method comprising the steps of:

10 (a) defining a read path between an address input port and an I/O data port of a memory core having addressable memory elements, said read path including one or more pipeline stages;

(b) latching data from said I/O port in response to a system clock;

15 (c) generating asynchronous control signals from a master control signal, each of said asynchronous control signals generated in accordance with a latency of an associated one of said pipeline stages; and

(d) controlling said pipeline stages with said asynchronous control signals whereby data latched in each of said pipeline stage is timed independently of said system clock.

7. A double data rate (DDR) pipelined synchronous dynamic random access memory  
20 comprising:

(a) a memory core having addressable memory elements;

25 (b) a read data path, defined between an address input pan and an J/Q data output port; said memory core being included in said read path, and said read path including first and second groups of pipeline stages, each of said pipeline stages including a latch responsive to a corresponding asynchronous control signal;

(c) an edge detector for detecting rise and fall edges of a system clock,

(d) means for directing address data to said first and second groups of pipeline stages in accordance with said rise and fall edges, respectively; and,

30 (e) delay elements associated with each of said pipeline stages for generating said asynchronous control signals, which are delayed versions of said rise and fall edges of said

system clock, each of said delay elements having a latency corresponding to a latency of its associated one of said pipeline stages, such that each of said pipeline stages is controlled independently of said system clock.

5 8. A memory as defined in claim 7, including a synchronization circuit coupled to said I/O data output port for synchronizing output data to said rise and fall edges of said system clock.

10 9. A memory as defined in claim 8, said synchronization circuit including a plurality of pipe latches coupled in parallel, and each responsive to respective pipe control signals for sequentially inputting said output data into successive latches.

10. A memory as defined in claim 9, said pipe control signals being generated by a pipe counter, said counter including pipe delay elements coupled to an output thereof.

15 11. A memory as defined in claim 8, said synchronization circuit including:  
(a) a plurality of output latches for latching said output data;  
(b) a latch signal generator for sequentially generating from said rise and fall edges of said system clock:

20 i. a set of latch input enable signals, each having a predetermined delay with respect to said rise and fall edges; and,  
ii. a set of latch output enable signals, wherein each of said output enable signals is delayed in accordance with a column address select latency of said pipelined memory; and,  
25 (c) a delay latch circuit for coupling said latch output enable signals to said output latches synchronous with said rise and fall edges of said system clock.

12. A memory as defined in claim 7, said first and second groups of pipeline stages have at least three stages each.

30

13. A memory as defined in claim 7, said latency being a delay in a signal or data path.
14. A memory as defined in claim 7, said latency being defined by a timing delay element.
- 5 15. A memory as defined in claim 7, each said pipeline stage having one said latch.
16. A memory as defined in claim 9, said plurality of pipe latches including first and second groups of pipe latches associated with said rise and fall edges, respectively.
- 10 17. A memory as defined in claim 10, said pipe counter including a plurality of count delay stages for matching a delay of said pipe counter to a propagation delay of said address data and said output data.
18. A method for pipelining a double data rate (DDR) synchronous dynamic random access memory, said method comprising the steps of:
  - (a) defining a read path between an address input port and an I/O data port of a memory core having addressable memory elements, said read path including first and second groups of pipeline stages;
  - (b) detecting rise and fall edges of a system clock and directing address data to said first and second groups of pipeline stages in accordance with said rise and fall edges, respectively;
  - (c) latching data from said I/O port in response to said rise and fall edges;
  - (d) generating asynchronous control signals from a master control signal, each of said asynchronous control signals generated in accordance with a latency of an associated one of said pipeline stages; and,
  - (e) controlling said pipeline stages with said asynchronous control signals whereby data latched in each of said pipeline stages is timed independently of said system clock.
19. A pipelined synchronous dynamic random access memory comprising:
  - 30 an address input port;

a memory core having addressable memory elements; an I/O data output port; a read data path defined between said address input port and said I/O data output port, said read path including a plurality of pipeline stages, each pipeline stage including latches responsive to a corresponding asynchronous control signal; and

5 a delay element associated with each pipeline stage for generating said corresponding asynchronous control signals as delayed versions of a system clock,

wherein a first delay element is arranged to generate the control signal based on the system clock, subsequent delay elements in the pipeline are arranged to generate the control signals using the control signals generated by a preceding delay element in the pipeline, and  
10 each of said delay elements has a latency corresponding to a latency of its associated pipeline stage, such that the pipeline stages controlled by control signals generated by subsequent delay elements are controlled asynchronously to said system clock.

20. A memory as defined in claim 19, including a synchronization circuit coupled to said  
15 I/O data output port for synchronizing output data to said system clock.

21. A memory as defined in claim 20, wherein said synchronization circuit includes a plurality of pipe latches coupled in parallel, and each responsive to respective pipe control signals for sequentially inputting data into successive latches.

20

22. A memory as defined in claim 21, including a pipe counter for generating said pipe control signals, said pipe counter including pipe delay elements coupled to an output thereof.

25

23. A memory as defined in claim 20, said synchronization circuit including:  
a plurality of output latches for latching said output data;  
an output latch signal generator for sequentially generating from said system clock:  
i. a set of output latch input enable signals, each having a predetermined delay with respect to said system clock; and  
ii. a set of output latch output enable signals, each having a delay in accordance with a column address select latency of said pipelined memory; and

30

a delay latch circuit for coupling said output latch output enable signals to said output latches synchronous with said system clock.

24. A method for pipelining a synchronous dynamic random access memory; said method comprising the steps of:

defining a read path between an address input port and an I/O data port of a memory core having addressable memory elements, said path including one or more pipeline stages;

latching data from said I/O data port in response to a system clock; generating asynchronous control signals from a master control signal; and

10 controlling said pipeline stages with said asynchronous control signals;

wherein each of said asynchronous control signals is generated by delaying a control signal received from a previous pipeline stage in accordance with a latency of an associated one of said pipeline stages; and

15 said pipeline stages are controlled using said asynchronous control signals such that data latched in each of said pipeline stages is timed asynchronously to said system clock.

25. A method as defined in claim 24, including the step of synchronizing output data to said system clock.

20 26. A method as defined in claim 25, wherein said step of synchronizing said output data to said system clock includes the steps of:

(a) latching said output data in a plurality of output latches;

(b) sequentially generating from said system clock:

i. a set of output latch input enable signals, each having a predetermined delay

25 with respect to said system clock; and

ii. a set of output latch output enable signals, each having a delay in

accordance with a column address select latency of said pipelined memory; and

(c) enabling said output latch output enable signals synchronous with said system

clock.

30

27. A pipelined synchronous dynamic random access memory (SDRAM) comprising:  
a memory core having addressable memory elements;  
a read path, defined between an address input port and a data output port;  
the memory core being included in the read path, the read path including a plurality of  
5 pipeline stages, each of the plurality of pipeline stages including a latch responsive to a  
corresponding asynchronous control signal; and  
a plurality of delay elements associated with the plurality of pipeline stages for  
providing the asynchronous control signals, which comprise delayed versions of a system  
clock signal, each of the delay elements having a latency corresponding to a latency of its  
10 associated one of the plurality of pipeline stages, such that each of the plurality of pipeline  
stages is controlled independently of the system clock signal.

28. The SDRAM of claim 27, further comprising a delay locked loop (DLL) circuit  
configured to provide a DLL clock signal in response to the system clock signal.  
15

29. The SDRAM of claim 28, further comprising a data output buffer configured to output  
data in response to the DLL clock signal.

30. The SDRAM of claim 27, wherein one of the plurality of delay elements is configured  
20 to gate the system clock signal to provide the delayed version of the system clock signal as the  
asynchronous control signal.

31. The SDRAM of claim 30, wherein the other one of the plurality of delay elements is  
configured to gate the delayed version of the system clock as the asynchronous control signal  
25 provided from the one of the plurality of delay elements.

32. A pipelined double data rate synchronous dynamic random access memory (SDRAM)  
comprising:  
a memory core having addressable memory elements;

a read path, defined between an address input port and a data output port, the read path comprising a data output buffer;

the memory core being included in the read path, the read path including a plurality of pipeline stages, each of the plurality of pipeline stages including a latch responsive to a corresponding asynchronous control signal; and

5 a plurality of delay elements associated with the plurality of pipeline stages for providing the asynchronous control signals, which comprise delayed versions of a system clock signal, each of the delay elements having a latency corresponding to a latency of its associated one of the plurality of pipeline stages, such that each of the plurality of pipeline 10 stages is controlled independently of the system clock signal.

33. The SDRAM of claim 32, further comprising a delay locked loop (DLL) circuit having an output for providing a DLL clock signal to the data output buffer in response to the system clock signal, the data output buffer being configured to output data in response to the 15 DLL clock signal.

34. A pipelined double data rate synchronous dynamic random access memory (SDRAM) comprising:

20 a memory core having addressable memory elements;  
a read path, defined between an address input port and a data output port;  
the read path comprising at least one data output buffer, the memory core being included in the read path, the read path including a plurality of pipeline stages, each of the plurality of pipeline stages including a latch responsive to a corresponding asynchronous control signal; and

25 a plurality of delay elements associated with the plurality of pipeline stages for providing the asynchronous control signals, which comprise delayed versions of a system clock signal, each of the delay elements comprising a control logic circuit, such that each of the plurality of pipeline stages is controlled independently of the system clock signal.

35. The SDRAM of claim 34, further comprising a delay locked loop (DLL) circuit having an output for providing a DLL clock signal to the data output buffer in response to the system clock signal, the data output buffer being configured to output data in response to the DLL clock signal.

5

36. The SDRAM of claim 34, wherein the control logic circuit comprised in each of the delay elements is responsive to a corresponding control signal.

37. A double data rate synchronous dynamic random access memory comprising:

10 a memory core having addressable memory elements;

a read path, defined between an address input port and a data output port, the read path including the memory core, a data output buffer and a plurality of pipeline stages, the data output buffer being coupled to a delay locked loop (DLL) circuit configured to provide a clock signal, the data output buffer outputting data in response to rising and falling edges of 15 the clock signal, each of the plurality of pipeline stages including a latch responsive to a corresponding asynchronous control signal; and

20 a plurality of delay elements associated with the plurality of pipeline stages for providing the asynchronous control signals, which comprise delayed versions of a system clock signal, each of the delay elements comprising a control logic circuit, the control logic circuit of each of the delay elements being responsive to a corresponding control signal, such that each of the plurality of pipeline stages is controlled independently of the system clock signal.

38. A pipelined synchronous dynamic random access memory (SDRAM) comprising:

25 a memory core having addressable memory elements;

a read path, defined between an address input port and a data output port;

the memory core being included in the read path, the read path including a plurality of pipeline stages, each of the plurality of pipeline stages including a latch responsive to a corresponding asynchronous control signal; and

a plurality of delay elements associated with the plurality of pipeline stages, each of the plurality of delay elements being configured to provide the asynchronous control signal, the asynchronous control signal comprising a delayed version of a system clock signal, each of the plurality of delay elements having a latency corresponding to a latency of its associated one of the plurality of pipeline stages, such that each of the plurality of pipeline stages is controlled independently of the system clock signal.

39. The SDRAM of claim 38, further comprising a delay locked loop (DLL) circuit configured to provide a DLL clock signal in response to the system clock signal.

10

40. The SDRAM of claim 39, further comprising a data output buffer configured to output data in response to the DLL clock signal.

41. The SDRAM of claim 38, wherein one of the plurality of the asynchronous control signals is a gated version of the system clock signal.

15

42. The SDRAM of claim 41, wherein one of the plurality of delay elements is configured to gate the delayed version of the system clock as the asynchronous control signal provided from a previous one of the plurality of delay elements.

20

43. A pipelined double data rate synchronous dynamic random access memory (SDRAM) comprising:

a memory core having addressable memory elements;

a read path, defined between an address input port and a data output port, the read path

25 comprising a data output buffer;

the memory core being included in the read path, the read path including a plurality of pipeline stages, each of the plurality of pipeline stages including a latch responsive to a corresponding asynchronous control signal; and

30 a plurality of delay elements associated with the plurality of pipeline stages, each of the plurality of delay elements being configured to provide the asynchronous control signal,

the asynchronous control signal comprising a delayed version of a system clock signal, each of the plurality of delay elements having a latency corresponding to a latency of its associated one of the plurality of pipeline stages, such that each of the plurality of pipeline stages is controlled independently of the system clock signal.

5

44. The SDRAM of claim 43, further comprising a delay locked loop (DLL) circuit having an output for providing a DLL clock signal to the data output buffer in response to the system clock signal, the data output buffer being configured to output data in response to the DLL clock signal.

10

45. A pipelined double data rate synchronous dynamic random access memory (SDRAM) comprising:

a memory core having addressable memory elements;

a read path, defined between an address input port and a data output port;

15 the read path comprising at least one data output buffer, the memory core being included in the read path, the read path including a plurality of pipeline stages, each of the plurality of pipeline stages including a latch responsive to a corresponding asynchronous control signal; and

20 a plurality of delay elements associated with the plurality of pipeline stages, each of the plurality of delay elements being configured to provide the asynchronous control signal, the asynchronous control signal comprising a delayed version of a system clock signal, each of the plurality of delay elements comprising a control logic circuit, such that each of the plurality of pipeline stages is controlled independently of the system clock signal.

25 46. The SDRAM of claim 45, further comprising a delay locked loop (DLL) circuit having an output for providing a DLL clock signal to the data output buffer in response to the system clock signal, the data output buffer being configured to output data in response to the DLL clock signal.

47. The SDRAM of claim 45, wherein the control logic circuit comprised in each of the delay elements is responsive to a corresponding control signal.

48. A double data rate synchronous dynamic random access memory comprising:



5        a memory core having addressable memory elements;

      a read path, defined between an address input port and a data output port, the read path including the memory core, a data output buffer and a plurality of pipeline stages, the data output buffer being coupled to a delay locked loop (DLL) circuit configured to provide a clock signal, the data output buffer outputting data in response to rising and falling edges of

10      the clock signal, each of the plurality of pipeline stages including a latch responsive to a corresponding asynchronous control signal; and

      a plurality of delay elements associated with the plurality of pipeline stages, each of the plurality of delay elements being configured to provide the asynchronous control signal, the asynchronous control signal comprising a delayed version of a system clock signal, each

15      of the delay elements comprising a control logic circuit, the control logic circuit of each of the delay elements being responsive to a corresponding control signal, such that each of the plurality of pipeline stages is controlled independently of the system clock signal.

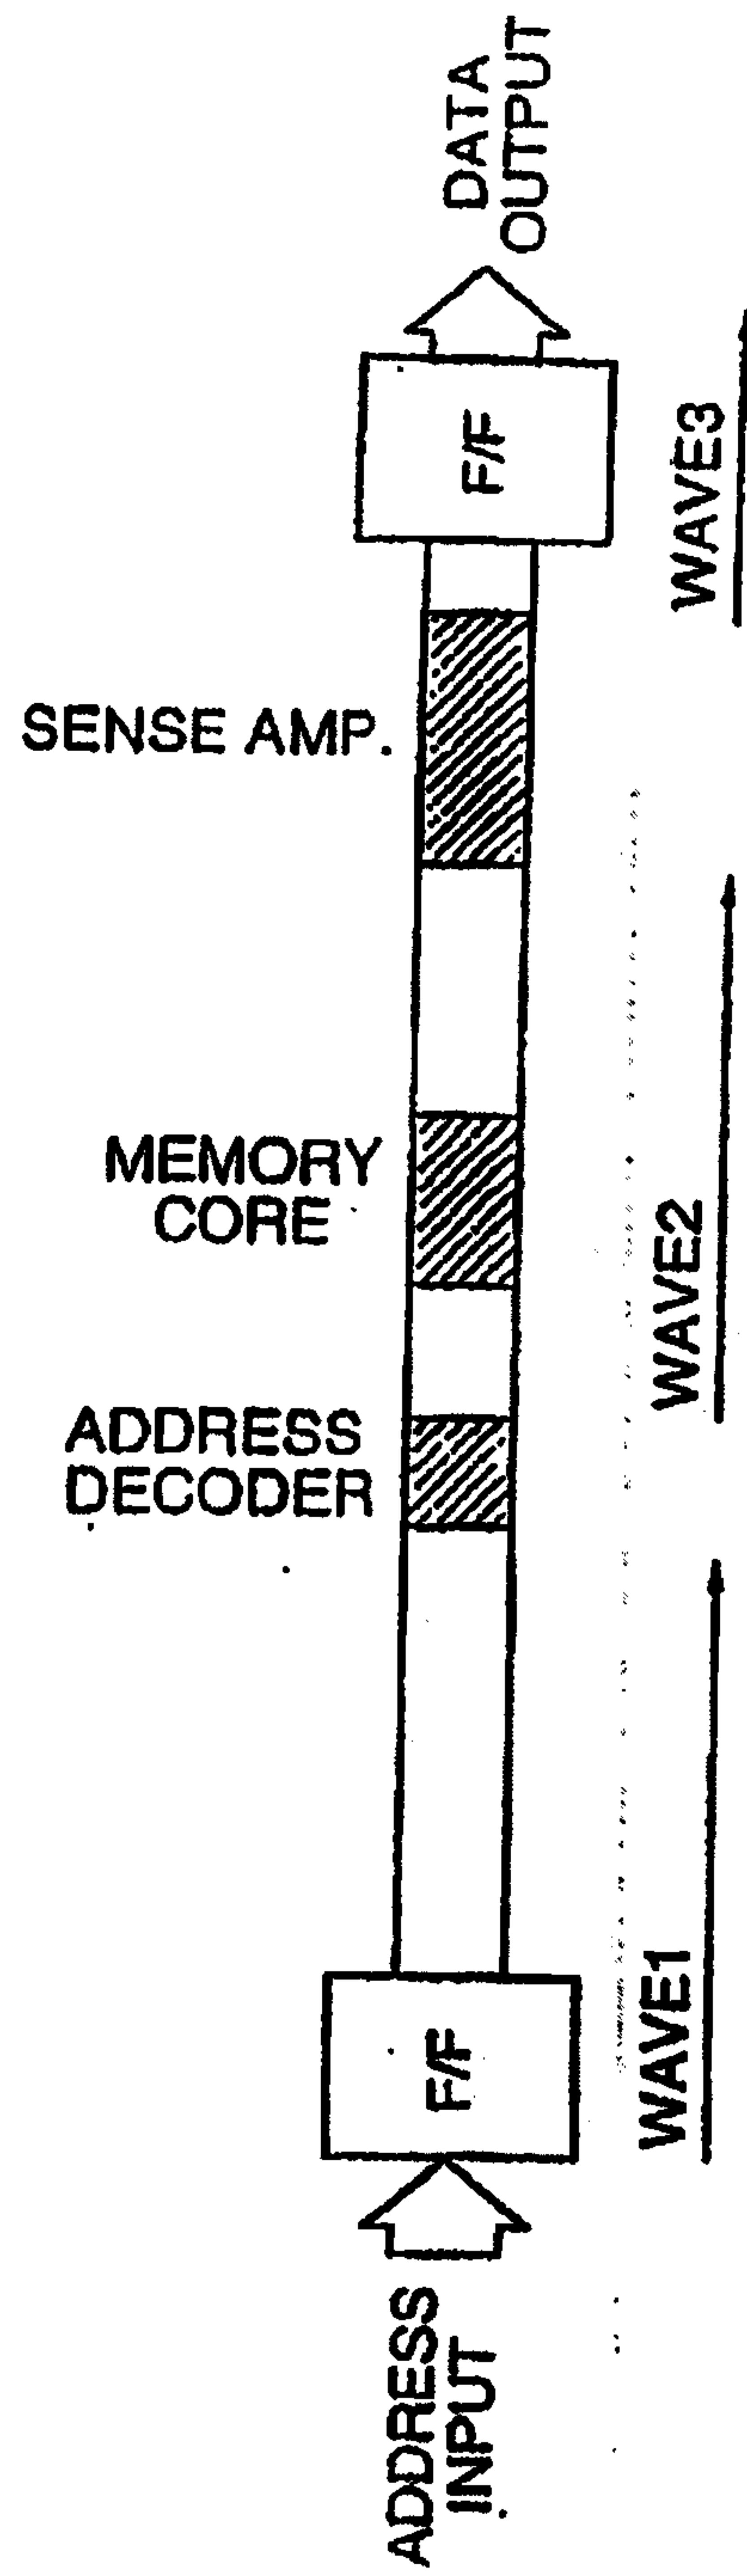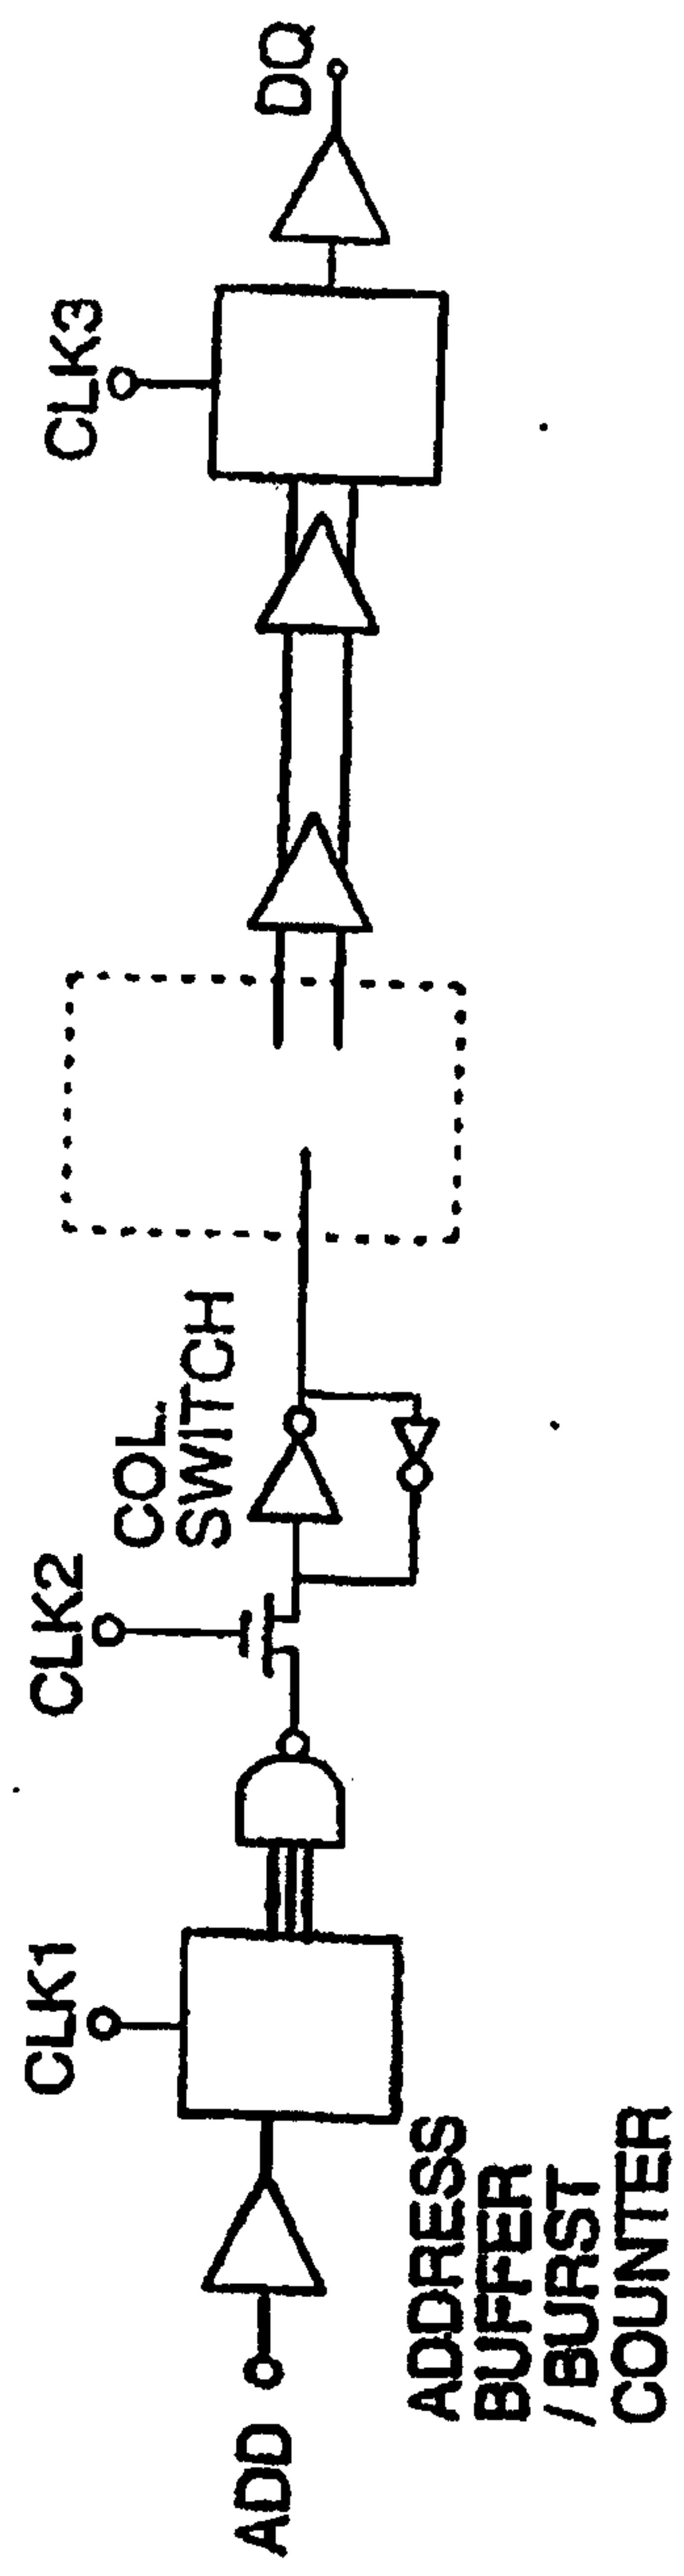

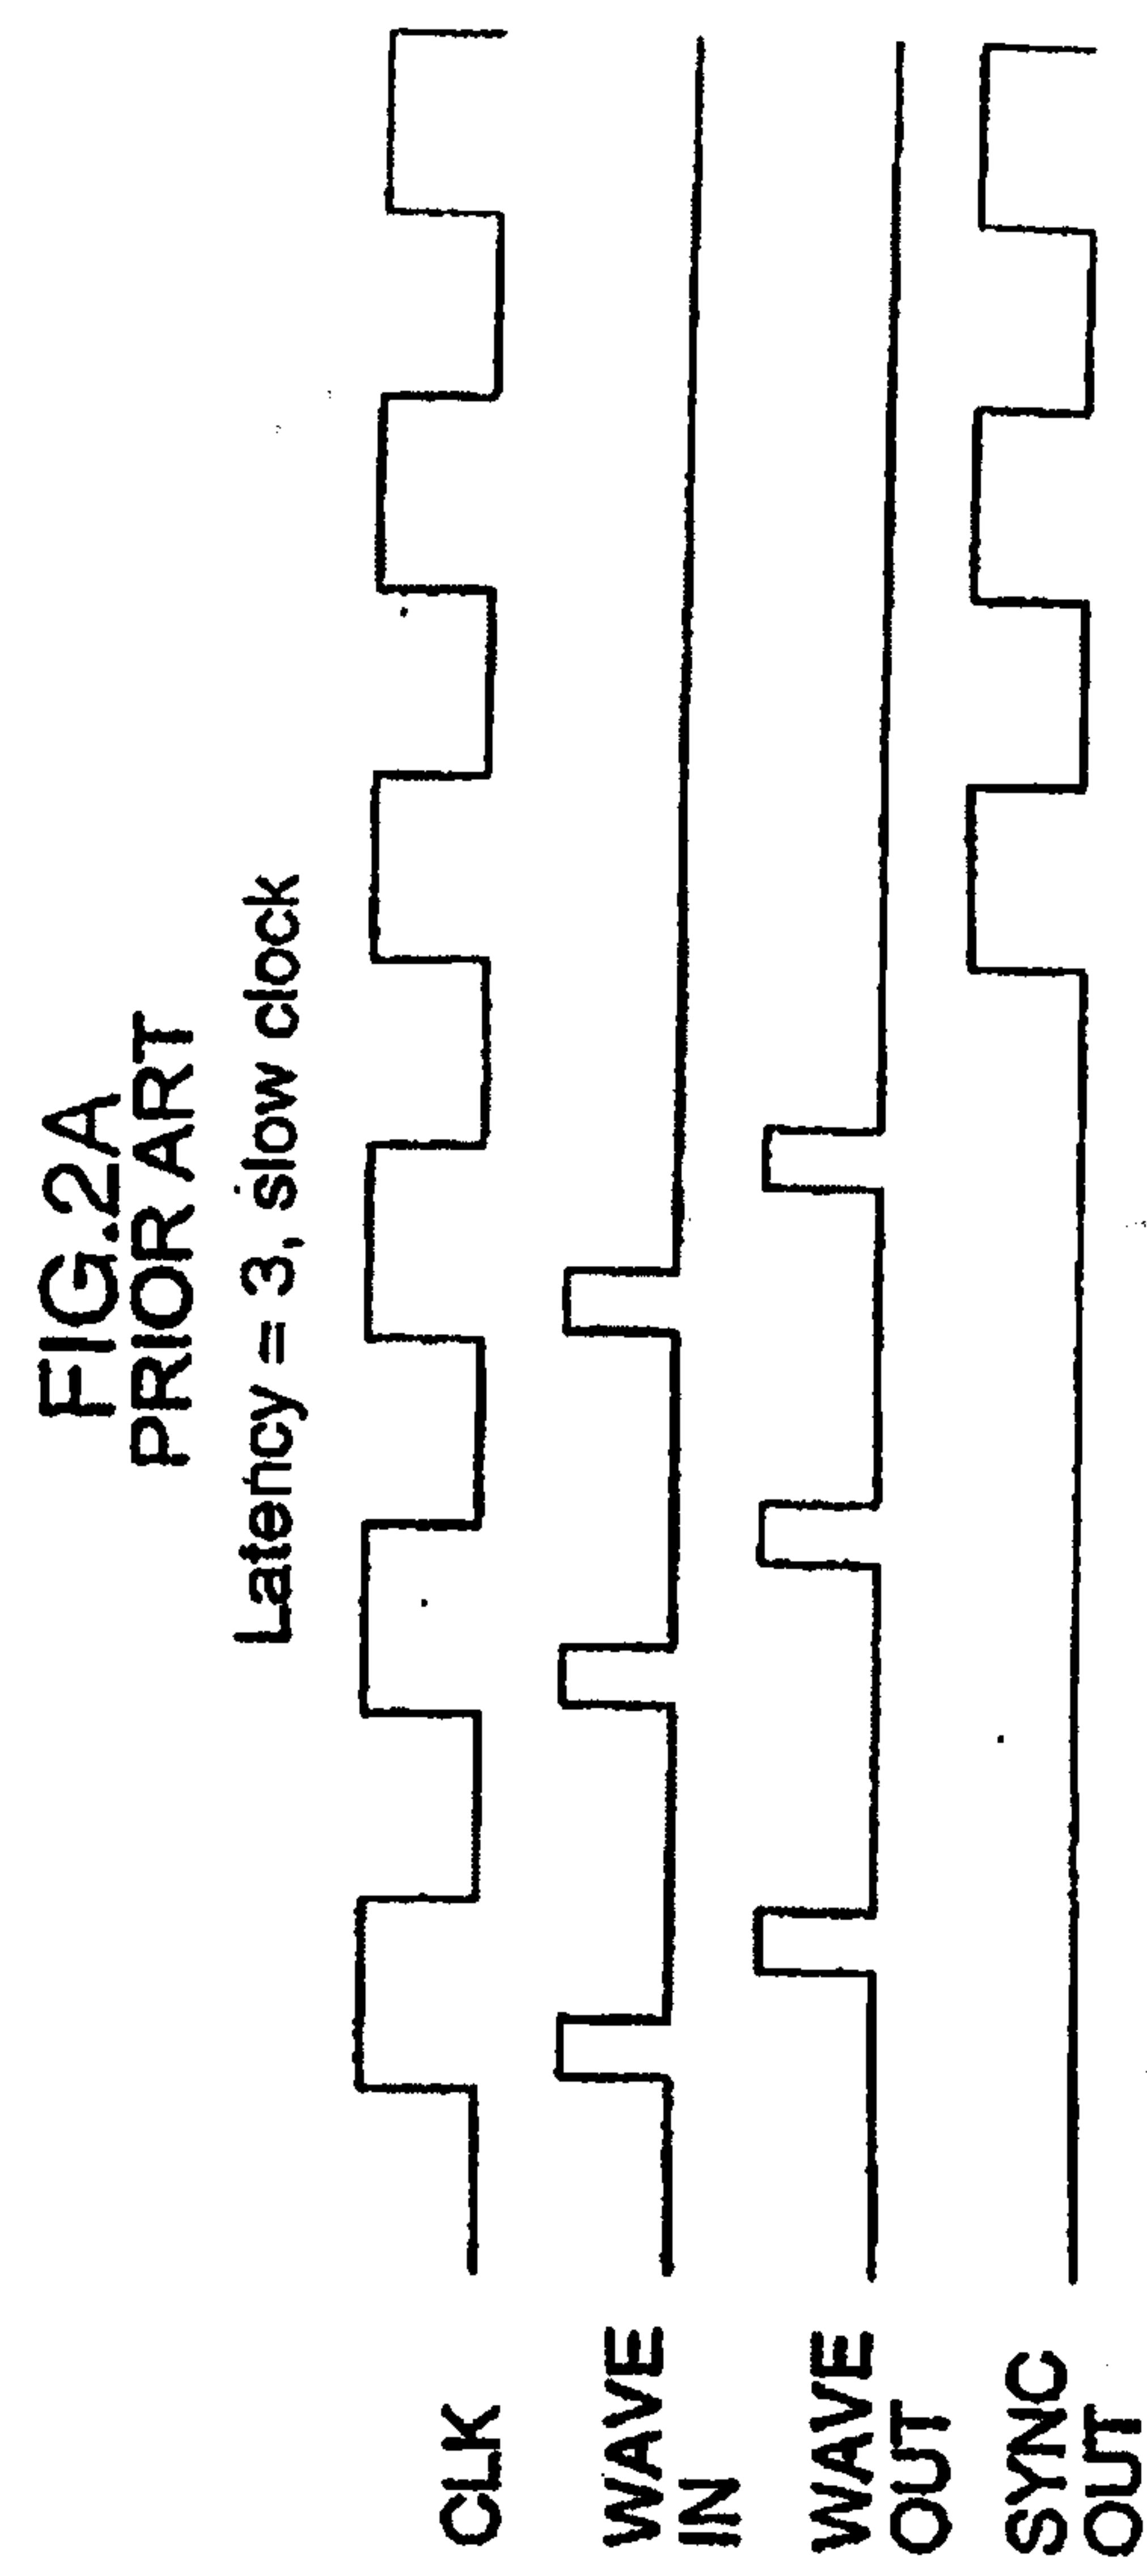
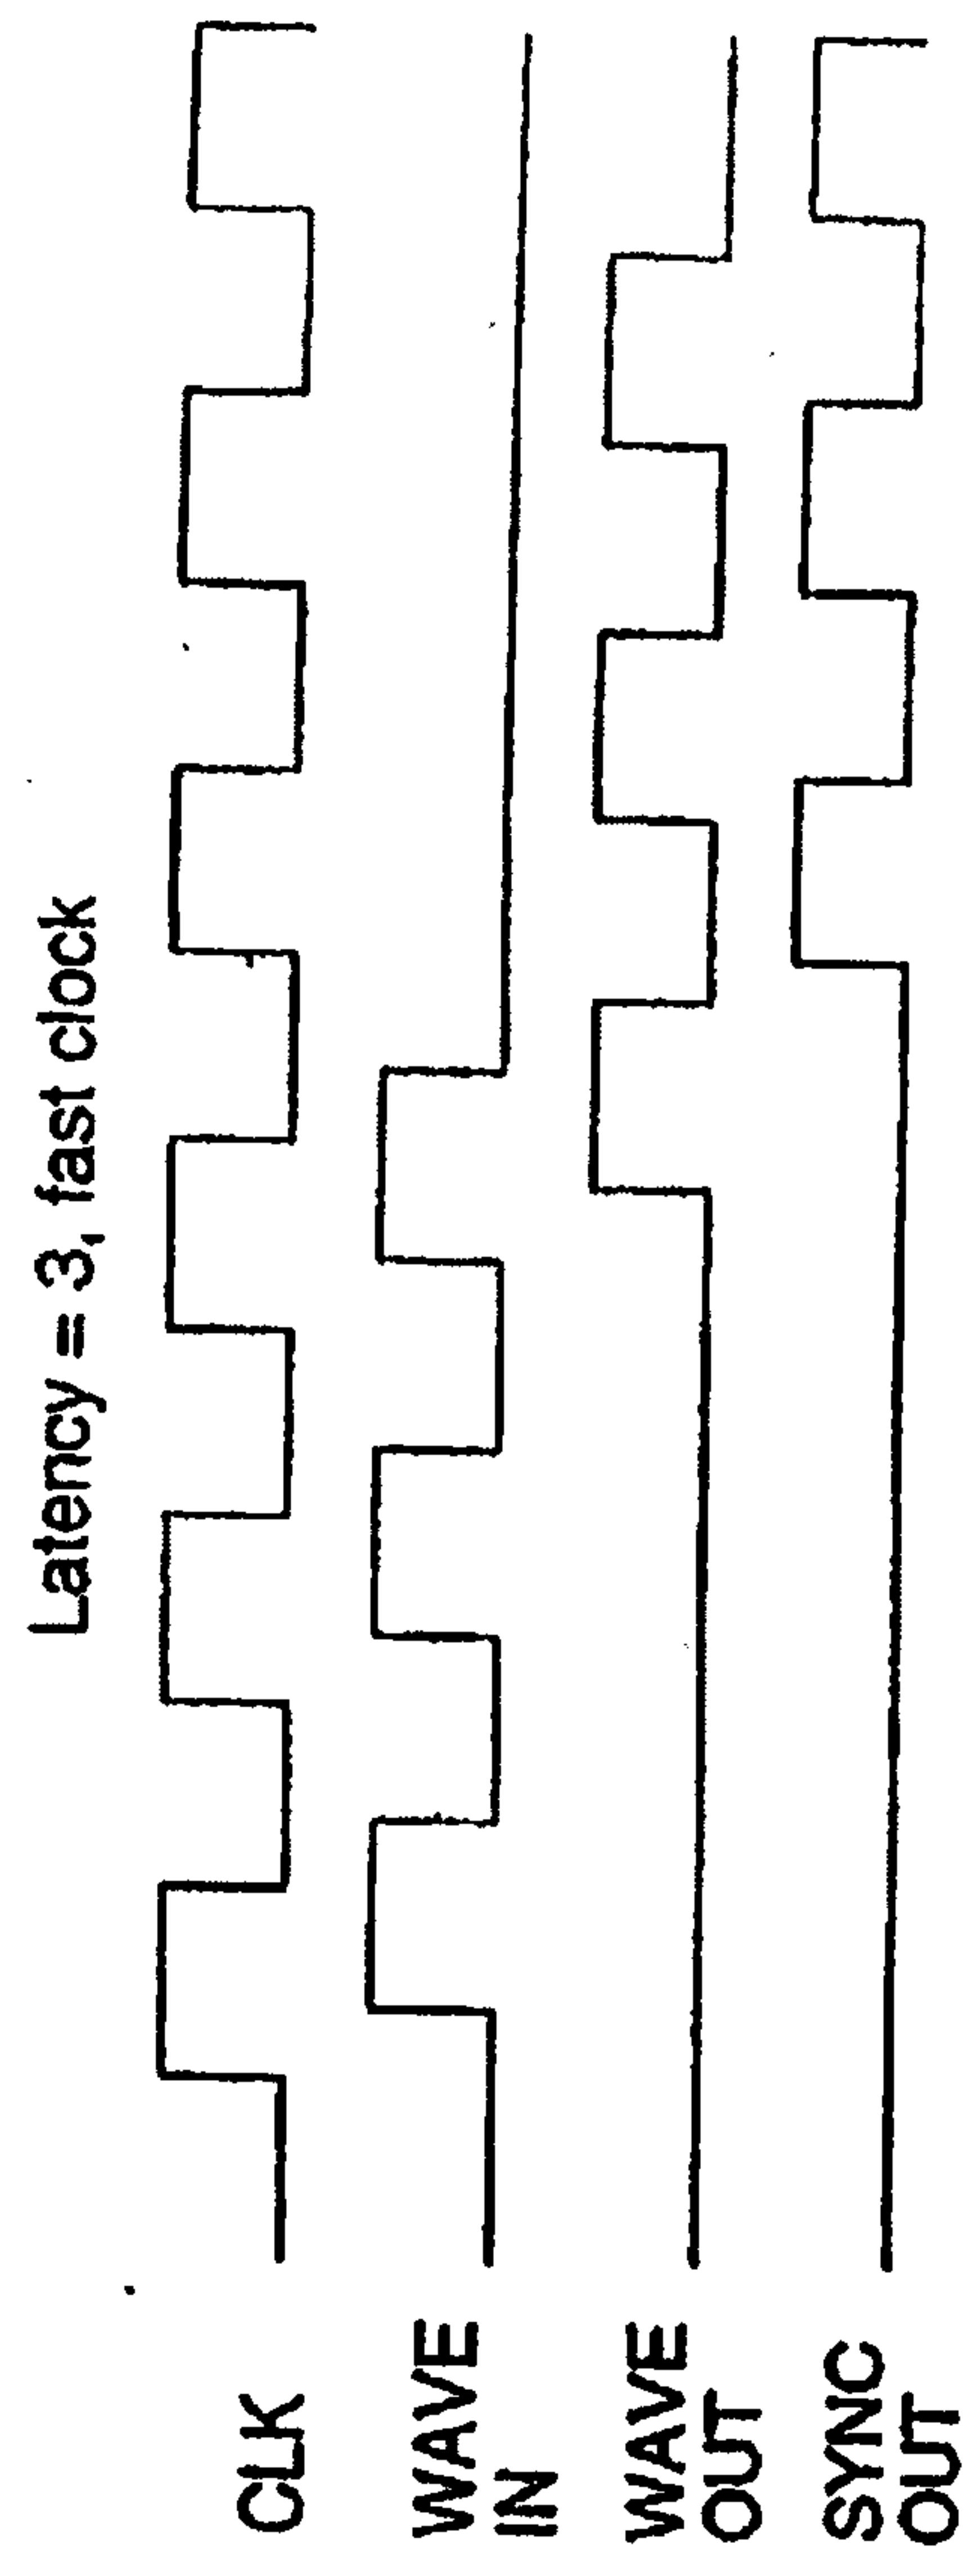
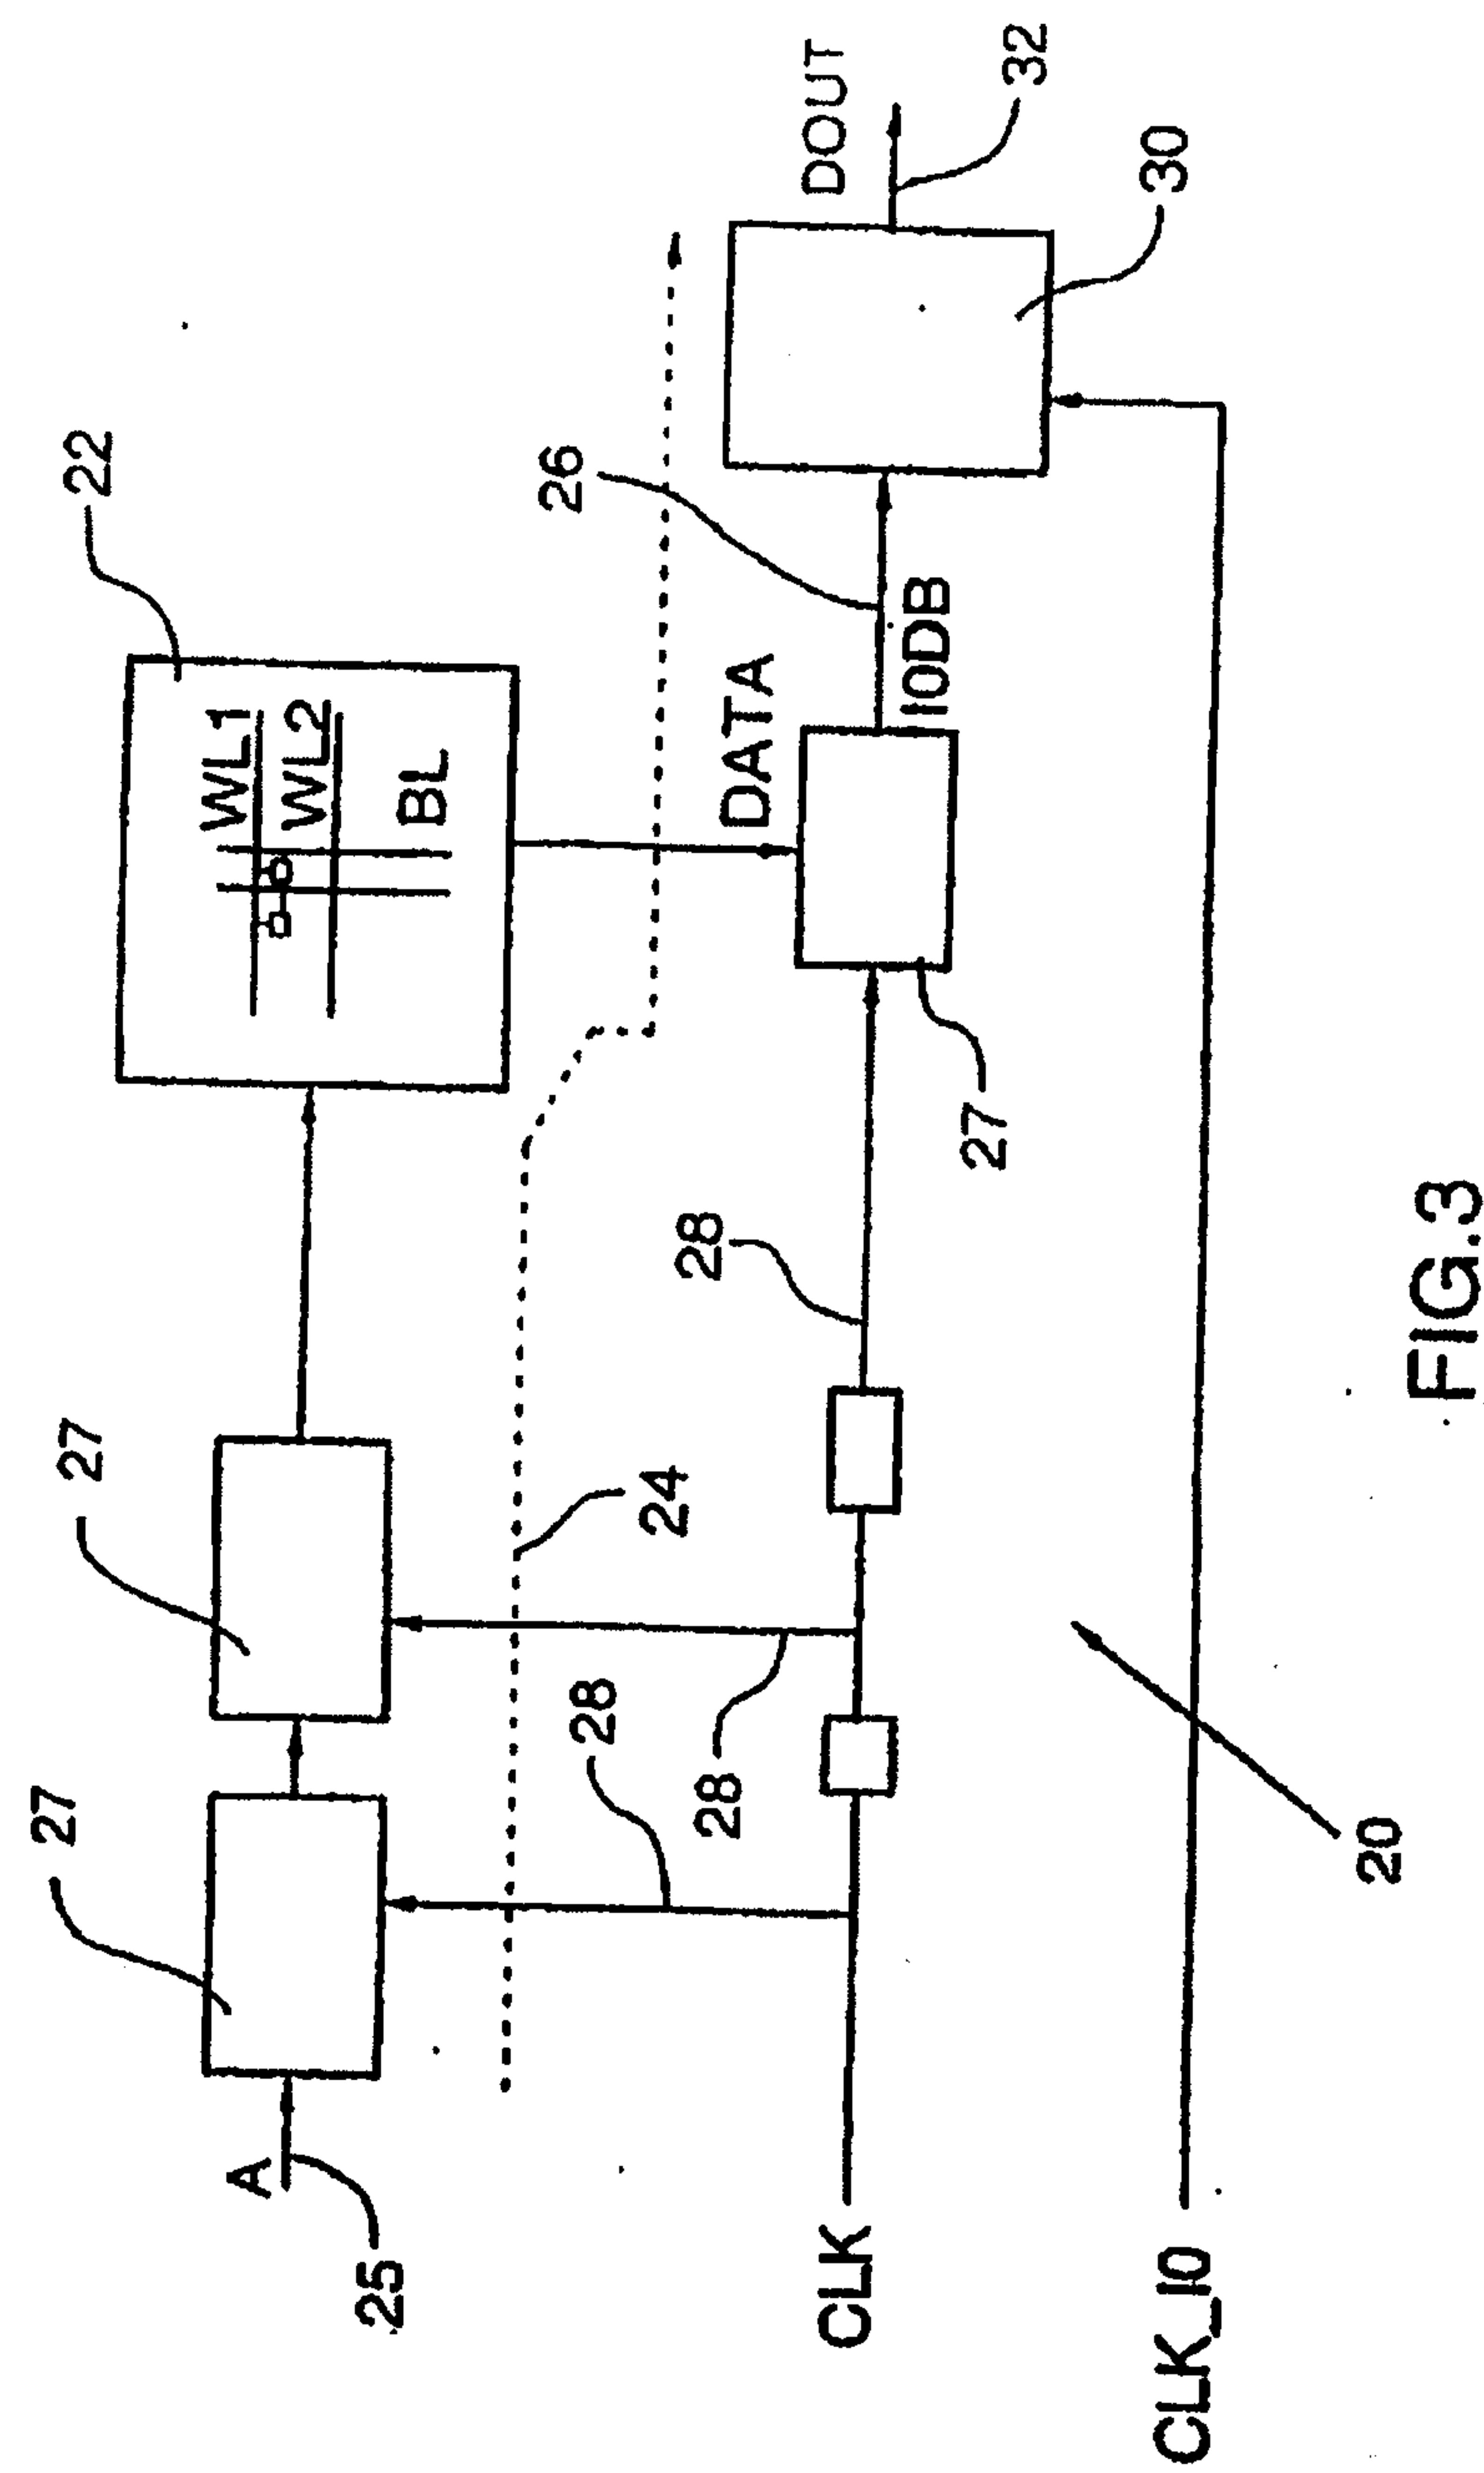


FIG.2B  
PRIOR ART



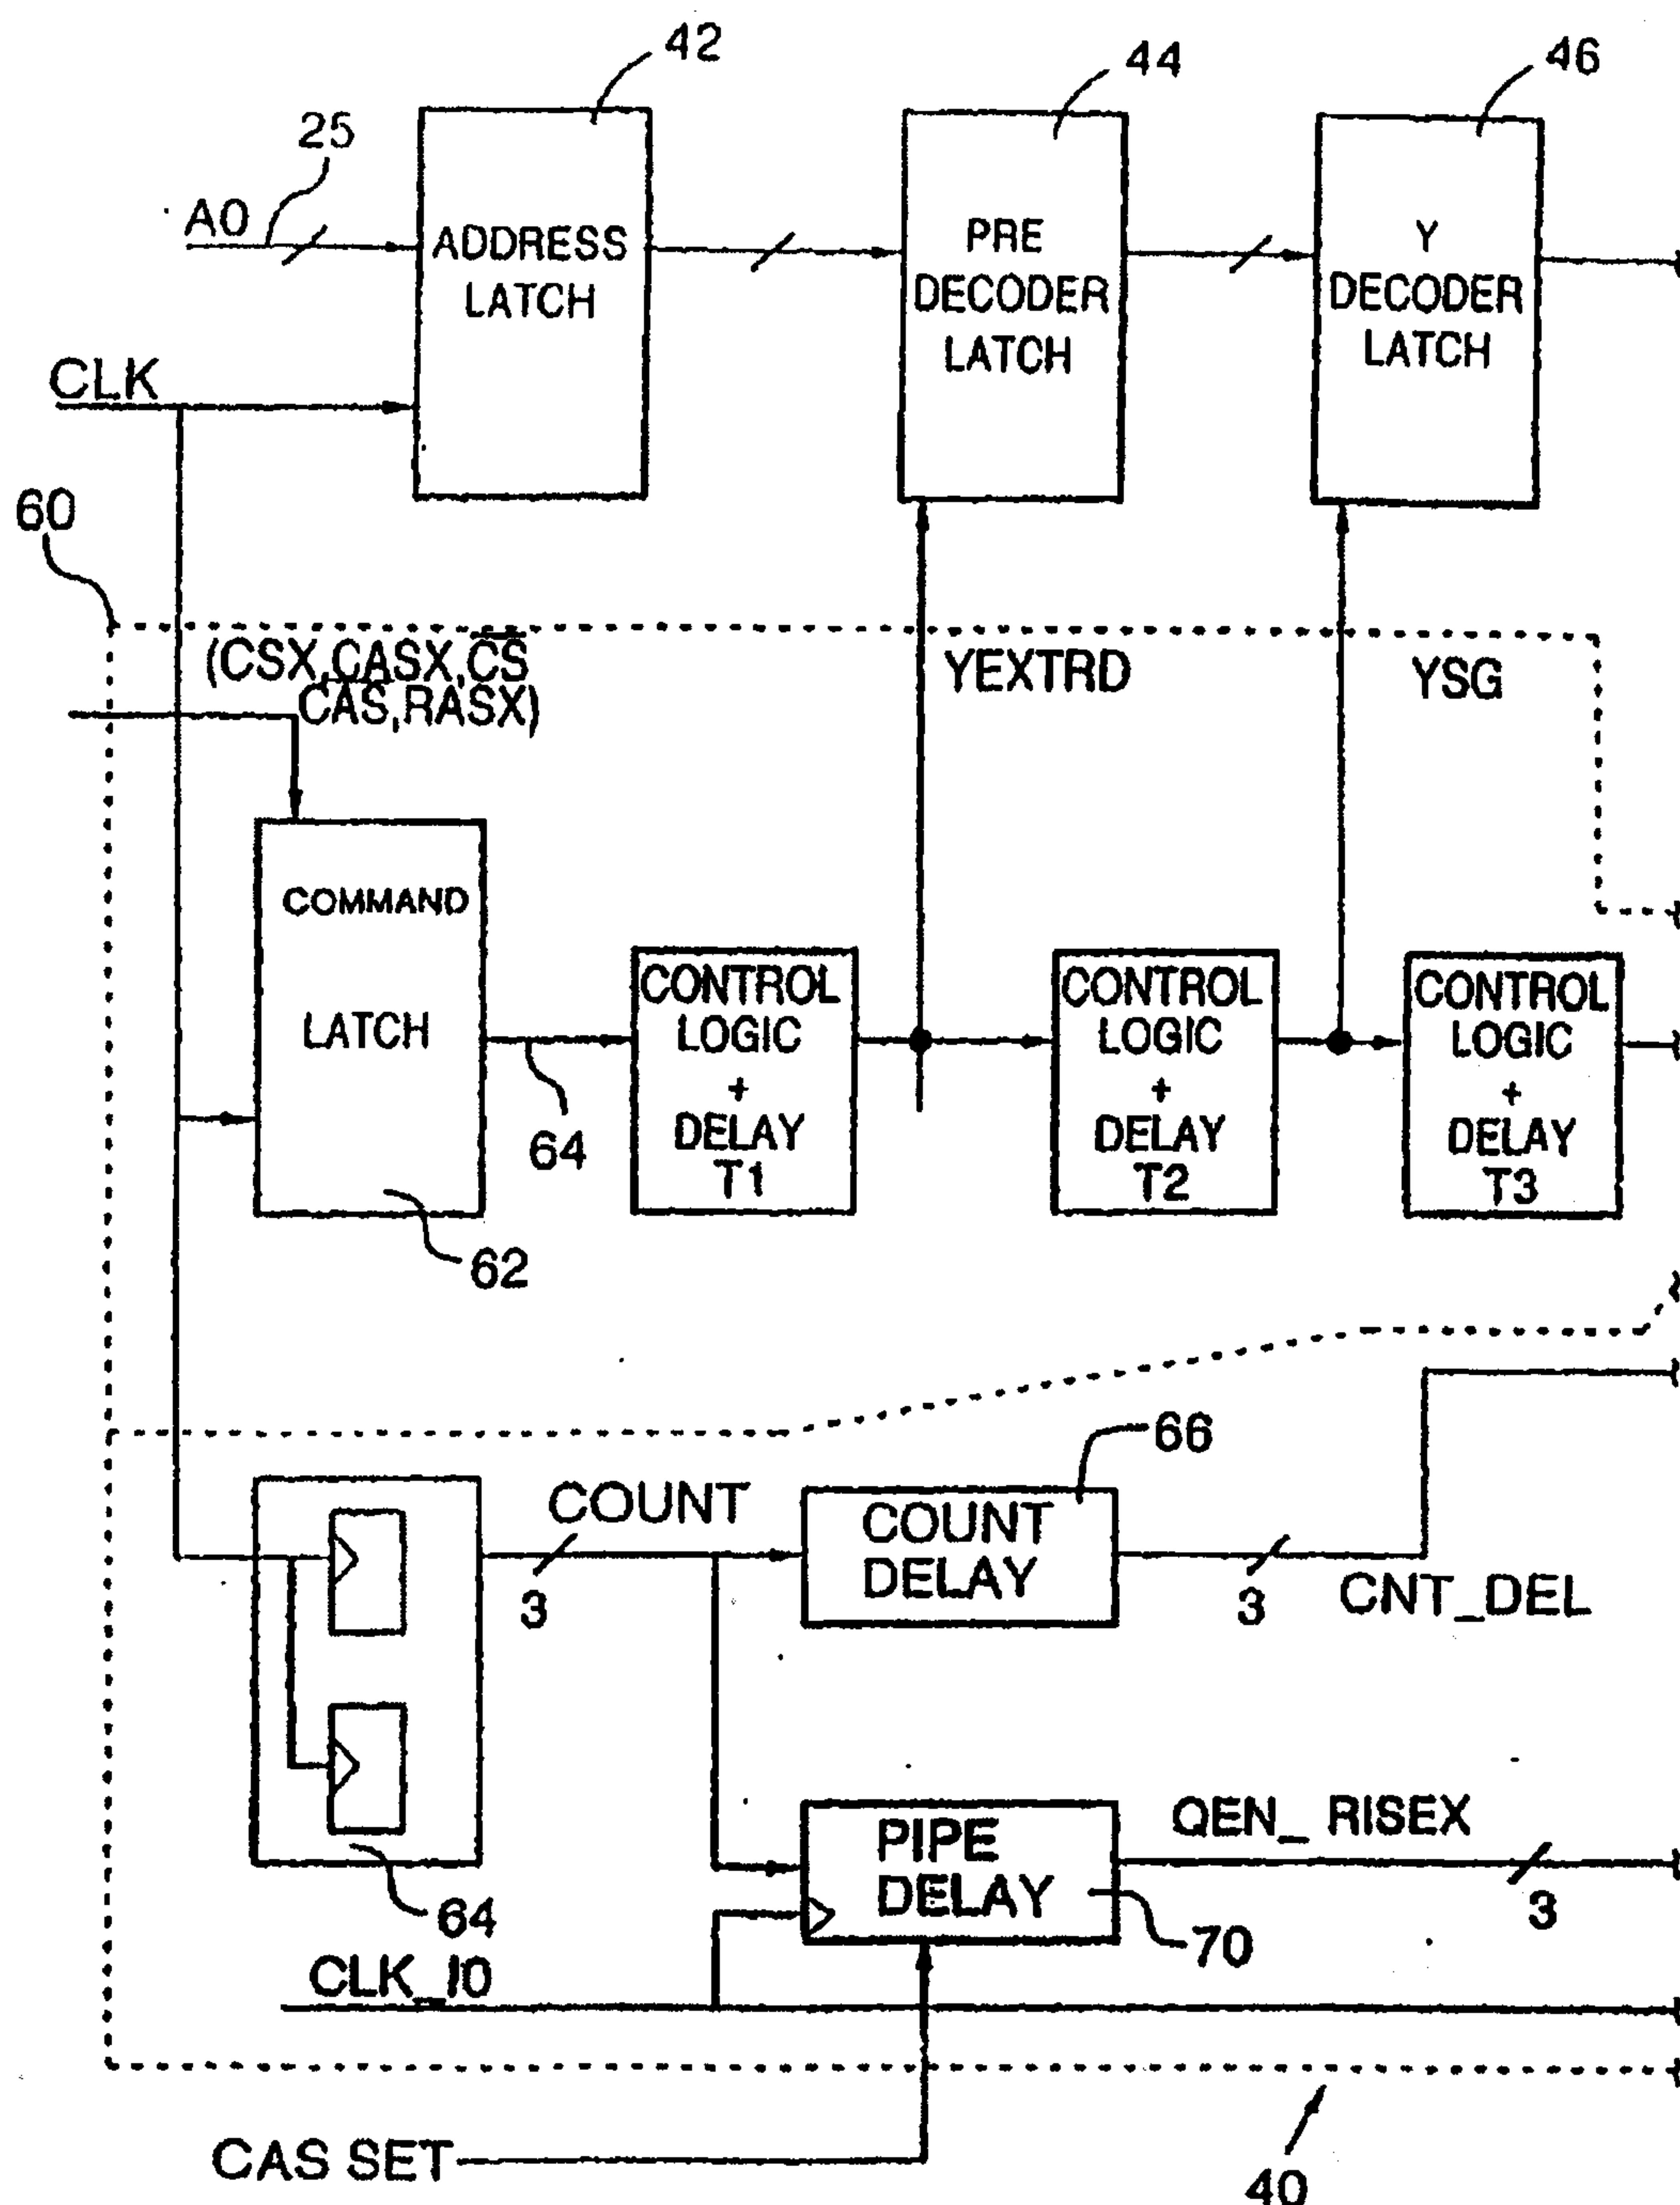


FIG.4A

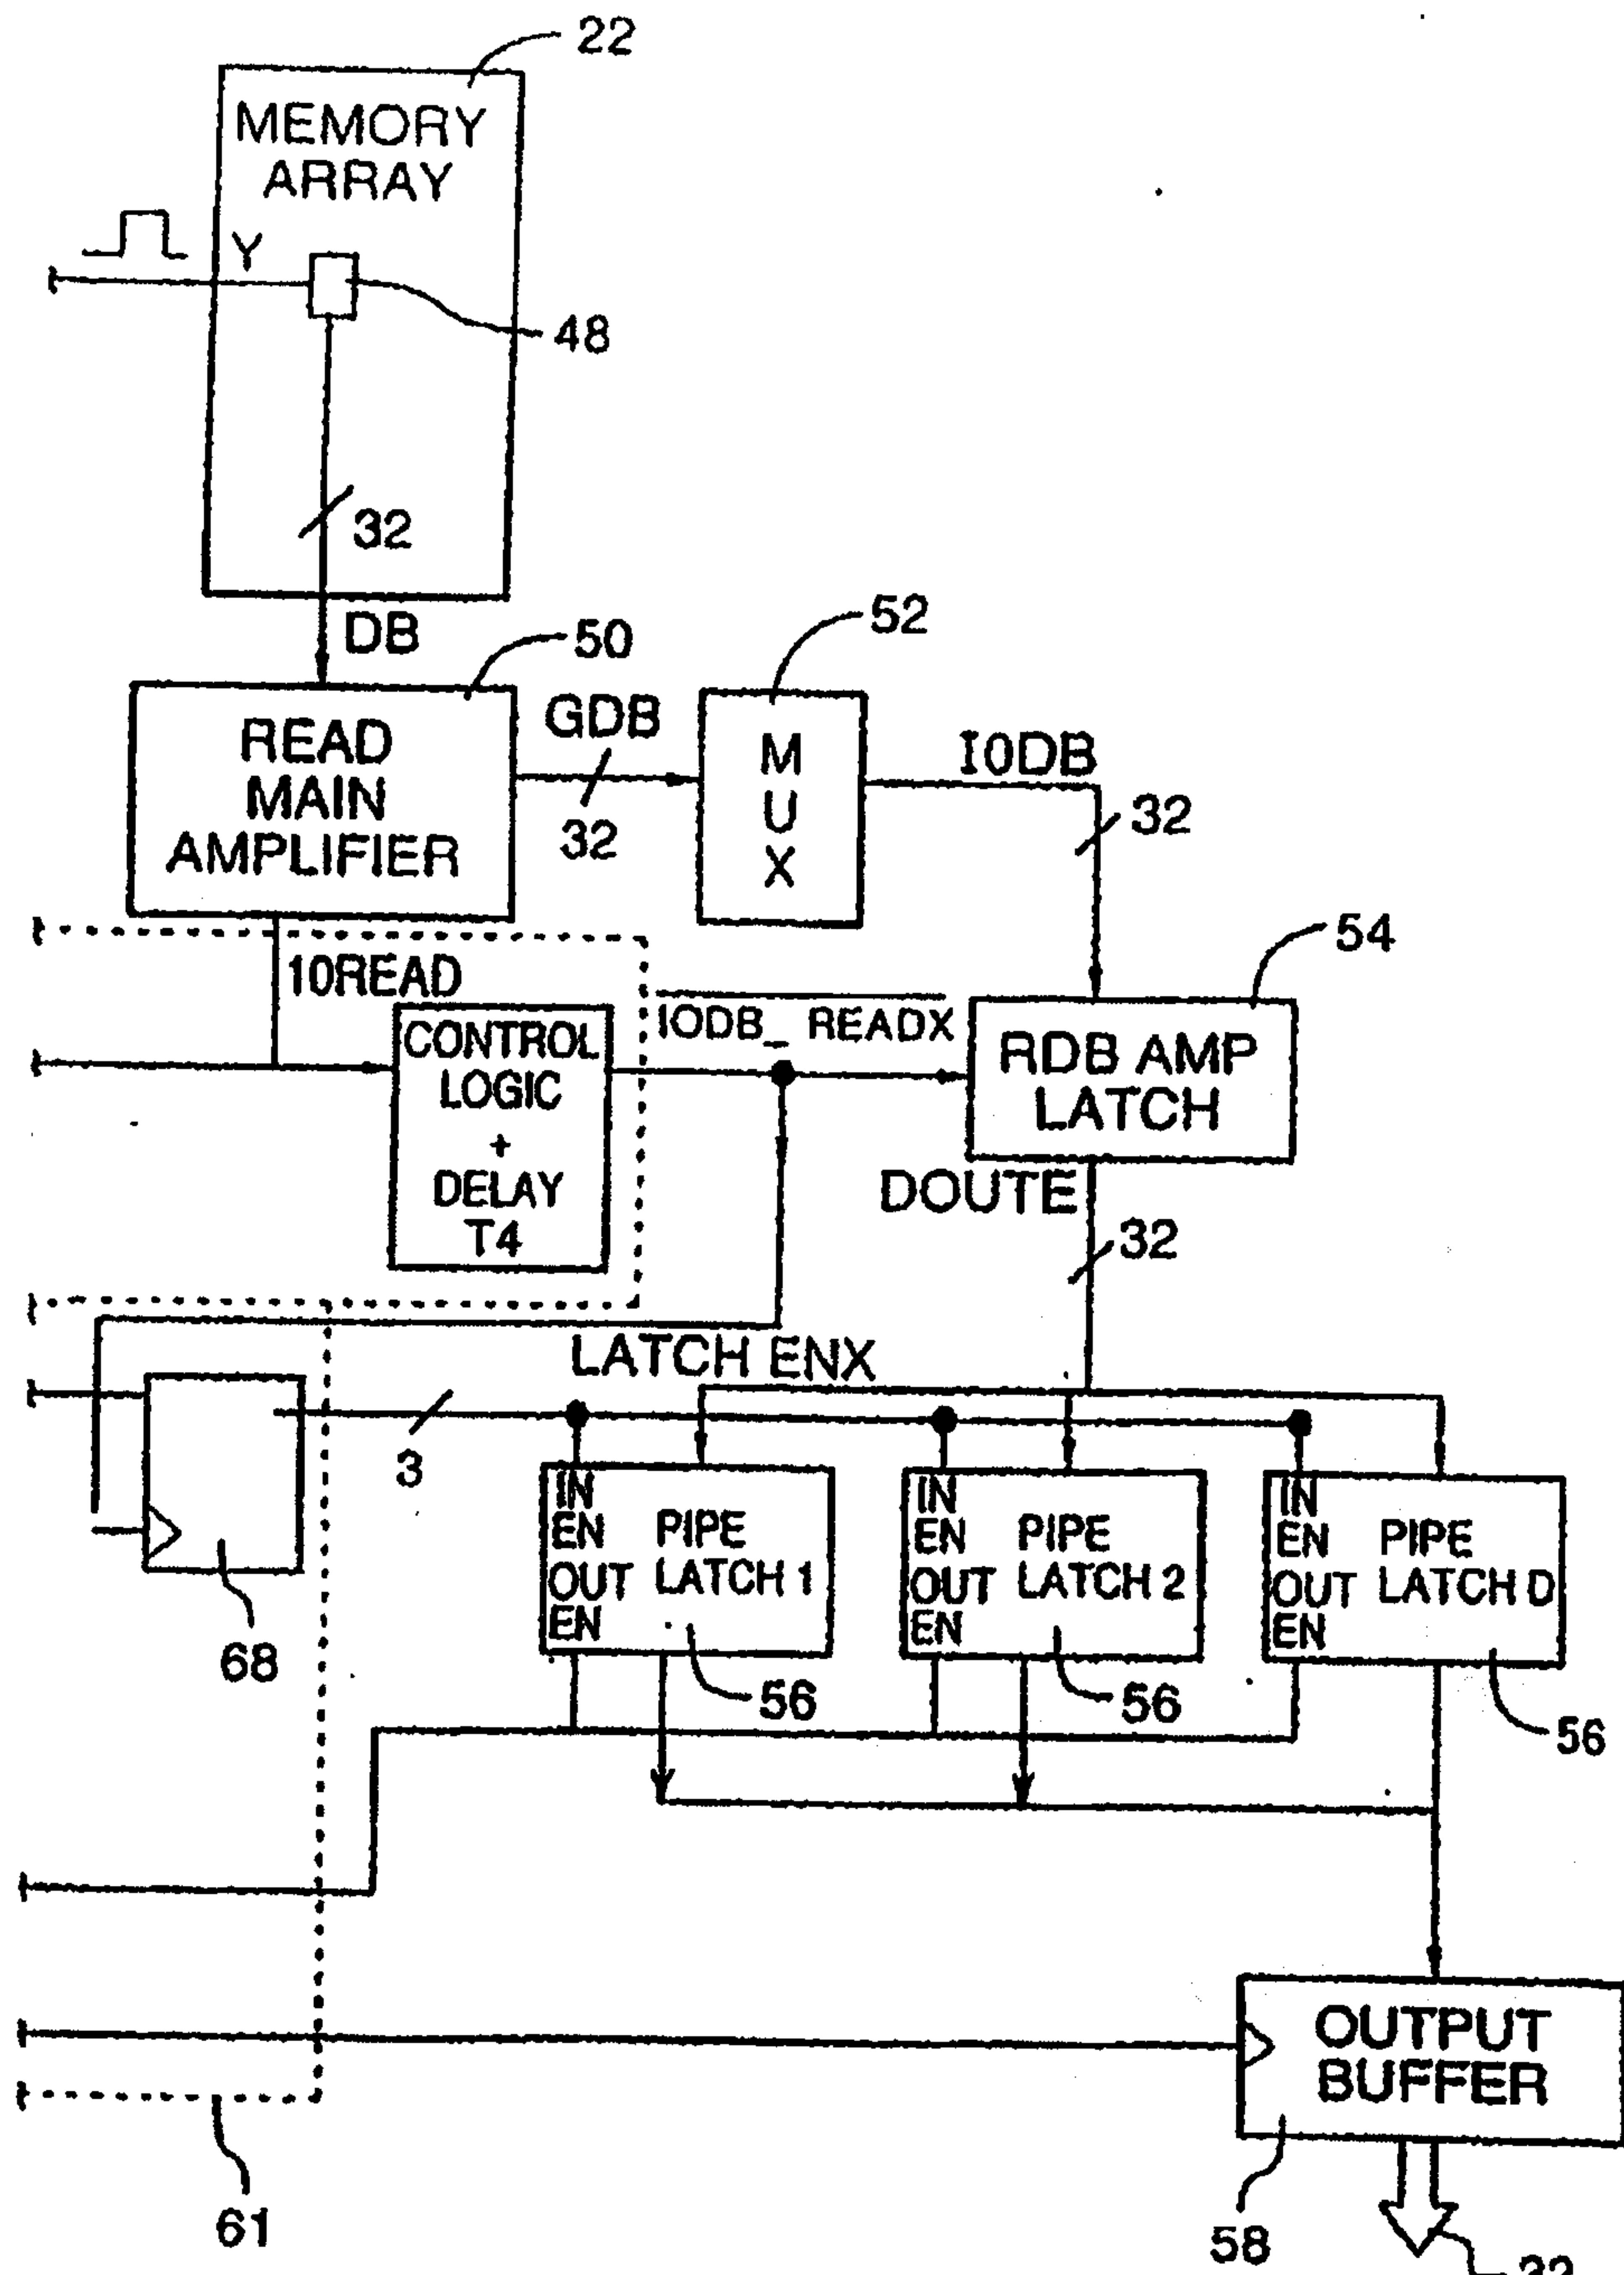


FIG.4B

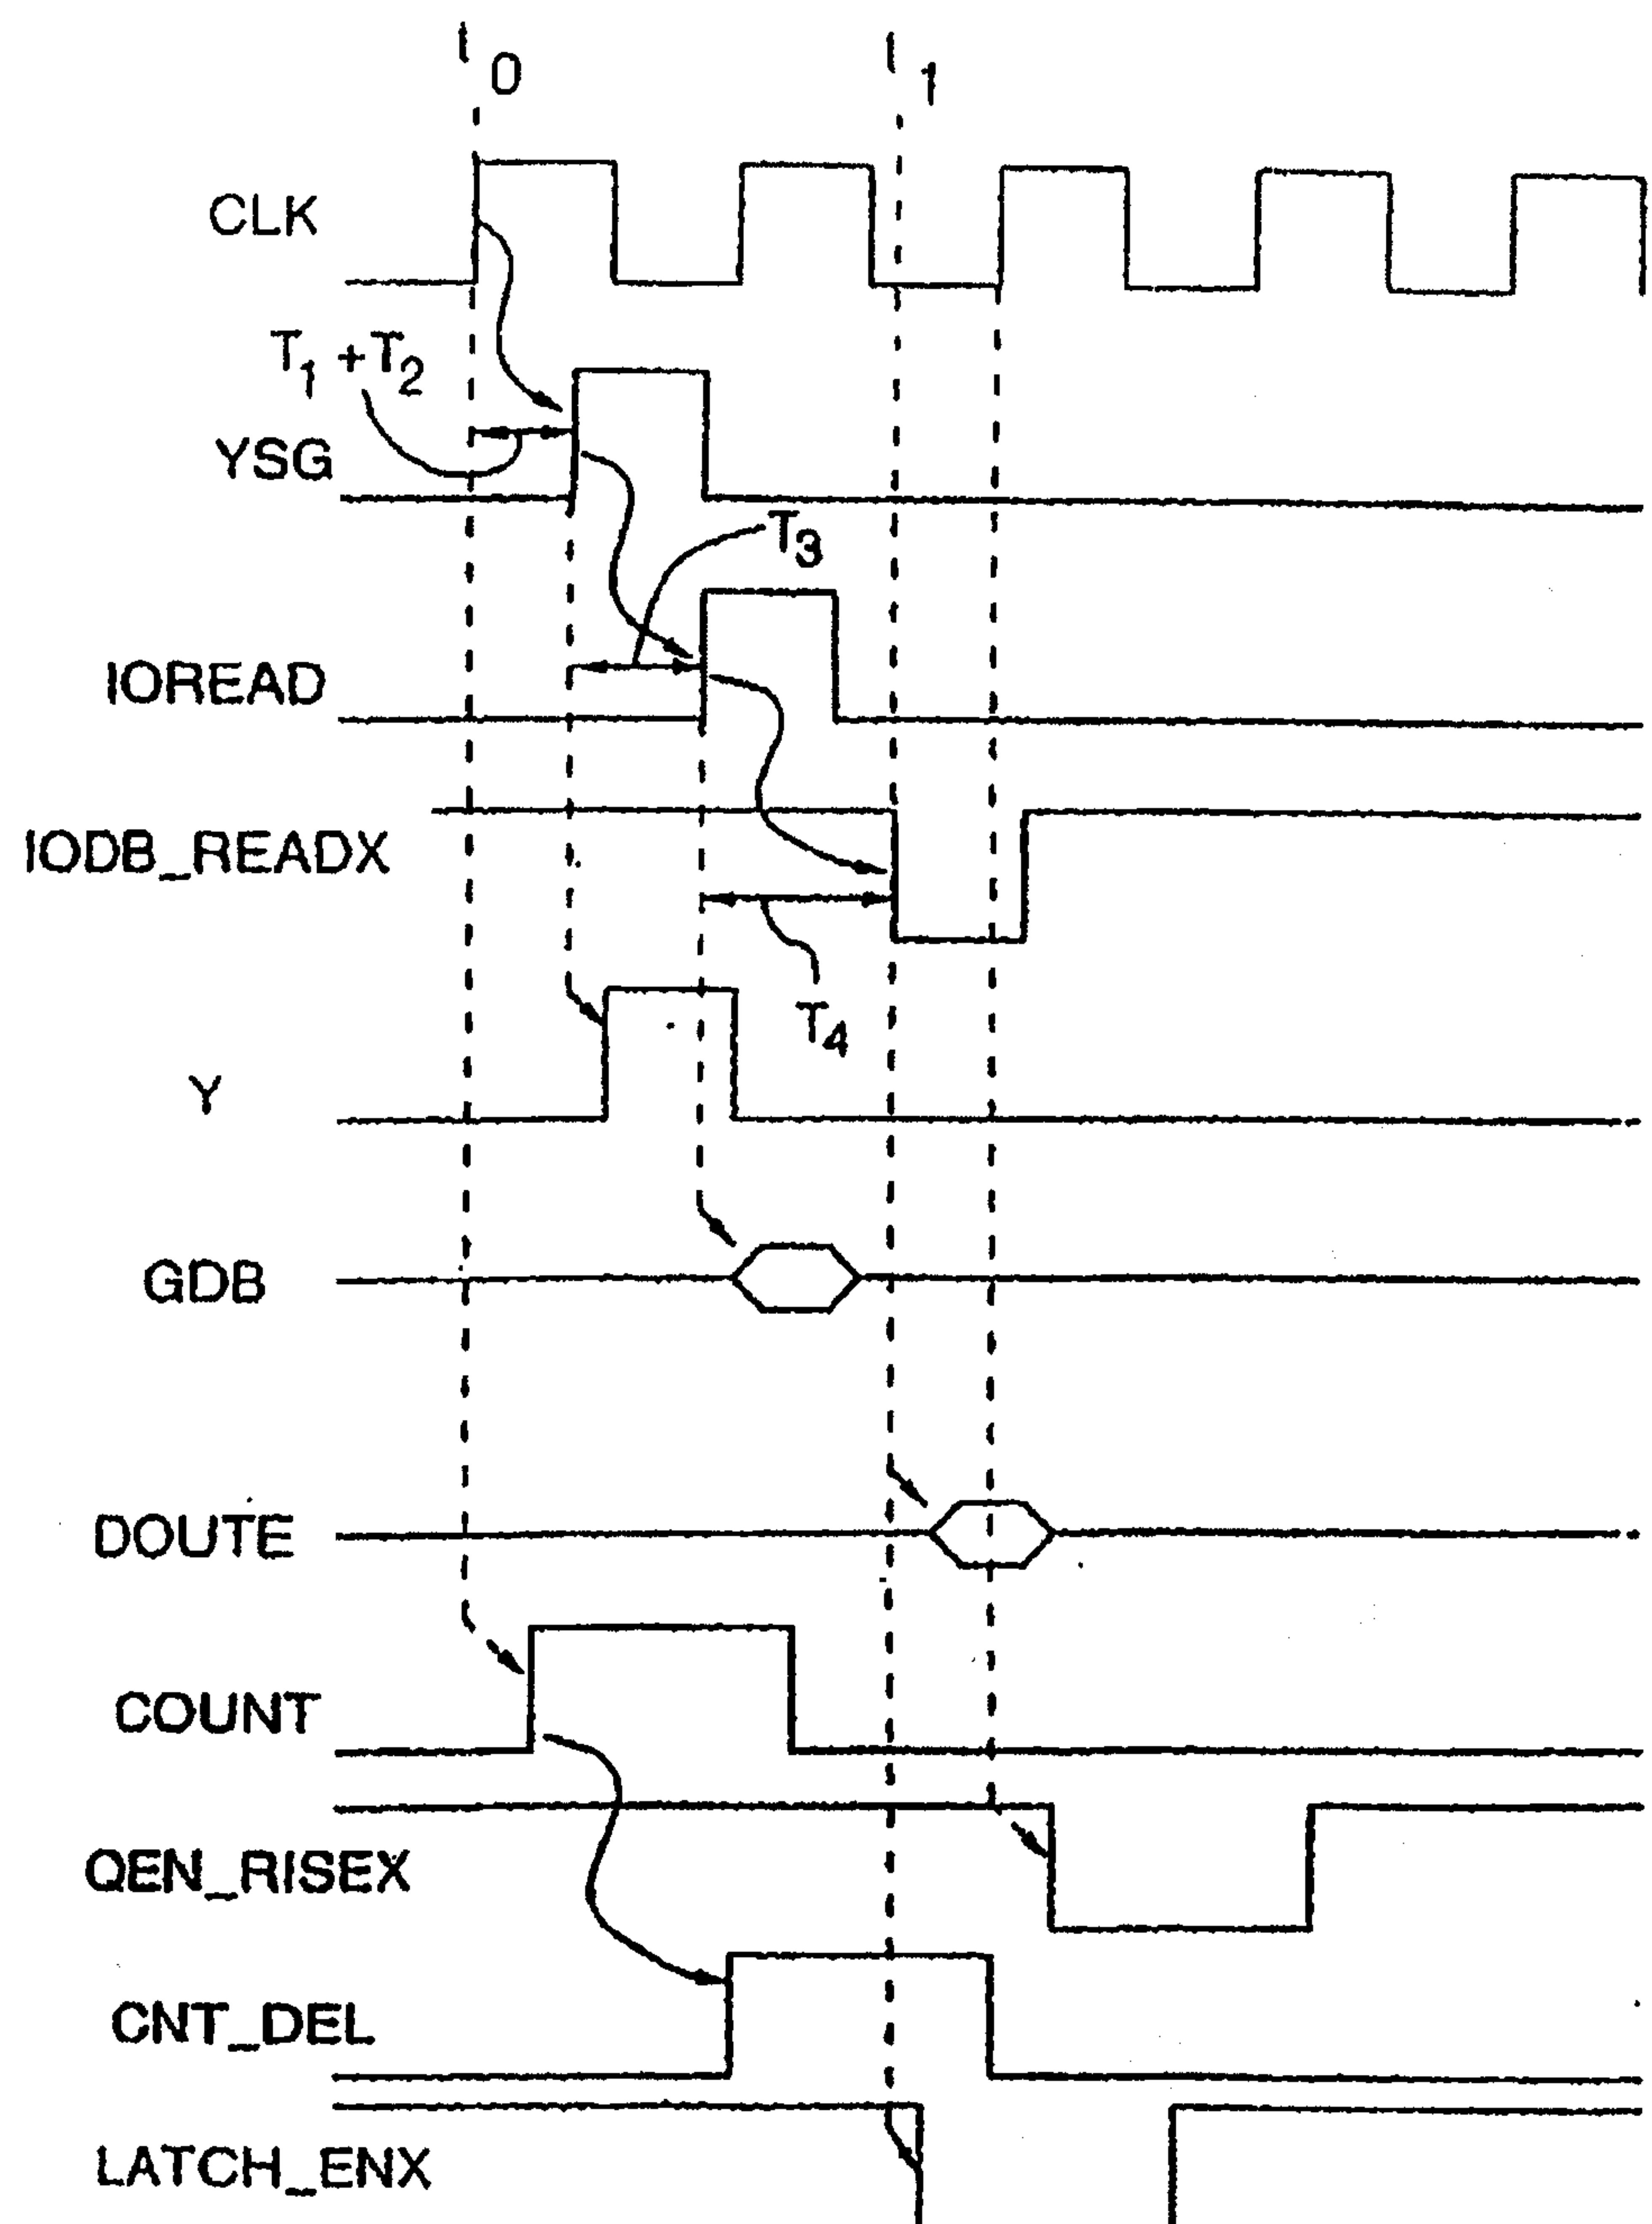


FIG.5

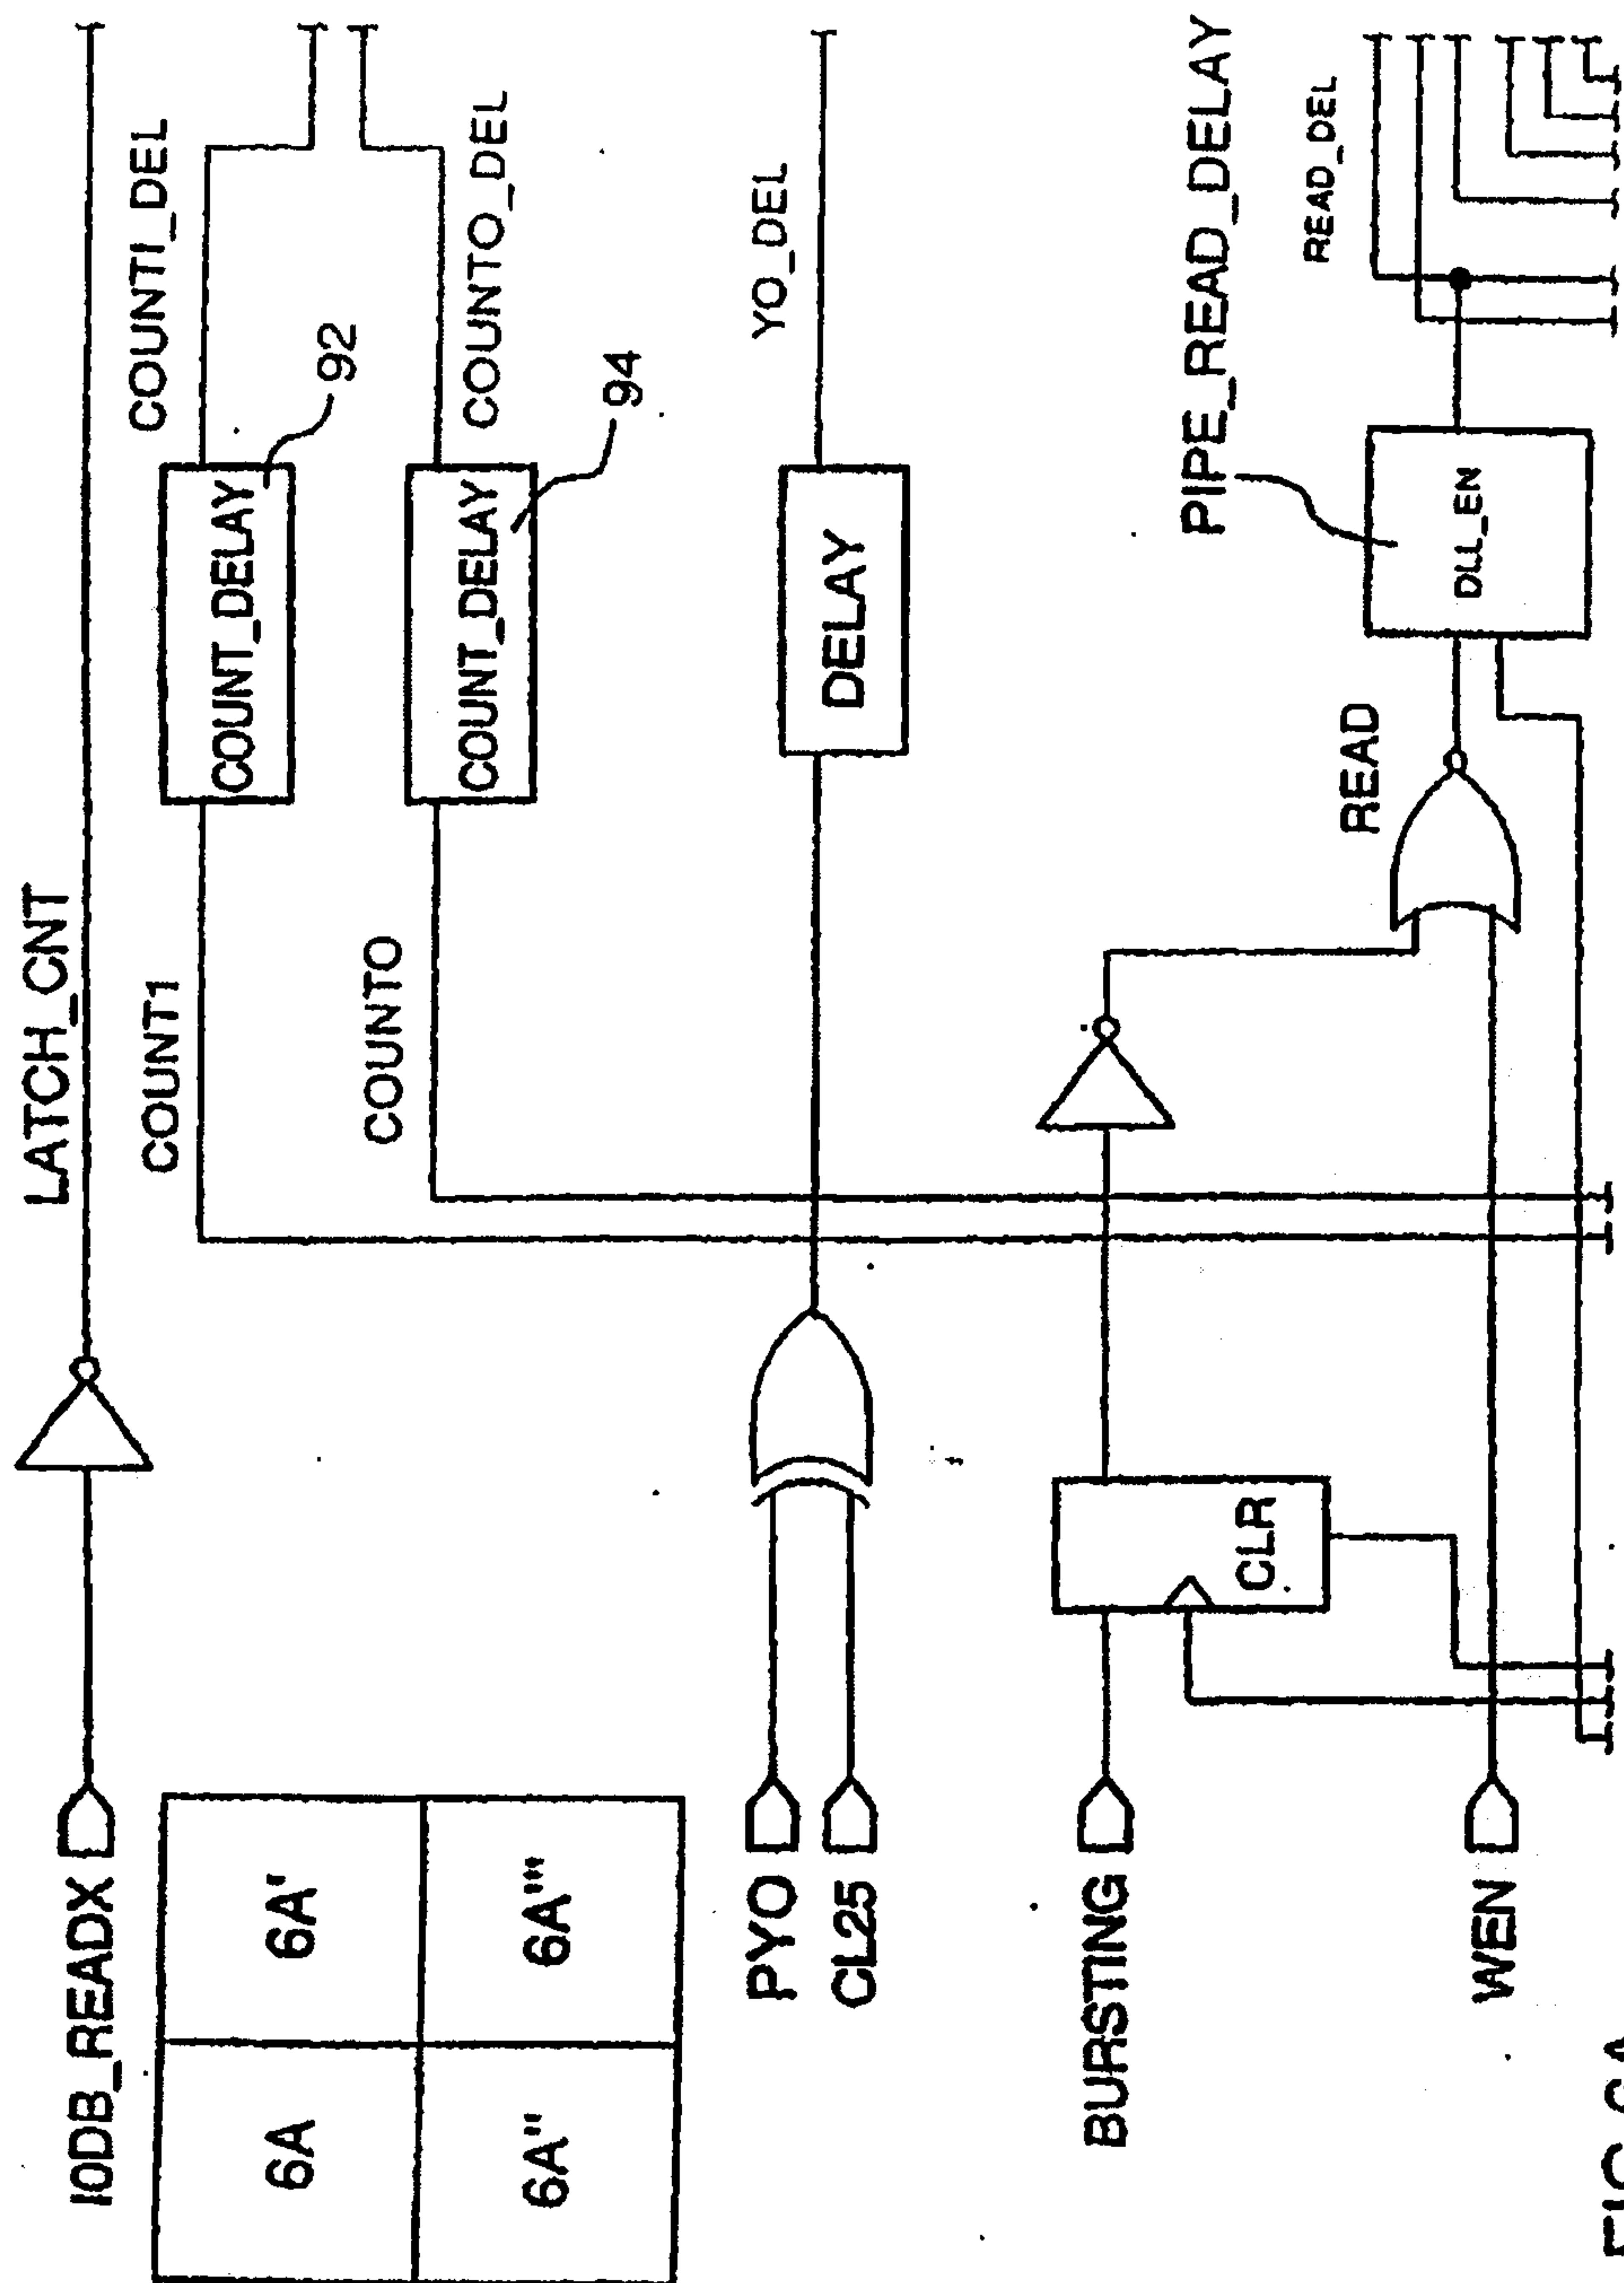


FIG.6A

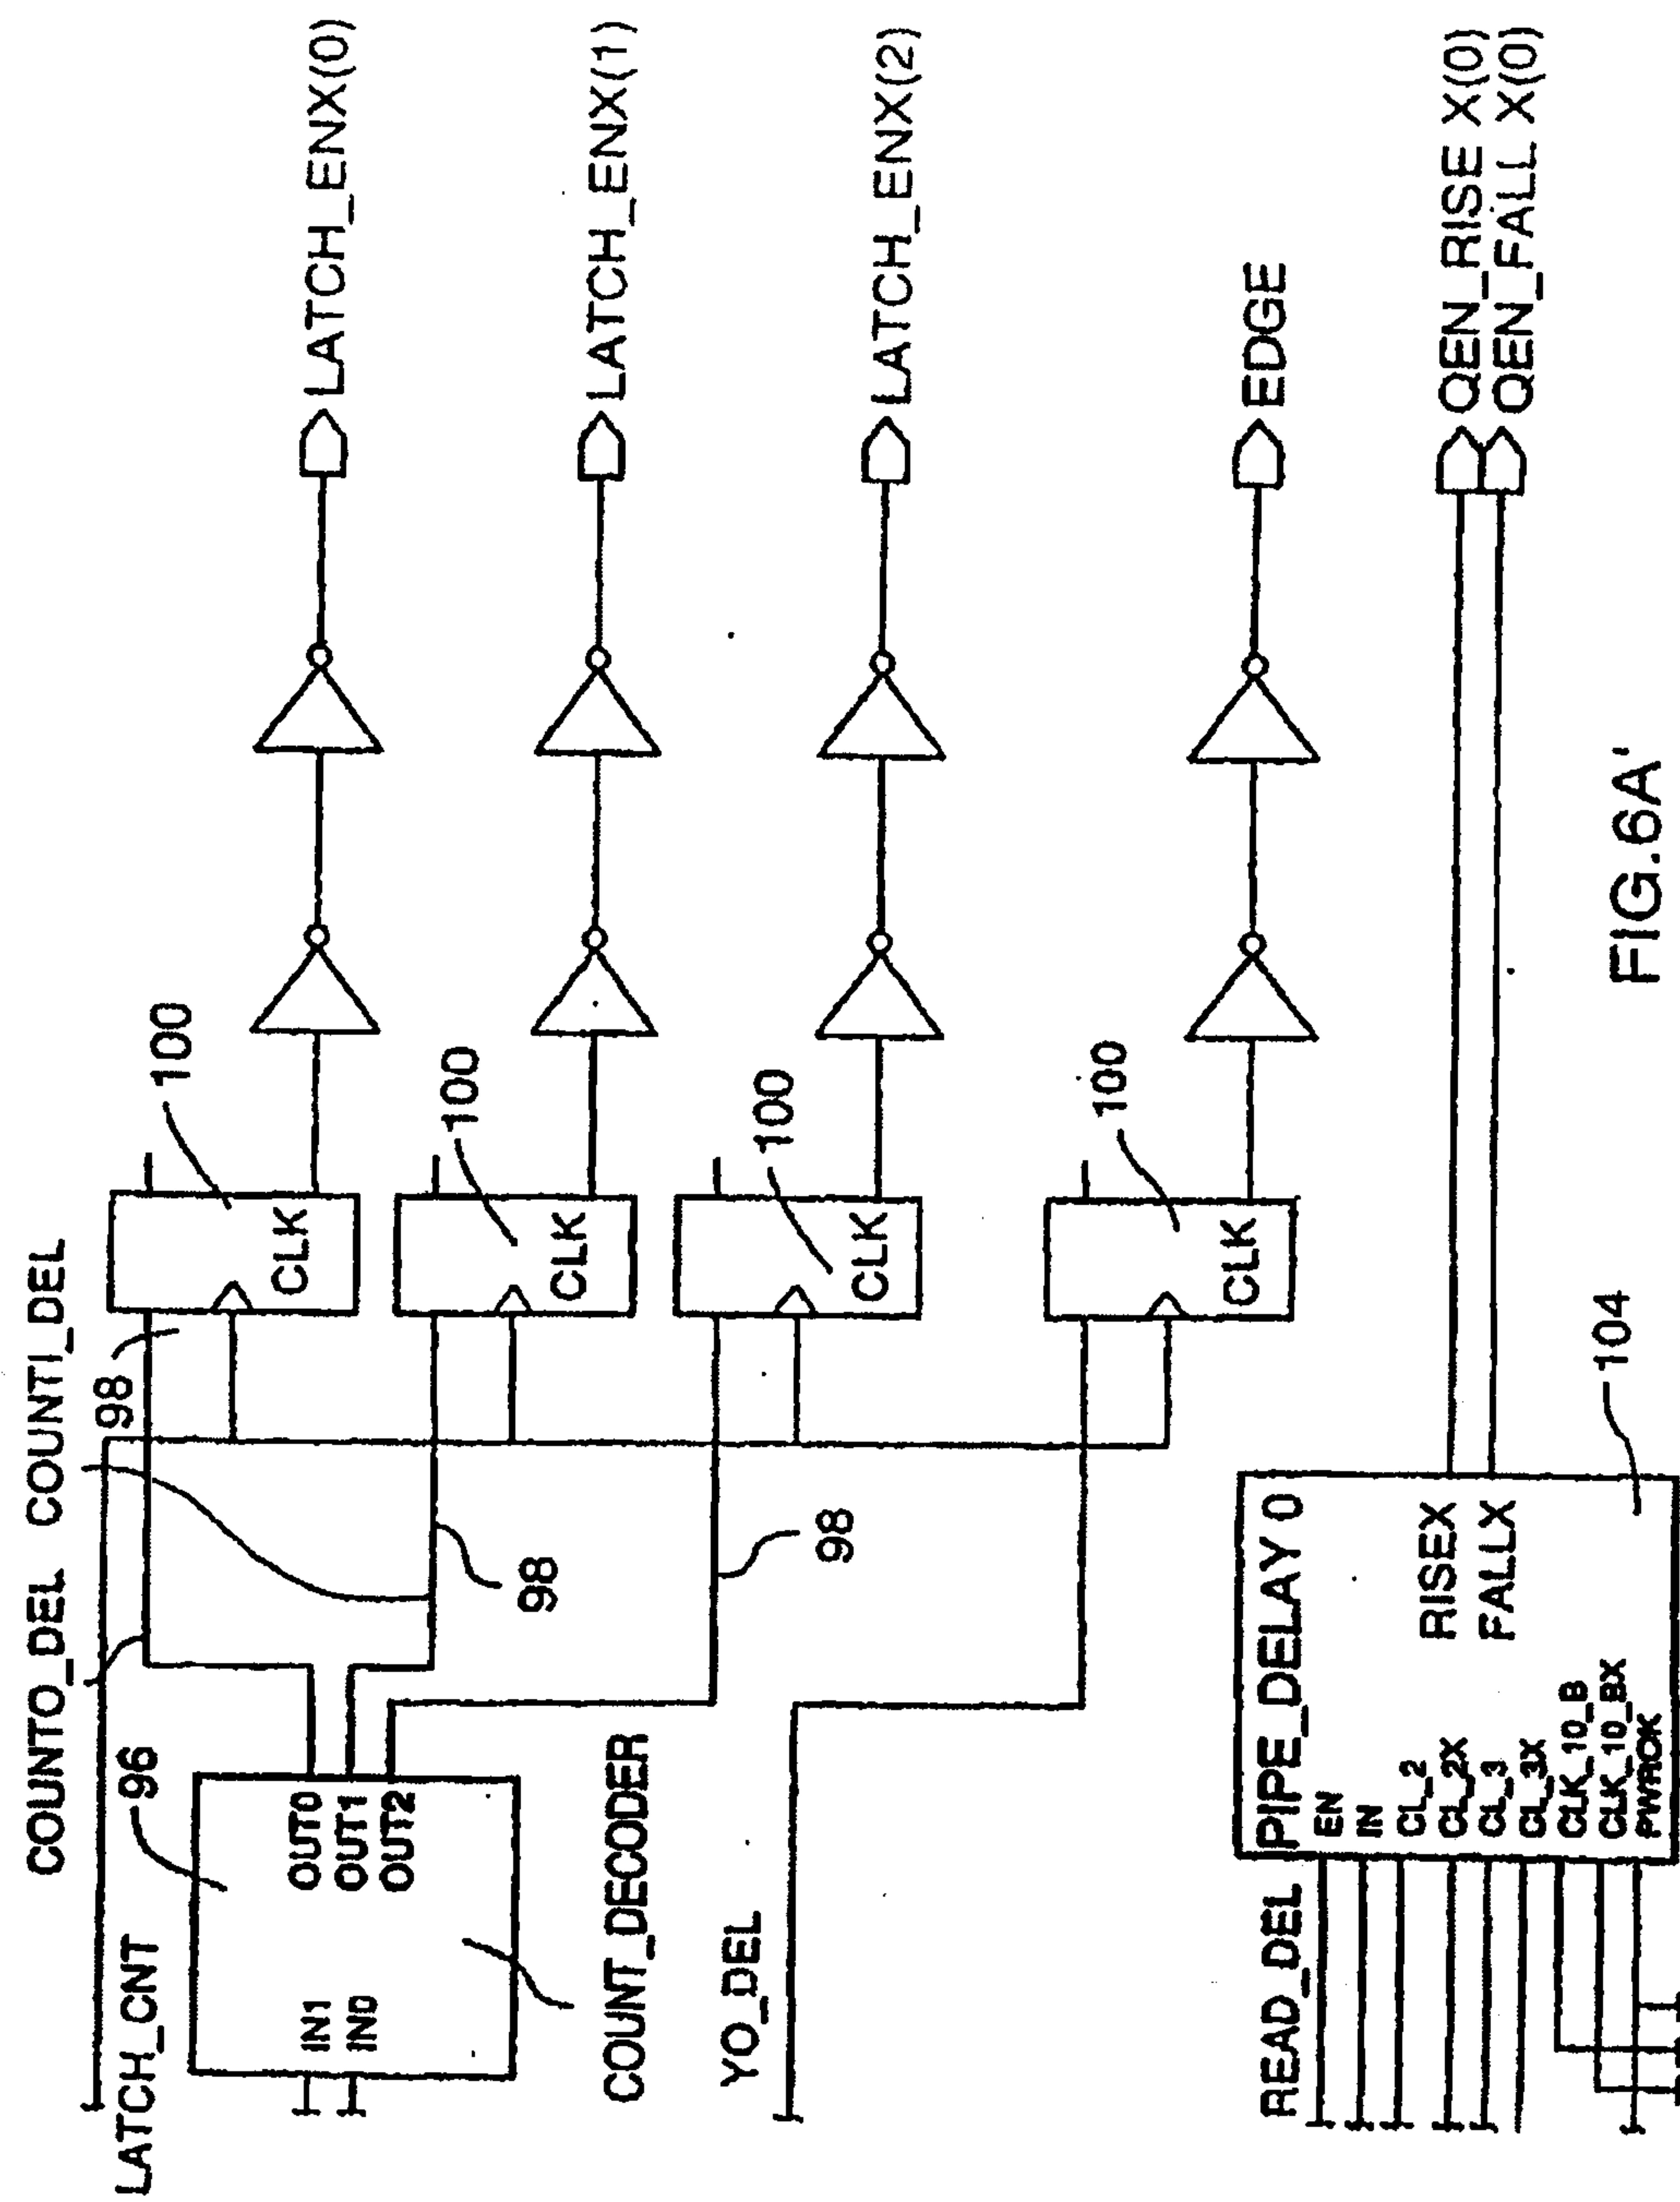
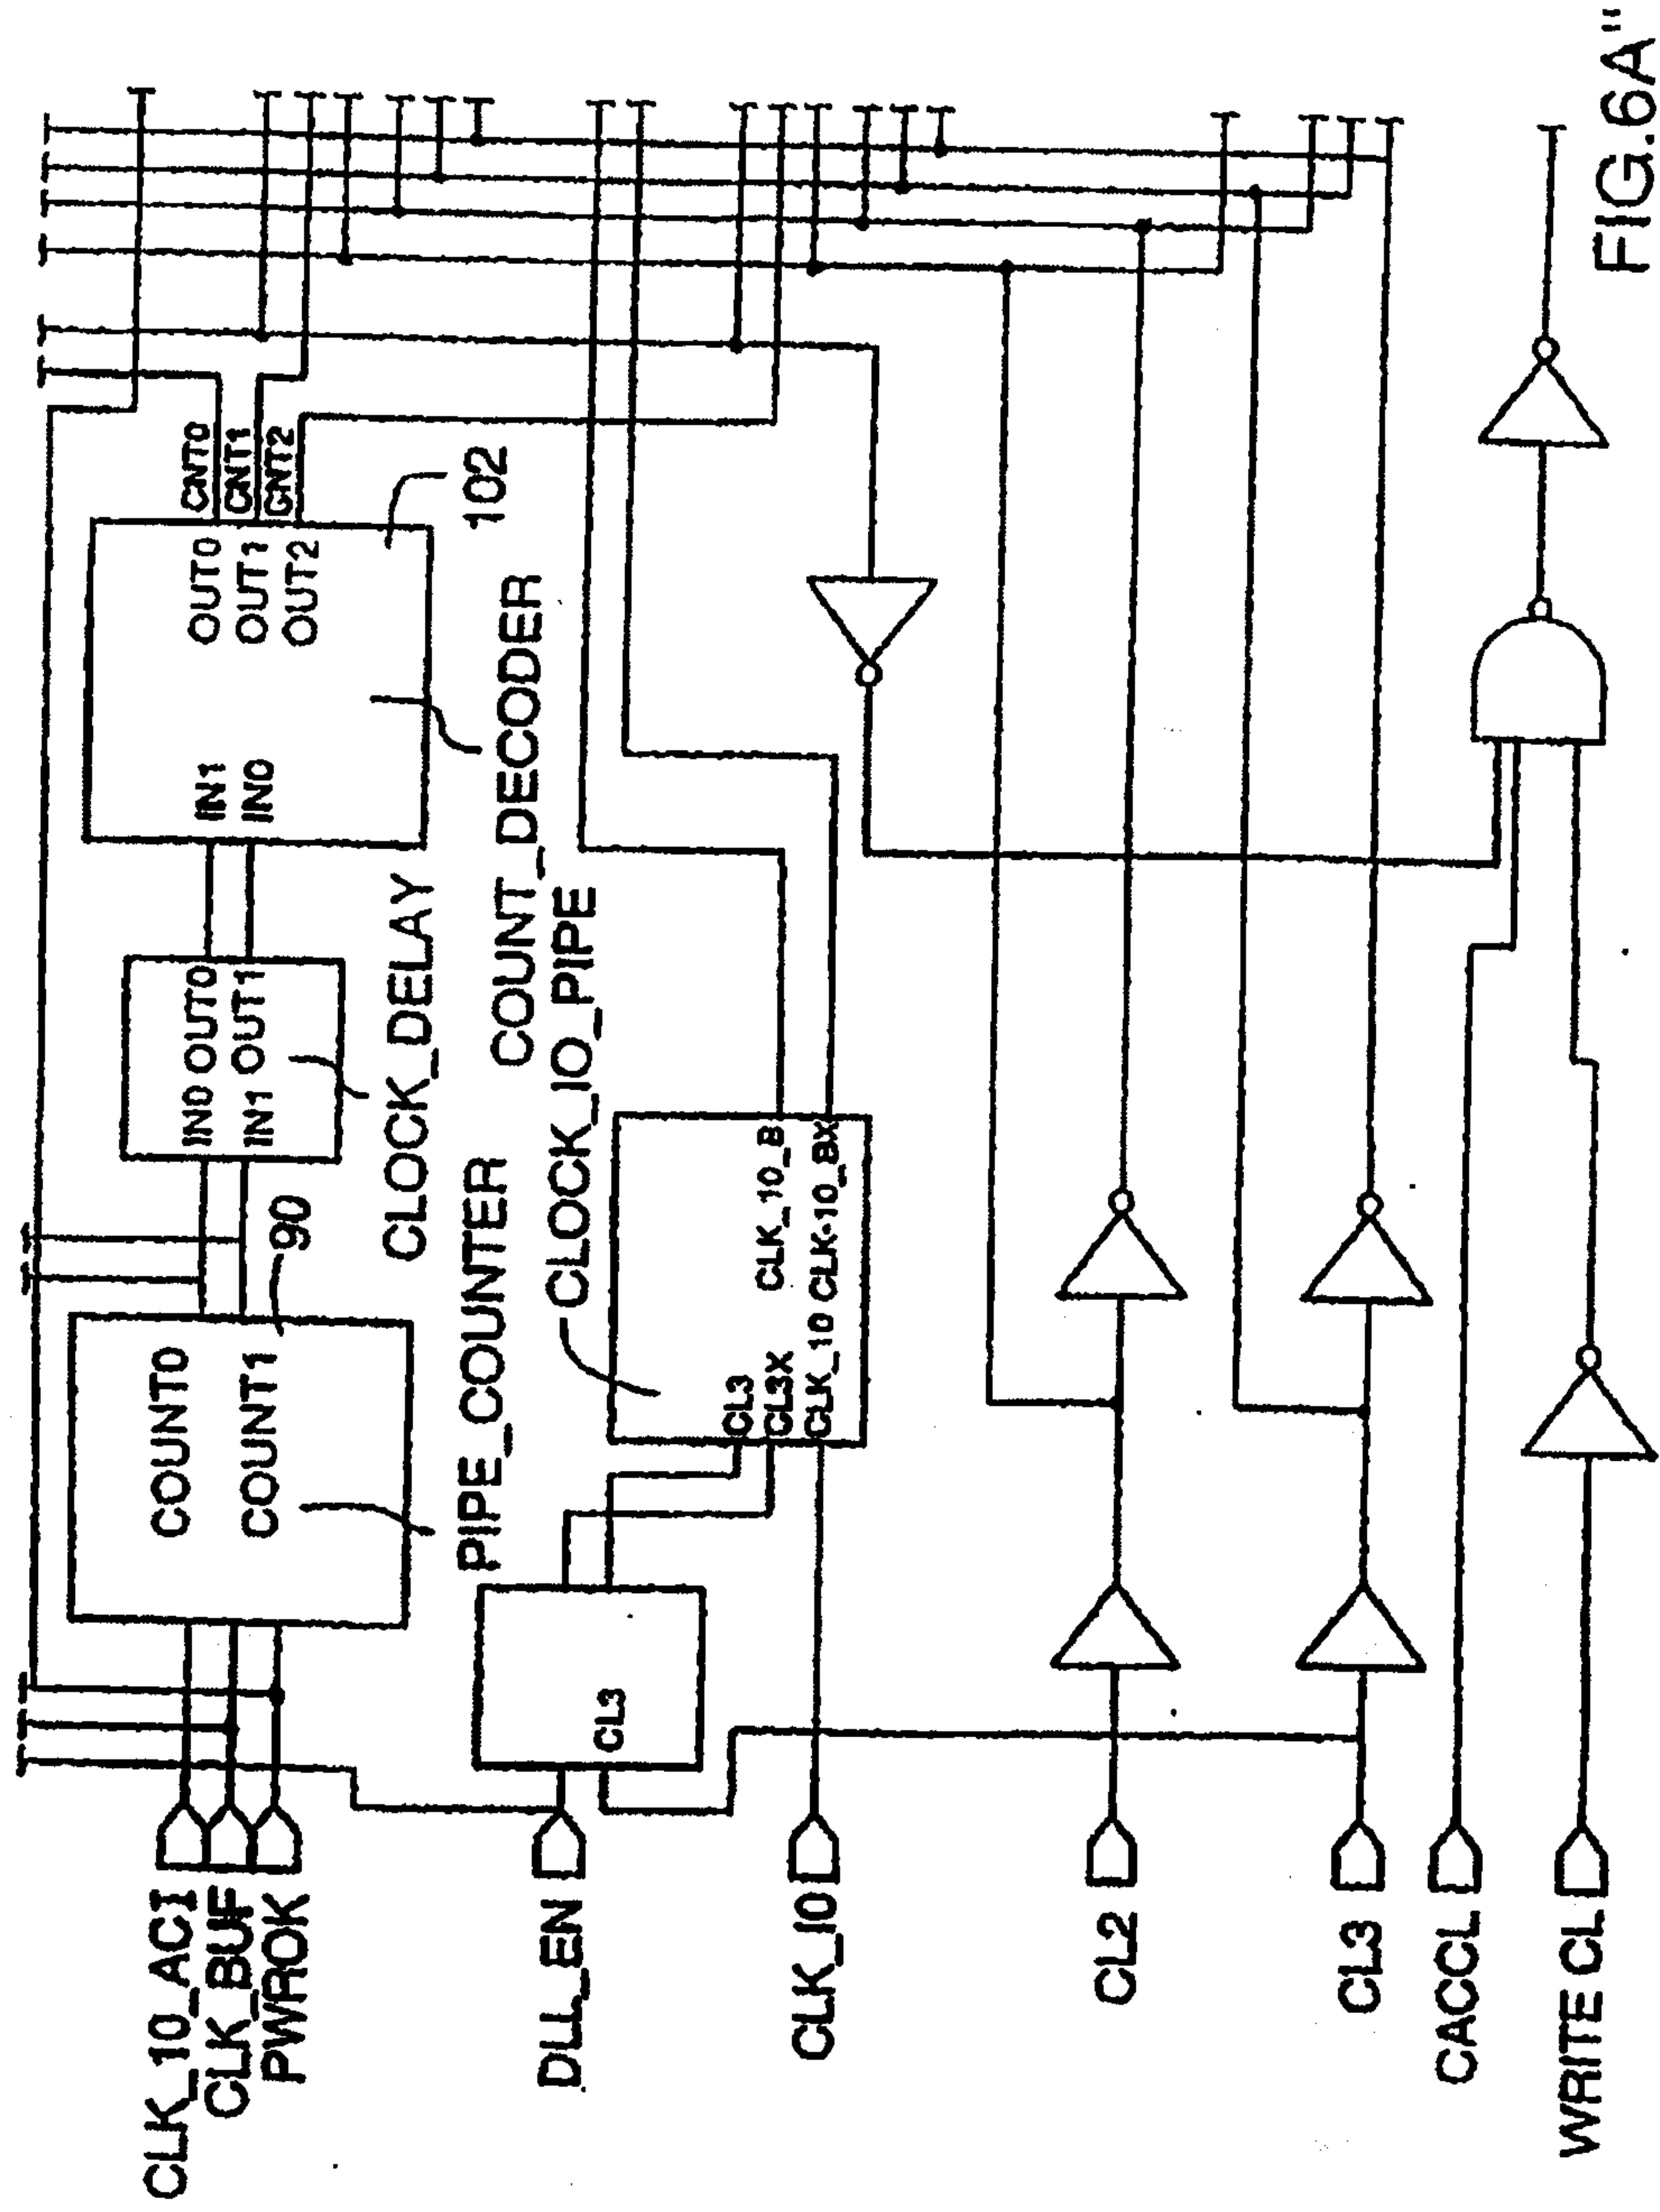


FIG.6A'



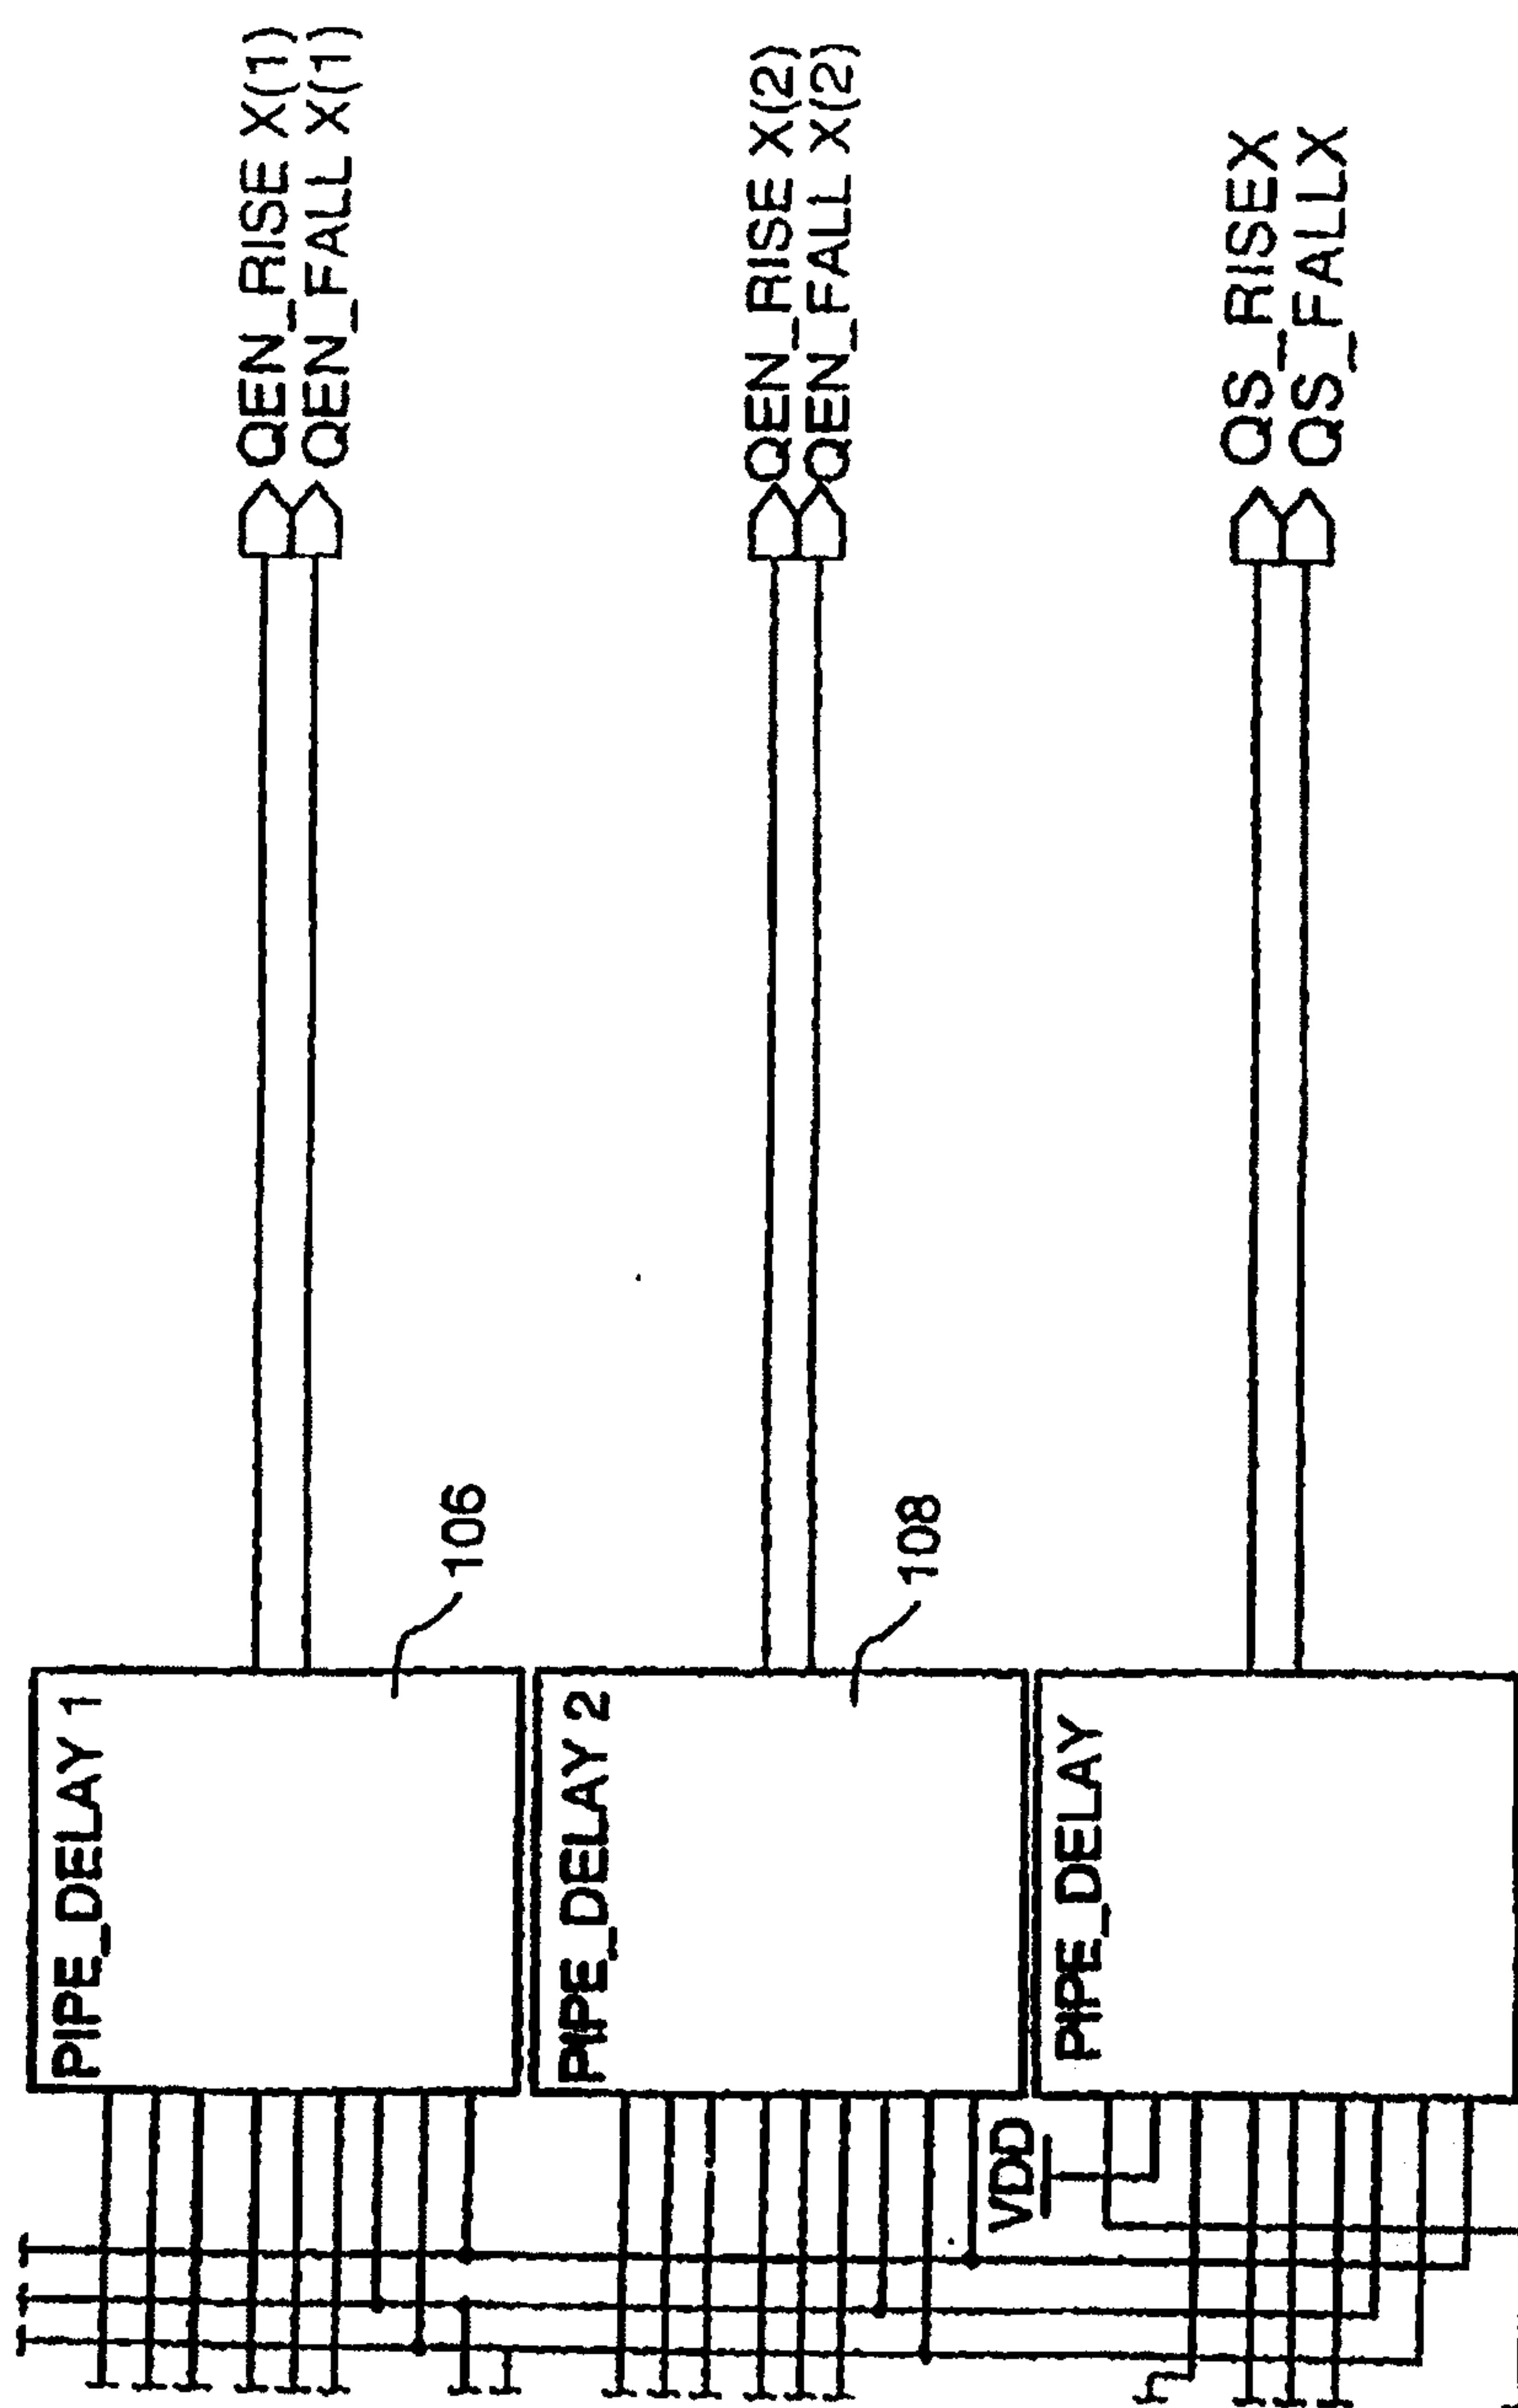


FIG.6A"


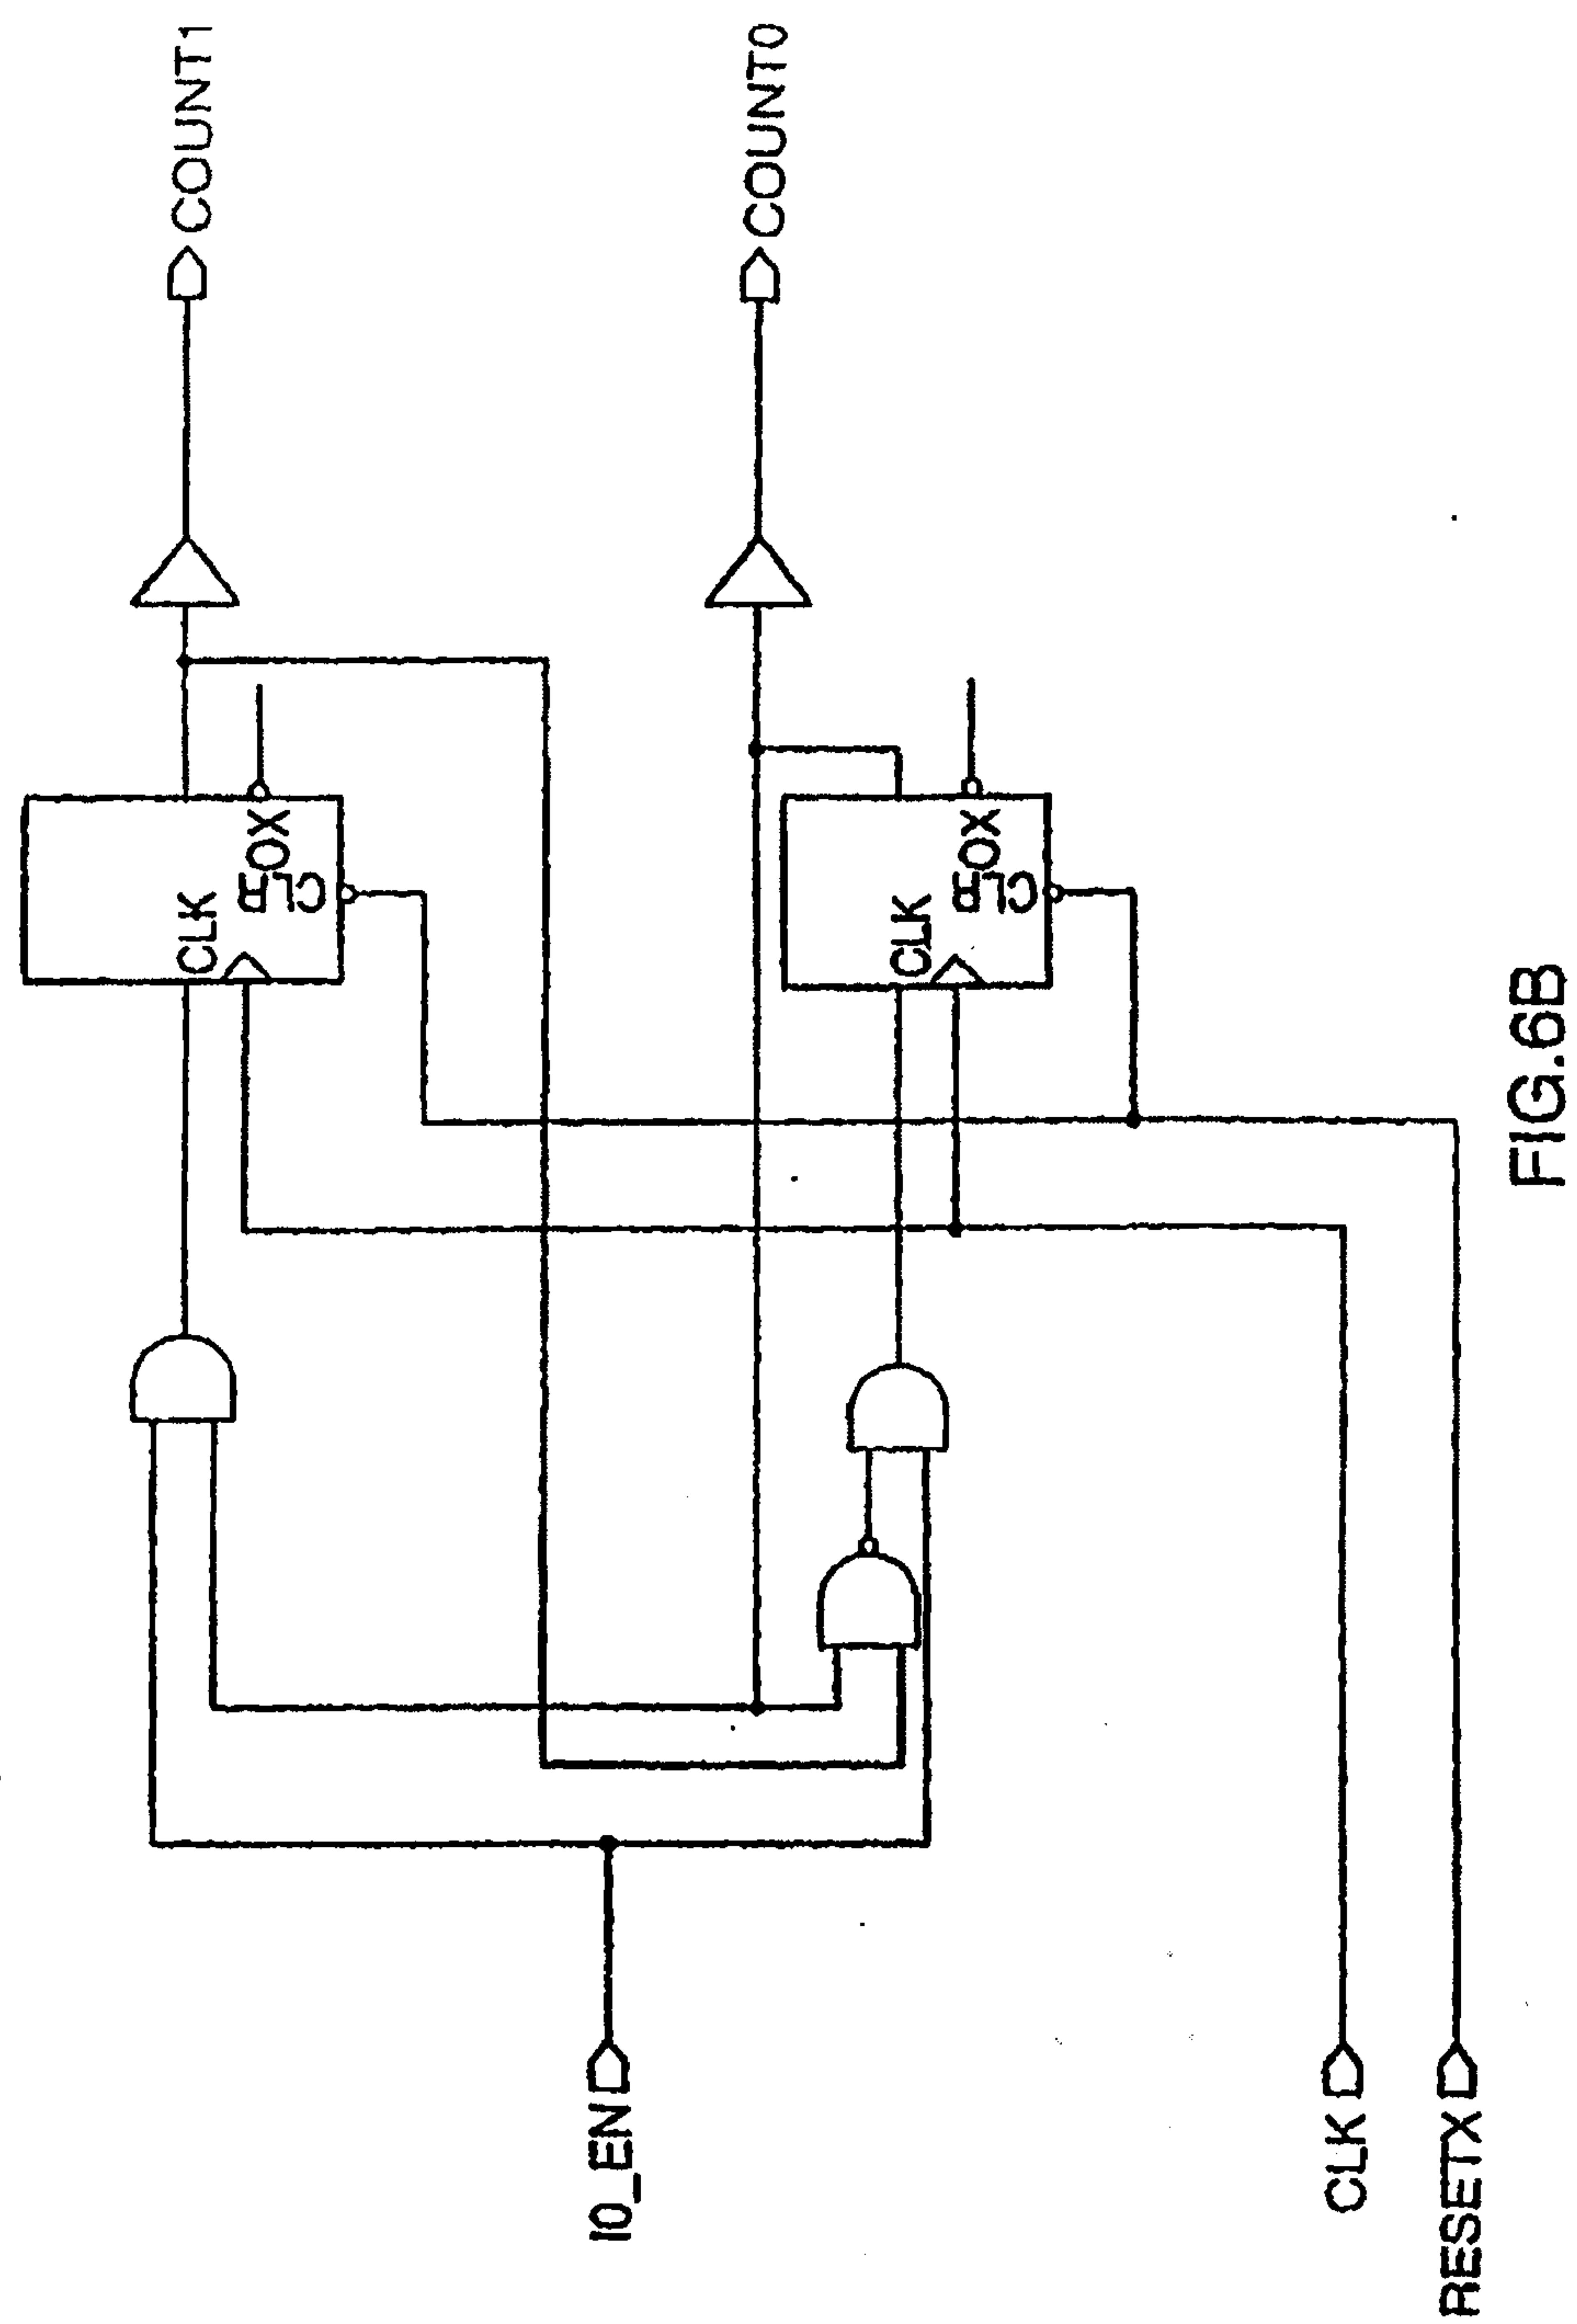


FIG. 6B

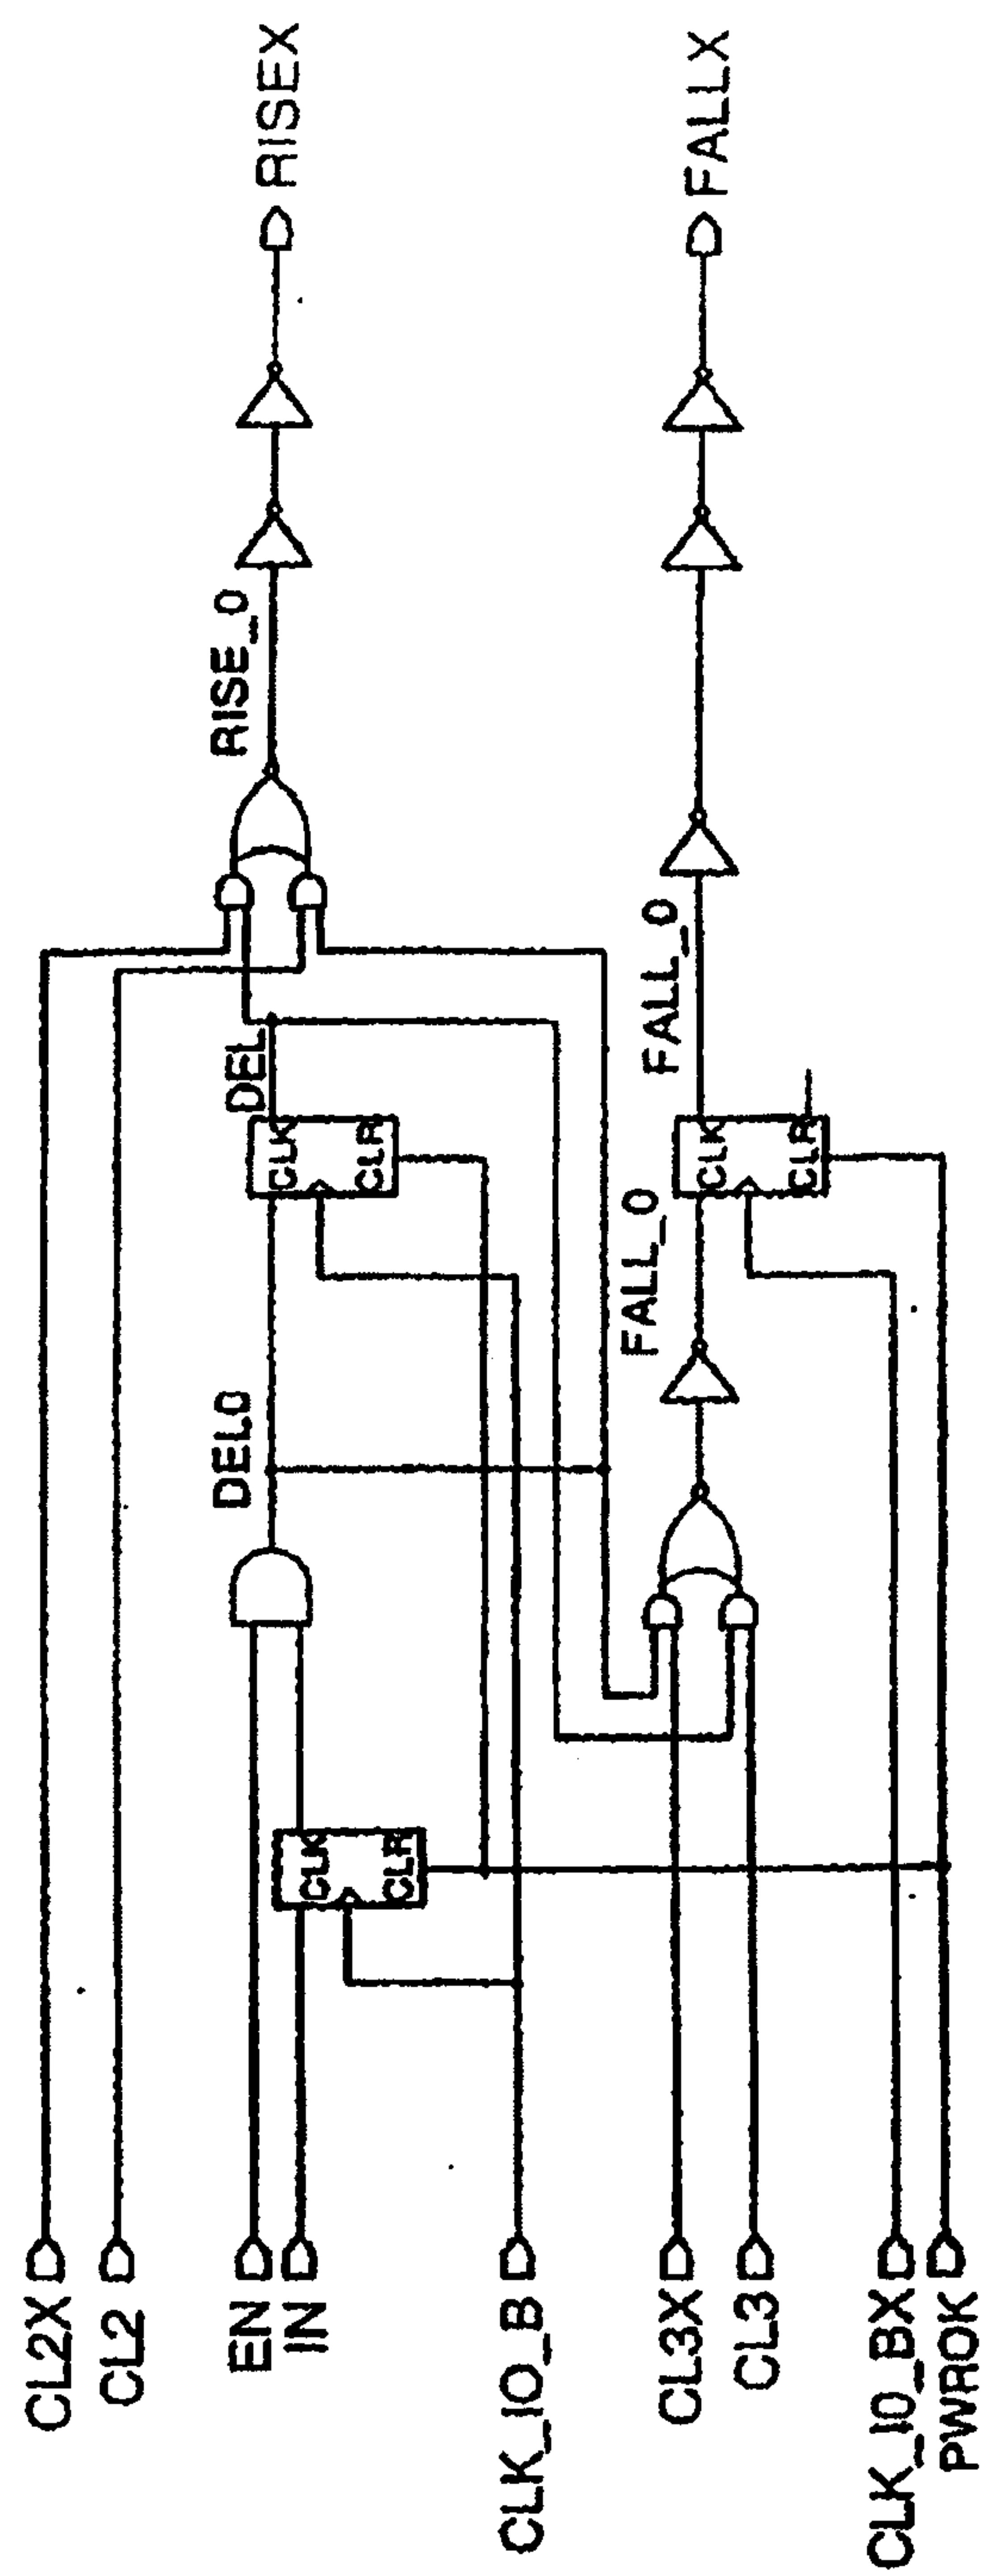

卷之六

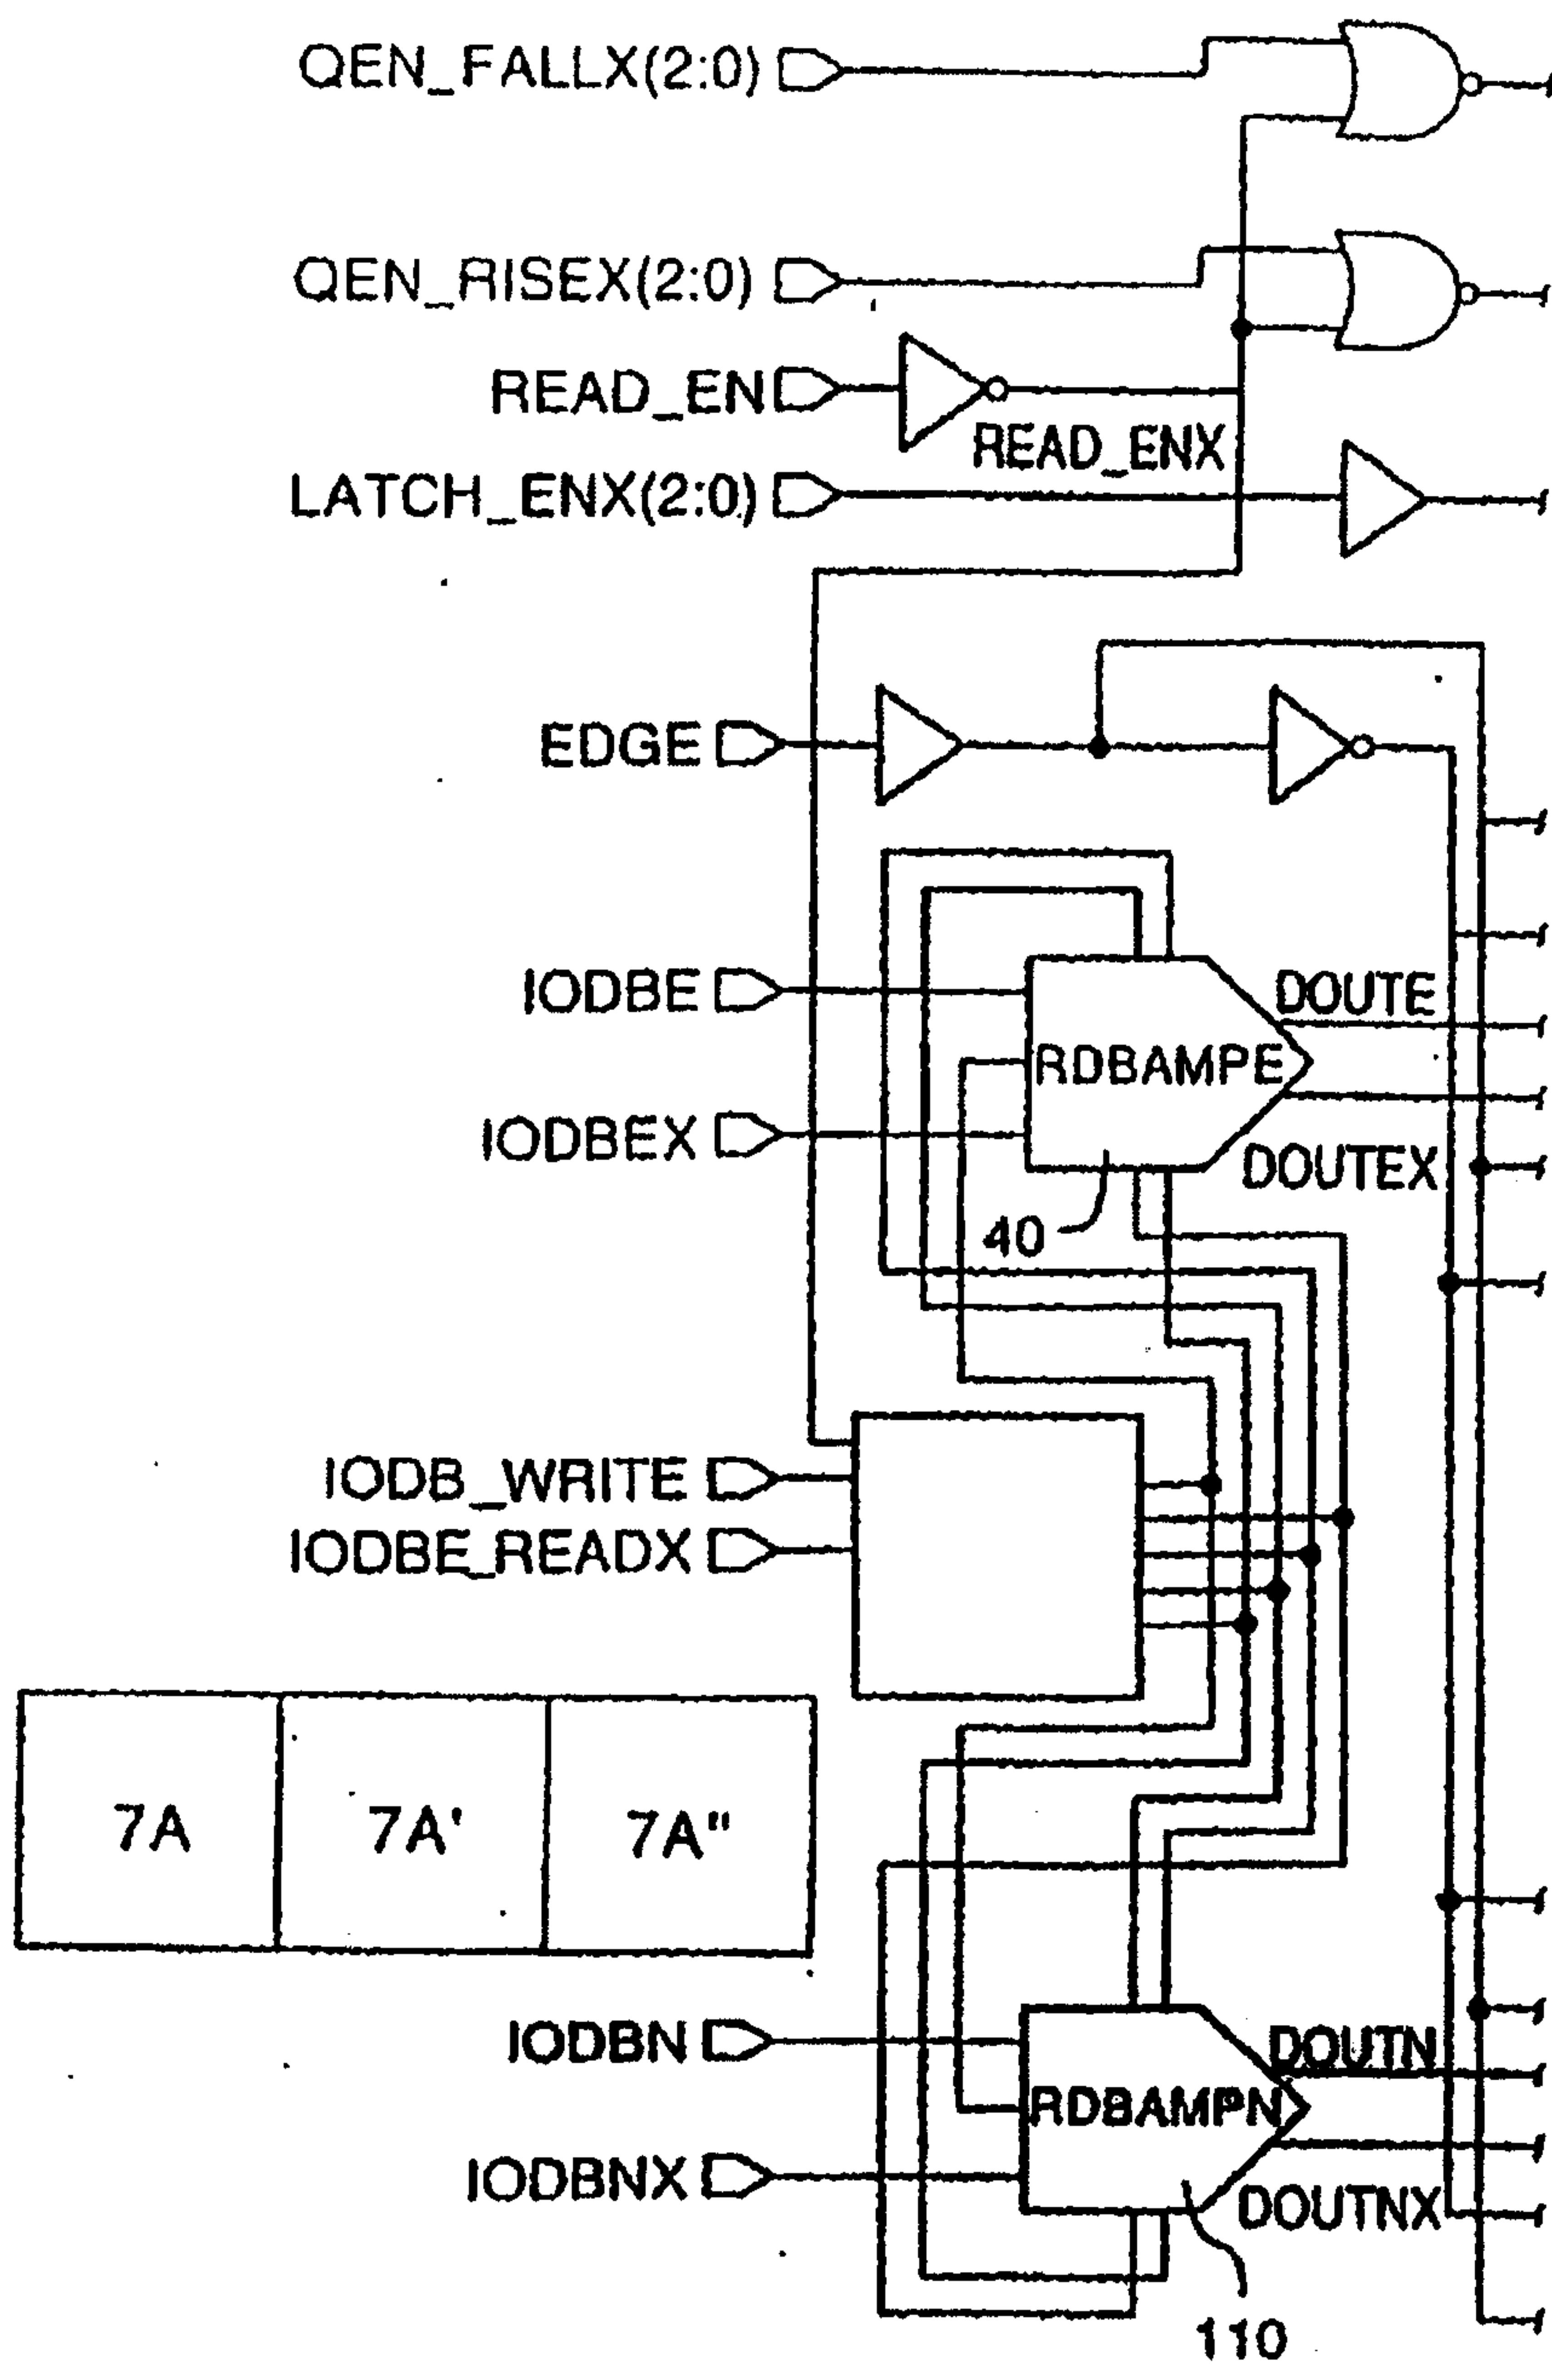


FIG.7A

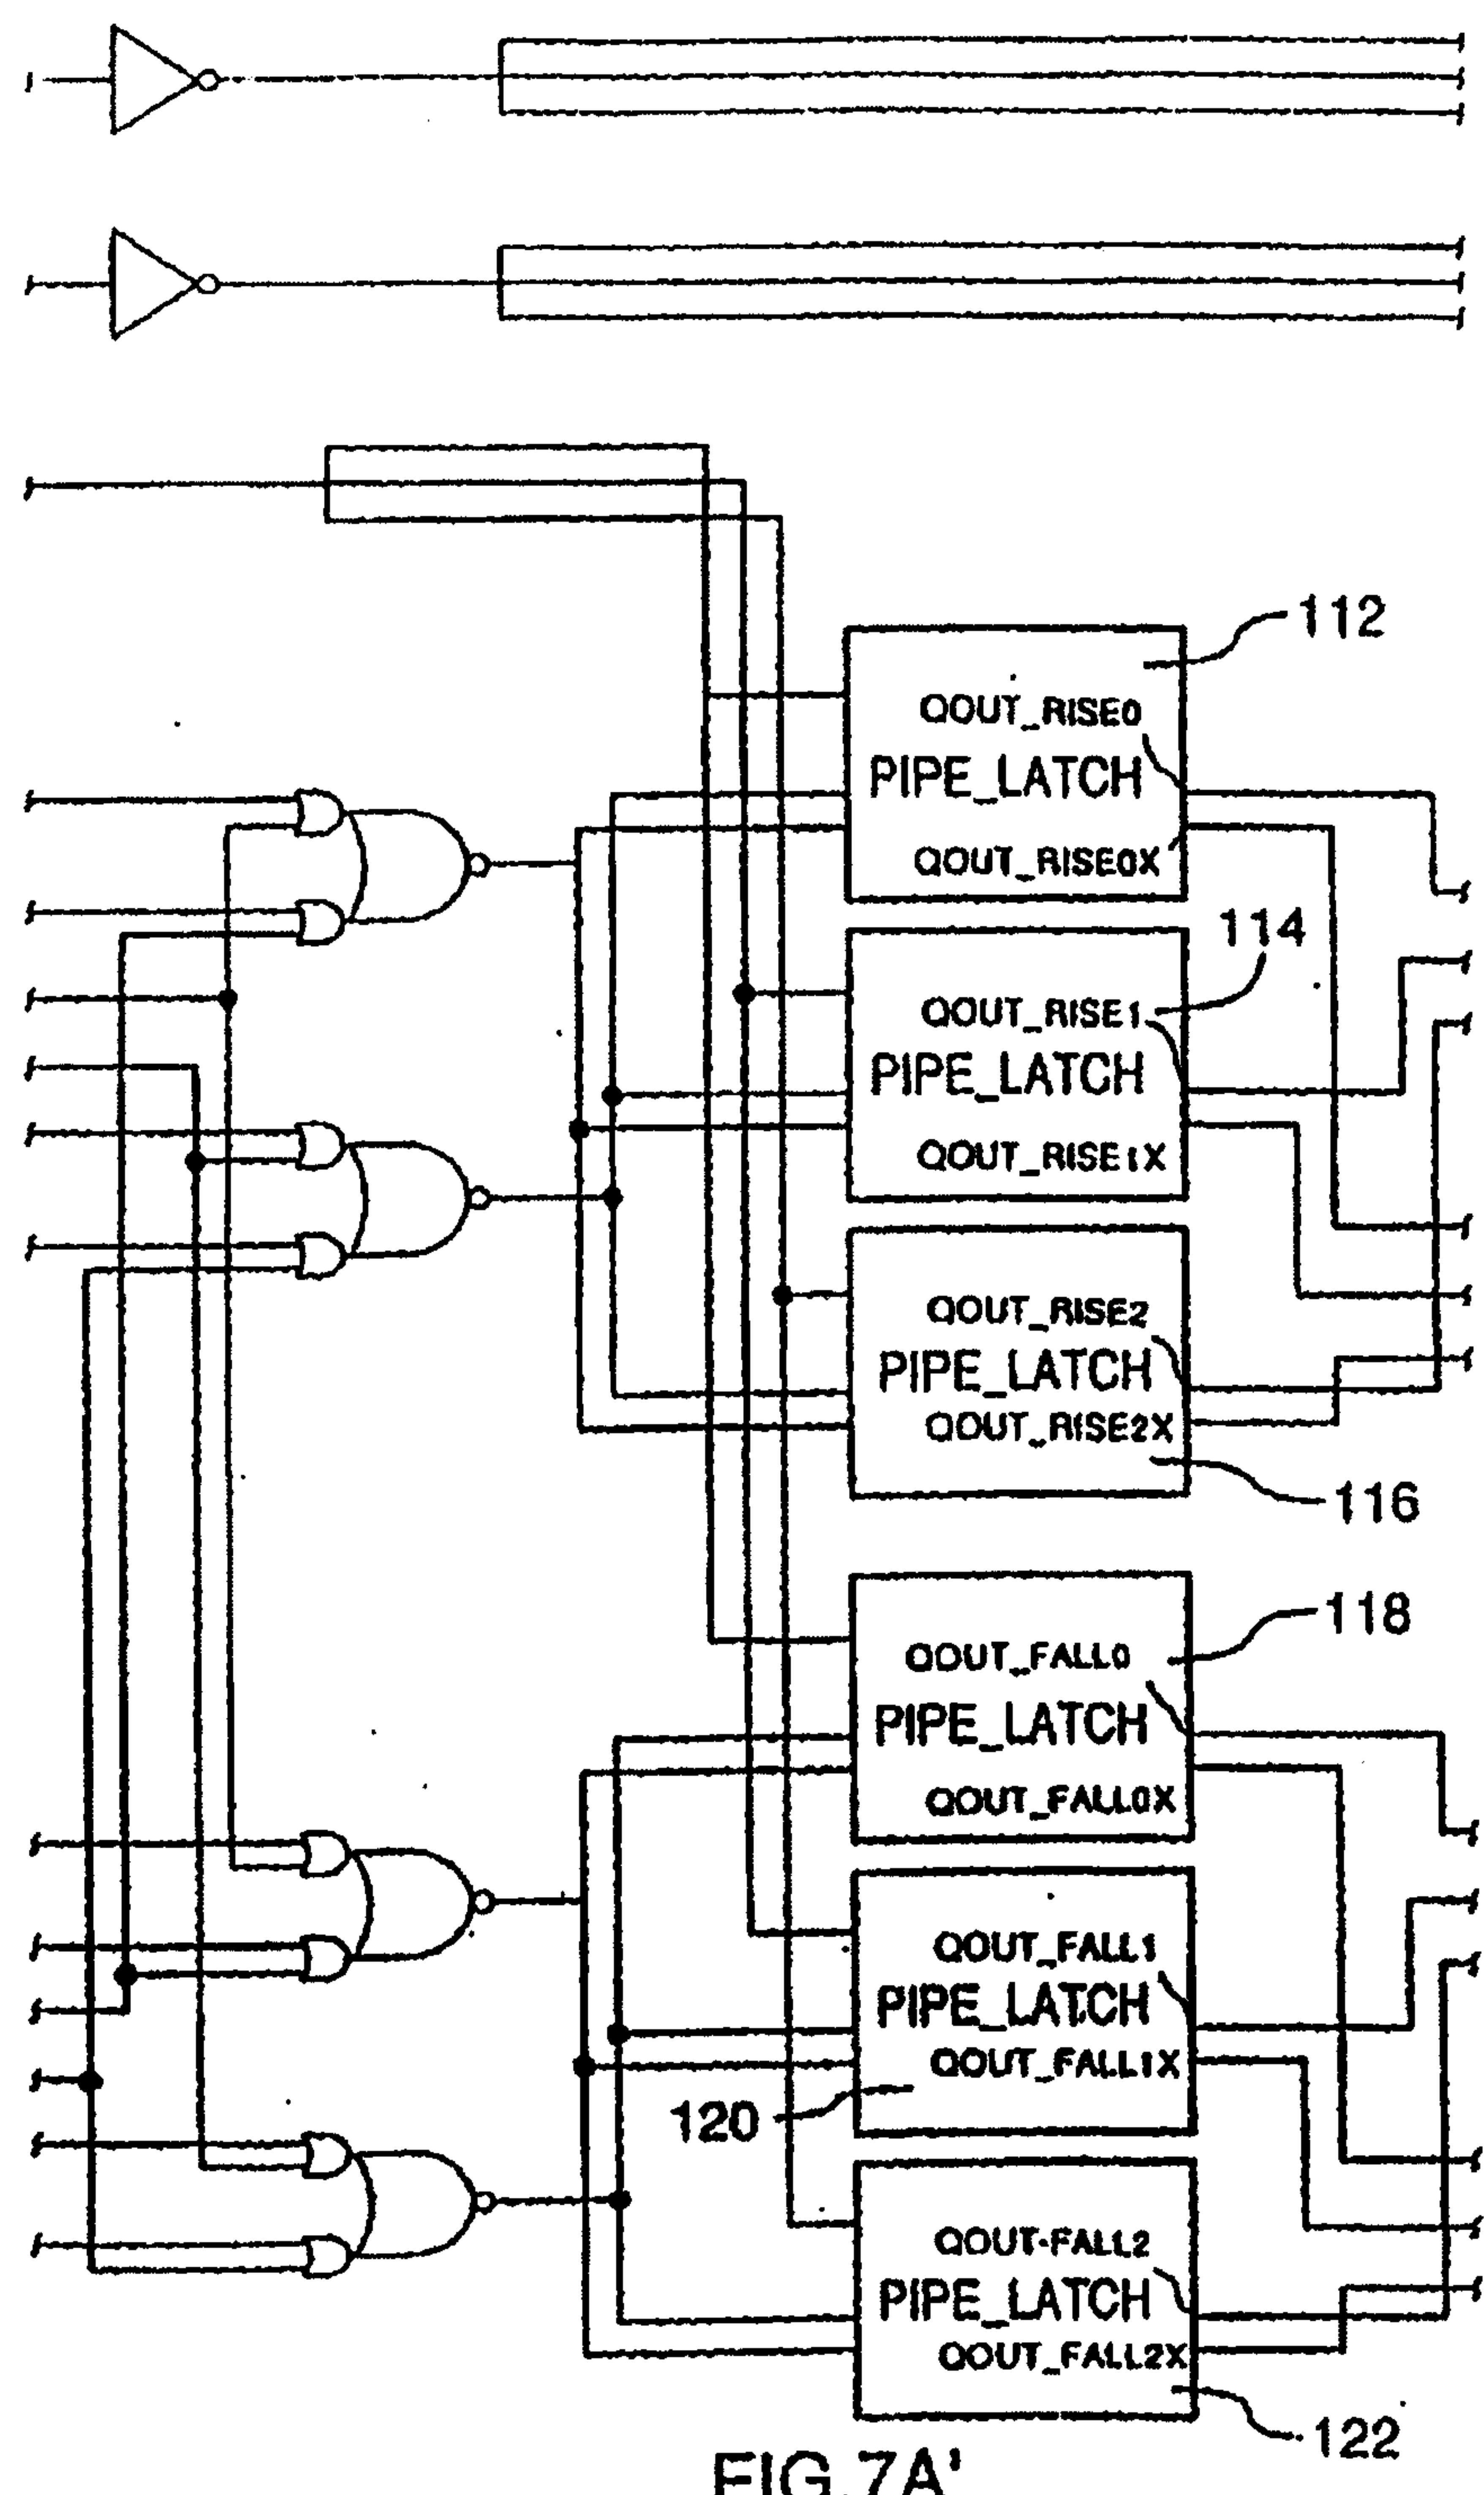


FIG.7A'

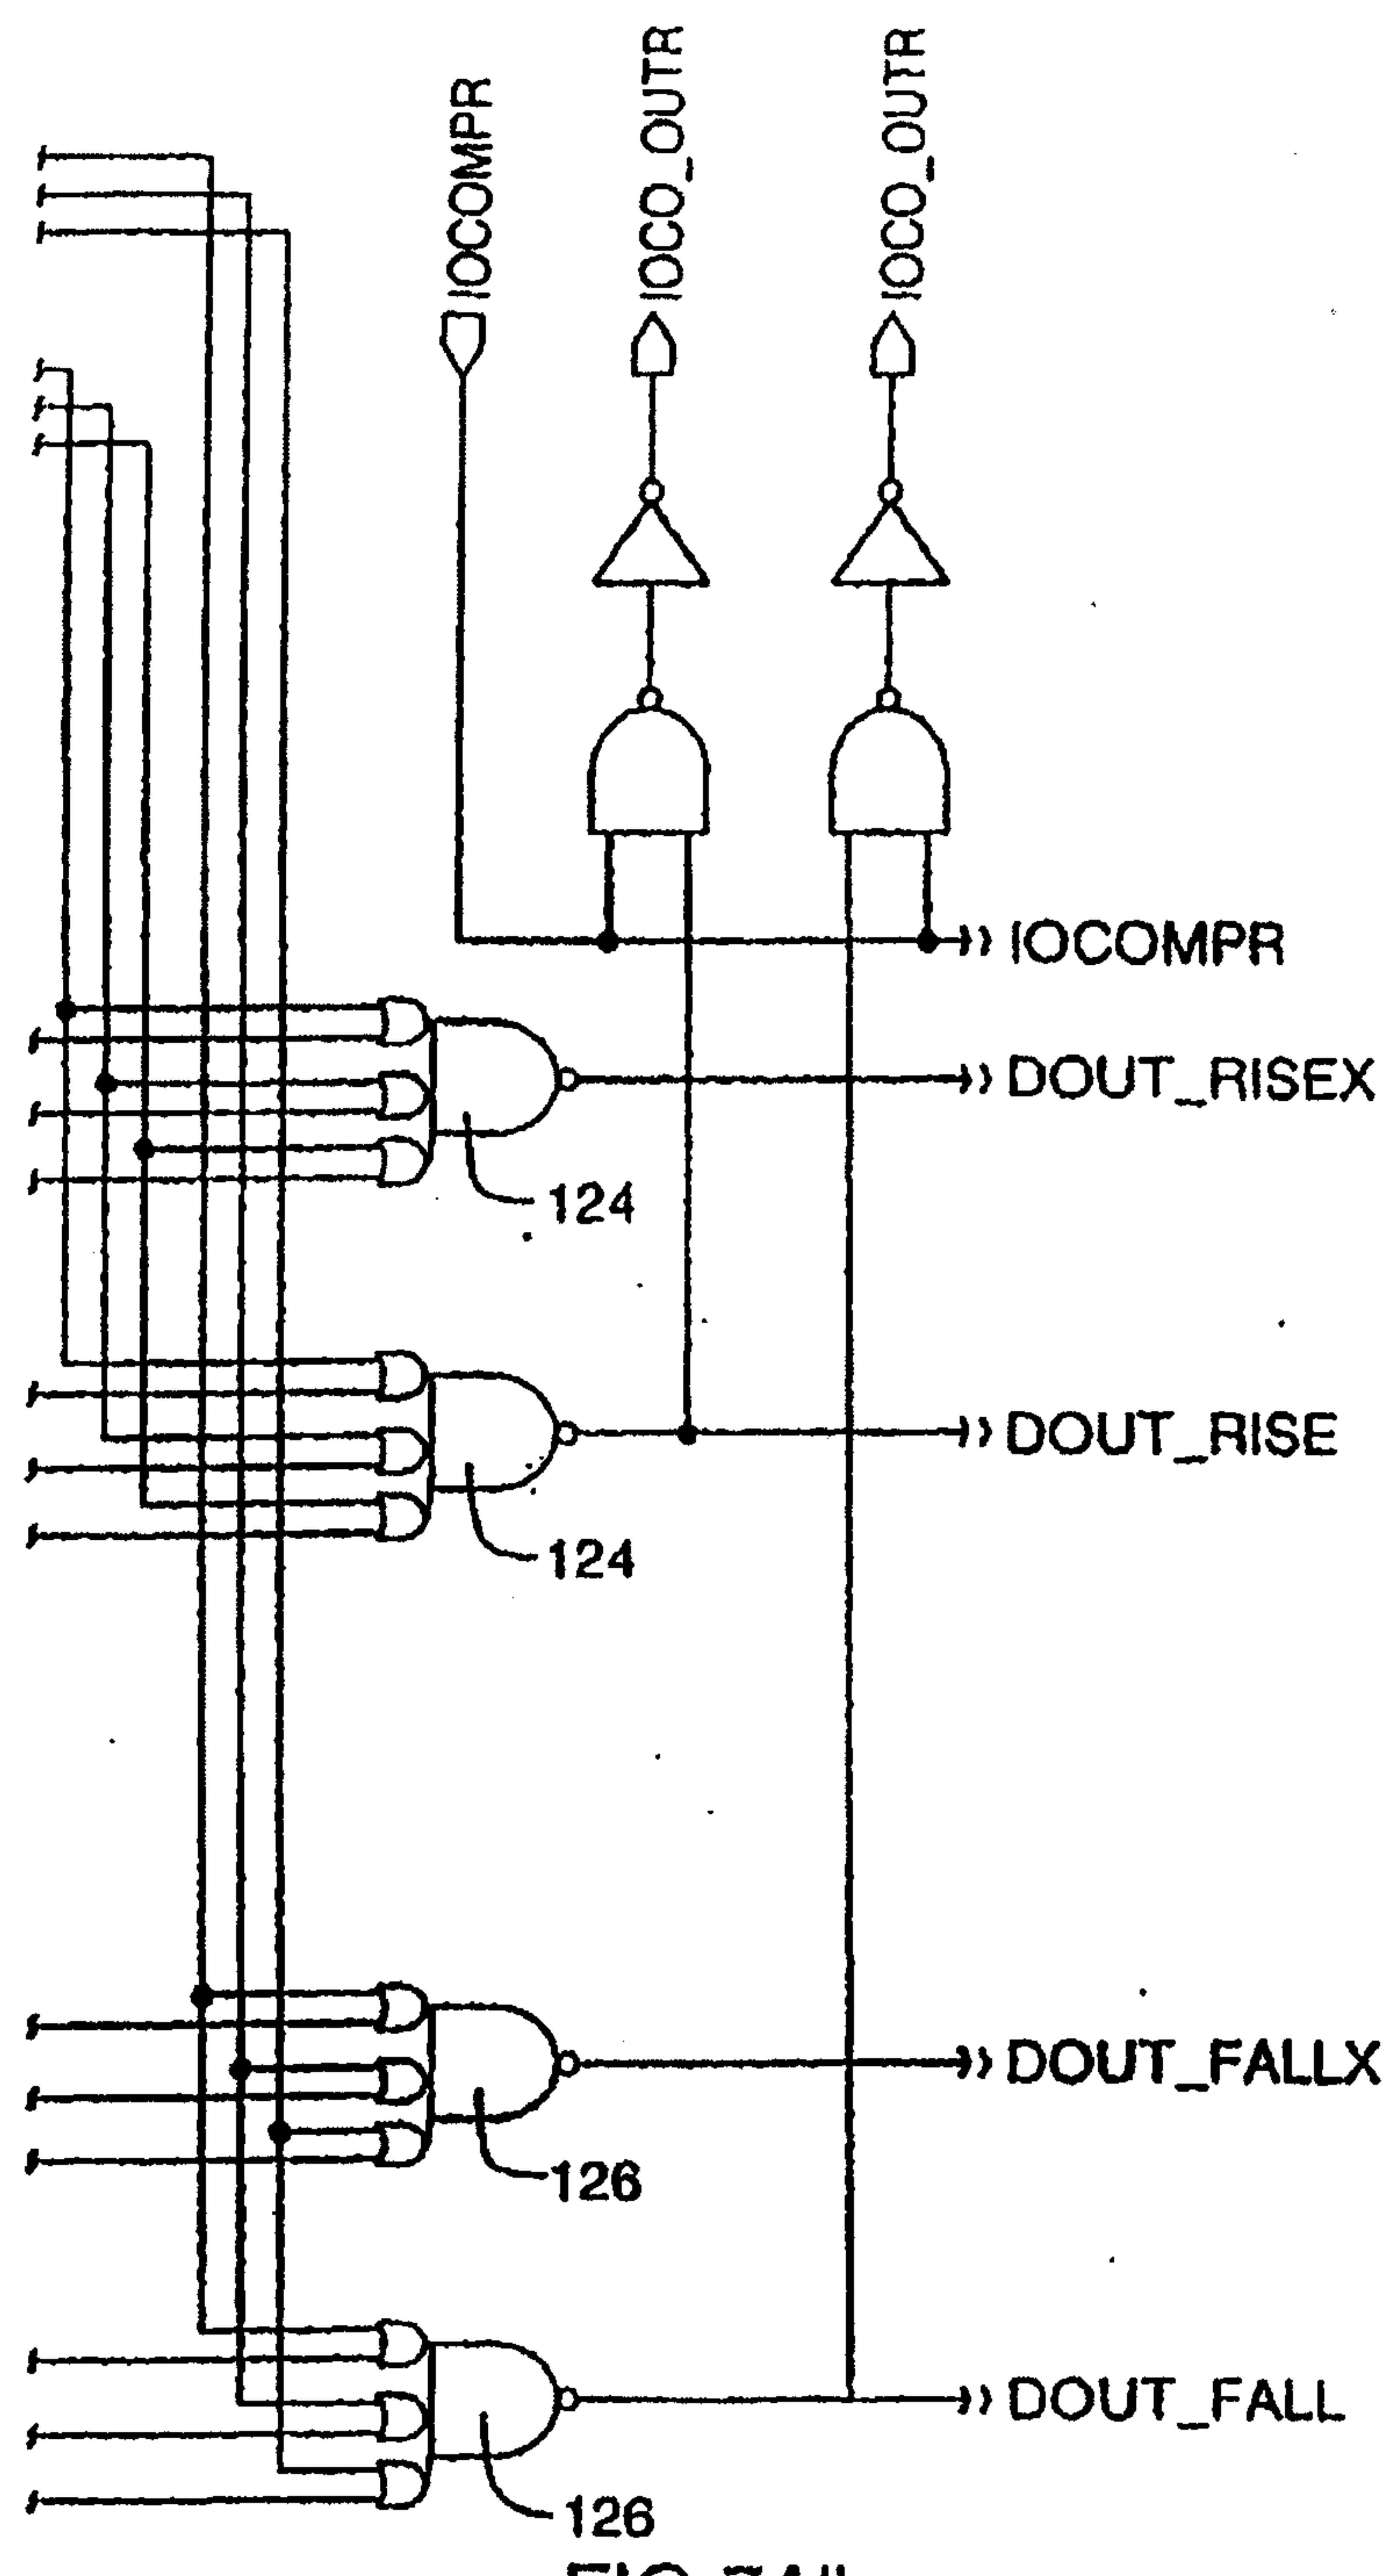


FIG.7A''




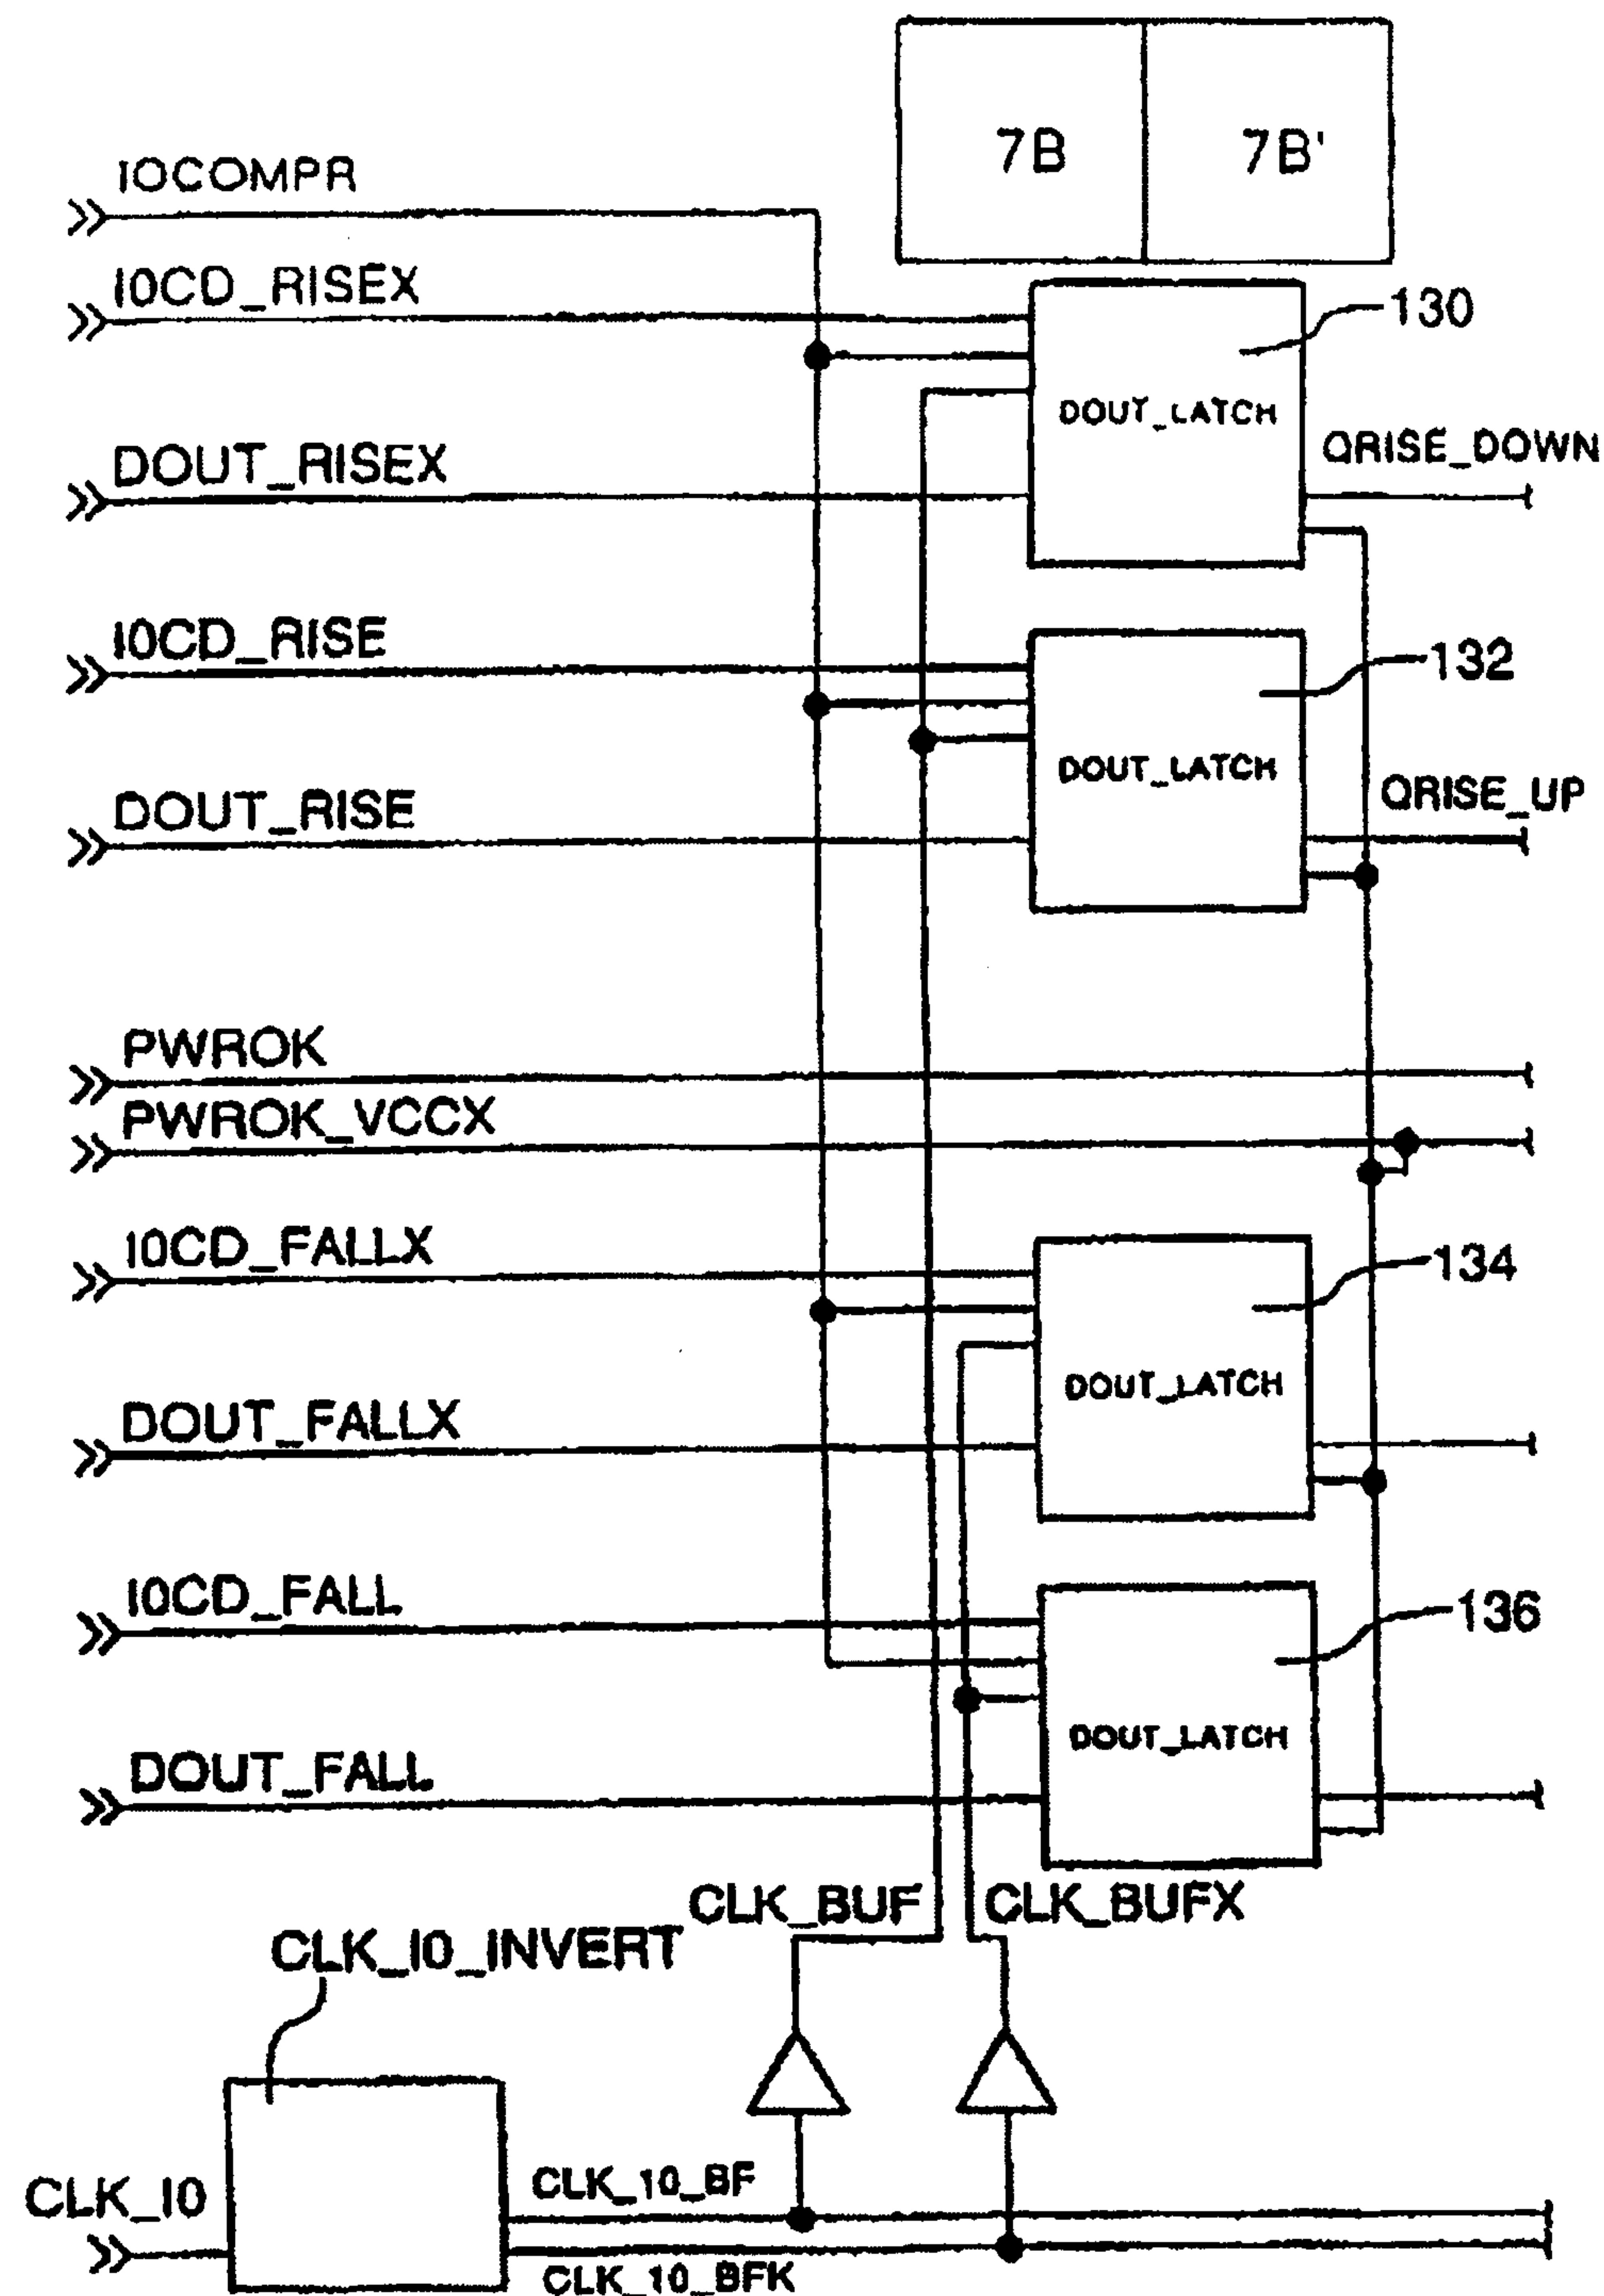


FIG.7B

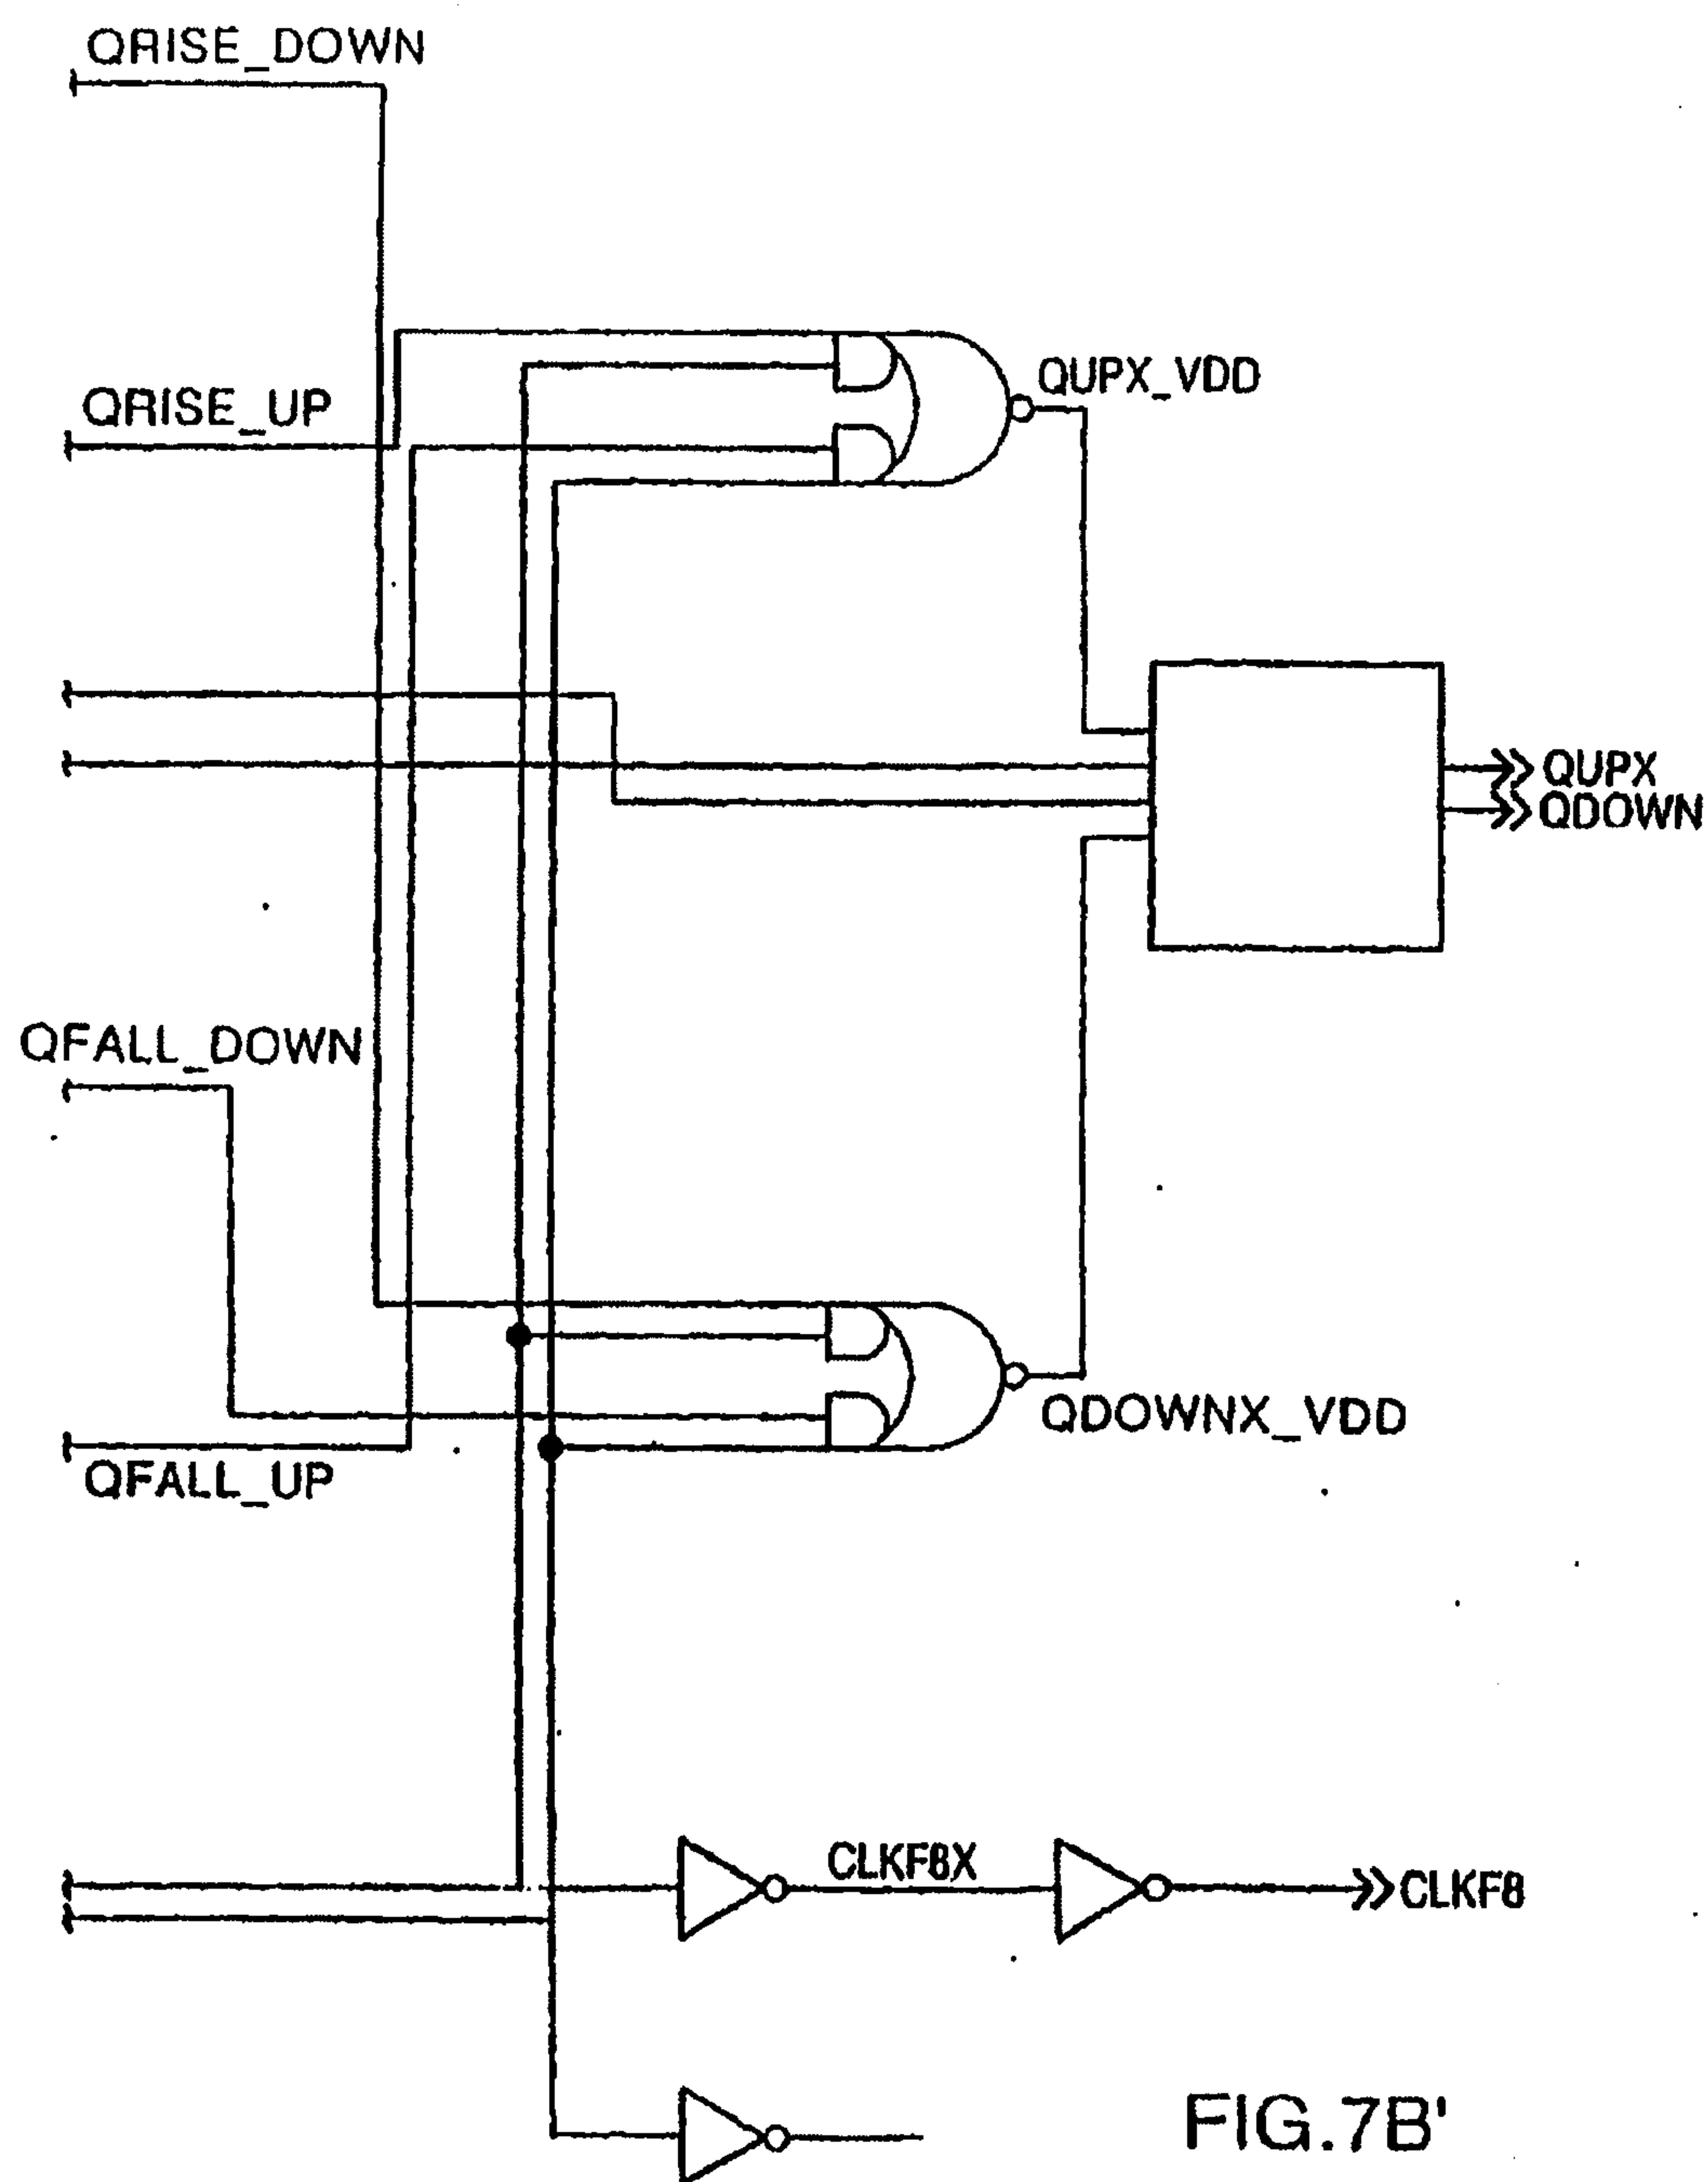

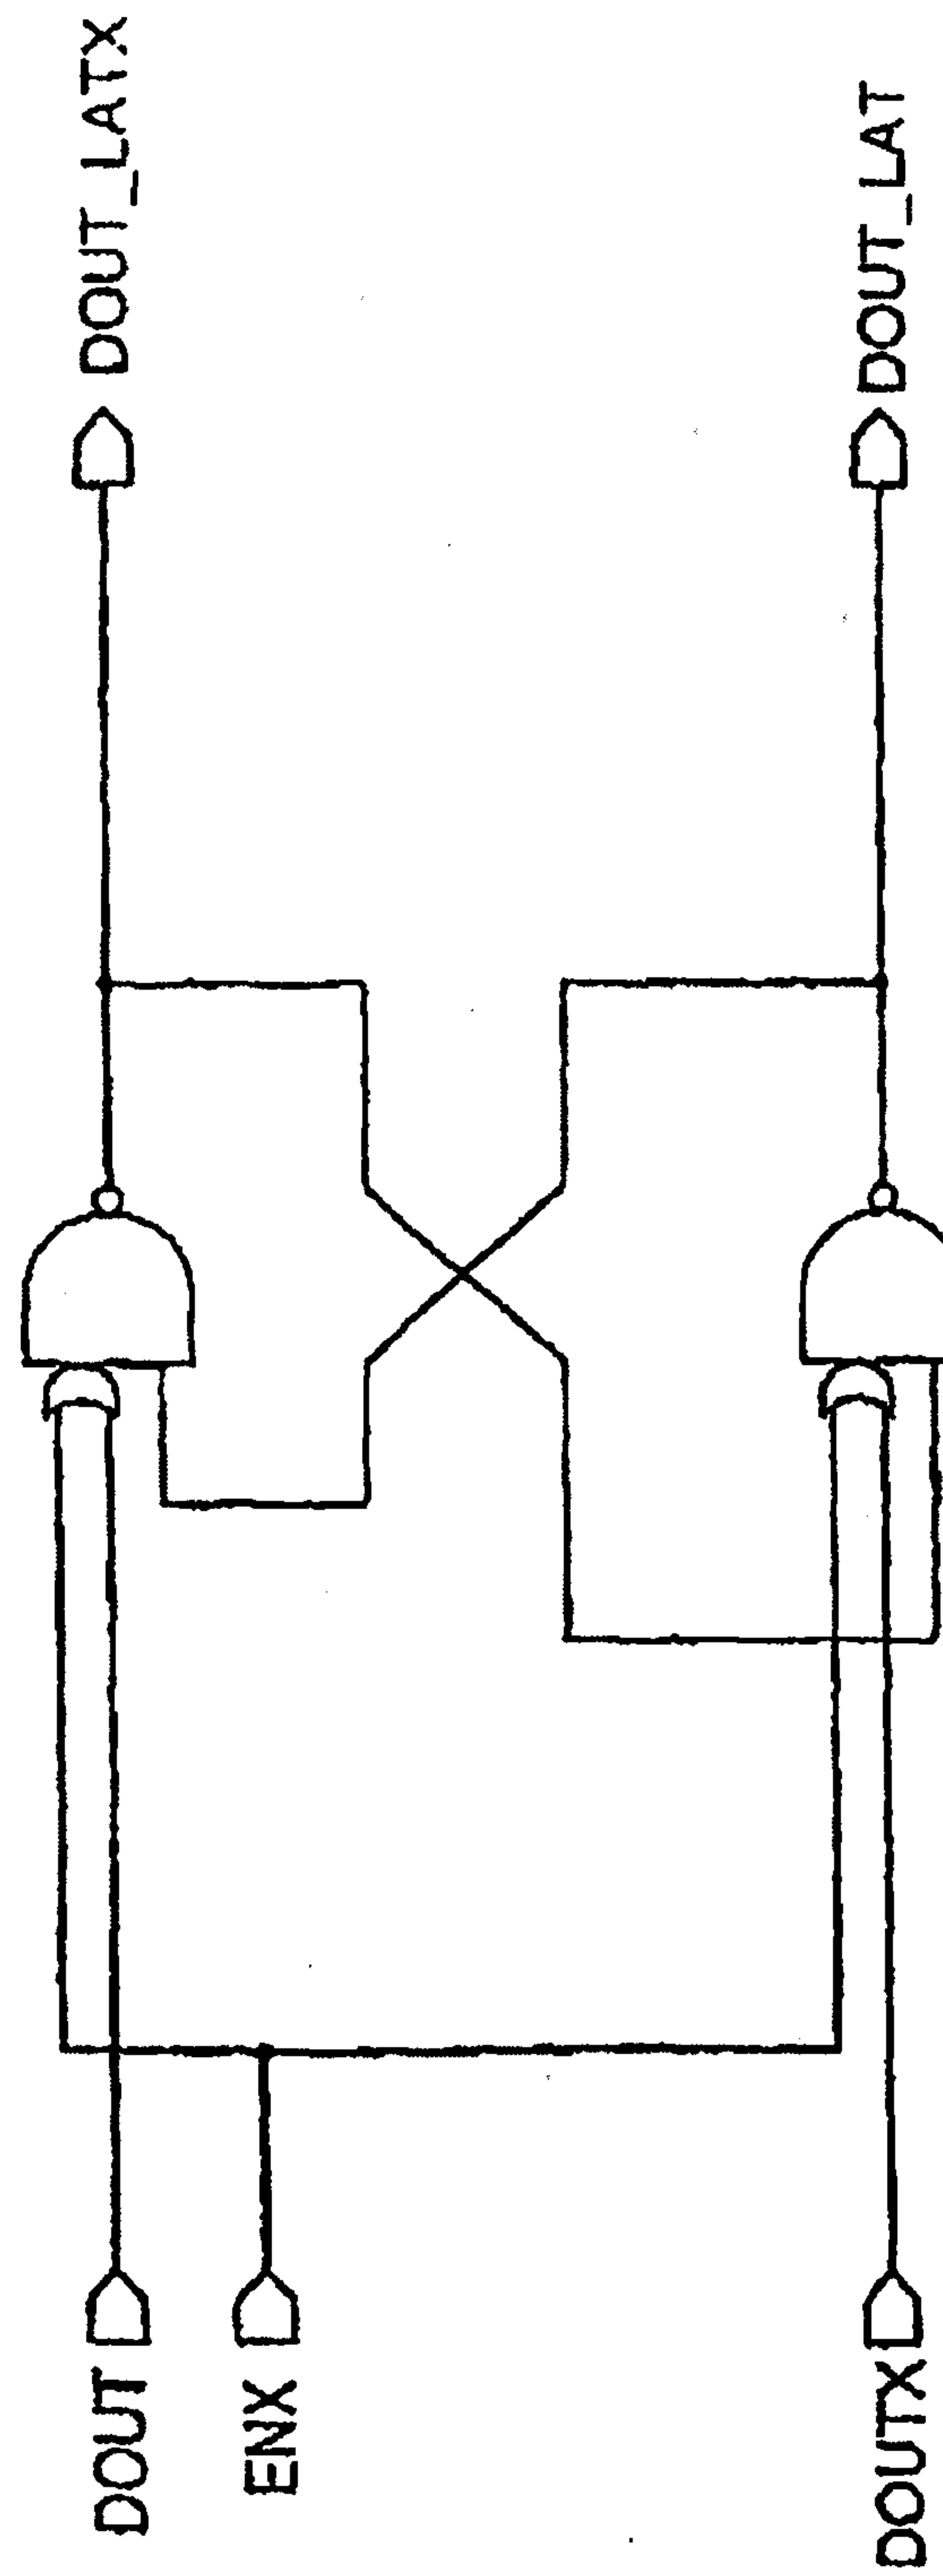

七

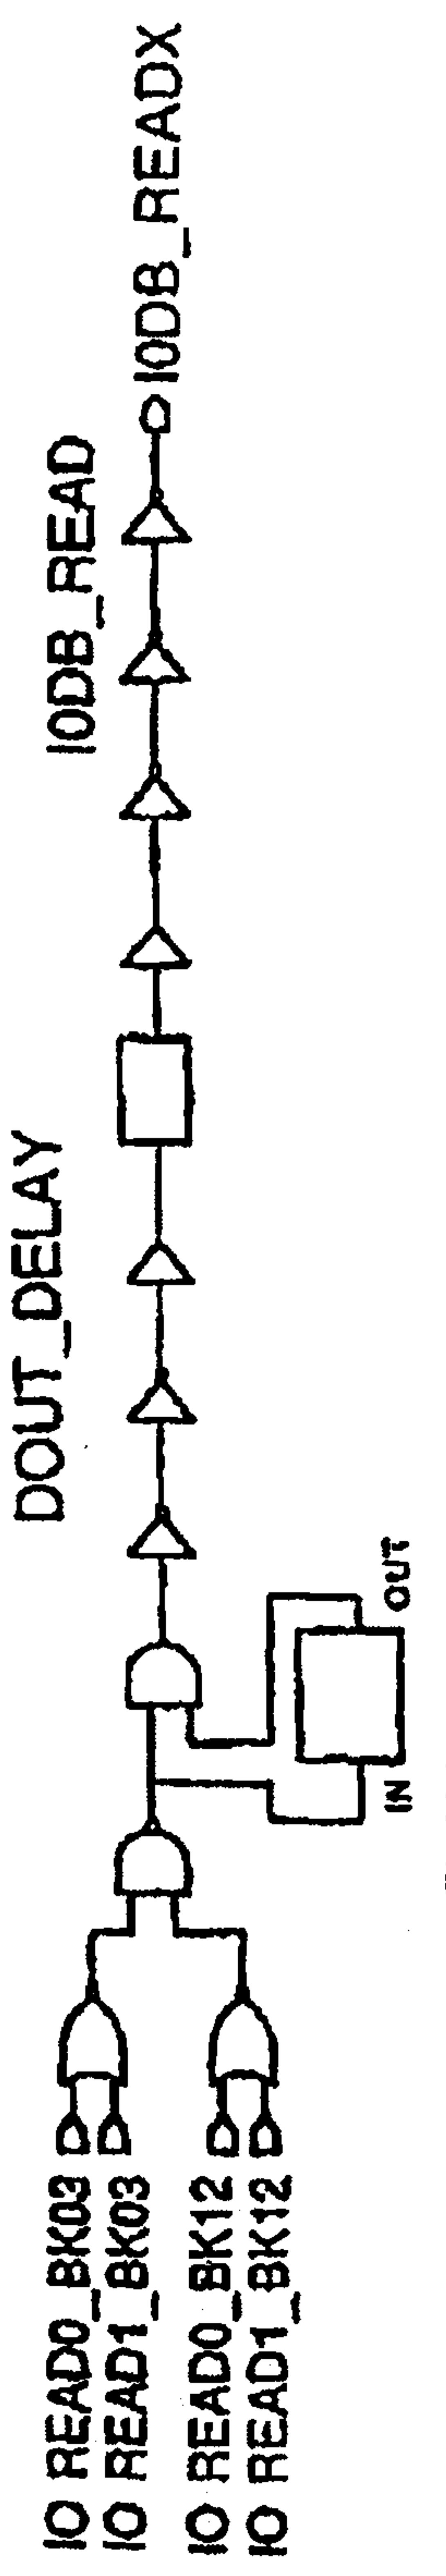

四  
正

