

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 177 707 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

15.09.2004 Bulletin 2004/38

(21) Application number: **00932346.0**

(22) Date of filing: **12.05.2000**

(51) Int Cl.7: **H04S 1/00**

(86) International application number:
PCT/US2000/013049

(87) International publication number:
WO 2000/070913 (23.11.2000 Gazette 2000/47)

(54) **CENTRALIZING OF A SPATIALLY EXPANDED STEREOPHONIC AUDIO IMAGE**

ZENTRIERUNG EINES RÄUMLICH ERWEITERTEN STEREOPHONISCHEN TONBILDES

CENTRAGE D'UNE IMAGE DE SONS STEREOPHONIQUES DILATEE SPATIALEMENT

(84) Designated Contracting States:
DE FR GB IT

(30) Priority: **13.05.1999 US 134005 P**

(43) Date of publication of application:
06.02.2002 Bulletin 2002/06

(73) Proprietor: **Thomson Licensing S.A.**
92648 Boulogne Cedex (FR)

(72) Inventor: **MORRIS, Robert, Edward, Jr.**
Indianapolis, IN 46256 (US)

(74) Representative: **Thies, Stephan et al**
Deutsche Thomson-Brandt GmbH,
European Patent Operations,
Karl-Wiechert-Allee 74
30625 Hannover (DE)

(56) References cited:
US-A- 4 229 716 **US-A- 4 451 927**
US-A- 4 866 774

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 177 707 B1

Description

BACKGROUND

[0001] Stereophonic enhancement audio systems typically process sum 'L+R and difference L-R signal components which, if not otherwise available, can be generated from a pair of left L and right R signals. The difference signal can be used to create a spatially broadened stereo image when reproduced through a pair of left and right loudspeakers or through a surround system.

[0002] Boosting the level of the difference signal with respect to the sum signal can widen such a perceived sound image. Such processing of the difference signal includes equalization comprising both bass and treble boost. However, an increase in level in the difference signal can have undesirable effects on a person's perception of the sound. For example, boosting of the difference signal in the mid-range of audio frequencies can cause a sound perception which is undesirably very sensitive to the physical location of the listener with respect to the left and right loudspeakers. Further, the spatially broadened stereo image does not properly localize sounds which would normally emanate from the center, such as speech from a person visually centered on a display of television or motion picture programming. This is the case whether or not the sound system includes a center loudspeaker or just left and right loudspeakers.

[0003] It has been found that in a system having an increase in the level of the L-R difference signal with respect to the L+R sum signal to produce a spatially broadened stereo image, that decreasing the bass response of the L+R sum signal along with increasing the treble response of the L+ R sum signal helps the listener to better localize central audio material more towards the center.

[0004] U.S. Patent No. 4,229,716 discloses an amplitude equalizer circuit utilizing active components in which unidirectional functional tuning of the amplitude, bandwidth and center frequency, may each be adjusted by varying a single resistance for each parameter. U.S. Patent No. 4,866,744 discloses a directivity servo for controllably amplifying a stereo difference signal in response to amplitude of an input signal from one side or the other or from one channel or the other.

SUMMARY OF THE INVENTION

[0005] For a consumer product it is necessary to keep costs low. It is herein recognized that the desired bass reduction in the L + R sum signal of the audio system, to help the listener to localize center audio material more towards the center, can be accomplished by the use of a gyrator to economically synthesize an inductance. A gyrator generated inductance, in combination with a resistance in the L + R sum signal path, economically provides

such a decreasing bass frequency response while avoiding the deficiencies of a wound inductance which would be more expensive, bulky, and subject to the picking-up of hum and other electromagnetic/electrostatic extraneous noise and signals. Thus, the gyrator synthesized inductance, as well as being more economical, can be used in a lower signal level portion of the audio system.

[0006] Additionally, the equalization(s) of the L+ R sum signal to reduce the signal at bass frequencies and to increase the signal at treble frequencies are switchable singly or in combination between "ON" and "OFF" modes, and/or are variably adjustable singly or in combination. This switchability/adjustability permits greater flexibility to tailor the response of the system to the listener's satisfaction.

DESCRIPTION OF THE DRAWINGS

[0007] The drawings are now described wherein:

Fig. 1 is a graph of the desired frequency response of the L+R sum signal for providing the desired centralizing locationalization effect for center audio material.

Fig. 2 shows block diagrams of the equalization in the L+R sum signal path and the spatial image broadening equalization in the L-R difference signal path.

Fig. 3 shows a schematic diagram of the block of Fig. 2 which provides the equalization in the L+R sum signal path.

Fig. 4 shows switching of the bass and treble equalization circuits of Fig. 3.

Fig. 5 shows an alternate embodiment of the switching of Fig. 4.

DESCRIPTION OF THE PREFERRED EMBODIMENT

[0008] Referring to the drawings wherein like members are given like numeral designations, Fig. 1 shows a nominal graph of the desired frequency response of the L+R sum signal for providing the desired centralizing locationalization effect for center audio material. This frequency response shows various levels of decreased bass response between the dashed lines of minimum bass 12 and maximum base 14 starting at 580 Hz, with a minimum response between 250 and 300 Hz, and then with an increasing bass response for a one dB gain at 100 Hz. The nominal treble response increases starting at 580 Hz up to a maximum gain of about 4 dB at about 2,000 Hz and above, within minimum treble 16 and maximum treble 18 limits shown by dashed lines.

[0009] Fig. 2 shows in block diagram form, the present equalization 20 in the L + R sum signal path and the spatial image broadening equalization 22 in the L-R difference signal path. Spatial image broadening equalization 22 using the L-R difference signal is known in the

prior art.

[0010] Fig. 2 shows the formation of the L+R and L-R signals from L and R signals, but this need not be the case for an FM or television stereophonic program in the United States wherein the detected signals are already in L + R and L-R format, and have to be matrix decoded to provide separate L and R signals. Thus, matrixing encoders/decoders 24/26 are shown for the instance when the difference L-R and sum L+R signals have to be both encoded and decoded.

[0011] Fig. 3 shows schematic diagrams of the block 20 of Fig. 2 which provides the equalization in the L+R sum signal path which helps the listener to localize center audio material more towards the center. LC network 30 is a divider with resistor 32 effectively realizing the bass frequency response of Fig. 1. Simulated gyrator inductance 34 has reduced impedance at lower frequencies, thus reducing the bass response with divider resistor 32 until the impedance of capacitor 36 in series with inductance 34 takes over and raises the response at lower frequencies. This divider can be placed at the input of an op-amp stage 38 which buffers the signal and allows a simple series RC network using feedback around op-amp 40 to provide the high frequency boost shown in Fig. 1.

[0012] More particularly, the gyrator 34 comprises a general purpose transistor 42 having an emitter electrode coupled to ground through resistor 44, and a base electrode biased through resistor 46. Capacitor 48 coupled to the base electrode, in combination with feedback resistor 50 in an almost unity gain emitter follower amplifier configuration, provide the gyrator simulated effective inductance of about 1.5 Henries. There are other circuit configurations for providing a gyrator circuit, many of which can be used herein. The gyrator 34 configuration shown is merely exemplary and is chosen to provide the required operation with a minimum cost of parts.

[0013] Capacitor 36 couples gyrator 34 to resistor 32 and provides the increasing impedance at low bass frequencies in order to increase the gain at lower bass frequencies, as discussed above, with a one dB gain at 100 Hz. The bias, provided through resistor 46, places transistor 42 in a linear operating region.

[0014] High pass filter 38 comprises op-amp 40 with feedback resistor 52 coupled to the negative terminal and a series RC network of capacitor and resistor 54, 56 coupled from the negative terminal to a source of bias which also provides an AC ground. For rising frequencies, the impedance of capacitor 54 goes down and the feedback is reduced, thus increasing the gain of op-amp 40. The bias is adjusted to place op-amp 40 in a linear operating region.

[0015] Fig. 4 shows the switching of the bass and treble equalization(s) circuits of Fig. 3. The equalization portions can be switched into an "ON" or an "OFF" mode, singly or in combination. This permits greater flexibility to tailor the response of the system to the lis-

tener's satisfaction.

[0016] This switching can be provided in response to respective control signals provided by a microprocessor (not shown), with the switching being accomplished by commonly available devices, e.g., a relay, a bipolar transistor, a MOS/CMOS FET or the like, which can be discrete components or be provided in a monolithic integrated circuit, as appropriate. The control signals are applied to respective transistors to saturate or to cut-off transistors 60, 62 of the respective gyrator and treble boost circuits. Additionally, the control signals applied to transistors 60, 62, and the bias provided by transistor 58, can each be variably adjustable, and for transistors 60, 62 be adjustable within the limits of the control signals necessary to switch the transistors between "ON" and "OFF".

[0017] Fig. 5 shows an alternate embodiment of the switching arrangement of Fig. 4 wherein the switch for the gyrator 34 and LC network 30 is removed from ground and is shown as a generic switch 64 responsive to a respective control signal, and the high pass filter circuit 38 is shown as being switched by a generic switch 66 responsive to its respective control signal.

[0018] The exemplary values of elements shown in the various Figs. are: resistor 32 = 3.3 Kohms, capacitor 36 = 0.22 uf, resistor 46 = 68 Kohms, resistor 44 = 1 Kohm, resistor 50 = 2.2 Kohms, resistors 52/56 = 15 Kohms and capacitor 54 = 0.01uf. The transistors 42, 58, 60, and 62 can be non-critical signal types, e.g., 2N2222, and op-amp 40 is a non-critical general purpose MC3404 op-amp.

Claims

1. A stereophonic audio system, comprising:

means (24) for providing a sum, L+R, and a difference, L-R, signals and respective signal paths from a pair of left, L, and right, R, signals; means (22) for providing a spatially expanded stereophonic audio effect in the L-R signal, and means (20) for processing the L+R signal for concentrating the apparent location of central sounds closer to the center between left and right sound emanating loudspeakers, the means (20) for processing comprising: means (30) for reducing signal levels at bass frequencies,

characterized in that the means for processing further comprises

means (38) for increasing signal levels at treble frequencies, and the means (30) for reducing signal levels at bass frequencies comprises a gyrator.

2. The audio system of claim 1 wherein the reduction of signal levels at bass frequencies and the increase of signal levels at treble frequencies are switchable singly or in combination between "ON" and "OFF" modes.
3. The audio system of claim 1 wherein the gyrator (34) is in shunt across the L + R signal path.
4. The audio system of claim 1 wherein the means (38) for increasing signal levels at treble frequencies comprises a high pass filter in series with the L + R signal path.
5. The audio system of claim 1 wherein the bass frequencies include frequencies within the band of 100 Hz to 580 Hz.
6. The audio system of claim 1 wherein the treble signal frequencies include frequencies above 580 Hz.
7. The audio system of claim 2 wherein the switching is responsive to control signals.
8. The audio system of claim 7 wherein the control signals are provided by a microprocessor.

Patentansprüche

1. Stereophonisches Audiosystem mit:

Mitteln (24) zur Bildung eines Summensignals L+R und eines Differenzsignals L-R und entsprechender Signalwege von einem Paar eines linken Signals L und eines rechten Signals R, Mitteln (22) zur Bildung einer räumlich erweiterten stereophonischen Audiowirkung in dem Signal L-R und Mitteln (20) zur Verarbeitung des Signals L+R zur Konzentration der wahrnehmbaren Lage der mittleren Töne näher zu dem Mittelpunkt zwischen dem von den Lautsprechern gelieferten linken und rechten Ton, wobei die Verarbeitungsmittel (20) enthalten: Mittel (30) zur Verringerung der Signalwerte bei Bassfrequenzen,

dadurch gekennzeichnet, dass

die Verarbeitungsmittel (38) außerdem enthalten:

Mittel (38) zur Anhebung der Signalwerte bei Höhenfrequenzen, wobei die Mittel (30) zur Verringerung der Signalwerte bei Bassfrequenzen einen Gyrator enthalten.

2. Audiosystem nach Anspruch 1, wobei die Verringerung der Signalwerte bei Bassfrequenzen und die

Zunahme der Signalwerte bei Höhenfrequenzen einzeln oder in Kombination zwischen den Modi "EIN" und "AUS" umschaltbar sind.

3. Audiosystem nach Anspruch 1, wobei der Gyrator (34) parallel zu dem Weg des Signals L+R liegt.
4. Audiosystem nach Anspruch 1, wobei die Mittel (38) zur Erhöhung der Signalwerte bei Höhenfrequenzen ein Hochpassfilter in Reihe mit dem Signalweg L+R enthalten.
5. Audiosystem nach Anspruch 1, wobei die Bassfrequenzen Frequenzen in dem Band von 100 Hz bis 580 Hz enthalten.
6. Audiosystem nach Anspruch 1, wobei die Höhen-Signalfrequenzen Frequenzen oberhalb von 580 Hz enthalten.
7. Audiosystem nach Anspruch 2, wobei die Umschaltung durch Steuersignale gesteuert wird.
8. Audiosystem nach Anspruch 7, wobei die Steuersignale durch einen Mikroprozessor geliefert werden.

Revendications

1. Système audio stéréophonique comportant :

un moyen (24) de génération d'un signal somme L+R et d'un signal différence L-R et des trajets respectifs de signal, à partir d'une paire de signaux gauche, L, et droite, R.
un moyen (22) pour produire un effet audio stéréophonique d'élargissement dans l'espace dans le signal L-R, et
un moyen (20) de traitement du signal L+R pour concentrer l'emplacement apparent des sons centraux plus près du centre entre les sons gauches et droites sortant des haut-parleurs, le moyen (20) de traitement comportant :
un moyen (30) de réduction des niveaux des signaux pour les graves,

caractérisé en ce que le moyen de traitement comporte en outre :

un moyen (38) d'augmentation des niveaux des signaux pour les aigus, et
le moyen (30) de réduction des niveaux des signaux pour les graves comporte un gyrateur.

2. Système audio selon la revendication 1, dans lequel la réduction des niveaux des signaux pour les graves et l'augmentation des niveaux pour les aigus sont commutables de façon indépendante ou en

combinaison entre les modes « ACTIVE » et « NON ACTIVE ».

3. Système audio selon la revendication 1, dans lequel le gyrateur (34) est en parallèle sur le trajet du signal L+R. 5
4. Système audio selon la revendication 1, dans lequel le moyen (38) d'augmentation des niveaux des signaux pour les aigus comporte un filtre passe-haut en série avec le trajet du signal L+R. 10
5. Système audio selon la revendication 1, dans lequel les graves comprennent des fréquences comprises entre 100 Hz et 580 Hz. 15
6. Système audio selon la revendication 1, dans lequel les fréquences des signaux aigus sont supérieures à 580 Hz. 20
7. Système audio selon la revendication 2, dans lequel la commutation se fait en réponse à des signaux de commande.
8. Système audio selon la revendication 7, dans lequel les signaux de commande sont générés par un microprocesseur. 25

30

35

40

45

50

55

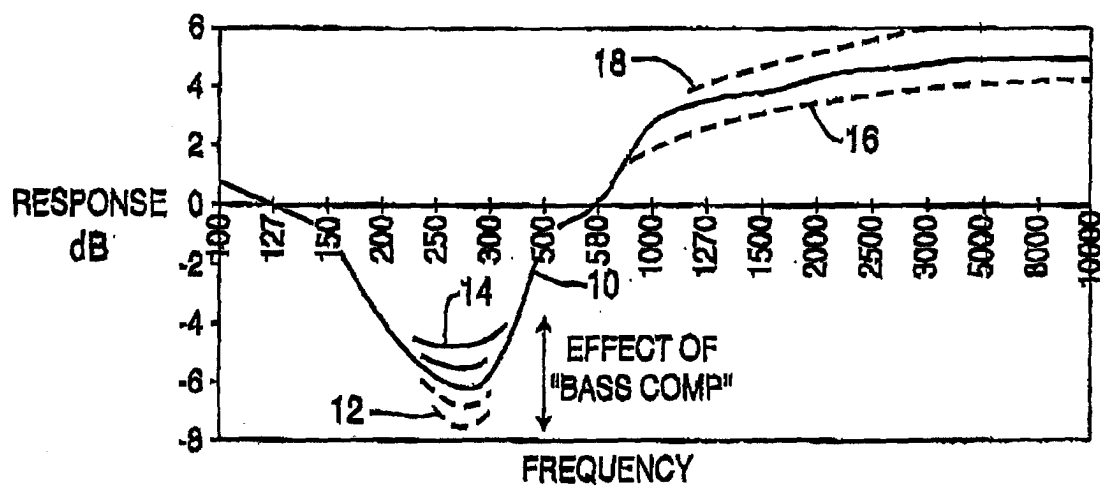


FIG. 1

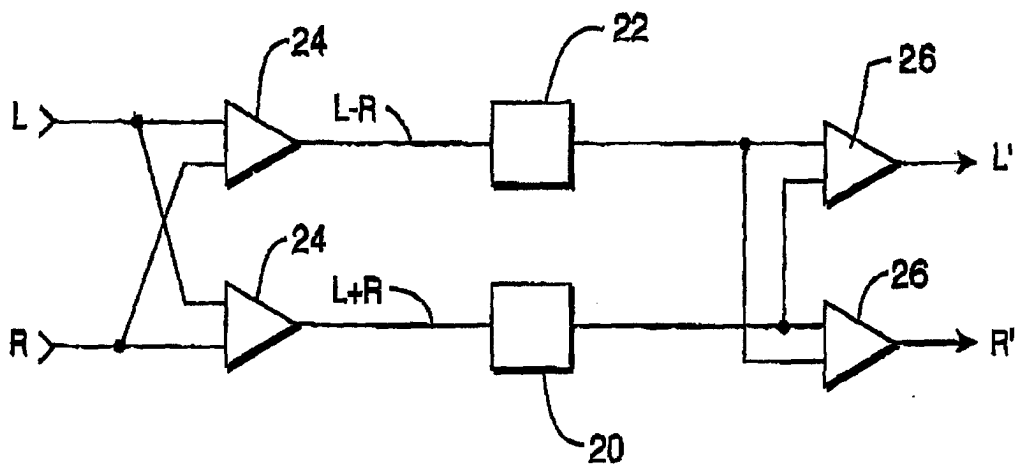


FIG. 2

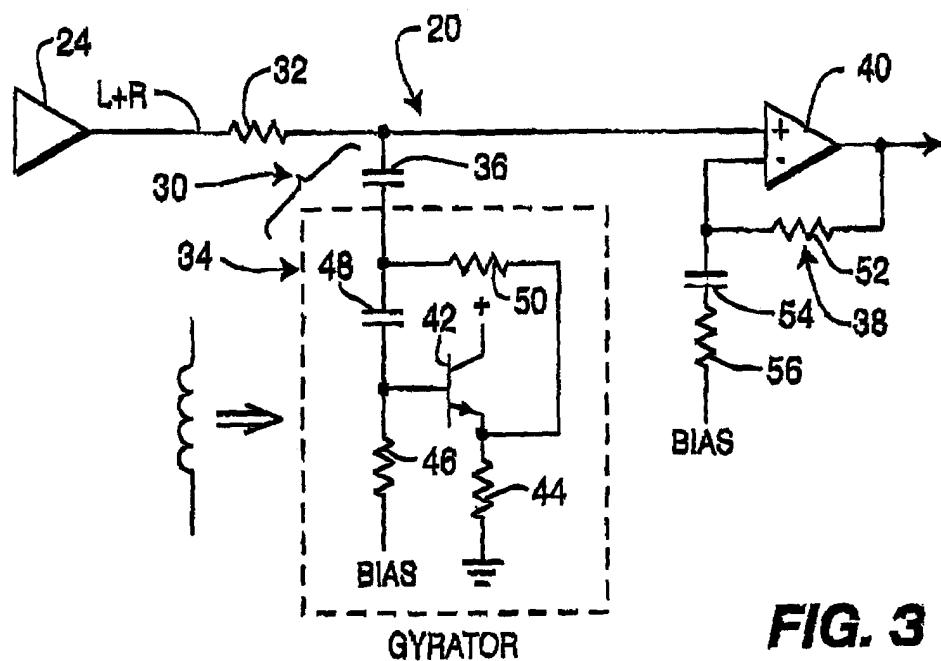


FIG. 3

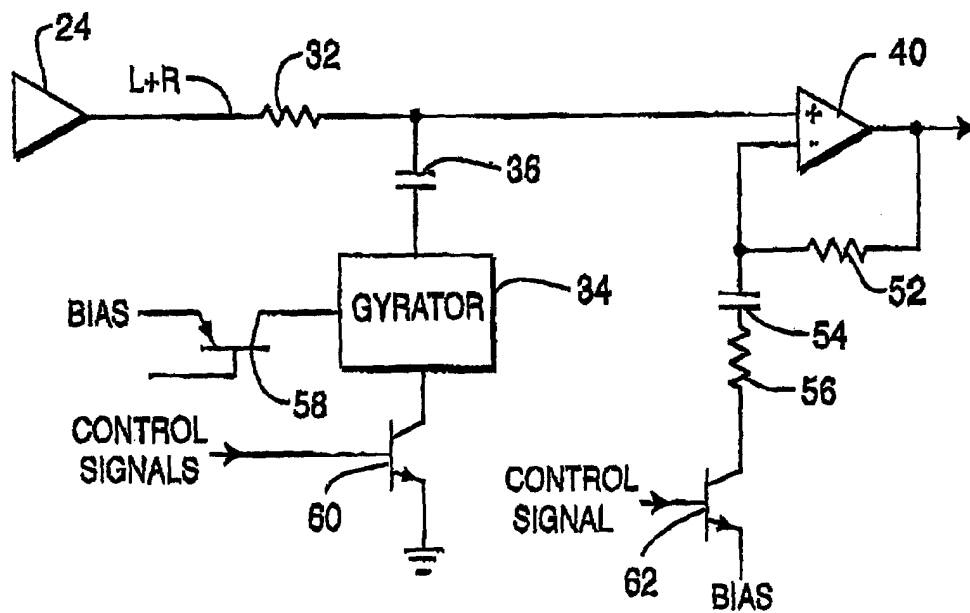


FIG. 4

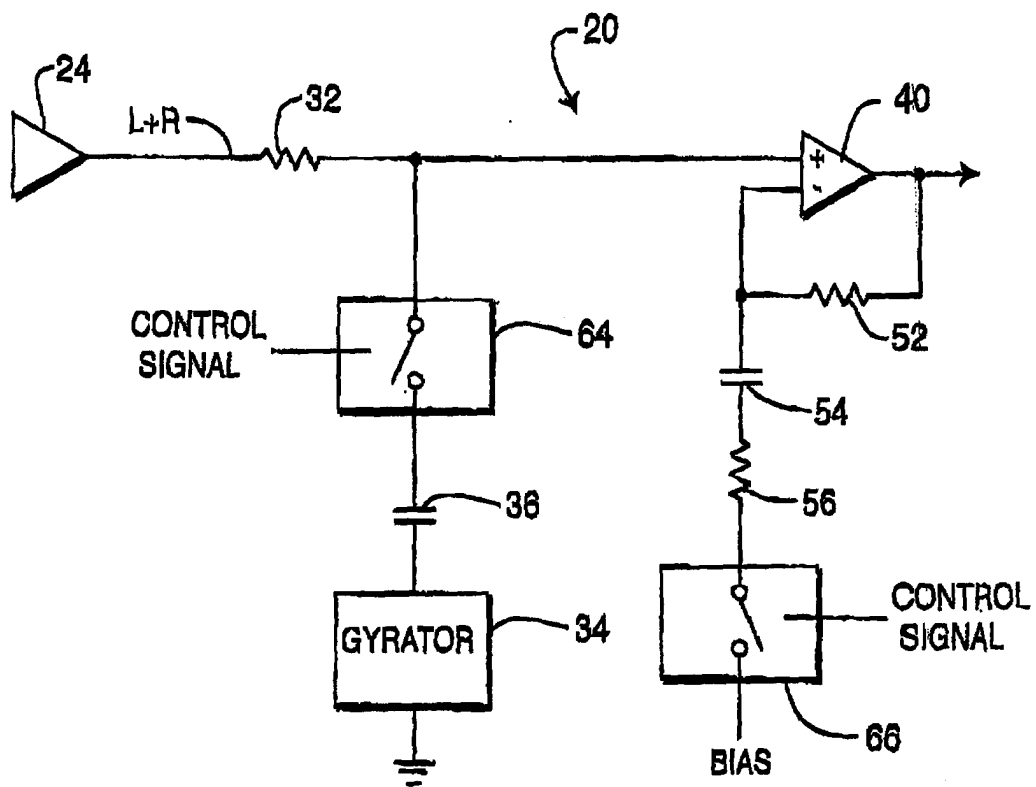


FIG. 5