




US 20100123607A1

(19) **United States**(12) **Patent Application Publication****He et al.**(10) **Pub. No.: US 2010/0123607 A1**(43) **Pub. Date: May 20, 2010**(54) **METHOD AND SYSTEM FOR EFFICIENT  
DATA TRANSMISSION WITH SERVER SIDE  
DE-DUPLICATION**(22) Filed: **Nov. 18, 2008****Publication Classification**(75) Inventors: **Dake He**, Waterloo (CA); **Vadim  
Sheinin**, Yorktown Heights, NY  
(US)(51) **Int. Cl.**  
**H03M 7/30** (2006.01)  
**H03M 7/00** (2006.01)(52) **U.S. Cl. .... 341/51; 341/55**

Correspondence Address:

**Myers Andras Sherman LLP**  
**19900 MacArthur Blvd., Suite 1150**  
**Irvine, CA 92612 (US)**(73) Assignee: **International Business Machines  
Corporation**, Armonk, NY (US)(21) Appl. No.: **12/273,329**(57) **ABSTRACT**

The invention provides a method and system for reducing redundant data blocks. The method includes encoding a first data block having a first length into a bitstream having a second length, transmitting the bitstream to a server device, and reducing redundant data blocks by decoding the first data block from a first plurality of data blocks and the bitstream where each block in the first plurality of data blocks has a length equal to the first length.

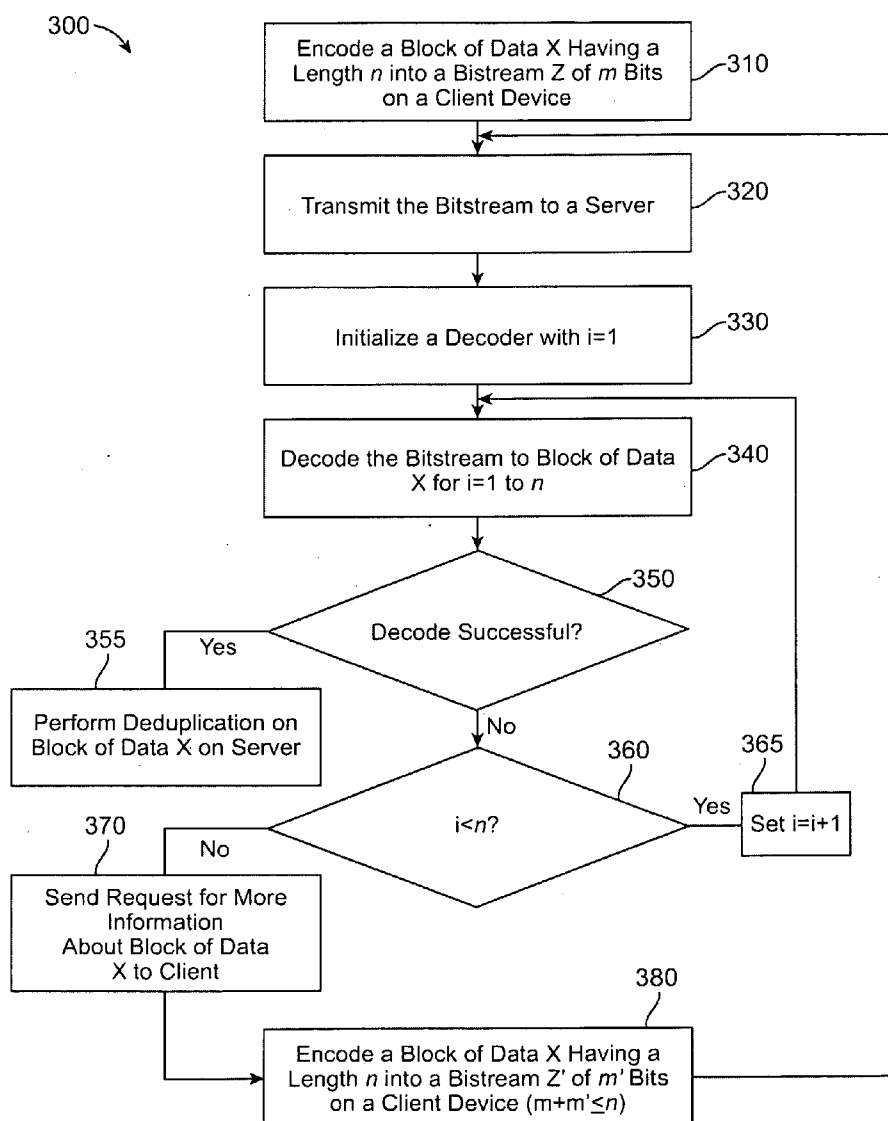

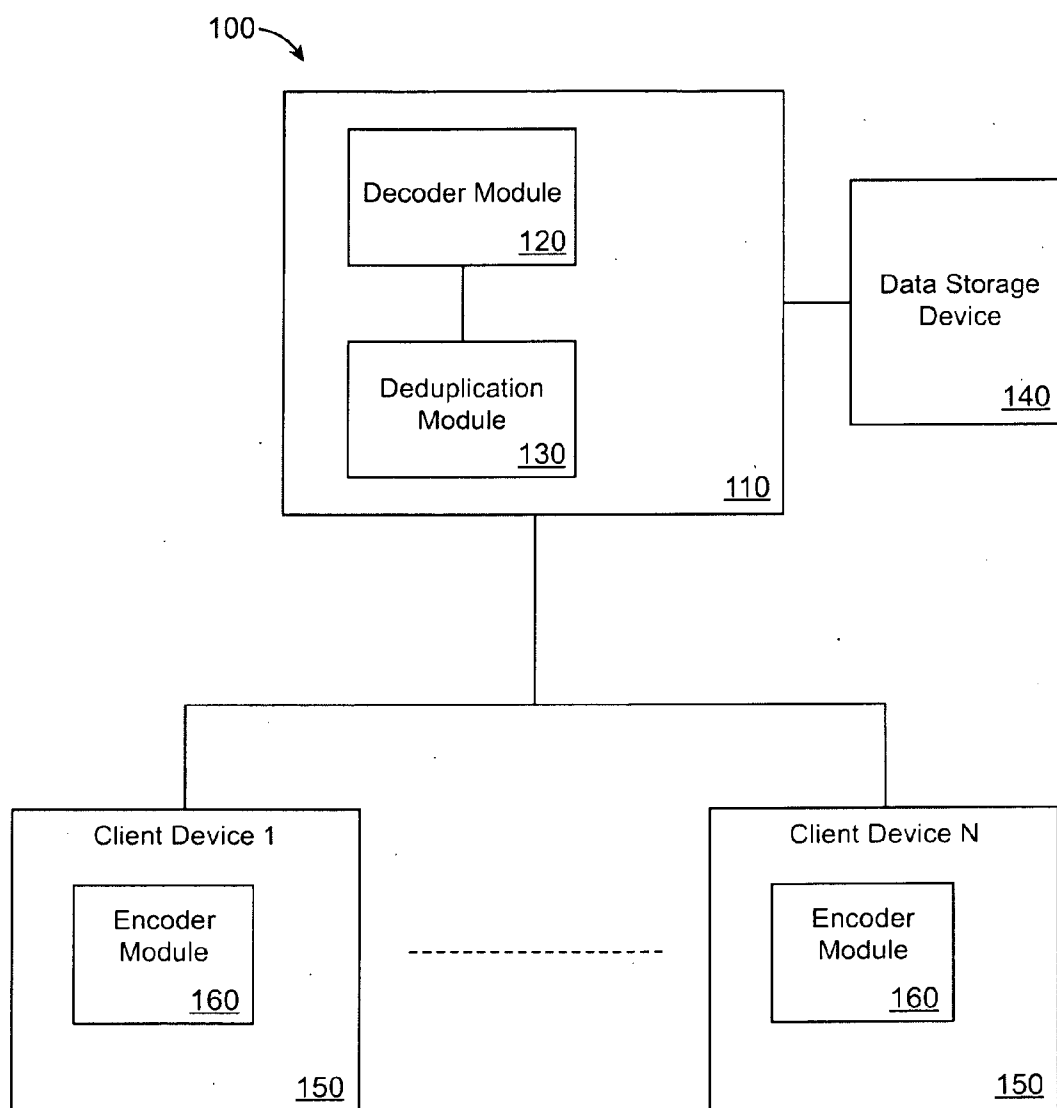
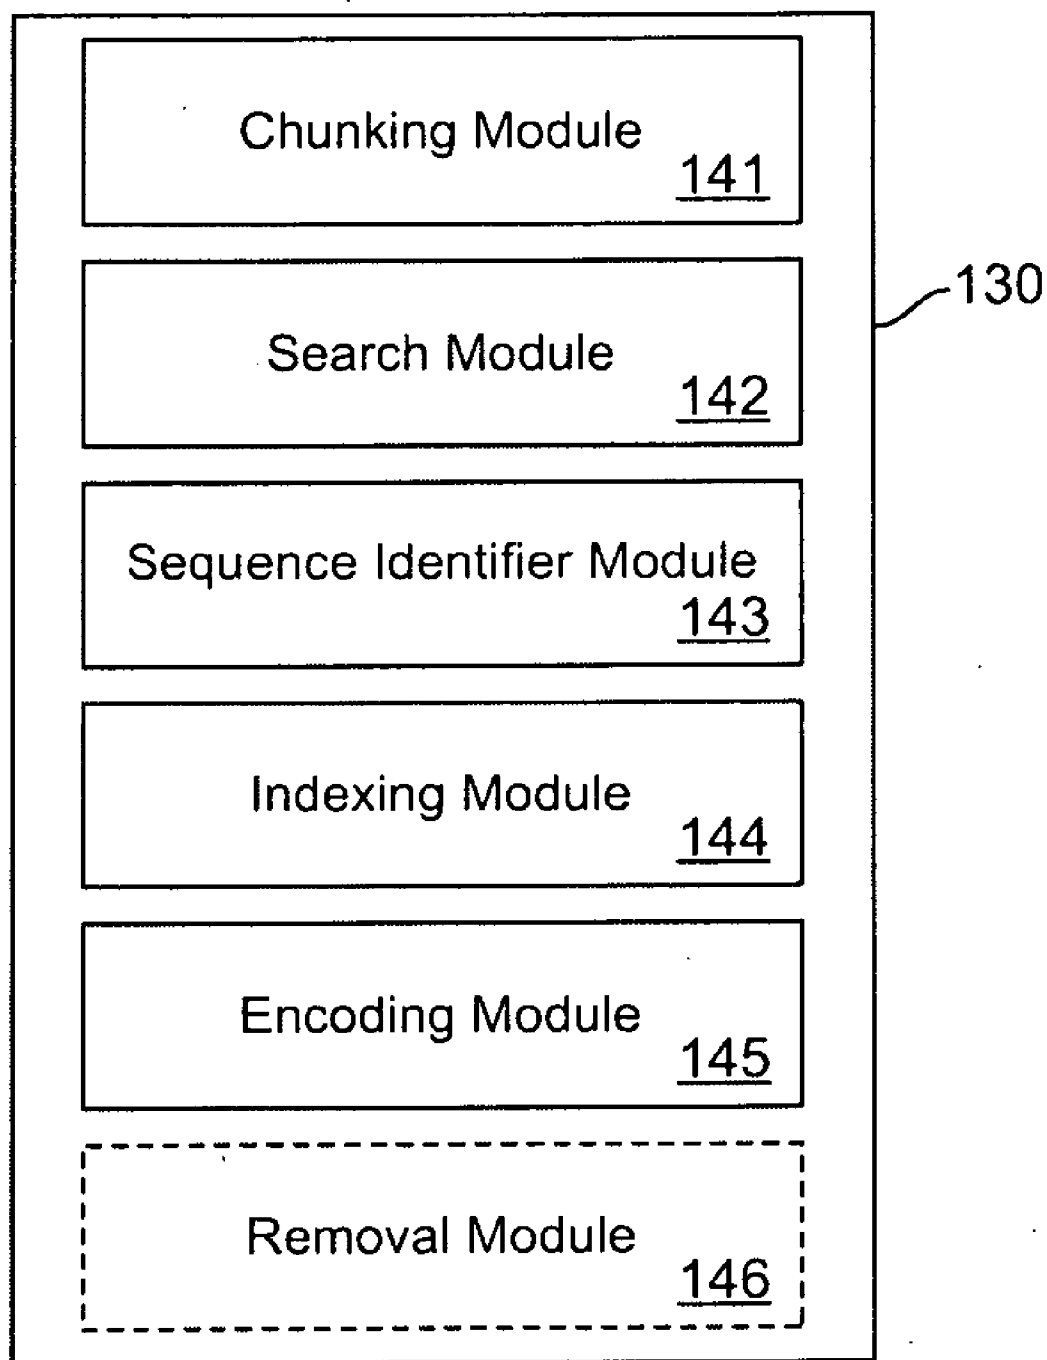


FIG. 1

**FIG. 2**

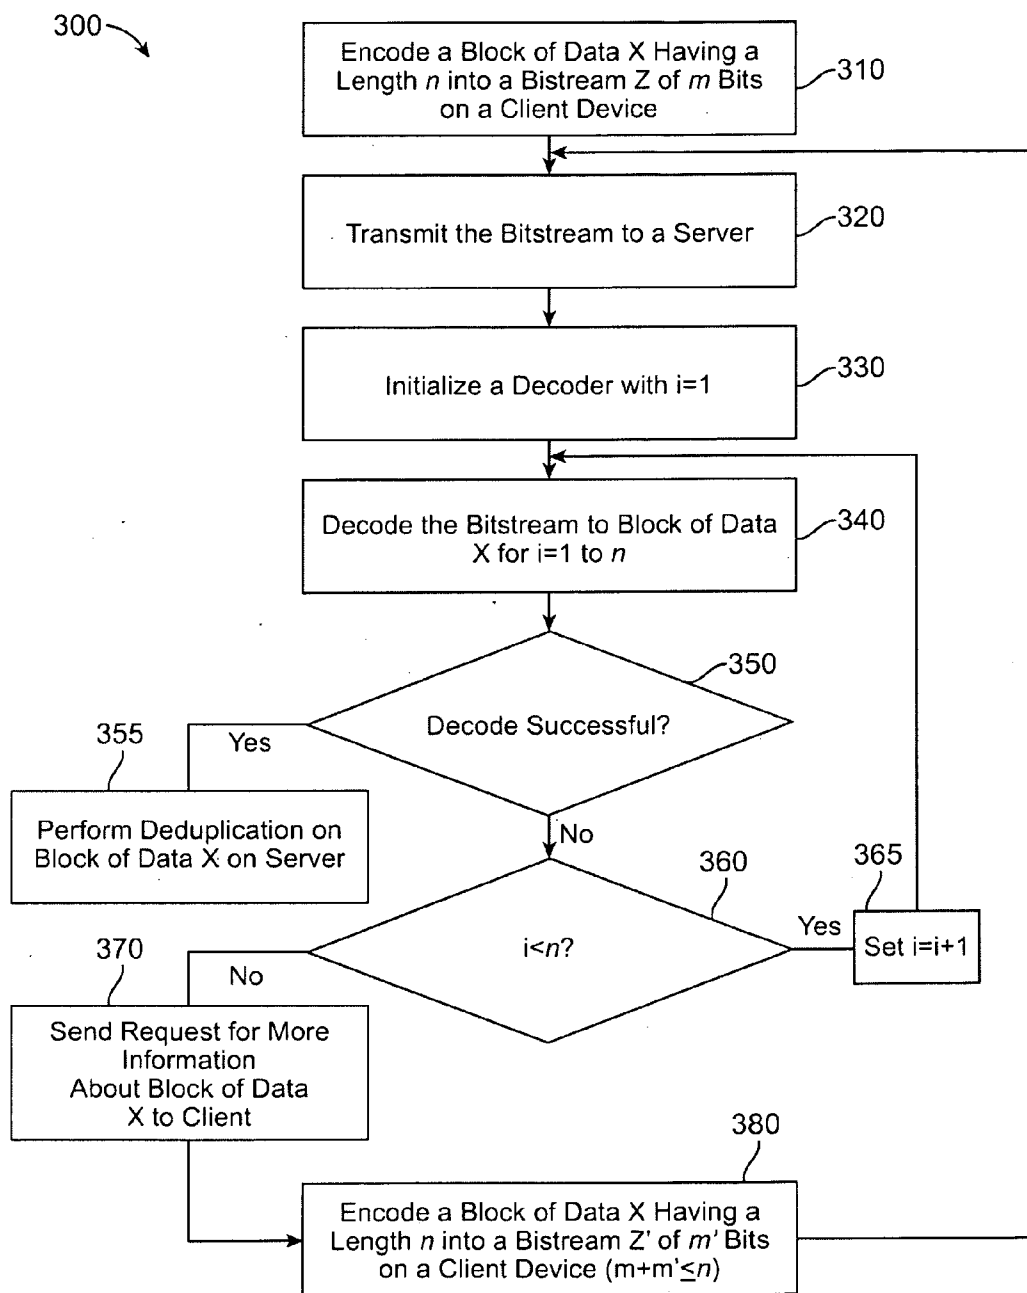


FIG. 3

## METHOD AND SYSTEM FOR EFFICIENT DATA TRANSMISSION WITH SERVER SIDE DE-DUPLICATION

### BACKGROUND OF THE INVENTION

#### [0001] 1. Field of the Invention

[0002] The present invention relates generally to removing redundant data, and in particular to reducing data transmission for server side data de-duplication.

#### [0003] 2. Background Information

[0004] De-duplication processes partition data objects into smaller parts (named "chunks") and retain only the unique chunks in a dictionary (repository) of chunks. To be able to reconstruct the object, a list of hashes (indexes or metadata) of the unique chunks is stored in place of original objects. The list of hashes is customarily ignored in the de-duplication compression ratios reported by various de-duplication product vendors. That is, vendors typically only report the unique chunk data size versus original size.

[0005] The list of hashes is relatively larger when smaller chunks are employed. Smaller chunks are more likely to match and can be used to achieve higher compression ratios. Known de-duplication systems try to diminish the significance of index metadata by using large chunk sizes, and therefore, accept lower overall compression ratios. Also, standard compression methods (LZ, Gzip, Compress, Bzip2, etc.) applied to the list of hashes perform poorly.

[0006] In order to reduce bandwidth requirements from client to server, (hash-based) data de-duplication has to be performed at the client. Client side data de-duplication has the following: 1) It is difficult to deploy as client side data de-duplication requires tighter integration into existing applications and systems; 2) It is difficult to do direct compare when using hashing methods in client side data de-duplication, and delta differencing requires large local cache which might not be available in a resource-limited client.

[0007] When client side data de-duplication is not possible, the alternative is to perform data de-duplication at the server. In server side data de-duplication, data is transmitted before de-duplication in the link from the client to server.

### SUMMARY OF THE INVENTION

[0008] The invention provides a method and system for reducing redundant data blocks. The method includes encoding a first data block having a first length into a bitstream having a second length, transmitting the bitstream to a server device, and reducing redundant data blocks by decoding the first data block from a first plurality of data blocks and the bitstream where each block in the first plurality of data blocks has a length equal to the first length.

[0009] In one embodiment of the invention, the decoding is performed with a Slepian-Wolf decoder. In another embodiment of the invention, upon decoding being successful for the complete first length, de-duplication is performed on the first data block. In yet another embodiment of the invention, upon the decoding being unsuccessful for the complete first length, requesting further information of the first data block from a client. This embodiment of the invention further provides encoding the first data block having the first length into another bitstream having one of the second length and a third length, transmitting the other bitstream to the server device, and reducing redundant data blocks by decoding the first data block from a second plurality of data blocks and the other

bitstream, where each block in the second plurality of data blocks has a length equal to the first length. In still another embodiment of the invention, de-duplication is performed by the decoding. In one embodiment of the invention, the decoding is performed with a variable length for a predetermined collision rate. In another embodiment of the invention, a transmission rate for the transmitting is variable to meet a predetermined collision rate.

[0010] In another provision of the invention, a system for reducing redundant data blocks includes a client device including an encoder module configured to encode a data block into a bitstream, a server device including a decoder module configured to decode the bitstream using a plurality of previously stored data blocks on the server device, and a de-duplication module coupled to the decoder module configured to deduplicate successful decoded portions of the data block.

[0011] One embodiment of the invention further includes a data storage device coupled to the server device. Another embodiment of the invention further includes at least another client device. In yet another embodiment of the invention, the encoder module performs a Slepian-Wolf encoding. In still another embodiment of the invention, the decoder module performs a Slepian-Wolf decoding. In one embodiment of the invention, the de-duplication module further includes a sequence identifier module configured to identify sequences of chunk portion identifiers of a data object, an indexing module configured to apply indexing to identification of chunk portions based on a sequence type, and an encoding module configured to encode first repeated sequences with a first encoding and encodes second repeated sequences with a second encoding, wherein storing repeated sequences of chunk portion identifiers is avoided.

[0012] Yet another embodiment of the invention provides a computer program product for reducing transmission of redundant data before de-duplication. The computer program product when executed by a processor encodes a first data block having a first length into a bitstream having a second length, transmits the bitstream to a server device, and reduces redundant data blocks by decoding the first data block from a first plurality of data blocks and the bitstream where each block in the first plurality of data blocks has a length equal to the first length.

[0013] In one embodiment of the invention, the decoding is performed with a Slepian-Wolf decoder. In another embodiment of the invention, upon decoding being successful for the complete first length, de-duplication is performed on the first data block. In yet another embodiment of the invention, upon decoding being unsuccessful for the complete first length, requesting further information of the first data block from a client. Still another embodiment of the invention further causes the computer to encode the first data block having the first length into another bitstream having one of the second length and a third length, transmit the other bitstream to the server device, and reduce redundant data blocks by decoding the first data block from a second plurality of data blocks and the other bitstream, where each block in the second plurality of data blocks have a length equal to the first length. In one embodiment of the invention, a transmission rate for the transmitting is variable to meet a predetermined collision rate.

[0014] Still another embodiment of the invention provides method including encoding a first data block having a first length into a bitstream having a second length using a

Slepian-Wolf encoding process, transmitting the bitstream to a server device, and reducing redundant data blocks before de-duplication using a Slepian-Wolf decoding process by decoding the first data block from a first plurality of data blocks and the bitstream, where each block in the first plurality of data blocks have a length equal to the first length.

**[0015]** In one embodiment of the invention, upon the decoding being unsuccessful for the complete first length, requesting further information of the first data block from a client. In another embodiment of the invention, the method further includes encoding the first data block having the first length into another bitstream having one of the second length and a third length, transmitting the other bitstream to the server device, and reducing redundant data blocks by decoding the first data block from a second plurality of data blocks and the other bitstream, where each block in the second plurality of data blocks has a length equal to the first length.

**[0016]** Yet another embodiment of the invention provides a system for reducing transmission of redundant data blocks. The system includes a client device including a Slepian-Wolf encoder module configured to encode a data block into a bitstream, a server device including a Slepian-Wolf decoder module configured to decode the bitstream using a plurality of previously stored data blocks on the server device, and a de-duplication module coupled to the decoder module configured to deduplicate successful decoded portions of the data block.

**[0017]** In one embodiment of the invention, the Slepian-Wolf decoder is configured to reduce redundant data blocks before de-duplication.

**[0018]** Other aspects and advantages of the present invention will become apparent from the following detailed description, which, when taken in conjunction with the drawings, illustrate by way of example the principles of the invention.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0019]** For a fuller understanding of the nature and advantages of the invention, as well as a preferred mode of use, reference should be made to the following detailed description read in conjunction with the accompanying drawings, in which:

**[0020]** FIG. 1 illustrates a system for reducing redundant data that needs to be transmitted to a server device before data de-duplication according to one embodiment of the invention;

**[0021]** FIG. 2 illustrates a block diagram of a process for reducing redundant data that needs to be transmitted to a server before data de-duplication according to one embodiment of the invention; and

**[0022]** FIG. 3 illustrates a de-duplication module of the system illustrated in FIG. 1 according to one embodiment of the invention.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

**[0023]** The following description is made for the purpose of illustrating the general principles of the invention and is not meant to limit the inventive concepts claimed herein. Further, particular features described herein can be used in combination with other described features in each of the various possible combinations and permutations. Unless otherwise specifically defined herein, all terms are to be given their

broadest possible interpretation including meanings implied from the specification as well as meanings understood by those skilled in the art and/or as defined in dictionaries, treatises, etc.

**[0024]** The description may disclose several preferred embodiments of reducing redundant data blocks before de-duplication, as well as operation and/or component parts thereof. While the following description will be described in terms of de-duplication reduction processes and devices for clarity and to place the invention in context, it should be kept in mind that the teachings herein may have broad application to all types of systems, devices and applications.

**[0025]** The invention provides a method and system for reducing redundant data blocks. The method includes encoding a first data block having a first length into a bitstream having a second length, transmitting the bitstream to a server device, and reducing redundant data blocks by decoding the first data block from a first plurality of data blocks and the bitstream where each block in the first plurality of data blocks has a length equal to the first length.

**[0026]** FIG. 1 illustrates a block diagram of a system **100** for reducing transmission of redundant data blocks before de-duplication according to one embodiment. As illustrated, system **100** includes client devices **1** to **N 150** including an encoder module **160**. In one embodiment of the invention, the encoder uses Slepian-Wolf encoding (David Slepian and J. K. Wolf "Noiseless Coding of Correlated Information Sources"; IEEE Transactions on Information Theory; July 1973; pp. 471-480; vol. 19.). It should be noted that Slepian-Wolf refers to the compression of the outputs of two or more physically separated sources that do not communicate with each other (hence distributed coding). These sources send their compressed outputs to a central point (e.g., the server device **110**) for joint decoding. Other embodiments of the invention use other known distributed coding techniques for encoding and decoding.

**[0027]** The client devices **150** are connected to a server device **110** through a network, wireless connection, wired connection, etc. The server device includes a decoder module **120** and a de-duplication module **130**. Coupled to the server device is a data storage device **140**. In one embodiment of the invention, the decoder module performs decoding using Slepian-Wolf decoding. In one embodiment of the invention, the client devices **150** include data sources, such as uploaded/downloaded files (e.g., data files, video/audio files, streaming media, etc.) that can be resident or non-resident in client device **150**. In one embodiment of the invention, the data source is downloaded from a network (wired or wirelessly), such as the Internet, a local area network (LAN), wide area network (WAN), a disk, a disk drive, flash card, memory, etc.

**[0028]** In one embodiment of the invention, the encoder module **160** uses a length- $n$  Slepian-Wolf coder to encode a binary data block  $X$  having a length  $n$  into a bitstream  $Z$  of  $m$  bits, where  $m < n$  ( $m$  and  $n$  being integers greater than 0). The client device **150** transmits or routes  $Z$  to the server device **110**. The server device **110** uses the decoder module **120** of the same Slepian-Wolf code used by the encoder module **160** of the client device **150** to decode  $X$  from  $Z$  and a set of  $N$  stored data blocks on the data storage device **140**, each having data block in the set having a length of  $n$   $\{Y(i)\}_{i=1}^N$ . If the decoding of  $(Z, Y_i)$  for  $i=N$  is successful, then  $X$  is forwarded to the de-duplication module **130** for de-duplication. If the decoding fails and  $i=N$ , the server device **110** sends a request to the client device **150** for more information about

X. When the client device **150** receives the server device **110** request for more information about X, the encoder module **160** uses the same or a different Slepian-Wolf code to generate another bitstream  $Z'$  of  $m'$  bits, where  $m+m' \leq n$ , and transmits or routes  $Z'$  to the server device **110** for further decoding by the decoder module **120** where  $Z=(Z, Z')$  for the decoding. In one embodiment of the invention,  $m$  and the Slepian-Wolf codes are designed to meet a desired collision rate.

[0029] FIG. 2 illustrates the de-duplication module **130**. The de-duplication module **130** performs de-duplication of the decoded data blocks in the data storage device **140**. In one embodiment, metadata includes descriptions, parameters, priority, date, time, and other pertinent information regarding chunked object portions. A hash is a transformation of a string of characters (e.g., metadata) into a shorter fixed-length value or key that represents the original string. In one embodiment, hashing is used to index and retrieve chunk portions in the data storage device **140**. It should be noted that it is faster to find a chunk portion using the shorter hashed metadata than to find it using the original value. In one embodiment a hashing function is used to create an indexed version of the represented value of chunk portions of data objects. That is, a hash function is used to index the original value and then used later each time the data associated with the value is to be retrieved. In one embodiment, known hash functions are used, such as a division-remainder method, folding, radix transformation, digit rearrangement, etc. In another embodiment, encryption hash functions are used, such as MD2, MD4, MD5, the Secure Hash Algorithm (SHA), etc.

[0030] In one embodiment of the invention, the de-duplication module **130** includes chunking module **141**, search module **142**, sequence identifier module **143**, indexing module **144**, encoding module **145** and a removal module **146**. In another embodiment of the invention, the individual modules included in the de-duplication module **130** can be a software process, a hardware module or a combination of software and hardware. In one embodiment of the invention, de-duplication module **130** reduces an index of identifiers for chunk portions in de-duplication where the identifiers are metadata hashes of objects. The chunking module **141** is configured to create smaller chunk portions from chunks received from a data chunker. In another embodiment of the invention, the chunking module **141** performs chunking of an input stream of larger chunks by one or more of: fixed size chunking, sliding window chunking, variable size chunking and content dependent chunking, in order to reduce the input stream of chunk portions to smaller chunk portions.

[0031] In one embodiment of the invention, the search module **142** searches the data storage device **140** to find matching chunks to a chunk originally destined for the data storage device **140**. In one embodiment of the invention, the sequence identifier module **143** operates to identify sequences of chunk portion identifiers of a data object. The indexing module **144** operates to apply indexing to identification of chunk portions based on a chunk repeating sequence type according to one embodiment of the invention. In another embodiment of the invention, the stored identification (e.g., hashed metadata) of chunk portions includes a chronological pointer linking newly added identification of chunk portions in chronological order.

[0032] In one embodiment of the invention, the encoding module **145** is connected to the indexing module **144** and the encoding module **145** operates to encode first repeated chunk sequences with a first encoding and encodes second repeated

chunk sequences with a second encoding, and repeated sequences of chunk portion identifiers are removed from a memory to reduce storage use. The second encoding identifies the first appearance of the first repeated sequences of chunk portions, according to one embodiment of the invention. In another embodiment of the invention, the second encoding includes a distance offset from a first appearance of a repeated chunk portion to a second appearance of the repeated chunk portion. In one embodiment of the invention, the sequence type is assigned based on a length of repeated chunk identification. In one embodiment of the invention, an optional removal module **146** removes repeated chunk portions from the data storage device **140** to reduce stored chunk portions stored in the data storage device **140**.

[0033] In one embodiment of the invention, the reduction in the amount of data to be transmitted or routed from the client device **150** to the server device **110** reduces transmission time and/or lowers bandwidth requirements. Since the encoder module **160** includes Slepian-Wolf coding, which is simple to implement and computationally efficient, the embodiments of the invention can be easily integrated into existing applications and systems.

[0034] One advantage of using the embodiments of the invention over non-hash-valued server side de-duplication is the amount of data to be transmitted is significantly reduced than using lossless compression in the case where data de-duplication is effective. For data having a duplicated copy stored at the server, de-duplication can be performed in one pass with Slepian-Wolf decoding whereas with lossless compression, decompression and de-duplication have to be performed sequentially in two passes. Other advantages of using the embodiments of the invention over hash-valued server side data de-duplication are: the embodiments are more flexible and efficient than hash-valued server side data de-duplication in the sense that significant compression can still be achieved when no exact copy of the data is available at the server but its slight variations are present (in this case no exact match of the hash value of the data to be transmitted can be found, and as a result the original data needs to be transmitted)[for the Slepian-Wolf case, if the difference between stored uncompressed data and Slepian-Wolf decoded data is small, a second tier of de-duplication can be performed after decoding to further compress stored data]; in contrast to sending only hash values within a definite range, the embodiments of the invention allow flexible adjustment of transmission rate to meet the desired collision rate.

[0035] FIG. 3 illustrates a block diagram of a process **300** for reducing transmission of data from a client device to a server device. Process **300** begins with block **310** where a block of data X having a length  $n$  is encoded using a Slepian-Wolf decoder into a bitstream  $Z$  of  $m$  bits on a client device. In block **320**, the bitstream  $Z$  is transmitted or routed to a server device. In block **330**, a Slepian-Wolf decoder is initialized by setting  $i$  to one ("1") where  $i$  is an index for decoding the  $i$ th block of data in the bitstream  $Z$ . In block **340**, the bitstream  $Z$  is decoded to  $X$  for the  $i$ th block of data (which is currently is  $i=1$ ).

[0036] Block **350** determines whether the decoding the  $i$ th block of data is successful or not. If the decoding for all data block is successful (i.e.,  $i=1-n$ ), process **300** continues to block **355** where data de-duplication is performed on the decoded data block  $X$  on the server device. If decoding the  $i$ th data block is not successful, process **300** continues with block **360**. In block **360**, it is determined if  $i$  is less than  $n$  ( $i < n$ ). If  $i$

is less than  $n$ , process **300** continues with block **365** where  $i$  is incremented by 1 ( $i=i+1$ ) and process **300** continues to block **340**. If it is determined that  $i$  is not less than 1, process **300** continues with block **370** where a request for more information about data block  $X$  is sent from the server device to the client device. Process **300** continues with block **380** where the client device encodes a data block of  $X$  having a length  $n$  using the same or different Slepian-Wolf encoder into a bitstream  $Z'$  of  $m'$  bits on the client device (where  $m+m'<n$ ).  $Z$  is then set to  $(Z,Z')$  and process **300** continues to block **320**. Process **300** continues until data block  $X$  is recovered for data de-duplication on the server device.

**[0037]** The embodiments of the invention can take the form of an entirely hardware embodiment, an entirely software embodiment or an embodiment containing both hardware and software elements. In a preferred embodiment, the invention is implemented in software, which includes but is not limited to firmware, resident software, microcode, etc.

**[0038]** Furthermore, the embodiments of the invention can take the form of a computer program product accessible from a computer-usable or computer-readable medium providing program code for use by or in connection with a computer, processing device, or any instruction execution system. For the purposes of this description, a computer-usable or computer readable medium can be any apparatus that can contain, store, communicate, or transport the program for use by or in connection with the instruction execution system, apparatus, or device.

**[0039]** The medium can be electronic, magnetic, optical, or a semiconductor system (or apparatus or device). Examples of a computer-readable medium include, but are not limited to, a semiconductor or solid state memory, magnetic tape, a removable computer diskette, a RAM, a read-only memory (ROM), a rigid magnetic disk, an optical disk, etc. Current examples of optical disks include compact disk-read only memory (CD-ROM), compact disk-read/write (CD-R/W) and DVD.

**[0040]** I/O devices (including but not limited to keyboards, displays, pointing devices, etc.) can be connected to the system either directly or through intervening controllers. Network adapters may also be connected to the system to enable the data processing system to become connected to other data processing systems or remote printers or storage devices through intervening private or public networks. Modems, cable modem and Ethernet cards are just a few of the currently available types of network adapters.

**[0041]** In the description above, numerous specific details are set forth. However, it is understood that embodiments of the invention may be practiced without these specific details. For example, well-known equivalent components and elements may be substituted in place of those described herein, and similarly, well-known equivalent techniques may be substituted in place of the particular techniques disclosed. In other instances, well-known structures and techniques have not been shown in detail to avoid obscuring the understanding of this description.

**[0042]** Reference in the specification to “an embodiment,” “one embodiment,” “some embodiments,” or “other embodiments” means that a particular feature, structure, or characteristic described in connection with the embodiments is included in at least some embodiments, but not necessarily all embodiments. The various appearances of “an embodiment,” “one embodiment,” or “some embodiments” are not necessarily all referring to the same embodiments. If the specifica-

tion states a component, feature, structure, or characteristic “may,” “might,” or “could” be included, that particular component, feature, structure, or characteristic is not required to be included. If the specification or claim refers to “a” or “an” element, that does not mean there is only one of the element. If the specification or claims refer to “an additional” element, that does not preclude there being more than one of the additional element.

**[0043]** While certain exemplary embodiments have been described and shown in the accompanying drawings, it is to be understood that such embodiments are merely illustrative of and not restrictive on the broad invention, and that this invention not be limited to the specific constructions and arrangements shown and described, since various other modifications may occur to those ordinarily skilled in the art.

What is claimed is:

1. A method comprising:
  - encoding a first data block having a first length into a bitstream having a second length;
  - transmitting the bitstream to a server; and
  - reducing redundant data blocks by decoding the first data block from a first plurality of data blocks and the bitstream where each block in the first plurality of data blocks has a length equal to the first length.
2. The method of claim 1, wherein the decoding is performed with a Slepian-Wolf decoder.
3. The method of claim 1, wherein upon decoding being successful for the complete first length, de-duplication is performed on the first data block.
4. The method of claim 1, wherein upon the decoding being unsuccessful for the complete first length, requesting further information of the first data block from a client.
5. The method of claim 4, further comprising:
  - encoding the first data block having the first length into another bitstream having one of the second length and a third length;
  - transmitting the other bitstream to the server; and
  - reducing redundant data blocks by decoding the first data block from a second plurality of data blocks and the other bitstream, where each block in the second plurality of data blocks has a length equal to the first length.
6. The method of claim 1, wherein de-duplication is performed by the decoding.
7. The method of claim 1, wherein the decoding is performed with a variable length for a predetermined collision rate.
8. The method of claim 1, wherein a transmission rate for the transmitting is variable to meet a predetermined collision rate.
9. A system for reducing redundant data blocks, comprising:
  - a client device including an encoder module configured to encode a data block into a bitstream;
  - a server device including a decoder module configured to decode the bitstream using a plurality of previously stored data blocks on the server device; and
  - a de-duplication module coupled to the decoder module configured to deduplicate successful decoded portions of the data block.
10. The system of claim 9, further comprising a data storage device coupled to the server device.
11. The system of claim 9, further comprising at least another client device.



**12.** The system of claim **9**, wherein the encoder module performs a Slepian-Wolf encoding.

**13.** The system of claim **9**, wherein the decoder module performs a Slepian-Wolf decoding.

**14.** A computer program product comprising a computer usable medium including a computer readable program, wherein the computer readable program when executed on a computer causes the computer to:

encode a first data block having a first length into a bitstream having a second length;

transmit the bitstream to a server; and

reduce redundant data blocks by decoding the first data block from a first plurality of data blocks and the bitstream where each block in the first plurality of data blocks has a length equal to the first length.

**15.** The computer program product of claim **14**, wherein the decoding is performed with a Slepian-Wolf decoder.

**16.** The computer program product of claim **14**, wherein upon decoding being successful for the complete first length, de-duplication is performed on the first data block.

**17.** The computer program product of claim **14**, wherein upon decoding being unsuccessful for the complete first length, requesting further information of the first data block from a client.

**18.** The computer program product of claim **14**, further causing the computer to:

encode the first data block having the first length into another bitstream having one of the second length and a third length;

transmit the other bitstream to the server; and

reduce redundant data blocks by decoding the first data block from a second plurality of data blocks and the other bitstream, where each block in the second plurality of data blocks has a length equal to the first length.

**19.** The computer program product of claim **14**, wherein a transmission rate for the transmitting is variable to meet a predetermined collision rate.

**20.** A method comprising:

encoding a first data block having a first length into a bitstream having a second length using a Slepian-Wolf encoding process;

transmitting the bitstream to a server device; and

reducing redundant data blocks before de-duplication using a Slepian-Wolf decoding process by decoding the first data block from a first plurality of data blocks and the bitstream, where each block in the first plurality of data blocks has a length equal to the first length.

**21.** The method of claim **20**, wherein upon the decoding being unsuccessful for the complete first length, requesting further information of the first data block from a client.

**22.** The method of claim **21**, further comprising:

encoding the first data block having the first length into another bitstream having one of the second length and a third length;

transmitting the other bitstream to the server device; and

reducing redundant data blocks by decoding the first data block from a second plurality of data blocks and the other bitstream, where each block in the second plurality of data blocks has a length equal to the first length.

**23.** A system for reducing transmission of redundant data blocks, comprising:

a client device including a Slepian-Wolf encoder module configured to encode a data block into a bitstream;

a server device including a Slepian-Wolf decoder module configured to decode the bitstream using a plurality of previously stored data blocks on the server device; and

a de-duplication module coupled to the decoder module configured to deduplicate successful decoded portions of the data block.

**24.** The system of claim **23**, wherein the Slepian-Wolf decoder is configured to reduce redundant data blocks before de-duplication.

\* \* \* \* \*