

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2012/177634 A1

(43) International Publication Date
27 December 2012 (27.12.2012)

WIPO | PCT

(51) International Patent Classification:

H04W 72/12 (2009.01)

(21) International Application Number:

PCT/US2012/043139

(22) International Filing Date:

19 June 2012 (19.06.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/500,282 23 June 2011 (23.06.2011)
13/525,933 18 June 2012 (18.06.2012)

US US

(71) Applicant (for all designated States except US): QUALCOMM INCORPORATED [US/US]; 5775 Morehouse Drive, Attn: International IP Administration, San Diego, CA 92121 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): WANG, Jibing [US/US]; 5775 Morehouse Drive, San Diego, CA 92121 (US). LINSKY, Joel, Benjamin [US/US]; 5775 Morehouse Drive, San Diego, CA 92121 (US). TSOU, Eric, Y. [US/US]; 5775 Morehouse Drive, San Diego, CA 92121 (US).

(74) Agent: LENKIN, Alan, M.; Seyfarth Shaw LLP, 2029 Century Park East, Suite 3500, Los Angeles, CA 90067 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) Title: MULTI - RADIO IN - DEVICE COEXISTENCE

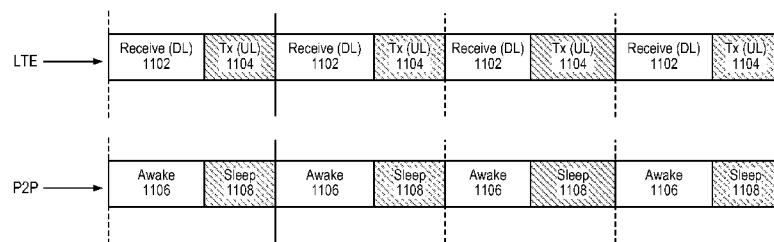


FIG. 11B

(57) Abstract: In a multi-radio user equipment, communications on a Long Term Evolution (LTE) radio and Wireless Local Area Network (WLAN) radio operating in Wi-Fi mode may be aligned to reduce interference between the two radios. Communications of the WLAN radio may be aligned to the LTE radio using Notice of Absence (NoA) functionality.

MULTI - RADIO IN - DEVICE COEXISTENCE

CROSS REFERENCE TO RELATED APPLICATION

[0001] This application claims the benefit of U.S. provisional patent application no. 61/500,282 filed June 23, 2011, in the names of WANG et al., the disclosure of which is expressly incorporated herein by reference in its entirety.

TECHNICAL FIELD

[0002] The present description is related, generally, to multi-radio techniques and, more specifically, to coexistence techniques for multi-radio devices.

BACKGROUND

[0003] Wireless communication systems are widely deployed to provide various types of communication content such as voice, data, and so on. These systems may be multiple-access systems capable of supporting communication with multiple users by sharing the available system resources (e.g., bandwidth and transmit power). Examples of such multiple access systems include code division multiple access (CDMA) systems, time division multiple access (TDMA) systems, frequency division multiple access (FDMA) systems, 3GPP Long Term Evolution (LTE) systems, and orthogonal frequency division multiple access (OFDMA) systems.

[0004] Generally, a wireless multiple-access communication system can simultaneously support communication for multiple wireless terminals. Each terminal communicates with one or more base stations via transmissions on the forward and reverse links. The forward link (or downlink) refers to the communication link from the base stations to the terminals, and the reverse link (or uplink) refers to the communication link from the terminals to the base stations. This communication link may be established via a single-in-single-out, multiple-in-single-out or a multiple-in-multiple out (MIMO) system.

[0005] Some conventional advanced devices include multiple radios for transmitting/receiving using different Radio Access Technologies (RATs). Examples of RATs include, e.g., Universal Mobile Telecommunications System (UMTS), Global System for Mobile Communications (GSM), cdma2000, WiMAX, WLAN (e.g., WiFi), Bluetooth, LTE, and the like.

[0006] An example mobile device includes an LTE User Equipment (UE), such as a fourth generation (4G) mobile phone. Such 4G phone may include various radios to provide a variety of functions for the user. For purposes of this example, the 4G phone

includes an LTE radio for voice and data, an IEEE 802.11 (WiFi) radio, a Global Positioning System (GPS) radio, and a Bluetooth radio, where two of the above or all four may operate simultaneously. While the different radios provide useful functionalities for the phone, their inclusion in a single device gives rise to coexistence issues. Specifically, operation of one radio may in some cases interfere with operation of another radio through radiative, conductive, resource collision, and/or other interference mechanisms. Coexistence issues include such interference.

[0007] This is especially true for the LTE uplink channel, which is adjacent to the Industrial Scientific and Medical (ISM) band and may cause interference therewith. It is noted that Bluetooth and some Wireless LAN (WLAN) channels fall within the ISM band. In some instances, a Bluetooth error rate can become unacceptable when LTE is active in some channels of Band 7 or even Band 40 for some Bluetooth channel conditions. Even though there is no significant degradation to LTE, simultaneous operation with Bluetooth can result in disruption in voice services terminating in a Bluetooth headset. Such disruption may be unacceptable to the consumer. A similar issue exists when LTE transmissions interfere with GPS. Currently, there is no mechanism that can solve this issue since LTE by itself does not experience any degradation

[0008] With reference specifically to LTE, it is noted that a UE communicates with an evolved NodeB (eNB; *e.g.*, a base station for a wireless communications network) to inform the eNB of interference seen by the UE on the downlink. Furthermore, the eNB may be able to estimate interference at the UE using a downlink error rate. In some instances, the eNB and the UE can cooperate to find a solution that reduces interference at the UE, even interference due to radios within the UE itself. However, in conventional LTE, the interference estimates regarding the downlink may not be adequate to comprehensively address interference.

[0009] In one instance, an LTE uplink signal interferes with a Bluetooth signal or WLAN signal. However, such interference is not reflected in the downlink measurement reports at the eNB. As a result, unilateral action on the part of the UE (*e.g.*, moving the uplink signal to a different channel) may be thwarted by the eNB, which is not aware of the uplink coexistence issue and seeks to undo the unilateral action. For instance, even if the UE re-establishes the connection on a different frequency channel, the network can still handover the UE back to the original frequency

channel that was corrupted by the in-device interference. This is a likely scenario because the desired signal strength on the corrupted channel may sometimes be higher than reflected in the measurement reports of the new channel based on Reference Signal Received Power (RSRP) to the eNB. Hence, a ping-pong effect of being transferred back and forth between the corrupted channel and the desired channel can happen if the eNB uses RSRP reports to make handover decisions.

[0010] Other unilateral action on the part of the UE, such as simply stopping uplink communications without coordination of the eNB may cause power loop malfunctions at the eNB. Additional issues that exist in conventional LTE include a general lack of ability on the part of the UE to suggest desired configurations as an alternative to configurations that have coexistence issues. For at least these reasons, uplink coexistence issues at the UE may remain unresolved for a long time period, degrading performance and efficiency for other radios of the UE.

SUMMARY

[0011] Offered is a method for wireless communications. The method includes determining timing for communications of a first radio access technology (RAT). The method also includes aligning inactive portions of communications of a second RAT with the timing for communications of the first RAT.

[0012] Offered is an apparatus for wireless communications. The apparatus includes means for determining timing for communications of a first radio access technology (RAT). The apparatus also includes means for aligning inactive portions of communications of a second RAT with the timing for communications of the first RAT.

[0013] Offered is a computer program product for wireless communications in a wireless network. The computer program product includes a computer-readable medium having non-transitory program code recorded thereon. The program code includes program code to determine timing for communications of a first radio access technology (RAT). The program code also includes program code to align inactive portions of communications of a second RAT with the timing for communications of the first RAT.

[0014] Offered is an apparatus for wireless communication. The apparatus includes a memory and a processor(s) coupled to the memory. The processor(s) is configured to determine timing for communications of a first radio access technology (RAT). The

processor(s) is also configured to align inactive portions of communications of a second RAT with the timing for communications of the first RAT.

[0015] Additional features and advantages of the disclosure will be described below. It should be appreciated by those skilled in the art that this disclosure may be readily utilized as a basis for modifying or designing other structures for carrying out the same purposes of the present disclosure. It should also be realized by those skilled in the art that such equivalent constructions do not depart from the teachings of the disclosure as set forth in the appended claims. The novel features, which are believed to be characteristic of the disclosure, both as to its organization and method of operation, together with further objects and advantages, will be better understood from the following description when considered in connection with the accompanying figures. It is to be expressly understood, however, that each of the figures is provided for the purpose of illustration and description only and is not intended as a definition of the limits of the present disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] The features, nature, and advantages of the present disclosure will become more apparent from the detailed description set forth below when taken in conjunction with the drawings in which like reference characters identify correspondingly throughout.

[0017] FIGURE 1 illustrates a multiple access wireless communication system according to one aspect.

[0018] FIGURE 2 is a block diagram of a communication system according to one aspect.

[0019] FIGURE 3 illustrates an exemplary frame structure in downlink Long Term Evolution (LTE) communications.

[0020] FIGURE 4 is a block diagram conceptually illustrating an exemplary frame structure in uplink Long Term Evolution (LTE) communications.

[0021] FIGURE 5 illustrates an example wireless communication environment.

[0022] FIGURE 6 is a block diagram of an example design for a multi-radio wireless device.

[0023] FIGURE 7 is graph showing respective potential collisions between seven example radios in a given decision period.

[0024] FIGURE 8 is a diagram showing operation of an example Coexistence Manager (CxM) over time.

[0025] FIGURE 9 is a block diagram illustrating adjacent frequency bands.

[0026] FIGURE 10 is a block diagram of a system for providing support within a wireless communication environment for multi-radio coexistence management according to one aspect of the present disclosure.

[0027] FIGURE 11A is a block diagram illustrating a communication timeline.

[0028] FIGURE 11B is a block diagram illustrating aligned communication timelines according to one aspect of the present disclosure.

[0029] FIGURE 11C is a block diagram illustrating aligned communication timelines according to one aspect of the present disclosure.

[0030] FIGURE 11D is a block diagram illustrating aligned communication timelines according to one aspect of the present disclosure.

[0031] FIGURE 12 is a block diagram illustrating multi-radio coexistence according to one aspect of the present disclosure.

[0032] FIGURE 13 is a diagram illustrating an example of a hardware implementation for an apparatus employing multi-radio coexistence.

DETAILED DESCRIPTION

[0033] Various aspects of the disclosure provide techniques to mitigate coexistence issues in multi-radio devices, where significant in-device coexistence problems can exist between, e.g., the LTE and Industrial Scientific and Medical (ISM) bands (e.g., for BT/WLAN). As explained above, some coexistence issues persist because an eNB is not aware of interference on the UE side that is experienced by other radios. According to one aspect, the UE declares a Radio Link Failure (RLF) and autonomously accesses a new channel or Radio Access Technology (RAT) if there is a coexistence issue on the present channel. The UE can declare a RLF in some examples for the following reasons: 1) UE reception is affected by interference due to coexistence, and 2) the UE transmitter is causing disruptive interference to another radio. The UE then sends a message indicating the coexistence issue to the eNB while reestablishing connection in the new channel or RAT. The eNB becomes aware of the coexistence issue by virtue of having received the message.

[0034] The techniques described herein can be used for various wireless communication networks such as Code Division Multiple Access (CDMA) networks, Time Division Multiple Access (TDMA) networks, Frequency Division Multiple Access (FDMA) networks, Orthogonal FDMA (OFDMA) networks, Single-Carrier FDMA (SC-FDMA) networks, etc. The terms “networks” and “systems” are often used interchangeably. A CDMA network can implement a radio technology such as Universal Terrestrial Radio Access (UTRA), cdma2000, etc. UTRA includes Wideband-CDMA (W-CDMA) and Low Chip Rate (LCR). cdma2000 covers IS-2000, IS-95 and IS-856 standards. A TDMA network can implement a radio technology such as Global System for Mobile Communications (GSM). An OFDMA network can implement a radio technology such as Evolved UTRA (E-UTRA), IEEE 802.11, IEEE 802.16, IEEE 802.20, Flash-OFDM®, etc. UTRA, E-UTRA, and GSM are part of Universal Mobile Telecommunication System (UMTS). Long Term Evolution (LTE) is an upcoming release of UMTS that uses E-UTRA. UTRA, E-UTRA, GSM, UMTS and LTE are described in documents from an organization named “3rd Generation Partnership Project” (3GPP). CDMA2000 is described in documents from an organization named “3rd Generation Partnership Project 2” (3GPP2). These various radio technologies and standards are known in the art. For clarity, certain aspects of the techniques are described below for LTE, and LTE terminology is used in portions of the description below.

[0035] Single carrier frequency division multiple access (SC-FDMA), which utilizes single carrier modulation and frequency domain equalization is a technique that can be utilized with various aspects described herein. SC-FDMA has similar performance and essentially the same overall complexity as those of an OFDMA system. SC-FDMA signal has lower peak-to-average power ratio (PAPR) because of its inherent single carrier structure. SC-FDMA has drawn great attention, especially in the uplink communications where lower PAPR greatly benefits the mobile terminal in terms of transmit power efficiency. It is currently a working assumption for an uplink multiple access scheme in 3GPP Long Term Evolution (LTE), or Evolved UTRA.

[0036] Referring to FIGURE 1, a multiple access wireless communication system according to one aspect is illustrated. An evolved Node B 100 (eNB) includes a computer 115 that has processing resources and memory resources to manage the LTE communications by allocating resources and parameters, granting/denying requests from

user equipment, and/or the like. The eNB 100 also has multiple antenna groups, one group including antenna 104 and antenna 106, another group including antenna 108 and antenna 110, and an additional group including antenna 112 and antenna 114. In FIGURE 1, only two antennas are shown for each antenna group, however, more or fewer antennas can be utilized for each antenna group. A User Equipment (UE) 116 (also referred to as an Access Terminal (AT)) is in communication with antennas 112 and 114, while antennas 112 and 114 transmit information to the UE 116 over an uplink (UL) 188. The UE 122 is in communication with antennas 106 and 108, while antennas 106 and 108 transmit information to the UE 122 over a downlink (DL) 126 and receive information from the UE 122 over an uplink 124. In a frequency division duplex (FDD) system, communication links 118, 120, 124 and 126 can use different frequencies for communication. For example, the downlink 120 can use a different frequency than used by the uplink 118.

[0037] Each group of antennas and/or the area in which they are designed to communicate is often referred to as a sector of the eNB. In this aspect, respective antenna groups are designed to communicate to UEs in a sector of the areas covered by the eNB 100.

[0038] In communication over the downlinks 120 and 126, the transmitting antennas of the eNB 100 utilize beamforming to improve the signal-to-noise ratio of the uplinks for the different UEs 116 and 122. Also, an eNB using beamforming to transmit to UEs scattered randomly through its coverage causes less interference to UEs in neighboring cells than a UE transmitting through a single antenna to all its UEs.

[0039] An eNB can be a fixed station used for communicating with the terminals and can also be referred to as an access point, base station, or some other terminology. A UE can also be called an access terminal, a wireless communication device, terminal, or some other terminology.

[0040] FIGURE 2 is a block diagram of an aspect of a transmitter system 210 (also known as an eNB) and a receiver system 250 (also known as a UE) in a MIMO system 200. In some instances, both a UE and an eNB each have a transceiver that includes a transmitter system and a receiver system. At the transmitter system 210, traffic data for a number of data streams is provided from a data source 212 to a transmit (TX) data processor 214.

[0041] A MIMO system employs multiple (N_T) transmit antennas and multiple (N_R) receive antennas for data transmission. A MIMO channel formed by the N_T transmit and N_R receive antennas may be decomposed into N_S independent channels, which are also referred to as spatial channels, wherein $N_S \leq \min\{N_T, N_R\}$. Each of the N_S independent channels corresponds to a dimension. The MIMO system can provide improved performance (e.g., higher throughput and/or greater reliability) if the additional dimensionalities created by the multiple transmit and receive antennas are utilized.

[0042] A MIMO system supports time division duplex (TDD) and frequency division duplex (FDD) systems. In a TDD system, the uplink and downlink transmissions are on the same frequency region so that the reciprocity principle allows the estimation of the downlink channel from the uplink channel. This enables the eNB to extract transmit beamforming gain on the downlink when multiple antennas are available at the eNB.

[0043] In an aspect, each data stream is transmitted over a respective transmit antenna. The TX data processor 214 formats, codes, and interleaves the traffic data for each data stream based on a particular coding scheme selected for that data stream to provide coded data.

[0044] The coded data for each data stream can be multiplexed with pilot data using OFDM techniques. The pilot data is a known data pattern processed in a known manner and can be used at the receiver system to estimate the channel response. The multiplexed pilot and coded data for each data stream is then modulated (e.g., symbol mapped) based on a particular modulation scheme (e.g., BPSK, QPSK, M-PSK, or M-QAM) selected for that data stream to provide modulation symbols. The data rate, coding, and modulation for each data stream can be determined by instructions performed by a processor 230 operating with a memory 232.

[0045] The modulation symbols for respective data streams are then provided to a TX MIMO processor 220, which can further process the modulation symbols (e.g., for OFDM). The TX MIMO processor 220 then provides N_T modulation symbol streams to N_T transmitters (TMTR) 222a through 222t. In certain aspects, the TX MIMO processor 220 applies beamforming weights to the symbols of the data streams and to the antenna from which the symbol is being transmitted.

[0046] Each transmitter 222 receives and processes a respective symbol stream to provide one or more analog signals, and further conditions (e.g., amplifies, filters, and

upconverts) the analog signals to provide a modulated signal suitable for transmission over the MIMO channel. N_T modulated signals from the transmitters 222a through 222t are then transmitted from N_T antennas 224a through 224t, respectively.

[0047] At a receiver system 250, the transmitted modulated signals are received by N_R antennas 252a through 252r and the received signal from each antenna 252 is provided to a respective receiver (RCVR) 254a through 254r. Each receiver 254 conditions (e.g., filters, amplifies, and downconverts) a respective received signal, digitizes the conditioned signal to provide samples, and further processes the samples to provide a corresponding “received” symbol stream.

[0048] An RX data processor 260 then receives and processes the N_R received symbol streams from N_R receivers 254 based on a particular receiver processing technique to provide N_R “detected” symbol streams. The RX data processor 260 then demodulates, deinterleaves, and decodes each detected symbol stream to recover the traffic data for the data stream. The processing by the RX data processor 260 is complementary to the processing performed by the TX MIMO processor 220 and the TX data processor 214 at the transmitter system 210.

[0049] A processor 270 (operating with a memory 272) periodically determines which pre-coding matrix to use (discussed below). The processor 270 formulates an uplink message having a matrix index portion and a rank value portion.

[0050] The uplink message can include various types of information regarding the communication link and/or the received data stream. The uplink message is then processed by a TX data processor 238, which also receives traffic data for a number of data streams from a data source 236, modulated by a modulator 280, conditioned by transmitters 254a through 254r, and transmitted back to the transmitter system 210.

[0051] At the transmitter system 210, the modulated signals from the receiver system 250 are received by antennas 224, conditioned by receivers 222, demodulated by a demodulator 240, and processed by an RX data processor 242 to extract the uplink message transmitted by the receiver system 250. The processor 230 then determines which pre-coding matrix to use for determining the beamforming weights, then processes the extracted message.

[0052] FIGURE 3 is a block diagram conceptually illustrating an exemplary frame structure in downlink Long Term Evolution (LTE) communications. The transmission timeline for the downlink may be partitioned into units of radio frames. Each radio

frame may have a predetermined duration (*e.g.*, 10 milliseconds (ms)) and may be partitioned into 10 subframes with indices of 0 through 9. Each subframe may include two slots. Each radio frame may thus include 20 slots with indices of 0 through 19. Each slot may include L symbol periods, *e.g.*, 7 symbol periods for a normal cyclic prefix (as shown in FIGURE 3) or 6 symbol periods for an extended cyclic prefix. The 2L symbol periods in each subframe may be assigned indices of 0 through 2L–1. The available time frequency resources may be partitioned into resource blocks. Each resource block may cover N subcarriers (*e.g.*, 12 subcarriers) in one slot.

[0053] In LTE, an eNB may send a Primary Synchronization Signal (PSS) and a Secondary Synchronization Signal (SSS) for each cell in the eNB. The PSS and SSS may be sent in symbol periods 6 and 5, respectively, in each of subframes 0 and 5 of each radio frame with the normal cyclic prefix, as shown in FIGURE 3. The synchronization signals may be used by UEs for cell detection and acquisition. The eNB may send a Physical Broadcast Channel (PBCH) in symbol periods 0 to 3 in slot 1 of subframe 0. The PBCH may carry certain system information.

[0054] The eNB may send a Cell-specific Reference Signal (CRS) for each cell in the eNB. The CRS may be sent in symbols 0, 1, and 4 of each slot in case of the normal cyclic prefix, and in symbols 0, 1, and 3 of each slot in case of the extended cyclic prefix. The CRS may be used by UEs for coherent demodulation of physical channels, timing and frequency tracking, Radio Link Monitoring (RLM), Reference Signal Received Power (RSRP), and Reference Signal Received Quality (RSRQ) measurements, etc.

[0055] The eNB may send a Physical Control Format Indicator Channel (PCFICH) in the first symbol period of each subframe, as seen in FIGURE 3. The PCFICH may convey the number of symbol periods (M) used for control channels, where M may be equal to 1, 2 or 3 and may change from subframe to subframe. M may also be equal to 4 for a small system bandwidth, *e.g.*, with less than 10 resource blocks. In the example shown in FIGURE 3, M=3. The eNB may send a Physical HARQ Indicator Channel (PHICH) and a Physical Downlink Control Channel (PDCCH) in the first M symbol periods of each subframe. The PDCCH and PHICH are also included in the first three symbol periods in the example shown in FIGURE 3. The PHICH may carry information to support Hybrid Automatic Repeat Request (HARQ). The PDCCH may carry information on resource allocation for UEs and control information for downlink

channels. The eNB may send a Physical Downlink Shared Channel (PDSCH) in the remaining symbol periods of each subframe. The PDSCH may carry data for UEs scheduled for data transmission on the downlink. The various signals and channels in LTE are described in 3GPP TS 36.211, entitled “Evolved Universal Terrestrial Radio Access (E-UTRA); Physical Channels and Modulation,” which is publicly available.

[0056] The eNB may send the PSS, SSS and PBCH in the center 1.08 MHz of the system bandwidth used by the eNB. The eNB may send the PCFICH and PHICH across the entire system bandwidth in each symbol period in which these channels are sent. The eNB may send the PDCCH to groups of UEs in certain portions of the system bandwidth. The eNB may send the PDSCH to specific UEs in specific portions of the system bandwidth. The eNB may send the PSS, SSS, PBCH, PCFICH and PHICH in a broadcast manner to all UEs, may send the PDCCH in a unicast manner to specific UEs, and may also send the PDSCH in a unicast manner to specific UEs.

[0057] A number of resource elements may be available in each symbol period. Each resource element may cover one subcarrier in one symbol period and may be used to send one modulation symbol, which may be a real or complex value. Resource elements not used for a reference signal in each symbol period may be arranged into resource element groups (REGs). Each REG may include four resource elements in one symbol period. The PCFICH may occupy four REGs, which may be spaced approximately equally across frequency, in symbol period 0. The PHICH may occupy three REGs, which may be spread across frequency, in one or more configurable symbol periods. For example, the three REGs for the PHICH may all belong in symbol period 0 or may be spread in symbol periods 0, 1 and 2. The PDCCH may occupy 9, 18, 32 or 64 REGs, which may be selected from the available REGs, in the first M symbol periods. Only certain combinations of REGs may be allowed for the PDCCH.

[0058] A UE may know the specific REGs used for the PHICH and the PCFICH. The UE may search different combinations of REGs for the PDCCH. The number of combinations to search is typically less than the number of allowed combinations for the PDCCH. An eNB may send the PDCCH to the UE in any of the combinations that the UE will search.

[0059] FIGURE 4 is a block diagram conceptually illustrating an exemplary frame structure in uplink Long Term Evolution (LTE) communications. The available Resource Blocks (RBs) for the uplink may be partitioned into a data section and a

control section. The control section may be formed at the two edges of the system bandwidth and may have a configurable size. The resource blocks in the control section may be assigned to UEs for transmission of control information. The data section may include all resource blocks not included in the control section. The design in FIGURE 4 results in the data section including contiguous subcarriers, which may allow a single UE to be assigned all of the contiguous subcarriers in the data section.

[0060] A UE may be assigned resource blocks in the control section to transmit control information to an eNB. The UE may also be assigned resource blocks in the data section to transmit data to the eNodeB. The UE may transmit control information in a Physical Uplink Control Channel (PUCCH) on the assigned resource blocks in the control section. The UE may transmit only data or both data and control information in a Physical Uplink Shared Channel (PUSCH) on the assigned resource blocks in the data section. An uplink transmission may span both slots of a subframe and may hop across frequency as shown in FIGURE 4.

[0061] The PSS, SSS, CRS, PBCH, PUCCH and PUSCH in LTE are described in 3GPP TS 36.211, entitled “Evolved Universal Terrestrial Radio Access (E-UTRA); Physical Channels and Modulation,” which is publicly available.

[0062] In an aspect, described herein are systems and methods for providing support within a wireless communication environment, such as a 3GPP LTE environment or the like, to facilitate multi-radio coexistence solutions.

[0063] Referring now to FIGURE 5, illustrated is an example wireless communication environment 500 in which various aspects described herein can function. The wireless communication environment 500 can include a wireless device 510, which can be capable of communicating with multiple communication systems. These systems can include, for example, one or more cellular systems 520 and/or 530, one or more WLAN systems 540 and/or 550, one or more wireless personal area network (WPAN) systems 560, one or more broadcast systems 570, one or more satellite positioning systems 580, other systems not shown in FIGURE 5, or any combination thereof. It should be appreciated that in the following description the terms “network” and “system” are often used interchangeably.

[0064] The cellular systems 520 and 530 can each be a CDMA, TDMA, FDMA, OFDMA, Single Carrier FDMA (SC-FDMA), or other suitable system. A CDMA system can implement a radio technology such as Universal Terrestrial Radio Access

(UTRA), cdma2000, etc. UTRA includes Wideband CDMA (WCDMA) and other variants of CDMA. Moreover, cdma2000 covers IS-2000 (CDMA2000 1X), IS-95 and IS-856 (HRPD) standards. A TDMA system can implement a radio technology such as Global System for Mobile Communications (GSM), Digital Advanced Mobile Phone System (D-AMPS), etc. An OFDMA system can implement a radio technology such as Evolved UTRA (E-UTRA), Ultra Mobile Broadband (UMB), IEEE 802.16 (WiMAX), IEEE 802.20, Flash-OFDM®, etc. UTRA and E-UTRA are part of Universal Mobile Telecommunication System (UMTS). 3GPP Long Term Evolution (LTE) and LTE-Advanced (LTE-A) are new releases of UMTS that use E-UTRA. UTRA, E-UTRA, UMTS, LTE, LTE-A and GSM are described in documents from an organization named “3rd Generation Partnership Project” (3GPP). cdma2000 and UMB are described in documents from an organization named “3rd Generation Partnership Project 2” (3GPP2). In an aspect, the cellular system 520 can include a number of base stations 522, which can support bi-directional communication for wireless devices within their coverage. Similarly, the cellular system 530 can include a number of base stations 532 that can support bi-directional communication for wireless devices within their coverage.

[0065] WLAN systems 540 and 550 can respectively implement radio technologies such as IEEE 802.11 (WiFi), Hiperlan, etc. The WLAN system 540 can include one or more access points 542 that can support bi-directional communication. Similarly, the WLAN system 550 can include one or more access points 552 that can support bi-directional communication. The WPAN system 560 can implement a radio technology such as Bluetooth (BT), IEEE 802.15, etc. Further, the WPAN system 560 can support bi-directional communication for various devices such as wireless device 510, a headset 562, a computer 564, a mouse 566, or the like.

[0066] The broadcast system 570 can be a television (TV) broadcast system, a frequency modulation (FM) broadcast system, a digital broadcast system, etc. A digital broadcast system can implement a radio technology such as MediaFLO™, Digital Video Broadcasting for Handhelds (DVB-H), Integrated Services Digital Broadcasting for Terrestrial Television Broadcasting (ISDB-T), or the like. Further, the broadcast system 570 can include one or more broadcast stations 572 that can support one-way communication.

[0067] The satellite positioning system 580 can be the United States Global Positioning System (GPS), the European Galileo system, the Russian GLONASS system, the Quasi-

Zenith Satellite System (QZSS) over Japan, the Indian Regional Navigational Satellite System (IRNSS) over India, the Beidou system over China, and/or any other suitable system. Further, the satellite positioning system 580 can include a number of satellites 582 that transmit signals for position determination.

[0068] In an aspect, the wireless device 510 can be stationary or mobile and can also be referred to as a user equipment (UE), a mobile station, a mobile equipment, a terminal, an access terminal, a subscriber unit, a station, etc. The wireless device 510 can be cellular phone, a personal digital assistance (PDA), a wireless modem, a handheld device, a laptop computer, a cordless phone, a wireless local loop (WLL) station, etc. In addition, a wireless device 510 can engage in two-way communication with the cellular system 520 and/or 530, the WLAN system 540 and/or 550, devices with the WPAN system 560, and/or any other suitable systems(s) and/or devices(s). The wireless device 510 can additionally or alternatively receive signals from the broadcast system 570 and/or satellite positioning system 580. In general, it can be appreciated that the wireless device 510 can communicate with any number of systems at any given moment. Also, the wireless device 510 may experience coexistence issues among various ones of its constituent radio devices that operate at the same time. Accordingly, device 510 includes a coexistence manager (CxM, not shown) that has a functional module to detect and mitigate coexistence issues, as explained further below.

[0069] Turning next to FIGURE 6, a block diagram is provided that illustrates an example design for a multi-radio wireless device 600 and may be used as an implementation of the radio 510 of FIGURE 5. As FIGURE 6 illustrates, the wireless device 600 can include N radios 620a through 620n, which can be coupled to N antennas 610a through 610n, respectively, where N can be any integer value. It should be appreciated, however, that respective radios 620 can be coupled to any number of antennas 610 and that multiple radios 620 can also share a given antenna 610.

[0070] In general, a radio 620 can be a unit that radiates or emits energy in an electromagnetic spectrum, receives energy in an electromagnetic spectrum, or generates energy that propagates via conductive means. By way of example, a radio 620 can be a unit that transmits a signal to a system or a device or a unit that receives signals from a system or device. Accordingly, it can be appreciated that a radio 620 can be utilized to support wireless communication. In another example, a radio 620 can also be a unit (e.g., a screen on a computer, a circuit board, etc.) that emits noise, which can impact

the performance of other radios. Accordingly, it can be further appreciated that a radio 620 can also be a unit that emits noise and interference without supporting wireless communication.

[0071] In an aspect, respective radios 620 can support communication with one or more systems. Multiple radios 620 can additionally or alternatively be used for a given system, *e.g.*, to transmit or receive on different frequency bands (*e.g.*, cellular and PCS bands).

[0072] In another aspect, a digital processor 630 can be coupled to radios 620a through 620n and can perform various functions, such as processing for data being transmitted or received via the radios 620. The processing for each radio 620 can be dependent on the radio technology supported by that radio and can include encryption, encoding, modulation, etc., for a transmitter; demodulation, decoding, decryption, etc., for a receiver, or the like. In one example, the digital processor 630 can include a coexistence manager (CxM) 640 that can control operation of the radios 620 in order to improve the performance of the wireless device 600 as generally described herein. The CxM 640 can have access to a database 644, which can store information used to control the operation of the radios 620. As explained further below, the CxM 640 can be adapted for a variety of techniques to decrease interference between the radios. In one example, the CxM 640 requests a measurement gap pattern or DRX cycle that allows an ISM radio to communicate during periods of LTE inactivity.

[0073] For simplicity, digital processor 630 is shown in FIGURE 6 as a single processor. However, it should be appreciated that the digital processor 630 can include any number of processors, controllers, memories, etc. In one example, a controller/processor 650 can direct the operation of various units within the wireless device 600. Additionally or alternatively, a memory 652 can store program codes and data for the wireless device 600. The digital processor 630, controller/processor 650, and memory 652 can be implemented on one or more integrated circuits (ICs), application specific integrated circuits (ASICs), etc. By way of specific, non-limiting example, the digital processor 630 can be implemented on a Mobile Station Modem (MSM) ASIC.

[0074] In an aspect, the CxM 640 can manage operation of respective radios 620 utilized by wireless device 600 in order to avoid interference and/or other performance degradation associated with collisions between respective radios 620. CxM 640 may

perform one or more processes, such as those illustrated in FIGURE 12. By way of further illustration, a graph 700 in FIGURE 7 represents respective potential collisions between seven example radios in a given decision period. In the example shown in graph 700, the seven radios include a WLAN transmitter (Tw), an LTE transmitter (Tl), an FM transmitter (Tf), a GSM/WCDMA transmitter (Tc/Tw), an LTE receiver (Rl), a Bluetooth receiver (Rb), and a GPS receiver (Rg). The four transmitters are represented by four nodes on the left side of the graph 700. The four receivers are represented by three nodes on the right side of the graph 700.

[0075] A potential collision between a transmitter and a receiver is represented on the graph 700 by a branch connecting the node for the transmitter and the node for the receiver. Accordingly, in the example shown in the graph 700, collisions may exist between (1) the WLAN transmitter (Tw) and the Bluetooth receiver (Rb); (2) the LTE transmitter (Tl) and the Bluetooth receiver (Rb); (3) the WLAN transmitter (Tw) and the LTE receiver (Rl); (4) the FM transmitter (Tf) and the GPS receiver (Rg); (5) a WLAN transmitter (Tw), a GSM/WCDMA transmitter (Tc/Tw), and a GPS receiver (Rg).

[0076] In one aspect, an example CxM 640 can operate in time in a manner such as that shown by diagram 800 in FIGURE 8. As diagram 800 illustrates, a timeline for CxM operation can be divided into Decision Units (DUs), which can be any suitable uniform or non-uniform length (*e.g.*, 100 μ s) where notifications are processed, and a response phase (*e.g.*, 20 μ s) where commands are provided to various radios 620 and/or other operations are performed based on actions taken in the evaluation phase. In one example, the timeline shown in the diagram 800 can have a latency parameter defined by a worst case operation of the timeline, *e.g.*, the timing of a response in the case that a notification is obtained from a given radio immediately following termination of the notification phase in a given DU.

[0077] As shown in FIGURE 9, Long Term Evolution (LTE) in band 7 (for frequency division duplex (FDD) uplink), band 40 (for time division duplex (TDD) communication), and band 38 (for TDD downlink) is adjacent to the 2.4 GHz Industrial Scientific and Medical (ISM) band used by Bluetooth (BT) and Wireless Local Area Network (WLAN) technologies. Frequency planning for these bands is such that there is limited or no guard band permitting traditional filtering solutions to avoid interference at adjacent frequencies. For example, a 20 MHz guard band exists between ISM and band 7, but no guard band exists between ISM and band 40.

[0078] To be compliant with appropriate standards, communication devices operating over a particular band are to be operable over the entire specified frequency range. For example, in order to be LTE compliant, a mobile station/user equipment should be able to communicate across the entirety of both band 40 (2300-2400 MHz) and band 7 (2500-2570 MHz) as defined by the 3rd Generation Partnership Project (3GPP). Without a sufficient guard band, devices employ filters that overlap into other bands causing band interference. Because band 40 filters are 100 MHz wide to cover the entire band, the rollover from those filters crosses over into the ISM band causing interference. Similarly, ISM devices that use the entirety of the ISM band (e.g., from 2401 through approximately 2480 MHz) will employ filters that rollover into the neighboring band 40 and band 7 and may cause interference.

[0079] In-device coexistence problems can exist with respect to a UE between resources such as, for example, LTE and ISM bands (e.g., for Bluetooth/WLAN). In current LTE implementations, any interference issues to LTE are reflected in the downlink measurements (e.g., Reference Signal Received Quality (RSRQ) metrics, etc.) reported by a UE and/or the downlink error rate which the eNB can use to make inter-frequency or inter-RAT handoff decisions to, e.g., move LTE to a channel or RAT with no coexistence issues. However, it can be appreciated that these existing techniques will not work if, for example, the LTE uplink is causing interference to Bluetooth/WLAN but the LTE downlink does not see any interference from Bluetooth/WLAN. More particularly, even if the UE autonomously moves itself to another channel on the uplink, the eNB can in some cases handover the UE back to the problematic channel for load balancing purposes. In any case, it can be appreciated that existing techniques do not facilitate use of the bandwidth of the problematic channel in the most efficient way.

[0080] Turning now to FIGURE 10, a block diagram of a system 1000 for providing support within a wireless communication environment for multi-radio coexistence management is illustrated. In an aspect, the system 1000 can include one or more UEs 1010 and/or eNBs 1040, which can engage in uplink and/or downlink communications, and/or any other suitable communication with each other and/or any other entities in the system 1000. In one example, the UE 1010 and/or eNB 1040 can be operable to communicate using a variety resources, including frequency channels and sub-bands, some of which can potentially be colliding with other radio resources (e.g., a broadband radio such as an LTE modem). Thus, the UE 1010 can utilize various techniques for

managing coexistence between multiple radios utilized by the UE 1010, as generally described herein.

[0081] To mitigate at least the above shortcomings, the UE 1010 can utilize respective features described herein and illustrated by the system 1000 to facilitate support for multi-radio coexistence within the UE 1010. For example, a channel monitoring module 1012, a Wi-Fi Direct Module 1014, and a Notice of Absence module 1016 can be provided. The various modules 1012-1016 may, in some examples, be implemented as part of a coexistence manager such as the CxM 640 of FIGURE 6. The various modules 1012-1016 and others may be configured to implement the embodiments discussed herein.

[0082] Offered is a coexistence solution between Long Term Evolution (LTE) communications and Wireless Local Area Network (WLAN) communications, in particular, WLAN Wi-Fi communications. The solution aligns communications using the two radio technologies using a Notice of Absence signal supported in Wi-Fi Direct Peer-to-Peer (P2P) communications.

[0083] P2P communications are commonly close range and low power. A device in P2P operation is typically designated either as a group owner or group client. A Notice of Absence (NoA) function is a power save mechanism for P2P operation. A NoA indication is sent by the P2P group owner to the P2P client(s) to notify the client(s) about periods during which the group owner will be unavailable. The P2P group owner can use the NoA function to indicate a periodic sleep/awake cycle to the P2P client(s). P2P clients may also suggest a NoA sleep/awake setting to the P2P group owner. During a P2P sleep period, there is no P2P activity from either the group owner or the client(s). The NoA setting may align P2P communications with LTE communications to reduce periods where transmit periods of one radio overlap with receive periods of the other radio, resulting in potential interference. For purposes of the present disclosure, a mobile device may be acting as a group owner or a group client.

[0084] LTE operating in time division duplex (TDD) mode may have a certain receive/transmit pattern alternating between downlink (DL) and uplink (UL) communications. This pattern may depend on the LTE configuration. LTE may also have an on/off pattern in certain modes such as discontinuous reception. LTE's specific operational pattern depends on various LTE modes and configurations. For example, for TDD-LTE configuration 1, LTE will have a half radio frame periodicity of 5 ms,

with 3 ms for receive/downlink and 2 ms for transmit/uplink as shown in FIGURE 11A. Each LTE half-frame is 5 ms long and each half-frame comprises a receive/downlink (DL) portion 1102 of 3 ms in length and a transmit (Tx)/uplink (UL) portion 1104 of 2 ms in length.

[0085] When a WLAN radio is operating in Wi-Fi Direct, the NoA feature may synchronize a P2P awake/sleep pattern with LTE's receive/transmit pattern. The particular awake/sleep pattern may be configured based on LTE configurations and other configurations or conditions. For example, for TDD-LTE configuration 1, when conditions exist so that LTE reception is not interfered with by WLAN transmissions (such as with low power P2P transmissions), the NoA pattern shown in FIGURE 11B may be used. As shown in FIGURE 11B, if P2P transmissions do not interfere with LTE reception, the P2P awake state 1106 may be aligned with the LTE receive slots 1102. During the LTE transmit slots 1104, P2P is asleep 1108, thereby avoiding interference to P2P reception by LTE transmission. In this configuration there is no WLAN (P2P) traffic during the LTE transmit slots 1104. A different P2P sleep/awake pattern may be used for a different LTE receive/transmit configuration.

[0086] For another example, again for TDD-LTE configuration 1, when conditions exist so that LTE reception is interfered with by WLAN transmission, but WLAN reception is not interfered with by LTE transmissions, the NoA pattern shown in FIGURE 11C may be used. If LTE transmissions 1104 do not interfere with P2P reception, the P2P awake state 1112 may be aligned with the LTE transmit slots 1104. During the LTE receive slots 1102, P2P is asleep 1110, thereby avoiding interference to LTE reception by P2P transmission. In this configuration there is no WLAN (P2P) traffic during the LTE receive slots 1102. As above, a different P2P sleep/awake pattern may be used for a different LTE receive/transmit configuration.

[0087] For another example, if LTE is awake/sleep in a certain pattern (such as with discontinuous reception (DRX) operation), the NoA feature may be operated to align the P2P awake/sleep pattern to be the opposite of the LTE awake/sleep pattern, as shown in FIGURE 11D. In this configuration interference is avoided as LTE is operational 1120 when WLAN (P2P) is not at period 1110, and WLAN (P2P) is operational 1112 when LTE is not at period 1122. A different P2P sleep/awake pattern may be configured for a different LTE awake/sleep configuration.

[0088] Other P2P sleep/awake patterns may be created using the NoA setting to match radio frequency communication conditions and LTE modes/configurations. NoA settings may change dynamically/adaptively to adapt to the P2P sleep/awake pattern to reduce interference when faced with changing communication conditions/configurations. Periodic synchronization may ensure proper alignment of LTE/P2P communication patterns.

[0089] As shown in FIGURE 12 a UE may determine timing for communications of a first radio access technology (RAT), as shown in block 1202. A UE may align inactive portions of communications of a second RAT with the timing for communications of the first RAT, as shown in block 1204.

[0090] FIGURE 13 is a diagram illustrating an example of a hardware implementation for an apparatus 1300 employing a processing system 1314. The processing system 1314 may be implemented with a bus architecture, represented generally by a bus 1324. The bus 1324 may include any number of interconnecting buses and bridges depending on the specific application of the processing system 1314 and the overall design constraints. The bus 1324 links together various circuits including one or more processors and/or hardware modules, represented by a processor 1326, a timing module 1302, an aligning module 1304, and a computer-readable medium 1328. The bus 1324 may also link various other circuits such as timing sources, peripherals, voltage regulators, and power management circuits, which are well known in the art, and therefore, will not be described any further.

[0091] The apparatus includes the processing system 1314 coupled to a transceiver 1322. The transceiver 1322 is coupled to one or more antennas 1320. The transceiver 1322 provides a means for communicating with various other apparatus over a transmission medium. The processing system 1314 includes the processor 1326 coupled to the computer-readable medium 1328. The processor 1326 is responsible for general processing, including the execution of software stored on the computer-readable medium 1328. The software, when executed by the processor 1326, causes the processing system 1314 to perform the various functions described supra for any particular apparatus. The computer-readable medium 1328 may also be used for storing data that is manipulated by the processor 1326 when executing software. The processing system 1314 further includes the timing module 1302 for determining timing for communications of a first RAT and the aligning module 1304 for aligning inactive

portions of communications of a second RAT with the timing for communications of the first RAT. The timing module 1302 and the aligning module 1304 may be software modules running in the processor 1326, resident/stored in the computer readable medium 1328, one or more hardware modules coupled to the processor 1326, or some combination thereof. The processing system 1314 may be a component of the UE 250 and may include the memory 272 and/or the processor 270.

[0092] In one configuration, the apparatus 1300 for wireless communication includes means for determining timing. The means may be the timing module 1302 and/or the processing system 1314 of the apparatus 1300 configured to perform the functions recited by the means. As described above, the processing system 1314 may include the antennae 252/1320, the receiver 254, the processor 270/1326, the memory 272, the transceiver 1322, and/or the computer-readable medium 1328. In another aspect, the aforementioned means may be any module or any apparatus configured to perform the functions recited by the aforementioned means.

[0093] In one configuration, the apparatus 1300 for wireless communication includes means for aligning. The means may be the aligning module 1304 and/or the processing system 1314 of the apparatus 1300 configured to perform the functions recited by the means. As described above, the processing system 1314 may include antennae 252/1320, the transmitter 254, the processor 270/1326, the memory 272, the transceiver 1322, and/or the computer-readable medium 1328. In another aspect, the aforementioned means may be any module or any apparatus configured to perform the functions recited by the aforementioned means.

[0094] The examples above describe aspects implemented in an LTE system. However, the scope of the disclosure is not so limited. Various aspects may be adapted for use with other communication systems, such as those that employ any of a variety of communication protocols including, but not limited to, CDMA systems, TDMA systems, FDMA systems, and OFDMA systems.

[0095] It is understood that the specific order or hierarchy of steps in the processes disclosed is an example of exemplary approaches. Based upon design preferences, it is understood that the specific order or hierarchy of steps in the processes may be rearranged while remaining within the scope of the present disclosure. The accompanying method claims present elements of the various steps in a sample order, and are not meant to be limited to the specific order or hierarchy presented.

[0096] Those of skill in the art would understand that information and signals may be represented using any of a variety of different technologies and techniques. For example, data, instructions, commands, information, signals, bits, symbols, and chips that may be referenced throughout the above description may be represented by voltages, currents, electromagnetic waves, magnetic fields or particles, optical fields or particles, or any combination thereof.

[0097] Those of skill would further appreciate that the various illustrative logical blocks, modules, circuits, and algorithm steps described in connection with the aspects disclosed herein may be implemented as electronic hardware, computer software, or combinations of both. To clearly illustrate this interchangeability of hardware and software, various illustrative components, blocks, modules, circuits, and steps have been described above generally in terms of their functionality. Whether such functionality is implemented as hardware or software depends upon the particular application and design constraints imposed on the overall system. Skilled artisans may implement the described functionality in varying ways for each particular application, but such implementation decisions should not be interpreted as causing a departure from the scope of the present disclosure.

[0098] The various illustrative logical blocks, modules, and circuits described in connection with the aspects disclosed herein may be implemented or performed with a general purpose processor, a digital signal processor (DSP), an application specific integrated circuit (ASIC), a field programmable gate array (FPGA) or other programmable logic device, discrete gate or transistor logic, discrete hardware components, or any combination thereof designed to perform the functions described herein. A general purpose processor may be a microprocessor, but in the alternative, the processor may be any conventional processor, controller, microcontroller, or state machine. A processor may also be implemented as a combination of computing devices, e.g., a combination of a DSP and a microprocessor, a plurality of microprocessors, one or more microprocessors in conjunction with a DSP core, or any other such configuration.

[0099] The steps of a method or algorithm described in connection with the aspects disclosed herein may be embodied directly in hardware, in a software module executed by a processor, or in a combination of the two. A software module may reside in RAM memory, flash memory, ROM memory, EPROM memory, EEPROM memory,

registers, hard disk, a removable disk, a CD-ROM, or any other form of storage medium known in the art. An exemplary storage medium is coupled to the processor such the processor can read information from, and write information to, the storage medium. In the alternative, the storage medium may be integral to the processor. The processor and the storage medium may reside in an ASIC. The ASIC may reside in a user terminal. In the alternative, the processor and the storage medium may reside as discrete components in a user terminal.

[0100] The previous description of the disclosed aspects is provided to enable any person skilled in the art to make or use the present disclosure. Various modifications to these aspects will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other aspects without departing from the spirit or scope of the disclosure. Thus, the present disclosure is not intended to be limited to the aspects shown herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

CLAIMS

What is claimed is:

1. A method for wireless communications, comprising:
determining timing for communications of a first radio access technology (RAT); and
aligning inactive portions of communications of a second RAT with the timing for communications of the first RAT.
2. The method of claim 1 in which the first RAT comprises Long Term Evolution (LTE) and the second RAT comprises wireless local area network (WLAN) operating in Wi-Fi Direct mode.
3. The method of claim 2 in which the aligning comprises aligning the communications of the second RAT with Notice of Absence (NoA) functionality.
4. The method of claim 3 in which the aligning comprises executing Notice of Absence timing by a Wi-Fi Direct group owner.
5. The method of claim 3 in which the aligning comprises requesting Notice of Absence timing from a Wi-Fi Direct group owner.
6. The method of claim 3 in which the aligning comprises requesting Notice of Absence timing from a Wi-Fi Direct group client.
7. The method of claim 1 in which the aligning is based at least in part on communication conditions.
8. The method of claim 1 in which the aligning is based at least in part on a first RAT configuration.
9. An apparatus for wireless communications, comprising:
means for determining timing for communications of a first radio access technology (RAT); and
means for aligning inactive portions of communications of a second RAT with the timing for communications of the first RAT.

10. The apparatus of claim 9 in which the means for aligning comprises means for aligning the communications of the second RAT with Notice of Absence (NoA) functionality.

11. A computer program product for wireless communications in a wireless network, comprising:

a computer-readable medium having non-transitory program code recorded thereon, the program code comprising:

program code to determine timing for communications of a first radio access technology (RAT); and

program code to align inactive portions of communications of a second RAT with the timing for communications of the first RAT.

12. The computer program product of claim 11 in which the program code to align comprises program code to align the communications of the second RAT with Notice of Absence (NoA) functionality.

13. An apparatus for wireless communication, comprising:

a memory; and

at least one processor coupled to the memory and configured:

to determine timing for communications of a first radio access technology (RAT); and

to align inactive portions of communications of a second RAT with the timing for communications of the first RAT.

14. The apparatus of claim 13 in which the first RAT comprises Long Term Evolution (LTE) and the second RAT comprises wireless local area network (WLAN) operating in Wi-Fi Direct mode.

15. The apparatus of claim 14 in which the at least one processor is configured to align the communications of the second RAT with Notice of Absence (NoA) functionality.

16. The apparatus of claim 15 in which the at least one processor is configured to align executing Notice of Absence timing by a Wi-Fi Direct group owner.

17. The apparatus of claim 15 in which the at least one processor is configured to align by requesting Notice of Absence timing from a Wi-Fi Direct group owner.

18. The apparatus of claim 15 in which the at least one processor is configured to align by requesting Notice of Absence timing from a Wi-Fi Direct group client.

19. The apparatus of claim 13 in which the at least one processor is configured to align based at least in part on communication conditions.

20. The apparatus of claim 13 in which the at least one processor is configured to align based at least in part on a first RAT configuration.

1/14

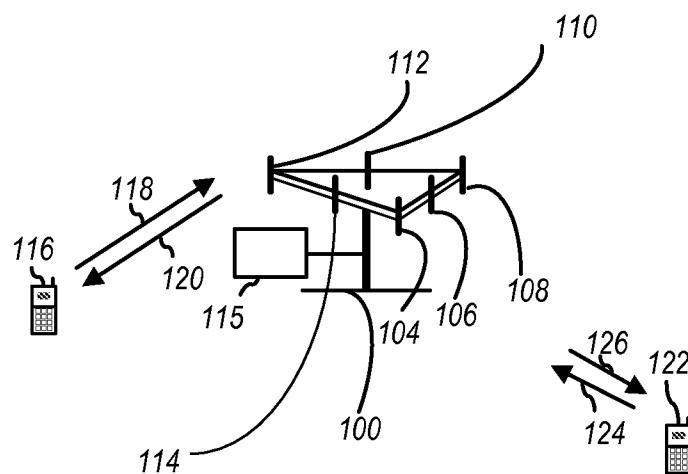


FIG. 1

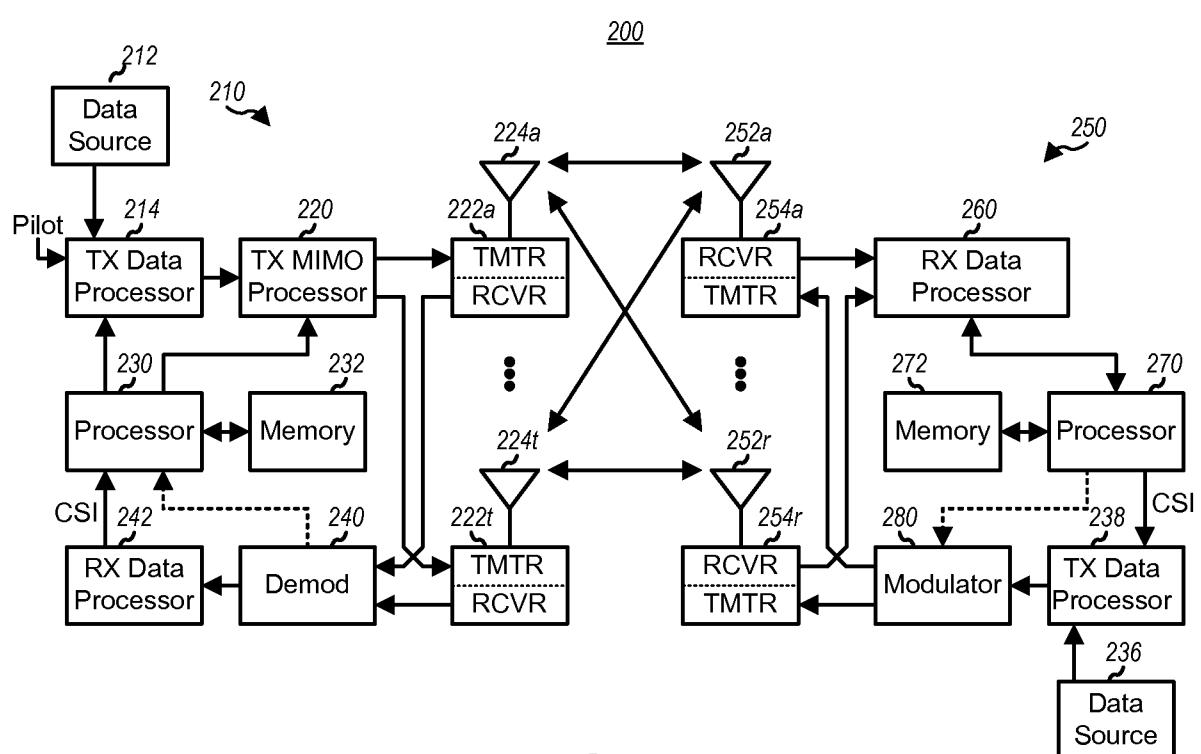


FIG. 2

2/14


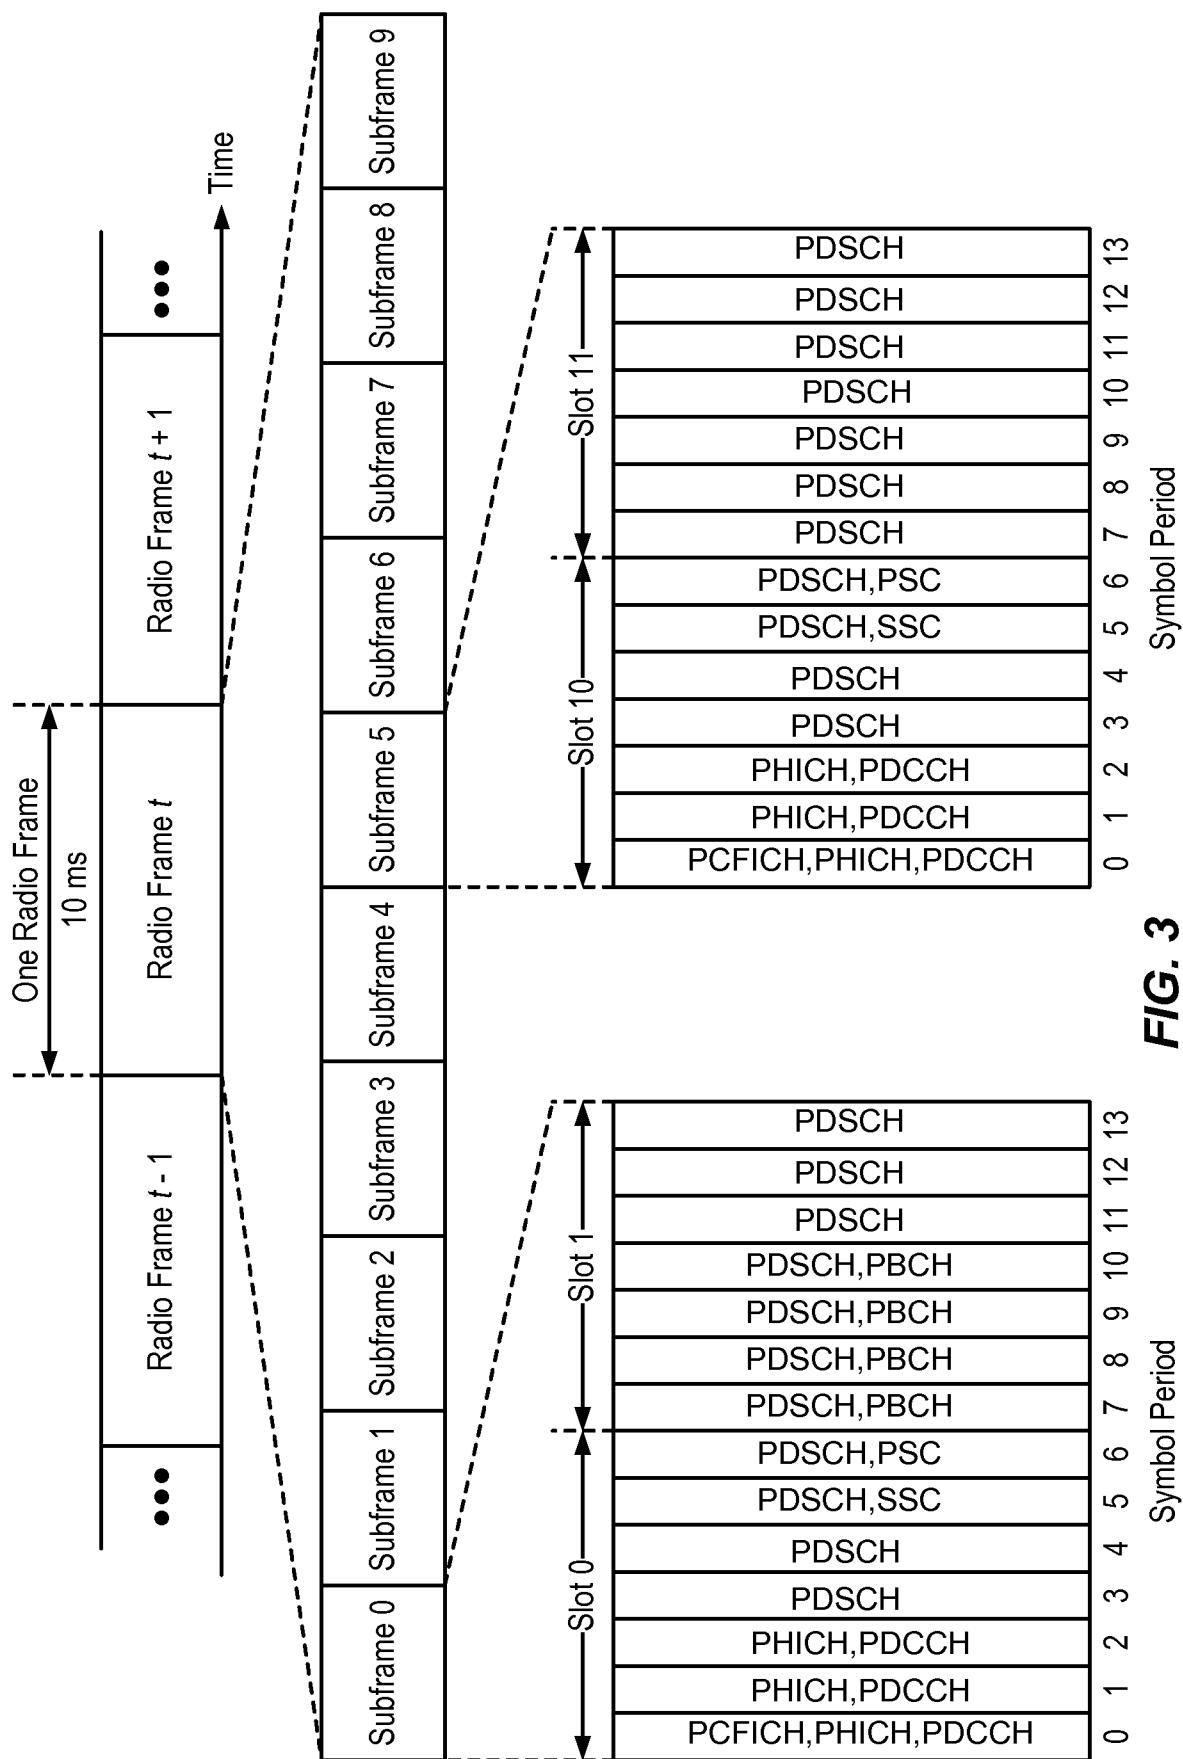


FIG. 3

3/14

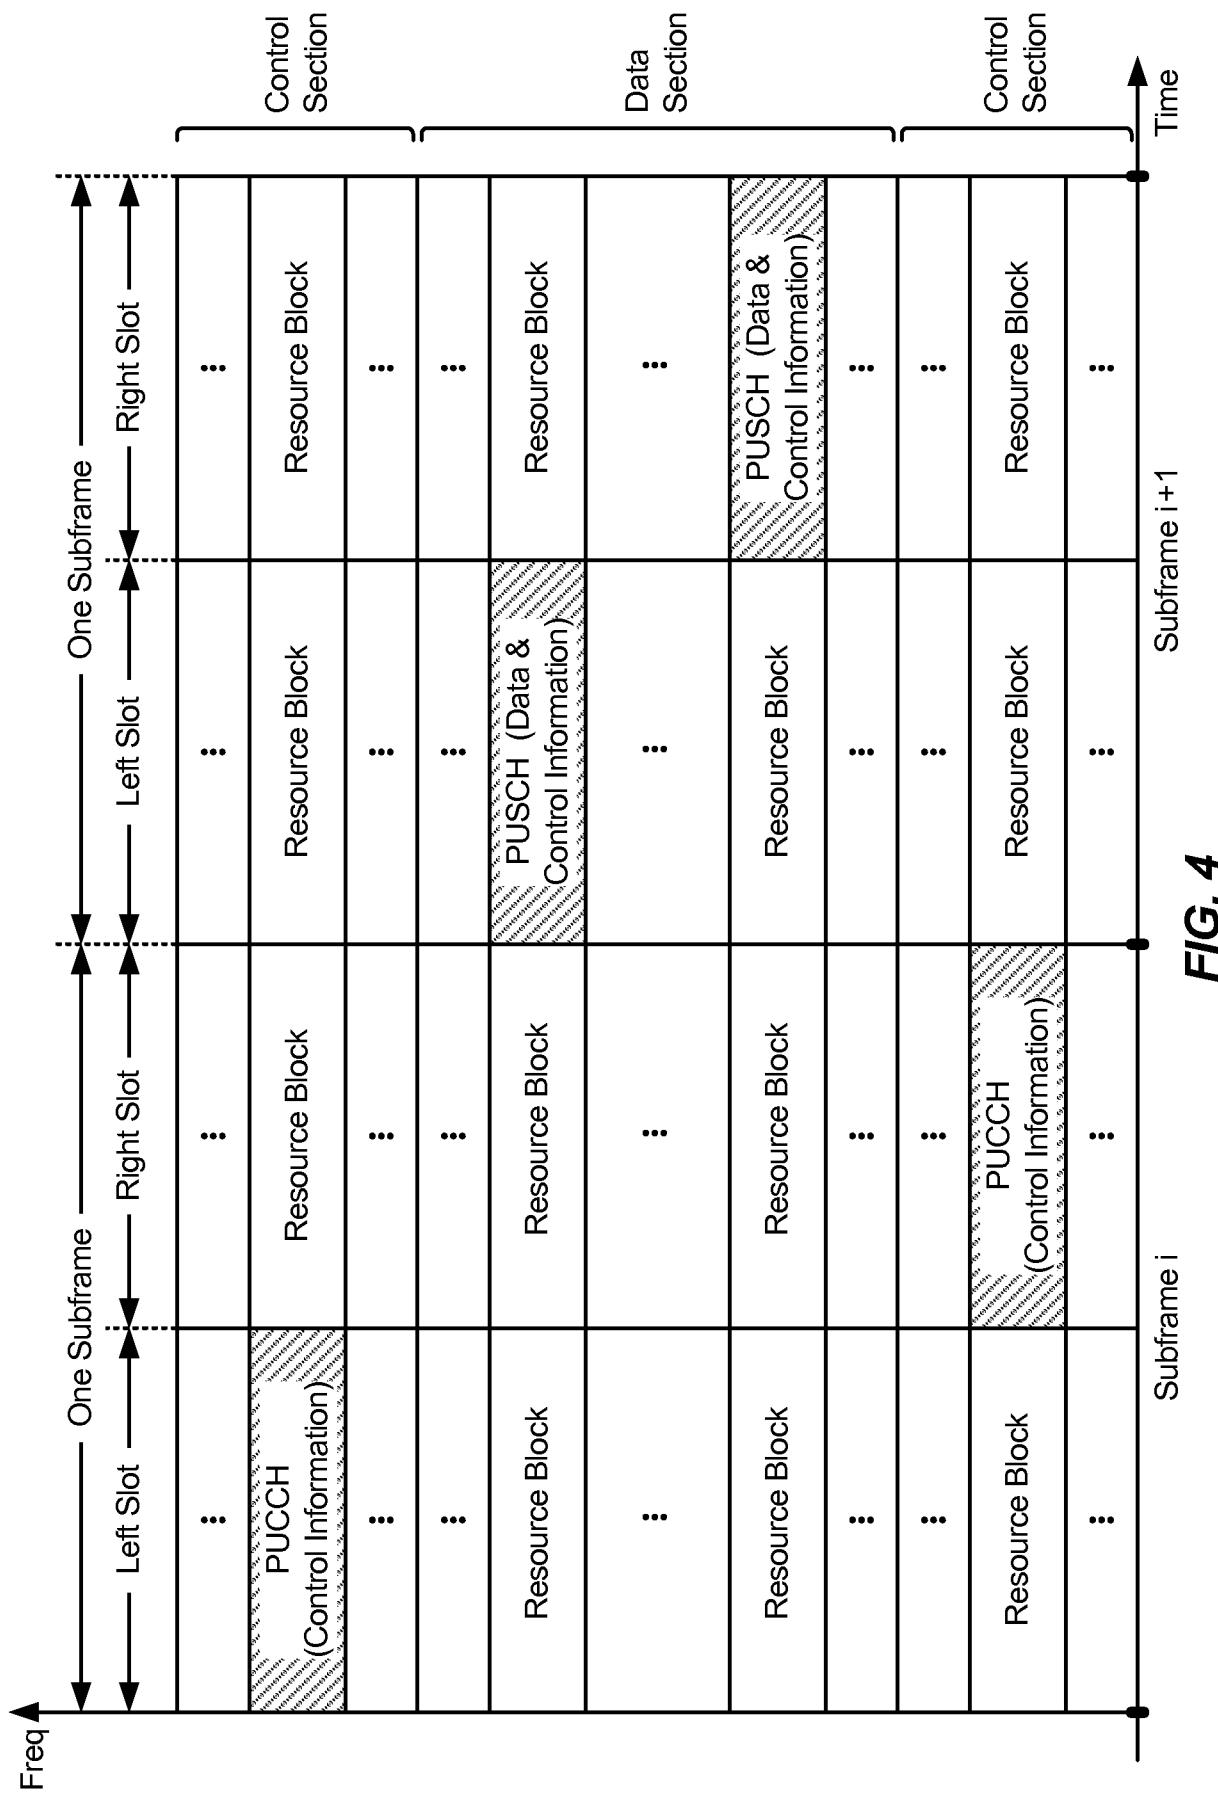

4/14

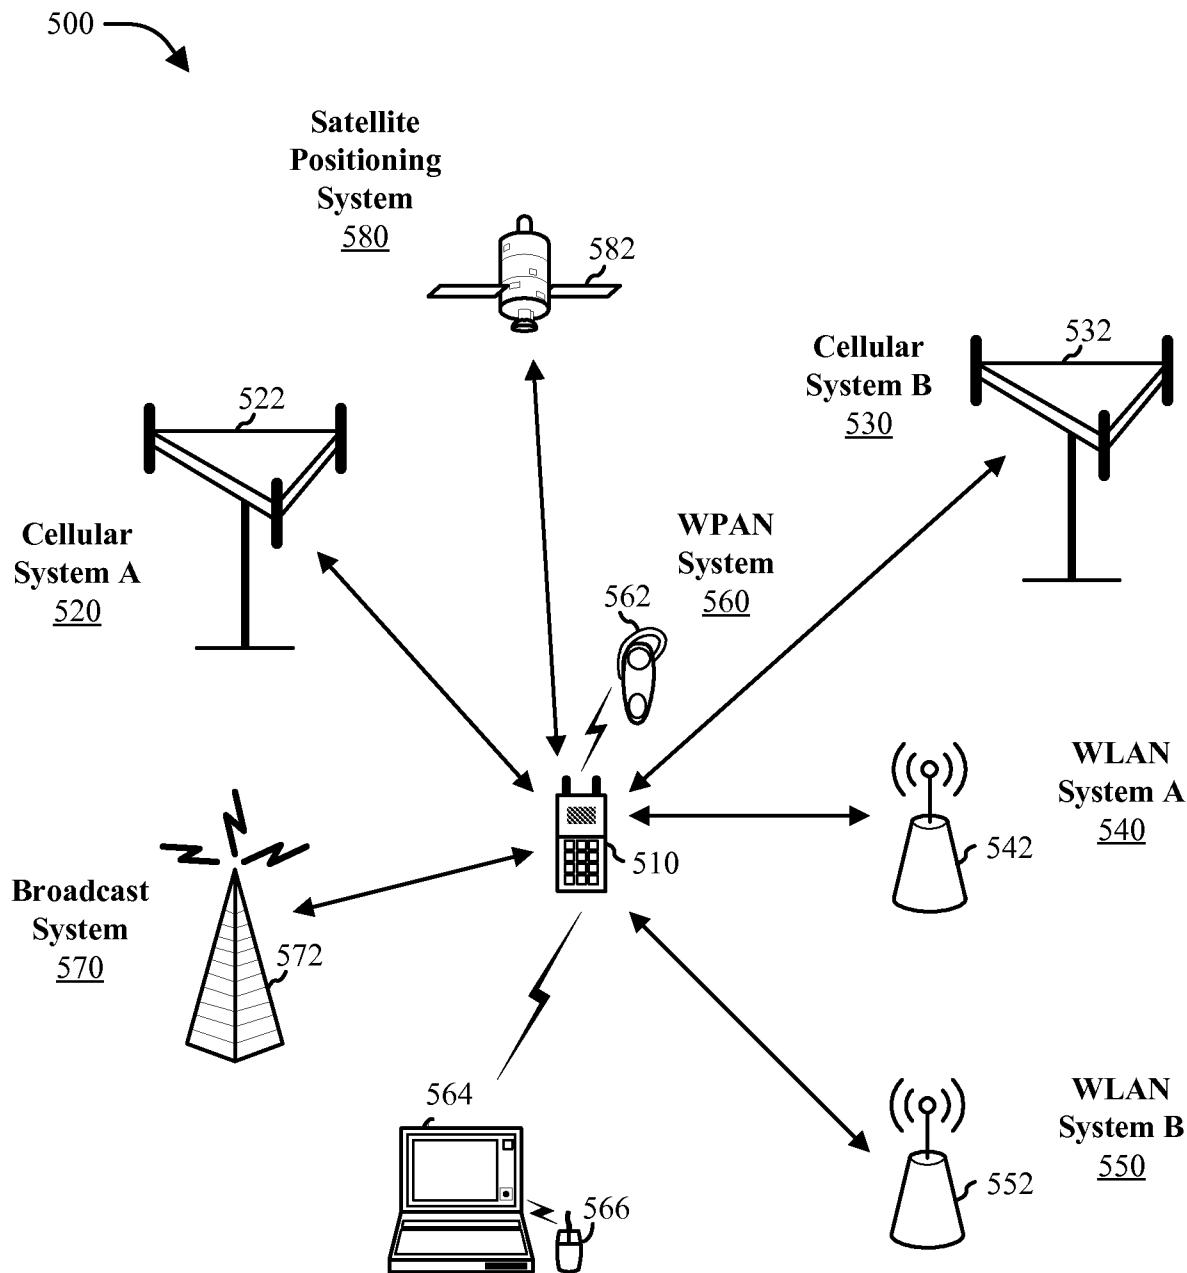


FIG. 5

5/14

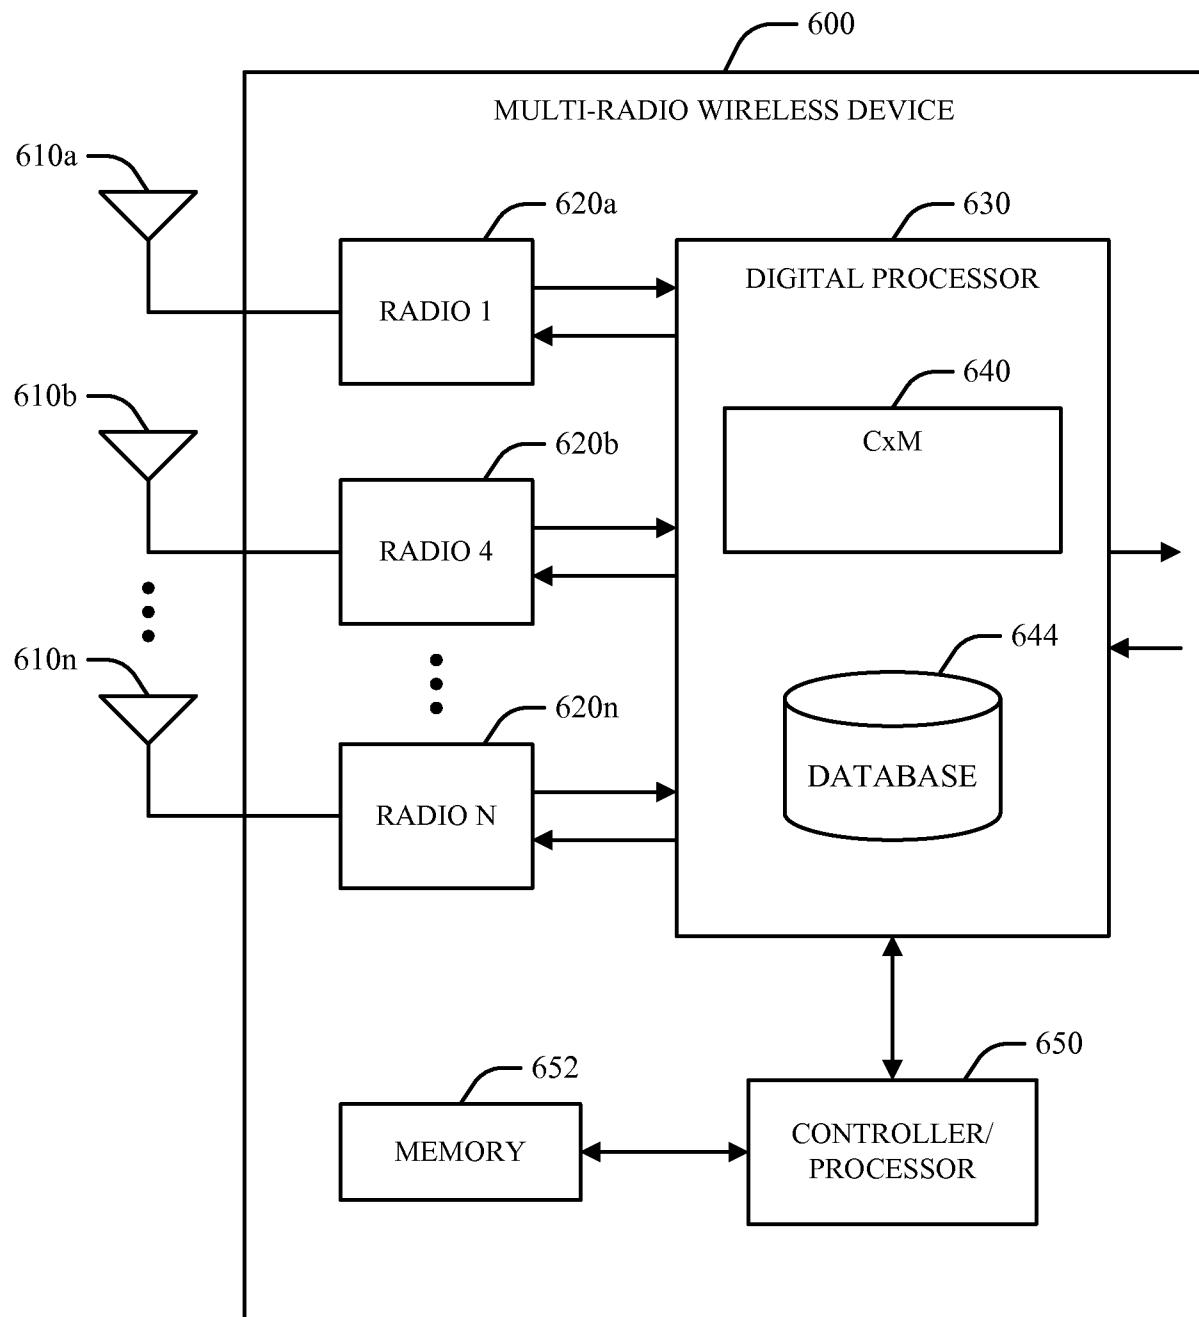
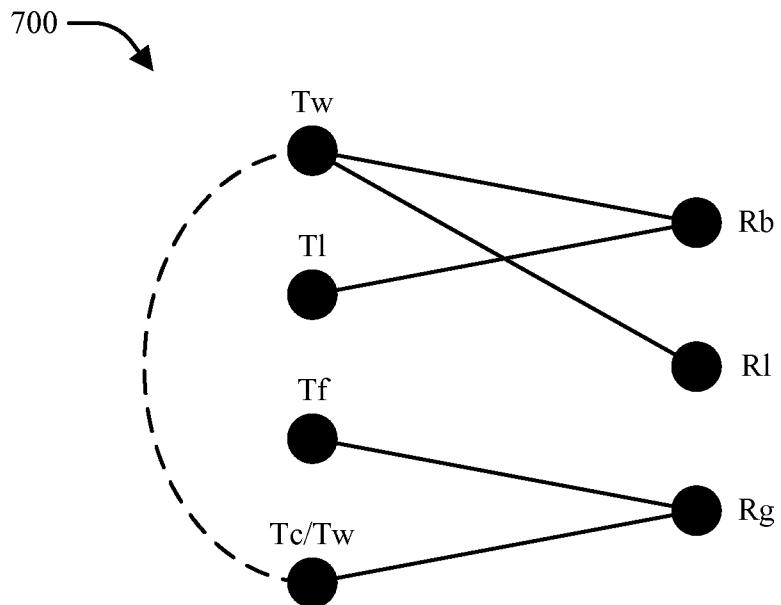
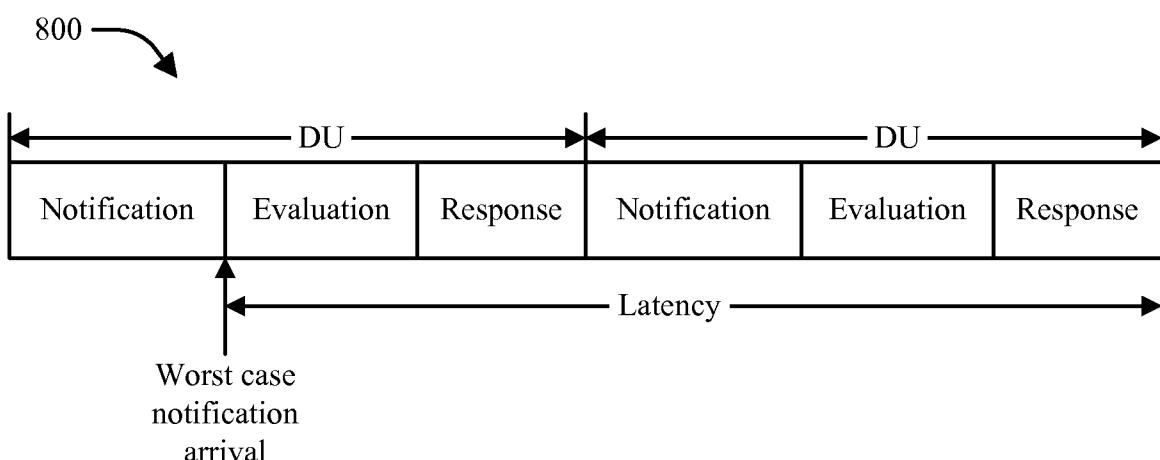


FIG. 6

6/14

**FIG. 7****FIG. 8**

7/14

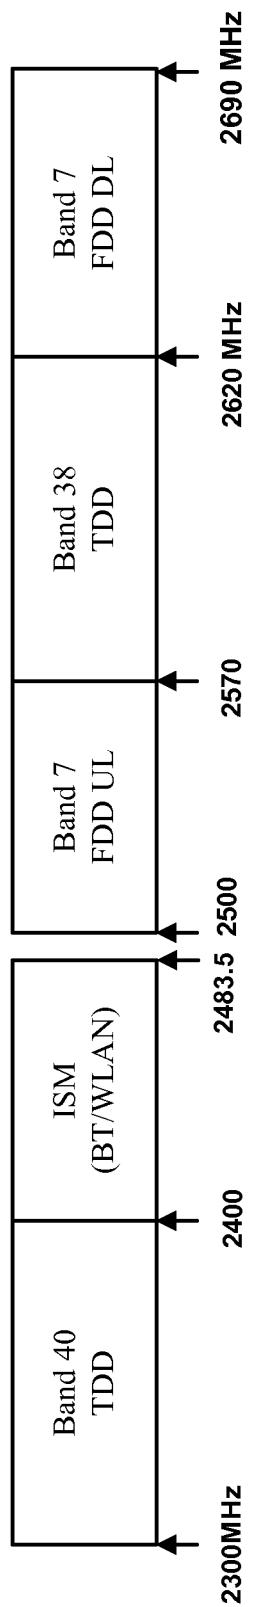
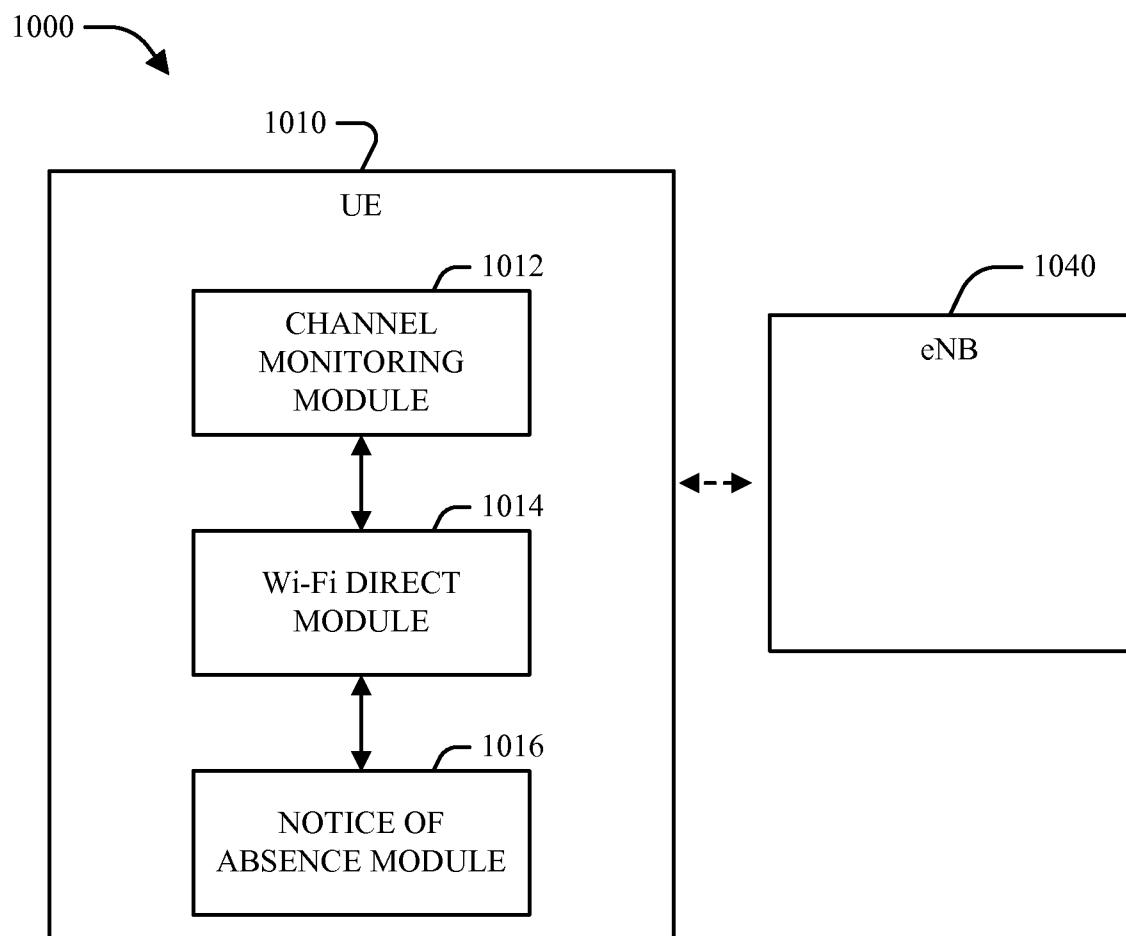


FIG. 9

8/14

**FIG. 10**

9/14

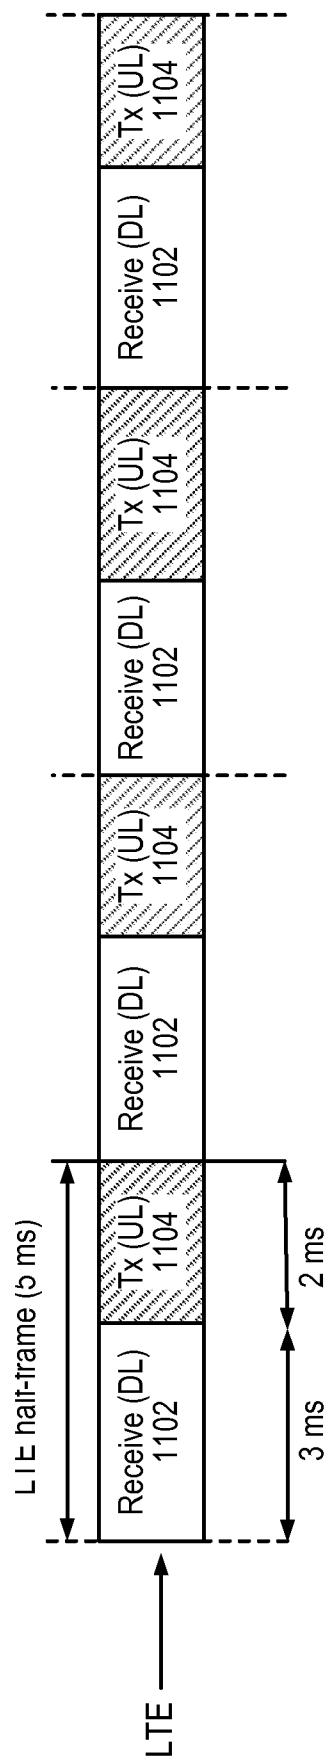


FIG. 11A

10/14

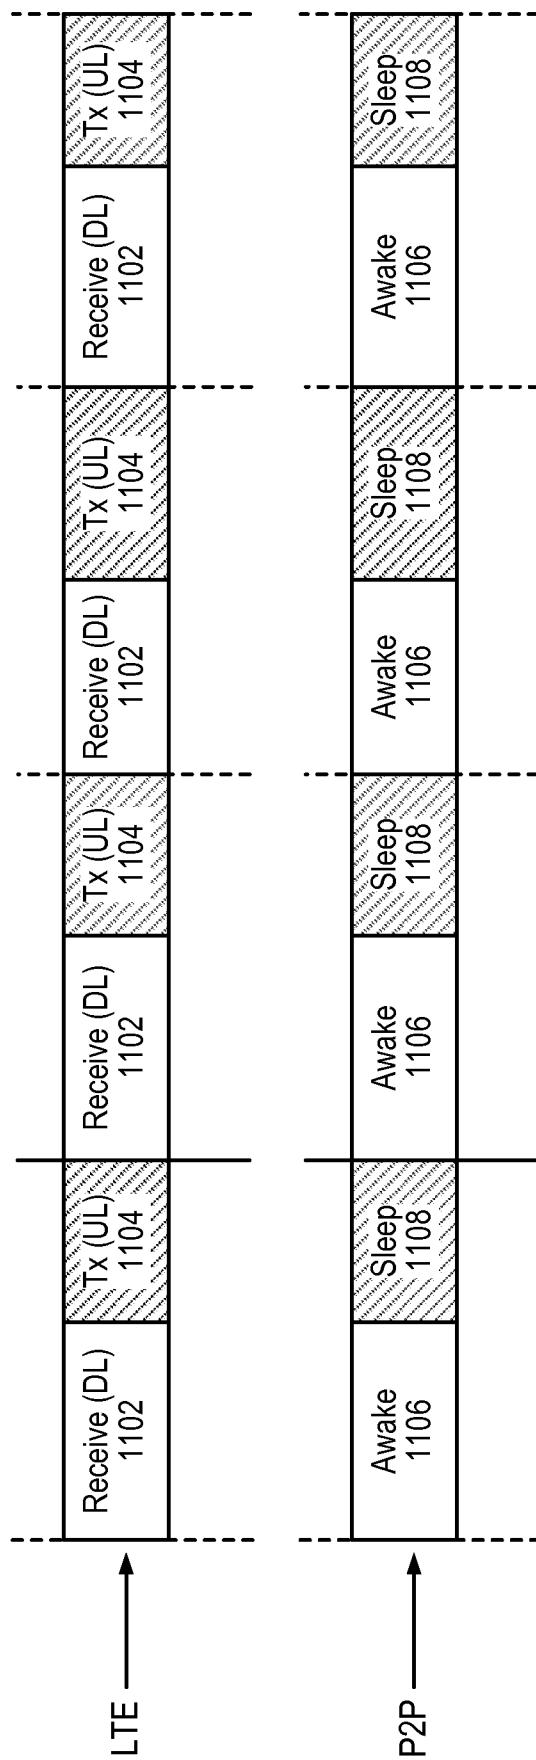


FIG. 11B

11/14

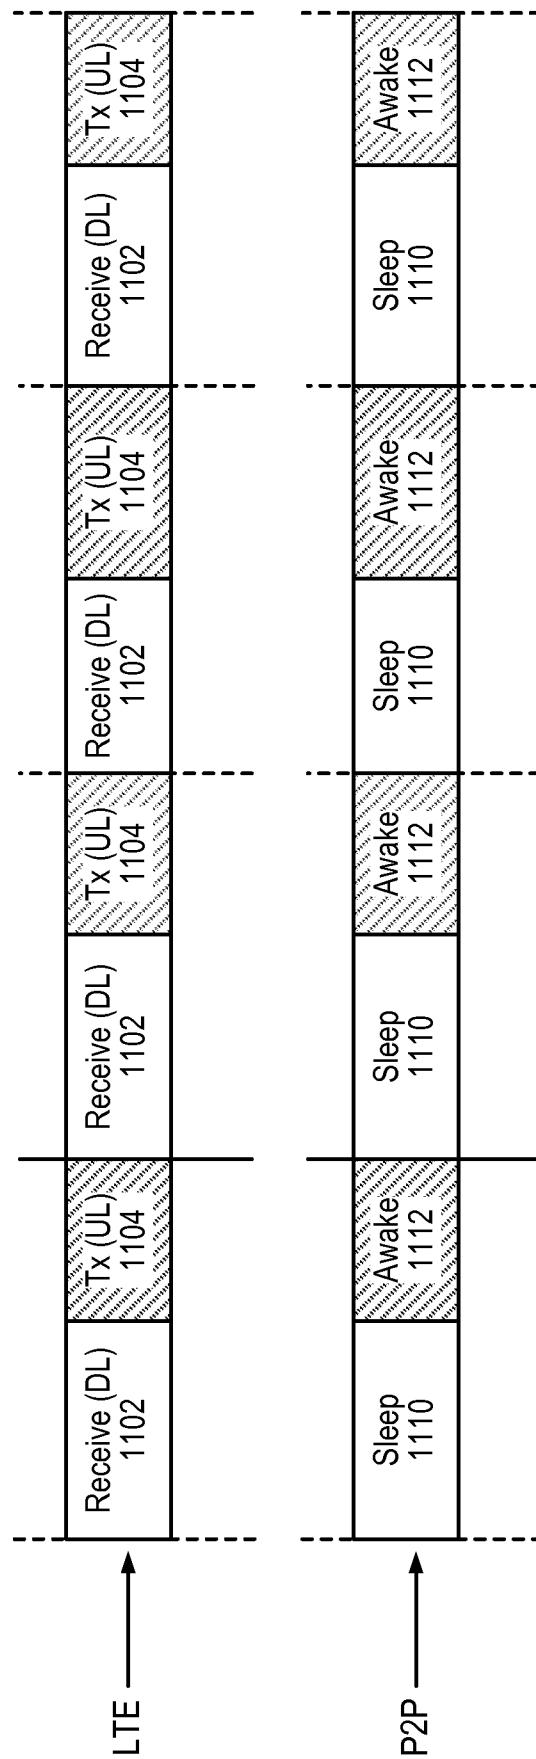


FIG. 11C

12/14

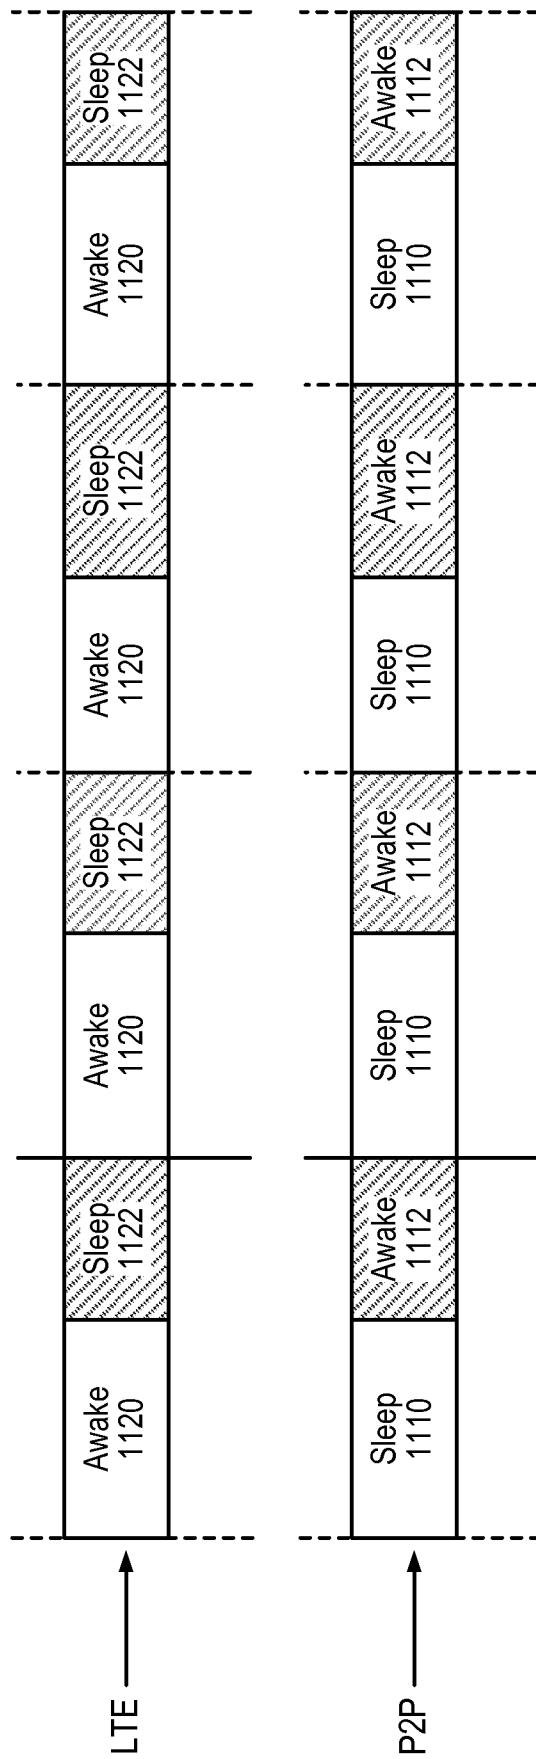
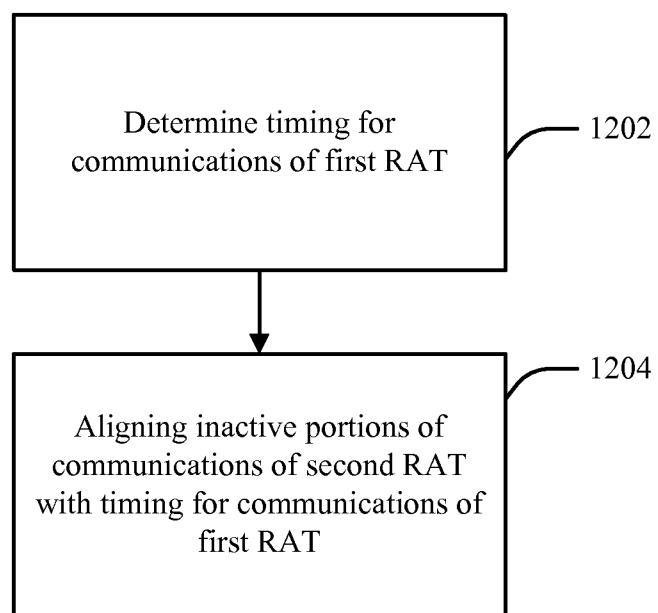


FIG. 11D

13/14

**FIG. 12**

14/14

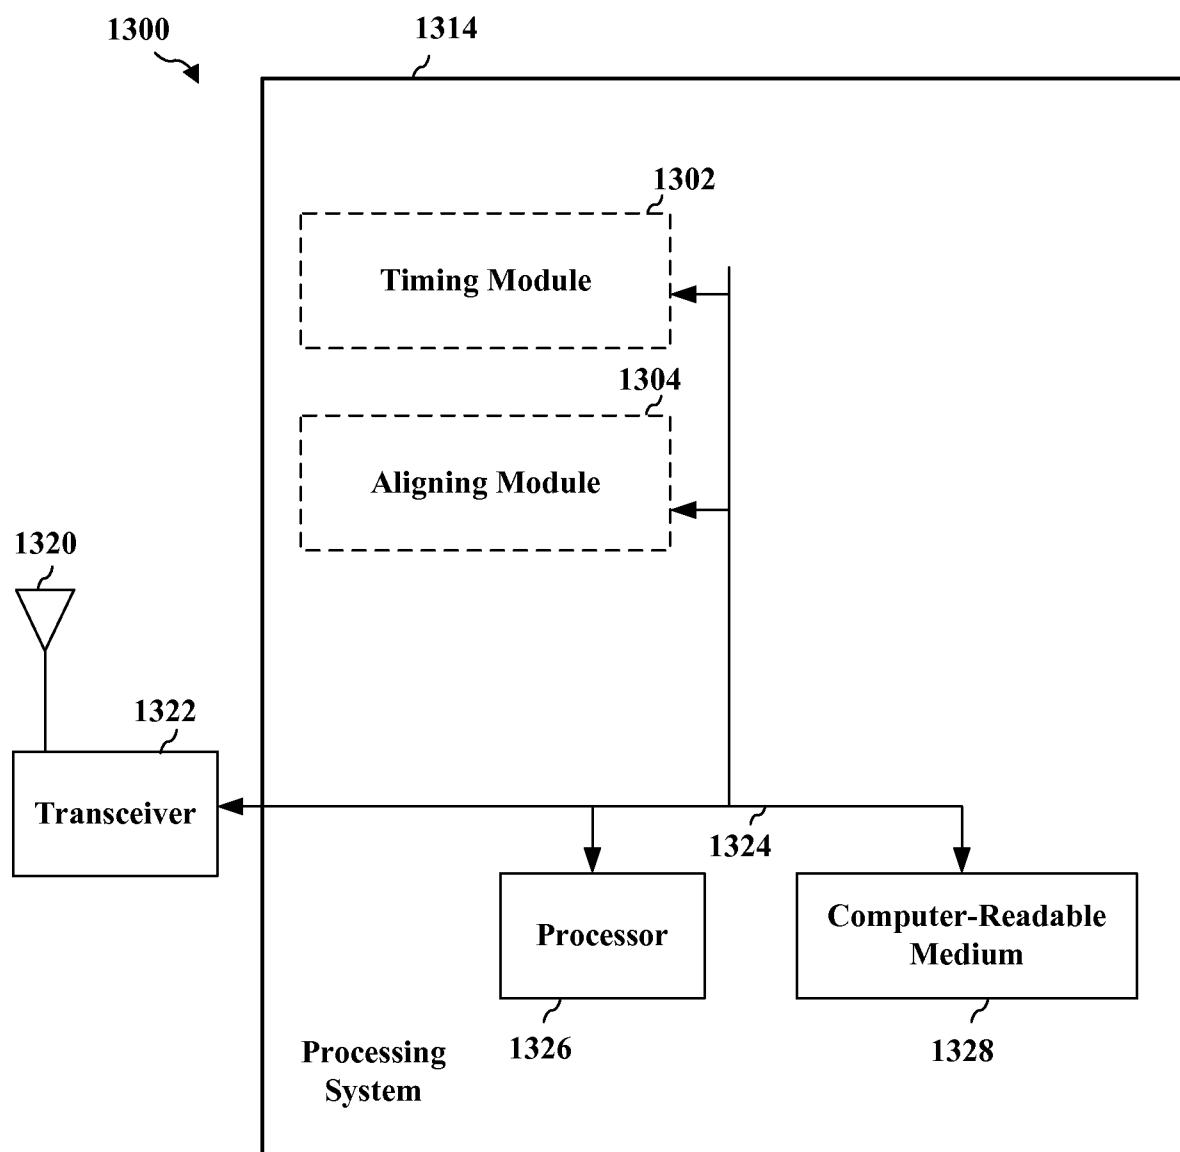


FIG. 13

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/043139

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04W72/12
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>"3rd Generation Partnership Project; Technical Specification Group Radio Access Networks; Evolved Universal Terrestrial Radio Access (E-UTRA); Study on signalling and procedure for interference avoidance for in-device coexistence; (Release 10)", 3GPP STANDARD; 3GPP TR 36.816, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, vol. RAN WG2, no. v2.0.0, 8 June 2011 (2011-06-08), pages 1-40, XP050552922, [retrieved on 2011-06-08] page 8 - page 9 *chapter 5.2.1.2.1 "DRX based solution"*</p> <p>-----</p>	1,7-9, 11,13, 19,20
Y	<p>-----</p> <p style="text-align: center;">-/-</p>	2-6,10, 12,14-18



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

27 July 2012

07/08/2012

Name and mailing address of the ISA/
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Schorgg, Alfred

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/043139

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WI-FI ALLIANCE TECHNICAL COMMITTEE P2P TASK GROUP: "Wi-Fi Peer-toPeer (P2P) Technical Specification", 20090101, no. vERSION 1.00, 1 January 2009 (2009-01-01), pages 1,48-52, XP002628430, *chapter 3.3.3.2 "P2P Group Owner Notice of Absence procedure"*	2-6,10, 12,14-18
X	MOTOROLA MOBILITY: "DRX based TDM Solution", 3GPP DRAFT; R2-113242-TDM, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, vol. RAN WG2, no. Barcelona, Spain; 20110509, 3 May 2011 (2011-05-03), XP050495395, [retrieved on 2011-05-03] *chapter 2 "discussion"*	1,7-9, 11,13, 19,20