

(21) Application No 9216072.0

(22) Date of filing 28.07.1992

(30) Priority data
(31) 07743792 (32) 12.08.1991 (33) US

(71) Applicant
Otis Engineering Corporation

(Incorporated in the USA - Delaware)

P O Box 819052, Dallas, Texas 75381-9052,
United States of America

(72) Inventors
Colby Munro Ross
Henry L Restarick

(74) Agent and/or Address for Service
Mewburn Ellis
2 Cursitor Street, London, EC4A 1BQ, United Kingdom

(51) INT CL⁵
E21B 23/06


(52) UK CL (Edition L)
E1F FGL FKF F205 F206

(56) Documents cited
GB 2156876 A US 4862966 A US 3524503 A

(58) Field of search
UK CL (Edition K) **E1F FKA FKF FKU**
INT CL⁵ **E21B**

(54) **Apparatus and method for placing and for backwashing well filtration devices in uncased well bores**

(57) An earth well completion apparatus and method employs a work string 18 equipped for jet washing downhole filtration devices, such as well screens, and for backwashing said downhole filtration devices and containing multiple ball catcher subs (90, 315). The apparatus is concentrically disposed in a production string and run in said well simultaneously. The ball catcher sub (315) which prevents the inadvertent actuation of said hydraulically operated tools is contained within the main fluid bore of said work string and has an expellable inner collar (613) with an outwardly biased catcher ring (616) which, when expelled, shears hollow shearable means (626) thereby actuating said tool. Expansion of said catcher ring frees a drop ball to fall into a catcher sub (90) which has a retention groove (907) milled into its inner circumference into which said drop ball extrudes thereby preventing its expulsion due to back pressure.

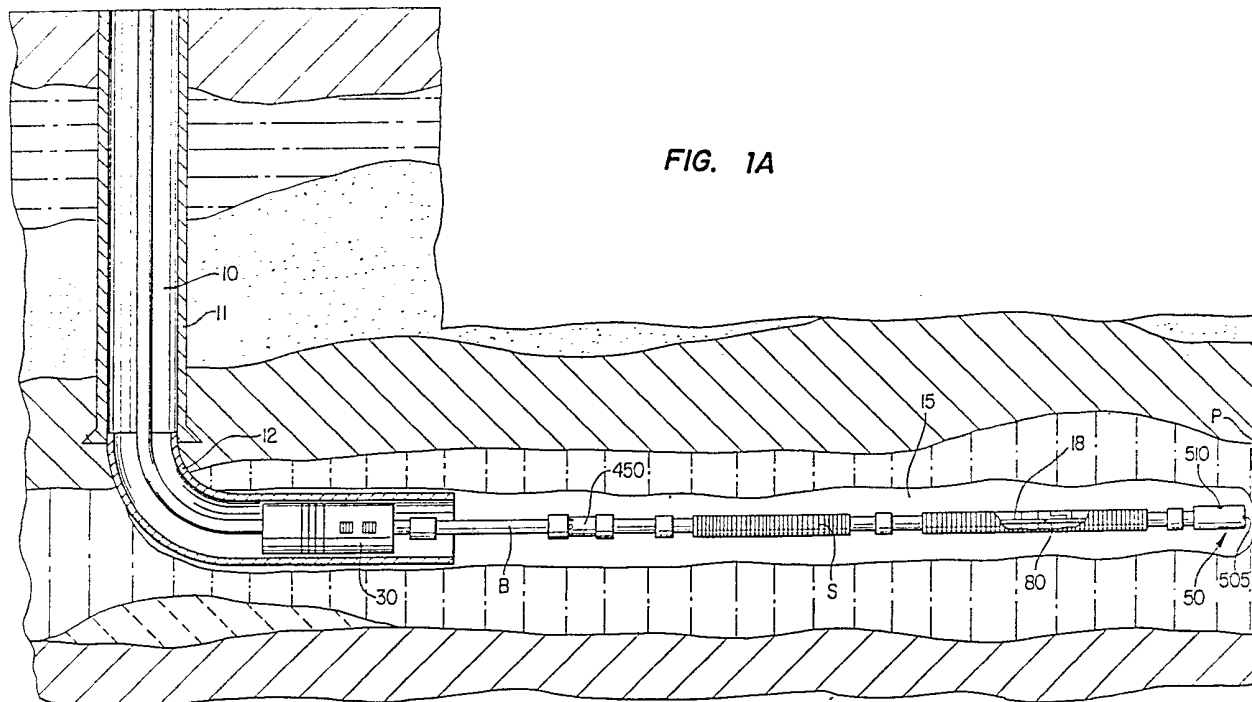

At least one drawing originally filed was informal and the print reproduced here is taken from a later filed formal copy.

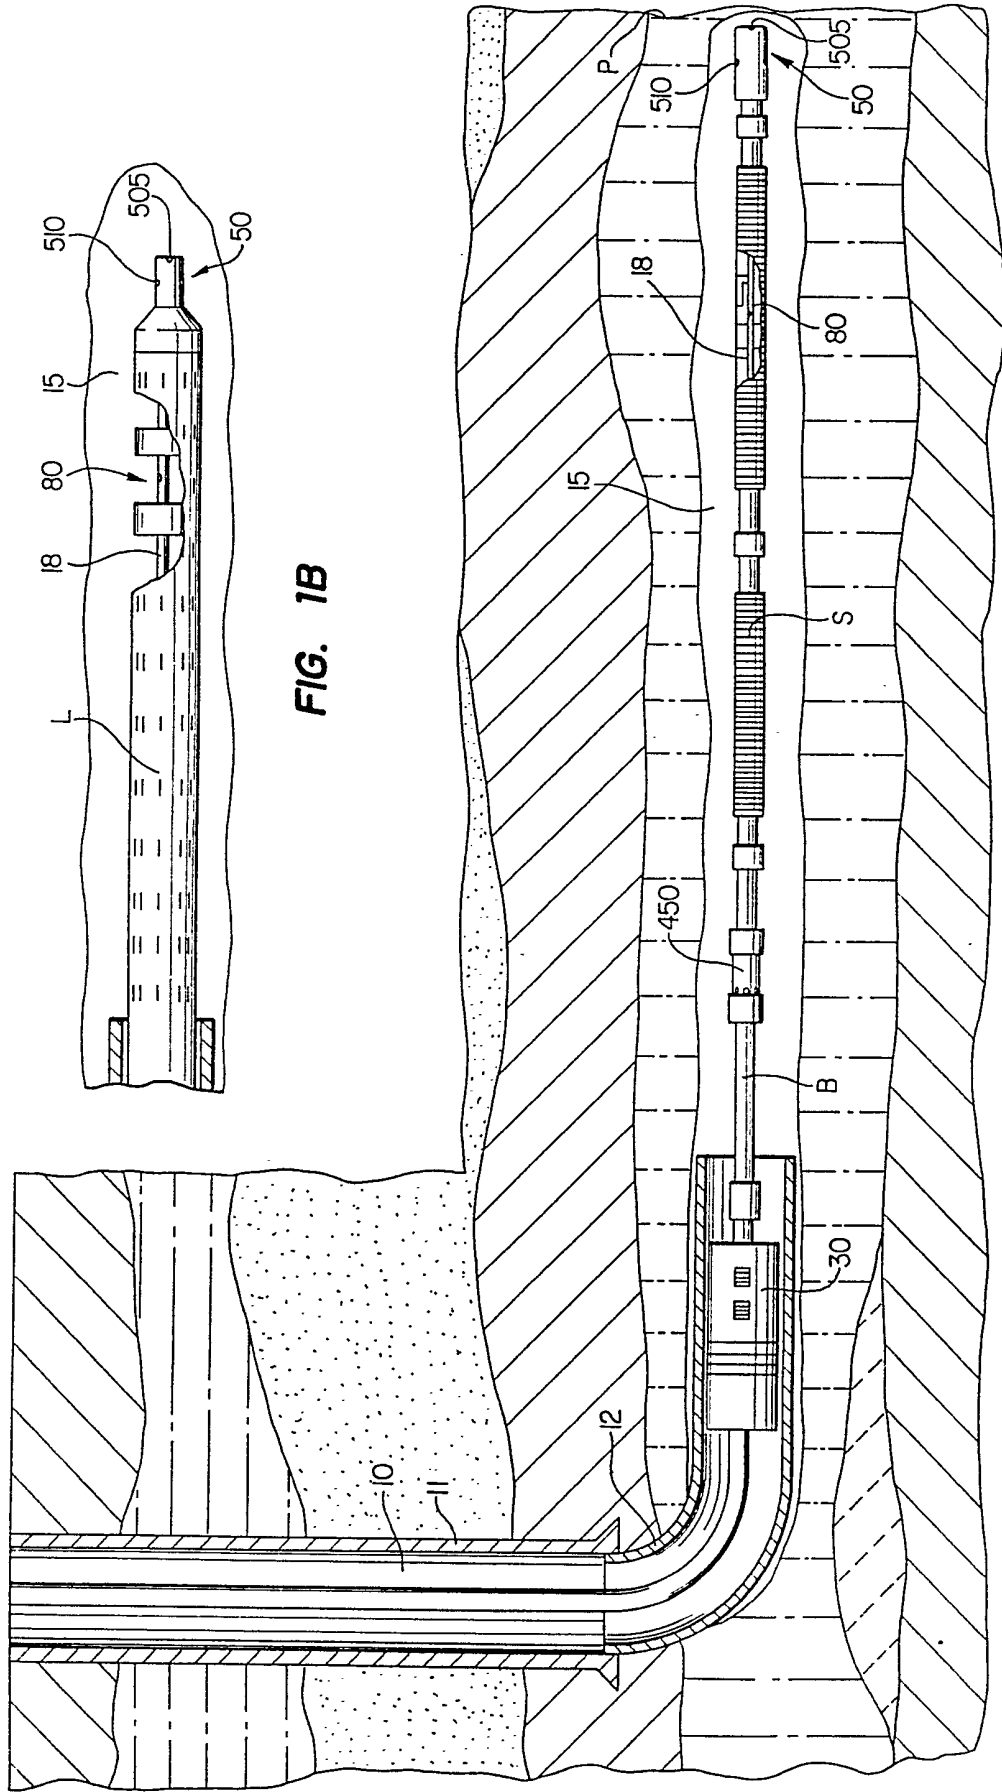


FIG. 1A

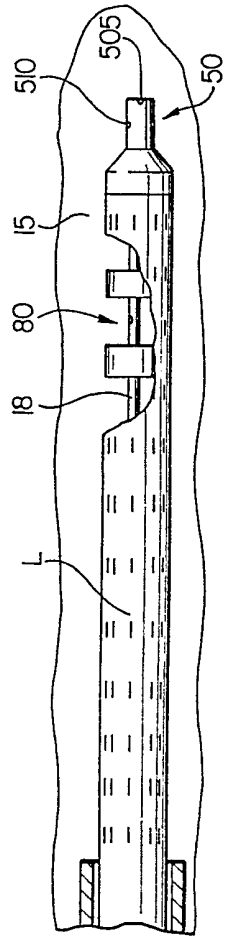
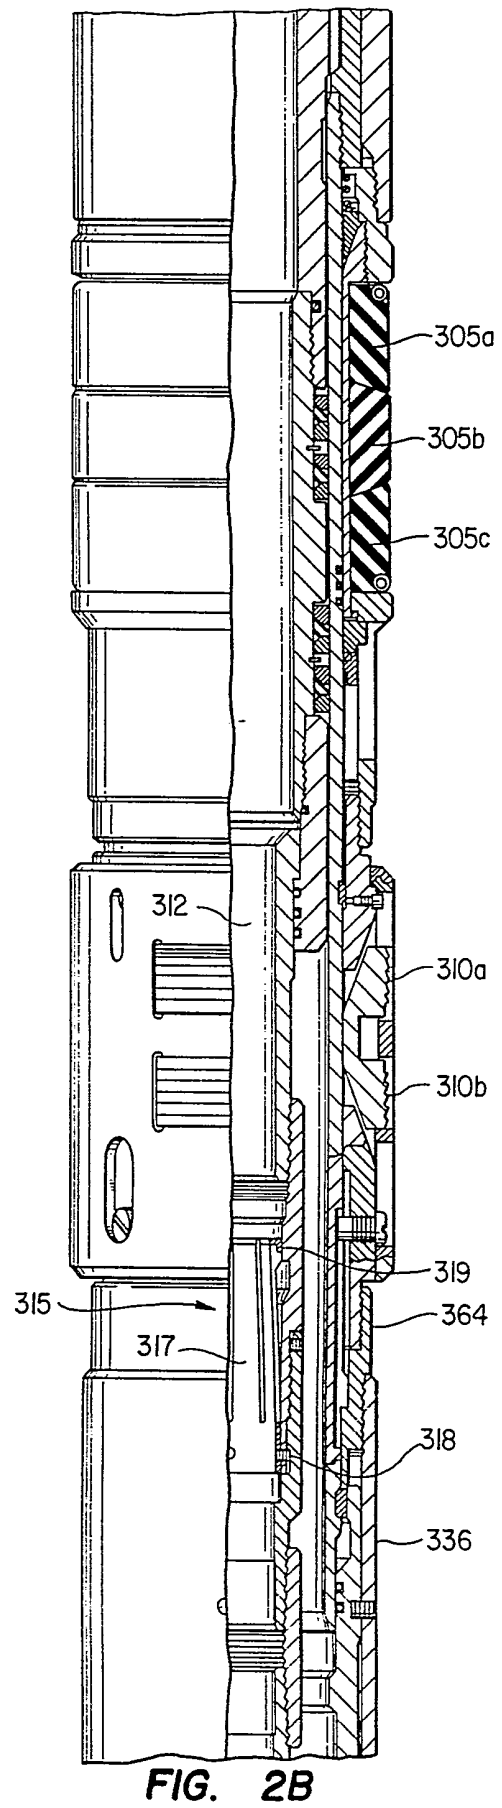
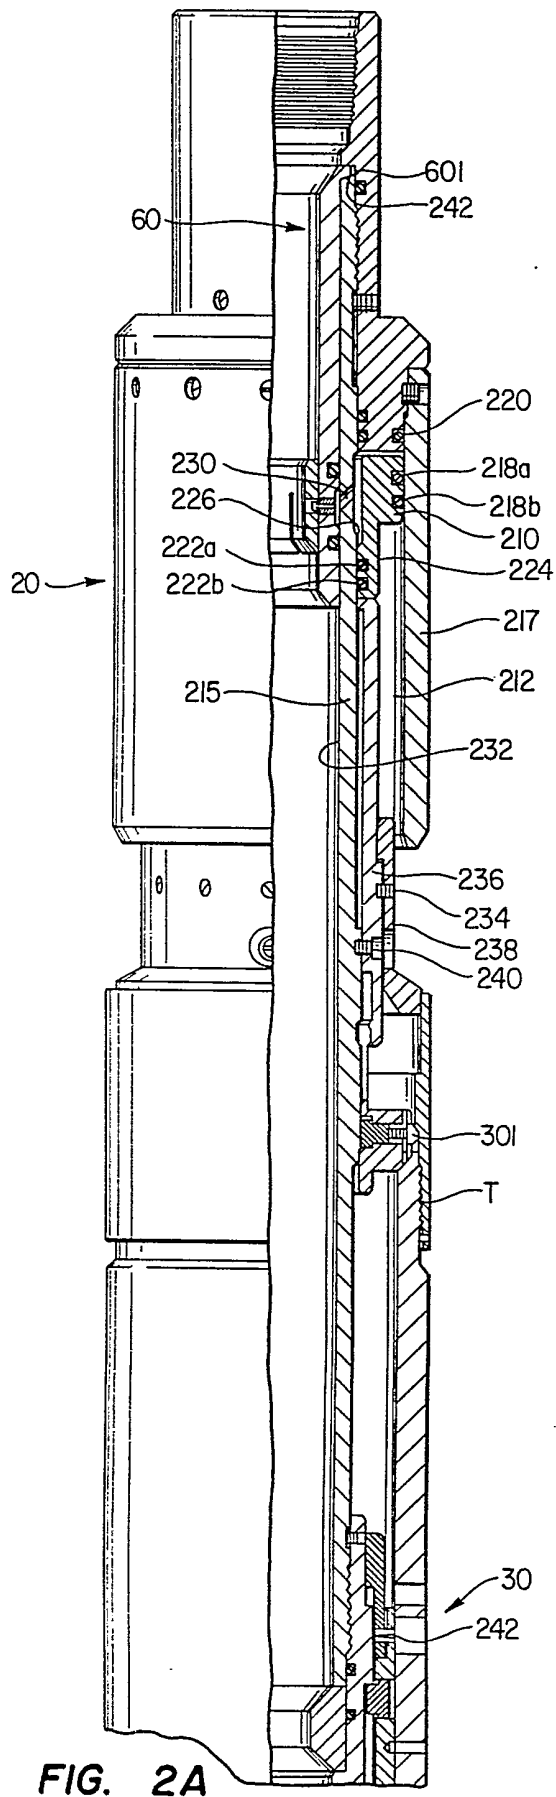


FIG. 1B



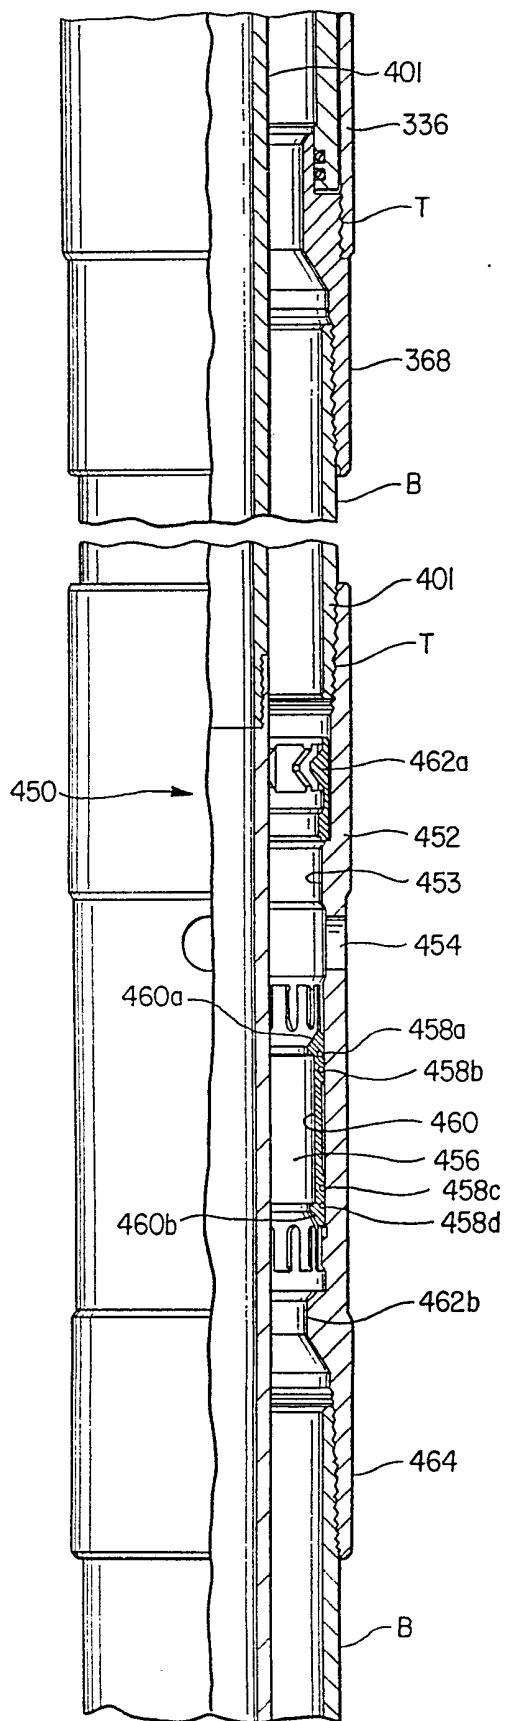


FIG. 2C

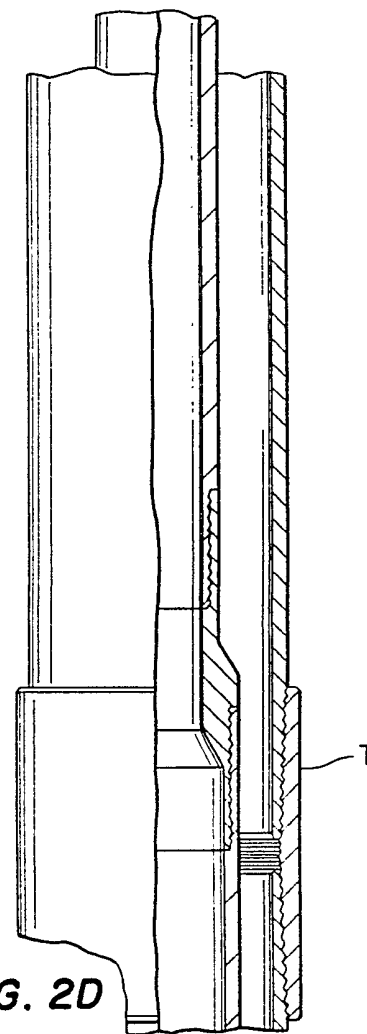
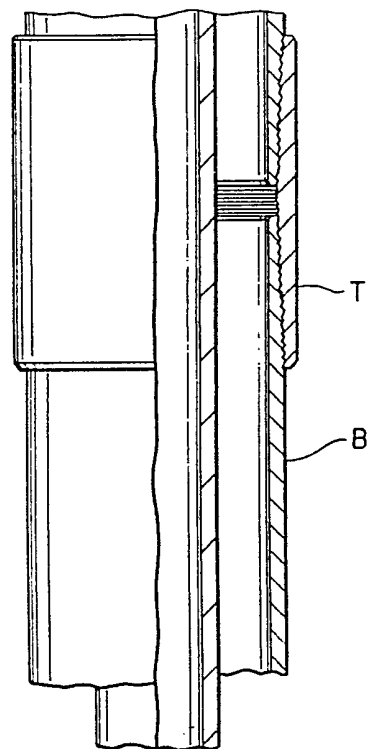


FIG. 2D

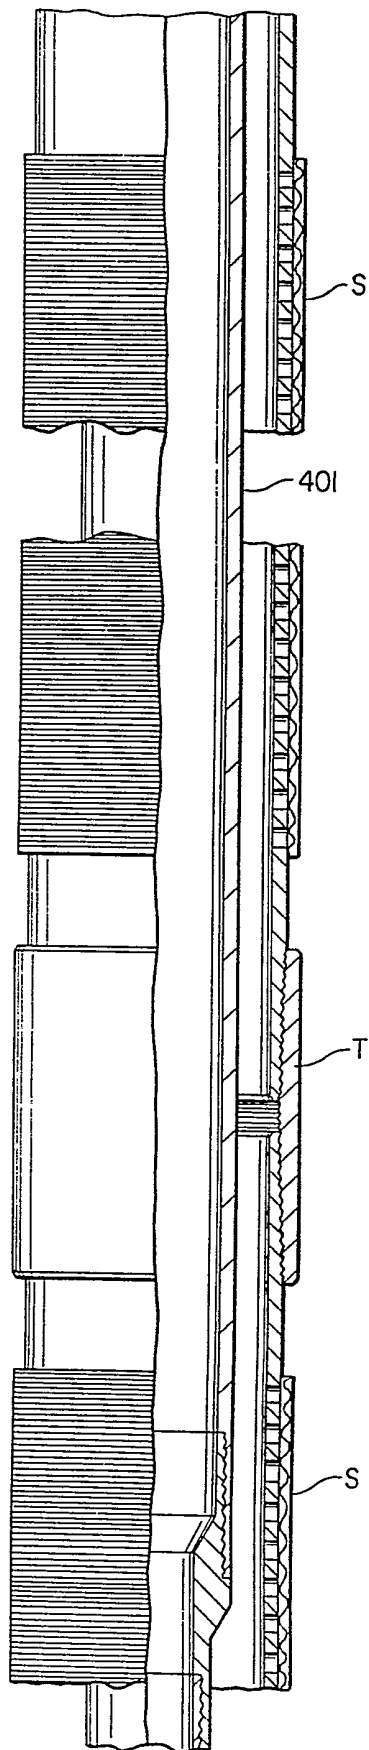


FIG. 2E

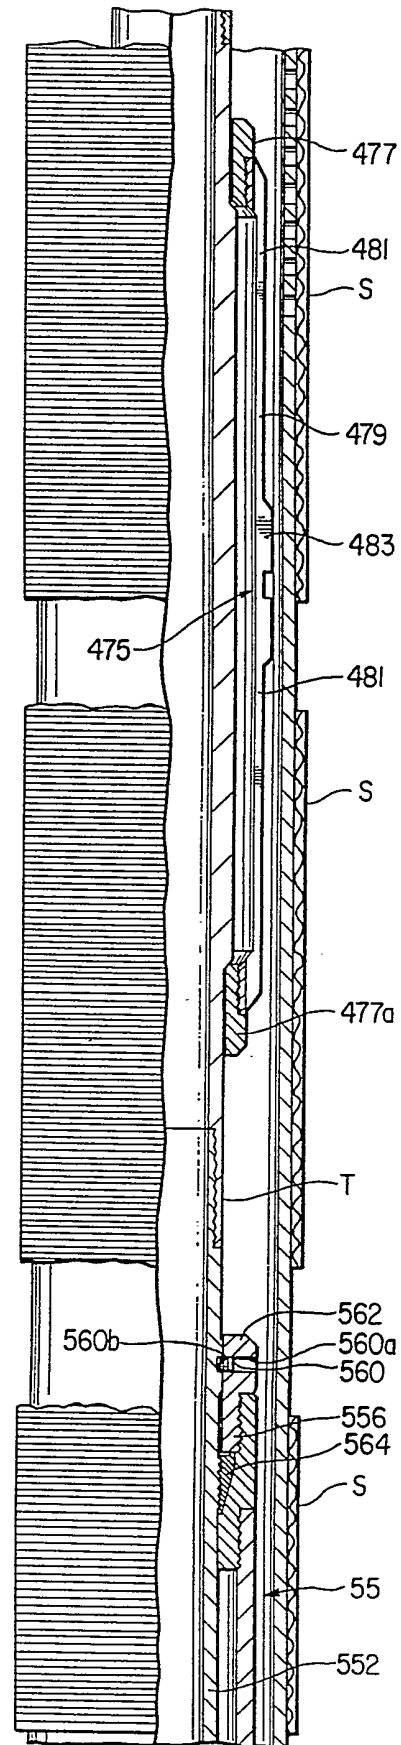
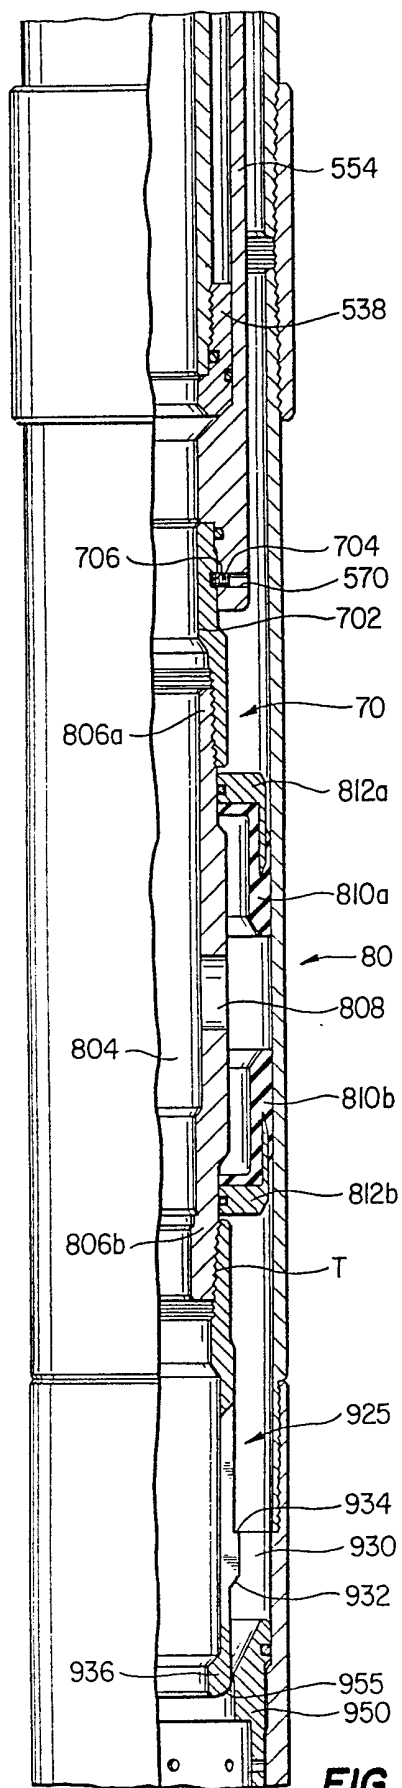
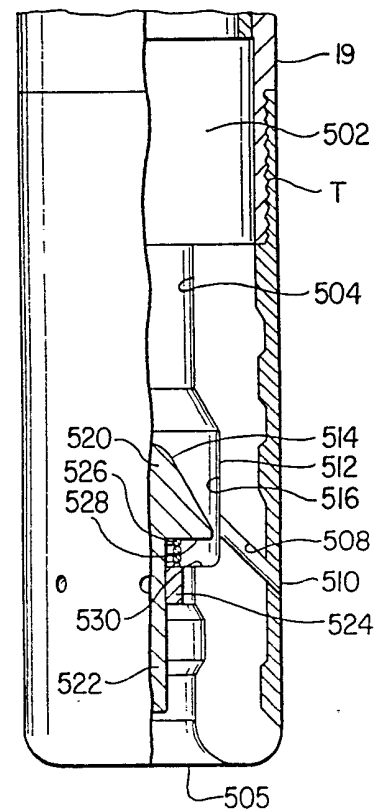
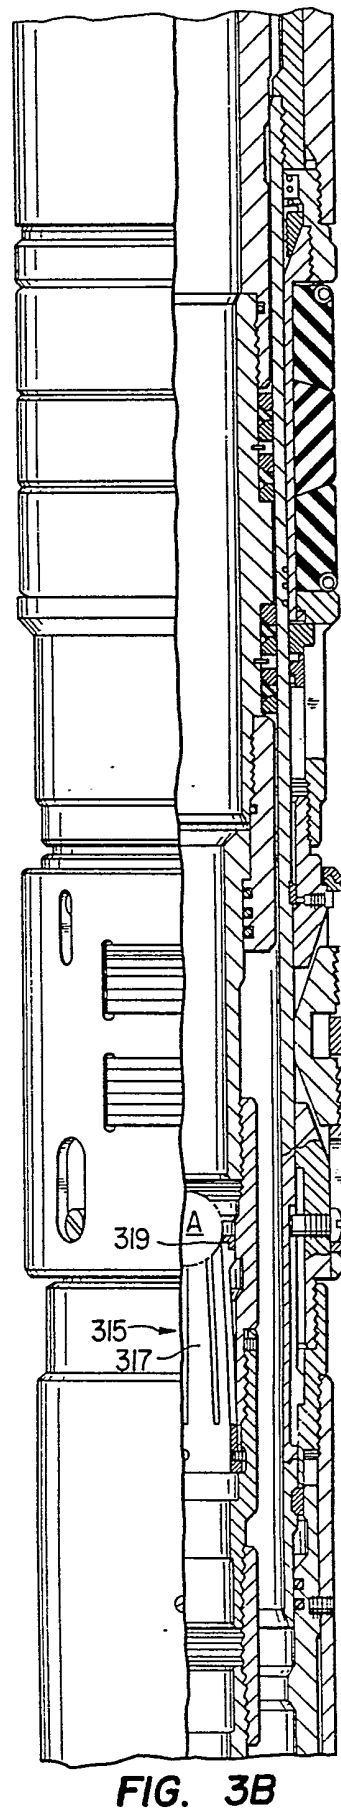
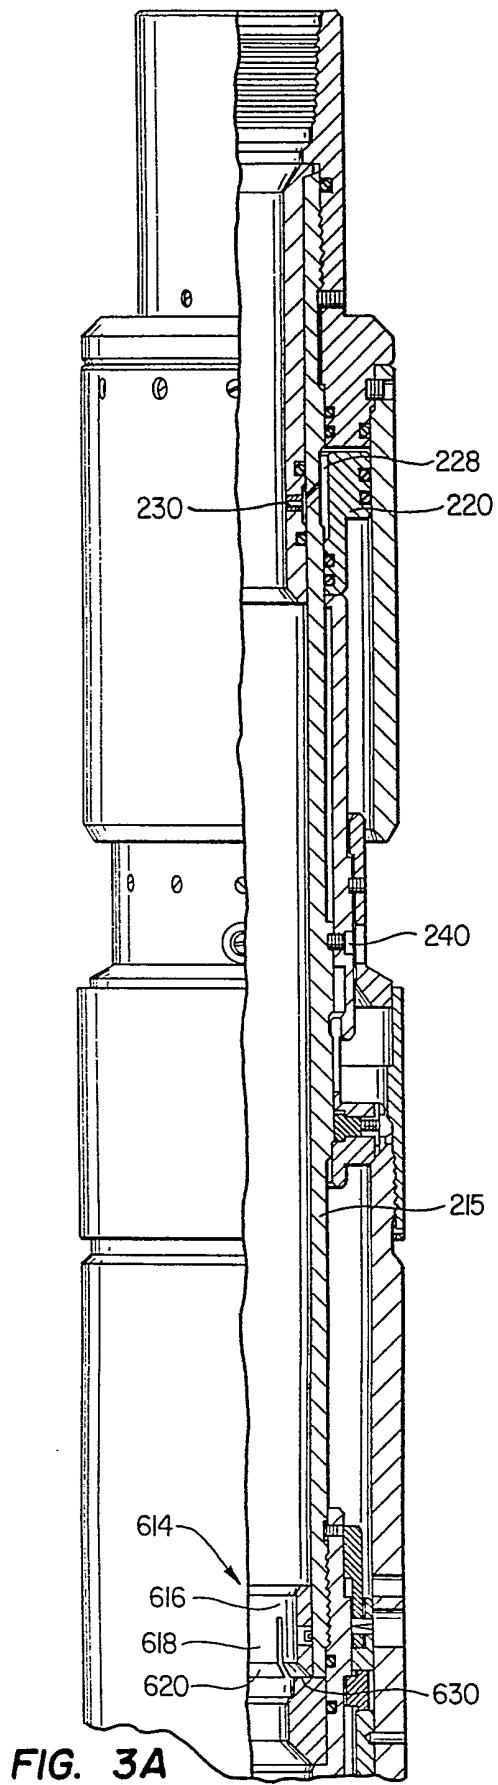


FIG. 2F

**FIG. 2G****FIG. 2H**



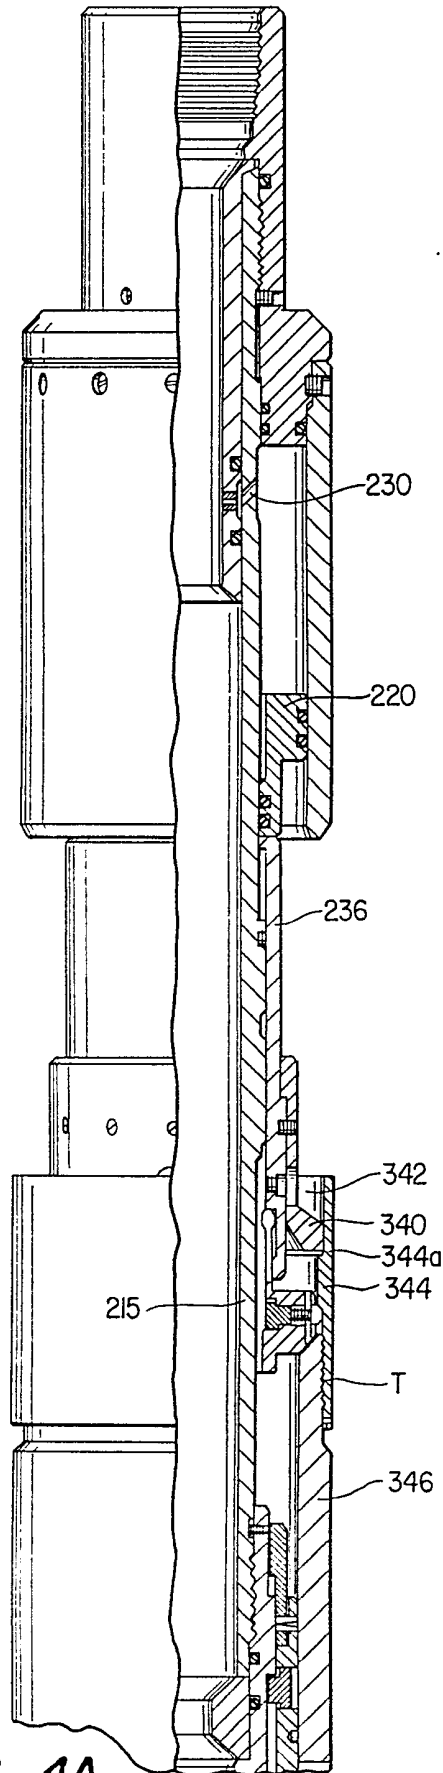


FIG. 4A

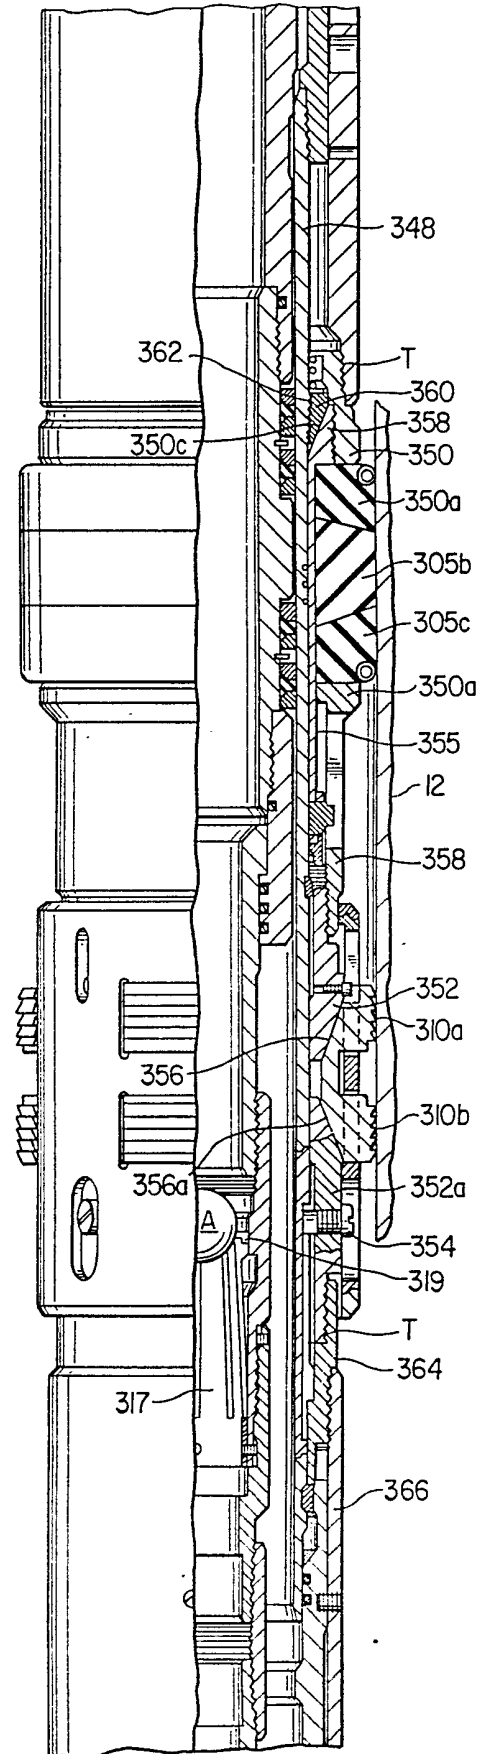


FIG. 4B

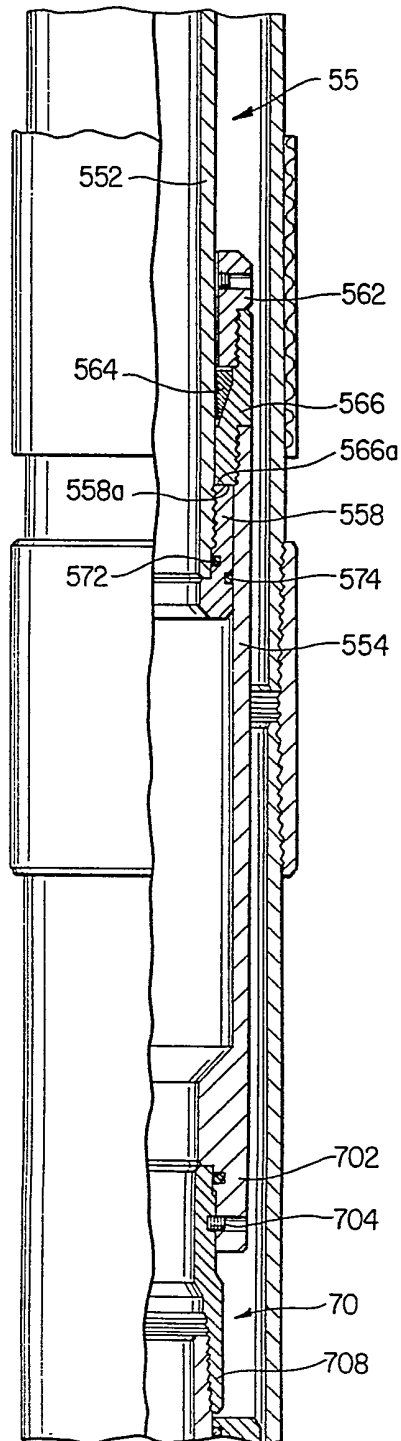


FIG. 5A





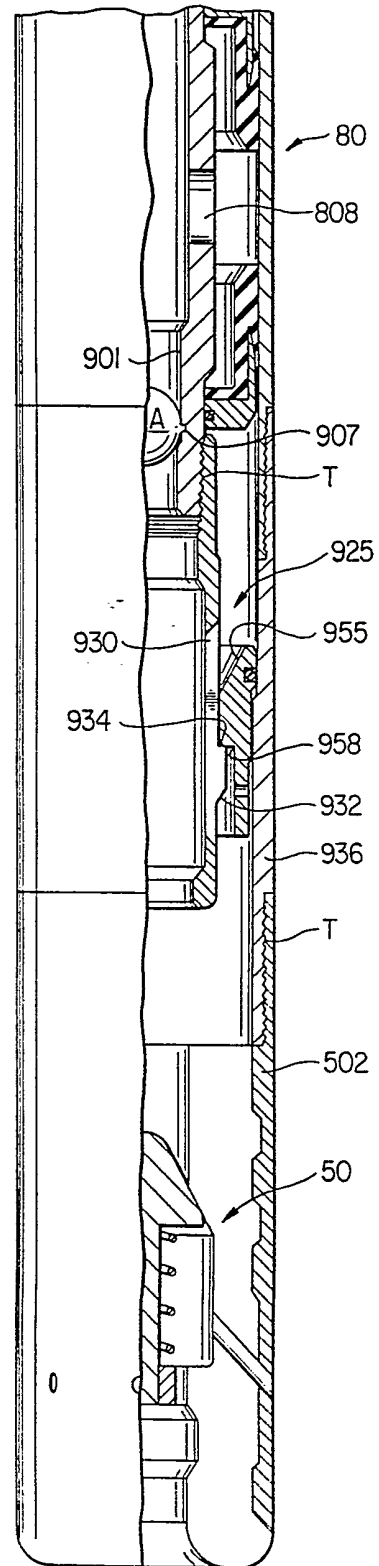


FIG. 5B

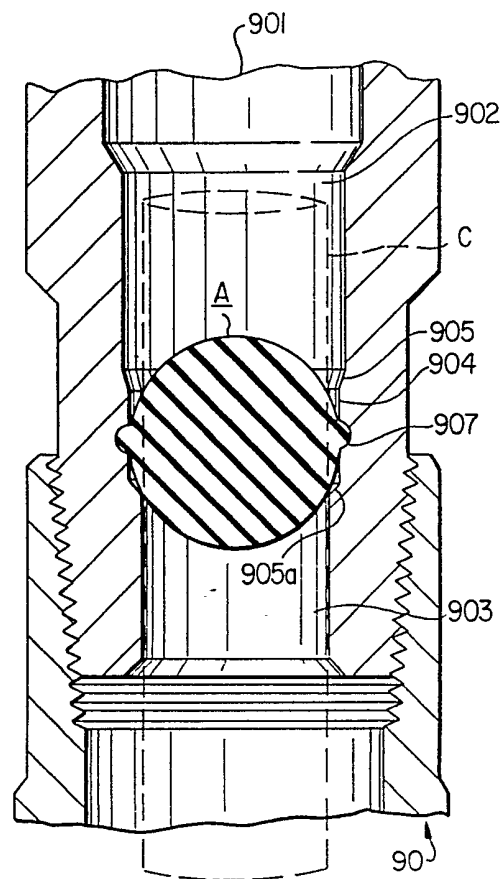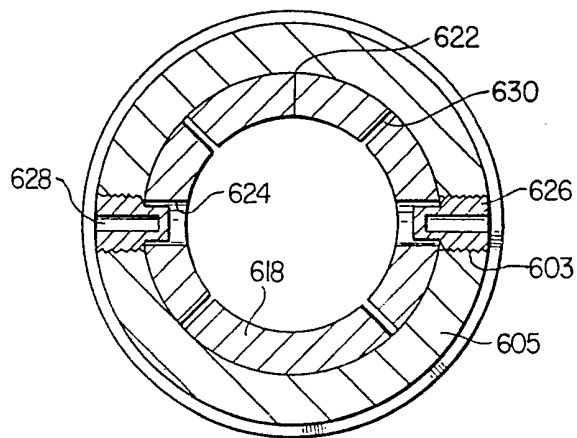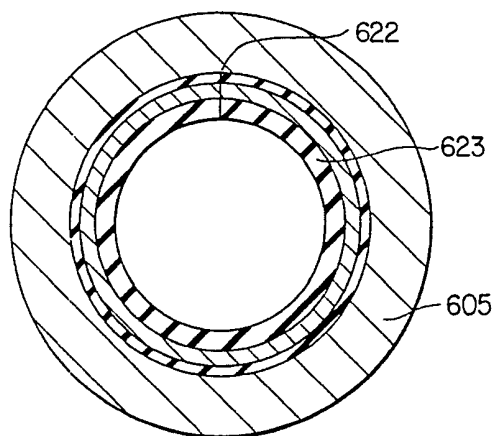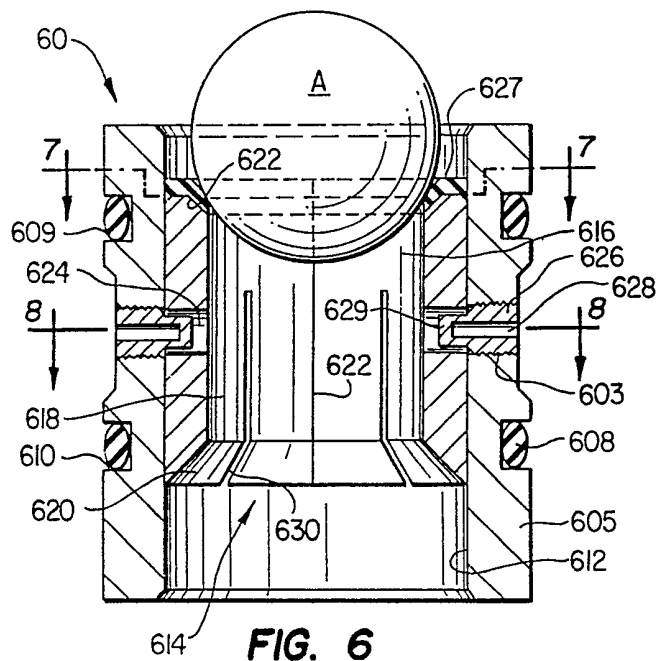

"APPARATUS AND METHOD FOR PLACING AND FOR BACKWASHING
WELL FILTRATION DEVICES IN UNCASSED WELL BORES"

This invention relates generally to completion techniques for
use in uncased highly deviated or horizontal well bores and in
5 particular to a method and apparatus for placing well filtration
devices, such as well screen or slotted liners in an uncased hole
and for backwashing well filtration devices prior to placing the
well on production.

Well filtration devices, such as well screen or slotted
10 liner, are often difficult to place at a desired location in a

well bore due to the presence of drill cuttings in the bore. In addition, those placement efforts which involve dragging or pushing such filtration devices through an uncased well bore can frequently result in partially clogging such filtration devices from the outside, thereby reducing both the production capabilities of the well and the useful life of the filtration device. Devices which provide for the removal of drill cuttings ease the spotting of well filtration devices and devices which provide for cleaning well filtration devices prior to placing a well into production are both desirable, especially if such operations can be accomplished in a single trip of pipe.

Using a float shoe which contains a plurality of ports through which fluids can be jetted to wash drill cuttings from a well bore while introducing a well filtration device into a well bore are well known in the art. However, because of the pressure intensive nature of pumping fluids down a tubing string and out through the jets at the end of the float shoe, it has heretofore been difficult to run hydraulically operated down hole well tools in the same trip because of the potential inadvertent operation of these other tools as a result of the back pressures generated in the tubing string during the jet cleaning operation. Therefore, when such operations have been conducted previously, it has been necessary to first jet the well filtration device into position in the well bore, and then, in a separate pipe trip which is costly,

completion equipment and production tubing into the well to place the well in a condition to go on production.

An additional problem associated with the placement of downhole filtration devices, such as wire wrapped screen, dual concentric wire wrapped screen, commonly known as dual screen prepack screens, in which the annulus between the concentric screens has been packed with gravel, sand or epoxy coated gravel prior to its introduction in the well, or electrocoated, sintered metal tube is that such devices frequently become partially clogged by well bore debris as a result of being dragged or pushed through an uncased well bore to the proper location therein. Heretofore, there has been no capability to efficiently and cost effectively wash out such down hole filtration devices prior to placing the well in production, such washing efforts being generally limited to passing clear completion fluids over the inside and the outside of the well screen without passing any fluid through the screen to clean its porous interstices. In the prior art methods, any effort to wash out the filtration device from the inside required an additional pipe trip after the gravel pack operation to wash the well filtration device from the inside, again at great expense.

The present invention has a number of different aspects, including the provision of means to wash a downhole filtration device into place in an incased well bore.

5 In another aspect the invention is able to provide a means to run down hole completion equipment into the well hole simultaneously with the washing of a downhole filtration device into place without risk of causing the premature or unintentional operation of
10 hydraulically operated tools which comprise a part or all of said completion equipment.

 In a further aspect the invention provides means to backwash downhole filtration devices after they have been placed at the desired location in the well bore and a
15 gravel pack operation has been performed.

 The invention in another of its aspects is able to provide a means to permanently plug a portion of production tubing which has been run into a well at a predetermined location in said tubing.

20 A still further aspect of the invention is the provision of a ball catcher which can temporarily seal a flow bore, such as that in a tool string.

 In one of its forms, the present invention provides an improved downhole filtration equipment
25 placement and backwashing apparatus having a float shoe shearably mounted within a work string and, at the same time being fixedly connected to a downhole filtration device. The float shoe has a large longitudinal port at the end of a flow bore which extends

therethrough, a check valve being mounted intermediate said longitudinal flow port and said flow bore to prevent the back flow of produced fluids from being introduced into the work string. In addition, laterally extending flow ports connect a plurality of angular jets spaced about the outer circumference of said float shoe with said longitudinal port to allow the jet washing of debris from the uncased well bore to enable easy placement of downhole filtration apparatus. Once the washing operation and the placement of said downhole filtration apparatus is completed, it is desirable to install a permanent plug in the tubing string prior to back washing said downhole filtration device in order to maximize pressure through ports in the cup packer as described below.

The plugging of the work string is accomplished by using a ball catcher sub having an internal groove about its flow passage in combination with a drop ball comprising extrudable material. When said drop ball is pumped into the flow passage of said grooved sub, the ball material extrudes into said groove thereby effecting a latching engagement with said sub which is resistant to the application of back pressure thereto.

Said work string also contains well completion equipment well known in the art including a packer which utilizes a hydraulically powered setting tool, said setting tool being initially isolated from the central bore of the work string by an expendable plug shearably mounted within said bore in such manner as to temporarily plug the flow ports of said setting tool. Said shearably mounted plug is arranged to expend a drop ball after the shearing process

is completed so that the same drop ball can be utilized further in the gravel packing process, including plugging the work string as aforesaid.

According to the foregoing arrangement, it is possible to run the hydraulically operated packer into the well simultaneously with the jet washing of said downhole filtration device into the desired location in the well bore without the danger of inadvertently or accidentally operating the hydraulically operated tool.

An expendable cup packer having ports connecting the bore of said work string with the annulus between the exterior wall of said work string and the interior wall of said well filtration device is also incorporated into said work string and adapted for reciprocal motion within the bore of said downhole filtration device, the sealing means of said cup packer being in slidable and sealing engagement with the inner wall of said filtration device. By reciprocally moving said cup packer within the flow bore of said downhole filtration device while pumping fluid through said ports, it is possible to back wash the filtration device from the inside thereby removing any well bore debris or drill cuttings from the pores or openings in said filtration device prior to placing said well on production.

In order to place the well on production, it is necessary to retrieve the work string from the bore of the previously installed production string which includes said downhole filtration device. However, since the diameter of the sealing means on said cup packer may be larger than the internal diameter of the bore through the

hydraulic packer mounted above said cup packer, it will be difficult, if not impossible for the work string including said cup packer to be retrieved prior to placing the well on production. Therefore, a collet latch assembly has been provided to park said cup packer at the distal end of the production string prior to retrieving the work string from the hole.

It will be appreciated that the novel assemblage of tools and equipment disclosed herein will provide a relatively low cost and effective means to place downhole filtration devices at a desired location in a well bore and effectively clean a downhole filtration device prior to placing a well on production in a single pipe trip has been provided.

The invention will be described in more detail with reference to the accompanying drawings, in which:

FIGURE 1A is a schematic view of a well completion partially in section and partly in elevation, with a portion cut away in which the downhole filtration device is a well screen or a sintered metal tube.

FIGURE 1B is a schematic view of a portion of a well completion shown in elevation, partially cut away, in which a slotted liner is used as the downhole filtration device.

FIGURES 2A through 2H taken together is a view, partly in section and partly in elevation of the work string constructed according to the present invention as it is run in the hole.

FIGURES 3A and 3B taken together is a view, partly in section and partly in elevation of the hydraulic packer, hydraulic setting tool and expendable plug according to the present invention after the flow ports of the setting tool have been opened but before the packer is set.

FIGURES 4A and 4B taken together is a view, partly in section and partly in elevation of the hydraulic packer and hydraulic setting tool in the set position.

FIGURES 5A and 5B taken together is a view, partly in section and partly in elevation of the float shoe, the permanent plug and the cup packer portion of the work string constructed according to the present invention.

FIGURE 6 is a longitudinal sectional view of the expendable plug constructed according to the present invention.

FIGURE 7 is a cross sectional view of the expendable plug taken across line 7 in Figure 6.

FIGURE 8 is a cross sectional view of the expendable plug taken across line 8 in Figure 6.

FIGURE 9 is a longitudinal section of the permanent plug and drop ball constructed according to the present invention.

In the description which follows, like parts are marked throughout the specification and drawings with the same reference numerals, respectively. The drawings are not necessarily to scale and the proportions of certain parts have been exaggerated to better illustrate details and features of the invention. Furthermore, throughout this disclosure, the letter "T" has been used to denote threaded tubular connections.

Referring now to Figure 1A, bore hole 10 for an earth well is drilled more or less vertically through several layers of overburden and may, through the use of directional drilling motors or the like may turn from the vertical to a more or less horizontal orientation for the purpose of either placing as much of the bore hole within a producing stratum, P, or for reaching an oil producing formation remote from the vertical portion of the bore.

The vertical portion of the bore is frequently shored up against collapse by a casing 11 which is cemented in position through which a liner 12 is run. As shown, the liner frequently only extends a portion of the length of the non-vertical portion of the well, leaving the balance of the bore as an open hole 15, which may be prone to erosion or collapse after the well is placed on production.

In order to place the well on production, production tubing which incorporates some form of downhole filtration means like that shown in Figure 1A comprising one or more wrapped wire well screens or one or more dual concentric wrapped wire well screens having an annulus between said concentric screens which has been packed with

sand, gravel or epoxy coated gravel, commonly referred to as dual screen prepack well screens, or sintered metal tubes, collectively S, are run in the uncased portion of the well bore to retard the flow of sand fines into the production tubing along with the produced fluids. For purposes of this application, wrapped wire well screens, dual screen prepacks and sintered tubes will collectively be referred to as well screens. Alternatively, as shown in Figure 1B, a slotted liner, L, may be utilized in place of or in addition to well screens.

According to the current invention, an hydraulically actuated packer 30 having retrievable hydraulic setting tool 20 shearably attached thereto is located within liner 12 and a sufficient number of lengths of blank pipe, B, are placed in the production string and threadedly attached to said hydraulic packer to allow for the proper placement of the downhole filtration device with reference to the producing formation P. Packer 30 is hydraulically connected to the earth's surface through tubular work string 18.

In a substantially horizontal well bore, the open hole 15 is frequently littered with drill cuttings, not shown, which make proper placement of the filtration means difficult. According to the current invention, a float shoe 50, described in further detail below, having a longitudinal flow passage therethrough with a lower flow port 505 at the end thereof and a plurality of lateral flow ports 510 extending from said longitudinal flow passage to the circumference of said float shoe is attached to the end of said downhole filtration device. The longitudinal flow passage of said

float shoe is attached to work string 18 which is concentrically placed within the flow passage of said downhole filtration device and run concurrently therewith.

5 In this manner, fluid can be pumped down the work string 18 under pressure and through flow ports 505 and 510 in float shoe 50 to jet wash said drill cuttings and other debris from in front of said filtration device thereby facilitating the easy placement thereof in its desired location within the well bore.

10 Ported cup packer 80 is shown incorporated in work string 18 in the cut away portion of screen S and of slotted liner L in the manner contemplated in this invention.

Referring now to Figures 2A through 2F, the work string, including the float shoe is shown in the run in position. It is to be understood that said work string is placed within the bore of production tubing 19 so that float shoe 50 is fixedly attached
15 either to screen S or slotted liner L and the work string is run into the hole concurrently with said production tubing as aforesaid.

Hydraulic packer 30 is attached to hydraulic setting tool 20
20 by lugs 301 and shear screws 242. Setting tool 20 and hydraulic packer 30 are of the type disclosed in U.S. Patent 4,832,129, which is incorporated herein by reference. Setting tool 20 has piston 210 guided for longitudinal movement in cylinder 212 as a result of being restrained against inner tool mandrel 215 by cylinder wall
25 217 and is maintained in sliding engagement therewith. Said piston is sealed against leakage of fluid power by seal means 218a and

218b mounted in grooves about piston head 220 and seal means 222a and 222b mounted in grooves about piston rod 224. Piston rod 224 has a radially inwardly sloping shoulder 226 which cooperates with inner tool mandrel 215 to form preopening chamber 228 in cylinder 212, said chamber being connected by flow port 230 to longitudinal tool string flow passage 232. Piston rod 224 is in contacting engagement with packer setting arm 236 which is slidably mounted within setting arm extension guide 238 and inner tool mandrel 215. Packer setting arm is restrained from longitudinal movement during run in by transit shear screws 240. One skilled in the art will recognize that such restraint is necessary during run in because it is possible to mechanically set a packer intended for hydraulic operation if sufficient opposing forces are generated in the tubing string during run in, especially as the tubing string is being forced through a turn or bend in the bore hole such as is illustrated in Figure 1. Additional restraint against premature setting is provided by anti preset lug 301 which is incorporated in packer 30 and described below.

Expendable plug assembly 60 is slidably fitted into tool string flow passage 232 and supported therein by the cooperation of outwardly turned shoulder 601 of external mounting collar 605 with upper shoulder 242 of inner tool mandrel 215. The assembly is aligned within tool string flow mandrel 232 so that radially extending flow bore 603 in said plug assembly is in flow registration with flow port 230 in hydraulic setting tool 20.

Referring now to Figure 6, expendable plug 60 is comprised of a cylindrical external mounting collar 605 having at least one internally threaded radially extending flow bore 603 extending from the outside of said cylinder to the inside of said cylinder.

5 Intermediate said flow bores and the ends of said mounting collar are sealing means, such as o-rings 607, 608 fitted into grooves 609, 610 to prevent leakage into said radially extending flow bore 603 from around the ends of said external mounting collar 605.

Compressed within longitudinal bore 612 of external mounting
10 collar 605 is internal C-Ring 614. Internal C-Ring 614 comprises an outwardly biased ring collar 616 from which depends a plurality of resilient collet fingers 618 formed by a plurality of slots 630 cut into said collar, said fingers being rigidly bound to said ring collar at one end and left free to flex at the other, said free end
15 terminating in a radially outwardly sloped shoulder 620. Said C-Ring has a single longitudinal slit 622 extending the entire length thereof and forming a dividing junction between two adjacent collet fingers. Said ring collar and said collet fingers combine to form a generally cylindrical shape when said ring and said collet
20 fingers are compressed so that the opposing sides of said longitudinal slit 622 approximate each other. The end of ring collar 616 opposite said collet fingers has a radially inwardly sloped shoulder 623 which is coated with an polymeric coating 627, such as nitrile rubber, to form a seat for drop ball A. Said
25 polymeric coating also assists in the maintenance of said outwardly biased ring collar in its circular shape as aforesaid. At a point

intermediate the free ends of said collet fingers and said ring collar, there are a number of bore holes 624 corresponding with and alignable with said internally threaded radially extending flow bores 603 in said external mounting collar 605. Shearable means
5 such as hollow shear screws 626 are threadedly engaged in said radially extending flow bores 603 in said external mounting collar 605 and extend into bore holes 624 sufficiently far enough that at least a portion of the hollow center 628 and the blind end thereof 629 extend into said bore hole.

10 Returning now to Figure 2A, hydraulic packer 30 comprises inner tool mandrel 215 which extends through the longitudinal bores of both said hydraulic setting tool 20 and packer 30, and outer mandrel 302 which supports sealing element package 305, comprising three sets of elements, 305a, 305b and 305c which are constructed
15 from materials well known in the art which are chosen to be compatible with the downhole environment in which they are expected to function, and opposing slips 310a and 310b.

 Inner mandrel 215 is threadedly connected to production tubing 19 at its upper end and to a swivel joint 312 to allow
20 rotation of wash pipe 401, described below, at its lower end. Threadedly connected to said swivel joint is collet type ball catcher 315 of a type well known in the art, comprising a plurality of upraised resilient collet fingers 317 and an upper sealing shoulder 319 with which said collet fingers cooperate to form a
25 seat within which a drop ball is pumped into sealing engagement in

order to provide a means to increase pressure within tool string flow passage 232.

In order to set packer 30, ball A is pumped down work string 18 into sealing engagement with outwardly sloped shoulder 620 of internal collet catcher 614. Increasing the pressure in said work string forces internal collet catcher 614 downwardly into engagement with hollow shear screws 626 causing said screws to shear thereby opening the hollow center 628 thereof and creating a flow passage between tool string flow passage 232 and preopening chamber 228. Further increasing pressure in the work string causes internal collet catcher 614 to be expelled from external mounting collar 605. As is shown in Figure 3, once collet catcher 614 clears the external mounting collar, the outwardly biased ring collar 616 is enabled to diametrically expand into contact with the inner wall of inner tool mandrel 215. The increased pressure forces the expelled collet catcher 614 and drop ball A down said inner mandrel until outwardly sloped shoulders 620 of depending collet fingers 618 contact radially inwardly stepped shoulder 630 of secondary ball seat 63. Once said contact is established, polymeric coating 627 tears along longitudinal slit 622 and C-ring 614 expands diametrically. Drop ball A is then expelled from internal collet catcher 614 and forced further down tool string flow passage 232 into sealing engagement with collet type ball catcher 315. This action seals said flow passage above catcher 315 and allows transfer of fluid power to preopening chamber 228 through flow port 230.

Of course, one skilled in the art will recognize that it is possible for ball A to be expelled from internal collet catcher 614 before said collet catcher engages radially inwardly stepped shoulder 630 without disrupting the remainder of the process described below.

Referring now to Figures 4 A and 4B, once drop ball A is landed on upraised resilient collet fingers 317 of collet catcher 315 and comes into sealing engagement with sealing shoulder 319, fluid pressure is directed through flow port 230 into preopening chamber 228. As pressure is applied to piston 220, the force generated shears transit shear screw 240 thus permitting piston 220 to longitudinally displace packer setting arm 236 and setting arm extension guide 238 attached thereto.

Setting arm extension guide 238 has wedge 340 at the lower end thereof slidably restrained within channel 342 formed by the lower end of packer setting arm 236 and tube extension guide 344. Tube guide extension 344 is threadedly connected to tube guide 346 at threaded union T and has radially inwardly stepped shoulder 344a which engages wedge 340 as said wedge is longitudinally displaced responsive to the longitudinal displacement of packer setting arm 236. Tube guide 346, which is free to move longitudinally with respect to inner packer mandrel 348 is threadedly connected to upper element shoe 350a at threaded union T.

In addition to tube guide 346 being free to move with respect to inner packer mandrel 348, upper element retainer 350a, element package 305, comprising three part element 305, 305b, and 305c,

lower element retainer 350b, upper slip carrier 352, opposing slips 310a and 310b and lower slip carrier 352a are also free to move with respect to inner packer mandrel 348. However, downward motion of the aforementioned components in response to longitudinal motion of packer setting arm 236 is transferred to said wedge by element retainer 350 through elements 305a, 305b and is translated upwardly thereby forcing opposing angular camming surfaces 356 and 356a of upper wedge 352 and lower wedge 352a, respectively against mating camming surfaces on opposing slips 310a and 310b resulting in said slips being forced into engagement with the inner wall of liner 12. Once said slips are set against said liner, further motion of said slip carriers is prohibited and applied force is then transmitted to lower element retainer 350b through lower element retainer extension 358 thereby opposing the downward force exerted by packer setting arm 236 against upper element retainer 350a. These opposing forces compress element package 305 thereby forcing sealing elements 305a, 305b and 305c into sealing engagement with inner wall of liner 12.

Upper element retainer 350a has internal angular camming surface 350b which mates with a corresponding camming surface on triangularly shaped internal slip 360. The base of said slip has a serrated surface 362 which is forced into biting engagement with a roughened surface on inner packer mandrel, commonly called a phonograph finish, in response to inward forces generated by the camming engagement of the camming surfaces of upper element retainer 350a and internal slip 360. Said biting engagement of

element locking block prevents the undesired unsetting or decompression of element package 305 and of opposing slips 310a and 310b from engagement with liner 12.

5 Lower wedge 352a is threadedly connected at union T to pin connector 364 which is in turn threadedly connected to lower packer body 366.

Referring now to Figures 2C through 2H, lower packer body is threadedly connected at union T to lower box connector 368 into which is threadedly inserted blank pipe B.

10 Tubular sleeve valve 450 of a type well known in the art, having upper box connector 451 threadedly connected to blank pipe B at threaded union T comprises an external tubular member 452 having a longitudinal flow bore 453 therethrough and connecting said upper box connector 451 and lower box connector 464.
15 Intermediate said box connectors, a plurality of flow ports 454 connect flow bore 453 with the exterior of said valve. Tubular sleeve 456 is disposed within said flow bore 453 and adapted for reciprocal motion from a first open position wherein said longitudinal flow bore is in flow registration with the exterior of
20 said valve to a second closed position wherein said flow registration is prevented by the positioning of said sleeve across said flow ports, said reciprocal motion being restricted between upper restraining shoulder 462a and lower restraining shoulder 462b. A plurality of seal means 458a, 458b, 458c and 458d, such as
25 o-rings are disposed about the exterior of said tubular sleeve intermediate said ports and the ends of said sleeve to prevent

leakage around said sleeve. Detent 460 is formed between raised shoulders 460a and 460b which are formed on the interior wall of said tubular sleeve.

In one embodiment of this invention, one or more lengths of blank pipe B are threadedly joined to each other in series by threaded unions T, the uppermost of said pipes being threadedly connected to lower box connector 464 and the lowermost of said pipes being threadedly connected to one or more well screens S also connected in series to each other. Of course, one skilled in the art will recognize that a sufficient number of lengths of blank pipe must be provided to position said well screen appropriately within the producing stratum P and a sufficient number of lengths of well screen S must be provided to traverse said producing stratum.

In an alternative embodiment depicted in Figure 1B, slotted liner L could either be substituted for the lengths of blank pipe and well screen described above or positioned concentrically around well screen and run concurrently therewith.

Concentrically disposed within said blank pipe and said well screens or within said slotted liner, is wash pipe 401 which depends from hydraulic packer 30 and comprises threadedly interconnected lengths of pipe.

Fixedly attached to the exterior of said wash pipe is collet shifter 475 comprising upper collet standoff 477 and lower collet standoff 477a. Attached at each end to said collet standoffs is raised flexible collet 479 comprising flexible upper and lower

collet members 481, 481a and thickened center portion 483 located intermediate said collet standoffs, said collet being adapted to ride over upper and lower raised shoulders 460a and 460b of sleeve valve 450 thereby enabling said thickened center portion to engage
5 detent 460 on sleeve valve 450. Upward motion of work string 18 after said center portion is so engaged shifts said tubular sleeve from said first position to said second position. Of course, one skilled in the art will recognize that it is possible to substitute such a tubular sleeve which will shift upon downward motion of said
10 work string.

Threadedly attached to said wash pipe below said collet shifter at threaded union T is inner tube 552 of telescoping joint 55. Concentrically disposed and slidably mounted about inner tube 552 is outer tube 554. Upper slide stop 556 is threadedly attached
15 to said outer tube and lower slide stop 558 which is in slidable and sealing engagement with said outer tube is threadedly attached to the opposing end of said inner tube. Shear screw carrier 562 is threadedly engaged with internal slip 564 and cooperates therewith to retain triangularly shaped internal slip 564 within internal
20 slip housing 566. The base of internal slip 564 has a serrated finish which enters into biting engagement with a corresponding roughened, or phonograph, finish on the exterior wall of the lower portion of inner tube 552 when said inner tube and said outer tube are moved into extended relationship with each other as described
25 below. On run in, inner tube 552 is maintained in a fully enclosed and retracted relationship with respect to outer tube 554 by

shearable screw 560 which is threadedly inserted into bore 560a in shear screw carrier 562 and protrudes into screw depression 560b in inner tube 552.

Outer tube 554 terminates in thickened shoulder 568 which has internal enlarged diameter to receive swaged upper end 702 of shear joint 70 in sliding and sealing engagement therewith, said swaged end being restrained within said lower shoulder by shearable means 704 threadedly inserted into shear bore 570 in lower shoulder 568, said shearable means protruding into retaining hole 706 in said swaged end. Lower end of shear joint 70 terminates in box connector 708 into which is threadedly inserted at threaded joint T to upper pin connector 806a of cup packer 80.

Cup packer 80 comprises a tubular mandrel 802 having longitudinal flow bore 804 therethrough and terminating in upper and lower pin connectors 806a, 806b, respectively. Intermediate said pin connectors are a plurality of flow ports 808 which connect said longitudinal flow bore with the exterior of said cup packer. Intermediate said flow ports 808 and said pin connectors 806a, 806b opposing bowl shaped sealing means 810a, 810b are fixedly and supportedly attached to the exterior of said tubular mandrel, sealing means 810a, 810b being supported on said mandrel in sliding and sealing engagement with the interior wall of production tubing 19 by L-shaped sealing means support 812a, 812b respectively. Said sealing means comprise resilient elastomeric material, such as nitrile rubber. Formed within longitudinal flow bore 804 adjacent lower pin connector 806b is lower ball catcher sub 90, described

below, which is disposed to receive drop ball A in sealing engagement therewith and for retaining said drop ball against expulsion due to the application of back pressure to said ball.

Referring now to Figure 9, lower ball catcher sub 90 comprises a longitudinal bore 901 which has a first bore section 902, a last bore section 903 and at least one intermediate bore section 904. Said first bore section has a larger internal diameter than both said intermediate bore sections and said last bore section. Said last bore section has a smaller internal diameter than either said first bore section or said intermediate bore sections and each of said intermediate bore sections is of a smaller internal diameter than said section which precedes it. Each of said bore sections is connected to the next succeeding bore section by radially inwardly sloping shoulder 905, 905a. At least one of said bore sections has a circumferential ball retention groove 907 milled into its internal wall.

Drop ball A must be carefully chosen not only for selection of the proper diameter, but also for the appropriate material of construction since the ball must comprise a material which will extrude upon the application of pressure thereto. Therefore, drop balls made of metals with a hardness greater than 80 Rockwell B, such as steel, are not suitable for the application described below because they will not extrude into groove 907 upon application of pressure from above. Better suited to this purpose is a drop ball made from materials having a durometer hardness ranging from about 50 Shore D to 75 Shore D. Such materials include elastomers, such

as urethanes, polyalkylene oxide polymers, silicone, fluorosilicone, polysulfide, polyacrylate, hypalon, Nylon 6 loaded with molybdenum sulfide, teflon, glass-filled teflon, nylon and glass-filled nylon. Also, rubbers, such as natural rubber, isoprene rubber, butadiene rubber, styrene-butadiene rubber, isobutene-isoprene rubber, chloroprene rubber, nitrile butadiene rubber and fluoro-rubber may be utilized in place of said elastomers. Especially suited for this application is a drop ball manufactured from glass-filled nylon.

Similarly, the dimensions of groove 907 are critical because it is desirable that drop ball A extrude into said groove as a result of the application of pressure from above in a manner that the groove is completely filled by the extruded ball material. If the groove is too narrow, too wide or too shallow, it is possible that an insufficient amount of ball material will be contained in said groove such that the application of back pressure from below the ball will cause the extruded material to shear from said ball thereby resulting in said ball being expelled from said catcher or that the extruded material will be of an insufficient quantity to function to prevent the discharge of said drop ball upon the application of back pressure thereto. Also, since for optimum performance it is desirable that groove 907 be completely filled with extruded ball material to provide maximum resistance to the application of back pressure, if the groove is too deep, it is possible that said groove either will not completely fill with extruded material upon the application of pressure to said drop

ball or will allow excessive extrusion of the ball into the groove also resulting in possible shearing of the ball from the extruded material.

Accordingly, it is desirable that said groove be of such a width and depth that from about one third to about one half of the ball material which is exterior to an imaginary cylinder C superimposed upon said ball and having a diameter equal to the smaller diameter of radially inwardly sloping shoulder 905a, which forms a seat for said ball, shown in Figure 9, is extruded thereinto.

Threadedly attached to lower pin connector 806b at threaded union T is latch collet 925 in which longitudinal flow bore 928, which extends the length of said latch collet, is in flow registration with longitudinal flow bore 804 of cup packer 80. Formed on the exterior wall 931 of said latch collet is resilient collet finger 930 having a lower radially outwardly sloped shoulder 932 and an upper radially outwardly stepped shoulder 934. Exterior wall 931 comprises sufficiently flexible material to allow collet finger to flex inwardly to pass over hold down ramp 955 of latch down collar 950 as described below. Lower end 936 of latch collet 925 is threadedly attached to upper collar 502 of float shoe 50.

Referring now to Figure 2H, float shoe 50 is threadedly attached to production tubing 19 at threaded union T. Longitudinal flow bore 504 extends the length of said float shoe and terminates in lower flow port 505 as aforesaid. Formed within said longitudinal flow bore is check valve 512. Check valve 512 has

upper conical valve seat 514 formed as a radially outwardly sloping shoulder in flow bore 504 and a valve housing section comprising a cylindrical bore 516, said valve housing section having a plurality of radially extending flow passages 508 which terminate in lateral flow ports 510 extending therefrom. The check valve has an upper conical valve portion 520 with cylindrical valve stem 522 depending therefrom, said valve stem being slidably mounted within valve stem guide 524. Said conical valve is biased to the closed position by spring 526 which is wound around said valve stem and confined between lower flat face 528 of conical valve portion 520 and valve stem guide 524. When conical valve 520 is forced open by pressure from above, spring 526 is compressed between said lower flat face and said valve guide, said compressed spring preventing said flat face from bottoming out on lower shoulder 530 of cylindrical bore 516 thereby maintaining open fluid flow passages through both lower flow port 505 and lateral flow ports 510.

METHOD OF OPERATION

Once an earth well has been drilled and casing 11 has been cemented into place, inner liner 12 is run through the bore of said casing and into the open or uncased portion of the well bore. A production tubing string 19 is assembled, which has a float shoe 50 fixedly attached at its terminal end with a latch down collar 950 threadedly attached thereto, a well filtration device such as one or more lengths of well screen S or slotted liner L, sleeve valve 450 and an appropriate number of lengths of blank pipe B are

threadedly connected and hung off hydraulic packer 20. Additional lengths of blank pipe form the production tubing 19 between said hydraulic packer and the earth's surface where it is connected to a tubing hanger and ultimately to a christmas tree after the well is completed. During run in, a work string is concentrically disposed within said production string, said work string comprising, from its lower end, a latch collet 925, threadedly connected to cup packer 80 having lower ball catcher sub 90 incorporated into its flow bore as aforesaid. Threadedly connected to said cup packer is shear joint 701 which is connected by shearable means to telescoping joint 550. The upper end of said telescoping joint is threadedly connected to collet shifter 475 which is in turn threadedly connected to one end of wash pipe 401. Threadedly connected to the other end of said wash pipe is collet catcher 315 which is disposed within the bore of hydraulic packer 20. Shearably attached to the upper end of said hydraulic packer is hydraulic setting tool 20 into which is threaded an upper work string comprising blank pipe which extends to the surface. Both said production string with said work string concentrically disposed therein are run in the hole simultaneously.

As said production string begins to encounter resistance to run in as a result of debris, such as drill cuttings, left in the open portion of the hole, wash fluid is pumped down said work string under pressure. Said pressure forces open conical check valve 520 and allows said fluid to escape under pressure through lower flow port 505 and lateral flow ports 510. As the fluid is

jettied through said flow ports, the debris is washed away thereby allowing said downhole filtration device to be moved into the desired position in the well bore.

Once said production string is in the desired position, drop ball A is introduced into the bore of the work string and pumped into sealing engagement with C-Ring 616 of expendable plug assembly 60. Increasing fluid pressure on drop ball A causes bore hole 624 to press against hollow shear screw 626 which will shear upon the application of sufficient pressure thereby opening flow port 230 of hydraulic setting tool 20. Continued application of pressure upon the work string forces internal collet catcher 614 from within longitudinal bore 612 of external mounting collar 605 and allows said internal collet catcher, together with drop ball A to fall within tool string flow passage 232 until said catcher lands on shoulder 630. Continued application of fluid pressure to said ball and said collet catcher forces drop ball A into the bore of said collet catcher causing the resilient elastomeric coating on said collet catcher to tear as aforesaid, thereby releasing outwardly biased ring collar 616 to spring outwardly and release drop ball A to fall into sealing engagement upon the upwardly extending resilient collet fingers 317 of collet catcher 315 as shown in Figure 4B. Once said drop ball is in sealing engagement with said collet fingers, further increasing fluid pressure within said work string will set slips 310a, 310b and sealing element package 305 of hydraulic packer 30 within casing 12 as aforesaid.

Although expendable plug assembly 60 has been presented as a means for isolating radial fluid power passages, one skilled in the art will readily recognize that said assembly, in cooperation with a drop ball can be used to isolate a lower portion of a main flow bore from an upper portion of a main flow bore as is well known in the art. Nothing in this disclosure is intended to restrict the use of said expendable plug assembly to one use or the other.

Referring now to Figures 5A and 5B, once hydraulic packer 30 is set, a further increase in pressure will cause shear pin 318 in the lower end of resilient collet fingers 317 of collet catcher 315 to shear and move down allowing said fingers to spread thereby expelling drop ball A further down the bore of said work string and into longitudinal bore 901 of lower ball catcher sub 90. Said increased pressure will force said drop ball into sealing engagement with radially inwardly sloping shoulder 905a, as is depicted in Figure 9, and will also cause the material of drop ball A to extrude into groove 907. Completion of this sealing process, which is signaled to the operator on the surface by an increase in pump outlet pressure, will prevent the further flow of fluid through float shoe 50.

Once float shoe 50 is sealed out of the system by drop ball A as aforesaid, the fluid which is being pumped through the work string is directed through flow ports 808 in cup packer 80.

Upon seeing the internal pressure rise indicating the sealing of float shoe 50 as aforesaid, the operator will begin to pick up work string 18 with all of its component parts while simultaneously

pumping fluid down the work string and out through ports 808. Said pumped fluid will be forced out through downhole filtration devices, whether they be screens S, as is depicted in Figure 1A or slotted liner L, as is depicted in Figure 1B, or a combination of the two from the inside of said device to the outside thereof. Returns are carried up the annulus between said downhole filtration device and the well bore, through ports 454 of sleeve valve 450 and thereafter to the surface in the annulus between production tubing 19 and work string 18.

As the work string is withdrawn from the production tubing, upper element support 812a of cup packer 80 will engage the interior bore of lower restraining shoulder 462b in sleeve valve 450 thereby restricting any further upward motion of the work string. This contact will be signaled to the operator on the surface by an apparent increase in weight on the rig weight indicator. Continued upward pull will shear screw 560 in telescoping joint 55. Once said screw is sheared the concentrically nested tubular portions of the telescoping joint will be pulled apart until upper slide stop 556 comes into contacting engagement with lower slide stop 560 as described below.

Referring now to Figure 5, lower slide stop 560 is threadedly attached to inner tube 552 and is sealed against leakage by o-ring seal 572 which is carried in a groove milled into said upper slide stop and compressed between said upper slide stop and inner tube 552. Leakage between inner tube 552 and outer tube 554 is prevented by o-ring seal 574 which is contained in a second groove

milled into the opposite surface of said slide stop and is maintained in sliding and sealing engagement with outer tube 554. As aforesaid, opposing radially stepped shoulders 558a in lower slide stop 558 and 566a in slide brake carrier 566 enter into restrictive engagement with each other thereby preventing the complete extraction of said inner tube from within said outer tube. Again, when said radially stepped shoulders enter into engagement with each other, the operator on the surface will be signaled that the telescoping joint is fully extended by an apparent increase in weight on the rig weight indicator.

Upon recognizing that the telescoping joint has extended, the operator will then lower the work string while simultaneously pumping fluid which exits the work string through ports 808 in cup packer 80 to continue backwashing the downhole filtration device. When lower radially outwardly sloped shoulder 932 of latch collet 925 contacts hold down ramp 955 of latch down collar 950, this event will be signaled to the operator by an apparent weight decrease. The operator will then once again raise the work string while pumping fluid until the upper sealing means support 812a again contacts lower restraining shoulder 462b of sleeve valve 450. Continued reciprocal motion of the work string between latch down collar 950 and sleeve valve 450 as aforesaid is continued while pumping fluid until a drop in indicated pump pressure at the surface indicates the downhole filtration device has been washed free of debris.

Upon completion of the washing process, the work string is once again lowered until sloped shoulder 932 of latch collet 925 is in contacting engagement with opposing hold down shoulder 958 of latch down collar 950. Additional set down weight is then applied which causes collet finger 930 to flex inwardly thereby allowing latch collet 925 to ride up and over latch down collar. Once upper radially outwardly stepped shoulder 934 of latch collet 925 clears hold down shoulder 958 of latch down collar 950, collet finger 930 is free to flex outwardly thereby forcing said shoulders into locking engagement with each other which is signified by a sudden apparent increase of applied set down weight at the surface.

After said latch collet is locked in the latch down collar, the operator applies sufficient upward force to shear shearable means 704 in shear joint 70 which frees swaged upper end 702 from box connector 708 and allows work string 18 to be withdrawn from the hole leaving cup packer 80 with lower ball catcher sub 90 retained within its longitudinal bore, and float shoe 50 down hole within the bore of production string 19. Thereafter, surface completion equipment can be installed and the well placed in production.

CLAIMS

1. An expendable plug for inhibiting the
unintentional introduction of fluid into a flow bore, the
plug comprising an external mounting collar having a
5 longitudinal flow passage therethrough and sealing means
about its exterior, the collar being arranged to be
mounted within said flow bore so that said flow passage is
in registration with said flow bore, within the collar
there being an internal C-ring comprising an outwardly
10 biased split ring having a bore hole therein, said C-ring
being restrained within the bore of said mounting collar
by shearable means protruding from said mounting collar
into said bore hole in said C-ring.
2. An expendable plug according to claim 1 wherein
15 the C-ring is compressed within said longitudinal bore of
said mounting collar.
3. An expendable plug according to claim 1 or claim
2 wherein said shearable means are shear pins or are shear
screws threaded into bores in said mounting collar.
- 20 4. An expendable plug for inhibiting the
unintentional introduction of fluid into a flow bore and
comprising an internal C-ring compressed within the bore
of an external mounting collar and restrained therein by
shearable means;

said C-ring comprising an outwardly biased ring having a slot therethrough, said ring being compressed to approximate a circular shape and retained in said shape by confinement within said bore in said mounting collar;

5 a plurality of resilient collet fingers being formed by slots in said ring, said fingers being rigidly attached at one end to said ring and depending therefrom and having a resilient coating thereon;

 each of said collet fingers having a radially
10 outwardly sloping shoulder at the unrestrained end of said finger, and at least one of said collet fingers has a drill hole therethrough intermediate said unrestrained end thereof and said ring;

 said external mounting collar comprising an
15 essentially cylindrical tube having at least one bore hole intermediate its ends, said bore hole being alignable with said drill hole in said internal C-ring; and

 said collar further having circumferential
grooves in the exterior surface thereof on each side of
20 said bore hole, each of said grooves being parallel to each other and being located intermediate said bore hole and an end of said mounting collar, each of said grooves holding peripheral sealing means.

5. An expendable plug according to claim 4 wherein
25 said shearable means comprises at least one hollow shear pin or hollow shear screw.

6. An expendable plug according to claim 4 or claim 5 wherein said shearable means are positioned in said at least one bore hole of said external mounting collar so as to protrude from said bore holes into at least one said drill hole of said internal C-ring.
7. An expendable plug according to claim 3 or claim 5 wherein the or each said shear screw is threaded into a bore hole of said collar and extend therefrom into a hole in said C-ring.
8. An expendable plug according to any one of the claims 4 to 6 wherein said external mounting collar is arranged to be fixedly aligned within said flow bore of a tool so that said bore hole is in registration with a flow passage in said tool.
9. An expendable plug according to any one of the preceding claims wherein the internal C-ring has a polymer coating.
10. An expendable plug according to claim 9 wherein said polymer is nitrile rubber.
11. An expendable plug according to any one of the preceding claims wherein said internal C-ring is arranged to receive a drop ball into sealing engagement therewith.

12. An expendable plug according to claim 9 wherein the internal C-ring is disposed to receive said drop ball in releasable engagement therewith.

13. An expendable plug according to claim 12 wherein the C-ring is expandable to release said drop ball from sealing engagement therewith.

14. An expendable plug according to any one of the preceding claims wherein the internal diameter of said C-ring is expandable upon expulsion of said C-ring from said external mounting collar.

15. An expendable plug according to any one of the preceding claims wherein the external sealing means comprises elastomeric rings.

16. A ball catcher for use in a well bore for sealingly and engagingly retaining a drop ball, it comprising a plurality of interconnected flow conduit segments in which a bottom flow segment has a smaller internal diameter than a top segment, and at least one intermediate flow segment, said intermediate segment having an internal diameter intermediate the segments adjacent to it, each of said segments being interconnected to an adjacent segment by a radially inwardly sloping shoulder, and the intermediate segment or at least one of said intermediate segments having a groove milled around

the internal circumference thereof intermediate the ends thereof; the ball catcher further comprising an extrudable drop ball having a diameter intermediate that of said top and bottom flow segments and at least as large as said
5 grooved intermediate flow segment, and is extrudable into said groove upon the application of pressure thereto.

17. A ball catcher according to claim 16 wherein said groove has a width and a depth sufficient to retain said ball in said intermediate flow segment.

10 18. A ball catcher according to claim 16 or claim 17 wherein said internal groove is large enough to contain extruded material from about one third to about one half of the chord length of the seat diameter.

15 19. A ball catcher according to any one of claims 16 to 18 having at least one of said radially inwardly sloping shoulders disposed in said flow passage to receive said drop ball in sealing engagement therewith.

20 20. A ball catcher according to any one of claims 16 to 19 having said extrudable drop ball comprising material with a durometer hardness from about 50 Shore D to about 75 Shore D.

21. An extrudable drop ball for a ball catcher according to any one of claims 16 to 20 and comprising

materials selected from the group of elastomers consisting of urethanes, polyalkylene oxide polymers, silicone, fluorosilicone, polysulfides, polyacrylates, hypalon, nylon, nylon 6 loaded with molybdenum sulfide, glass filled nylon, teflon, and glass-filled teflon.

22. An extrudable drop ball for a ball catcher according to any one of claims 16 to 20 and comprising materials selected from group of rubbers consisting of natural rubber, isoprene, butadiene, styrene-butadiene, isobutene-isoprene, chloroprene, nitrile-butadiene, and fluoro rubber.

23. A ball catcher in combination with an extrudable drop ball which is resistant to unsealing as a result of the application of back pressure comprising:

- a. a first segment having a longitudinal flow conduit therethrough;
- b. a last segment having a longitudinal flow conduit therethrough, the internal diameter of said last segment flow conduit being smaller than the internal diameter of said first segment;
- c. said segments being connected by at least one radially inwardly sloping shoulder;
- d. a groove milled into the internal circumference of at least one of said longitudinal flow conduits; and

- e. an extrudable drop ball having a diameter larger than the or at least one of said grooved flow conduits and being sufficiently soft enough to extrude into said groove upon the application of sufficient pressure thereto.

5

24. A ball catcher according to claim 23 comprising an intermediate flow conduit with an internal diameter intermediate that of said first and last flow segments.

25. A ball catcher according to claim 24 wherein the diameter of the or each intermediate flow segment is intermediate the diameters of the flow segments immediately adjacent to it.

10

26. A ball catcher according to claim 24 or claim 25 wherein each preceding flow segment is connected to its succeeding flow segment by a radially inwardly sloping shoulder.

15

27. A ball catcher according to any one of claims 24 to 26 wherein the at least one intermediate flow segment has a groove milled into the internal circumference of said segment.

20

28. A ball catcher according to any one of claims 23 to 27 wherein said groove has a width and a depth sufficient to retain said ball in the associated flow

segment.

29. A ball catcher according to any one of claims 23 to 28 in combination with an extrudable drop ball which is resistant to unsealing as a result of the application of back pressure wherein one or more intermediate flow segments are interconnected between said first flow segment and said last flow segment.

30. A ball catcher according to any one of claims 23 to 28 in combination with an extrudable drop ball comprising material with a durometer hardness from approximately 50 Shore D to approximately 75 Shore D.

31. A combination according to claim 29 or claim 30 wherein the ball comprises materials selected from the group of elastomers consisting of urethanes, polyalkylene oxide polymers, silicone, fluorosilicone, polysulfides, polyacrylates, hypalon, nylon, nylon 6 loaded with molybdenum sulfide, glass-filled nylon, teflon, and glass-filled teflon.

32. A combination according to claim 29 or claim 30 wherein the ball comprises materials selected from group of rubbers consisting of natural rubber, isoprene, butadiene, styrene-butadiene, isobutene-isoprene, chloroprene, nitrile-butadiene, and fluoro-rubber.

33. Apparatus for backwashing downhole filtration means comprising a cup packer having a tubular central mandrel with flow ports connecting the inside of said tubular mandrel with an annular space between said tubular
5 mandrel and the inner wall of filtration means, sealing means arranged upon said mandrel intermediate said flow ports and the end of said mandrel, latching means provided on said mandrel and means for sealing the flow conduit in said mandrel below said flow ports, said cup packer being
10 attached to a work string by shearable means, said apparatus being adapted for reciprocal motion within and sealing engagement with the inner wall of said filtration means.

34. Apparatus according to claim 33 wherein said
15 sealing elements are of a bowl shaped construction.

35. Apparatus according to claim 34 wherein said sealing elements of claim 34 are so arranged on said mandrel that the interior of said bowl shape is nearer said flow ports than the base thereof.

20 36. Apparatus according to any one of claims 33 to 35 wherein the sealing elements comprise a resilient elastomer.

37. Apparatus according to claim 36 wherein the resilient elastomer comprises nitrile rubber.

38. Apparatus according to any one of claims 33 to 37 wherein said sealing means comprises a ball catcher sub having a ball retention groove milled into an inner wall perpendicular to the longitudinal axis of a flow conduit passing through said catcher sub and a shoulder disposed for receiving a drop ball in sealing engagement therewith within said flow conduit and intermediate said groove and a lower end of said sub.

39. Apparatus according to any one of claims 33 to 38 wherein said latching means cooperates with a locking means on said downhole filtration means to fixedly retain said apparatus downhole after the completion of said backwashing.

40. Apparatus for backwashing downhole filtration means incorporated into a production string having a latch down collar proximate a terminal end thereof and for backwashing said downhole filtration devices comprising, in combination, from a lower to an upper region:

a. a float shoe having a longitudinal flow conduit therethrough, said flow conduit having a smooth bore at the one end thereof, a plurality of axially extending jet washing ports depending therefrom and a jet washing port at the terminal end thereof, said float shoe being rigidly attached at said terminal end to the end of said

downhole filtration means so that said washing ports protrude from said filtration means;

b. a latch collet sub connected to said float shoe and having a longitudinal flow passage therethrough and an external collet latch intermediate the ends of said sub, said collet latch comprising a lower radially outwardly stepped shoulder adapted to positively engage and latch together with a corresponding radially inwardly stepped shoulder in said latch down collar;

c. a ball catcher resistant to back pressure for sealingly and engagedly retaining a drop ball therein threadedly connected to said latch collet, said ball catcher having a flow passage therethrough in flow registration with the longitudinal flow passage of said latch collet sub and connecting upper and lower openings and having a decreasing diameter therebetween, a ball retention groove milled into the inner wall of said flow passage intermediate said openings and a radially inwardly sloping ball seat intermediate said ball retention groove and said lower opening;

d. a cup packer threadedly connected to said ball catcher, said cup packer having a central mandrel with a longitudinal flow passage therethrough, a plurality of flow ports

connecting said flow passage to the annular space between the exterior of said mandrel and the interior of said production string and two opposing essentially hollow bowl-shaped sealing elements, each of said elements extending from and being supported by said mandrel such that said plurality of flow ports are intermediate said elements and being oriented so that the bases of said cones face each other, the sides of said bowl-shaped element being in slidable and sealing engagement with the interior wall of said filtration means, and

e. a shear sub having a first threaded end, a second swaged end and a flow passage connecting said ends, said shear sub being threadedly attached to said cup packer and being attached to the balance of the work string thereabove by shearable means.

41. Apparatus according to claim 40 wherein said downhole filtration means comprise at least one well screen.

42. Apparatus according to claim 41 wherein said well screen is a wrapped wire screen.

43. Apparatus according to claim 41 or claim 42 comprising dual concentric wrapped wire well screens with

an annulus therebetween, said annulus having particulate material packed therein.

44. Apparatus according to claim 43 wherein the particulate material is chosen from the group comprising gravel, epoxy coated gravel or sand.

45. Apparatus according to any one of claims 40 to 44 wherein said downhole filtration means comprises an electropolished sintered metal tube.

46. Apparatus according to any one of claims 40 to 44 wherein said downhole filtration means comprise a slotted liner.

47. Apparatus according to any one of claims 40 to 46 wherein said cup packer is adapted for reciprocal motion within said filtration means.

48. A method for completing a partially cased, highly deviated or horizontal well bore comprising:

a. assembling a production string consisting of a ported float shoe having a latch down collar incorporated therein threadedly connected to a plurality of threadedly interconnected well filtration devices, a sleeve valve, a hydraulically operated well packer and a sufficient number of lengths of tubing to reach

{ the surface of said well;

- b. concentrically disposing within said production string a work string consisting of a latching collet in flow registration with the flow ports of said float shoe and being threadedly connected to an anti-blow back ball catcher sub which is in turn threadedly connected to a cup packer having ports connecting the internal bore of said packer with the annulus between said packer and the inner wall of said production string and opposing conical elements disposed on either side of said ports, said cup packer being threadedly connected to a shear joint onto which is slidably and shearably attached a telescoping joint having concentric flow tubes, one being slidably mounted within the other and said tubes being lockable in a fully expanded condition, said expansion joint being threadedly connected to a collet-type ball catcher sub, said ball catcher sub being threadedly connected to a hydraulic setting tool, said setting tool being disposed in engageable relationship with said packer to effect the setting thereof and said setting tool having a ball actuated valve in sealing engagement with the flow ports of said setting tool and sufficient lengths of interconnected tubing to reach the earth's surface;

- c. running said production string and said work string into the well bore as a unit and pumping wash fluid through said work string into said well bore through said ports in said float shoe to remove debris from said well bore;
- d. positioning said production string at the desired location in said well bore while maintaining said packer within the cased portion of said well bore and thereafter ceasing the pumping of said wash fluid through said work string;
- e. dropping an extrudable ball into said work string and pumping fluid down said work string to force said ball into engagement with said ball actuated valve;
- f. increasing the pressure applied to said valve and said ball sufficiently to shear hollow shear pins therein thereby simultaneously expending an internal collet catcher from the external mounting collar of said valve and opening flow ports in the packer setting tool;
- g. further increasing the pressure applied to said ball to expend said ball from said internal collet catcher into sealing engagement with a second collet catcher;
- h. applying pressure sufficient to stroke a piston in said setting tool thereby moving the slips of said packer into binding engagement and the

seals of said packer into sealing engagement with the casing of said cased portion of said well bore;

- 5 i. further increasing the pressure within said work string to both expel the drop ball from said second collet catcher sub into sealing engagement with an anti-blow back ball catcher sub and to extrude said drop ball into a ball retention groove within said anti-blow back ball catcher sub thereby isolating the flow ports in
10 said float shoe from the remainder of said work string;
- j. simultaneously pumping wash fluid down said work string and through the ports in said cup packer
15 while manipulating said work string to reciprocate said cup packer within the bore of said well filtration devices until said wash fluid flows freely therethrough;
- k. pulling up on said work string until the upper
20 shoulder of said cup packer is brought into engagement with a packer retention shoulder and continuing said upward pull until said telescoping joint is locked into its fully extended position;
- l. pushing down on said work string until said
25 latching collet is restrainedly engaged by said latch down collar;
- m. applying sufficient upward force on said work

string to shear the shearable means in said
shear joint;

n. withdrawing that portion of said work string
above said cup packer from the bore of said
production string; and

o. attaching such accessory and surface equipment
to said production string to place the well in
production.

49. A method according to claim 48 wherein said well
filtration device comprises a well screen.

50. A method according to claim 49 wherein said
screen comprises a wire wrapped screen.

51. A method according to claim 50 wherein said
screen comprises dual concentric wire wrapped screens with
an annulus therebetween, said annulus having particulate
material packed therein.

52. A method according to claim 51 wherein the
particulate material is chosen from the group comprising
gravel, epoxy coated gravel and sand.

53. A method according to claim 49 wherein said well
filtration device comprises an electropolished sintered
metal tube.

54. A method according to claim 49 wherein said well filtration device comprises a slotted liner.

55. An expendable plug constructed and arranged for use and operation substantially as described herein with
5 reference to the accompanying drawings.

56. A ball catcher constructed and arranged for use and operation substantially as described herein with reference to the accompanying drawings.

57. An extrudable drop ball constructed and arranged
10 for use and operation substantially as described herein with reference to the accompanying drawings.

58. Apparatus for backwashing downhole filtration means constructed and arranged for use and operation substantially as described herein with reference to the
15 accompanying drawings.

59. A method for completing a partially cased, highly deviated or horizontal well bore substantially as described herein.

Patents Act 1977
Examiner's report to the Comptroller under
Section 17 (The Search Report)

Application number

GB 9216072.0

Relevant Technical fields

(i) UK CI (Edition K) E1F (FKA, FKF, FKU)

(ii) Int CI (Edition 5) E21B

Databases (see over)

(i) UK Patent Office

(ii)

Search Examiner

P A MAKIN

Date of Search

1 OCTOBER 1992

Documents considered relevant following a search in respect of claims 1-15

Category (see over)	Identity of document and relevant passages	Relevant to claim(s)
A	GB 2156876 (CAMCO) whole document	1
A	US 4862966 (LINDSEY) see figure 3	1
A	US 3524503 (BAKER) whole document	1

Category	Identity of document and relevant passages	Relevance to claim(s)

Categories of documents

X: Document indicating lack of novelty or of inventive step.

Y: Document indicating lack of inventive step if combined with one or more other documents of the same category.

A: Document indicating technological background and/or state of the art.

P: Document published on or after the declared priority date but before the filing date of the present application.

E: Patent document published on or after, but with priority date earlier than, the filing date of the present application.

&: Member of the same patent family, corresponding document.

Databases: The UK Patent Office database comprises classified collections of GB, EP, WO and US patent specifications as outlined periodically in the Official Journal (Patents). The on-line databases considered for search are also listed periodically in the Official Journal (Patents).