




- (51) **International Patent Classification:**  
A47L 17/06 (2006.01) A47L 13/10 (2006.01)
- (21) **International Application Number:**  
PCT/US2017/018184
- (22) **International Filing Date:**  
16 February 2017 (16.02.2017)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**  
62/296,175 17 February 2016 (17.02.2016) US
- (71) **Applicant:** ECOLAB USA INC. [US/US]; 1 Ecolab  
Place, St. Paul, MN 55102 (US).
- (72) **Inventors:** WEILAGE, Hope; 111 East Kellogg  
Boulevard, St. Paul, MN 55101 (US). GILBERTSON,  
Sarah; 1264 Dayton Avenue, St. Paul, MN 55104 (US).
- (74) **Agent:** KOWALCHYK, Katherine, M.; Merchant &  
Gould P.C., P.O. Box 2903, Minneapolis, MN 55402-0903  
(US).

- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) **Title:** CLEANING TOOL WITH REMOVABLE SOCK

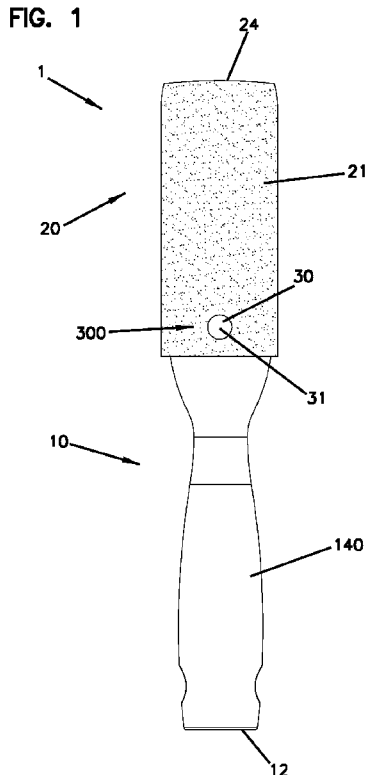

(57) **Abstract:** A cleaning tool includes a shaft extending from a proximal end to a distal end, where the shaft has a handle at the proximal end and a tool head at the distal end; and a sock removably mountable on the tool head. The tool head may include a through hole, and the sock may include a fastener with a first coupling member and a second coupling member, where the first and second coupling members are constructed to align with and couple through the through hole on the tool head. Alternatively the tool head includes one or more coupling members and the sock includes one or more corresponding coupling members constructed align with and couple with the one or more coupling members on the tool head.

**Published:**

— *with international search report (Art. 21(3))*

## CLEANING TOOL WITH REMOVABLE SOCK

### CROSS REFERENCE TO RELATED APPLICATIONS

This application is being filed on February 16, 2017, as a PCT International  
5 application and claims the benefit of priority of U.S. Provisional Application No.  
62/296,175, filed February 17, 2016, which is hereby incorporated by reference in  
its entirety.

### FIELD

The present disclosure relates to cleaning tools with removable, replaceable  
10 and/or exchangeable socks.

### BACKGROUND

Appliances in kitchens, and particularly commercial kitchens, can be  
challenging to clean. Appliances may have irregular shapes with many corners and  
crevices, narrow spaces, and multiple heating coils that need to be cleaned.  
15 Appliances may also be soiled with soils that are difficult to clean, such as baked-on  
or burned soil that includes grease, protein residue, and carbohydrate residue. The  
soil may also include wet grease and carbonized grease. When selecting cleaning  
tools, considerations of soil type, tool reach, and ergonomics may play a role. Some  
areas or soils may require different cleaning pads than others, with certain areas and  
20 soils requiring aggressive pads for cleaning. Due to soiling or wear of the pad in  
heavy use and the need to use different types of pads on different areas of the same  
appliance, the pads may need to be switched out frequently. It is against this  
background that the present disclosure is made.

### SUMMARY

25 The cleaning tool of the present disclosure includes a shaft extending from a  
proximal end to a distal end, where the shaft has a handle at the proximal end and a  
tool head at the distal end; and a sock removably mountable on the tool head. The  
tool head may include a through hole, and the sock may include a fastener with a  
first coupling member and a second coupling member, where the first and second

coupling members are constructed to align with and couple through the through hole on the tool head. According to an alternative aspect, the tool head includes one or more coupling members and the sock includes one or more corresponding coupling members constructed align with and couple with the one or more coupling members on the tool head.

### BRIEF DESCRIPTION OF DRAWINGS

FIG. 1 is a schematic front view of a cleaning tool according to an embodiment.

FIG. 2A is a front view of the shaft of the cleaning tool of FIG. 1.

10 FIG. 2B is a side view of the shaft of the cleaning tool of FIG. 1.

FIGS. 2C and 2D are perspective views of the shaft of the cleaning tool of FIG. 1.

FIG. 3A is a schematic front view of a cleaning sock of the cleaning tool of FIG. 1.

15 FIG. 3B is a schematic perspective view of the cleaning sock of FIG. 3A.

FIG. 4A is a front view of the shaft of a cleaning tool according to an embodiment.

FIG. 4B is a side view of the shaft of the cleaning tool of FIG. 4A.

FIG. 4C is a perspective view of the shaft of the cleaning tool of FIG. 4A.

20 FIG. 4D is an end view of the shaft of the cleaning tool of FIG. 4A.

FIG. 4E is a cross sectional view of the shaft of the cleaning tool of FIG. 4A along cut A-A in FIG. 4D.

FIG. 4F is a schematic view of the tool head of the cleaning tool of FIG. 4A.

25 FIG. 5A is a front view of the shaft of a cleaning tool according to an embodiment.

FIG. 5B is a side view of the shaft of the cleaning tool of FIG. 5A.

FIG. 5C is a perspective view of the shaft of the cleaning tool of FIG. 5A.

FIG. 5D is an end view of the shaft of the cleaning tool of FIG. 5A.

FIG. 5E is a cross sectional view of the shaft of the cleaning tool of FIG. 5A  
5 along cut A-A in FIG. 5D.

FIG. 6A is a front view of an extension handle of the cleaning tool of FIG. 1.

FIG. 6B is a back view of the extension handle of FIG. 6A.

FIG. 6C is a side view of the extension handle of FIG. 6A.

FIG. 7 is a photograph of an exemplary cleaning tool according to an  
10 embodiment.

FIGS. 8A and 8B are photographs of an exemplary cleaning tool according  
to an embodiment.

FIGS. 9A and 9B are photographs of an exemplary cleaning tool sock and  
shaft according to an embodiment.

FIG. 10 is a photograph of another exemplary cleaning tool sock according  
15 to an embodiment.

In the drawings, like items are identified by the same reference number or in  
some instances showing alternative embodiments, by the same reference number  
distinguished by a prime.

## 20 **DETAILED DESCRIPTION**

As used herein, the term “about” refers to variation in the numerical quantity  
that can occur, for example, through typical measuring procedures in the real world;  
through inadvertent error in these procedures; through differences in the  
manufacture, source, or material used to make the device; and the like. The term  
25 “about” also encompasses amounts that differ due to different equilibrium

conditions for a composition resulting from a particular initial mixture. Whether or not modified by the term “about”, the claims include equivalents to the quantities.

The term “sock” is used here broadly to refer to the removable portion of the cleaning tool that comes into contact with the surface being cleaned. A sock is  
5 understood to include material defining a cavity with a closed end and an open end such that a tool end can be inserted through the open end into the cavity of the sock.

The present disclosure relates to cleaning tools with a removable, replaceable and/or exchangeable sock or cleaning pad. In particular, the present disclosure provides for a cleaning tool with a shaft having a handle and a tool head, and a sock  
10 that can be removably attached to the tool head. The sock can be removed and cleaned when it becomes soiled, or can be discarded when it becomes worn, or can be exchanged with a different style sock or cleaning pad based on the type of surface or soil being cleaned.

An exemplary embodiment of the cleaning tool 1 is shown in FIGURE 1.  
15 According to an embodiment, the cleaning tool 1 includes a shaft 10 and a removable sock 20. The shaft 10, shown in FIGURE 2A, has a length L10 extending from a proximal end 12 to a distal end 11. The shaft 10 includes a handle 140 at the proximal end 12 and a tool head 110 at the distal end 11.

According to embodiments, the tool head 110 extends from a distal end of  
20 the handle 140. For example, the tool head 110 may extend from a neck 142 and/or a transition portion 143 of the handle 140. The handle 140 may have a round, semi-round, oval, oblong, square, rounded square, rectangle, rounded (and/or flattened) rectangle, or any other suitable transverse cross sectional shape. The neck 142 may  
25 comprise a narrowing portion of the handle 140, having a smaller cross dimension at the end connected to the tool head 110 than the gripping portion 141 of the handle 140, as shown in the exemplary embodiment in FIGURES 2B-2D. The transition portion 143 may be a funnel-like portion that transitions from the cross section of the handle 140 and/or the neck 142 to the cross section of the tool head 110. In the  
30 embodiments shown, the transition portion 143 provides a smooth transition from the handle 140 to the tool head 110 without sharp corners or edges.

The tool head 110 includes a first side 111 and a second side 112 opposite of the first side 111, where the first and second sides 111, 112 are major sides, and lateral sides 115, where the lateral sides 115 are minor sides. The first and second sides 111, 112 of the tool head 110 define a proximal end 114 adjacent the transition portion 143 and a distal end 113 opposite of the proximal end 114. The first and second sides 111, 112 may be disposed parallel to one another, and may be parallel to the longitudinal axis A of the shaft 10.

The tool head 110 may be generally coaxially aligned with the central longitudinal axis A of the handle 140, or may be offset from the axis A. For example, the tool head 110 can be offset by a distance D111 from the axis A, as shown in FIGURE 2B. In one embodiment, the distance D111 is about 0.2 to about 1 inch, or about 0.3 to about 0.75 inches. In one particular embodiment, the distance D111 is about 0.5 inches. In other embodiments, the offset may be greater to accommodate a more ergonomic design of the cleaning tool 1. For example, the distance D111 may be up to about 2 to about 3 inches.

In one embodiment, the tool head 110 is offset such that one or both of the flat surfaces (e.g., the first and/or second sides 111, 112) of the tool head 110 are parallel to the central axis A. In alternative embodiments, the tool head 110 may be disposed in an angle relative to the central axis A, or may be curved about an axis parallel to central axis A or about an axis transverse thereto. The orientation of the tool head 110 may be designed and constructed for a specific cleaning task or an appliance to be cleaned.

The tool head 110 may have an elongated shape extending from the transition portion 143. The tool head 110 may have an approximately rectangular shape, or any other suitable shape, such as oblong, oval, triangular, square, etc. The tool head 110 may have a generally flat transverse cross section (e.g., a flattened and/or rounded rectangle or oval), as shown in FIGURES 2B-2D. In alternative embodiments, the tool head 110 may have a more rounded cross section, such as an oblong, oval, or round cross section. The shape of the tool head 110 may be designed and constructed for a specific cleaning task or an appliance to be cleaned.

The cleaning tool 1 can be constructed for use as a universal cleaning tool with a tool head 110 having a size that is suitable for most cleaning applications. Alternatively, the cleaning tool 1 can be constructed for a specific cleaning application, such as for cleaning a specific appliance, e.g., a grill, a fryer, or a universal holding cabinet (“UHC”). The cleaning tool 1 can also be constructed so that it can be used either with or without an extension handle.

The tool head 110 may have any suitable size. For example, the tool head 110 may have a length L110 of about 2 to about 12 inches, about 2.5 to about 10 inches, or about 3 to about 8 inches. In one embodiment, the tool head 110 has a length L110 of about 3 to 4 inches. In another embodiment, the tool head 110 has a length L110 of about 4 to 5 inches. The tool head 110 may have a width W110 of about  $\frac{3}{4}$  to about 6 inches, about 1 to about 4 inches, or about 1.25 to about 3 inches. The cleaning tool 1 can be constructed to be used to clean equipment that has narrow channels or spaces. For example, the cleaning tool 1 can be constructed with a tool head 110 that fits into narrow channels or spaces, where the tool head 110 has a width W110 of about 0.5 to about 2.5 inches, about 1.0 to about 2.25 inches, or about 1.25 to about 2.0 inches.

An exemplary embodiment of a sock 20 to be mounted on the tool head 110 is shown in FIGURES 3A and 3B. The sock 20 may have a tube-like or pocket-like construction comprising a first side 21 and a second side 22, where the first and second sides 21, 22 are attached along three edges (e.g., two lateral side edges and a top edge) with an opening 28 at the proximal end 25 of the sock 20. The sock 20 may alternatively have a tubular construction that does not have separate sides but rather a cylindrical body. The cylindrical body may be closed at the distal end of the sock 20.

The sock 20 has a width W20 and length L20 that approximately correspond to the width W110 and length L110 of the tool head 110 such that the sock 20 can be slidably mounted onto the tool head 110 by inserting the tool head 110 through the opening 28. In one embodiment, where the tool head 110 has a round transverse cross-sectional shape, the sock 20 has a circumference that fits around the tool head 110.

The sock 20 may be provided with slits 27 or partial openings along the lateral side edges near the proximal end 25 to help with mounting and removing of the sock 20. The slits 27 may extend about 10 %, about 15 %, about 20 %, about 25 %, or up to about 50 % of the length L20 of the sock 20 from the proximal end 25.

5 In one exemplary embodiment shown in FIGURE 10, the sock 20 has a length L20 of about 4 to about 5 inches, and includes a slit 27 on one or both lateral sides of the sock 20 extending about 1 to 2 inches from the opening at the proximal end of the sock 20.

The tool head 110 and the removable sock 20 can include a fastening  
10 mechanism 300, as shown in FIGURE 1. The fastening mechanism 300 is constructed to retain the sock 20 on the tool head 110 when the sock 20 is mounted on the tool head 110 and when the cleaning tool 1 is in use. Further, the fastening mechanism 300 is constructed to be uncoupled so that the sock 20 can be removed.

The fastening mechanism 300 can comprise at least one fastener 30 on the  
15 sock 20 for fastening the sock 20 onto the tool head 110. The fastener 30 may, for example, include a first coupling member 31 and a second coupling member 32, as shown in FIGURE 3B. The fastener 30 can comprise a snap closure, a hook-and-loop closure, a latch, a clasp, a button closure, a magnetic closure, or other suitable closure mechanism. The first coupling member 31 can be positioned on the first side  
20 21 of the sock 20, and the second coupling member 32 on the second side 22. The first and second coupling members 31, 32 can be constructed to be coupled with each other, or with a coupling member on the tool head 110. Each of the first and second coupling member 3, 32 include a coupling side constructed to couple with a coupling side on a corresponding other coupling member either on the other side of  
25 the sock 20 or on the tool head 110. If the sock 20 is provided with one or more slits 27, the one or more slits 27 may extend from the proximal end 25 at least to or past the vertical position of the first and second coupling members 31, 32 along a longitudinal axis of the sock 20.

In the exemplary embodiment shown, the tool head 110 includes a through  
30 hole 130 that aligns with the fastener 30 on the sock 20 when the sock 20 is mounted on the tool head 110 and facilitates coupling of the first and second coupling

members 31, 32. Although the fastening mechanism 300, including the through hole 130 and the fastener 30, is shown as a single button positioned approximately centered at the proximal end of the sock 20, the type, number, and location of the fastening mechanism 300 could vary and is not limited to the exemplary

5 embodiment shown. For example, the cleaning tool 1 could include a plurality of fastening mechanisms 300, or the fastening mechanism(s) 300 could be positioned at different locations, such as off center, or on both sides of the center, or further away from the proximal end 25. A hook-and-loop fastening mechanism 300 could extend from one side edge of the sock 20 to the other side edge. The fastening mechanism

10 300 can also be positioned on or around the handle 140, such as the transition portion 143 or the neck 42. The fastening mechanism 300 could also have a different shape or size, for example in the event that the fastening mechanism 300 includes a hook-and-loop type closure. If the shaft 10 includes a through hole 130, the through hole 130 can be any suitable shape to accommodate the fastener 30 on the pad 20.

15 For example, the through hole 130 can be round, oval, oblong, elongated, rectangular, etc.

In an alternative embodiment, the tool head 110 may include a coupling member that is constructed to couple with one or more coupling members on the sock 20. For example, if the fastening mechanism 300 includes snap buttons, the

20 tool head 110 may include one half of a snap button and the sock 20 may include a mating half of the snap button as the first and/or second coupling member 31, 32. The tool head 110 may include a portion of the fastening mechanism (e.g., a half of a snap button, hook-and-loop closure, button closure, or magnetic closure) on both sides (e.g., first side 111 and second side 112) of the tool head 110. The mating

25 halves of the fastening mechanism 300 can be arranged so that the sock 20 can be mounted on the tool head 110 with either side of the sock 20 (e.g., first side 21 or second side 22) facing the front of the cleaning tool 1.

In some embodiments, the cleaning tool 1 includes more than one fastening mechanism 300 for fastening the sock 20 to the tool head 110. The fasteners 30 on

30 the sock 20 and the through holes 130 or other coupling members on the tool head 110 are positioned such that each fastener 30 aligns with a through hole 130 or other coupling member.

The tool head 110 can further be provided with a roughened surface on the first side 111 and/or the second side 112 to provide friction and to further help keep the sock 20 mounted on the tool head 110. For example, the tool head 110' can be constructed with a plurality of bumps 116 as shown in FIGURES 4A-4D and 5A-5D  
5 to provide friction. In the exemplary embodiment shown, the bumps 116 are positioned on both sides (first side 111 and second side 112) of the tool head 110. However, the bumps 116 may also be positioned on one side only (e.g., first side 111 or second side 112), and may be positioned throughout the surface, or in a limited area, such as in the center area 117A only (see FIGURE 4F), in the distal  
10 area 117B only, on the sides 117C only, in the proximal area 117D only, or any combination thereof.

In one embodiment, the bumps 116 are absent from the proximal area 117D of the tool head 110' or the area near the through hole 130. In the exemplary embodiment shown in FIGURES 4A-4F, the bumps 116 extend from the proximal  
15 end 114 of the tool head 110' to approximately  $\frac{3}{4}$  of the way toward the distal end 113. In the alternative embodiment in FIGURES 5A-5F, the bumps 116' extend substantially all the way from the area near the through hole 130 to the distal end 113 of the tool head.

The bumps 116 can have any suitable size and shape to help retain the sock  
20 20 mounted on the tool head 110. For example, the bumps can be conical or pyramid-shaped having a cross diameter of about 0.5 to about 4 mm, about 1 to about 3 mm, or about 1.5 to about 2.5 mm, as shown in FIGURES 4A-4D. Or the bumps may be rectangular, as shown in FIGURES 5A-5D, having a length of about 2 to about 12 mm, or about 4 to 8 mm, and a width of about 0.5 to about 4 mm. The  
25 height of the bumps may be about 0.5 to about 4 mm, about 1 to about 3 mm, or about 1.5 to about 2.5 mm. The bumps may be distributed and/or oriented in any suitable arrangement or pattern, such as the exemplary grid patterns shown in FIGURES 4A and 5A. Combinations of various shapes, sizes, and patterns of bumps may also be used.

30 The tool head 110 may also include one or more laterally extending bumps 1161 that extend laterally from one or more of the lateral sides 115, as shown in

FIGURES 5A-5C. The laterally extending bumps 1161 may be positioned adjacent the distal end of the tool head 110, or between the distal end of the tool head 110 and a midpoint on a longitudinal axis of the tool head 110. The laterally extending bumps 1161 may be similar in size and shape to the bumps 116 discussed above.

5           The sock 20 can be made of any suitable material or combination of materials to provide a desired cleaning surface. For example, the sock 20 can include a scrub pad, a scour pad, a sponge, a cloth, or a mop-style fringe. The material of the sock can include man-made materials, such as nylon, polypropylene, polyester, polyethylene, polyurethane, melamine foam, microfiber, or natural or modified  
10 materials like cotton, bamboo, agave, rayon, viscose, lyocell, wool, metal, etc. The material can be woven, knitted, or non-woven. In embodiments where the sock 20 includes a fringe, the material of the fringe may be independently selected from the same materials as the sock 20. The sock 20 or a portion of the sock 20 may also include inclusions to provide abrasion, such as silicate, silicon carbide, aluminum  
15 oxide, steel wool, etc. The abrasive portion may be provided for various grades of abrasion, including a scratching or non-scratching abrasive. To impart different levels of abrasion, various grades of abrasive materials can be employed. The abrasiveness of the material generally depends from the hardness and particle size of the abrasive. For example, a softer abrasive with a finer particle size can be used to  
20 produce a non-scratching pad, whereas a harder abrasive with a coarser particle size can be used to produce a rougher pad. Similarly, if the sock 20 includes steel wool, the steel wool can be fine or coarse depending on the desired abrasiveness. Steel wool is generally available as extra coarse (grade 4), coarse (grade 3), medium coarse (grade 2), medium (grade 1), medium fine (grade 0), fine (grade 00), extra  
25 fine (grade 000), and finest (grade 0000). The coarser grades are typically used for cleaning or removing material, whereas the finer grades can be used for buffing. In some embodiments, the sock 20 is made without metal parts to avoid scratching or damaging the surfaces being cleaned.

          In some embodiments the sock 20 is constructed to be washable, e.g., by  
30 laundering the sock 20 in a laundry machine. In such embodiments, the sock 20 can be made without metal parts that could damage the laundry machine. In some

embodiments, the sock 20 is intended to be used for a period of time and then discarded. In some further embodiments, the sock 20 is intended for one-time use.

The sock 20 can be reinforced with a second layer of material or with a layer of different material. For example, the sock 20 may include a reinforcement in the  
5 area where the fastener 30 is located. The sock 20 or a portion of the sock 20 may further include extensions, such as a fringe, scraper, wiping blade, or brush bristles.

The first side 21 and the second side 22 of the sock 20 can be similar or different from one another. For example, one of the sides can be constructed to have a rough or abrasive surface for scrubbing, and the other side to have a smoother or  
10 softer surface for wiping. The sock 20 can also include a rough or abrasive material on only a portion of one or both of the first and second sides 21, 22. For example, one or both sides may include a rough or abrasive material near the distal end 24 or near the proximal end 25 of the sock 20. In one example, the sock 20 comprises a scrub pad or scour pad made from a non-woven material, such as a polyester or  
15 polypropylene web. In another example, the sock 20 comprises a microfiber cloth or fringe. For example, the sock 20 may include a mop-like fringe 26 attached to the first and/or second sides 21, 22 and/or to the lateral sides of the sock, or any combination thereof. In yet another example, the sock 20 includes a brush.

The shaft 10 can be constructed of any suitable material or combination of  
20 materials. For example, the shaft 10 can be constructed of plastic (e.g., polypropylene, polyethylene, PVC, polyester, polyacrylic, nylon, etc.), rubber, metal, carbon fiber, wood, bamboo, etc., or a combination thereof. In one exemplary embodiment, the shaft 10 has an integral (i.e., one piece), molded plastic construction.

The handle 140 may have any suitable length or may be extendable. For  
25 example, the handle 140 may be constructed to be used as a short hand tool having a length of about 4-8 inches. The handle 140 can be constructed to fit into a user's hand, having a gripping portion 141 extending from the proximate end 12 to the transition portion 143, and may include a gripping surface and/or an ergonomic  
30 design at the gripping portion 141 of the handle 140.

The handle 140 may also include a hollow center 146 accessible through an opening 145 at the proximal end 12 of the handle 140, as shown in FIGURE 4E. The hollow center 146 may be constructed to accept an extension handle 180. The handle 140 may further include a mechanism 144 (such as holes 144a, 144b) for securing  
5 the extension handle 180 into place.

An exemplary extension handle 180 is shown in FIGURES 6A-6C. The extension handle 180 can include a shaft 183 extending from a first end 181 to a second end 182, where the first end 181 can be constructed to be coaxially inserted into and received by the opening 145 at the proximal end 12 of the handle 140. The  
10 extension handle 180 may include a coupling mechanism 188 constructed to mate with the holes 144a, 144b on the handle 140. The second end may optionally include a hanging mechanism 185, such as a hook or a hole. The extension handle 180 can be made from the same material as the shaft 10 or from a different material. In one exemplary embodiment, the extension handle 180 has an integral, molded plastic  
15 construction.

According to an embodiment, the cleaning tool 1 is assembled by inserting the distal end 11 of the tool head 110 through the opening 28 at the proximal end of the sock 20. The sock 20 is slid onto the tool head 110 until the fastening  
20 mechanism 300 is aligned. For example, the sock 20 can be slid onto the tool head 110 until the first coupling member 31 and the second coupling member 32 are aligned with the through hole 130 on the tool head 110, and until the first and second coupling members 31, 32 can be couple with one another (e.g., pressed or snapped together). After the cleaning tool 1 is used for cleaning, the sock 20 can be removed by uncoupling the fastening mechanism 300 and pulling the sock 20 off the  
25 tool head 110. The sock 20 can be cleaned and reused, or can be disposed. The sock 20 can also be replaced with a different style cleaning sock. For example, a cloth or sponge sock for wiping can be replaced by a scouring pad.

The various embodiments and alternatives of the cleaning tool 1 discussed here can be included in any combination. In some embodiments, the cleaning tool 1  
30 includes a shaft 10 with a handle 140 and a tool head 110 extending from a neck 142 and/or a transition portion 143 of the handle, and a removable sock 20. The handle

140 may have a round, semi-round, oval, oblong, square, rounded square, rectangle, or rounded (and/or flattened) rectangle transverse cross sectional shape. The neck 142 may comprise a narrowing portion of the handle 140. The transition portion 143 may be a funnel-like portion. The tool head 110 may be generally coaxially aligned with the central longitudinal axis A of the handle 140, or may be offset from the axis A by at least about 0.2 or 0.3 inches and up to about 3 inches, 2 inches, 1 inch, 0.75 inches, or about 0.5 inches. One or both of the flat surfaces of the tool head 110 may be parallel to the central axis A, or the tool head 110 may be disposed in an angle relative to the central axis A, or may be curved. The tool head 110 may have an approximately rectangular shape, or may be oblong, oval, triangular, square, etc., and have a generally flat transverse cross section. The tool head 110 may have a length L110 of about 2 to about 12 inches, about 2.5 to about 10 inches, or about 3 to about 8 inches, and a width W110 of about 0.5 to about 2.5 inches, about 1.0 to about 2.25 inches, about 1.25 to about 2.0 inches, about  $\frac{3}{4}$  to about 6 inches, about 1 to about 4 inches, or about 1.25 to about 3 inches. A tube-like or pocket-like sock 20 is provided to be mounted on the tool head 110. The sock 20 may be provided with slits 27 or partial openings extending about 10 %, about 15 %, about 20 %, about 25 %, or up to about 50 % of the length L20 of the sock 20 from the proximal end 25. The sock 20 can include a scrub pad, a scour pad, a sponge, a cloth, or a mop-style fringe, and can be made of man-made materials, such as nylon, polypropylene, polyester, polyethylene, polyurethane, melamine foam, microfiber, or natural or modified materials like cotton, bamboo, agave, rayon, viscose, lyocell, wool, metal, etc. The material can be woven, knitted, or non-woven, and can be washable or disposable. The sock 20 or a portion of the sock 20 may also include inclusions to provide abrasion, such as silicate, silicon carbide, aluminum oxide, steel wool, etc. The sock 20 or a portion of the sock 20 may include extensions, such as a fringe, scraper, wiping blade, or brush bristles, and may be reinforced, for example, in the area where the fastener 30 is located. The first side 21 and the second side 22 of the sock 20 can be similar or different from one another. The tool head 110 and the sock 20 can include one or more fastening mechanisms 300 to retain the sock 20 on the tool head 110. The fastening mechanism 300 can comprise at least one fastener 30 on the sock, and may include first and second coupling members 31, 32, constructed to be coupled with each other, or with a coupling member on the tool head. The

fastener 30 can comprise a snap closure, a hook-and-loop closure, a latch, a clasp, a button closure, or a magnetic closure. The first coupling member 31 can be positioned on the first side 21 of the sock 20, and the second coupling member 32 on the second side 22. The tool head 110 may include a through hole 130 that facilitates coupling of the first and second coupling members 31, 32. The fastening mechanism(s) 300 could be positioned at different locations, such as centered, off center, on both sides of the center, further away from the proximal end 25, or on or around the handle 140, transition portion 143, or the neck 142. The tool head 110 can include a roughened surface positioned on both sides of the tool head 110, or on one side only, or in a limited area, such as in the center area 117A only, in the distal area 117B only, on the sides 117C only, in the proximal area 117D only, or any combination thereof. The bumps 116 of the roughened surface can be conical or pyramid-shaped having a cross diameter of about 0.5 to about 4 mm, about 1 to about 3 mm, or about 1.5 to about 2.5 mm, or rectangular having a length of about 2 to about 12 mm, or about 4 to 8 mm, a width of about 0.5 to about 4 mm, and a height of about 0.5 to about 4 mm, about 1 to about 3 mm, or about 1.5 to about 2.5 mm. The tool head 110 may also include one or more laterally extending bumps 1161. The shaft 10 can be constructed of plastic (e.g., polypropylene, polyethylene, PVC, polyester, polyacrylic, nylon, etc.), rubber, metal, carbon fiber, wood, bamboo, etc., or a combination thereof. The handle 140 may have any suitable length, e.g., about 4-8 inches, or may be extendable. The handle 140 may also include a hollow center 146 for coupling with an extension handle.

## EXAMPLES

Various embodiments of the cleaning tool were constructed. In each instance, the shaft of the cleaning tool was constructed from molded plastic.

### Example 1A

A cleaning tool was constructed with a sock constructed from a polymer scrub pad material for high temperature applications. The sock included a slit extending on each side of the sock about 1 inch from the proximal end of the sock.

The sock was provided with a snap button, and a corresponding mating portion of the snap button was provided on the shaft. The cleaning tool is shown in FIGURE 7.

### **Example 1B**

5 The sock was constructed as in Example 1A. The shaft was constructed with a through hole in the tool head. The sock was provided with a snap button that could be aligned with and coupled through the hole in the tool head. The cleaning tool is shown in FIGURES 8A and 8B.

### **Example 2**

10 A cleaning tool was constructed with a sock constructed with woven base layer and a fringe attached to the outside of the base layer on both the first side and the second side. The sock was provided with a snap button closure, where the first half of the snap button was placed on the first side of the sock and the second half of the snap button on the second side of the sock. The sock is shown in FIGURE 9A, and mounted on a shaft in FIGURE 9B.

15

While certain embodiments of the invention have been described, other embodiments may exist. While the specification includes a detailed description, the invention's scope is indicated by the following claims. The specific features and acts described above are disclosed as illustrative aspects and embodiments of the invention. Various other aspects, embodiments, modifications, and equivalents thereof which, after reading the description herein, may suggest themselves to one of ordinary skill in the art without departing from the spirit of the present invention or the scope of the claimed subject matter.

20

## CLAIMS

What is claimed is:

1. A cleaning tool comprising:
  - (a) a shaft extending from a proximal end to a distal end, the shaft comprising a handle at the proximal end and a tool head at the distal end, the tool head comprising first and second major sides extending longitudinally from the handle; and
  - (b) a sock removably mountable on the tool head, the sock comprising a pocket with an opening for inserting the tool head, wherein the tool head comprises a through hole, and the sock comprises a fastener comprising a first coupling member and a second coupling member, and wherein the first and second coupling members are constructed to align with and couple through the through hole on the tool head.
2. The cleaning tool of claim 1, wherein the fastener comprises a snap button.
3. The cleaning tool of claim 2, wherein the fastener comprises a hook and loop fastener.
4. The cleaning tool of any one of claims 1-3, wherein the sock comprises a scour pad or a scrub pad.
5. The cleaning tool of any one of claims 1-3, wherein the sock comprises a mop fringe.
6. The cleaning tool of claim 5, wherein the pocket comprises a first material and the mop fringe comprises a second material.
7. The cleaning tool of any one of claims 1-6, wherein the shaft has a center axis, and wherein the tool head is disposed in a plane that is offset from the center axis.

8. The cleaning tool of any one of claims 1-7, wherein the shaft is extendable.
9. The cleaning tool of claim 8, wherein the shaft comprises a hollow center, and wherein the cleaning tool further comprises comprising an extension handle that can be coupled with the hollow center of the shaft.
10. The cleaning tool of any one of claims 1-9, wherein the first and second major sides of the shaft are positioned parallel to and offset from a longitudinal axis of the shaft.
11. The cleaning tool of any one of claims 1-10, wherein the tool head comprises a plurality of through holes and the sock comprises a plurality of corresponding fasteners.
12. The cleaning tool of any one of claims 1-10, wherein the tool head comprises first and second minor sides extending parallel to the first and second major sides, and one or more bumps extending laterally from one or both of the first and second minor sides, wherein the bumps are constructed to provide friction for the sock.
13. A cleaning tool comprising:
  - (a) a shaft extending from a proximal end to a distal end of the cleaning tool, the shaft comprising a handle at the proximal end and a tool head at the distal end, the tool head comprising first and second major sides extending longitudinally from the handle; and
  - (b) a sock removably mountable on the tool head, the sock comprising a pocket with an opening for inserting the tool head, wherein the tool head comprises one or more coupling members and the sock comprises one or more corresponding coupling members constructed align with and couple with the one or more coupling members on the tool head.

14. The cleaning tool of claim 13, wherein the coupling members on the tool head and the corresponding coupling members on the sock comprise one or more snap buttons.

15. The cleaning tool of either one of claim 13 or 14, wherein the coupling members on the tool head and the corresponding coupling members on the sock comprise one or more hook and loop fasteners.

16. The cleaning tool of any one of claims 13-15, wherein the sock comprises a scour pad or a scrub pad.

17. The cleaning tool of any one of claims 13-16, wherein the sock comprises a mop fringe.

18. The cleaning tool of claim 17, wherein the pocket comprises a first material and the mop fringe comprises a second material.

19. The cleaning tool of any one of claims 13-18, wherein the shaft has a center axis, and wherein the tool head is disposed in a plane that is offset from the center axis.

20. The cleaning tool of any one of claims 13-19, wherein the shaft is extendable.

21. The cleaning tool of claim 20, wherein the shaft comprises a hollow center, and wherein the cleaning tool further comprises comprising an extension handle that can be coupled with the hollow center of the shaft.

22. The cleaning tool of any one of claims 13-21, wherein the first and second major sides of the shaft are positioned parallel to and offset from a longitudinal axis of the shaft.

23. The cleaning tool of any one of claims 13-22, wherein the tool head comprises coupling members and the sock comprises a plurality of corresponding coupling members.

24. The cleaning tool of any one of claims 13-23, wherein the tool head comprises first and second minor sides extending parallel to the first and second major sides, and one or more bumps extending laterally from one or both of the first and second minor sides, wherein the bumps are constructed to provide friction for the sock.

FIG. 1

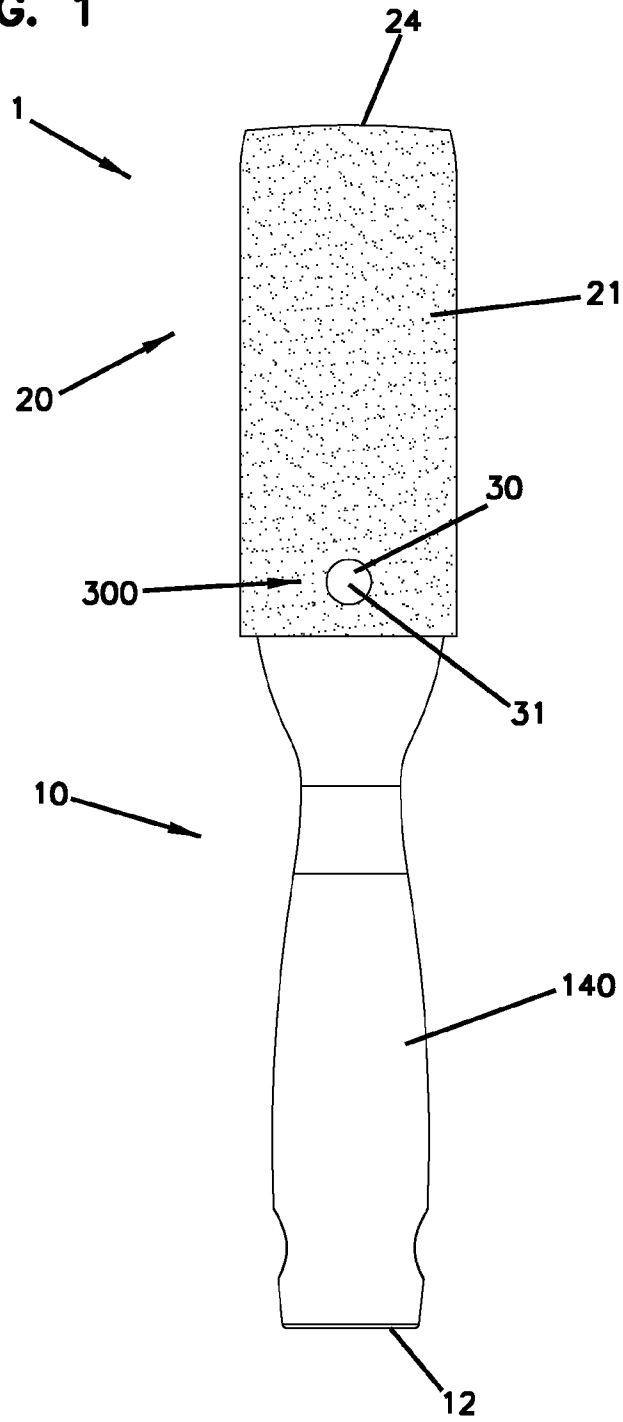


FIG. 2A

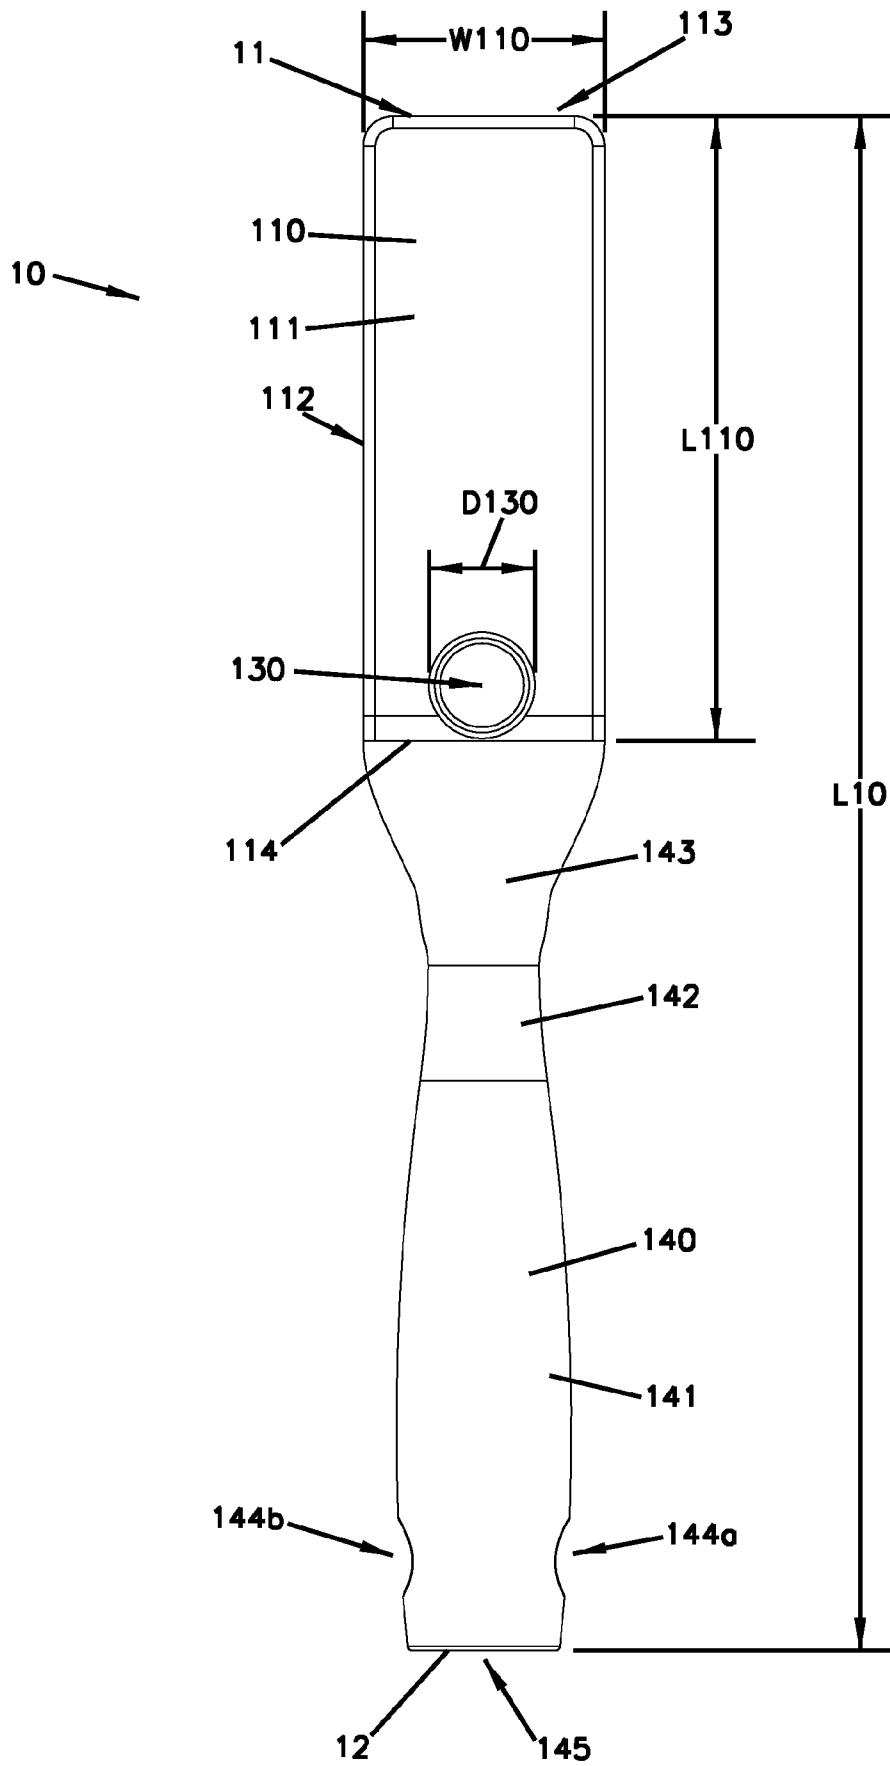


FIG. 2B

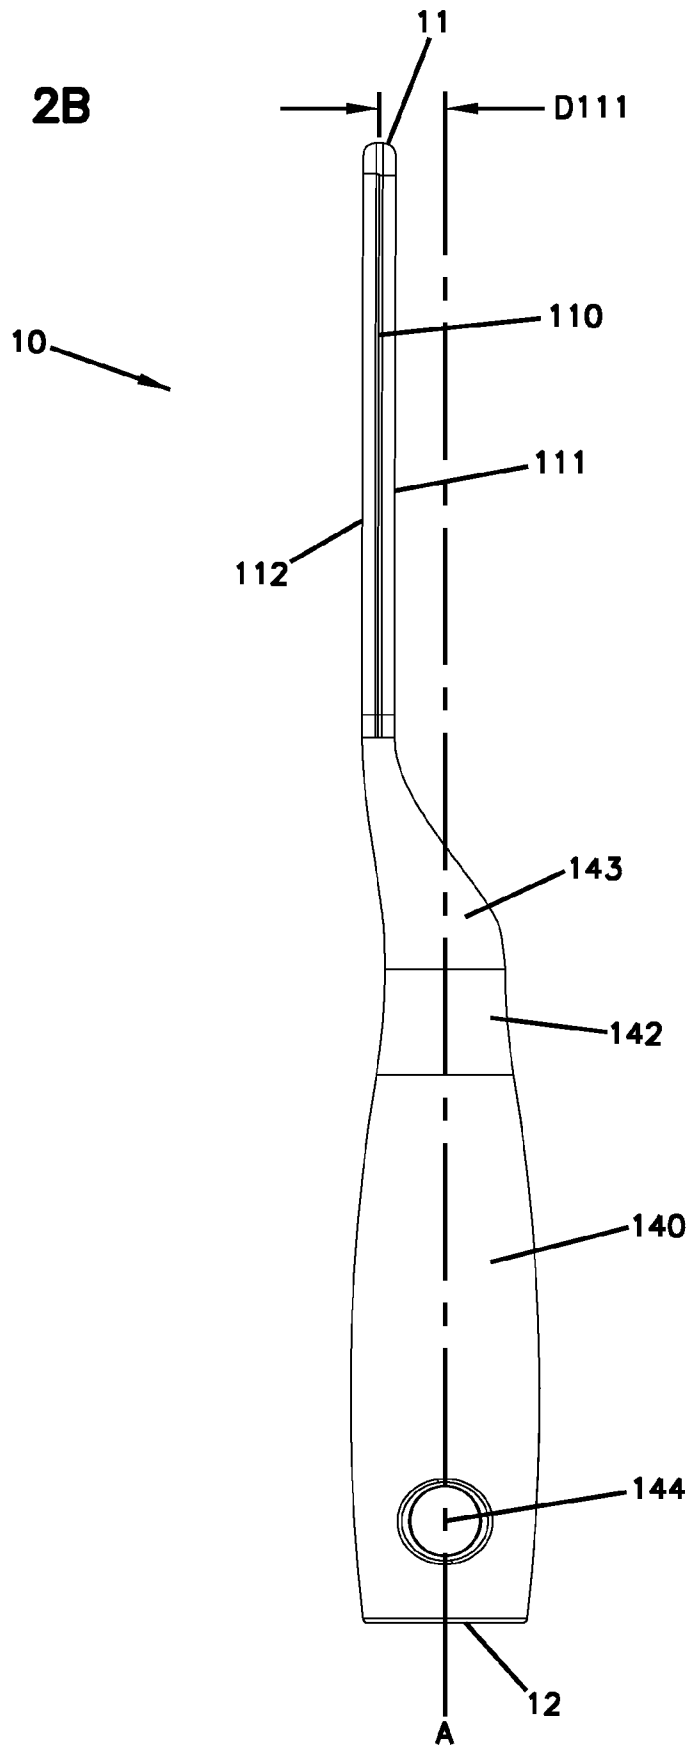


FIG. 2C

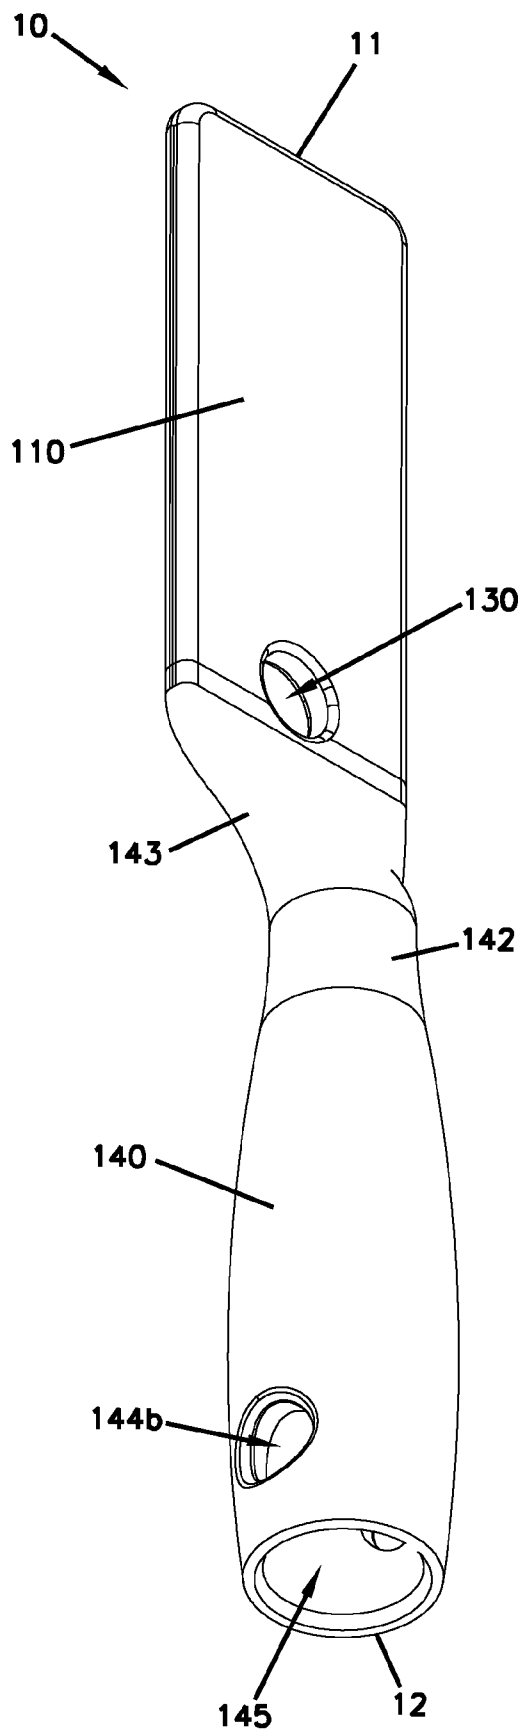


FIG. 2D

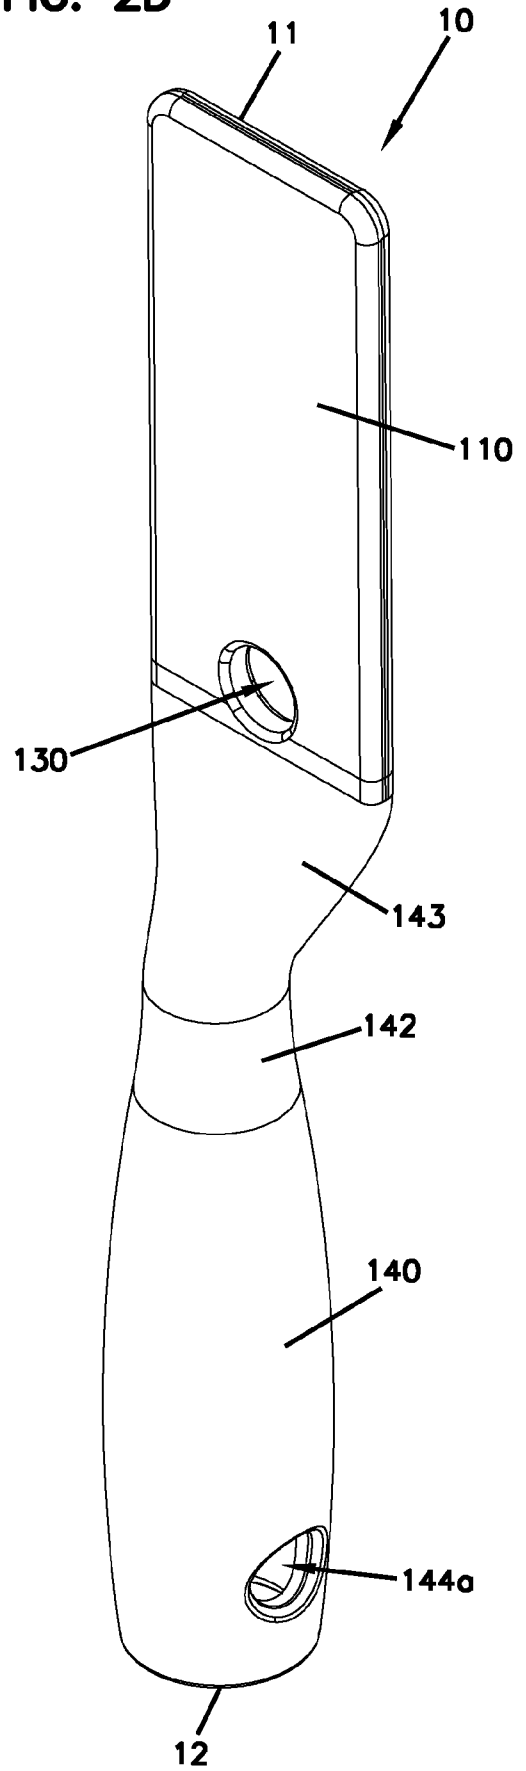


FIG. 3A

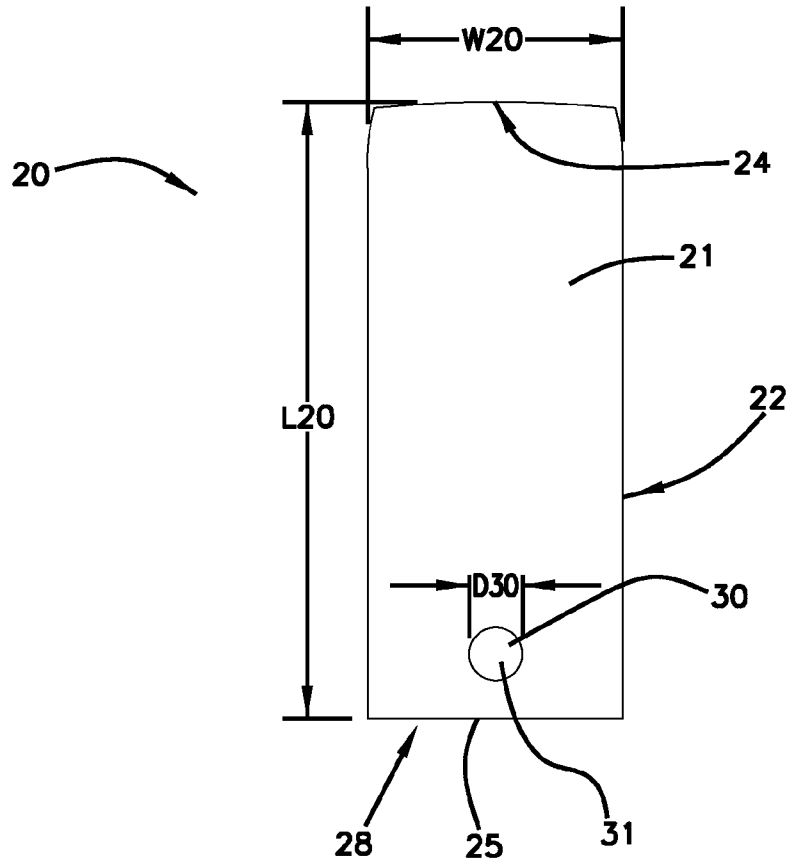
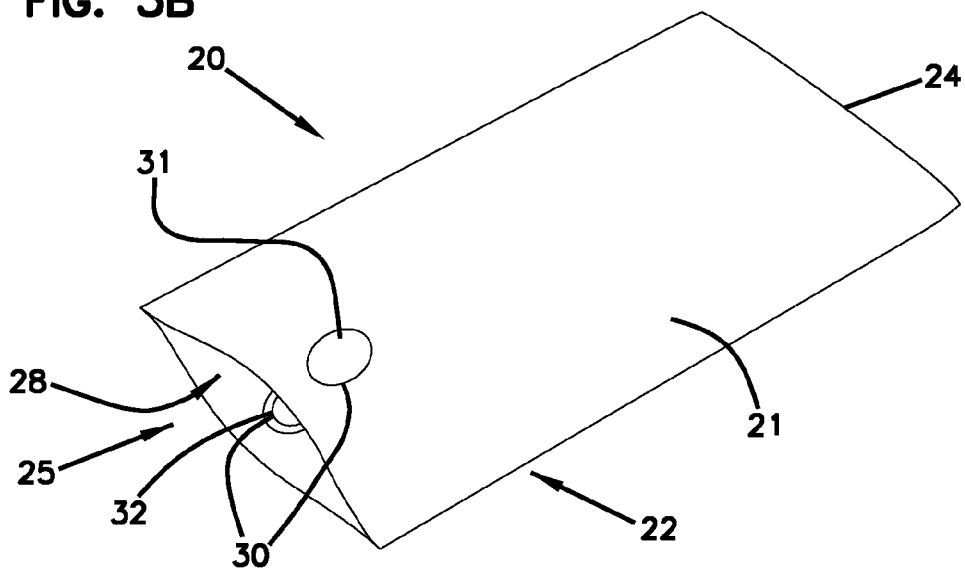
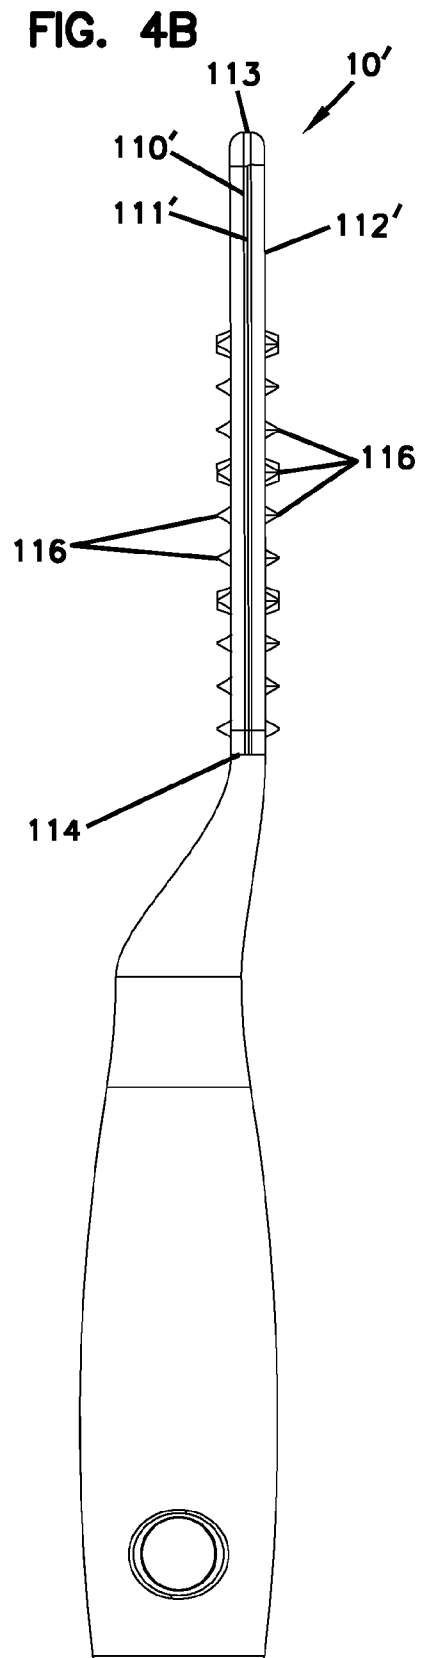
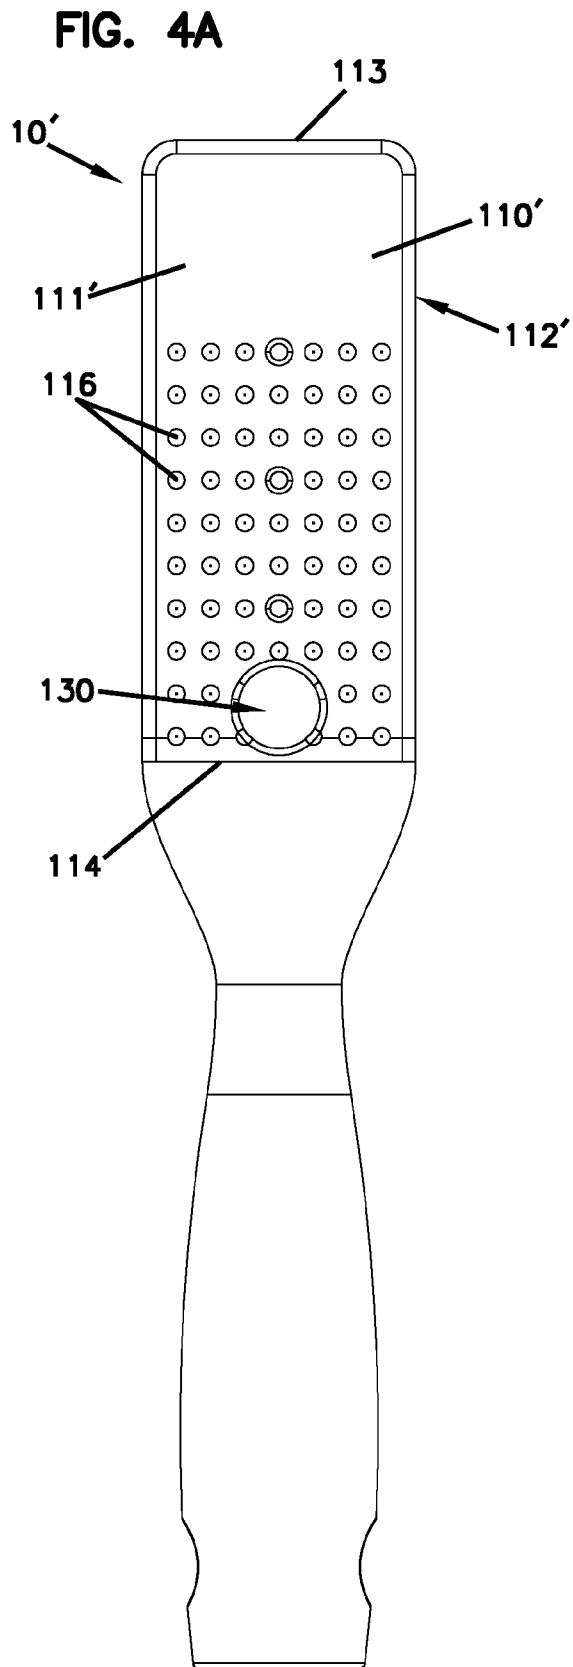


FIG. 3B





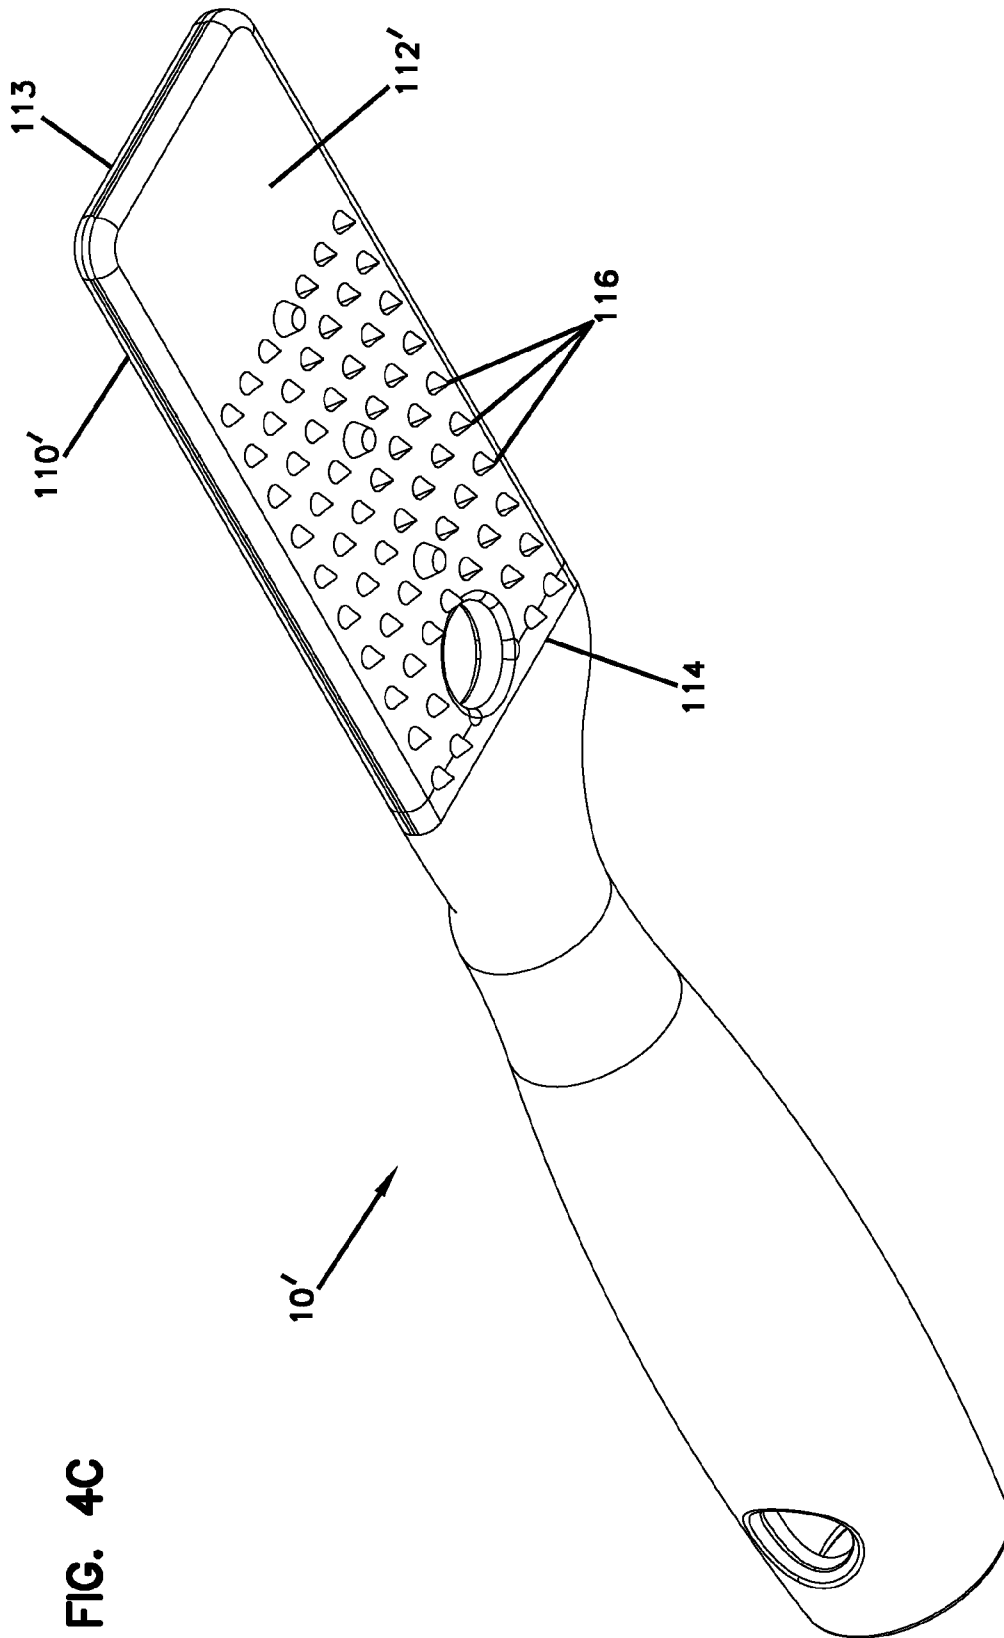


FIG. 4C

FIG. 4D

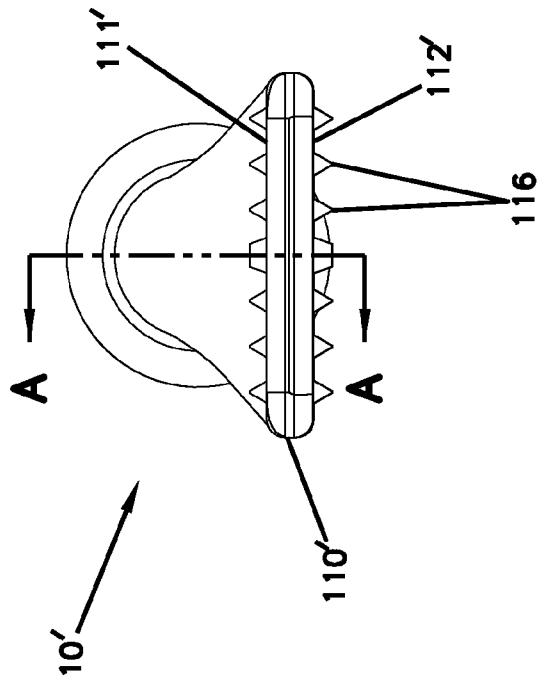


FIG. 4E





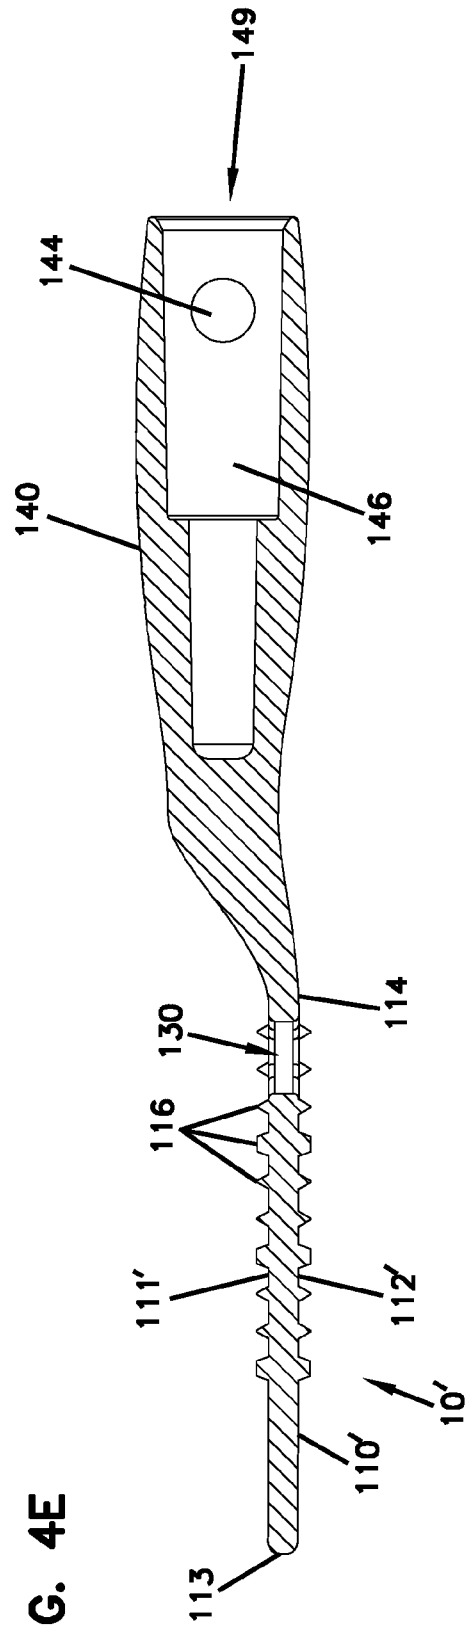


FIG. 4F

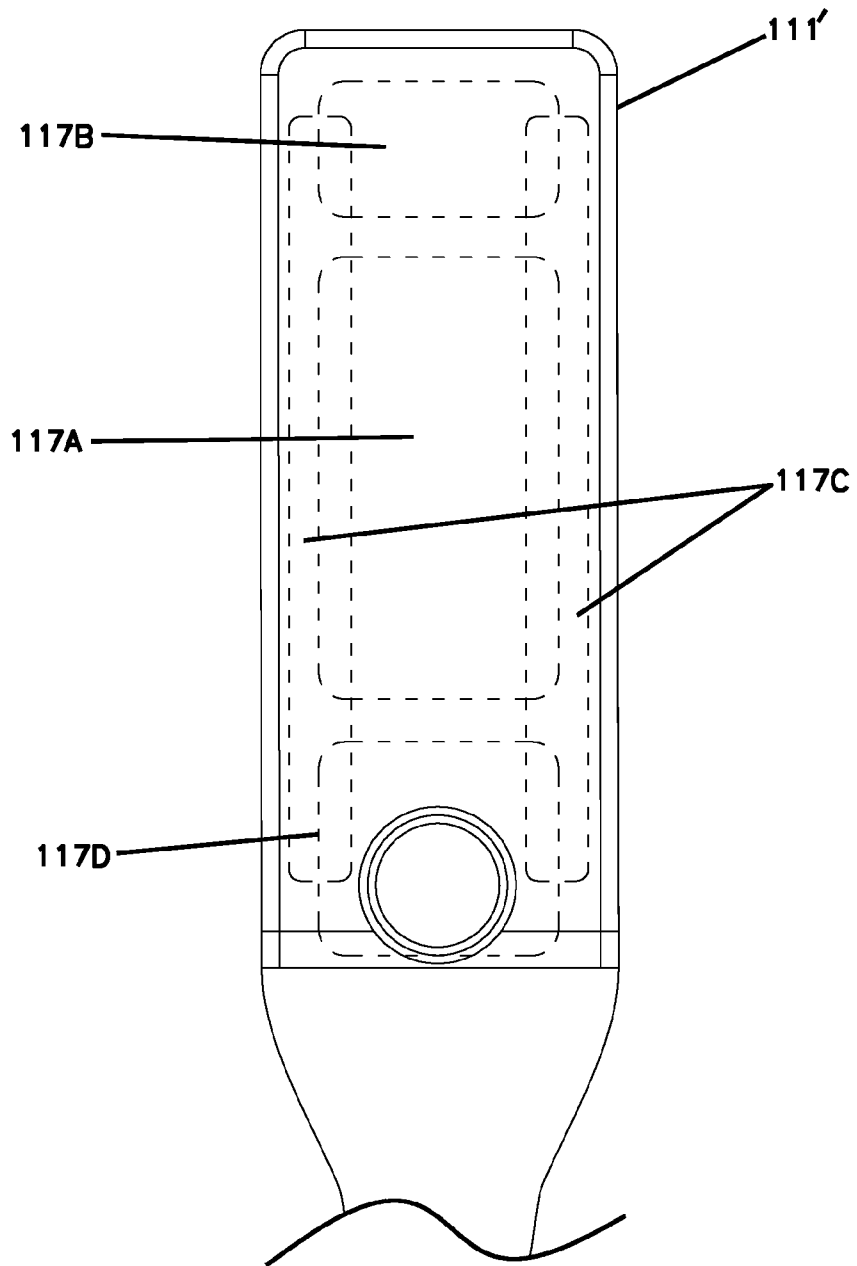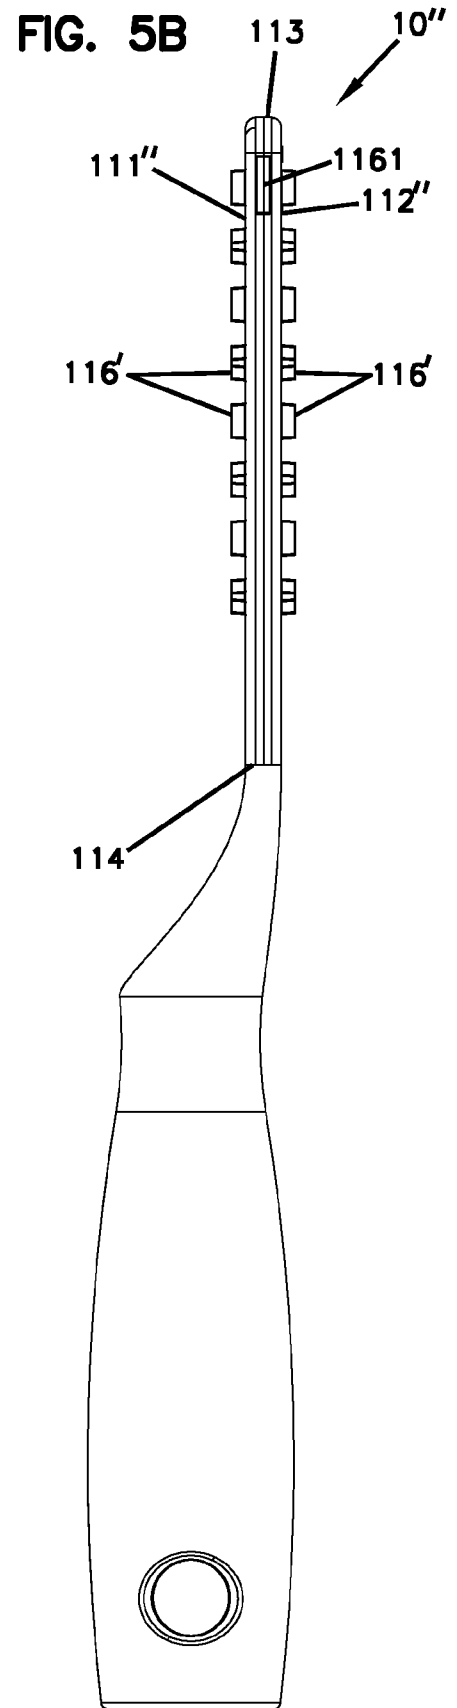

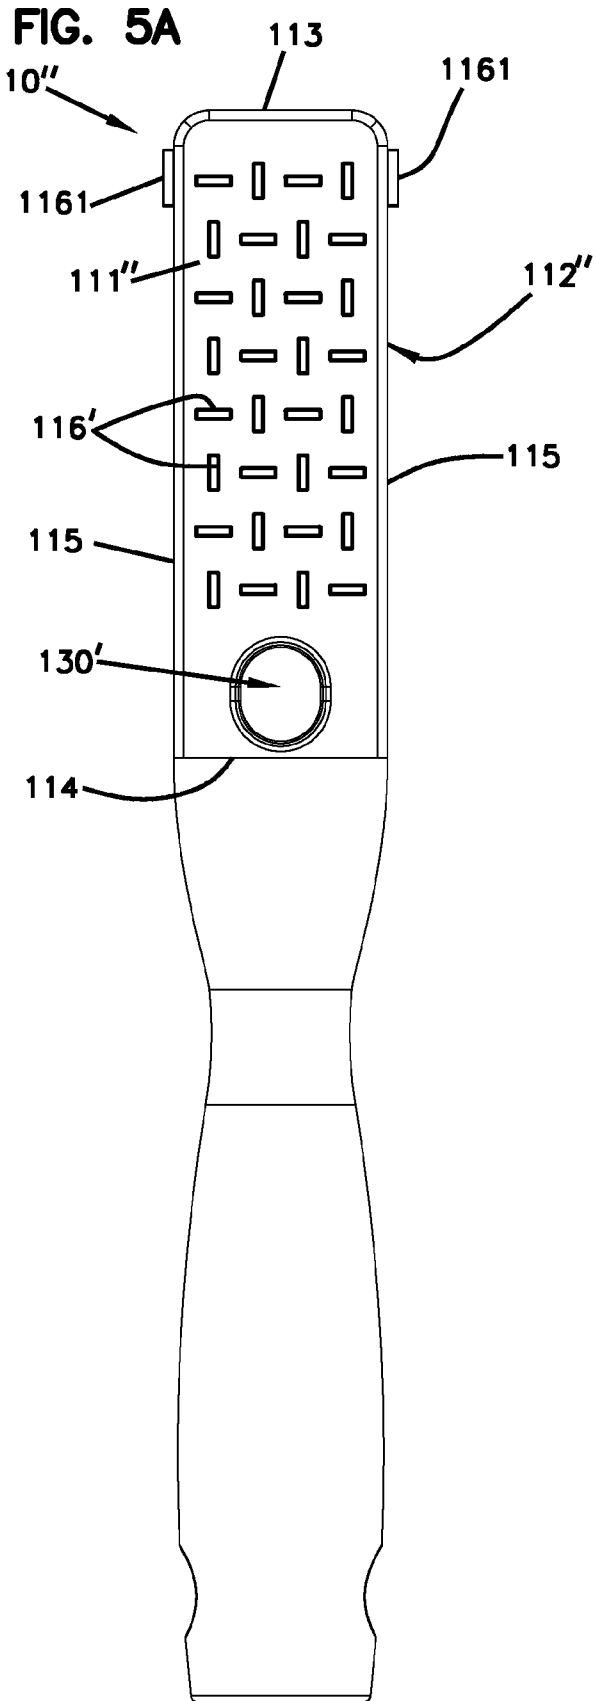

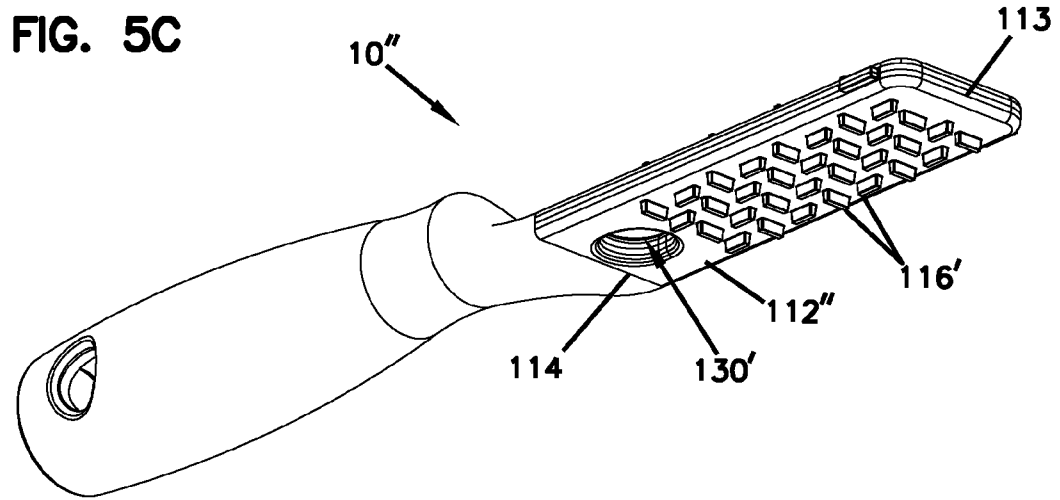

**FIG. 5D**

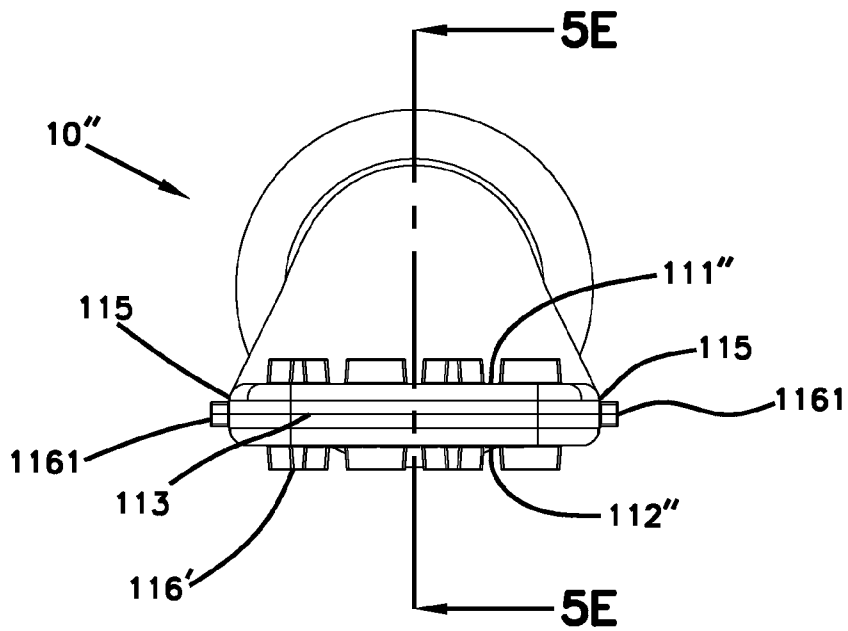


FIG. 5E

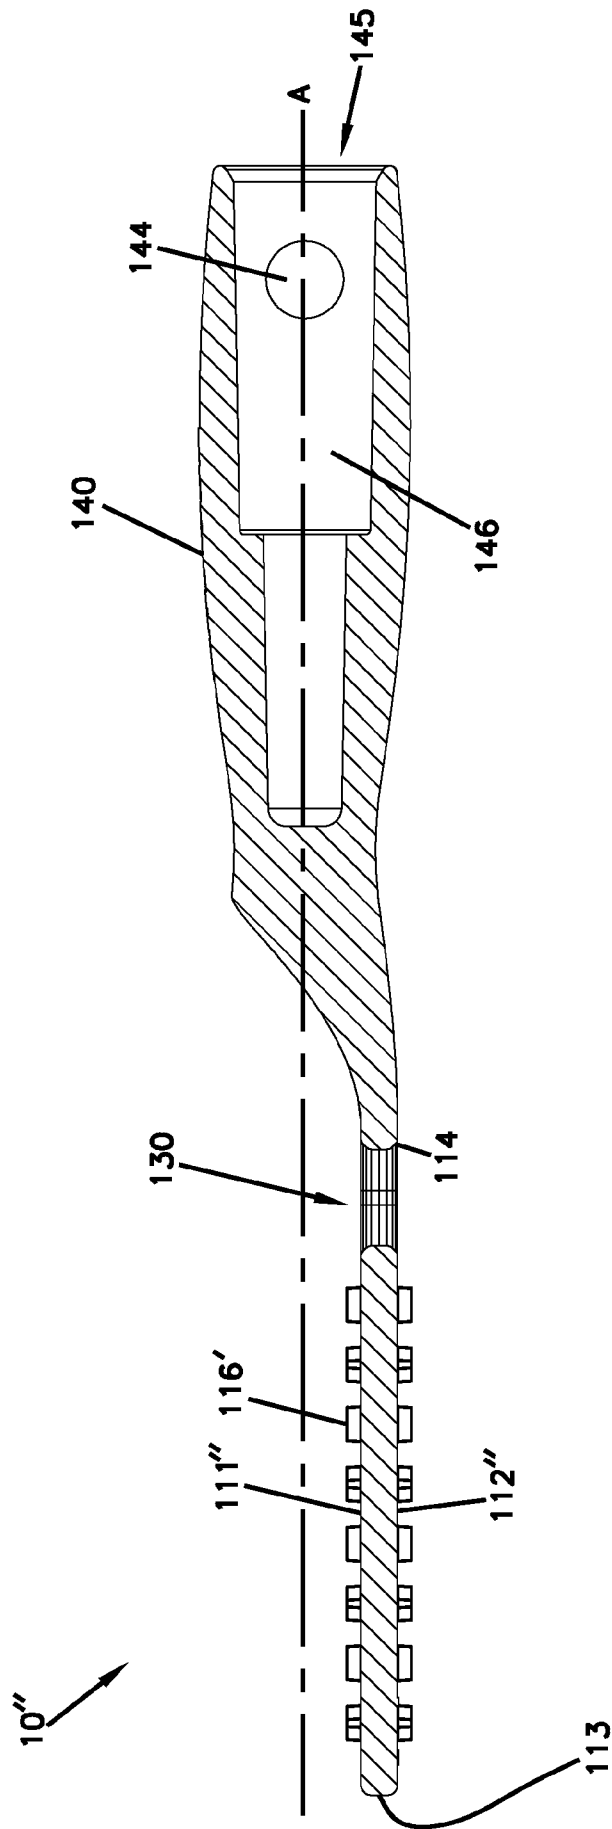


FIG. 6A

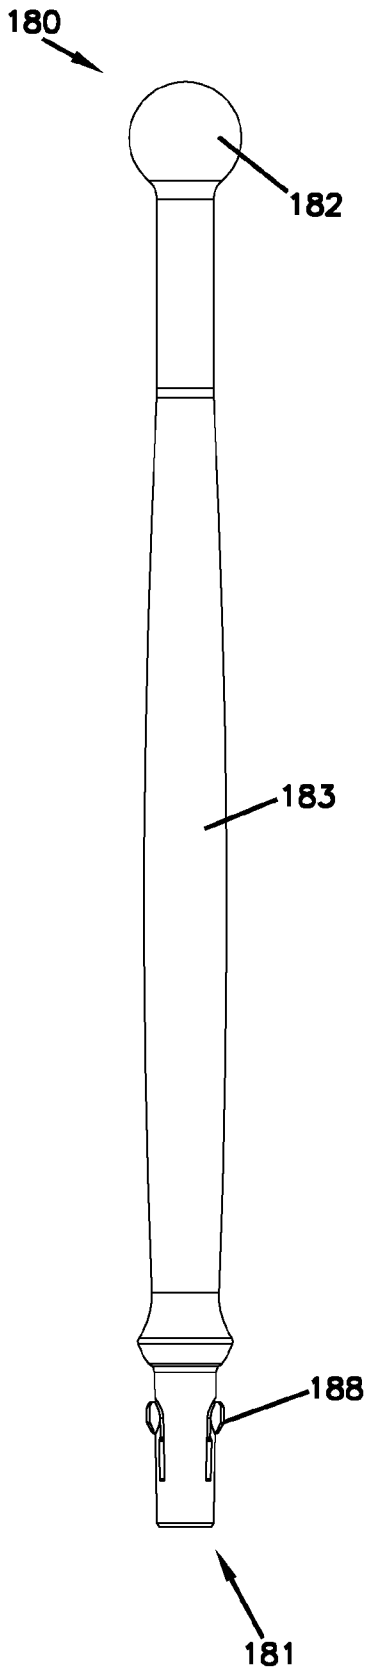


FIG. 6B




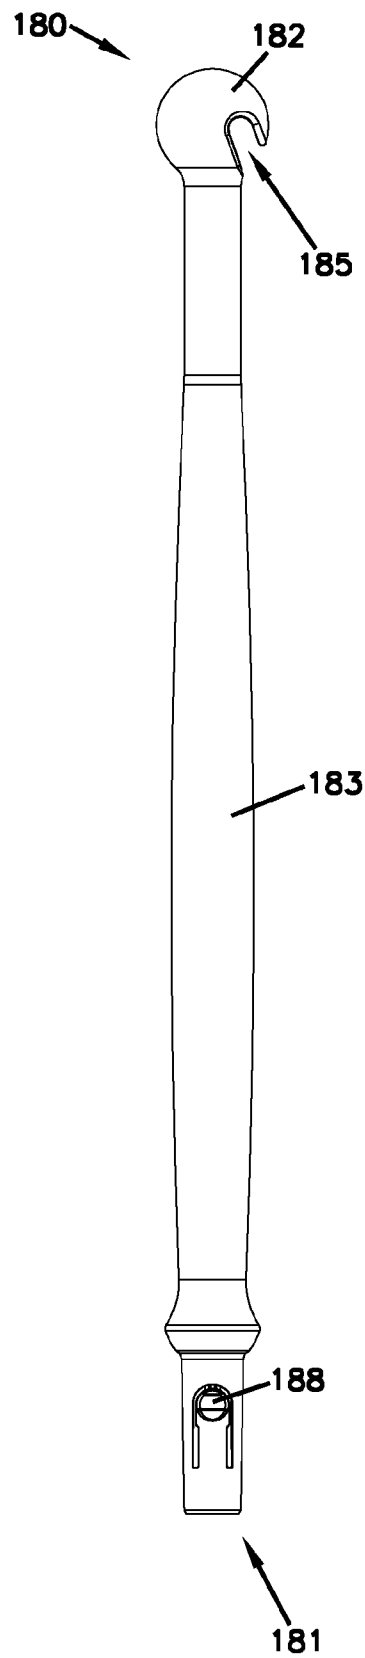


FIG. 6C

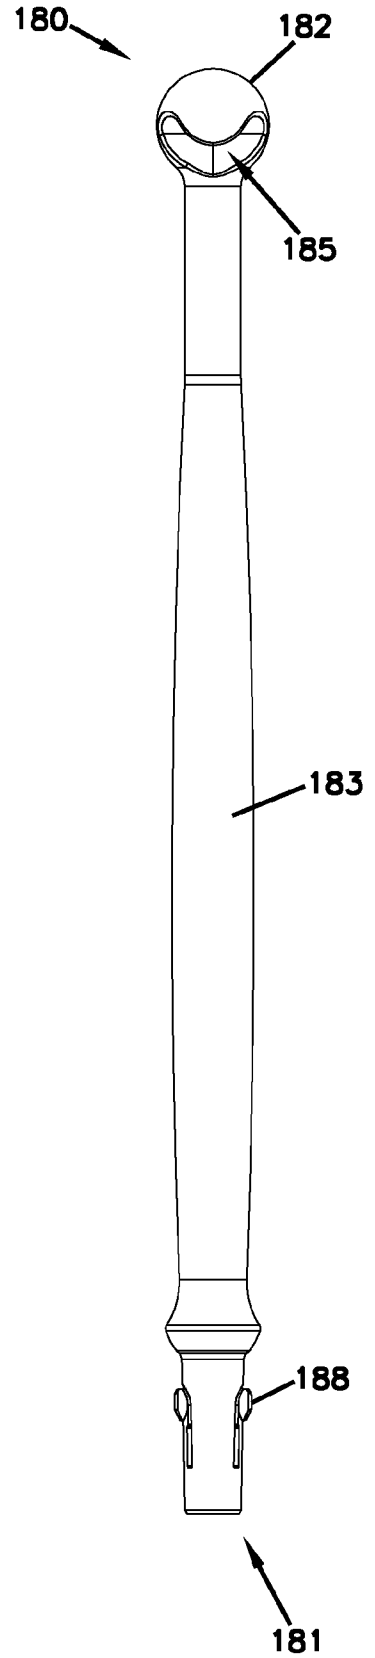


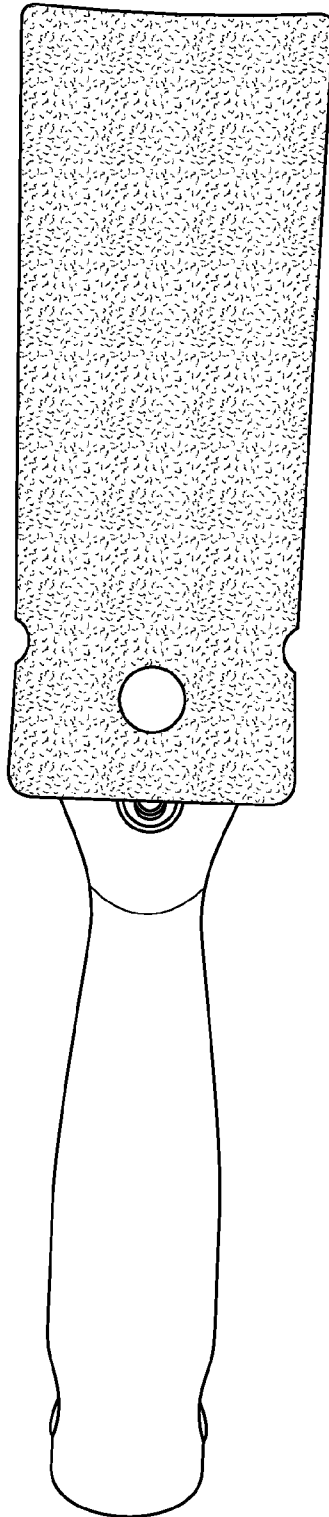


**FIG. 7**

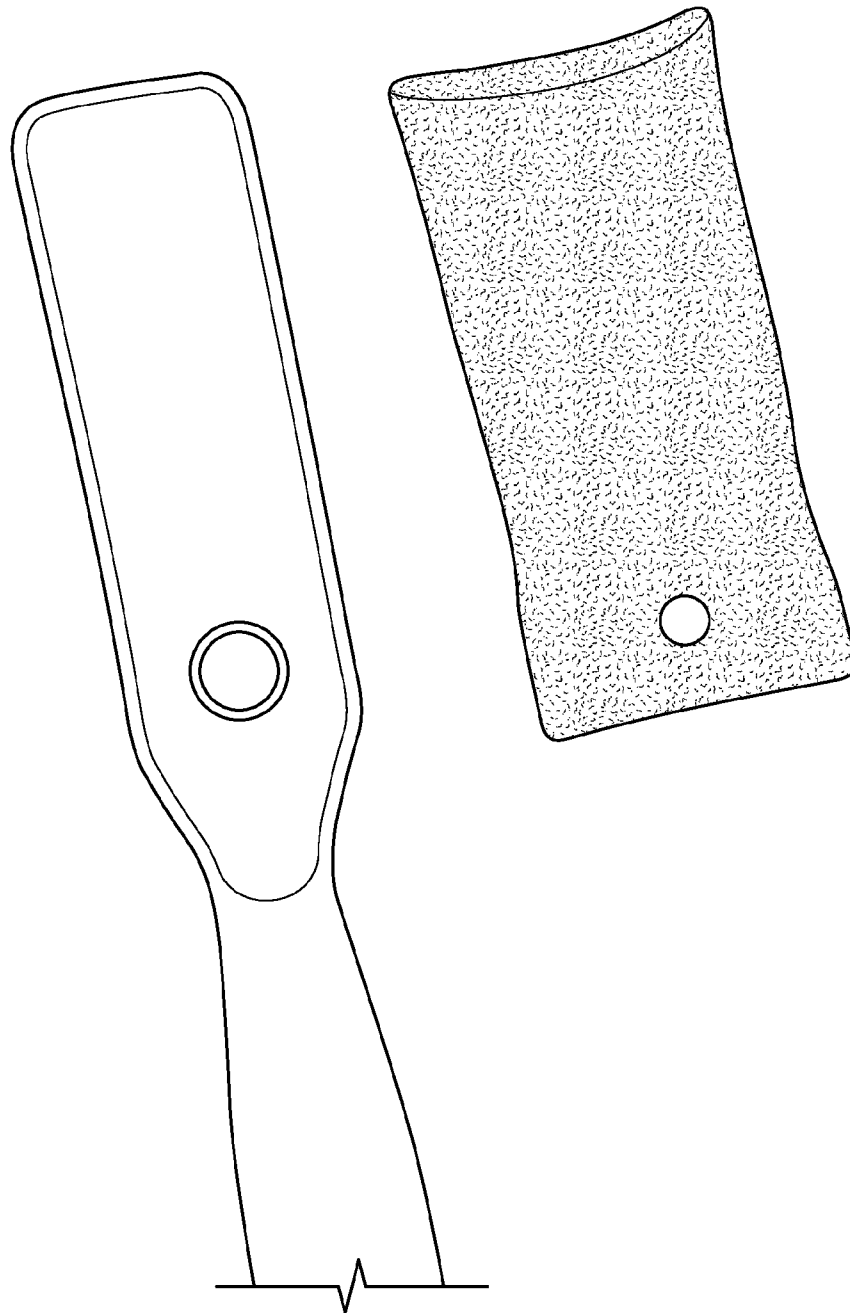


**FIG. 8A**

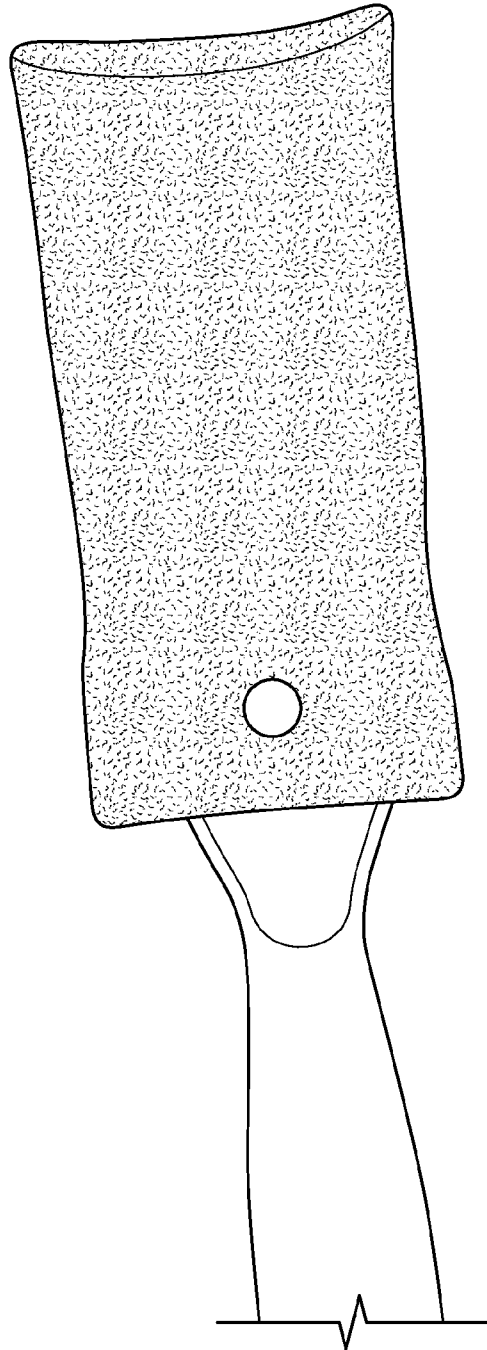


**FIG. 8B**

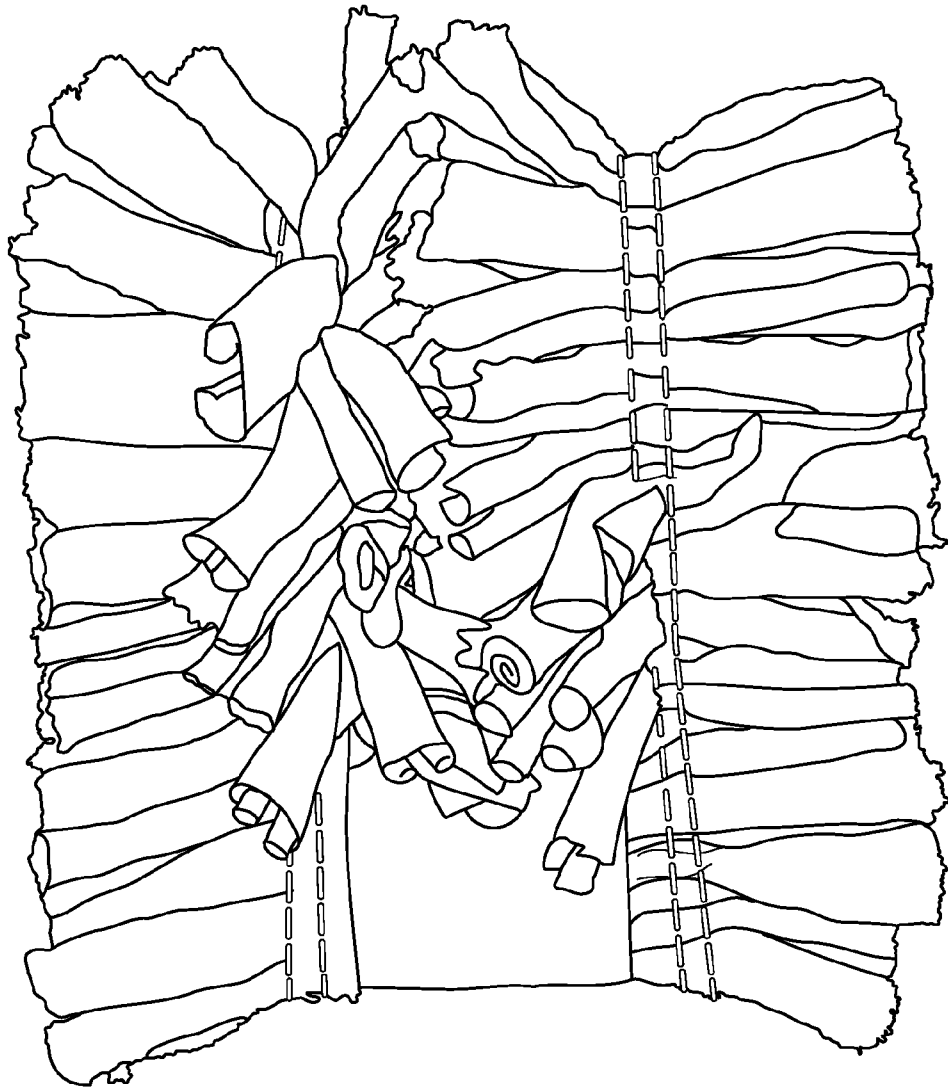

**FIG. 9A**

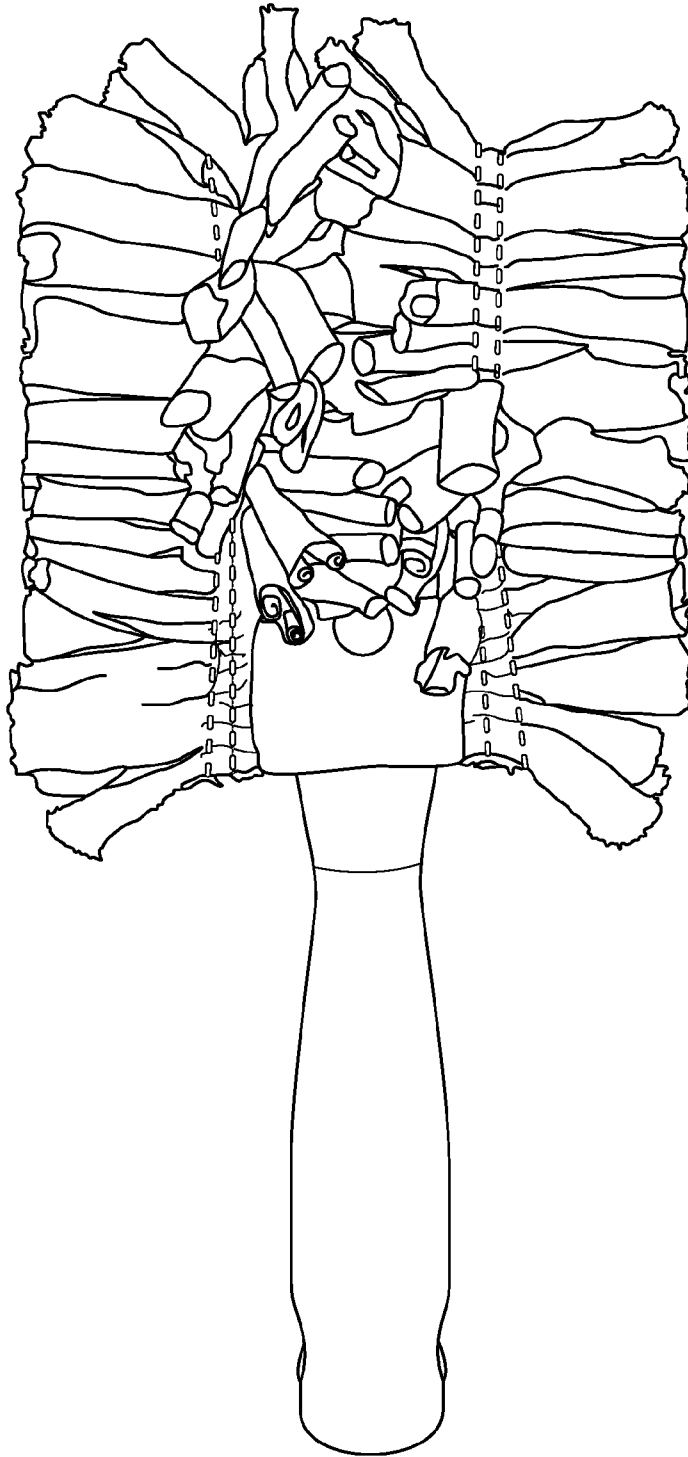

**FIG. 9B**

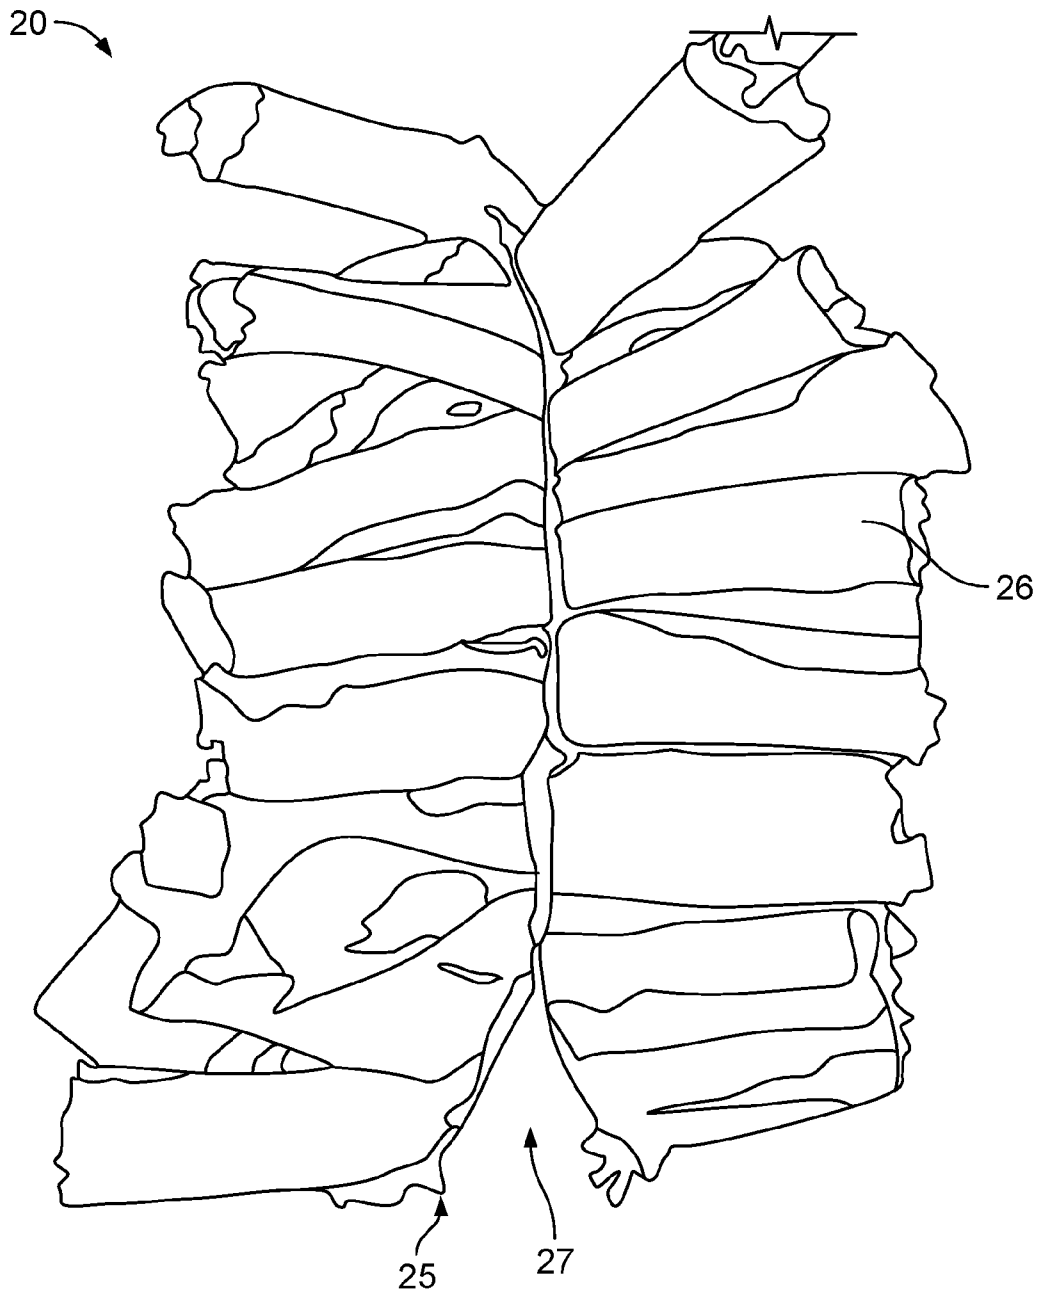

**FIG. 10**

**INTERNATIONAL SEARCH REPORT**

International application No.

PCT/US2017/018184

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC (2017.01) A47L 17/06, A47L 13/10

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC (2017.01) A47L 17/06, A47L 13/10

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Databases consulted: THOMSON INNOVATION, Esp@cenet, Google Patents, FamPat database, PatBase

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2013134069 A1 3M INNOVATIVE 12 Sep 2013 (2013/09/12) entire document	1-24
X	US 2008028555 A1 NICE LIFE INC 07 Feb 2008 (2008/02/07) entire document	1-24
X	DE 10159793 A1 RUETTIGER MAXIMILIAN 10 Jul 2004 (2004/07/10) entire document	1-24

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 May 2017

Date of mailing of the international search report

28 May 2017

Name and mailing address of the ISA.

Israel Patent Office

Technology Park, Bldg.5, Malcha, Jerusalem, 9695101, Israel

Facsimile No. 972-2-5651616

Authorized officer

COHEN Galit

Telephone No. 972-2-5651806

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International application No.  
PCT/US2017/018184

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
WO 2013134069 A1	12 Sep 2013	WO 2013134069 A1	12 Sep 2013
		CN 104144631 A	12 Nov 2014
		CN 104144631 B	22 Feb 2017
		EP 2822443 A1	14 Jan 2015
		EP 2822443 A4	06 Jan 2016
		JP 2015512684 A	30 Apr 2015
		US 2013233347 A1	12 Sep 2013
		US 9408522 B2	09 Aug 2016
US 2008028555 A1	07 Feb 2008	US 2008028555 A1	07 Feb 2008
DE 10159793 A1	10 Jul 2004	DE 10159793 A1	10 Jul 2003
		DE 10159793 C2	16 Oct 2003