

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 February 2007 (22.02.2007)

PCT

(10) International Publication Number
WO 2007/019666 A1

(51) International Patent Classification:
H04Q 7/32 (2006.01) **H04B 1/10** (2006.01)

(74) Agents: **HUNG, Shin** et al.; BORDEN LADNER GERVAIS LLP, World Exchange Plaza, 100 Queen Street, Suite 1100, Ottawa, Ontario K1P 1J9 (CA).

(21) International Application Number:
PCT/CA2006/000855

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 25 May 2006 (25.05.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2,515,995 15 August 2005 (15.08.2005) CA

(71) Applicant (for all designated States except US): **RESEARCH IN MOTION LIMITED** [CA/CA]; 295 Phillip Street, Waterloo, Ontario N2L 3W8 (CA).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(72) Inventors; and

(75) Inventors/Applicants (for US only): **WU, Huan** [CA/CA]; 20 Glens Meadows, C1, Kanata, Ontario K2M 2W8 (CA). **SIMMONS, Sean** [CA/CA]; 120 Sandford Fleming Drive, Waterloo, Ontario N2T 1E7 (CA). **KE-MENCZY, Zoltan** [CA/CA]; 4110 Treetop Crescent, Mississauga, Ontario L5L 2L8 (CA).

Published:
— with international search report

[Continued on next page]

(54) Title: JOINT SPACE-TIME OPTIMUM FILTERS (JSTOF) FOR INTERFERENCE CANCELLATION

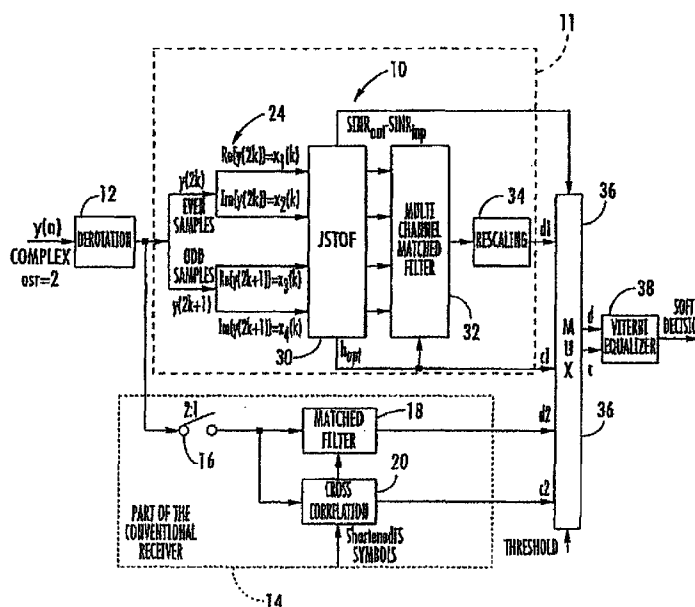

(57) Abstract: A wireless communications device may include a wireless transmitter and a wireless receiver. The wireless receiver may include a filter for reducing co-channel interference within a communications receiver. The filter may include a multi-channel, space-time filter circuit that filters n signal parts that have been split from a communications signal by jointly estimating space-time filter weights and multi-channel impulse responses (CIRs). The filter may further include a multi-channel, matched filter circuit that receives multi-channel signals from the multi-channel, space-time filter circuit and has a filter response that is provided by a channel impulse response estimation from the space-time filter circuit.

WO 2007/019666 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**JOINT SPACE-TIME OPTIMUM FILTERS (JSTOF) FOR INTERFERENCE
CANCELLATION**

Field of the Invention

5 The present invention relates to wireless communications systems, such as cellular communications systems, and, more particularly, to filtering received wireless signals to reduce unwanted interference.

Background of the Invention

10 Interference canceling matched filters (ICMF) and joint demodulation (JDM) has been investigated to meet requirements for a Downlink Advanced Receiver Performance (DARF) that is standardized by the third generation mobile
15 communications system and the Third Generation Partnership Project (3GPP). Some of these proposals are set forth in the following articles and documents.

1. Liang et al., A Two-Stage Hybrid Approach for CCI/ISI Reduction with Space-Time Processing, IEEE
20 Communication Letter Vol. 1, No. 6, Nov. 1997.

2. Pipon et al., Multichannel Receives Performance Comparison In the Presence of ISI and CCI, 1997 13th Intl. Conf. on Digital Signal Processing, July 1997.

3. Spagnolini, Adaptive Rank-One Receiver for GSM/DCS
25 Systems, IEEE Trans. on Vehicular Technology, Vol. 51, No.5, Sept. 2002.

4. Feasibility Study on Single Antenna Interference Cancellation (SAIC) for GSM Networks, 3GPP TR 45.903 Version 6.0.1, Release 6, European Telecommunications
30 Standards Institute, 2004.

5. Radio Transmission and Reception (Release 6), 3GPP TS 45.005 Version 6.8.0; European Telecommunications Standards Institute, 2005.

6. Stoica et al., Maximum Likelihood Parameter and Rank Estimation in Reduced-Rank Multivariate Linear Regressions, IEEE Trans. On Signal Processing, Vol. 44, No.12, Dec. 1996.

5 7. Kristensson et al., Blind Subspace Identification of a BPSK Communication Channel, Proc. 30th Asilomar Conf. On Signals, Systems and Computers, 1996.

8. Golub et al., Matrix Computations, 3rd Edition, 1996.

10 9. Trefethen et al., Numerical Linear Algebra, 1997.

10. Press et al., Numerical Recipes in C, 2nd Edition, 1992.

Current Global System for Mobile communications (GSM) cellular systems have to address the co-channel interference (CCI) on the mobile station (MS) side, as well as address the DARP requirements. Some single channel structures and pre-filters have been used to aid in canceling the interference and provide some channel impulse response (CIR) estimation. Moreover, some systems have used maximization of the signal-to-interference to design jointly a single channel space-time filter and the CIR estimation for a single channel. Other systems have used a constrained minimization of the mean-square error to design a single channel space filter. Other systems have used a single channel space filter that is designed by a rank-one approximation of the ML channel estimation. The target applications for these systems have been a base station where a physical antenna array including a plurality of antennas is available.

Brief Description of the Drawings

Various objects, features and advantages will become apparent from the following detailed description when considered in light of the accompanying drawings, in which:

5 FIG. 1 is a block diagram of a Joint Space-Time Optimum Filter based Downlink Advanced Receiver Performance (DARP) capable receiver in accordance with an embodiment of the invention;

10 FIG. 2 is a more detailed block diagram of the Joint Space-Time Optimum Filter and Multi-Channel Matched Filters shown in FIG. 1;

 FIG. 2A is a block diagram of a method in accordance with the present invention;

15 FIG. 3 is a graph showing the Joint Space-Time Optimum Filter based DARP capable receiver performance for various DARP test cases;

20 FIG. 4 is a graph showing the Joint Space-Time Optimum Filter receiver performance in accordance with the present invention with additive white Gaussian noise (AWGN), compared with and without an auto-switching strategy;

 FIG. 5 is a graph showing the Joint Space-Time Optimum Filter receiver performance in accordance with the present invention with DTS-5, compared with and without auto-switching;

25 FIG. 6 is a graph comparing the performance of single with multiple Viterbi equalizers in accordance with the present invention, using 8-bit SD limiter in the simulation;

30 FIG. 7 is a graph showing the performance of Joint Space-Time Optimum Filter Receiver and a modified test case in accordance with the present invention;

 FIG. 8 is a schematic block diagram of an exemplary model wireless communication device that can be used in accordance with one embodiment of the present invention; and

FIG. 9 is a table comparing the three approaches for performing Cholesky, QR, and SVD computations in accordance with the present invention.

5 **Detailed Description of the Preferred Embodiments**

Several non-limiting embodiments will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments are shown. These embodiments may, however, be embodied in many different
10 forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope to those skilled in the art. Like numbers refer to like elements throughout,
15 and prime notation is used to indicate similar elements in alternative embodiments.

In accordance with one embodiment, Co-Channel Interference (CCI) on a mobile station (MS) side in a current Global System for Mobile (GSM) communications system
20 is addressed, as well as the compliant requirement of a Downlink Advanced Receiver Performance (DARP) standard by the Third Generation Partnership Project (3GPP).

The invention may generally be summarized as follows. A wireless communications device may include a wireless
25 transmitter and a wireless receiver. More particularly, the wireless receiver may include a filter for reducing co-channel interference within a communications receiver. The filter may include a multi-channel, space-time filter circuit that filters n signal parts that have been split
30 from a communications signal by jointly estimating space-time filter weights and multi-channel impulse responses (CIRs). The filter may further include a multi-channel, matched filter circuit that receives multi-channel signals

from the multi-channel, space-time filter circuit and has a filter response that is provided by a channel impulse response estimation from the space-time filter circuit.

In one aspect, the multi-channel, space-time filter circuit may include a plurality of multiplier and delay circuits that each receive n signal parts. The multiplier and delay circuits may be operative based on space-time filter weights. More particularly, two multiplier circuits connected in parallel and a delay circuit connected to the input of one of the multiplier circuits may be used for each signal part. Each multiplier and delay circuit may have about a one symbol delay. A joint optimal filter weights and channel estimator may be operatively connected to the multi-channel, space-time filter circuit and receive training sequence (TS) symbols and timing uncertainty data and generate space-time filter weights for the multi-channel, space-time filter circuit. A summer circuit may sum data from the multiplier and delay circuits for each channel. An equalizer circuit may be operative with the multi-channel, matched filter circuit.

The illustrated embodiment in FIG. 1 provides a multi-channel pre-filter that is operable for canceling interference and providing channel impulse response (CIR) estimation adaptively and optimally. The pre-filter can use two major components in one non-limiting example: (1) a multiple-input-multiple-output (MIMO) based Joint Space-Time Optimum Filter (JSTOF); and (2) a multiple-input-single-output (MISO) based multi-channel matched filter. In a typical mobile station using a single available antenna, a virtual antenna array can be configured internally by the combination of over sampling and the separation of real and imaginary parts that receive samples, as will be appreciated by those skilled in the art.

In one non-limiting embodiment, a signal from the virtual antenna array is fed to the JSTOF, where the optimum weights for the MIMO-based interference canceling filter are estimated. At the same time, the multi-channel CIRs for the desired signal are jointly estimated. The output of the JSTOF allows the interference to be filtered and fed to a MISO-based multi-channel matched filter. The filter response of the matched filter is provided by the CIR estimation from the JSTOF.

The output of the multi-channel matched filter passes to a Viterbi equalizer which removes the inter-symbol interference (ISI) and provides soft decisions for further processing. A single channel response required by the equalizer can be formed by a combination of the convolved CIRs from the JSTOF. This pre-filter can also automatically switch to the conventional or standard filter in the conventional receiver in any AWGN dominant cases and switch back to the JSTOF-based receiver in any interference dominant cases. This auto-switching capability reduces the loss in AWGN dominant cases.

An example of the pre-filter or interference canceling filter for the JSTOF-based and DARP-capable receiver is shown at **10** in FIG. 1, in which the oversampling ratio is 2 and the number of the virtual antennas is 4 ($M = 4$), as also indicated by $X_1(k)$ through $X_4(k)$. Throughout this description the pre-filter **10** can be referred to as the interference canceling filter or JSTOF filter, and acts as a pre-filter in a DARP compliant receiver. A receiver incorporating this filter **10** could be described as a JSTOF receiver as is shown by the dashed line at **11** in FIG. 1.

FIG. 1 shows examples of the various circuit blocks used for the filter **10**. An input signal is received into a derotation circuit **12**. The derotated output signal is split,

with a portion passing into a filter **14** of a conventional receiver that includes a 2:1 switch **16**, and an output into a matched filter **18** and a cross-correlation circuit **20** that receives shortened training sequence (TS) symbols. The 2:1 switch **16** is operable to allow switching between the filter **14** and the JSTOF-based and DARP-capable pre-filter **10**.

The other portion of the output signal from the derotation circuit **12** is split into even samples and odd samples as part of the virtual antenna **24** and split again into real and imaginary signals to form the respective $X_1(k)$ through $X_4(k)$ input signals into a JSTOF circuit **30**, also referred to as a multi-channel, space-time filter circuit. It should be noted that a virtual antenna arrangement need not be used in all embodiments. That is, the filter **18** may be used for filtering signals directly from one or more physical (i.e., real) antennas, such as in a phase shift keying (PSK) application (e.g., 8PSK), for example. The output signals from the JSTOF circuit are passed into a multi-channel matched filter circuit **32**, and its output signal is passed into a rescaling circuit **34** and then into a multiplexer circuit **36** as data (d_1). The multiplexer circuit **36** also receives a channel (c_1) response. When the conventional filter **14** is connected, the multiplexer **36** receives the data (d_2) and channel (c_2) response from the matched filter circuit **18** and cross-correlation circuit **20**. Signals are passed into a Viterbi equalizer **38** as a soft decision output.

Further details of the JSTOF and the multi-channel matched filters are shown in FIG. 2, where the number of time-delayed samples used in the JSTOF circuit is 2 ($N = 2$). The various inputs $X_1(k)$ through $X_4(k)$ are received into the JSTOF, which is shown in greater detail. The JSTOF circuit **30** includes channelized multipliers, also termed mixers **40**,

42, delay units **44** and summers **46**, which input into multi-channel matched filters **48** for each of the four illustrated channels, and signals from the matched filters are passed into a summer **50**. A joint optimal filter weights and channel estimator circuit **52** receives TS symbols and timing uncertainty signals to produce the weights (W_{OPT}) used for the mixers **40**, **42**.

It thus is possible as described to integrate a pre-filter function into a conventional GSM receiver by adding a pre-filter branch parallel to a conventional matched filter as shown in FIG. 1. The conventional software/hardware Viterbi equalizer **38** can be used without change. In one non-limiting example, an integrated DARP-capable receiver has been tested against DARP test cases by simulations, which indicates that the receiver provides 1.6 dB to 6.9 dB margin over a specified performance in terms of the frame error rate (FER) for one of the AMR speech channels.

FIG. 2a is a flow chart illustrating a high-level method associated with the described system in which the various steps are shown as non-limiting examples. The various steps begin with the 100 series reference numerals. The incoming communications signal is derotated (Block **100**) and passed into the virtual antenna. The communications signal is split into even and odd samples (Block **102**), and each even and odd sample is then split into real and imaginary signal parts (Block **104**). The communications signals from the virtual antenna are passed into the JSTOF circuit, where the communications signals are multiplied and delayed (Block **106**) and then summed (Block **108**), all as part of a first multiple-in, multiple-out (MIMO) Joint Space Time Optimum Filter (JSTOF). After summing, summed signals are passed into the multi-channel, multiple-input single-output (MISO) matched filter circuit (Block **110**) and then summed

(Block **112**) and passed as a single out signal into the Viterbi equalizer (Block **114**) in which a soft decision is made (Block **116**).

In operation, the derotation circuit **12** is operable
5 with GMSK modulated signals and the frequency offset that is part of that signaling protocol. Before any derotation, the signal constellation is dynamic and after derotation the signal constellation becomes static, i.e., any symbols are typically concentrated on 0° and 180° , with symbols rotated
10 to those two points. Thus, the GMSK signal can be treated as a typical binary phase shift keying (BPSK) signal. The derotation at the front end is used for even and odd samplings, which is useful because of the over-sampling rate. For example, in a conventional receiver, this is
15 typically at the rate of 1, i.e., one sample per symbol.

The virtual antenna **24** can increase the sampling rate to two samples per symbol in a serial manner coming from the baseband filter to form two separate channels of even and odd. Before this process, the odd/even samples were serially
20 interleaved. These signals are then further split into the real and imaginary signal parts to form the four independent channels of the virtual antenna. It should be noted that in some embodiments other numbers of virtual antennas/channels may be used (e.g., one or more), as will be appreciated by
25 those skilled in the art.

As best shown in FIG. 2, these signals are then passed into the multiplier **40,42** and unit delay circuits **44**, e.g., a one symbol delay, and thus the signal is processed with a multiply and delay, followed by a multiply operation as
30 evident by the two multipliers **40, 42** and one delay circuit **44**. This operation is followed by a summation in summer **46** as illustrated. This portion of the system is operable as a multi-channel, two-dimensional filter. One dimension occurs

because of the delay in time and another dimension is introduced from the virtual antenna, i.e., a spatial dimension as described and thus the two dimensions form a space-time filter.

5 It is evident each incoming signal is used in conjunction with other channels, and multipliers receive weights from the Joint Optimal Filter Weights and Channel Estimator **52**. The weights coming from the Joint Optimal Filter Weight and Channel Estimator **52** are passed into the
10 multipliers.

 The weights are also an 8 x 4 dimensional matrix in one non-limiting example, i.e., 32 weights. As to the training sequence symbols input into the Joint Optimal Filter Weights and Channel Estimator **52**, there are typically in some non-
15 limiting examples about 26 known symbols and it is known which training sequence a packet contains. A +/-3 or seven positions search in a non-limiting example can be used to find the timing. The impulse response of the multi-channel matched filter ($\mathbf{h}_{\text{opt}}$) can be used such that the system
20 matches the channel response and makes the signal stronger after the matched filter.

 As shown in FIG. 1, rescaling can occur as a hardware or software convenience, although it is not required. This rescaling circuit **34** allows greater operation for a 4-bit or
25 5-bit input as a non-limiting example to the Viterbi equalizer **38**. The dynamic range of the signal can be readjusted such that the signal can be sent into a 4-bit or 5-bit circuit.

 As noted before, the multiplexer **36** can take the
30 signals d_2 and c_2 for the data and channel response from the conventional filter receiver **14** or the signals d_1 and c_1 for the data and channel response from the JSTOF receiver **10** to allow a switch-over between the two. The JSTOF receiver will

introduce some loss if there is no interference, i.e., just pure white noise. In this case the conventional receiver **14** can be used and will work adequately. So, the circuits can switch back to the conventional filter without loss
5 introduced by the JSTOF receiver and its circuits. The switching is based on the estimation of the $SINR_{OUT}$ minus $SINR_{INP}$. If the quantity is below a threshold, the system determines there is little interference and the interference canceling of the JSTOF receiver is not required. Thus, the
10 filter of the conventional receiver **14** is used by switching the 2:1 switch **16**.

The circuit is operable in beam forming systems and other systems. This type of system also allows the signal-to-noise ratio to be improved and the bit error rate (BER)
15 to be improved. This could impact top level protocols and phone calls and other communications matters for use with these circuits.

The multi-channel structure of the JSTOF-based filter **10** is used in one embodiment, and the MIMO-based JSTOF
20 circuit **30** provides a space-time filter weight and channel estimations that are different from prior art solutions. This circuit provides the ability to combat the interference efficiently for both synchronous and asynchronous interferences and yield high performance. Some simulations
25 have shown that none of the solutions in some prior art techniques provide the required performance against the DARPA test cases.

This MISO-based multi-channel matched filter circuit **32** is a feature that improves the overall error rate
30 performance and reduces the complexity of the equalizer by avoiding multi-channel Viterbi equalizers. The built-in automatic switching between JSTOF-based and conventional receivers reduce the loss in AWGN cases.

Suitable receiver structures can be used in order to meet the DARP requirements. An Interference Canceling Matched Filter (ICMF) can use an example of the virtual antenna as described and beamforming to combat the interference. The circuit is sensitive to the estimation errors of the Channel Impulse Response (CIR) of the desired signal. A Joint Demodulation (JD) showed good performance for the various test cases. In addition to the difficulty in combating the asynchronous interferers, there may be heavy computational complexity involved in finding the CIR of an interferer.

In one embodiment, the virtual antenna **24** is operable with adaptive space-time filtering, allowing the Joint Spatial-Temporal Optimum Filter (JSTOF) circuit **30** to be used. One difference from the ICMF is that the spatial-temporal filter weights used to suppress the interference and the CIR estimation of the desired signal are jointly estimated and optimized in the JSTOF while the two are separately estimated in an ICMF. The JSTOF circuit **30** can be a Multiple-Input-Multiple-Output (MIMO) circuit that takes advantage of the rank deficiency nature of the desired CIR matrix in the space-time setup. Simulations have shown a satisfactory performance for the various DARP test cases. Computational load is deemed acceptable given that fixed-point Cholesky factorization and EVD/SVD are feasible.

This method has some simplicity and low computational complexity. It is also robust because the system makes few assumptions about the source of the interference. In addition, the system can continue to use the existing equalizer structure, as the solution is integrated as a pre-processing step on the input data. This would allow the system to use the HW equalizer accelerators if available.

In order to support the evaluation of this technique,

the system level Block Error Rate (BLER) simulator was extended to support all of the interferer models/scenarios being used by the 3GPP DARP Specification.

There now follows a description of the simulation performance for DARP test cases using the JSTOF circuit. It should be understood that space-time processing for joint interference reduction and channel estimation has been used in a base station, where an array of M antennas is available. Assuming that the equivalent channel response for the single desired user can be modeled as an L-tap Finite Impulse Response (FIR) filter, a snapshot sample of the received baseband signal can be expressed as

$$\mathbf{x}(k) = \sum_{l=0}^{L-1} \mathbf{c}(l) s_{k-l} + \mathbf{v}(k) = \mathbf{H}\mathbf{s}(k) + \mathbf{v}(k), \quad (1)$$

15

where $\mathbf{x}(k)$ is an $M \times 1$ vector representing the output from the antennas, $\mathbf{H}$ is an $M \times L$ matrix containing the channel response for the antenna array, $\mathbf{s}(k)$ is an $L \times 1$ vector for the corresponding symbols transmitted, and $\mathbf{v}(k)$ is an $M \times 1$ vector including the AWGN and the interference. The space-time extension for formula (1) can be obtained by stacking N time-delayed versions of $\mathbf{x}(k)$ into a taller $MN \times 1$ vector $\bar{\mathbf{x}}(k)$ as follows:

$$\bar{\mathbf{x}}(k) = [\mathbf{x}^T(k), \mathbf{x}^T(k-1), \dots, \mathbf{x}^T(k-N+1)]^T = \bar{\mathbf{H}}\bar{\mathbf{s}}(k) + \bar{\mathbf{v}}(k), \quad (2)$$

25

where $\bar{\mathbf{H}}$ an $MN \times (L+N-1)$ matrix is the block Toeplitz version of $\mathbf{H}$ and $\bar{\mathbf{s}}(k) = [s_k, s_{k-1}, \dots, s_{k-L+N+2}]^T$. The samples that correspond to the training sequence can be collected,

30

$$\bar{\mathbf{X}} = [\bar{\mathbf{x}}(k), \bar{\mathbf{x}}(k+1), \dots, \bar{\mathbf{x}}(k+p-1)] = \bar{\mathbf{H}}\bar{\mathbf{S}} + \bar{\mathbf{V}}, \quad (3)$$

where $p = P - L - N + 2$, P is the number of symbols of the training sequence, $\bar{\mathbf{X}}$ is an $MN \times p$ matrix, and $\bar{\mathbf{S}} = [\bar{\mathbf{s}}(k), \bar{\mathbf{s}}(k+1), \dots, \bar{\mathbf{s}}(k+p-1)]$ is an $(L+N-1) \times p$ convolution matrix of the training symbols. The joint optimization is to find a non-trivial $MN \times 1$ weight vector $\mathbf{w}$ for a space-time filter and a non-trivial $(L+N-1) \times 1$ channel estimation vector $\mathbf{h}$ after the filter such that the output interference residual of the filter is minimized, i.e., to solve the following optimization problem:

$$\min_{\mathbf{w}, \mathbf{h}} \|\mathbf{w}^T \bar{\mathbf{X}} - \mathbf{h}^T \bar{\mathbf{S}}\|^2. \quad (4)$$

It can be found that the optimal weight is:

$$\mathbf{w}_{opt} = \mathbf{R}_x^{-1} \mathbf{R}_{xs} \mathbf{h}_{opt}, \quad (5)$$

and the optimal channel estimation $\mathbf{h}_{opt}$ is the eigenvector corresponding to the minimum eigenvalue of the matrix $\mathbf{R}_s - \mathbf{R}_{xs}^H \mathbf{R}_x^{-1} \mathbf{R}_{xs}$, where

$$\mathbf{R}_x = \bar{\mathbf{X}}^* \bar{\mathbf{X}}^T, \quad (MN \times MN) \quad (6)$$

$$\mathbf{R}_s = \bar{\mathbf{S}}^* \bar{\mathbf{S}}^T, \quad ((L+N-1) \times (L+N-1)) \text{ and} \quad (7)$$

$$\mathbf{R}_{xs} = \bar{\mathbf{X}}^* \bar{\mathbf{S}}^T, \quad ((MN) \times (L+N-1)). \quad (8)$$

Given that the noise plus interference component $\bar{\mathbf{V}}$ in the space-time model of equation (3) is no longer white but approximately Gaussian distributed with unknown covariance

matrix $\mathbf{R}_v$, the optimal estimation for the channel $\bar{\mathbf{H}}$ is the maximum-likelihood (ML) estimation, which is a minimization of the following quantity:

$$\ell(\bar{\mathbf{H}}, \mathbf{R}_v) = \log|\mathbf{R}_v| + \|\bar{\mathbf{X}} - \bar{\mathbf{H}}\bar{\mathbf{S}}\|_{\mathbf{R}_v^{-1}}^2. \quad (9)$$

In this non-limiting space-time model, the number of the independent channels is always less than or equal to M and $\bar{\mathbf{H}}$ is usually rank deficient, i.e., $\text{rank}(\bar{\mathbf{H}}) = r < \min(MN, L+N-1)$. The rank deficient ML problem can be used for the rank-1 approximation of the space-time filter.

The JSTOF circuit in one embodiment can use a different approach to find the joint optimum solutions for the filter weight and the channel estimation. It is possible to find the ML estimation of $\bar{\mathbf{H}}$. The estimation can be decomposed as

$$\hat{\mathbf{H}}^* = \hat{\mathbf{H}}_s \hat{\mathbf{H}}_t^H, \quad (10)$$

where $\hat{\mathbf{H}}_s$ ($MN \times M$) is the estimation of the space matrix of $\bar{\mathbf{H}}$ and $\hat{\mathbf{H}}_t$ ($(L+N-1) \times M$) is the estimation of the time matrix of $\bar{\mathbf{H}}$. They can be obtained by:

$$\hat{\mathbf{H}}_t = \mathbf{R}_s^{-1/2} \mathbf{V}_{DM}, \quad \text{and} \quad (11)$$

$$\hat{\mathbf{H}}_s = \mathbf{R}_{xs} \hat{\mathbf{H}}_t, \quad (12)$$

where $\mathbf{R}_s = \mathbf{R}_s^{1/2} \mathbf{R}_s^{H/2}$ is the Cholesky factorization and $\mathbf{V}_{DM}$ consists of the M eigenvectors corresponding to the top M eigenvalues of the matrix $\mathbf{D}$,

$$\mathbf{D} = \mathbf{R}_s^{-H/2} \mathbf{R}_{xs}^H \mathbf{R}_x^{-1} \mathbf{R}_{xs} \mathbf{R}_s^{-1/2}. \quad (13)$$

In a next step, the optimal weight for the space-time filter can be obtained by

5

$$\mathbf{w}_{opt} = \mathbf{R}_x^{-1} \mathbf{R}_{xs} \hat{\mathbf{H}}_t, \quad (MN \times M) \quad (14)$$

and the optimal channel estimation is

10

$$\mathbf{h}_{opt} = \mathbf{w}_{opt}^T \cdot \hat{\mathbf{H}}. \quad (M \times (L+N-1)) \quad (15)$$

It is then possible to apply the optimal space-time filter in equation (14) to the samples from the antenna array **24**. Clearly the outputs of the filter **30** still have M channels, and it is a MIMO system. The optimal channel estimation in equation (15) can be used for the multi-channel matched filters **32**. The outputs of the matched filter are then combined (summed up) and rescaled in the rescaling circuit **34** to the modified desired level. The final output is a single-channel sample stream and can be fed into the Viterbi equalizer **38**. Note also that the number of channel taps after the JSTOF has been changed to L+N-1 comparing to L of the modeled channel taps before the JSTOF.

It was observed by simulations that the JSTOF receiver incurred more than 1 dB loss in the pure AWGN cases compared to the conventional receiver using the conventional filter. To reduce the loss, a strategy of automatic switching between the JSTOF and conventional receivers was developed. The switching is based on the measurement of the difference of the input and output SINR's of the JSTOF. When the difference is below a predefined threshold the JSTOF receiver is turned off and the conventional receiver is

turned on. The input SINR can be easily computed once the estimation of $\bar{\mathbf{H}}$ is done in equation (10):

$$SINR_{inp} = \frac{\|\hat{\mathbf{H}}\bar{\mathbf{S}}\|^2}{\|\bar{\mathbf{X}} - \hat{\mathbf{H}}\bar{\mathbf{S}}\|^2} = \frac{\text{tr}(\hat{\mathbf{H}}^* \mathbf{R}_s \hat{\mathbf{H}}^T)}{\text{tr}(\mathbf{R}_x + \hat{\mathbf{H}}^* \mathbf{R}_s \hat{\mathbf{H}}^T - 2\text{Re}\{\mathbf{R}_{xs} \hat{\mathbf{H}}^T\})}, \quad (16)$$

5

and the output SINR can be computed from equations (14) and (15):

$$SINR_{out} = \frac{\|\mathbf{h}_{opt} \bar{\mathbf{S}}\|^2}{\|\mathbf{w}_{opt}^T \bar{\mathbf{X}} - \mathbf{h}_{opt} \bar{\mathbf{S}}\|^2} = \frac{\text{tr}(\mathbf{h}_{opt}^* \mathbf{R}_s \mathbf{h}_{opt}^T)}{\text{tr}(\mathbf{w}_{opt}^H \mathbf{R}_x \mathbf{w}_{opt} + \mathbf{h}_{opt}^* \mathbf{R}_s \mathbf{h}_{opt}^T - 2\text{Re}\{\mathbf{w}_{opt}^H \mathbf{R}_{xs} \mathbf{h}_{opt}^T\})}. \quad (17)$$

10

On the mobile side, a virtual antenna array can be set up by the combination of oversampling and the separation of the real and imaginary parts as shown in FIG. 1.

In accordance with various embodiments, the joint optimum MIMO space-time filter and channel estimation set forth in equations (14) and (15) enhances interference suppression performance. The MISO multi-channel matched filters **32**, which are based on the channel estimation in equation (15), improve the error rate performance while reducing the complexity of the Viterbi equalizer **38**. A strategy of automatic switching between JSTOF and conventional receivers reduces the loss in pure AWGN cases.

The JSTOF defined by equations (6)-(17) can be implemented in different ways in terms of numerical stability and computational complexity. The major differences are the way in which the inverse of the autocorrelation matrix $\mathbf{R}_x$ is calculated and the way in which the channel $\hat{\mathbf{H}}$ is estimated with reduced rank.

One such implementation is a Cholesky decomposition-

based matrix inversion of $\mathbf{R}_x$ and the eigenvalue decomposition of matrix $\mathbf{D}$ in equation (13). Specifically, since $\mathbf{R}_x$ is symmetric positive definite, the Cholesky decomposition exists:

$$\mathbf{R}_x = \mathbf{L}_x \mathbf{L}_x^T. \quad (18)$$

$\mathbf{D}$ can be rewritten as

$$\mathbf{D} = \mathbf{D}_1 \mathbf{D}_1^T, \quad (19)$$

where

$$\mathbf{D}_1 = \mathbf{L}_s^{-T} \mathbf{R}_{xs}^T \mathbf{L}_x^{-T}. \quad (20)$$

15

It should be noted that the inverse is actually performed with the square-root of $\mathbf{R}_x$, and the explicit computation of the inverse may be avoided by the back-substitution. Also, $\mathbf{D}$ is numerically stable because of its structure of mutual cancellations. This was verified by simulations that showed the condition number of $\mathbf{D}$ is seldom greater than 300. This implies the eigenvalue decomposition on $\mathbf{D}$ would not require unduly sophisticated algorithms for typical applications, as will be appreciated by those skilled in the art. In fact, this approach may potentially have the least computational complexity of the approaches outlined herein.

One potential numerical concern is the Cholesky decomposition on $\mathbf{R}_x$, as its condition number may potentially be relatively high, and its positive definite property may be offset to some degree by round-off errors. Simulations

30

showed, however, that the condition number of $\mathbf{R}_x$ is less than 10^7 even in some extreme scenarios such as very high and very low carrier-to-interference (C/I) ratios.

In accordance with an alternate embodiment, the QR decomposition in the sample domain may be used to avoid the direct calculation of the inverse of $\mathbf{R}_x$. Since the $\bar{\mathbf{X}}^T$ in equation (3) has full column rank, it has the unique QR decomposition

$$\bar{\mathbf{X}}^T = \mathbf{Q}\mathbf{R}, \quad (21)$$

where $\mathbf{Q}$ is a $p \times MN$ matrix with orthogonal columns and $\mathbf{R}$ is a full rank $MN \times MN$ upper triangular matrix. It can be shown that

$$\mathbf{R}_x^{-1} = \mathbf{R}^{-1}\mathbf{R}^{-T}, \quad (22)$$

and the $\mathbf{D}$ in equation (13) can be written in the form of equation (19) with the $\mathbf{D}_1$ re-defined by

$$\mathbf{D}_1 = \mathbf{L}_s^{-T} \bar{\mathbf{S}} \mathbf{Q}. \quad (23)$$

The reduced rank channel estimation may be performed with the eigenvalue decomposition on $\mathbf{D}$ as in the previous approach, and the optimum filter weight matrix of (14) can be reduced as

$$\mathbf{w}_{opt} = \mathbf{R}^{-1} \mathbf{D}_1^T \mathbf{V}_{DM}. \quad (24)$$

This approach is basically an equivalent version of Cholesky decomposition in the sample domain since one can

show that $\mathbf{R} = \mathbf{L}_x^T$. It has improved numerical stability at the expense of the QR decomposition's greater complexity (requiring approximately twice as many operations for a matrix of given size) and larger sample matrix (having approximately 3 times as many rows in an example case where M=4, N=2 and L=5).

The two approaches described above still require the computation of the triangular matrix inverse, although this may be done by back-substitutions. Turning now to yet another alternate approach, i.e., the singular value decomposition (SVD) approach, the matrix inversion may be avoided and the numerical stability may be further improved in some applications. This approach starts with the SVD on the sample matrix in equation (3):

$$\bar{\mathbf{X}}^T = \mathbf{U}_x \Sigma_x \mathbf{V}_x^T, \quad (25)$$

where $\mathbf{U}_x$ is a $p \times MN$ matrix with orthogonal columns, $\mathbf{V}_x$ is an $MN \times MN$ orthogonal matrix and Σ_x is an $MN \times MN$ diagonal matrix, $\Sigma_x = \text{diag}(\sigma_1, \dots, \sigma_{MN})$, with the singular values on its diagonal. It can be shown that

$$\mathbf{R}_x^{-1} = \mathbf{V}_x \Sigma_x^{-2} \mathbf{V}_x^T. \quad (26)$$

The $\mathbf{D}$ in equation (13) still has the form of equation (19) with $\mathbf{D}_1$ defined by:

$$\mathbf{D}_1 = \mathbf{L}_s^{-T} \bar{\mathbf{S}} \mathbf{U}_x. \quad (27)$$

The channel estimation may be obtained by the SVD on $\mathbf{D}_1$ and the filter weight matrix may be written as

$$\mathbf{w}_{opt} = \mathbf{V}_x \Sigma_x^{-1} \mathbf{D}_1^T \mathbf{V}_{DM}, \quad (28)$$

where $\mathbf{V}_{DM}$ contains the top M right singular vectors of $\mathbf{D}_1$.

5 The SVD in this approach may require more computations than the Cholesky and QR decompositions used in the previous two approaches.

As a comparison of the three approaches outlined above (i.e., Cholesky, QR, and SVD), the table in FIG. 9 lists the
 10 computations step by step for an example where $M=4$, $N=2$ and $L=5$. To find the best timing of the burst, the JSTOF searches a number of timing hypotheses and the one corresponding to the minimum output residual is chosen as the best timing. The output residual is defined by:

15

$$e = \left\| \mathbf{w}_{opt}^T \bar{\mathbf{X}} - \mathbf{h}_{opt}^T \bar{\mathbf{S}} \right\|^2, \quad (29)$$

The search process basically repeats the operations listed in the table for each hypothesis, but the input sample
 20 matrices from the consecutive timing hypotheses change slightly by appending and deleting a column. The updating and the downdating algorithms are potentially applicable to some of the operations, and the overall computation load may potentially be reduced.

25 Let $\bar{\mathbf{X}}(k)$ represent the sample matrix at time instant k . It may be partitioned from equation (3) to

$$\bar{\mathbf{X}}(k) = [\bar{\mathbf{x}}(k), \tilde{\mathbf{X}}(k+1)], \quad (30)$$

30 where

$$\tilde{\mathbf{X}}(k+1) = [\bar{\mathbf{x}}(k+1), \dots, \bar{\mathbf{x}}(k+p-1)]. \quad (31)$$

The sample matrix at time $k+1$ may be expressed as

$$\bar{\mathbf{X}}(k+1) = [\tilde{\mathbf{X}}(k+1), \bar{\mathbf{x}}(k+p)]. \quad (32)$$

5

The autocorrelation matrix at time $k+1$ has the form

$$\mathbf{R}_x(k+1) = \mathbf{R}_x(k) - \bar{\mathbf{x}}(k)\bar{\mathbf{x}}^T(k) + \bar{\mathbf{x}}(k+p)\bar{\mathbf{x}}^T(k+p). \quad (33)$$

10 This is a combination of a rank-1 downdate and a rank-1 update. One hyperbolic rotation-based algorithm for updating/downdating the Cholesky factorization is set forth in Matrix Computations by Golub et al., 3rd edition, 1996.

Another applicable update/downdate algorithm disclosed
15 in Golub et al. text is for QR decomposition, which is based on the Givens rotation. Of course, the given approach that should be used in a particular application will depend on factors such as available processing resources, computational complexity, etc., as will be appreciated by
20 those skilled in the art. Other approaches may also be used, as will also be appreciated by those skilled in the art.

The performance of the JSTOF based receiver has been evaluated by Matlab simulations using an extended BLER simulation engine. The parameters for the JSTOF based
25 receiver can be set with different aspects. Examples of values follow:

1) The oversampling ratio (OSR) of 2 can be selected, which maps to the number of virtual antennas (M) of 4 in this non-limiting example, and simulation shows that
30 reducing the OSR to 1 causes significant performance degradations;

2) A number of temporal delayed samples (N) can be selected as 2. Increasing the number, however, does not

always improve the performance;

3) A reduced rank for the channel response matrix can be selected as M . Increasing or decreasing the rank does not necessarily improve the performance.

4) An auto-switch threshold can be 4.75 dB.

5) A soft decision output can be quantized in 5 bits width. Increasing the width to 8 bits can improve the performance marginally for DTS-5. Soft decision correction can be enabled.

The AMR speech channel, TCH-AFS12.2 can be used to evaluate the performance of the JSTOF in terms of FER. The propagation condition TU50km/h-1950MHz can be assumed throughout the simulations. A simulation ran 1000 trials (blocks) for each case.

The FER's of the receiver, against the carrier-to-interference (C/I) ratio, are shown in the graph of FIG. 3. The margins against the reference performance specified are listed in the table below.

Test case	JSTOF performance: C/I at FER = 1%, dB	Spec. performance: C/I at FER = 1%, dB	Margin of JSTOF against Spec., dB
DTS-1	-2.6	4	6.6
DTS-2	7.3	9	1.7
DTS-3	7.6	10	2.4
DTS-4	-0.9	6	6.9
DTS-5	7.4	9	1.6

The performance of the receiver under pure AWGN and DTS-5 cases with and without the auto-switching strategy is shown in the graphs of FIG. 4 and FIG. 5, respectively. The strategy reduced the loss in AWGN by about 1 dB (at FER =

10%) and incurred little loss for DTS-5.

The JSTOF receiver can include multiple Viterbi equalizers, followed by a multi-channel match filter, which combines the soft decisions after the equalizers. A result
5 is shown and compared with the original in the graph of FIG. 6.

Performance can be evaluated with a modified test case DTS-5R, where the delay of the asynchronous interferer can be configured. The performance at 0, $\frac{1}{4}$, $\frac{1}{2}$ and $\frac{3}{4}$ of the burst
10 length is shown in the graph of FIG. 7. The results indicate that the performance of JSTOF receiver degrades "slowly" with severe delay of the interferer.

The above-described receiver may advantageously be used in mobile wireless devices (e.g., cellular devices) as well
15 as cellular base stations, for example. An example of a mobile wireless communications device **1000** that may be used is further described in the example below with reference to FIG. 8. The device **1000** illustratively includes a housing **1200**, a keypad **1400** and an output device **1600**. The output
20 device shown is a display **1600**, which is preferably a full graphic LCD. Other types of output devices may alternatively be utilized. A processing device **1800** is contained within the housing **1200** and is coupled between the keypad **1400** and the display **1600**. The processing device **1800** controls the
25 operation of the display **1600**, as well as the overall operation of the mobile device **1000**, in response to actuation of keys on the keypad **1400** by the user.

The housing **1200** may be elongated vertically, or may take on other sizes and shapes (including clamshell housing
30 structures). The keypad may include a mode selection key, or other hardware or software for switching between text entry and telephony entry.

In addition to the processing device **1800**, other parts of the mobile device **1000** are shown schematically in FIG. 8. These include a communications subsystem **1001**; a short-range communications subsystem **1020**; the keypad **1400** and the display **1600**, along with other input/output devices **1060**, **1080**, **1100** and **1120**; as well as memory devices **1160**, **1180** and various other device subsystems **1201**. The mobile device **1000** is preferably a two-way RF communications device having voice and data communications capabilities. In addition, the mobile device **1000** preferably has the capability to communicate with other computer systems via the Internet.

Operating system software executed by the processing device **1800** is preferably stored in a persistent store, such as the flash memory **1160**, but may be stored in other types of memory devices, such as a read only memory (ROM) or similar storage element. In addition, system software, specific device applications, or parts thereof, may be temporarily loaded into a volatile store, such as the random access memory (RAM) **1180**. Communications signals received by the mobile device may also be stored in the RAM **1180**.

The processing device **1800**, in addition to its operating system functions, enables execution of software applications **1300A-1300N** on the device **1000**. A predetermined set of applications that control basic device operations, such as data and voice communications **1300A** and **1300B**, may be installed on the device **1000** during manufacture. In addition, a personal information manager (PIM) application may be installed during manufacture. The PIM is preferably capable of organizing and managing data items, such as e-mail, calendar events, voice mails, appointments, and task items. The PIM application is also preferably capable of sending and receiving data items via a wireless network **1401**. Preferably, the PIM data items are seamlessly

integrated, synchronized and updated via the wireless network **1401** with the device user's corresponding data items stored or associated with a host computer system.

Communication functions, including data and voice
5 communications, are performed through the communications subsystem **1001**, and possibly through the short-range communications subsystem. The communications subsystem **1001** includes a receiver **1500**, a transmitter **1520**, and one or more antennas **1540** and **1560**. In addition, the communications
10 subsystem **1001** also includes a processing module, such as a digital signal processor (DSP) **1580**, and local oscillators (LOs) **1601**. The specific design and implementation of the communications subsystem **1001** is dependent upon the communications network in which the mobile device **1000** is
15 intended to operate. For example, a mobile device **1000** may include a communications subsystem **1001** designed to operate with the Mobitex™, Data TAC™ or General Packet Radio Service (GPRS) mobile data communications networks, and also designed to operate with any of a variety of voice
20 communications networks, such as AMPS, TDMA, CDMA, WCDMA, PCS, GSM, EDGE, etc. Other types of data and voice networks, both separate and integrated, may also be utilized with the mobile device **1000**. The mobile device **1000** may also be compliant with other communications standards such as 3GSM,
25 3GPP, UMTS, etc.

Network access requirements vary depending upon the type of communication system. For example, in the Mobitex and DataTAC networks, mobile devices are registered on the network using a unique personal identification number or PIN
30 associated with each device. In GPRS networks, however, network access is associated with a subscriber or user of a device. A GPRS device therefore requires a subscriber

identity module, commonly referred to as a SIM card, in order to operate on a GPRS network.

When required network registration or activation procedures have been completed, the mobile device **1000** may
5 send and receive communications signals over the communication network **1401**. Signals received from the communications network **1401** by the antenna **1540** are routed to the receiver **1500**, which provides for signal amplification, frequency down conversion, filtering, channel
10 selection, etc., and may also provide analog to digital conversion. Analog-to-digital conversion of the received signal allows the DSP **1580** to perform more complex communications functions, such as demodulation and decoding. In a similar manner, signals to be transmitted to the
15 network **1401** are processed (e.g. modulated and encoded) by the DSP **1580** and are then provided to the transmitter **1520** for digital to analog conversion, frequency up conversion, filtering, amplification and transmission to the communication network **1401** (or networks) via the antenna
20 **1560**.

In addition to processing communications signals, the DSP **1580** provides for control of the receiver **1500** and the transmitter **1520**. For example, gains applied to communications signals in the receiver **1500** and transmitter
25 **1520** may be adaptively controlled through automatic gain control algorithms implemented in the DSP **1580**.

In a data communications mode, a received signal, such as a text message or web page download, is processed by the communications subsystem **1001** and is input to the
30 processing device **1800**. The received signal is then further processed by the processing device **1800** for an output to the display **1600**, or alternatively to some other auxiliary I/O device **1060**. A device user may also compose data items, such

as e-mail messages, using the keypad **1400** and/or some other auxiliary I/O device **1060**, such as a touchpad, a rocker switch, a thumb-wheel, or some other type of input device. The composed data items may then be transmitted over the communications network **1401** via the communications subsystem **1001**.

In a voice communications mode, overall operation of the device is substantially similar to the data communications mode, except that received signals are output to a speaker **1100**, and signals for transmission are generated by a microphone **1120**. Alternative voice or audio I/O subsystems, such as a voice message recording subsystem, may also be implemented on the device **1000**. In addition, the display **1600** may also be utilized in voice communications mode, for example to display the identity of a calling party, the duration of a voice call, or other voice call related information.

The short-range communications subsystem enables communication between the mobile device **1000** and other proximate systems or devices, which need not necessarily be similar devices. For example, the short-range communications subsystem may include an infrared device and associated circuits and components, or a Bluetooth™ communications module to provide for communication with similarly-enabled systems and devices.

Many modifications and other embodiments of the invention will come to the mind of one skilled in the art having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. Therefore, it is understood that the invention is not to be limited to the specific embodiments disclosed, and that modifications and embodiments are intended to be included within the scope of the invention.

CLAIMS:

1. A wireless communications device comprising:

a wireless transmitter and a wireless receiver;

5 said wireless receiver comprising a filter for reducing co-channel interference within a communications receiver and comprising

10 a multi-channel, space-time filter circuit that filters n signal parts that have been split from a communications signal by jointly estimating space-time filter weights and multi-channel impulse responses (CIRs), and

15 a multi-channel, matched filter circuit that receives multi-channel signals from the multi-channel, space-time filter circuit and having a filter response that is provided by a channel impulse response estimation from the space-time filter circuit.

20 2. The wireless communications device of Claim 1 wherein said filter further comprises a virtual antenna circuit connected to said multi-channel, space-time filter circuit that splits the communications signal into odd and even sampled, real and imaginary n signal parts.

25 3. The wireless communications device of Claim 1 wherein said multi-channel, space-time filter circuit comprises at least one multiplier for multiplying each signal part by a respective space-time filter weight.

30 4. The wireless communications device of Claim 3 wherein said at least one multiplier comprises a pair thereof connected in parallel; and wherein said multi-channel, space-time filter circuit further comprises a respective

delay circuit for each signal part connected to an input of one of said pair of multipliers.

5 5. The wireless communications device of Claim 4 wherein the communications signal comprises a plurality of symbols; and wherein each of said multipliers and delay circuits has about a one-symbol delay associated therewith.

10 6. The wireless communications device of Claim 3 wherein said filter further comprises a respective summer circuit for each channel for summing outputs of the multipliers.

15 7. The wireless communications device of Claim 1 wherein said filter further comprises a joint optimal filter weights and channel estimator for receiving training sequence symbols and timing uncertainty data and for generating space-time filter weights for said multi-channel, space-time filter circuit and a multi-channel impulse response for said multi-channel matched filter circuit.

20

8. The wireless communications device of Claim 1 wherein said filter further comprises an equalizer circuit downstream from said multi-channel, matched filter circuit.

25 9. A wireless communications device comprising:
 a wireless transmitter and a wireless receiver;
 said wireless receiver comprising a filter system for reducing co-channel interference and comprising
 a joint space-time filter comprising
30 a multi-channel, space-time filter circuit that filters n signal parts that have been split from a communications signal by jointly estimating

space-time filter weights and multi-channel impulse responses (CIRs), and

5 a multi-channel, matched filter circuit that receives multi-channel signals from the multi-channel, space-time filter circuit and having a filter response that is provided by a channel impulse response estimation from the space-time filter circuit, and

10 an alternative filter operative when an interference level is below a predetermined threshold and comprising a matched filter, a cross-correlation circuit, and a switch mechanism for switching the n signal parts into the matched filter and cross-correlation circuit.

15 10. The wireless communications device of Claim 9 wherein said joint space-time filter further comprises a virtual antenna circuit connected to said multi-channel, space-time filter circuit that splits the communications signal into
20 odd and even sampled, real and imaginary n signal parts.

11. The wireless communications device of Claim 9 wherein said multi-channel, space-time filter circuit comprises at least one multiplier for multiplying each signal part by a
25 respective space-time filter weight.

12. The wireless communications device of Claim 11 wherein said at least one multiplier comprises a pair thereof connected in parallel; and wherein said multi-channel, space-time filter circuit further comprises a respective
30 delay circuit for each signal part connected to an input of one of said pair of multipliers.

13. The wireless communications device of Claim 12 wherein the communications signal comprises a plurality of symbols; and wherein each of said multipliers and delay circuits has about a one-symbol delay associated therewith.

5

14. The wireless communications device of Claim 11 wherein said joint space-time filter further comprises a respective summer circuit for each channel for summing outputs of the multipliers.

10

15. The wireless communications device of Claim 9 wherein said joint space-time filter further comprises a joint optimal filter weights and channel estimator for receiving training sequence symbols and timing uncertainty data and
15 for generating space-time filter weights for said multi-channel, space-time filter circuit and a multi-channel impulse response for said multi-channel matched filter circuit.

20

16. The wireless communications device of Claim 9 wherein said joint space-time filter further comprises an equalizer circuit downstream from said multi-channel, matched filter circuit.

25

17. A method of reducing co-channel interference within a wireless communications device and comprising:

providing a wireless receiver for the wireless communications device comprising a multi-channel, space-time filter circuit and a multi-channel matched filter circuit;

30

splitting a received communications signal into n signal parts;

filtering the n signal parts within the multi-channel, space-time filter circuit and jointly estimating space-time

filter weights and multi-channel channel impulse responses (CIRs); and

receiving multi-channel signals from the space-time filter circuit within the multi-channel matched filter circuit having a filter response that is provided by a
5 channel impulse response estimation from the space-time filter circuit.

18. The method according to Claim 17 wherein splitting
10 comprises sampling the communications signal into even and odd samples and separating the even and odd samples into real and imaginary signal parts.

19. The method according to Claim 17 further comprising
15 summing outputs of the matched filter and rescaling to a desired level.

20. The method according to Claim 19 further comprising
20 equalizing a single channel signal after rescaling to a desired level.

21. The method according to Claim 17 wherein the wireless receiver further comprises an alternative filter; and further comprising filtering the n-signal parts within the
25 alternative filter when an interference level is below a threshold.

22. The method according to Claim 17 further comprising
30 multiplying each signal part based on space-time filter weights.

23. The method according to Claim 22 further comprising summing the signal parts for each channel after multiplying.

1/10

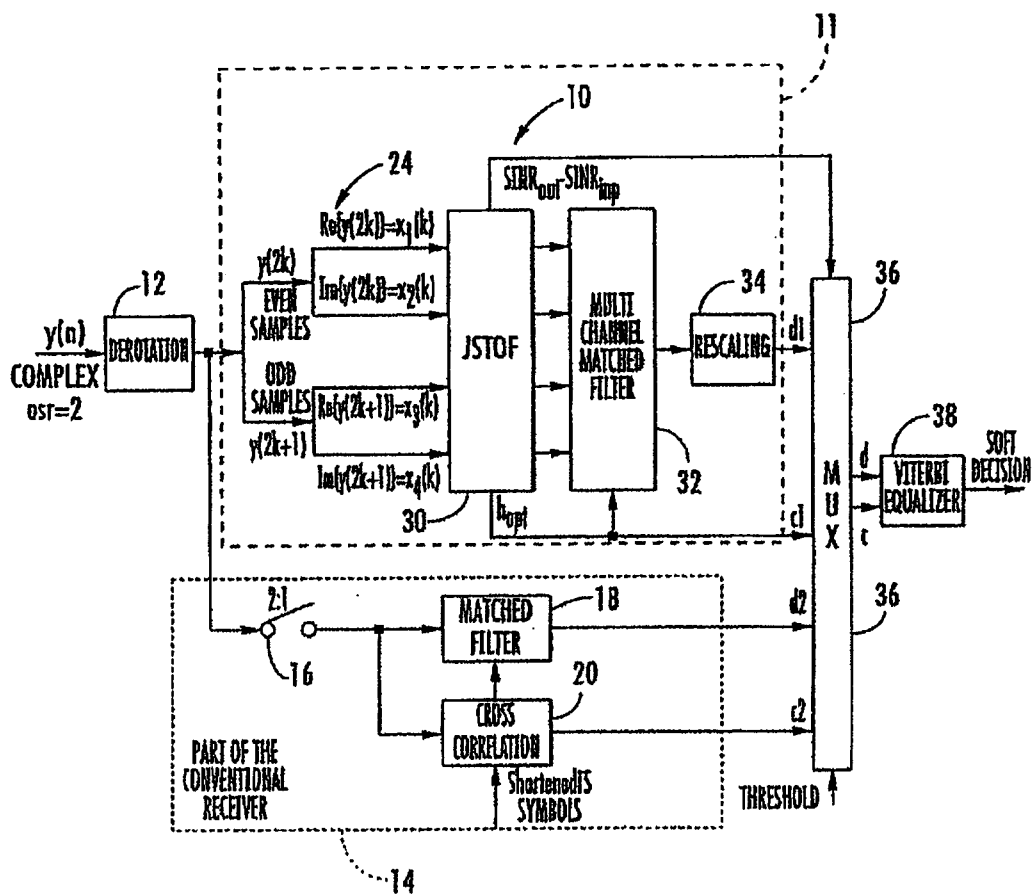


FIG. 1

2/10

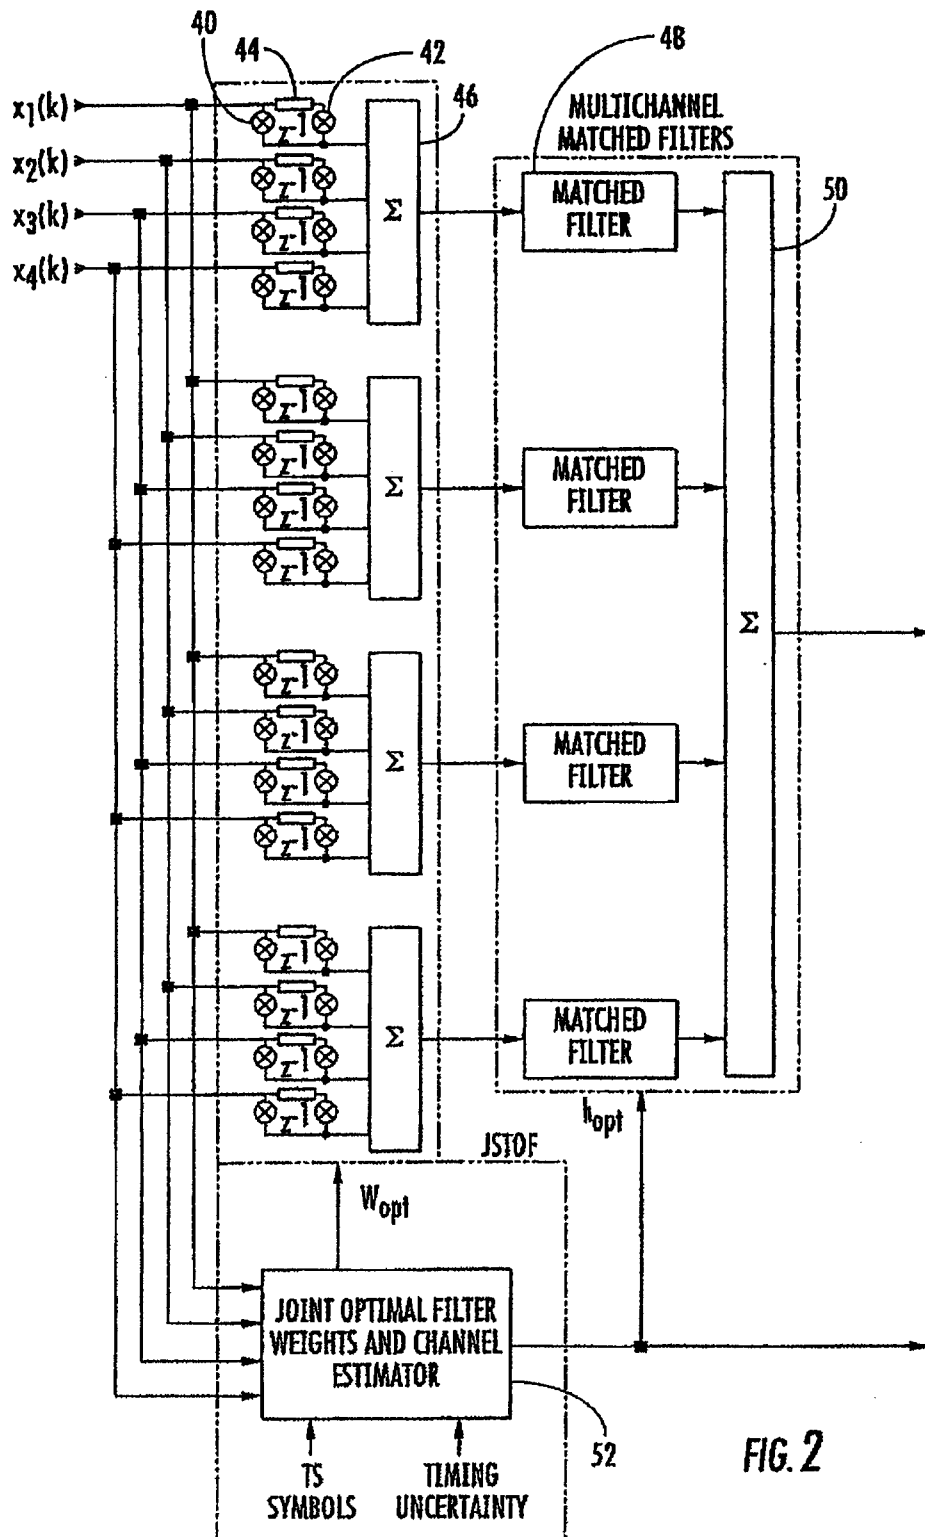


FIG. 2

3/10



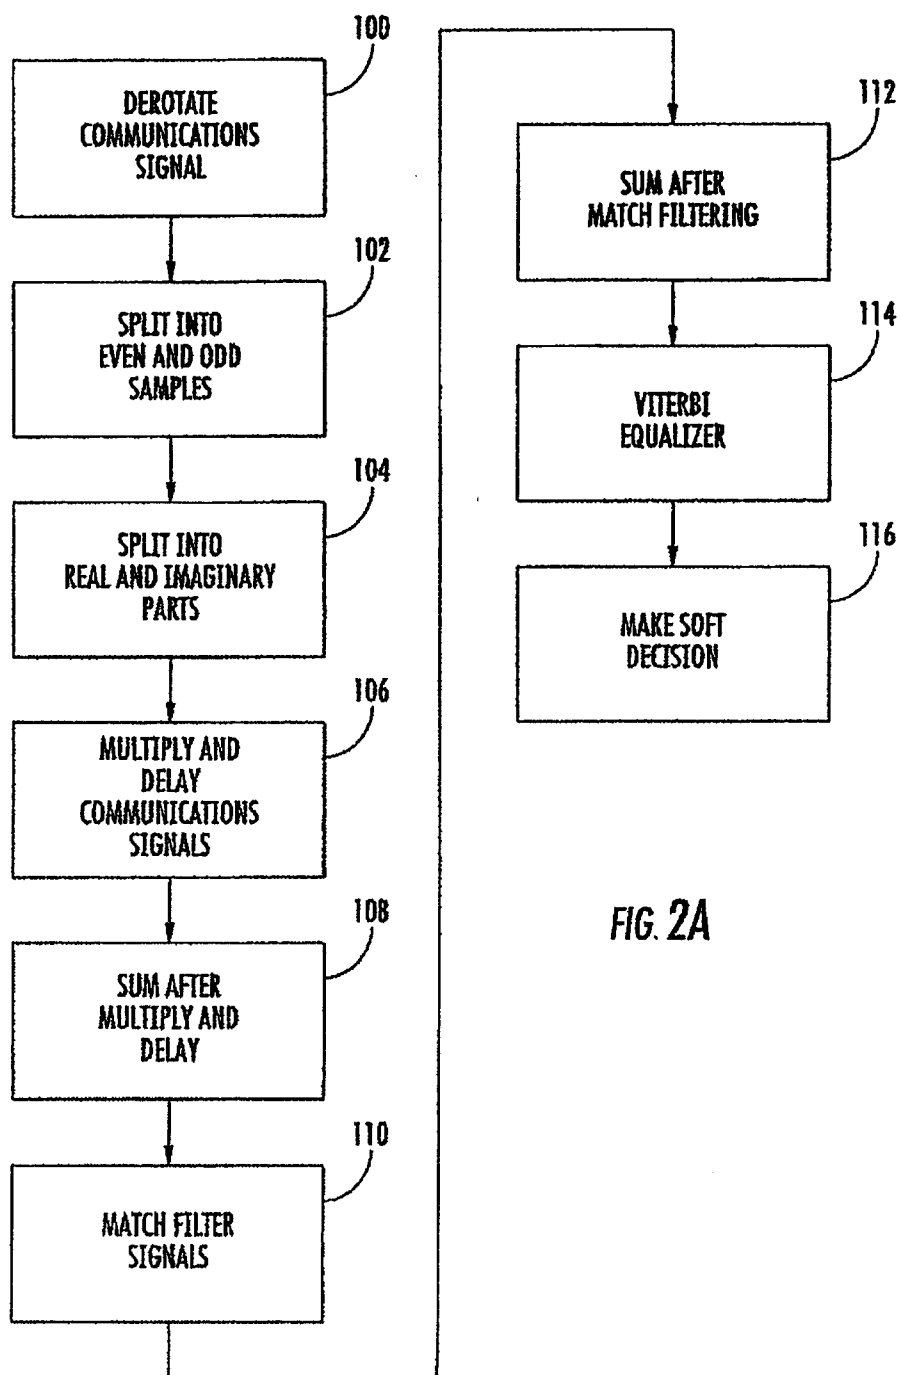


FIG. 2A

4/10

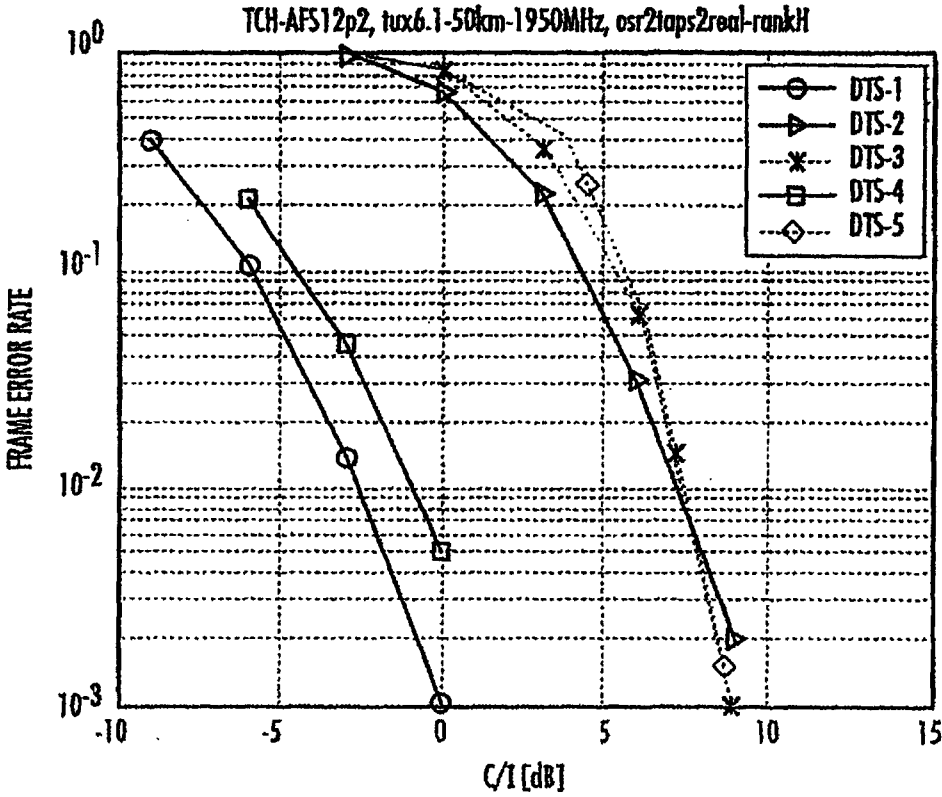

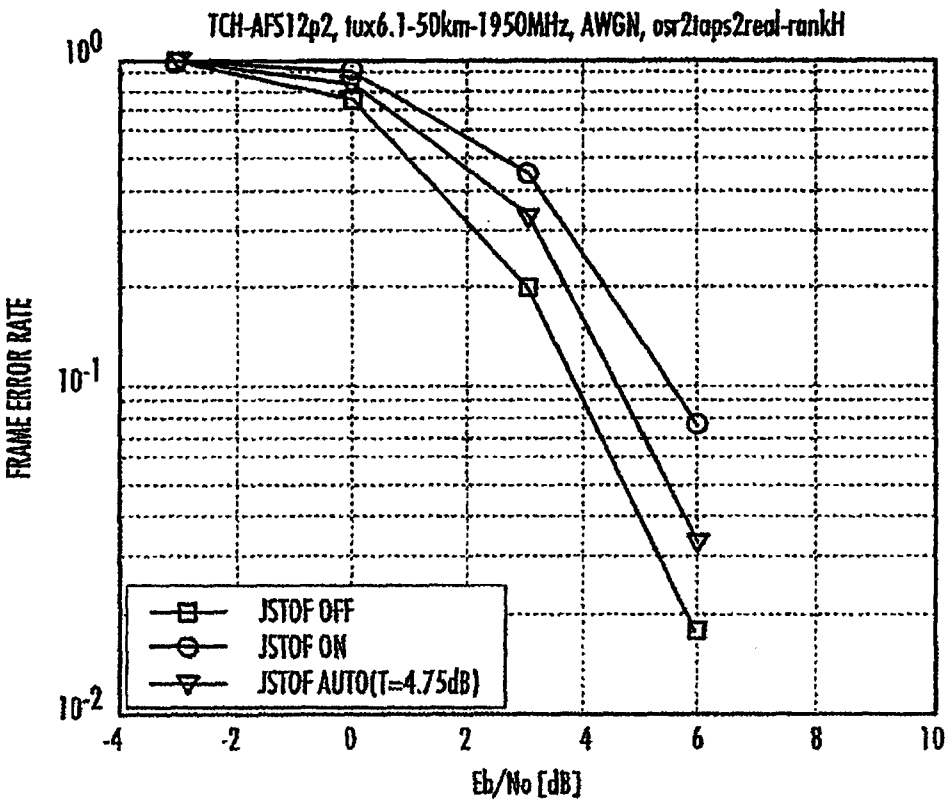

6/10

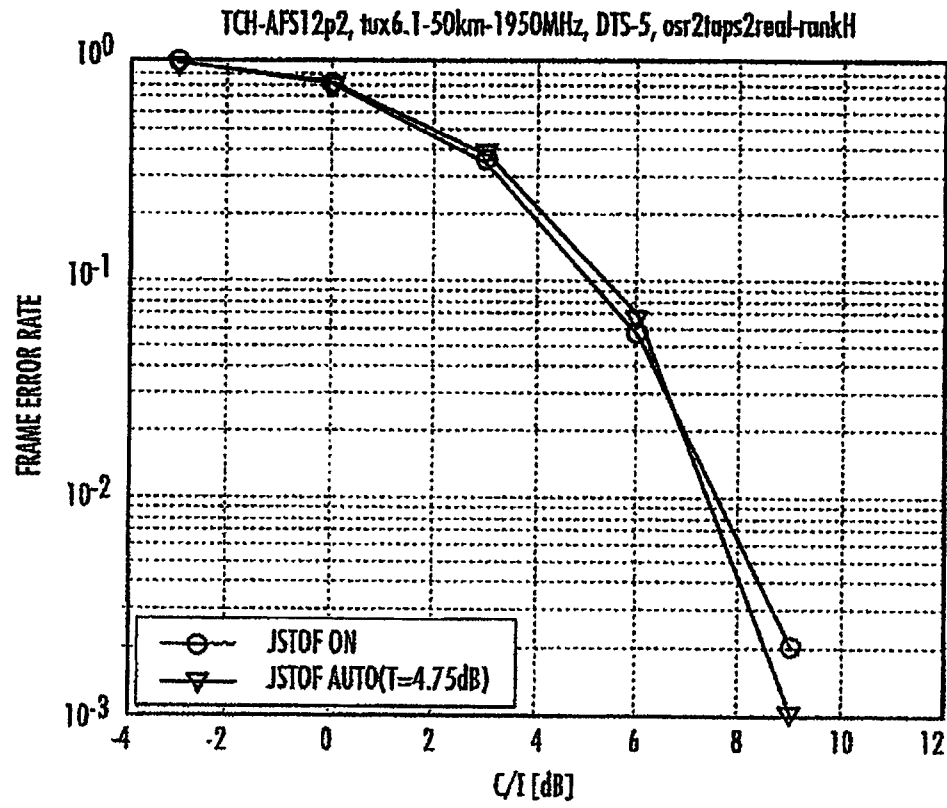


FIG. 5

7/10


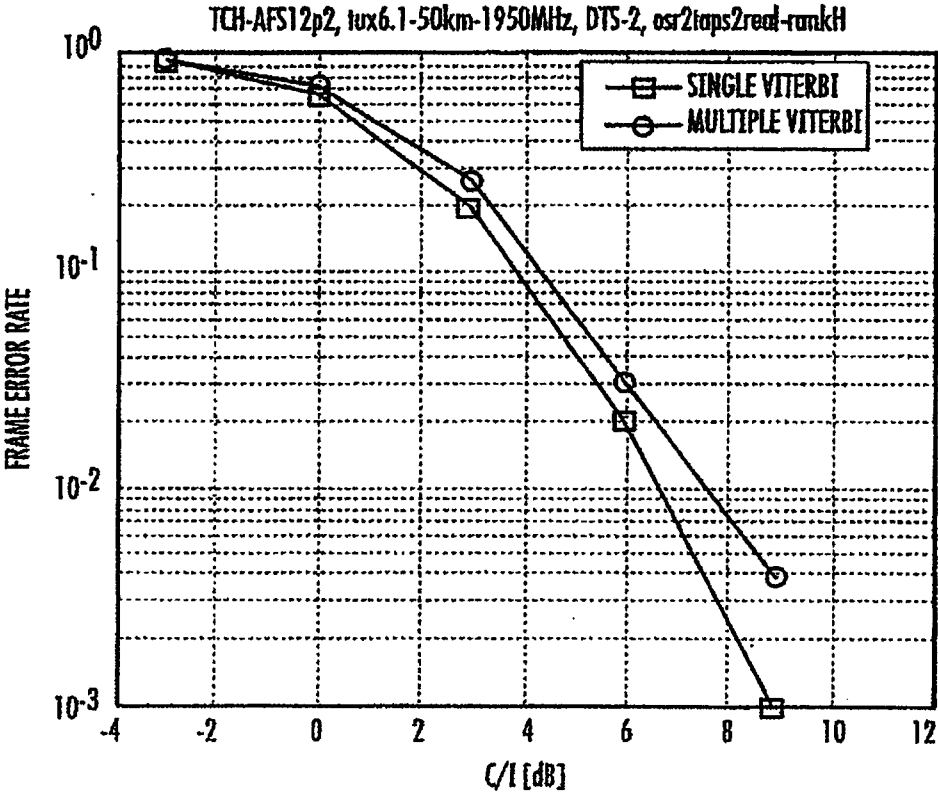


FIG. 6

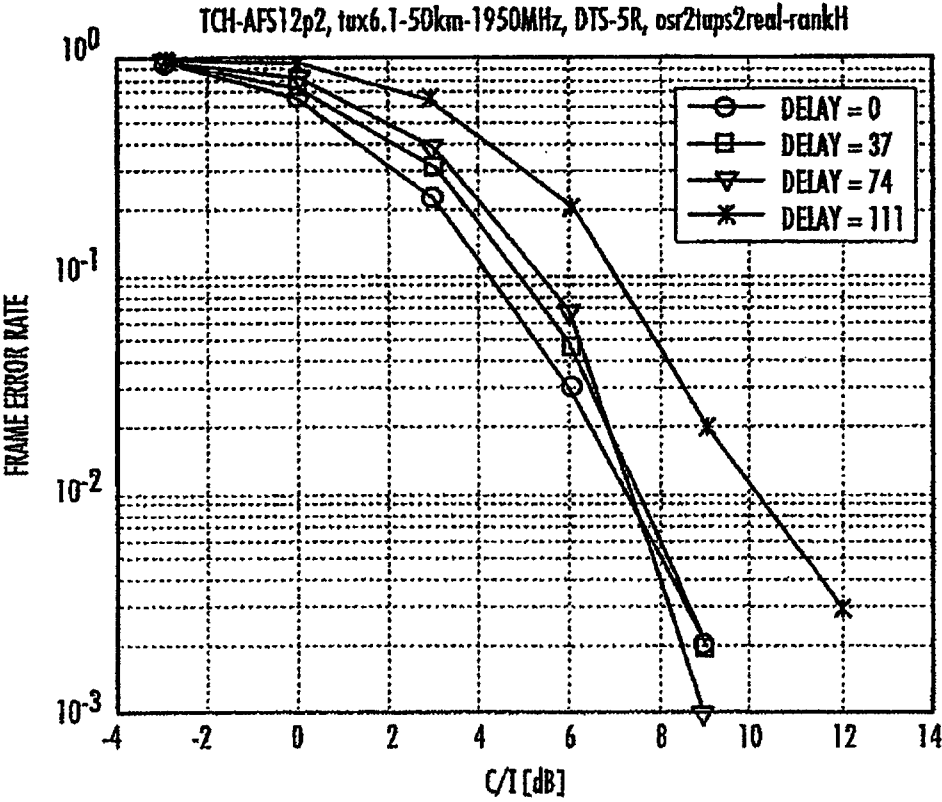

9/10

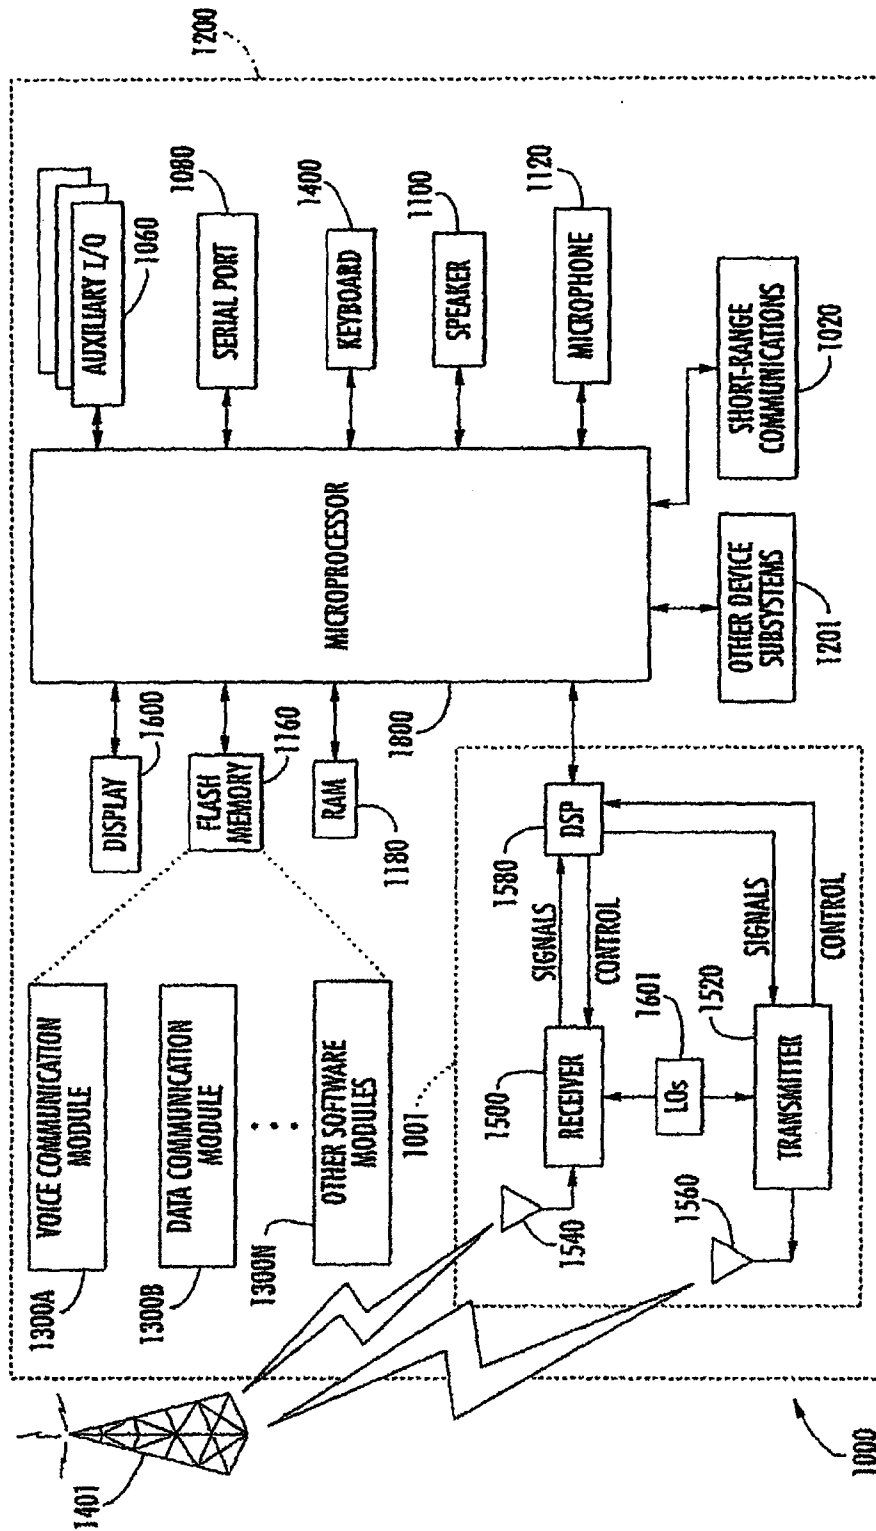


FIG. 8

10/10

Cholesky and EVD in Covariance Domain	QR and EVD in Sample and Covariance Domain	SVD in Sample Domain
1. $\mathbf{R}_s = \overline{\mathbf{S}}\overline{\mathbf{S}}^T$ (6×21) (21×6) $\mathbf{R}_s = \mathbf{L}_s\mathbf{L}_s^T$ (6×6)	$\mathbf{R}_s = \overline{\mathbf{S}}\overline{\mathbf{S}}^T$ (6×21) (21×6) $\mathbf{R}_s = \mathbf{L}_s\mathbf{L}_s^T$ (6×6)	$\mathbf{R}_s = \overline{\mathbf{S}}\overline{\mathbf{S}}^T$ (6×21) (21×6) $\mathbf{R}_s = \mathbf{L}_s\mathbf{L}_s^T$ (6×6)
2. $\mathbf{R}_x = \overline{\mathbf{X}}\overline{\mathbf{X}}^T$ (8×21) (21×8) $\mathbf{R}_{xs} = \overline{\mathbf{X}}\overline{\mathbf{S}}^T$ (8×21) (21×6) $\mathbf{R}_x = \mathbf{L}_x\mathbf{L}_x^T$ (8×8) (8×8)	$\overline{\mathbf{X}}^T = \mathbf{Q}\mathbf{R}$ (21×8) (8×8)	$\overline{\mathbf{X}}^T = \mathbf{U}_x\boldsymbol{\Sigma}_x\mathbf{V}_x^T$ (21×8) (8×8) (8×8) $\boldsymbol{\Sigma}_x = \text{diag}(\sigma_1, \dots, \sigma_8)$ (8×8)
3. $\mathbf{D} = \mathbf{L}_s^T\mathbf{R}_{xs}\mathbf{R}_x^{-1}\mathbf{R}_{xs}\mathbf{L}_s^{-1}$ (6×6) $= \mathbf{D}_1\mathbf{D}_1^T$ (6×8) (8×6) $\mathbf{D}_1 = \mathbf{L}_s^T\mathbf{R}_{xs}\mathbf{L}_x^{-T} = \mathbf{R}_1^T\mathbf{L}_x^{-T}$ (6×8) = (6×8) (8×8) $\mathbf{R}_1 = \mathbf{R}_{xs}\mathbf{L}_s^{-1}$ (8×6)	$\mathbf{D} = \mathbf{D}_1\mathbf{D}_1^T$ (6×6) $\mathbf{D}_1 = \mathbf{L}_s^T\overline{\mathbf{S}}\mathbf{Q}$ (6×8) = (6×6) (6×21) (21×8)	$\mathbf{D} = \mathbf{D}_1\mathbf{D}_1^T$ (6×6) $\mathbf{D}_1 = \mathbf{L}_s^T\overline{\mathbf{S}}\mathbf{U}_x$ (6×8) = (6×6) (6×21) (21×8)
4. $\mathbf{D} = \mathbf{V}_D\boldsymbol{\Lambda}_D\mathbf{V}_D^T$ (6×6) (6×6) (6×6) $\mathbf{V}_{D4} = \mathbf{V}_D(:, 1:4)$ (6×4)	$\mathbf{D} = \mathbf{V}_D\boldsymbol{\Lambda}_D\mathbf{V}_D^T$ (6×6) (6×6) (6×6) $\mathbf{V}_{D4} = \mathbf{V}_D(:, 1:4)$ (6×4)	$\mathbf{D}_1^T = \mathbf{U}_D\boldsymbol{\Sigma}_D\mathbf{V}_D^T$ (8×6) (6×6) (6×6) $\mathbf{V}_{D4} = \mathbf{V}_D(:, 1:4)$ (6×4)
5. $\hat{\mathbf{H}}_t = \mathbf{L}_s^{-1}\mathbf{V}_{D4}$ (6×4) $\hat{\mathbf{H}}_s = \mathbf{R}_{xs}\hat{\mathbf{H}}_t$ (8×4) $\hat{\mathbf{H}} = \hat{\mathbf{H}}_s\hat{\mathbf{H}}_t^T = \mathbf{R}_1\mathbf{V}_{D4}\mathbf{V}_{D4}^T\mathbf{L}_s^{-T}$ $= \mathbf{R}_{1v}\mathbf{L}_s^{-T}$ (8×6) = (8×6) (6×6) $\mathbf{R}_{1v} = \mathbf{R}_1\mathbf{V}_{D4}\mathbf{V}_{D4}^T$ (8×6) = (8×6) (6×4) (4×6)	$\hat{\mathbf{H}}_t = \mathbf{L}_s^{-1}\mathbf{V}_{D4}$ (6×4) $\hat{\mathbf{H}}_s = \mathbf{R}_{xs}\hat{\mathbf{H}}_t = \mathbf{R}^T\mathbf{D}_1^T\mathbf{V}_{D4}$ (8×4) $\hat{\mathbf{H}} = \mathbf{R}_{1v}\mathbf{L}_s^{-T}$ (8×6) = (8×6) (6×6) $\mathbf{R}_{1v} = \mathbf{R}^T\mathbf{D}_1^T\mathbf{V}_{D4}\mathbf{V}_{D4}^T$ (8×6) = (8×8) (8×6) (6×4) (4×6)	$\hat{\mathbf{H}}_t = \mathbf{L}_s^{-1}\mathbf{V}_{D4}$ (6×4) $\hat{\mathbf{H}}_s = \overline{\mathbf{X}}\overline{\mathbf{S}}^T\mathbf{L}_s^{-1}\mathbf{V}_{D4}$ (8×4) $\mathbf{H} = \overline{\mathbf{X}}\overline{\mathbf{S}}^T\mathbf{L}_s^{-1}\mathbf{V}_{D4}\mathbf{V}_{D4}^T\mathbf{L}_s^{-T}$ (8×6) = (8×21) (21×6) (6×4) (4×6) (6×6)
6. $\mathbf{w}_{opt} = \mathbf{R}_x^{-1}\mathbf{R}_{xs}\hat{\mathbf{H}}_t$ (8×4) $= \mathbf{L}_x^{-T}\mathbf{D}_v$ (8×8) (8×4) = (8×4) $\mathbf{D}_v = \mathbf{D}_1^T\mathbf{V}_{D4}$ (8×6) (6×4) = (8×4)	$\mathbf{w}_{opt} = \mathbf{R}_x^{-1}\mathbf{R}_{xs}\hat{\mathbf{H}}_t$ (8×4) $= \mathbf{R}^{-1}\mathbf{D}_v$ (8×8) (8×4) = (8×4) $\mathbf{D}_v = \mathbf{D}_1^T\mathbf{V}_{D4}$ (8×6) (6×4) = (8×4)	$\mathbf{w}_{opt} = \mathbf{V}_x\boldsymbol{\Sigma}_x^{-1}\mathbf{U}_x^T\overline{\mathbf{S}}^T\mathbf{L}_s^{-1}\mathbf{V}_{D4}$ $= \mathbf{V}_x\boldsymbol{\Sigma}_x^{-1}\mathbf{D}_1^T\mathbf{V}_{D4}$ (8×8)(8×8)(8×6) (6×4) $\boldsymbol{\Sigma}_x^{-1} = \text{diag}(1/\sigma_1, \dots, 1/\sigma_8)$ (8×8)
7. $\mathbf{h}_{opt} = \mathbf{w}_{opt}^T\hat{\mathbf{H}}$ (4×6)	$\mathbf{h}_{opt} = \mathbf{w}_{opt}^T\hat{\mathbf{H}}$ (4×6)	$\mathbf{h}_{opt} = \mathbf{w}_{opt}^T\hat{\mathbf{H}}$ (4×6)

FIG. 9

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2006/000855

A. CLASSIFICATION OF SUBJECT MATTER IPC: <i>H04Q 7/32</i> (2006.01) , <i>H04B 1/10</i> (2006.01) According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) IPC (2006.01) H04Q, H04B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used) Epodoc, Delphion, IEEE Xplore, Canadian Patent Database. Terms used: virtual, antenna, space, time, filter, spatial, array, complex, imaginary, impulse, matched, wireless, downlink advanced wireless performance, darp, mimo, jstof, miso		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2004/019447 (Van Rooyen et al.) 4 March 2004 (04-03-2004) whole document	1, 9, 17
A	US 2005/0047515 (Walton et al.) 3 March 2005 (03-03-2005) paragraphs 0081 to 0144	1, 9, 17
A	DE 4201439 (Mueller) 22 July 1993 (22-07-1993)	
A	EP 1,404,046 (Kuzminskiy et al.) 31 March 2004 (31-03-2004)	
A	WO 2005/011047 (Judd) 3 February 2005 (03-02-2005)	
A	Higher order space-time block codes for virtual antenna arrays Dohler et al. Telecommunications, 2003. ICT 2003. 10th International Conference on Volume 1, 23 Feb.-1 March 2003, pages 198 - 203 Digital Object Identifier: 10.1109/ICTEL.2003.1191212	
☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents :	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family	
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search	Date of mailing of the international search report	
30 August 2006 (30-08-2006)	13 September 2006 (13-09-2006)	
Name and mailing address of the ISA/CA Canadian Intellectual Property Office Place du Portage I, C114 - 1st Floor, Box PCT 50 Victoria Street Gatineau, Quebec K1A 0C9 Facsimile No.: 001(819)953-2476	Authorized officer Andrew O'Malley (819) 953-5481	

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CA2006/000855

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
WO2004019447	04-03-2004	AU2003262848 A1 CN1695271 A EP1540763 A2 US2004104844 A1	11-03-2004 09-11-2005 15-06-2005 03-06-2004
US2005047515	03-03-2005	CA2536425 A1 EP1671443 A1 US7065144 B2 WO2005022817 A1	10-03-2005 21-06-2006 20-06-2006 10-03-2005
DE4201439	22-07-1993	NONE	
EP1404046	31-03-2004	US2004062328 A1	01-04-2004
WO2005011047	03-02-2005	US2005030228 A1	10-02-2005