



(12) **DEMANDE DE BREVET CANADIEN**
CANADIAN PATENT APPLICATION

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2019/01/11
(87) Date publication PCT/PCT Publication Date: 2019/07/18
(85) Entrée phase nationale/National Entry: 2020/07/10
(86) N° demande PCT/PCT Application No.: US 2019/013333
(87) N° publication PCT/PCT Publication No.: 2019/140287
(30) Priorités/Priorities: 2018/01/12 (US62/617,108);
2019/01/11 (US16/245,375)

(51) Cl.Int./Int.Cl. *E21B 43/26* (2006.01),
E21B 43/267 (2006.01), *E21B 47/06* (2012.01),
E21B 49/00 (2006.01)
(71) Demandeur/Applicant:
COILED TUBING SPECIALTIES, LLC, US
(72) Inventeurs/Inventors:
RANDALL, BRUCE L., US;
RANDALL, BRADFORD G., US;
BRISCO, DAVID P., US
(74) Agent: MACRAE & CO.

(54) Titre : PROCÉDE PERMETTANT D'ÉVITER LES IMPACTS DE FRACTURATION PENDANT UNE STIMULATION
DE FORMATION

(54) Title: METHOD OF AVOIDING FRAC HITS DURING FORMATION STIMULATION

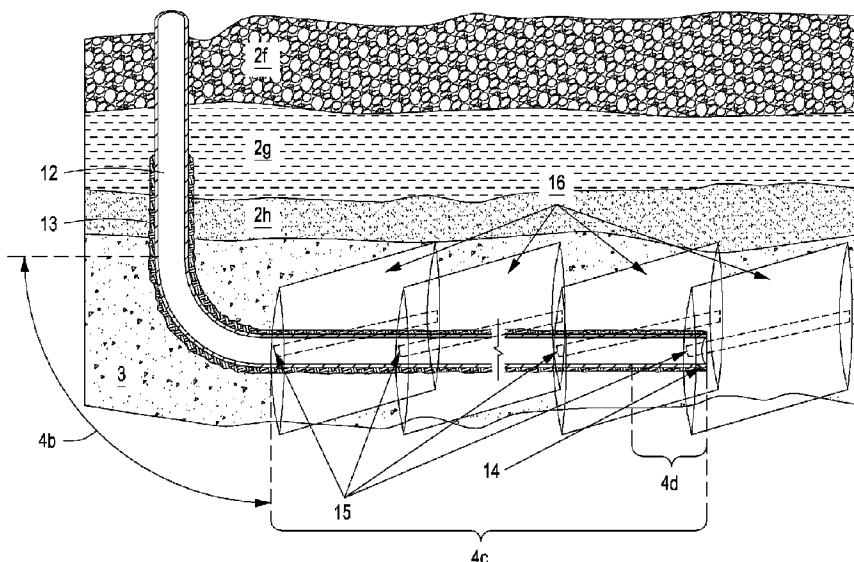


FIG. 1B

(57) **Abrégé/Abstract:**

A method for avoiding a frac hit during a formation stimulation operation. The method includes providing a child wellbore within a hydrocarbon-producing field. The method also includes identifying a parent wellbore within the hydrocarbon-producing field. The method also includes conveying a hydraulic jetting assembly into the child wellbore on a working string. The method additionally includes setting a whipstock in the wellbore at a first casing exit location. The method then includes injecting hydraulic jetting fluid through a jetting hose and connected jetting nozzle while advancing the nozzle through against a face of the whipstock, and through a first window. The nozzle advances into the surrounding rock matrix, thereby forming a lateral borehole that extends away from the wellbore. The method also includes controlling (i) a distance of the lateral borehole from the child wellbore, (ii) a direction of the lateral borehole from the child wellbore, or (iii) both prior to hydraulic fracturing.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property

Organization

International Bureau

(43) International Publication Date

18 July 2019 (18.07.2019)



(10) International Publication Number

WO 2019/140287 A3

(51) International Patent Classification:

E21B 43/247 (2006.01) *E21B 47/06* (2012.01)*E21B 43/26* (2006.01) *E21B 49/00* (2006.01)*E21B 43/267* (2006.01)

(21) International Application Number:

PCT/US2019/013333

(22) International Filing Date:

11 January 2019 (11.01.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/617,108 12 January 2018 (12.01.2018) US

16/245,375 11 January 2019 (11.01.2019) US

(71) Applicant: **COILED TUBING SPECIALTIES, LLC**

[US/US]; 7404 South Yale Avenue, Silver Ridge Office Park, Tulsa, OK 74136 (US).

(72) Inventors; and

(71) Applicants: **RANDALL, Bruce, L.** [US/US]; 7404 South Yale Avenue, Silver Ridge Office Park, Tulsa, OK 74136 (US). **RANDALL, Bradford, G.** [US/US]; 6764 S. Atlanta Place, Tulsa, OK 74136 (US). **BRISCO, David, P.** [US/US]; 7404 Hidden Creek Drive, Duncan, OK 73533 (US).(74) Agent: **BREWER, Peter**; Thrive IP, 8903 Linksvue Drive, Knoxville, TN 37919 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,

(54) Title: METHOD OF AVOIDING FRAC HITS DURING FORMATION STIMULATION

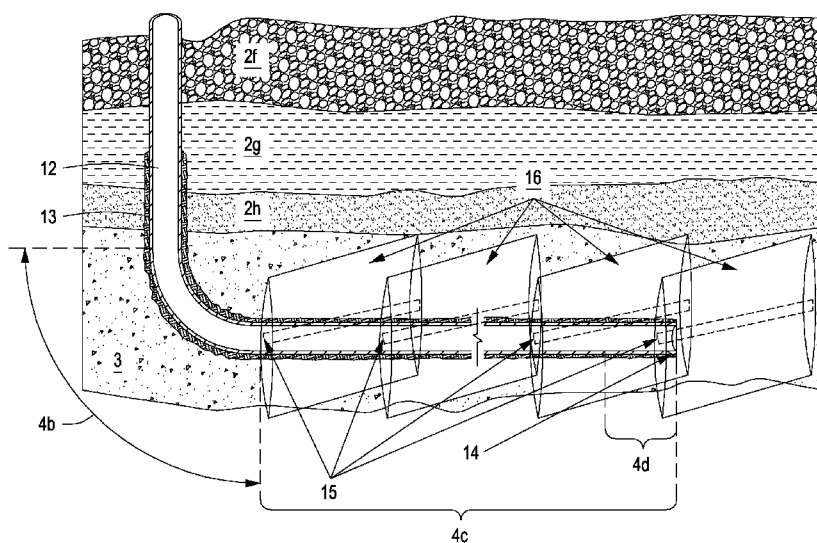


FIG. 1B

(57) **Abstract:** A method for avoiding a frac hit during a formation stimulation operation. The method includes providing a child wellbore within a hydrocarbon-producing field. The method also includes identifying a parent wellbore within the hydrocarbon-producing field. The method also includes conveying a hydraulic jetting assembly into the child wellbore on a working string. The method additionally includes setting a whipstock in the wellbore at a first casing exit location. The method then includes injecting hydraulic jetting fluid through a jetting hose and connected jetting nozzle while advancing the nozzle through against a face of the whipstock, and through a first window. The nozzle advances into the surrounding rock matrix, thereby forming a lateral borehole that extends away from the wellbore. The method also includes controlling (i) a distance of the lateral borehole from the child wellbore, (ii) a direction of the lateral borehole from the child wellbore, or (iii) both prior to hydraulic fracturing.

[Continued on next page]



WO 2019/140287 A3

WO 2019/140287 A3

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *of inventorship (Rule 4.17(iv))*

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) Date of publication of the international search report:

15 August 2019 (15.08.2019)

**METHOD FOR AVOIDING FRAC HITS
DURING FORMATION STIMULATION**

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

[001] Not applicable.

THE NAMES OF THE PARTIES TO A JOINT RESEARCH AGREEMENT

[002] Not applicable.

STATEMENT OF RELATED APPLICATIONS

[003] This application claims the benefit of U.S. Provisional Patent Appl. No. 62/617,108 filed January 12, 2018. That application is entitled “Method of Avoiding Frac Hits During Formation Stimulation.”

[004] This application is also a Continuation-In-Part of U.S. Patent Appl. No. 15/009,623 filed January 28, 2016. That application is entitled “Method of Forming Lateral Boreholes From A Parent Wellbore.”

[005] The parent application claims the benefit of U.S. Provisional Patent Appl. No. 62/198,575 filed July 29, 2015. That application is entitled “Downhole Hydraulic Jetting Assembly, and Method for Forming Mini-Lateral Boreholes.” The parent application also claims the benefit of U.S. Provisional Patent Appl. No. 62/120,212 filed February 24, 2015 of the same title.

[006] These applications are all incorporated by reference herein in their entireties.

BACKGROUND OF THE INVENTION

[007] This section is intended to introduce selected aspects of the art, which may be associated with various embodiments of the present disclosure. This discussion is believed to assist in providing a framework to facilitate a better understanding of particular aspects of the present disclosure. Accordingly, it should be understood that this section should be read in this light, and not necessarily as admissions of prior art.

Field of the Invention

[008] The present disclosure relates to the field of well completion. More specifically, the present disclosure relates to the completion and stimulation of a hydrocarbon-producing formation by the generation of small diameter boreholes from an existing wellbore using a hydraulic jetting assembly. The present disclosure further relates to the controlled generation of one or more lateral boreholes that extend into a subsurface formation while minimizing or completely avoiding “frac hits” in neighboring wellbores.

Discussion of Technology

[009] In the drilling of an oil and gas well, a near-vertical wellbore is formed through the earth using a drill bit urged downwardly at a lower end of a drill string. After drilling to a predetermined bottomhole location, the drill string and bit are removed and the wellbore is lined with a string of casing. An annular area is thus formed between the string of casing and the formation penetrated by the wellbore. Particularly in a vertical wellbore, or the vertical section of a horizontal well, a cementing operation is conducted in order to fill or “squeeze” the annular volume with cement along part or all of the length of the wellbore. The combination of cement and casing strengthens the wellbore and facilitates zonal isolation behind the casing.

[0010] Advances in drilling technology have enabled oil and gas operators to economically “kick-off” and steer wellbore trajectories from a generally vertical orientation to a generally horizontal orientation. The horizontal “leg” of each of these wellbores now often exceeds a length of one mile, and sometimes two or even three miles. This significantly multiplies the

wellbore exposure to a target hydrocarbon-bearing formation (or “pay zone”). As an example, consider a target pay zone having a (vertical) thickness of 100 feet. A one-mile horizontal leg exposes 52.8 times as much pay zone to a horizontal wellbore as compared to the 100-foot exposure of a conventional vertical wellbore.

[0011] **Figure 1A** provides a cross-sectional view of a wellbore **4** having been completed in a horizontal orientation. It can be seen that the wellbore **4** has been formed from the earth surface **1**, through numerous earth strata **2a**, **2b**, . . . **2h** and down to a hydrocarbon-producing formation **3**. The subsurface formation **3** represents a “pay zone” for the oil and gas operator. The wellbore **4** includes a vertical section **4a** above the pay zone, and a horizontal section **4c**. The horizontal section **4c** defines a heel **4b** and a toe **4d** and an elongated leg there between that extends through the pay zone **3**.

[0012] In connection with the completion of the wellbore **4**, several strings of casing having progressively smaller outer diameters have been cemented into the wellbore **4**. These include a string of surface casing **6**, and may include one or more strings of intermediate casing **9**, and finally, a production casing **12**. (Not shown is the shallowest and largest diameter casing referred to as conductor pipe, which is a short section of pipe separate from and immediately above the surface casing.) One of the main functions of the surface casing **6** is to isolate and protect the shallower, fresh water bearing aquifers from contamination by any wellbore fluids. Accordingly, the conductor pipe and the surface casing **6** are almost always cemented **7** entirely back to the surface **1**.

[0013] Surface casing **6** is shown as cemented **7** fully from a surface casing shoe **8** back to the surface **1**. An intermediate casing string **9** is only partially cemented **10** from its shoe **11**. Similarly, production casing string **12** is only partially cemented **13** from its casing shoe **14**, though sufficiently isolating the pay zone **3**.

[0014] The process of drilling and then cementing progressively smaller strings of casing is repeated several times until the well has reached total depth. In some instances, the final string of casing **12** is a liner, that is, a string of casing that is not tied back to the surface **1**. The final

string of casing **12**, referred to as a production casing, is also typically cemented **13** into place. In the case of a horizontal completion, the production casing **12** may be cemented, or may provide zonal isolation using external casing packers (“ECP’s), swell packers, or some combination thereof.

[0015] Additional tubular bodies may be included in a well completion. These include one or more strings of production tubing placed within the production casing or liner (not shown in **Figure 1A**). In a vertical well completion, each tubing string extends from the surface **1** to a designated depth proximate the production interval **3**, and may be attached to a packer (not shown). The packer serves to seal off the annular space between the production tubing string and the surrounding casing **12**. In a horizontal well completion, the production tubing is typically landed (with or without a packer) at or near the heel **4b** of the wellbore **4**.

[0016] In some instances, the pay zone **3** is incapable of flowing fluids to the surface **1** efficiently. When this occurs, the operator may install artificial lift equipment (not shown in **Figure 1A**) as part of the wellbore completion. Artificial lift equipment may include a downhole pump connected to a surface pumping unit via a string of sucker rods run within the tubing. Alternatively, an electrically-driven submersible pump may be placed at the bottom end of the production tubing. As part of the completion process, a wellhead **5** is installed at the surface **1**. The wellhead **5** serves to contain wellbore pressures and direct the flow of production fluids at the surface **1**.

[0017] Within the United States, many wells are now drilled principally to recover oil and/or natural gas, and potentially natural gas liquids, from pay zones previously thought to be too impermeable to produce hydrocarbons in economically viable quantities. Such “tight” or “unconventional” formations may be sandstone, siltstone, or even shale formations. Alternatively, such unconventional formations may include coalbed methane. In any instance, “low permeability” typically refers to a rock interval having permeability less than 0.1 millidarcies.

[0018] In order to enhance the recovery of hydrocarbons, particularly in low-permeability formations, subsequent (i.e., after perforating the production casing or liner) stimulation techniques may be employed in the completion of pay zones. Such techniques include hydraulic fracturing and/or acidizing. In addition, “kick-off” wellbores may be formed from a primary wellbore in order to create one or more new directionally or horizontally completed boreholes. This allows a well to penetrate along the depositional plane of a subsurface formation to increase exposure to the pay zone. Where the natural or hydraulically-induced fracture plane(s) of a formation is vertical, a horizontally completed wellbore allows the production casing to intersect, or “source,” multiple fracture planes. Accordingly, whereas vertically oriented wellbores are typically constrained to a single hydraulically-induced fracture plane per pay zone, horizontal wellbores may be perforated and hydraulically fractured in multiple locations, or “stages,” along the horizontal leg **4c**, producing multiple fracture planes.

[0019] **Figure 1A** demonstrates a series of fracture half-planes **16** along the horizontal section **4c** of the wellbore **4**. The fracture half-planes **16** represent the orientation of fractures that will form in connection with a known perforating/fracturing operation. The fractures are formed by the injection of a fracturing fluid through perforations **15** formed in the horizontal section **4c**.

[0020] The size and orientation of a fracture, and the amount of hydraulic pressure needed to part the rock along a fracture plane, are dictated by the formation’s *in situ* stress field. This stress field can be defined by three principal compressive stresses which are oriented perpendicular to one another. These represent a vertical stress, a minimum horizontal stress, and a maximum horizontal stress. The magnitudes and orientations of these three principal stresses are determined by the geomechanics in the region and by the pore pressure, depth and rock properties.

[0021] According to principles of geo-mechanics, fracture planes will generally form in a direction that is perpendicular to the plane of least principal stress in a rock matrix. Stated more simply, in most wellbores, the rock matrix will part along vertical lines when the horizontal section of a wellbore resides below 3,000 feet, and sometimes as shallow as 1,500 feet, below the surface. In this instance, hydraulic fractures will tend to propagate from the wellbore’s

perforations **15** in a vertical, elliptical plane perpendicular to the plane of least principle stress. If the orientation of the least principle stress plane is known, the longitudinal axis of the leg **4c** of a horizontal wellbore **4** is ideally oriented parallel to it such that the multiple fracture planes **16** will intersect the wellbore at-or-near orthogonal to the horizontal leg **4c** of the wellbore, as depicted in **Figure 1A**.

[0022] In actuality, and particularly in unconventional shale reservoirs, resultant fracture geometries are often more complex than a single, essentially two-dimensional elliptical plane. Instead, a more complex three-dimensional Stimulated Reservoir Volume (“SRV”) is generated from a single hydraulic fracturing treatment. Hence, whereas for conventional reservoirs the key post-stimulation metric was propped frac length (or “half length”) within the pay zone, for unconventional reservoirs the key metric is SRV.

[0023] In **Figure 1A**, the fracture planes **16** are spaced apart along the horizontal leg **4c**. The desired density of the perforated and fractured intervals along the horizontal leg **4c** is optimized by calculating:

- the estimated ultimate recovery (“EUR”) of hydrocarbons each fracture will drain, which requires a computation of the SRV that each fracture treatment will connect to the wellbore via its respective perforations; less
- any overlap with the respective SRV’s of bounding fracture intervals; coupled with
- the anticipated time-distribution of hydrocarbon recovery from each fracture; versus
- the incremental cost of adding another perforated/fractured interval.

The ability to make this calculation and replicate multiple vertical completions along a single horizontal wellbore is what has made the pursuit of hydrocarbon reserves from unconventional reservoirs, and particularly shales, economically viable within relatively recent times. This revolutionary technology has had such a profound impact that currently Baker Hughes Rig Count information for the United States indicates only about one out of every fifteen (7%) of wells

being drilled in the U.S. are classified as “Vertical”, whereas the remainder are classified as either “Horizontal” or “Directional” (85% and 8%, respectively). That is, horizontal wells currently comprise approximately six out of every seven wells being drilled in the United States.

[0024] The additional costs in drilling and completing horizontal wells as opposed to vertical wells is not insignificant. In fact, it is not at all uncommon to see horizontal well drilling and completion (“D&C”) costs top multiples (double, triple, or greater) of their vertical counterparts. Obviously, the vertical-vs-horizontal D&C cost multiplier is a direct function of the length of the horizontal leg 4c of wellbore 4.

[0025] Common perforation mechanisms are “plug-n-perf” operations where sequences of bridge plugs and perforating guns are pumped down the wellbore to desired locations, or hydra-jet perforations typically obtained from coiled tubing (“CT”) conveyed systems, the former being perhaps the most common method. Though relatively simple, plug-n-perf systems leave a series of bridge plugs that must be later drilled out (unless they are dissolvable, and hence, typically more expensive), a function that becomes even more time consuming (and again, more expensive) as horizontal lateral lengths continue to get longer and longer. Even more elaborate mechanisms providing pressure communication between the casing I.D. and the pay zone 3 include ported systems activated by dissolvable balls (of graduated diameters) or plugs, or sliding sleeve systems typically opened or closed via a CT-conveyed tool.

[0026] Important to the economic success of any horizontal well is the achievement of satisfactory SRV’s within the pay zone being completed. Many factors can contribute to the success or failure in achieving the desired SRV’s, including the rock properties of the pay zone and how these properties contrast with bounding rock layers both above and below the pay zone. For example, if either bounding layer is weaker than the pay zone, hydraulic fractures will tend to propagate out-of-zone into that weaker layer, thus commensurately reducing the SRV that might have otherwise been obtained. Similarly, pressure depletion from offset well production of the pay zone’s reservoir fluids can significantly weaken the *in situ* stress profile within the pay zone itself. Stated another way, reservoir depletion that has occurred as a result of production operations in the parent wellbores will reduce pore pressure in the formation, which

reduces the principal horizontal stresses of the rock matrix itself. The weakened rock fabric now superimposes a new “path of least resistance” for the high pressure frac fluids during formation stimulation. This means that fractures and fracturing fluids will now tend to migrate toward pressure depleted areas formed by adjacent wells.

[0027] In some instances, a sweeping of fracturing fluids towards a producing well can be beneficial, providing an increase in formation pressure and, possibly, increased fracture connectivity. This occurrence is sometimes referred to as a “pressure hit.” However, the migration of fracturing fluids may also create an issue of redundancy. In this respect, a portion, if not a majority of costs of a child well’s frac stage (including its constituent frac fluids, additives, proppant, hydraulic horsepower (“HHP”) and other costs) is spent building SRV in a portion of the pay zone already being drained by the parent wellbore. Additionally, there is now child-vs-parent competition to drain reserves that would have eventually been drained by the parent alone.

[0028] In more extreme instances, pressure in an adjacent wellbore can suddenly increase significantly, such as up to 1,000 psi or greater. This is an obvious symptom of fluid communication between a child wellbore and the neighboring parent. This is what is known as a “frac hit.” When a frac hit occurs, downhole production equipment in the neighboring parent wellbore can suffer proppant (typically sand) erosion, with the parent’s tubulars becoming filled with sand. Events of collapsed casing, blown-out stuffing boxes and resultant surface streams of frac fluids have also been reported. The parent’s previously productive SRV’s may never recover. In a worst case scenario, the parent’s tubulars and/or wellhead connections may experience failure associated with exposure to high burst and/or collapse pressures. Accordingly, frac hit damage may not be contained within the ‘hit’ parent wellbore itself.

[0029] Those of ordinary skill in the art will appreciate that frac hits are generally a by-product of in-fill drilling, meaning that a new wellbore (sometimes referred to as a “child well”) is being completed in proximity to existing wellbores (referred to as “offset” or “parent wells”) within a hydrocarbon-producing field. Frac hits are also, of course, a by-product of tight well

spacing. Ultimately, however, frac hits are the result of the operator being unable to control or “direct” the propagation of fractures within the pay zone.

[0030] The problem of frac hits is receiving a great deal of attention in the oil and gas industry. It is estimated that in the last 18 months 100 technical papers have been published. Currently, a technical work dealing with “frac hits” is being produced every 2.75 working days. This is in addition to the litigation that is taking place between well owners and service companies based on “improper drilling techniques.” Quite often, a parent’s hit damage is sometimes self-inflicted, that is, an operator is causing a frac-hit to occur on its own offset well.

[0031] A “frac hits” lobbying group, the Oklahoma Energy Producers Alliance (“OEPA”; <https://okenergyproducers.org/>), has been recently formed. This organization cites “Hundreds if not thousands of wells are being destroyed by horizontal frac jobs...”. The group seeks to find regulatory and legislative solutions to the problem of frac hits and the protection of “vertical rights” among operators. Partly as a result of efforts by the OEPA and groups like it, many frac operations now require notification of offset parent operators, affording them the opportunity to (before child frac), pull the rods, the pump, and the production tubing and to strategically place retrievable bridge plugs in order to preclude downhole and surface damages. Such efforts are commonly referred to as a “de-completion”, and can cost upwards of \$200,000 per well.

[0032] Accordingly, a need exists for controlling, directing, or at least influencing the directions and dimensions by which a hydraulic fracture (“frac”) propagates within a pay zone, such that in-the-pay SRV can be created and frac hits can be minimized or avoided altogether. Thus, a need exists for a method of forming pre-frac mini-lateral boreholes off of a parent wellbore wherein the small, lateral boreholes are formed in controlled directions and at pre-selected lengths and configurations.

[0033] Additionally, a need exists for a method of forming lateral boreholes wherein access ports for the lateral boreholes can be selectively opened and closed along the casing, thus enabling pre-frac depletion of the rock matrix surrounding a selected mini-lateral(s), with commensurate weakening making them the new preferred paths for frac and SRV propagation.

A need further exists for a downhole casing collar having custom ports that enable the boreholes to be jetted through the ports in pre-set “east and west” directions.

[0034] Also, a need exists for a downhole assembly having a jetting hose and a whipstock, whereby the assembly can be conveyed into any wellbore interval of any inclination, including an extended horizontal leg. A need further exists for a hydraulic jetting system that provides for substantially a 90° turn of the jetting hose opposite the point of a casing exit, preferably utilizing the entire casing inner diameter as the bend radius for the jetting hose, thereby providing for the maximum possible inner diameter of jetting hose, and thus providing the maximum possible hydraulic horsepower to the jetting nozzle. A need further exists for a system that includes a whipstock deployable on a string of coiled tubing, wherein the whipstock can be reoriented in discreet, known increments, and not depend upon pipe rotation at the surface translating downhole.

[0035] Further, a need exists for a downhole jetting assembly that can, in a single trip of the assembly into the wellbore, repeatably generate both: (1) hydraulically jetted casing exits and subsequent mini-lateral boreholes from any point in the production casing; and, (2) mateably enjoin and operate ported casing collars, wherein the casing exits are pre-formed by the ports and jetting of mini-lateral boreholes into the pay zone is initiated therefrom.

[0036] Additionally, a need exists for improved methods of forming lateral wellbores using hydraulically directed forces, wherein a desired length of jetting hose can be conveyed even from a horizontal wellbore. Further, a need exists for a method of forming mini-lateral boreholes off of a horizontal leg wherein the extent of the mini-laterals is limited or even avoided in a direction of a neighboring wellbore.

[0037] A need further exists for a method of hydraulically fracturing mini-lateral boreholes jetted off of the horizontal leg of a wellbore immediately following lateral borehole formation, and without the need of pulling the jetting hose, whipstock, and conveyance system out of the parent wellbore. A need further exists for a method of controlling the erosional excavation path of the jetting nozzle and connected hydraulic hose, such that a lateral borehole, or multiple lateral

borehole “clusters,” can be directed to avoid frac hits in an adjacent wellbore during a subsequent formation fracturing operation, or to enable newly created SRV to reach and recover otherwise stranded reserves.

SUMMARY OF THE INVENTION

[0038] The systems and methods described herein have various benefits in the conducting of oil and gas well completion activities. In the present disclosure, a method of avoiding a frac hit during a formation stimulation operation is first provided. The formation stimulation operation involves the forming of one or more small, lateral boreholes off of a child wellbore. The lateral boreholes are hydraulically excavated into a pay zone that exists within a surrounding rock matrix. The pay zone has been identified as holding, or at least potentially holding, hydrocarbon fluids or organic-rich rock.

[0039] The formation stimulation operation further includes the creation of a fracture-induced stimulated reservoir volume off of the lateral boreholes. This is done by the injection of a fracturing fluid into the lateral boreholes at high pressure. Additionally, lateral boreholes may be formed in groups, or clusters, and the fracturing process conducted in stages, wherein a cluster of lateral boreholes is “fracked” together. Alternatively, the mini-lateral boreholes may be isolated and fracked individually.

[0040] In one aspect, the method first comprises providing a child wellbore within a hydrocarbon-producing field. The child wellbore is either being completed as a new well or represents an existing well that is being recompleted. This new completion or recompletion will be in a specific pay zone that requires hydraulic fracturing for improved production performance. Preferably, the child wellbore is completed horizontally such that a horizontal leg of the child wellbore extends within the pay zone.

[0041] The method further comprises identifying an existing parent wellbore. The parent wellbore has been completed within the same hydrocarbon-producing field. The parent wellbore may be either a vertically, directionally, or horizontally drilled and completed well. The parent wellbore may have been completed, or completed and produced, in one or more pay zones.

[0042] In one aspect, the parent wellbore is completed in the same child-targeted pay zone, and has extracted significant production volumes from it, such that the reservoir pressure in the vicinity of the parent wellbore has been commensurately reduced. In this instance, the parent wellbore has created a “pressure sink” in the same pay zone targeted by the child wellbore. The result is that reservoir pressure in the vicinity of the parent wellbore is less than that which the child wellbore is targeting to drain. The reduction in pore pressure also serves to weaken the rock matrix in the pay zone adjacent the parent wellbore creating an undesirable “path of least resistance.”

[0043] In another aspect, the child wellbore will be completed in a different pay zone than an offsetting parent wellbore. Notwithstanding, one or more hydraulic fracture treatments of the child well may frac through the boundary layers of its respective pay zone and into the pay zone of the parent wellbore. In these cases, the path-of-least-resistance towards the parent wellbore is still effective.

[0044] The method further includes conveying a hydraulic jetting assembly into the child wellbore. The hydraulic jetting assembly is transported into the wellbore on a working string. Preferably, the working string is a string of coiled tubing. This may include coiled tubing having one or more electrical wires (“e-coil”) and, optionally, one or more fiber optic data cables.

[0045] Generally, the hydraulic jetting assembly will include:

- a whipstock providing a defined arcuate path for a jetting hose,
- an elongated jetting hose having a proximal end and a distal end, and
- a jetting nozzle disposed at a distal end of the jetting hose.

[0046] The downhole hydraulic jetting assembly is useful for jetting multiple lateral boreholes from a child wellbore into the subsurface formation. The assembly is basically comprised of two synergetic systems:

- (1) an internal system, which defines the jetting hose having at its proximal end a jetting fluid inlet, and at its terminal end the jetting nozzle, all being configured to be directed to and through a child wellbore exit location; and
- (2) an external system that is run in on the coiled tubing, with the external system being configured to carry the jetting hose into the wellbore and “push” the nozzle against the whipstock set in the wellbore to urge the jetting nozzle forward through the exit location in the production casing, and on out into the surrounding formation.

[0047] A window or “casing exit” is formed in the cased wellbore in one of two ways: First, a casing exit can be hydraulically jetted through the casing using the jetting hose and connected nozzle. In this instance, a high pressure jetting fluid (preferably with abrasives) is directed against the inner wall of the casing at the desired exit point. Alternatively, a casing exit is obtained by the alignment of pre-formed portals in a casing collar. In this instance, the casing collar is a novel, specially-fabricated tubular body included within the production casing string during the initial well completion. The casing collar employs pre-formed portals that are accessible when the position of an inner sleeve is manipulated by forces exerted on it from within by the whipstock.

[0048] Regardless of how the casing exit is obtained, window formation is followed by the formation of a lateral borehole out into the hydrocarbon-bearing pay zone. The configuration and operation of the synergetic internal and external systems provide that the whipstock may be re-oriented and/or re-located, and the jetting hose re-deployed into the casing and re-retrieved, for the jetting of multiple casing exits and lateral boreholes in the same trip. The whipstock includes a concave face for receiving and directing the jetting nozzle and connected hose during operation of the assembly. The curvature of the path designed for the jetting hose, including its trajectory along the face of the whipstock, bends the jetting hose such that it will exit the casing at or near a 90° angle relative to the longitudinal axis of the wellbore.

[0049] In one aspect, the whipstock is configured so that a face of the whipstock provides a bend radius for the jetting hose across the entire wellbore. In the case of a cased hole, the jetting hose will bend across the entire inner diameter of the production casing. Thus, the hose contacts

the production casing on one side, bends along the face of the whipstock, and then extends to a casing exit on an opposite side of the production casing. The jetting hose bend radius spanning the entire I.D. of the production casing provides for utilization of the greatest possible diameter of jetting hose, which in turn provides for maximum delivery of hydraulic horsepower through the jetting hose to the jetting nozzle.

[0050] In the case where the novel ported casing collar is used, the bend radius provided for the jetting hose may actually be greater than the casing I.D.

[0051] The hydraulic jetting assembly is configured to (i) translate the jetting hose out of the jetting hose carrier and against the arcuate whipstock face by a translation force to a desired point of wellbore exit, (ii) upon reaching the desired point of wellbore exit, direct jetting fluid through the jetting hose and the connected jetting nozzle, (iii) continue jetting along an operator's designed geo-trajectory forming a lateral borehole into the rock matrix within the pay zone, and then (iv) pull the jetting hose back into the jetting hose carrier after a lateral borehole has been formed to allow the location of the whipstock device within the wellbore to be adjusted.

[0052] Of interest, the lateral borehole may be formed at a desired depth, a desired trajectory, or both. The only limitation is the length of the jetting hose itself. Optionally, the direction of lateral borehole formation may be controlled by the use of a guidance system.

[0053] The external system is configured such that it contains, conveys, deploys, and retrieves the jetting hose of the internal system in such a way as to maintain the hose in an uncoiled state. Thus, the minimum bend radius that the hose must satisfy is that of the bend radius within the production casing (or within the casing and ported casing collar), along the whipstock face, at the point of a desired casing exit. In addition, the coiled tubing-based conveyance of these synergetic internal/external systems provides for simultaneous running of other conventional coiled tubing tools in the same tool string. These may include a packer, a mud motor, a downhole (external) tractor, logging tools, and/or a retrievable bridge plug residing below the whipstock member.

[0054] Additional details concerning operation of the internal and external systems, including the guidance system (including the use of actuator wires at the end of the jetting hose and a geo-spatial chip in the body of the jetting nozzle), are provided in co-owned U.S. Patent No. 9,976,351 entitled “Downhole Hydraulic Jetting Assembly.” The ‘351 patent is incorporated herein by reference in its entirety.

[0055] Returning to the method at hand, the method also comprises setting the whipstock at a desired first casing exit location along the child wellbore. The face of the whipstock bends the jetting hose substantially across the entire inner diameter of the wellbore while the jetting hose is translated out of the jetting hose carrier.

[0056] The method additionally includes translating the jetting hose out of the jetting hose carrier to advance the jetting nozzle against the face of the whipstock, then directly opposite a point where it is desired to generate a casing exit, or to exit the casing through a pre-formed port in a casing collar.

[0057] The method also includes further advancing the jetting nozzle through a first window (which may include an aligned casing collar port) at the first casing exit location and into the pay zone. The method then includes further injecting the jetting fluid while further translating the jetting hose and connected jetting nozzle through the jetting hose carrier and along the face of the whipstock. In this way, a first lateral borehole that extends from the horizontal wellbore and out into the pay zone is formed.

[0058] In one aspect, the method of the present invention additionally includes controlling (i) a distance of the first lateral borehole from the child wellbore, (ii) a direction of the first lateral borehole from the child wellbore, or (iii) both, to avoid a frac hit with the parent wellbore. In one aspect, avoiding a frac hit means that the lateral borehole does not intercept a fracture network or SRV associated with the parent wellbore. More preferably, avoiding a frac hit means that the lateral borehole is oriented in such a way that a subsequent hydraulic fracturing stage will not likely create fluid communication (a pressure hit or a frac hit) with the parent wellbore.

[0059] In another aspect, the method may include (iv) producing reservoir fluids from the first lateral borehole into the child wellbore. This would be for the purpose of weakening the rock matrix surrounding the lateral borehole prior to hydraulic fracturing, thereby creating a new path-of-least-resistance from which to propagate SRV. Note that multiple lateral boreholes may be generated, with various combinations of these four controls, prior to their receiving a single frac stage.

[0060] In one embodiment, the method further comprises monitoring wellbore pressure within the parent wellbore while pumping fracturing fluids into the first lateral borehole of the child wellbore in a designated frac stage. “Wellbore pressure” may mean pressure within the production tubing string of the parent wellbore (particularly if it is completed with a downhole packer), or may mean pressure within a tubing-casing annulus. Parent well pressure may be measured in real-time during the child well frac operation either via surface pressure gauges, acoustic fluid level measurements in the tubing-casing annulus, or with downhole gauges.

[0061] The parent’s wellbore pressure is monitored to see if a so-called pressure hit is taking place in the parent wellbore. Thus, upon detecting a pressure hit within the parent wellbore, the operator may discontinue the pumping of jetting fluids into the child wellbore. Alternatively, the operator may re-direct the jetting nozzle to change a course of the first lateral borehole to access otherwise stranded hydrocarbon reserves

[0062] In one embodiment, the operator may determine an orientation of the face of the whipstock once the whipstock is set at the first casing exit location along the child wellbore. The operator may change an orientation of the whipstock before hydraulically jetting a second lateral borehole. Alternatively, the operator may partially withdraw the jetting hose and connected jetting nozzle from the second lateral borehole, and then form a side borehole off of the second lateral borehole in a direction away from the parent wellbore to either: (a) avoid a frac hit in the parent well; or (b) to generate SRV in a volume of the pay zone that would otherwise have stranded reserves; or (c) both.

[0063] During the fracturing of a lateral borehole, the operator may monitor micro-seismic data and/or tiltmeter data in the hydrocarbon producing field. In response to receiving this data, optionally coupled with pressure data from the parent wellbore, the operator may discontinue the pumping of fracturing fluids into the first lateral borehole.

[0064] In one aspect, the first casing exit location comprises a casing sleeve placed along a string of production casing within the wellbore. The casing sleeve comprises an outer sleeve that self-oriens, then is locked into a stationary position, and having at least one portal, and an inner sleeve also having at least one portal. The method then further comprises mechanically rotating the inner sleeve to align the at least one portal in the inner sleeve with the at least one portal in the outer sleeve, thereby forming the first window. Mechanically rotating the inner sleeve may comprise latching a pin along the whipstock into a matching groove within the inner sleeve, and then rotating the whipstock.

[0065] In one aspect, the method may further comprise the steps of:

retracting the jetting hose and connected nozzle from the first window;

re-orienting the whipstock at the desired first location;

injecting hydraulic jetting fluid through the jetting hose and connected nozzle, thereby forming a second window at the first casing exit location;

advancing the jetting nozzle against the face of the whipstock while injecting hydraulic jetting fluid through the jetting hose and connected jetting nozzle;

advancing the jetting nozzle through a first window at the first casing exit location and into the pay zone; and

further injecting the jetting fluid while advancing the jetting hose and connected nozzle along the face of the whipstock, thereby forming a second lateral borehole that extends from the second window through a rock matrix in the pay zone.

[0066] The geometry of the second lateral borehole is controlled such that (i) a distance of the second lateral borehole from the child wellbore, (ii) a direction of the second lateral borehole from

the child wellbore, or (iii) both, will avoid a frac hit with the parent wellbore during a subsequent injection of formation fracturing fluids into the second lateral borehole.

[0067] In this embodiment, one or both of the “windows” referenced above may actually be the aligned ports in a casing collar. Also in this embodiment, the child wellbore is preferably a horizontal wellbore, and the first casing exit location is preferably along the horizontal leg. In addition, the second lateral borehole is preferably offset from the first lateral borehole by between 10-degrees and 350-degrees. In any instance, the jetting fluid typically comprises abrasive solid particles, particularly when windows must be formed erosionally through the casing.

[0068] In another embodiment of the method herein, the method may further comprise:

retracting the jetting hose and connected nozzle from the first window;

moving the whipstock to a desired second casing exit location along the child wellbore, and setting the whipstock;

injecting hydraulic jetting fluid through the jetting hose and connected nozzle;

advancing the jetting nozzle against the face of the whipstock while injecting hydraulic jetting fluid through the jetting hose and connected jetting nozzle;

advancing the jetting nozzle through the second window at the second casing exit location and into the pay zone;

further injecting the jetting fluid while translating the jetting hose and connected jetting nozzle along the face of the whipstock, thereby forming a second lateral borehole that extends from the second window through the rock matrix in the pay zone; and

controlling (i) a distance of the second lateral borehole from the child wellbore, (ii) a direction of the second lateral borehole from the child wellbore, or (iii) both, to avoid a frac hit with the parent wellbore during a subsequent fracturing operation.

[0069] Once again, the child wellbore is preferably a horizontal wellbore, and the first casing exit location is preferably along the horizontal leg. The first and second casing exit locations are each along a horizontal leg of the horizontal wellbore. In addition, the second casing exit

location is preferably separated from the first casing exit location by 15 to 200 feet. Preferably, each of the first and second lateral boreholes is at least 25 feet in length and, more preferably, at least 100 feet in length. In any instance, the jetting fluid typically comprises abrasive solid particles while jetting through the casing and cement. The operator may then produce reservoir fluids from the first and/or the second lateral boreholes.

[0070] Prior to and during pumping fracturing fluids into the second lateral borehole, the operator may take pressure data, micro-seismic data and/or tiltmeter data in the hydrocarbon producing field from the previous frac stage, and use such data in:

- (i) selecting an orientation of the second lateral borehole from the child wellbore,
- (ii) selecting a distance of the second lateral borehole to be formed from the child wellbore, or
- (iii) both, to avoid a frac hit.

[0071] The process of forming lateral boreholes in such a manner as to avoid a frac hit during a subsequent formation fracturing may be done during initial well completion. Alternatively, the process may be done after the child wellbore has been producing hydrocarbon fluids for a period of time. Alternatively, each lateral borehole may be custom designed based on data received during preceding frac stages. In one embodiment, the operator will determine a distance of the parent wellbore from the first casing exit location in connection with avoiding a frac hit.

[0072] During the fracturing of the second lateral borehole, the operator may again monitor micro-seismic data and/or tiltmeter data in the hydrocarbon producing field. In response to receiving this data, optionally coupled with pressure data from the parent wellbore, and upon detecting a pressure hit within the parent wellbore or significant SRV advancement toward the parent well, the operator will discontinue the pumping of fracturing fluids into the second lateral borehole.

[0073] In one embodiment, the operator may partially withdraw the jetting hose and connected jetting nozzle from the second lateral borehole, and then form a side borehole off of the second

lateral borehole in a direction away from the parent wellbore to avoid a frac hit. Avoiding a frac hit may mean that the side borehole is oriented in such a way that a subsequent hydraulic fracturing stage will not likely create fluid communication with the parent wellbore.

[0074] The hydraulic jetting assembly herein is able to generate lateral bore holes in excess of 10 feet, or in excess of 25 feet, and even in excess of 300 feet, depending on the length of the jetting hose and its jetting hose carrier. Length of penetration and penetration rate itself may also be influenced by the hydraulic jetting-resistance qualities of the rock matrix, or “host rock.” These jetting-resistance qualities may include compressive strength, pore pressure, cementation, and other features inherent to the lithology of the host rock matrix. In any instance, the lateral boreholes may have a diameter of about 1.0” or greater and may be formed at penetration rates much higher than any of the systems that have preceded it that have in common completing a 90° turn of the jetting hose within the production casing.

[0075] The present system will have the capacity to generate lateral boreholes from portions of horizontal and highly directional wellbores heretofore thought unreachable. Anywhere to which conventional coiled tubing can be tracted within a cased wellbore, lateral boreholes can now be hydraulically jetted. Similarly, superior efficiencies will be captured as multiple intervals of lateral boreholes are formed from a single trip. Wherever satisfactory fracturing hydraulics (pump rates and pressures) are attainable via the coiled tubing-casing annulus, the entire horizontal leg of a newly drilled well may be “perforated and fractured” in stages without need of frac plugs, sliding sleeves or dropped balls.

[0076] In one embodiment, multiple lateral boreholes and, optionally, side mini-lateral boreholes, together form a network or cluster of ultra-deep perforations in the rock matrix. Such a network may be designed by the operator to optimally create SRV and thereby drain a pay zone. Preferably, the lateral boreholes extend away from the child wellbore at or near the plane of maximum *in situ* horizontal stress (σ_H) within the host pay zone; i.e., in the same vertical plane direction that subsequent hydraulic fracks should propagate. It is preferred that the longitudinal axis of the child wellbore runs at-or-near normal, or at a right angle, to σ_H ; that is, parallel to the plane of minimum *in situ* horizontal stress (σ_h) within the host rock. Such a child

wellbore orientation provides for the trajectory of the jetting nozzle and hose, after an approximate 90° turn along the face of the whipstock and immediately upon exiting the child wellbore's casing (or casing sleeve), to be in approximate alignment with σ_H .

[0077] Various angles may be used for the mini-lateral boreholes to take advantage of the richest portions of a pay zone while avoiding frac hits with neighboring wellbores. Where multiple lateral boreholes are formed at different orientations from the child wellbore extending into different depths, hydrocarbons may be produced from a network of lateral boreholes. Moreover, the operator may choose to conduct subsequent formation fracturing (or other treating) operations from the lateral boreholes, thereby further extending the Stimulated Reservoir Volume ("SRV").

[0078] In one aspect, geometries of lateral boreholes and side mini-lateral boreholes are customized within the host pay zone. The boreholes can then optimally receive a subsequent stimulation (particularly, hydraulic fracturing) treatments. This, in turn, enables optimization of the resultant "SRV" to be obtained from each pumping stage. During fracturing, the operator may receive real-time geophysical data, such as micro-seismic, tiltmeter, and/or ambient micro-seismic data, indicative of the effectiveness of formation treatments and SRV development. In one aspect, during a horizontal wellbore's completion or re-completion, real-time customization of the next cluster's lateral borehole geometries may be conducted prior to pumping a next stage.

[0079] In a variation, the method comprises:

- using hydraulic jetting to form casing exits along the horizontal wellbore in sequential stages, or utilizing ported casing collars as pre-formed casing exits;
- utilizing hydraulic jetting to form mini-lateral boreholes from each casing exit in the designated lengths (up to a maximum length equal to that of the jetting hose) and trajectories into the surrounding rock matrix;
- hydraulically fracturing the rock matrix along the horizontal wellbore through the casing exit;

- optionally, prior to hydraulically fracturing the rock matrix through the casing exit, producing reservoir fluids from the rock matrix, through the mini-lateral borehole for a period of time in order to weaken the rock matrix thus biasing a trajectory of fractures.

[0080] In any of the above embodiments, the method may further comprise injecting fracturing fluids through an annulus formed between the jetting assembly and the surrounding production casing, and injecting the fracturing fluids into one or more lateral boreholes at injection pressures sufficient to: (1) initially part the rock matrix in the pay zone; and, (2) continue propagating the fracture(s), or network of fractures; and typically, (3) deliver and place proppant(s), often of various sieve sizes and concentrations throughout the frac slurry, in order to “prop-open” the fracture, or network of fractures (whether created or pre-existing), thus creating a Stimulated Reservoir Volume (“SRV”) that is hydraulically connected to the wellbore.

[0081] Alternatively or in addition, an acid treatment may be washed down through the annular region and into the lateral boreholes, preferably prior to fracturing. Given the system’s ability to controllably “steer” a jetting nozzle and thereby contour the path of a lateral borehole (or, “clusters” of boreholes), fracturing fluids can be more optimally “guided” and constrained within a pay zone. Note that, particularly in rocks having a significant carbonaceous component to their matrix that is satisfactorily reactive to low-pH fluids, this hydraulic connection of SRV to the wellbore may be achieved with acidic stimulation fluids, either with or without accompanying proppants.

[0082] In any of the above methods, the translation force used in moving the jetting hose out of the jetting hose carrier may be a hydraulic force. The jetting hose and associated jetting hose carrier are preferably each at least 10 feet in length and, more preferably, at least 50 feet in length.

[0083] In one arrangement, the method further comprises

- obtaining geo-mechanical data for the pay zone, the data comprising porosity, permeability, Poisson ratio, modulus of elasticity, shear modulus, Lamé' constant, V_p/V_s , or combinations thereof;
- conducting a geo-mechanical analysis of the rock matrix in the pay zone to determine a direction of least principle stress; and
- forming at least two lateral boreholes in the pay zone using the downhole hydraulic jetting assembly by steering the nozzle (i) in a direction perpendicular to the direction of least minimum principle stress, or (ii) in a direction parallel to the direction of least minimum principle stress.

[0084] A separate method of completing a wellbore in a hydrocarbon-bearing pay zone is also provided herein. In one aspect, the method first comprises hydraulically jetting a lateral borehole from a horizontal wellbore. The lateral borehole is formed using a jetting nozzle and connected jetting hose. Of interest, the horizontal wellbore and the lateral borehole are each formed along a plane in a rock matrix of the pay zone of least principle stress.

[0085] The method also includes producing hydrocarbon fluids from the pay zone for a designated period of time. The result of this period of production is that the rock matrix is weakened.

[0086] After the designated period of time, the method includes injecting fracturing fluids into the horizontal wellbore and into the lateral borehole. In this step, a pumping pressure of the fracturing fluids initially exceeds a fracture initiation pressure of the pay zone, and subsequently exceeds a fracture propagation pressure of the pay zone.

[0087] The method then includes forming a vertical plane of weakness intersecting the lateral borehole such that a preferred initial path for the fracturing fluids is created along a longitudinal axis of the lateral borehole. In other words, a vertical fracture plane is formed.

[0088] In this method, it is preferred that a longitudinal axis of the horizontal wellbore runs parallel to a direction of the pay zone's least principal horizontal stress. Similarly, the longitudinal axis of the lateral borehole runs perpendicular to the horizontal wellbore, and accordingly runs parallel to a direction of the pay zone's maximum principal horizontal stress.

[0089] It is preferred that the jetting hose comprises at least three electrical power wires extending along its length. At least three longitudinally oriented actuator wires receive current from a corresponding electrical power wire. The actuator wires are connected at a distal end of the jetting hose, with the actuator wires being equi-distantly spaced about a circumference of the jetting hose. The actuator wires are configured to contract in response to the electrical current, whereby differing amounts of electrical current directed through the actuator wires will induce a bending moment to orient the jetting nozzle.

[0090] In one aspect, the method further comprises controlling (i) a distance of the lateral borehole from the child wellbore away from the parent wellbore, (ii) a direction of the first lateral borehole from the child wellbore away from the parent wellbore, or (iii) both, in order to avoid a frac hit, wherein the fracturing fluid injected into the child wellbore reaches: (A) a near-wellbore vicinity of a parent wellbore; or proceeds even further to, (B) the parent wellbore itself.

[0091] In another aspect, the method further includes monitoring tubing, tubing-casing annulus, and casing-casing annuli pressures within the parent wellbore while injecting the hydraulic fracturing fluid into the child wellbore. Upon detecting a pressure hit within the parent wellbore, the operator will discontinue pumping the hydraulic fracturing fluid into the child wellbore.

[0092] In a related embodiment, the method may further comprise conducting micro-seismic monitoring while injecting jetting fluid into the jetting hose to form the lateral borehole in the child wellbore, thereby generating micro-seismic data. In connection with this step, the operator may calibrate the micro-seismic data to a known depth and geospatial coordinates of the jetting nozzle. Alternatively or in addition, micro-seismic monitoring may be conducted while forming

the vertical fracture plane. Upon detecting fracture propagation from the lateral borehole into the near-wellbore vicinity of the parent wellbore, the operator may:

- (i) discontinue the pumping of fracturing fluid into the child wellbore;
- (ii) relocate the jetting hose along the horizontal wellbore to prepare for placement of the a next frac stage based upon an interpretation of the micro-seismic data; and
- (iii) configure respective depths and directions for additional lateral boreholes in a next frac stage based upon the micro-seismic data associated with the first lateral borehole;

in order to maximize Stimulated Reservoir Volume (“SRV”) for the next frac stage while avoiding a frac hit in the parent wellbore.

Brief Description of the Drawings

[0093] So that the manner in which the present inventions can be better understood, certain illustrations, charts and/or flow charts are appended hereto. It is to be noted, however, that the drawings illustrate only selected embodiments of the inventions and are therefore not to be considered limiting of scope, for the inventions may admit to other equally effective embodiments and applications.

[0094] Figure 1A is a cross-sectional view of an illustrative horizontal wellbore. Half-fracture planes are shown in 3-D along a horizontal leg of the wellbore to illustrate fracture stages and fracture orientation relative to a subsurface formation.

[0095] Figure 1B is an enlarged view of the horizontal portion of the wellbore of Figure 1A. Conventional perforations are replaced by ultra-deep perforations (“UDP’s”), or mini-lateral boreholes, that are subsequently fracked to create fracture planes.

[0096] Figure 2 is a longitudinal, cross-sectional view of a downhole hydraulic jetting assembly of the present invention, in one embodiment. The assembly is shown within a horizontal section of a production casing. The jetting assembly has an external system and an internal system.

[0097] Figure 3A is a longitudinal, cross-sectional view of the internal system of the hydraulic jetting assembly of Figure 2. The internal system extends from an upstream battery pack end cap (that mates with the external system's docking station) at its proximal end to an elongated hose having a jetting nozzle at its distal end.

[0098] Figure 3B is an expanded cross-sectional view of the terminal end of the jetting hose of Figure 3A, showing the jetting nozzle of the internal system. The bend radius of the jetting hose "R" is shown within a cut-away section of the whipstock of the external system of Figure 3.

[0099] Figure 4 is a longitudinal, cross-sectional view of the external system of the downhole hydraulic jetting assembly of Figure 2, in one embodiment. The external system resides within production casing of the horizontal leg of the wellbore of Figure 2.

[00100] Figure 4A is an enlarged, longitudinal cross-sectional view of a portion of a bundled coiled tubing conveyance medium which conveys the external system of Figure 4 into and out of the wellbore.

[00101] Figure 4A-1a is an axial, cross-sectional view of the coiled tubing conveyance medium of Figure 4A-1. In this embodiment, an inner coiled tubing is "bundled" concentrically with both electrical wires and data cables within a protective outer layer.

[00102] Figures 4A-2 is another axial, cross-sectional view of the coiled tubing conveyance medium of Figure 4A-1a, but in a different embodiment. Here, the inner coiled tubing is "bundled" eccentrically within the protective outer layer to provide more evenly-spaced protection of the electrical wires and data cables.

[00103] Figure 4B is a longitudinal, cross-sectional view of a crossover connection, which is the upper-most member of the external system of Figure 4. The crossover section is configured to join the coiled tubing conveyance medium of Figure 4A to a main control valve.

[00104] Figure 4B-1a is an enlarged, perspective view of the crossover connection of Figure 4B, seen between cross-sections E-E' and F-F'. This view highlights the wiring chamber's general transition in cross-sectional shape from circular to elliptical.

[00105] Figure 4C is a longitudinal, cross-sectional view of the main control valve of the external system of Figure 4.

[00106] Figure 4C-1a is a cross-sectional view of the main control valve, taken across line G-G' of Figure 4C.

[00107] Figure 4C-1b is a perspective view of a sealing passage cover of the main control valve, shown exploded away from Figure 4C-1a.

[00108] Figure 4D is a longitudinal, cross-sectional view of selected portions of the external system of Figure 4. Visible are a jetting hose pack-off section, and an outer body transition from the preceding circular body (I-I') of the jetting hose carrier section to a star-shaped body (J-J') of the jetting hose pack-off section

[00109] Figure 4D-1a is an enlarged, perspective view of the transition between lines I-I' and J-J' of Figure 4D.

[00110] Figure 4D-2 shows an enlarged view of a portion of the jetting hose pack-off section. Internal seals of the pack-off section conform to the outer circumference of the jetting hose residing therein. A pressure regulator valve is shown schematically adjacent the pack-off section.

[00111] Figure 4E is a cross-sectional view of a whipstock member of the external system of Figure 4, but shown vertically instead of horizontally. The jetting hose of the internal system is shown bending across the whipstock, and extending through a window in the production casing. The jetting nozzle of the internal system is shown affixed to the distal end of the jetting hose.

[00112] Figure 4E-1a is an axial, cross-sectional view of the whipstock member, with a perspective view of sequential axial jetting hose cross-sections depicting its path downstream

from the center of the whipstock member taken across line O-O' of Figure 4E to the start of the jetting hose's bend radius as it approaches line P-P'.

[00113] Figure 4E-1b depicts an axial, cross-sectional view of the whipstock member taken across line P-P' of Figure 4E.

[00114] Figure 4MW is a longitudinal cross-sectional view of a modified whipstock designed to be mateably received within a ported casing collar. Translational and rotational movement of the modified whipstock actuates movement of an inner sleeve of the ported casing collar, providing a pre-formed casing exit.

[00115] Figure 4MW.1 is an exploded view of the modified whipstock wherein a jetting hose exit is aligned with portals of inner and outer sleeves of the casing collar.

[00116] Figure 4MW.2 is an enlarged view of the whipstock of Figure 4MW.1. Here, the whipstock is rotated 90° about a longitudinal access, revealing a pair of opposing “shift dogs.”

[00117] Figure 4MW.2.SD is an exploded, cross-sectional view of one of the two spring-loaded shift dogs.

[00118] Figure 4MW.2.AB is an exploded, cross-sectional view of a portion of one of the spring-loaded alignment blocks of Figure 4MW.

[00119] Figure 4PCC.1 is a longitudinal cross-sectional view of the ported casing collar of Figure 4MW.

[00120] Figure 4PCC.1.SDG is an exploded, longitudinal cross-sectional view of a shift dog groove that resides in the ported casing collar of Figure 4PCC.1. The shift dog groove is dimensioned to receive the shift dogs of the modified whipstock.

[00121] Figure 4PCC.1.CLD is an exploded cross-sectional view of a collet latch dog of the ported casing collar of Figure 4PCC.1.

[00122] Figure 4PCC.1.CSP is a two-dimensional “roll-out” view of a control slot pattern for the inner sleeve of the ported casing collar, showing each of five possible slot positions.

[00123] Figure 4PCC.2 is an operational series showing the relative positions of each of the outer sleeve’s two stationary portals versus each of the inner sleeve’s three portals as the inner sleeve is translated and rotated into each of its five possible positions.

[00124] Figure 4PCC.3d is a series of perspective views of the ported casing collar of Figure 4PCC.1. Figure 4PCC.3d illustrates positions of the ported casing collar when placed along a production casing string per the control slot positions of Figure 4PCC.2.

[00125] Figure 4PCC.3d.1 shows the ported casing collar in a position where the inner sleeve portals and the outer sleeve portals are out of alignment. This is a “closed” position.

[00126] Figure 4PCC.3d.2 shows an alignment of certain inner sleeve portals with certain outer sleeve portals where “east” ports are open.

[00127] Figure 4PCC.3d.3 shows an alignment of certain inner sleeve portals with certain outer sleeve portals where “west” ports are open.

[00128] Figure 4PCC.3d.4 shows an alignment of certain inner sleeve portals with certain outer sleeve portals where both the “east” and the “west” ports are open.

[00129] Figure 4PCC.3d.5 again shows the inner sleeve portals and the outer sleeve portals out of alignment. This is another closed position.

[00130] Figure 4HLS is a longitudinal, cross-sectional view of a hydraulic locking swivel as may be placed at each end of the ported casing collar of Figure 4PCC.3d.

[00131] Figure 5A is a perspective view of a hydrocarbon-producing field. In this view, a child wellbore is being completed adjacent to a parent wellbore. Depletion in a pay zone surrounding the parent wellbore attracts a frac hit while pumping frac stage “n” during completion of the child.

[00132] Figure 5B is another perspective view of the hydrocarbon-producing field of Figure 5A. Additional frac stages are shown from the child wellbore.

Detailed Description of Certain Embodiments

Definitions

[00133] As used herein, the term “hydrocarbon” refers to an organic compound that includes primarily, if not exclusively, the elements hydrogen and carbon. Examples of hydrocarbon-containing materials include any form of natural gas, oil, coal, and bitumen that can be used as a fuel or upgraded into a fuel.

[00134] As used herein, the term “fluid” refers to gases, liquids, and combinations of gases and liquids, as well as to combinations of gases and solids, and combinations of liquids and solids.

[00135] As used herein, the term “hydrocarbon fluids” refers to a hydrocarbon or mixtures of hydrocarbons that are gases or liquids at formation conditions, at processing conditions, or at ambient conditions. Examples include oil, natural gas, condensate, coal bed methane, shale oil, shale gas, and other hydrocarbons that are in a gaseous or liquid state.

[00136] As used herein, the term “subsurface” refers to geologic strata occurring below the earth's surface.

[00137] The term “subsurface interval” refers to a formation or a portion of a formation wherein formation fluids may reside. The fluids may be, for example, hydrocarbon liquids, hydrocarbon gases, aqueous fluids, or combinations thereof.

[00138] The terms “zone” or “zone of interest” refer to a portion of a formation containing hydrocarbons. Sometimes, the terms “target zone,” “pay zone,” “reservoir”, or “interval” may be used.

[00139] The term “borehole” as used herein refers to the excavated void space in the subsurface, typically of circular cross-section and generated by excavation mechanisms; for example, of either drilling or jetting. A borehole may have almost any longitudinal azimuth or orientation, and may be up to hundreds (jetting) or more typically thousands or tens of thousands of feet in length (drilling).

[00140] As used herein, the term “wellbore” refers to a borehole excavated by drilling and subsequently cased (typically with steel casing) along much if not its entire length. Usually at least 3 or more concentric strings of casing are required to form a wellbore for the production of hydrocarbons. Each casing is typically cemented within the borehole along a significant portion(s) of its length, with the cementing of the larger diameter, shallower strings requiring circulation to surface. As used herein, the term “well” may be used interchangeably with the term “wellbore.”

[00141] The term “jetting fluid” refers to any fluid pumped through a jetting hose and nozzle assembly for the purpose of erosionally boring a lateral borehole from an existing wellbore. The jetting fluid may or may not contain an abrasive material.

[00142] The term “abrasive material” or “abrasives” refers to small, solid particles mixed with or suspended in the jetting fluid to enhance the erosional degradation of the target by the (jetting) liquid by adding to it destruction of the target face via the solid impact force(s) of the abrasive. Targets typically referenced herein are: (1) the pay zone; and/or (2) the cement sheath between the production casing and pay zone; and/or (3) the wall of the production casing at the point of desired casing exit.

[00143] The terms “tubular” or “tubular member” refer to any pipe, such as a joint of casing, a portion of a liner, a joint of tubing, a pup joint, or coiled tubing.

[00144] The terms “lateral borehole” or “mini-lateral” or “ultra-deep perforation” (“UDP”) refer to the resultant borehole in a subsurface formation, typically upon exiting a production casing and its surrounding cement sheath in a child wellbore, with the borehole being formed in a pay zone. For the purposes herein, a UDP is formed as a result of hydraulic jetting forces

erosionally boring through the pay zone with a high pressure jetting fluid directed through a jetting hose and out a jetting nozzle affixed to the terminal end of the jetting hose.

[00145] The terms “steerable” or “guidable”, as applied to a hydraulic jetting assembly, refers to a portion of the jetting assembly (typically, the jetting nozzle and/or the portion of jetting hose immediately proximal the nozzle) for which an operator can direct and control its geo-spatial orientation while the jetting assembly is in operation. This ability to direct, and subsequently re-direct the orientation of the jetting assembly during the course of erosional excavation can yield UDP’s with directional components in one, two, or three dimensions, as desired.

[00146] The term “perforation cluster” refers to a group of conventional perforations, and/or sliding sleeve ports generally proximal to one another in a common wellbore. A given perforation cluster is generally hydraulically fracture stimulated with a common frac “stage,” typically with the intent of creating a single contiguous Stimulated Reservoir Volume (“SRV”) within the pay zone. In this disclosure, a “cluster” may be used to refer to two or more lateral boreholes formed at a single casing exit location for a frac stage.

[00147] The term “stage” references a discreet portion of a stimulation treatment applied in completing or recompleting a specific pay zone, or specific portion of a pay zone. In the case of a cased horizontal child wellbore, up to 10, 20, 50 or more stages may be applied to their respective perforation borehole clusters. Typically, this requires some form of zonal isolation prior to pumping each stage.

[00148] The terms “contour” or “contouring” as applied to individual UDP’s, or groupings of UDP’s in a “cluster”, refers to steerably excavating the lateral borehole so as to optimally receive, direct, and control stimulation fluids, or fluids and proppants, of a given stimulation (typically, fracking) stage. The result is an optimized Stimulated Reservoir Volume (“SRV”).

[00149] The terms “real time” or “real time analysis” of geophysical data (such as micro-seismic, tiltmeter, and or ambient micro-seismic data) and/or pressure data (such as obtained from pressure “bombs”) that is obtained during the course of pumping a stage of a stimulation (such as fracking) treatment means that results of said data analysis can be applied to: (1) altering

the remaining portion of the stimulation treatment (yet to be pumped) in its pump rates, treating pressures, fluid rheology, and proppant concentration in order to optimize the benefits therefrom; and, (2) optimizing the placement of perforations, or contouring the trajectories of UDP's, within the subsequent "cluster(s)" to optimize the SRV obtained from the subsequent stimulation stages.

[00150] The term "parent wellbore" refers to a wellbore that has already been completed in and is producing reservoir fluids from a pay zone for a period of time, creating an area of pressure depletion within the pay zone. A "parent" wellbore may be a vertical, horizontal, or directional well.

[00151] The term "child wellbore" refers to a well being completed in a common pay zone proximal an offsetting "parent" wellbore.

[00152] The term "frac hit" describes an interwell communication event wherein a "parent" well is affected by the pumping of a hydraulic fracturing treatment in a new "child" well. A frac hit from a single child well can hit more than one parent well.

[00153] The term "jetting hose" refers to a flexible fluid conduit, capable of conducting relatively small volumes of fluids at relatively high pressures, typically up to thousands of psi.

Description of Specific Embodiments

[00154] A method of stimulating a subsurface formation is provided herein. Specifically, a method of stimulating a formation, such as through hydraulic fracturing, is provided wherein a so-called "frac hit" of a neighboring wellbore is avoided or wherein an otherwise stranded portion of a reservoir is accessed.

[00155] The method employs a novel downhole hydraulic jetting assembly as disclosed in co-owned U.S. Patent No. 9, 976,351 entitled "Downhole Hydraulic Jetting Assembly." This assembly allows an operator to run a jetting hose into the horizontal section of a wellbore, and then "push" the jetting hose out of a tubular jetting hose carrier using hydraulic forces. Beneficially, the jetting hose is extruded out of the jetting hose carrier and against the concave

face of a whipstock, whereupon jetting fluids may be injected through the jetting hose and a connected nozzle. A mini-lateral borehole may then be formed extending from the wellbore.

[00156] In accordance with industry procedures, a hydraulic fracturing (or other formation treating procedure) is conducted in the horizontally formed wellbore. In this instance, fracing is conducted by injecting fracturing fluids into the lateral borehole. In the present method, wellbore pressure in an offset well is monitored during the fracing stage. In the event pressures indicative of an impending frac hit are detected, the pumping of fracturing fluids into the lateral borehole is discontinued.

[00157] In one aspect of the present method, a specially-designed whipstock of the jetting assembly is provided. The whipstock is designed to be mateably received by a novel ported casing collar, which is also provided herein. The whipstock may be manipulated at the surface to selectively align portals within the casing collar, thereby creating casing windows, or “casing exits,” through which the jetting nozzle and connected hydraulic hose may pass. One or more boreholes may then be “jetted” outwardly into a surrounding subsurface formation through the aligned portals.

[00158] The lateral boreholes essentially represent ultra-deep perforations (“UDP’s”) that are formed by using hydraulic forces directed through a flexible, high pressure jetting hose. Both the trajectory and the length of the borehole may be controlled. Using the downhole assembly, the operator is able to use a single hose and nozzle to jet a series of lateral boreholes within the leg of a horizontal wellbore in a single trip.

[00159] **Figure 1A** is a schematic depiction of a horizontal well **4**. A wellhead **5** is located above the well **4** at an earth’s surface **1**. The well **4** penetrates through a series of subsurface strata **2a** through **2h** before reaching a pay zone **3**. The well **4** includes a horizontal section **4c**. The horizontal section **4c** is depicted between a “heel” **4b** and a “toe” **4d**.

[00160] Conventional perforations **15** within the production casing **12** are shown in up-and-down pairs. The perforations **15** are depicted with subsequent hydraulic fracture half-planes (or, “frac wings”) **16**.

[00161] **Figure 1B** is an enlarged view of the lower portion of the well **4** of **Figure 1A**. Here, the horizontal section **4c** between the heel **4b** and the toe **4d** is more clearly seen. In this depiction, application of the subject apparatus and methods herein replaces the conventional perforations (**15** in **Figure 1A**) with pairs of opposing lateral boreholes **15**. Of interest, the lateral boreholes include subsequently generated fracture half-planes **16**. In the view of **Figure 1B**, the frac wings **16** are now better confined within the pay zone **3**, while reaching much further out from the horizontal wellbore **4c** into the pay zone **3**. Stated another way, in-zone fracture propagation is enhanced by the pre-formed UDP's **15**, forming an enhanced Stimulated Reservoir Volume, or "SRV."

[00162] **Figure 2** provides a longitudinal, cross-sectional view of a downhole hydraulic jetting assembly **50**, in one embodiment. The jetting assembly **50** is shown residing within a string of production casing **12**. The production casing **12** may have, for example, a 4.5-inch O.D. (4.0-inch I.D.). The production casing **12** is presented along a horizontal portion **4c** of the wellbore **4**. As noted in connection with **Figures 1A** and **1B**, the horizontal portion **4c** defines a heel **4b** and a toe **4d**.

[00163] The jetting assembly **50** generally includes an internal system **1500** and an external system **2000**. The jetting assembly **50** is designed to be run into a wellbore **4** at the end of a working string, sometimes referred to herein as a "conveyance medium." Preferably, the working string is a string of coiled tubing, or more preferably, coiled tubing with electric line ("e-coil") **100**. Alternatively, a "bundled" product that incorporates electrically conductive wiring and data conductive cables (such as fiber optic cables) around the coiled tubing core may be used.

[00164] It is preferred to maintain an outer diameter of the coiled tubing **100** that leaves an annular area within the approximate 4.0" I.D. of the casing **12** that is greater than or equal to the cross-sectional area open to flow for a 3.5" O.D. frac (tubing) string. This is because, in the preferred method (after jetting one or more, preferably two opposing mini-laterals, or even specially contoured "clusters" of small-diameter lateral boreholes), fracture stimulation can immediately (after repositioning the tool string slightly downhole) take place down the annulus

between the coiled tubing **100** plus the external system **2000**, and the well casing **12**. For 9.2#, 3.5" O.D. tubing (i.e., frac string equivalent), the I.D. is 2.992 inches, and the cross-sectional area open to flow is 7.0309 square inches. Back-calculating from this same 7.0309 in² equivalency yields a maximum O.D. available for both the coiled tubing conveyance medium **100** and the external system **2000** (having generally circular cross-sections) of 2.655". Of course, a smaller O.D. for either may be used provided such accommodate a jetting hose **1595**.

[00165] In the view of **Figure 2**, the assembly **50** is in an operating position, with a jetting hose **1595** being run through a whipstock **1000**, and a jetting nozzle **1600** passing through a first window "W" of the production casing **12**. The jetting hose **1595** will preferably have a core that is fluid impermeable and that has a low friction resistance to the flowing fluid. Suitable core materials include PTFE (or "Teflon[®]"). The jetting hose **1595** will also have one or more layers of reinforcement surrounding the core, such as spiral or braided steel wire or braided Kevlar. Finally, a cover or shroud is placed around the reinforcement layer.

[00166] The nozzle **1600** may be any known jetting nozzle, including those described in the '351 patent, useful for jetting through casing, cement and a rock formation. However, it is preferred that a unique, electric-driven, rotatable "fan jet" jetting nozzle be employed as part of the external system. The nozzle can emulate the hydraulics of conventional hydraulic perforators, thereby precluding the need for a separate run with a milling tool to form a casing exit. The nozzle optionally includes rearward thrusting jets about the body to enhance forward thrust and borehole cleaning during lateral borehole formation, and to provide clean-out and borehole expansion during pull-out.

[00167] As an alternative feature, the whipstock **1000** may operate in conjunction with a novel casing collar. In this instance, the whipstock **1000** latches into and manipulates an inner sleeve of the collar using an extension mechanism (discussed below). In this way, portals of the inner sleeve can be selectively aligned with portals of an outer sleeve that has self-oriented by virtue of gravitational forces applied to its weighted belly. Hydraulic pressure then locks the outer sleeve into this desired orientation, thereby rendering it stationary relative to the inner sleeve. The whipstock **1000** can then mateably attach to, and manipulate both rotationally and

translationally, the inner sleeve, thereby creating access to pre-fabricated and pre-oriented casing exit alternatives.

[00168] In **Figure 2**, a string of coiled tubing **100** is used as the conveyance medium for the downhole hydraulic jetting assembly. The jetting assembly **50** includes an internal system (shown in **Figure 3A** at **1500**) and an external system (shown in **Figure 4** at **2000**). The internal system **1500** largely resides within the external system **2000** during run-in.

[00169] Near the proximal end of the jetting assembly **50**, just downstream to its connection to the conveyance medium coiled tubing **100**, is a main control valve, indicated at **300**. The main control valve **300** directs fluids selectively to either: (1) the internal system **1500**, and specifically to the jetting hose **1595**; or, (2) annuli associated with the external system **2000**.

[00170] A jetting hose carrier **400** is shown in **Figure 1**. The jetting hose carrier **400** is part of the external system **2000**, and closely holds the jetting hose **1595** during run-in and pull-out. A micro-annulus resides between the jetting hose **1595** and the jetting hose carrier **400**. The micro-annulus is sized to prevent buckling of the jetting hose **1595**.

[00171] Crossover sections are shown at **500**, **800** and **1200**. The crossover sections **500**, **800** are also part of the external system **2000**. In addition, a pack-off section **600** and an optional internal tractor system **700** are provided. The features are described in the '351 patent.

[00172] At the end of the jetting assembly **50**, and below the whipstock **1000**, are optional components. These may include a conventional tractor **1350** and a logging sonde **1400**.

[00173] **Figure 3A** is a longitudinal, cross-sectional view of the internal system **1500** of the hydraulic jetting assembly **50** of **Figure 2**. The internal system **1500** is a steerable system that, when in operation, is able to move within and extend out of the external system **2000**. The internal system **1500** is comprised primarily of:

- (1) power and geo-control components;
- (2) a jetting fluid intake;

- (3) the jetting hose **1595**; and
- (4) the jetting nozzle **1600**.

[00174] The internal system **1500** is designed to be housed within the external system **2000** while being conveyed by the coiled tubing **100** and the attached external system **2000** into and out of the child wellbore **4**. Extension of the internal system **1500** from and retraction back into the external system **2000** is accomplished by the application of: (a) hydraulic forces; (b) mechanical forces; or (c) a combination of hydraulic and mechanical forces. Beneficial to the design of the internal **1500** and external **2000** systems comprising the hydraulic jetting apparatus **50** is that transport, deployment, or retraction of the jetting hose **1595** never requires the jetting hose **1595** to be coiled. Specifically, the jetting hose **1595** is never subjected to a bend radius smaller than the I.D. of the production casing **12**, and that only incrementally while being advanced along the whipstock **1050** of the jetting hose whipstock member **1000** of the external system **2000**. Note the jetting hose **1595** is typically $\frac{1}{4}$ " to $\frac{5}{8}$ " I.D., and up to approximately 1" O.D., flexible tubing that is capable of withstanding high internal pressures.

[00175] During jetting, the path of the high pressure hydraulic jetting fluid is as follows:

- (1) Jetting fluid is discharged from a high pressure pump at the surface **1** down the I.D. of the coiled tubing conveyance medium **100**, at the end of which it enters the external system **2000**;
- (2) Jetting fluid enters the external system **2000** through a coiled tubing transition connection **200**;
- (3) Jetting fluid enters the main control valve **300** through a jetting fluid passage;
- (4) Because the main control valve **300** is positioned to receive jetting fluid (as opposed to hydraulic fluid), a sealing passage cover will be positioned to seal a hydraulic fluid passage, leaving the only available fluid path through the jetting fluid passage; and
- (5) Because of an upper seal assembly **1580** at the top of the jetting hose carrier **400**, which seals a micro-annulus between the jetting hose **1595** and the jetting

hose carrier **400**, jetting fluid cannot go around the jetting hose **1595** (note this hydraulic pressure on the seal assembly **1580** is the force that tends to pump the internal system **1500**, and hence the jetting hose **1595**, “down the hole”) and thus jetting fluid is forced to go through the jetting hose **1595**.

[00176] Features of the internal system **1500** as depicted in **Figure 3A** are also described in the ‘351 patent. These include the optional battery pack **1510** with its upstream and downstream battery pack end caps **1520** and **1530**, the battery pack casing **1540**, the batteries **1551**, columnar supports **1560**, a fluid receiving funnel **1570**, end caps **1562**, **1563**, the seal assembly **1580** and electrical wires **1590**. In addition, a docking station **325** with a conically shaped end cap **323** is described in the ‘351 patent.

[00177] The downward hydraulic pressure of the jetting fluid acting upon the axial cross-sectional area of the jetting hose’s fluid receiving funnel **1570** creates an upstream-to-downstream force that tends to “pump” the seal assembly **1580** and connected jetting hose **1595** “down the hole.” In addition, because the components of the fluid receiving funnel **1570** and a supporting upper seal **1580U** of the seal assembly **1580** are slightly flexible, the net pressure drop described above serves to swell and flare the outer diameters of upper seal **1580** radially outwards, thus producing a fluid seal that precludes fluid flow behind the hose **1595**.

[00178] Moving down the hose **1595** to the distal end, **Figure 3B** provides an enlarged, cross sectional view of the end of the jetting hose **1595**. Here, the jetting hose **1595** is passing through the whipstock **1000** along the whipstock face **1050.1**. A jetting nozzle **1600** is attached to the distal end of the jetting hose **1595**. The jetting nozzle **1600** is shown in a position immediately subsequent to forming an exit opening, or window “**W**” in the production casing **12**. Of course, it is understood that the present assembly **50** may be reconfigured for deployment in an uncased wellbore.

[00179] As described in the parent applications, the jetting hose **1595** immediately preceding this point of casing exit “**W**” spans the entire I.D. of the production casing **12**. In this way, a bend radius “**R**” of the jetting hose **1595** is provided that is always equal to the I.D. of the

production casing **12**. This allows the assembly **50** to utilize the entire casing (or wellbore) I.D. as the bend radius “**R**” for the jetting hose **1595**, thereby providing for utilization of the maximum I.D./O.D hose. This, in turn, provides for placement of maximum hydraulic horsepower (“HHP”) at the jetting nozzle **1600**, which further translates into the capacity to maximize formation jetting results such as penetration rate for the lateral boreholes.

[00180] It is observed from **Figure 3B** that there are three “touch points” for the bend radius “**R**” of the jetting hose **1595**. First, there is a touch point where the hose **1595** contacts the I.D. of the casing **12**. This occurs at a point directly opposite and slightly (approximately one casing I.D. width) above the point of casing exit “**W**.” Second, there is a touch point along a whipstock curved face **1050.1** of the whipstock member **1000** itself. Finally, there is a touch point against the I.D. of the casing **12** at the point of casing exit “**W**,” at least until the window “**W**” is formed. Note these same three touch points may be provided by the arcuate path of the jetting hose tunnel **3050** within the modified whipstock **3000**, discussed later herein.

[00181] Note that this hydraulic horsepower may be utilized in boring operations via five distinct modes:

- (1) jetting with purely high pressure fluid, such that the boring mechanism is purely erosional;
- (2) adding to erosion the destruction (boring) mechanism of cavitation, as with high pressure fluid discharged from a vortex nozzle, or jetting with a supercritical gas;
- (3) adding an abrasive to the fluid jetting streams of (1) and (2); and lastly,
- (4) boring through the rock target mechanically, via the interface of blades, teeth, or “buttons”, protruding from the nozzle face such that the destructive force of the fluid jets are augmented by mechanical forces expended directly on the rock.

[00182] In any of these cases, an indexing mechanism in the tool string allows the whipstock **1050** to be oriented in discreet increments radially about the longitudinal axis of the wellbore. Once the slips are set, the indexing mechanism utilizes a hydraulically actuated ratchet-like action that can rotate an upstream portion of the whipstock **1000** in discreet, say 5° or 10°

increments. The indexing mechanism is hydraulically actuated, meaning that it relies upon pressure pulses to rotate about the wellbore. Optionally, a modified whipstock **3000** may be rotated electromechanically rotated into the desired position. A gyroscopic / geospatial device may be incorporated in the whipstocks **1050** or **3000**, or otherwise along the tool string **50** to provide a real-time measurement of whipstock orientation. The indexing section is described in detail in U.S. Patent No. 9,856,700, which is incorporated herein by reference in its entirety. In this way, the whipstock face **1050.1** is set to direct the jetting nozzle **1600** in a desired orientation, such as away from a neighboring parent wellbore.

[00183] In an alternate embodiment, the hydraulically operated indexing mechanism is replaced by an electrically powered motor that rotates the whipstock. Such an assembly can include orientation sensors (such as gyroscopic sensors, magnetometers, accelerometers, or some combination thereof) that provide a direct, real-time measurement of the whipstock face **1050.1** orientation. Particularly since the advent of horizontal drilling, this sensor technology has become quite robust and commonplace. Such a directional sensor package, particularly developed to be extremely compact (1.04" O.D. X 12.3" long) and rated for high temperatures (175°C / 347°F) is provided in Applied Physics Systems' Model 850HT High Temperature, Small Diameter Directional Sensor package.

[00184] As depicted in **Figure 3B** (and in **Figure 4E**), the whipstock **1000** is in its set and operating position within the casing **12**. (U.S. Patent No. 8,991,522, which is incorporated herein by reference, also demonstrates the whipstock member **1050** in its run-in position.) The actual whipstock **1050** within the whipstock member **1000** is supported by a lower whipstock rod **1060**. When the whipstock member **1000** is in its set-and-operating position, the upper curved face **1050.1** of the whipstock member **1050** itself spans substantially the entire I.D. of the casing **12**. If, for example, the casing I.D. were to vary slightly larger, this would obviously not be the case. The three aforementioned "touch points" of the jetting hose **1595** would remain the same, however, albeit while forming a slightly larger bend radius "**R**" precisely equal to the (new) enlarged I.D. of casing **12**.

[00185] **Figure 4E** is a cross-sectional view of the whipstock member **1000** of the external system of **Figure 4**, but shown vertically instead of horizontally. The jetting hose **1050** of the internal system (**Figure 3**) is shown bending across the whipstock face **1050.1**, and extending through a window “**W**” in the production casing **12**. The jetting nozzle **1600** of the internal system **1500** is shown affixed to the distal end of the jetting hose **1595**.

[00186] **Figure 4E-1a** is an axial, cross-sectional view of the whipstock member **1000**, with a perspective view of sequential axial jetting hose cross-sections depicting its path downstream from the center of the whipstock member **1000**. This view is taken across line **O-O'** of **Figure 4E**, and presents sequential views of the jetting hose **1600** from the start of the bend radius as it approaches line **P-P'**.

[00187] **Figure 4E-1b** depicts an axial, cross-sectional view of the whipstock member **1000** taken across line **P-P'** of **Figure 4E**. Note the adjustments in location and configuration of both the whipstock member's wiring chamber and hydraulic fluid chamber from line **O-O'** to line **P-P'**.

[00188] In an alternative embodiment (discussed further below in connection with **Figure 4MW**), the jetting hose assembly's whipstock **3000** is configured to be mateably received by a casing collar **4000** located downhole. The casing collar **4000** is not run in with the coiled tubing string **100** and is not part of the assembly **50**; instead, the casing collar is run into the well **4c** with the production casing during completion. In this instance, the whipstock **1050** is a single body having an integral curved face, and an outer diameter having a pair of opposing shift dogs that releasably latch into internal recesses of the casing collar.

[00189] As provided in full detail in the '351 patent, the internal system **1500** enables a powerful hydraulic nozzle **1600** to jet away subsurface rock in a controlled (or steerable) manner, thereby forming a mini-lateral borehole that may extend many feet out into a formation. The unique combination of the internal system's jetting fluid receiving funnel **1570**, the upper seal **1580U**, the jetting hose **1595**, in connection with the external system's **2000** pressure regulator valve **610** and pack-off section **600** (discussed below) provide for a system by which

advancement and retraction of the jetting hose **1595**, regardless of the orientation of the wellbore **4**, can be accomplished entirely by hydraulic means. Alternatively, mechanical means may be added through use of an internal tractor system **700**.

[00190] Specifically, “pumping the hose **1595** down-the-hole” has the following sequence:

- (1) the micro-annulus **1595.420** between the jetting hose **1595** and the jetting hose carrier’s inner conduit **420** is filled by pumping hydraulic fluid through the main control valve **310**, and then through the pressure regulator valve **610**; then
- (2) the main control valve **310** is switched electronically using surface controls to begin directing jetting fluid to the internal system **1500**; which
- (3) initiates a hydraulic force against the internal system **1500** directing jetting fluid through the intake funnel **1570**, into the jetting hose **1595**, and “down-the-hole”; such force being resisted by
- (4) compressing hydraulic fluid in the micro-annulus **1595.420**; which is
- (5) bled-off, as desired, from surface control of the pressure regulator valve **610**, thereby regulating the rate of “down-the-hole” decent of the internal system **1500**.

[00191] Similarly, the internal system **1500** can be pumped back “up-the-hole” by directing the pumping of hydraulic fluid through the main control valve **310** and then through the pressure regulator valve **610**, thereby forcing an ever-increasing volume of hydraulic fluid into the micro-annulus **1595.420** between the jetting hose **1595** and the jetting hose conduit **420**. The hydraulic pressure pushes upwardly against the bottom seals **1580L** of the jetting hose seal assembly **1580**, thereby driving the internal system **1500** back “up-the-hole”. Thus, hydraulic forces are available to assist in both conveyance and retrieval of the jetting hose **1595**.

[00192] The **Figure 3** series of drawings, and the preceding paragraphs discussing those drawings, are directed to the internal system **1500** for the hydraulic jetting assembly **50**. The internal system **1500** provides a novel system for conveying the jetting hose **1595** into and out of a child wellbore **4** for the subsequent steerable generation of multiple mini-lateral boreholes

15 in a single trip. The jetting hose **1595** may be as short as 10 feet or as long as 300 feet or even 500 feet, depending on the thickness and compressive strength of the formation or the desired geo-trajectory of each lateral borehole.

[00193] **Figure 4** is a longitudinal, cross-sectional view of the external system **2000** of the downhole hydraulic jetting assembly **50** of **Figure 2**, in one embodiment. The external system **2000** is presented within the string of production casing **12**. For clarification, **Figure 4** presents the external system **2000** as “empty”; that is, without containing the components of the internal system **1500** described above in connection with the **Figure 3** series of drawings. For example, the jetting hose **1595** is not shown. However, it is understood that the jetting hose **1595** is largely contained in the external system during run-in and pull-out.

[00194] In presenting the components of the external system **2000**, it is assumed that the system **2000** is run into production casing **12** having a standard 4.50” O.D. and approximate 4.0” I.D. In one embodiment, the external system **2000** has a maximum outer diameter constraint of 2.655” and a preferred maximum outer diameter of 2.500”. This O.D. constraint provides for an annular (i.e., between the system **2000** O.D. and the surrounding production casing **12** I.D.) area open to flow equal to or greater than 7.0309 in², which is the equivalent of a 9.2#, 3.5” frac (tubing) string.

[00195] The external system **2000** is configured to allow the operator to optionally “frac” down the annulus between the coiled tubing conveyance medium **100** (with attached apparatus) and the surrounding production casing **12**. Preserving a substantive annular region between the O.D. of the external system **2000** and the I.D. of the production casing **12** allows the operator to pump a fracturing (or other treatment) fluid down the subject annulus immediately after jetting the desired number of lateral bores and without having to trip the coiled tubing **100** with attached apparatus **2000** out of the child wellbore **4**. Thus, multiple stimulation treatments may be performed with only one trip of the assembly **50** in to and out of the child wellbore **4**. Of course, the operator may choose to trip out of the wellbore for each frac job, in which case the operator would utilize standard (mechanical) bridge plugs, frac plugs and/or sliding sleeves. However,

this would impose a much greater time requirement (with commensurate expense), as well as much greater wear and fatigue of the coiled tubing-based conveyance medium **100**.

[00196] **Figure 4A-1** is a longitudinal, cross-sectional view of a “bundled” coiled tubing string **100**. The coiled tubing **100** serves as a conveyance system for the downhole hydraulic jetting assembly **50** of **Figure 2**. The coiled tubing **100** is shown residing within the production casing **12** of a child wellbore **4**, and extending through a heel **4b** and into the horizontal leg **4c**.

[00197] **Figure 4A-1a** is an axial, cross-sectional view of the coiled tubing string **100** of **Figure 4A-1**. It is seen that the illustrative coiled tubing **100** includes a core **105**. In one aspect, the coiled tubing core **105** is comprised of a standard 2.000” O.D. (**105.2**) and 1.620” I.D. (**105.1**), 3.68 lbm/ft. HSt110 coiled tubing string, having a Minimum Yield Strength of 116,700 lbm and an Internal Minimum Yield Pressure of 19,000 psi. This standard sized coiled tubing provides for an inner cross-sectional area open to flow of 2.06 in². As shown, this “bundled” product **100** includes three electrical wire ports **106** of up to .20” in diameter, which can accommodate up to AWG #5 gauge wire, and 2 data cable ports **107** of up to .10” in diameter.

[00198] The coiled tubing string **100** also has an outermost, or “wrap,” layer **110**. In one aspect, the outer layer **110** has an outer diameter of 2.500”, and an inner diameter bonded to and exactly equal to that of the O.D. **105.2** of the core coiled tubing string **105** of 2.000”.

[00199] Both the axial and longitudinal cross-sections presented in **Figures 4A-1** and **4A-1a** presume bundling the product **100** concentrically, when in actuality, an eccentric bundling may be preferred. An eccentric bundling provides more wrap layer protection for the electrical wiring **106** and data cables **107**. Such a depiction is included as **Figure 4A-2** for an eccentrically bundled coiled tubing conveyance medium **101**. Fortunately, eccentric bundling would have no practical ramifications on sizing pack-off rubbers or wellhead injector components for lubrication into and out of the child wellbore, since the O.D. **105.2** and circularity of the outer wrap layer **110** of an eccentric conveyance medium **101** remain unaffected.

[00200] Moving further down the external system **2000**, **Figure 4B** presents a longitudinal, cross-sectional view of a crossover connection, which is the coiled tubing crossover connection

200. **Figure 4B-1a** shows a portion of the coiled tubing crossover connection **200** in perspective view. Specifically, the transition between lines **E-E'** and line **F-F'** of **Figure 4B** is shown. In this arrangement, an outer profile transitions from circular to oval to bypass the main control valve **300**.

[00201] The main functions of this crossover connection **200** are as follows:

- (1) To connect the coiled tubing **100** to the jetting assembly **50** and, specifically, to the main control valve **300**. In **Figure 4B**, this connection is depicted by the steel coiled tubing core **105** connected to the main control valve's outer wall **290** at connection point **210**.
- (2) To transition electrical cables **106** and data cables **107** from the outside of the core **105** of the coiled tubing **100** to the inside of the main control valve **300**. This is accomplished with a wiring port **220** facilitating the transition of wires/cables **106/107** inside outer wall **290**.
- (3) To provide an ease-of-access point, such as the threaded and coupled collars **235** and **250**, for the splicing/connection of electrical cables **106** and data cables **107**.
and
- (4) To provide separate, non-intersecting and non-interfering pathways for electrical cables **106** and data cables **107** through a pressure- and fluid-protected conduit, that is, a wiring chamber **230**.

[00202] The next component in the external system **2000** is the main control valve **300**. **Figure 4C** provides a longitudinal, cross-sectional view of the main control valve **300**. **Figure 4C-1a** provides an axial, cross-sectional view of the main control valve **300**, taken across line **G-G'** of **Figure 4C**. The main control valve **300** will be discussed in connection with both **Figures 4C-1** and **4C-1a** together.

[00203] The function of the main control valve **300** is to receive high pressure fluids pumped from within the coiled tubing **100**, and to selectively direct them either to the internal system

1500 or to the external system **2000**. The operator sends control signals to the main control valve **300** by means of the wires **106** and/or data cable ports **107**.

[00204] The main control valve **300** includes two fluid passages. These comprise a hydraulic fluid passage **340** and a jetting fluid passage **345**. Visible in **Figures 4C, 4C-1a** and **4C-1b** (longitudinal cross-sectional, axial cross-sectional, and perspective view, respectively) is a sealing passage cover **320**. The sealing passage cover **320** is fitted to form a fluid-tight seal against inlets of both the hydraulic fluid passage **340** and the jetting fluid passage **345**. Of interest, **Figure 4C-1b** presents a three dimensional depiction of the passage cover **320**. This view illustrates how the cover **320** can be shaped to help minimize frictional and erosional effects.

[00205] The main control valve **300** also includes a cover pivot **350**. The passage cover **320** rotates with rotation of the passage cover pivot **350**. The cover pivot **350** is driven by a passage cover pivot motor **360**. The sealing passage cover **320** is positioned by the passage cover pivot **350** (as driven by the passage cover pivot motor **360**) to either: (1) seal the hydraulic fluid passage **340**, thereby directing all of the fluid flow from the coiled tubing **100** into the jetting fluid passage **345**, or (2) seal the jetting fluid passage **345**, thereby directing all of the fluid flow from the coiled tubing **100** into the hydraulic fluid passage **340**.

[00206] The main control valve **300** also includes a wiring conduit **310**. The wiring conduit **310** carries the electrical wires **106** and data cables **107**. The wiring conduit **310** is optionally elliptically shaped at the point of receipt (from the coiled tubing transition connection **200**, and gradually transforms to a bent rectangular shape at the point of discharging the wires **106** and cables **107** into the jetting hose carrier system **400**. Beneficially, this bent rectangular shape serves to cradle the jetting hose conduit **420** throughout the length of the jetting hose carrier system **400**.

[00207] **Figure 4** also shows a jetting hose carrier system **400** as part of the external system **2000**. The jetting hose carrier system **400** includes a jetting hose conduit (or jetting hose carrier) **420**. The jetting hose carrier **490** houses, protects, and stabilizes the internal system **1500** and,

particularly, the jetting hose **1595**. The micro-annulus **1595.420** referenced above resides between the jetting hose **1595** and the surrounding jetting hose carrier **490**.

[00208] The length of the jetting hose carrier **490** is quite long, and should be approximately equivalent to the desired length of jetting hose **1595**, and thereby defines the maximum reach of the jetting nozzle **1600** orthogonal to the wellbore **4**, and the corresponding length of the mini-laterals **15**. The inner diameter specification defines the size of the micro-annulus **1595.420** between the jetting hose **1595** and the surrounding jetting hose conduit **420**. The I.D. should be close enough to the O.D. of the jetting hose **1595** so as to preclude the jetting hose **1595** from ever becoming buckled or kinked, yet it must be large enough to provide sufficient annular area for a robust set of seals **1580L** by which hydraulic fluid can be pumped into the sealed micro-annulus **1595.420** to assist in controlling the rate of deployment of the jetting hose **1595**, or assisting in hose retrieval.

[00209] The jetting hose carrier system **400** also includes an outer conduit **490**. The outer conduit **490** resides along and circumscribes the jetting hose conduit **420**. In one aspect, the outer conduit **490** and the jetting hose conduit **420** are simply concentric strings of 2.500" O.D. and 1.500" O.D. HSt100 coiled tubing, respectively. The jetting hose conduit **420** is sealed to and contiguous with the jetting fluid passage **345** of the main control valve **300**. When high pressure jetting fluid is directed by the valve **300** into the jetting fluid passage **345**, the fluid flows directly and only into the jetting hose conduit **420** and then into the jetting hose **1595**.

[00210] A separate annular area exists between the inner (jetting hose) conduit **420** and the surrounding outer conduit **490**. The annular area is also fluid tight, directly sealed to and contiguous with the hydraulic fluid passage **340** of the control valve **300**. When high pressure hydraulic fluid is directed by the main control valve **300** into the hydraulic fluid passage **340**, the fluid flows directly into the conduit-carrier annulus.

[00211] The external system **2000** next includes the second crossover connection **500**, transitioning to the jetting hose pack-off section **600**. The main function of the jetting hose pack-off section **600** is to "pack-off", or seal, the annular space between the jetting hose **1595** and the

surrounding inner conduit **620**. The jetting hose pack-off section **600** is a stationary component of the external system **2000**. Through transition **500**, and partially through pack-off section **600**, there is a direct extension of the micro-annulus **1595.420**. This extension terminates at the pressure/fluid seal of the jetting hose **1595** against the inner faces of seal cups making up a pack-off seal assembly.

[00212] Immediately prior to this terminus point is the location of a pressure regulator valve. The pressure regulator valve serves to either communicate or segregate the annulus **1595.420** from the hydraulic fluid running throughout the external system **2000**. The hydraulic fluid takes its feed from the inner diameter of the coiled tubing conveyance medium **100** (specifically, from the I.D. **105.1** of coiled tubing core **105**) and proceeds through the continuum of hydraulic fluid passages **240**, **340**, **440**, **540**, **640**, **740**, **840**, **940**, **1040**, and **1140**, then through the transitional connection **1200** to the coiled tubing mud motor **1300**, and eventually terminating at the tractor **1350** (or, terminating at the operation of some other conventional downhole application, such as a hydraulically set retrievable bridge plug.)

[00213] Additional details concerning the jetting hose conduit **420**, the outer conduit **490**, the crossover section **500**, the regulator valve and the pack-off section **600** are taught in U.S. Patent No. 9,976,351 referenced several times above.

[00214] Returning to **Figure 4**, and as noted above, the external system **2000** also includes a whipstock **1000**. The jetting hose whipstock **1000** is a fully reorienting, resettable, and retrievable whipstock means similar to those described in the precedent works of U.S. Provisional Patent Application No. 61/308,060 filed February 25, 2010, U.S. Patent No. 8,752,651 issued June 17, 2014, and U.S. Patent No. 8,991,522 issued March 31, 2015. Those applications are again referred to and incorporated herein for their discussions of setting, actuating and indexing the whipstock. Accordingly, detailed discussion of the jetting hose whipstock **1000** will not be repeated herein.

[00215] **Figure 4E** provides a longitudinal cross-sectional view of a portion of the wellbore **4** from **Figure 2**. Specifically, the jetting hose whipstock **1000** is seen. The jetting hose

whipstock **1000** is in its set position, with the upper curved face **1050.1** of the whipstock **1050** receiving a jetting hose **1595**. The jetting hose **1595** is bending across the hemispherically-shaped channel that defines the face **1050.1**. The face **1050.1**, combined with the inner wall of the production casing **12**, forms the only possible pathway within which the jetting hose **1595** can be advanced through and later retracted from the casing exit “**W**” and lateral borehole **15**.

[00216] A nozzle **1600** is also shown in **Figure 4E**. The nozzle **1600** is disposed at the end of the jetting hose **1595**. Jetting fluids are being dispersed through the nozzle **1600** to initiate formation of a mini-lateral borehole into the formation. The jetting hose **1595** extends down from the inner wall **1020** of the jetting hose whipstock member **1000** in order to deliver the nozzle **1600** to the whipstock member **1050**.

[00217] As discussed in U.S. Patent No. 8,991,522, the jetting hose whipstock **1000** is set utilizing hydraulically controlled manipulations. In one aspect, hydraulic pulse technology is used for hydraulic control. Release of the slips is achieved by pulling tension on the tool. These manipulations were designed into the whipstock member **1000** to accommodate the general limitations of the conveyance medium (conventional coiled tubing) **100**, which can only convey forces hydraulically (e.g., by manipulating surface and hence, downhole hydraulic pressure) and mechanically (i.e., tensile force by pulling on the coiled tubing, or compressive force by utilizing the coiled tubing’s own set-down weight).

[00218] The whipstock **1000** is herein designed to accommodate the delivery of wires **106** and data cables **107** further downhole. To this end, a wiring chamber **1030** (conducting electrical wires **106** and data cables **107**) is provided. Power and data are provided from the external system **2000** to conventional logging equipment **1400**, such as a Gamma Ray – Casing Collar Locator logging tool, in conjunction with a gyroscopic tool. This would be attached immediately below a conventional mud motor **1300** and coiled tubing tractor **1350**. Hence, for this embodiment, hydraulic conductance through the whipstock **1000** is desirable to operate a conventional (“external”) hydraulic-over-electric coiled tubing tractor **1350** immediately below, and electrical (and preferably, fiber optic) conductance to operate the logging sonde **1400** below

the coiled tubing tractor **1350**. The wiring chamber **1030** is shown in the cross-sectional views of **Figures 4E-1a** and **4E-1b**, along lines **O-O'** and **P-P'**, respectively, of **Figure 4E**.

[00219] A hydraulic fluid chamber **1040** is also provided along the jetting hose whipstock **1000**. The wiring chamber **1030** and the fluid chamber **1040** become bifurcated while transitioning from semi-circular profiles (approximately matching their respective counterparts **930** and **940** of the upper swivel **900**) to a profile whereby each chamber occupies separate end sections of a rounded rectangle (straddling the whipstock member **1050**). Once sufficiently downstream of the whipstock member **1050**, the chambers can be recombined into their original circular pattern, in preparation to mirror their respective dimensions and alignments in a lower swivel **1100**. This enables the transport of power, data, and high pressure hydraulic fluid through the whipstock member **1000** (via their respective wiring chamber **1030** and hydraulic fluid chamber **1040**) down to the mud motor **1300**.

[00220] **Figures 2** and **4** also show an upper swivel **900** and a lower swivel **1100**. The swivels **900**, **1100** are mirror images of one another. Below the whipstock member **1000** and the nozzle **1600** but above the tractor **1350** is an optional lower swivel **1100**. The upper swivel **900** allows the whipstock **1000** to rotate, or index, relative to the stationary external system **2000**. Similarly, the lower swivel **1100** allows the whipstock **1000** to rotate relative to any downhole tools, such as a mud motor **1300** or a coiled tubing tractor **1350**.

[00221] Logging tools **1400**, a packer, or a bridge plug (preferably retrievable, not shown) may also be provided. Note that, depending on the length of the horizontal portion **4c** of the wellbore **4**, the respective sizes of the conveyance medium **100** and production casing **12**, and hence the frictional forces to be encountered, more than one mud motor **1300** and/or CT tractor **1350** may be needed. The packer or retrievable bridge plug are set before any fracturing fluids are injected.

[00222] Typically, the packer or bridge plug is set between two distinct frac stages. In the sequential completion (or recompletion) of a horizontal wellbore, the packer or bridge plug is set above the perforations (or casing exits or casing collars) corresponding to the frac stage that

has just been pumped, and below the perforations (or casing exits or casing collars) correlative to the next frac stage to be pumped. Note that it may be advantageous to run a bottom hole pressure measurement device (called a pressure “bomb”) below the packer or bridge plug and obtain real-time data from same. Alternatively, it may be further advantageous to run dual bombs, one below and one above the packer. This pressure data is helpful in determining both: (1) the integrity of the pressure seal being provided by the packer or bridge plug; and (2) whether or not there may be behind pipe (i.e., behind the production casing) pressure communication between frac stages.

[00223] In cases where previous frac stages’ multi-lateral boreholes were created through ports in a ported casing collar, and those ports have subsequently been closed off after receipt of frac stimulation, then a packer or bridge plug need not be set in order to provide zonal isolation for the next frac through those casing exit- or port-initiated UDP’s about to be fracked in the next stage. Notwithstanding, the packer or bridge plug could be set as a safeguard to insure zonal isolation, that is, as insurance to the leaking of a closed sleeve port that had failed. In this instance, if a pressure bomb were to indicate communication of treating pressures from below, and these same pressure readings had been monitored sequentially (without incident) while working up the hole, then that is a positive indication of communication from only the previous stage.

[00224] It is anticipated that, in preparation for a subsequent hydraulic fracturing treatment in a horizontal child wellbore **4c**, an initial borehole **15** will be jetted substantially perpendicular to and at or near the same horizontal plane as the child wellbore **4c**, and a second lateral borehole will be jetted at an azimuth of 180° rotation from the first (again, perpendicular to and at or near the same horizontal plane as the child wellbore). In thicker formations, however, and particularly given the ability to steer the jetting nozzle **1600** in a desired direction, more complex lateral bores may be desired. Similarly, multiple lateral boreholes (from multiple setting points typically close together) may be desired within a given “perforation cluster” that is designed to receive a single hydraulic fracturing treatment stage. The complexity of design for each of the lateral boreholes will typically be a reflection of the hydraulic fracturing characteristics of the host reservoir rock for the pay zone **3**. For example, an operator may design individually

contoured lateral boreholes within a given “cluster” to help retain a hydraulic fracture treatment predominantly “in zone.” This “borehole cluster” would then be analogous to “perf clusters” commonly used in horizontal well completions today.

[00225] It can be seen that an improved downhole hydraulic jetting assembly **50** is provided herein. The assembly **50** includes an internal system **1500** comprised of a guidable jetting hose and jetting nozzle that can jet both a casing exit and a subsequent lateral borehole in a single step. The assembly **50** further includes an external system **2000** containing, among other components, a carrier apparatus that can house, transport, deploy, and retract the internal system to repeatably construct the requisite lateral boreholes during a single trip into and out of a child wellbore **4**, and regardless of its inclination. The external system **2000** provides for annular frac treatments (that is, pumping fracturing fluids or acids down the annulus between the coiled tubing deployment string and the production casing **12**) to treat newly jetted lateral boreholes. When combined with stage isolation provided by a packer and/or spotting temporary or retrievable plugs, thus providing for repetitive sequences of plug-and-UDP-and-frac, completion of the entire horizontal section **4c** can be accomplished in a single trip.

[00226] In one aspect, the assembly **50** is able to utilize the full I.D. of the production casing **12** in forming the bend radius **1599** of the jetting hose **1595**, thereby allowing the operator to use a jetting hose **1595** having a maximum diameter. This, in turn, allows the operator to pump jetting fluid at higher pump rates, thereby generating higher hydraulic horsepower at the jetting nozzle **1600** at a given pump pressure. This will provide for substantially more power output at the jetting nozzle, which will enable:

- (1) optionally, jetting larger diameter lateral boreholes within the target formation;
- (2) optionally, achieving longer lateral lengths;
- (3) optionally, achieving greater erosional penetration rates; and

- (4) achieving erosional penetration of higher strength and threshold pressure (σ_M and P_{Th}) oil/gas formations heretofore considered impenetrable by existing hydraulic jetting technology.

[00227] Also of significance, the internal system **1500** allows the jetting hose **1595** and connected jetting nozzle **1600** to be propelled independently of a mechanical downhole conveyance medium. The jetting hose **1595** is not attached to a rigid working string that “pushes” the hose and connected nozzle **1600**, but instead uses a hydraulic system that allows the hose and nozzle to travel longitudinally (in both upstream and downstream directions) within the external system **2000**. It is this transformation that enables the subject system **1500** to overcome the “can’t-push-a-rope” limitation inherent to all other hydraulic jetting systems to date. Further, because the subject system does not rely on gravitational force for either propulsion or alignment of the jetting hose/nozzle, system deployment and hydraulic jetting can occur at any angle and at any point within the host child wellbore **4** to which the assembly **50** can be “tractored” in.

[00228] The downhole hydraulic jetting assembly allows for the formation of multiple mini-laterals, or bore holes, of an extended length and controlled direction, from a single child wellbore. Each mini-lateral may extend from 10 to 500 feet, or greater, from the child wellbore. As applied to horizontal wellbore completions in preparation for subsequent hydraulic fracturing (“frac”) treatments in certain geologic formations, these small lateral wellbores may yield significant benefits to optimization and enhancement of fracture (or fracture network) geometry, SRV creation, and subsequent hydrocarbon production rates and reserves recovery. By enabling: (1) better extension of the propped fracture length; (2) better confinement of the fracture height within the pay zone; (3) better placement of proppant within the pay zone; and (4) further extension of a fracture network prior to cross-stage breakthrough, the lateral boreholes may yield significant reductions of the requisite fracturing fluids, fluid additives, proppants, fracture breakdown and fracture propagation pressures, hydraulic horsepower, and hence related fracturing costs previously required to obtain a desired fracture geometry, if it was even attainable at all. Further, for a fixed input of fracturing fluids, additives, proppants, and

horsepower, preparation of the pay zone with lateral boreholes prior to fracturing could yield significantly greater Stimulated Reservoir Volume, to the degree that well spacing within a given field may be increased. Stated another way, fewer wells may be needed in a given field to attain a certain production rate, production decline profile, and reserves recovery, providing a significance of cost savings. Further, in conventional reservoirs, the drainage enhancement obtained from the lateral boreholes themselves may be sufficient as to preclude the need for subsequent hydraulic fracturing altogether.

[00229] As an additional benefit, the downhole hydraulic jetting assembly 50 and the methods herein permit the operator to apply radial hydraulic jetting technology without “killing” the parent wellbore. In addition, the operator may jet radial lateral boreholes from a horizontal child wellbore as part of a new well completion. Still further, the jetting hose may take advantage of the entire I.D. of the production casing. Further yet, the reservoir engineer or field operator may analyze geo-mechanical properties of a subject reservoir, and then design a fracture network emanating from a customized configuration of directionally-drilled lateral boreholes. Further still, the operator may control a direction of the lateral boreholes to avoid a frac hit with a neighboring offset wellbore.

[00230] In yet another aspect, the method of the present invention allows the operator to capture stranded or “hemmed in” oil and/or gas reserves in the general direction of the first lateral borehole from the child wellbore. In some situations, these measures are beneficial to not only maximize child well performance, but also to protect correlative rights. That is, the method of the present invention may serve not only for protection of a parent wellbore, but for procurement of otherwise stranded or “hemmed in” reserves.

[00231] The hydraulic jetting of lateral boreholes may be conducted to enhance fracture and acidization operations during completion. As noted, in a fracturing operation, fluid is injected into the formation at pressures sufficient to separate or part the rock matrix. In contrast, in an acidization treatment, an acid solution is pumped at bottom-hole pressures less than the pressure required to break down, or fracture, a given pay zone. (In an acid frac, however, pump pressure

intentionally exceeds formation parting pressure.) Examples where the pre-stimulation jetting of lateral boreholes may be beneficial include:

- (a) prior to hydraulic fracturing (or prior to acid fracturing) in order to help confine fracture (or fracture network) propagation within a pay zone and to develop fracture (network) lengths a significant distance from the child wellbore before any boundary beds are ruptured, or before any cross-stage fracturing can occur; and
- (b) using lateral boreholes to place stimulation from a matrix acid treatment far beyond the near-wellbore area before the acid can be “spent,” and before pumping pressures approach the formation parting pressure.

[00232] The downhole hydraulic jetting assembly 50 and the methods herein permit the operator to conduct acid fracturing operations through a network of lateral boreholes formed through the use of a very long jetting hose and connected nozzle that is advanced through the rock matrix. In one aspect, the operator may determine a direction of a pressure sink in the reservoir, such as from an adjacent producer, and hence anticipate that adjacent producer is a “hit” target. The operator may then form one or more lateral boreholes in an orthogonal direction, and then conduct acid fracturing through that borehole. In this instance, assuming the greatest principal stress is in the vertical due to overburden, fractures will typically open in the vertical direction, and propagate along the top and bottom “weak points” of the lateral boreholes.

[00233] The operator may alternatively consider or determine a flux-rate of acid (or other formation-dissolving fluid) in the rock matrix. In this instance, the acid is not injected at a formation parting pressure, but allows dissolution to form in the direction(s) of the greatest concentrations of reactants within the rock matrix that first “spend” the acid. Note this procedure may be highly desirable for stimulating oil and/or gas pay zones that are “on water”. That is, these formations have an oil/water or gas/water contacts in such close proximity below the desired azimuth(s) of the UDP’s such that pumping the acid above formation parting pressures would risk “fracking into water”. Note a common result of such a misstep is that the wellbore subsequently “cones” water. That is, because the pay zone has a higher relative permeability to

water (typically because it is a “water wet” reservoir; that is, due to capillary pressure effects, the first fluid layer contacting the rock matrix is water), the well will produce significantly more water than oil and/or gas... often by such a magnitude of disproportion that continued production of the well is unprofitable. Hence, pumping acid into the UDP’s (below formation parting pressures) and allowing for near-UDP dissolution may be the best stimulation alternative available. This could even be the case for horizontal, open hole completions, typically in highly competent carbonate reservoirs, such as the many prolific pay zones found in the Middle East. Note that only slight modifications to the jetting assembly 50 would be required to accommodate these open hole completions.

[00234] The downhole hydraulic jetting assembly 50 and the methods herein also permit the operator to pre-determine a path for the jetting of lateral boreholes. Such boreholes may be controlled in terms of length, direction or even shape. For example, a curved borehole or each “cluster” of curved boreholes may be intentionally formed to further increase SRV exposure of the formation 3 to the wellbore 4c.

[00235] The downhole hydraulic jetting assembly 50 and the methods herein also permit the operator to re-enter an existing wellbore that has been completed in an unconventional formation, and “re-frac” the wellbore by forming one or more lateral boreholes using hydraulic jetting technology. The hydraulic jetting process would use the hydraulic jetting assembly 50 of the present invention in any of its embodiments. There will be no need for a workover rig, a ball dropper / ball catcher, drillable seats or sliding sleeve assemblies. For such a recompletion in a single trip, even in a horizontal wellbore 4c, annular frac’s (or re-frac’s) could still be performed (while the jetting assembly 50 remains in the wellbore) by first pumping a pump-able diverting agent (such as Halliburton’s “BioVert®” NWB Biodegradable Diverting Agent) to temporarily plug off existing perforations and fractures, then jetting the desired UDP(s) comprising a target “borehole cluster”, followed by pumping the frac stage targeting stimulation along the jetted UDP’s. Note given the packer within the jetting assembly 50, divertant would need only be applied the perf’s/frac’s located uphole of the target borehole cluster.

[00236] Finally, and as discussed in much greater detail below, the downhole hydraulic jetting assembly **50** permits the operator to select a distance of lateral boreholes generated from the horizontal leg, or to select an orientation or trajectory of the lateral boreholes relative to the horizontal leg, or to sidetrack off of an existing lateral borehole, or even to change a trajectory during lateral borehole formation. All of this is useful for avoiding a frac hit in an offset well, or seeking out what would otherwise be stranded reserves.

[00237] As noted above, the present disclosure includes an alternate embodiment for an indexing whipstock, that is, an alternative to the whipstock **1000** of **Figure 4E**. As an alternative, customized ported casing collars **4000** may be strategically placed between joints of production casing **12** during completion of the child wellbore **4**. The collars are configured to mateably receive the alternate whipstock. Once received, a force is exerted upon the whipstock that opens a portal in the casing collar, such that the alignment of the portal is in direct alignment with the curved face of the whipstock, thereby continuing the defined path for the jetting hose **1600** and precluding the need to erosionally bore an exit through the casing.

[00238] The portals are selectively opened and closed using the mating whipstock **3000**. The whipstock **3000** utilizes alignment blocks **3400** and shift dogs **3200** to engage and manipulate an inner sleeve **4200** of the casing collar **4000**. Once the portals are opened, the hydraulic jetting assembly **50** can be deployed to create the Ultra Deep Perforations (UDP's) (or lateral boreholes) **15** in the reservoir rock **3**.

[00239] The specially-designed collars **4000** have tensile and compressive strengths and burst and collapse resistances that are at or near those of the production casing and, if desired, can be cemented into place simultaneously with cementing the production casing. Similarly, the collars **4000** can conduct stimulation fluids at pressure tolerances at or near that of the production casing. Preferably, the collars have I.D.'s approximately the same as the production casing; i.e., they are "full opening".

[00240] **Figure 4MW** presents a cross-sectional view of the whipstock **3000**, which may be used in lieu of the whipstock **1000** of **Figure 4E**. The whipstock **3000** defines an elongated

tubular body **3100** that is part of the external system **2000**. The whipstock **3000** has an upper end and a lower end. The upper end is connected to the upper swivel **900**, and can be releasably fixed within an inner sleeve **4200** of a ported casing collar **4000** (discussed below).

[00241] **Figure 4MW** depicts how the whipstock **3000**, after being mateably received by the casing collar **4000**, has manipulated the inner sleeve **4200** such that its portal **4210.S** is in alignment with the outer sleeve's portal **4110.W**.

[00242] **Figure 4MW.1** demonstrates the exit portal **3200** in greater detail. **Figure 4MW.1** is an exploded view of the whipstock **3000** wherein a jetting hose exit portal **3200** is aligned with portals **4210.S** and **4110.W** of the casing collar. Portal **4210.S** resides along the inner sleeve **4200** while portal **4110.W** resides along an outer sleeve **4100**. In this view, the inner sleeve **4200** has been rotated so that portal **4210.S** is aligned with portal **4110.W**, thereby providing a casing exit “W.”

[00243] The inner diameter of the whipstock **3000** represents a bending tunnel **3050**. The bending tunnel **3050** has a face **3001** that serves the same function as the whipstock face **1050.1** depicted in **Figure 4E**. In this respect, the bending tunnel **3050** provides the “three touch points” for the jetting hose **1595** and jetting nozzle **1600** as it traverses across the whipstock face **1050.1**. Of interest, the first touch point is provided at a heel **3100** of the hose bending tunnel **3050**.

[00244] The hose bending tunnel **3050** is configured to receive the jetting hose **1600** at the upstream end. The hose bending tunnel **3050** terminates at an exit portal **3200**, which is above the downstream end of the whipstock **3000**. The hose bending tunnel **3000** closely receives the jetting hose **1600** as it is extruded from the jetting hose carrier, and delivers it to the exit portal **3200**.

[00245] Of interest, it can be seen in **Figure 4MW.1** how the customized contours of portals **4210.S** and **4110.W** continue the trajectory of the whipstock's bending tunnel **3050** from its terminus at the jetting hose exit portal **3200**. In so doing, the bend radius now available to the jetting hose **1595** has increased from “**R**” to “**R'**”, as depicted.

[00246] The whipstock **3000** provides all other features of the whipstock assembly **1000** discussed above, including conducting hydraulic fluid through chamber **1040**, conducting electrical and or fiber optic cable through chamber **1030**, hydraulic operation and indexing, and other features. A presentation of these features has not been repeated in **Figures 4MW, 4MW.1, 4MW.2** and **4MW.2.SD** to avoid redundancy.

[00247] During operation, the whipstock **3000** is run into the wellbore **4** as part of the downhole assembly **50**. The ported casing collars **4000** are strategically located between joints of production casing **12** during the completion of the child wellbore **4**. As noted, the collars **4000** are configured to mateably receive the whipstock **3000**. Once the whipstock **3000** reaches the depth of a selected casing collar **4000**, the whipstock **3000** will latch into slots provided along the inner diameter of the inner sleeve **4200**.

[00248] Once received, a force is exerted upon the whipstock **3000** that shifts the inner sleeve **4200** such that an inner sleeve portal is indirect alignment with a like portal in the outer sleeve **4100**. When in the opened position, both of these co-aligned portals are also in direct alignment with the curved face **3001** of the whipstock **3000**, thereby continuing the defined path for the jetting hose **1595** and precluding the need to erosionally bore an exit through the casing. Note that as shown in **Figure 4MW.1** the inner faces of these portals themselves can be curved such that they continue the radius of curvature defined by the whipstock face **3001**.

[00249] **Figure 4MW.2** is an enlarged, cross-sectional view of the whipstock **3000** of **Figure 4MW.1**. Here, the whipstock **3000** is rotated 90° about a longitudinal axis; hence, the hose bending tunnel **3050** and the exit portal **3200** are not visible. Of interest, opposing “shift dogs” **3200** are shown. The shift dogs **3200** reside on opposing outer surfaces of the whipstock **3000**, and extend out from the outer diameter of the whipstock **3000**.

[00250] **Figure 4MW.2.SD** is an exploded, cross-sectional view of **Figure 4MW.2**. One of the spring-loaded shift dogs **3201** is shown. The opposing shift dogs **3201** are designed to releasably mate with a “shift dog groove” **4202** located along the inner sleeve **4200** of the ported casing collar **4000**. The shift dog grooves **4202** are shown in **Figure 4PCC.1** discussed below.

Each shift dog **3201** includes a beveled tip **3210**. In addition, each shift dog **3201** includes a spring **3250** that is held in compression. The springs **3250** bias the respective beveled tips **3210** outwardly.

[00251] The whipstock **3000** also includes a pair of alignment blocks **3400**. **Figure 4MW.2.AB** is an exploded, cross-sectional view of a portion of one of the spring-loaded alignment blocks **3400** of **Figure 4MW.2**. The springs **3450** between the alignment blocks **3400** and the whipstock **3000** act to bias the alignment blocks **3400** outwardly. Each of the alignment blocks **3450** represents an area of enlarged outer diameter along the whipstock **3000**.

[00252] The alignment blocks **3400** are dimensioned to be received by a contoured profile (referred to below as “beveled entries” **4211** along the inner sleeve **4200** of the ported casing collar **4000**. **Figure 4PCC.1** is a cross-sectional view of the ported casing collar **4000**. The ported casing collar **4000** is dimensioned to receive the whipstock **3000** and to be manipulated by the whipstock **3000** using the mating alignment blocks **3400**, shift dogs **3201** and shift dog grooves **4202**.

[00253] **Figure 4PCC.1.SDG** is an exploded, longitudinal cross-sectional view of a shift dog groove **4202** that resides in the ported casing collar **4000** of **Figure 4PCC.1**. The shift dog groove **4202** is formed within a body **4201** of the inner sleeve **4200**. The shift dog groove **4202** is dimensioned to receive the shift dogs **3200** of the whipstock **3000**.

[00254] Returning to **Figure 4PCC.1**, the casing collar **4000** includes two beveled entries **4211**. The beveled entries **4211** are configured to receive or act upon the pair of alignment blocks **3400** of **Figures 4MW.2** and **4MW.2.AB**. Specifically, the beveled entries **4211** form shoulders that contact the alignment blocks **3400**. The contour of these mirror-image beveled entries **4211** force the whipstock **3000** to rotate until the alignment blocks **3400** engage opposing inner sleeve alignment slots **4212**. A continued downstream push on the e-coil conveyance medium **100** moves the alignment blocks **3400** further into the alignment slots **4212** in the inner sleeve **4200** until the spring-loaded shift dogs **3201** on the whipstock **3000** engage the shift dog grooves **4202** in the inner sleeve body **4201**. Once the shift dogs **3201** are engaged into the

respective shift dog grooves **4202**, the whipstock **3000** can rotate the inner sleeve **4200** via the alignment blocks **3400** and shift the inner sleeve **4200** axially through the shift dogs **3201**.

[00255] Once the whipstock **3000** is aligned within and locked into the inner sleeve **4200**, the combined torsional and axial movements of the whipstock **3000** allows the whipstock **3000** to rotate and/or translate the inner sleeve **4200** to shift the inner sleeve **4200** into any of five positions. The five positions are depicted in a control slot pattern **4800** in Figure **4PCC.1.CSP**.

[00256] **Figure 4PCC.1.CSP** is a schematic view showing a progression of the torsional and axial movements of the whipstock **3000**. More specifically, **Figure 4PCC.1.CSP** is a two-dimensional “roll-out” view of a control slot pattern for the inner sleeve **4200** of the ported casing collar **4000**, showing each of five possible slot positions.

[00257] In **Figure 4PCC.1.CSP**, a control slot **4800** is shown. The control slot **4800** is milled into the outer diameter of the inner sleeve **4200**. In each of the five position, the inner sleeve **4200** is held in place and guided through the control slot **4800** by two opposing torque pins **4500**. The torque pins **4500** are seen in each of **Figures 4PCC.1** and **4PCC.1.CSP**. The torque pins **4500** protrude through the outer sleeve **4100** into the two mirror-image control slots **4800**.

[00258] The control slots **4800** are designed to selectively align portals in the inner **4200** and outer **4100** sleeves. The inner sleeve **4200** has, for example, portals **4210.S**, **4210.W**, **4210Dd** and **4210Du**. The outer sleeve **4100** has, for example, portals **4110.W** and **4110.E** (indicating east and west). These portals are all illustrated in **Figure 4PCC.2**.

[00259] In position “1,” all portals of the inner sleeve **4200** and the outer sleeve **4100** are out of alignment, meaning that the ported casing collar **4000** is closed. Of interest, the casing collar **4000** is run into the wellbore **4** as an integral part of the casing string **12** in the closed position “1.”

[00260] In position “2,” portals **4210.S** and **4110.E** are in alignment, providing an “East Open” position.

[00261] In position “3,” portals **4210.S** and **4110.W** are in alignment, providing a “**West Open**” position.

[00262] In position “4,” portals **4110.W** and **4210.Du** are aligned as are portals **4110.E** and **4210.Dd**, meaning that the ported casing collar **4000** is fully open.

[00263] In position “5,” portals of the inner sleeve **4200** and the outer sleeve **4100** are again out of alignment, meaning that the ported casing collar **4000** is once again closed.

[00264] It is noted that in all of these torque pin positions, the outer sleeve **4100** remains stationary in a pre-oriented position. Stated another way, the outer sleeve **4100** is in a fixed position throughout the manipulation and repositioning of the inner sleeve **4200**. Placement of the outer sleeve **4100** in its fixed position is aided by an optional “weighted belly” **4900**. The weighted belly **4900** forms an eccentric profile for the outer sleeve **4100** and urges the outer sleeve **4100** to rotate within the horizontal leg **4C** to the bottom of the bore.

[00265] **Figure 4PCC.2** presents an operational series showing the relative positions of each of the outer sleeve’s two stationary portals versus each of the inner sleeve’s three portals as the inner sleeve **4200** is translated and rotated into each of its five possible positions.

[00266] In position “1,” injection fluids flow through the ported casing collar **4000**, but no fluids flow through portals of the inner sleeve **4200** and the outer sleeve **4100**.

[00267] In position “2,” portals **4210.S** and **4110.E** are in alignment, providing an “**East Open**” position.

[00268] In position “3,” portals **4210.S** and **4110.W** are in alignment, providing a “**West Open**” position.

[00269] In position “4,” portals **4110.W** and **4210.Du** are aligned as are portals **4110.E** and **4210.Dd**, meaning that the ported casing collar **4000** is fully open. Both easterly and westerly portals are open.

[00270] In position “5,” portals of the inner sleeve **4200** and the outer sleeve **4100** are again out of alignment. Injection fluids flow through the ported casing collar **4000** but do not flow through any sleeve portals.

[00271] **Figure 4PCC.3d** is a series of perspective views of the ported casing collar **4000** of **Figure 4PCC.1**. **Figure 4PCC.3d** illustrates positions of the ported casing collar **4000** when placed along the production casing string **12**. Each of the perspective views I the **Figure 4PCC.3d** series illustrates one of the five possible positions for the inner sleeve portals relative to the outer sleeve portals.

[00272] First, **Figure 4PCC.3d.1** shows the ported casing collar **4000** in a position where the inner sleeve portals and the outer sleeve portals are out of alignment. This is the closed position of position “1.”

[00273] **Figure 4PCC.3d.2** shows an alignment of portals **4210.S** with portals **4110.E**. Here, the “east” ports are open. This illustrates position “2.”

[00274] **Figure 4PCC.3d.3** shows an alignment of portals **4210.S** with portals **4110.W**. Here “west” ports are open. This is illustrative of position “3.”

[00275] **Figure 4PCC.3d.4** shows an alignment of all inner sleeve portals with all outer sleeve portals. Both the east and the west portals are open. This represents position “4.”

[00276] **Figure 4PCC.3d.5** again shows the inner sleeve portals and the outer sleeve portals out of alignment. This is the closed position of position “5.”

[00277] In each drawing of the **Figure 4PCC.3d** series, a hydraulic locking swivel **5000** is shown. The casing collar **4000** is run into the wellbore **4** in combination with pairs of the hydraulic locking swivels **5000** and at least one, but preferably two, standard casing centralizers **6000**. Since the outer sleeves **4100** must be able to rotate freely when the casing collar **4000** is placed next to a casing centralizer **6000**, then the maximum O.D. of the casing collar **4000** must be measurably less than O.D. of a casing centralizer **6000** when in a loaded position in gauge hole; i.e., the bit diameter.

[00278] The hydraulic locking swivels **5000** allow the “weighted belly” to gravitationally rotate the outer sleeve **4100** into the proper orientation prior to cementing. Once the casing has been cemented or is in the desired location in the wellbore **4**, internal pressure is applied to lock the hydraulic locking swivels **5000** in place. Once the swivels **5000** are locked, the ported casing collar **4000** can be manipulated as needed to access desired portals.

[00279] **Figure 4HLS** is a longitudinal, cross-sectional view of the hydraulic locking swivel **5000** as shown in the **Figure 4PCC.3d** series of drawings. The swivel **5000** first comprises a top sub **5100**. The top sub **5100** represents a cylindrical body. An upper end of the top sub **5100** comprises threads configured to connect to a string of production casing (not shown).

[00280] The swivel **5000** also comprises a bottom sub **5500**. The bottom sub **5500** also represents a cylindrical body. Together, the top sub **5100** and the bottom sub **5500** form an inner bore that is in fluid communication with the inner bore of the production casing **12** and the casing collars **4000**. The inner bore of these components forms a primary flow path for production fluids.

[00281] A lower end of the bottom sub **5500** includes threads. These threads also connect in series to the production casing **12**. An upper bearing **5210** is placed between an upper end of the bottom sub **5500** and a lower end of the top sub **5100**. The upper bearing **5210** allows relative rotational movement between the top sub **5100** and the bottom sub **5500**.

[00282] A body of the top sub **5100** threadedly connects to a bearing housing **5200**. The bearing housing **5200** forms a portion of an outer diameter of the swivel **5000**. Along with the top sub **5100**, the bearing housing **5200** is stationary. The bearing housing **5200** includes a shoulder **5201** that resides below a corresponding shoulder **5501** of the bottom sub **5500**. A lower bearing **5220** resides between these two shoulders. Along with the upper bearing **5210**, the lower bearing **5220** facilitates rotational movement of the bottom sub **5500** within the wellbore **4c**.

[00283] The swivel **5000** also includes a clutch **5300**. The clutch **5300** also defines a tubular body, and resides circumferentially around the bottom sub **5500**. Shear screws **5350** fix the

clutch **5300** to the bottom sub **5500**, preventing relative rotation of the bottom sub **5500** until the shear screws **5350** are sheared by an axial force.

[00284] Keys **5700** reside in annular slots between the bottom sub **5500** and the surrounding clutch **5300**. The keys **5700** provide proper alignment of the bottom sub **5500** and the clutch **5300**. In addition, o-rings **5400** reside within the annular region on opposing ends of the keys **5700**. Further, snap rings **5600** are placed along an outer diameter of the bottom sub **5500**. The snap rings **5600** are configured to slide into a mating groove to lock the clutch **5300** in place. This takes place when the clutch **5300** is engaged.

[00285] Finally, a clutch cover **5310** is placed on the swivel **5000**. The clutch cover **5310** is threadedly connected to a bottom end of the bearing housing **5200**. The clutch cover **5310** is also stationary, meaning that it will not rotate. A bottom end of the clutch cover **5310** extends down and covers an upper portion of the clutch **5300**. Once the shear screws **5350** are sheared, the clutch **5300** is able to slide along the bottom sub **5500** under the clutch cover **5310**.

[00286] The hydraulic locking swivel **5000** is designed to be run in on opposing ends of the ported casing collar **4000**. Placement of the two hydraulic locking swivels **5000** enables the eccentrically-weighted” belly” **4900** of the outer sleeve **4100** to gravitationally rotate into a position 180° from true vertical, thereby pre-aligning the porta’s in the casing collar **4000** at true horizontal.

[00287] In operation, the casing **12** is run into the wellbore **4** and cemented. Internal pressure is applied to all of the swivels **5000** along the casing string **12** simultaneously. This may be done when “bumping-the-plug” at the conclusion of cementing the casing string **12** in place. This internal hydraulic pressure, when first applied to the swivels **5000**, will shear their respective shear screws **5350**, thereby engaging the clutches **5300** to prevent further rotation. Once the clutch **5300** is engaged, the snap ring **5600** moves into a mating groove and locks the clutch **5300** in place. No further rotation is possible through the swivels **5000** or the attached outer sleeve **4100**, nor is this locking process reversible.

[00288] The whipstock **3000** can be run and engaged with the casing collar **4000** as described above, and the casing collar portals can be open/closed as needed pursuant to the operations detailed shown in **Figure 4PCC.2** and the **Figure 4PCC.3d** series.

[00289] Once the swivels **5000** are hydraulically released to swivel, and once the desired position of the inner sleeve **4200** within the casing collar **4000** is reached, the shift dogs **3200** and the alignment blocks **3400** can be released with upstream movement of the whipstock **3000**. Upstream movement releases the shift dogs **3200** from the shift dog grooves **4202** and allows the alignment blocks **3400** to be removed from the alignment slots **4210**.

[00290] The main functions of the ported casing collar **4000** are:

- To pre-orient the whipstock **3000**, and hence the jetting hose **1595** and attached nozzle **1600**, for a desired lateral borehole trajectory;
- To preclude the need to hydraulically bore or mechanically mill casing exits in the casing to form lateral boreholes; and
- To provide a way to either temporarily or permanently open up or seal off a specific portal within the casing collar **4000**, and hence (assuming a competent cement job) its associated UDP, at any point during the completion / production / recompletion of a well.

[00291] The ported casing collar **4000** also allows an operator to:

- Provide an *in situ* method for favorably weakening the stress profile of a pay zone in a specific direction, either by:
 - Jetting a lateral borehole immediately prior to a formation fracturing operation through the open portals in the casing collar **4000**; or
 - Jetting a lateral borehole, then prior to fracturing, producing reservoir fluids and commensurately drawing down reservoir pressure in the vicinity of the pay zone immediately surrounding the lateral borehole, thus even further weakening this respective portion of the unstimulated pay zone.

[00292] The use of the ported casing collar **4000** and its five positions provides for generating lateral boreholes in an eastwardly direction, a westwardly direction, or both, and may also serve to isolate, and/or stimulate, and/or produce (either prior to or after hydraulic fracturing) the eastwardly and westwardly lateral boreholes, either individually or in tandem, as desired.

[00293] During operation, the inner sleeve **4200** mateably receives the hydraulic jetting assembly **50**. This may be accomplished by pins and/or dogs protruding from the circumference of the jetting hose assembly **50**, preferably at or near the whipstock **3000**. This protruding mechanism may employ springs to provide an outwards biasing force.

[00294] **Figure 4PCC.1.CLD** is an exploded, cross-sectional view of a collet latch dog profile **4310** of the casing collar of **Figure 4PCC.1**. The collet latch **4310** interacts with a collet latch profile **4150**. The collet latch profiles **4150**, in turn, reside along the outer sleeve **4100**.

[00295] The protruding mechanism may also have a unique shape/profile such as to be mateably received by the inner sleeve **4200** of the ported casing collar **4000**, such as by slots/grooves within the inner sleeve **4200**. The slots/grooves may approximate the mirror image of the profile of the protruding pin/dog at or near the whipstock **3000** within the jetting hose assembly **50**. Hence, as the hydraulic jetting assembly **50** is advanced uphole while its protruding pins/dogs travel within the slots/grooves of the inner sleeve **4200**, they will eventually “snug up”, or latch within the inner sleeve **4200** so as to form a temporary mechanical connection between the hydraulic jetting assembly **50** and the inner sleeve **4200**.

[00296] It is noted that during initial latching of the whipstock **3000** to the inner sleeve **4200**, the inner sleeve **4200** is pinned to the stationary outer sleeve **4100**. Referring again to **Figure 4PCC.1**, a shear screw **4700** is shown. Shear screws **4700** are employed to pin the inner sleeve **4200** to the outer sleeve **4100**.

[00297] As the protruding pins/dogs are traversed distally within the slots/grooves of the inner sleeve **4200**, the whipstock **3000** will receive an induced rotational force. Since at this stage the whipstock **3000** is free to rotate, and the inner sleeve **4200** is not, this induced torque will cause the whipstock **4200** to rotate about bearings within the swivel assemblies **900**, **1100** included in

the tool string. As the whipstock **3000** rotates, the distal end of the whipstock's curved face **3001** approaches alignment with a port along the inner sleeve **4200**. At the point at which the protruding pins/dogs are "snugged up" within the slots/grooves of the inner sleeve **4200**, the distal end of the whipstock **4200** will become precisely aligned with an inner sleeve portal (such as portal **4210.S** shown in **Figure 4MW**). This portal will be placed and contoured within the inner sleeve **4200** such that it effectively serves as an extension of the arc of the whipstock's curved face **3001**.

[00298] Referring back to **Figure 4MW**, it can be seen that the jetting hose exit portal **3200**, the portal **4210.S** of the inner sleeve **4200** and the portal **4110.W** of the outer sleeve **4100** are in alignment. Dimensionally, the inner diameter of the inner sleeve **4100** is approximately equal to that of the production casing **12** itself. Beneficially, any tools that could be run in the production casing **12** may also be run through the casing collars **4000**. As designed, this provides an even larger bend radius **R'** available to the jetting hose **1595** than if the desired degree of jetting hose bending (for instance, 90 degrees) had to be accomplished entirely within the I.D. of the bending tunnel **3050**.

[00299] The benefit of the small **R** to **R'** radius increase is deceptive. In absolute magnitude, the **R** to **R'** increase will only approximate the combined wall thicknesses of the inner sleeve **4200** and the outer sleeve **4100**; i.e., about .25" to .50". Notwithstanding, this relatively small incremental gain in available bend radius for selection of an appropriate jetting hose yields an increase in the I.D. of the jetting hose **1595** that can be utilized. Specifically in the case of smaller casing sizes, such as OCTG's standard 4.5" O.D. and 4.0" I.D., increasing the available bend radius from 4.0" to 4.5" could mean an additional 1/8th inch in jetting hose I.D. Over a jetting hose length of 300 feet, this can provide a subsequent increase in deliverable HHP to the jetting nozzle **1600** while staying within the bend radius and burst pressure constraints of the larger hose **1595**.

[00300] Note the maximum limit of this protrusion's extension from the O.D. out into the borehole should approximate the same protrusion distance (from the O.D. of the outer sleeve **4200** out into the borehole) of the weighted belly **4900**. And, (2) by including a slot cut out of

the inner sleeve **4200** that receives the bent jetting hose **1595** at a position 180° opposite, and slightly above, the inner sleeve portal **4210.S**. This enables the furthest extension of the “bend” in the jetting hose **1595** to be limited by the I.D. of the outer sleeve **4100**, instead of being constrained by the I.D. of the inner sleeve **4200**.

[00301] To accommodate the rotation of the weighted belly **4900**, the ported casing collar **4000** may also have a series of circumferential bearings. These bearings may be located at both the proximal and distal ends of the casing collar **4000** such that adding the eccentric weighted belly **4900** to the outer sleeve **4100** of the casing collar **4000** enables gravitational force to self-orient the exit ports at the desired exit orientation. However, it is preferred to use the hydraulically locked swivels **5000** described above.

[00302] Running a casing centralizer (such as centralizer **6000** shown in the **Figure 4PCC.3d** series discussed below) near one or both ends of the ported casing collar **4000** helps ensure that the casing collar **4000** can rotate freely until it rotationally comes to rest at the desired orientation. As discussed above, the hydraulic jetting assembly **50** mates with the inner sleeve **4200**, and can rotate or translate the inner sleeve **4200** into its desired position according to the control slot **4800**. Receipt of the whipstock **50** by the inner sleeve **4200** is such that a distal end of the whipstock face **3001** is in alignment with a pre-shaped portal **4210.S** in the inner sleeve **4200**.

[00303] In another aspect, once the ported casing collar **4000** has mateably received the hydraulic jetting assembly **50**, and once the portals of the inner sleeve **4200** are rotated by the hydraulic jetting assembly such that the portals are in alignment with portals of the outer sleeve **4100**, the hydraulic jetting assembly **50** may further rotate both the inner **4200** and outer **4100** sleeves into the desired alignment relative to the pay zone. The requisite rotational force may be provided by either: (1) the same protruding mechanism that rotates the whipstock **3000** into its desired alignment as discussed above; or, (2) a separate rotating mechanism, preferably of significant torque capacity such that any bonding forces of cement, drilling mud and filtrate to the outer sleeve **4100** can be sheered, and similarly any binding forces due to hole ovality and wellbore friction can be overcome. To aid in this rotation, the outer sleeve **4100** may be coated

with a thin film of polytetrafluoroethylene (“PTFE”; a.k.a. Chemours’ [formerly DuPont Company’s] trade name Teflon[®]), or some similar substance, in order to minimize the torque required to shear any bond that may have formed between the outer sleeve **4100** and any subsequently circulated cement, or drilling mud, or any wellbore fluids. Note that this ability to rotate both sleeves **4100**, **4200** simultaneously precludes the need for a weighted belly **4900**.

[00304] In yet another aspect, a rotational force exerted by the whipstock **3000** shears the set screws **4900** that had immobilized the inner sleeve **4200** relative to the outer sleeve **4100**. A pulling force (in the uphole direction) applied by the coiled tubing string **100** translates the inner sleeve **4200** from its position “1” (where all portals are out of alignment and the casing collar **4000** is sealed) into its position “2” (where selective portals of the inner **4200** and the outer **4100** sleeves are in alignment).

[00305] In one embodiment of the whipstock **3000**, particularly given the preferred conveyance medium of e-coil versus standard coiled tubing, coupled with delivery of electric cable to (and actually, through) the whipstock **3000**, the hydraulically powered rotation/indexing system is replaced with an electro-mechanical system. That is, where rotation of the whipstock **3000** is powered by a small, high torque electric motor, and its orientation is given in real time by a sensor reading tool face orientation.

[00306] In another aspect, a coiled tubing tractor may be used to assist in conveyance of the coiled tubing string **100** and the hydraulic jetting assembly **50** along the horizontal leg **4c** of the wellbore **4**. In any instance, the force in the uphole direction will drive the inner sleeve **4200** into its position “2.” In position “2,” alignment of the jetting hose exit portal **3200** and the inner **4210.S** and the outer **4110.E** portals will position the jetting nozzle and hose to exit horizontally in an eastwardly direction.

[00307] **Figure 4PCC.3d.2** demonstrates the alignment of portals in an eastwardly direction, representing position “2.” In this second position, an eastwardly lateral borehole may be jetted, and subsequently produced, and/or subsequently stimulated. Applying subsequent translating and/or rotating forces will align inner and outer sleeve portals to position “3,” such that the

sleeves' portals are aligned and open, providing for jetting, producing, or stimulating a lateral borehole in a westwardly direction. Yet a third translation/rotation of the inner sleeve **4200** will align the inner and outer sleeve portals into position "4," aligning portals in both eastwardly and westwardly directions and thus providing for simultaneous stimulation and/or production of both lateral boreholes. And finally, a fourth translating force application will shift the inner sleeve **4200** to position "5") and final position, such that all of the portals of the outer sleeve are sealed off.

[00308] O-rings **4600** seal the annular interface between the inner sleeve **4200** and the surrounding outer sleeve **4100**.

[00309] Once the hydraulic jetting operation is completed and the jetting hose **1595** and jetting nozzle **1600** have been retrieved back into the external system **2000**, a mechanical force can be transmitted to the casing collars **4000** along the production casing **12** via the whipstock **3000**. The portals of the casing collars **4000** are then closed, that is, placed in position "5." When closed, the casing collars **4000** can conduct stimulation fluids at similar I.D. dimensions and burst/collapse tolerances as the production casing **12**.

[00310] The downhole hydraulic jetting assembly **50** allows an operator to create a network of lateral boreholes, wherein formation of the lateral boreholes may be controlled so as to avoid frac hits in neighboring wells. The lateral boreholes are hydraulically excavated into a pay zone that exists within a surrounding rock matrix. The pay zone has been identified as holding, or at least potentially holding, hydrocarbon fluids.

[00311] **Figure 5A** is a perspective view of a hydrocarbon-producing field **500**. In this view, a child wellbore **510** is being completed adjacent to a parent wellbore **550**. In the illustrative arrangement of **Figure 5**, the child wellbore **510** is a new wellbore that is being completed horizontally. In contrast, the parent wellbore **550** is an older wellbore also completed horizontally.

[00312] The child wellbore **510** has a vertical leg **512** and a horizontal leg **514**. The horizontal leg **514** extends from a heel **511** to a toe **515**. The horizontal leg **514** extends along a pay zone

530. The horizontal leg **514** may be of any length, but is typically at least 2,000 feet. Of interest, the horizontal leg **514** passes by or is generally parallel to the parent wellbore **550**, coming perhaps as close as 200 feet.

[00313] In the completion of **Figure 5A**, frac stages 1, 2, and 3 followed conventional perforations placed in “clusters.” These clusters were then fracked using the common “plug-n’-perf” technique; that is, by placing a drillable bridge plug between each hydraulic fracturing stage. These bridge plugs must be drilled out later, before the SRV’s gained from frac stages 1 thru 3 before frac and reservoir fluids can flow into the wellbore **511**.

[00314] This typical completion technique of child well **510** is carried out until frac stage “n”, during which time a frac hit **599** is observed in the parent wellbore **550**. In many instances, the severity of the frac hit **599** is first indicated by a blown-out stuffing box of the parent well **550**.

[00315] An SRV **597** is shown in **Figure 5A**, emanating from the child wellbore **510** as a result of frac stage “n.” In the hypothetical but very real scenario depicted in **Figure 5A**, the SRV **597** grows only in one direction, and that as a very narrow “line-out” toward a depletion zone **598** surrounding the lateral section of parent wellbore **550**. Note here the operator’s greatest economic loss may not be: (1) the cleanout expense of parent wellbore **550**, or (2) the potential loss of unrecoverable production and remaining reserves from the depletion zone **598**; nor even, (3) frac costs to build so much of SRV **597** within the parent’s depletion zone **598**. Instead, it is highly probable the operator’s greatest economic loss is incurred by his inability to access hydrocarbon production and reserves from the higher reservoir pressure, and hence production- and reserves-rich pay zone volume depicted as **596**; that is, half of the SRV that frac stage “n” was otherwise designed to construct.

[00316] The narrow “line-out” of the SRV from frac stage “n” toward the depletion zone **598** is a result of the weakening of the principal horizontal stress profile within the pay zone **530**. Such weakening is typically directly proportional to the reduction in pore pressure. For previous flow of hydrocarbons to be captured by a parent wellbore, the pore pressure of the reservoir would have been represented by a gradient from a maximum at an outer drainage boundary,

gradually decreasing to a minimum in the vicinity of the parent wellbore. Commensurately, the principal horizontal stress profile within the reservoir would follow the same gradient: maximum at an outer drainage boundary, minimum in the vicinity of the parent wellbore **550**. Thus, the likelihood of frac hits increases proportionally to the pore pressure gradient between the locations of the existing parent **550** and the new child wellbore **510**.

[00317] When a frac hit such as frac hit **599** occurs, the operator of the parent wellbore **550** will naturally become concerned that subsequent frac stages, beginning with the very next stage “**n+1**”, are going to hit parent wellbore **550** just as stage “**n**” did. Thus, it is desirable in connection with a horizontal well completion to obtain greater control over the geometric growth of the primary fracture network extending perpendicularly outward from the horizontal leg **4c**. It is further desirable to actually control, or at least favorably influence, the growth of a fracture network and its resultant SRV while completing a newer “child” to avoid frac hits damaging offsetting “parent” wells and “thiefing” the subject frac stage. It is proposed herein that this can be accomplished through the use of one or more hydraulically-jetted mini-lateral boreholes, otherwise called Ultra Deep Perforations (“UDP’s”), extending from the horizontal leg **514** in the child wellbore **510**, in a direction away from the parent wellbore.

[00318] **Figure 5B** is another perspective view of the hydrocarbon-producing field **500** of **Figure 5A**. Here, a mini-lateral borehole **522** has been jetted from the child wellbore **510**. The lateral borehole **522** extends from a first casing exit location **521** along the child wellbore **510**, and is formed transverse to the horizontal leg **514**. Of course, the lateral borehole **522** may extend away from the horizontal leg **514** at any angle. What is significant in **Figure 5B** is that the lateral borehole **522** is formed in a direction that is moving away from the existing parent wellbore **550**.

[00319] The lateral borehole **522** has been formed subsequent to and in the opposite direction of the frac hit **599** occurring from pumping stage “**n**.” The lateral borehole **522** has also been formed prior to pumping stage “**n+1**.” In order to form the lateral borehole **522**, the operator of the formation fracturing operation taking place in the child wellbore **510** may rig down the wireline service providing the “plug-n’perf” functions, and moved in an e-coil unit to run in a

downhole hydraulic jetting assembly **50**. Thus, the lateral borehole **522** is formed using the downhole hydraulic jetting assembly **50** described above, including the use of either whipstock **1000** or whipstock **3000**.

[00320] It is observed that there is nothing improper about the formation of the lateral borehole **522**, provided that regulatory reporting requirements are met. It is also observed from **Figure 5A** that SRV's were also formed from frac stages #1, #2 and #3. This is proper as well. However, these SRV's **515** did not extend in only one direction (the direction of depletion zone **598**, but formed bilaterally as they were designed to do. No additional frac hits were created.

[00321] Where the whipstock **3000** and ported casing collar **4000** are used to form lateral borehole **522**, it is anticipated that the path established by the portals' alignments will be perpendicular to the longitudinal axis of production casing **12** at 90° and 270° from true vertical. Because of the self-aligning feature of the casing collar **4000**, the 90° / 270° are not essential to the design, and could be modified as desired. For example, the portals may be used to align the longitudinal axis of the portals (said axis being at-or-near perpendicular to the longitudinal axis of the wellbore, and hence of the casing collar body itself) at 100° and 280° as to initiate lateral boreholes parallel to a host pay zone's bedding plane having a 10° dip.

[00322] In any instance, during the formation of the lateral borehole **522** it is desirable for the operator to obtain real-time geophysical feedback. An example of such feedback is from micro-seismic data. For example, if the micro-seismic data's processing and presentation times are truly close to "real-time", pumping operations could be shut down prior to a "hit" **599** being incurred. At the very least, real-time micro-seismic feedback should yield valuable information as to what the lateral borehole **522** configuration for the subsequent frac stage **521** should be.

[00323] For the remainder of the child wellbore **510** completion, for each remaining frac stage the operator may jet lateral boreholes only in a westerly direction, and none easterly, particularly if he discovers lateral borehole **522** was successful in both: (1) directing SRV **596** growth westerly for frac stage **521** ("n+1"), and (2) avoiding another frac hit **599** in parent wellbore **550**.

[00324] In addition, sensor tools may be used to provide real-time data describing the downhole location and the alignment of the whipstock face 1050.1 or 3001. This data is useful in determining:

- (1) how many degrees of re-alignment, via the whipstock face **1050.1** alignment, are desired to direct the initial lateral borehole along its preferred azimuth; and
- (2) subsequent to jetting the first lateral borehole, how many degrees of re-alignment are required to direct subsequent lateral borehole(s) along their respective preferred azimuth(s).

[00325] In addition, the tool face sensor data received in real time, subsequent to the whipstock **3000** being latched into a casing collar **4000**, would confirm:

- (3) the initial alignment of the casing collar **4000** by validation of the weighted belly **4900** successfully orienting at 180° from true vertical;
- (4) the alignments of the outer sleeve's easterly-oriented port **4110.E** and westerly-oriented port **4110.W** being oriented at 90° and 270° , respectively, from true vertical (presuming that their longitudinal azimuths were designed for true horizontal); and,
- (5) the hydraulic locking swivels **5000** (or, at least one of them) located at each end of the casing collar **4000** had successfully actuated, locking the rotational position of the casing collar **4000** and the swivels **5000** in place. That is, throughout the rotational movements of the whipstock face 3001, induced by torque from an electric motor, it can be observed whether or not the casing collar **4000** is rotating with it.

[00326] The operating procedures for the whipstock **3000** and the ported casing collar **4000** are as follows.

- (1) After the hydraulic locking swivels are pressurized and hydraulically locked, the whipstock **3000** is run inside an inner sleeve **4200** to operate the casing

collar **4000** and to place it in the desired port-open condition such that hydraulic jetting and/or stimulation and/or production operations can begin.

- (2) Once the whipstock **3000** is inside the inner sleeve **4200**, the alignment blocks **3400** are guided by the beveled entries **4211** to matingly rest in the axial alignment slots **4212**.
- (3) Continued downstream movement of the whipstock **3000** snaps the shift dogs **3200** into the mating shift dog groove **4202** in the inner sleeve body **4201**. At this point of engagement by the whipstock **3000**, the casing collar **4000** is in position “1,” which is the run-in-hole position. all portals are sealed and pressure-tight in the casing collar **4000**.
- (4) Rotating the whipstock **3000** clockwise (right-hand) applies torque to the inner sleeve **4200** through the alignment blocks **3400**, shearing the shear screws **4700** in the lower portion of the inner sleeve **4200** and places the inner sleeve **4200** in an axial portion of the control slots **4800** relative to the torque pins **4500**. The torque pins **4500** are used to guide the inner sleeve’s movement along the path established by the control slots **4800**.
- (5) Moving the whipstock **3000** upstream via the shift dogs’ **3200**’s engagement of shift dog groove **4202**, followed by counter clockwise (left-hand) rotation places the inner sleeve **4200** in position “2.” This is the “East Hole Open” position relative to the torque pins **4500**. Further longitudinal movement is prevented. Hydraulic jetting, stimulation and/or production operations in the easterly direction can begin while in this position “2.”
- (6) To move the inner sleeve **4200** from position “2” to position “3,” which is the “West Port Open” position, 180° of clockwise rotation is applied through rotation of the whipstock **3000**, placing the torque pins **4500** in a longitudinal portion of the control slot **4800**. This is shown in **Figure 4PCC.1.CSP**. Upstream movement via the shift dogs **3200** and clockwise (right-hand) rotation of the whipstock **3000** and matingly attached inner sleeve **4200** place the torque pins **4500** in position “3.” In this position, hydraulic jetting, stimulation and/or production operations in the westerly direction can begin.

- (7) Moving from position “3” to position “4” is accomplished by applying counterclockwise (left-hand) rotation, then upstream axial movement, to the whipstock **3000**. This aligns all portals as shown in **Figures 4PCC.2** and **4PCC.3d.4**, meaning that both East and West Ports are open. Clockwise (right-hand) rotation locks the inner sleeve **4200** in Position “4.” Further longitudinal movement is again prevented and stimulation and/or production operations in simultaneous easterly and westerly directions can begin. (Note that hydraulic jetting is not possible in Position “4” as the whipstock’s jetting hose exit portal **3200** is no longer in alignment with a portal in the inner sleeve **4200**.)
- (8) Applying 90° of counterclockwise (left-hand) rotation to the whipstock **3000** followed by upstream longitudinal movement and additional counterclockwise (left-hand) rotation places the torque pins **4500** in control slot Position “5.” This is the “Both Holes Closed” position, shown in **Figures 4PCC.2** and **4PCC.3d.5**. In this position, further axial movement is prevented. Straight upstream movement (i.e. no rotation) can be applied when in any of the five “locked” control slot positions and removes the shift dogs **3200** from the mating circumferential shift dog groove **4202**. Further upstream longitudinal movement removes the alignment blocks **3400** from the alignment slots **4212**, thereby allowing the whipstock **3000** to be moved to a next casing collar **4000** along the casing string **12**.

[00327] Beneficially, the above completion protocol could include all of the lateral boreholes being jetted in advance of any frac equipment arriving at the child well location. In fact, the only necessary equipment would be the hydraulic jetting assembly **50** with the casing collars **4000** placed along the production casing **12** to jet the lateral boreholes.

[00328] Using the whipstock **3000**, the casing collars **4000** may be selectively opened or closed at a later time to provide for fracing through them in any sequence desired. Additionally, lateral boreholes jetted through the aligned portals of the casing collars **4000** may be augmented by additional lateral boreholes jetted through the casing **12** and into the pay zone using either the

whipstock **1000** or **3000**. The configuration of the lateral boreholes may be based upon the at-or-near real time interpretation of micro-seismic data or electromagnetic imaging of an SRV.

[00329] In **Figures 4E** and **4MW**, the whipstock **1050** and **3000** is disposed below the lower end of the outer conduit **490** of the external section **2000**. The whipstock **1050**, **3000** is presented as having a generally 90° curvature. However, other degrees of curvature may be desired such that the jetting hose **1595** exits the casing **12** (or the outer sleeve **4100**) closer to the plane of maximum principle (horizontal) stress, σ_H , of the host pay zone. Beneficially, a larger-diameter jetting hose **1595** may be used where the angle of curvature is less than 90°.

[00330] Note that in many cases, drillers will purposefully orient the lateral sections of their wellbores to be perpendicular to σ_H , which is typically parallel to the minimum principle (horizontal) stress, σ_h . As applied to the technology disclosed herein, a 90° casing exit by the jetting hose **1595** should generate a lateral borehole in a direction perpendicular to σ_h ; i.e., along the same trajectory that hydraulic fractures (in the absence of natural fractures or other geologic anomalies) tend to propagate within a rock matrix. Knowing this, the operator can locate lateral boreholes at a location along the horizontal leg **4c** of the wellbore and in a direction that is away from an offset parent wellbore. Optionally, the operator can select a whipstock face curvature that will avoid a frac hit with an offset wellbore.

[00331] The hydraulic jetting assembly **50** also allows the operator to make a 180° rotation of the face **1050.1** of the whipstock **1000**. This may be done, for example, if the operator wishes to align a subsequent UDP with σ_h or if the operator wishes to increase SRV while still avoiding a frac hit.

[00332] It is also proposed herein that a mini-lateral borehole (such as lateral borehole **522**) can control frac direction. As a first point, it is observed that the hydraulic pressures used in connection with forming a lateral borehole are typically lower than the initial fracturing pressure required to generate a parting of the formation. Thus, a lateral borehole can be formed in a direction away from an offset wellbore without creating a fracturing network and the accompanying risk of a frac hit. Thereafter, the lateral borehole could be produced for a period

of time, thereby weakening the rock matrix making up the pay zone – again, in a location away from the offset wellbore. Stated another way, pre-frac depletion serves to “magnetize” the lateral borehole.

[00333] After a period of producing reservoir fluids, a formation fracturing operation could be conducted in the lateral borehole. In this instance, the fracture network will not be biased to flow in the direction of the parent wellbore but will form more closely in a perpendicular orientation off of the lateral borehole.

[00334] As long as the “weaker stress” points along the lateral borehole have an initial fracture pressure (P_{Fi}) that is less than a formation parting pressure at the parent wellbore (P_{Fp}) = 5,950 psi), the fractures will propagate along the top and bottom of the lateral borehole in a desired direction that will not create a measurable risk of frac hit.

[00335] Because of the presence of the lateral borehole, initial formation parting pressure (P_{Fi}) and formation propagation pressure (P_{Fp}) in the rock matrix (at-or-near the top and bottom of a pre-frac lateral borehole) are reduced below the correlative (P_{Fi}) and (P_{Fp}) thresholds extending from the child well towards the parent. If necessary, combining the disruption of the *in situ* stress profile of the rock matrix surrounding the lateral borehole itself with the compounding P_{Fi} and P_{Fp} reductions from near-lateral borehole depletion, (P_{Fi}) and (P_{Fp}) (at-or-near the top and bottom of the pre-frac lateral borehole) are then reduced below the correlative (P_{Fi}) and (P_{Fp}) thresholds extending from the parent wellbore.

[00336] As part of the method of avoiding frac hits herein, the operator will need to determine how long will it take to drain a sufficiently depleted volume surrounding the lateral borehole, and how much drained volume is required to create the desired pressure bias. Answers to these questions will be governed by numerous factors, chiefly those inherent to the reservoir itself, such as relative permeability's to the respective reservoir fluids.

[00337] One noteworthy practice in unconventional reservoirs development, particularly utilizing horizontal wellbores, is that many wells are drilled and cased long before they are perforated and fracked via multi-stage completions. This interim state is referred to in the

industry as drilled-but-uncompleted, with wellbores in this classification simply referred to as “DUC’s”. The procedure referenced above provides a methodology to utilize this interim “DUC” state to enhance the desired SRV geometry from subsequent fracs by first partially depleting reservoir volumes surrounding pre-frac lateral boreholes. Further, given the right reservoir parameters, the referenced procedure may even place an otherwise idle DUC into a cash flow positive position as oil and/or gas are produced via the pre-frac lateral boreholes.

[00338] Referring back to the downhole hydraulic jetting assembly **50**, **Figures 2** and **4** depict the final transitional component **1200**, the conventional mud motor **1300**, and the (external) coiled tubing tractor **1350**. Along with the tools listed above, the operator may also choose to use a logging sonde **1400** comprised of, for example, a Gamma Ray – Casing Collar Locator and gyroscopic logging tools.

[00339] Using the downhole hydraulic jetting assembly **50** described above, a method of avoiding frac hits is offered herein. In one aspect, the method first comprises providing a child wellbore **510** within a hydrocarbon-producing field **500**. A portion of the child wellbore **510** extends into the pay zone **530**. Preferably, the wellbore **510** is completed horizontally such that a horizontal leg **514** of the child wellbore **510** extends along the pay zone **530**.

[00340] The method also includes identifying a parent wellbore **550** within the hydrocarbon-producing field **500**. In the context of the present disclosure, the parent wellbore **550** is a well located near or adjacent to the child wellbore **510**. The parent wellbore **550** is an existing older well that was previously completed within the pay zone **530** such as shown in **Figures 5A** and **5B**.

[00341] Within a drainage volume affected by the parent wellbore, production of reservoir fluids has reduced pore pressure in the rock matrix. This reduction of pore pressure has affected the *in situ* stress profile of the rock matrix within the pay zone’s pressure sink. The result is that the rock matrix will hydraulically fracture with significantly less hydraulic/pressure force than it otherwise would have at virgin conditions.

[00342] Note that this reduction in formation breakdown pressure is somewhat proportional to the reduction in pore pressure. That is, the greater the drainage of pore pressure of a specific rock, the less the frac pressure required to initiate formation fractures; and extend (or propagate) fractures out into the formation. Accordingly, this pre-existing pore pressure gradient within the pay zone, upon the arrival and completion of the child wellbore, creates a preferential “path-of-least-resistance” for a hydraulic fracture initiating from a child wellbore and extending towards the vicinity of the parent wellbore.

[00343] The method further includes conveying a hydraulic jetting assembly into the child wellbore. The hydraulic jetting assembly is in accordance with the assembly **50** of **Figure 2**, in any of its various embodiments. The hydraulic jetting assembly **50** is transported into the wellbore on a working string. Preferably, the working string is a string of e-coil, that is, coiled tubing carrying an electric line within, along the entirety of its length. Even more preferably, the working string is a string of coiled tubing having a sheath for holding one or more electrical wires and, optionally, one or more fiber optic data cables as presented in detail in the '351 patent incorporated above.

[00344] Generally, the hydraulic jetting assembly **50** will include:

- a whipstock member having a curved face,
- a jetting hose having a proximal end and a distal end, and
- a jetting nozzle disposed at a distal end of the jetting hose.

[00345] The method also comprises setting the whipstock at a desired first casing exit **521** location along the child wellbore **510**. The face of the whipstock bends the jetting hose substantially across the entire inner diameter of the wellbore **510** while the jetting hose is translated out of the jetting hose carrier.

[00346] The method additionally includes translating the jetting hose out of the jetting hose carrier to advance the jetting nozzle against the face of the whipstock. This is done while

injecting hydraulic jetting fluid through the jetting hose and connected jetting nozzle, thereby excavating a lateral borehole within the rock matrix in the pay zone.

[00347] The method also includes further advancing the jetting nozzle through a first window at the first casing exit location **521** and into the pay zone **530**. The method then includes further injecting the jetting fluid while further translating the jetting hose and connected jetting nozzle through the jetting hose carrier and along the face of the whipstock. In this way, a first lateral borehole **522** that extends at least 5 feet from the horizontal (child) wellbore **514** is formed.

[00348] In one aspect, the method of the present invention additionally includes controlling (i) a distance of the first lateral borehole **522** from the child wellbore **514**, (ii) a direction of the first lateral borehole **522** from the child wellbore **514**, or (iii) both, to avoid a frac hit with the parent wellbore **550** during a subsequent formation treatment operation. The formation treatment operation is preferably a formation fracturing operation, such as the frac stage “**n+1**” of **Figure 5B**.

[00349] In one embodiment, the method further comprises monitoring tubing and annular pressures of the parent wellbore **550** while conducting frac operations of child wellbore **510**. “Tubing pressure” typically means pressure within the production string of the parent wellbore **550**. “Annular pressures” would include pressure within a tubing-casing annulus, but would also include pressure in the annuli between casing strings. The latter could perhaps prove to be the most ominous, as it could indicate issues concerning wellbore (and particularly, casing) integrity, well control, and even the exposure of fresh water zones to well and frac fluids.

[00350] The tubing and annular pressures are monitored to see if a so-called pressure hit is taking place in the parent wellbore **550** during any frac stage “**n**”. Note that, even if the parent wellbore **550** is producing from a highly depleted portion **598** of pay zone **530**, the tubing-production casing annulus pressure could be monitored, not only by a pressure gauge at surface, but by continuously shooting downhole fluid levels. Even if the surface gauge is reading zero, an increasing downhole fluid level could indicate that a pressure hit is occurring within the parent wellbore **550**, and the operator could discontinue pumping frac fluid into child wellbore **510**.

Alternatively, prior to pumping the subsequent frac stage, the operator will jet lateral borehole **522** away from the parent wellbore **510**. Alternatively still, the operator may partially withdraw the jetting hose and connected jetting nozzle from the first lateral borehole **522**, and then form a side borehole off of the first lateral borehole **522** in order to create even more SRV in a direction away from the parent wellbore **550** to avoid a frac hit from frac stage “**n+1**”.

[00351] The process of forming the first lateral borehole **522** in such a manner as to avoid a frac hit may be done during initial well completion. Alternatively, the process may be done after the child wellbore **510** has been producing hydrocarbon fluids for a period of time.

[00352] It is preferred, though not required, that the child wellbore **510** be completed horizontally, referred to as a “horizontal wellbore.” In this instance, the first casing exit location **521** will be along a horizontal leg **514** of the child wellbore **510**. In one embodiment, the operator will determine a distance of the parent wellbore **550** from the first casing exit location **521** in connection with avoiding a frac hit.

[00353] In one aspect, the method may further comprise the steps of:

retracting the jetting hose and connected nozzle from the first window (at the first casing exit location **521**);

re-orienting the whipstock at the first casing exit location **521**;

injecting hydraulic jetting fluid through the jetting hose and connected nozzle, thereby forming a second window at the first casing exit location **521**;

advancing the jetting nozzle against the face of the whipstock while injecting hydraulic jetting fluid through the jetting hose and connected jetting nozzle;

advancing the jetting nozzle through the second window at the first casing exit location **521** and into the pay zone **530**;

further injecting the jetting fluid while advancing the jetting hose and connected nozzle along the face of the whipstock, thereby forming a second lateral borehole **524** that extends from the second window through a rock matrix in the pay zone **530**; and

controlling (i) a distance of the second lateral borehole (not shown) from the child wellbore **510**, (ii) a direction of the second lateral borehole from the child wellbore **510**, or (iii) both, to avoid a frac hit with the parent wellbore **550** during a subsequent formation fracturing operation in order to create SRV in the pay zone **530**.

[00354] In this embodiment, the child wellbore **510** is preferably a horizontal wellbore, and the first casing exit location **521** is preferably along the horizontal leg **514**. In addition, the second lateral borehole is preferably offset from the first lateral borehole **522** by between 10-degrees and 180-degrees, and is thus not excavated in a horizontal orientation. In any instance, the jetting fluid typically comprises abrasive solid particles. The operator may then produce hydrocarbon fluids from both the first and second lateral boreholes.

[00355] In one embodiment of the method, the operator of the child wellbore **510** produces reservoir fluids from the first and second lateral boreholes for a period of time prior to pumping fracturing fluids into the first and second lateral boreholes. In another embodiment of the method, particularly suited for settings of significant *in situ* stress anisotropy (as in the case where offset production from the subject pay zone has locally reduced pore pressure) would be to only jet a lateral(s) into the higher pressure / higher stress region of the pay zone. That is, in a direction opposite the source of depletion. Once completed, these laterals could be produced for a given time span prior to hydraulically fracturing, thus reducing the pore pressures, and rock stresses, in the vicinity surrounding the lateral boreholes. If the frac treatments of these lateral boreholes did not eventually break into a direction towards the original depletion source, subsequent lateral boreholes could be jetted in that direction, and then be subsequently fracked. Note in this case it would be advantageous to utilize a casing collar **4000** of **Figure 4MW**, so the portals exposing the original lateral boreholes could be closed off while fracking the more recent lateral boreholes.

[00356] It is understood that the operator may form a third or a fourth lateral borehole (not shown) proximate the first casing exit location **521**. This allows an even greater exposure of the wellbore **514** to the surrounding pay zone **530**. Confirmation of the directions of the original fractures could be detected in offsetting well pressures, through the use of chemical tracers, or

through micro-seismic data. Also, tiltmeter measurements in or near the child wellbore **510** could be employed.

[00357] In another embodiment of the method herein, the method may further comprise:

retracting the jetting hose and connected nozzle from the first window (at the first casing exit location **521**);

moving the whipstock to a desired second casing exit location along the horizontal leg **514** of the child wellbore **510**, and setting the whipstock;

injecting hydraulic jetting fluid through the jetting hose and connected nozzle, thereby forming a second window at the second casing exit location;

advancing the jetting nozzle against the face of the whipstock while injecting hydraulic jetting fluid through the jetting hose and connected jetting nozzle;

advancing the jetting nozzle through the second window at the second casing exit location and into the pay zone **530**;

further injecting the jetting fluid while translating the jetting hose and connected jetting nozzle along the face of the whipstock, thereby forming a second lateral borehole that extends from the second window through the rock matrix in the pay zone **530**; and

controlling (i) a distance of the second lateral borehole from the child wellbore **510**, (ii) a direction of the second lateral borehole from the child wellbore **510**, or (iii) both, to avoid a frac hit with the parent wellbore **550** during a subsequent pumping of frac fluid.

[00358] It is observed that in the illustrative wellbore **510**, the second lateral borehole could be oriented vertically relative to the horizontal leg **514**. In practice, the second lateral borehole may be oriented in any radial direction off of the horizontal leg **514**. In addition, the second lateral borehole may extend any distance from the horizontal leg **514**, provided that regulatory reporting requirements are met.

[00359] Once again, the child wellbore **510** is preferably a horizontal wellbore, and the first casing exit location **521** (and any second, third, or subsequent casing exits) is preferably along

the horizontal leg **514**. The second casing exit location is preferably separated from the first casing exit location **521** by 15 to 200 feet. Preferably, each of the first **522** and second lateral boreholes is at least 25 feet in length and, more preferably, at least 100 feet in length. In any instance, the jetting fluid typically comprises abrasive solid particles. The operator may then produce hydrocarbon fluids from both the first and second lateral boreholes, with or without subsequent hydraulic fracturing.

[00360] In any of the above methods, advancing the jetting hose into a lateral borehole is done at least in part through a hydraulic force acting on a sealing assembly along (such as at an upstream end of) the jetting hose. Further, the jetting hose is advanced and subsequently withdrawn without coiling or uncoiling the jetting hose in the wellbore.

[00361] In one embodiment, advancing the jetting hose into a lateral borehole is further done through a mechanical force applied by rotating grippers of a mechanical tractor assembly located within the wellbore, wherein the grippers frictionally engage an outer surface of the jetting hose.

[00362] In another embodiment, advancing the jetting hose into a lateral borehole is accomplished by forward thrust forces generated from flowing jetting fluid through rearward thrust jets located in the jetting assembly. These rearward thrust jets are specifically located in the jetting nozzle, or in a combination of the nozzle and one or more in-line jetting collars strategically located along the jetting hose. Preferably, the nozzle permits a flow of the jetting fluid through rearward thrust jets in response to a designated hydraulic pressure level. In this instance, the flowing of fluid through the rearward thrust jets is only activated after the jetting hose has advanced into each borehole at least 5 feet from the child wellbore. The additional rearward thrust jets located in the in-line jetting collar(s) are then activated at incrementally higher operating pressures, typically when the jetting hose has been extended such a significant length from the child wellbore that the rearward thrust jets within the nozzle alone can no longer generate significant pull force to continue dragging the full length of jetting hose along the lateral borehole.

[00363] In a related aspect, the method may include monitoring tensiometer readings at a surface. The tensiometer readings are indicative of drag experienced by the jetting hose as lateral

boreholes are formed. In this instance, the flowing of fluid through the rearward thrust jets is activated in each of the plurality of boreholes in response to a designated tensiometer reading.

[00364] Of course, the operator will also monitor pressure readings at the child wellbore. During a hydraulic fracturing operation, a sudden drop in pumping pressure at the surface indicates fracture initiation. At this point, fluids flow into the fractured formation. This means that a formation parting pressure has been reached and that the fracture initiation pressure has exceeded the sum of the minimum principal stress plus the tensile strength of the rock.

[00365] Additional prophylactic steps to avoid a frac hit may be undertaken. Such may include monitoring tubing and/or annular pressures in the parent wellbore **550** or conducting real-time micro-seismic and/or tiltmeter measurements in or near the child wellbore **510** and extending to (and preferably beyond) parent wellbore **550** and at least to any other directly offsetting parent wellbores in every direction. This will provide at least two benefits: (1) provision of a precise horizontal depth datum (particularly, as the jetting nozzle and hose just begin to extend from the child wellbore) with which to calibrate subsequently gathered micro-seismic data; and (2) confirmation of the path of the lateral borehole as it is being erosionally excavated.

[00366] During a fracing operation, if monitoring indicates that an SRV has failed to propagate in the pay zone in any desired orientation emanating from the child well, then the next stage's configuration of lateral boreholes can be tailored to address the issues. For example, a well plan may be modified so that lateral boreholes in a subsequent stage may only be formed in one direction, rather than bilaterally. Alternatively, the lateral boreholes in a subsequent fracturing stage may be formed a longer distance in a direction away from an offset well, and a shorter distance in a direction towards the offset well.

[00367] Upon detecting propagation near a parent wellbore **550**, the operator can discontinue the injection of the jetting fluid into the first lateral borehole, thereby:

- (1) protecting the parent wellbore, its associated production, and future recoverable reserves it may still be able to capture;

- (2) saving the cost of associated frac fluids, proppants, and hydraulic horsepower that would be wasted while “hitting” or “bashing” the parent wellbore;
- (3) precluding the expense of fishing the parent well’s rods, pumps, tubulars, tubing anchor and other downhole production equipment that may become stuck due to the influx of frac fluids and particularly, proppants from child well frac operations;
- (4) precluding the expense of a parent well cleanout operation, often requiring coiled tubing and nitrogen to circulate out frac fluids and proppants;
- (5) precluding the cost of lost hydrocarbon production and (previously) remaining reserves attributable to the parent well, which is often the most significant expense of all; and
- (6) precluding the expense of surface cleanup and remediation from an induced “blowout” situation (note in the case where the parent wellbore is much older (typically vertical) wells, and due to corrosion and aging may have weakened and/or already have leaking casing, the “blowout” scenario could occur entirely underground).

[00368] Therefore in the subject method, no longer is the operator superimposing a pre-designed frac stage spacing, perforation densities, or even perforation direction without considering the frac behavior of the immediately preceding stage. By utilizing the hydraulic jetting assembly **50** and the methods presented herein, a given “cluster” (or set) of lateral boreholes can provide customization of (quite literally) far greater depths, wherein the dual objectives of (1) SRV maximization and (2) frac hits minimization can be achieved. Each grouping of lateral boreholes can be customized in terms of depth, direction, distance, design, and density in preparation for receiving a next frac stage. Where a ported custom collar **4000** is used, a given borehole’s level of depletion can also be increased to further enhance achievement of these two main objectives.

[00369] Each of the UDP customization criteria is elaborated below:

Depth

[00370] Because the apparatus can be set and re-set multiple times, individual lateral boreholes can be jetted through the casing and on out into the pay zone from any position along the horizontal wellbore. Further, even though the apparatus is conveyed via a string of coiled tubing, because it is configured to be able to conduct hydraulic fluid entirely throughout its length, it can thus incorporate and drive a downhole motor/CT tractor assembly toward its distal end. Thus, the depth limit is not that of the CT alone (e.g., to the point at which, while advancing downhole, CT “buckling” produces “lock-up”), but that depth to which a CT tractor can convey the CT and the apparatus. Note when utilizing ported custom collars, some of this depth flexibility is lost because the collars are run within the casing string itself. That is, the casing collar portals that will provide the casing exit location for a given lateral borehole is at a fixed, predetermined wellbore depth along the string of production casing. Notwithstanding this limitation, multiple other lateral boreholes may be jetted through the casing in conjunction with, or in place of, lateral boreholes jetting through the casing collars.

Direction

[00371] Lateral boreholes can be jetted in any axial direction (depending on the tool assembly’s ratchet mechanism setting, typically within 5- or 10-degree increments) from the wellbore. Generally speaking, more and longer lateral boreholes are desired in the direction for which fracking is most difficult. Note that, typically, when utilizing the casing collars herein, the hydraulic locking swivels on each end will have been pressure-actuated to lock the casing collars in place when “bumping-the-plug” at the conclusion of the cement job of the production casing string. Hence, this employment of the casing collars carries with it the inherent limitation of the orientation of the exit portals relative to the self-orienting mechanism (that is, the “weighted belly”). That is, where the weighted belly will find true vertical at 180° (down), the exit portals will have been milled at true horizontal (90° and 270°), or perhaps some slight variation to correspond with the bedding plane of the pay zone. However, there is the alternative method of first engaging the casing collars with the whipstock of the jetting assembly before they have been locked, and using the whipstock’s orienting mechanism and tool-face measurements to selectively

set the casing collars (with their pre-milled port orientations) in any desired orientation, then pressuring-up on the CT-casing annulus to lock the casing collar in place. (Note this would require an uphole-to-downhole progression.) Thus, in the case where the tool assembly's hydraulic 'pressure pulse' ratchet mechanism has been replaced with an electric driven motor assembly, coupled with real time tool face orientation, the operator at surface can select any precise exit orientation (at least, for one direction of exit ports) desired in real-time. Notwithstanding any initial orientation limitations imposed by the casing collar exit portals, in a preferred embodiment of the jetting assembly, the jetting nozzle and hose can be steered toward any desired orientation after exiting the wellbore.

Distance

[00372] Lateral boreholes may be generated that extend any distance from the child wellbore, limited only by the length of the jetting hose itself. This 'distance' customization capability is also available "on-the-fly" between frac stages.

Design

[00373] In certain embodiments, the subject apparatus is capable of generating steerable lateral boreholes. Though the maximum length of each lateral borehole is dictated by the length of the jetting hose, the ability to steer the jetting nozzle in 3-D space within the pay zone provides for an almost infinite number of geometries. Incorporated U.S. Patent No. 9,976,351 entitled "Downhole Hydraulic Jetting Assembly." highlights this 'design' capability in significant detail. Note that this particular flexibility is independent of whether the initial casing exit is obtained from jetting through the casing or from utilizing portals in a casing collar. This is true even if the casing collar is of the self-orienting embodiment previously described, and has been cemented into place. This 'design' customization capability is also available "on-the-fly" between pumping frac stages.

[00374] The subject hydraulic jetting assembly **50** can generate lateral boreholes at multiple azimuths and at any given depth location. For this reason, the density of lateral boreholes can be highly customized.

Depletion

[00375] Depletion of the pay zone in the vicinity around the circumference of the lateral borehole for a designated period of time can be useful in making the lateral borehole a preferred “path-of-least-resistance” for a subsequent frac stage. Optionally, selected portals along a stage that is considered to be high risk for a frac hit may be kept open for the selected period of time for production while other portals that are located along less-at-risk depths may be closed.

[00376] Preferably, it will be the information observed from the immediately preceding frac stage that will guide design of a current lateral borehole. Of course, the closer to real-time the data feedback is to actual pumping times, the more frac fluids, proppant volumes, pumping rates and pressures can also be custom-tailored for each stage’s already customized lateral borehole(s).

[00377] The method disclosed herein also encompasses the deployment of ported casing collars within the production casing string. The casing collars serve as a substitute for conventional perf clusters in a child wellbore. The casing collars are run in conjunction with pairs of hydraulic locking swivels. The eccentric weighted belly’s turns at approximately 180° from true vertical, thus orienting all of the exit portals at or near true horizontal.

[00378] A benefit of the present methods and of the hydraulic jetting assembly disclosed herein is that lateral boreholes may be excavated within the pay zone without creating fractures of any significant scale. This means that, in many if not most cases, the operator can favorably influence the direction and distance of the growth of the fracture network (in the form of SRV emanating from the lateral boreholes) relative to the wellbore.

[00379] In one aspect of the present invention, lateral boreholes are intentionally formed in a horizontal direction. In addition, the horizontal leg of the wellbore is drilled in a direction of least principal (horizontal) stress, and the lateral boreholes extend “transverse” to the wellbore horizontally. This enables pumping pressures through the lateral boreholes to be minimized since rock stresses acting against the hydraulic forces will be minimized.

[00380] Optionally, after a lateral borehole has been formed, the operator may increase pumping pressure up to the formation parting pressure. Fractures will then emanate vertically, and propagate horizontally in a vertical plane running parallel to the longitudinal axis of the lateral borehole itself.

[00381] It is observed that after a formation has parted, fractures will begin to propagate. The fracture propagation pressure of a formation (indicated at the fracture tip) is typically less than the original formation parting pressure. It is further observed that producing reservoir fluids from the pay zone **530** will change the stress regime in the rock matrix, and lower the formation parting pressure. Thus, in one aspect of the methods herein, the operator may choose to produce reservoir fluids from the lateral borehole(s) for a period of time before actually injecting fluids into the lateral borehole(s) at a pressure that exceeds the formation parting pressure. In other words, the operator may form the lateral boreholes, produce reservoir fluids from the formation (causing a reduction in pore pressure and a corresponding fracture propagation pressure), and then inject traditional proppant-laden fracturing fluids to create fracture networks.

[00382] In another aspect of the method, the well is completed with casing collars **4000** and all desired lateral borehole configurations are completed before commencing formation fracturing operations. The hydraulic jetting assembly **50** is the re-run into the hole with the whipstock **3000**. This provides the operator with the ability to selectively close-off (or frac and then re-close) portals in the casing collars **4000** in any sequence desired.

[00383] Suppose, for example, real-time micro-seismic reveals the first stage produced an SRV highly skewed easterly. If the operator wanted to know if this characteristic was going to continue throughout the entirety of his, say, 100-stage well completion, instead of proceeding from stage #1 to #2, he may want to skip to stages 25, 50, 75, and 100, to learn east-leaning tendency was going to continue throughout. Say it does, and even increasingly so from toe-to-heel, with unacceptable westwardly SRV generation occurring by stage 75. Hence, instead of completing the remainder of the well after, say, stage 50, the operator may opt shut-down frac operations at that point, flow back the stages he has fracked, while simultaneously pre-producing stages 51-100. Notwithstanding this particular scenario, obviously, whatever the operator observes form

completing in stages sequence 1-25-75-100 will certainly influence his planning, and validate probable modifications of the completion plan.

[00384] Another aspect of the method, in the 1-25-50-75-100 stage sequence scenario above, revealing an increasingly heavy eastwards SRV generation, the operator (with or without the pre-frac production option afforded by completing with the casing collars **4000**) may want to utilize the ability to steer the jetting nozzle **1600** and branch-off the existing westerly lateral boreholes to further enhance westerly SRV generation. Further, the operator may want to actually frac through one or more casing collars, first in a westerly direction (i.e., all portals in position “**3**”), then shut down briefly to re-shift the same casing collars into position “**2**” (east open, only) or perhaps some into position “**4**” (both east and west open).

[00385] In a still further aspect, steps may be taken to determine a suitable period of time of reservoir production to generate a change in *in situ* stresses before injecting fracturing fluids and forming the resultant fracture (SRV) network.

[00386] Once again, where a fracture network is formed, prophylactic steps may be taken to monitor pressure hits. Some degree of pressure change sensed in or caused to the parent wellbore **550** may be beneficial. However, a frac hit where proppant invades the tubing string of the parent wellbore **550** or where a pressure in the parent wellbore exceeds burst pressure ratings is to be avoided herein.

[00387] In another aspect of the method of avoiding frac hits herein, the operator of the parent wellbore may take affirmative steps to prevent child well fracturing interference. For example, the operator may dump a heavy drilling mud into the well, creating hydrostatic head that will act against rising formation pressures during the fracturing operation in the neighboring well. Thereafter, the operator of the child well may turn off artificial lift equipment (if it exists) and shut in the well by closing off valves in the wellhead.

[00388] As an alternative, the operator of the parent wellbore may inject an aqueous fluid into the well and at least partially into the surrounding formation. This has the effect of reversing the

pressure sink that has been formed in the subsurface formation during production, and minimizing the “path of least resistance” created by changes in the *in situ* stress field during production.

[00389] In a more aggressive aspect of protecting the child wellbore from a frac hit, the operator of the child wellbore may pump a diverting agent into the well. Diverting agents are known and may be used to redirect fluid flow away from one pay zone compartment already thought to be adequately stimulated, towards another compartment not yet adequately stimulated. Divertants can in some cases be used to block an established stimulation fluid’s flow path, and redirect the fluid to an unstimulated (or under-stimulated) set of perforations. This forced redirection improves the stimulation treatment’s efficacy and efficiency in the creation of Stimulated Reservoir Volume (“SRV”), whether during the wellbore’s initial completion, a recompletion, or remedial work.

[00390] In the present case, the operator is injecting a diverting agent not for the purpose of creating SRV, but to protect it. The diverting agent temporarily seals perforations by creating a positive pressure differential across perforations along the parent wellbore. Halliburton’s BioVert™ diverting agent is a suitable example. Once the diverting agent is in place, surface-generated back pressure can be held on the reservoir in the previously completed parent well(s), thus creating a pressure barriers or “halo” to the offset frac(s), thereby avoiding frac hits from an offset child well’s completion/hydraulic fracturing operations. Once the offset child frac operations are complete, the diverting agent can be removed by dissolution or by flowing the parent well back.

[00391] Of course, the operator of the parent wellbore can also install a bridge plug at the bottom of the production tubing. In a more extreme case, the operator could completely pull the production tubing and associated artificial lift equipment.

[00392] In an alternate method of protecting the parent wellbore from a frac hit, the parent wellbore may be completed with the ported casing collars 4000 along its production string. In this case, the ported casing collars are not necessarily used in the parent wellbore for jetting lateral boreholes, although they certainly could be; rather, the ported casing collars are provided in lieu

of conventional or hydra-jet perforations. In other words, the ported casing collars are serving as “slotted base pipes,” but wherein the slots may be selectively opened and closed.

[00393] In the current method, the operator of the parent wellbore will take the step of protecting against a frac hit from an offset child well’s frac by running a setting tool having two spring-loaded shift dogs **3201** and alignment blocks **3400**. The setting tool may or may not be the modified whipstock **3000** as previously presented. Either way, the setting tool provides for operating the ported casing collars **4000** and setting them in a “closed” position. This method, though protecting only the parent wellbore, provides for mechanically sealing each port, and thus precluding offset frac fluids, or re-pressurized reservoir fluids, from entering the wellbore at all.

[00394] Note that if additional protection out in the reservoir is desired, the desired quantities of a product like Halliburton’s BioVert[®] could be pumped out of each port just prior to closing the collars **4000**. Otherwise, this method requires that no additional fluids be introduced into the parent wellbore.

[00395] It is acknowledged that this method would require pulling all rods, pumps, and production tubing to give the setting tool, e.g., whipstock **3000**, full wellbore access so it can mateably engage with the casing collars for operation. Obviously, after the threat of offset frac fluid invasion passes, re-engaging the collar’s sequentially, reopening them, and re-running production tubulars and equipment is required.

[00396] An additional method for completing a wellbore is also provided herein. In this method, the wellbore is a child wellbore having a horizontal leg. The wellbore is being completed in a hydrocarbon-bearing pay zone wherein a significant pressure gradient exists across the pay zone due to partial depletion of reservoir fluids and pressure in the vicinity of a parent wellbore offsetting the child wellbore. The depletion increases with proximity to the parent wellbore.

[00397] As a result, a similar gradient of hydraulic fracturing initiation and propagation pressures also exists throughout the pay zone. The fracturing pressure requirements generally decrease with proximity to the parent wellbore. Therefore a placement of the horizontal child wellbore must transgress these pre-existing pressure/fracture gradients, such that the pay zone on

one side of the child wellbore will have weaker pressures and fracturing thresholds (the “weak side”), and the pay zone on the opposite side of the child wellbore will have stronger pressures and fracturing thresholds (the “strong side”).

[00398] The method comprises:

hydraulically jetting a series of lateral boreholes from the horizontal leg of the child wellbore, wherein:

each of the lateral boreholes is formed only into the strong side of the pay zone relative to the child wellbore, such that a trajectory of each lateral borehole is generally towards ever increasing pressures and fracturing thresholds, and

each of the lateral boreholes is formed using a jetting nozzle and connected jetting hose,

producing reservoir fluids from the pay zone from each of the lateral boreholes, thereby weakening the rock matrix by the reduction of pore pressures and fracturing thresholds on the strong side;

after sufficient weakening has occurred, injecting fracturing fluids into the horizontal wellbore and into the lateral boreholes, wherein a pumping pressure of the fracturing fluids initially exceeds a fracture initiation pressure of the pay zone immediately proximate to the lateral boreholes, and subsequently exceeds a fracture propagation pressure of the pay zone also immediately proximate to the lateral boreholes; and

forming a plane of weakness intersecting the lateral borehole such that a preferred initial path for the fracturing fluids and a resultant SRV creation is along a longitudinal axis of the lateral borehole.

[00399] In connection with this method, the horizontal leg may be completed to have the ported casing collars 4000. The ported casing collars allow for “directional depletion” into the strong side, then re-closing the lateral boreholes on the strong side so that they can be pressure-isolated and subsequently fracked.

[00400] It is finally observed that the downhole hydraulic jetting assembly discussed herein and the concepts provided may be used to maximize the SRV of a field within a designated lease. In this respect, the operator may form a series of UDP's designed to extend to "the four corners" of a leasehold, thereby fulfilling the operator's duty of diligence to the royalty owners or mineral rights owners while operating within regulatory constraints of the state commission.

[00401] It can be seen that an improved method for stimulating a subsurface formation and achieving the desired SRV for the production of hydrocarbon fluids while avoiding frac hits in neighboring wells has been provided. By avoiding frac hits, the operator is spared the expense of cleaning out or recompleting the parent wellbore. At the same time, the operator has significantly increased the Stimulated Reservoir Volume for the child wellbore without harming adjacent parent wellbores. In the unlikely event that the operator actually does "hit" a neighbor's well, the operator can demonstrate that an effort was made to control the propagation of fractures by intentionally directing lateral boreholes away from (meaning not in the direction of) or not in the vicinity of the neighboring parent wellbores.

[00402] It will be apparent that the inventions herein described are well calculated to achieve the benefits and advantages set forth above, it will be appreciated that the inventions are susceptible to modification, variation and change without departing from the spirit thereof. Improved methods for completing a child wellbore that avoids frac hits in neighboring wells are provided. In addition, a novel casing collar that may be mechanically manipulated downhole to selectively open and close portals that provide access to a surrounding rock formation are provided.

CLAIMS

What is claimed is:

1. A method for avoiding frac hits during a formation stimulation of a pay zone, comprising:
providing a child wellbore having a horizontal leg placed along the pay zone;
forming one or more lateral boreholes off of the horizontal wellbore at a first casing exit location;
conducting a formation stimulation operation at the first casing exit location through the lateral boreholes, as a first stage;
monitoring field data in a hydrocarbon-producing field associated with the child wellbore during the formation stimulation operation; and
forming one or more lateral boreholes off of the horizontal wellbore at a second casing exit location longitudinally offset from the first casing exit location along the horizontal leg;
and wherein (i) a location of the second cluster along the horizontal leg, (ii) a density of the lateral boreholes in the second cluster, (iii) a distance of the lateral boreholes in the second cluster generated from the horizontal leg, (iv) an orientation of the lateral boreholes in the second cluster relative to the horizontal leg, (v) a geometry of each of the lateral boreholes in the second cluster, or (vi) combinations thereof, is determined based on the field data.
2. The method of claim 1, wherein each of the one or more lateral boreholes at the first casing exit and each of the one or more lateral boreholes at the second casing exit is formed by using a jetting nozzle associated with a downhole hydraulic jetting assembly.
3. The method of claim 2, wherein the formation stimulation operation comprises the injection of a fracturing fluid or the injection of an acid into the lateral boreholes of the first cluster.
4. The method of claim 3, wherein:
the hydrocarbon-producing field comprises the parent wellbore; and
the method further comprises:
(i) selecting a location of the second casing exit along the horizontal leg,

- (ii) selecting a distance of the lateral boreholes at the second casing exit generated from the horizontal leg,
 - (iii) selecting an orientation of the lateral boreholes at the second casing exit relative to the horizontal leg,
 - (iv) selecting a geometry of each of the lateral boreholes at the second casing exit or
 - (v) combinations thereof
- to avoid a frac hit with the parent wellbore.
5. The method of claim 4, further comprising:
selecting a length of jetting hose for the hydraulic jetting assembly;
obtaining geo-mechanical data for the rock matrix in the pay zone; and
determining a direction of least principle stress in the rock matrix.
6. The method of claim 5, wherein the geo-mechanical data comprises porosity, permeability, Poisson ratio, modulus of elasticity, shear modulus, Lamé' constant, V_p/V_s , or combinations thereof.
7. The method of claim 6, wherein:
the method further comprises conducting a geo-mechanical analysis of the rock matrix in the pay zone to determine a direction of least principle stress; and
the horizontal leg is oriented in a direction of least minimum principle stress within a rock matrix in the pay zone.
8. The method of claim 4, wherein the field data comprises:
(i) wellbore pressure in a parent wellbore in the hydrocarbon-producing;
(ii) micro-seismic data;
(iii) tiltmeter data; or
(iv) combinations thereof.

9. The method of claim 8, wherein each lateral borehole is formed in a direction perpendicular to the horizontal leg.
10. A method of avoiding a frac hit during a formation stimulation operation, comprising:
providing a child wellbore within a hydrocarbon-producing field, wherein a portion of the child wellbore extends into a pay zone;
identifying a parent wellbore within the hydrocarbon-producing field;
conveying a hydraulic jetting assembly into the child wellbore on a working string, the hydraulic jetting assembly comprising:
a whipstock having an arcuate face,
a jetting hose having a proximal end and a distal end, and
a jetting nozzle disposed at a distal end of the jetting hose;
setting the whipstock at a desired first casing exit location along the child wellbore;
advancing the jetting nozzle against the face of the whipstock while injecting hydraulic jetting fluid through the jetting hose and connected jetting nozzle;
further advancing the jetting nozzle through a first window at the first casing exit location and into the pay zone;
further injecting the jetting fluid while further translating the jetting hose and connected jetting nozzle along the face of the whipstock, thereby forming a first lateral borehole that extends from the first window through a rock matrix in the pay zone; and
controlling (i) a distance of the first lateral borehole from the child wellbore, (ii) a direction of the first lateral borehole from the child wellbore, or (iii) both, to avoid a frac hit with the parent wellbore during a subsequent injection of fracturing fluids into the first lateral borehole.
11. The method of claim 10, wherein controlling a direction of the first lateral borehole from the child wellbore comprises:
orienting a face of the whipstock in a direction that is offset from the parent wellbore by at least 90°.
12. The method of claim 11, wherein orienting the face of the whipstock comprises:

determining an orientation of the face of the whipstock once the whipstock is set at the first casing exit location along the child wellbore; and
changing an orientation of the face of the whipstock using an indexing tool.

13. The method of claim 10, wherein:

the first casing exit location comprises a casing sleeve placed along a string of production casing within the wellbore;

the casing sleeve comprises a stationary outer sleeve having at least one portal, and an inner sleeve also having at least one portal; and

the method further comprises mechanically rotating the inner sleeve to align the at least one portal in the inner sleeve with the at least one portal in the outer sleeve, thereby forming the first window.

14. The method of claim 13, wherein mechanically rotating the inner sleeve comprises:

latching a protruding device along the whipstock into a matching groove within the inner sleeve; and

rotating the whipstock.

15. The method of claim 10, wherein:

the child wellbore is a horizontal wellbore formed in a direction of least principal (horizontal) stress of the pay zone;

the first casing exit location is along a horizontal leg of the horizontal wellbore; and

the first lateral borehole extends horizontally from and generally transverse to the horizontal leg.

16. The method of claim 15, wherein:

the child wellbore is a newly completed well, or is a well that is being recompleted; and

the method further comprises determining a distance of the parent wellbore from the first casing exit location.

17. The method of claim 10, further comprising:
producing hydrocarbon fluids from the first lateral borehole for a period of time before conducting a hydraulic fracturing operation through the first lateral borehole.
18. The method of claim 10, further comprising:
during the forming of the first lateral borehole, monitoring micro-seismic data in the hydrocarbon producing field; and
re-directing the jetting nozzle to change a course of the first lateral borehole to access otherwise stranded hydrocarbon reserves.
19. The method of claim 10, further comprising:
injecting fracturing fluids into the child wellbore in order to fracture the rock matrix from the first lateral borehole; and
during the fracturing of the rock matrix:
(i) monitoring tubing pressure within the parent wellbore;
(ii) monitoring micro-seismic data in the hydrocarbon producing field;
(iii) monitoring tiltmeter data in the hydrocarbon producing field; or
(iv) combinations thereof.
20. The method of claim 19, further comprising:
in response to data received from steps (i), (ii), (iii) or (iv) that is indicative of fracture propagation in a vicinity of the parent wellbore or that is indicative of a frac hit in the parent wellbore, discontinuing the pumping of fracturing fluids into the first lateral borehole.
21. The method of claim 10, further comprising:
retracting the jetting hose and connected nozzle from the first window;
re-orienting the whipstock at the desired first casing exit location;
advancing the jetting nozzle against the face of the whipstock while injecting hydraulic jetting fluid through the jetting hose and connected jetting nozzle;

advancing the jetting nozzle through the second window located at the first casing exit location and into the pay zone;

further injecting the jetting fluid while advancing the jetting hose and connected nozzle along the face of the whipstock, thereby forming a second lateral borehole that extends from the second window through a rock matrix in the pay zone; and

controlling (i) a distance of the second lateral borehole from the child wellbore, (ii) a direction of the second lateral borehole from the child wellbore, or (iii) both, to avoid a frac hit with the parent wellbore during a subsequent injection of formation fracturing fluids into the second lateral borehole.

22. The method of claim 21, wherein:

each of the first and second lateral boreholes has an internal diameter of between about 0.4 and 2.5 inches; and

the second lateral borehole is offset from the first lateral borehole by between 10-degrees and 350-degrees.

23. The method of claim 10, further comprising:

retracting the jetting hose and connected nozzle from the first window;

moving the whipstock to a desired second casing exit location along the child wellbore, and setting the whipstock;

advancing the jetting nozzle against the face of the whipstock while injecting hydraulic jetting fluid through the jetting hose and connected jetting nozzle;

further advancing the jetting nozzle through a second window located at the second casing exit location and into the pay zone;

further injecting the jetting fluid while further translating the jetting hose and connected jetting nozzle along the face of the whipstock, thereby forming a second lateral borehole that extends from the second window through the rock matrix in the pay zone; and

controlling (i) a distance of the second lateral borehole from the child wellbore, (ii) a direction of the second lateral borehole from the child wellbore, or (iii) both, to avoid a frac hit

with the parent wellbore during a subsequent injection of formation fracturing fluids into the second lateral borehole.

24. The method of claim 23, further comprising:

during the forming of the second lateral borehole, monitoring micro-seismic data in the hydrocarbon producing field; and

re-directing the jetting nozzle to change a course of the first lateral borehole to access otherwise stranded hydrocarbon reserves.

25. The method of claim 10, further comprising:

injecting fracturing fluids into the child wellbore in order to fracture the rock matrix from the second lateral borehole; and

during the fracturing of the rock matrix:

- (i) monitoring tubing pressure within the parent wellbore;
- (ii) monitoring micro-seismic data in the hydrocarbon producing field;
- (iii) monitoring tiltmeter data in the hydrocarbon producing field; or
- (iv) combinations thereof.

26. The method of claim 25, further comprising:

in response to data received from steps (i), (ii), (iii) or (iv) that is indicative of fracture propagation in a vicinity of the parent wellbore or that is indicative of a frac hit in the parent wellbore, discontinuing the pumping of fracturing fluids into the first lateral borehole.

27. The method of claim 25, further comprising:

in response to data received from steps (i), (ii), (iii) or (iv) during the injection of fracturing fluids into the first lateral borehole,

- (i) selecting an orientation of the second lateral borehole from the child wellbore,
- (ii) selecting a distance of the second lateral borehole to be formed from the child wellbore, or
- (iii) both

to avoid a frac hit with the parent wellbore.

28. The method of claim 27, wherein:

the child wellbore is a horizontal wellbore formed in a direction of least principal (horizontal) stress of the pay zone;

the first casing exit location is along a horizontal leg of the horizontal wellbore; and

the first and second lateral boreholes extend horizontally from and transverse to the horizontal leg.

29. The method of claim 27, further comprising:

producing hydrocarbon fluids from the first and second lateral boreholes for a period of time before conducting a hydraulic fracturing operation through the first and second lateral boreholes.

30. The method of claim 27, wherein:

each of the first and second lateral boreholes has an internal diameter of between about 0.4 and 2.5 inches;

the second casing exit location is separated from the first casing exit location by 15 to 200 feet; and

the first and second lateral boreholes are oriented in essentially the same direction as the greatest principal (horizontal) stress of the pay zone.

31. The method of claim 27, further comprising:

injecting a fluid into the parent wellbore immediately before or during injection of fracturing fluids into the second lateral borehole to build pressure in the rock matrix adjacent the parent wellbore.

32. The method of claim 10, wherein:

the hydraulic jetting assembly comprises:

an external system having:

an external conduit,
the whipstock member, wherein the whipstock member is placed at a lower end of the external conduit, and
a jetting hose carrier residing within the external conduit above the whipstock member and forming an annular region between the jetting hose carrier and the surrounding external conduit; and
an internal system having:
the jetting hose,
the jetting nozzle, and
a micro-annulus formed between the jetting hose and the surrounding jetting hose carrier, the micro-annulus being sized to allow the jetting hose to be translated out of and back into the jetting hose carrier without buckling.

33. The method of claim 32, wherein the assembly is configured to (i) translate the jetting hose out of the jetting hose carrier and against the whipstock face by a translation force to a desired point of wellbore exit, (ii) upon reaching the desired point of wellbore exit, direct jetting fluid through the jetting hose and the connected jetting nozzle to form a lateral borehole into the rock matrix within the pay zone, and then (iii) pull the jetting hose back into the jetting hose carrier after a lateral borehole has been formed to allow a location of the whipstock along the wellbore to be adjusted.

34. The method of claim 33, wherein:

the face of the whipstock is configured to bend the jetting hose substantially across an entire inner diameter of the wellbore when the jetting hose is translated out of the jetting hose carrier;

the wellbore is completed with a string of production casing;

the inner diameter of the wellbore is the inner diameter of the production casing; and

the hydraulic jetting assembly further comprises a retrievable packer disposed below the whipstock member; and

the method further comprises:

setting the packer; and
injecting fracturing fluids through an annulus formed between the external conduit and the surrounding production casing
in order to form the first lateral borehole.

35. The method of claim 33, wherein:

the translation force comprises a hydraulic force;
the jetting hose is at least 10 feet in length; and
the hydraulic jetting assembly further comprises:

a main control valve disposed proximate the upper end of the outer conduit, the main control valve being movable between a first position and a second position, wherein in the first position the main control valve directs jetting fluids pumped into the wellbore into the jetting hose, and in the second position the main control valve directs hydraulic fluid pumped into the wellbore into the annular region formed between the jetting hose carrier and the surrounding outer conduit, providing the hydraulic force.

36. The method of claim 35, wherein the jetting assembly further comprises:

an upper seal assembly connected to the jetting hose at an upper end and sealing the micro-annulus;

a jetting hose pack-off section connected to an inner diameter of the inner conduit and sealing the micro-annulus proximate a lower end of the jetting hose carrier, and slidably receiving the jetting hose; and

a pressure regulator valve placed along the micro-annulus controlling fluid pressure within the micro-annulus;

and wherein the hydraulic jetting assembly is configured such that:

placement of the main control valve in its first position allows an operator to pump jetting fluids into the tubing conveyance medium, through the main control valve, and against the upper seal assembly in the micro-annulus, thereby pistonly pushing the jetting hose and connected nozzle downhole in an uncoiled state while also directing jetting fluids through the jetting hose and connected nozzle; and

placement of the main control valve in its second position allows an operator to pump hydraulic fluids into the tubing conveyance medium, through the main control valve, into the annular region between the jetting hose carrier and the surrounding outer conduit, through the pressure regulator valve and into the micro-annulus, thereby pulling the jetting hose back up into the inner conduit in its uncoiled state.

37. The method of claim 36, wherein:

the hydraulic jetting assembly further comprises at least three longitudinally oriented actuator wires connected at or near a proximal end of the jetting nozzle, the actuator wires being equidistantly spaced about the circumference of the jetting hose at its distal end, and further being configured to contract in response to electrical current sent through the actuator wires, whereby differing amounts of electrical current directed through the actuator wires will induce a bending moment to orient the jetting nozzle.

38. A method of completing a wellbore in a hydrocarbon-bearing pay zone, comprising:

hydraulically jetting a lateral borehole from a horizontal wellbore, wherein the horizontal wellbore and the lateral borehole are each formed along a plane in a rock matrix of the pay zone of least principle stress, and wherein the lateral borehole is formed using a jetting nozzle and connected jetting hose;

producing hydrocarbon fluids from the pay zone for a designated period of time, thereby weakening the rock matrix;

after the designated period of time, injecting fracturing fluids into the horizontal wellbore and into the lateral borehole, wherein a pumping pressure of the fracturing fluids initially exceeds a fracture initiation pressure of the pay zone, and subsequently exceeds a fracture propagation pressure of the pay zone; and

forming a vertical plane of weakness intersecting the lateral borehole such that a preferred initial path for the fracturing fluids is created along a longitudinal axis of the lateral borehole.

39. The method of claim 38, wherein:

a longitudinal axis of the horizontal wellbore runs parallel to a direction of the pay zone's least principal horizontal stress; and

the longitudinal axis of the lateral borehole runs perpendicular to the horizontal wellbore, and accordingly runs parallel to a direction of the pay zone's maximum principal horizontal stress.

40. The method of claim 39, wherein the jetting hose comprises:

at least three electrical power wires extending along its length; and

at least three longitudinally oriented actuator wires that receive current from a corresponding electrical power wire, wherein the actuator wires are connected at a distal end of the jetting hose, with the actuator wires being equidistantly spaced about a circumference of the jetting hose, and being configured to contract in response to the electrical current, whereby differing amounts of electrical current directed through the actuator wires will induce a bending moment to orient the jetting nozzle.

41. The method of claim 40, wherein the method further comprises:

controlling (i) a distance of the lateral borehole from the child wellbore away from the parent wellbore, (ii) a direction of the first lateral borehole from the child wellbore away from the parent wellbore, or (iii) both, in order to avoid a frac hit,

wherein the fracturing fluid injected into the child wellbore reaches: (A) a near-wellbore vicinity of a parent wellbore; or proceeds even further to, (B) the parent wellbore itself.

42. The method of claim 41, further comprising:

monitoring tubing, tubing-casing annulus, and casing-casing annuli pressures within the parent wellbore while injecting the hydraulic fracturing fluid into the child wellbore; and

upon detecting a pressure hit within the parent wellbore, discontinuing pumping of the hydraulic fracturing fluid into the child wellbore.

43. The method of claim 41, further comprising:

conducting micro-seismic monitoring while injecting jetting fluid into the jetting hose to form the lateral borehole in the child wellbore, thereby generating micro-seismic data;

calibrating the micro-seismic data to a known depth and geospatial coordinates of the jetting nozzle; and

upon detecting fracture propagation from the lateral borehole into the near-wellbore vicinity of the parent wellbore,

(i) discontinuing the pumping of hydraulic fracturing fluid into the child wellbore;

(ii) relocating the jetting hose along the horizontal wellbore to prepare for placement of the a next frac stage based upon an interpretation of the micro-seismic data;

(iii) configuring respective depths and directions for additional lateral boreholes in a next frac stage based upon the micro-seismic data associated with the first lateral borehole;

in order to maximize Stimulated Reservoir Volume (“SRV”) for the next frac stage while avoiding a frac hit in the parent wellbore.

44. A method of completing a child wellbore in a hydrocarbon-bearing pay zone, the wellbore being completed to have a horizontal leg, and wherein a pressure gradient exists across the pay zone due to partial depletion of reservoir fluids arising from the production of reservoir fluids by an offsetting parent wellbore, said depletion increasing with proximity to the parent wellbore and creating a pressure regime wherein the pay zone has weaker pressures and corresponding fracturing thresholds on one side of the horizontal leg (the “weak side”) than on an opposing side (the “strong side”), and the method comprising:

hydraulically jetting a series of lateral boreholes from the horizontal leg of the child wellbore, wherein:

each of the lateral boreholes is formed only into the strong side of the pay zone relative to the child wellbore, such that a trajectory of each lateral borehole is generally towards ever increasing pressures and fracturing thresholds, and

each of the lateral boreholes is formed using a jetting nozzle and connected jetting hose,

producing reservoir fluids from the pay zone from each of the lateral boreholes, thereby weakening the rock matrix by the reduction of pore pressures and fracturing thresholds on the strong side;

after sufficient weakening has occurred, injecting fracturing fluids into the horizontal wellbore and into the lateral boreholes, wherein a pumping pressure of the fracturing fluids initially exceeds a fracture initiation pressure of the pay zone immediately proximate to the lateral boreholes, and subsequently exceeds a fracture propagation pressure of the pay zone also immediately proximate to the lateral boreholes; and

forming a plane of weakness intersecting the lateral borehole such that a preferred initial path for the fracturing fluids and a resultant SRV creation is along a longitudinal axis of the lateral borehole.

1/25

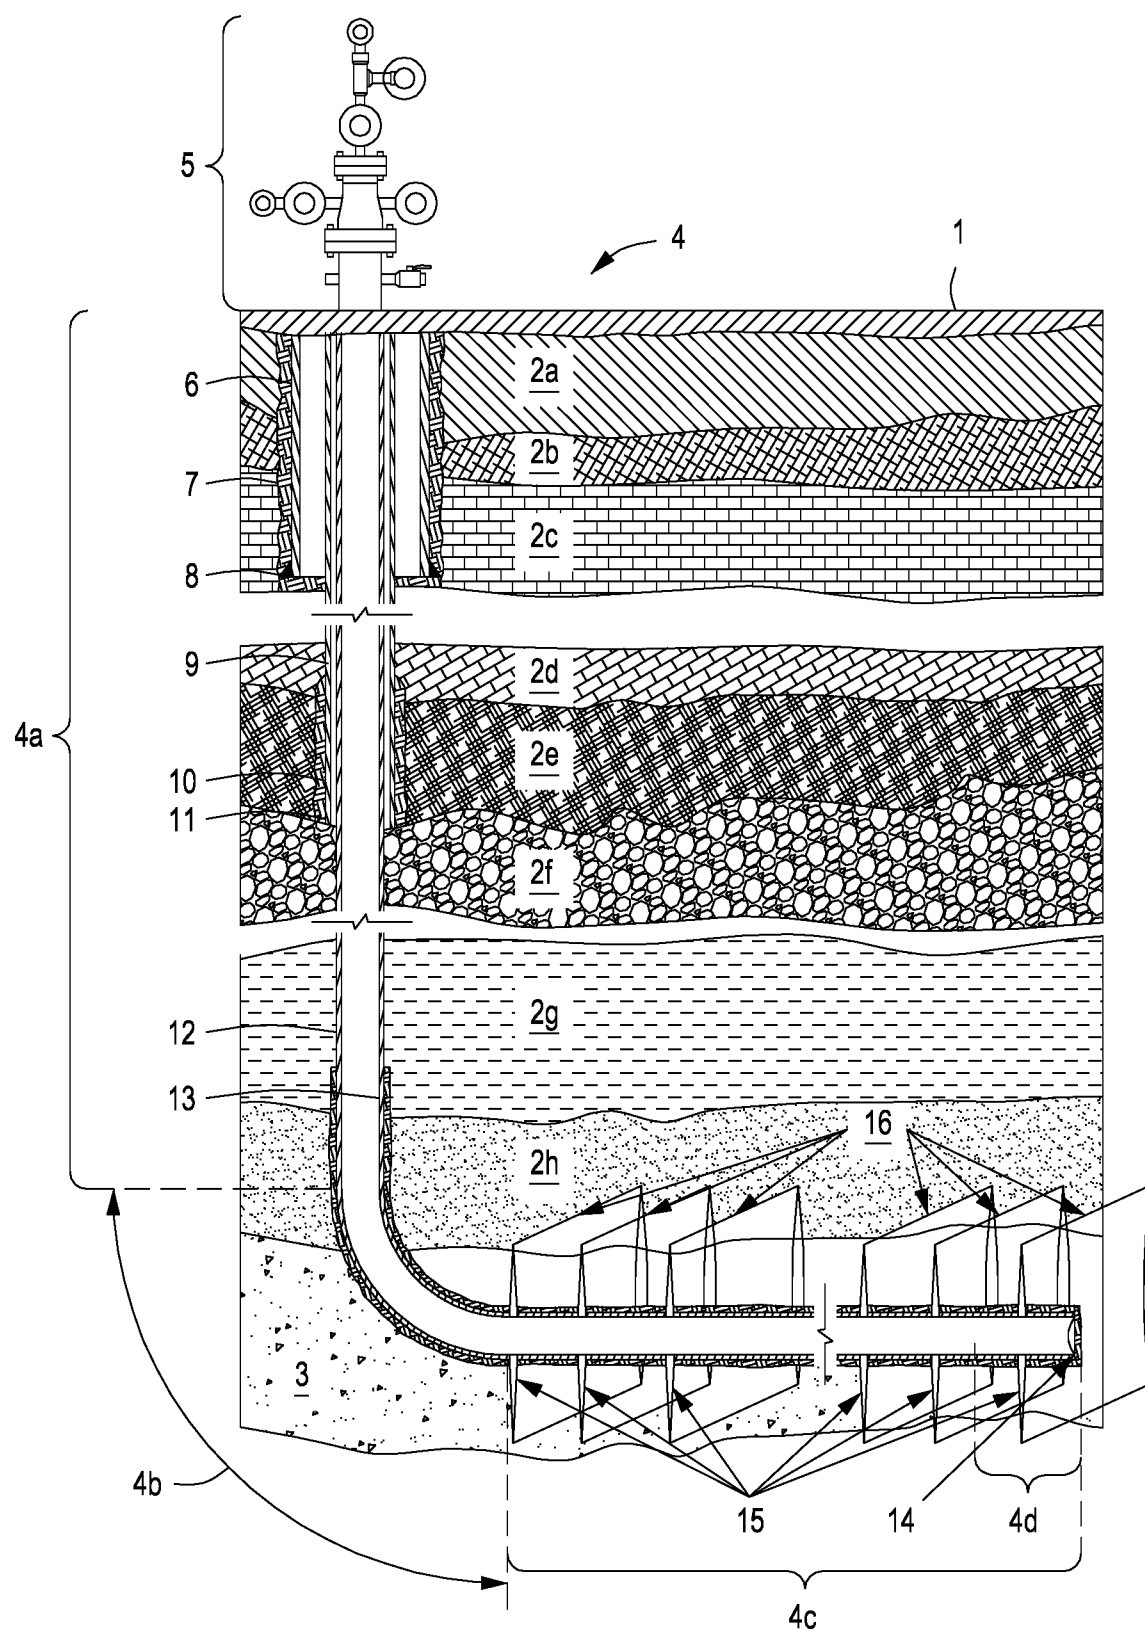


FIG. 1A

2/25

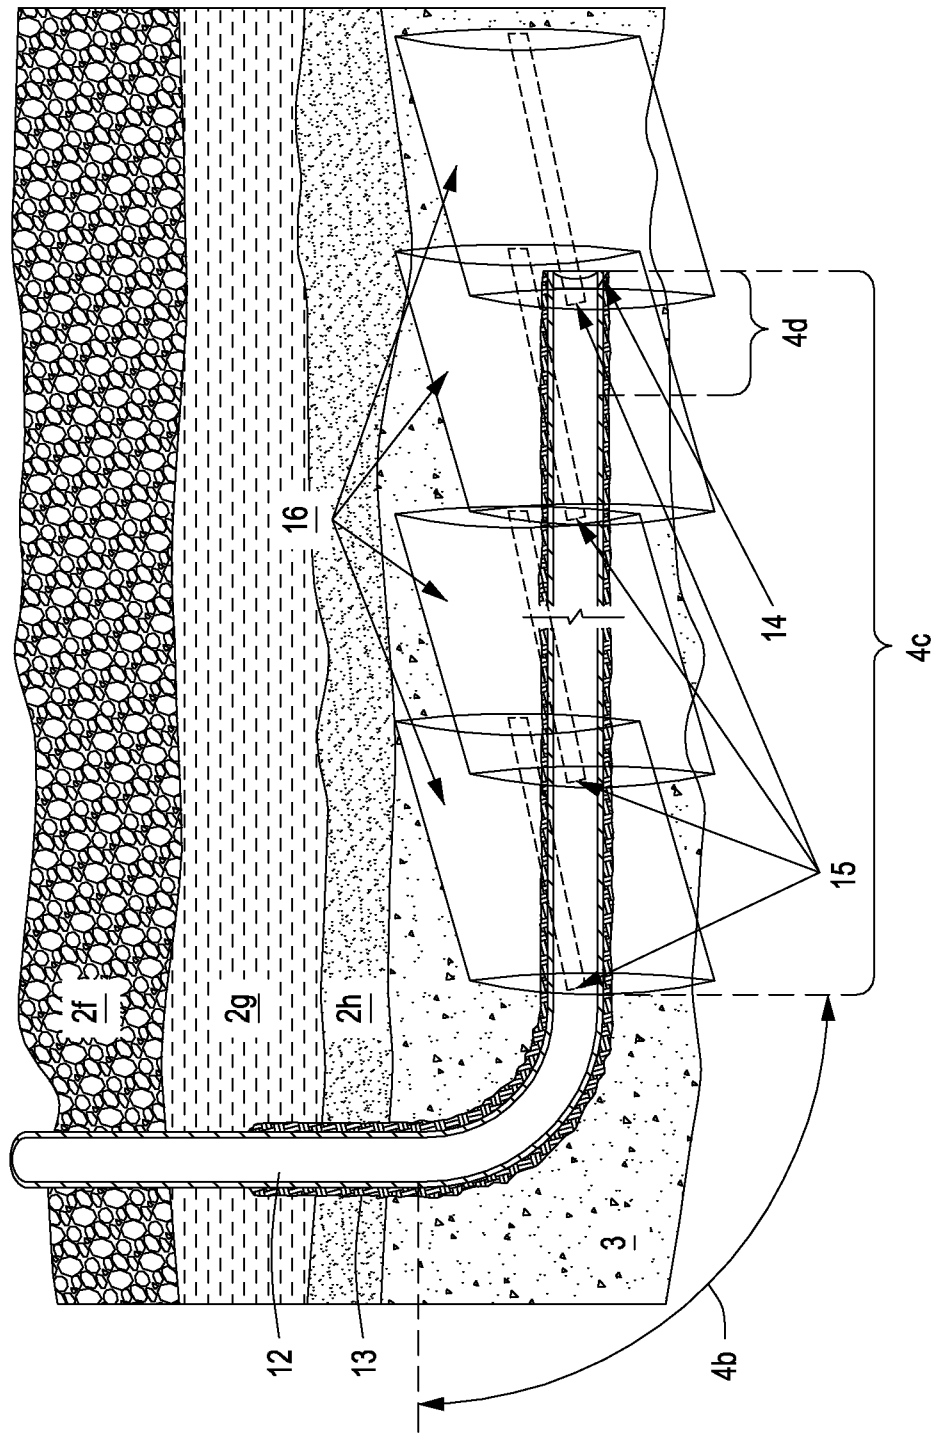


FIG. 1B

3/25

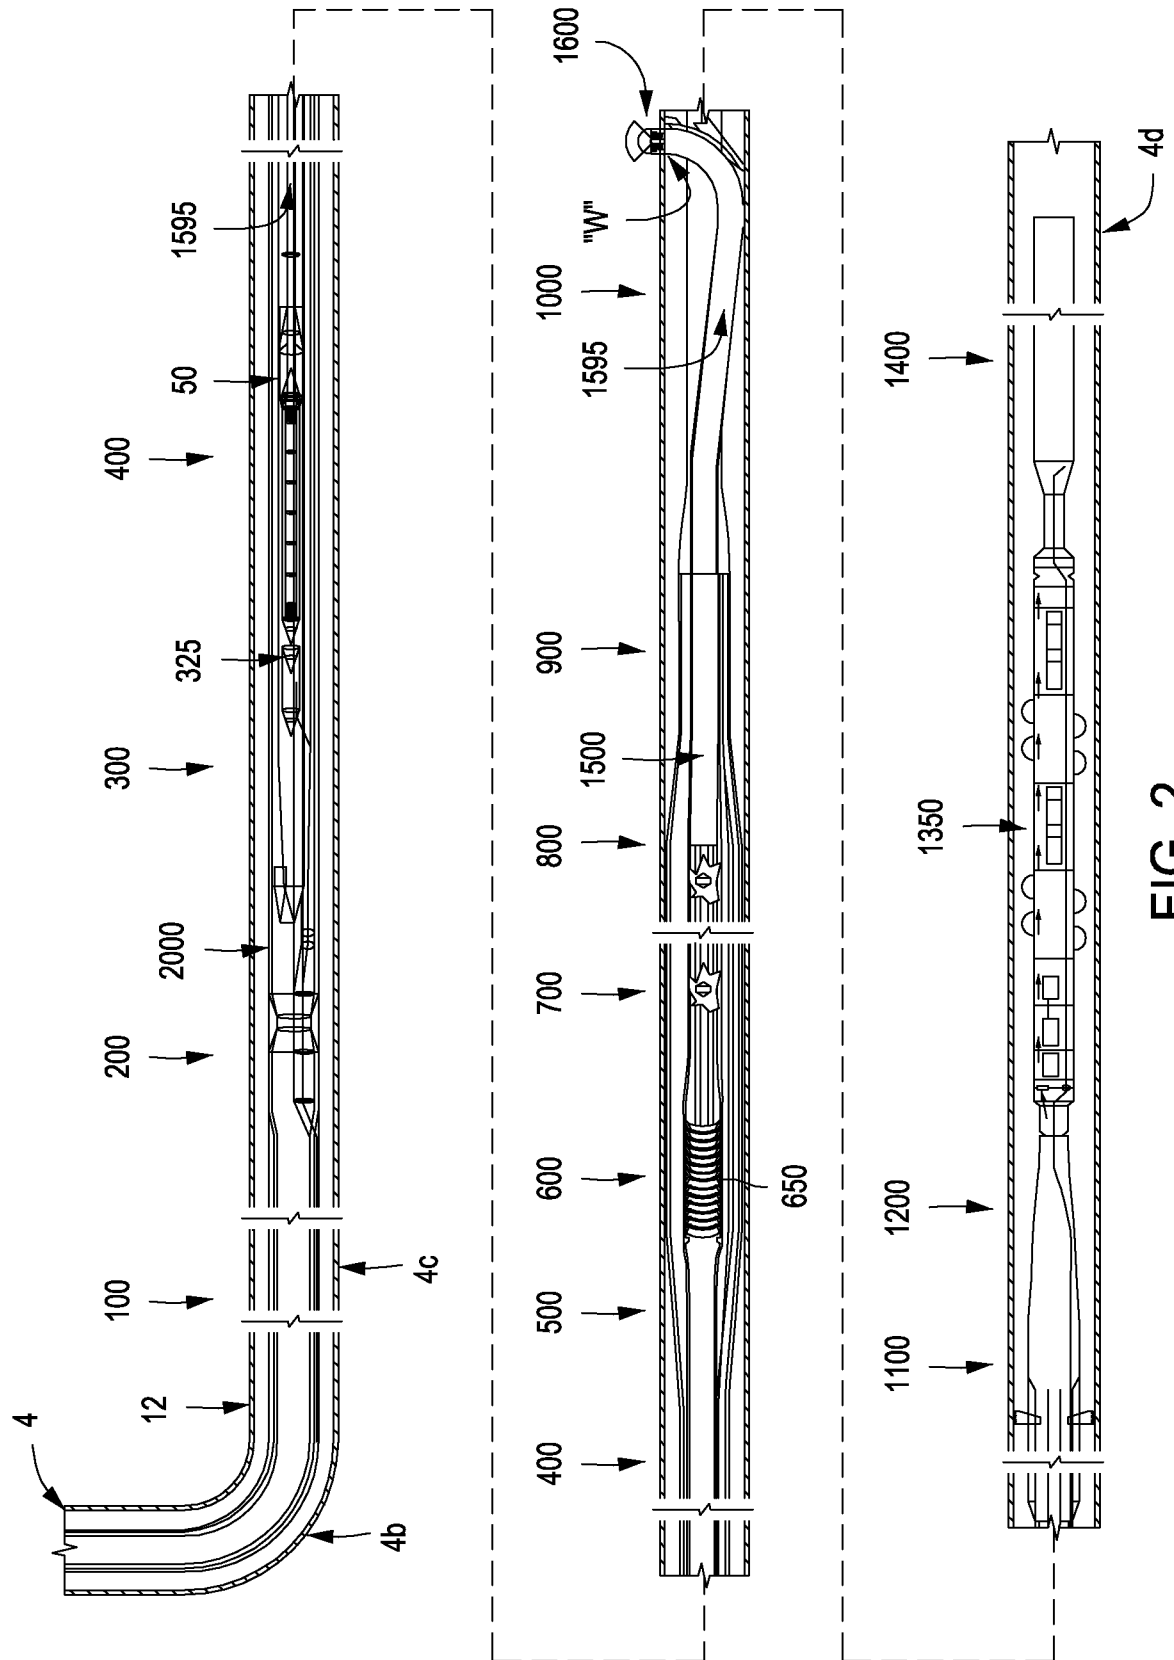


FIG. 2

4/25

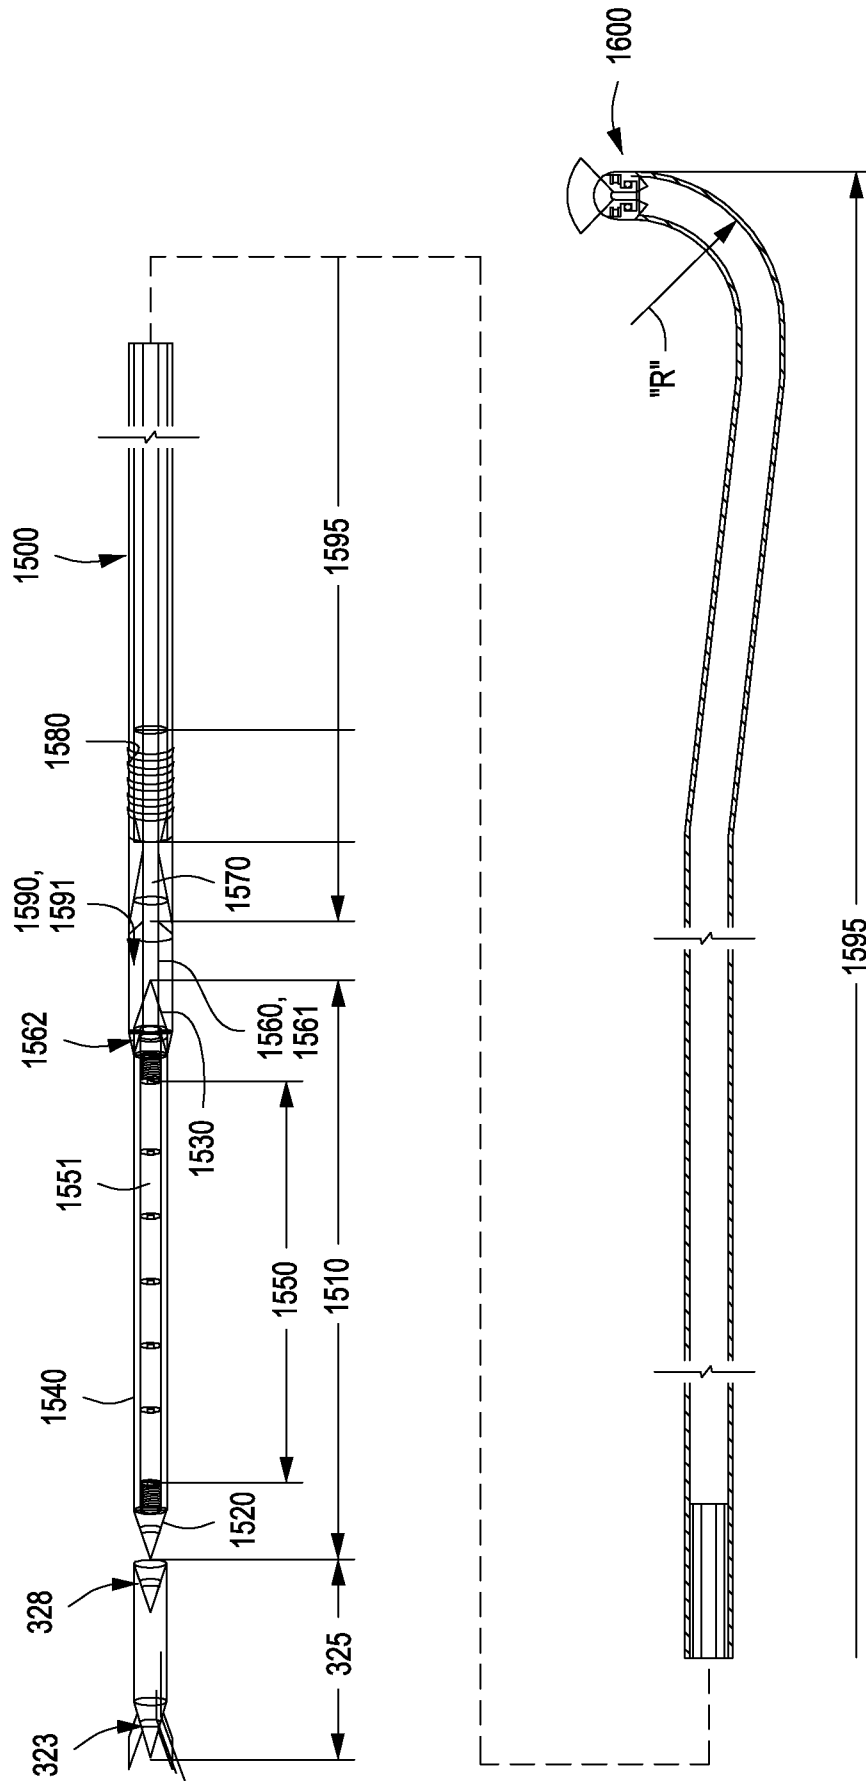


FIG. 3A

5/25


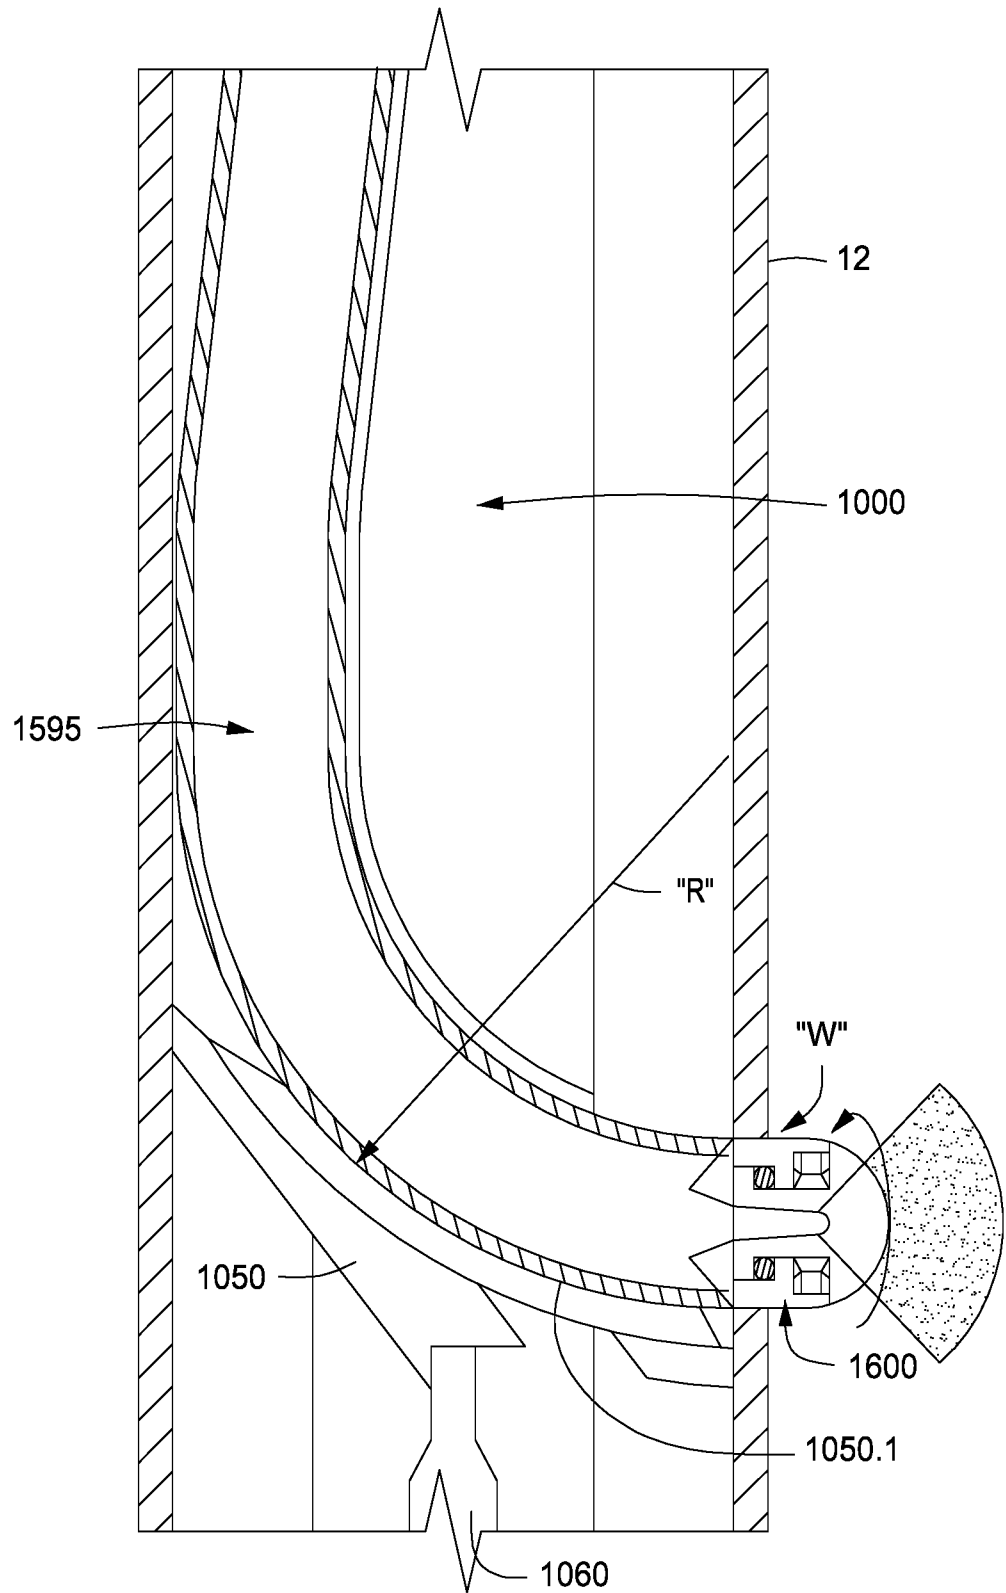


FIG. 3B

6/25

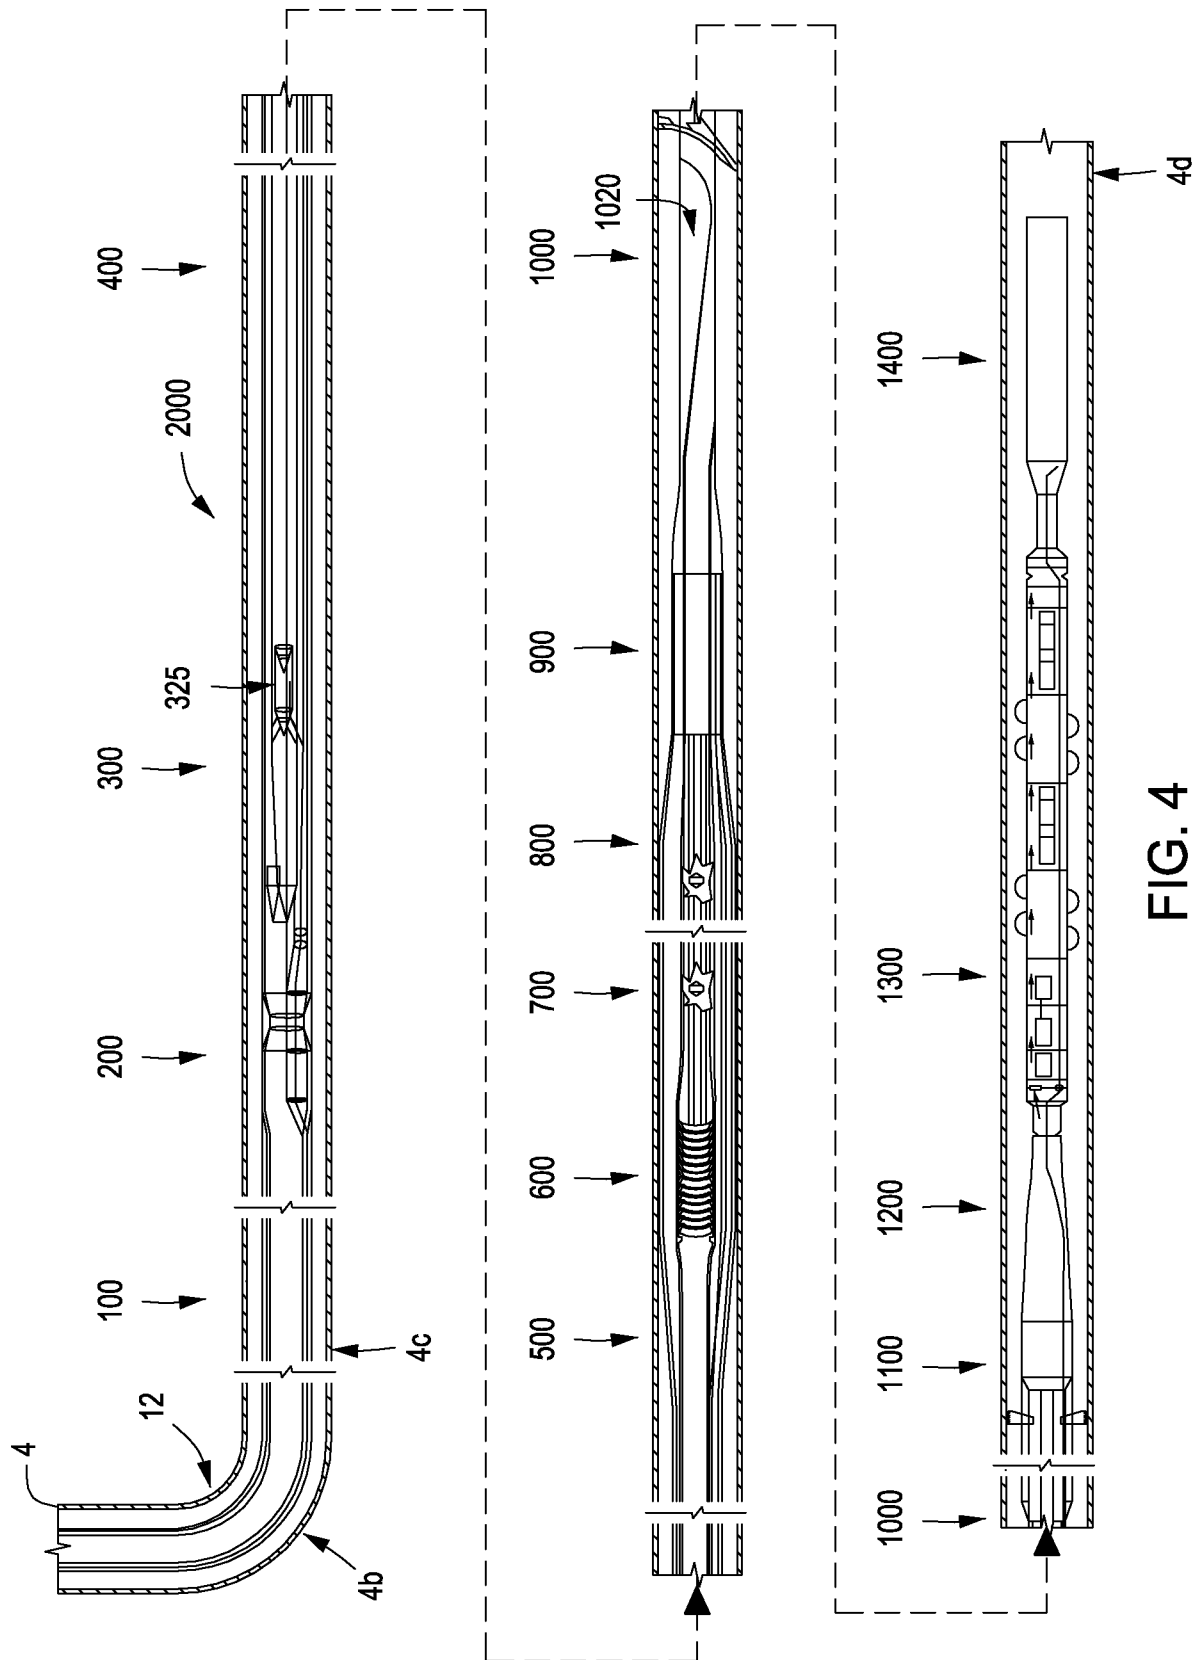

7/25

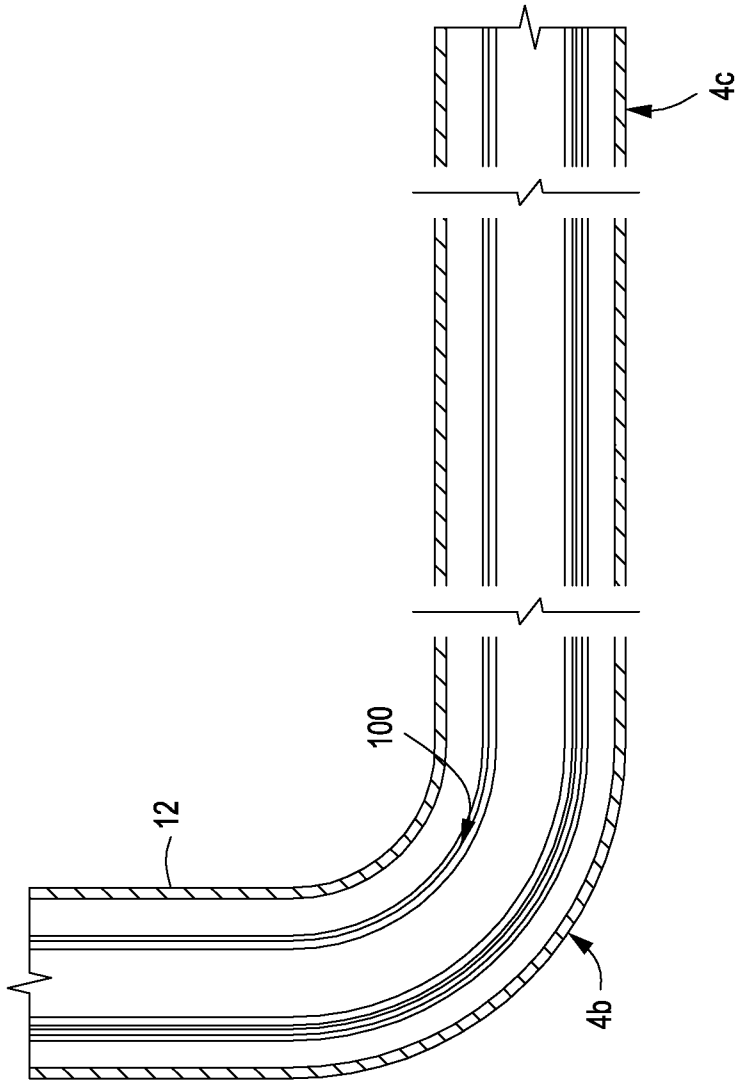


FIG. 4A

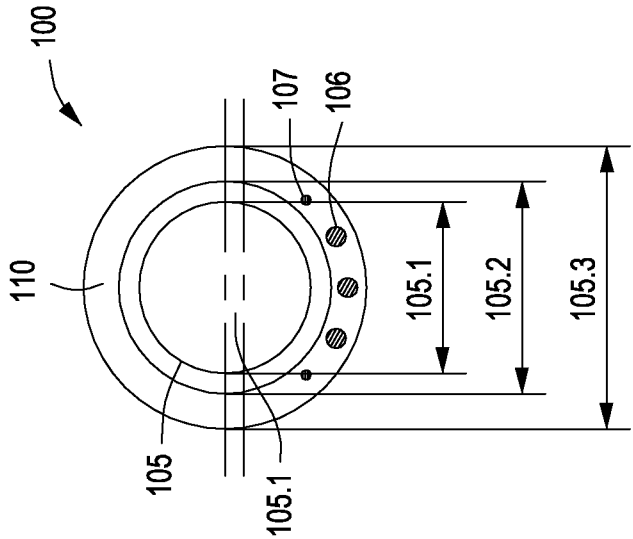


FIG. 4A-1a

8/25

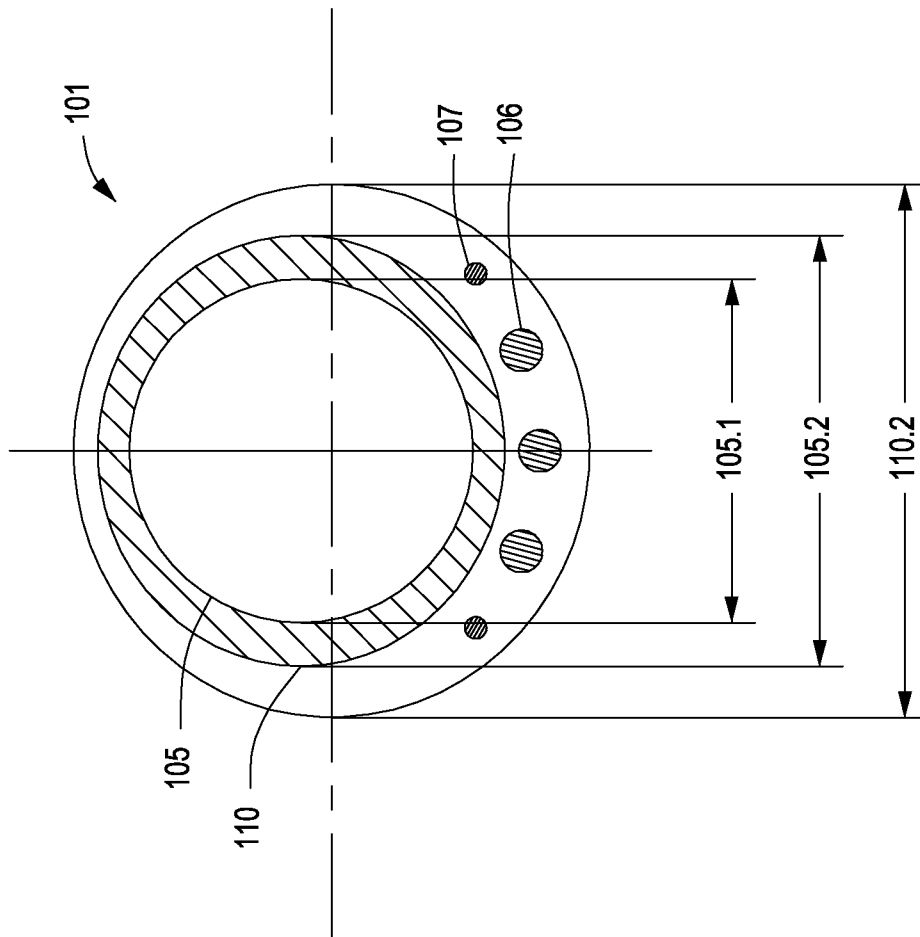


FIG. 4A-2

9/25

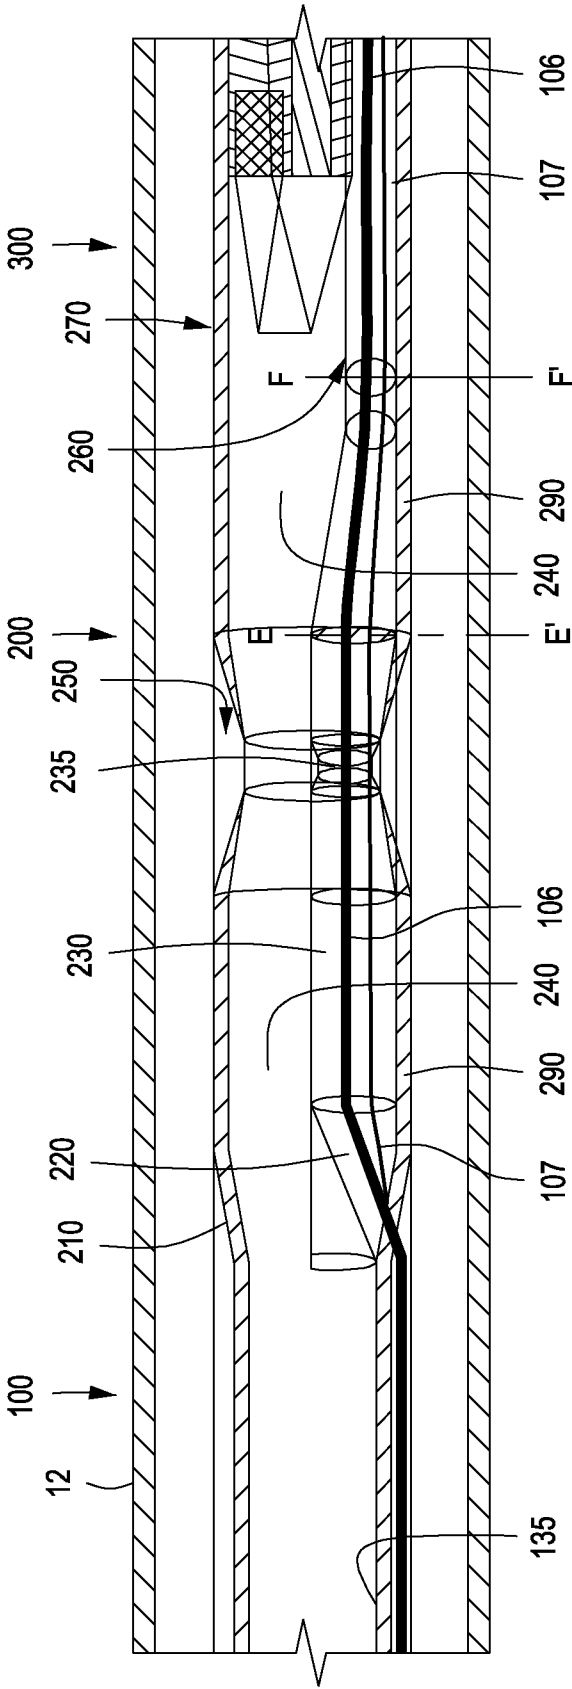


FIG. 4B

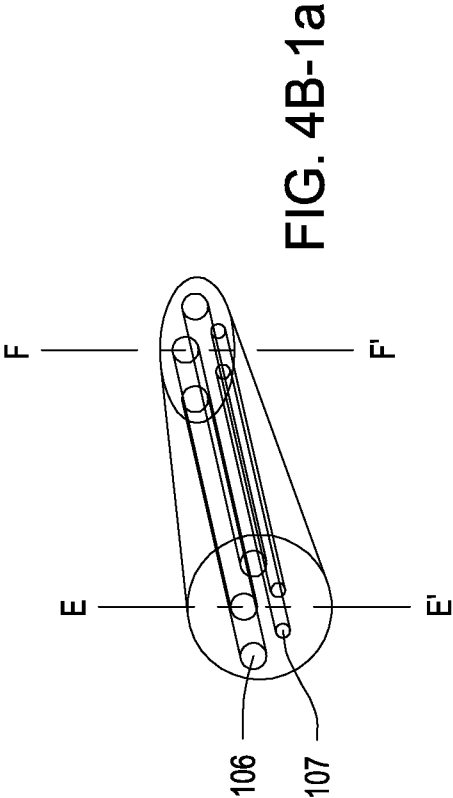


FIG. 4B-1a

10/25

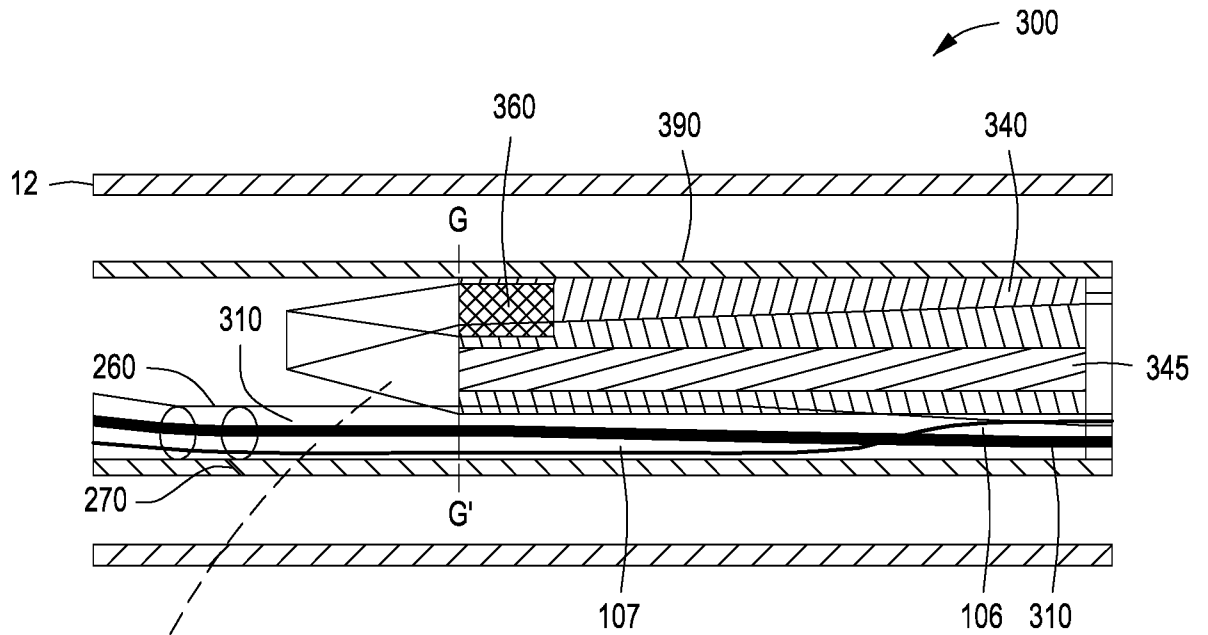


FIG. 4C

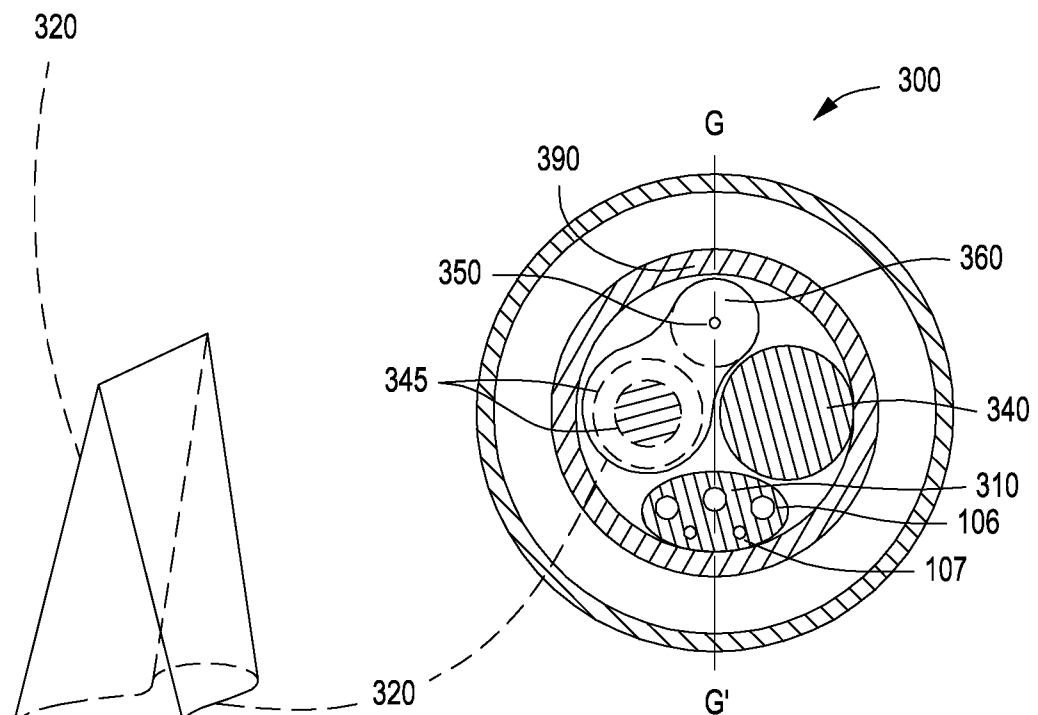


FIG. 4C-1a

FIG. 4C-1b

11/25

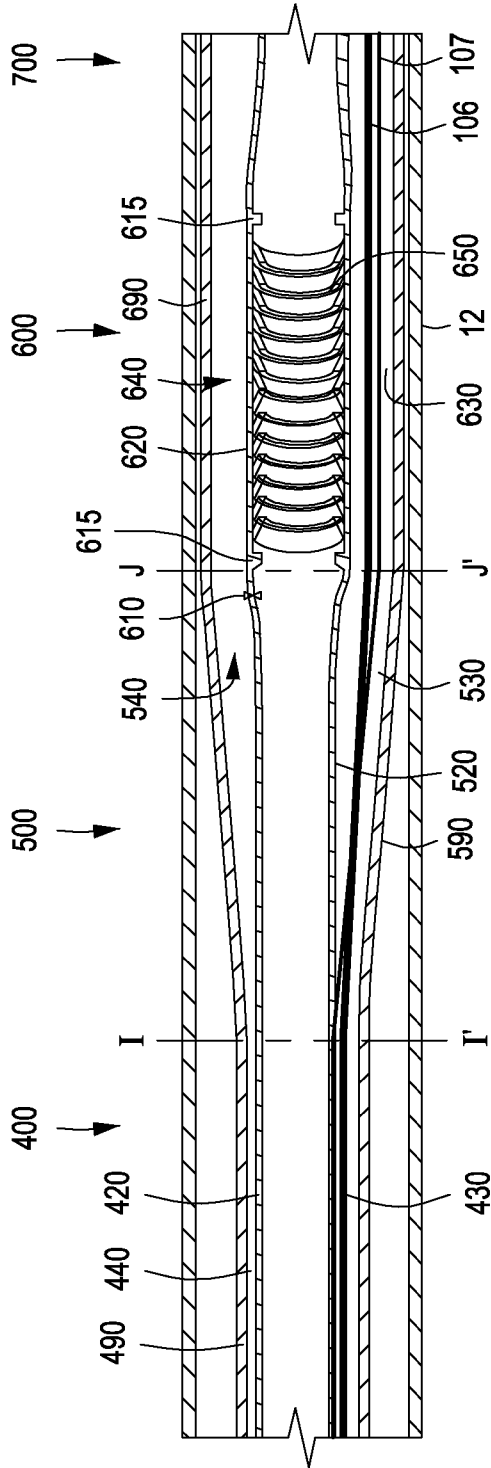


FIG. 4D

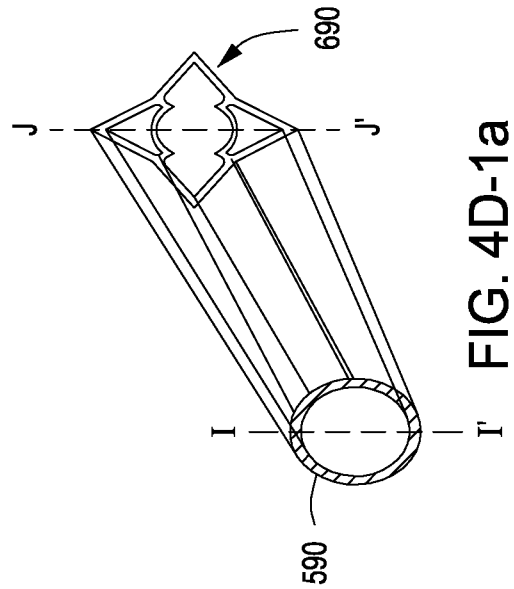


FIG. 4D-1a

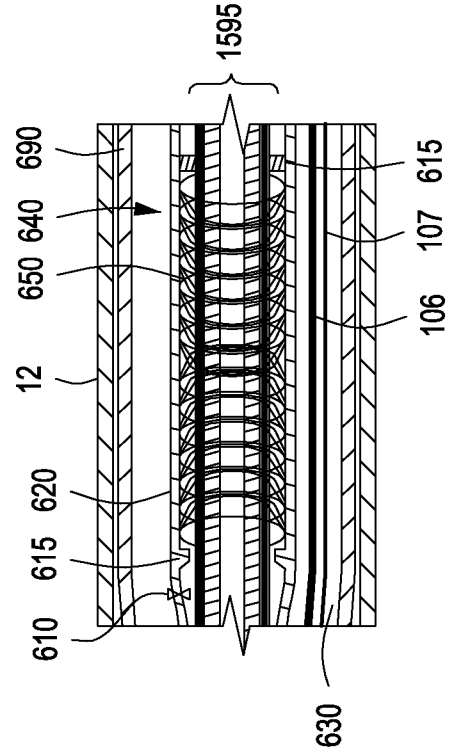


FIG. 4D-2

12/25

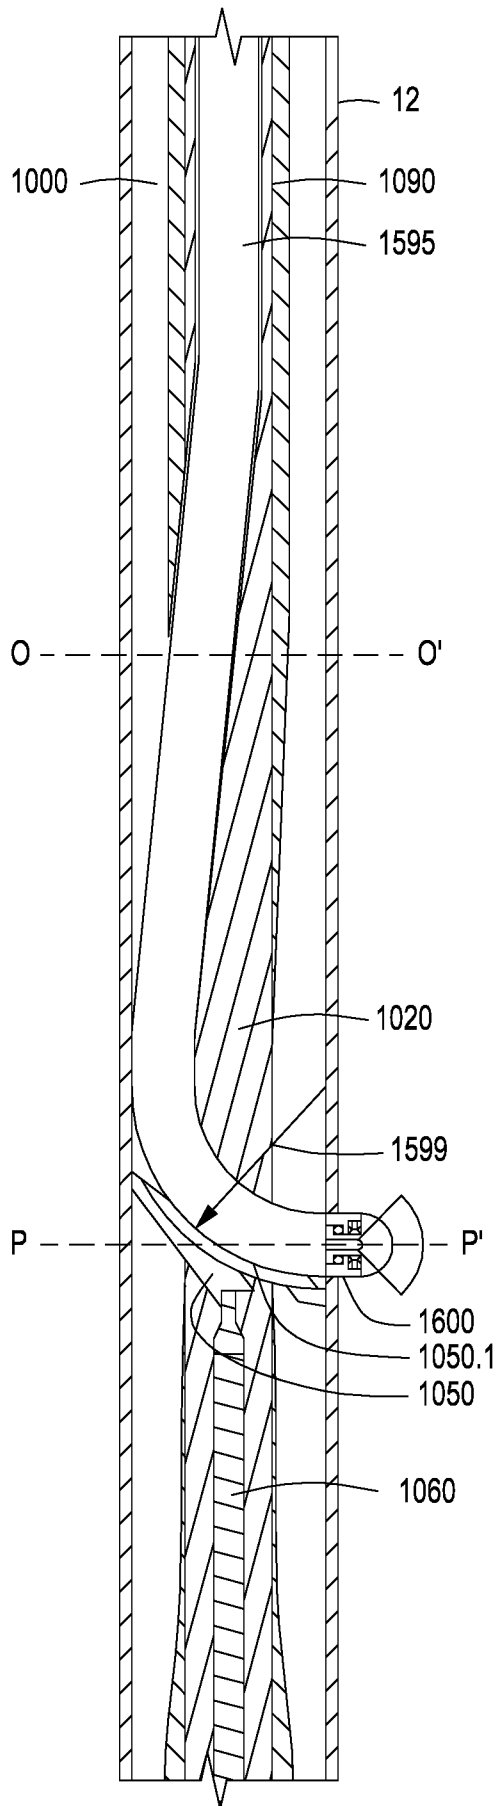


FIG. 4E

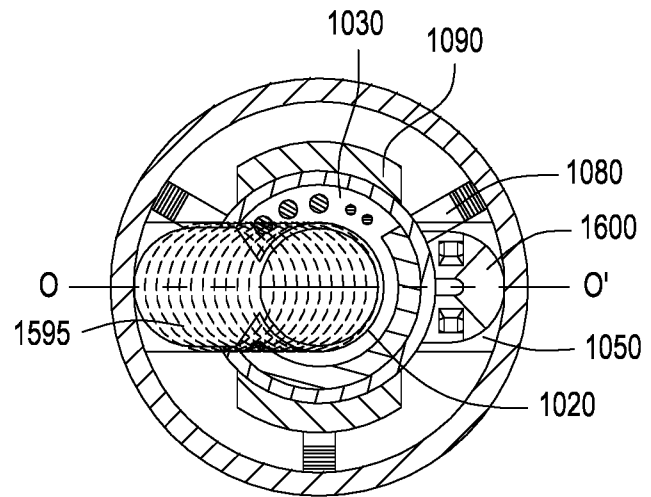


FIG. 4E-1a

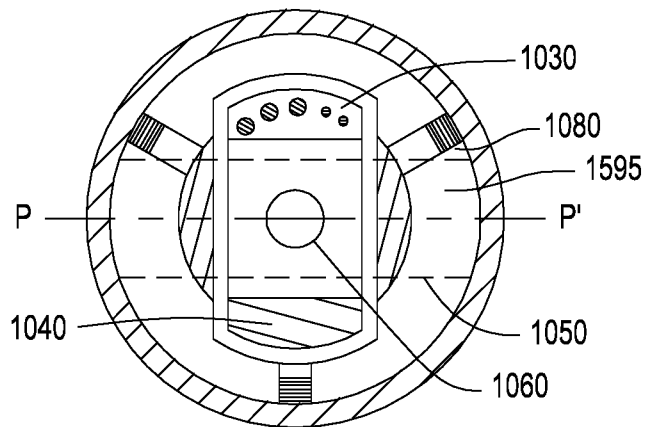


FIG. 4E-1b

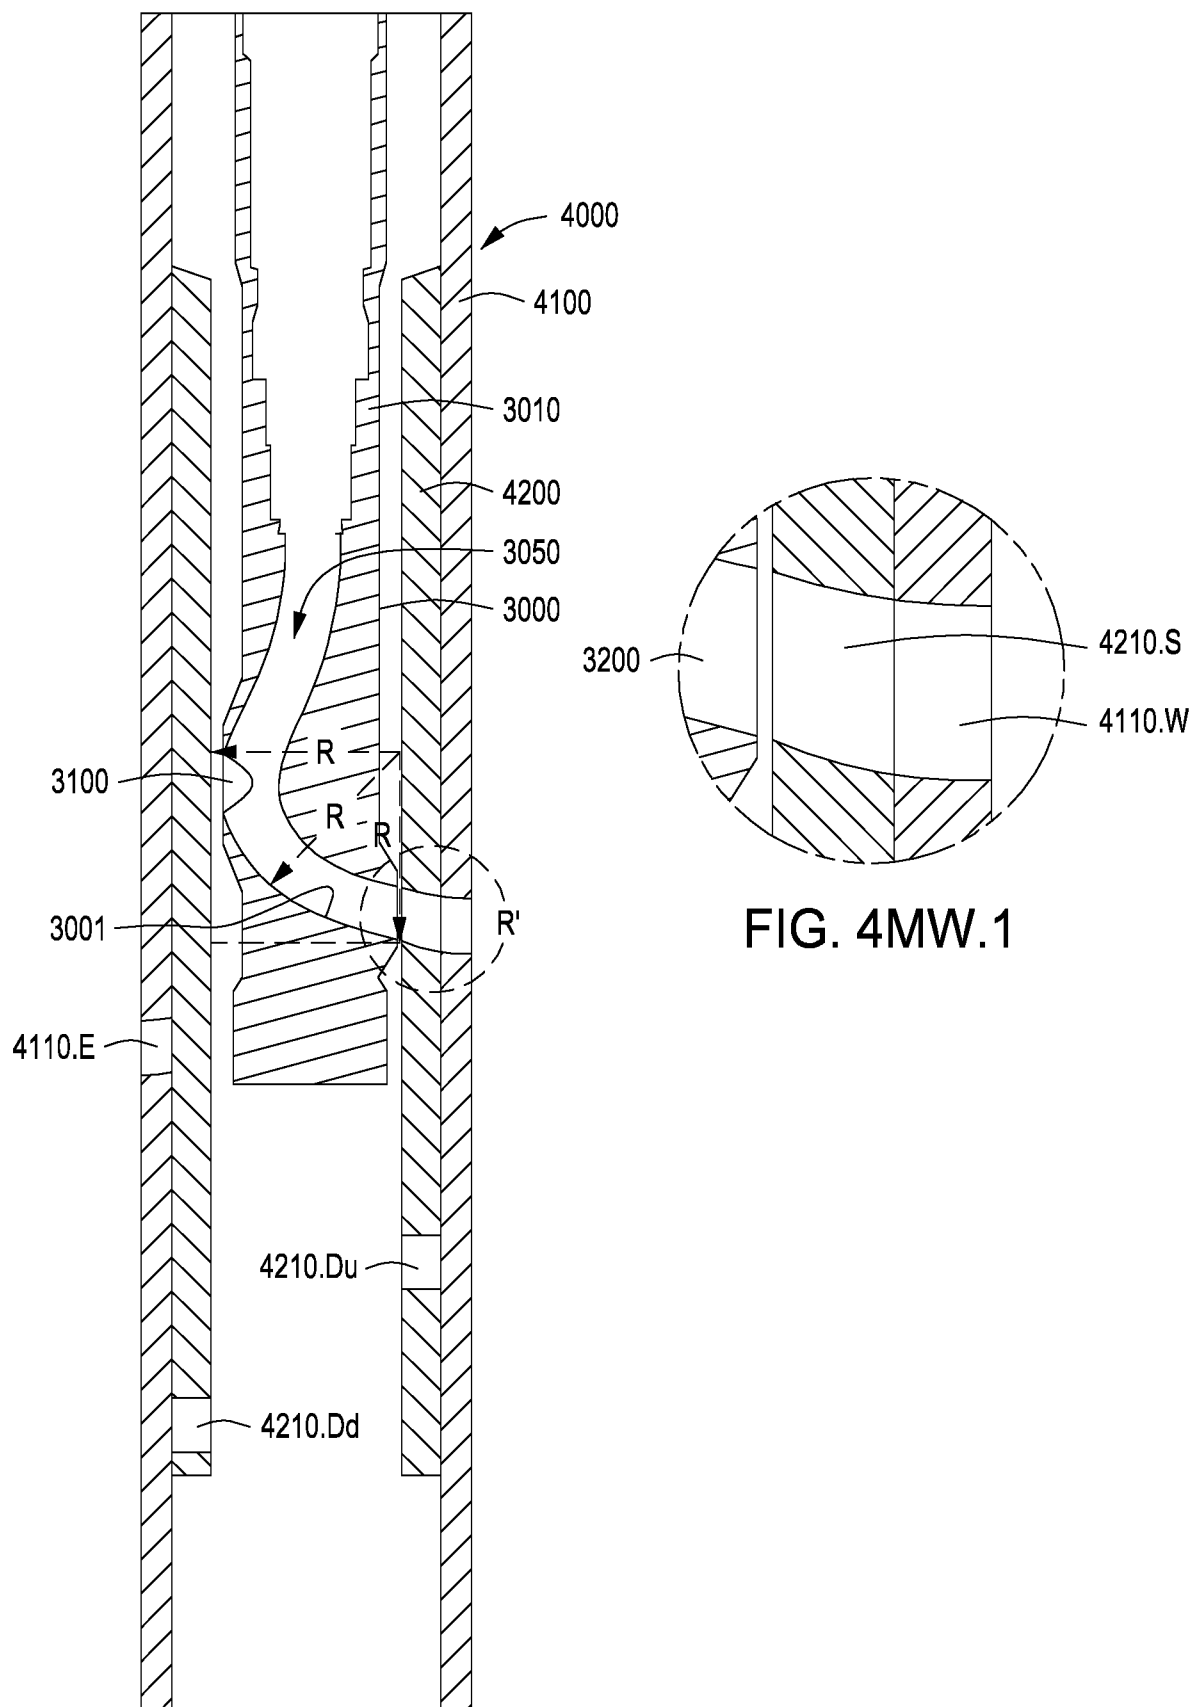


FIG. 4MW

14/25

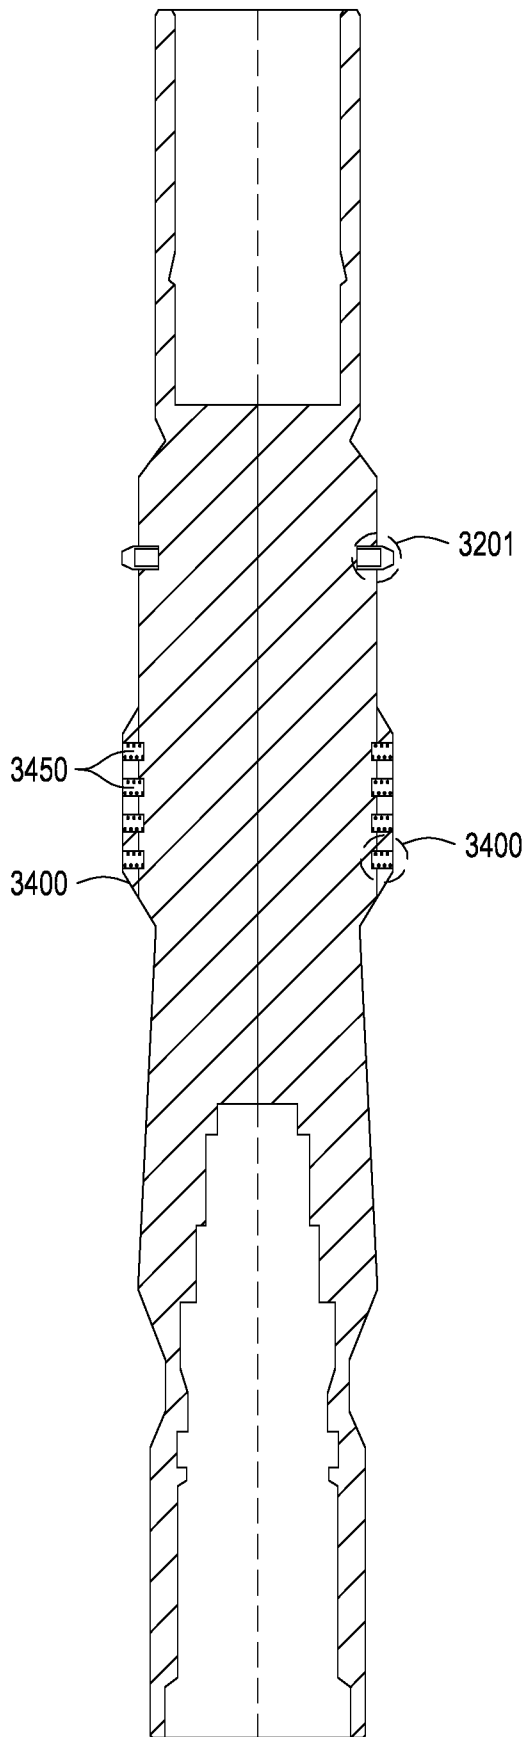


FIG. 4MW.2

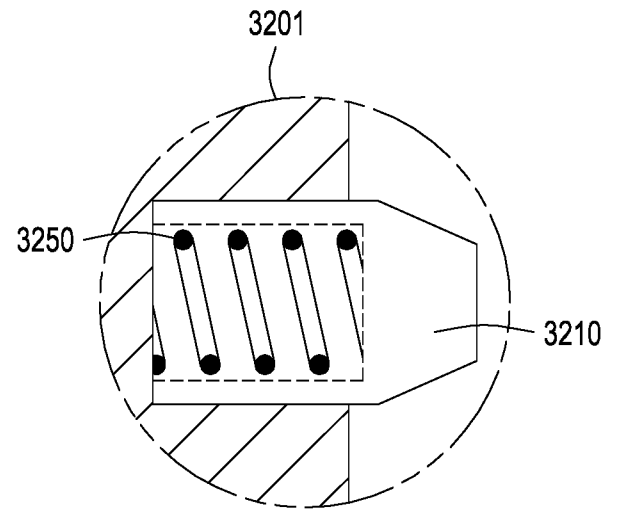


FIG. 4MW.2.SD

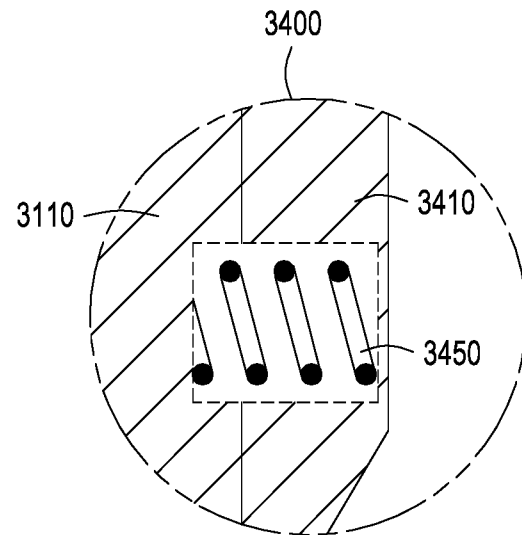


FIG. 4MW.2.AB

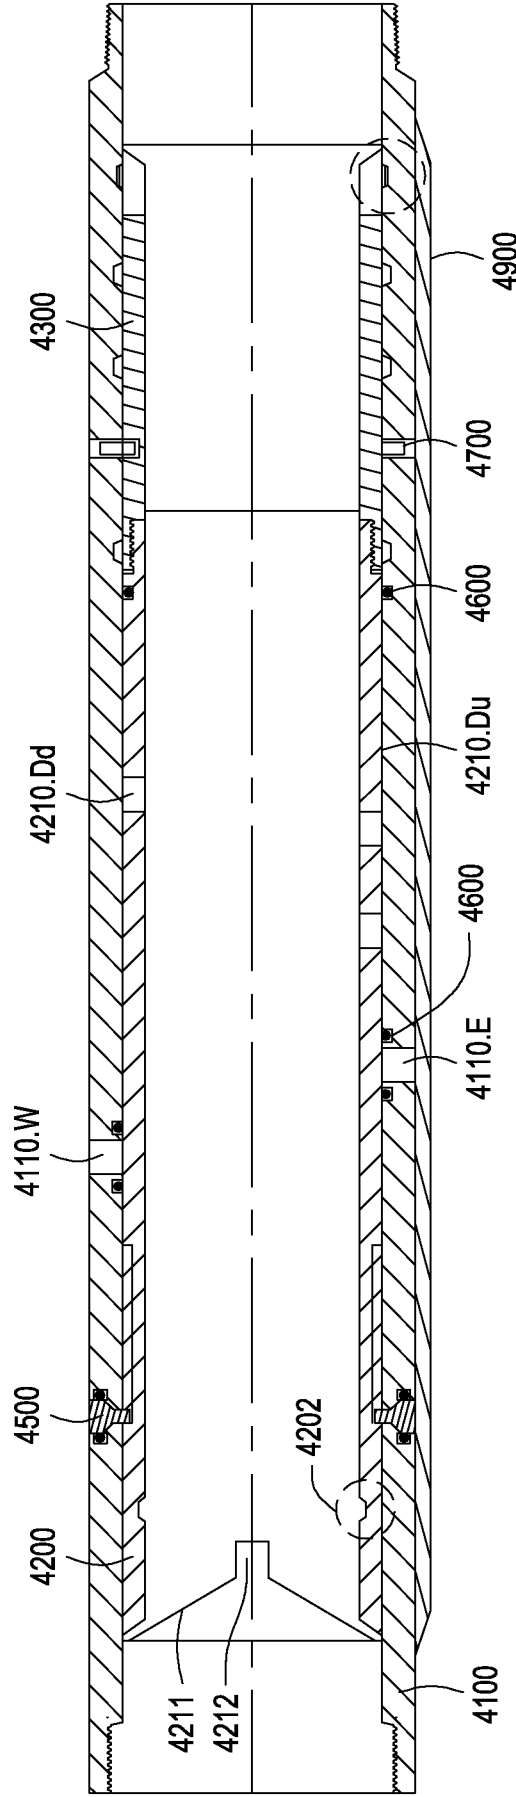


FIG. 4PCC.1




FIG. 4PCC.1.SDG

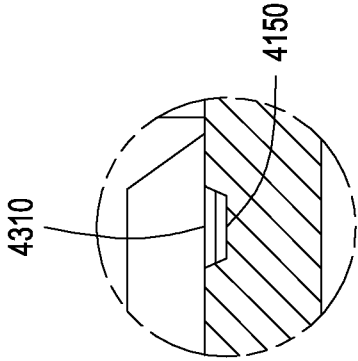


FIG. 4PCC.1.CLD

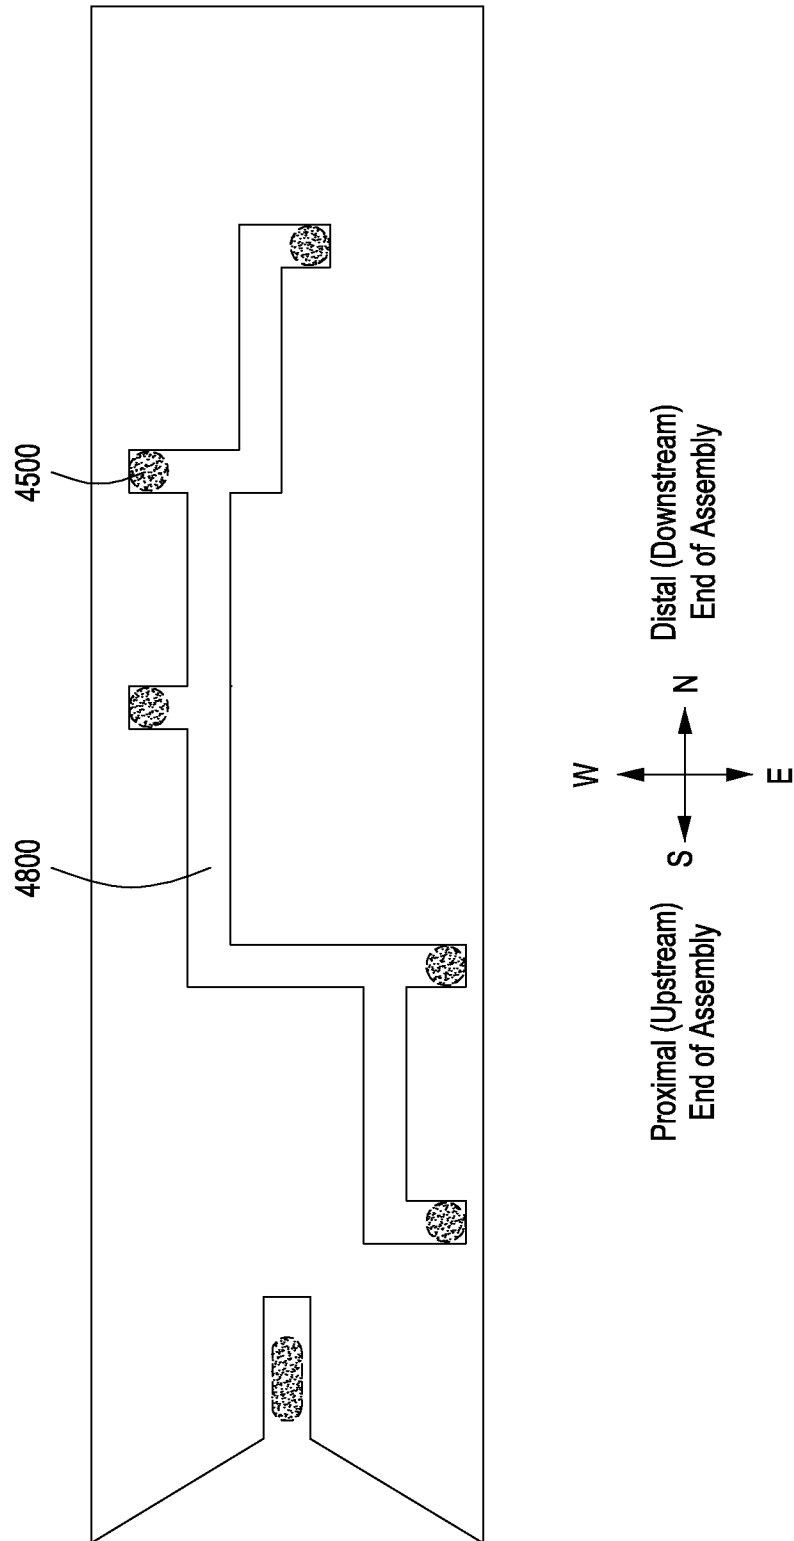
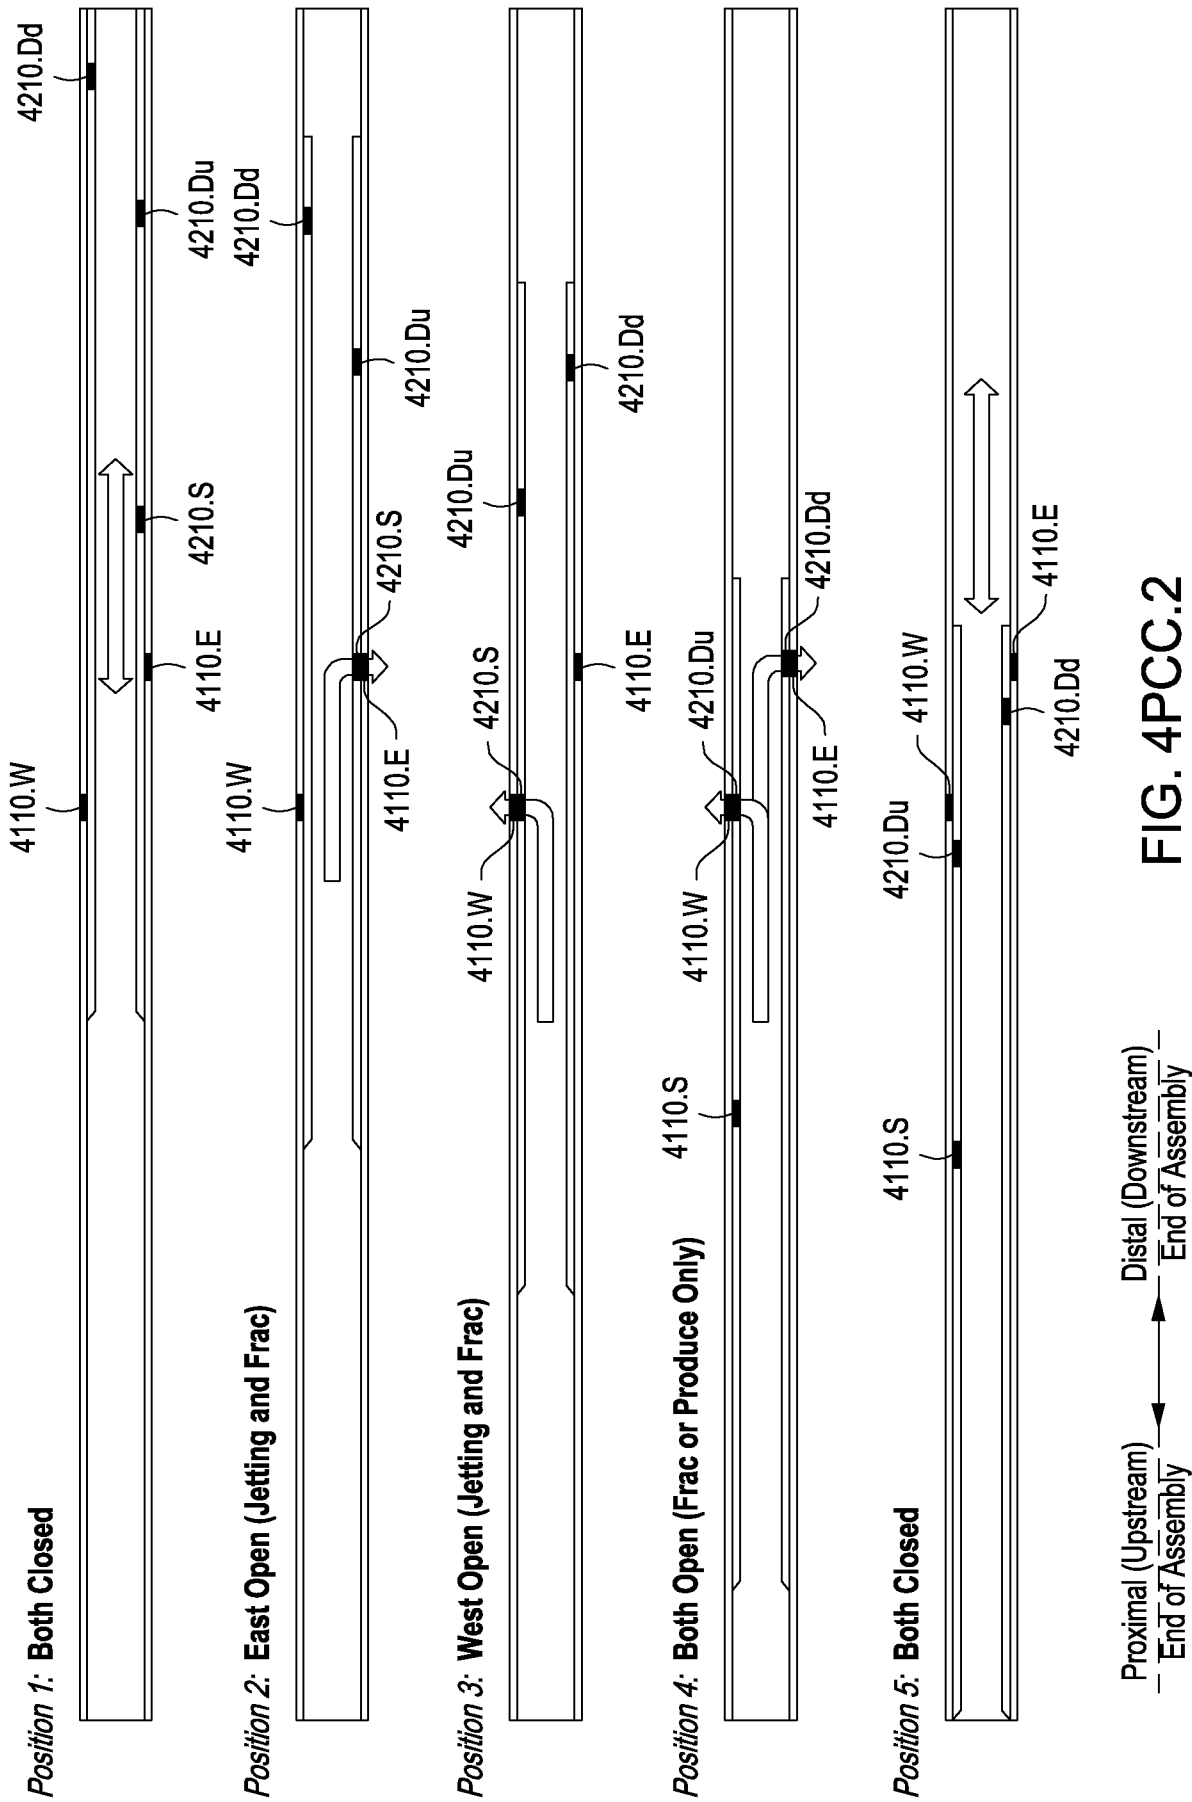


FIG. 4PCC.1.CSP



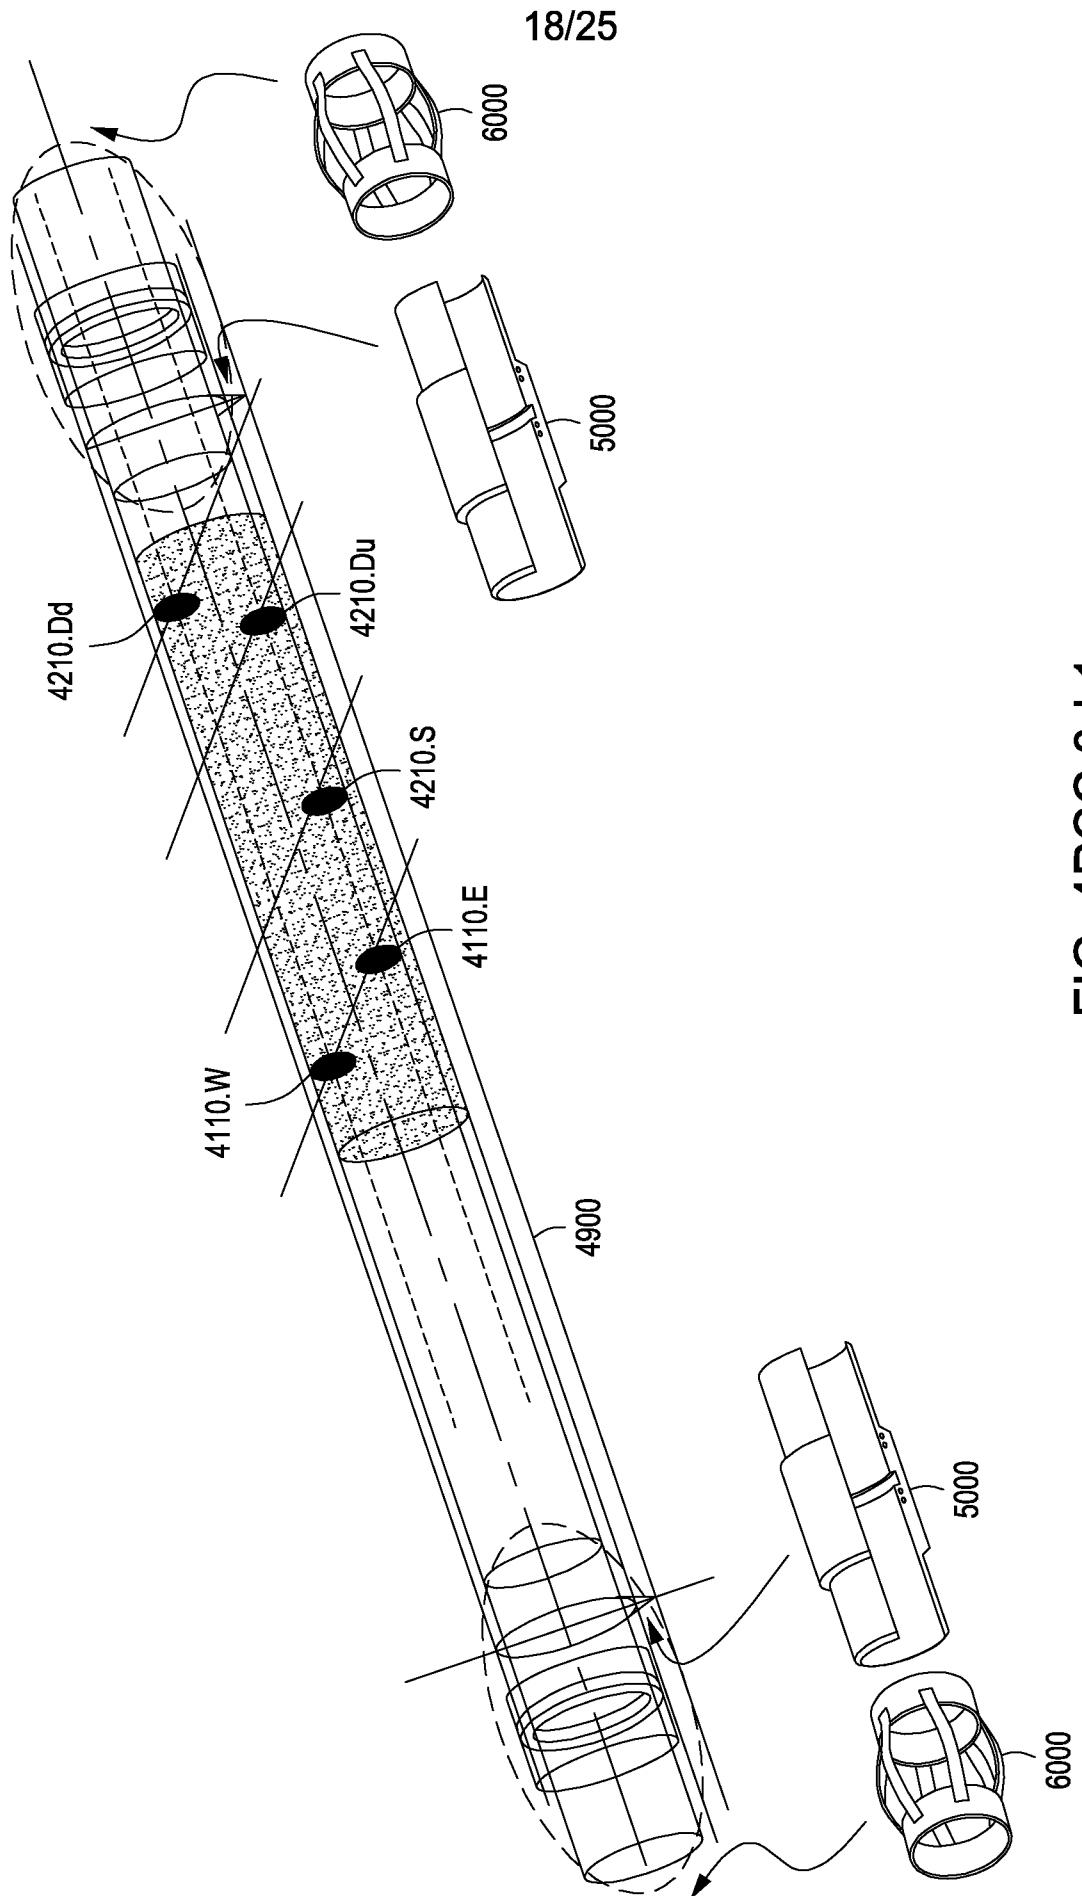


FIG. 4PCC.3d.1

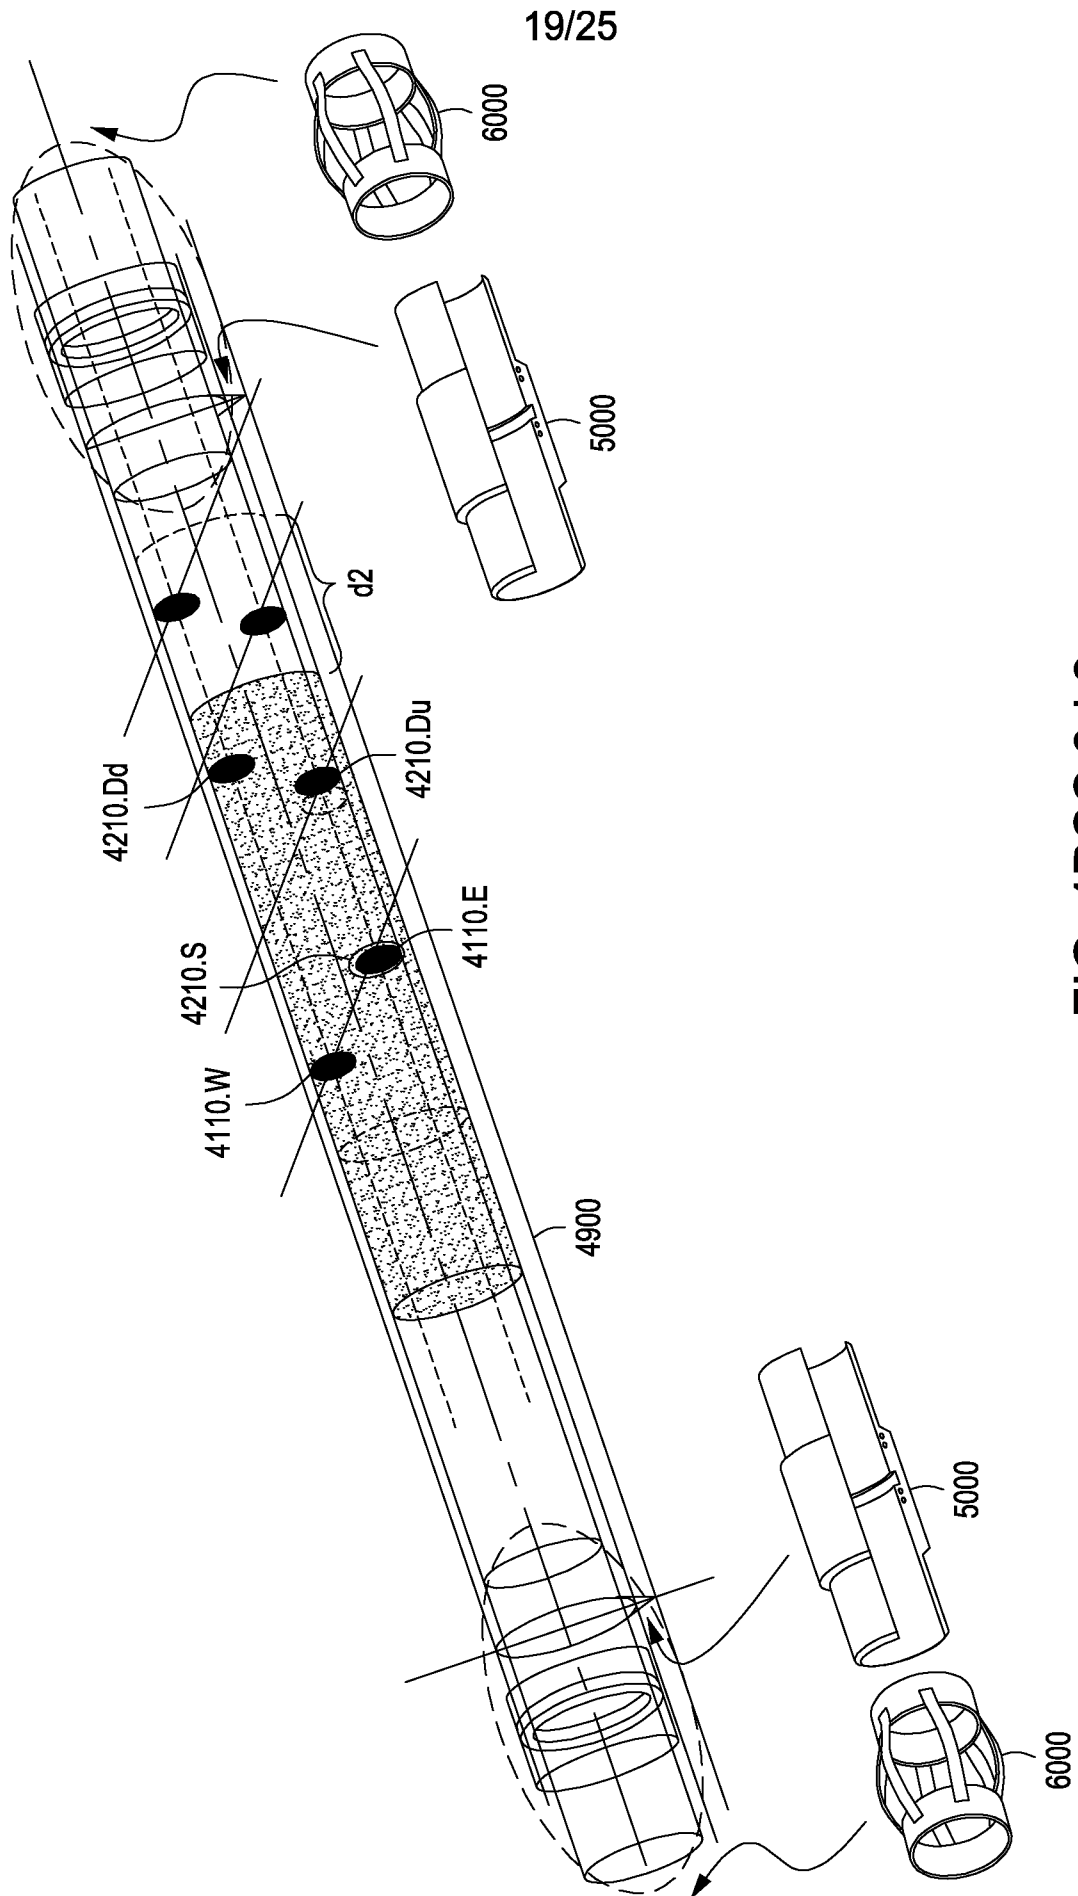


FIG. 4PCC.3d.2

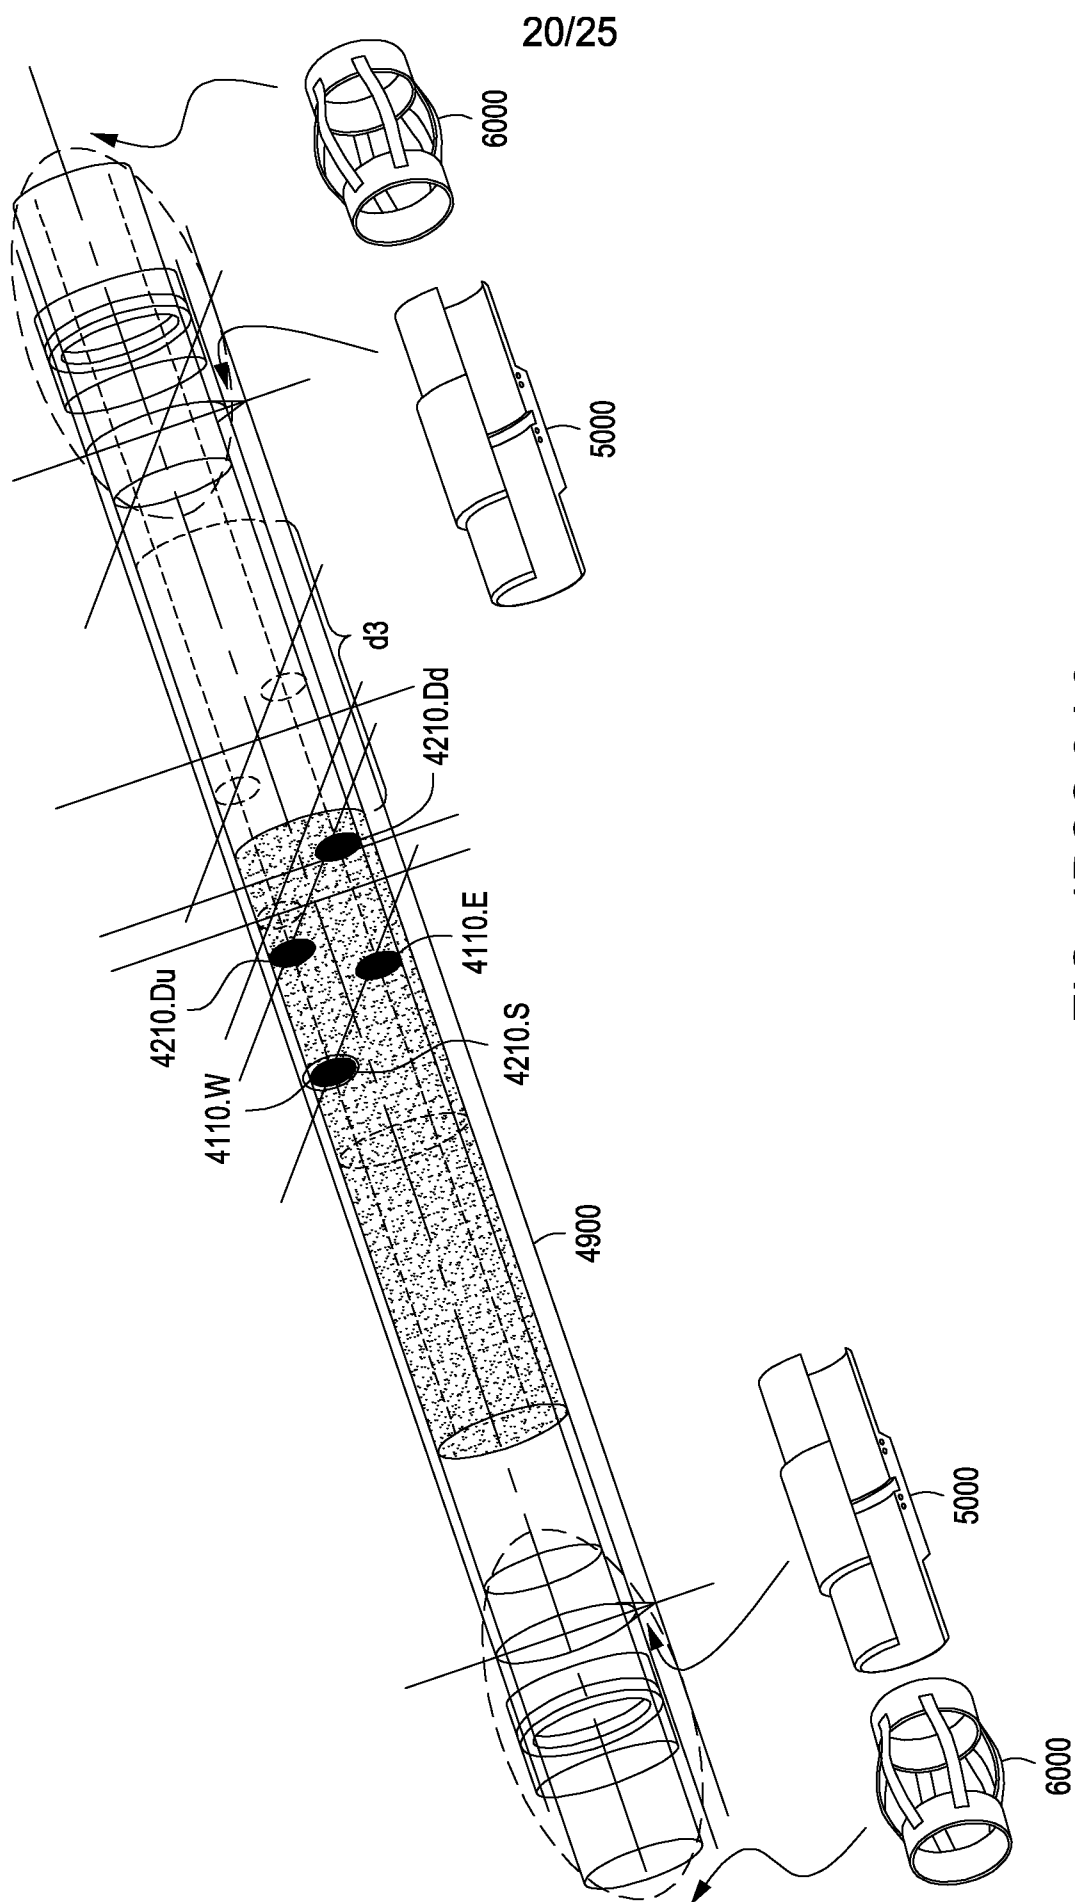


FIG. 4PCC.3d.3

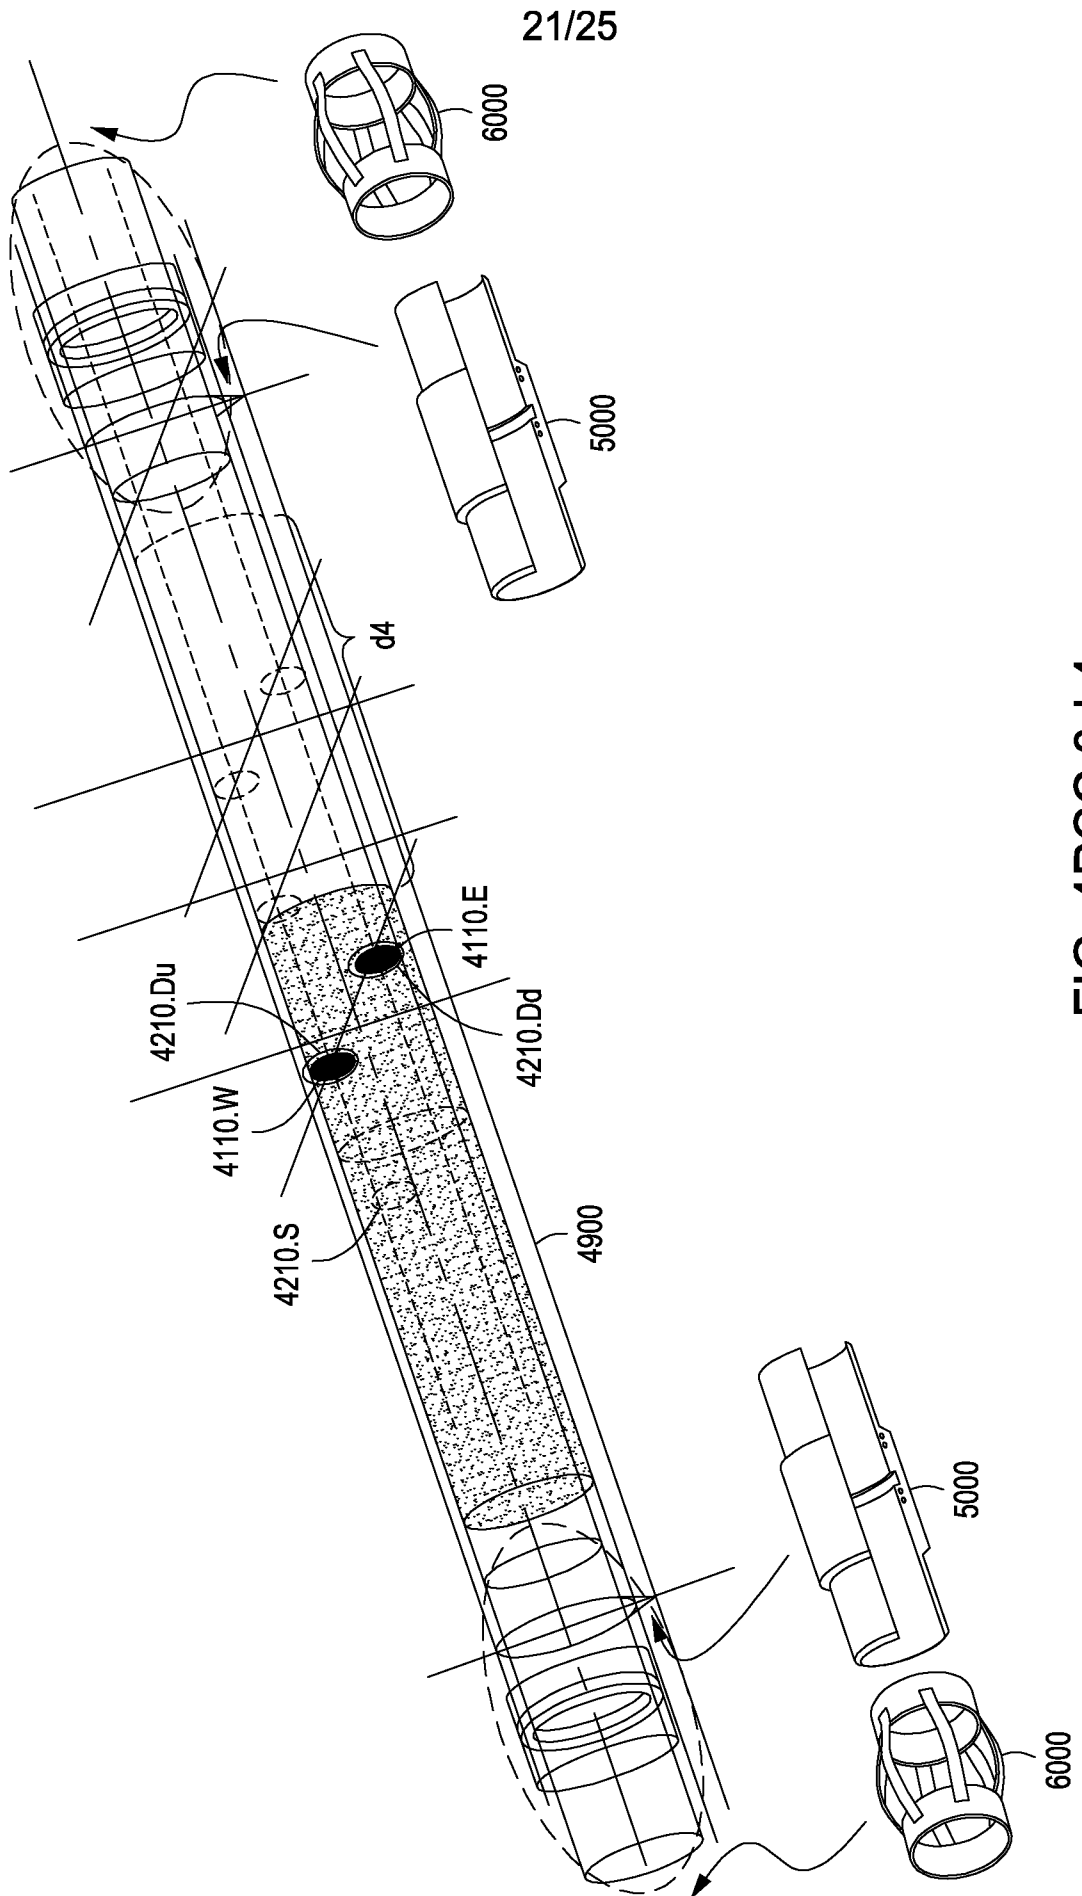


FIG. 4PCC.3d.4

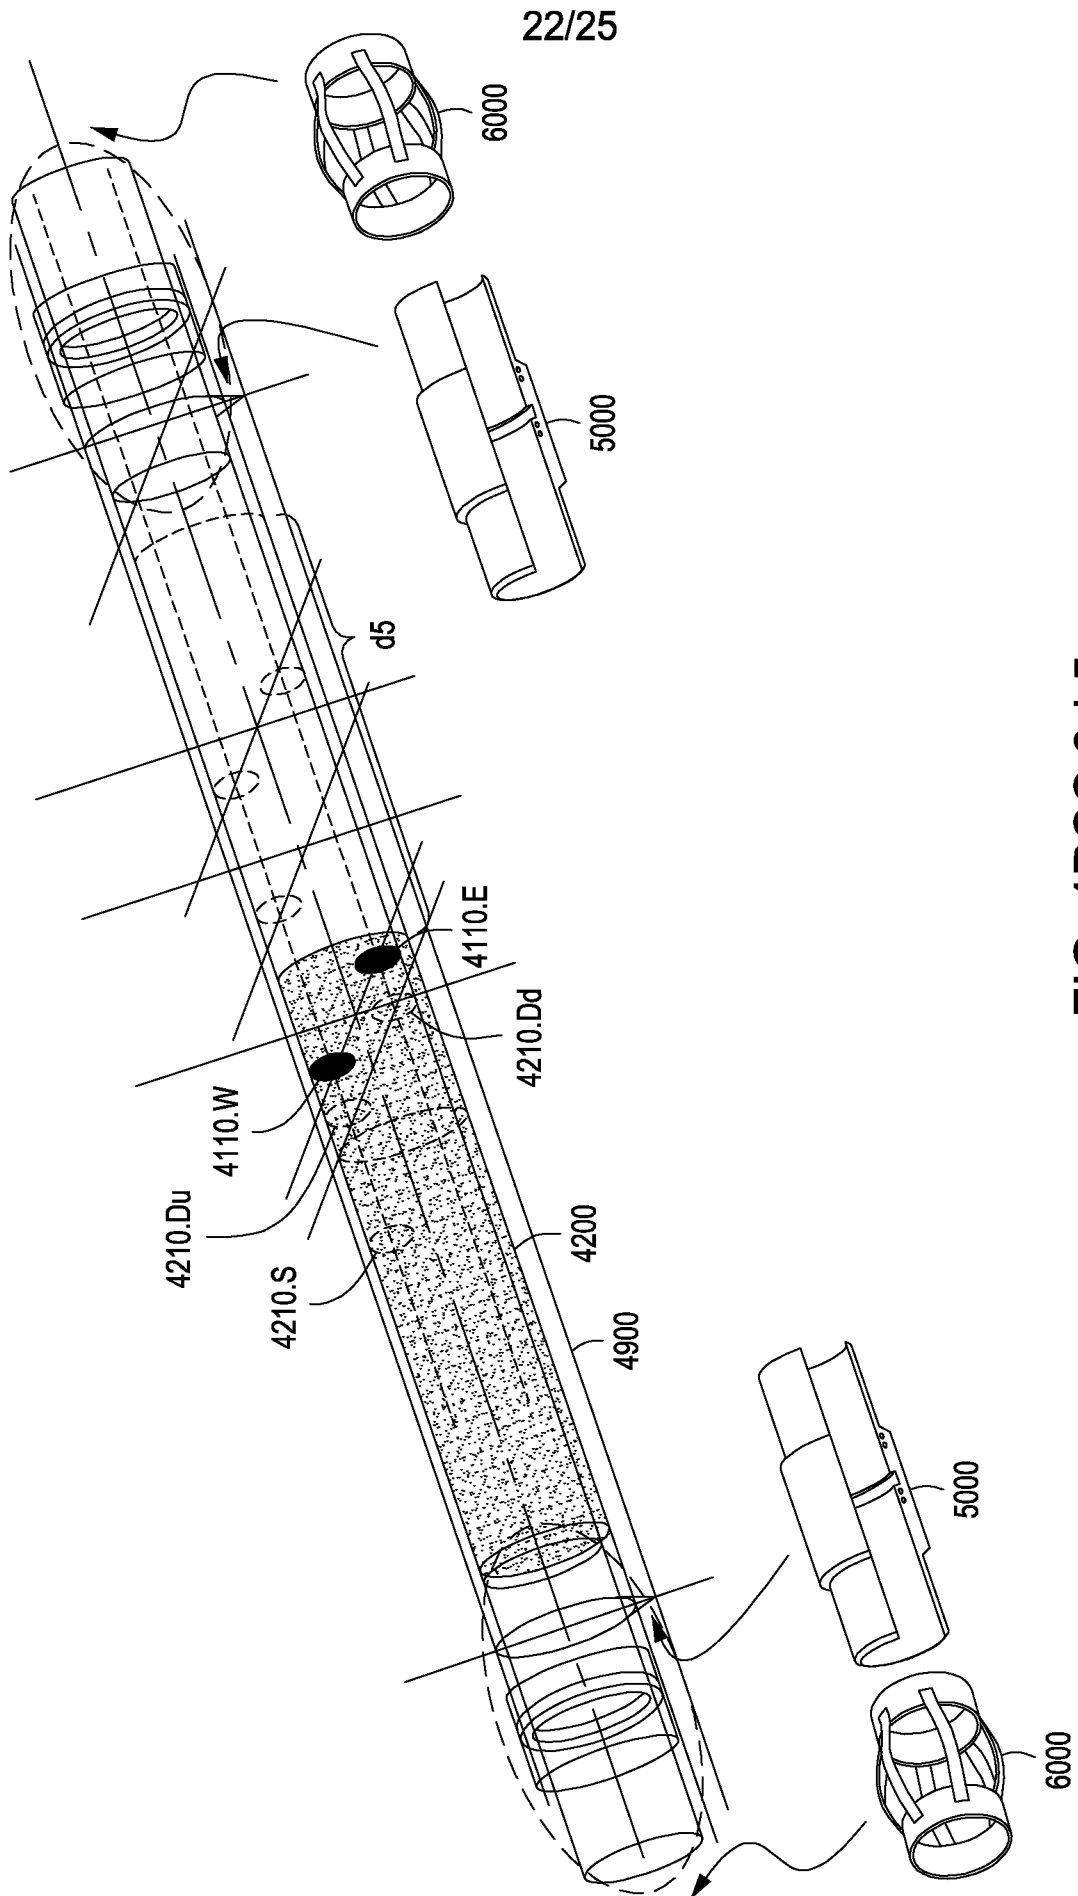


FIG. 4PCC.3d.5

23/25

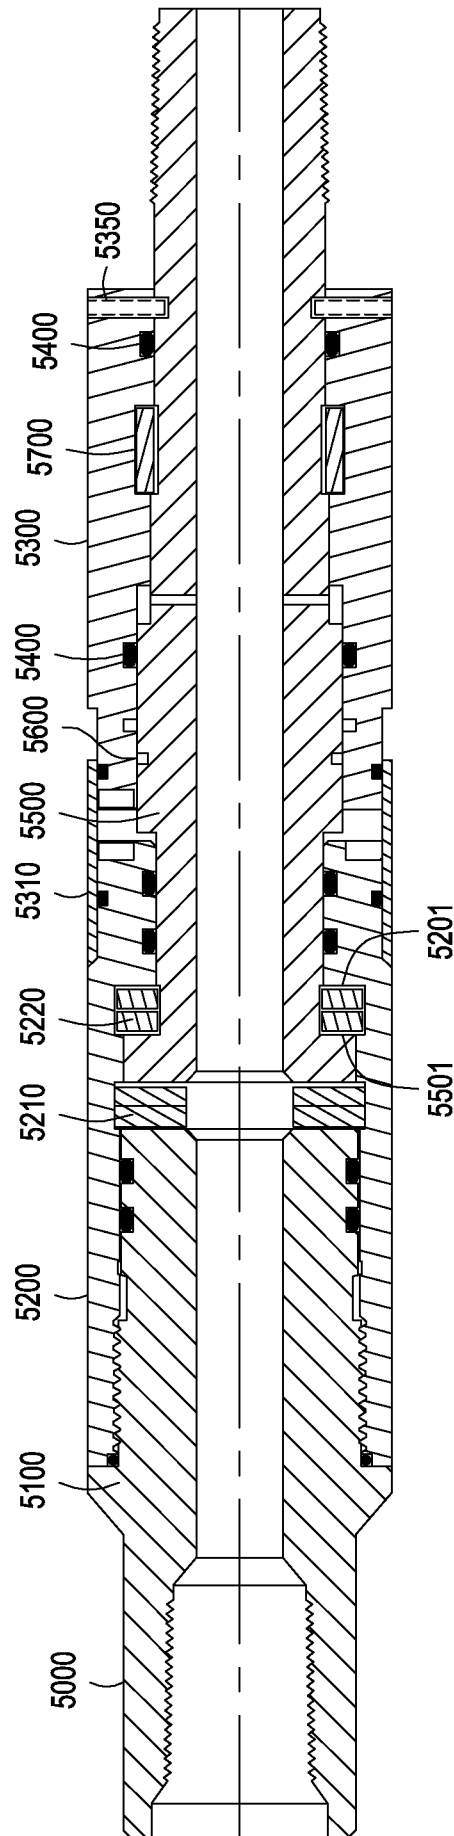


FIG. 4HLS

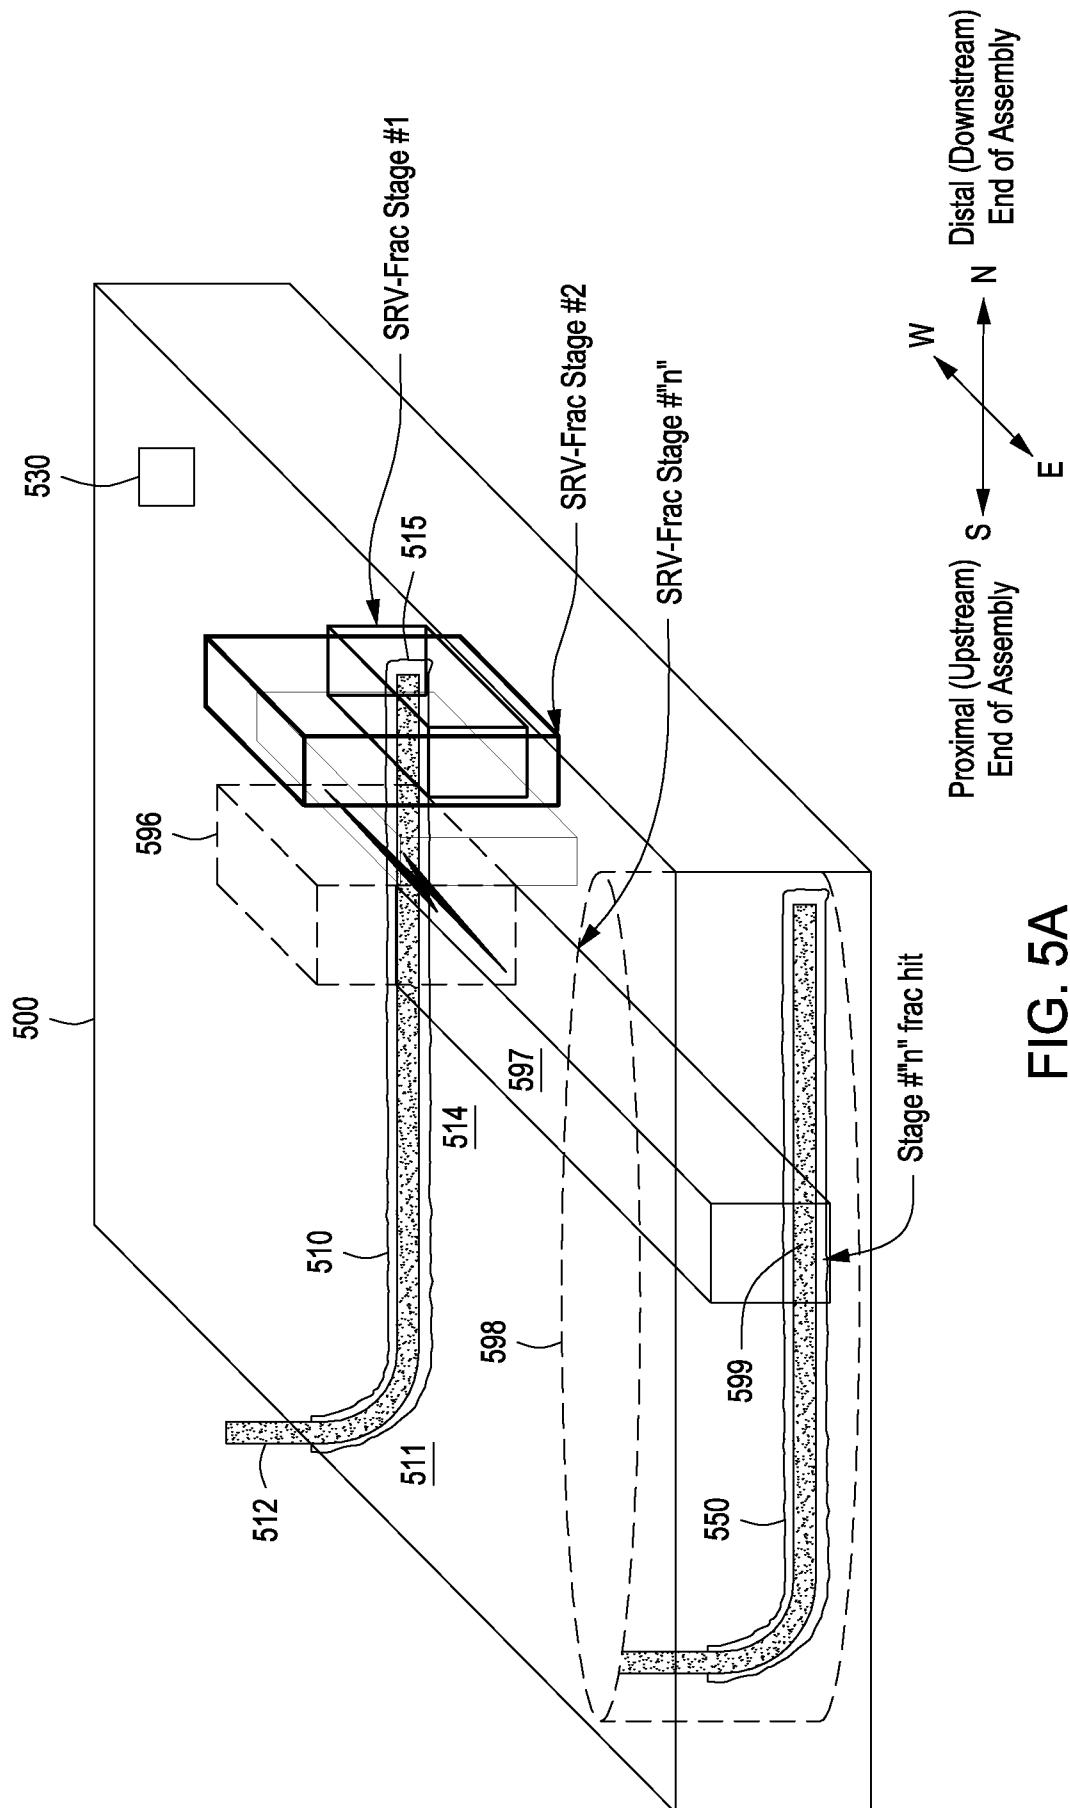


FIG. 5A

25/25

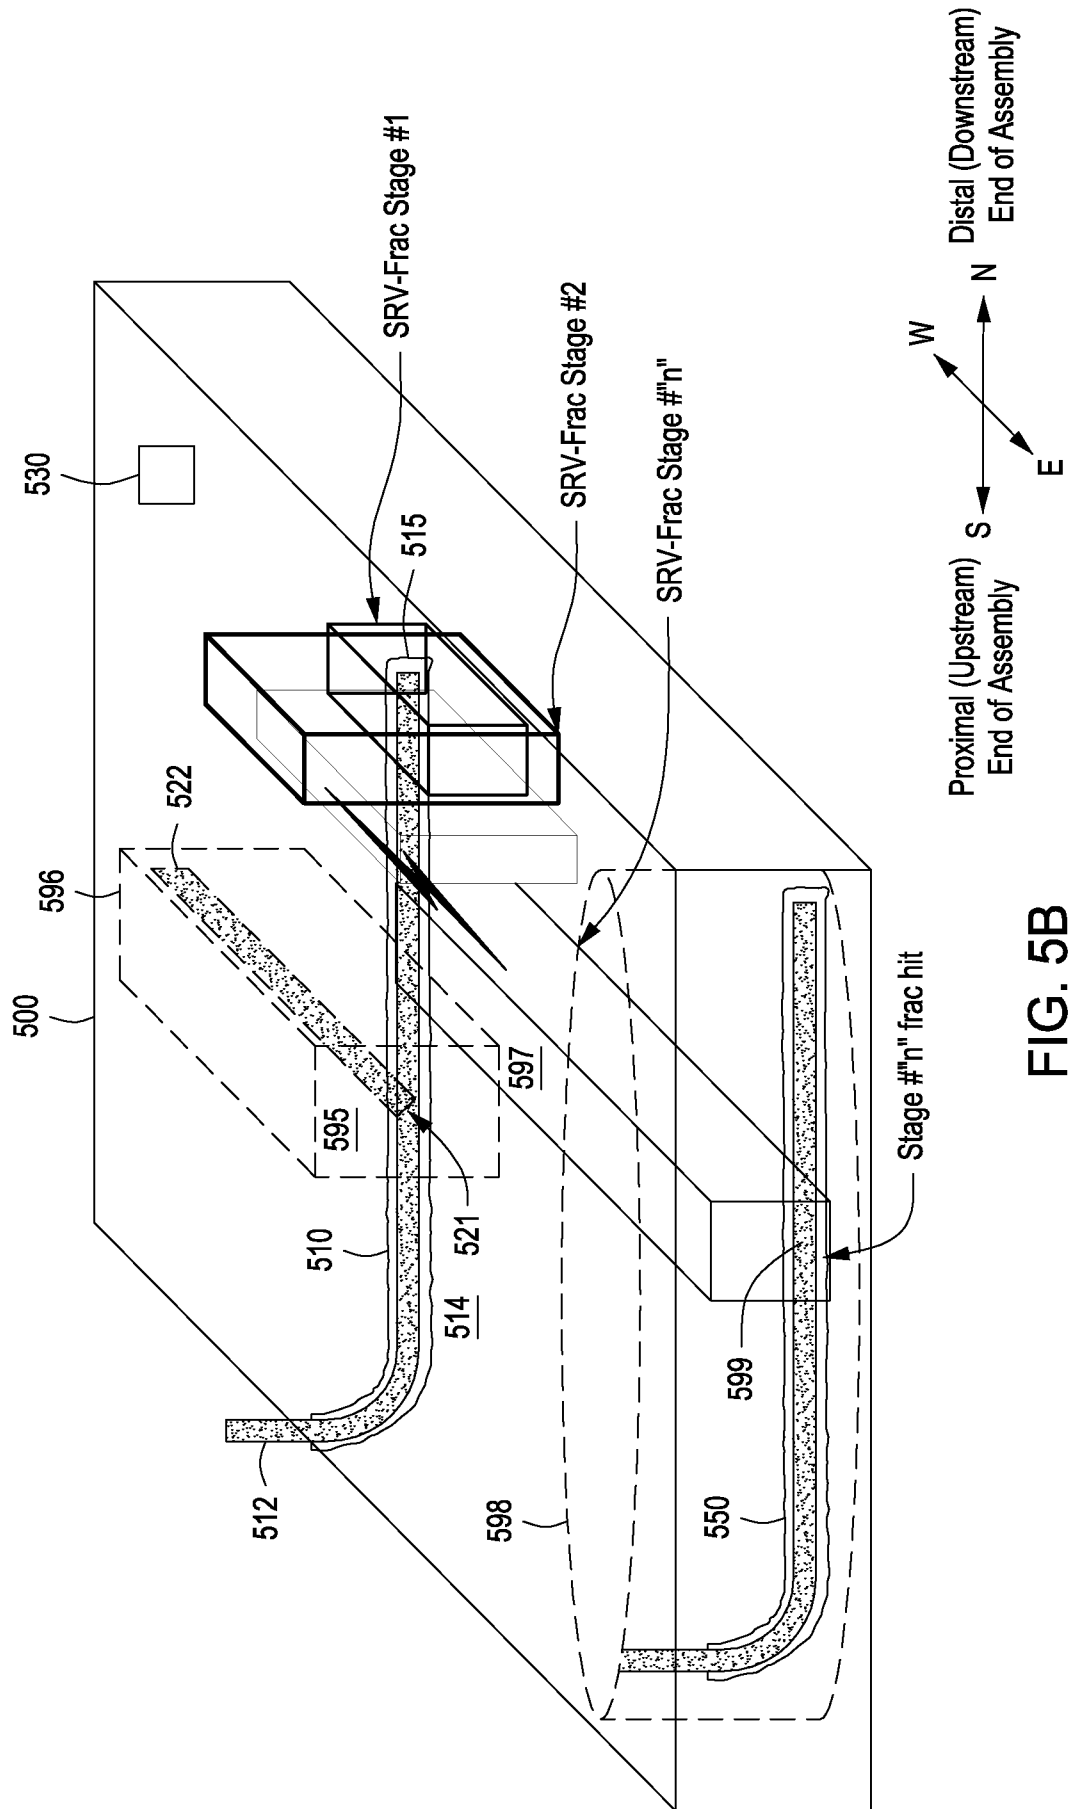


FIG. 5B

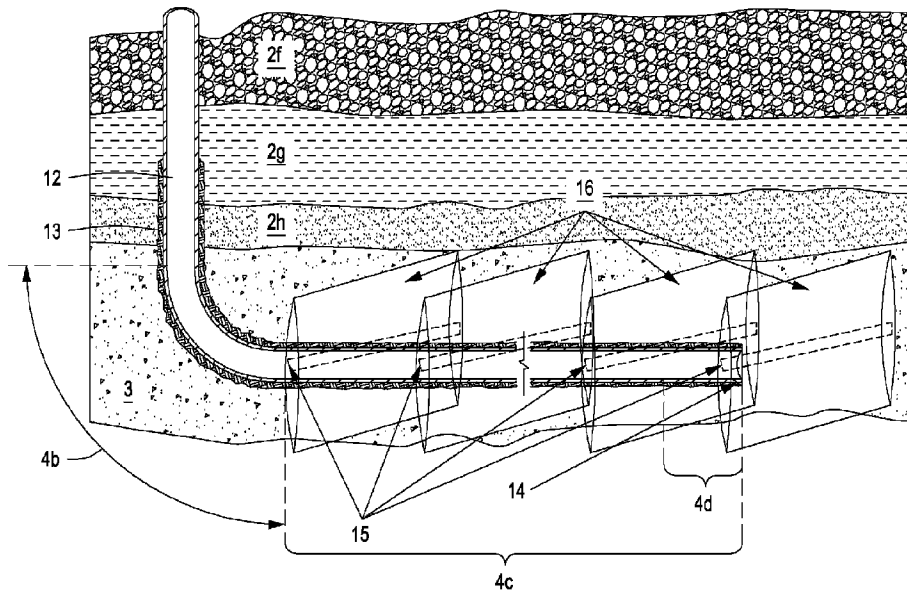


FIG. 1B