



(51) International Patent Classification:

H04B 7/0413 (2017.01) *H04L 1/06* (2006.01)

(21) International Application Number:

PCT/CN2019/123894

(22) International Filing Date:

09 December 2019 (09.12.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

201910058663.1 22 January 2019 (22.01.2019) CN

(71) Applicants: **BOE TECHNOLOGY GROUP CO., LTD.**[CN/CN]; No. 10 Jiuxianqiao Rd., Chaoyang District, Beijing 100015 (CN). **CHONGQING BOE SMART ELECTRONICS SYSTEM CO., LTD.** [CN/CN]; No. 9 Yunhan Rd., Shuitu Hi-tech Industrial, Zone, Beibei District, Chongqing 400714 (CN).(72) Inventors: **XIE, Yunyan**; No. 9 Dize Rd., BDA, Beijing 100176 (CN). **CHEN, Lichun**; No. 9 Dize Rd., BDA, Beijing 100176 (CN). **LIU, Bo**; No. 9 Dize Rd., BDA, Beijing 100176 (CN). **CHENG, Qiangeng**; No. 9 Dize Rd., BDA, Beijing 100176 (CN). **WANG, Han**; No. 9 Dize Rd., BDA, Beijing 100176 (CN).(74) Agent: **TEE & HOWE INTELLECTUAL PROPERTY ATTORNEYS**; Libo GU, 10th Floor, Tower D, Minsheng Financial Center, 28 Jianguomennei Avenue Dongcheng District, Beijing 100005 (CN).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,

(54) Title: A METHOD FOR WIRELESS DATA COMMUNICATION AND A COMMUNICATION APPARATUS

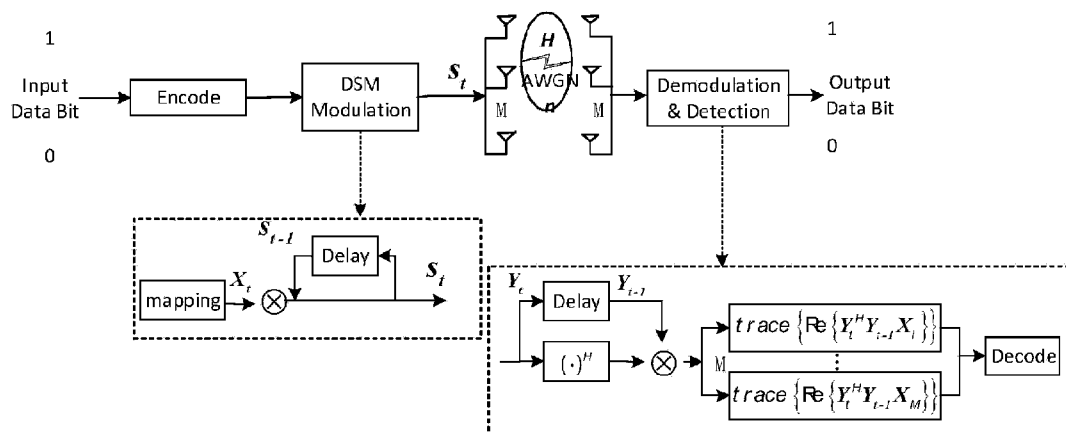


FIG. 1

(57) **Abstract:** The present application discloses a method for operating a wireless communication system. The method includes receiving a series of input data bits in a current timeslot by a transmitter and encoding the input data bits with a cross-Gray coding scheme to obtain coded information bits. Additionally, the method includes mapping the coded information bits to obtain respective multiple transmission symbols X_t for the current timeslot in a constellation diagram. Furthermore, the method includes converting the multiple transmission symbols X_t to generate a space-time matrix S_t of the current timeslot by incorporating spatial bits associated with orders of respective transmitting antennas based on a space-time matrix S_{t-1} of a previous timeslot. Moreover, the method includes transmitting a respective one of elements in the space-time matrix S_t using a respective one transmitting antenna activated in the transmitter.



OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

A METHOD FOR WIRELESS DATA COMMUNICATION AND A COMMUNICATION APPARATUS

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims priority to Chinese Patent Application No. 201910058663.1, January 22, 2019, the contents of which are incorporated by reference in the entirety.

TECHNICAL FIELD

[0002] The present invention relates to communication technology, more particularly, to a method for wireless data communication, and a communication apparatus.

BACKGROUND

[0003] Multiple-Input Multiple-Output (MIMO) technology has been widely applied with relative high diversity gain and multiplexing gain in wireless communication system in which multiple antennas are used at both the source (transmitter) and the destination (receiver). The antennas at each end of the communications circuit are combined to minimize errors and optimize data speed. However, channel-channel interference becomes more and more a serious problem, the reliability of data transmission gradually drops. Spatial modulation (SM) is introduced as a branch technology of MIMO to activate only one transmitting antenna during one timeslot, thus avoiding the channel-channel interference completely. Compared to traditional MIMO technology, SM technology adds space dimension. Therefore, spectrum efficiency of communication with SM technology is enhanced over traditional communication with MIMO technology. On the other hand, SM technology has its own limitation. In the SM system, receiver terminal requires to know the channel state information first, which makes channel estimation even more difficult. Especially for high-speed data flow through channels, the reliability associated with channel state information is even harder to be guaranteed. Improved communication technology is desired.

SUMMARY

[0004] In an aspect, the present disclosure provides a method for operating a wireless communication system for data communication. The method includes a step of receiving a series of input data bits in a current timeslot by a transmitter of the wireless communication system. The method further includes a step of encoding the input data bits with a cross-Gray coding scheme to obtain coded information bits. Additionally, the method includes a step of mapping the coded information bits to respectively obtain multiple transmission symbols X_t for the current timeslot in a constellation diagram, including θ degree rotation within the constellation diagram. Furthermore, the method includes a step of converting the multiple transmission symbols X_t to generate a space-time matrix S_t of the current timeslot by incorporating spatial bits associated with orders of respective transmitting antennas based on a space-time matrix S_{t-1} of a previous timeslot. Moreover, the method includes transmitting a respective one of elements in the space-time matrix S_t using a respective one transmitting antenna being activated.

[0005] Optionally, the step of encoding the input data bits with the cross-Gray coding scheme includes receiving the input data bits including a series of bit-elements of $\{p_1, p_2, p_3, \dots, p_{n-1}, p_n\}$. The step further includes inserting p_n every other one bit-element in a sub-sequence of $\{p_1, p_2, p_3, \dots, p_{n-1}\}$ either from left to right or from right to left of the input data bits to obtain the coded information bits.

[0006] Optionally, the step of mapping the coded information bits includes mapping the coded information bits to obtain multiple initial constellation symbols X_t' of the current timeslot at multiple constellation nodes (i, j) in the constellation diagram, $X_t' = X_{ij}^R + X_{ij}^I$, wherein X_{ij}^R is a real part of and X_{ij}^I is an imaginary part of a respective one initial constellation symbol $X_t'_{(i,j)}$ at a respective one of the multiple constellation nodes (i, j) . The step further includes rotating the multiple initial constellation symbols X_t' by θ degree rotation to obtain the multiple transmission symbols X_t as

$$X_t = \begin{bmatrix} \cos \theta & \sin \theta \\ -\sin \theta & \cos \theta \end{bmatrix} \begin{bmatrix} X_{ij}^R \\ X_{ij}^I \end{bmatrix}, \text{ where } 0^\circ < \theta < 360^\circ.$$

[0007] Optionally, the step step of mapping the coded information bits inincludes modulating the coded information bits by Quadrature Amplitude Modulation (QAM) protocol, or Phase shift Keying (PSK) protocol, or Amplitude-Phase shift Keying (APSK) protocol to obtain modulated bits in terms of the multiple transmission symbols X_t .

[0008] Optionally, the step of converting the multiple transmission symbols X_t to generate a space-time matrix S_t of the current timeslot by incorporating spatial bits associated with orders of respective transmitting antennas based on a space-time matrix S_{t-1} of a previous timeslot includes performing a convolution operation of the multiple transmission symbols X_t for the current timeslot with the space-time matrix S_{t-1} generated in the previous timeslot.

[0009] Optionally, the space-time matrix S_t of the current timeslot includes a real matrix with one element per column denoting a to-be-transmitted information bit including a respective one of the modulated bits and a respective one of the spatial bits for activating a respective one transmitting antenna and only one to-be-transmitted information bit per row associated with only one transmitting antenna being activated once in the current timeslot.

[0010] Optionally, the step of performing a convolution operation includes estimating a channel transmission matrix H_t of the current timeslot, $H_t = Y_{t-1} X_t - N_{t-1} X_t$, based on multiple reception symbols Y_{t-1} received in the previous timeslot by a receiver of the wireless communication system, $Y_{t-1} = H_{t-1} S_{t-1} + N_{t-1}$, where H_{t-1} is a channel transmission matrix of the previous timeslot and N_{t-1} is a noise vector in the previous timeslot. Additionally, the step includes converting both the multiple transmission symbols X_t and the channel transmission matrix H_t from a complex field to a real field. Furthermore, the step includes performing an orthogonal triangulation decomposition to the channel transmission matrix H_t .

[0011] Optionally, the step of transmitting a respective one of elements in the space-time matrix S_t includes activating a respective one transmitting antenna for transmitting a respective one to-be-transmitted information bit to a respective one receiving antenna based on an estimated channel transmission matrix.

[0012] In another aspect, the present disclosure provides a method for operating a wireless communication system for data communication. The method includes a step of transmitting a respective one of elements in a space-time matrix S_t using an activated one of n_t number of transmitting antennas of the wireless communication system through respective one of channels based on an additive white Gaussian noise (AWGN) model. The method further includes a step of receiving multiple reception symbols Y_t respectively by n_r number of receiving antennas of the wireless communication system, wherein $Y_t = H_t S_t + N_t$, H_t is a channel transmission matrix at a current timeslot with a dimension of $(n_r \times n_t)$ and respective elements representing channel gains associated with respective n_r number of receiving antennas and n_t number of transmitting antennas. H_t is estimated from multiple symbols Y_{t-1}

received during a previous timeslot by a receiver via $Y_{t-1}X_t - N_{t-1}X_t$, the space-time matrix S_t is generated by the transmitter from multiple transmission symbols X_t in a constellation diagram mapped from coded information bits for the current timeslot. N_t is a transmission noise vector in the current timeslot based on the AWGN model. N_{t-1} is a transmission noise vector in the previous timeslot. Furthermore, the method includes a step of demodulating the multiple reception symbols Y_t to obtain demodulated information bits. Moreover, the method includes a step of decoding a respective one of the demodulated information bits to obtain a respective one decoded constellation symbol.

[0013] Optionally, the step of decoding a respective one of the demodulated information bits includes decoding by a sphere decoding detection algorithm to obtain corresponding spatial bits or demodulated data bits in decoded constellation symbols.

[0014] Optionally, the step of decoding includes using a receiver-centric sphere decoding detection algorithm to decode the demodulated information bits to obtain decoded constellation symbols independent from a channel transmission matrix of the current timeslot.

[0015] Optionally, the decoded constellation symbols are represented by

$$[\hat{X}_{DSM}^{Rx-SD}] = \operatorname{argmax}_{S \in X_t} \operatorname{trace} \{ \operatorname{Re}(Y_t^H - Y_{t-1}X_t) \leq C_R^2 \},$$

where $\operatorname{argmax}\{.\}$ is to output an argmax value within a search radius C_R for the current timeslot. Y_t^H are conjugate transposition of multiple reception symbols Y_t respectively received in the current timeslot by n_r number of antennas in the receiver of the wireless communication system. Y_{t-1} is reception symbols received in a previous timeslot.

[0016] Optionally, the method further includes a step of converting both the multiple transmission symbols X_t in a transmitter of the wireless communication system and an estimated channel transmission matrix H_t from a complex field to a real field. Additionally, the method includes a step of performing an orthogonal triangulation decomposition to the estimated channel transmission matrix H_t . The method further includes a step of converting the multiple transmission symbols X_t to a space-time matrix S_t . Furthermore, the method includes a step of transmitting an information bit made by a respective one of elements in the space-time matrix S_t using a respective activated transmitter antenna. Moreover, the method includes a step of decoding the multiple reception symbols $Y_t = H_t S_t + N_t$ received by the receiver based on a transmitter-centric sphere decoding detection algorithm to decode the demodulated information bits to obtain decoded constellation symbols.

[0017] Optionally, the decoded constellation symbols are represented by

$$[\hat{X}_{DSM}^{Tx-SD}] = \underset{\bar{X} \in O_c}{\operatorname{argmin}} \left\{ \|\bar{Y}_t^Q - R\bar{X}_t\|^2 \leq C_R^2 \right\},$$

where $\operatorname{argmin}\{.\}$ is a function for obtaining a minimum value in a group O_c of $\bar{X}$ within a search radius C_R for the current timeslot. $\bar{Y}_t^Q$ represents multiple reception symbols Y_t left-multiplying a positive definite matrix Q .

$$\bar{Y}_t = [\operatorname{Re}(Y_t), \operatorname{Im}(Y_t)]^T,$$

$$R = \begin{bmatrix} \operatorname{Re}(Q^H \bar{Y}_{t-1}), & -\operatorname{Im}(Q^H \bar{Y}_{t-1}) \\ \operatorname{Re}(Q^H \bar{Y}_{t-1}), & \operatorname{Im}(Q^H \bar{Y}_{t-1}) \end{bmatrix},$$

$$\bar{X}_t = [\operatorname{Re}(\bar{X}_t^T), \operatorname{Im}(\bar{X}_t^T)]^T,$$

$$Q^H \bar{Y}_{t-1} = QR = \begin{cases} [Q_{1[2n_r \times 2n_t]} & Q_{2[2n_r \times 2(n_r - n_t)]}] \begin{bmatrix} R_{1[2n_t \times 2n_t]} \\ 0_{[2(n_r - n_t) \times 2n_t]} \end{bmatrix} & n_r \geq n_t, \\ Q_{1[2n_r \times 2n_r]} & [R_{1[2n_r \times 2n_r]} & R_{2[2n_r \times 2(n_t - n_r)]}] & n_r < n_t \end{cases},$$

where Q^H is a conjugate transposition of matrix Q , $Q_1 Q_2 = Q$, $R_1 R_2 = R$. n_r represents numbers of receiving antennas, and n_t represent numbers of transmitting antennas.

[0018] Optionally, the step of decoding the multiple reception symbols Y_t includes searching through a shortest searching path $\hat{T}$ among a group of searching paths T_i in the constellation diagram to obtain the decoded constellation symbols. The shortest searching path is represented by

$$\hat{T} = \underset{T_i \in T_{\text{tree}}}{\operatorname{argmin}} \left\{ \left\| Q_1^H \bar{Y}_t - R \times T_i \right\|^2 \leq C_Q^2 - \left\| Q_2^H \bar{Y}_t \right\|^2 \right\}.$$

[0019] Optionally, the step of decoding a respective one of the demodulated information bits includes decoding the demodulated information bit of the current timeslot to obtain an output data bit containing a spatial bit and/or modulated bit, and storing the output data bit, if the spatial bit and/or modulated bit in a to-be-transmitted information bit of the current timeslot is different from a spatial bit and/or modulated bit in a to-be-transmitted information bit of a previous timeslot. The step further includes obtaining and storing an output data bit associated with the to-be-transmitted information bit of the previous timeslot to be the output data bit for the current timeslot, if the spatial bit and/or modulated bit in the to-be-transmitted information bit of the current timeslot is same as a spatial bit and/or modulated bit in the to-be-transmitted information bit of the previous timeslot.

[0020] In yet another aspect, the present disclosure provides a wireless communication apparatus. The wireless communication apparatus includes an encoder configured to encode input data bits of a current timeslot with a cross-Gray coding scheme to obtain coded information bits. The wireless communication apparatus further includes a modulator configured to map the coded information bits to respectively obtain multiple transmission symbols X_t for the current timeslot in a constellation diagram, including θ degree rotation within the constellation diagram. Additionally, the wireless communication apparatus includes a processor configured to convert the multiple transmission symbols X_t to generate a space-time matrix S_t of the current timeslot by incorporating spatial bits associated with orders of respective transmitting antennas based on a space-time matrix S_{t-1} of a previous timeslot. The wireless communication apparatus further includes a transmitter configured to activate a respective one of n_t number of transmitting antennas to transmit a respective one of elements in the space-time matrix S_t . Furthermore, the wireless communication apparatus includes a receiver configured to have a respective one of n_r number of receiving antennas to receive a respective one of multiple reception symbols $Y_t = H_t S_t + N_t$ based on channel gain defined by a channel transmission matrix H_t . The wireless communication apparatus further includes a demodulator configured to demodulate the multiple reception symbols Y_t to obtain demodulated information bits. Moreover, the wireless communication apparatus includes a decoder configured to decode a respective one of the demodulated information bits to obtain a respective one decoded constellation symbol from which an output data bit can be extracted and stored.

[0021] Optionally, the modulator includes one selected from a Quadrature Amplitude Modulation (QAM) modulator, or a Phase shift Keying (PSK) modulator, or an Amplitude-Phase shift Keying (APSK) modulator to obtain modulated bits in terms of the multiple transmission symbols X_t . The processor is configured to perform a convolution operation of the multiple transmission symbols X_t of the current timeslot with the space-time matrix S_{t-1} of the previous timeslot to generate the space-time matrix S_t of the current timeslot.

[0022] Optionally, the decoder includes a detector storing a receiver-centric sphere decoding detection algorithm executed to decode demodulated information bits to obtain decoded constellation symbols when the transmitter directly transmits the elements in the space-time matrix S_t of the current timeslot without having the processor to perform extra digital-data operations to the multiple transmission symbols X_t .

[0023] Optionally, the decoder includes a detector storing a transmitter-centric sphere decoding detection algorithm executed to decode demodulated information bits to obtain decoded constellation symbols when the transmitter transmits to-be-transmitted information bits after the processor performs extra digital-data operations of these steps: estimating a channel transmission matrix H_t of the current timeslot, $H_t = Y_{t-1} X_t - N_{t-1} X_t$, based on multiple reception symbols Y_{t-1} received in the previous timeslot by a receiver of the wireless communication apparatus, $Y_{t-1} = H_{t-1} S_{t-1} + N_{t-1}$. H_{t-1} is a channel transmission matrix of the previous timeslot and N_{t-1} is a noise vector in the previous timeslot; converting both the multiple transmission symbols X_t and the channel transmission matrix H_t from a complex field to a real field; and performing an orthogonal triangulation decomposition to the channel transmission matrix H_t .

BRIEF DESCRIPTION OF THE FIGURES

[0024] The following drawings are merely examples for illustrative purposes according to various disclosed embodiments and are not intended to limit the scope of the present invention.

[0025] FIG. 1 is a schematic diagram of a wireless communication system according to some embodiments of the present disclosure.

[0026] FIG. 2 is a flow chart of a wireless communication method according to an embodiment of the present disclosure.

[0027] FIG. 3 is schematic diagram of encoded spatial bits corresponding to arrangements of transmitting antennas according to an embodiment of the present disclosure.

[0028] FIG. 4 is a table of using BPSK modulation in differential spatial modulation (DSM) mapping according to an embodiment of the present disclosure.

[0029] FIG. 5 is a flow chart of another wireless communication method according to an embodiment of the present disclosure.

[0030] FIG. 6 is a schematic diagram of bit information under a DSM modulation scheme according to an embodiment of the present disclosure.

[0031] FIG. 7 is a schematic diagram of comparing a searching process using a conventional sphere decoding detection algorithm versus an improved sphere decoding detection algorithm according to an embodiment of the present disclosure.

[0032] FIG. 8 is a schematic diagram of a searching process using an improved sphere decoding detection algorithm according to an embodiment of the present disclosure.

[0033] FIG. 9 is a schematic diagram of an electronic price-tag communication system according to an embodiment of the present disclosure.

[0034] FIG. 10 is a block diagram of a communication apparatus according to an embodiment of the present disclosure.

DETAILED DESCRIPTION

[0035] The disclosure will now be described more specifically with reference to the following embodiments. It is to be noted that the following descriptions of some embodiments are presented herein for purpose of illustration and description only. It is not intended to be exhaustive or to be limited to the precise form disclosed.

[0036] Accordingly, the present disclosure provides, *inter alia*, a wireless communication method, a communication apparatus utilizing differential spatial modulation (DSM) without need of channel transmission estimation, that possesses advantages with simplified system processing and enhanced system reliability for data transmission substantially to obviate one or more of the problems due to limitations of the related art. For example, the method of the present disclosure can be applied in an electronic price-tag updating system.

[0037] In one aspect, a wireless communication method is provided. Optionally, the wireless communication method is implemented thorough a wireless communication system illustrated in FIG. 1 as an example. The method is shown by a flow chart shown in FIG. 2 based on the wireless communication system shown in FIG. 1. Referring to FIG. 1, the wireless communication system is configured to receive a series of input data bits that are subjected for wirelessly transmitting via a transmitter to a receiver in the communication system. Optionally, the series of input data bits include information generated in a server device which is associated with the transmitter configured to transmit the input data bits in terms of multiple transmission symbols that are processed before transmission via an

activated one of multiple transmitting antennas. The data processing operation of the input data bits includes encoding the input data bits to coded bits via an encoder based on a certain encoding scheme and modulating the coded bits via a modulator according to a certain modulation scheme. Optionally, a differential spatial modulation scheme is used. Optionally, the wireless transmission is achieved through one of multiple channels controlled by a channel transmission matrix. For example, Multiple-Input Multiple-Output (MIMO) technology has been widely applied with relative high diversity gain and multiplexing gain in wireless communication system in which multiple antennas are used at both a transmitter and a receiver of the wireless communication system. The receiver is part of a user device configured to receive the multiple reception symbols wirelessly via at least one receiving antenna. The multiple reception symbols are related to the multiple transmission symbols processed through the channel transmission matrix plus certain channel noises. The multiple reception symbols are then demodulated by a demodulator to obtain demodulated information bits and decoded by a decoder/detector to generate decoded symbols, from which an output data bit can be deduced.

[0038] Optionally, the transmitter side and the receiver side of the wireless communication system can be switched in positions, i.e., the receiver can include multiple antennas configured to transmit signals and the transmitter also can include multiple antennas configured to receive the signals from the receiver.

[0039] Referring to FIG. 2, in the embodiment, the method includes receiving a series of input data bits in a current timeslot by a transmitter of the wireless communication system. The method further includes a step of encoding the input data bits with a cross-Gray coding scheme to obtain coded information bits. Optionally, the input data bits can be encoded via various encoding schemes. Optionally, the input data bits can be encoded using Gray encoding scheme. In the embodiment, the input data bits are encoded using Cross-Gray encoding scheme, enhancing encoding efficiency for subsequent differential spatial modulation operation. The cross-Gray encoding scheme can be achieved, for example, on an input bits sequence $\{p_1, p_2, p_3, \dots, p_{n-1}, p_n\}$. The encoding is performed by inserting p_n every other bit from left to right or from right to left of a bit sequence $\{p_1, p_2, p_3, \dots, p_{n-1}\}$ to obtain coded bit sequence. In an example, the input data bits are formed by a sequence of binary digits 0 and 1. Any two neighboring digits in the coded bit sequence, only two are different. Inserting p_n from left to right every other digit into a bit sequence $\{p_1, p_2, p_3, \dots, p_{n-1}\}$ leads to a coded bit sequence $\{p_n, p_1, p_n, p_2, p_n, p_3, \dots, p_n, p_{n-1}\}$. Inserting p_n from right to left every

other digit into a bit sequence $\{p_1, p_2, p_3, \dots, p_{n-1}\}$ leads to another coded bit sequence $\{p_1, p_n, p_2, p_n, p_3, \dots, p_n, p_{n-1}, p_n\}$. Cross-Gray encoding scheme changes a length of the bit sequence with a simple encoding rule, enhancing encoding efficiency comparing to traditional gray encoding scheme. Correspondingly, a receiver of the wireless communication system can perform a decoding operation from left to right or from right to left according to a same manner.

[0040] Referring to FIG. 2, the method additionally includes a step of mapping the coded information bits to obtain respective multiple transmission symbols X_t for the current timeslot in a constellation diagram. In the embodiment, the step of mapping the coded information bits to a constellation diagram includes performing a modulation operation to the coded information bits to obtain modulated bits in terms of multiple transmission symbols X_t in the constellation diagram. Optionally, the modulation operation includes one selected from Quadrature Amplitude Modulation (QAM), Phase Shift Keying (SK) or Amplitude-Phase Shift Keying (APSK) modulation techniques. For example, the symbols are encoded in the difference in phase between successive sample information bits, this is called differential phase-shift keying (DPSK). A convenient method to represent PSK schemes is on a constellation diagram. This shows the points in the complex plane where, in this context, the real and imaginary axes are termed the in-phase and quadrature axes respectively due to their 90° separation. Such a representation on perpendicular axes lends itself to straightforward implementation. The amplitude of each point along the in-phase axis is used to modulate a cosine (or sine) wave and the amplitude along the quadrature axis to modulate a sine (or cosine) wave. For example, BPSK uses two phases which are separated by 180° and so can also be termed 2-PSK. For example, QPSK uses four points on the constellation diagram, equi-spaced around a circle. In the constellation diagram each symbol X is a complex number having a real portion X^R and an imaginary portion X^I .

[0041] Optionally, if the cross-Gray coding scheme is used only on the transmitter of the wireless communication system, a higher error rate may be caused. For example, the transmitter transmits symbols $(0+j)$ and $(1+0j)$ (where j is the imaginary part symbol). After cross-Gray coding, two different symbols $(1+j)$ and $(0+0j)$ are obtained with corresponding real part symbol being crossed on the constellation diagram. In this case, it results in one of the transmitting antennas to transmit a symbol $(0+0j)$, corresponding to 0 for both the real part and the imaginary part. Thus, the antenna has no corresponding transmission information to transmit, causing a large error in the encoding process. Additionally, after the

transmission symbols are encoded via the cross-Gray coding scheme, the Euclidean distance of the transmission symbols also changes, causing reliability of the communication system to drop.

[0042] Accordingly, a rotation coordinates cross-Gray encoding scheme is adopted. In particular, after encoding to obtain the coded information bits, the mapping of the coded information bits to the constellation diagram leads to multiple initial constellation symbols X_t' of the current timeslot at multiple constellation nodes with coordinates of (i, j) . In this case, $X_t' = X_{ij}^R + X_{ij}^I$, wherein X_{ij}^R is a real part of and X_{ij}^I is an imaginary part of a respective one symbol $X_t'(i, j)$ at the node (i, j) in the constellation diagram. Then, a rotation operation is performed to rotate the multiple initial constellation symbols X_t' by θ degree to obtain the multiple transmission symbols X_t as

$$X_t = \begin{bmatrix} \cos \theta & \sin \theta \\ -\sin \theta & \cos \theta \end{bmatrix} \begin{bmatrix} X_{ij}^R \\ X_{ij}^I \end{bmatrix},$$

where $0^\circ < \theta < 360^\circ$ and is different per usage of different modulation scheme during the constellation mapping operation. Optionally, a simulation is performed and verified by experiment to select an optimum value of θ to determine final transmission symbol X_t to reduce error-bit rate. In some embodiments, nPSK modulation scheme is employed to modulate coded information bits through the constellation mapping and rotation. A spectral efficiency at the transmitter can be given as $m_{DSM} = \frac{1}{n_t} \log_2(n_t!) + n$, where n_t is the number of transmitting antennas and n is the order of the nPSK modulation scheme.

[0043] Referring to FIG. 2, the method additionally includes a step of converting the multiple transmission symbols X_t to generate a space-time matrix S_t of the current timeslot by incorporating spatial bits associated with orders of respective transmitting antennas based on a space-time matrix S_{t-1} of a previous timeslot. In the embodiment, the differential spatial modulation operation in the wireless communication system introduces a space-time field in which the transmission symbol X is converted to a space-time matrix S with dimensions of $n_t \times n_t$ with each element $S(m, t)$ of the space-time matrix represents a transmission symbol being transmitted in time t within the timeslot by the m -th antenna of the n_t transmitting antennas in the transmitter. Each element of the space-time matrix S becomes a to-be-transmitted symbol by the transmitter at a specific time using one activated transmitting antenna during the current timeslot. The method includes a step of transmitting a respective

one of elements in the space-time matrix S_t using a respective one transmitting antenna being activated.

[0044] For example, a space-time matrix $S = \begin{bmatrix} S_{11} & 0 \\ 0 & S_{22} \end{bmatrix}$ representing two transmission symbols S_{11} and S_{22} respectively transmitted by a 1-st and a 2-nd transmitting antenna during 1-st time and 2-nd time. Other elements being equal to 0 indicate that other transmitting antennas transmit no symbols. In an embodiment, the space-time matrix S is obtained by incorporating spatial bits information associated with orders of transmitting antennas being activated for transmission through wireless channels. The space-time matrix S must meet two following conditions: 1) every column of the space-time matrix S only has one element (effectively) so that every time it activates one transmitting antennas; 2) every row of the space-time matrix S has one element (effectively) so that one transmitting antenna must be activated only once for one time during the timeslot.

[0045] FIG. 3 is schematic diagram of encoded spatial bits corresponding to arrangements of transmitting antennas according to an embodiment of the present disclosure. The spatial bit information is represented respectively in real part and imaginary part of the transmission symbol corresponding to orders of the transmitting antennas in the transmitter. In a case that there are two transmitting antennas in the transmitter, the mapping order of the antennas is 1, 2 corresponds to a spatial bit of 0; the mapping order of the antennas is 2, 1 corresponds to another spatial bit of 1. Referring to FIG. 3, the number of transmitting antennas is $n_t = 4$. In this case, spatial bits can adopt at least 8 codes to represent the four transmitting antennas. Extra 4 codes shown in FIG. 3 are discarded. Diversity gain is significantly enhanced.

[0046] FIG. 4 is a table of using BPSK modulation in differential spatial modulation (DSM) mapping according to an embodiment of the present disclosure. The Input data bit may be encoded information bit after performing encoding operation via cross-Gray encoding scheme. Two transmitting antennas are involved, denoted by serial number #1 and #2, respectively. BPSK modulation scheme is employed in this case. For example, when activated antenna is in order of (1, 2) with corresponding spatial bit of 0. If the to-be-transmitted space-time matrix is $\begin{bmatrix} +1 & 0 \\ 0 & +1 \end{bmatrix}$, the BPSK modulated bit is 11. Correspondingly, the transmitted information bit will be 011.

[0047] In an embodiment, the space-time matrix S_t of a current timeslot is obtained by performing a convolution operation of the multiple transmission symbols X_t for the current

timeslot with the space-time matrix S_{t-1} generated in the previous timeslot. Referring to FIG. 1, a channel model is needed to properly assess a multi-input multi-output channel for the wireless communication system containing n_t number of transmitting antennas and n_r number of receiving antennas, wherein $n_t = n_r = M$. Each receiving antenna receives not only the direct transmission symbol intended for it, but also receives a fraction of signal from other propagation paths. The channel response is expressed as a channel transmission matrix H with dimension of $(n_r \times n_t)$. For example, a direct path formed between antenna 1 at the transmitter and the antenna 1 at the receiver is represented by the channel response as an element h_{11} . The channel response of the path formed between antenna 1 in the transmitter and antenna 2 in the receiver is expressed as another element h_{21} and so on.

[0048] In the embodiment, a channel transmission matrix H_t for the current timeslot needs to be estimated based on a H_{t-1} for a previous timeslot, which is feedback from a receiver of the wireless communication system that is linked through channels between n_r number of receiving antennas and n_t number of transmitting antennas. Optionally, the channels are access points based on an additive white Gaussian noise (AWGN) model. The modulation operation of the coded information bits (mapped to multiple transmission symbols X_t through the constellation mapping operation and coordinates rotation operation) at the transmitter can be performed without need of the channel transmission state of the current timeslot, thereby simplifying system processing on the transmission data and enhancing reliability of data transmission through the wireless communication system. Specifically, the step of modulating the coded information bits includes estimating a channel transmission matrix H_t of the current timeslot, $H_t = Y_{t-1} X_t - N_{t-1} X_t$, based on multiple reception symbols Y_{t-1} received in the previous timeslot by a receiver of the wireless communication system, $Y_{t-1} = H_{t-1} S_{t-1} + N_{t-1}$, where H_{t-1} is a channel transmission matrix of the previous timeslot and N_{t-1} is a noise vector in the previous timeslot. Referring to FIG. 2, the step of transmitting a respective one of elements in the space-time matrix S_t includes activating a respective one transmitting antenna for transmitting the respective one to-be-transmitted information bit to a respective one receiving antenna based on the estimated channel transmission matrix.

[0049] Both the multiple transmission symbols X_t and channel transmission matrix H_t contain complex elements that describe both the amplitude and phase variations of the coded information bits and the channel link between the transmitter and the receiver of the wireless communication system. In a specific embodiment, the modulation operation at the transmitter side of the wireless communication system further includes converting both the multiple

transmission symbols X_t and the channel transmission matrix H_t from a complex field to a real field and performing an orthogonal triangulation (QR) decomposition to the channel transmission matrix H_t to obtain a QR-decomposed channel transmission matrix that is used for transmitting multiple transmission symbols during the current timeslot. The QR decomposition of the channel transmission matrix can be performed before or after it is converted from the complex field to the real field. When the above modulation operation to convert both the transmission symbols and channel transmission matrix from complex field to real field is performed at the transmitter side of the wireless communication system, the decoding complexity at the receiver side of the wireless communication system can be reduced.

[0050] FIG. 5 shows a flow chart of another wireless communication method according to an embodiment of the present disclosure. Referring to FIG. 1 and FIG. 5, the wireless communication method includes transmitting a respective one of elements in a space-time matrix S_t using an activated one of n_t number of transmitting antennas of the wireless communication system through respective one of channels based on an additive white Gaussian noise (AWGN) model. X_1 represents a first transmission symbol in the constellation diagram. X_M represents a M -th transmission symbol in the constellation diagram. In an example, $1 \leq M \leq n_r$. n_r is the number of receiving antennas in the receiver of the wireless communication system. The method further includes a step of receiving multiple reception symbols Y_t respectively by n_r number of receiving antennas of the wireless communication system, where $Y_t = H_t S_t + N_t$. H_t is a channel transmission matrix at a current timeslot and is estimated from multiple symbols Y_{t-1} received during a previous timeslot by the receiver via a relationship of $Y_{t-1} X_t - N_{t-1} X_t$. N_t is a transmission noise vector in the current timeslot based on the AWGN model. N_{t-1} is a transmission noise vector in the previous timeslot.

[0051] Referring to FIG. 5, the method further includes a step of demodulating the multiple reception symbols Y_t to obtain demodulated information bits. In the embodiment, the receiver of the wireless communication system does not need information of wireless channel state information through estimation of the channel transmission matrix of the current timeslot. Instead, the demodulation can be performed based on channel transmission matrix obtained for the previous timeslot.

[0052] Additionally, referring to FIG. 5, the method includes another step of decoding a respective one of the demodulated information bits to obtain a respective one decoded constellation symbol. Optionally, the wireless communication system can adopt various different decoding algorithms to decode the demodulated information bits. For example, maximum likelihood detection (ML) algorithm is used. In another example, sphere decoding detection (SD) algorithm is used. The ML algorithm is to perform a complete searching through all grids in the constellation diagram to detect the transmission symbols. Its computational complexity grows exponentially with the increase in the number of transmitting antennas. The sphere decoding detection (SD) algorithm is applied to limit a range of searching space under a foundation of the ML algorithm by limiting numbers of grids to be searched.

[0053] In a preferred embodiment, an improved sphere decoding detection (SD) algorithm is provided to reduce calculation complexity in the detection process. In particular, each constellation grid is calculated through multiple layers within a sphere with a given radius and the search of transmission symbols is performed from bottom up in the sphere. When a layer associated with a grid currently being searched is beyond the radius of the sphere, the grid is then discarded. Instead, simply searching for the symbol on a grid with minimum Euclidean distance as the symbol for decoding.

[0054] In the embodiment, decoding scheme for a respective one of the demodulated information bits includes a decoding operation performed via a sphere decoding detection algorithm to obtain corresponding spatial bits or demodulated data bits in the decoded constellation symbols.

[0055] In the embodiment, the decoding scheme includes a receiver-centric sphere decoding detection algorithm configured to decode the demodulated information bits to obtain decoded constellation symbols independent from a channel transmission matrix of the current timeslot.

[0056] In a specific embodiment, the decoded constellation symbols $\hat{X}_{DSM}^{Rx-SD}$ obtained by using the receiver-centric sphere decoding detection algorithm are represented by

$$\begin{aligned} [\hat{X}_{DSM}^{Rx-SD}] &= \underset{X_t = X_{R,t} + jX_{I,t}}{\operatorname{argmin}} \{ \|Y_t - Y_{t-1}X_t\|^2 \leq C_R^2 \} \\ &= \underset{X_t = X_{R,t} + jX_{I,t}}{\operatorname{argmax}} \operatorname{trace} \{ (Y_t - Y_{t-1}X_t)^H (Y_t - Y_{t-1}X_t) \leq C_R^2 \}_t \end{aligned}$$

$$= \underset{S \in X_t}{\operatorname{argmax}} \operatorname{trace}\{Re(Y_t^H - Y_{t-1}X_t) \leq C_R^2\},$$

where $\operatorname{argmax}\operatorname{trace}\{.\}$ is to output an argmax value within a search radius C_R for the current timeslot, Y_t^H are conjugate transposition of multiple reception symbols Y_t respectively received during current timeslot by n_r number of antennas in the receiver of the wireless communication system based on transmission symbol X_t transmitted during the current timeslot. Y_{t-1} is reception symbols received in a previous timeslot. $\max Re(Y_t^H - Y_{t-1}X_t) = \min(Y_t - Y_{t-1}X_t)^H(Y_t - Y_{t-1}X_t)$.

[0057] As shown above, based on the receiver-centric sphere decoding detection algorithm the receiver side of the wireless communication system can demodulate and decode the transmitted information bits to obtain decoded symbol without need to know information about the wireless channel transmission state information.

[0058] In another specific embodiment, the decoding scheme includes a transmitter-centric sphere decoding detection algorithm configured to decode the demodulated information bits to obtain decoded constellation symbols. Before performing the decoding operation, two following steps are executed at the transmitter side of the wireless communication system: 1) a step includes converting both the multiple transmission symbols X_t and an estimated channel transmission matrix H_t from a complex field to a real field; 2) and a second step includes performing an orthogonal triangulation decomposition to the estimated channel transmission matrix H_t . Based on the QR decomposition analysis on the estimated channel transmission matrix and upper-triangular characteristics of R matrix, the constellation grids at upper layer are made to be sequentially dependent to grids in lower layers. This reduces number of elements in the channel transmission matrix and reduces calculation complexity. Then, the transmitter side further execute steps of converting the multiple transmission symbols X_t to a space-time matrix S_t and transmitting an information bit made by a respective one of elements in the space-time matrix S_t using a respective activated transmitter antenna. After the receiver receives the information bits in terms of multiple reception symbols $Y_t = H_t S_t + N_t$ based on which demodulated information bits are obtained, the transmitter-centric sphere decoding detection algorithm is executed to decode the demodulated information bits to obtain decoded constellation symbols.

[0059] In the specific embodiment, the decoded constellation symbols $\hat{X}_{DSM}^{Tx-SD}$ obtained by using the transmitter-centric sphere decoding detection algorithm are represented by

$$\begin{aligned}
[\hat{X}_{DSM}^{Tx-SD}] &= \underset{X_t=X_{R,t}+jX_{I,t}}{\operatorname{argmin}} \{ \|Q^H \bar{Y}_t - Q^H \bar{Y}_{t-1} \bar{X}_t\|^2 \leq C_Q^2 \} \\
&= \underset{\bar{X} \in O_c}{\operatorname{argmin}} \{ \|\bar{Y}_t^Q - R \bar{X}_t\|^2 \leq C_Q^2 \} \\
&= \bar{X},
\end{aligned}$$

wherein $\operatorname{argmin}\{.\}$ is a function for obtaining a minimum value in a group O_c of $\bar{X}$ within a search radius C_Q for the current timeslot, $\bar{Y}_t^Q$ represents multiple reception symbols Y_t left-multiplying a positive definite matrix Q ,

$$\begin{aligned}
\bar{Y}_t &= [\operatorname{Re}(Y_t), \operatorname{Im}(Y_t)]^T, \\
R &= \begin{bmatrix} \operatorname{Re}(Q^H \bar{Y}_{t-1}), & -\operatorname{Im}(Q^H \bar{Y}_{t-1}) \\ \operatorname{Re}(Q^H \bar{Y}_{t-1}), & \operatorname{Im}(Q^H \bar{Y}_{t-1}) \end{bmatrix}, \\
\bar{X}_t &= [\operatorname{Re}(\bar{X}_t^T), \operatorname{Im}(\bar{X}_t^T)]^T;
\end{aligned}$$

[0060] Here $\operatorname{Re}(\cdot)$ represent real part of the matrix and $\operatorname{Im}(\cdot)$ represents imaginary part of the matrix. Under the transmitter-centric sphere decoding detection algorithm, every layer is updated with an updated searching radius C_Q . After the conversion to real field, $\bar{Y}_t$ is changed to a real matrix with a dimension of $2n_r \times 2n_t$. R is changed to a real matrix with a dimension of $2n_t \times 2n_r$. $\bar{X}_t$ is changed to a real matrix with a dimension of $2n_t \times 1$. Even though the dimensions of the channel transmission matrix have increased, but calculation volume during the process of decoding the demodulated information still becomes lighter since both the transmission and reception symbols are all represented by real matrices. And this transformation does not change the system transmission reliability or affect error-bit rate.

[0061] In the embodiment, the estimated channel transmission matrix is subjected a QR decomposition analysis for two conditions:

$$Q^H \bar{Y}_{t-1} = QR = \begin{cases} [Q_1[2n_r \times 2n_t] \quad Q_2[2n_r \times 2(n_r - n_t)]] \begin{bmatrix} R_1[2n_t \times 2n_t] \\ 0[2(n_r - n_t) \times 2n_t] \end{bmatrix} & n_r \geq n_t, \\ Q_1[2n_r \times 2n_r] \quad [R_1[2n_r \times 2n_r] \quad R_2[2n_r \times 2(n_t - n_r)]] & n_r < n_t \end{cases},$$

where Q^H is a conjugate transposition of matrix Q , $Q_1 Q_2 = Q$, $R_1 R_2 = R$; n_r represents numbers of receiving antennas, and n_t represent numbers of transmitting antennas. Under the condition of $n_r < n_t$, matrix Q_2 is a null matrix so that it is not shown in above formula. Thus, $Q = Q_1$.

[0062] In an example for a case with two transmitting antennas ($n_t = 2$), a search scheme for every layer is shown in FIG. 6 in a differential spatial modulation system adopting, e.g., a BPSK modulation scheme. For the transmitted information bit 000 and 001, the spatial bit is

the same during the search process. For the transmitted information bit 000 and 100, the modulated bit is the same. In the decoding operation of using either receiver-centric sphere decoding detection algorithm or transmitter-centric sphere decoding detection algorithm, three searches are conducted, yet two of them are repeated searches.

[0063] In another specific embodiment, a “tree”-branching search scheme is introduced to be associated with the decoding operation employing the transmitter-centric sphere decoding algorithm to further reduce number of searches and calculation complexity. Optionally, decoding a respective one of the demodulated information bits includes decoding the demodulated information bit of the current timeslot to obtain an output data bit containing a spatial bit and/or modulated bit, and storing the output data bit, if the spatial bit and/or modulated bit in a to-be-transmitted information bit of the current timeslot is different from a spatial bit and/or modulated bit in a to-be-transmitted information bit of a previous timeslot. Optionally, decoding a respective one of the demodulated information bits includes obtaining and storing an output data bit associated with the to-be-transmitted information bit of the previous timeslot to be the output data bit for the current timeslot, if the spatial bit and/or modulated bit in the to-be-transmitted information bit of the current timeslot is same as a spatial bit and/or modulated bit in the to-be-transmitted information bit of the previous timeslot.

[0064] For example, in a case there are four transmitting antennas ($n_t = 4$), a searching process using a conventional sphere decoding detection algorithm versus an improved tree-branching sphere decoding detection algorithm is shown in FIG. 7 and FIG. 8 in a differential spatial modulation system adopting BPSK modulation scheme. Accordingly, by using the tree-branching transmitter-centric sphere decoding detection algorithm the number of calculations is substantially reduced. For searching a grid under conventional sphere decoding detection algorithm, total number of calculations is $16 \times 3 = 48$. While for searching a grid under the tree-branching transmitter-centric sphere decoding detection algorithm, total number of calculations becomes $(2 + 4 \times 2) \times 2 = 20$, being reduced by more than half of original number.

[0065] In an embodiment under the tree-branching transmitter-centric sphere decoding detection algorithm, a shortest searching path for searching a grid is defined as a minimum Euclidean distance from the grid to a reception symbol $\bar{Y}_t$ after conducting a mapping

operation to the elements at grids of each layer through a upper-triangular matrix $\mathbf{R}$. The shortest searching path is represented by

$$\hat{\mathbf{T}} = \arg \min_{\mathbf{T}_i \in \text{Tree}} \left\| \begin{bmatrix} \mathbf{Q}_1^H \\ \mathbf{Q}_2^H \end{bmatrix} \bar{\mathbf{Y}}_t - \begin{bmatrix} \mathbf{R}_1 \\ \mathbf{0} \end{bmatrix} \times \mathbf{T}_i \right\|^2$$

$$\hat{\mathbf{T}} = \arg \min_{\mathbf{T}_i \in \text{Tree}} \left\{ \left\| \mathbf{Q}_1^H \bar{\mathbf{Y}}_t - \mathbf{R} \times \mathbf{T}_i \right\|^2 \leq C_Q^2 - \left\| \mathbf{Q}_2^H \bar{\mathbf{Y}}_t \right\|^2 \right\}$$

where Tree is a group of all searching paths associated with the tree-branching search scheme. By implementing this algorithm for decoding detection, the complexity of calculations is reduced to more than half amount while without affecting reliability of the system. During the decoding detection, the decoding time is substantially reduced and hardware performance requirement by the system can be also relaxed.

[0066] In an alternative aspect, the wireless communication method of the present disclosure can be applicated to different kinds of communication systems. In an example, the wireless communication system utilizing the method of the present disclosure is an electronic price-tag communication system. FIG. 9 shows a schematic diagram of an electronic price-tag communication system. Referring to FIG. 9, a price-tag terminal serves as a transmitter to transmit information of price-tag back to a server. Alternatively, the price-tag terminal also can serve as a receiver to receive information from the server. Both the transmitter and the receiver are linked through wireless access point (AP) terminal for information communication. In some embodiments, differential spatial modulation and cross-Gray encoding scheme are incorporated with constellation symbols with mapping coordinate rotation technique to encode the information bits to obtain to-be-transmitted symbols for transmission from either the server or the price-tag terminal. Optionally, the AP terminal adopting Rayleigh flat fading channels with an estimated channel transmission matrix for transmitting the to-be-transmitted symbols, demodulating the reception symbols, and decoding the demodulated information bits to obtain the originally-modulated bits (plus spatial bits). In some embodiments, the method as disclosed in the present disclosure can effectively enhance diversity gain of the electronic price-tag communication system and secure reliability of data transmission through the communication system.

[0067] In another aspect, the present disclosure provides a wireless communication apparatus. FIG. 10 is a block diagram of a wireless communication apparatus according to an embodiment of the present disclosure. Referring to FIG. 10, the wireless communication apparatus includes an encoder configured to encode the input data bits of a current timeslot with a cross-Gray coding scheme to obtain coded information bits. The wireless communication apparatus further includes a modulator configured to map the coded information bits to obtain respective multiple transmission symbols X_t for the current timeslot in a constellation diagram. The mapping operation includes a rotation operation of an initial constellation symbol X'_t by θ degree within the constellation diagram. Additionally, the wireless communication apparatus includes a processor configured to convert the multiple transmission symbols X_t to generate a space-time matrix S_t of the current timeslot by incorporating spatial bits associated with orders of respective transmitting antennas based on a space-time matrix S_{t-1} of a previous timeslot. The wireless communication apparatus also includes a transmitter configured to activate a respective one of n_t number of transmitting antennas to transmit a respective one of elements in the space-time matrix S_t . Furthermore, the wireless communication apparatus includes a receiver configured to have a respective one of n_r number of receiving antennas to receive respective one of multiple reception symbols $Y_t = H_t S_t + N_t$ based on channel gain defined by a channel transmission matrix H_t . The wireless communication apparatus still includes a demodulator configured to demodulate the multiple reception symbols Y_t to obtain demodulated information bits. Moreover, the wireless communication apparatus includes a decoder configured to decode a respective one of the demodulated information bits to obtain a respective one decoded constellation symbol from which an output data bit can be extracted and stored or transmitted.

[0068] Optionally, the modulator of the wireless communication apparatus includes one of following modulators selected from a Quadrature Amplitude Modulation (QAM) modulator, or a Phase shift Keying (PSK) modulator, or an Amplitude-Phase shift Keying (APSK) modulator to obtain modulated bits in terms of the multiple transmission symbols X_t . The processor of the wireless communication apparatus is configured to perform a convolution operation of the multiple transmission symbols X_t of the current timeslot with the space-time matrix S_{t-1} of the previous timeslot to generate the space-time matrix S_t of the current timeslot. Optionally, the processor includes a memory configured to store a computer-executable program designed to execute multiple steps of the method of operating the wireless communication system and store any coded information bits, perform data-processing

operation and mapping constellation symbols. Optionally, the encoder, the modulator, and the processor are integrated with the transmitter to form a transmission terminal. Optionally, the transmission terminal is a server. Optionally, the transmission terminal is a user device or a field-deployed device.

[0069] Optionally, the decoder of the wireless communication apparatus includes a detector storing a receiver-centric sphere decoding detection algorithm executed to decode demodulated information bits to obtain decoded constellation symbols when the transmitter directly transmits the elements in the space-time matrix S_t of the current timeslot without having the processor to perform extra digital-data operations to the multiple transmission symbols X_t .

[0070] Optionally, the decoder of the wireless communication apparatus includes a detector storing a transmitter-centric sphere decoding detection algorithm executed to decode demodulated information bits to obtain decoded constellation symbols when the transmitter transmits to-be-transmitted information bits after the processor performs extra digital-data operations. Optionally, the detector includes a memory configured to store a computer-executable program which includes the sphere decoding detection algorithm and store any decoded information bits or symbols. The extra operations are performed at the transmitter terminal, including 1) estimating a channel transmission matrix H_t of the current timeslot, $H_t = Y_{t-1} X_t - N_{t-1} X_t$, based on multiple reception symbols Y_{t-1} received in the previous timeslot by a receiver of the wireless communication system, $Y_{t-1} = H_{t-1} S_{t-1} + N_{t-1}$, where H_{t-1} is a channel transmission matrix of the previous timeslot and N_{t-1} is a noise vector in the previous timeslot; 2) converting both the multiple transmission symbols X_t and the channel transmission matrix H_t from a complex field to a real field; and 3) performing an orthogonal triangulation decomposition to the channel transmission matrix H_t .

[0071] Optionally, the demodulator and the decoder are integrated within the receiver to form a receiving terminal. Optionally, the receiving terminal is a field deployed device. Optionally, the receiving terminal is a price-tag device. Optionally, the receiving terminal is also configured to transmit signal/data back to the transmission terminal or server. Optionally, the transmission between the transmission terminal and the receiving terminal is achieved through wireless channels acted as access points.

[0072] The foregoing description of the embodiments of the invention has been presented for purposes of illustration and description. It is not intended to be exhaustive or to limit the

invention to the precise form or to exemplary embodiments disclosed. Accordingly, the foregoing description should be regarded as illustrative rather than restrictive. Obviously, many modifications and variations will be apparent to practitioners skilled in this art. The embodiments are chosen and described in order to explain the principles of the invention and its best mode practical application, thereby to enable persons skilled in the art to understand the invention for various embodiments and with various modifications as are suited to the particular use or implementation contemplated. It is intended that the scope of the invention be defined by the claims appended hereto and their equivalents in which all terms are meant in their broadest reasonable sense unless otherwise indicated. Therefore, the term “the invention”, “the present invention” or the like does not necessarily limit the claim scope to a specific embodiment, and the reference to exemplary embodiments of the invention does not imply a limitation on the invention, and no such limitation is to be inferred. The invention is limited only by the spirit and scope of the appended claims. Moreover, these claims may refer to use “first”, “second”, etc. following with noun or element. Such terms should be understood as a nomenclature and should not be construed as giving the limitation on the number of the elements modified by such nomenclature unless specific number has been given. Any advantages and benefits described may not apply to all embodiments of the invention. It should be appreciated that variations may be made in the embodiments described by persons skilled in the art without departing from the scope of the present invention as defined by the following claims. Moreover, no element and component in the present disclosure is intended to be dedicated to the public regardless of whether the element or component is explicitly recited in the following claims.

WHAT IS CLAIMED IS:

1. A method for operating a wireless communication system for data communication comprising:
 - receiving a series of input data bits in a current timeslot by a transmitter of the wireless communication system;
 - encoding the input data bits with a cross-Gray coding scheme to obtain coded information bits;
 - mapping the coded information bits to respectively obtain multiple transmission symbols X_t for the current timeslot in a constellation diagram, including θ degree rotation within the constellation diagram;
 - converting the multiple transmission symbols X_t to generate a space-time matrix S_t of the current timeslot by incorporating spatial bits associated with orders of respective transmitting antennas based on a space-time matrix S_{t-1} of a previous timeslot; and
 - transmitting a respective one of elements in the space-time matrix S_t using a respective one transmitting antenna being activated.
2. The method of claim 1, wherein encoding the input data bits with the cross-Gray coding scheme comprises:
 - receiving the input data bits including a series of bit-elements of $\{p_1, p_2, p_3, \dots, p_{n-1}, p_n\}$;
 - inserting p_n every other one bit-element in a sub-sequence of $\{p_1, p_2, p_3, \dots, p_{n-1}\}$ either from left to right or from right to left of the input data bits to obtain the coded information bits.
3. The method of claim 1, wherein mapping the coded information bits comprises:
 - mapping the coded information bits to obtain multiple initial constellation symbols X_t' of the current timeslot at multiple constellation nodes (i, j) in the constellation diagram, $X_t' = X_{ij}^R + X_{ij}^I$, wherein X_{ij}^R is a real part of and X_{ij}^I is an imaginary part of a respective one initial constellation symbol $X_{t'(i,j)}$ at a respective one of the multiple constellation nodes (i, j) ;
 - rotating the multiple initial constellation symbols X_t' by θ degree rotation to obtain the multiple transmission symbols X_t as

$$X_t = \begin{bmatrix} \cos \theta & \sin \theta \\ -\sin \theta & \cos \theta \end{bmatrix} \begin{bmatrix} X_{ij}^R \\ X_{ij}^I \end{bmatrix}, \text{ where } 0^\circ < \theta < 360^\circ.$$

4. The method of claim 3, wherein mapping the coded information bits comprises modulating the coded information bits by Quadrature Amplitude Modulation (QAM) protocol, or Phase shift Keying (PSK) protocol, or Amplitude-Phase shift Keying (APSK) protocol to obtain modulated bits in terms of the multiple transmission symbols X_t .

5. The method of claim 4, wherein converting the multiple transmission symbols X_t to generate a space-time matrix S_t of the current timeslot by incorporating spatial bits associated with orders of respective transmitting antennas based on a space-time matrix S_{t-1} of a previous timeslot comprises performing a convolution operation of the multiple transmission symbols X_t for the current timeslot with the space-time matrix S_{t-1} generated in the previous timeslot.

6. The method of claim 5, wherein the space-time matrix S_t of the current timeslot comprises a real matrix with one element per column denoting a to-be-transmitted information bit including a respective one of the modulated bits and a respective one of the spatial bits for activating a respective one transmitting antenna and only one to-be-transmitted information bit per row associated with only one transmitting antenna being activated once in the current timeslot.

7. The method of claim 5, wherein performing a convolution operation comprises:

estimating a channel transmission matrix H_t of the current timeslot, $H_t = Y_{t-1} X_t - N_{t-1} X_t$, based on multiple reception symbols Y_{t-1} received in the previous timeslot by a receiver of the wireless communication system, $Y_{t-1} = H_{t-1} S_{t-1} + N_{t-1}$, where H_{t-1} is a channel transmission matrix of the previous timeslot and N_{t-1} is a noise vector in the previous timeslot;

converting both the multiple transmission symbols X_t and the channel transmission matrix H_t from a complex field to a real field; and

performing an orthogonal triangulation decomposition to the channel transmission matrix H_t .

8. The method of claim 7, wherein transmitting a respective one of elements in the space-time matrix S_t comprises activating a respective one transmitting

antenna for transmitting a respective one to-be-transmitted information bit to a respective one receiving antenna based on an estimated channel transmission matrix.

9. A method for operating a wireless communication system for data communication comprising:

transmitting a respective one of elements in a space-time matrix S_t using an activated one of n_t number of transmitting antennas of the wireless communication system through respective one of channels based on an additive white Gaussian noise (AWGN) model;

receiving multiple reception symbols Y_t respectively by n_r number of receiving antennas of the wireless communication system, wherein $Y_t = H_t S_t + N_t$, H_t is a channel transmission matrix at a current timeslot with a dimension of $(n_r \times n_t)$ and respective elements representing channel gains associated with respective n_r number of receiving antennas and n_t number of transmitting antennas and H_t is estimated from multiple symbols Y_{t-1} received during a previous timeslot by a receiver via $Y_{t-1} X_t - N_{t-1} X_t$, the space-time matrix S_t is generated by the transmitter from multiple transmission symbols X_t in a constellation diagram mapped from coded information bits for the current timeslot, N_t is a transmission noise vector in the current timeslot based on the AWGN model, N_{t-1} is a transmission noise vector in the previous timeslot;

demodulating the multiple reception symbols Y_t to obtain demodulated information bits; and

decoding a respective one of the demodulated information bits to obtain a respective one decoded constellation symbol.

10. The method of claim 9, wherein decoding a respective one of the demodulated information bits comprises decoding by a sphere decoding detection algorithm to obtain corresponding spatial bits or demodulated data bits in decoded constellation symbols.

11. The method of claim 10, wherein decoding comprises using a receiver-centric sphere decoding detection algorithm to decode the demodulated information bits to obtain decoded constellation symbols independent from a channel transmission matrix of the current timeslot.

12. The method of claim 11, wherein the decoded constellation symbols are represented by

$$[\hat{X}_{DSM}^{Rx-SD}] = \operatorname{argmax}_{s \in X_t} \{ \operatorname{Re}(Y_t^H - Y_{t-1} X_t) \leq C_R^2 \},$$

wherein $\operatorname{argmax}\{.\}$ is to output an argmax value within a search radius C_R for the current timeslot, Y_t^H are conjugate transposition of multiple reception symbols Y_t respectively received in the current timeslot by n_r number of antennas in the receiver of the wireless communication system, Y_{t-1} is reception symbols received in a previous timeslot.

13. The method of claim 10, further comprising:

converting both the multiple transmission symbols X_t in a transmitter of the wireless communication system and an estimated channel transmission matrix H_t from a complex field to a real field;

performing an orthogonal triangulation decomposition to the estimated channel transmission matrix H_t ;

converting the multiple transmission symbols X_t to a space-time matrix S_t ;

transmitting an information bit made by a respective one of elements in the space-time matrix S_t using a respective activated transmitter antenna; and

decoding the multiple reception symbols $Y_t = H_t S_t + N_t$ received by the receiver based on a transmitter-centric sphere decoding detection algorithm to decode the demodulated information bits to obtain decoded constellation symbols.

14. The method of claim 13, wherein the decoded constellation symbols are represented by

$$[\hat{X}_{DSM}^{Tx-SD}] = \operatorname{argmin}_{\bar{X} \in O_c} \{ \|\bar{Y}_t^Q - R \bar{X}_t\|^2 \leq C_R^2 \},$$

wherein $\operatorname{argmin}\{.\}$ is a function for obtaining a minimum value in a group O_c of $\bar{X}$ within a search radius C_R for the current timeslot, $\bar{Y}_t^Q$ represents multiple reception symbols Y_t left-multiplying a positive definite matrix Q ,

$$\bar{Y}_t = [\operatorname{Re}(Y_t), \operatorname{Im}(Y_t)]^T,$$

$$R = \begin{bmatrix} \operatorname{Re}(Q^H \bar{Y}_{t-1}), & -\operatorname{Im}(Q^H \bar{Y}_{t-1}) \\ \operatorname{Re}(Q^H \bar{Y}_{t-1}), & \operatorname{Im}(Q^H \bar{Y}_{t-1}) \end{bmatrix},$$

$$\bar{X}_t = [\operatorname{Re}(\bar{X}_t^T), \operatorname{Im}(\bar{X}_t^T)]^T,$$

$$Q^H \bar{Y}_{t-1} = QR = \begin{cases} [Q_1[2n_r \times 2n_t] \quad Q_2[2n_r \times 2(n_r - n_t)]] \begin{bmatrix} R_1[2n_t \times 2n_t] \\ 0_{[2(n_r - n_t) \times 2n_t]} \end{bmatrix} & n_r \geq n_t, \\ Q_1[2n_r \times 2n_r] \quad [R_1[2n_r \times 2n_r] \quad R_2[2n_r \times 2(n_t - n_r)]] & n_r < n_t \end{cases},$$

where Q^H is a conjugate transposition of matrix Q , $Q_1 Q_2 = Q$, $R_1 R_2 = R$; n_r represents numbers of receiving antennas, and n_t represent numbers of transmitting antennas.

15. The method of claim 14, wherein decoding the multiple reception symbols Y_t comprises searching through a shortest searching path $\hat{T}$ among a group of searching paths T_i in the constellation diagram to obtain the decoded constellation symbols, wherein the shortest searching path is represented by

$$\hat{T} = \arg \min_{T_i \in Tree} \left\{ \left\| Q_1^H \bar{Y}_t - R \times T_i \right\|^2 \leq C_Q^2 - \left\| Q_2^H \bar{Y}_t \right\|^2 \right\} .$$

16. The method of claim 10, wherein decoding a respective one of the demodulated information bits comprises decoding the demodulated information bit of the current timeslot to obtain an output data bit containing a spatial bit and/or modulated bit, and storing the output data bit, if the spatial bit and/or modulated bit in a to-be-transmitted information bit of the current timeslot is different from a spatial bit and/or modulated bit in a to-be-transmitted information bit of a previous timeslot;

obtaining and storing an output data bit associated with the to-be-transmitted information bit of the previous timeslot to be the output data bit for the current timeslot, if the spatial bit and/or modulated bit in the to-be-transmitted information bit of the current timeslot is same as a spatial bit and/or modulated bit in the to-be-transmitted information bit of the previous timeslot.

17. A wireless communication apparatus comprising:
 an encoder configured to encode input data bits of a current timeslot with a cross-Gray coding scheme to obtain coded information bits;
 a modulator configured to map the coded information bits to respectively obtain multiple transmission symbols X_t for the current timeslot in a constellation diagram, including θ degree rotation within the constellation diagram;
 a processor configured to convert the multiple transmission symbols X_t to generate a space-time matrix S_t of the current timeslot by incorporating spatial bits associated with orders of respective transmitting antennas based on a space-time matrix S_{t-1} of a previous timeslot;
 a transmitter configured to activate a respective one of n_t number of transmitting antennas to transmit a respective one of elements in the space-time matrix S_t ;

a receiver configured to have a respective one of n_r number of receiving antennas to receive a respective one of multiple reception symbols $Y_t = H_t S_t + N_t$ based on channel gain defined by a channel transmission matrix H_t ;

a demodulator configured to demodulate the multiple reception symbols Y_t to obtain demodulated information bits; and

a decoder configured to decode a respective one of the demodulated information bits to obtain a respective one decoded constellation symbol from which an output data bit can be extracted and stored.

18. The wireless communication apparatus of claim 17, wherein the modulator comprises one selected from a Quadrature Amplitude Modulation (QAM) modulator, or a Phase shift Keying (PSK) modulator, or an Amplitude-Phase shift Keying (APSK) modulator to obtain modulated bits in terms of the multiple transmission symbols X_t , and the processor is configured to perform a convolution operation of the multiple transmission symbols X_t of the current timeslot with the space-time matrix S_{t-1} of the previous timeslot to generate the space-time matrix S_t of the current timeslot.

19. The wireless communication apparatus of claim 17, wherein the decoder comprises a detector storing a receiver-centric sphere decoding detection algorithm executed to decode demodulated information bits to obtain decoded constellation symbols when the transmitter directly transmits the elements in the space-time matrix S_t of the current timeslot without having the processor to perform extra digital-data operations to the multiple transmission symbols X_t .

20. The wireless communication apparatus of claim 17, wherein the decoder comprises a detector storing a transmitter-centric sphere decoding detection algorithm executed to decode demodulated information bits to obtain decoded constellation symbols when the transmitter transmits to-be-transmitted information bits after the processor performs extra digital-data operations of:

estimating a channel transmission matrix H_t of the current timeslot, $H_t = Y_{t-1} X_t - N_{t-1} X_t$, based on multiple reception symbols Y_{t-1} received in the previous timeslot by a receiver of the wireless communication apparatus, $Y_{t-1} = H_{t-1} S_{t-1} + N_{t-1}$, where H_{t-1} is a channel transmission matrix of the previous timeslot and N_{t-1} is a noise vector in the previous timeslot;

converting both the multiple transmission symbols X_t and the channel transmission matrix H_t from a complex field to a real field; and

performing an orthogonal triangulation decomposition to the channel transmission matrix H_t .

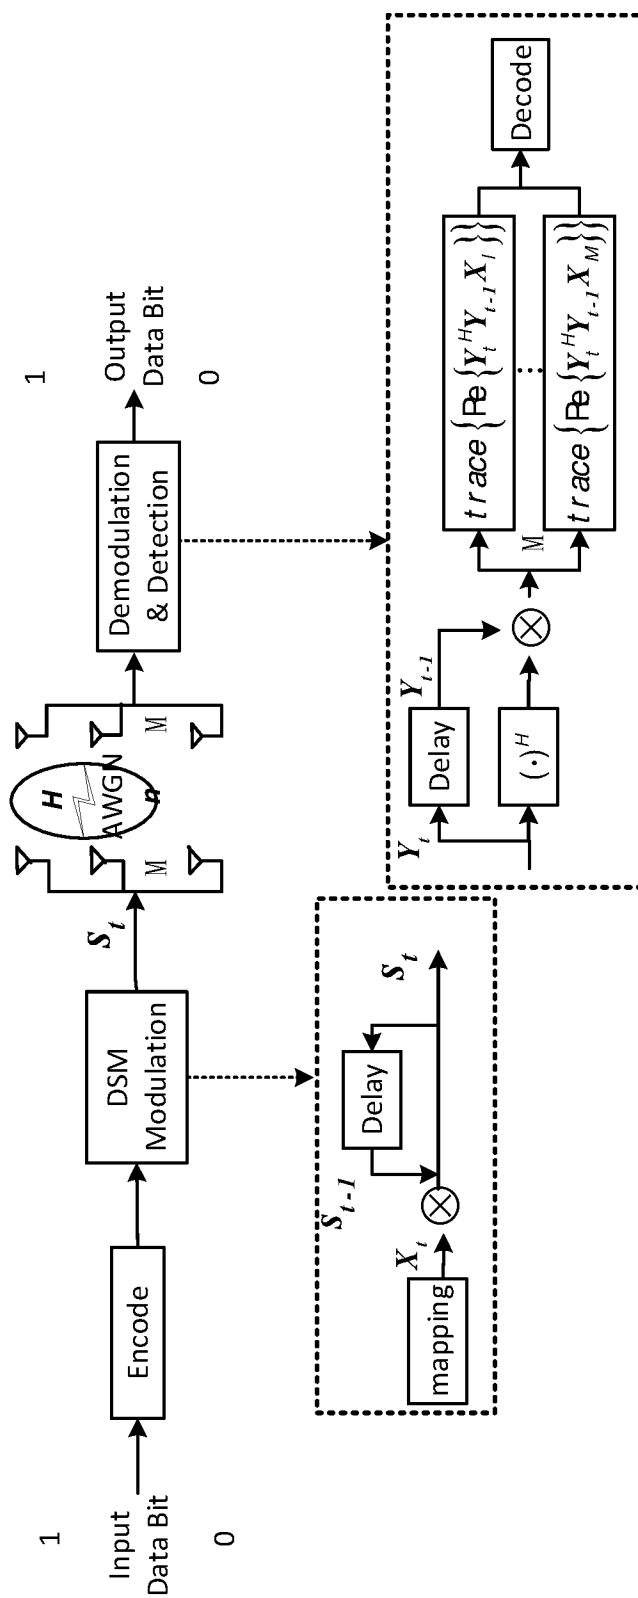


FIG. 1

2/6

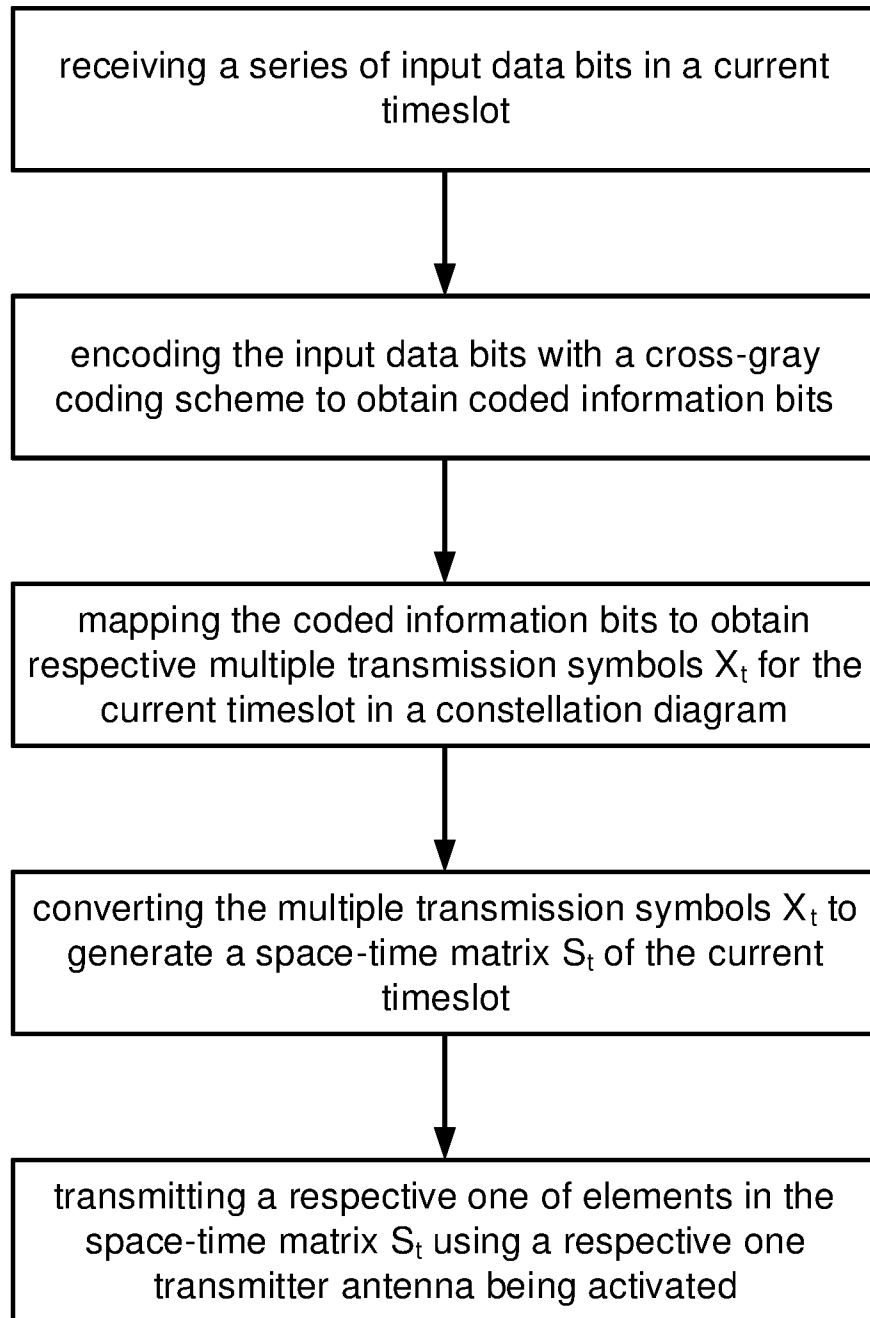


FIG. 2

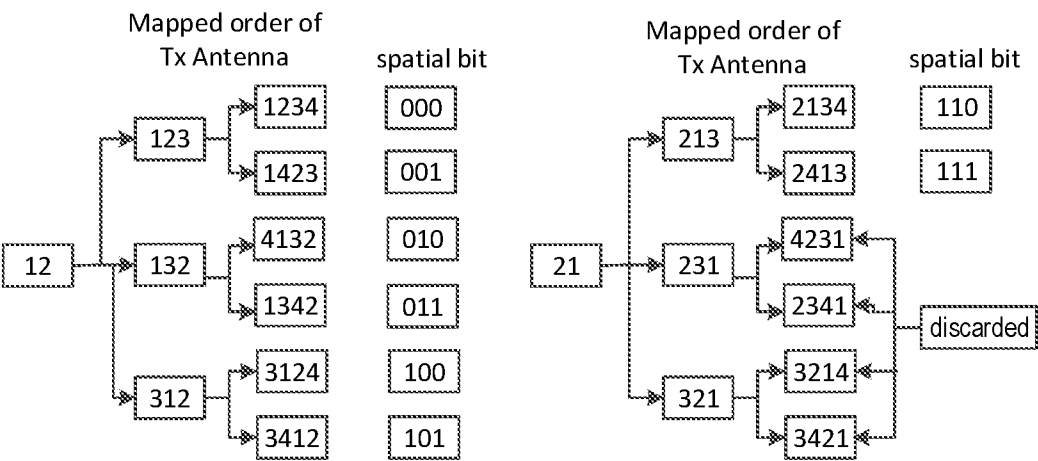


FIG. 3

Input Data Bit	Spatial Bit	Antenna Serial #1	Antenna Serial #2	Modulated Bit	Space-Time Matrix
000	0	1	2	00	$\begin{bmatrix} -1 & 0 \\ 0 & -1 \end{bmatrix}$
001	0	1	2	01	$\begin{bmatrix} -1 & 0 \\ 0 & +1 \end{bmatrix}$
010	0	1	2	10	$\begin{bmatrix} +1 & 0 \\ 0 & -1 \end{bmatrix}$
011	0	1	2	11	$\begin{bmatrix} +1 & 0 \\ 0 & +1 \end{bmatrix}$
100	1	2	1	00	$\begin{bmatrix} -1 & 0 \\ 0 & -1 \end{bmatrix}$
101	1	2	1	01	$\begin{bmatrix} -1 & 0 \\ 0 & +1 \end{bmatrix}$
110	1	2	1	10	$\begin{bmatrix} +1 & 0 \\ 0 & -1 \end{bmatrix}$
111	1	2	1	11	$\begin{bmatrix} +1 & 0 \\ 0 & +1 \end{bmatrix}$

FIG. 4

4/6

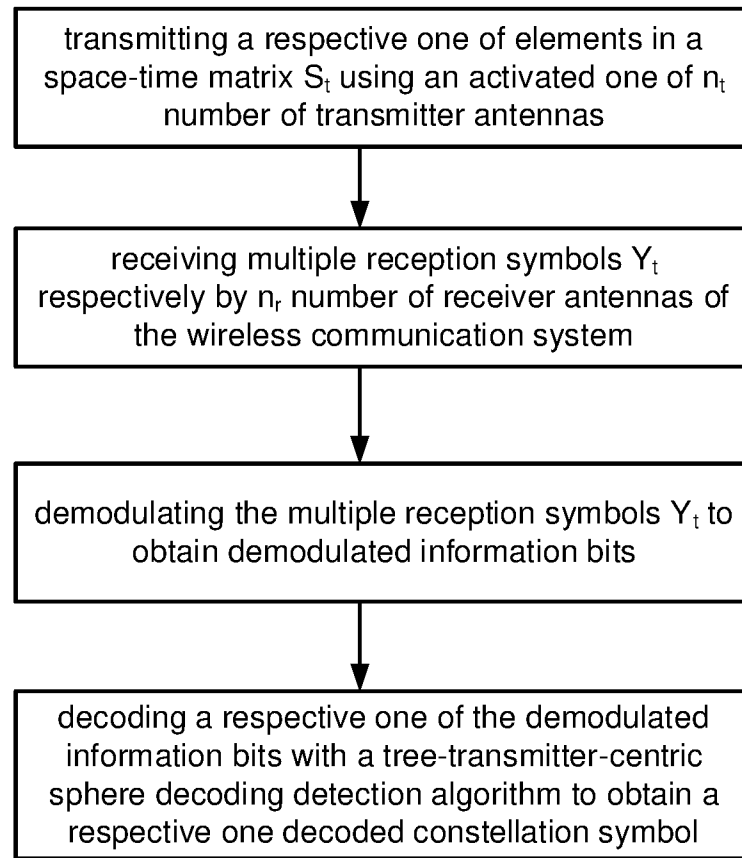


FIG. 5

Tx Info Bit	000	001	010	011	100	101	110	111
Spatial Bit	0	0	0	0	1	1	1	1
DSM Modu Bit	00	01	10	11	00	01	10	11

FIG. 6

5/6

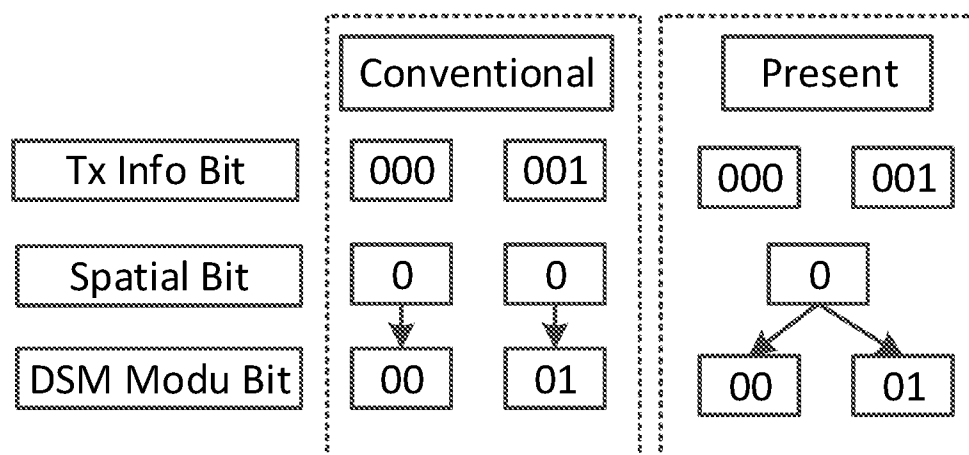


FIG. 7

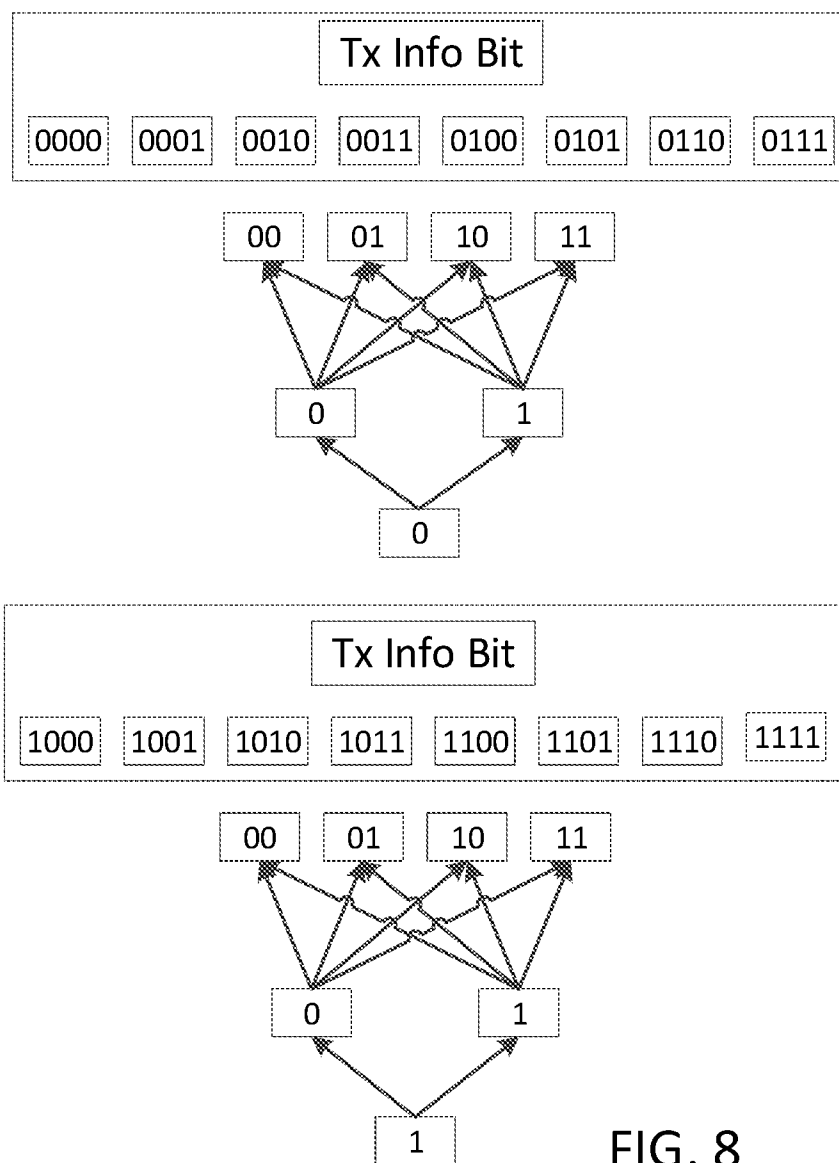


FIG. 8

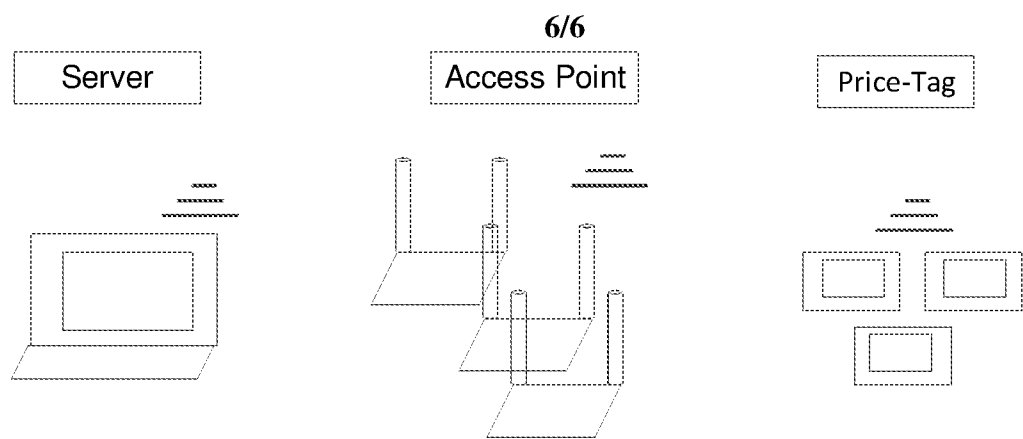


FIG. 9

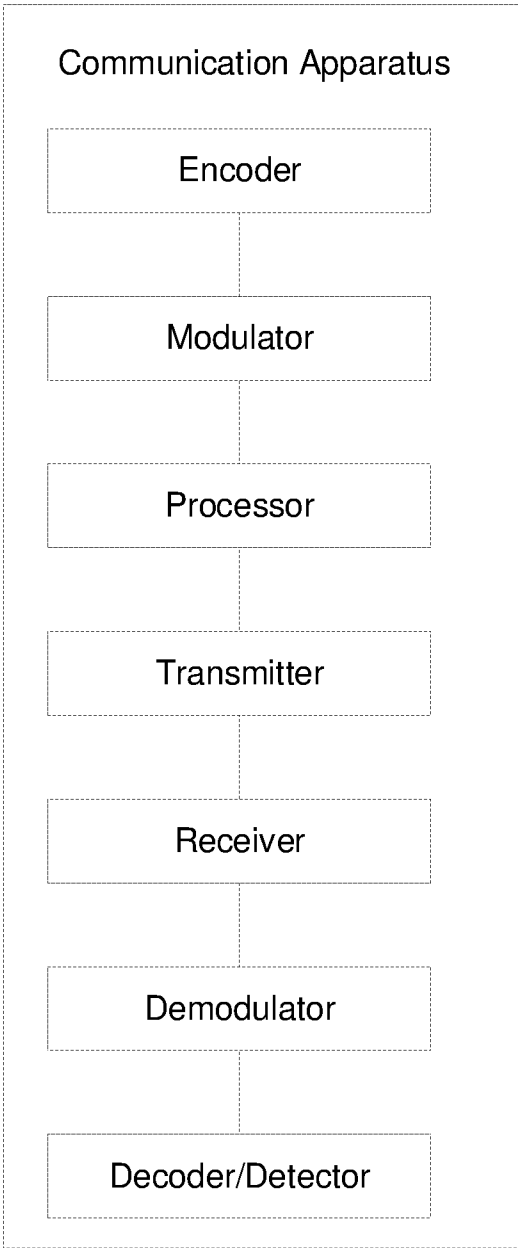


FIG. 10

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2019/123894

A. CLASSIFICATION OF SUBJECT MATTER

H04B 7/0413(2017.01)i; H04L 1/06(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04B H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNPAT,CNKI,EPODOC,WPL,3GPP: MIMO multiple-input multiple-output spatial modulation differential DSM input data cross-Gray encode constellation matrix space-time AWGN channel state

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
PX	CN 109547077 A (CHONGQING BOE WISDOM ELECTRONIC SYSTEM CO., LTD. et al.) 29 March 2019 (2019-03-29) description, paragraphs [0071]-[0188]	1-20
A	CN 107959519 A (BEIJING SAMSUNG COMMUNICATION TECHNOLOGY RESEARCH CO., LTD. et al.) 24 April 2018 (2018-04-24) description, paragraphs [0057]-[0093]	1-20
A	CN 105282085 A (HUAWEI TECHNOLOGIES CO., LTD.) 27 January 2016 (2016-01-27) the whole document	1-20
A	US 2008037673 A1 (AHN, Chang-Wook et al.) 14 February 2008 (2008-02-14) the whole document	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

29 February 2020

Date of mailing of the international search report

06 March 2020

Name and mailing address of the ISA/CN

National Intellectual Property Administration, PRC
6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing
100088
China

Authorized officer

AN,Xiaolan

Facsimile No. (86-10)62019451

Telephone No. 86-(10)-53961732

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2019/123894

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
CN	109547077	A	29 March 2019	None			
CN	107959519	A	24 April 2018	None			
CN	105282085	A	27 January 2016	CN	105282085	B	16 November 2018
US	2008037673	A1	14 February 2008	KR	20080006148	A	16 January 2008
				KR	101009774	B1	19 January 2011
				US	8094743	B2	10 January 2012