

(19) **DANMARK**

(10) **DK/EP 3761565 T3**



(12)

Oversættelse af europæisk patentskrift

Patent- og
Varemærkestyrelsen

-
- (51) Int.Cl.: **H 04 L 41/082 (2022.01)** **H 04 L 41/5051 (2022.01)** **H 04 W 88/08 (2009.01)**
H 04 W 92/04 (2009.01)
- (45) Oversættelsen bekendtgjort den: **2023-03-13**
- (80) Dato for Den Europæiske Patentmyndigheds
bekendtgørelse om meddelelse af patentet: **2022-12-28**
- (86) Europæisk ansøgning nr.: **20183090.8**
- (86) Europæisk indleveringsdag: **2020-06-30**
- (87) Den europæiske ansøgnings publiceringsdag: **2021-01-06**
- (30) Prioritet: **2019-07-04 FI 20195612**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV
MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **Telia Company AB, Stjärntorget 1, 16994 Solna, Sverige**
- (72) Opfinder: **JALKANEN, Tero, Kalliopohjantie 8 B 3, 04300 TUUSULA, Finland**
SARAJISTO, Tomi, Erik Spåren tie 5d 16, 00790 HELSINKI, Finland
- (74) Fuldmægtig i Danmark: **Budde Schou A/S, Dronningens Tværgade 30, 1302 København K, Danmark**
- (54) Benævnelse: **Opdatering af en netværksindretning i et mobilkommunikationsnetværk**
- (56) Fremdragne publikationer:
EP-A1- 2 466 932
EP-A1- 2 750 467
WO-A1-2012/026857
WO-A1-2015/092114
US-A1- 2010 131 628

DESCRIPTION

TECHNICAL FIELD

[0001] The invention concerns in general the technical field of telecommunications. More particularly, the invention concerns a management of network devices.

BACKGROUND

[0002] A complexity in a management of communication networks has increased partly because of a great variety of terminal devices willing to utilize services of the communication networks. Due to specific tasks of the terminal devices the requirements for the services vary a lot. On the other hand, the telecom operators have challenges to meet all the requirements due to technical and commercial reasons. For example, it is not necessarily reasonable to acquire all possible features for all base stations of the communication network if there are no terminal devices e.g. within an area which could utilize certain feature. Hence, the telecom operator shall optimize the features in view of costs when planning the communication network and developing it.

[0003] On the other hand, so-called Software Defined Radio (SDR) concept, or any similar technology, allows optimizing features of a radio device. Such a concept enables moving from the traditional "one radio unit for one frequency and one service" into model where the actual radio part of the base station, or other radio device, would be very slim adaptable node fully configurable by an advanced driver node handling all the necessary intelligence and processing capability.

[0004] An example of a solution for requesting an establishment of a new access network from an access node by a wireless device is disclosed in a document WO 2015/092114 A1.

[0005] Hence, by enabling the capability to update network nodes in accordance with user's needs customer satisfaction may be improved and the investments by the telecom operators may be optimized.

SUMMARY

[0006] The following presents a simplified summary in order to provide basic understanding of some aspects of various invention embodiments. The summary is not an extensive overview of the invention. It is neither intended to identify key or critical elements of the invention nor to delineate the scope of the invention. The following summary merely presents some concepts of the invention in a simplified form as a prelude to a more detailed description of exemplifying

embodiments of the invention.

[0007] An object of the invention is to present a method, a network node, a communication system and a computer program for performing an update procedure of a network device.

[0008] The objects of the invention are reached by a method, a network node, a communication system and a computer program for performing an update procedure of a network device as defined by the respective independent claims.

[0009] According to a first aspect, a method for updating radio access technology related characteristic of a radio access network device is provided, the method, performed by a core network node, comprising: receiving a request of a service applying the radio access technology related characteristic, the request is received from a terminal device through the radio access network device configured to include an identifier of the radio access network device to the request; determining, in response to a detection that the radio access network device does not support the requested service, a capability to update the radio access network device by applying the identifier of the radio access network device in the determining; retrieving, in response to a detection that the radio access network device is updateable, data package to update at least the radio access network device; and delivering the data package to the radio access network device for updating the radio access network device to support the requested radio access technology related characteristic requested by the terminal device.

[0010] For example, the request may be received in a context of an attachment request.

[0011] The data package may be inquired from data storage by the core network node with the identifier of the radio access network device.

[0012] Moreover, the retrieved data package may further comprise data to update the terminal device. For example, the data to update the terminal device may be included in the data package on the basis of one of the following: an identifier representing the terminal device included in the request received from the terminal device; the radio access technology related characteristic applied by the service.

[0013] Still further, at least one predetermined criterion may be set for retrieving the data package. The at least one predetermined criterion may be one of: at least one technical requirement for the data package, at least one commercial requirement of the data package.

[0014] In turn, the radio access technology related characteristic is one of: narrow-band IoT characteristic, a frequency band used for the service, data speed used in the service.

[0015] According to a second aspect, a network node for updating radio access technology related characteristic of a radio access network device is provided, the network node comprising: at least one processor; and at least one memory including computer program code; the at least one memory and the computer program code configured to, with the at least

one processor, cause the network node to: receive a request of a service applying the radio access technology related characteristic from a terminal device through the radio access network device configured to include an identifier of the radio access network device to the request; determine, in response to a detection that the radio access network device does not support the requested service, a capability to update the radio access network device by applying the identifier of the radio access network device in the determining; retrieve, in response to a detection that the radio access network device is updateable, data package to update at least the radio access network device; and deliver the data package to the radio access network device for updating the radio access network device to support the requested radio access technology related characteristic requested by the terminal device.

[0016] For example, the network node may be arranged to receive the request in a context of an attachment request.

[0017] Moreover, the network node may be arranged to inquire the data package from data storage with the identifier of the radio access network device.

[0018] The retrieved data package may further comprise data to update the terminal device. For example, the network node may be arranged to receive the data to update the terminal device, the data to update the terminal device may be included in the data package on the basis of one of the following: an identifier representing the terminal device included in the request received from the terminal device; the radio access technology related characteristic applied by the service.

[0019] Still further, the network node may comprise at least one predetermined criterion set for retrieving the data package. The at least one predetermined criterion may e.g. be one of: at least one technical requirement for the data package, at least one commercial requirement of the data package.

[0020] The radio access technology related characteristic, in turn, may be one of: narrow-band IoT characteristic, a frequency band used for the service, data speed used in the service.

[0021] According to a third aspect, a communication system is provided, the communication system comprising: at least one terminal device; a radio access network device; and a network node as defined according to the second aspect.

[0022] According to a fourth aspect, a computer program embodied on a computer readable medium is provided, the computer program comprising computer executable program code, which code, when executed by at least one processor of a network node, causes the network node to perform the method according to the first aspect.

[0023] The expression "a number of" refers herein to any positive integer starting from one, e.g. to one, two, or three.

[0024] The expression "a plurality of" refers herein to any positive integer starting from two, e.g. to two, three, or four.

[0025] Various exemplifying and non-limiting embodiments of the invention both as to constructions and to methods of operation, together with additional objects and advantages thereof, will be best understood from the following description of specific exemplifying and non-limiting embodiments when read in connection with the accompanying drawings.

[0026] The verbs "to comprise" and "to include" are used in this document as open limitations that neither exclude nor require the existence of unrecited features. The features recited in dependent claims are mutually freely combinable unless otherwise explicitly stated. Furthermore, it is to be understood that the use of "a" or "an", i.e. a singular form, throughout this document does not exclude a plurality.

BRIEF DESCRIPTION OF FIGURES

[0027] The embodiments of the invention are illustrated by way of example, and not by way of limitation, in the figures of the accompanying drawings.

Figure 1 illustrates schematically a communication system suitable for an implementation of the present invention.

Figure 2 illustrates schematically a method according to an example embodiment of the invention.

Figure 3 illustrates schematically signaling between a plurality of entities according to an example embodiment of the invention.

Figure 4 illustrates schematically a core network node according to an example embodiment of the invention.

DESCRIPTION OF THE EXEMPLIFYING EMBODIMENTS

[0028] The specific examples provided in the description given below should not be construed as limiting the scope and/or the applicability of the appended claims. Lists and groups of examples provided in the description given below are not exhaustive unless otherwise explicitly stated.

[0029] Figure 1 illustrates schematically a communication system suitable for an implementation of the present invention. Fundamentally thinking the communication system communication illustrated in Figure 1 comprises a mobile communication network 100

consisting of a core network 110 and a radio access network 130. The core network 110 may be understood as a mobile communication network's core part, which offers numerous services to the subscribers who are interconnected by an access network. Some key functions of the core network 110 is to direct telephone calls as well as take care of overall management of the subscribers. For the purpose of the present invention the core network 130 may comprise a network node called as a core network node 140 arranged to perform operations as will be described in the forthcoming description. In addition to the core network node 140 the core network 130 may comprise further entities in order to perform the typical core network functionalities. Moreover, the radio access network 130, in turn, may be understood as a technology that connects individual devices to other parts of a network through radio connections. Core entities of the radio access network 130 are radio access network devices 120 also called as base stations which are serving terminal devices 190 residing in a service area of a radio access network device 120 in question.

[0030] Still further, the communication system may comprise a communication network 150, such as an Internet. The mobile communication network 100 and the communication network 150 may be arranged to interwork with each other by means of interworking entities. The communication network 150 may host a number of network entities, such as application servers 170 e.g. providing service with respect to one or more task of the terminal device 190 in the communication network 150. For example, the one or more terminal devices 190 may be IoT devices, such as devices for measuring temperature in premises, having a capability to communicate with the mobile communication network 110 which terminal devices 190 are configured to transmit measurement data to an application server 170 residing in the communication network. Additionally, the communication network 150 may host a number of data storages 160 at least some of which may e.g. be accessed from the mobile communication network 100. In some example embodiments at least some of the data storages 160 may be implemented in a context of another network entity, such as the core network node 140.

[0031] Next, at least some aspects of the present invention is described by referring to a method schematically illustrated in Figure 2. As a starting point a terminal device 190, such as an IoT device, may enter an area served by a radio access network device 120. For example, a technician may install the device in a certain location and by switching on the terminal device 190 it may start searching for a radio access network to attach to. At some point of time the terminal device 190 may find a mobile communication network 100 providing a communication channel to a core network 130 of the mobile communication network 100 through the radio access network 110 and attaches to that network. The terminal device 190 may be arranged to establish a request defining a service it prefers to receive at least from the radio access network device 120. Preferences with respect to the service may be defined in a memory of the terminal device 190. A non-limiting example of the preference may e.g. be to receive communication service through so-called narrow-band IoT communication technology in order to save battery life of the terminal device 190 as well as optimize, from the telecom operator perspective, usage of radio frequencies. Hence, the request may be received 210 by a core network device 140. For example, the request may be delivered in a context of an attachment

request which may be generated by the terminal device 190 in response to a detection of a communication network providing communication services within an area of the terminal device 190. According to various embodiments of the invention the core network device 140 may be arranged to perform a detection 220 in response to the receipt of the request if the radio access network device 120 supports the requested service or not. In response to the detection that the radio access device 120 supports the requested service the core network node 140 may e.g. be configured to instruct the radio access network device 120 to initiate a provision of the service accordingly. On the other hand, if the core network node 140 detects that the radio access device 120 does not support the requested service it may be arranged to determine a capability to update 230 the radio access network device 120. In order to perform the operations referred with references 220 and 230 in Figure 2 the radio access network device 120 is arranged to include in the request an identifier. The core network node 140 may use the identifier e.g. in an inquiry to a database to determine a type of the radio access network device 120 and its capabilities, for example, by means of which it may determine if the radio access network device 120 is updateable or not. If it is not, the core network node 140 may e.g. be arranged to generate a signal for informing at least the radio access network device 120 on the outcome, and preferably the terminal device 190 on the same. On the other hand, if the radio access network device 120 may be updated, the core network node 140 may be arranged to retrieve 240 data package to update the radio access network device. The retrieval of the data package may e.g. be performed by inquiring it from data storage 160 e.g. by including the identifier of the radio access network device 120 in the inquiry. In response to a receipt of the data package from the data storage 160, the core network node 140 may be arranged to deliver 250 the data package to the radio access network device 120 and instruct it to update itself to support the requested radio access technology related characteristic requested by the terminal device. For example, in response to the update, an acknowledgement of the update may be generated at least towards the core network node 140, but also to the terminal device 190. In some other embodiment, the core network node 140 may generate the acknowledgement and deliver it to the terminal device 190 through the radio access network device 120.

[0032] In an example embodiment described above it is indicated that the data package retrieved by the core network node 140 comprises data by means of which the radio access network device 120 may be updated. In some other example embodiments, the data storage 160 may also store one or more data packages for updating the terminal device 190 requesting the service. Such a situation may e.g. be advantageous when there is a new release available complying with the radio access technology related characteristic applied by the service or if an implementation of the system is such the terminal device 190 does not support the service by definition (e.g. when installed in a location) and there is need to confirm that the terminal device 190 may use the service applying the radio access technology related characteristic in question. In order to meet such a situation, or any corresponding situation, the core network node 140 may receive an identifier of the terminal device 190 together with the request, or with any other corresponding signaling, an inquire data package to update the terminal device 190 from the data storage 160. Naturally, the core network node 140 may be arranged to perform corresponding detections if the terminal device 190 supports the

requested service or not and if the terminal device 190 is updateable or not as it performs with respect to the radio access network node 120. Hence, the data package may be retrieved from the data storage 160 on the basis of the identifier representing, or identifying, the terminal device 190 which identifier is included in the request received from the terminal device 190. Alternatively or in addition, the core network node 140 may retrieve the data package for the terminal device 190 on the basis of the radio access technology related characteristic applied by the service as requested. For example, the core network node 140 may be arranged to be aware of capabilities of the terminal device 190 and/or updates dedicated to the terminal devices 190, which e.g. are not yet distributed to the terminal devices 190, and based on that to retrieve data package to update also the terminal device 190. For sake of clarity it is worthwhile to mention that the data package retrieved from the data storage may comprise the update data for both the radio access network device 120 and the terminal device 190.

[0033] Still further, in some further example embodiments one or more predetermined criterion may be set of the retrieval of the data package. The criterion may e.g. be established based on at least one technical requirement for the data package or on at least one commercial requirement of the data package or both. The technical requirement may e.g. refer to an implementation in which the core network node 140 is arranged to consult the data storage on characteristics of the data packet, such as which release it is or when it is released. In some embodiment, the core network node 140 may compare information with respect to the data package to information received in the request, and to determine if there is newer version available for updating. Alternatively or in addition, the at least one technical requirement may be defined explicitly by the terminal device 190 or the radio access network device 120 and if the technical requirement cannot be fulfilled the data package is not retrieved.

[0034] Alternatively or in addition to the technical requirement one or more commercial requirements may be set for the data package. For example, a price for the data package may be determined in the storage which piece of information may be retrieved by the core network node 140 from the data storage. In response to the retrieval of the piece of information the core network node 140 may determine if the data package is to be downloaded or not. The determination may e.g. be performed by comparing if the price, or any corresponding piece of information, is acceptable or not. For example, the core network node 140 may consult some other entities, such as a register maintaining acceptable price values for one or more data packages and based on that to decide if the data package in question is retrieved or not.

[0035] In various example embodiments, the retrieval of the data package, especially comprising data package for the terminal device 190, may require a certain bandwidth in order to enable the retrieval of the data package. For such a requirement it may be arranged that the mobile communication network, i.e. the telecom operator, may provide an applicable bandwidth to the terminal device 190 for the delivery of the data package. The telecom operator may e.g. set a price for such a use of the communication connection for the delivery.

[0036] In the foregoing description the radio access technology related characteristic is indicated to be IoT related, such as a narrow-band IoT characteristic, which the terminal device

190 is willing to use. However, the present invention is not only limited to such a characteristic, but the characteristic may be any other. For example, the characteristic may be a definition for a frequency band used by the service, or a definition of a data speed used by the service of any combination of these.

[0037] Figure 3 illustrates schematically as a flow chart signalling between a plurality of entities according to an example embodiment. First, a terminal device 190 may initiate an establishment of communication by performing a search 310 for a network service provided by a communication network. In response to finding the network service the terminal device may generate a signal 320 to a radio access network device 120 requesting a service applying a radio access technology related characteristic. The signal 320 of Figure 3 may correspond to an attachment request. The radio access network device 120 may be arranged to forward the request to core network and, specifically, to a core network node 140 there (signal 330 in Figure 3). In response to a receipt of the signal 330 the core network node 140 may be arranged to handle the request by performing the detections 220, 230 in the manner as described in the foregoing description (indicated with arrow 340 in Figure 3). In response to a detection that the radio access network device 120 is updateable a retrieval of data package may be initiated from data storage 160 (signal 350). Prior to the retrieval of the data package further determinations may be performed through signalling, such as determining one or more technical issues and/or commercial issues. The data storage 160 shall be understood as any entity suitable for storing and delivering updates for the mentioned entities. In some embodiment the data storage may correspond to a marketplace, e.g. implemented as a server device, for telecom operators. The data storage may deliver the data package in question (signal 360) to the core network node 140. The core network node 140, in turn, may deliver the data package to the radio access network device 120 (signal 370), which may be configured to update itself in response to the receipt of the data package. In response to the update the radio access network device 120 may support the radio access technology related characteristic needed in the service requested by the terminal device 190. In addition to the data package the signal 370 may carry further information, such as an indication of an acceptance of the attachment. With the signal 380 the radio access network device 120 may indicate to the terminal device 190 the acceptance of the attachment. Additional information may also be delivered, such as that the radio access network device 120 is updated to support the radio access technology related characteristic requested by the terminal device 120. In response to the update procedure, the terminal device 190 may start utilizing the updated the radio access technology related characteristic and connect to an application server 170 serving the terminal device 190 in its task (signal 390 in Figure 3).

[0038] In addition to the signals schematically illustrated in Figure 3 further signalling may occur as well as the signals either illustrated in Figure 3 or the further signals may carry further data. For example, as mentioned in the foregoing description there may be delivered data related to the terminal device 190, such as inquiries of updating also the terminal device 190 as well as data packet(s), or portions of the data packets, for updating the terminal device 190 e.g. to operate with the updated radio access network device 120.

[0039] As discussed above, a system may comprise a network node 140 for implementing at least portions of the method as described. Figure 4 illustrates schematically as a block diagram an example of the core network node 140 applicable in the system. The block diagram of Figure 4 depicts some components of an apparatus that may be employed to implement the core network node 140. The apparatus comprises a processor 410 and a memory 420. The memory 420 may store data and computer program code 425. The apparatus may further comprise communication interface, or communication means, 430 for wired or wireless communication with other apparatuses and/or possible I/O (input/output) components 440 that may be arranged, together with the processor 410 and a portion of the computer program code 425, to provide an interface for receiving input from a user and/or providing output to the user operator. The components of the apparatus may be communicatively coupled to each other via a bus 450 that enables transfer of data and control information between the components.

[0040] The memory 420 and a portion of the computer program code 425 stored therein may be further arranged, with the processor 410, to cause the apparatus, i.e. the core network node 140, to perform the method as described. The processor 410 may be configured to read from and write to the memory 420. Although the processor 410 is depicted as a respective single component, it may be implemented as respective one or more separate processing components. Similarly, although the memory 420 is depicted as a respective single component, it may be implemented as respective one or more separate components, some or all of which may be integrated/removable and/or may provide permanent / semi-permanent / dynamic / cached storage.

[0041] The computer program code 425 may comprise computer-executable instructions that implement functions that correspond to steps of the method as will be described when loaded into the processor 410. As an example, the computer program code 425 may include a computer program consisting of one or more sequences of one or more instructions. The processor 410 is able to load and execute the computer program by reading the one or more sequences of one or more instructions included therein from the memory 420. The one or more sequences of one or more instructions may be configured to, when executed by the processor 410, cause the apparatus to perform the method will be described. Hence, the apparatus may comprise at least one processor 410 and at least one memory 420 including the computer program code 425 for one or more programs, the at least one memory 420 and the computer program code 425 configured to, with the at least one processor 410, cause the apparatus to perform the method described in the foregoing.

[0042] The computer program code 425 may be provided e.g. a computer program product comprising at least one computer-readable non-transitory medium having the computer program code 425 stored thereon, which computer program code 425, when executed by the processor 410 causes the apparatus to perform the method. The computer-readable non-transitory medium may comprise a memory device or a record medium such as a CD-ROM, a DVD, a Blu-ray disc or another article of manufacture that tangibly embodies the computer program. As another example, the computer program may be provided as a signal configured

to reliably transfer the computer program.

[0043] The functionality of the core network node 140 may be implemented in a core network entity, such as in a Mobility Management Entity (MME).

[0044] The specific examples provided in the description given above should not be construed as limiting the applicability and/or the interpretation of the appended claims. Lists and groups of examples provided in the description given above are not exhaustive unless otherwise explicitly stated. The invention is solely defined by the appended claims.

REFERENCES CITED IN THE DESCRIPTION

Cited references

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO2015092114A1 [0004]

PATENTKRAV

1. Fremgangsmåde til opdatering af en radioadgangsteknologi relateret egenskab for en radioadgangsnetværksindretning (120), **kendetegnet ved, at** fremgangsmåden, udført af et kernenetværksknudepunkt (140), omfatter:

modtagelse (210) af en anmodning om en tjeneste, som anvender den radioadgangsteknologi relaterede egenskab, hvilken anmodning modtages fra en terminalindretning (190) via radioadgangsnetværksindretningen (120), som er konfigureret til at inkludere en identifikator for radioadgangsnetværksindretningen (120) i anmodningen,

bestemmelse, som svar på en detektion (220) af at radioadgangsnetværksindretningen (120) ikke understøtter den anmodede tjeneste, af en kapacitet til at opdatere radioadgangsnetværksindretningen (120), ved at anvende identifikatoren for radioadgangsnetværksindretningen (120) ved bestemmelsen,

fremfindning (240), som svar på en detektion (230) af at radioadgangsnetværksindretningen (120) kan opdateres, af en datapakke til at opdatere i det mindste radioadgangsnetværksindretningen (120), og

levering (260) af datapakken til radioadgangsnetværksindretningen (120) for opdatering af radioadgangsnetværksindretningen (120) til at understøtte den anmodede radioadgangsteknologi relaterede egenskab, som anmodes af terminalindretningen (190).

2. Fremgangsmåde ifølge krav 1, hvor anmodningen modtages i en kontekst af en forbindelsesansøgning.

3. Fremgangsmåde ifølge ethvert af de foregående krav, hvor datapakken forespørges fra datalager af kernenetværksknudepunktet (140) med identifikatoren for radioadgangsnetværksindretningen (120).

4. Fremgangsmåde ifølge ethvert af de foregående krav, hvor den fremfundne datapakke yderligere omfatter data til at opdatere terminalindretningen (190).

5. Fremgangsmåde ifølge krav 4, hvor dataene til opdatering af terminalindretningen (190) er inkluderet i datapakken på basis af én af følgende:

en identifikator, som repræsenterer terminalindretningen (190), som er inkluderet i anmodningen modtaget fra terminalindretningen (190);
den radioadgangsteknologi relaterede egenskab, som anvendes af tjenesten.

- 5 6. Fremgangsmåde ifølge ethvert af de foregående krav, hvor i det mindste et forudbestemt kriterie sættes for fremfinding af datapakken.

7. Fremgangsmåde ifølge krav 6, hvor det i det mindste ene forudbestemte kriterie er en af:

- 10 i det mindste et teknisk krav for datapakken,
i det mindste et kommercielt krav for datapakken.

8. Fremgangsmåde ifølge ethvert af de foregående krav, hvor den radioadgangsteknologi relaterede egenskab er en af:

- 15 smalbånds IoT egenskab,
et frekvensbånd anvendt for indretningen,
datahastighed anvendt i tjenesten.

9. Netværksknudepunkt (140) til opdatering af radioadgangsteknologi relaterede egenskaber for en radioadgangsnetværksindretning (120), hvilket netværksknudepunkt (140) omfatter:
- 20

i det mindste én processor (410); og

i det mindste én hukommelse (420), som omfatter computerprogramkode (425);

- 25 **kendetegnet ved, at** den i det mindste ene hukommelse (420) og computerprogramkoden (425) er konfigureret til, med den i det mindste ene processor (410), at forårsage at netværksknudepunktet (140) udfører:

- 30 modtagelse (210) af en anmodning om en tjeneste, som anvender den radioadgangsteknologi relaterede egenskab, fra en terminalindretning (190), via radioadgangsnetværksindretningen (120), som er konfigureret til at inkludere en identifikator for radioadgangsnetværksindretningen (120) i anmodningen, bestemmelse, som svar på en detektion (220) af, at radioadgangsnetværksindretningen (120) ikke understøtter den anmodede tjeneste, af en kapabilitet til
- 35 opdatering af radioadgangsnetværksindretningen (120), ved anvendelse af

identifikatoren for radioadgangsnetværksindretningen (120) ved bestemmelsen,

fremfindelse (240), som svar på en detektion (230) af at radioadgangsnetværksindretningen (120) kan opdateres, af en datapakke til at opdatere i det mindste radioadgangsnetværksindretningen (120), og levering (250) af datapakken til radioadgangsnetværksindretningen (210) for opdatering af radioadgangsnetværksindretningen (120) til at understøtte den anmodede radioadgangsteknologi relaterede egenskab, som anmodes af terminalindretningen (190).

10

10. Netværksknudepunkt (140) ifølge krav 9, hvor netværksknudepunktet (140) er indrettet til at modtage anmodningen i en kontekst af en forbindelsesanmodning.

15

11. Netværksknudepunkt (140) ifølge ethvert af de foregående krav 9-10, hvor netværksknudepunktet (140) er indrettet til at forespørge datapakken fra datalager med identifikatoren for radioadgangsnetværksindretningen (120).

20

12. Netværksknudepunkt (140) ifølge ethvert af de foregående krav 9-11, hvor den fremfundne datapakke yderligere omfatter data til at opdatere terminalindretningen (190).

25

13. Netværksknudepunkt (140) ifølge krav 12, hvor netværksknudepunktet (140) er indrettet til at modtage dataene til at opdatere terminalindretningen (190), hvilke data til at opdatere terminalindretningen (190) er inkluderet i datapakken på basis af én af følgende:

en identifikator, som repræsenterer terminalindretningen (190), som er inkluderet i anmodningen modtaget fra terminalindretningen (190);
den radioadgangsteknologi relaterede egenskab, som anvendes af tjenesten.

30

14. Netværksknudepunkt (140) ifølge ethvert af de foregående krav 9-13, hvor netværksknudepunktet (140) omfatter i det mindste ét forudbestemt kriterie, sat til fremfinding af datapakken.

35

15. Netværksknudepunkt (140) ifølge krav 14, hvor det i det mindste ene forudbestemte kriterie er én af:
i det mindste ét teknisk krav for datapakken,

i det mindste ét kommercielt krav for datapakken.

16. Netværksknudepunkt (140) ifølge ethvert af de foregående krav 9-15, hvor den radioadgangsteknologi relaterede egenskab er én af:

- 5 smalbånds IoT egenskab,
et frekvensbånd anvendt for tjenesten,
datahastighed anvendt i tjenesten.

17. Kommunikationssystem omfattende:

- 10 i det mindste én terminalindretning (190),
en radioadgangsnetværksindretning (120), og
et netværksknudepunkt (140) i overensstemmelse med ethvert af kravene 9-16.

18. Computerprogram foreliggende på et computer læsbart medie, omfattende computer eksekverbar kode, hvilken kode, når den eksekveres af i det mindste én processor i et netværksknudepunkt (140), forårsager at netværksknudepunktet (140) udfører fremgangsmåden i overensstemmelse med ethvert af kravene 1-8.

DRAWINGS

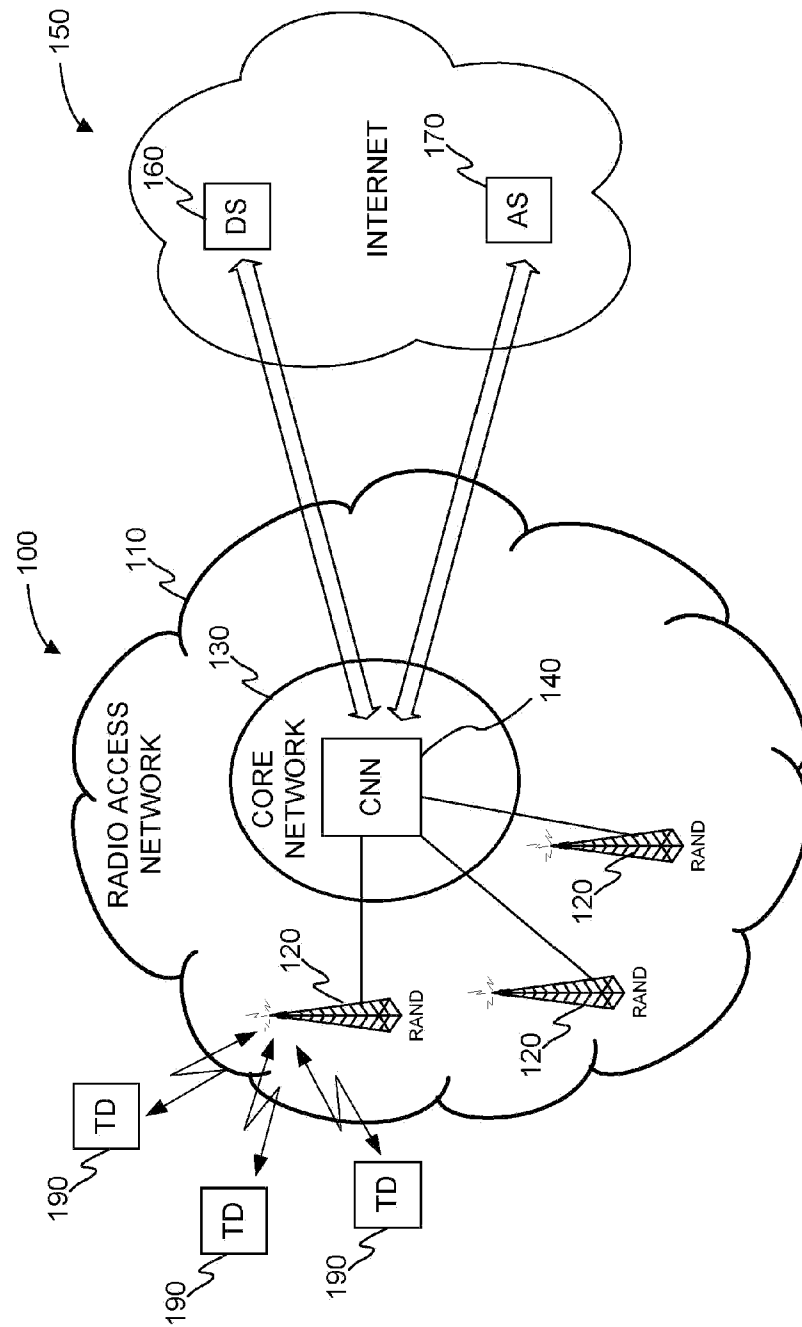


FIGURE 1

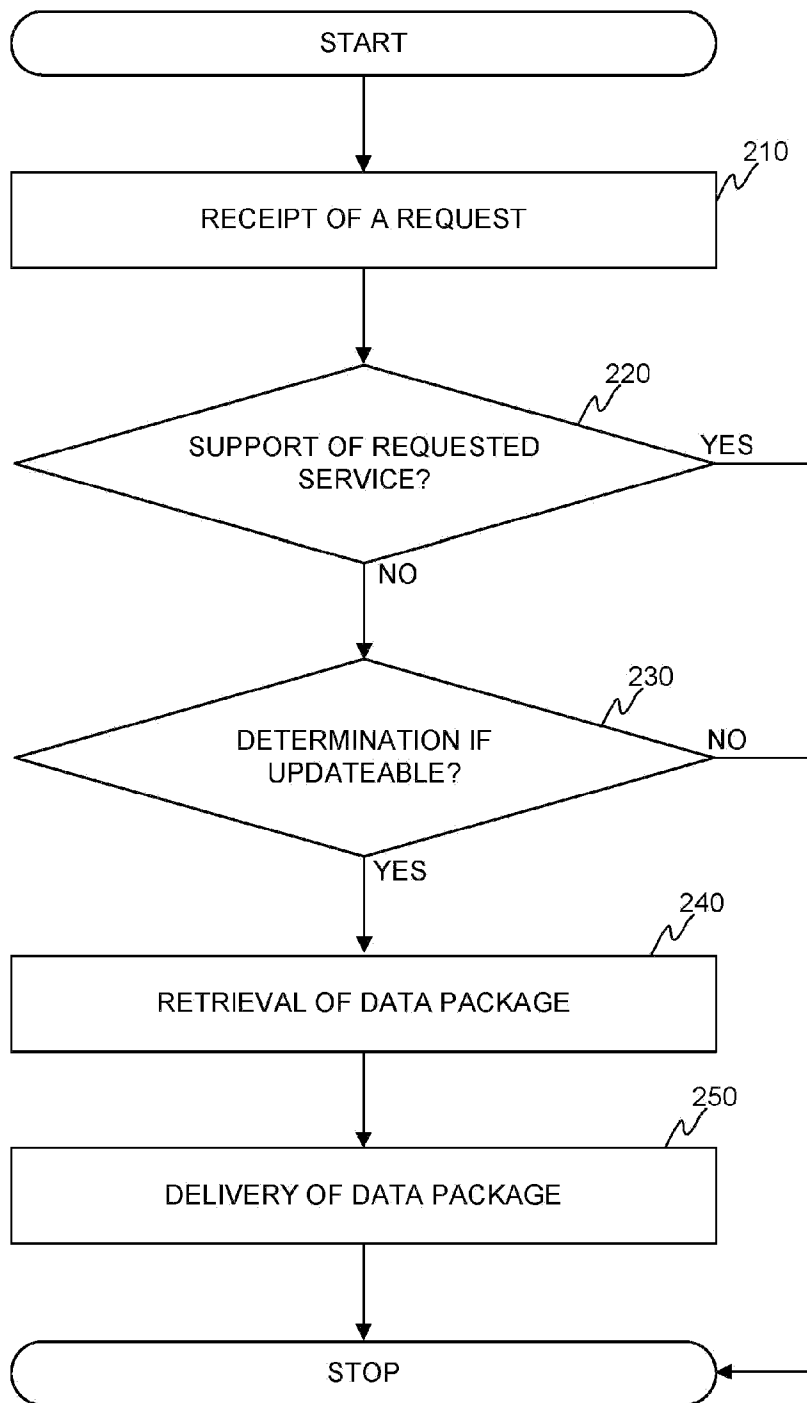


FIGURE 2

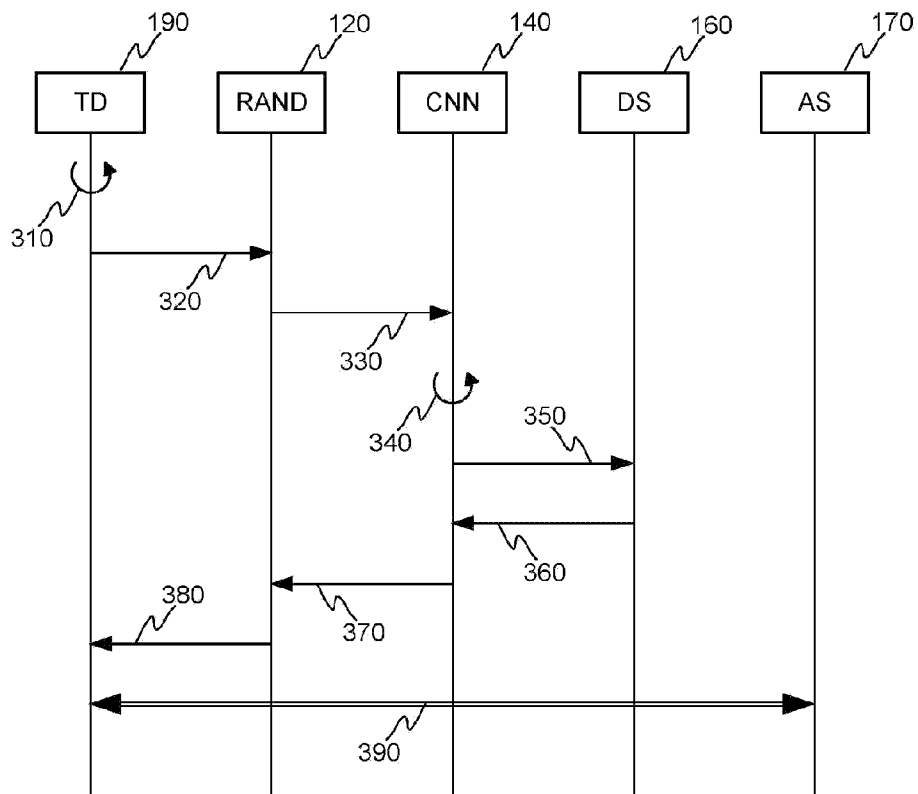


FIGURE 3

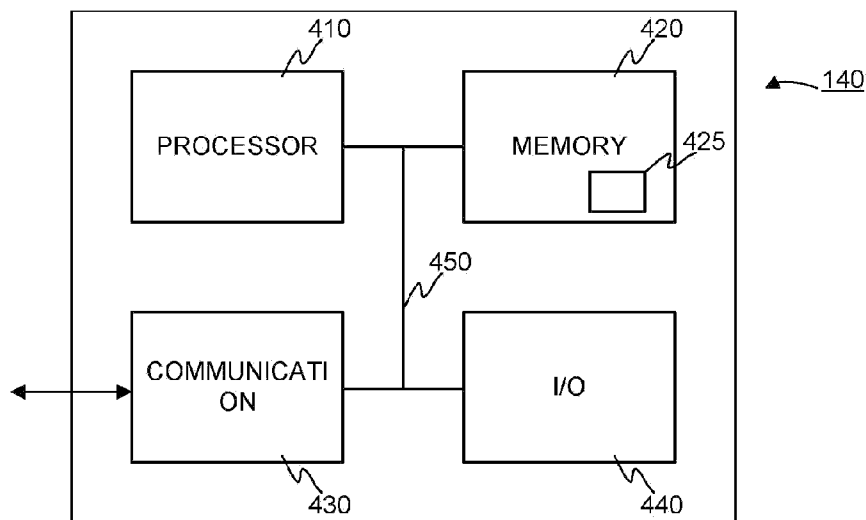


FIGURE 4