

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 February 2006 (02.02.2006)

PCT

(10) International Publication Number
WO 2006/010604 A1

(51) International Patent Classification: **G01N 21/64**

(21) International Application Number:
PCT/EP2005/008147

(22) International Filing Date: 27 July 2005 (27.07.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0416732.6 27 July 2004 (27.07.2004) GB

(71) Applicant (for all designated States except US): **PRECISENSE A/S** [DK/DK]; Neergaards Vej 3, DK-2970 Hørsholm (DK).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **AASMUL, Søren** [DK/DK]; Borg. Schneidersvej 60, DK-2840 Holte (DK).

(74) Agent: **SMART, Peter, J.**; Beck Greener, Fulwood House, 12 Fulwood Place, London WC1V 6HR (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A METHOD AND APPARATUS FOR MEASURING THE PHASE SHIFT INDUCED IN A LIGHT SIGNAL BY A SAMPLE

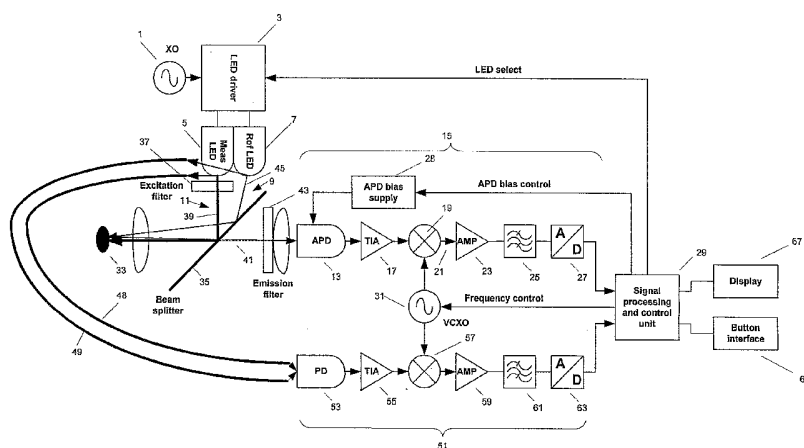

(57) Abstract: Apparatus for measuring a phase shift induced in a light signal has a first light source for emitting a light signal along a measurement optical path that includes a sample, for example a fluorescent sample, and a second light source for emitting a light signal along a dummy measurement optical path. A measurement electronic circuit is provided for receiving the light signals and providing outputs separated in time which are indicative of the phase of the respective light signals. In use, a phase shift is induced in light in the measurement optical path by the fluorescent sample. A reference electronic circuit is provided for receiving a signal, indicative of the phase of the light signals emitted by the first and second light sources. Circuitry is provided to compare the respective phases of light output from the two circuits to provide an output indicative of a first measured phase difference during operation of the first light source. A correction is then applied to this measurement by taking a similar phase difference measurement during operation of the second light source and comparing the two phase differences.



WO 2006/010604 A1

**A METHOD AND APPARATUS FOR MEASURING THE PHASE SHIFT
INDUCED IN A LIGHT SIGNAL BY A SAMPLE**

The present invention relates to a method and
5 apparatus for measuring a phase shift induced in a light
signal by a sample.

In conventional fluorescence microscopy, the
intensity distribution of the emission of a fluorophore is
10 recorded. Another parameter that can be measured is
"fluorescence lifetime". When a fluorophore is excited by
a light pulse, the emission shows a decay (typically in
the order of nano-seconds). This decay time, referred to
as fluorescence lifetime is characteristic of the
15 fluorophore, as well as its state.

Fluorescence lifetime sensing is a powerful method to
measure energy transfer efficiency in fluorescence
resonance energy transfer (FRET) assays. FRET is a
20 distance-dependent interaction between the excited states
of two dye species in which excitation energy is
transferred from a donor to an acceptor without emission
of a photon. The efficiency of FRET is inversely dependent
on the sixth power of the intermolecular separation.
25 Detection of FRET can therefore be used to determine the
distance between a species labelled with the donor and a
species labelled with the acceptor. This may be used for
example to determine whether the two species are bound to
one another.

30 In a competitive assay based on FRET, FRET can occur
as a result of a FRET active molecule combining with a
competition agent that is also FRET active. The
competition agent competes with FRET inactive material (an
35 analyte), which when combined with the FRET active
molecule, will not cause FRET. Each of the competition
agent and the analyte binds reversibly to the FRET active
material for a finite amount of time. This means that

both the competition agent and analyte have opportunities to bind with the FRET active material to reach equilibrium. As the amount of competition agent present in such an assay is predetermined, the amount of FRET
5 occurring can be used to calculate the concentration of analyte present. When no analyte is present, a 100% of the possible FRET will occur.

When an excitation light is modulated at sufficiently
10 high frequency, a FRET signal can be detected not only by the intensity of the fluorescence, but also in the phase shift between the excitation light and the emitted fluorescence.

15 However, it is difficult to get an accurate reading of the phase shift caused by fluorescence as the measured phase of a light signal may drift as a result of factors affecting the sensor's electronics, such as the measuring electronics having been subjected to temperature changes
20 and ageing.

Attempts have been made to measure accurately the shift in phase caused by fluorescence with the use of phase fluorometers. Commercially available phase
25 fluorometers, as shown in figure 1, sometimes have two identical signal branches, a sample signal branch 201 and a reference signal branch 203. Excitation light 209 is generated by a light source 205 to be radiated upon a fluorescent sample 207. A small portion 211 of this
30 excitation light is split out before the sample 207 to illuminate a detector 213 in the reference branch 203. The phase of the light detected in the reference signal branch 203 is compared with the phase of the fluorescent light emitted from the sample 207 to give the phase
35 difference between the reference and sample branches. This gives an initial measurement of the shift in phase induced as a result of fluorescence of light in the sample signal branch. The phase measurement compensates for phase

drift in the light source or light source driving circuitry, but does not account for the phase drift that may be caused by the electronic circuitry.

5 Shortly before and after illumination of the fluorescent sample 207, the fluorescent sample is replaced with a reference object 215 that does not fluoresce when excitation light is radiated upon it. As previously, the excitation light 209 is generated by the light source to
10 radiate the reference object. A small portion of the excitation light is split out before the reference object to illuminate the detector on the reference branch. The phase of the light detected in the reference signal branch is compared with the phase of light detected in the sample
15 branch to provide a calibration for the final signal measured when the sample object fluoresces. Any difference in phase between the signals detected by the sample branch and reference branch in this case will be due to differences in the electronics or to differences in
20 the respective path lengths.

The phase lag induced by the fluorescent sample object is finally calculated by comparing the phase difference between the two branches when fluorescence
25 occurs and the phase difference between the two branches when fluorescence does not occur.

This eliminates phase drifting caused by the electric components and accounts for any difference in phase that
30 might be caused by the optical path the light follows.

The system described above requires a motorised or manually driven mechanism for changing the object from the sample object to the reference object. At this time, it
35 becomes necessary to change the filters receiving light reflected from the reference object due to its non-fluorescent nature. Furthermore, it may be necessary to change the filters in the optical paths to adapt to the

different light intensities. This would also need to be done using a motorised, mechanical system. This sort of system is undesirable as it is ultimately expensive, space consuming, complex to produce and is prone to damage as a result of the moving parts. Furthermore, it may be desirable to miniaturise a system as described above to enable use of such a system for medical purposes, e.g. for continuous blood glucose measuring. In applications such as these where the phase fluorometer would be worn by man, it would be undesirable to use motors that cause excessive vibrations and noise.

The object of this invention is to provide a system and method of measuring the difference in phase including correction for electronic drift performed without the need for manual or mechanical intervention.

According to a first aspect of the present invention, apparatus is provided for measuring a phase shift induced in a light signal by a sample, the apparatus comprising:

a first light source for emitting a light signal along a measurement optical path, wherein the measurement optical path includes a sample location;

a second light source for emitting a light signal along a dummy measurement optical path, the first and second light sources being arranged for alternate operation;

a measurement electronic circuit for receiving the light signals from the measurement and dummy measurement optical paths, the measurement electronic circuit being arranged to provide outputs separated in time which are respectively indicative of the phase of the light signals received from each of the measurement and dummy measurement optical paths, wherein in use a phase shift is induced in light in the measurement optical path by a sample in said sample location such that the phase of light of the first light source received from the

measurement optical path is different to the phase of light emitted from the first light source;

a reference electronic circuit for receiving a signal indicative of the phase of the light signals emitted by
5 the first and second light sources;

circuitry to compare the phase of light indicated by the output of the measurement electronic circuit responsive to the first light source with the phase of light indicated by the reference electronic circuit to
10 provide an output indicative of a first measured phase difference and to compare the phase of light indicated by the output of the measurement electronic circuit responsive to the second light source with the phase of light indicated by the reference electronic circuit to
15 provide an output indicative of a second measured phase difference, and circuitry to apply a correction to the first measured phase difference on the basis of the second measured phase difference to correct for errors in said first measured phase difference due to phase changes
20 induced by said measurement and reference electronic circuits so as to obtain an improved measurement of the shift in phase induced in the light of the first light source by the sample.

25 Preferably, the measurement optical path comprises a beam splitter receiving light from said first light source and reflecting said light toward said sample location and receiving fluorescence emission light in use emitted from said sample location and transmitting said fluorescence
30 emission light to said measurement electronic circuit.

More preferably, the measurement optical path comprises an excitation filter arranged to select a wave length of light suitable for exciting a fluorescent sample
35 at said sample location and an emission filter suitable for selecting a wave length of fluorescent light emitted from said sample location.

An oscillator is coupled to each of the first and second light sources to produce light signals of oscillating intensity. A drive current fed into each of the first and second light sources to produce light signals of oscillating intensity is generated by direct digital synthesis.

In one embodiment, the dummy measurement path comprises the beam splitter, the beam splitter being arranged to receive light from the second light source, reflect said light toward said sample location, receive said light reflected from said sample location and transmit the light to said measurement electronic circuit.

Preferably, the dummy measurement optical path further comprises the said emission filter for selecting a wavelength of light comparable to the wavelength of fluorescent light emitted from the sample location.

In an alternative embodiment, light from the second light source is not received by the beam splitter and is guided directly to the measurement electronic circuit.

Accordingly, the dummy measurement path further comprises an electro-optical attenuator for reducing the intensity of light emitted from the second light source.

In a preferred embodiment, the light in the dummy measurement path does not include a wave length of light suitable for exciting the fluorescent sample.

In one embodiment, light emitted from said first and second light sources is of the same wavelength and the dummy measurement path further comprises a filter to eliminate light of the wavelength suitable for exciting the fluorescent sample.

In an alternative embodiment, the first light source

and the second light source emit light of different wavelengths, and the light emitted from the second light source does not include a wavelength suitable for exciting the fluorescent sample.

5

Preferably, the measurement electronic circuit comprises an opto-electric converter for receiving light signals from said measurement path and the dummy measurement path, wherein the opto-electric converter
10 outputs an electrical signal corresponding to an intensity of the light illuminating it.

More preferably, the opto-electric converter of the sample circuit is an avalanche photo-diode, whereby a bias
15 voltage is provided to the avalanche photo-diode to enhance the electrical signal corresponding to the intensity of the light illuminating the avalanche photo-diode.

20 Means are provided for guiding light from the first and second light sources along the reference and dummy reference optical paths respectively to an opto-electric converter of the reference circuit.

25 Preferably, the opto-electric converter of the reference circuit is a photo-diode.

In a preferred embodiment, the system further comprises electronic circuitry for modulating the signal
30 being processed in each of the measurement circuit and the reference circuit to produce an output representing the phase of the signal being processed.

Preferably, the electronic circuitry modulating the
35 signal in each of the measurement and reference circuit comprises a mixer in each of the measurement electronic circuit and the reference electronic circuit, each mixer being coupled to a further oscillator.

In one embodiment, a signal having a modulated frequency of from 0.1 to 10^3 megahertz is output from the further oscillator, and is combined with the signal in each of the measurement and reference circuits by means of the respective mixers and a modulated frequency of the light output from each said light source differs from said modulated frequency by an amount, which is from 10^2 to 10^5 hertz (heterodyne detection).

The measurement electronic circuit and the reference electronic circuit each further comprise a band pass filter, wherein the high frequency component of the output from each of the mixers of the measurement circuit and the reference electronic circuit is eliminated by the band pass filter.

In an alternative embodiment, a signal having a modulated frequency the same as the modulated frequency of light output from each light source is output from the further oscillator, and is combined with the signal in each of said measurement and reference circuits by means of the respective mixers (homodyne detection).

In a further embodiment, a modulated frequency of the light output from each light source is from 10 to 10^5 hertz.

Preferably, the opto-electric converter of each of the measurement and reference electronic circuits is arranged to output an electronic signal to an amplifier which produces a voltage output, the respective mixers being arranged to receive said voltage outputs and the signal of modulated frequency from the further oscillator to produce a beat frequency output representing the frequency difference between said inputs, said output being indicative of the phase of the light received at the opto-electronic converter.

The further oscillator providing the predetermined frequency to the mixers of each of the measurement and reference circuit is a voltage controlled crystal oscillator.

5

Preferably, the predetermined frequency to the mixers of each of the measurement and reference circuit is generated by direct digital synthesis.

10

In a preferred embodiment, the band pass filter of each of the measurement and reference electronic circuits are respectively arranged to receive the beat frequency output from each mixer to reduce noise in the respective signal.

15

Preferably, the measurement and reference electronic circuits each further comprise an amplifier to amplify the filtered signal from the band pass filter and an analogue to digital converter for digitising the amplified signal.

20

In a preferred embodiment, a signal processing and control unit is provided to receive the digitised outputs from each of the measurement circuit and the reference circuit, the signal processing and control unit comprising further circuitry to compare the digitised signals received during operation of the first and second light sources respectively and to calculate the phase change induced by the sample. A result of the calculation is output to a display.

30

Preferably, the signal processing and control unit is arranged to control alternate operation of the first and second light sources, the frequency of the further oscillator, and the bias voltage provided to the avalanche photo-diode.

35

In one embodiment, two different frequencies of light are alternately generated and output from each of the

first and second light sources consecutively to enable further calculations.

The present invention also extends to a method of
5 measuring a phase shift induced in a light signal by a sample, comprising the steps of:

emitting a first light signal along a measurement optical path, wherein the measurement optical path includes a sample location;

10 emitting a second light signal along a dummy-measurement optical path, the first and second light signals being emitted alternately;

receiving in a measurement electronic circuit light signals from the measurement and dummy-measurement optical
15 paths;

providing outputs separated in time from the measurement electronic circuit, wherein the outputs are respectively indicative of the phase of the light signals received from each measurement and dummy-measurement
20 optical path;

receiving in a reference electronic circuit a signal indicative of the phase of the first and second light signals;

comparing the phase of light indicated by the output
25 of the measurement electronic circuit and responsive to the first light signal with the phase of light indicated by the reference electronic circuit;

providing an output indicative of the first measured phase difference;

30 comparing the phase of light indicated by the output of the measurement electronic circuit in response to the second light signal with the phase of light indicated by the reference electronic circuit;

providing an output indicative of a second measured
35 phase difference;

applying a correction to the first measured phase difference on the basis of the second measured phase difference to correct errors in said first measured phase

difference due to phase changes induced by said measurement and reference electronic circuit so as to obtain an improved measurement of the shifting phase induced in the light of the first light source by the
5 sample.

Embodiments of the invention will hereinafter be described with reference to the accompanying drawings, in which:

10

Figure 1 is a schematic diagram of a commercially available fluorometer.

Figure 2 is a schematic diagram of one embodiment of the present invention.

15

Figure 3 is a schematic diagram of a second embodiment of the present invention;

Figures 4A and 4B are graphs showing the excitation spectra of the first and second light sources, together with graphs of the spectra of the excitation filters, the
20 beam splitter and the emission filter;

Figure 5 is a schematic diagram of a third embodiment of the present invention;

Figure 6 is a further schematic of the embodiment shown in figure 5 with additional circuitry;

25

Figure 7 is a schematic diagram of a fourth embodiment of the present invention;

Figure 8 shows a graph of the smooth excitation pulse used in an embodiment of the present invention;

Figure 9 shows a plan view of the apparatus of the
30 invention.

Figure 10 shows a calibration curve for use in real operation.

Figure 11 shows a schematic diagram of two parallel direct digital synthesisers.

35

Shown in Figure 2 are the various components of an embodiment of the present invention. The system includes a crystal oscillator 1 coupled to a LED driver 3, two LEDs

5, 7, which can be activated one at a time, and an excitation filter 37. Light from each of the LEDs 5, 7 is directed simultaneously to a measurement circuit 15 and a reference circuit 51. Light from both LEDs 5, 7 is
5 directed by means of a beam splitter 35.

The measurement circuit 15 comprises an emission filter 43, avalanche photo diode 13, trans-impedance amplifier 17 for converting the current signals received
10 to voltage signals, mixer 19, amplifier 23, band pass filter 25, an analogue to digital converter 27 and an avalanche photo diode bias supply 28.

Similarly, the reference circuit 51 comprises a photo
15 diode 53, a trans-impedance amplifier 55, a mixer 57, an amplifier 59, a band pass filter 61 and an analogue to digital converter 63. Both the reference and measurement circuits are further provided with a signal processing and control unit 29 to process the information from both
20 circuits, a further crystal oscillator 31, a display unit 67 to display results, and an interface 69 having at least two buttons.

Although the invention has been described with
25 respect to the use of light emitting diodes, it will be appreciated that other light sources could be used, for example, laser diodes.

In operation, the LED driver 3 is coupled to the
30 crystal oscillator 1 and is arranged to produce a light signal from each of the first and second LEDs 5, 7 respectively. In this embodiment, a sinusoidal light signal is produced by means of the crystal oscillator 1. It should be clear, however, that provided a phase of the
35 light signals can be determined, other methods known in the art may be suitable, for example, by generating a light signal having a square pulse.

For example, in one embodiment, the light signal generated and emitted from each of the first and second light LEDs has a smooth excitation pulse. As shown in Figure 8, the positive pulses are narrower than that of a sinusoidal waveform so that the overall shape of the pulse is approximately Gaussian.

As set out in the paper "Theoretical investigation of the signal-to-noise ratio for different fluorescence lifetime imaging techniques" by CARLSSON K. PHILLIP J, Proc SPIE 4611, 70-78, 2002, Dirac pulse excitation is the most favourable excitation method for use with a fluorophore. Dirac pulses are infinitely narrow and a Dirac excitation signal yields a nominal figure of merit (F) of 1. Such pulse excitation is, however, hard to produce in practice.

The signal to noise ratio (SNR) is reversly proportional to F^2 . Therefore, an optimum SNR is achieved when $F = 1$. Sinusoidal modulation yields a figure of merit of 4, and as such, sinusoidal modulation is 16 times less favourable than Dirac modulation in terms of SNR. However, sinusoidal modulation is easier to produce as there is a lower demand for bandwidth and power consumption.

As set out by Carlsson, a smooth excitation pulse gives a figure of merit of 1.55, which corresponds to a SNR reduction of 2.4 times compared to the Dirac pulse excitation. This is therefore more favourable than a standard sinusoidal signal.

Direct digital synthesis may be used to generate the sinusoidal waveform as well as the smooth pulse excitation. As shown in Figure 11, a direct digital synthesiser 71 consists of an address counter 73, a programmable read only memory (PROM) 75 that is used to store various waveforms, a register 77 and a digital to

analogue converter 79.

Digital amplitude information that corresponds to a complete cycle of a sine wave is stored in the PROM 75, which functions as a sine look-up table. The address counter steps through and accesses each of the PROM's memory locations and the contents, the equivalent sine amplitude words, are presented to a high speed digital to analogue converter 79. The digital to analogue converter generates an analogue sine wave in response to the digital input words from the PROM. The rate at which the synthesiser completes one wave governs the frequency. A clock 81 is provided by the signal processing and control unit 29.

15

The LED driver 3 is controlled by the signal processing and control unit 29 such that the first LED 5 (hereinafter referred to as "the measurement LED") and the second LED 7 (hereinafter referred to as "the reference LED") are switched on and off alternately such that only one out of the measurement 5 or reference LED 7 is active at any one time. A light signal is therefore alternately emitted from the measurement LED 5 and the reference LED 7.

25

In the embodiment shown in figure 2, light from the measurement LED 5 is directed along two different paths, a first optical path 11, and a first reference path 48. Similarly, light from the reference LED 7 is directed along two different paths, a second optical path 9, and a second reference path 49. The first optical path 11 and the second optical path 9 follow a similar route to lead to the avalanche photo-diode (APD) 13 of the sample circuit 15.

35

Similarly, the first reference path 48 and the second reference path 49 follow a similar route to lead to the photo-diode 53 of the reference circuit 51.

Light in the first optical path passes through the excitation filter 37 and is directed by means of the beam splitter 35 onto a fluorescent sample 33. The light
5 (excitation light) 39 in the first optical path is passed through the excitation filter 37 to ensure that it has stable spectral characteristics. The excitation light 39 causes excitation of the sample such that it emits a fluorescent light 41 having a different phase, spectrum
10 and intensity to the light 39 emitted from the measurement LED 5.

The fluorescent light 41 is then passed through the emission filter 43 before illuminating the APD 13 of the
15 sample circuit 15. The signal is then processed by the sample circuit 15 such that the phase of fluorescent light 41 detected by the APD 13 can be determined.

Simultaneously, light 39 from the measurement LED 5
20 is guided along the reference path 48 to the photo-diode 53 of the reference circuit 51, such that the phase of the reference light can be determined. The phase of the light received at the reference circuit 51 should be the same as that emitted from the measurement LED 5.

25 The phase of light determined in each of the sample circuit 15 and the reference circuit 51 is compared, to determine a phase shift induced in the first optical path 11. It is expected that the main shift in phase along the
30 first optical path 11 is caused by the fluorescent sample 33. However, this measurement can not be considered to be absolute, since the electronics in each circuit may cause varying degrees of drift in phase as a result of ageing of the electronics or temperature changes.

35 To determine an absolute shift in phase caused by the fluorescent sample 33, it is necessary to correct for such drift caused by the electronics of the system. To enable

this, immediately before and after activation of the measurement LED 5, the reference LED 7 is activated. A portion of light emitted from the reference LED 7 is directed along the reference path 49 to the reference
5 circuit 51. The remainder of the light emitted from the reference LED 7 is directed along the second optical path 9 towards the measurement circuit 15.

In this embodiment, to enable correction, the light
10 in the second optical path does not cause the fluorescent sample to excite. This can be achieved in two ways. As shown in figure 2, the light 45 emitted from the reference LED 5 is directed by means of the beam splitter 35 towards the fluorescent sample 33.

15 In one embodiment, the light emitted from the reference LED 7 is of a different wavelength to that emitted from the measurement LED 5. Specifically, the light from the reference LED 7 is situated spectrally in
20 the pass band of the emission filter 43 such that the light is scattered or reflected from the sample site. In an alternative embodiment, the light emitted from both the measurement LED 5 and the reference LED 7 is of the same wavelength. In this embodiment (not shown), a further
25 filter is provided prior to illumination of the sample site to exclude those wavelengths required for exciting the sample.

As previously, the signal in the measurement branch
30 is compared to that detected in the reference branch. In ideal conditions, the phase difference between the two detected signals is representative of the phase change introduced by the sample. In real operation, however, the degree of drift in phase caused by the electronic
35 circuitry will vary between the measurement and reference branches. As almost no time elapses between measurement of the signals during operation of the measurement LED 5 and during operation of the reference LED 7, it is assumed

that the condition of the circuitry in both the measurement and reference branches will not have varied significantly between readings.

5 Therefore, it is assumed that any difference in phase detected between the sample and measurement branches during operation of the reference LED 7 is caused by the electronics and differences in the respective path lengths.

10

 It is appreciated that there is a minor variation in path length from the measurement LED 5 to the APD 13, and from the reference LED 7 to the APD 13. However, this is constant, i.e. the difference in the respective path
15 lengths will always remain the same, resulting in a constant phase offset which easily may be corrected for. The avalanche photo-diode (APD) 13 of the sample circuit is reverse biased with a high voltage. This causes an amplification of the initial photo current of typically
20 between 50 and 500. The light signal fed into the APD 13 is very weak and in a normal photodiode would produce a signal, which would be comparable to or lower than the noise produced by an amplifier. Use of the APD increases the signal-to-noise ratio of the signal and thus increases
25 the precision of the measurement. However, it should be clear to those skilled in the art that any electrical device that is capable of outputting an electrical signal corresponding to the intensity of light illuminating it would be suitable. For example, in an alternative
30 embodiment the APD could be replaced by a photo-multiplier tube (PMT).

 Alternatively, a second fluorescent sample is provided at the sample location. In this embodiment shown
35 in figure 3, it is arranged so that the second fluorescent sample is excitable only by light passing along the dummy measurement path. This can be achieved by emitting light of the appropriate wavelength for excitation from the

reference LED. Furthermore, a filter may be provided in the dummy measurement path that allows only light of the relevant wavelength for excitation of the second fluorescent sample to pass through.

5

A dichroic beam splitter 34 having two reflection bands and two transmission bands is used to selectively allow light to be reflected from the light sources to the sample location and for allowing only the relevant
10 fluorescence to pass from the sample location to the measurement circuit. Similarly, the emission filter 43 has two transmission bands to allow the fluorescent light emitted from both fluorescent samples to pass through.

15 An example of wavelengths that may be appropriate is shown in figures 4A and 4B. In this example, light emitted from the first LED has a wavelength of 592nm. As can be seen, the fluorescent sample has an absorption spectrum around this wavelength, and the corresponding
20 emission spectrum from the first fluorescent sample is based around a slightly larger wavelength. Similarly, the light emitted from the second LED has a wavelength of approximately 700nm. The second fluorescent sample has an absorption spectrum around this sample wavelength and the
25 corresponding emission spectrum is based around a slightly larger wavelength.

Figure 4B shows the transmission characteristics of corresponding filters. The two bands of wavelength of
30 light reflected by the dichroic beam splitter can be seen to correspond with the wavelengths of light emitted from the respective LEDs, that is, at approximately 592 nm and 740 nm. As shown in figure 4B, these frequencies fall outside the transmission band of the dichroic beam
35 splitter and as such, light corresponding to these wavelengths is reflected. Similarly, the two transmission bands of the dichroic beam splitter correspond with the wavelengths of the fluorescent light emitted from both

fluorescent samples. Finally, the transmission bands of the emission filter also correspond to the wavelengths of the fluorescent light emitted from both samples.

5 In the embodiments described above, the reverse biased high voltage is provided by an APD bias supply 28 that is controlled by the signal processing and control unit 29. The signal processing and control unit 29 is also responsible for operating the further crystal
10 oscillator 31. The waveform output from the further oscillator is also generated by means of direct digital synthesis. It would be preferred to have the same clock driving both direct digital synthesiser units. This clock is provided by the signal processing and control unit 39
15 such that the two oscillators are implemented as two parallel direct digital synthesisers. A sinusoidal signal from the further crystal oscillator is fed into the mixer 19, 57 of each of the sample circuit 15 and the reference circuit 51. If the optical signals input into each of the
20 opto-electric converters 13, 53 of the sample circuit 15 and the reference circuit 53 are sinusoidal, the output from the mixer will be represented by the following equation:

$$\begin{aligned} 25 \quad Y(t) &= A1 \cdot \sin(\omega1 \cdot t) \cdot A2 \cdot \sin(\omega2 \cdot t + \phi2) \\ &= A1 \cdot A2 \cdot \cos((\omega1 + \omega2) \cdot t + \phi2) - A1 \cdot A2 \cdot \cos((\omega2 - \omega1) \cdot t + \phi2) \end{aligned}$$

In the present application, the mixers are used for down-mixing the signal to a frequency range which can be
30 handled. The signal is therefore low pass filtered, which reduces the equation to:

$$Y(t) = - A1 \cdot A2 \cdot \cos((\omega2 - \omega1) \cdot t + \phi2)$$

35 It is expected that as the optical signals fed into the opto-electric converters of both the sample circuit 15 and the reference circuit 51 originate from the same light source, the frequency of the optical signals incident upon

the opto-electric converters 13, 53 should be the same.

In one embodiment, the further crystal oscillator 31 is arranged to oscillate at the same frequency as the optical signal incoming to the sample and reference circuits respectively. This is known as homodyne detection. This type of detection results in a signal output that is proportional to the phase difference between the signals. In this embodiment, the amplitude of the final signal has some mathematical relationship with the difference in phase. For $\omega_1 = \omega_2$, the equation above the low pass filtered signal is reduced to:

$$Y(t) = -A_1 A_2 \cos(\phi_2)$$

15

Therefore, following conversion of the analogue signal to a digital signal, it would be possible to use these corresponding amplitudes to perform calculations to derive any shift in phase caused by the fluorescent sample 33.

Where there is a fixed difference in the frequency of the signal output from the further oscillator 31 and that of the optical signal incident upon the opto-electric converters 13, 53, this is known as heterodyne detection. The heterodyne principal is based on modulation of the light sources (measurement light source 5 and reference light source 7) with a frequency f . The gain of the signal in the sample circuit 15 and the reference circuit 51 is modulated with a frequency:

$$\begin{array}{ll} f + df & \text{or} \\ f - df \end{array}$$

As stated above, this results in a down-conversion of the signals, but maintains the phase difference between the two branches. f is typically in the range of a few megahertz up to 200 megahertz. df is typically in the

range of 100 to 1000Hz, although in principle, 1 Hz up to a few MHz would be suitable. The high frequency component is eliminated by the band pass filters 25, 61 to reduce noise in the sample circuit 15 and the reference circuit 51 respectively. As previously, the digital signals output from the analogue to digital converters 27, 63 can be processed by the signal processing and control unit to determine the shift in phase of the respective signals. This may be done in three stages:

10

1) determine the phase lag between the signal received in the sample circuit and the signal received in the reference circuit for the sample measurement;

15

2) determine the phase lag between the signal received in the sample circuit and the signal received in the reference circuit for the reference measurement; and

3) subtract the two results from each other.

20

If the drift in phase caused by the electronic circuitry, including the LEDs and the LED drive electronics, is negligible when comparing the shift in phase during operation of the first light source and operation of the second light source, the operation may be described by the following equations:

The constant phase lag and phase drift in the electronics are as follows:

30

LED driver and measure LED

$$\phi_{m1} + \Delta\phi_{m1}$$

35 LED driver and reference LED

$$\phi_{r1} + \Delta\phi_{r1}$$

measurement branch detector chain

$$\phi_{sd} + \Delta\phi_{sd}$$

5 Reference branch detector chain

$$\phi_{rd} + \Delta\phi_{rd}$$

The phase lag introduced by the fluorophore is

10 ϕ_{fl}

Phase measurement on fluorophore gives the following equation (excitation with measure LED, phase in measurement branch minus phase in reference branch):

15

$$\phi_{ml} + \Delta\phi_{ml} + \phi_{fl} + \phi_{sd} + \Delta\phi_{sd} - (\phi_{ml} + \Delta\phi_{ml} + \phi_{rd} + \Delta\phi_{rd})$$

This may be reduced to

20 $\phi_{fl} + \phi_{sd} + \Delta\phi_{sd} - \phi_{rd} - \Delta\phi_{rd}$

The respective reference phase measurement gives the following equations (excitation with reference LED, phase in measurement branch minus phase in reference branch):

25

$$\phi_{rl} + \Delta\phi_{rl} + \phi_{sd} + \Delta\phi_{sd} - (\phi_{rl} + \Delta\phi_{rl} + \phi_{rd} + \Delta\phi_{rd})$$

This may be reduced to

30 $\phi_{sd} + \Delta\phi_{sd} - \phi_{rd} - \Delta\phi_{rd}$

The phase lag induced by the fluorophore is calculated by subtracting fluorophore and reference measurement:

35 $\phi_{fl} + \phi_{sd} + \Delta\phi_{sd} - \phi_{rd} - \Delta\phi_{rd} - (\phi_{sd} + \Delta\phi_{sd} - \phi_{rd} - \Delta\phi_{rd})$
 $= \phi_{fl}$

It is observed that constant phase offset and drift

induced by the electronics is cancelled.

The concentration of the analyte is calculated by the signal processing and control unit 29 based upon a pre-calculated calibration curve. The result is displayed on
5 the display 67 as a number.

The calibration curve is the result of phase offset induced by the difference in optical path length, if any, and the dose response curve, which is characteristic for the assay chemistry. An example on a calibration curve is
10 shown in figure 6. If batch variations are present on the assay chemistry, calibration parameters may be keyed in by the use of a simple user interface 69, e.g. consisting of two buttons. Said buttons may furthermore be used to initiate a measurement or to set-up a sequence of
15 measurements as required for continuous blood glucose monitoring. In the case of blood glucose monitoring, calibration of the system may be done by performing a reference glucose measurement with an ordinary discrete blood glucose meter and keying in the result. The
20 calibration is then done by the device using the reference measurement and the corresponding measurement performed by the device.

An alternative embodiment of the system described
25 above is illustrated in Figures 5 and 6 where during operation of the reference LED 5, the light signal 45 emitted is guided directly to the APD 13. The light 45 is guided to the APD 13 of the measurement circuit 15 by means of a light guide 65 or by a free optical path. The
30 embodiment shown in these diagrams does not measure absolute phase as there is a significant difference in the path the reference light follows before illuminating the measurement branch circuitry. The phase measured during operation of the reference LED 7 may differ from the phase
35 measured during operation of the measurement LED 5 by a small constant offset induced by the difference between the optical path lengths 11, 9.

Therefore, while it is preferable for the paths to be the same, or almost the same, it is not essential. For example, at a modulation frequency of 60 MHz, a variation in measurement path length of 1.5mm produces a phase
5 change of approximately 0.1° . The phase change is inversely proportional to the modulation frequency, which increases the demands on the stability on the path length at 1GHz (0.1mm gives approximately 0.1°). It is preferable to have a variation below 1.5mm in path difference in the
10 measurement path.

In the embodiment shown in figure 5, where the light signal from the reference LED 7 travels direct to the electro-optical converter 13 of the sample circuit 15, it
15 may be desired to adjust the intensity of the detected light. This may be necessary in order to allow the sample circuit 15 to operate under similar conditions as when receiving light emitted by the fluorescent sample 33. One way in which this may be done is by adjusting the drive
20 current to the reference LED 7. However, this would affect the conditions in the reference branch as the output from the reference LED 7 would be different. It is therefore preferable to maintain the light intensity in the reference branch by adjusting the intensity of the
25 detected light from the reference LED 7 by introducing an electro optical attenuator 47 in the second optical path 9, as shown in figure 6.

As an example, the electro optical attenuator 47
30 could be a twisted nematic liquid crystal display (TN LCD), a super twisted nematic liquid crystal display (STN LCD), a digital Micro-mirror Device/Digital light processor (DMD/DLP) or a ferro electric liquid crystal display.

35

In another alternative embodiment, the phase of light may be measured directly by measuring the phase of the drive current to the first and second LEDs. In this

embodiment, it would not be necessary to emit light from both the first and second LEDs along a reference path to an opto-electric convertor of the reference circuit.

Instead, and as shown in figure 7, the phase is measured
5 directly from the LED driver and input to the mixer of the reference circuit.

A system as described can be used to determine the concentration of analyte present in a competition assay.
10 In a competition assay, FRET can occur as a result of a FRET active molecule combining with a competition agent that is also FRET active. The shift in phase detected is based upon the average lifetime of the detected fluorescence. The system described above is calibrated by
15 directing light from the measurement LED 5 to a solution having a known concentration of analyte. Information derived from the signals in the various circuits can be used to create a calibration curve. During real time operation, a predetermined concentration of FRET active
20 material and competition agent are provided. FRET is detected by calculating the shift of phase caused in the light received by the measurement electronic circuit. As the amount of FRET corresponds to the amount of analyte present, this shift of phase is compared with the
25 calibration curve to enable determination of the concentration of analyte present.

One application of such a system would be in the measurement of blood glucose concentrations. In these
30 circumstances, a fluorophore is linked to a glucose binding molecule and an energy acceptor is linked to a glucose analogue. As long as the glucose analogue is bound to the glucose binding molecule, the maximum possible FRET will occur. When glucose is present, it
35 competes with the glucose analogue for the binding site and displaces the acceptor molecule. At this time, less FRET occurs.

Where two fluorescent samples are required for obtaining measurements, in addition to linking a fluorophore to a glucose binding molecule, a further reference fluorophore, which is not affected by the glucose concentration, can be provided as the second fluorescent sample. In this case, if the second fluorescent sample has a known effect on the intensity and phase of the resultant fluorescence, then it can be used as a reference from which to calculate the shift in phase caused by the FRET.

When taking measurements, it is possible that other fluorophores found in the skin, could cause interference if they emit fluorescent light upon radiation by the excitation light. This additional interference would make it difficult to detect the shift in phase caused by FRET. In these circumstances, it would be preferable to adapt the system to enable light of two or more different modulation frequencies to be alternately emitted from the reference and measurement LEDs. The additional frequencies would preferably be in a range similar to that of the first. The modulation frequencies typically but not necessarily differ from each other with a factor of two or more depending on the fluorophores that contribute to the phase changes. In the case of heterodyne detection, the frequency difference between the two oscillators is kept constant so that no further processing electronics would be required.

As the different fluorophores would each have different lifetimes, this would cause varying degrees of shift in phase of the respective signals. In addition, each fluorophore would cause a different reduction in amplitude of the fluorescent signal. Using light of two or more different modulation frequencies would enable further calculations to be made based upon the changes in phase and amplitude of the fluorescent signal by the signal processing and control unit 29. In this respect,

the circuitry required for detecting the difference in amplitude would be the same as that for detecting a shift in phase. The beat frequency fed into the respective analogue to digital converters 27, 63 in each of the measurement and reference circuits would have an amplitude corresponding to the intensity of the fluorescent signal. These digitised signals would be fed into the signal processing and control unit to enable determination of the shift in frequency caused by FRET. For each additional lifetime that may be measured, a measurement at a different frequency would be required. At each different frequency, a measurement should be taken with both the measurement LED and the reference LED active.

15 This system could also be used in Fluorescence Lifetime Imaging Microscopy (FLIM). FLIM enables the discrimination of fluorescence emitted from different fluorescent materials, that exhibit similar absorption and emission properties, but that show a difference in fluorescence lifetime. Fluorescence lifetime is calculated by measuring the phase shift of fluorescence and the reduction in its amplitude. In lifetime imaging acquisition, a number of images are acquired, where the phase will vary depending on the lifetime of the fluorescence at that particular point. Signals obtained as a result of FLIM will be subject to similar factors that may cause drift of the phase of the signal. Therefore, to relate this relative lifetime image to an actual lifetime image a reference is necessary. The system described above would be capable of performing consecutive measurements as described above for each pixel or line of the image.

It is appreciated that variations in, and modifications to, the embodiments described and illustrated may be made within the scope of the appended claims.

CLAIMS

1. Apparatus for measuring a phase shift induced in a
5 light signal by a sample, the apparatus comprising:
a first light source for emitting a light signal
along a measurement optical path, wherein the measurement
optical path includes a sample location;
a second light source for emitting a light signal
10 along a dummy measurement optical path, the first and
second light sources being arranged for alternate
operation;
a measurement electronic circuit for receiving the
light signals from the measurement and dummy measurement
15 optical paths, the measurement electronic circuit being
arranged to provide outputs separated in time which are
respectively indicative of the phase of the light signals
received from each of the measurement and dummy
measurement optical paths, wherein in use a phase shift is
20 induced in light in the measurement optical path by a
sample in said sample location such that the phase of
light of the first light source received from the
measurement optical path is different to the phase of
light emitted from the first light source;
25 a reference electronic circuit for receiving a signal
indicative of the phase of the light signals emitted by
the first and second light sources;
circuitry to compare the phase of light indicated by
the output of the measurement electronic circuit
30 responsive to the first light source with the phase of
light indicated by the reference electronic circuit to
provide an output indicative of a first measured phase
difference and to compare the phase of light indicated by
the output of the measurement electronic circuit
35 responsive to the second light source with the phase of
light indicated by the reference electronic circuit to
provide an output indicative of a second measured phase

difference, and circuitry to apply a correction to the first measured phase difference on the basis of the second measured phase difference to correct for errors in said first measured phase difference due to phase changes
5 induced by said measurement and reference electronic circuits so as to obtain an improved measurement of the shift in phase induced in the light of the first light source by the sample.

10 2. Apparatus as claimed in Claim 1, wherein the first light source further emits a light signal along a reference optical path, and the second light source further emits a light signal along a dummy reference optical path, wherein the reference electronic circuit
15 further comprises means for receiving the light signals from the reference and dummy reference optical paths, the reference electronic circuit being arranged to provide outputs separated in time which are respectively indicative of the phase of the light signals received from
20 each of the reference and dummy reference optical paths.

3. Apparatus as claimed in claim 1 or claim 2, wherein the measurement optical path comprises a beam splitter receiving light from said first light source and
25 reflecting said light toward said sample location and receiving fluorescence emission light in use emitted from said sample location and transmitting said fluorescence emission light to said measurement electronic circuit.

30 4. Apparatus as claimed in claim 1 or claim 2, wherein said measurement optical path comprises an excitation filter arranged to select a wave length of light suitable for exciting a first fluorescent sample at said sample location and an emission filter suitable for selecting a
35 wave length of fluorescent light emitted from said sample location.

5. Apparatus as claimed in any preceding claim wherein an oscillator is coupled to each of the first and second light sources to produce light signals of oscillating intensity.
- 5
6. Apparatus as claimed in claim 5, wherein the signal output from the oscillator is in the form of smooth excitation pulses.
- 10 7. Apparatus as claimed in any preceding claim wherein a drive current fed into each of the first and second light sources to produce light signals of oscillating intensity is generated by direct digital synthesis.
- 15 8. Apparatus as claimed in Claims 3 to 7, wherein the dummy measurement path comprises said beam splitter, the beam splitter being arranged to receive light from the second light source, reflect said light toward said sample location, receive said light reflected from said sample
- 20 location and transmit the light to said measurement electronic circuit.
9. Apparatus as claimed in claim 8, wherein the dummy measurement optical path further comprises the said
- 25 emission filter for selecting a wavelength of light comparable to the wavelength of fluorescent light emitted from the sample location.
- 30 10. Apparatus as claimed in any of claims 3 to 7, wherein light from the second light source is not received by the beam splitter and is guided directly to the measurement electronic circuit.
- 35 11. Apparatus as claimed in claim 10, wherein the dummy measurement path further comprises an electro-optical attenuator for reducing the intensity of light emitted from the second light source.

12. Apparatus as claimed in any preceding claims, wherein the light in the dummy measurement path does not include a wave length of light suitable for exciting the first
5 fluorescent sample.

13. Apparatus as claimed in any preceding claims, wherein light emitted from said first and second light sources is of the same wavelength and the dummy measurement path
10 further comprises a filter to eliminate light of the wavelength suitable for exciting the first fluorescent sample.

14. Apparatus as claimed in any of claims 1 to 10,
15 wherein the first light source and the second light source emit light of different wavelengths, and the light emitted from the second light source does not include a wavelength suitable for exciting the fluorescent sample.

20 15. Apparatus as claimed in Claims 3 to 7, wherein the dummy measurement path comprises said beam splitter, and the beam splitter is arranged to receive light from said second light source, reflect said light towards said sample location, receive fluorescence emission light in
25 use emitted from said sample location and to transmit said fluorescence light to said measurement circuit.

16. Apparatus as claimed in Claim 15, wherein said dummy measurement optical path comprises an excitation filter
30 arranged to select a wavelength of light suitable for exciting a second fluorescent sample at said sample location and an emission filter for selecting a wavelength of fluorescent light emitted from said sample location.

35 17. Apparatus as claimed in claim 15 or claim 16, wherein the wavelength of light required to excite the first fluorescent sample is different to the wavelength of light required to excite the second fluorescent sample.

18. Apparatus as claimed in any preceding claim, wherein the measurement electronic circuit comprises an opto-electric converter for receiving light signals from said measurement path and the dummy measurement path, wherein
5 the opto-electric converter outputs an electrical signal corresponding to an intensity of the light illuminating it.

19. Apparatus as claimed in Claim 18, wherein the opto-electric converter is a photo-multiplier tube, whereby a
10 bias voltage is provided to the photo-multiplier tube to enhance the electrical signal corresponding to the intensity of the light illuminating the avalanche photo-diode.

20. Apparatus as claimed in claim 18, wherein the opto-electric converter of the sample circuit is an avalanche photo-diode, whereby a bias voltage is provided to the avalanche photo-diode to enhance the electrical signal
20 corresponding to the intensity of the light illuminating the avalanche photo-diode.

21. Apparatus as claimed in any preceding claim, wherein means are provided for guiding light from the first and
25 second light sources along the reference and dummy reference optical paths respectively to an opto-electric converter of the reference circuit.

22. Apparatus as claimed in claim 21, wherein the opto-electric converter of the reference circuit is a photo-diode.
30

23. Apparatus as claimed in any preceding claim, further comprising electronic circuitry modulating the signal
35 being processed in each of the measurement circuit and the reference circuit to produce an output representing the phase of the signal being processed.

24. Apparatus as claimed in claim 23, wherein the electronic circuitry modulating the signal in each of the measurement and reference circuit comprises a mixer in each of the measurement electronic circuit and the
5 reference electronic circuit, each mixer being coupled to a further oscillator.

25. Apparatus as claimed in claim 24, wherein a signal having a modulated frequency of from 0.1 to 10^3 megahertz
10 is output from the further oscillator, and is combined with the signal in each of the measurement and reference circuits by means of the respective mixers and a modulated frequency of the light output from each said light source differs from said modulated frequency by an amount, which
15 is from 10^2 to 10^5 hertz (heterodyne detection).

26. Apparatus as claimed in claim 25, wherein the measurement electronic circuit and the reference electronic circuit each further comprise a band pass
20 filter, wherein the high frequency component of the output from each of the mixers of the measurement circuit and the reference electronic circuit is eliminated by the band pass filter.

27. Apparatus as claimed in claim 24, wherein a signal having a modulated frequency the same as the modulated frequency of light output from each light source is output
from the further oscillator, and is combined with the signal in each of said measurement and reference circuits
30 by means of the respective mixers (homodyne detection).

28. Apparatus as claimed in any of claims 1 to 23 wherein a modulated frequency of the light output from each light source is from 10 to 10^5 hertz.
35

29. Apparatus as claimed in any of claims 24 to 28, wherein the opto-electric converter of each of the measurement and reference electronic circuits is arranged

to output an electronic signal to an amplifier which produces a voltage output, the respective mixers being arranged to receive said voltage outputs and the signal of modulated frequency from the further oscillator to produce
5 a beat frequency output representing the frequency difference between said inputs, said output being indicative of the phase of the light received at the opto-electronic converter.

10 30. Apparatus as claimed in any of claims 24 to 29, wherein the further oscillator providing the predetermined frequency to the mixers of each of the measurement and reference circuit is a voltage controlled crystal oscillator.

15 31. Apparatus as claimed in any of claims 24 to 30, wherein the predetermined frequency to the mixers of each of the measurement and reference circuit is generated by direct digital synthesis.

20 32. Apparatus as claimed in any of claims 24 to 31, wherein the band pass filter of each of the measurement and reference electronic circuits are respectively arranged to receive the beat frequency output from each
25 mixer to reduce noise in the respective signal.

33. Apparatus as claimed in claim 32 wherein the measurement and reference electronic circuits each further comprise an amplifier to amplify the filtered signal from
30 the band pass filter and an analogue to digital converter for digitising the amplified signal.

34. Apparatus as claimed in claim 33 wherein a signal processing and control unit is provided to receive the
35 digitised outputs from each of the measurement circuit and the reference circuit, the signal processing and control unit comprising further circuitry to compare the digitised signals received during operation of the first and second

light sources respectively and to calculate the phase change induced by the sample.

35. Apparatus as claimed in claim 34, wherein a result of
5 the calculation is output to a display.

36. Apparatus as claimed in any of claims 34 or 35,
wherein the signal processing and control unit is arranged
to control alternate operation of the first and second
10 light sources

37. Apparatus as claimed in any of claims 34 to 36,
wherein the signal processing and control unit is arranged
to control the frequency of the further oscillator.
15

38. Apparatus as claimed in any of claims 34 to 37,
wherein the signal processing and control unit is arranged
to control the bias voltage provided to the avalanche
photo-diode.
20

39. Apparatus as claimed in any preceding claim wherein
light modulated at two or more different frequencies are
alternately generated and output from each of the first
and second light sources consecutively to enable further
25 calculations.

40. Apparatus as claimed in any preceding claim for use
in a glucose measuring system, wherein the sample has
fluorescence characteristics which can be modulated by the
30 concentration of glucose present in the sample.

41. A method of measuring a phase shift induced in a
light signal by a sample, comprising the steps of:
emitting a first light signal along a measurement
35 optical path, wherein the measurement optical path
includes a sample location;

emitting a second light signal along a dummy-measurement optical path, the first and second light signals being emitted alternately;

receiving light signals from the measurement and
5 dummy-measurement optical paths in a measurement electronic circuit;

providing outputs separated in time from the measurement electronic circuit, wherein the outputs are respectively indicative of the phase of the light signals
10 received from each measurement and dummy-measurement optical path;

receiving a signal indicative of the phase of the first and second light signals in a reference electronic circuit;

15 comparing the phase of light indicated by the output of the measurement electronic circuit and responsive to the first light signal with the phase of light indicated by the reference electronic circuit;

providing an output indicative of the first measured
20 phase difference;

comparing the phase of light indicated by the output of the measurement electronic circuit in response to the second light signal with the phase of light indicated by the reference electronic circuit;

25 providing an output indicative of a second measured phase difference;

applying a correction to the first measured phase difference on the basis of the second measured phase difference to correct errors in said first measured phase
30 difference due to phase changes induced by said measurement and reference electronic circuit so as to obtain an improved measurement of the shifting phase induced in the light of the first light source by the sample.

35

42. A method as claimed in claim 41 further comprising:
additionally emitting the first light signal along a

reference optical path and the second light signal along a dummy-reference optical path;

receiving the light signals from the reference and dummy-reference optical paths in the reference electronic
5 circuit;

outputting from the reference electronic circuit signals separated in time which are respectively indicative of the phase of each of the light signals received from the reference and dummy-reference optical
10 paths.

43. A method as claimed in any of claims 41 or claim 42, further comprising:

selecting a wavelength of light for the first light
15 signal suitable for exciting a first fluorescent sample at said sample location; and

selecting a wavelength of fluorescent light emitted from said sample location.

20 44. A method as claimed in any of claims 41 to 43, further comprising producing first and second light signals of oscillating intensity.

45. A method as claimed in claim 44, further comprising:

25 generating a drive current by direct digital synthesis; and

producing said first and second light signals of oscillating intensity by feeding the drive current into a first and second light source respectively.

30

46. A method as claimed in any of claims 41 to 45, further comprising:

receiving the first light signal emitted along the dummy measurement path in a beam splitter;

35 reflecting said light toward said sample location; and

transmitting the light to said measurement circuit.

47. A method as claimed in claim 46 further comprising selecting a wavelength of light comparable to the wavelength of fluorescent light emitted from the sample location.

5

48. A method as claimed in any of claims 41 to 45, further comprising guiding the second light signal directly from the second light source to the measurement circuit.

10

49. A method as claimed in claim 48, further comprising reducing the intensity of light emitted from the second light source.

15 50. A method as claimed in any of claims 41 to 49, further comprising:

converting the light signal received in the measurement electronic circuit into an electrical signal corresponding to an intensity of the light signal; and

20 outputting the electrical signal.

51. A method as claimed in any of claims 41 to 50, further comprising guiding the first and second light signals from the first and second light sources

25 respectively along the reference and dummy reference paths to an opto-electric converter of the reference circuit.

52. A method as claimed in any of claims 41 to 51, further comprising modulating the signal being processed in each of the measurement electronic circuit and reference electronic circuit to produce an output representing the phase of the signal being processed.

53. A method as claimed in any of claims 41 to 52, further comprising outputting a signal having a modulated frequency of from 0.1 to 10^3 megahertz from a further oscillator; and

combining the modulated signal with the signal being processed in each of the measurement and reference circuits by means of respective mixers.

- 5 54. A method as claimed in claim 53, further comprising eliminating a high frequency component of the output from each of the mixers of the measurement and reference electronic circuits by a band pass filter.
- 10 55. A method as claimed in any of claims 41 to 52, further comprising:
outputting a signal having a modulated frequency the same as the modulated frequency of the first and second light signals; and
- 15 combining the modulated signal with the signal being processed in each of the measurement and reference electronic circuits by means of respective mixers.
56. A method as claimed in any of claims 53 to 55,
20 further comprising:
outputting an electronic signal from each of the measurement and reference electronic circuits to an amplifier which produces a voltage output;
receiving said voltage outputs and the signal of
25 modulated frequency from the further oscillator in the respective mixers;
thereafter producing a beat frequency representing the frequency difference between said inputs.
- 30 57. A method as claimed in claim 56, further comprising receiving the beat frequency output from each mixer in the band pass filter of each of the measurement and reference electronic circuits to reduce noise in the respective signals.
- 35 58. A method as claimed in claim 57, further comprising:
amplifying the filtered signal from the band pass filter; and

digitising the amplified signal.

59. A method as claimed in claim 57, further comprising:
comparing the digitised signals generated during
5 operation of each of the first and second light sources
respectively; and
calculating the phase change induced by the sample.
60. A method as claimed in claim 59, further comprising
10 outputting a result of the calculation to a display.

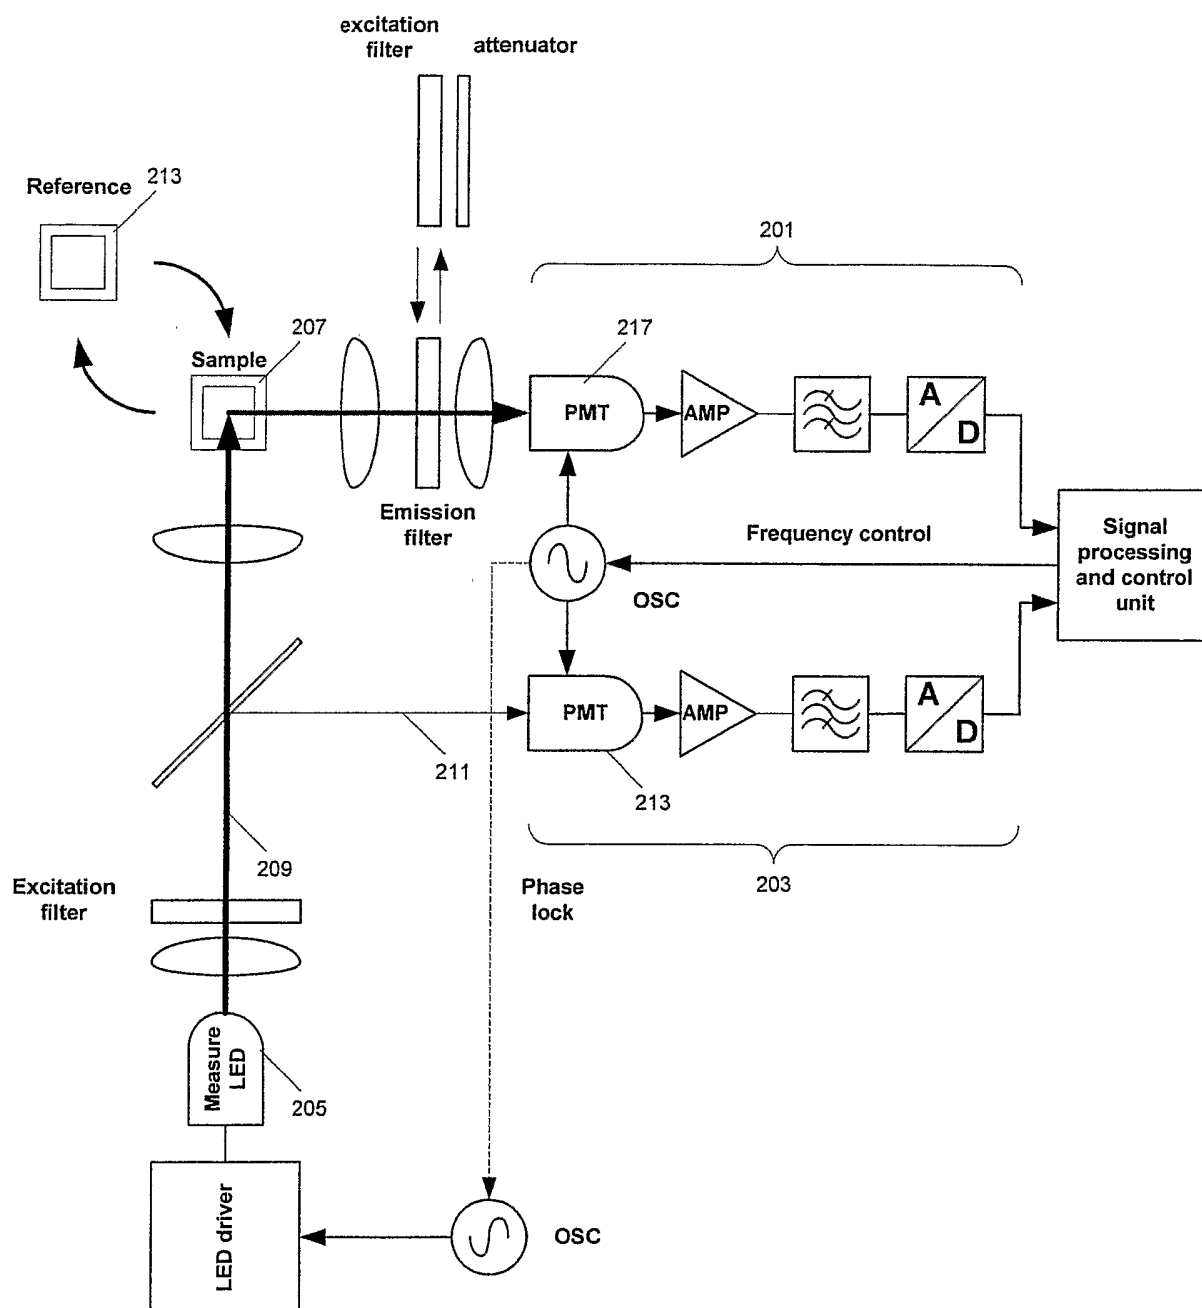


FIGURE 1

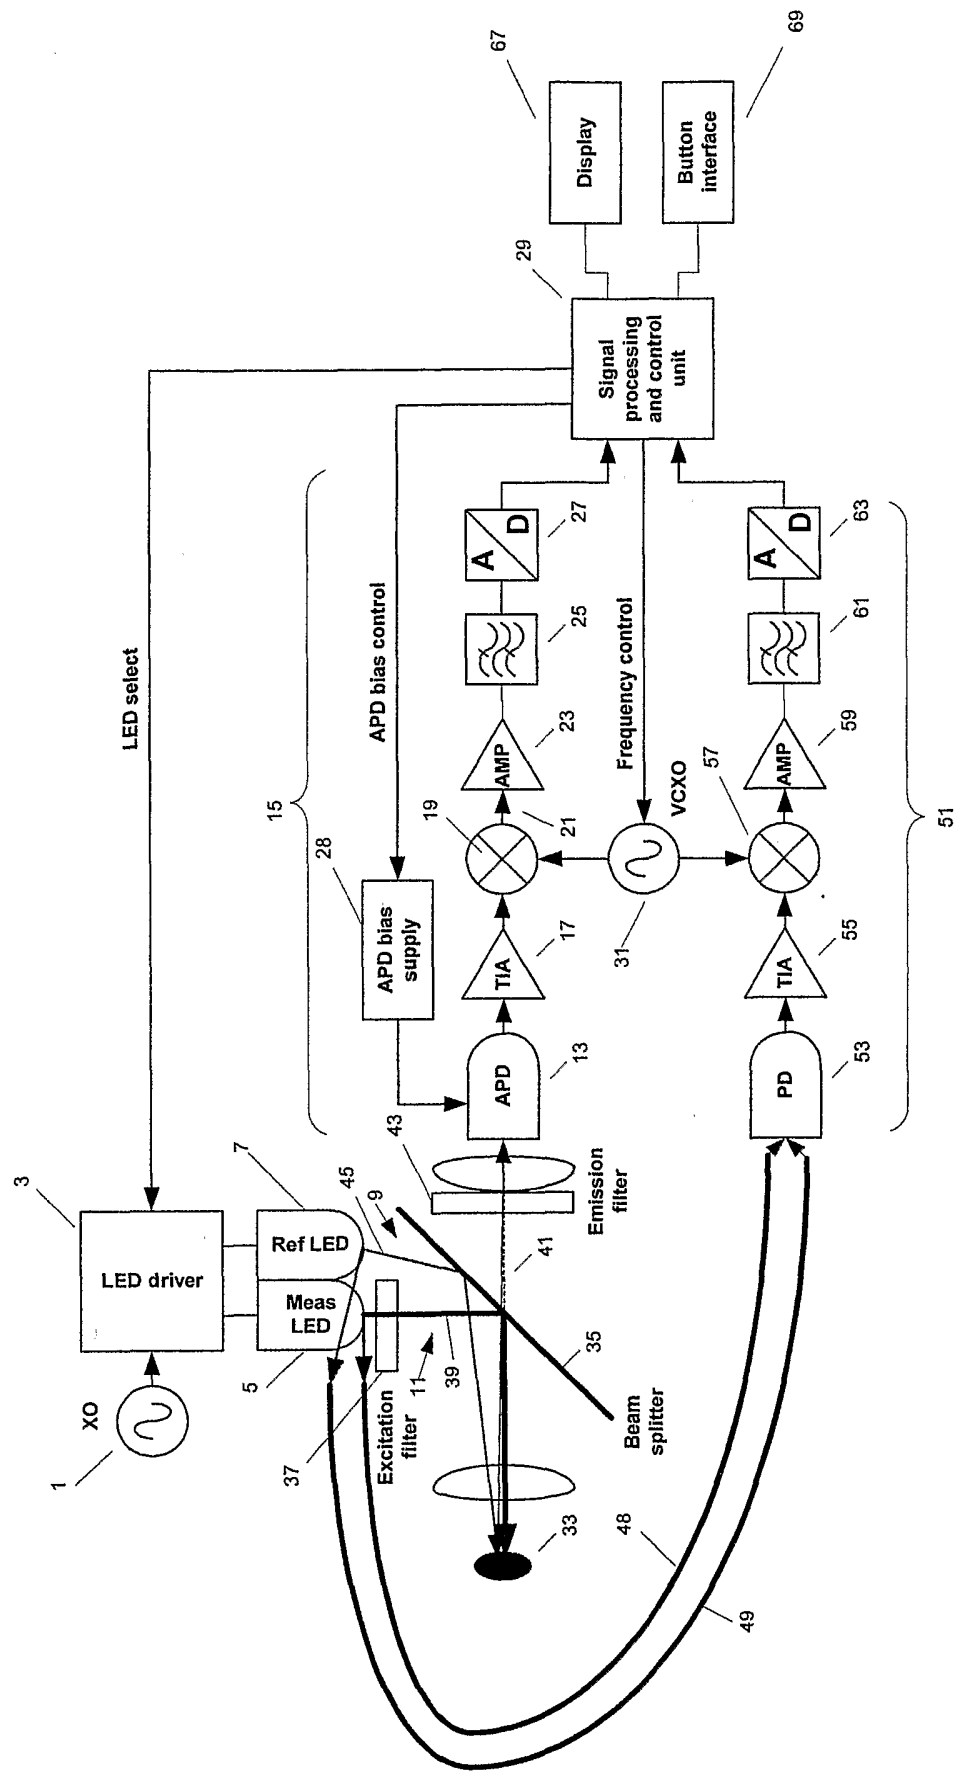


FIGURE 2

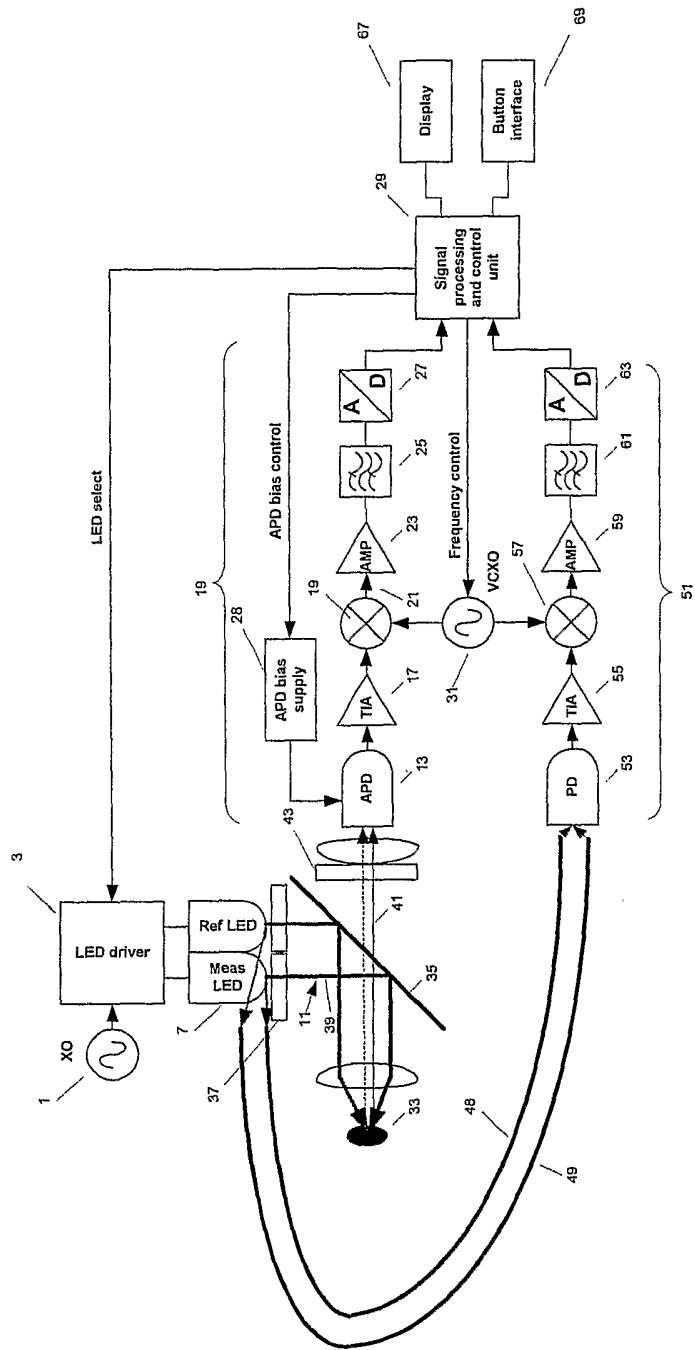


FIGURE 3

4 / 11

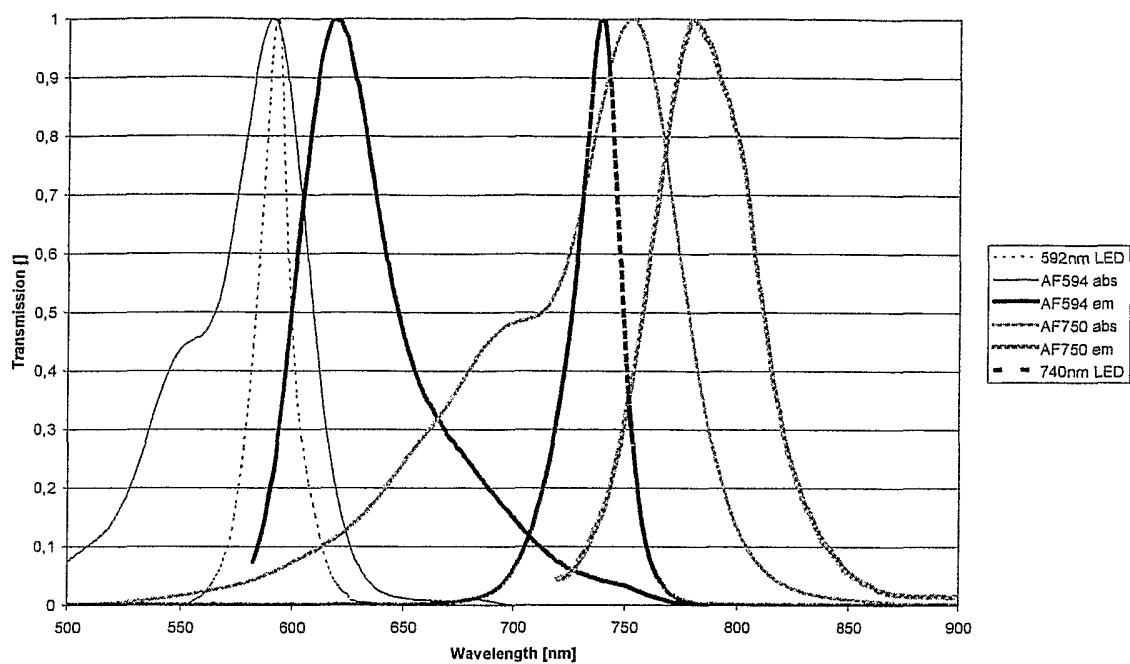


FIGURE 4A

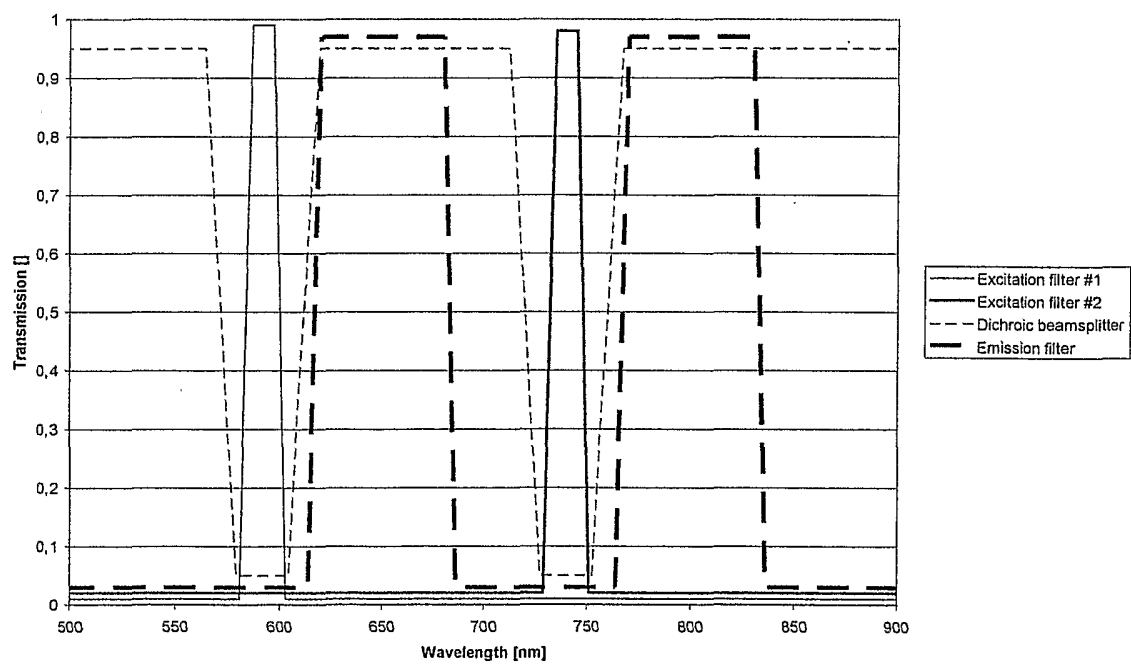


FIGURE 4B

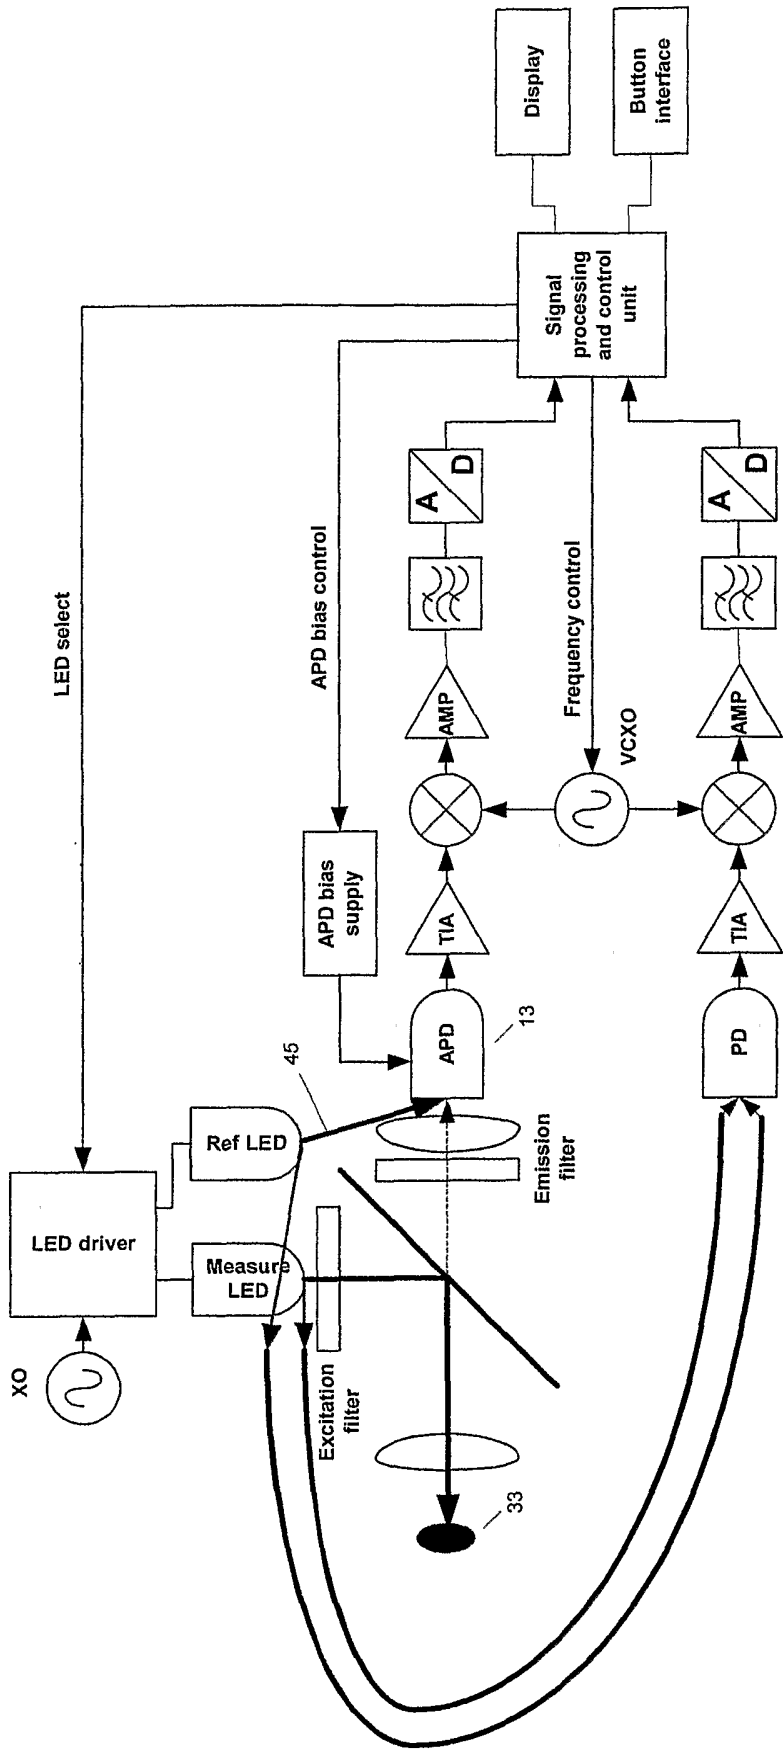


FIGURE 5

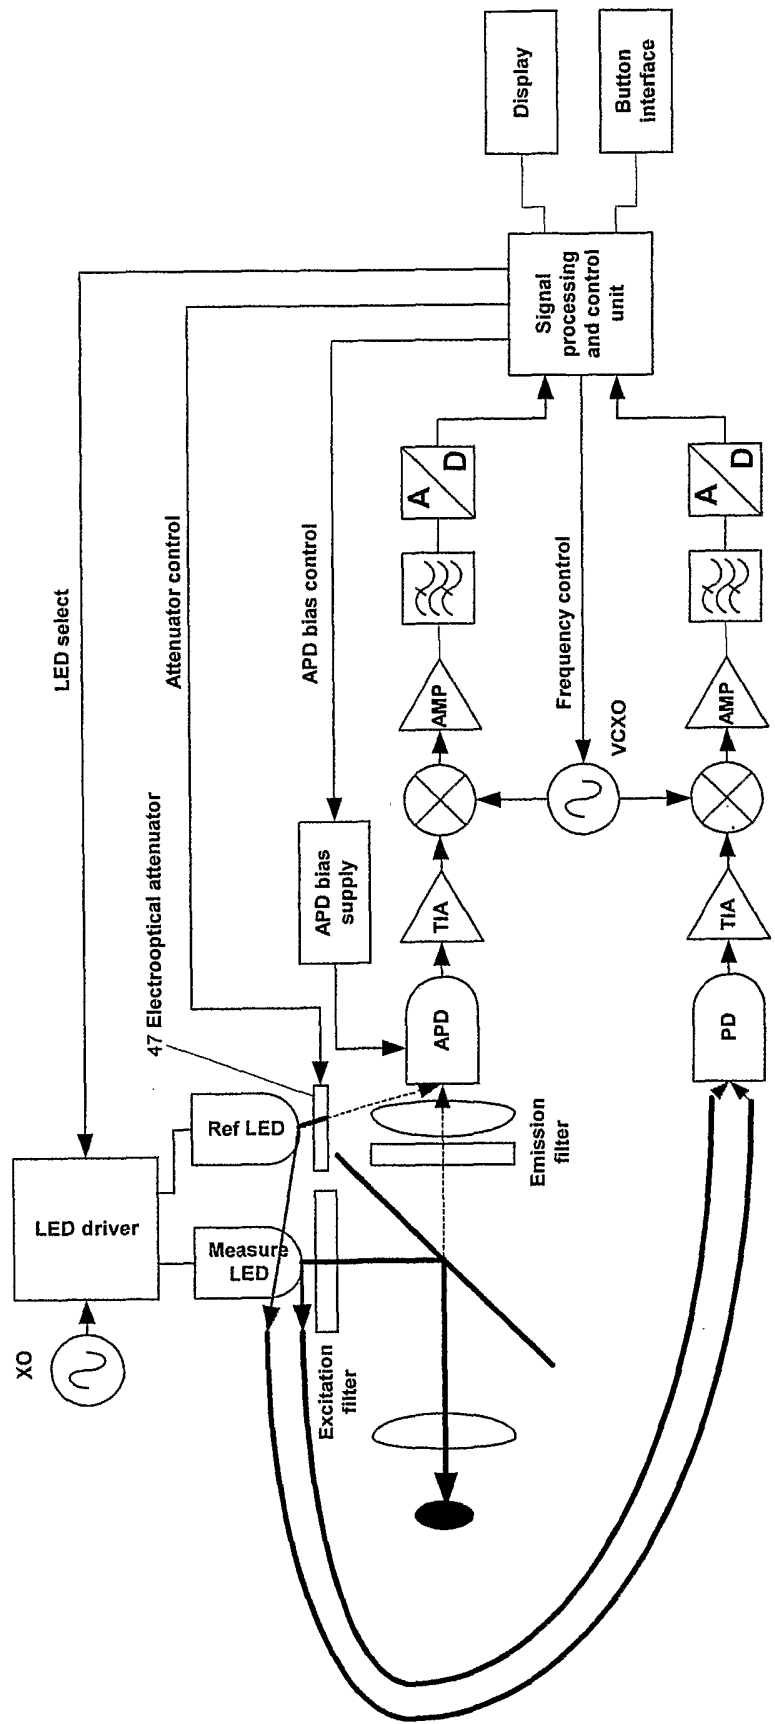


FIGURE 6

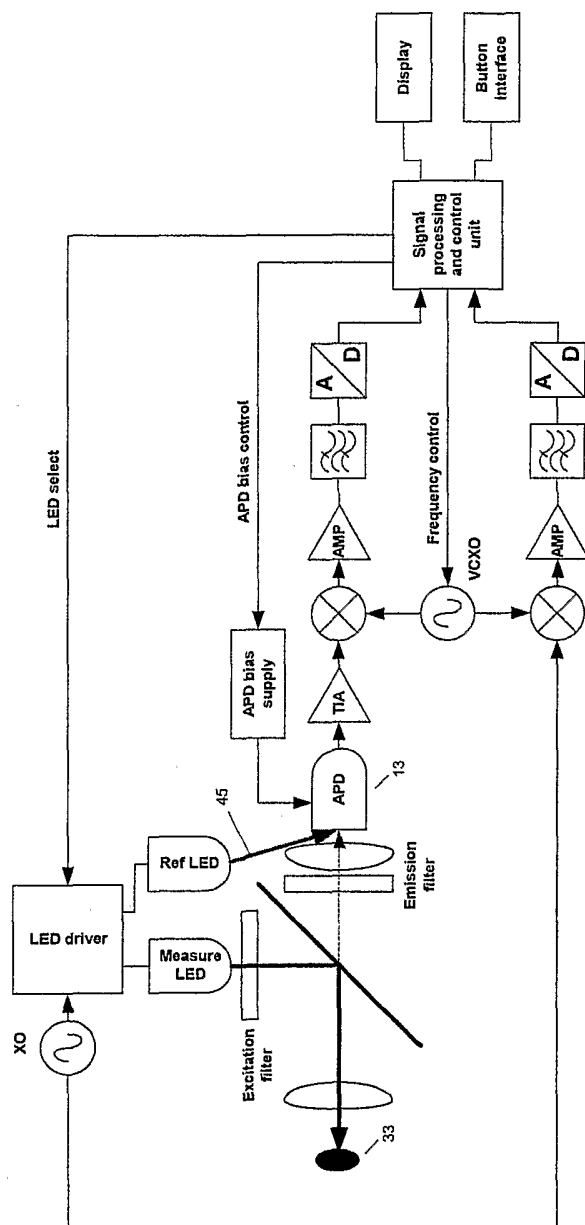


FIGURE 7

8 / 11

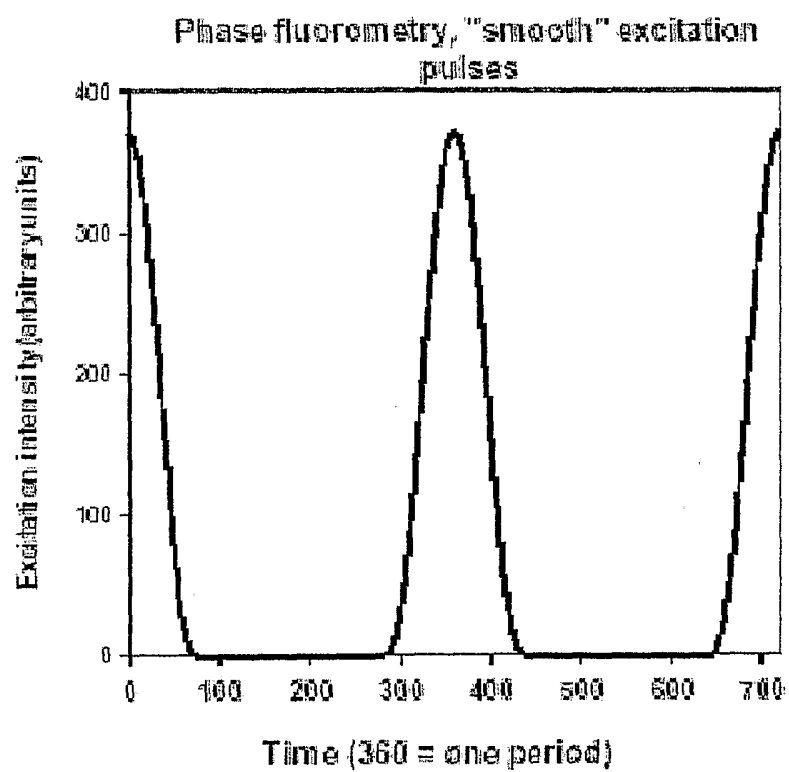


FIGURE 8

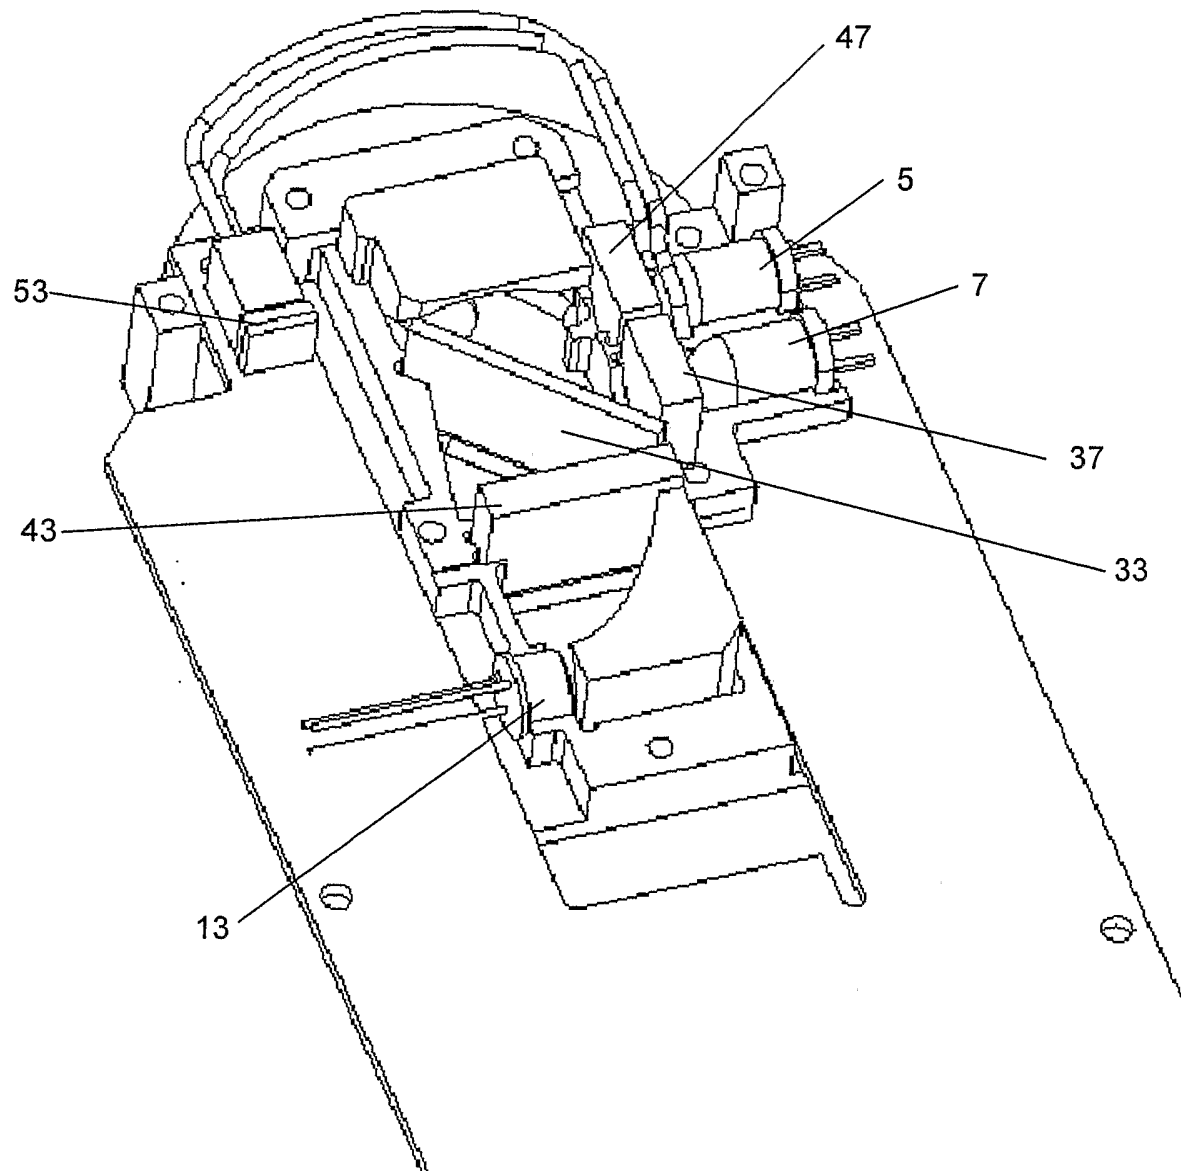
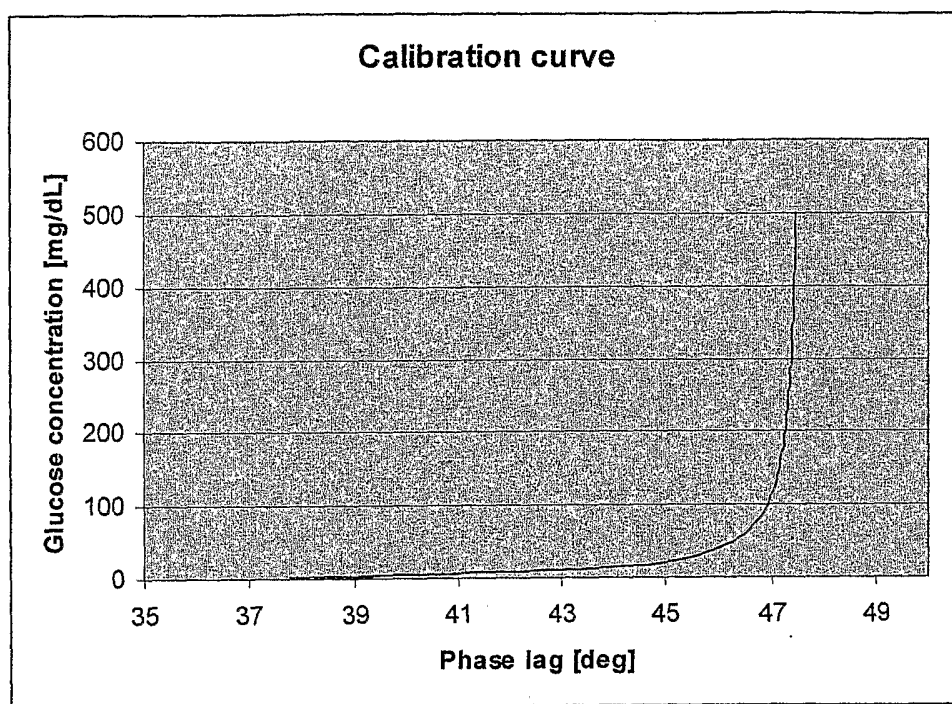


FIGURE 9

10 / 11

**FIGURE 10**

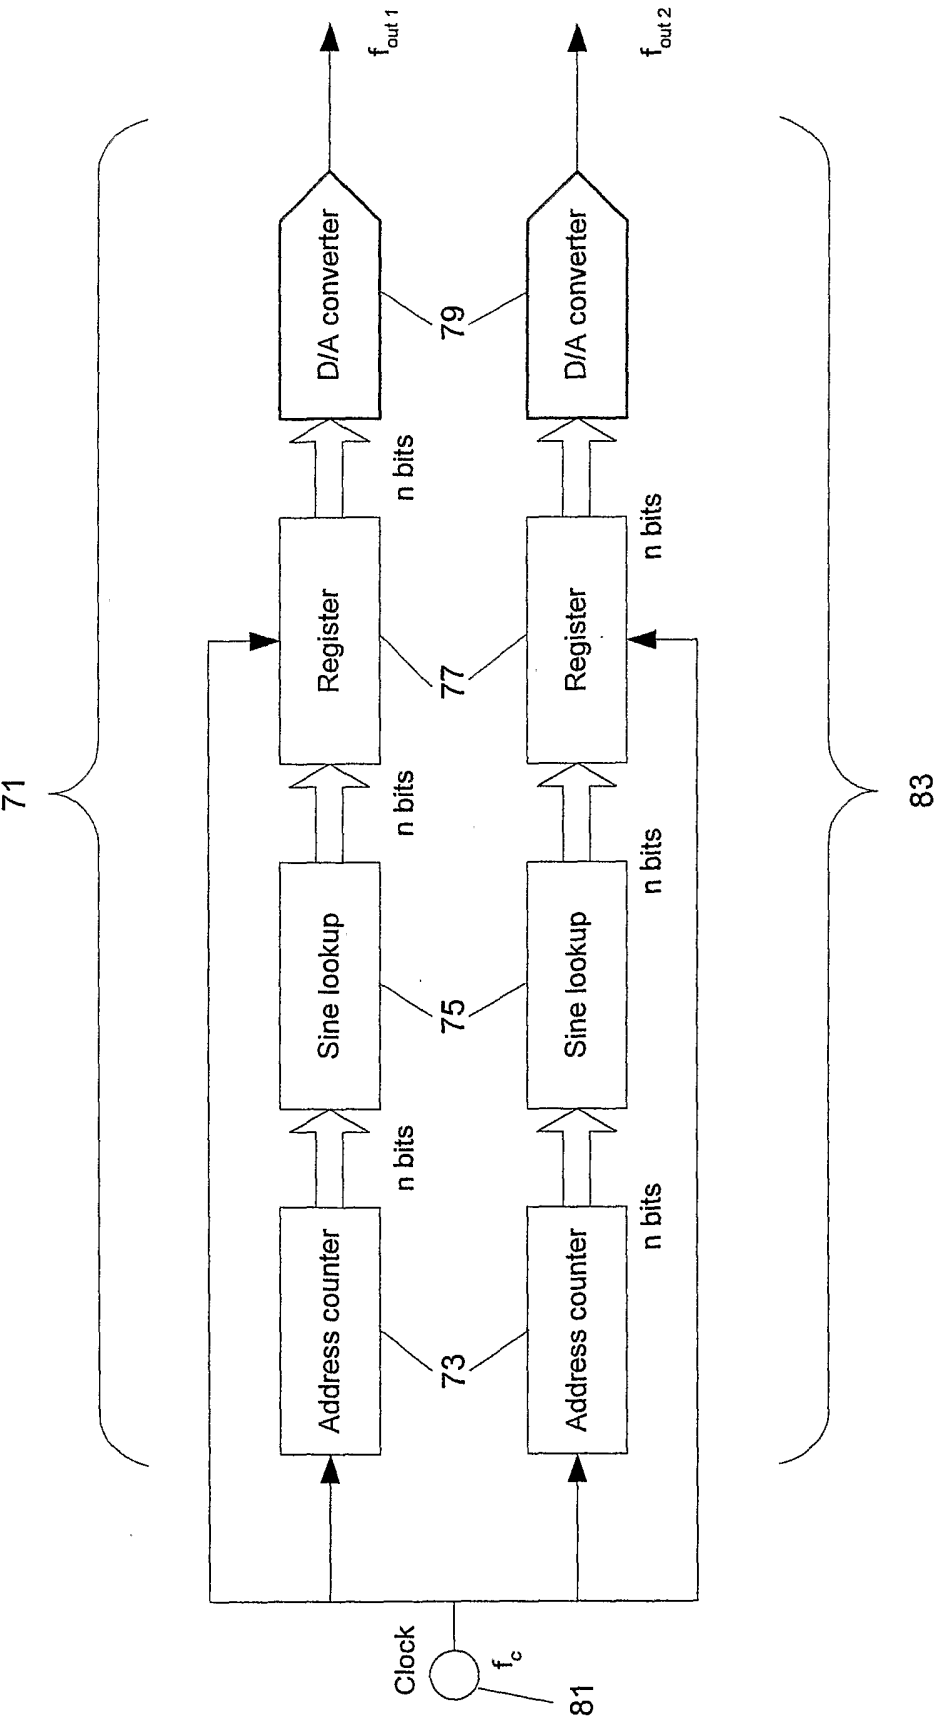


FIGURE 11

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP2005/008147

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G01N21/64

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	US 2004/114137 A1 (MADER LUTZ ET AL) 17 June 2004 (2004-06-17) paragraph '0057! - paragraph '0063!; figure 1	1,41 4,9,18, 21,22, 33-36, 43,47, 50,58-60
Y A	EP 0 453 599 A (HEWLETT-PACKARD GMBH) 30 October 1991 (1991-10-30) column 12, line 2 - column 13, line 34; figure 5	1,41 3-5,14, 22,26, 33-36, 43,44, 58-60
	----- -/-	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

22 September 2005

Date of mailing of the international search report

14/10/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Stuebner, B

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP2005/008147

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 216 483 A (BERTHOLD ET AL) 1 June 1993 (1993-06-01) column 7, line 25 - column 9, line 5; figures 4-6 -----	1,41
A	US 2004/090622 A1 (NIELSEN HANS OLE ET AL) 13 May 2004 (2004-05-13) paragraph '0138! - paragraph '0141!; figure 1 -----	1,41
A	US 5 757 013 A (GROGER ET AL) 26 May 1998 (1998-05-26) column 4, line 34 - column 6, line 64 -----	1,41
A	EP 0 442 295 A (THE BOC GROUP, INC) 21 August 1991 (1991-08-21) page 6, line 9 - page 7, line 4; figure 1 -----	1,41

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP2005/008147

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2004114137	A1	17-06-2004	AU 782106 B2	07-07-2005
			AU 1898802 A	27-05-2002
			CA 2429019 A1	23-05-2002
			WO 0240972 A1	23-05-2002
			DE 10058579 A1	13-06-2002
			EP 1336091 A1	20-08-2003
EP 0453599	A	30-10-1991	JP 4230835 A	19-08-1992
			US 5184618 A	09-02-1993
US 5216483	A	01-06-1993	CA 2078183 A1	24-03-1993
US 2004090622	A1	13-05-2004	WO 02090948 A1	14-11-2002
			EP 1384063 A1	28-01-2004
US 5757013	A	26-05-1998	NONE	
EP 0442295	A	21-08-1991	JP 4213046 A	04-08-1992
			US 5151869 A	29-09-1992