

(51) International Patent Classification:
H02H 7/08 (2006.01)(21) International Application Number:
PCT/US2014/045048(22) International Filing Date:
1 July 2014 (01.07.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
13/933,803 2 July 2013 (02.07.2013) US
14/096,614 4 December 2013 (04.12.2013) US(71) Applicant: **THE BOEING COMPANY** [US/US]; 100 North Riverside Plaza, Chicago, Illinois 60606-2016 (US).(72) Inventors: **BENSON, Christopher Pete**; 100 North Riverside Plaza, Chicago, Illinois 60606-2016 (US).
CAMERON, Douglas C.; 100 North Riverside Plaza, Chicago, Illinois 60606-2016 (US).(74) Agents: **COUSINS, Clifford G.** et al.; The Boeing Company, 5301 Bolsa Avenue, MC H011-B171, Huntington Beach, California 92647 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: MOTOR CONTROL FOR STABILITY AND POWER SUPPLY PROTECTION

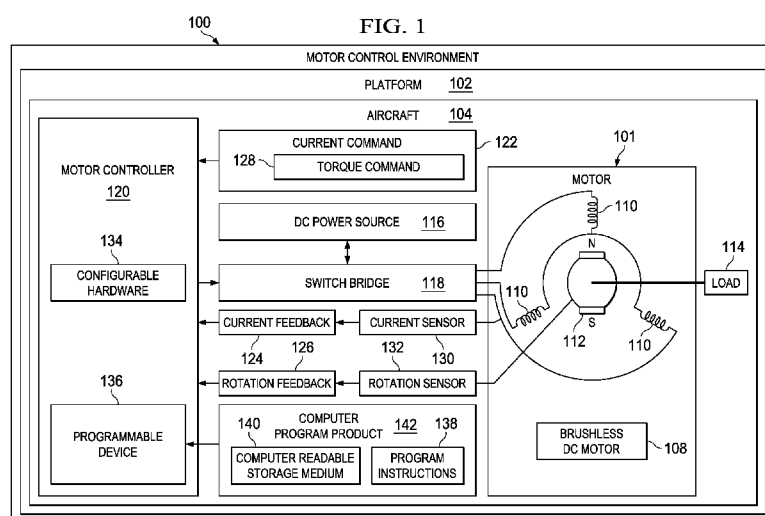

(57) Abstract: A method and apparatus for controlling a motor. The motor comprises windings. A switch bridge comprising a plurality of switches is configured to couple a power source to the windings. A motor controller is configured to control the plurality of switches. An undesired condition identifier is configured to identify an undesired condition when the motor is providing power to the power source, wherein the undesired condition is defined with respect to a characteristic of the power source. An undesired condition reducer is configured to reduce the undesired condition in response to identifying the undesired condition by the undesired condition identifier.

MOTOR CONTROL FOR STABILITY AND POWER SUPPLY PROTECTION

BACKGROUND INFORMATION

The present disclosure relates generally to electric motors and to the control of electric motors. More particularly, the present disclosure relates to controlling an electric motor to reduce instability when the motor is providing power to a power source and to protect the power source from undesired current levels.

Aircraft may employ various electronic devices and systems to perform various functions on the aircraft. For example, without limitation, electric motors on an aircraft may be used to move flight control surfaces, to raise and lower landing gear, and to perform other functions on the aircraft. Power for the electric motors and other electronic systems and devices on an aircraft may be provided by an aircraft power system.

An example of a type of electric motor used on aircraft, and for many other applications, is a brushless DC electric motor. This type of motor is also known as an electronically commutated motor. A brushless DC motor may comprise, for example, a permanent magnet synchronous motor, a switched reluctance motor, or an induction motor. Brushless DC motors are powered by a direct current (DC) electrical power source via an inverter which is controlled to provide a switching power signal to drive the motor.

For example, a brushless DC motor may include permanent magnets which rotate and a fixed armature which comprises the stator windings. An electronic controller continually switches the phase of power provided to the windings to keep the motor turning. The controller may employ a solid state circuit to provide timed power distribution to the motor windings.

To direct the rotor rotation, the controller for a brushless DC motor requires some means of determining the rotor's orientation relative to the stator windings. Some brushless DC motors use Hall effect sensors or a rotary encoder to directly measure the position of the rotor. Others measure the back electromotive force (EMF) in the undriven windings to infer the rotor position. Controllers of this latter type are often called sensorless controllers. Other sensorless controllers are capable of

measuring winding saturation caused by the position of the magnets to infer the rotor position.

The controller for a brushless DC motor may provide bi-directional outputs to control the driving of DC power to the motor windings. The outputs may be controlled by a logic circuit. Simple controllers may employ comparators to determine when the output phase should be advanced. More advanced controllers may employ a microcontroller to manage acceleration, control speed, and fine tune-motor efficiency. Motor controllers of this type may be referred to as electronic speed controllers.

A controller may control the power that is provided to the windings of a DC motor by controlling the switches in a switch bridge. The switch bridge couples the DC power source to the windings of the DC motor. For example, a three-phase switch bridge may have six switches arranged to form three parallel half H-bridges for coupling the DC power source to three motor windings of a DC motor. The switches of the switch bridge may be controlled by the controller to drive a current in either direction on each of the motor windings. For example, without limitation, the switch bridge may be implemented using solid state switching devices such as metal-oxide-semiconductor field-effect transistors (MOSFETs).

Various methods may be used to control the switches in a switch bridge to modulate the current in the windings of a brushless DC motor. However, existing methods for modulating the current in the motor windings of a brushless DC motor may have various drawbacks and limitations. A method for controlling the current in the windings of a brushless DC motor that overcomes these drawbacks and limitations is desirable.

The rotor in a brushless DC motor may be controlled to rotate in either direction, clockwise or counter-clockwise. The current in the windings of the motor may be controlled to produce torque on the rotor in either the clockwise or counter-clockwise direction. The current in the windings may be controlled to produce torque on the rotor that is either in the same direction as the direction of rotation of the rotor or in the opposite direction from the direction of rotation of the rotor at a particular point in time.

Operation of a brushless DC motor thus may be described with reference to four quadrants. For example, in a first quadrant of operation, the rotor may be rotating in a clockwise direction and the current in the motor windings may produce torque on the rotor in the same clockwise direction. In a second quadrant of operation,

the rotor may be rotating in a counter-clockwise direction and the current in the motor windings may produce torque on the rotor in the opposite clockwise direction. In a third quadrant of operation, the rotor may be rotating in a counter-clockwise direction and the current in the motor windings may produce torque on the rotor in the same counter-clockwise direction. In the fourth quadrant of operation, the rotor may be rotating in a clockwise direction and the current in the motor windings may produce torque on the rotor in the opposite counter-clockwise direction.

When a motor is operating in the second and fourth quadrants of operation, the motor may provide power back to the power source. In this case, the motor may be said to be regenerating or in a regenerating mode of operation. It is desirable to reduce or prevent undesired conditions that may occur when the motor is regenerating. For example, it is desirable to reduce or prevent instability that may occur when the motor is regenerating. It is also desirable to reduce or prevent undesired current flow between the motor and the power source when the motor is operating in various quadrants, including when the motor is regenerating. Accordingly, it would be desirable to have a method and apparatus that take into account one or more of the issues discussed above as well as possibly other issues.

SUMMARY

Embodiments of the present disclosure provide an apparatus comprising a motor, a switch bridge, a motor controller, an undesired condition identifier, and an undesired condition reducer. The motor comprises windings. The switch bridge comprises a plurality of switches configured to couple a power source to the windings. The motor controller is configured to control the plurality of switches. The undesired condition identifier is configured to identify an undesired condition in the apparatus when the motor is providing power to the power source, wherein the undesired condition is defined with respect to a characteristic of the power source. The undesired condition reducer is configured to reduce the undesired condition in response to identifying the undesired condition in the apparatus by the undesired condition identifier.

Embodiments of the present disclosure also provide a method of controlling a motor. A plurality of switches in a switch bridge is controlled to couple a power source to windings of the motor. It is determined whether a voltage across the windings is greater than a first voltage threshold, wherein the first voltage threshold is

defined with respect to an output voltage of the power source. A current in the windings is directed to ground via a resistor in response to a determination that the voltage across the windings is greater than the first voltage threshold.

Embodiments of the present disclosure also provide another method of controlling a motor. A plurality of switches in a switch bridge is controlled to couple a power source to windings of the motor. A duty cycle during which a number of the plurality of switches are closed to provide a current between the power source and the windings is limited such that the current between the power source and the windings does not exceed a current limit for the power source.

Further, the disclosure comprises embodiments according to the following clauses:

Clause 1. An apparatus, comprising a motor comprising windings; a switch bridge comprising a plurality of switches configured to couple a power source to the windings; a motor controller configured to control the plurality of switches; an undesired condition identifier configured to identify an undesired condition in the apparatus when the motor is providing power to the power source, wherein the undesired condition is defined with respect to a characteristic of the power source; and an undesired condition reducer configured to reduce the undesired condition in response to identifying the undesired condition in the apparatus by the undesired condition identifier.

Clause 2. The apparatus of clause 1, wherein in being configured to identify the undesired condition in the apparatus when the motor is providing the power to the power source, the undesired condition identifier is configured to identify the undesired condition in the apparatus when a voltage across the windings is greater than a first voltage threshold, wherein the first voltage threshold is defined with respect to an output voltage of the power source; and in being configured to reduce the undesired condition in response to identifying the undesired condition in the apparatus, the undesired condition reducer is configured to direct a current in the windings to ground via a resistor in response to identifying the undesired condition in the apparatus.

Clause 3. The apparatus of clause 2, wherein the first voltage threshold is approximately equal to the output voltage of the power source.

Clause 4. The apparatus of clause 2, wherein the undesired condition identifier is further configured to identify when the voltage across the windings is less

than a second voltage threshold, wherein the second voltage threshold is lower than the first voltage threshold; and the undesired condition reducer is configured to cease directing the current in the windings to ground in response to identifying when the voltage across the windings is less than the second voltage threshold.

Clause 5. The apparatus of clause 2, wherein the resistor is a variable resistor; and the undesired condition reducer is further configured to select a resistance of the variable resistor in response to a level of the current in the windings.

Clause 6. The apparatus of clause 5, wherein the resistor comprises a plurality of resistors in parallel; and the undesired condition reducer is further configured to select a number of resistors in the plurality of resistors through which the current in the windings is directed to ground based on temperatures of the plurality of resistors.

Clause 7. The apparatus of clause 1, wherein the motor controller is configured to control a duty cycle during which a number of the plurality of switches in the switch bridge is closed to provide a current between the power source and the windings in response to a commanded current; in being configured to identify the undesired condition in the apparatus when the motor is providing the power to the power source, the undesired condition identifier is configured to identify the undesired condition in the apparatus when the commanded current is greater than a current limit for the power source; and in being configured to reduce the undesired condition in response to identifying the undesired condition in the apparatus, the undesired condition reducer is configured to set the commanded current based on the current limit for the power source when the commanded current is greater than the current limit for the power source.

Clause 8. The apparatus of clause 7, wherein the current limit for the power source is variable; the power source comprises a battery; and the undesired condition identifier is further configured to select a value for the current limit based on feedback from a cell balancer circuit for the battery.

Clause 9. The apparatus of claim 1, wherein the apparatus is on an aircraft.

Clause 10. A method of controlling a motor, comprising controlling a plurality of switches in a switch bridge to couple a power source to windings of the motor; determining whether a voltage across the windings is greater than a first voltage threshold, wherein the first voltage threshold is defined with respect to an output voltage

of the power source; and directing a current in the windings to ground via a resistor in response to a determination that the voltage across the windings is greater than the first voltage threshold.

Clause 11. The method of clause 10, wherein the first voltage threshold is substantially equal to the output voltage of the power source.

Clause 12. The method of clause 10 further comprising determining when the voltage across the windings is less than a second voltage threshold, wherein the second voltage threshold is lower than the first voltage threshold; and ceasing directing the current in the windings to ground in response to determining when the voltage across the windings is less than the second voltage threshold.

Clause 13. The method of clause 10, wherein the resistor is a variable resistor.

Clause 14. The method of clause 13 further comprising: selecting a resistance for the variable resistor in response to a level of the current in the windings.

Clause 15. The method of clause 14, wherein the resistor comprises a plurality of resistors in parallel; and further comprising selecting a number of the plurality of resistors through which the current in the windings is directed to ground based on temperatures of the plurality of resistors.

Clause 16.A method of controlling a motor comprising controlling a plurality of switches in a switch bridge to couple a power source to windings of the motor, wherein a duty cycle during which a number of the plurality of switches are closed to provide a current between the power source and the windings is limited such that the current between the power source and the windings does not exceed a current limit for the power source.

Clause 17. The method of clause 16 further comprising determining when a commanded current is greater than the current limit for the power source; setting the commanded current based on the current limit for the power source when the commanded current is greater than the current limit for the power source; and controlling the duty cycle in response to the commanded current.

Clause 18. The method of clause 16, wherein the current limit for the power source is variable; the power source comprises a battery; and a value for the current limit is selected based on feedback from a cell balancer circuit for the battery.

Clause 19. The method of clause 16, wherein the current between the power source and the windings is the current between the motor and the power source when the motor is providing power to the power source.

Clause 20. The method of clause 16, wherein the current between the power source and the windings is the current between the power source and the motor when power is provided from the power source to the motor.

The features and functions can be achieved independently in various embodiments of the present disclosure or may be combined in yet other embodiments in which further details can be seen with reference to the following description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

The novel features believed characteristic of the illustrative embodiments are set forth in the appended claims. The illustrative embodiments, however, as well as a preferred mode of use, further objectives, and features thereof will best be understood by reference to the following detailed description of an illustrative embodiment of the present disclosure when read in conjunction with the accompanying drawings, wherein:

Figure 1 is an illustration of a block diagram of a motor control environment in accordance with an illustrative embodiment;

Figure 2 is an illustration of a block diagram of a motor controller in accordance with an illustrative embodiment;

Figure 3 is an illustration of a schematic circuit diagram of a switch bridge for controlling current in a motor in accordance with an illustrative embodiment;

Figure 4 is an illustration of a schematic circuit diagram of a switch bridge for controlling current in a motor in a driving configuration in accordance with an illustrative embodiment;

Figure 5 is an illustration of a schematic circuit diagram of a switch bridge for controlling current in a motor in a first coasting configuration in accordance with an illustrative embodiment;

Figure 6 is an illustration of a schematic circuit diagram of a switch bridge for controlling current in a motor in a second coasting configuration in accordance with an illustrative embodiment;

Figure 7 is an illustration of a schematic circuit diagram of a switch bridge for controlling current in a motor in a regenerating configuration in accordance with an illustrative embodiment;

Figure 8 is an illustration of switch timing for a switching cycle providing driving and coasting current for a motor in accordance with an illustrative embodiment;

Figure 9 is an illustration of switch timing for a switching cycle providing only coasting current for a motor in accordance with an illustrative embodiment;

Figure 10 is an illustration of switch timing for a switching cycle providing coasting and regenerating current for a motor in accordance with an illustrative embodiment;

Figure 11 is an illustration of switch timing for a switching cycle providing only regenerating current for a motor in accordance with an illustrative embodiment;

Figure 12 is an illustration of the quadrants of operation of a motor in accordance with an illustrative embodiment;

Figure 13 is an illustration of a block diagram of an undesired condition identifier and an undesired condition reducer for reducing instability in the current in a motor in accordance with an illustrative embodiment;

Figure 14 is an illustration of a schematic circuit diagram of a switch bridge and a switch and resistor for directing current in a motor winding to ground in accordance with an illustrative embodiment;

Figure 15 is an illustration of a schematic circuit diagram of a discrete valued variable resistor in accordance with an illustrative embodiment;

Figure 16 is an illustration of a block diagram of a resistance selector in accordance with an illustrative embodiment;

Figure 17 is an illustration of current in the windings of a motor in accordance with an illustrative embodiment;

Figure 18 is an illustration of a flowchart of a process for reducing instability in a motor in accordance with an illustrative embodiment;

Figure 19 is an illustration of a flowchart of a process for selecting the resistance of a variable resistor in accordance with an illustrative embodiment;

Figure 20 is an illustration of a block diagram of an undesired condition identifier and an undesired condition reducer for protecting a power source from

undesired current during operation of a motor in accordance with an illustrative embodiment;

Figure 21 is an illustration of a waveform diagram of current control for protecting a power source from undesired current during operation of a motor in accordance with an illustrative embodiment; and

Figure 22 is an illustration of a flowchart of a process for protecting a power source from undesired current during operation of a motor in accordance with an illustrative embodiment.

DETAILED DESCRIPTION

The different illustrative embodiments recognize and take into account a number of different considerations. “A number”, as used herein with reference to items, means one or more items. For example, “a number of different considerations” means one or more different considerations.

The different illustrative embodiments recognize and take into account that it is desirable to protect against instability when a motor is regenerating. When a motor is regenerating, the switches in a switch bridge are controlled such that power is provided from the motor back to a power source via the switch bridge. The switches in the switch bridge comprise switching devices configured to conduct current in a first direction when the switching devices are closed and diodes connected in parallel with the switching devices and configured to conduct current in a second direction opposite to the first direction.

When the motor is regenerating, it is possible for the voltage across the motor windings to climb higher than the voltage of the power source. When the voltage across the motor windings is higher than the power source voltage, the diodes in parallel with the switching devices in the switch bridge will conduct current in an uncontrollable manner. When the current in the switch bridge is uncontrollable, the current flowing to the power source and in the windings of the motor may run away and become unacceptably high. Such high current increases the risk of an inconsistency, or damage, occurring in one or more of the motor, the switch bridge, or the power source.

The different illustrative embodiments provide a system and method for reducing instability when a motor is regenerating. In accordance with an illustrative embodiment, impending instability is identified when a voltage across the windings of

the motor is greater than a voltage threshold. The voltage threshold is defined with respect to the output voltage of a power source for the motor. For example, the voltage threshold may be approximately equal to the output voltage of the power source. In response to identifying the impending instability, current in the motor windings is directed to ground via a resistor to drive down the voltage across the motor windings. The resistor may be a variable resistor. The resistance of the variable resistor may be selected based on the level of current to be directed to ground. The variable resistor may be controlled based on the temperature of the resistor, to prevent overheating of the resistor.

The different illustrative embodiments also recognize and take into account that the flow of current between a power source and the windings of a motor via a switch bridge may have undesired effects on the power source in some cases. For example, when a motor is regenerating, power is provided from the motor back to the power source for the motor via the switch bridge. In this case, there is a potential for inconsistencies to occur in the power source if too much current is flowing back into the power source from the motor.

The duty cycle for the switching of the switching devices in a switch bridge defines the portion of a switching cycle during which current may flow between a power source and a motor. In accordance with an illustrative embodiment, the duty cycle may be controlled to limit the flow of current between the motor and the power source such that the flow of current between the motor and the power source does not exceed a current limit of the power source. The current limit of the power source may be fixed or variable. For example, the power source may be a battery. In this case, the current limit may be set based on feedback from a cell balancer circuit for the battery.

Turning to **Figure 1**, an illustration of a block diagram of a motor control environment is depicted in accordance with an illustrative embodiment. Motor control environment **100** may be implemented for controlling motor **101** for operation on platform **102**. Platform **102** may be any fixed or mobile structure on which motor **101** may be operated.

Motor control environment **100** may be configured to operate motor **101** to perform any appropriate function or combination of functions on platform **102**. For example, without limitation, platform **102** may be aircraft **104** or another vehicle. Aircraft **104** may be a fixed wing, rotary wing, or lighter-than-air aircraft.

In some illustrative examples, aircraft **104** also may be manned or unmanned. For example, without limitation, aircraft **104** may be a commercial passenger aircraft, a cargo aircraft, a military aircraft, a government aircraft, a private aircraft, or any other type of aircraft configured to perform any appropriate task or mission or combination of tasks or missions. As further examples, platform **102** may be a submarine, an automobile, a satellite, or any other vehicle capable of traveling in the air, in space, on land, on the surface of water, underwater, or in any other medium or combination of media.

Motor **101** is an electric motor. Specifically, motor **101** may comprise brushless DC motor **108**. For example, without limitation, motor **101** may comprise a brushless interior permanent magnet motor, a permanent-magnet synchronous motor, or any other appropriate type of brushless DC motor **108** or other appropriate electric motor.

Motor **101** comprises windings **110** and rotor **112**. Windings **110** are stationary and form the motor stator. Windings **110** also may be referred to as coils. Power may be provided on windings **110** to drive rotation of rotor **112**. Thus, windings **110** form the armature for motor **101**.

Rotor **112** may be coupled to load **114**. Load **114** may be any structure that may be moved in any manner via any appropriate direct or indirect connection to rotor **112**. For example, on aircraft **104**, load **114** may include actuators for flight control surfaces, for landing gear, or for performing any other appropriate functions or combinations of functions on aircraft **104**. In other applications, load **114** may be a pump, a vehicle drive train, an actuator for performing another function, or any other appropriate load or combination of loads on platform **102**.

Electrical power for motor **101** may be provided by DC power source **116**. DC power source **116** may comprise any appropriate source of DC power. For example, without limitation, DC power source **116** on aircraft **104** may comprise a DC bus that is provided with DC power from an AC to DC power converter. Power for the AC to DC power converter may be provided from AC power on an AC bus. AC power on the AC bus may be provided by a generator on aircraft **104**. For example, without limitation, the generator may be driven by a number of engines on aircraft **104**. In other applications, DC power source **116** may be another type of DC power source, such as a battery or any other appropriate source or combination of sources of DC power.

DC power source **116** is coupled to windings **110** of motor **101** via switch bridge **118**. Switch bridge **118** comprises a plurality of switches that are configured to be opened and closed to connect DC power source **116** to windings **110** in a variety of configurations. The plurality of switches in switch bridge **118** may be controlled to provide the appropriate configuration of power on windings **110** to operate motor **101** in a desired manner. The number and arrangement of switches in switch bridge **118** may depend on the number of phases of windings **110** in motor **101**. For example, without limitation, switch bridge **118** may be a three-phase bridge comprising three parallel half H-bridges for coupling DC power source **116** to three-phase windings in a three-phase motor.

Motor controller **120** may be configured to control the switching of switch bridge **118** to control the operation of motor **101** in a desired manner. In the present application, including in the claims, the switching of a switch bridge refers to the opening and closing of one or more switches in a switch bridge. For example, without limitation, motor controller **120** may employ current command **122**, current feedback **124**, and rotation feedback **126** to control motor **101**.

Current command **122** may indicate desired current in windings **110** of motor **101**. For example, without limitation, current command **122** may indicate a desired magnitude and direction of current in windings **110**. The torque produced by motor **101** is a function of the current in windings **110** of motor **101**. Therefore, current command **122** may be referred to as torque command **128**.

Motor controller **120** may receive current command **122** to start motor **101**, to stop motor **101**, or to operate motor **101** or load **114** at a desired speed in a desired direction. Current command **122** may be provided to motor controller **120** in any appropriate form from any appropriate source. For example, without limitation, current command **122** may be received by motor controller **120** from one or more higher level controllers for controlling motor **101** or load **114**. Such a higher level controller may comprise an entirely automated controller, a human operator, or a human operator in combination with a machine controller.

Current feedback **124** may identify the current in windings **110** of motor **101**. The current in windings **110** of motor **101** that is identified by current feedback **124** may be referred to as the actual current in windings **110**. Preferably, current feedback

124 includes information identifying both the magnitude and direction of current in windings **110**.

Current feedback **124** may be provided by any appropriate current sensor **130**. Current sensor **130** may include any number of appropriate sensors that may be configured to provide the desired current feedback **124**. For example, without limitation, motor controller **120** may be configured to control the switching of switch bridge **118** in an appropriate manner to cause the current in windings **110** of motor **101**, as identified by current feedback **124**, to match the desired current identified in current command **122**.

Rotation feedback **126** may identify the rotation of rotor **112** of motor **101**. Preferably, rotation feedback **126** includes information identifying both the direction and speed of rotation of rotor **112**. Rotation feedback **126** may be provided by any appropriate rotation sensor **132**. Rotation sensor **132** may include any number of appropriate sensors that may be configured to provide the desired rotation feedback **126**.

Motor controller **120** may be implemented using hardware or hardware in combination with software. For example, motor controller **120** may be implemented using configurable hardware **134**, programmable device **136**, or both. Configurable hardware **134** may comprise hardware that is configurable to perform one or more functions of motor controller **120**. Programmable device **136** may comprise any device that is programmable to implement one or more functions of motor controller **120**. For example, without limitation, programmable device **136** may comprise a programmable microcontroller, digital signal processor, or other programmable device.

Programmable device **136** may be configured to run software or firmware in the form of program instructions **138** to implement one or more functions of motor controller **120**. Program instructions **138** may be stored in any appropriate computer readable storage medium **140** for use by, or transfer to, programmable device **136**. For example, without limitation, computer readable storage medium **140** may comprise a computer readable storage device or any other physical medium for storing program instructions **138**. Program instructions **138** stored on computer readable storage medium **140** may comprise computer program product **142**.

The illustration of **Figure 1** is not meant to imply physical or architectural limitations to the manner in which different illustrative embodiments may be

implemented. Other components in addition to, in place of, or both in addition to and in place of the ones illustrated may be used. Some components may be unnecessary in some illustrative embodiments. Also, the blocks are presented to illustrate some functional components. One or more of these blocks may be combined or divided into different blocks when implemented in different illustrative embodiments.

For example, motor **101** may be connected to drive more than one load. The illustrative embodiments may be used to control motors of any size for use in any application or operating environment. For example, without limitation, the illustrative embodiments may be used to control motors used on automobiles, airplanes, boats, spacecraft, and other vehicles. For example, without limitation, the illustrative embodiments may be used to control motors for pointing antennas on spacecraft, for heating ventilation and air conditioning (HVAC) systems, for boring devices for riveting on aircraft wings and fuselages, and for other applications.

Turning to **Figure 2**, an illustration of a block diagram of a motor controller is depicted in accordance with an illustrative embodiment. In this example, motor controller **200** may be an example of one implementation of motor controller **120** for controlling motor **101** in **Figure 1**.

Motor controller **200** may be configured to control the operation of motor **202** in a desired manner by controlling the switching of the switches in switch bridge **204**. Switch bridge **204** comprises a plurality of switches that are configured to be opened and closed to connect power source **206** to windings **208** of motor **202** in a variety of configurations. The switches in switch bridge **204** may be controlled to provide the appropriate configuration of power on windings **208** to operate motor **202** in a desired manner. The number and arrangement of switches in switch bridge **204** may depend on the number of phases of windings **208** in motor **202**. For example, without limitation, switch bridge **204** may be a three-phase bridge comprising three parallel half H-bridges for coupling power source **206** to three-phase windings in a three-phase motor. Switch bridge **300** in **Figure 3** is an example of such a three-phase switch bridge. Switch bridge **1400** in **Figure 14** is an example of a switch bridge for a single phase winding of a motor.

Motor controller **200** may comprise feedback controller **210**. Feedback controller **210** may be configured to receive commanded rotation **212**, actual rotation **214**, commanded current **216**, and actual current **218**. Commanded rotation **212** may

indicate a desired rotation for rotor **220** of motor **202**. For example, commanded rotation **212** may indicate a desired direction and speed of rotation of rotor **220**. Actual rotation **214** comprises an indication of the rotation of rotor **220**. Actual rotation **212** is provided as feedback to feedback controller **210**. Actual rotation **214** may be identified using any appropriate rotation sensor **222** for identifying the rotation of rotor **220**.

Commanded current **216** may indicate a desired current in windings **208** of motor **202**. For example, commanded current **216** may indicate a desired magnitude and direction of current **224** in windings **208** of motor **202**. Actual current **218** comprises an indication of current **224** in windings **208** of motor **202**. Actual current **218** is provided as feedback to feedback controller **210**. Actual current **218** may be identified using any appropriate current sensor **226**.

Feedback controller **210** may be implemented in any appropriate manner to generate duty cycle **228**. Duty cycle **228** is the portion of each switching cycle **230** during which the appropriate switches in switch bridge **204** are closed so that current can flow between power source **206** and windings **208** of motor **202**. Duty cycle **228** provided by feedback controller **210** also may identify a direction of current flow between power source **206** and windings **208** during the identified portion of switching cycle **230**.

For example, without limitation, duty cycle **228** may be identified by a single value output from feedback controller **210** that indicates both whether commanded current **216** is greater than or less than actual current **218** in windings **208** of motor **202**, as well as the magnitude of the difference between commanded current **216** and actual current **218** in windings **208** of motor **202**. For example, the sign of duty cycle **228** may indicate whether commanded current **216** is greater than or less than actual current **218** in windings **208**. The absolute value of duty cycle **228** may indicate the magnitude of the difference between commanded current **216** and actual current **218**. In this case, the value for duty cycle **228** may be zero when actual current **218** in windings **208** of motor **202** matches commanded current **216**.

For example, without limitation, feedback controller **210** may comprise a proportional-integral controller or any other appropriate controller for determining commanded current **216** relative to the difference between commanded rotation **212** and actual rotation **214**. Feedback controller **210** may comprise a proportional-integral controller or any other appropriate controller for determining duty cycle **228** relative to

the difference between commanded current **216** and actual current **218**. Duty cycle **228** generated by feedback controller **210** is provided to switch controller **232**.

Switch controller **232** is configured to generate the appropriate control signals for opening and closing the switches in switch bridge **204** to implement duty cycle **228**. Switch controller **232** may be configured to control the switching of the switches in switch bridge **204** based on switching cycle **230**. The duration of switching cycle **230** may be selected in any appropriate manner. Switch controller **223** may implement duty cycle **228** by controlling the switches in switch bridge **204** each switching cycle **230** to control the portion of each switching cycle **230** in which switch bridge **204** is configured for driving **234**, coasting **236**, or regenerating **238**.

When the switches in switch bridge **204** are configured for driving **234**, power source **206** is connected across windings **208** of motor **202** to increase the magnitude of current **224** in windings **208**. Driving **234** also may be referred to as generating current **224** in windings **208** of motor **202**.

The switches in switch bridge **204** may be configured to short-circuit windings **208** of motor **202** through switch bridge **204** to configure switch bridge **204** for coasting **236**. During coasting **236**, current **224** in windings **208** may remain relatively constant. For example, during coasting **236**, current **224** in windings **208** of motor **202** may decrease only due to resistance and similar losses in switch bridge **204** and windings **208**.

When the switches in switch bridge **204** are configured for regenerating **238**, power source **206** is connected across windings **208** of motor **202** to return the energy in windings **208** to power source **206**. During regenerating **238**, the magnitude of current **224** in windings **208** of motor **202** is reduced relatively quickly.

Switch controller **232** may configure switch bridge **204** for driving **234**, coasting **236**, and regenerating **238** based on duty cycle **228** from feedback controller **210**. For example, duty cycle **228** from feedback controller **210** may indicate that the desired current in windings **208** of motor **202** is greater than actual current **218** in windings **208**. In this case, switch controller **232** may control the switches in switch bridge **204** to configure switch bridge **204** for driving **234** for at least a portion of switching cycle **230** to increase current **224** in windings **208**.

The switches in switch bridge **204** that are controlled to configure switch bridge **204** for driving **234**, coasting **236**, or regenerating **238** may be different

depending on the direction of current **224** in windings **208** of motor **202**. In other words, the switches in switch bridge **204** that are controlled to configure switch bridge **204** for driving **234**, coasting **236**, or regenerating **238** may be different depending on the quadrant of operation of motor **202**.

Undesired condition identifier **240** is configured to identify the occurrence of undesired condition **242** during operation of motor **202** by motor controller **200**. Undesired condition **242** may include any condition that may have an undesired effect on one or more of motor controller **200**, motor **202**, switch bridge **204**, and power source **206**. For example, undesired condition **242** may be defined with respect to characteristic **244** of power source **206**.

One characteristic **244** of power source **206** is output voltage **246**. When motor **202** is regenerating **238**, voltage **248** across windings **208** may become greater than output voltage **246** of power source **206**. Voltage **248** across windings **208** that is greater than output voltage **246** of power source **206** may result in undesirable large and unstable current in windings **208**. The instability resulting from voltage **248** in windings **208** being greater than output voltage **246** of power source **206** is one example of undesired condition **242**. In this case, undesired condition **242** may be identified by undesired condition identifier **240** by comparing output voltage **246** of power source **206** to voltage **248** across windings **208**. Voltage **248** across windings **208** may be determined using an appropriate voltage sensor **250**.

Current limit **252** of power source **206** is another characteristic **244** of power source **206**. Inconsistencies in power source **206** may result if the current provided to power source **206** is greater than current limit **252**. Thus, current **224** in windings **208** that is greater than current limit **252** of power source **206** when motor **202** is regenerating **238** is another example of undesired condition **242**.

Undesired condition reducer **254** may be configured to take appropriate action to reduce or prevent undesired condition **242**. For example, undesired condition reducer **254** may be configured to direct current **224** in windings **208** to ground to reduce voltage **248** across windings **208** in response to a determination that voltage **248** across windings **208** is greater than output voltage **246** of power source **206**. As another example, undesired condition reducer **254** may be configured to control duty cycle **228** to reduce current **224** on windings **208** provided to power source **206** in

response to a determination that current **224** provided to power source **206** is greater than current limit **252** of power source **206**.

The illustration of **Figure 2** is not meant to imply physical or architectural limitations to the manner in which different illustrative embodiments may be implemented. Other components in addition to, in place of, or both in addition to and in place of the ones illustrated may be used. Some components may be unnecessary in some illustrative embodiments. Also, the blocks are presented to illustrate some functional components. One or more of these blocks may be combined or divided into different blocks when implemented in different illustrative embodiments.

Turning now to **Figure 3**, an illustration of a schematic circuit diagram of a switch bridge for controlling current in a motor is depicted in accordance with an illustrative embodiment. In this example, switch bridge **300** is an example of one implementation of switch bridge **118** in **Figure 1** and switch bridge **204** in **Figure 2**.

Switch bridge **300** is connected to DC power on line **302** and ground **304**. Switch bridge **300** is configured to couple DC power on line **302** to windings **306**, windings **308**, and windings **310** of a motor.

In this example, the motor connected to switch bridge **300** is a three-phase motor comprising windings **306** for phase A, windings **308** for phase B, and windings **310** for phase C. For purposes of the present explanation, current in windings **306**, windings **308**, and windings **310** in the direction indicated by arrow **307**, arrow **309**, and arrow **311**, respectively, may be referred to as positive current or current in a positive direction. Current in windings **306**, windings **308**, and windings **310** in the direction opposite to arrow **307**, arrow **309**, and arrow **311** may be referred to as negative current or current in a negative direction.

Switch bridge **300** comprises switching units **312**, **314**, **316**, **318**, **320**, and **322** arranged to form three parallel half H-bridges. Switching units **312**, **314**, **316**, **318**, **320**, and **322** may be implemented using solid state circuit elements. For example, without limitation, switching units **312**, **314**, **316**, **318**, **320**, and **322** may be implemented using metal-oxide-semiconductor field-effect transistors (MOSFETs), insulated-gate bipolar transistors (IGBTs), or other transistors or combinations of transistors. Switching units **312**, **314**, **316**, **318**, **320**, and **322** may comprise switching devices configured to conduct in a first direction when the switching devices are closed

and diodes are connected in parallel with the switching devices and configured to conduct in a second direction opposite to the first direction.

Switching unit **312** is connected between line **302** and windings **306** for phase A. Switching unit **312** comprises switch AH **324** and diode **326**. Switch AH **324** conducts current in the direction from line **302** to windings **306** when closed. Diode **326** is parallel with switch AH **324** and conducts current in the opposite direction of switch AH **324**.

Switching unit **314** is connected between line **302** and windings **308** for phase B. Switching unit **314** comprises switch BH **328** and diode **330**. Switch BH **328** conducts current in the direction from line **302** to windings **308** when closed. Diode **330** is parallel with switch BH **328** and conducts current in the opposite direction of switch BH **328**.

Switching unit **316** is connected between line **302** and windings **310** for phase C. Switching unit **316** comprises switch CH **332** and diode **334**. Switch CH **332** conducts current in the direction from line **302** to windings **310** when closed. Diode **334** is parallel with switch CH **332** and conducts current in the opposite direction of switch CH **332**.

Switching unit **318** is connected between windings **306** for phase A and ground **304**. Switching unit **318** comprises switch AL **336** and diode **338**. Switch AL **336** conducts current in the direction from windings **306** to ground **304** when closed. Diode **338** is parallel with switch AL **336** and conducts current in the opposite direction of switch AL **336**.

Switching unit **320** is connected between windings **308** for phase B and ground **304**. Switching unit **320** comprises switch BL **340** and diode **342**. Switch BL **340** conducts current in the direction from windings **308** to ground **304** when closed. Diode **342** is parallel with switch BL **340** and conducts current in the opposite direction of switch BL **340**.

Switching unit **322** is connected between windings **310** for phase C and ground **304**. Switching unit **322** comprises switch CL **344** and diode **346**. Switch CL **344** conducts current in the direction from windings **310** to ground **304** when closed. Diode **346** is parallel with switch CL **344** and conducts current in the opposite direction of switch CL **344**.

In accordance with an illustrative embodiment, the switches in switch bridge **300** may be controlled using impulse width modulation to control the current in windings **306**, windings **308**, and windings **310**. For an existing current in either a positive or negative direction in one of windings **306**, windings **308**, or windings **310**, switch bridge **300** may be configured for driving the existing current from the DC power on line **302**, for coasting the existing current in switch bridge **300**, or for regenerating the existing current back to line **302**. Switch bridge **300** also may be controlled to reverse the current in windings **306**, windings **308**, and windings **310** to change the quadrant of operation of the motor.

Switch bridge **300** is an example of a generic switch bridge structure that is presented to more clearly describe the operation of various illustrative embodiments. The illustration of **Figure 3** is not meant to imply physical or architectural limitations to the manner in which a switch bridge in accordance with different illustrative embodiments may be implemented. A switch bridge, in accordance with different illustrative embodiments, may be implemented with combinations of parts that are different from those illustrated for example in **Figure 3**.

For example, for a switch bridge implemented using IGBTs, the diodes in the switching units of the switch bridge may need to be provided as separate devices, because IGBTs do not have body diodes. For a switch bridge implemented using MOSFETs, the internal body diodes of the MOSFETs may be used. With MOSFETs used for switches, separate freewheeling diodes are not necessary. Separate diodes in series with the MOSFET switches also are not necessary, but may be used in some applications.

Turning to **Figures 4-7**, various configurations of switch bridge **300** in **Figure 3** for driving, coasting, and regenerating the current in the windings of a motor are depicted in accordance with an illustrative embodiment. The example configurations in **Figures 4-7** are for driving, coasting, and regenerating the current in one set of windings of a motor operating in a first quadrant of operation. Switching configurations of a switch bridge for driving, coasting, and regenerating the current in other windings of the motor and for other quadrants of operation will be known to those skilled in the art based on the detailed description and examples of illustrative embodiments as presented herein.

Turning to **Figure 4**, an illustration of a schematic circuit diagram of a switch bridge for controlling current in a motor in a driving configuration is depicted in accordance with an illustrative embodiment. In this example, switch bridge **400** is an example configuration of switch bridge **300** in **Figure 3**.

In this example, the driving configuration for switch bridge **400** comprises closing switch **AH 324** and switch **BL 340**. Closing switches **AH 324** and **BL 340** results in current **402** running from line **302** through closed switch **AH 324**, in the positive direction of arrow **307** through windings **306** for phase A, and through closed switch **BL 340** to ground **304**. Assuming an existing positive current in windings **306** in the direction of arrow **307**, current **402** will drive the existing current in windings **306**, thereby increasing the current in windings **306**. For example, without limitation, the driving configuration for switch bridge **400** may be used in response to an indication from a motor controller that the current in the positive direction of arrow **307** in windings **306** should be increased.

Turning now to **Figure 5**, an illustration of a schematic circuit diagram of a switch bridge for controlling current in a motor in a first coasting configuration is depicted in accordance with an illustrative embodiment. In this example, switch bridge **500** is another example configuration of switch bridge **300** in **Figure 3**.

In this example, switch **AH 324** is closed to provide the coasting configuration for switch bridge **500**. Assuming an existing positive current in windings **306** in the direction of arrow **307**, closing switch **AH 324** creates a short circuit through switch bridge **500** for the existing current in windings **306**. The resulting current **502** in switch bridge **500** runs from windings **306** through diode **330** in switching unit **314**, through closed switch **AH 324**, and back to windings **306** in the positive direction of arrow **307**. The existing current in windings **306** may remain relatively constant with switch bridge **500** in coasting configuration.

With switch bridge **500** in coasting configuration the existing current in windings **306** may decrease by a relatively small amount due to resistance and similar losses in switch bridge **500** and windings **306** windings and **308**. For example, without limitation, the coasting configuration for switch bridge **500** may be used in response to an indication from a motor controller that the current in the positive direction of arrow **307** in windings **306** should be maintained at the present level.

Turning to **Figure 6**, an illustration of a schematic circuit diagram of a switch bridge for controlling current in a motor in a second coasting configuration is depicted in accordance with an illustrative embodiment. In this example, switch bridge **600** is another example configuration of switch bridge **300** in **Figure 3**.

In this example, switch BL **340** is closed to provide the coasting configuration for switch bridge **600**. Assuming an existing positive current in windings **306** in the direction of arrow **307**, closing switch BL **340** creates a short circuit through switch bridge **600** for the existing current in windings **306**. The resulting current **602** in switch bridge **600** runs from windings **306** through closed switch BL **340**, through diode **338** in switching unit **318**, and back to windings **306** in the positive direction of arrow **307**. The existing current in windings **306** may remain relatively constant with switch bridge **600** in coasting configuration.

With switch bridge **600** in coasting configuration the existing current in windings **306** may decrease by a relatively small amount due to resistance and similar losses in switch bridge **600** and windings **306** and windings **308**. For example, without limitation, the coasting configuration for switch bridge **600** may be used in response to an indication from a motor controller that the current in the positive direction of arrow **307** in windings **306** should be maintained at the present level.

The coasting configurations of switch bridge **500** in **Figure 5** and switch bridge **600** in **Figure 6** are alternative configurations for coasting a current in the positive direction of arrow **307** in windings **306**. In accordance with an illustrative embodiment, both alternative configurations may be used during a switching cycle in which coasting the positive current in the direction of arrow **307** in windings **306** is called for. For example, during a switching cycle in which coasting the positive current in windings **306** is called for, switch AH **324** may be closed and switch BL **340** opened to implement coasting configuration for switch bridge **500** in **Figure 5** for a portion of the switching cycle. Switch AH **324** then may be opened and switch BL **340** closed to implement coasting configuration for switch bridge **600** in **Figure 6**, during another portion of the switching cycle.

Switching between different coasting configurations in this manner shares the burden of carrying the coasting current between different components of the switch bridge each switching cycle. Therefore, switching between different coasting

configurations in this manner may reduce undesired heating of components in the switch bridge resulting from carrying the coasting current.

Turning to **Figure 7**, an illustration of a schematic circuit diagram of a switch bridge for controlling current in a motor in a regenerating configuration is depicted in accordance with an illustrative embodiment. In this example, switch bridge **700** is another example configuration of switch bridge **300** in **Figure 3**.

In this example, the regenerating configuration of switch bridge **700** comprises opening all of the switches in switch bridge **700**. Assuming an existing positive current in windings **306** in the direction of arrow **307**, opening all of the switches in switch bridge **700** will result in regenerating current **702**.

Regenerating current **702** runs in the direction from ground **304** through diode **338**, in the positive direction of arrow **307** through windings **306**, and through diode **330** to line **302**. Regenerating current **702** returns the energy in windings **306** back to the DC power source via line **302**, thereby decreasing the current in windings **306**. For example, without limitation, the regenerating configuration for switch bridge **700** may be used in response to an indication from a motor controller that the current in the positive direction of arrow **307** in windings **306** should be decreased.

Turning to **Figures 8-10**, switch timing in various switching cycles for controlling the switches in a switch bridge for driving, coasting, and regenerating the current in the windings of a motor are depicted in accordance with an illustrative embodiment. The example switching cycles in **Figures 8-10** are for driving, coasting, and regenerating the current in one set of windings of a motor operating in a first quadrant of operation. Switching cycles for controlling the switches in a switch bridge for driving, coasting, and regenerating the current in other windings of the motor and for other quadrants of operation will be known to those skilled in the art based on the detailed description and examples of illustrative embodiments as presented herein. References to particular switches in **Figures 8-10** are references to corresponding switches in switch bridge **300** in **Figure 3**.

Turning to **Figure 8**, an illustration of switch timing for a switching cycle providing driving and coasting current for a motor is depicted in accordance with an illustrative embodiment. In this example, switching cycle **800** may be an example of one implementation of switching cycle **230** implemented in switch controller **232** for

controlling the switches in switch bridge **204** in **Figure 2** or in switch bridge **300** in **Figure 3**.

Switching cycle **800** may be defined with reference to triangle wave **802**. The frequency of triangle wave **802** may define the frequency of switching cycle **800**. In accordance with an illustrative embodiment, switches in a switch bridge may be opened and closed during each switching cycle to provide the desired driving, coasting, and regenerating current for the windings of a motor, as defined by a motor controller. Therefore, the frequency of triangle wave **802** also may define the switching frequency of the switches in the switch bridge. The frequency of triangle wave **802**, and, therefore, the frequency of switching cycle **800**, may be selected in any appropriate manner.

In this example, the position of line **804** with respect to triangle wave **802** may define the timing of the switching of switch AH in a switch bridge during switching cycle **800**. For example, switch AH may be closed at point **808**, where triangle wave **802** is falling and crosses line **804**. Switch AH may be opened at point **810**, where triangle wave **802** is rising and crosses line **804**. Similarly, the position of line **806** with respect to triangle wave **802** may define the timing of the switching of switch BL in the switch bridge during switching cycle **800**. For example, switch BL may be opened at point **812**, where triangle wave **802** is falling and crosses line **806**. Switch BL may be closed at point **814**, where triangle wave **802** is rising and crosses line **806**.

As will be seen, the positions of line **804** and line **806** with respect to triangle wave **802** may define how much time during each switching cycle a switch bridge is configured for driving, coasting, or regenerating current in the windings of a motor. Therefore, the positions of line **804** and line **806** with respect to triangle wave **802** may be adjusted by a motor controller as appropriate to achieve the desired current in the motor windings. For example, without limitation, the positions of line **804** and line **806** with respect to triangle wave **802** may be adjusted in response to the output from a feedback controller, such as from feedback controller **210** in **Figure 2**.

In this example, a complete period of switching cycle **800** may run from time t_1 to time t_6 . During time period **816**, from time t_1 to time t_2 , switch BL in the switch bridge is closed and switch AH in the switch bridge is open. Therefore, during time period **816**, the switch bridge may be configured for coasting current as illustrated in **Figure 6**. Switch AH is closed at time t_2 . During time period **818**, from time t_2 to time t_3 ,

both switch BL and switch AH are closed. Therefore, during time period **818**, the switch bridge may be configured for driving current as illustrated in **Figure 4**.

Switch BL is opened at time t_3 . During time period **820**, from time t_3 to time t_4 , switch BL is open and switch AH is closed. Therefore, during time period **820**, the switch bridge may be configured for coasting current as illustrated in **Figure 5**. At time t_4 , switch BL is closed again. During time period **822**, from time t_4 to time t_5 , both switch BL and switch AH are closed and the switch bridge is again configured for driving as in time period **818**. At time t_5 , switch AH is opened. During time period **824**, from time t_5 to time t_6 , switch BL is closed and switch AH is open and the switch bridge is again configured for coasting as in time period **816**.

In this example, the switch bridge is configured for driving current for approximately half of the time during switching cycle **800**. During the other half of the time during switching cycle **800** the switch bridge is configured for coasting. Therefore, for example, without limitation, the duty cycle for switching cycle **800** may be referred to as a 50% duty cycle or a +50% duty cycle.

The output from a feedback controller may define the desired duty cycle for switching of the switches in a switch bridge as a single signed value in the range from 1 to -1. In this case, for example, without limitation, the switches in the switch bridge may be controlled as described for switching cycle **800** in response to an output value of 0.5 from the feedback controller.

Turning to **Figure 9**, an illustration of switch timing for a switching cycle providing only coasting current for a motor is depicted in accordance with an illustrative embodiment. In this example, switching cycle **900** may be an example of one implementation of switching cycle **230** implemented in switch controller **232** for controlling the switches in switch bridge **204** in **Figure 2** or in switch bridge **300** in **Figure 3**.

In this example, both line **804**, defining the timing of the switching of switch AH in the switch bridge, and line **806**, defining the timing of the switching of switch BL in the switch bridge, are positioned halfway between the peaks of triangle wave **802**. In this case, switch BL is opened at the same time that switch AH is closed and switch AH is opened at the same time that switch BL is closed during switching cycle **900**. Each switch AH and BL is opened and closed one time during the period of switching cycle **900**.

Therefore, in this example, switch BL is closed and switch AH is open for approximately half of the time during switching cycle **900**. During this time, the switch bridge may be configured for coasting current as illustrated in **Figure 6**. Switch BL is open and switch AH is closed for the other half of the time during switching cycle **900**. During this time the switch bridge may be configured for coasting current as illustrated in **Figure 5**.

The switch bridge is thus configured for coasting current for approximately all of the time during switching cycle **900**. Therefore, for example, without limitation, the duty cycle for switching cycle **900** may be referred to as a 0% duty cycle. The output from a feedback controller may define the desired duty cycle for switch bridge switching as a single signed value in the range from 1 to -1. In this case, for example, without limitation, the switches in the switch bridge may be controlled as described for switching cycle **900** in response to an output value of 0 from the feedback controller.

Turning to **Figure 10**, an illustration of switch timing for a switching cycle providing coasting and regenerating current for a motor is depicted in accordance with an illustrative embodiment. In this example, switching cycle **1000** may be another example of one implementation of switching cycle **230** implemented in switch controller **232** for controlling the switches in switch bridge **204** in **Figure 2** or in switch bridge **300** in **Figure 3**. As in previous examples, the positions of lines **804** and **806** with respect to triangle wave **802** may define the timing of the switching of switches AH and BL, respectively, in a switch bridge during switching cycle **1000**.

In this example, a complete period of switching cycle **1000** may run from time t_1 to time t_5 . During time period **1002**, from time t_1 to time t_2 , switch BL in the switch bridge is closed and switch AH in the switch bridge is open. Therefore, during time period **1002** the switch bridge may be configured for coasting current as illustrated in **Figure 6**. Switch BL is opened at time t_2 , when triangle wave **802** is falling and crosses line **806**.

During time period **1004**, from time t_2 to time t_3 , both switch BL and switch AH are open. Therefore, during time period **1004** the switch bridge may be configured for regenerating current as illustrated in **Figure 7**. Switch AH is closed at time t_3 , when triangle wave **802** is falling and crosses line **804**. During time period **1006**, from time t_3 to time t_4 , switch BL is open and switch AH is closed. Therefore, during time period **1006** the switch bridge may be configured for coasting current as illustrated in **Figure 5**.

At time t_4 , switch AH is opened when triangle wave **802** is rising and crosses line **804**. During time period **1008**, from time t_4 to time t_5 , both switch BL and witch AH are open and the switch bridge is again configured for regenerating as in time period **1004**.

In this example, the switch bridge is configured for regenerating current for approximately half of the time during switching cycle **1000**. During the other half of the time during switching cycle **1000**, the switch bridge is configured for coasting. Regenerating current is in the opposite direction to driving current in a motor. Therefore, for example, without limitation, the duty cycle for switching cycle **1000** may be referred to as a -50% duty cycle.

The output from a feedback controller may define the desired duty cycle for the switching of the switch bridge as a single signed value in the range from 1 to -1. In this case, for example, without limitation, the switches in the switch bridge may be controlled as described for switching cycle **1000** in response to an output value of -0.5 from the feedback controller.

Turning to **Figure 11**, an illustration of switch timing for a switching cycle providing only regenerating current for a motor is depicted in accordance with an illustrative embodiment. In this example, switching cycle **1100** may be another example of one implementation of switching cycle **230** implemented in switch controller **232** for controlling the switches in switch bridge **204** in **Figure 2** or switch bridge **300** in **Figure 3**.

The example switching cycles in **Figures 8-10** are for controlling the current in one set of windings of a motor operating in the first quadrant of operation. In contrast, switching cycle **1100** is an example of a switching cycle for controlling the current in the same set of windings of the motor when the motor is operating in the fourth quadrant of operation.

The directions of currents in the windings for driving, coasting, and regenerating in the fourth quadrant of operation may be opposite to the directions of the currents in the windings for driving, coasting, and regenerating in the first quadrant of operation. Therefore, the switches in the switch bridge that are controlled during a switching cycle in the fourth quadrant of operation may be different from the switches in the switch bridge that are controlled during a switching cycle in the first quadrant of operation to provide the desired driving, coasting, and regenerating currents for motor

operation in the fourth quadrant that are in the opposite direction to the currents for motor operation in the first quadrant.

For example, in **Figures 8-10** switches AH and BL in a switch bridge are controlled during a switching cycle to control the current in the motor windings for a motor operating in the first quadrant. In contrast, switches AL and BH in the switch bridge are controlled during switching cycle **1100** to control the current in the same windings for the motor operating in the fourth quadrant.

In this example, the position of line **1104** with respect to triangle wave **802** may define the timing of the switching of switch AL in the switch bridge during switching cycle **1100**. For example, switch AL may be closed when triangle wave **802** is falling and crosses line **1104** and may be opened when triangle wave **802** is rising and crosses line **1104**. Similarly, the position of line **1106** with respect to triangle wave **802** may define the timing of the switching of switch BH in the switch bridge during switching cycle **1100**. For example, switch BH may be closed when triangle wave **802** is climbing and crosses line **1106** and may be opened when triangle wave **802** is falling and crosses line **1106**.

The positions of line **1104** and line **1106** with respect to triangle wave **802**, thus, may define how much time during each switching cycle the switch bridge is configured for driving, coasting, or regenerating current in the windings of a motor. Therefore, the positions of line **1104** and line **1106** with respect to triangle wave **802** may be adjusted by a motor controller as appropriate to achieve the desired current in the motor windings. For example, without limitation, the positions of line **1104** and line **1106** with respect to triangle wave **802** may be adjusted in response to the output from a feedback controller, such as from feedback controller **210** in **Figure 2**.

In this example, line **1104** and line **1106** are positioned at opposite peaks of triangle wave **802** such that triangle wave **802** never crosses lines **1104** and **1106**. In this case, switches AL and BH may both remain open throughout switching cycle **1100**. Therefore, the switch bridge may be configured for providing only regenerating current in the motor windings for all of switching cycle **1100**.

Currents in the motor windings during operation of the motor in the fourth quadrant of operation are in the opposite direction to currents in the motor windings during operation of the motor in the first quadrant of operation. Therefore, regenerating current in the windings during operation of the motor in the fourth quadrant of operation

is in the same direction as driving current in the windings during operation of the motor in the first quadrant of operation. Therefore, for example, without limitation, the duty cycle for switching cycle **1100**, in which the switch bridge is configured for regenerating current in the motor windings for approximately all of the time of switching cycle **1100**, may be referred to as a 100% duty cycle.

The output from a feedback controller may define the desired duty cycle for switching of the switches in a switch bridge as a single signed value in the range from 1 to -1. In this case, for example, without limitation, the switches in the switch bridge may be controlled as described for switching cycle **1100** during operation of a motor in the fourth quadrant of operation in response to an output value of 1 from the feedback controller.

Turning to **Figure 12**, an illustration of the quadrants of operation of a motor are depicted in accordance with an illustrative embodiment. In this example, quadrants of operation **1200** of a motor may be examples of quadrants of operation of motor **101** in **Figure 1**. Quadrants of operation **1200** may be defined with reference to the rotation rate of the motor and the current in the motor windings.

In this example, the rotation rate of the motor is identified with reference to horizontal axis **1202**. For example, without limitation, the rotation rate of the motor may be the speed of the rotor expressed in revolutions per minute, RPM, or using any other appropriate units for indicating how fast the rotor is spinning.

The rotation rate of the motor at point **1206** on horizontal axis **1202** is zero. Therefore, point **1206** on horizontal axis **1202** corresponds to no rotation of the motor in either direction.

Points to the right of point **1206** on horizontal axis **1202** correspond to rotation of the motor in a first direction of rotation. Points further to the right of point **1206** on horizontal axis **1202** correspond to faster rotation of the motor in the first direction of rotation. For example, without limitation, points to the right of point **1206** on horizontal axis **1202** may correspond to rotation of the motor in a clockwise direction. Points to the right of point **1206** on horizontal axis **1202** may be identified by positive numbers. Therefore, rotation of the motor in the first direction of rotation may be referred to as positive rotation.

Points to the left of point **1206** on horizontal axis **1202** correspond to rotation of the motor in a second direction of rotation. Points further to the left of point

1206 on horizontal axis **1202** correspond to faster rotation of the motor in the second direction of rotation. The second direction of rotation may be referred to as the opposite direction of rotation with respect to the first direction of rotation.

Similarly, the first direction of rotation may be referred to as the opposite direction of rotation with respect to the second direction of rotation. For example, without limitation, points to the left of point **1206** on horizontal axis **1202** may correspond to rotation of the motor in a counter-clockwise direction. Points to the left of point **1206** on horizontal axis **1202** may be identified by negative numbers. Therefore, rotation of the motor in the second direction of rotation may be referred to as negative rotation.

In this example, the current in the windings of the motor is identified with reference to vertical axis **1207**. For example, without limitation, the current in the motor windings may be identified using any appropriate units of current. The direction and magnitude of torque produced by the motor may vary directly with the direction and magnitude of current in the motor windings. Therefore, the current in the motor windings also may be identified using any appropriate units of torque. In this case, the torque produced by the motor may be identified with reference to vertical axis **1207** and quadrants of operation **1200** may be defined with reference to the rotation rate of the motor and the torque produced by the motor.

The current in the motor windings and torque produced by the motor at point **1206** on vertical axis **1207** is zero. Therefore, point **1206** on vertical axis **1207** corresponds to no current in the motor windings in either direction and no torque produced by the motor in either direction.

Points above point **1206** on vertical axis **1207** correspond to current in the motor windings in a first current direction and torque produced by the motor in the first direction of rotation. Points further above point **1206** on vertical axis **1207** correspond to greater magnitudes of current in the first current direction and greater torque in the first direction of rotation. For example, without limitation, points above point **1206** on vertical axis **1207** may correspond to torque in the clockwise direction. Points above point **1206** on vertical axis **1207** may be identified by positive numbers. Therefore, current in the first current direction may be referred to as positive current or current in a positive direction and torque in the first direction of rotation may be referred to as positive torque.

Points below point **1206** on vertical axis **1207** correspond to current in the motor windings in a second current direction and torque produced by the motor in the second direction of rotation. Points further above point **1206** on vertical axis **1207** correspond to greater magnitudes of current in the second current direction and greater torque in the second direction of rotation. The second current direction may be referred to as the opposite direction of current with respect to the first current direction.

Similarly, the first current direction may be referred to as the opposite direction of current with respect to the second current direction. For example, without limitation, points below point **1206** on vertical axis **1207** may correspond to torque in the counter-clockwise direction. Points below point **1206** on vertical axis **1207** may be identified by negative numbers. Therefore, current in the second current direction may be referred to as negative current or current in a negative direction and torque in the second direction of rotation may be referred to as negative torque.

A motor may be operating in quadrant 1 **1208** when the motor is rotating in the first direction of rotation and the current in the windings of the motor is in the first current direction to produce torque in the first direction of rotation. Therefore, in this example, operation of the motor in quadrant 1 **1208** may be characterized by positive rotation, positive current, and positive torque.

The motor may be operating in quadrant 2 **1210** when the motor is rotating in the second direction of rotation and the current in the windings of the motor is in the first current direction to produce torque in the first direction of rotation. Therefore, in this example, operation of the motor in quadrant 2 **1210** may be characterized by negative rotation, positive current, and positive torque.

The motor may be operating in quadrant 3 **1212** when the motor is rotating in the second direction of rotation and the current in the windings of the motor is in the second current direction to produce torque in the second direction of rotation. Therefore, in this example, operation of the motor in quadrant 3 **1212** may be characterized by negative rotation, negative current, and negative torque.

The motor may be operating in quadrant 4 **1214** when the motor is rotating in the first direction of rotation and the current in the windings of the motor is in the second current direction to produce torque in the second direction of rotation. Therefore, in this example, operation of the motor in quadrant 4 **1214** may be characterized by positive rotation, negative current, and negative torque.

In quadrant 1 **1208** and quadrant 3 **1212** the current in the motor windings produces torque that is in the same direction as the direction of rotation of the motor. Therefore, in quadrant 1 **1208** and quadrant 3 **1212** the torque produced by the motor supports the rotation of the motor. Operation of the motor in quadrant 1 **1208** and quadrant 3 **1212** may be referred to as traction. The directions of rotation of a motor operating in quadrant 1 **1208** and quadrant 3 **1212** are reversed. Therefore, quadrant 3 **1212** may be referred to as a reverse traction quadrant of operation with respect to quadrant 1 **1208**. Quadrant 1 **1208** may be referred to as a reverse traction quadrant of operation with respect to quadrant 3 **1212**.

In quadrant 2 **1210** and quadrant 4 **1214**, the current in the motor windings produces torque that is in the direction opposite to the direction of rotation of the motor. Therefore, in quadrant 2 **1210** and quadrant 4 **1214**, the torque produced by the motor opposes the rotation of the motor. Operation of the motor in quadrant 2 **1210** and quadrant 4 **1214** may be referred to as braking.

In one example, line **1216** illustrates the changing rate of rotation, winding current, and torque of a motor as the motor is operated in several quadrants of operation **1200**. Operation of the motor may begin in quadrant 1 **1208**. Line segment **1218** indicates an initial relatively large increase in the current in the motor windings in the positive direction. This relatively large increase in current produces a corresponding large increase in torque in the first direction of rotation, causing the motor to begin rotating in the first direction of rotation.

Line segment **1220** indicates that the positive current in the windings, and thus the torque in the first direction of rotation, may be maintained to accelerate the rate of rotation of the motor in the first direction of rotation to a desired coasting speed. Line segment **1220** indicates that the magnitude of the positive current, and thus the torque produced in the first direction of rotation, may be reduced gradually after rotation of the motor is started and as the rate of rotation of the motor is accelerated to the desired coasting speed. Line segment **1222** indicates that the magnitude of the positive current in the motor windings, and thus the torque produced in the first direction of rotation, may be reduced further as the rate of rotation of the motor is maintained at the desired coasting speed.

At point **1224**, operation of the motor changes from quadrant 1 **1208** to quadrant 4 **1214**. Line segment **1226** indicates a relatively large increase in the current

in the motor windings in the negative direction. This relatively large increase in negative current produces a corresponding large increase in torque in the second direction of rotation. The torque produced by the motor now opposes the rotation of the motor, causing the motor to begin braking.

Line segment **1228** indicates that the negative current in the windings, and thus the torque in the second direction of rotation, is maintained to reduce the rate of rotation of the motor in the first direction of rotation. Line segment **1228** indicates that the magnitude of the negative current, and thus the torque produced in the second direction of rotation, may be reduced gradually during braking as the rate of rotation of the motor is reduced.

At point **1230**, the operation of the motor changes from quadrant 4 **1214** to quadrant 3 **1212**. At point **1230**, the direction of rotation of the motor is reversed from the first direction of rotation to the second direction of rotation. Line segment **1232** indicates that the negative current in the motor windings, and thus the torque produced in the second direction of rotation, may be maintained to accelerate the rate of rotation of the motor in the second direction of rotation.

Turning to **Figure 13**, an illustration of a block diagram of an undesired condition identifier and an undesired condition reducer for reducing instability in the current in a motor is depicted in accordance with an illustrative embodiment. Undesired condition identifier **1300** and undesired condition reducer **1302** may be examples of implementations of undesired condition identifier **240** and undesired condition reducer **254**, respectively, in **Figure 2**.

Undesired condition identifier **1300** is configured to identify undesired condition **1304** when voltage **1306** across windings **1308** is greater than first voltage threshold **1310**. Voltage **1306** across windings **1308** may be identified using an appropriate voltage sensor **1312**. First voltage threshold **1310** may be defined with respect to output voltage **1314** of power source **1316**. For example, without limitation, first voltage threshold **1310** may be approximately equal to output voltage **1314** of power source **1316**. Output voltage **1314** of power source **1316** may be identified using appropriate voltage sensor **1318**.

Undesired condition identifier **1300** also may be configured to identify when voltage **1306** across windings **1308** is less than second voltage threshold **1320**. Second voltage threshold **1320** is lower than first voltage threshold **1310**.

Undesired condition reducer **1302** may include switch **1322** and resistor **1324**. Switch **1322** may be an appropriate solid state switch. Undesired condition reducer **1302** may be configured to close switch **1322** to direct current **1326** in windings **1308** to ground through resistor **1324** in response to undesired condition **1304** identified by undesired condition identifier **1300**. Undesired condition reducer **1302** may be configured to open switch **1322**, to cease directing current **1326** through resistor **1324** to ground **1328**, when voltage **1306** across windings **1308** is lower than second voltage threshold **1320**.

Resistor **1324** may comprise variable resistor **1330**. In this case, resistance **1332** of resistor **1324** may be set by resistance selector **1334** based on level **1336** of current **1326** in windings **1308**. For example, a higher resistance **1332** may be selected by resistance selector **1334** in response to a higher level **1336** of current **1326** in windings **1308**. Level **1336** of current **1326** in windings **1308** may be identified using an appropriate current sensor **1338**.

Variable resistor **1330** may comprise a plurality of resistors. In this case, resistance selector **1334** may select a number of the plurality of resistors in variable resistor **1330** to provide appropriate resistance **1332** based on temperatures of the plurality of resistors to prevent overheating of the resistors in variable resistor **1330**. The temperatures of the resistors in variable resistor **1330** may be determined using appropriate temperature sensors **1340**.

Turning to **Figure 14**, an illustration of a schematic circuit diagram of a switch bridge and a switch and resistor for directing current in a motor winding to ground is depicted in accordance with an illustrative embodiment. Switch **1402** and resistor **1404** may be examples of switch **1322** and resistor **1324**, respectively, in **Figure 13**.

In this example, switch bridge **1400** is configured to couple winding **1406** of a motor to a power source connected between terminal **1408** and ground **1410**. Current in winding **1406** is directed to ground **1410** via resistor **1404** when switch **1402** is closed. Diode **1412** is connected between switch bridge **1400** and switch **1402** to prevent shorting of the power source through switch **1402** when switch **1402** is closed.

Turning to **Figure 15**, an illustration of a schematic circuit diagram of a discrete valued variable resistor is depicted in accordance with an illustrative embodiment. Variable resistor **1500** is an example of one implementation of variable resistor **1330** in **Figure 13**.

Variable resistor **1500** comprises four resistors **1502**, **1504**, **1506**, and **1508** connected in parallel. Switches **1510**, **1512**, **1514**, and **1516** are connected in series with resistors **1502**, **1504**, **1506**, and **1508**, respectively. A variable resistor in accordance with an illustrative embodiment may have more or fewer than four resistors and switches. The resistance of resistors **1502**, **1504**, **1506**, and **1508** may be the same or different. The resistance of variable resistor **1500** is selected by closing appropriate ones of switches **1510**, **1512**, **1514**, and **1516**.

Turning to **Figure 16**, an illustration of a block diagram of a resistance selector is depicted in accordance with an illustrative embodiment. Resistance selector **1600** is an example of one implementation of resistance selector **1334** in **Figure 13**. In this example, resistance selector **1600** is configured for selecting the resistance provided by variable resistor **1500** in **Figure 15**.

Resistance selector **1600** may be configured to determine selected resistance **1602** based on the difference between commanded current **1604** and actual current **1606** in the windings of a motor. Selected resistance **1602** may be provided to resistor switch controller **1608**. Resistor switch controller **1608** may be configured to generate control signals **1610** for controlling switches to select a number of resistors in a variable resistor comprising a plurality of resistors connected in parallel.

Resistor switch controller **1608** may be configured to use temperature information **1612** for the plurality of resistors in the variable resistor to select which of the plurality of resistors should be used to provide selected resistance **1602**. Temperature information **1612** may be used to select the resistors to be used to prevent overheating of the resistors in the variable resistor. Temperature information **1612** may be used to identify resistors in the variable resistor that should or should not be used based on risk of overheating, and thus may affect available resistance **1614** of the variable resistor. Available resistance **1614** may be provided to resistance selector **1600** and used by resistance selector **1600** to determine selected resistance **1602**.

Turning to **Figure 17**, an illustration of current in the windings of a motor is depicted in accordance with an illustrative embodiment. For example, line **1700** may indicate current **1326** in windings **1308** in **Figure 13**.

In this example, a motor is operating in Quadrant 1 from time 0 to time t1. In Quadrant 1 the motor is driving and the current in the motor is positive. At time t1 the motor is instructed to begin braking. In response, the motor controller controls the

switching bridge to reverse the current in the motor windings. As a result, at time t2 the motor begins operating in Quadrant 4. In Quadrant 4 the motor is regenerating and the current in the motor is negative.

When the motor is regenerating in Quadrant 4 the voltage across the motor windings climbs higher than the power supply voltage at time t3, resulting in an undesired current spike **1706**. In accordance with an illustrative embodiment, the undesired condition of the voltage across the motor windings climbing higher than the power supply voltage may be identified at time t3 and the current in the windings may be directed through a resistor to ground in response. In this case, the current in the windings remains well controlled, as indicated by line segment **1708**.

Turning to **Figure 18**, an illustration of a flowchart of a process for reducing instability in a motor is depicted in accordance with an illustrative embodiment. For example, process **1800** may be performed by undesired condition identifier **1300** and undesired condition reducer **1302** in **Figure 13**.

Process **1800** may begin by identifying the output voltage of a power source (operation **1802**). The voltage across the motor windings of a motor being powered by the power source is also identified (operation **1804**). It is then determined whether the voltage across the motor windings is greater than the output voltage of the power source (operation **1806**). Process **1800** may repeat identifying the output voltage of the power source at operation **1802** and identifying the voltage across the motor windings at operation **1804** until a determination is made at operation **1806** that the voltage across the motor windings is greater than the output voltage of the power source.

In response to a determination that the voltage across the windings is greater than the output voltage of the power source, the current in the motor windings is directed to ground via a resistor (operation **1808**). It then is determined whether the voltage across the motor windings is less than a second voltage threshold (operation **1810**). Current in the motor windings may continue to be directed to ground via the resistor at operation **1808** until it is determined at operation **1810** that the voltage across the motor windings is less than the second voltage threshold. The second voltage threshold may be less than the output voltage of the power source. For example, without limitation, the second voltage threshold may be approximately 20 volts less than the output voltage of the power source or less than the output voltage of the power

source by any other appropriate amount. The directing of the current in the motor windings to ground may cease (operation **1812**) when the voltage across the motor windings is determined to be less than the second voltage threshold, with the process terminating thereafter.

Turning to **Figure 19**, an illustration of a flowchart of a process for selecting the resistance of a variable resistor is depicted in accordance with an illustrative embodiment. For example, process **1900** may be performed by resistance selector **1334** in **Figure 13**.

Process **1900** may begin by identifying a level of current in the windings of a motor (operation **1902**). The temperatures of a plurality of resistors in a variable resistor may be identified (operation **1904**). A number of the plurality of resistors in the variable resistor is then selected based on the level of current in the motor windings and the temperatures of the resistors (operation **1906**), with the process terminating thereafter.

Turning to **Figure 20**, an illustration of a block diagram of an undesired condition identifier and an undesired condition reducer for protecting a power source from undesired current during operation of a motor is depicted in accordance with an illustrative embodiment. Undesired condition identifier **2000** and undesired condition reducer **2002** are examples of one implementation of undesired condition identifier **240** and undesired condition reducer **254**, respectively, in **Figure 2**.

Undesired condition identifier **2000** is configured to identify undesired condition **2004** wherein the flow of current between a motor and power source **2006** is greater than current limit **2008** for power source **2006**. For example, undesired condition **2004** may be identified when commanded current **2010** for the windings of the motor is greater than current limit **2008**. For example, without limitation, commanded current **2010** may be determined at block **2012** based on the difference between commanded rotation **2014** for the motor and actual rotation **2016** for the motor.

Undesired condition reducer **2002** is configured to control duty cycle **2018** for controlling the motor such that the current between the motor and power source **2006** does not exceed current limit **2008** of power source **2006**. For example, duty cycle **2018** may be determined at block **2020** based on the difference between commanded current **2022** and actual current **2024** in the windings of the motor. Undesired condition reducer **2002** may set commanded current **2022** based on current

limit **2008** in response to undesired condition **2004** identified by undesired condition identifier **2000**. Otherwise, commanded current **2010** may be used to determine duty cycle **2018**.

Current limit **2008** of power source **2006** may be variable **2026**. For example, power source **2006** may comprise battery **2028**. In this case, value **2030** for current limit **2008** may be determined using feedback from cell balancer circuit **2032** for battery **2028**.

Turning to **Figure 21**, an illustration of a waveform diagram current control for protecting a power source from undesired current during operation of a motor is depicted in accordance with an illustrative embodiment. In this example, line **2100** indicates the commanded current for the windings of a motor and line **2102** indicates the actual current in the windings of the motor.

Before time 0 the motor is driving and the duty cycle for the motor is maintained approximately steady at about ten percent. At time 0, the motor is commanded to brake hard. In response, the commanded current reverses direction. The duty cycle is changed to 100 percent in the reverse direction, to change the direction of the current in the windings as quickly as possible. In this example, the commanded current is limited to the current limit of the power source for the motor.

Dashed line segment **2104** indicates that the magnitude of the command current would be larger if it was not limited by the current limit of the power source. In this case, the magnitude of the current in the windings would exceed the current limit of the power supply, as shown by dashed line segment **2106**.

Turning to **Figure 22**, an illustration of a flowchart of a process for protecting a power source from undesired current during operation of a motor is depicted in accordance with an illustrative embodiment. For example, process **2200** may be performed by undesired condition identifier **2000** and undesired condition reducer **2002** in **Figure 20**.

Process **2200** may begin by identifying a commanded current for the motor (operation **2202**). A current limit of the power source also is identified (operation **2204**). It then is determined whether the commanded current is greater than the current limit of the power source (operation **2206**). The commanded current is set equal to the current limit of the power source (operation **2208**) in response to determining at operation **2206** that the commanded current identified in operation **2202** is greater than

the current limit of the power source. The duty cycle for controlling the current in the motor windings is then controlled using the commanded current (operation **2210**), with the process terminating thereafter.

The different illustrative embodiments can take the form of an entirely hardware embodiment, an entirely software embodiment, or an embodiment containing both hardware and software elements. Some embodiments are implemented in software, which includes, but is not limited to, forms such as, for example, without limitation, firmware, resident software, and microcode.

Furthermore, the different embodiments can take the form of a computer program product accessible from a computer usable or computer readable medium providing program code for use by, or in connection with, a computer or any device or system that executes instructions. For the purposes of this disclosure, a computer usable or computer readable medium can generally be any tangible apparatus that can contain, store, communicate, propagate, or transport the program for use by or in connection with the instruction execution system, apparatus, or device.

The computer usable or computer readable medium can be, for example, without limitation, an electronic, magnetic, optical, electromagnetic, infrared, or semiconductor system, or a propagation medium. Non-limiting examples of a computer readable medium include a semiconductor or solid state memory, magnetic tape, a removable computer diskette, a random access memory (RAM), a read-only memory (ROM), a rigid magnetic disk, and an optical disk. Optical disks may include compact disk – read only memory (CD-ROM), compact disk – read/write (CD-R/W), and DVD.

Further, a computer usable or computer readable medium may contain or store a computer readable or computer usable program code such that when the computer readable or computer usable program code is executed on a computer, the execution of this computer readable or computer usable program code causes the computer to transmit another computer readable or computer usable program code over a communications link. This communications link may use a medium that is, for example, without limitation, physical or wireless.

A data processing system suitable for storing and/or executing computer readable or computer usable program code will include one or more processors coupled directly or indirectly to memory elements through a communications fabric, such as a system bus. The memory elements may include local memory employed during actual

execution of the program code, bulk storage, and cache memories which provide temporary storage of at least some computer readable or computer usable program code to reduce the number of times code may be retrieved from bulk storage during execution of the code.

Input/output, or I/O, devices can be coupled to the system either directly or through intervening I/O controllers. These devices may include, for example, without limitation, keyboards, touch screen displays, and pointing devices. Different communications adapters may also be coupled to the system to enable the data processing system to become coupled to other data processing systems or remote printers or storage devices through intervening private or public networks. Non-limiting examples such as modems and network adapters are just a few of the currently available types of communications adapters.

The description of the different illustrative embodiments has been presented for purposes of illustration and description, and is not intended to be exhaustive or limited to the embodiments in the form disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art. Further, different illustrative embodiments may provide different features as compared to other illustrative embodiments. The embodiment or embodiments selected are chosen and described in order to best explain the principles of the embodiments, the practical application, and to enable others of ordinary skill in the art to understand the disclosure for various embodiments with various modifications as are suited to the particular use contemplated.

CLAIMS:

What is claimed is:

1. An apparatus, comprising:
 - a motor comprising windings;
 - a switch bridge comprising a plurality of switches configured to couple a power source to the windings;
 - a motor controller configured to control the plurality of switches;
 - an undesired condition identifier configured to identify an undesired condition in the apparatus when the motor is providing power to the power source, wherein the undesired condition is defined with respect to a characteristic of the power source; and
 - an undesired condition reducer configured to reduce the undesired condition in response to identifying the undesired condition in the apparatus by the undesired condition identifier.
2. The apparatus of claim 1, wherein:
 - in being configured to identify the undesired condition in the apparatus when the motor is providing the power to the power source, the undesired condition identifier is configured to identify the undesired condition in the apparatus when a voltage across the windings is greater than a first voltage threshold, wherein the first voltage threshold is defined with respect to an output voltage of the power source; and
 - in being configured to reduce the undesired condition in response to identifying the undesired condition in the apparatus, the undesired condition reducer is configured to direct a current in the windings to ground via a resistor in response to identifying the undesired condition in the apparatus.
3. The apparatus of claim 2, wherein the first voltage threshold is approximately equal to the output voltage of the power source.
4. The apparatus of claim 2, wherein:

the undesired condition identifier is further configured to identify when the voltage across the windings is less than a second voltage threshold, wherein the second voltage threshold is lower than the first voltage threshold; and

the undesired condition reducer is configured to cease directing the current in the windings to ground in response to identifying when the voltage across the windings is less than the second voltage threshold.

5. The apparatus of claim 2, wherein:

the resistor is a variable resistor; and

the undesired condition reducer is further configured to select a resistance of the variable resistor in response to a level of the current in the windings.

6. The apparatus of claim 5, wherein:

the resistor comprises a plurality of resistors in parallel; and

the undesired condition reducer is further configured to select a number of resistors in the plurality of resistors through which the current in the windings is directed to ground based on temperatures of the plurality of resistors.

7. The apparatus of claim 1, wherein:

the motor controller is configured to control a duty cycle during which a number of the plurality of switches in the switch bridge is closed to provide a current between the power source and the windings in response to a commanded current;

in being configured to identify the undesired condition in the apparatus when the motor is providing the power to the power source, the undesired condition identifier is configured to identify the undesired condition in the apparatus when the commanded current is greater than a current limit for the power source; and

in being configured to reduce the undesired condition in response to identifying the undesired condition in the apparatus, the undesired condition reducer is configured to set the commanded current based on the current limit for the power source when the commanded current is greater than the current limit for the power source.

8. The apparatus of claim 7, wherein:


the current limit for the power source is variable;

the power source comprises a battery; and
the undesired condition identifier is further configured to select a value for the current limit based on feedback from a cell balancer circuit for the battery.

9. The apparatus of claim 1, wherein the apparatus is on an aircraft.
10. A method of controlling a motor, comprising:
controlling a plurality of switches in a switch bridge to couple a power source to windings of the motor;
determining whether a voltage across the windings is greater than a first voltage threshold, wherein the first voltage threshold is defined with respect to an output voltage of the power source; and
directing a current in the windings to ground via a resistor in response to a determination that the voltage across the windings is greater than the first voltage threshold.
11. The method of claim 10, wherein the first voltage threshold is substantially equal to the output voltage of the power source.
12. The method of claim 10 further comprising:
determining when the voltage across the windings is less than a second voltage threshold, wherein the second voltage threshold is lower than the first voltage threshold; and
ceasing directing the current in the windings to ground in response to determining when the voltage across the windings is less than the second voltage threshold.
13. The method of claim 10, wherein the resistor is a variable resistor.
14. The method of claim 13 further comprising:
selecting a resistance for the variable resistor in response to a level of the current in the windings.

15. The method of claim 14, wherein:
- the resistor comprises a plurality of resistors in parallel; and
 - further comprising selecting a number of the plurality of resistors through which the current in the windings is directed to ground based on temperatures of the plurality of resistors.

FIG. 1

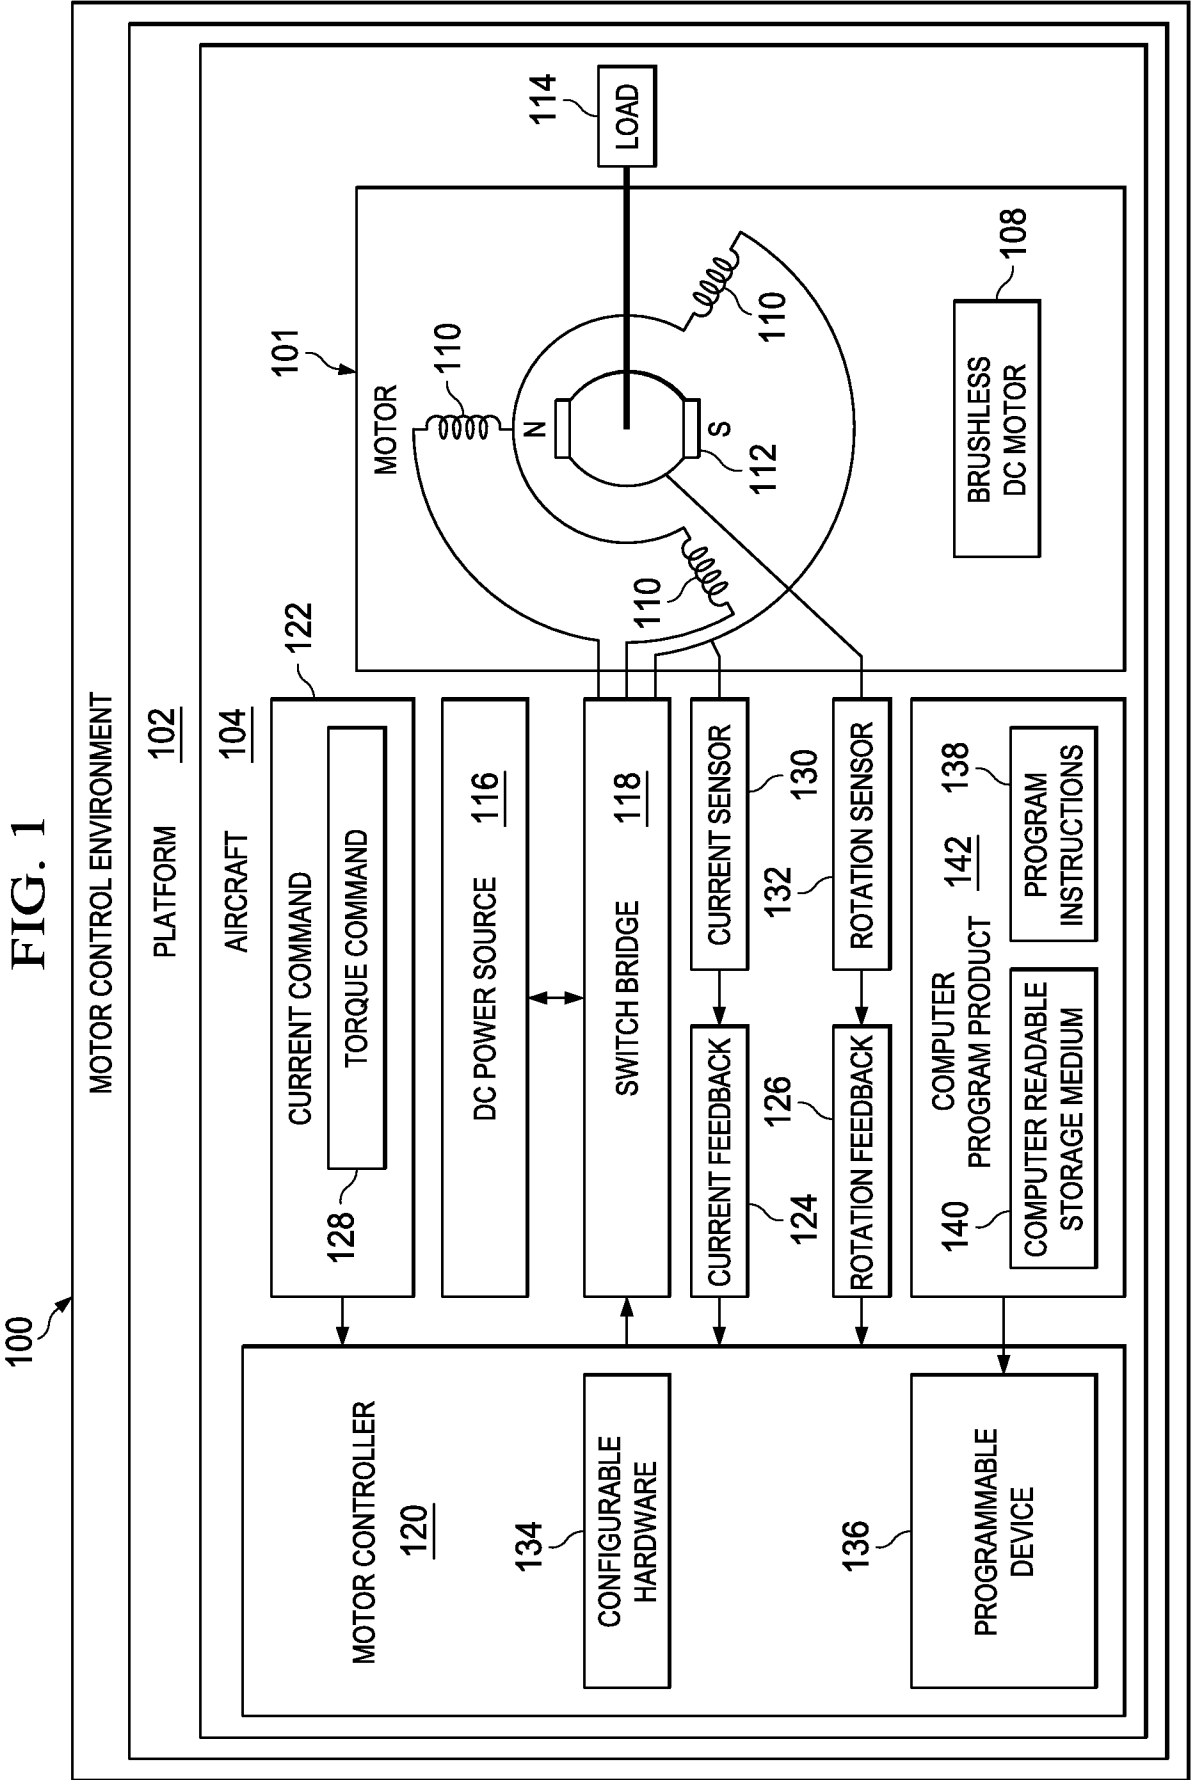

2/17


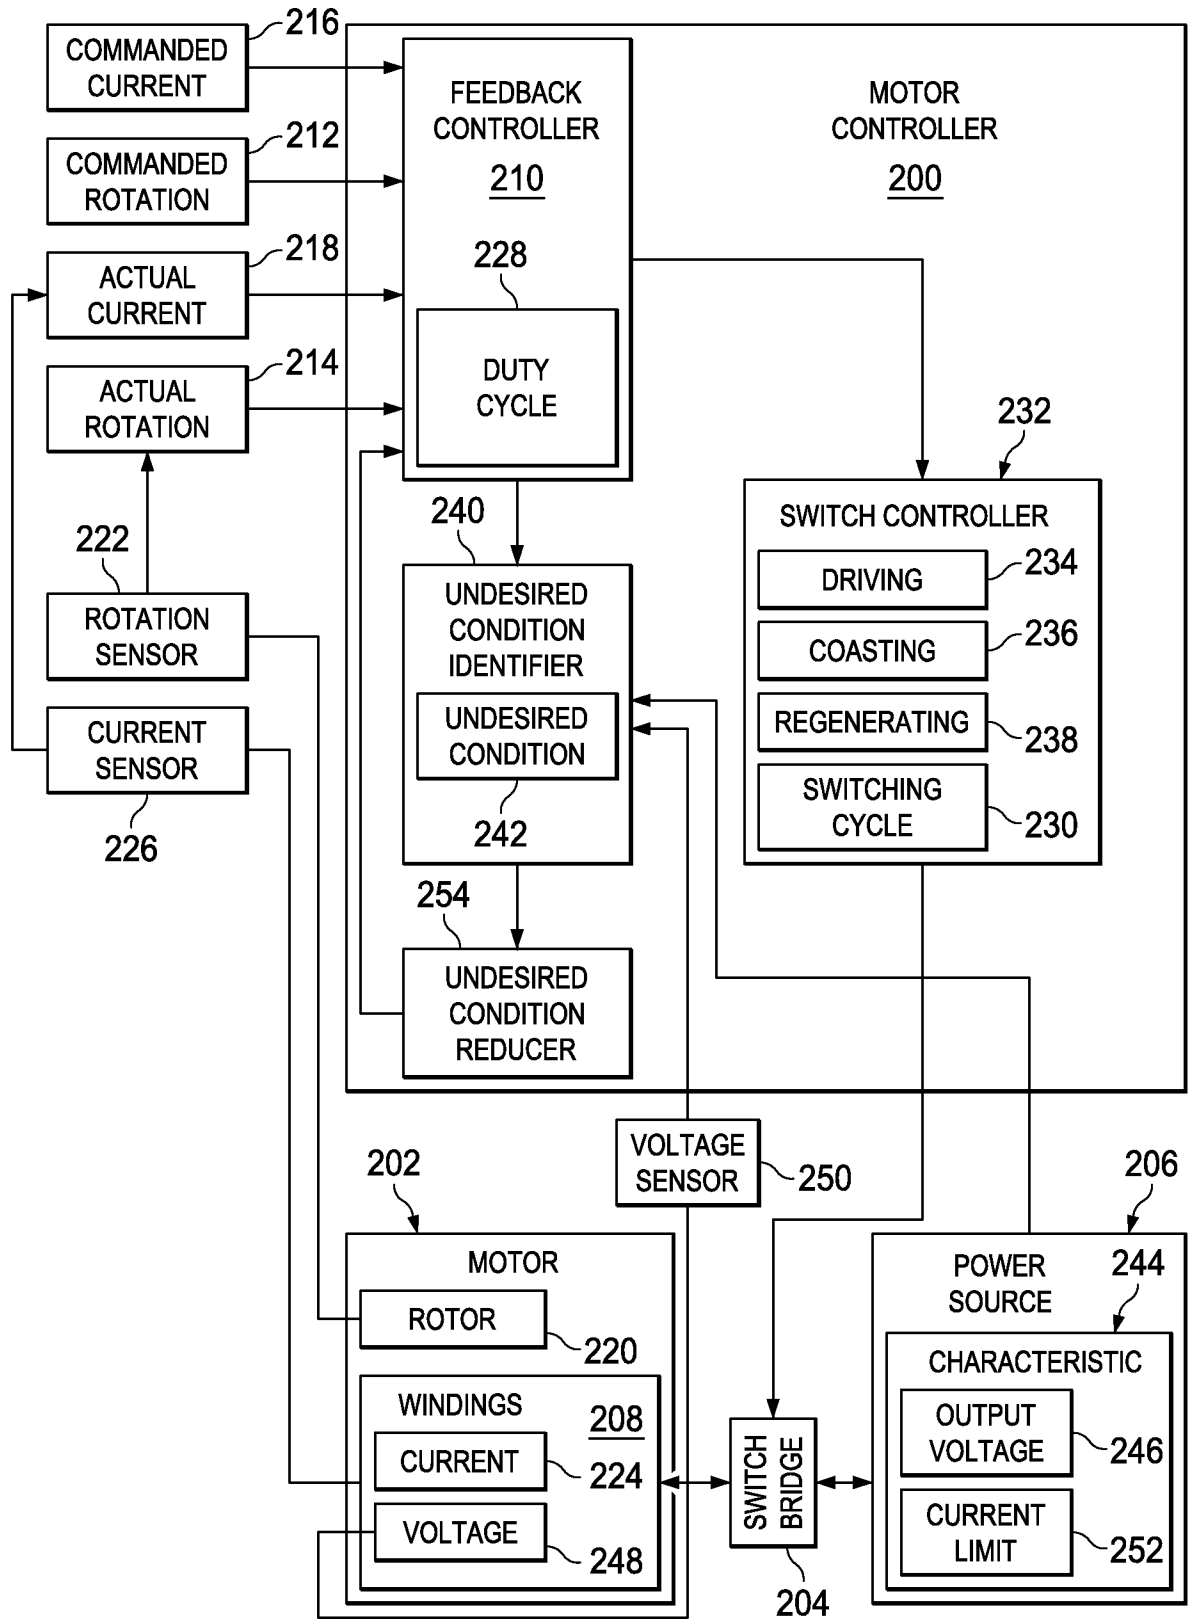


FIG. 2


3/17

FIG. 3

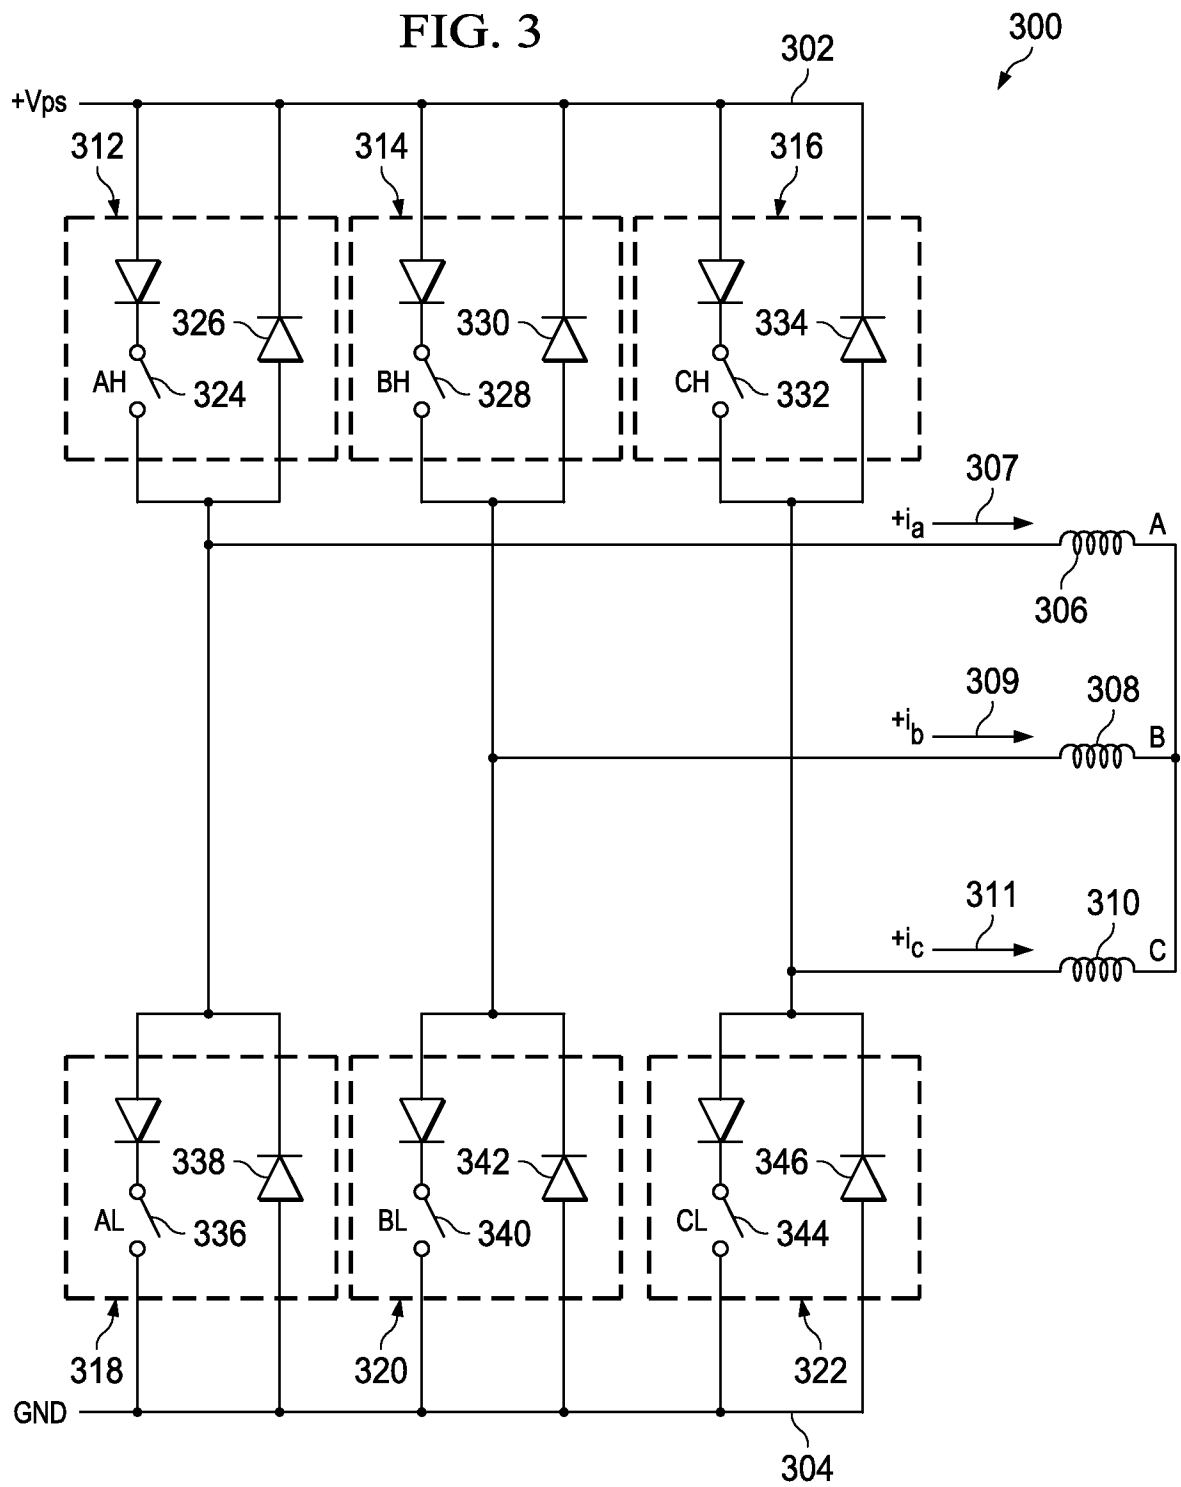


4/17

FIG. 4

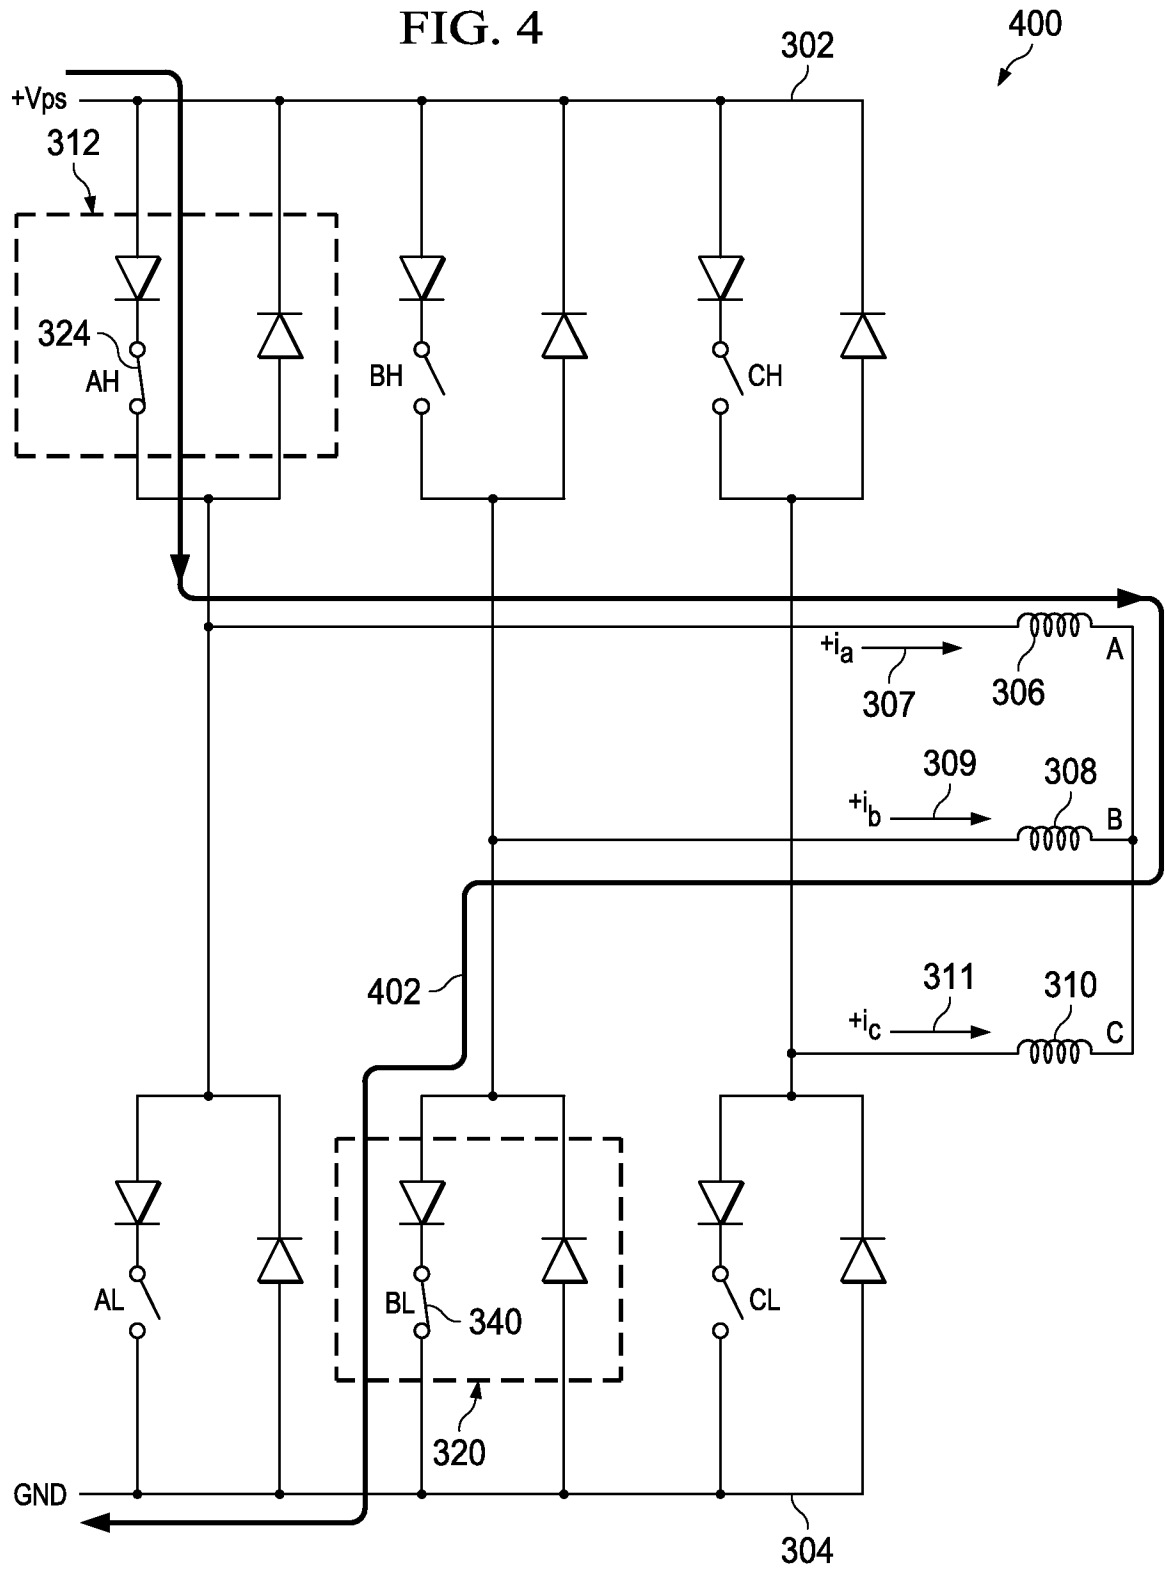


5/17

FIG. 5

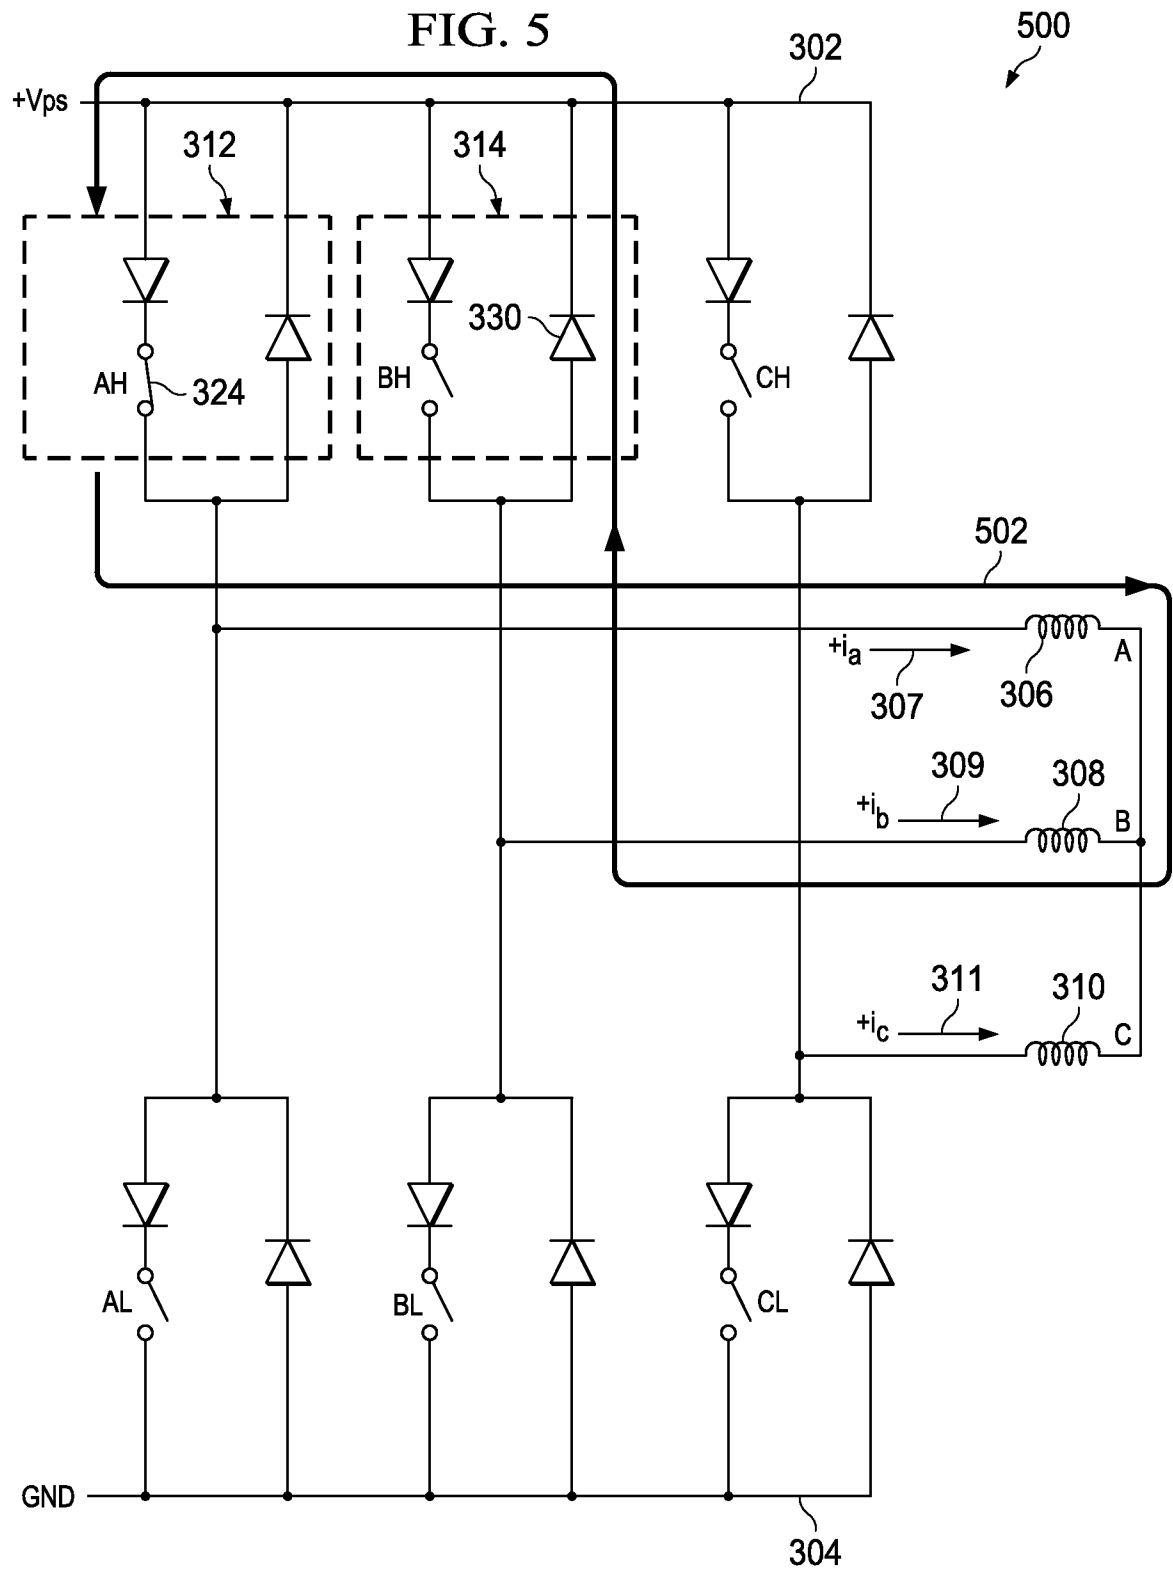


6/17

FIG. 6

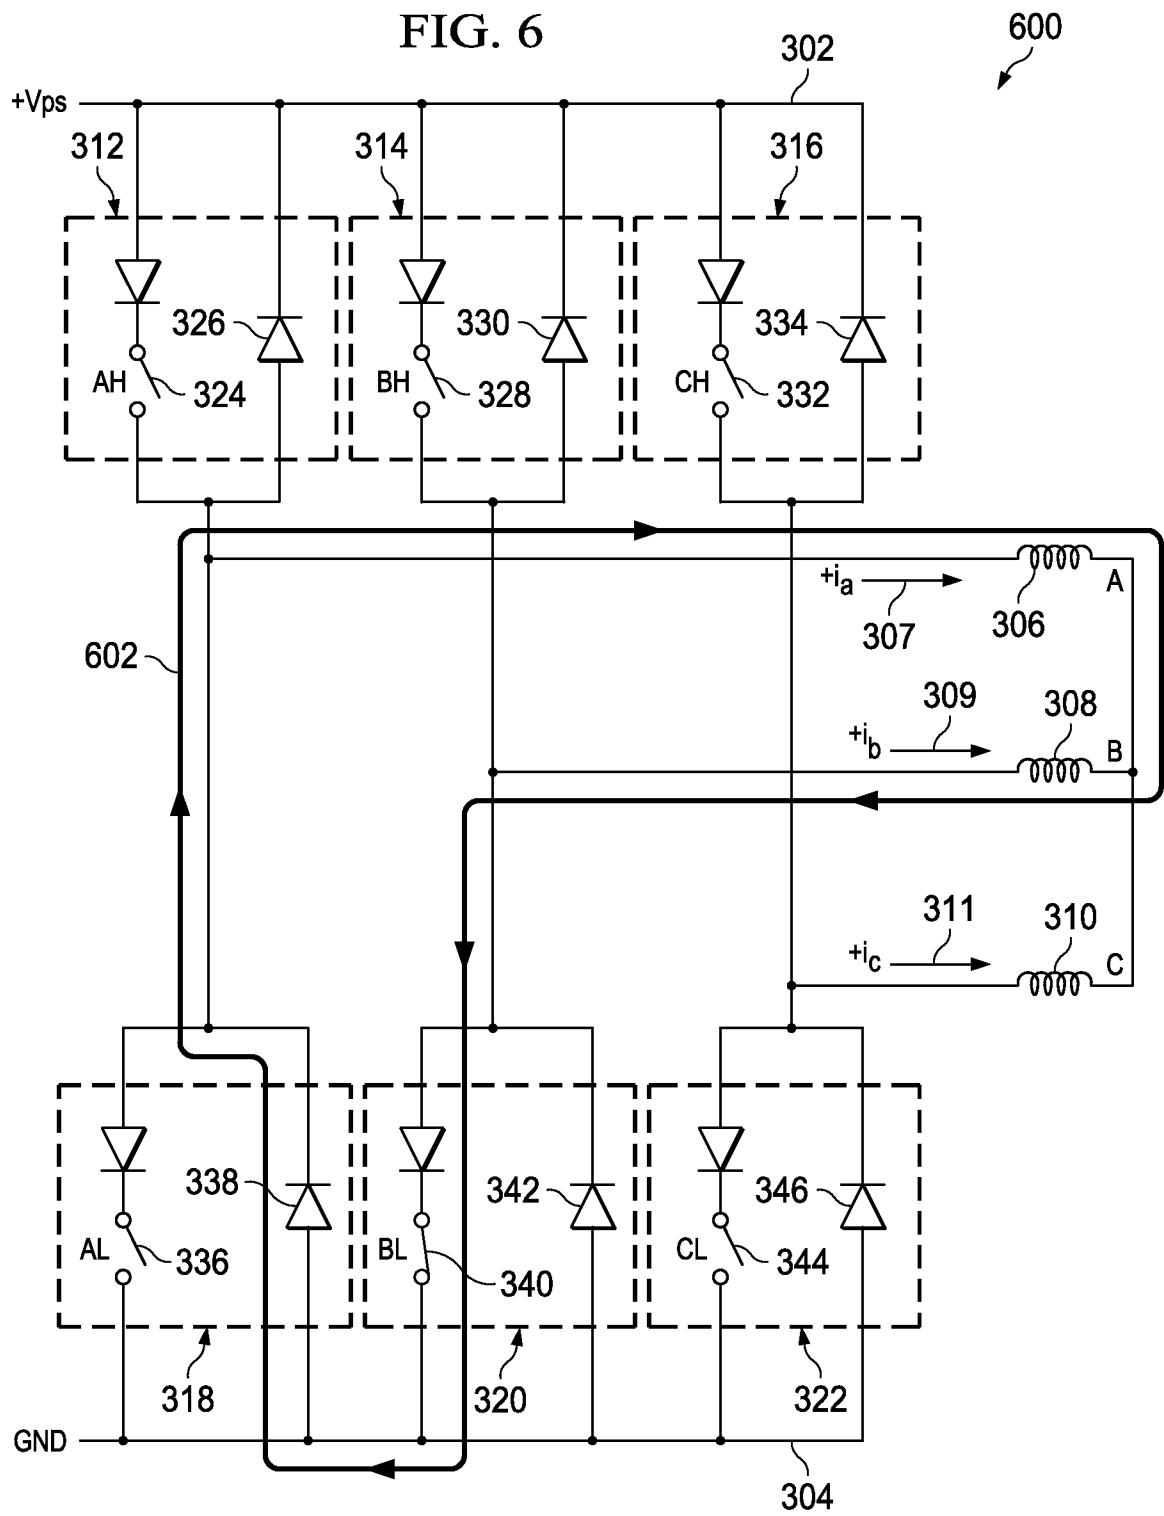

7/17

FIG. 7

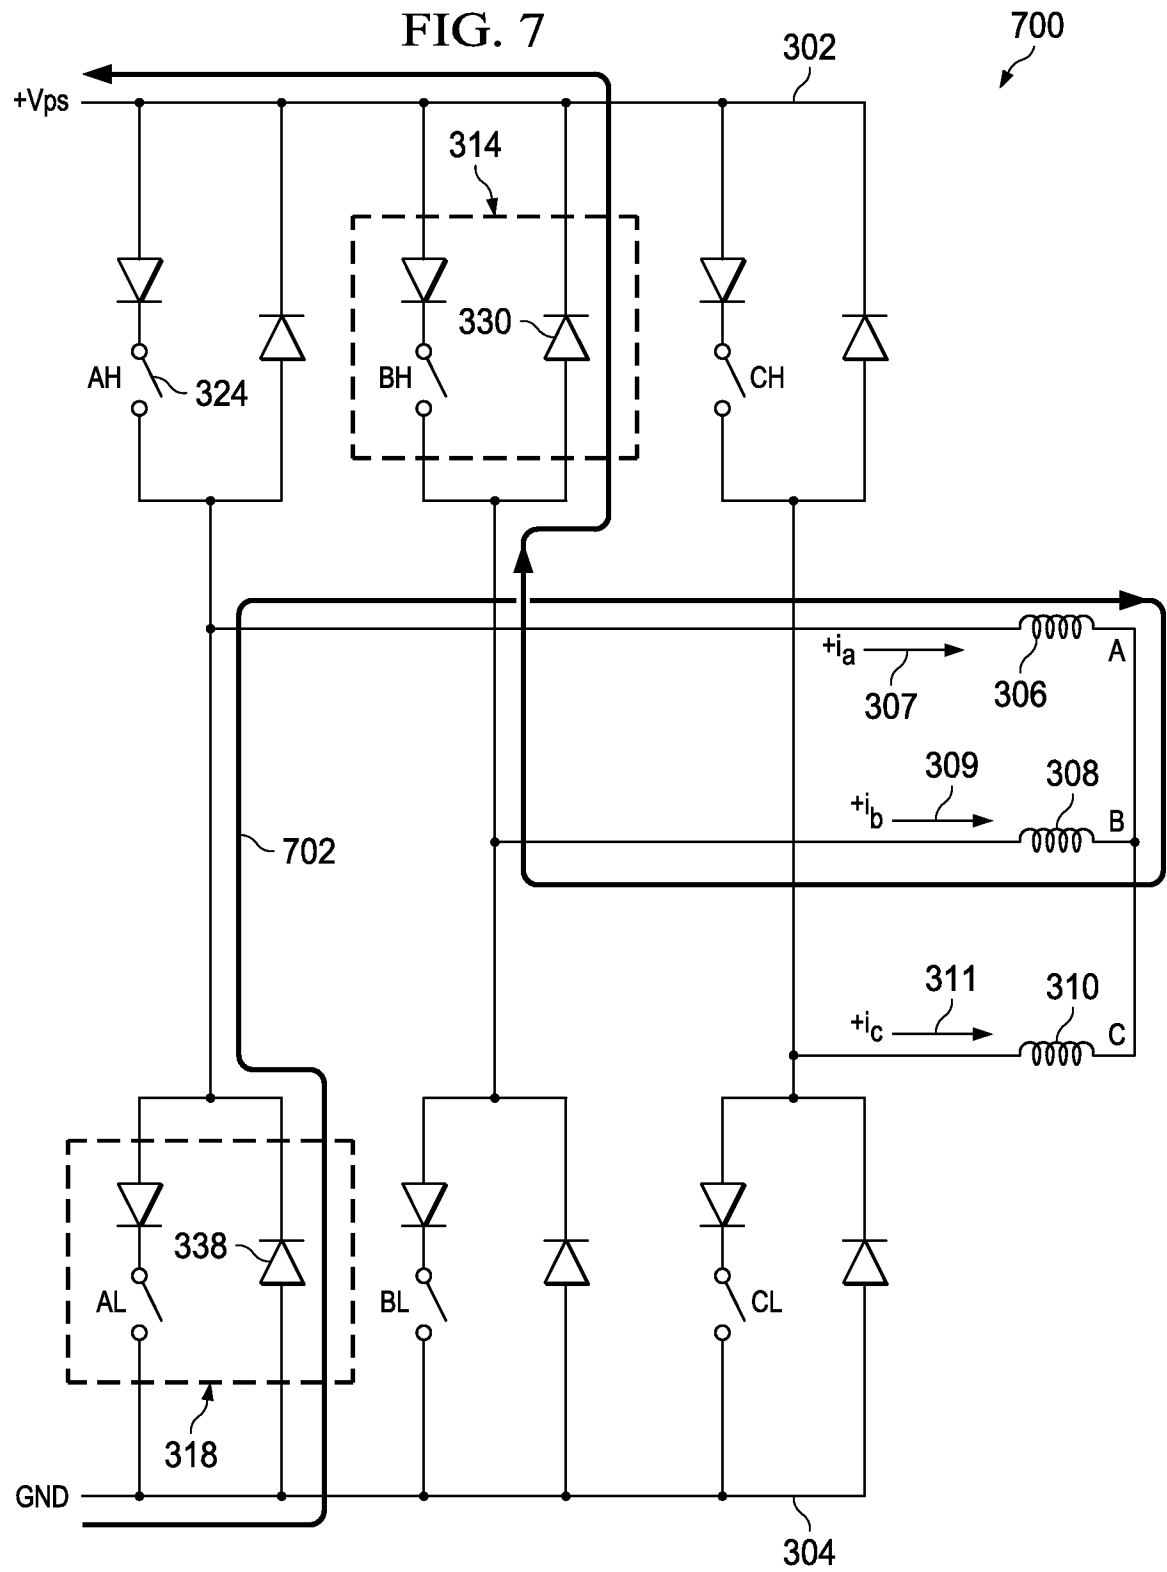

8/17

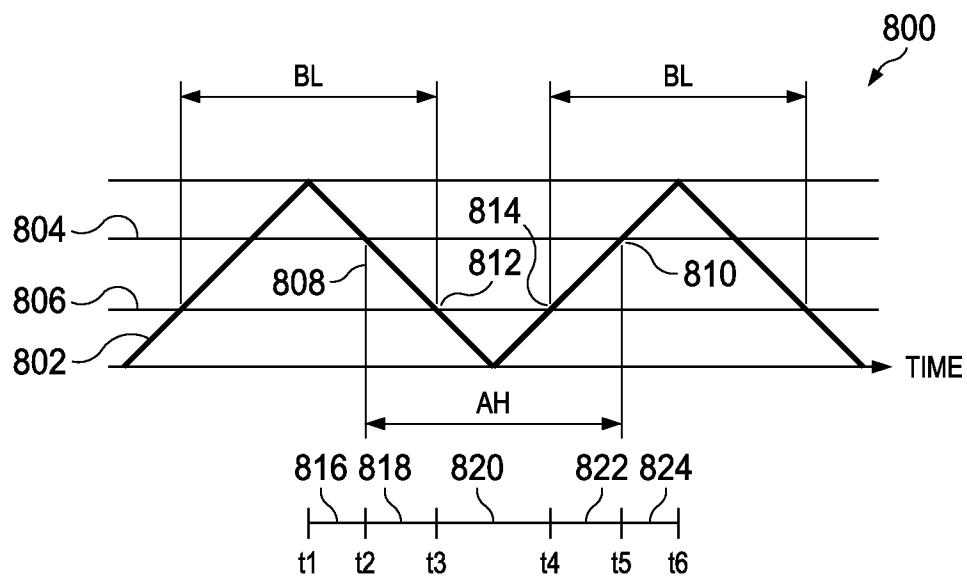


FIG. 8

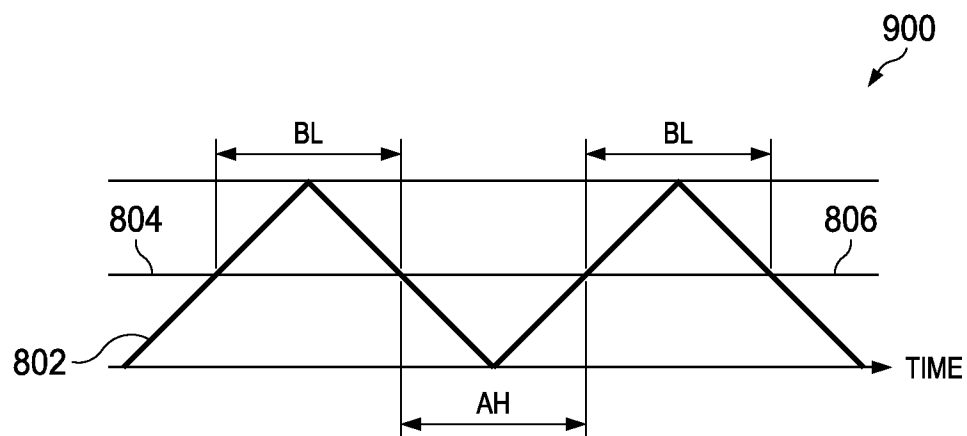


FIG. 9

9/17

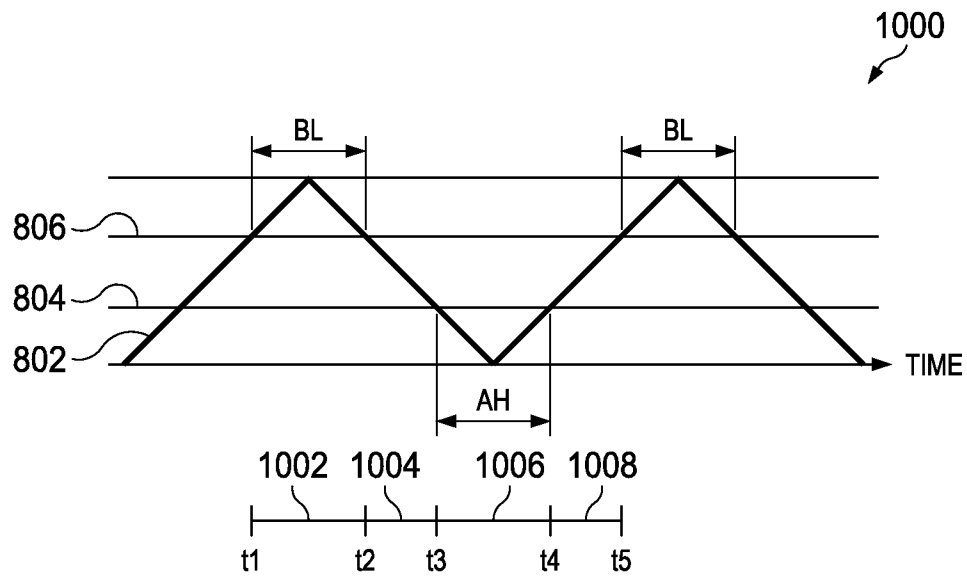


FIG. 10


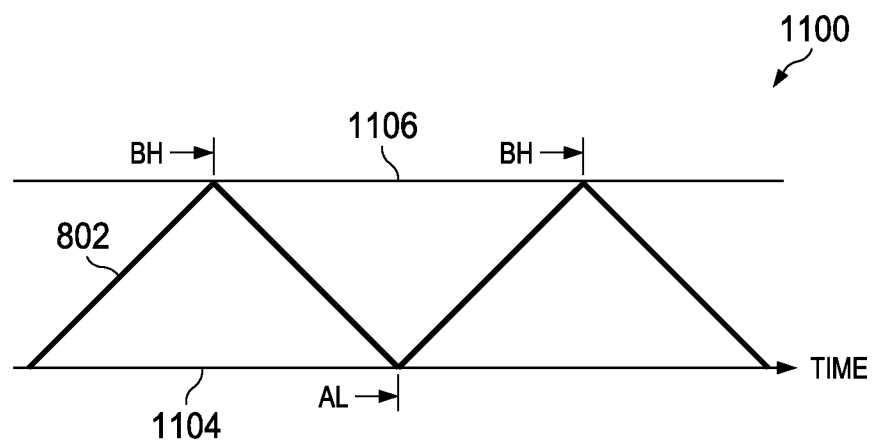


FIG. 11

10/17

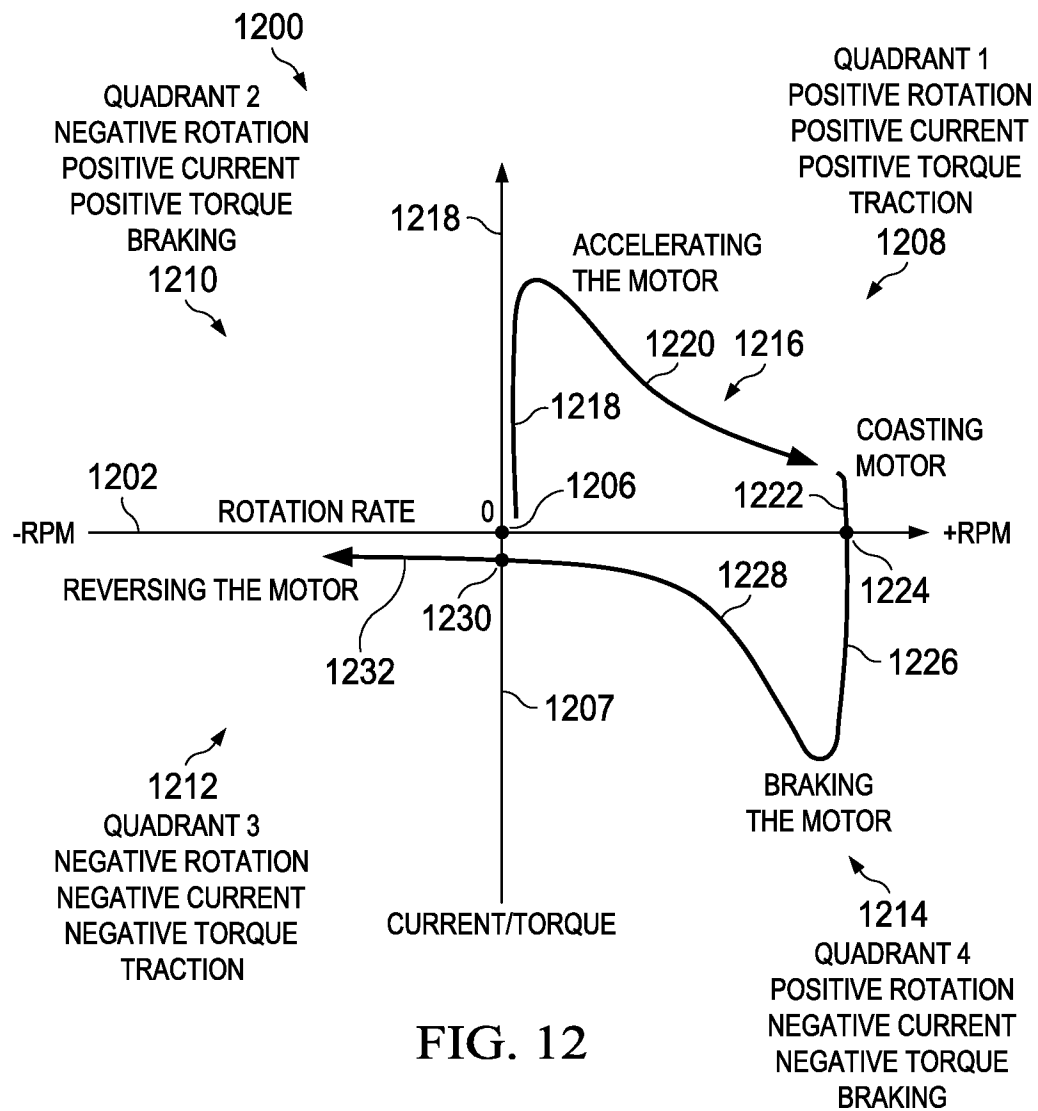

11/17

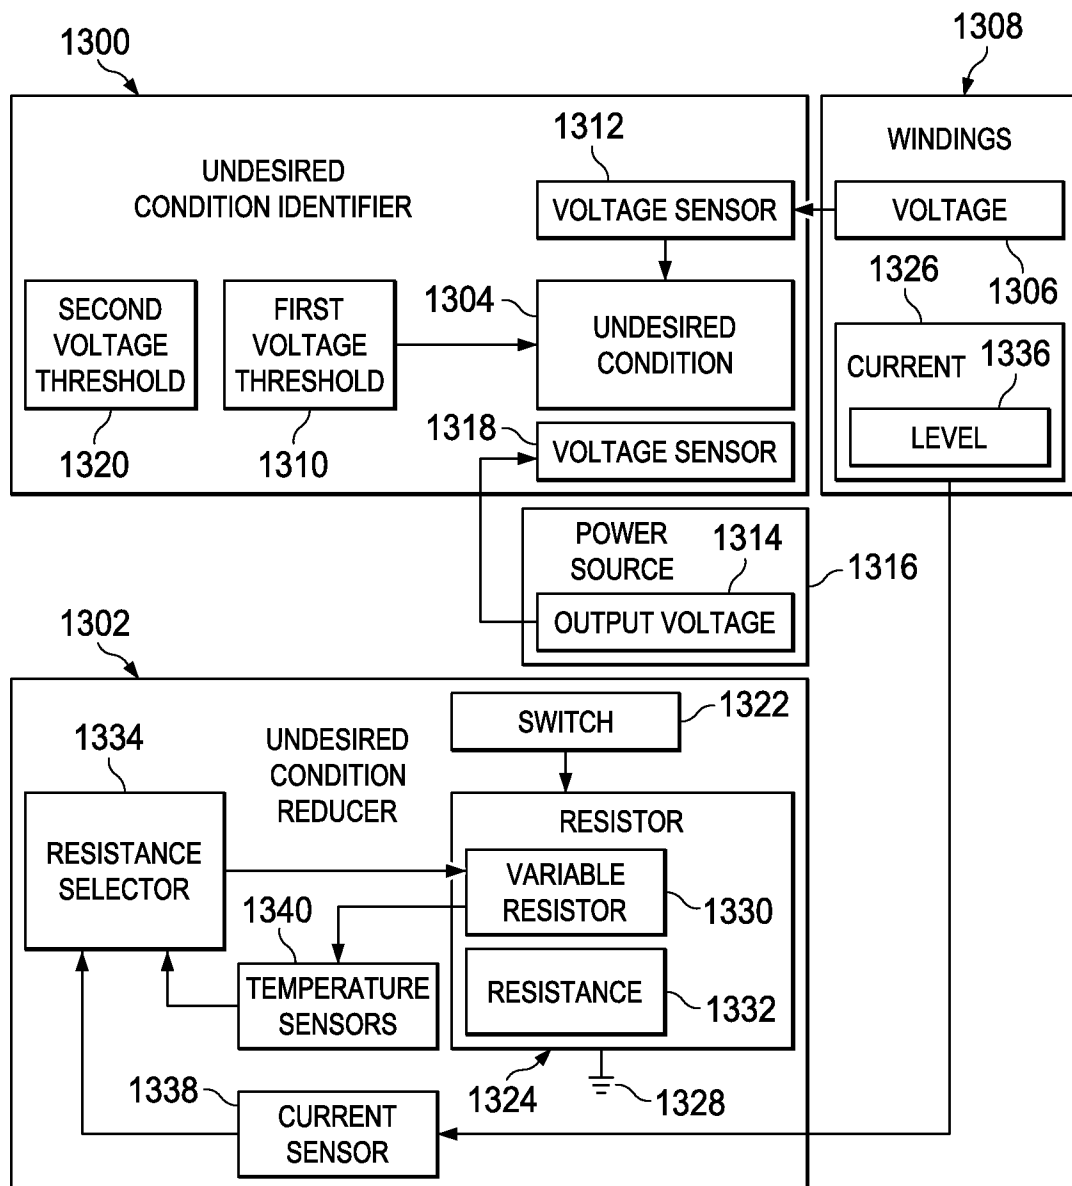


FIG. 13

12/17

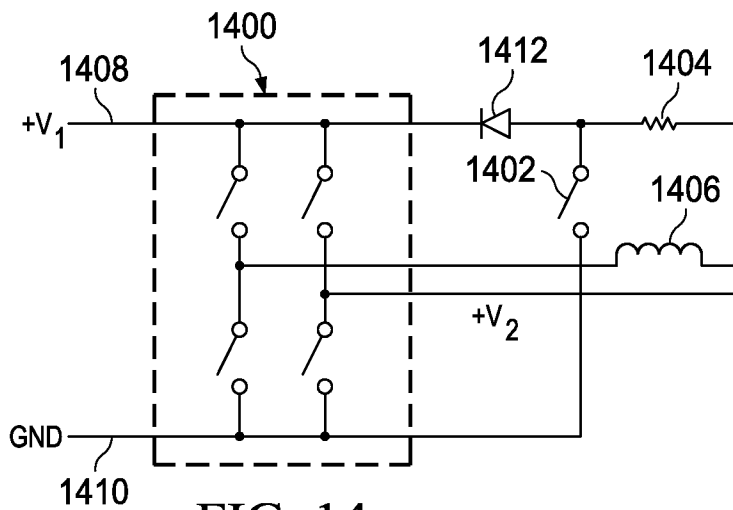


FIG. 14

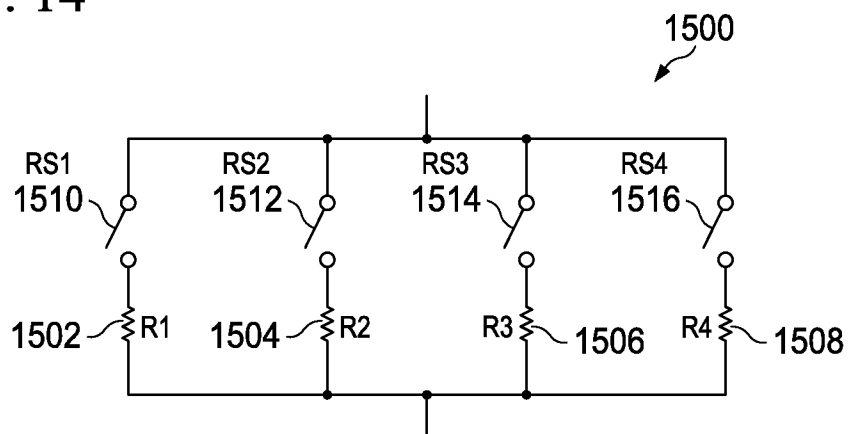


FIG. 15

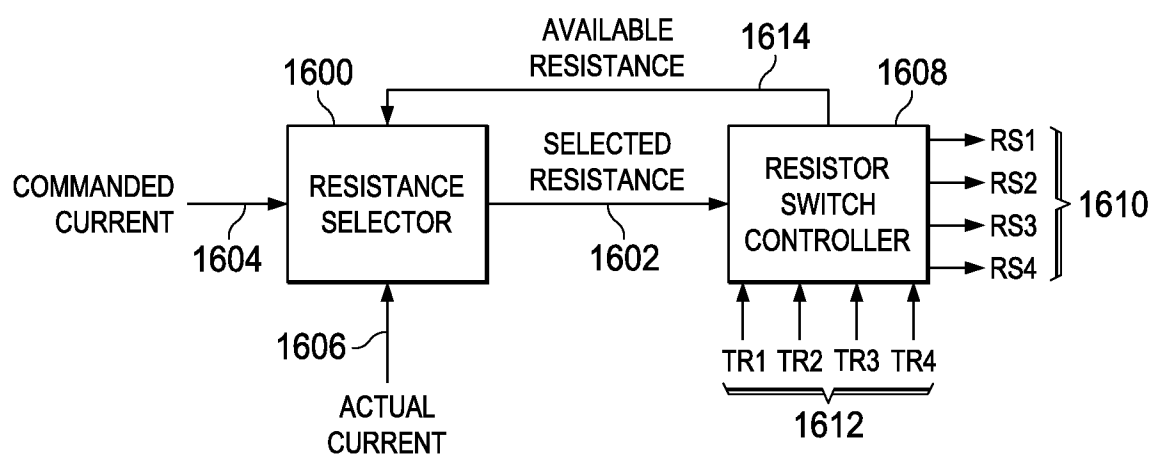


FIG. 16

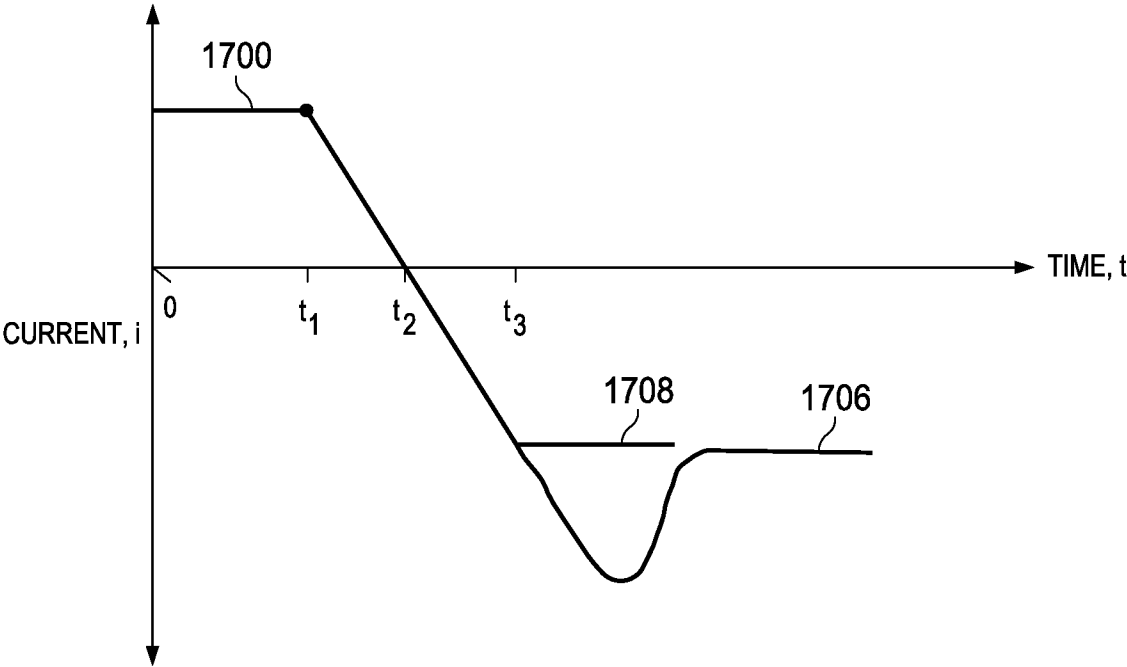


FIG. 17

14/17

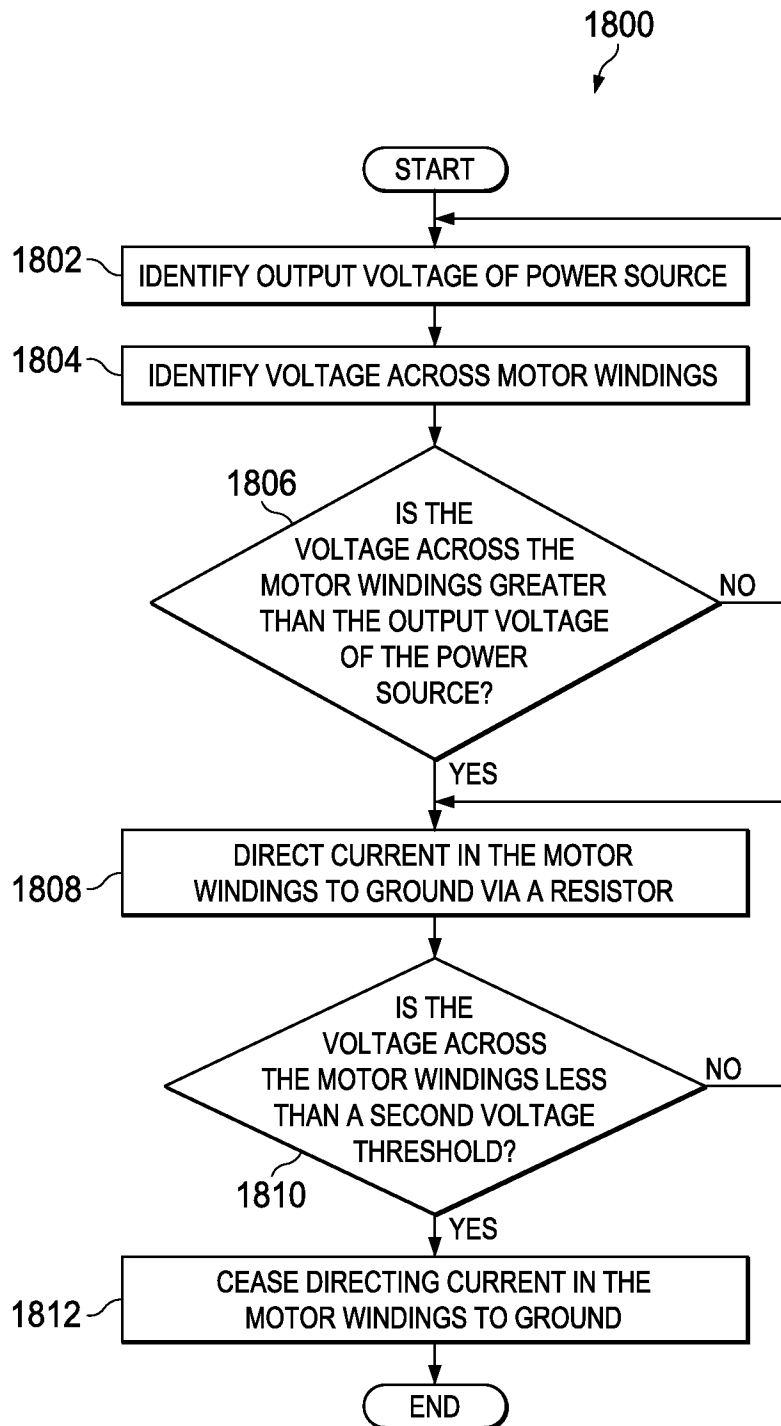


FIG. 18

15/17

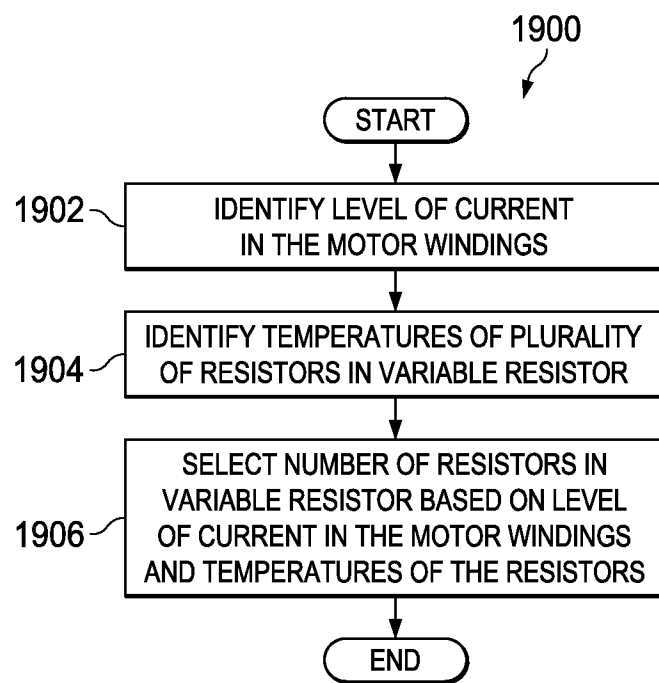


FIG. 19

16/17

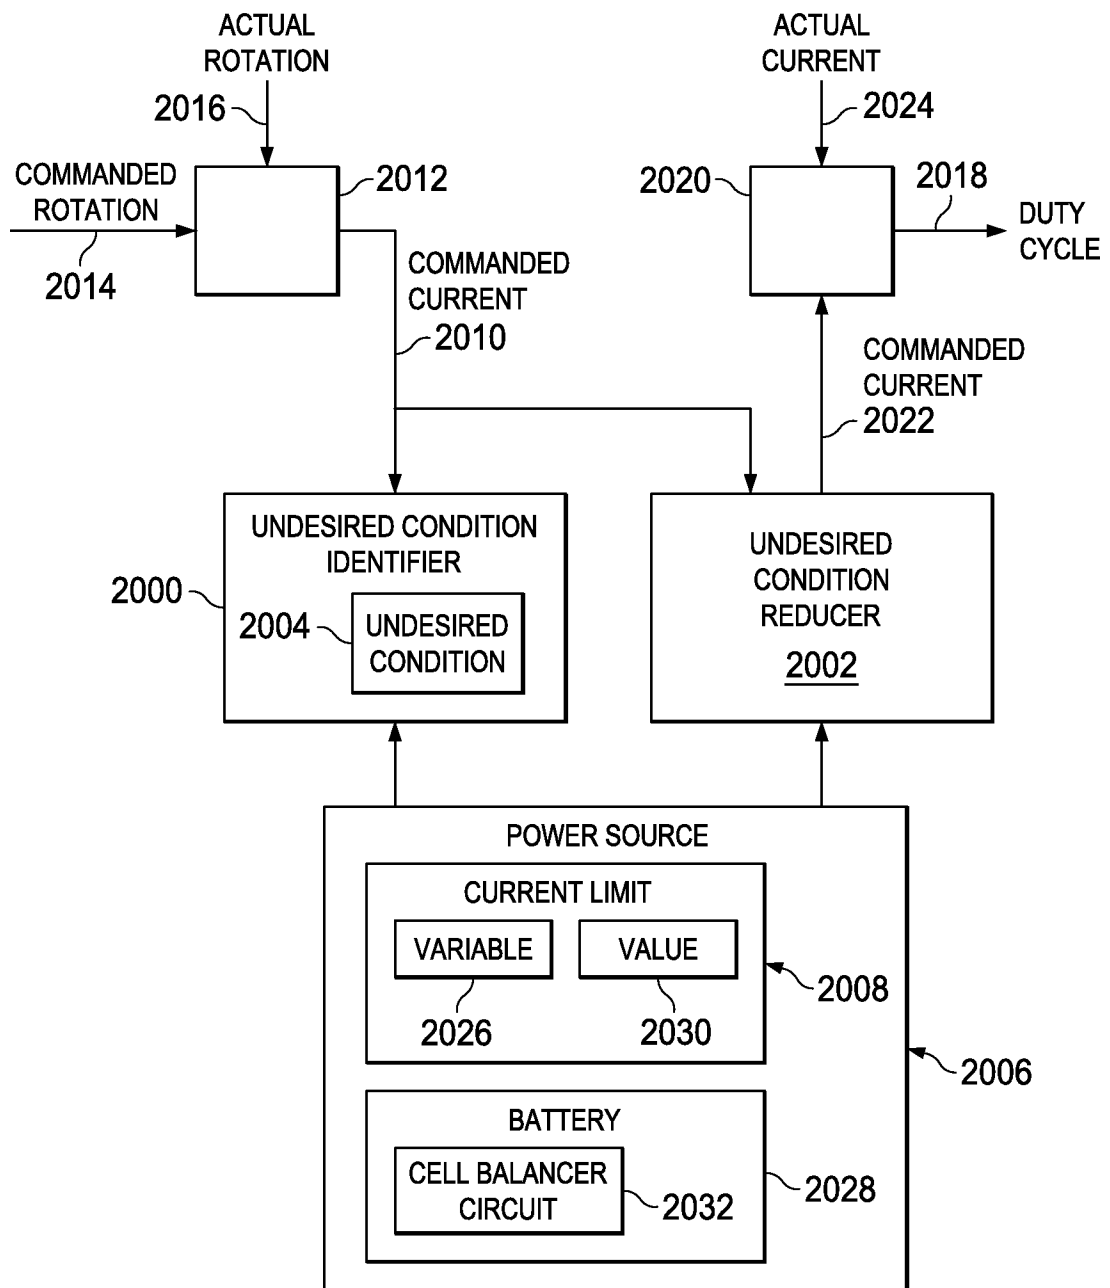


FIG. 20

