



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



Publication number: **0 268 940 B1**

19

12

## EUROPEAN PATENT SPECIFICATION

49 Date of publication of patent specification: **08.04.92** 51 Int. Cl.<sup>5</sup>: **H01R 33/76**

21 Application number: **87116675.7**

22 Date of filing: **11.11.87**

54 **CRT socket.**

30 Priority: **21.11.86 JP 179185/86 U**

43 Date of publication of application:  
**01.06.88 Bulletin 88/22**

45 Publication of the grant of the patent:  
**08.04.92 Bulletin 92/15**

84 Designated Contracting States:  
**DE ES FR GB**

56 References cited:  
EP-A- 0 050 574            EP-A- 0 173 790  
DE-A- 3 227 880            US-A- 1 721 474  
US-A- 4 036 545            US-A- 4 253 717

73 Proprietor: **HOSIDEN CORPORATION**  
**4-33, Kitakyuhoji 1-chome**  
**Yao-shi Osaka(JP)**

72 Inventor: **Nishikawa, Yasunori**  
**Hosiden Corporation 4-33, Kitakyuhoji**  
**1-chome**  
**Yao-shi Osaka(JP)**  
Inventor: **Inaba, Hirobumi**  
**Hosiden Corporation 4-33, Kitakyuhoji**  
**1-chome**  
**Yao-shi Osaka(JP)**

74 Representative: **Blumbach Weser Bergen**  
**Kramer Zwirner Hoffmann Patentanwälte**  
**Radeckestrasse 43**  
**W-8000 München 60(DE)**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

## Description

### BACKGROUND OF THE INVENTION

The present invention relates to a cathode ray tube socket comprising a socket part and a high-voltage chamber, and particularly to the type in which a high-voltage lead can be connected to a high-voltage discharge electrode housed in the high-voltage chamber.

Prior art cathode ray tube (hereinafter referred to as CRT) socket is disclosed in U.S. Patent No. 4,649,315, in which a high-voltage terminal is provided so as to be connected to an external high-voltage lead by soldering. The soldering work is nuisance, and once connected, disconnection is also nuisance. Therefore, when repair was necessary, it was not unusual that the whole CRT socket was replaced by a new one, which was uneconomical.

### SUMMARY OF THE INVENTION

An object of the present invention is to provide a CRT socket which allows easy connection of a high-voltage lead without soldering, and which allows easy disconnection of the connected high-voltage lead.

According to the present invention, a contact plate is disposed near and opposite a flange part of a high-voltage discharge electrode which is a high-voltage side of one of two electrodes defining a high-voltage discharge gap therebetween, and a lead insertion hole is formed in an outer wall of the high-voltage chamber so that a high-voltage lead can be inserted from the outside through the lead insertion hole into between the flange part and the contact plate. The high-voltage chamber also has a pivotable urging member which presses the contact plate resiliently against the flange part, whereby the high-voltage lead can be gripped between the contact plate and the flange part, achieving good electrical connection.

### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view showing an embodiment of CRT socket according to the invention;  
 Fig. 2 is a plan view of the CRT socket shown in Fig. 1;  
 Fig. 3 is a front view of the CRT socket with a socket part 12 in cross-section;  
 Fig. 4 is a bottom view of Fig. 1;  
 Fig. 5 is a cross-sectional view of a high-voltage chamber 13 shown in Fig. 3;  
 Fig. 6 is a perspective view showing an integral structure of a high-voltage contact 28h and a high-voltage discharge electrode 51;

Fig. 7A is a perspective view of part of an arm plate 57 seen from an opposite direction in Fig. 6;

Fig. 7B is a plan view of the arm plate 57;

Fig. 8 is a perspective view showing the holding state of a flange part 55;

Fig. 9 is a perspective view showing a container part 62 and a cover 63, separately, with a pivotal plate 73 in open state;

Fig. 10 is a perspective view showing a high-voltage chamber of another embodiment of the invention;

Fig. 11 is a perspective view showing a modification of the high-voltage discharge electrode 51; and

Fig. 12 is a perspective view showing another modification of the high-voltage discharge electrode 51.

### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

As shown in Figs. 1 to 4, a body 11 of an insulating material comprises a socket part 12 for connection with terminal pins of a counterpart CRT, and a high-voltage chamber 13 provided at a side of the socket part 12 integrally therewith. The socket part 12 is substantially of cylindrical shape, the diameter of which increases stepwise on rear side thereof (lower side in Fig. 1), and has a circular front face, in which are formed a plurality of insertion holes 16 for insertion therein of terminal pins of the CRT. A plurality of contact housing rooms 17 (Figs. 3 and 4) are provided inside the socket part 12 in corresponding relation with the insertion holes 16. A plurality of contact pieces 18 are housed in the respective contact housing rooms 17. An intermediate portion of each contact piece 18 closes, from the inside, a corresponding one of through holes 25, which are formed in a circumferential wall of the socket part 12 to communicate radially with the respective contact housing rooms 17. A belt-like ground electrode 41 is provided around the circumferential wall to close, from the outside, the respective through holes 25, thus defining a discharge gap room in each of the closed through holes 25. A rear end of each contact piece 18 is led out as a terminal 35.

A high-voltage post 20 is defined adjacent the high-voltage chamber 13 by dividing the cylindrical portion of the socket part 12 by two valleys 30a, 30b. The high-voltage post 20 has a housing hole, in which is disposed a high-voltage contact 28h for receiving therein a high-voltage terminal pin of the CRT.

Although only brief explanation has been given in the foregoing with respect to the structure of the socket part 12, the socket part 12 employed in the

embodiment of CRT socket according to the invention is exactly the same as that disclosed in the aforementioned U.S. patent and, therefore, further detailed explanation will be omitted.

As shown in Figs. 2, 5 and 9, the high-voltage chamber 13 houses therein a pair of high-voltage discharge electrodes 51 and 52 having semispherical parts 51a and 52a defining a high-voltage discharge gap therebetween. The electrode 51 is connected integrally with the high-voltage contact 28h in the post 20 via a connecting conductor 53, thus referred to as a high-voltage side electrode. The opposite electrode 52 is called a ground side electrode. The electrodes 51 and 52 are provided with square flange parts 55 and 56 around their semispherical parts 51a, 52a, and opposite sides of each of the flange parts 55, 56 are fitted in grooves formed in inner wall surfaces of the high-voltage chamber 13.

As shown in Figs. 5 and 6, according to the invention, a contact plate 57a is provided in closely opposing relation to the flange part 55 of the high-voltage side electrode 51. In more specific, an L-shaped arm plate 57 is formed to extend integrally from an edge of the flange part 55. The L-shaped arm plate 57 is bent near the edge of the flange part 55 through about a right angle in a direction opposite from the spherical projection of the electrode 51 and further bent inwardly at an intermediate portion of the base part of L forming a connecting portion 57b to define a receiver plate 57c facing the back side of the flange part 55 in a slightly oblique relation thereto. The receiver plate 57c includes an upright part of L, an intermediate portion of which is bent to define the contact plate 57a so that the contact plate 57a forms an acute angle with respect to the flange part 55 on the side where the high-voltage lead 67 will be inserted into.

As shown in Fig. 7A, a triangular taper groove 61 may be cut in a tip edge of the contact plate 57a at the center thereof. The triangular taper groove 61 serves as positioning and guide for the high-voltage lead 67.

As shown in Figs. 3, 5 and 9, the high-voltage chamber 13 comprises a box-shaped container part 62 formed integrally with the socket part 12 and a cover 63 for closing a front opening of the container part 62. Support walls 64a, 65a are formed integrally with the container part 62 to hold the flange part 55 of the electrode 51. In the embodiment shown in Fig. 8, these support walls 64a, 65a have guide walls 64b, 65b formed integrally therewith in orthogonal relation thereto, whereby displacement of the receiver plate 59 in widthwise direction thereof is limited. The flange part 56 of the ground side discharge electrode 52 is fitted in support grooves 66a, 66b defined in a side wall 62b of the container part 62, with a ground terminal

56a of the electrode 52 being extended integrally from an edge of the flange part 56 thereof to the outside through a bottom wall of the container part 62.

As shown in Fig. 5, a lead insertion hole 68 is bored through the cover 63 in opposing relation to the triangular taper groove 61 so that the high-voltage lead 67 can be inserted from the outside into between the flange part 55 and the contact plate 57a. If desired, a sleeve 69 may be formed on the outer surface of the cover 63 integrally therewith in concentric relation to the lead insertion hole 68 so that an end portion of an outer sheath of the high-voltage lead 67 can be fitted in the sleeve 69. Further, a slit 69s may be cut in the sleeve 69 in its axial direction to provide resilient gripping force.

An urging member 71 is provided as shown in Figs. 5 and 9 to urge the contact plate 57a resiliently against the flange part 55 with the high-voltage lead 67 having been inserted in between the flange part 55 and the contact plate 57a through the lead insertion hole 68. The urging member 71 is formed integrally with a pivotable plate 73 to extend perpendicularly therefrom, and the pivotable plate 73 is pivotably connected along one edge thereof with a front side edge of the cover 63 via a hinge 74 formed integrally therewith. A slot 72 is cut in the cover 63 near the sleeve 67 to locate almost above the bent portion between the contact plate 57a and the receiver plate 57c when the cover 63 is mounted on the container part 62. When the pivotable plate 73 is pivoted to abut against a front face of the cover 63, that is, when the pivotable plate 73 is brought into a closed state, the urging member 71 enters the slot 72 and pushes the receiver plate 59 aside towards the flange part 55, thus clipping the high-voltage lead 67 between the contact plate 57a and the flange part 55 and achieving a good electrical connection between the high-voltage lead 67 and the electrode 51. A suitable selection of an angle between the contact plate 57a and the flange part 55 can provide a strong resistive force against pulling out of the high-voltage lead 67. A U-shaped piece 75 is formed integrally with the pivotable plate 73 so as to engage with a protuberance 76 formed on an outer side surface of the cover 63 when the pivotable plate 73 is closed. The cover 63 also has U-shaped locking pieces 81a and 81b on both sides thereof for engagement with locking ridges 82a and 82b formed on the outer surfaces of the side walls 62a and 62b of the container part 62.

Since the angle  $\theta_1$  between the contact plate 57a and the receiver plate 57c can be resiliently varied as seen in Figs. 6 and 7A, it is also possible to insert the high-voltage lead 67 into between the flange part 55 and the contact plate 57a even after

Using the pivotable plate 73 to resiliently press the contact plate 57a against the flange part 55 with the urging member 71. Moreover, since the angle  $\theta_2$  between the receiver plate 57c and the flange part 55 can be resiliently varied, the receiver plate 57c can assume the initial posture after removal of the inserted urging member 71, allowing easy pulling out of the high-voltage lead 67.

Fig. 10 shows an embodiment which is arranged so that the high-voltage lead 67 can be inserted through a lead insertion hole in a side wall 62c of the container part 62. In this embodiment, such a pivotable plate as the one 73 employed in Fig. 9, for example, is not provided. Rather, the cover 63 itself works as the pivotable plate. The cover 63 is formed integrally with the side wall 62c of the container part 62 opposite the socket part 12 and is pivotable about a hinge 83 defined along between the cover 63 and the side wall 62c. The urging member 71 is formed integrally with the cover 63 to project from the inner surface thereof. Accordingly, in this embodiment, the urging member 71 can be disposed behind the receiver plate 57c by closing the cover 63 through pivotal movement thereof. Of course, a pivotable plate with the urging member 71 such as shown in Fig. 9 may be provided on the outer surface of the cover 63. In the embodiment of Fig. 10, the L-shaped arm plate 57 defining the contact plate 57a, the connecting portion 57b and the receiver plate 57c is formed integrally with the flange part 55 to extend from upper side edge thereof. The lead insertion hole 68 for guiding the high-voltage lead 67 into between the contact plate 57a and the flange part 55 is bored through the side wall 62c of the container part 62. Although not seen in Fig. 10, a sleeve 69 is provided on the outer surface of the side wall 62c in a manner similar to that shown in Figs. 2, 3 and 5. In order to disconnect the high-voltage lead 67 which has been engaged between the edge of the contact plate 57a and the flange part 55, it is only necessary to open the cover 63 so as to bring the urging member 71 away from the receiver plate 57c.

Figs. 11 and 12 show other examples of the arm plate 57 which is formed integrally with the flange part 55 of the high-voltage discharge electrode 51. The electrode 51 shown in Fig. 11 is a modification of the electrode 51 shown in Fig. 6, which is used for the type of CRT socket where a high-voltage lead 67 will be inserted through the hole 68 in the cover 63 shown in Fig. 9, for example. In contrast, the electrode 51 shown in Fig. 12 is a modification of the one seen in Fig. 10, which is used for the type of CRT socket where a high-voltage lead 67 will be inserted through the hole 68 in the side wall 62c of the container part 62. In either example, the arm plate 57 is formed

by cutting one marginal side of the flange part 55 in parallel relation to the side edge thereof to an intermediate and then bending the strip-like arm plate in a folding manner to define the contact plate 57a, connecting portion 57b and receiver plate 57c.

As explained in the foregoing, the CRT socket according to the present invention enables electrical connection between the high-voltage contact 28h and the high-voltage lead 67 by simple insertion of the latter. Moreover, the urging member 71 presses the contact plate 57a against the flange part 55, assuring both electrical connection and holding of the high-voltage lead 67. In addition, the lead 67 can be easily disconnected upon request by pivoting the urging member 71. Accordingly, the CRT socket according to the present invention requires simpler work than the prior art CRT socket does for electrically connecting the high-voltage lead and the high-voltage contact. Further, the easy removal of high-voltage lead according to the present invention unnecessitates melting of soldered connection or replacement of the CRT socket in use with a new one each time associated parts or circuits are repaired. Moreover, both the integral structure of the contact plate 57a and the high-voltage electrode 51 and the integral structure of the cover 63 and the urging member 71 serve to reduce the number of parts constituting the CRT socket according to the present invention.

## Claims

1. A cathode ray tube (CRT) socket comprising:
  - a socket part (12) for receiving terminal pins of a cathode ray tube including a high-voltage contact (28h) for receiving a high voltage terminal pin;
  - a high-voltage chamber (13) provided adjacent a side of said socket part (12);
  - a pair of high-voltage discharge electrodes (51,52) disposed in said high-voltage chamber (13) in opposing relation to each other to define a high-voltage discharge gap therebetween, one of said pair of electrodes (51,52) being connected to the high-voltage contact (28h) and the other being grounded, the high-voltage electrode (51) having a flange part (55);
  - a contact plate (57a) disposed near said flange part (55) in obliquely opposing relation thereto;
  - a lead insertion hole (68) bored through said high-voltage chamber (13), for introducing therethrough a high-voltage lead (67) from the outside to a place between said contact plate (57a) and said flange part (55); and
  - an urging member (71) movable into a position for resiliently pressing said contact

- plate (57a) against said flange part (55).
2. A CRT socket according to claim 1, wherein said high-voltage chamber comprises a box-shaped container part formed integrally with said socket part, and a cover for closing a front opening of said container part.
  3. A CRT socket according to claim 2, wherein said urging member is provided on said cover.
  4. A CRT socket according to claim 1, wherein said contact plate is formed by bending an arm plate extended integrally from an edge of said flange part.
  5. A CRT socket according to claim 2, wherein said lead insertion hole is formed in said cover.
  6. A CRT socket according to claim 5, comprising a pivotable plate formed integrally with said cover via a hinge formed along one front edge of said cover so that said pivotable plate can be brought into abutment with a front face of said cover, wherein said urging member extends integrally from said pivotable plate, and a slot is cut in said cover for passing therethrough said urging member to push aside said contact plate towards said flange part.
  7. A CRT socket according to claim 6, wherein said pivotable plate has a locking piece formed integrally therewith for engagement with a protuberance formed on said cover in a state when said pivotable plate is in abutment with said cover.
  8. A CRT socket according to claim 1, comprising a sleeve formed on said high-voltage chamber in concentric relation with said lead insertion hole, for receiving therein an end portion of an outer sheath from which the high-voltage lead is extended out.
  9. A CRT socket according to claim 8, wherein said sleeve has a slit cut therein in lengthwise direction thereof.
  10. A CRT socket according to claim 1, comprising support walls formed in said high-voltage chamber integrally therewith, for limiting lateral movement of said contact plate.
  11. A CRT socket according to claim 1, wherein a guide groove is formed in an end portion of said contact plate in opposing relation to said flange part.

12. A CRT socket according to claim 2, wherein said lead insertion hole is bored through a side wall of said container part.
13. A CRT socket according to claim 12, wherein said cover is formed integrally with the side wall of said container part, said cover being pivotable about a hinge defined between said cover and said side wall.
14. A CRT socket according to claim 13, wherein said urging member is formed on an inner surface of said cover integrally therewith.

#### 15 Revendications

1. Socle de tube à rayons cathodiques (CRT) comprenant:
  - une partie socle (12) pour recevoir des broches d'un tube à rayons cathodiques comprenant un contact de haute tension (28h) pour recevoir une borne de haute tension ;
  - une chambre à haute tension (13) disposée au voisinage d'un côté de ladite partie socle (12) ;
  - une paire d'électrodes de décharge de haute tension (51, 52) disposées dans ladite chambre à haute tension (13) en relation face à face l'une par rapport à l'autre pour définir entre elles un écartement de décharge de haute tension, l'une de ladite paire d'électrodes (51, 52) étant connectée au contact de haute tension (28h) et l'autre étant mise à la masse, l'électrode de haute tension (51) comportant une partie rebord (55) ;
  - une plaque de contact (57a) disposée au voisinage de ladite partie rebord (55) en relation de face à face obliquement par rapport à celle-ci ;
  - un trou d'introduction de conducteur (68) percé au travers de ladite chambre à haute tension (13), pour l'introduction à travers celui-ci d'un conducteur de haute tension (67) à partir de l'extérieur jusqu'à un endroit situé entre ladite plaque de contact (57a) et ladite partie rebord (55) ; et
  - un élément de pression (71) pouvant être amené dans une position dans laquelle il presse de manière élastique ladite plaque de contact (57a) contre ladite partie rebord (55).
2. Socle de CRT selon la revendication 1, dans lequel ladite chambre à haute tension comprend une partie conteneur en forme de boîte formée d'une seule pièce avec ladite partie socle, et un couvercle pour fermer une ouverture avant de ladite partie conteneur.

- Socle CRT selon la revendication 2, dans lequel ledit élément de pression est disposé sur ledit couvercle.
4. Socle CRT selon la revendication 1, dans lequel ladite plaque de contact est formée en recourbant une lame bras s'étendant d'un seul tenant à partir d'un côté de ladite partie rebord.
5. Socle CRT selon la revendication 2, dans lequel ledit trou d'introduction de conducteur est formé dans ledit couvercle.
6. Socle CRT selon la revendication 5, comprenant une plaque pivotante formée d'un seul tenant avec ledit couvercle par l'intermédiaire d'une charnière formée le long de l'un des bords avant dudit couvercle de sorte que ladite plaque pivotante puisse être amenée en butée avec une face avant dudit couvercle, dans lequel ledit élément de pression s'étend d'un seul tenant à partir de ladite plaque pivotante, et dans lequel une rainure est découpée dans ledit couvercle pour laisser passer à travers elle ledit élément de pression pour pousser latéralement ladite plaque de contact en direction de ladite partie rebord.
7. Socle CRT selon la revendication 6, dans lequel ladite plaque pivotante comporte une pièce de verrouillage formée d'un seul tenant avec elle pour s'enclencher avec une protubérance formée sur ledit couvercle dans un état dans lequel ladite plaque pivotante est en butée contre ledit couvercle.
8. Socle CRT selon la revendication 1, comprenant un manchon formé sur ladite chambre à haute tension en relation concentrique avec ledit trou d'introduction de conducteur, pour recevoir à l'intérieur une partie d'extrémité d'une gaine extérieure d'où est sorti le conducteur de haute tension.
9. Socle CRT selon la revendication 8, dans lequel ledit manchon comporte une fente découpée à l'intérieur dans le sens de la longueur de celui-ci.
10. Socle CRT selon la revendication 1, comprenant des parois supports formées dans ladite chambre à haute tension d'un seul tenant avec elle, pour limiter le déplacement latéral de ladite plaque de contact.
11. Socle CRT selon la revendication 1, dans lequel une rainure de guidage est formée dans

une partie d'extrémité de ladite plaque de contact en relation d'opposition par rapport à ladite partie rebord.

- 5 12. Socle CRT selon la revendication 2, dans lequel ledit trou d'introduction de conducteur est percé à travers une paroi latérale de ladite partie conteneur.
- 10 13. Socle CRT selon la revendication 12, dans lequel ledit couvercle est formé d'un seul tenant avec la paroi latérale de ladite partie conteneur, ledit couvercle pouvant pivoter autour d'une charnière définie entre ledit couvercle et ladite paroi latérale.
- 15 14. Socle CRT selon la revendication 13, dans lequel ledit élément de pression est formé sur une face intérieure dudit couvercle d'un seul tenant avec lui.
- 20

#### Patentansprüche

- 25 1. Kathodenstrahlröhren-(CRT)-Fassung, umfassend:  
 ein Fassungsteil (12) zur Aufnahme von Anschlußstiften einer Kathodenstrahlröhre einschließlich eines Hochspannungskontakts (28h) zur Aufnahme eines Hochspannungsanschlusses,  
 eine Hochspannungskammer (13), die neben einer Seite des Fassungsteils (12) angeordnet ist,  
 ein Paar von Hochspannungsentladungselektroden (51, 52), die in der Hochspannungskammer (13) einander gegenüberliegend angeordnet sind, um zwischen sich eine Hochspannungsentladungsstrecke zu bilden, wobei eine des Paares von Elektroden (51, 52) mit dem Hochspannungskontakt (28h) verbunden ist, während die andere geerdet ist und die Hochspannungselektrode (51) einen Flanschteil (55) aufweist,  
 eine Kontaktplatte (57a), die nahe dem Flanschteil (55), diesem schräg gegenüberliegend, angeordnet ist,  
 ein Leitungseinführloch (68), das durch die Hochspannungskammer (13) gebohrt ist, damit durch dieses Loch hindurch eine Hochspannungselektrode (67) von außen an eine Stelle zwischen der Kontaktplatte (57a) und dem Flanschteil (55) geführt werden kann, und  
 ein Spannelement (71), das in eine Position beweglich ist, in der es elastisch die Kontaktplatte (57a) gegen den Flanschteil (55) drückt.
- 30
- 35
- 40
- 45
- 50
- 55
2. CRT-Fassung nach Anspruch 1, bei der die

- Hochspannungskammer einen kastenförmigen Behälterteil umfaßt, der einstückig mit dem Fassungsteil ausgebildet ist, sowie einen Deckel zum Verschließen einer Frontöffnung des Behälterteils.
3. CRT-Fassung nach Anspruch 2, bei der das Spannelement an dem Deckel vorgesehen ist.
4. CRT-Fassung nach Anspruch 1, bei der die Kontaktplatte durch Biegen einer einstückig von einer Kante des Flanschteils abstehenden Armplatte gebildet ist.
5. CRT-Fassung nach Anspruch 2, bei der das Leitungseinführloch in dem Deckel ausgebildet ist.
6. CRT-Fassung nach Anspruch 5, umfassend eine schwenkbare Platte, die einstückig mit dem Deckel über ein Gelenk ausgebildet ist, das längs einer Vorderkante des Deckels ausgebildet ist, so daß die schwenkbare Platte in Anlage an eine Vorderfläche des Deckels bringbar ist, wobei das Spannelement einstückig von der schwenkbaren Platte absteht und ein Schlitz in den Deckel für den Durchgang des Spannelements geschnitten ist, damit dieses die Kontaktplatte gegen den Flanschteil zur Seite stößt.
7. CRT-Fassung nach Anspruch 6, bei der die schwenkbare Platte einstückig mit ihr ausgebildetes Verriegelungsstück zum Eingriff mit einem an den Deckel ausgebildeten Vorsprung in einem Zustand aufweist, wenn die schwenkbare Platte an den Deckel anstößt.
8. CRT-Fassung nach Anspruch 1, umfassend eine Hülse, die auf der Hochspannungskammer konzentrisch zu dem Leitungseinführloch ausgebildet ist, um darin ein Endteil eines äußeren Mantels aufzunehmen, von dem sich die Hochspannungseitung nach außen erstreckt.
9. CRT-Fassung nach Anspruch 8, bei dem in die Hülse in deren Längsrichtung ein Schlitz geschnitten ist.
10. CRT-Fassung nach Anspruch 1, umfassend Tragwände, die einstückig mit der Hochspannungskammer in dieser ausgebildet sind, um die seitliche Bewegung der Kontaktplatte zu begrenzen.
11. CRT-Fassung nach Anspruch 1, bei der eine Führungsnut in einem Endteil der Kontaktplatte, dem Flanschteil gegenüberliegend ausgebildet ist.
12. CRT-Fassung nach Anspruch 2, bei der das Leitungseinführloch durch eine Seitenwand des Behälterteil gebohrt ist.
13. CRT-Fassung nach Anspruch 12, bei dem der Deckel einstückig mit der Seitenwand des Behälterteils ausgebildet ist und um ein Gelenk schwenkbar ist, das zwischen dem Deckel und der Seitenwand gebildet wird.
14. CRT-Fassung nach Anspruch 13, bei der das Spannelement an einer Innenfläche des Deckels einstückig mit diesem ausgebildet ist.

FIG. 1

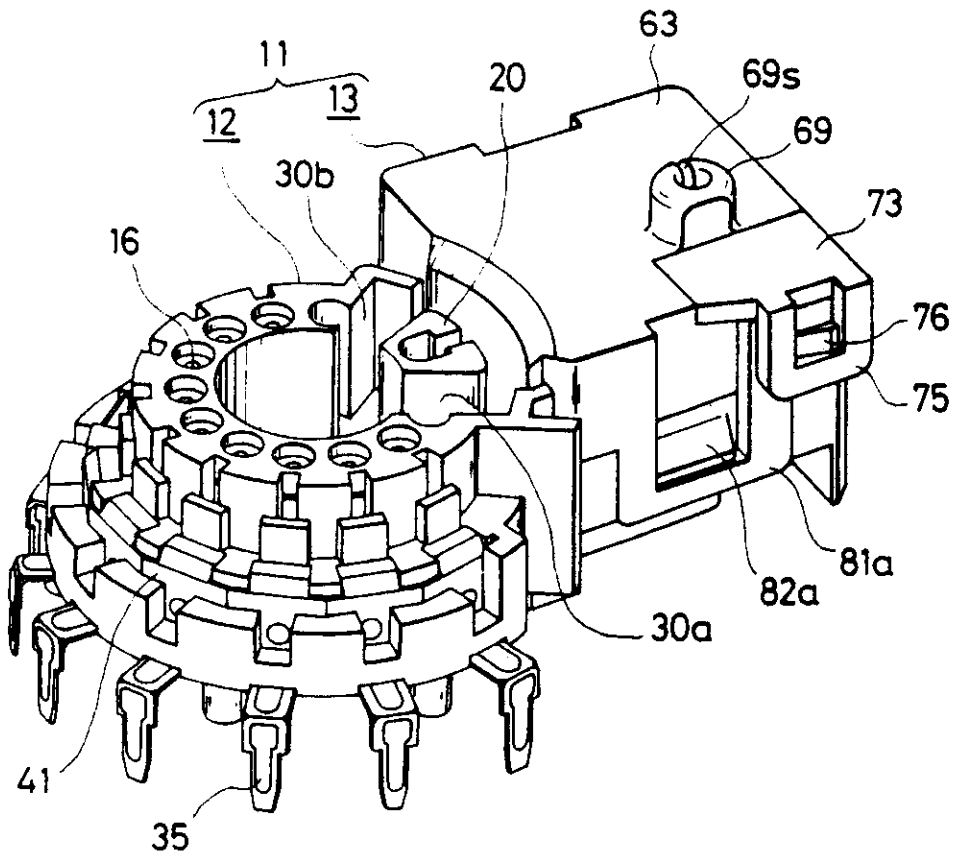


FIG. 2

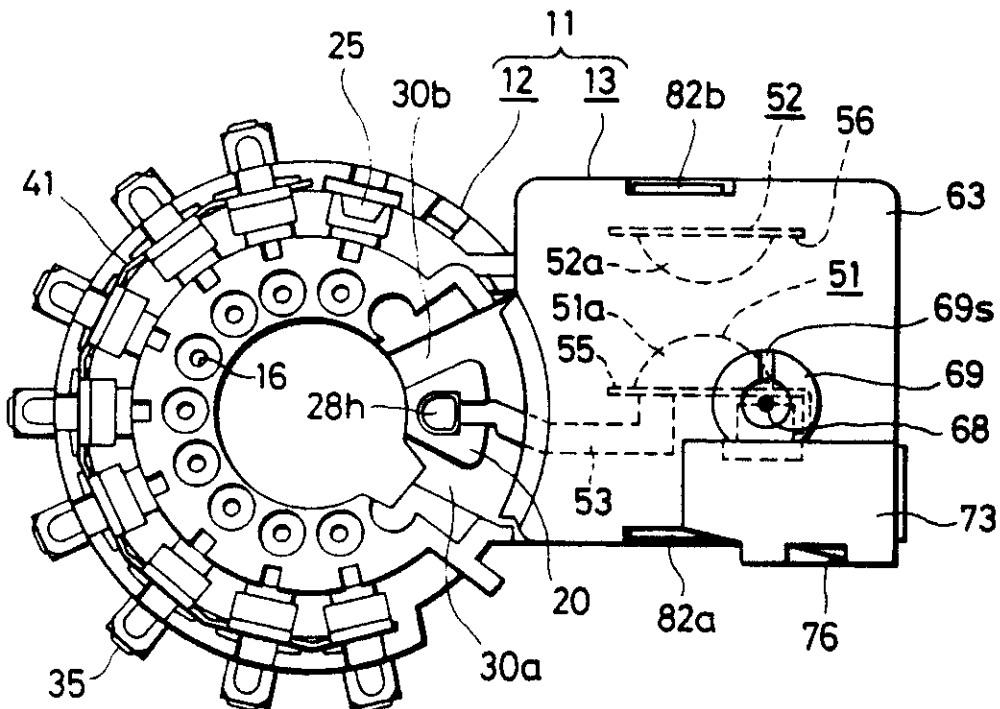




FIG. 3

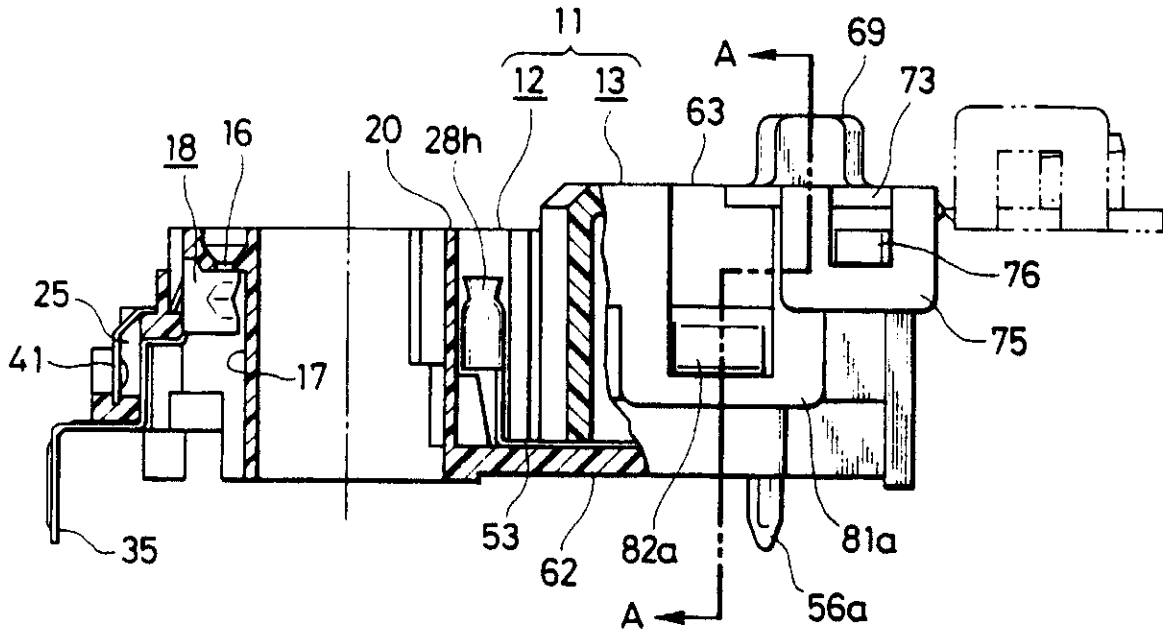


FIG. 4

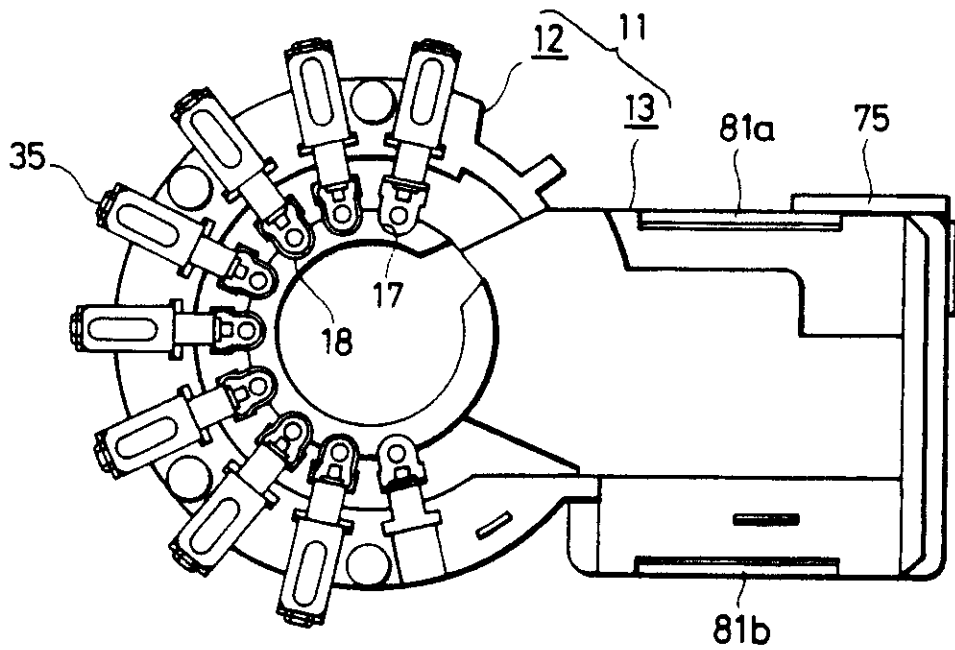


FIG. 5

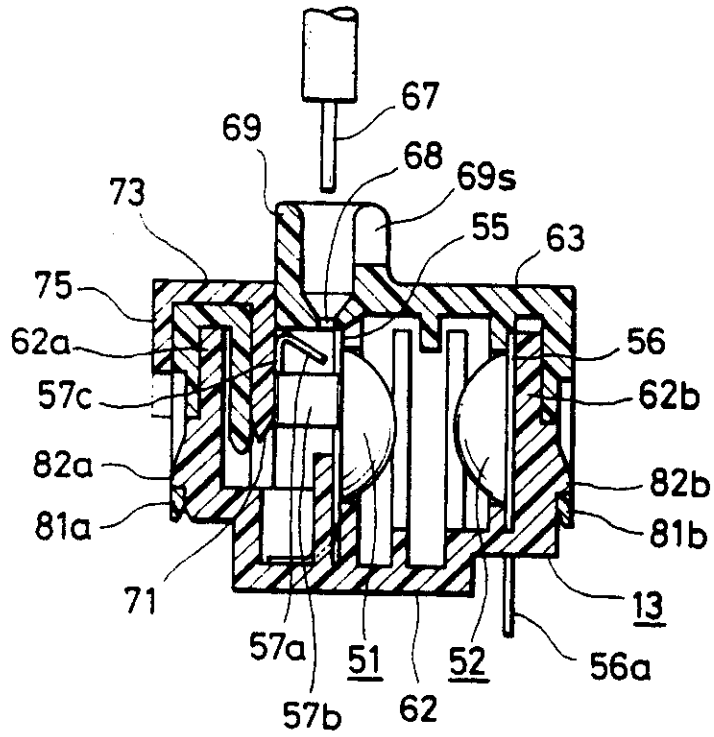


FIG. 6

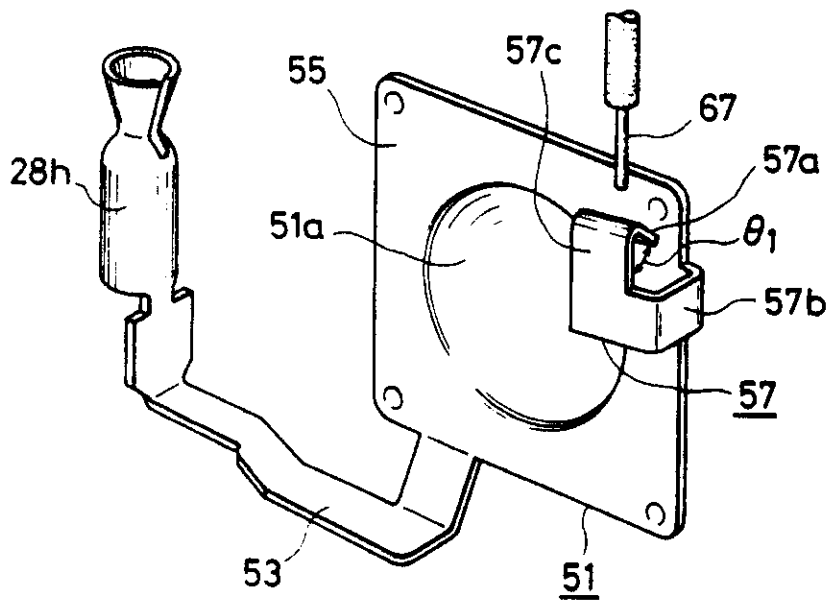


FIG. 7A

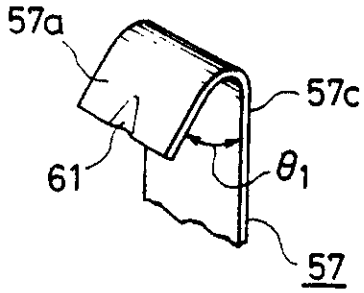


FIG. 7B

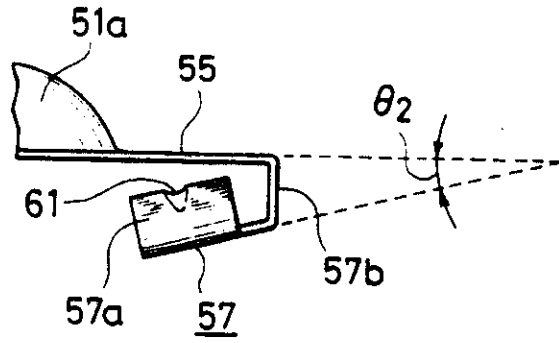


FIG. 8

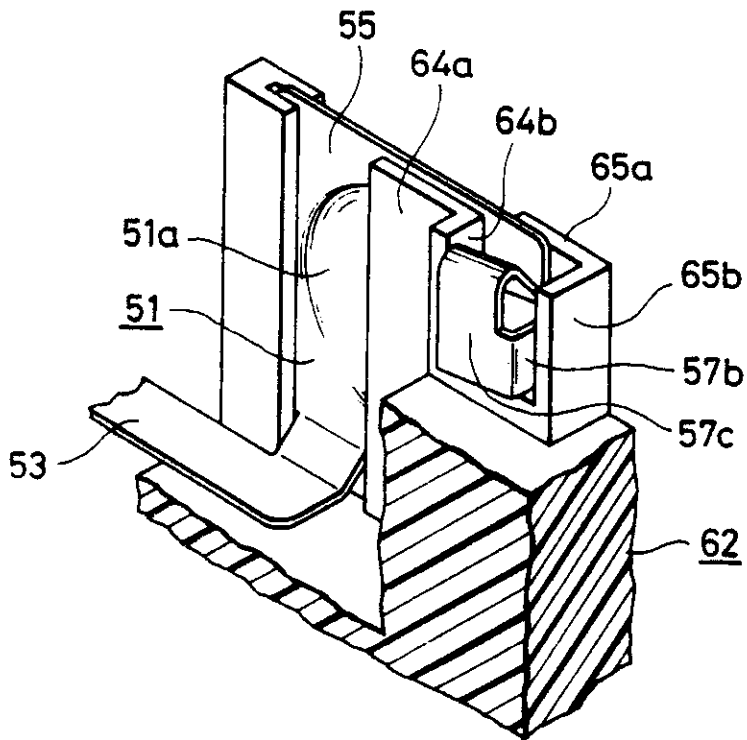


FIG. 9

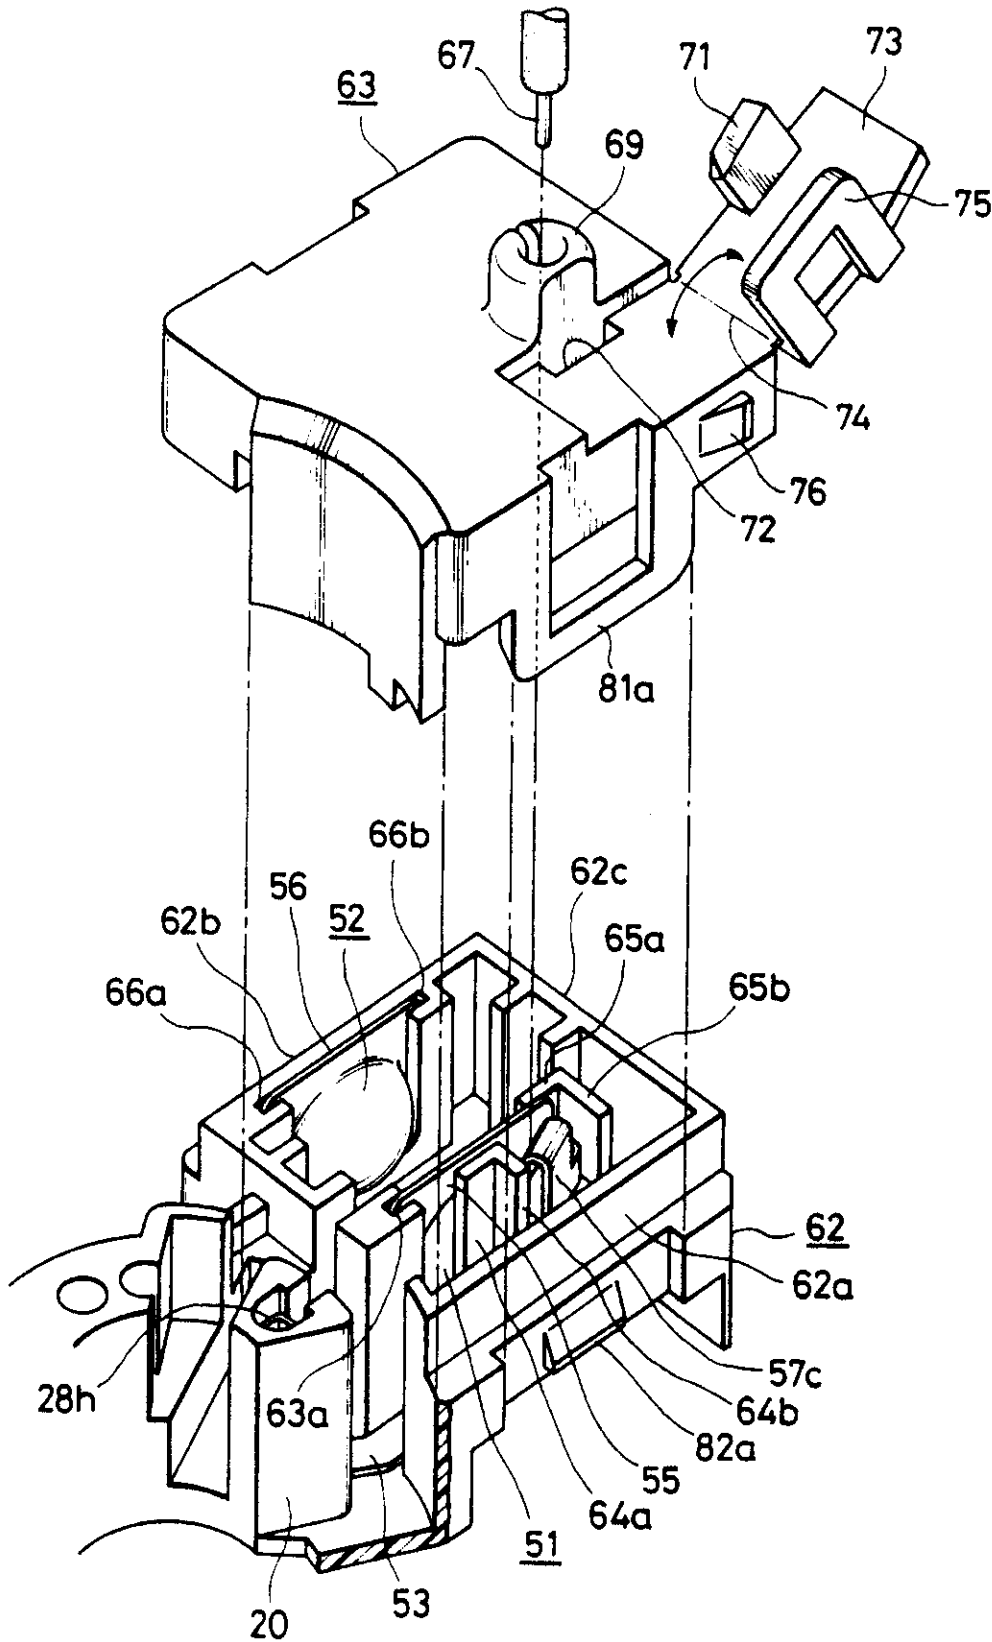


FIG. 10

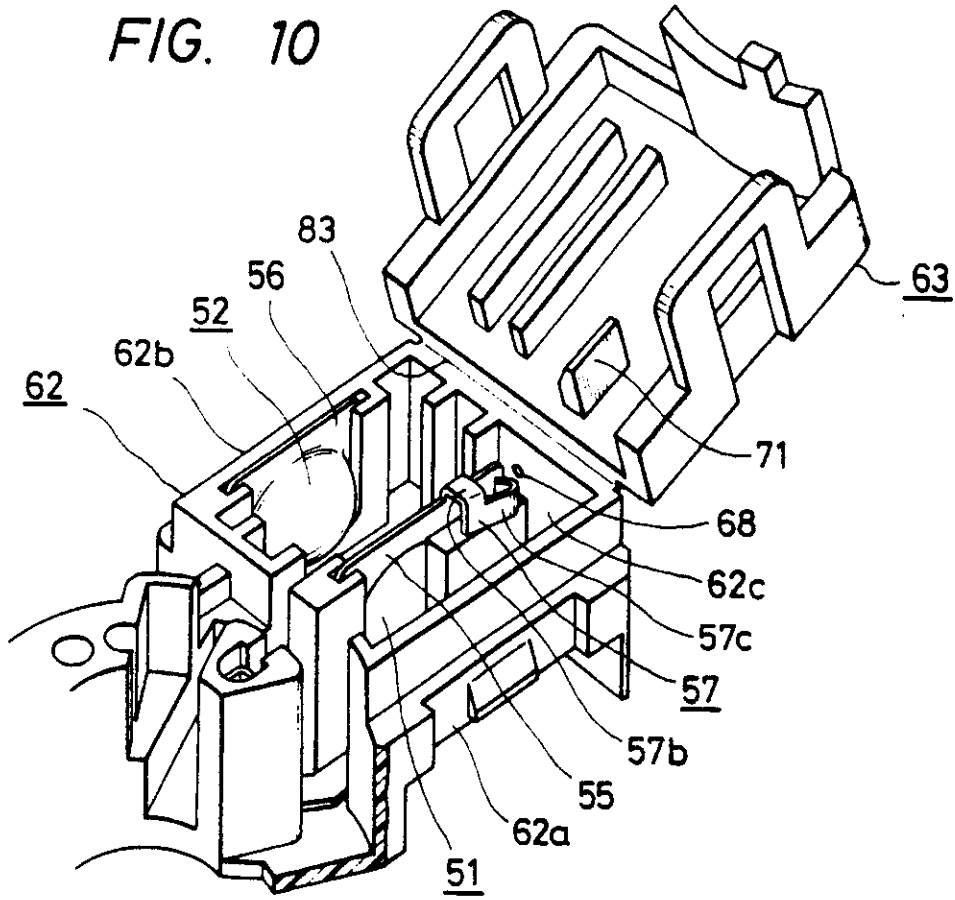


FIG. 11


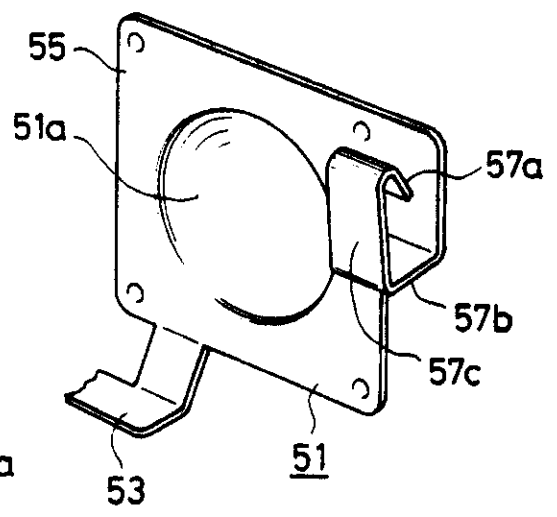


FIG. 12

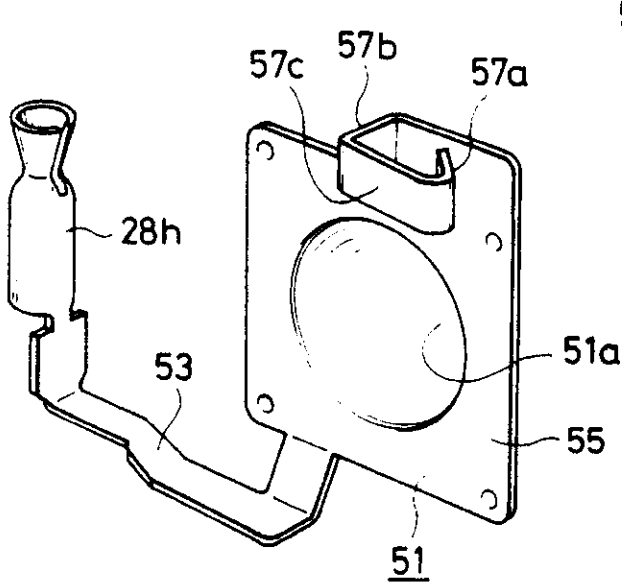

REGISTER ENTRY FOR EP0268940

European Application No EP87116675.7 filing date 11.11.1987

Priority claimed:

21.11.1986 in Japan - doc: 35179185U

Designated States DE ES FR GB

Title CRT SOCKET

Applicant/Proprietor

HOSIDEN ELECTRONICS CO., LTD., 4-33, Kitakyuhoji 1-chome, Yao-shi Osaka,  
Japan [ADP No. 50024850002]

Inventors

YASUNORI NISHIKAWA, Hosiden Elec. Co. Ltd. 4-33, Kitakyuhoji 1-chome,  
Yao-shi Osaka, Japan [ADP No. 55698930001]

HIROBUMI INABA, Hosiden Elec. Co. Ltd. 4-33, Kitakyuhoji 1-chome, Yao-shi  
Osaka, Japan [ADP No. 55698948001]

Classified to

H2E U1S

H01R

Address for Service

MARKS & CLERK, Alpha Tower, Suffolk Street Queensway, BIRMINGHAM, B1 1TT,  
United Kingdom [ADP No. 00000018002]

EPO Representative

BLUMBACH WESER BERGEN KRAMER ZWIRNER HOFFMANN PATENTANWÄLTE,  
Radeckestrasse 43, D-8000 München 60, Federal Republic of Germany  
[ADP No. 50114305001]

Publication No EP0268940 dated 01.06.1988

Publication in English

Examination requested 11.11.1987

Patent Granted with effect from 08.04.1992 (Section 25(1)) with title CRT  
SOCKET.

---

20.03.1989 EPO: Search report published on 19.04.1989

Entry Type 25.11 Staff ID.

Auth ID. EPT

23.08.1991 Notification from EPO of change of Applicant/Proprietor details  
from

HOSIDEN ELECTRONICS CO., LTD., 4-33, Kitakyuhoji 1-chome, Yao-shi  
Osaka, Japan [ADP No. 50024850002]

to

HOSIDEN CORPORATION, 4-33, Kitakyuhoji 1-chome, Yao-shi Osaka,  
Japan [ADP No. 58449570002]

Entry Type 25.14 Staff ID. RD06 Auth ID. EPT

06.11.1991 MARKS & CLERK, Alpha Tower, Suffolk Street Queensway, BIRMINGHAM,  
B1 1TT, United Kingdom [ADP No. 00000018002]  
registered as address for service  
Entry Type 8.11 Staff ID. SW1 Auth ID. AA

09.03.1992 Notification from EPO of change of Inventor details from  
YASUNORI NISHIKAWA, Hosiden Elec. Co. Ltd. 4-33, Kitakyuhoji  
1-chome, Yao-shi Osaka, Japan [ADP No. 55698930001]

HIROBUMI INABA, Hosiden Elec. Co. Ltd. 4-33, Kitakyuhoji 1-chome,  
Yao-shi Osaka, Japan [ADP No. 55698948001]

to  
YASUNORI NISHIKAWA, Hosiden Corporation 4-33, Kitakyuhoji 1-chome,  
Yao-shi Osaka, Japan [ADP No. 59610832001]

HIROBUMI INABA, Hosiden Corporation 4-33, Kitakyuhoji 1-chome,  
Yao-shi Osaka, Japan [ADP No. 59610840001]  
Entry Type 25.14 Staff ID. RD06 Auth ID. EPT

09.03.1992 Notification from EPO of change of EPO Representative details from  
BLUMBACH WESER BERGEN KRAMER ZWIRNER HOFFMANN PATENTANWÄLTE,  
Radeckestrasse 43, D-8000 München 60, Federal Republic of Germany  
[ADP No. 50114305001]

to  
BLUMBACH WESER BERGEN KRAMER ZWIRNER HOFFMANN PATENTANWÄLTE,  
Radeckestrasse 43, W-8000 München 60, Federal Republic of Germany  
[ADP No. 50114305001]

Entry Type 25.14 Staff ID. RD06 Auth ID. EPT

\*\*\*\* END OF REGISTER ENTRY \*\*\*\*

OA80-01  
EP

OPTICS - PATENTS

08/07/92 11:47:43  
PAGE: 1

RENEWAL DETAILS

PUBLICATION NUMBER                    EP0268940 ✓

PROPRIETOR(S)

HOSIDEN CORPORATION, 4-33, Kitakyuhoji 1-chome, Yao-shi Osaka,  
Japan

DATE FILED                              11.11.1987 ✓

DATE GRANTED                            08.04.1992 ✓

DATE NEXT RENEWAL DUE                11.11.1992

DATE NOT IN FORCE

DATE OF LAST RENEWAL

YEAR OF LAST RENEWAL                 00

STATUS                                    PATENT IN FORCE ✓