


(74) **Agent:** FETHERSTONHAUGH & CO.

(54) Title: AC TRANSMISSION SYSTEM WITH REACTANCE COMPENSATION

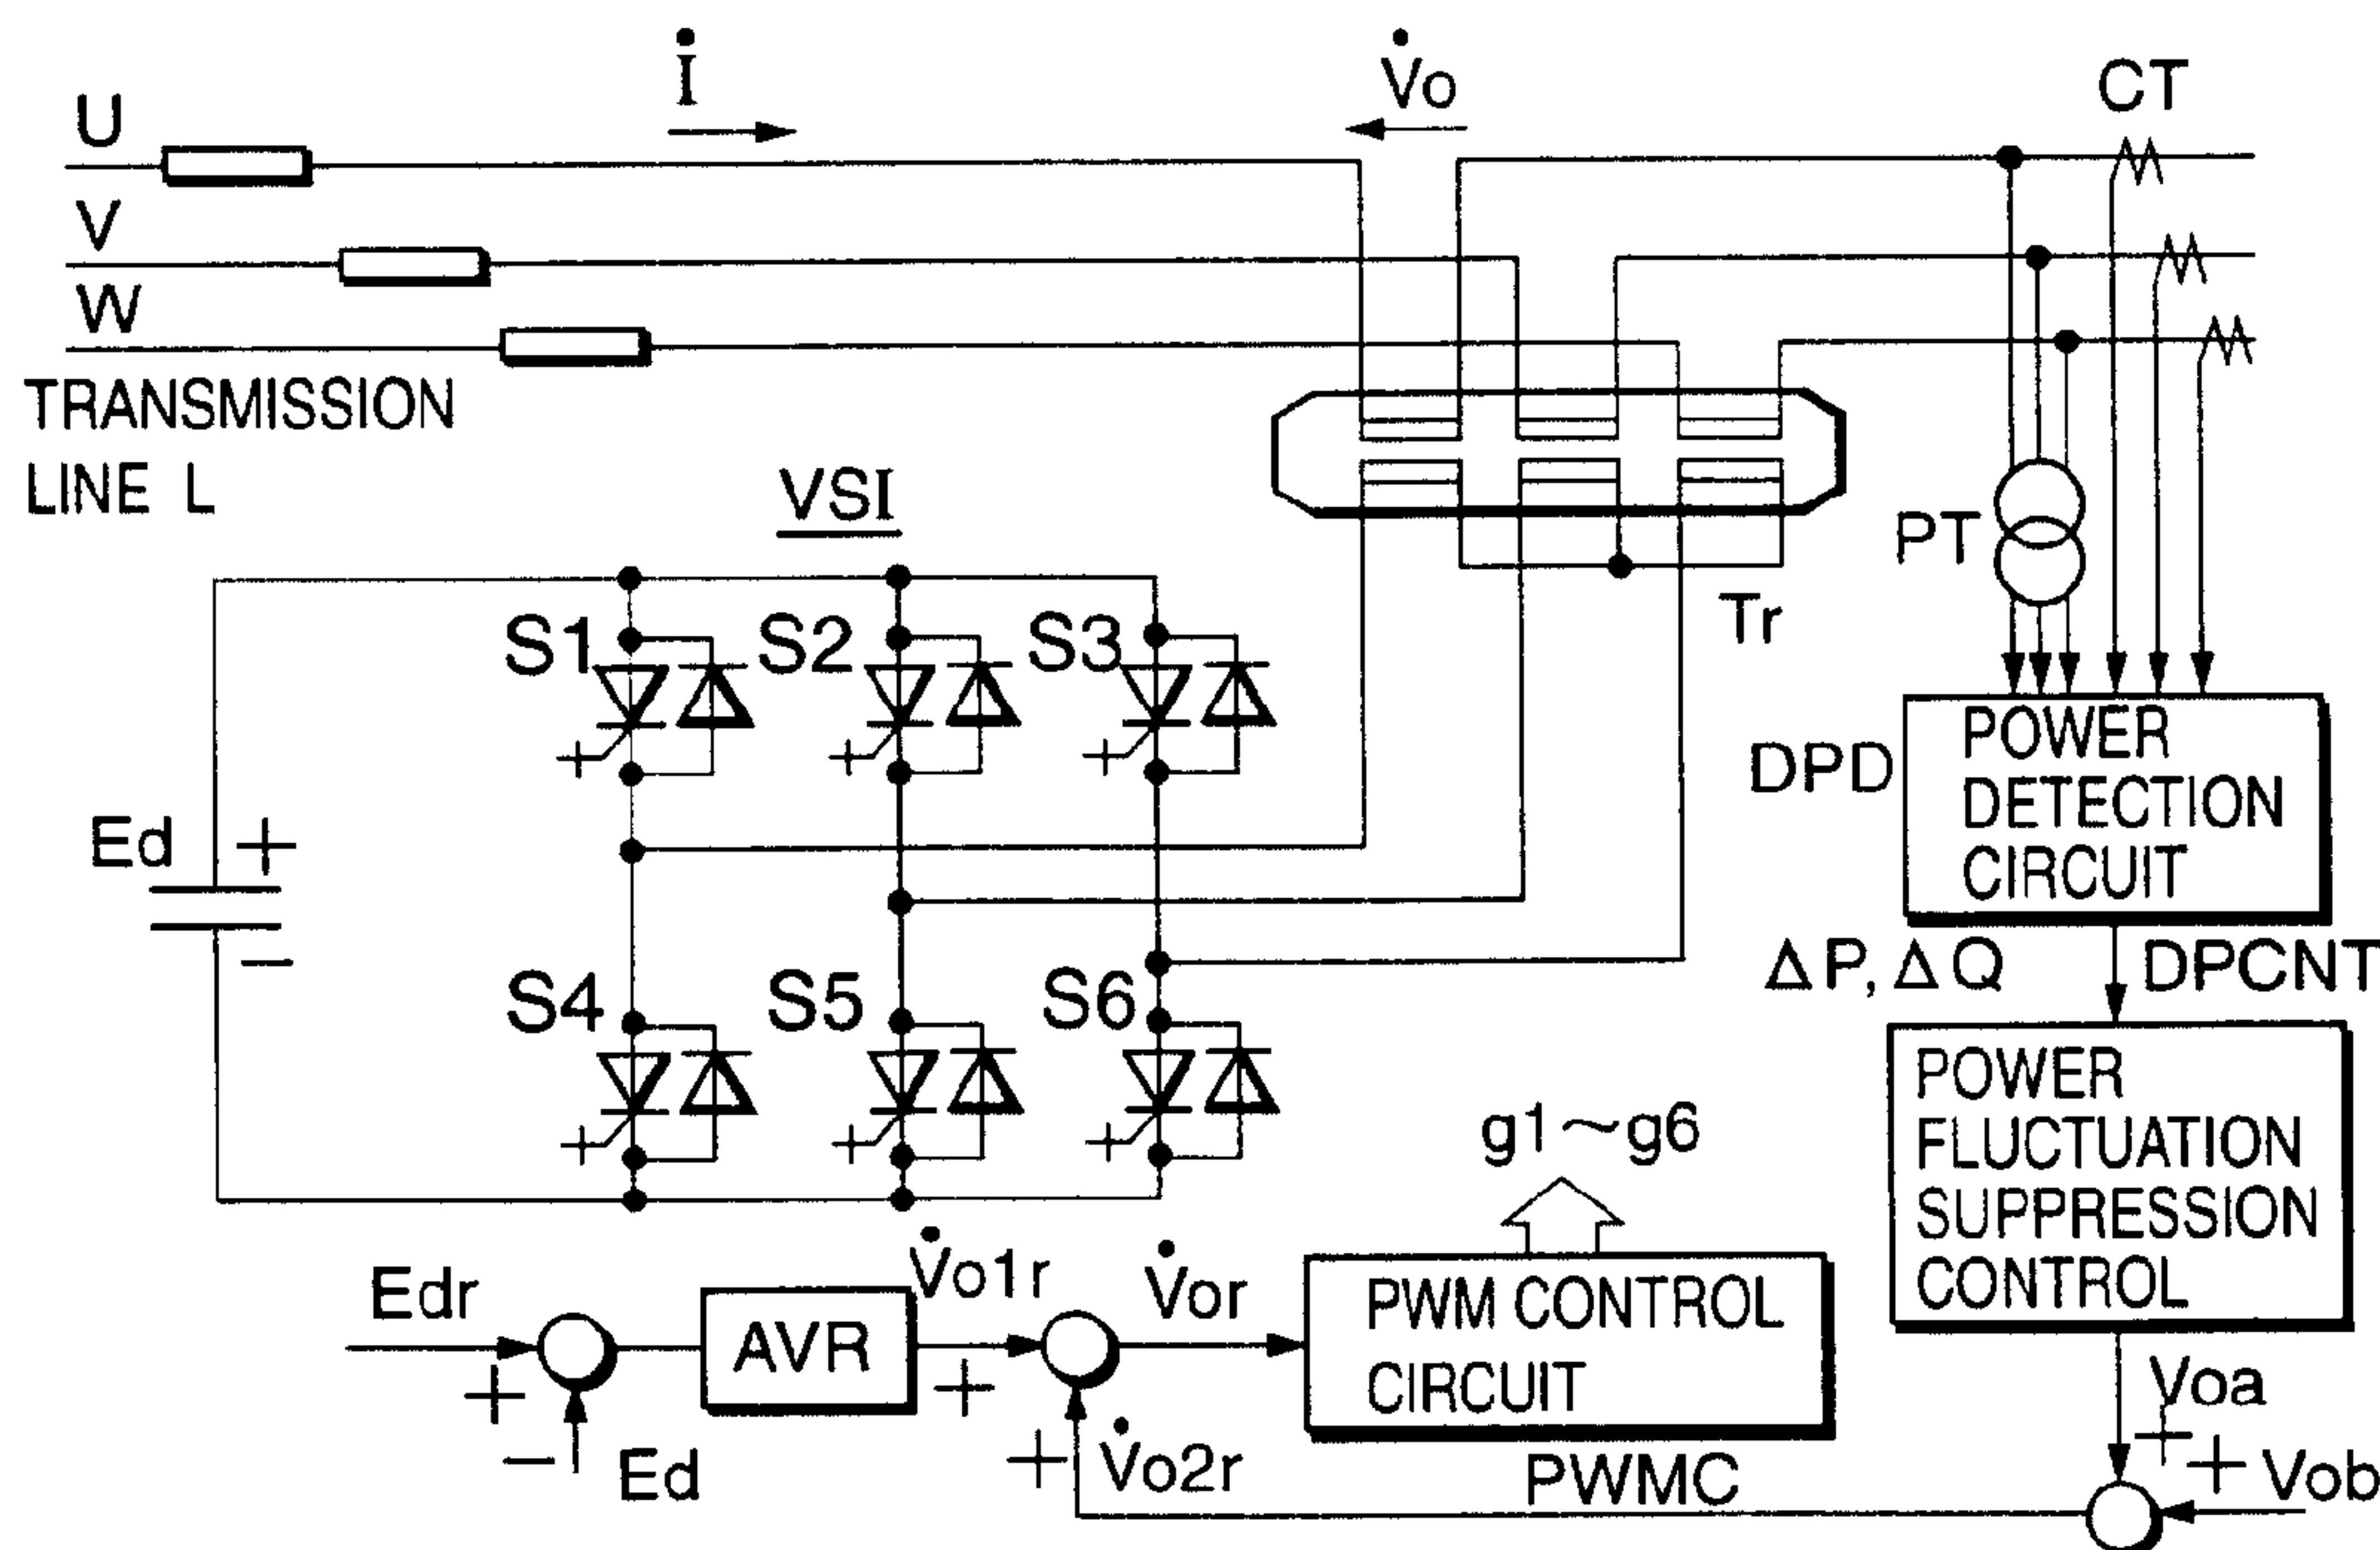

A series compensation generator SCG is installed in a transmission line that links various substations SS and the transmission capability of the system as a whole can be increased by regulating the equivalent reactance of the transmission line. Series compensation generator SCG generates a voltage of which the phase angle is shifted substantially 90° in relation to the current flowing in the transmission line, and it also generates a voltage that compensates the voltage drop due to the equivalent reactance. Also, when an electrical fluctuation phenomenon (power oscillation) occurs in the transmission line, it is possible speedily to suppress the power oscillation by detecting the power fluctuation of the transmission line and controlling the compensating voltage of series compensation generator SCG so that it suppresses that power fluctuation.

ABSTRACT OF THE DISCLOSURE

A series compensation generator **SCG** is installed in a
5 transmission line that links various substations **SS** and the
transmission capability of the system as a whole can be
increased by regulating the equivalent reactance of the
transmission line. Series compensation generator **SCG**
generates a voltage of which the phase angle is shifted
10 substantially 90° in relation to the current flowing in the
transmission line, and it also generates a voltage that
compensates the voltage drop due to the equivalent reactance.
Also, when an electrical fluctuation phenomenon (power
oscillation) occurs in the transmission line, it is possible
15 speedily to suppress the power oscillation by detecting the
power fluctuation of the transmission line and controlling
the compensating voltage of series compensation generator **SCG**
so that it suppresses that power fluctuation.

29606-7

TITLE OF THE INVENTION

AC TRANSMISSION SYSTEM WITH REACTANCE COMPENSATION

5 BACKGROUND OF THE INVENTION**1. Field of the Invention**

The present invention relates to AC transmission
10 systems that use existing AC transmission lines, but are
unaffected by the reactance of the transmission lines, and
more particularly relates to AC transmission systems that
improve the transmission capability of transmission lines or
distribution lines by cancelling the impedance of AC
15 transmission lines or AC distribution lines.

2. Description of the Related Art

Most Japanese transmission lines are AC transmission
20 type of frequency 50Hz or 60Hz, while some, such as inter-
system links and long-distance transmission lines, use DC
transmission.

FIG.1 shows system block diagrams illustrating the
concepts of DC transmission and AC transmission.

25 In the diagrams, **G** indicates a power station, **SS** a
sub-station, **TR1**, **TR2** transformers, **CNV** an AC/DC power

converter, **INV** a DC/AC power converter, **Ld** a DC reactor and **X** AC transmission line reactance, respectively.

FIG.1(a) shows a DC transmission system. AC power generated in power station **G** is converted to DC by AC/DC power converter **CNV**. That DC power is transmitted to the receiving sub-station via DC transmission lines. Then, the DC power is once more converted to AC power by DC/AC power converter **INV**, and AC power is supplied to other sub-stations or to demand loads.

This DC transmission system has the advantage that it is possible to transmit power over long distances without voltage drops due to transmission line reactance because the power is transmitted by temporarily converting it to DC. Also, even if two AC systems have different frequencies, it is possible to link them. However, power converters each having the same transmission capacity are required on the transmitting side and the receiving side. Also, new DC transmission lines must be constructed, and the system becomes expensive.

On the other hand, FIG.1(b) shows an AC transmission system. This has the advantage that transformers **TR1** and **TR2** can freely alter the voltage, and the AC can be transmitted as it is. Also, most of the present transmission lines are AC transmission lines, and an economical power supply that uses these effectively is possible. However, when there is reactance **X** in a transmission line, its voltage drop becomes

a problem, and there is the disadvantage that there is a limit to the active power than can be transmitted.

In FIG.2, FIG.2(a) shows a simple equivalent circuit for an AC transmission line, and FIG.2(b) shows the relationship of the transmitted power to phase angle θ . In the drawings, when the transmitting terminal voltage is taken as V_s , the receiving terminal voltage as V_r , its phase difference as θ and the reactance of the transmission line as X , the active power P that can be transmitted is expressed by the following expression.

$$P = \frac{V_s \cdot V_r}{X} \cdot \sin\theta$$

Consequently, as the length of the transmission line becomes longer, reactance X becomes greater, and the transmissible active power is more limited.

Also, normal transmission is operated with a phase difference θ of 30° or less. However, if power fluctuations occur in the system and the phase difference θ exceeds 90° , a so-called generator out-of-step phenomenon occurs, and transmission becomes impossible. Moreover, in a system with a large transmission line reactance X , there is the disadvantage that, since the maximum value of transmitted power is small, phase difference θ will fluctuate greatly, even with a small power fluctuation, and the system readily becomes unstable.

With AC transmission, the voltage can freely be varied by a transformer, and this is economical, providing AC transmission over long distances using existing lines is possible. Thus, there is a great advantage on both the power supply side and the power user side. However, it suffers from the effect of transmission line reactance, and there are limits to the transmissible active power.

On the other hand, DC transmission does not suffer the effect of transmission line reactance. However, since it cannot use existing transmission lines, and also large capacity power converters sufficient for the transmission capacity are required, the system cost becomes very high. Moreover, when attempting to supply power to a load partway along the transmission route, it is necessary temporarily to convert the DC to AC power; power converters are required for that, and that, too, becomes an uneconomic system.

SUMMARY OF THE INVENTION

Accordingly, one object of the present invention is to provide a novel AC transmission system that can make effective use of existing AC transmission lines, can cancel effects due to reactance, and can transmit over long distances by increasing the transmission capabilities of the transmission lines.

Also, one object of the present invention is to

provide an AC transmission system that can make effective use of existing transmission lines (including distribution lines), can cancel the effects due to reactance, can increase the transmission capabilities of transmission lines or
5 distribution lines, and can transmit over long distances.

To achieve the above objects, in a power system in which transmission is via multiple substations, the present invention is an AC transmission system that provides at least one series compensation generator that generates a
10 compensating voltage for regulating the equivalent reactance of power lines between those substations and inhibiting power oscillation.

With AC transmission, the performance of long distance transmission via multiple substations, making use of existing
15 transmission lines, can be considered. The transmission capability of the system as a whole can be increased by installing multiple series compensation generators on the transmission lines that connect the various substations, and regulating the equivalent reactance of the transmission lines.

20 A series compensation generator generates a voltage with its phase shifted by an electrical angle of approximately 90° to the current flowing in a transmission line. Thus, it generates a voltage that compensates the voltage drop due to the equivalent reactance. Provided the
25 series compensation generator generates a compensating voltage such that it will entirely cancel the voltage drop

due to the inductance of the transmission line, the equivalent reactance of the transmission line will become zero.

Also, even if the reactance is not entirely cancelled,
5 by reducing the inductance, the transmission capability of the transmission line can be markedly improved.

Moreover, even if, from whatever cause, an electrical oscillation phenomenon (power oscillation) occurs in the transmission line, that electrical oscillation phenomenon can
10 be suppressed by outputting a compensating voltage from the series compensation generator. That is to say, it is possible speedily to suppress power oscillation by detecting the power fluctuation of the transmission line, and controlling the compensating voltage of the series
15 compensation generator so that it inhibits the power oscillation.

By this means, long-distance AC transmission is possible via multiple substations.

The capacity of a series compensation generator is
20 determined by the percentage reactance **%XI** of the transmission line, and it is possible to manage about 10 ~ 20% of that of a power converter of a DC transmission system. Also, since it can be used in existing transmission lines, the system cost is much more economical.

25 Also, in order to achieve the above objects, the

present invention is an AC transmission system in which the above-mentioned series compensation generator is designed for inclusive regulation of the reactance of neighbouring transmission lines.

5 In the case of performing long-distance AC transmission via multiple transmission lines, there is a requirement to increase the transmission capability with a minimum of equipment. By compensating the reactance of neighbouring transmission lines using one series compensation generator, the transmission capability of all the
10 transmission lines can be improved. By this means, low system cost long-distance AC transmission can be achieved.

 Moreover, in order to achieve the above-mentioned objects, in a power system in which transmission is via
15 multiple substations, the present invention is an AC transmission system that provides series compensation generators that generate compensating voltages so that the equivalent reactances in the transmission lines that are connected between all the various substations of the
20 transmission route become approximately zero.

 In an AC transmission system that supplies power via multiple substations and transmission lines, compensatory control is exercised so that all the equivalent reactances on that transmission route become approximately zero. By this
25 means, the size and phase of the voltage in each substation become the same. Thus, AC transmission that is unaffected by

reactance becomes possible from the substation to the domestic consumer, and the same effect is obtained as with DC transmission. Furthermore, existing AC transmission lines can be used, and also the capacities of the series
5 compensation generators are markedly smaller than those of DC transmission power converters. Also, the maximum value of the transmissible power is increased by the fact that the reactances of the various transmission lines on the transmission route become approximately zero. The result is
10 a stable power system in which the phase difference does not shift, even for some degree of power fluctuation.

Furthermore, in order to achieve the above-mentioned objects, in a power system in which transmission is via multiple substations, the present invention is an AC
15 transmission system that selects the transmission line with the largest percentage reactance **%XI** out of the transmission lines that are connected between the above-mentioned substations, and provides a series compensation generator that generates a compensating voltage to reduce the
20 equivalent reactance of that transmission line.

With AC transmission, the performance of long distance transmission via multiple substations, making use of existing transmission lines, can be considered. The transmission capability of the whole system can be increased by selecting
25 the transmission line with the largest equivalent reactance

%**XI** out of the transmission lines that are connected between the various substations, and causing the generation of a compensating voltage by a series compensation generator that will reduce the equivalent reactance of that transmission
5 line to approximately zero. By this means, efficient long-distance AC transmission via multiple substations becomes possible.

Furthermore, in order to achieve the above-mentioned objects, in a power system in which transmission is via
10 multiple substations, the present invention is an AC transmission system that selects the transmission line for which the product of the reactance **X** of the transmission line and the amount of power flow **P** flowing in that transmission line is the largest out of the transmission lines that are
15 connected between the above substations, and provides a series compensation generator that generates a compensating voltage to reduce the equivalent reactance of that transmission line.

With AC transmission, the performance of long distance
20 transmission via multiple substations, making use of existing transmission lines, can be considered. The transmission capability of the whole system can be increased by selecting the transmission line for which the product of the transmission line reactance **X** and the amount of power flow **P**
25 flowing in that transmission line is the largest out of the transmission lines that are connected between the various

substations, and causing the generation of a compensating voltage by a series compensation generator so that the equivalent reactance of that transmission line is reduced. A transmission line in which the amount of power flow P flowing is large is one in which the effect of transmission line reactance X will be large. Therefore, it is effective to select and compensate the one in which the product of P and X is the largest. By this means, efficient long-distance AC transmission via multiple substations becomes possible.

Furthermore, in order to achieve the above-mentioned objects, the present invention is an AC transmission system in which the series compensation generator is provided with a means for detecting the fluctuation components of the active power and the reactive power of the transmission line. This system is designed to suppress power oscillation of the power system by regulating the compensating voltage of the component that is orthogonal to the current flowing in the transmission line according to that active power fluctuation, and also by regulating the compensating voltage of the component that is the same phase as the current flowing in the transmission line according to that reactive power fluctuation.

A series compensation generator has been stated to have the function of regulating the equivalent reactance of a transmission line by generating the voltage of a component

29606-7

that is approximately orthogonal to the current flowing in a transmission line in the steady state.

When a transmission line earth or ground fault happens, power oscillation occurs in the system. In that case, the oscillation of the power system is suppressed by detecting the fluctuations of the active power and the reactive power of the transmission line, regulating the compensating voltage of the component that is orthogonal to the current flowing in the transmission line according to that active power fluctuation, and also regulating the compensating voltage of the component that is the same phase as the current flowing in the transmission line according to that reactive power fluctuation. By this means, it is possible to design the speedy suppression of power fluctuation and the stability of long-distance AC transmission.

Furthermore, in order to achieve the above-mentioned objects, the present invention is an AC transmission system in which a series compensation generator is provided with means of detecting the amount of power flow in a transmission line, and of regulating the equivalent reactance of that transmission line according to that power flow amount.

The series compensation generator detects the flowing power of a transmission line, regulates the equivalent reactance of the transmission line according to the amount of power flow, and thus increases the transmission capability of that transmission line. That is to say, when the power flow

amount is large, it reduces the equivalent reactance of the transmission line, and conversely, when the amount of flow is small, it increases the equivalent reactance. As a result, the sizes of voltage V_s on the transmitting side and voltage V_r on the receiving side together with phase difference θ can be kept approximately constant, and a stable system voltage is obtained.

Furthermore, in order to achieve the above-mentioned objects, the present invention is an AC transmission system in which the series compensation generator is provided with a circuit that bypasses that overcurrent when an overcurrent has occurred due to an earth fault and the like in the transmission line.

When an earth fault and the like occur in the power system, an excessive current will flow in the transmission line. At this time, there is a danger that an excessive current will also flow in the series compensation generator and the equipment will be damaged. To prevent this, a bypass circuit is provided in parallel with the series compensation generator, and control is exercised so that, when the passage of a current of a set value or greater is detected, that current will flow via the bypass circuit. By this means, operation is possible without damage to the equipment, even when a fault has occurred.

Furthermore, in order to achieve the above-mentioned objects, the present invention is an AC transmission system

in which the series compensation generator is composed of a series transformer and a voltage source self-commutating inverter connected to the secondary side of that transformer.

With a large-capacity AC transmission line, there is
5 high-voltage transmission of several hundred kV. The primary winding of the series transformer is connected in series with the relevant transmission line, and the voltage source self-commutating inverter is connected to the secondary winding of the series transformer. By this means, it is possible to
10 insulate the inverter from the high-voltage transmission line. The voltage source self-commutating inverter regulates the amplitude of the output voltage by pulse-width modulation control (PWM control), or the like, and, in the steady state, generates a voltage of which the phase is shifted 90° in
15 relation to the current flowing in the transmission line. When power oscillation occurs, that power oscillation is suppressed by controlling the phase and amplitude of the inverter output voltage.

Furthermore, in order to achieve the above-mentioned
20 objects, the present invention is an AC transmission system in which the series compensation generator is composed of a series capacitor and a compensation voltage generator that is connected in series with that series capacitor.

The series capacitor cancels the greater part of the
25 transmission line reactance and thus reduces the capacity of the compensation generator. The compensation voltage

generator regulates the equivalent reactance of the transmission line, thus increasing the transmission capability, and also inhibits power oscillation of the system.

Furthermore, in order to achieve the above-mentioned
5 objects, the present invention is an AC transmission system in which the series compensation generator is composed of a series capacitor and a compensation current generator that is connected in parallel with that series capacitor.

The series capacitor cancels the greater part of the
10 transmission line reactance and thus reduces the capacity of the compensation current generator. The compensation current generator supplies a compensating current to the series capacitor and regulates the equivalent reactance of the transmission line by regulating the impressed voltage of the
15 capacitor, thus increasing the transmission capability and also inhibiting power oscillation in the system. In this case, it is possible to manage with a compensation current generator of small capacity. Also, this method has the advantage that, even in the case of an earth fault occurring
20 in the transmission line, most of the excessive current will flow via the series capacitor and the effect on the compensation current generator will be small.

Furthermore, in order to achieve the above-mentioned
objects, the present invention is an AC transmission system
25 in which the series compensation generator is composed of a main series capacitor, an auxiliary series capacitor

connected in series with that main series capacitor, and a compensation current generator that is connected in parallel with that auxiliary series capacitor.

The main series capacitor cancels the greater part of the transmission line reactance. The compensation current generator regulates the voltage impressed on (applied to) the auxiliary series capacitor by supplying a compensating current to that capacitor. The equivalent reactance of the transmission line is regulated by regulating the voltage impressed on (applied to) the auxiliary series capacitor. Thus, transmission capacity is increased, and also power oscillation in the system is inhibited. In this case, it is possible to manage with a compensation current generator of very small capacity. Also, this method has the advantage that, even in the case of an earth fault occurring in the transmission line, most of the excessive current will flow via the auxiliary series capacitor and the effect on the compensation current generator will be small.

Furthermore, in order to achieve the above-mentioned objects, in a power system in which transmission is via multiple substations, the present invention is an AC transmission system that is provided with:

multiple series capacitors that are connected in series with the relevant transmission lines to cancel the greater part of the inductance of the transmission lines between the substations; and

compensation voltage generators that generate compensating voltages to regulate the reactance of the transmission lines and to inhibit power oscillation.

With AC transmission, the performance of long distance transmission via multiple substations, making use of existing transmission lines, can be considered. The greater part of the inductance of the transmission lines that link the various substations is cancelled by the multiple series capacitors, and the transmission capability of the system as a whole is increased by decreasing the equivalent reactance of the transmission lines. Also, the reactance of the transmission lines is regulated and the power oscillation of the system suppressed by the compensation voltage generators. By this means, long-distance AC transmission via multiple substations becomes possible. Provided there is regulation to completely cancel the inductance of the transmission lines, long-distance AC transmission unaffected by the reactance of the transmission lines is possible.

Furthermore, in order to achieve the above-mentioned objects, in a power system in which transmission is via multiple substations, the present invention is an AC transmission system that is provided with:

multiple series capacitors that are connected in series with the relevant transmission lines to cancel the greater part of the inductance of the transmission lines between the substations; and

a compensation voltage generator that is connected in series with any of the series capacitors and generates a compensating voltage to inhibit power oscillation in the transmission lines.

5 With AC transmission, the performance of long distance transmission via multiple substations, making use of existing transmission lines, can be considered. The greater part of the inductance of the transmission lines that link the various substations is cancelled by the multiple series
10 capacitors, and the transmission capability of the system as a whole is increased by decreasing the equivalent reactance of the transmission lines. Also, the reactance of the transmission lines is regulated and power oscillation of the system suppressed by the compensation voltage generator that
15 is connected to any of the series capacitors. In this case, there is the advantage that, since the reactance of the transmission lines is compensated by the series capacitors, it is possible to manage with a compensation voltage generator of small capacity. By this means, provided there
20 is regulation to completely cancel the inductance of the transmission lines, long-distance AC transmission unaffected by the reactance of the transmission lines is possible.

Furthermore, in order to achieve the above-mentioned objects, the present invention is an AC transmission system
25 in which the multiple series capacitors and the compensation voltage generator are provided with circuits that will bypass

those overcurrents in the event of overcurrents being generated by earth faults, or the like, in the transmission lines.

When an earth fault or the like has occurred in a transmission line, the overcurrent becomes greater as the reactance of the transmission line becomes smaller. Therefore, the series capacitors will quickly short, and the transmission line reactance will become greater. For that reason, the overcurrent is detected, and if it reaches a certain level or above, the current is made to flow via the bypass circuit. By this means, increase of the overcurrent is inhibited, and the series capacitors and the compensation voltage generator are protected. As soon as the overcurrent has disappeared, first, power oscillation is suppressed by opening the compensation voltage generator bypass circuit. After that, the series capacitor bypass circuits are sequentially opened, and long-distance AC transmission shifts to normal.

Furthermore, in order to achieve the above-mentioned objects, in a power system in which transmission is via multiple substations, the present invention is an AC transmission system that is provided with:

multiple series capacitors that are connected in series with the relevant transmission lines to cancel the greater part of the inductance of the transmission lines between the substations; and

a compensation current generator that is connected in parallel with any of the series capacitors and generates a compensating current to inhibit power oscillation in the transmission lines.

5 With AC transmission, the performance of long distance transmission via multiple substations, making use of existing transmission lines, can be considered. The greater part of the inductance of the transmission lines that link the various substations is cancelled by the multiple series
10 capacitors, and power oscillation of the system is suppressed by the compensation current generator that is connected in parallel with any of the series capacitors. Thus, the transmission capability of the system as a whole is increased by decreasing the equivalent reactance of the transmission
15 lines. By this means, long-distance AC transmission via multiple substations becomes possible. Provided there is regulation completely to cancel the inductance of the transmission lines, long-distance AC transmission unaffected by the reactance of the transmission lines is possible.

20 Furthermore, in order to achieve the above-mentioned objects, the present invention is an AC transmission system in which the multiple series capacitors are provided with circuits that bypass those overcurrents when overcurrents occur due to earth faults or the like in the transmission
25 lines.

When an earth fault or the like has occurred in a

transmission line, the overcurrent becomes greater as the reactance of the transmission line becomes smaller.

Therefore, the series capacitors will quickly short, and the transmission line reactance will become greater. For that

5 reason, the overcurrent is detected, and if it reaches a certain level or above, the current is made to flow via the bypass circuits. By this means, increase of the overcurrent is inhibited, and the series capacitors and the compensation current generator are protected. As soon as the overcurrent
10 has disappeared, first, power oscillation is suppressed by opening the bypass circuit of the series capacitor that is connected in parallel with the compensation current generator. After that, the series capacitor bypass circuits are sequentially opened, thus causing long-distance AC
15 transmission to shift to normal.

Furthermore, in order to achieve the above-mentioned objects, in a power system in which transmission is via multiple substations, the present invention is an AC transmission system that is provided with:

20 multiple main series capacitors that are connected in series with the relevant transmission lines to cancel the greater part of the inductance of the transmission lines between the substations;

an auxiliary series capacitor that is connected in
25 series with any of the main series capacitors; and

a compensation current generator that is connected in

parallel with that auxiliary series capacitor.

With AC transmission, the performance of long distance transmission via multiple substations, making use of existing transmission lines, can be considered. The greater part of the inductance of the transmission lines that link the various substations is cancelled by the multiple main series capacitors, and an auxiliary series capacitor is connected in series with any one of the main series capacitors. The compensation current generator regulates the impressed voltage of the auxiliary series capacitor by supplying a compensating current to the auxiliary series capacitor. By this means, the power oscillation of the system is suppressed, and the transmission capability of the system as a whole is increased by reducing the equivalent reactance of the transmission lines. Thus, long-distance AC transmission via multiple substations becomes possible. In this case, it is possible to manage with a compensation current generator of very small capacity. Provided there is regulation completely to cancel the inductance of the transmission lines, long-distance AC transmission unaffected by the reactance of the transmission lines is possible.

Furthermore, in order to achieve the above-mentioned objects, the present invention is an AC transmission system in which the multiple main series capacitors and the auxiliary series capacitor are provided with circuits that bypass those overcurrents when overcurrents occur due to

earth faults or the like in the transmission lines.

When an earth fault or the like has occurred in a transmission line, the overcurrent becomes greater as the reactance of the transmission line becomes smaller.

5 Therefore, the series capacitors will quickly short, and the transmission line reactance will become greater. For that reason, the overcurrent is detected, and if it reaches a certain level or above, the current is made to flow via the bypass circuits. By this means, increase of the overcurrent
10 is inhibited, and the series capacitors and the compensation current generator are protected. As soon as the overcurrent has disappeared, first, power oscillation is suppressed by opening the bypass circuit of the auxiliary series capacitor that is connected in parallel with the compensation current
15 generator. After that, the main series capacitor bypass circuits are sequentially opened, thus causing long-distance AC transmission to shift to normal.

Furthermore, in order to achieve the above-mentioned objects, the present invention is an AC transmission system
20 that is provided with:

a long-distance AC transmission line;

a series compensation generator that generates a compensating voltage for regulating the equivalent reactance of the transmission line; and

25 a static var generator that compensates the reactive current or the higher harmonic current flowing in the

transmission line.

The series compensation generator generates a compensation voltage that is shifted to a phase angle of approximately 90° to the current flowing in the transmission line, and this regulates the equivalent reactance of the transmission line, and inhibits power oscillation. At the same time, there is inter-line, or line to ground, floating capacitance in transmission lines, and in a long-distance transmission line a large reactive current will come to flow via that floating capacitance. As this reactive current becomes larger, it will affect the current capacity of the transmission line and, ultimately, long-distance AC transmission will become impossible. The static var generator compensates the reactive current and higher harmonic current flowing in this transmission line and, together with the series compensation generator, increases the transmission capability of the transmission line, thus achieving long-distance AC transmission.

Furthermore, in order to achieve the above-mentioned objects, the present invention is an AC transmission system that is provided with:

a long-distance AC transmission line;

a series compensation generator that generates a compensating voltage for reducing the equivalent inductance of the transmission line to approximately zero; and

a static var generator that compensates the reactive

current or the higher harmonic current flowing in the floating inductance of the transmission line.

The series compensation generator generates a compensation voltage that is shifted to a phase angle of approximately 90° to the current flowing in the transmission line, and makes the equivalent inductance approximately zero. Also, the design is such that, when power oscillation occurs, it acts to inhibit that, and thus stabilizes the system.

The reactive current and higher harmonic current flowing in the floating inductance are compensated by the static var generator. As a result, the currents on the transmission side and the current receiving side become approximately equal, and it becomes easier for a steady compensating voltage outputted from the series compensation generator to generate a component of which the phase is shifted 90° to the current flowing in the transmission line. Therefore, it comes about that the series compensation generator generates a steady reactive power, and it is possible to manage with a small capacity energy storage element. Incidentally, when inhibiting power oscillation, the phase of the compensating voltage varies transitionally. Only at that time is the output and input of active power of short duration.

In this way, the static var generator, in combination with the series compensation generator, increases the

transmission capability of the transmission line and achieves long-distance AC transmission.

Furthermore, in order to achieve the above-mentioned objects, the present invention is an AC transmission system
5 in which the series compensation generator is provided with a power oscillation inhibition means that detects power fluctuation in the transmission line and inhibits that power fluctuation.

When an earth fault or the like has occurred in a
10 transmission line, power fluctuation occurs even after the earthed point has been disconnected, and brings about generator out-of-step phenomena and the like. The power oscillation in the transmission line is detected, and a compensating voltage is caused to be generated from the
15 series compensation generator to suppress that fluctuation. By this means, stabilization of the AC transmission system is designed.

Furthermore, in order to achieve the above-mentioned objects, the present invention is an AC transmission system
20 in which the series compensation generator is provided with a circuit that bypasses that overcurrent when an overcurrent occurs due to an earth fault or the like in the transmission line.

When an earth fault or the like has occurred in a
25 transmission line, the overcurrent becomes greater as the reactance of the transmission line becomes smaller.

Therefore, the series capacitor will quickly short, and the transmission line reactance will become greater. For that reason, the overcurrent is detected, and if it reaches a certain level or above, the current is made to flow via the
5 bypass circuit. By this means, increase of the overcurrent is inhibited, and the series compensation generator is protected. As soon as the overcurrent has disappeared, the power oscillation is suppressed by opening the bypass circuit of the series compensation generator.

10 Furthermore, in order to achieve the above-mentioned objects, the present invention is an AC transmission system in which series compensation generators or static var generators are split and installed in multiple locations in the transmission line.

15 The inductance and floating capacitance of a transmission line are by no means concentrated in one place. They exist as distributed constants. Thus, by splitting the series compensation generators and static var generators and installing them in multiple dispersed locations, compensation
20 can be even more detailed. Also, the voltage distribution of the transmission line becomes uniform and the withstand-voltage capability of the transmission equipment can be reduced.

Also, with a long-distance AC transmission line, the
25 voltage phase at the receiving end shifts greatly in relation to the voltage phase at the transmitting end, due to the

voltage drop caused by the transmission line inductance.

With particularly long distance transmission, the phase shift sometimes exceeds 90° partway along the transmission line.

When that is the case, the maximum transmissible power is

5 determined at that point, and a series compensation generator installed at the receiving end will become unable to function.

To solve the problem, series compensation generators are

split and installed in multiple places in the transmission

line. By this means, the phase difference will not exceed 90°

10 in relation to the transmitting end voltage phase at all

places in the transmission line, and long-distance AC

transmission can be achieved.

Furthermore, in order to achieve the above-mentioned objects, the present invention is an AC transmission system

15 that is provided with:

a long-distance AC transmission line;

a series capacitor that is connected in series with the transmission line to cancel the greater part of the transmission line inductance;

20 a compensation voltage generator that is connected in series with the capacitor; and

a static var generator that compensates the reactive current or the higher harmonic current flowing in the floating capacitance of the transmission line.

25 The series capacitor achieves transmission with

approximately zero reactance by cancelling the greater part of the transmission line inductance. The compensation voltage generator, by regulating its output voltage, performs stabilization of the system and regulation of the
5 transmission line reactance.

In a transmission line, there is inter-line and line-to-earth floating capacitance. Thus, with a long-distance transmission line, a large reactive current will flow via that floating inductance. As this reactive current becomes
10 larger, it will affect the current capacity of the transmission line and, ultimately, long-distance AC transmission will become impossible. The static var generator compensates the reactive current and higher harmonic current that flow in the floating capacitance of the
15 transmission line and, in combination with the above-mentioned series compensation generator, achieves long-distance AC transmission.

Also, by compensating the reactive current flowing in the floating capacitance of the transmission line using a
20 static var generator, the current on the transmission side and the current on the receiving side become approximately equal. Thus, the voltage drop of the transmission line inductance and the voltage drop of the series capacitors become exactly cancelling phases. Therefore, the capacity of
25 the compensation voltage generator can be decreased by that amount, and an economical system can be provided. Moreover,

the steady compensating voltage that is outputted from the compensation voltage generator may be generated with a phase that is shifted 90° from the current flowing in the transmission line. Thus, reactive power will be steadily
5 supplied, and it is possible to manage with a reduced capacity energy storage element.

Furthermore, in order to achieve the above-mentioned objects, the present invention is an AC transmission system in which the series capacitor and the compensation voltage
10 generator are provided with circuits that bypass that overcurrent when an overcurrent occurs due to an earth fault or the like in the transmission line.

When an earth fault or the like has occurred in a transmission line, the overcurrent becomes greater as the
15 reactance of the transmission line becomes smaller. Therefore, the series capacitor will quickly short, and the transmission line reactance will become greater. For that reason, the overcurrent is detected, and if it reaches a certain level or above, the current is made to flow via the
20 bypass circuit. By this means, increase of the overcurrent is inhibited, and the series capacitor and the compensation voltage generator are protected. As soon as the overcurrent has disappeared, first, power oscillation is suppressed by opening the bypass circuit of the compensation voltage
25 generator. After that, the series capacitor bypass circuits are sequentially opened, thus causing long-distance AC

transmission to shift to normal.

Furthermore, in order to achieve the above-mentioned objects, the present invention is an AC transmission system in which the compensation voltage generator is provided with
5 a power oscillation inhibition means that detects the power fluctuation of the transmission line and inhibits that power fluctuation.

The power oscillation of the transmission line is detected, and the output voltage from the compensation
10 voltage generator is controlled so that the power fluctuation is suppressed. By this means, it becomes possible to suppress any shaft torsion oscillation contained in the generator, and the resonance phenomenon generated between the inductance of the transmission line and the series capacitor.

15 Furthermore, in order to achieve the above-mentioned objects, the present invention is an AC transmission system in which series capacitors or static var generators are split and installed in multiple locations in the transmission line.

The inductance and floating capacitance of a
20 transmission line are by no means concentrated in one place. They exist as distributed constants. Thus, by splitting the series capacitors and static var generators and installing them in multiple dispersed locations, compensation can be even more detailed. Also, the voltage distribution of the
25 transmission line becomes uniform and the withstand-voltage capability of the transmission equipment can be reduced.

With a long-distance AC transmission line, the voltage phase at the receiving end shifts greatly in relation to the voltage phase at the transmitting end, due to the voltage drop caused by the transmission line inductance. With particularly long distance transmission, the phase shift sometimes exceeds 90° partway along the transmission line. When that is the case, the maximum transmissible power is determined at that point, and a series capacitor installed at the receiving end will become unable to function. To solve the problem, series capacitors are split and installed in multiple places in the transmission line. By this means, the phase difference will not exceed 90° in relation to the transmitting end voltage phase at all places in the transmission line, and long-distance AC transmission can be achieved.

Furthermore, in order to achieve the above-mentioned objects, the present invention is an AC transmission system that is provided with:

- a long-distance AC transmission line;
- a series capacitor that is connected in series with the transmission line to cancel the greater part of the transmission line inductance;
- a compensation current generator that is connected in parallel with the series capacitor; and
- a static var generator that compensates the reactive

current or the higher harmonic current flowing in the floating capacitance of the transmission line.

The greater part of the transmission line inductance is cancelled by the series capacitor. The compensation current generator supplies a compensating current to the series capacitor, and, by varying the impressed voltage of that capacitor, it regulates the equivalent reactance of the transmission line and thus inhibits transmission line power oscillation.

In a transmission line, there is inter-line and line-to-earth floating capacitance. Thus, with a long-distance transmission line, a large reactive current will flow via that floating inductance. As this reactive current becomes larger, it will affect the current capacity of the transmission line and, ultimately, long-distance AC transmission will become impossible. The static var generator compensates the reactive current that flows in the floating capacitance of the transmission line and, in combination with the above-mentioned series capacitor and compensation current generator, is designed to stabilize the system and improve transmission capability. Thus, long-distance AC transmission is achieved.

Also, by compensating the reactive current flowing in the floating capacitance of the transmission line using a static var generator, the current on the transmission side and the current on the receiving side become approximately

equal. Thus, the voltage drop of the transmission line inductance and the voltage drop of the series capacitor become exactly cancelling phases. As a result, the capacity of the compensation current generator can be decreased, and
5 an economical system can be provided.

Furthermore, in order to achieve the above-mentioned objects, the present invention is an AC transmission system in which the series capacitor is provided with a circuit that bypasses that overcurrent when an overcurrent occurs due to
10 an earth fault or the like in the transmission line.

When an earth fault or the like has occurred in a transmission line, the overcurrent becomes greater as the reactance of the transmission line becomes smaller. Therefore, the series capacitor will quickly short, and the
15 transmission line reactance will become greater. For that reason, the overcurrent is detected, and if it reaches a certain level or above, the current is made to flow via the bypass circuit. By this means, increase of the overcurrent is inhibited, and the series capacitor and the compensation
20 current generator are protected. As soon as the overcurrent has disappeared, the power oscillation is suppressed by opening the bypass circuit, thus causing long-distance AC transmission to shift to normal.

Furthermore, in order to achieve the above-mentioned
25 objects, the present invention is an AC transmission system that is provided with:

a long-distance AC transmission line;

a main series capacitor that is connected in series with the transmission line to cancel the greater part of the transmission line inductance;

5 an auxiliary series capacitor that is connected in series with the main series capacitor;

a compensation current generator that is connected in parallel with the auxiliary series capacitor; and

a static var generator that compensates the reactive
10 current or the higher harmonic current flowing in the floating capacitance of the transmission line.

The greater part of the transmission line inductance is cancelled by the main series capacitor. The compensation current generator supplies a compensating current to the
15 auxiliary series capacitor, and, by varying the impressed (applied) voltage of that capacitor, it regulates the equivalent reactance of the transmission line. The parallel compensation generator compensates the reactive current and the higher harmonic current flowing in the transmission line.
20 In combination with the main series capacitor, the auxiliary series capacitor and the compensation current generator, it stabilizes the system and acts to improve transmission capability, thus achieving long-distance AC transmission.

Furthermore, in order to achieve the above-mentioned
25 objects, the present invention is an AC transmission system in which the main series capacitor and the auxiliary series

capacitor are provided with circuits that bypass those overcurrents when overcurrents occur due to earth faults or the like in the transmission lines.

When an earth fault or the like has occurred in a transmission line, the overcurrent becomes greater as the reactance of the transmission line becomes smaller. Therefore, the main series capacitor and the auxiliary series capacitor will quickly short, and the transmission line reactance will become greater. For that reason, the overcurrent is detected, and if it reaches a certain level or above, the current is made to flow via the bypass circuit. By this means, increase of the overcurrent is inhibited, and the main series capacitor or the auxiliary series capacitor and the compensation current generator are protected. As soon as the overcurrent has disappeared, first, power oscillation is suppressed by opening the bypass circuit of the auxiliary series capacitor. After that, long-distance AC transmission is caused to shift to normal by opening the main series capacitor bypass circuit.

Furthermore, in order to achieve the above-mentioned objects, the present invention is an AC transmission system in which main series capacitors or static var generators are split and installed in multiple locations in the transmission line.

The inductance and floating capacitance of a transmission line are by no means concentrated in one place.

They exist as distributed constants. Thus, by splitting the main series capacitors or the static var generators and installing them in multiple dispersed locations, compensation can be even more detailed. Also, the voltage distribution of the transmission line becomes uniform and the withstand-voltage capability of the transmission equipment can be reduced.

Also, with a long-distance AC transmission line, the voltage phase at the receiving end shifts greatly in relation to the voltage phase at the transmitting end, due to the voltage drop caused by the transmission line inductance. With particularly long distance transmission, the phase shift sometimes exceeds 90° partway along the transmission line. When that is the case, the maximum transmissible power is determined at that point, and a series compensation generator installed at the receiving end will become unable to function. To solve the problem, main series capacitors are split and installed in multiple places in the transmission line. By this means, the phase difference will not exceed 90° in relation to the transmitting end voltage phase at all places in the transmission line, and long-distance AC transmission can be achieved.

Furthermore, in order to achieve the above-mentioned objects, the present invention is an AC transmission system in which the compensation current generator comprises means

for detecting the amount of power fluctuation in the transmission line and suppressing that power fluctuation.

The amount of power fluctuation in the transmission line is detected, and the output current from the compensation current generator is regulated, thereby controlling the applied voltage to the series capacitors or auxiliary series capacitors, in such a manner that the power fluctuation is suppressed. By this means, it is possible to suppress torsional oscillations, including those in the generator, and resonance phenomena generated between the inductance of the transmission line and the series capacitors.

Furthermore, in order to achieve the above-mentioned objects, in the present invention, the compensation voltage generating means generates a voltage whose phase in terms of an electrical angle is displaced by almost 90° with respect to the current flowing in the AC transmission line, thereby generating a voltage drop due to the equivalent reactance. If the compensation voltage generating means generates a compensating voltage in such a manner that the voltage drop due to the inductance of the transmission line is cancelled out, then the equivalent reactance of the transmission line becomes substantially zero. Thereby, zero-reactance transmission becomes possible, and long-distance AC power transmission can be achieved.

Moreover, in addition to not cancelling out the reactance totally, by reducing the inductance, it is possible

to raise the transmission capability of the transmission line dramatically. In particular, significant advantages can be expected in raising the transmission capability of minor transmission lines.

5 Since the capacity of the compensation voltage generating means is merely 10 ~ 20%, approximately, of the capacity of a power converter in a DC transmission system, and since existing transmission lines can be used, the system costs are extremely low.

10 In the present invention, the compensation voltage generating means generates a voltage whose phase in terms of an electrical angle is displaced by almost 90° with respect to the current flowing in the AC transmission line, thereby generating a voltage drop due to the equivalent reactance.

15 If the compensation voltage generating means generates a compensating voltage in such a manner that the voltage drop due to the inductance of the transmission line is cancelled out, then the equivalent reactance of the transmission line becomes substantially zero. Thereby, zero-reactance
20 transmission becomes possible, and long-distance AC power transmission can be achieved.

 Moreover, in addition to not cancelling out the reactance totally, by reducing the inductance, it is possible to raise the transmission capability of the transmission line
25 dramatically. In particular, significant advantages can be

expected in raising the transmission capability of minor transmission lines.

Moreover, if, for some reason, electrical oscillation phenomena occur in the transmission line, these oscillation phenomena can be suppressed by outputting a compensating voltage from the compensation voltage generating means.

Since the capacity of the compensation voltage generating means is merely 10 ~ 20%, approximately, of the capacity of a power converter in a DC transmission system, and since existing transmission lines can be used, the system costs are extremely low.

Furthermore, in order to achieve the above-mentioned objects, in the present invention, it is possible to cancel out the greater part of the inductance in a transmission line by connecting capacitors to the transmission line. In this case, resonance phenomena may occur between the inductance of the transmission line and the capacitors. The compensation voltage generating means generates a compensating voltage in order to suppress these resonance phenomena. For example, if a power fluctuation has occurred at the power station (transmitting end) or at the substation or load (receiving end), then the compensation voltage generating means is able to generate a compensating voltage in order to suppress any power oscillation.

The greater part of the inductance of the transmission line is cancelled out by the capacitors, and furthermore, the

system can be operated at an overall equivalent reactance of zero using the compensation voltage generating means.

Consequently, long-distance AC power transmission becomes possible, and the transmission capability of minor

5 transmission lines can be improved dramatically. Moreover, the capacity of the compensation voltage generating means is small, so it is possible to provide an AC transmission system.

Furthermore, in order to achieve the above-mentioned objects, in the present invention, it is also possible to
10 cancel out the greater part of the inductance of a transmission line by connecting capacitors to the transmission line. In this case, resonance phenomena may occur between the inductance of the transmission line and the capacitors. The compensation voltage generating means
15 generates a compensating voltage in order to suppress these resonance phenomena. For example, if a power fluctuation has occurred at the power station (transmitting end) or at the substation or load (receiving end), then the compensation voltage generating means is able to generate a compensating
20 voltage in order to suppress power oscillation. Moreover, since the capacitance of the capacitors in question can be changed in step fashion, it is also possible to control slow power oscillations by changing the capacitance of the capacitors in steps.

25 Thus, the greater part of the inductance of the transmission line or distribution line can be cancelled out

using series capacitors, and furthermore, the system can be operated at an overall equivalent reactance of zero using the compensation voltage generating means. Consequently, long-distance AC power transmission becomes possible, and the transmission capability of minor transmission lines can be improved dramatically. Moreover, the capacity of the compensation voltage generating means is small, so it is possible to provide an AC transmission system.

Furthermore, in order to achieve the above-mentioned objects, in the present invention, it is also possible to cancel out the greater part of the inductance of a transmission line by connecting capacitors to the transmission line. In this case, resonance phenomena may occur between the inductance of the transmission line and the capacitors. The compensation voltage generating means generates a compensating voltage in order to suppress these resonance phenomena. For example, if a power fluctuation has occurred at the power station (transmitting end) or at the substation or load (receiving end), then the compensation voltage generating means is able to generate a compensating voltage in order to suppress power oscillation.

Since the capacitors, which are split and installed in multiple locations on the transmission line, compensate for the reactance of the transmission line from one capacitor to the next capacitor, the capacitors have small capacities. Moreover, since voltage drops can be compensated for in a

detailed fashion by installing the split capacitors in multiple locations, it is possible to achieve a uniform voltage distribution in the transmission line.

Thus, the greater part of the inductance of the
5 transmission line can be cancelled out using capacitors, and furthermore, the system can be operated at an overall equivalent reactance of zero using the compensation voltage generating means. Consequently, long-distance AC power transmission becomes possible, and the transmission
10 capability of minor transmission lines can be improved dramatically. Moreover, the capacity of the compensation voltage generating means is small, so it is possible to provide an AC transmission system.

Furthermore, in order to achieve the above-mentioned
15 objects, in the present invention, it is also possible to cancel out the greater part of the inductance of a transmission line by connecting capacitors. In this case, resonance phenomena may occur between the inductance of the transmission line and the capacitors. The compensation
20 voltage generating means generates a compensating voltage in order to suppress these resonance phenomena. For example, if a power fluctuation has occurred at the power station (transmitting end) or at the substation or load (receiving end), then the compensation voltage generating means is able
25 to generate a compensating voltage in order to suppress power oscillation.

If an overcurrent is generated in the transmission line system, then the inductance of the transmission line has the effect of easing changes in current, but in cases where capacitors are connected to the system in series, this effect is reduced and changes in current can be extreme. By providing bypass circuits that short the two ends of the capacitors, the equivalent inductance of the transmission line is increased, in such a manner that no extreme changes in current are produced. Moreover, this also has the action of protecting the capacitors from overvoltages, and the like.

Thus, the greater part of the inductance of the transmission line can be cancelled out by means of capacitors, and furthermore, the system can be operated at an overall equivalent reactance of zero by means of the compensation voltage generating means. Consequently, long-distance AC power transmission becomes possible, and the transmission capability of minor transmission lines can be improved dramatically. Moreover, the capacity of the compensation voltage generating means is small, so it is possible to provide an AC transmission system.

Furthermore, in order to achieve the above-mentioned objects, in the present invention, it is also possible to cancel out the greater part of the inductance of a transmission line by connecting capacitors to the transmission line. In this case, resonance phenomena may occur between the inductance of the transmission line and the

capacitors. The compensation voltage generating means generates a compensating voltage in order to suppress these resonance phenomena. For example, if a power fluctuation has occurred at the power station (transmitting end) or at the substation or load (receiving end), then the compensation voltage generating means is able to generate a compensating voltage in order to suppress power oscillation.

If an overcurrent is generated in the transmission line system, the compensation voltage generating means is isolated from the system by a shorting bypass circuit, which has the effect of protecting the compensation voltage generating means.

Thus, the greater part of the inductance of the transmission line can be cancelled out by means of capacitors, and furthermore, the system can be operated at an overall equivalent reactance of zero using the compensation voltage generating means. Consequently, long-distance AC power transmission becomes possible, and the transmission capability of minor transmission lines can be improved dramatically. Moreover, the capacity of the compensation voltage generating means is small, so it is possible to provide an AC transmission system.

Furthermore, in order to achieve the above-mentioned objects, in the present invention, the equivalent reactance of a transmission line becomes substantially zero if the output current of a compensation current generating means is

controlled such that voltages cancelling out voltage drops due to the inductance of the transmission line are generated by capacitors connected in parallel thereto. By this means, zero-reactance transmission becomes possible, and hence long-
5 distance AC power transmission can be achieved.

Moreover, even if the reactance is not totally cancelled, by reducing the inductance, it is possible to raise the transmission capability of the transmission line dramatically. In particular, significant advantages can be
10 expected in raising the transmission capability of minor transmission lines.

Furthermore, in order to achieve the above-mentioned objects, in the present invention, the equivalent reactance of a transmission line becomes substantially zero if the
15 output current of a compensation current generating means is controlled such that voltages cancelling out voltage drops due to the inductance of the transmission line are generated by capacitors connected in parallel thereto. By this means, zero-reactance transmission becomes possible, and hence long-
20 distance AC power transmission can be achieved.

Furthermore, even if the reactance is not totally cancelled, by reducing the inductance, it is possible to raise the transmission capability of the transmission line dramatically. In particular, significant advantages can be
25 expected in raising the transmission capability of minor transmission lines.

Moreover, if, for some reason, electrical oscillation phenomena occur in the transmission line, these oscillation phenomena can be suppressed by outputting a compensating current from the compensation current generating means.

5 Furthermore, in order to achieve the above-mentioned objects, in the present invention, it is possible to cancel out the greater part of the inductance of a transmission line by connecting first capacitors. In this case, resonance phenomena may be generated between the inductance of the
10 transmission line and the capacitors. Moreover, power fluctuations may also occur at the power station (transmitting end) or at the substation or load (receiving end). By controlling the output current of the compensation current generating means, the voltage applied to the above-
15 mentioned second capacitors is regulated and hence power oscillation in the system is suppressed and the system can be operated at zero equivalent reactance.

Consequently, long-distance AC power transmission becomes possible and the transmission capability of minor
20 transmission lines can be improved. Furthermore, the capacity of the compensation current generating means is small, so it is possible to provide an AC transmission system.

Furthermore, in order to achieve the above-mentioned objects, in the present invention, it is possible to cancel
25 out the greater part of the inductance of a transmission line by connecting first capacitors. In this case, resonance

phenomena may be generated between the inductance of the transmission line and the capacitors. Moreover, power fluctuations may also occur at the power station (transmitting end) or at the substation or load side

5 (receiving end). By controlling the output current of the compensation current generating means, the voltage applied to second capacitors is regulated and hence power oscillation in the system is suppressed and the system can be operated at zero equivalent reactance.

10 Also, since the capacitance of the first capacitors can be changed in step fashion, it is also possible to control slow power oscillations by changing the capacitance of the first capacitors in steps.

Consequently, long-distance AC power transmission
15 becomes possible and the transmission capability of minor transmission lines can be improved. Furthermore, the capacity of the compensation current generating means is small, so it is possible to provide an AC transmission system.

Furthermore, in order to achieve the above-mentioned
20 objects, in the present invention, it is possible to cancel out the greater part of the inductance of a transmission line by connecting first capacitors. In this case, resonance phenomena may be generated between the inductance of the transmission line and the capacitors. Moreover, power
25 fluctuations may also occur at the power station (transmitting end) or at the substation or load side

(receiving end). By controlling the output current of the compensation current generating means, the voltage applied to second capacitors is regulated and hence power oscillation in the system is suppressed and the system can be operated at
5 zero equivalent reactance.

Since the first capacitors, which are split and installed in multiple locations on the transmission line, compensate for the reactance of the transmission line from one capacitor to the next capacitor, they have small
10 capacitances. Moreover, since voltage drops can be compensated in a detailed fashion by installing the split capacitors in multiple locations, it is possible to achieve a uniform voltage distribution in the transmission line.

Consequently, long-distance AC power transmission
15 becomes possible and the transmission capability of minor transmission lines can be improved. Furthermore, the capacity of the compensation current generating means is small, so it is possible to provide an AC transmission system.

Furthermore, in order to achieve the above-mentioned
20 objects, in the present invention, it is possible to cancel out the greater part of the inductance of a transmission line by connecting first capacitors. In this case, resonance phenomena may be generated between the inductance of the transmission line and the capacitors. Moreover, power
25 fluctuations may also occur at the power station (transmitting end) or at the substation or load side

(receiving end). By controlling the output current of the compensation current generating means, the voltage applied to the above-mentioned second capacitors is regulated and hence power oscillation in the system is suppressed, and the system
5 can be operated at zero equivalent reactance.

If an overcurrent is generated in the transmission line system, then the inductance of the transmission line has the effect of easing the change in current, but in cases where capacitors are connected to the system in series, this
10 effect is reduced and changes in current can be extreme. By providing bypass circuits that short the two ends of the capacitors, the equivalent inductance of the transmission line is increased in such a manner that no extreme changes in current are produced. Moreover, this also has the action of
15 protecting the capacitors from overvoltages, and the like.

Consequently, long-distance AC power transmission becomes possible and the transmission capability of minor transmission lines can be improved. Furthermore, the capacity of the compensation current generating means is
20 small, so it is possible to provide an AC transmission system.

Furthermore, in order to achieve the above-mentioned objects, in the present invention, it is possible to cancel out the greater part of the inductance of a transmission line by connecting first capacitors. In this case, resonance
25 phenomena may be generated between the inductance of the transmission line and the capacitors. Moreover, power

fluctuations may also occur at the power station
(transmitting end) or at the substation or load side
(receiving end). By controlling the output current of the
compensation current generating means, the voltage applied to
5 the second capacitors is regulated and hence power
oscillation in the system is suppressed, and the system can
be operated at zero equivalent reactance.

If an overcurrent is generated in the transmission
line system, the compensation current generating means is
10 isolated from the system by a shorting bypass circuit, which
has the effect of protecting the compensation current
generating means.

Consequently, long-distance AC power transmission
becomes possible and the transmission capability of minor
15 transmission lines can be improved. Furthermore, the
capacity of the compensation current generating means is
small, so it is possible to provide an AC transmission system.

BRIEF DESCRIPTION OF THE DRAWINGS

20 A more complete appreciation of the present invention
and many of the attendant advantages thereof will be readily
obtained as the same becomes better understood by reference
to the following detailed description when considered in
25 connection with the accompanying drawings, wherein:

FIG.1 is block diagrams showing a DC power transmission system and an AC power transmission system according to the prior art;

FIG.2 shows a characteristic graph of a prior art AC
5 power transmission system;

FIG.3 is a block diagram showing a first embodiment of an AC long-distance power transmission system according to the present invention;

FIG.4 is a block diagram showing an embodiment of a
10 series compensation generator in the system in FIG.3;

FIG.5 is a voltage/current vector diagram to illustrate the operation of the system in FIG.3;

FIG.6 is a voltage/current vector diagram to illustrate the power oscillation suppressing action of the
15 system in FIG.3;

FIG.7 is a voltage/current vector diagram to illustrate the control operation of the series compensation generator in FIG.4;

FIG.8 is a block diagram showing a second embodiment
20 of an AC long-distance power transmission system according to the present invention;

FIG.9 is a block diagram showing a third embodiment of an AC long-distance power transmission system according to the present invention;

FIG.10 is a block diagram showing a fourth embodiment of an AC long-distance power transmission system according to the present invention;

FIG.11 is a block diagram showing a fifth embodiment
5 of an AC long-distance power transmission system according to the present invention;

FIG.12 is a block diagram showing an embodiment of a control system for the series compensation generator according to the present invention;

10 FIG.13 is a graph to illustrate the operation of the system in FIG.12;

FIG.14 is a block diagram showing a further modification of a series compensation generator according to the present invention;

15 FIG.15 is a block diagram showing a sixth embodiment of an AC long-distance power transmission system according to the present invention;

FIG.16 is a block diagram showing an embodiment of a series compensation generator of the system in FIG.15;

20 FIG.17 is a voltage/current vector diagram to illustrate the operation of the system in FIG.15;

FIG.18 is a block diagram showing a seventh embodiment of an AC long-distance power transmission system according to the present invention;

25 FIG.19 is a block diagram showing an embodiment of a series compensation generator of the system in FIG.18;

FIG.20 is a voltage/current vector diagram to illustrate the operation of the system in FIG.18;

FIG.21 is a block diagram showing a further modification of the series compensation generator of the system in FIG.18;

FIG.22 is a voltage/current vector diagram to illustrate the operation of the device in FIG.21;

FIG.23 is a block diagram showing yet a further modification of the series compensation generator of the system in FIG.18;

FIG.24 is a block diagram showing yet a further modification of the series compensation generator of the system in FIG.18;

FIG.25 is a block diagram showing an eighth embodiment of an AC long-distance power transmission system according to the present invention;

FIG.26 is a block diagram showing an embodiment of a series compensation generator of the system in FIG.25;

FIG.27 is a voltage/current vector diagram to illustrate the operation of the system in FIG.25;

FIG.28 is a block diagram showing a further modification of the series compensation generator of the system in FIG.25;

FIG.29 is a block diagram showing a ninth embodiment of an AC long-distance power transmission system according to the present invention;

FIG.30 is a voltage/current vector diagram to illustrate the operation of the system in FIG.29;

FIG.31 is a block diagram showing a tenth embodiment of an AC long-distance power transmission system according to
5 the present invention;

FIG.32 is a block diagram showing an eleventh embodiment of an AC long-distance power transmission system according to the present invention;

FIG.33 is a block diagram showing a twelfth embodiment of an AC long-distance power transmission system according to
10 the present invention;

FIG.34 is a block diagram showing a thirteenth embodiment of an AC long-distance power transmission system according to the present invention;

FIG.35 is a block diagram showing a fourteenth embodiment of an AC long-distance power transmission system according to the present invention;
15

FIG.36 is a block diagram showing a fifteenth embodiment of an AC long-distance power transmission system
20 according to the present invention;

FIG.37 is a block diagram showing a sixteenth embodiment of an AC long-distance power transmission system according to the present invention;

FIG.38 is a block diagram showing an embodiment of a
25 static var generator of the system in FIG.37;

FIG.39 is a voltage/current vector diagram to illustrate the operation of the system in FIG.37;

FIG.40 is a voltage/current vector diagram to illustrate the power oscillation suppressing action of the
5 system in FIG.37;

FIG.41 is a block diagram showing a further modification of the static var generator of the system in FIG.37;

FIG.42 is a block diagram showing yet a further
10 modification of the static var generator of the system in FIG.37;

FIG.43 is a block diagram showing a seventeenth embodiment of an AC long-distance power transmission system according to the present invention;

15 FIG.44 is a block diagram showing an eighteenth embodiment of an AC long-distance power transmission system according to the present invention;

FIG.45 is a voltage/current vector diagram to illustrate the operation of the system in FIG.44;

20 FIG.46 is a block diagram showing a nineteenth embodiment of an AC long-distance power transmission system according to the present invention;

FIG.47 is a block diagram showing a twentieth embodiment of an AC long-distance power transmission system
25 according to the present invention;

FIG.48 is a voltage/current diagram to illustrate the operation of the system in FIG.47;

FIG.49 is a block diagram showing a twenty-first embodiment of an AC long-distance power transmission system
5 according to the present invention;

FIG.50 is a voltage/current diagram to illustrate the operation of the system in FIG.49;

FIG.51 is a block diagram showing a twenty-second embodiment of an AC long-distance power transmission system
10 according to the present invention;

FIG.52 is a block diagram of an AC power transmission system according to a twenty-third embodiment;

FIG.53 is an equivalent circuit diagram in a case where no compensation voltage generator is provided;

15 FIG.54 is a power vector diagram for the equivalent circuit in FIG.53;

FIG.55 is an equivalent circuit diagram in a case where a compensation voltage generator is provided;

20 FIG.56 is a power vector diagram in a steady state of the equivalent circuit in FIG.55;

FIG.57 is a power vector diagram in a case where a power fluctuation is generated in the equivalent circuit in FIG.55;

FIG.58 is a practical block diagram of an AC power
25 transmission system according to a twenty-third embodiment of the present invention;

FIG.59 is a block diagram of a compensation control circuit according to the twenty-third embodiment of the present invention;

FIG.60 is a diagram of the correlation between system
5 current I and compensating voltage V_p in an AC power transmission system;

FIG.61 is a waveform diagram of PWM control in an AC power transmission system;

FIG.62 is a block diagram of an AC power transmission
10 system according to a twenty-fourth embodiment of the present invention;

FIG.63 is a power vector diagram of a steady state according to the twenty-fourth embodiment of the present invention;

FIG.64 is a power vector diagram in a case where a
15 power fluctuation arises in the twenty-fourth embodiment of the present invention;

FIG.65 is a practical block diagram of an AC power transmission system according to the twenty-fourth embodiment
20 of the present invention;

FIG.66 is a waveform diagram of PWM control in an AC power transmission system according to the twenty-fourth embodiment of the present invention;

FIG.67 is a further block diagram of an AC power
25 transmission system according to the twenty-fourth embodiment of the present invention;

FIG.68 is a block diagram of an AC power transmission system according to a twenty-fifth embodiment of the present invention;

FIG.69 is a block diagram of a modification of an AC power transmission system according to the twenty-fifth embodiment of the present invention;

FIG.70 is a block diagram of an AC power transmission system according to a twenty-sixth embodiment of the present invention;

FIG.71 is a block diagram of an AC power transmission system according to a twenty-seventh embodiment of the present invention;

FIG.72 is a further block diagram of an AC power transmission system according to the twenty-seventh embodiment of the present invention;

FIG.73 is a block diagram of an AC power transmission system according to a twenty-eighth embodiment of the present invention;

FIG.74 is a block diagram of an AC power transmission system according to a twenty-ninth embodiment of the present invention;

FIG.75 is a block diagram of a compensation control circuit according to the twenty-ninth embodiment of the present invention;

FIG.76 is a power vector diagram of a steady state according to the twenty-ninth embodiment of the present invention;

FIG.77 is a power vector diagram of a case where a power fluctuation occurs according to the twenty-ninth embodiment of the present invention;

FIG.78 is a block diagram of an AC power transmission system according to a thirtieth embodiment of the present invention;

FIG.79 is a block diagram of an AC power transmission system according to a thirty-first embodiment of the present invention;

FIG.80 is a block diagram of an AC power transmission system according to a thirty-second embodiment of the present invention;

FIG.81 is a block diagram of an AC power transmission system according to a thirty-third embodiment of the present invention; and

FIG.82 is a block diagram of a power transmission system according to a thirty-fourth embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to the drawings, wherein like reference numerals designate identical or corresponding parts

throughout the several views, and more particularly to FIG.3 thereof, one embodiment of the present invention will be described.

FIG.3 is a block diagram showing a first embodiment of an AC power transmission system according to the present invention.

In the diagram, **G** is a generator, **SS1 ~ SS5** are substations, **LOAD1 ~ LOAD4** are loads, **SCG1** and **SCG2** are series compensation generators, and **x1 ~ x4** are transmission line reactance values.

The electrical power generated by generator **G** is transmitted over a long distance, via multiple substations **SS1 → SS2 → SS4 → SS5**, to a load, **LOAD4**, which is a bulk consumer.

Series compensation generator **SCG1** generates a compensating voltage which cancels out reactance **x2** of the transmission line, thereby reducing the equivalent reactance and hence improving the transmission capability in that section. Similarly, series compensation generator **SCG2** generates a compensating voltage which cancels out reactance **x3** of the transmission line, thereby reducing the equivalent reactance and hence improving the transmission capability in that section.

Moreover, if power oscillation occurs in the transmission line, the series compensation generator

generates a voltage in such a manner that it controls this oscillation, and hence power oscillations are suppressed.

FIG.4 is a block diagram showing an embodiment of a series compensation generator in the system in FIG.3;

5 In the diagram: **UVW** is a three-phase AC transmission line; **L** is the inductance of the transmission line; **Tr** is a series transformer; **VSI** is a voltage source PWM control inverter; **Ed** is a DC voltage source; **CT** is a current detector; **PT** is a voltage detector; **DPD** is a power detector;
 10 **DPCNT** is a power fluctuation suppression control circuit; **AVR** is a voltage control circuit; and **PWMC** is a pulse width modulation (PWM) control circuit.

The primary side of series transformer **Tr** is connected in series to each of the phases of the transmission line, and
 15 the secondary side of transformer **Tr** is connected to voltage source inverter **VSI** for pulse-width modulation control (PWM control).

Voltage source inverter **VSI** is wired to a three-phase bridge, and an AC voltage **Vo** proportional to voltage command
 20 value **Vor** is generated by PWM control. **S1 ~ S6** are self-turn-off devices, such as GTOs, and a diode is connected inversely in parallel to each of these devices. In the steady state, compensating voltage **Vo** generates a component that is orthogonal to current **I** flowing in the transmission
 25 line, thereby regulating the equivalent reactance of the transmission line. **Vob** is a command value (a reference

value), and by regulating this value, it is possible to regulate reactance X of the transmission line in such a manner that it becomes substantially zero.

On the other hand, if power oscillation occurs in the transmission line, then suppression control is carried out in the following manner.

Namely, the three-phase AC voltage and current of the transmission line is detected by current detector **CT** and voltage detector **PT**, and active power **P** and reactive power **Q** are determined using these values. If there is power oscillation, then these **P** and **Q** values will change, and hence the corresponding amounts of change ΔP and ΔQ are derived and supplied to the subsequent power fluctuation suppression control circuit **DPCNT**. Compensating voltage **V_{oq}** for the component that is orthogonal to current **I** flowing in the transmission line is regulated in accordance with change in active power ΔP , and furthermore, compensating voltage **V_{op}** (omitted from the diagram) for the component having the same phase as (or the component having the opposite phase to) current **I** is regulated in accordance with change in reactive power ΔQ . In the diagram, **V_{oa}** indicates the combined compensating voltage command. When power oscillation occurs, compensating voltage **V_{oa}** changes in response to ΔP and ΔQ , thereby suppressing the power oscillation.

DC voltage source **Ed** may be provided as a separate

power source, but here, a DC voltage source is already created integrally. In other words, a DC smoothing capacitor is provided as the DC voltage source, and voltage **Ed** thereof is controlled to a uniform value. Firstly, DC command value **Edr** and DC voltage detection value **Ed** are compared, and the deviation between them is amplified by DC voltage control circuit **AVR**. DC voltage **Ed** is then controlled by means of **AVR** output signal **Vo1** (omitted from the diagram) applying a compensating voltage command for the same-phase component (or opposite-phase component) with respect to current **I** flowing in the transmission line.

Below, the respective operations involved are described using voltage and current vector diagrams for the AC side. FIG.5 shows transmission line equivalent circuit diagrams and voltage/current vector diagrams for the purpose of describing the steady state operation of the system in FIG.3. (a) is an equivalent circuit of a transmission line having no series compensation generator; (b) is a voltage/current vector diagram of the equivalent circuit in (a); (c) is an equivalent circuit of a case where a series compensation generator is inserted into the transmission line; and (d) is a voltage/current vector diagram of the equivalent circuit in (c).

In the diagram, **Vs** is the transmitting-side voltage; **Vr** is the receiving-side voltage; **L** is the inductance of the transmission line; **I** is the current; **Vo** is the compensating

voltage; and ω is the angular frequency of the power source. The resistance of the transmission line is sufficiently small to be ignored.

Essentially, since **Es**, **Er**, **Vs**, **Vr**, **I**, **Vo**, and the like, are vector quantities, then vector notation such as **Es**, **Er**, **Vs**, **Vr**, **I**, **Vo**, and the like, should be almost used.

FIG.5(b) is a vector diagram of a case where no series compensation generator is provided, and here, when current **I** is flowing, this produces a voltage drop of $j\omega L \cdot I$ and causes phase difference θ between transmission voltages **Vs** and **Vr** to increase. If current **I** becomes larger, then this phase difference θ will also increase, and if it exceeds 90° , it becomes impossible to transmit active power **P** above this level. In a generator, this means that the synchronising speed is not maintained and step-out occurs. In a long-distance transmission line, inductance **L** is large and so this limit is quickly reached.

On the other hand, FIG.5(d) shows a vector diagram of a case where a series compensation generator according to the present invention is introduced, and here, voltage drop $j\omega L \cdot I$ due to inductance **L** of the transmission line is cancelled out by generating compensating voltage **Vo** for a component substantially orthogonal to current **I** flowing in the transmission line, thereby making it possible to reduce the equivalent reactance of the transmission line. Consequently,

phase difference θ between transmission voltage $\mathbf{V_s}$ and reception voltage $\mathbf{V_r}$ is restricted, and hence the transmission capability of the line can be increased.

Assuming that $\mathbf{V_o} = -j\omega\mathbf{L}\cdot\mathbf{I}$, then transmission at equivalent
 5 reactance $\mathbf{X} = 0$ becomes possible. In this case, it is possible to achieve matching values for $\mathbf{V_r}$ and $\mathbf{V_s}$. In zero-reactance transmission, no phase difference θ is produced between $\mathbf{V_s}$ and $\mathbf{V_r}$, even if current $\mathbf{I}$ increases, thus yielding a system that is resistant to power oscillations. However,
 10 in the series compensation generator in FIG.4, it is necessary to increase compensating voltage $\mathbf{V_o}$ in proportion to current $\mathbf{I}$ of the transmission line.

FIG.6 shows equivalent circuits of a transmission line and voltage/current vector diagrams for the purpose of
 15 describing the power oscillation suppressing operation of the system in FIG.3. The reference numerals in this diagram are based on those in FIG.5.

FIG.6(b) is a voltage/current vector diagram of a steady state, wherein a compensating voltage of $\mathbf{V_o} = -j\omega\mathbf{L}\cdot\mathbf{I}$
 20 is generated, and equivalent reactance $\mathbf{X}$ is substantially zero.

FIG.6(c) is an operational vector diagram of a case where, for some reason, the voltage phase on the transmission side has changed and a power oscillation has occurred. In
 25 other words, in a case where transmission voltage $\mathbf{V_s}$ has

changed to $\mathbf{Vs'}$, it is assumed that a voltage differential of $\mathbf{Vs' - Vr}$ arises, and current $\mathbf{I}$ increases to $\mathbf{I'}$. When the power fluctuation is detected at the receiving side, current component $\Delta\mathbf{Ip}$ in the same phase as $\mathbf{Vr}$ is taken as the
 5 increase in the active current component, and in order to suppress this, compensating voltage $\Delta\mathbf{Voq}$ that is orthogonal to current $\mathbf{I}$ is generated in the opposite direction to original voltage $\mathbf{Vo}$. Furthermore, current component $\Delta\mathbf{Iq}$ that is orthogonal to $\mathbf{Vr}$ is taken as the increase in the reactive
 10 current component, and in order to suppress this, compensating voltage $\Delta\mathbf{Vop}$ of opposite phase to current $\mathbf{I}$ is generated. Thereby, compensating voltage $\mathbf{Vo}$ changes to $\mathbf{Vo'}$. Consequently, voltage $\mathbf{j\omega L \cdot I}$ applied to transmission line $\mathbf{L}$ becomes voltage differential $\mathbf{Vs' - Vr - Vo'}$, which is the
 15 same as the previous value, and current $\mathbf{I}$ returns to the original current value. In other words, it is possible to suppress power oscillations by regulating compensating voltage $\mathbf{Vo}$ in accordance with changes in $\mathbf{Vs}$ (or $\mathbf{Vr}$).

FIG.7 shows an equivalent circuit of a transmission
 20 line and voltage/current vector diagrams for the purpose of describing the control operation of the series compensation generator in FIG.4. The reference numerals in this diagram are based on those in FIG.5.

FIG.7(b) is a voltage/current vector diagram of a
 25 certain steady state. In the device in FIG.4, if DC voltage

Ed is smaller than command value **Edr**, then deviation ϵ is a positive value and **Volr** is increased. FIG.7(c) is a vector diagram illustrating this case, wherein compensating voltage **Vop** for the component of the same phase as current **I** is generated by command value **Volr**. Consequently, active power that is proportional to $\mathbf{I} \times \mathbf{Vop}$ is supplied to voltage source inverter **VSI**, thereby raising DC voltage **Ed**. If, conversely, **Edr** < **Ed**, then the direction of **Vop** is reversed and active power is transmitted from inverter **VSI** into the transmission line, thereby reducing DC voltage **Ed**. In this way, it is possible to guarantee the DC voltage source of the voltage source inverter, in an integral fashion. Naturally, a voltage source inverter may also be constituted by introducing a separate power source.

FIG.8 shows a block diagram and voltage/current vector diagrams illustrating a second embodiment of an AC long-distance power transmission system according to the present invention. In the diagram, **LOAD** is a load, **V1** ~ **V4** are voltages at different substations, **x1** ~ **x3** are the reactance values of transmission lines, **Vo** is the voltage generated by a series compensation generator, and **I** is the transmission current.

In the vector diagram in FIG.8(b), the series compensation generator generates compensating voltage **Vo** such that voltage drop $\mathbf{jX2 \cdot I}$ due to reactance **x2** is cancelled out.

Therefore, **V2** and **V3** become equal, and when current **I** flows, **V2 = V3** lags slightly behind voltage **V1**, and **V4** lags slightly further behind.

In the vector diagram in FIG.8(c), **V1** and **V3** become
 5 equal by means of the series compensation generator
 generating compensating voltage $V_o = -j(X_1 + X_2)$. In this case,
 if **X1 = X3**, then **V2 = V4**, forming a vector slightly lagging
 behind **V1 = V3**, and thereby mitigating the voltage variations
 in the four substations.

10 Moreover, in the vector diagram in FIG.8(d), the
 compensating voltage is taken as $V_o = -(X_1 + X_2 + X_3) \cdot I$, and
 hence **V1** and **V4** can be made equal vectors. In this case, the
V3 vector is slightly leading, and the **V2** voltage vector lags
 slightly behind **V1 = V4**.

15 In this way, it is possible to compensate for
 reactance in adjoining transmission lines, and hence the
 transmission capability can be raised by providing the
 minimum required number of series compensation generators.

FIG.9 is a block diagram showing a third embodiment of
 20 an AC long-distance power transmission system according to
 the present invention.

In the diagram, **G** is a generator, **SS1 ~ SS5** are
 substations, **LOAD1 ~ LOAD4** are loads, **SCG1 ~ SCG4** are series
 compensation generators, and **X1 ~ X4** are the reactance values
 25 of transmission lines.

If long-distance AC power transmission is being carried out through multiple substations, then series compensation generators **SCG1** ~ **SCG4** are provided on every transmission line corresponding to the transmission path. By
5 this means, the equivalent reactance of the transmission path can be reduced to substantially zero, reactance effects which have conventionally presented problems can be eliminated completely, and power transmission that is equivalent to DC transmission can be achieved. Moreover, the capacities of
10 the series compensation generators provided are merely 10%, approximately, of the capacities of converters used in DC power transmission, and hence an economical system can be achieved.

Moreover, in DC power transmission, it is extremely
15 difficult to extract power midway along a transmission line, but in the AC long-distance power transmission system according to the present invention, power can be extracted freely from any substation in the transmission path, or alternatively, power from another generator can be received
20 freely at any substation.

Moreover, in zero-reactance power transmission, the transmission capability is dramatically improved and a system that is resistant to external power disturbances can be achieved; even if external disturbances enter into the system,
25 causing power oscillations, those oscillations can be suppressed rapidly.

FIG.10 is a block diagram showing a fourth embodiment of an AC long-distance power transmission system according to the present invention.

In the diagram, **G** is a generator, **SS1 ~ SS5** are substations, **LOAD1 ~ LOAD4** are loads, **SCG1 ~ SCG2** are series compensation generators, and **%XI1 ~ %XI5** are the percentage reactance values of transmission lines.

In the drawing, in a case where the relationship between the percentage reactance values of each transmission line is such that **%XI3 > %XI1 > %XI2 > %XI5 > %XI4**, firstly, series compensation generator **SCG1** is installed such that it compensates for **%XI3**, and secondly, series compensation generator **SCG2** is installed such that it compensates for **%XI1**. In cases involving long-distance power transmission from generator **G** to bulk consumer **LOAD4**, the voltage drop due to reactance in the whole system is reduced and the transmission capability is significantly increased, by compensating firstly for the sections of the transmission path having a high percentage reactance. Moreover, it is also possible thereby to achieve a maximum effect using a minimum requirement of compensation generators.

FIG.11 is a block diagram showing a fifth embodiment of an AC long-distance power transmission system according to the present invention. In the diagram, **G** is a generator, **SS1 ~ SS5** are substations, **LOAD1 ~ LOAD4** are loads, **SCG1** and **SCG2** are series compensation generators, **X1 ~ X5** are the reactance

values of transmission lines, and **P1 ~ P5** are the power values flowing in each transmission line.

In the case of long-distance power transmission from generator **G** to bulk consumer **LOAD4**, the product
 5 (multiplication) of the reactance of each transmission line and the power flowing in that line is found, and the lines producing high values are selected for installation of a series compensation generator. In FIG.9, in a case where
 $P3 \cdot X3 > P1 \cdot X1 > P2 \cdot X2 > P5 \cdot X5 > P4 \cdot X4$, firstly, series
 10 compensation generator **SCG1** is installed in order to reduce transmission line reactance **X3**, and secondly, series compensation generator **SCG2** is installed in order to reduce transmission line reactance **X1**. Accordingly, the
 transmission capability of transmission lines having high
 15 power flow **P** and high transmission line reactance **X** is increased, and hence the transmission capability of the whole transmission path can be improved significantly. Moreover, the minimum required number of series compensation generators is used, thereby allowing economical AC long-distance power
 20 transmission to be achieved.

FIG.12 is a block diagram showing an embodiment of a control system for a series compensation generator according to the present invention.

In the diagram, **UVW** is a three-phase AC power
 25 transmission line, **L** is the inductance of the transmission line, **Tr** is a series transformer, **VSI** is a voltage source PWM

control inverter, **Ed** is a DC voltage source, **CT** is a current detector, **PT** is a voltage detector, **PD** is a power detector, **FX** is a function generator, **VREF** is a compensating voltage setting device, and **VCNT** is a voltage control circuit.

5 The primary side of series transformer **Tr** is connected in series to each phase of the transmission line respectively, and the secondary side thereof is connected to voltage source inverter **VSI** for pulse width modulation control (PWM control).

 Voltage source inverter **VSI** is connected to a three-
10 phase bridge, and generates AC voltage **Vo** proportional to command value **Vob**, in accordance with voltage control circuit **VCNT**. **S1 ~ S6** are self-turn-off devices, such as GTOs, and a diode is connected inversely in parallel to each of these devices. In a steady state, compensating voltage **Vo**
15 generates a component that is orthogonal to current **I** flowing in the transmission line, thereby regulating the equivalent reactance of the transmission line.

 Active power **P** is determined using the voltage and current values detected by voltage detector **PT** and current
20 detector **CT**. Function generator **FX** supplies the relationship between active power **P** and equivalent reactance setting value **Xr** for the transmission line, and it has, for example, the characteristics shown in FIG.13.

 In FIG.13, equivalent reactance command **Xr** is changed
25 as indicated by the solid line with respect to the absolute value of active power **P**. In other words, when active power **P**

is small, then equivalent reactance command **Xr** is set to a large value, and this set value **Xr** is reduced as active power **P** increases.

Compensating voltage setting device **VREF** determines
 5 command value **Vob** of compensating voltage **Vo** output from the series compensation generator, in accordance with above-mentioned equivalent reactance setting **Xr**. For example, if the current is **I** and the reactance of the transmission line is **XL**, then voltage command value **Vob** will be **Vob = (XL-Xr) · I**.
 10 Consequently, the equivalent reactance of the transmission line after compensation will be

$$\mathbf{Xr} = \mathbf{XL} - \mathbf{Vob/I}$$

which can be matched to the **Xr** set value supplied by function generator **FX**.

15 Thus, by changing equivalent reactance **Xr** of a transmission line in accordance with active power **P** flowing in the transmission line, it is possible to create a transmission line which is not affected by power tides. Consequently, it is possible to maintain substantially
 20 uniform values for the size of the transmitting-side voltage and the receiving-side voltage, and the phase difference between them, regardless of the magnitude of tidal currents, and hence a stable system voltage can be obtained.

Power command value **Vob** is the same as command value
 25 **Vob** shown in FIG.4, and it is added to power oscillation suppressing signal **Voa**, and the like, to give actual

compensating voltage command value **Vor**. In FIG.13, the broken line indicates stepped changes in equivalent reactance setting **Xr** in response to active power **P**, which allow the number of settings for **Xr** to be reduced, thereby enabling
 5 substantially the same advantages as a system based on the solid line of the graph to be obtained, by means of a simple method.

FIG.14 is a block diagram showing a further modification of the series compensation generator according
 10 to the present invention.

In the diagram, **UVW** is a three-phase AC power transmission line, **L** is the inductance of the transmission line, **Tr** is a series transformer, **VSI** is a voltage source PWM control inverter, **Ed** is a DC voltage source, **SWu**, **SWv** and **SWw**
 15 are bypass circuits, and **OCT** is an overcurrent detector.

U-phase bypass circuit **SWu** is constituted by two thyristors connected inversely in parallel, and it is connected in parallel to the primary side of series transformer **Tr**. The V-phase and W-phase bypass circuits are
 20 also constituted in a similar manner.

If an overcurrent flows in the transmission line, due to an earthing fault, or the like, then this overcurrent is detected by overcurrent detector **OCT**, and firstly, the output voltage of voltage source inverter **VSI** is controlled to zero.
 25 Thereupon, a turn-on signal is supplied to the thyristors in above-mentioned bypass circuits **SWu**, **SWv**, **SWw**, and the

overcurrent flowing in the transmission line flows through the bypass circuits. In this manner, the equivalent reactance of the transmission line is increased, any increase in current is suppressed, and furthermore, the series compensation generators can be protected from the overcurrent. Moreover, by opening the bypass circuits at the moment that the overcurrent has ended, it is possible to suppress power oscillations rapidly by operating the series compensation generators.

The bypass circuits also have a similar effect if they are installed on the secondary side of the series transformer.

FIG.15 is a block diagram showing a sixth embodiment of an AC long-distance power transmission system according to the present invention.

In the diagram, **G** is a generator, **SS1 ~ SS5** are substations, **LOAD1 ~ LOAD4** are loads, **C1** and **C2** are series capacitors, **CVG1** and **CVG2** are compensation voltage generators, and **X1 ~ X4** are transmission line reactance values.

The power generated by generator **G** is transmitted over a long distance, via multiple substations **SS1 → SS2 → SS3 → SS4 → SS5**, to load **LOAD4**, which is a bulk consumer.

Series capacitor **C1** and compensation voltage generator **CVG1** generate a compensating voltage which cancels out transmission line reactance **X2**, thereby reducing the equivalent reactance and hence increasing the transmission

capability of that section. Similarly, series capacitor **C2** and compensation voltage generator **CVG2** generate a compensating voltage which cancels out transmission line reactance **X3**, thereby reducing the equivalent reactance and hence increasing the transmission capability of that section. Furthermore, if power oscillation arises in the transmission line, then compensating voltages are generated by compensation voltage generators **CVG1** and **CVG2** in order to regulate this, and hence power oscillations are suppressed. In other words, a first series compensation generator is constituted by series capacitor **C1** and compensation voltage generator **CVG1**, and a second series compensation generator is constituted by series capacitor **C2** and compensation voltage generator **CVG2**.

FIG.16 is a block diagram showing an embodiment of a series compensation generator of the system in FIG.15.

In the diagram, **UVW** is a three-phase AC power transmission line, **L** is the inductance of the transmission line, **CAP** is a series capacitor, **Tr** is a series transformer, **VSI** is a voltage source PWM control inverter, **Ed** is a DC voltage source, **SWu**, **SWv** and **SWw** are bypass circuits, and **OCT** is an overcurrent detector.

Series capacitor **CAP** acts in such a manner as to cancel out inductance **L** of the transmission line.

Furthermore, a compensation voltage generator, which regulates the reactance of the transmission line and

suppresses and controls power oscillations in the transmission line, is constituted by series transformer **Tr** and voltage source self-commutating inverter **VSI**. When compared with the system illustrated in FIG.4, voltage source inverter **VSI** has only a small capacity. Therefore, more economical AC long-distance power transmission can be achieved.

If an overcurrent flows in the transmission line, bypass circuits **SWu**, **SWv** and **SWw** are set to a conducting state, such that the overcurrent flows through them. In this way, the above-mentioned compensation voltage generators can be protected from overcurrents.

FIG.17 shows equivalent circuits of transmission lines and corresponding voltage/current vector diagrams for the purpose of describing the operation of the system in FIG.15. In the diagram, **Vs** is the transmitting-side voltage, **Vr** is the receiving-side voltage, **L** is the transmission line inductance, **CAP** is a series capacitor, **I** is the current, **Vo** is the compensating voltage, and ω is the angular frequency of the power source. Here, the resistance of the transmission line is sufficiently small to be ignored.

In FIG.17, (a) and (b) are, respectively, an equivalent circuit and a voltage/current vector diagram of a transmission line which does not contain a series compensation generator, and (c) and (d) are, respectively, an equivalent circuit and a voltage/current vector diagram of a

transmission line which contains a series compensation generator.

In the vector diagram in FIG.17(b), when current $\mathbf{I}$ flows in the transmission line, a voltage drop of $\mathbf{j}\omega\mathbf{L}\cdot\mathbf{I}$ is produced and phase difference θ appears between transmitting-side voltage $\mathbf{Vs}$ and receiving-side voltage $\mathbf{Vr}$. Furthermore, if current $\mathbf{I}$ lags behind voltage $\mathbf{Vr}$, then voltage $\mathbf{Vr}$ will be smaller than voltage $\mathbf{Vs}$.

In the vector diagram in FIG.17(d), when current $\mathbf{I}$ flows in the transmission line, a voltage drop of $\mathbf{j}\omega\mathbf{L}\cdot\mathbf{I}$ is produced by the inductance of the transmission line, and a voltage drop of $\mathbf{I}/(\mathbf{j}\omega\mathbf{C})$ is generated by series capacitor $\mathbf{CAP}$. These two factors act in opposing directions, and hence the equivalent reactance of the transmission line is reduced. Moreover, by means of the compensation voltage generator generating compensating voltage $\mathbf{Vo}$, the difference between transmitting-side voltage $\mathbf{Vs}$ and receiving-side voltage $\mathbf{Vr}$ becomes smaller, as shown in the diagram, and phase difference θ between them also becomes smaller. Moreover, the magnitudes of voltage $\mathbf{Vr}$ and voltage $\mathbf{Vs}$ are substantially the same.

If power oscillation occurs in the transmission line, then the compensation voltage generator generates a compensating voltage, thereby suppressing the oscillation.

In this system, the voltage generated by the compensation voltage generator is only small, so the capacity of the power converter (voltage source self-commutating inverter, or the like) used for this device can be reduced.

5 FIG.18 is a block diagram showing a seventh embodiment of an AC long-distance power transmission system according to the present invention.

In the diagram, **G** is a generator, **SS1 ~ SS5** are substations, **LOAD1 ~ LOAD4** are loads, **C1** and **C2** are series
10 capacitors, **CIG1** and **CIG2** are compensation current generators, and **X1 ~ X4** are transmission line reactance values.

The power generated by generator **G** is transmitted over a long distance, via multiple substations **SS1 → SS2 → SS3 → SS4 → SS5**, to load **LOAD4**, which is a bulk consumer.

15 Series capacitor **C1** and compensation current generator **CIG1** generate a compensating voltage which cancels out transmission line reactance **X2**, thereby reducing the equivalent reactance and hence increasing the transmission capability of that section. Similarly, series capacitor **C2**
20 and compensation current generator **CIG2** generate a compensating voltage which cancels out transmission line reactance **X3**, thereby reducing the equivalent reactance and hence increasing the transmission capability of that section. Furthermore, if power oscillation occurs in the transmission
25 line, compensating currents are generated by compensation

current generators **CIG1** and **CIG2** in order to regulate this, and hence power oscillations are suppressed. In other words, a first series compensation generator is constituted by series capacitor **C1** and compensation current generator **CIG1** and a second series compensation generator is constituted by series capacitor **C2** and compensation current generator **CIG2**.

FIG.19 is a block diagram showing an embodiment of a series compensation generator of the system in FIG.16.

In the diagram, **UVW** is a three-phase AC power transmission line, **L** is the inductance of the transmission line, **CAP** is a series capacitor, **Tr** is a series transformer, **CSI** is a current source PWM control inverter, **DCL** is a DC current source, **Cf** is a filter capacitor, **CT** is a current detector, **PT** is a voltage detector, **DPD** is a power detecting circuit, **DPCNT** is a power fluctuation suppressing circuit, **ACR** is a current control circuit, and **PWMC** is a PWM control circuit.

Series capacitor **CAP** acts in such a manner that it cancels out inductance **L** of the transmission line respectively. A compensation current generator is constituted by series transformer **Tr** and current source self-commutating inverter **CSI**, which regulates the transmission line reactance and suppresses and controls power oscillations in the transmission line.

The primary side of series transformer **Tr** is connected in parallel to each phase of series capacitor **CAP**

respectively, and the secondary side thereof is connected to current source inverter **CSI** for pulse width modulation control (PWM control).

Current source inverter **CSI** is constituted by self-
 5 turn-off devices **S1** ~ **S6**, such as non-inverting GTOs, or the like, and is constituted as a three-phase bridge. Current source inverter **CSI** supplies AC current **I_c** proportional to current command value **I_{cr}** to series capacitor **CAP**, by means of PWM control. Filter capacitor **C_f** absorbs the higher
 10 harmonic wave current generated by PWM control. Applied voltage **V_o** for series capacitor **CAP** is determined by the sum of current **I** flowing in the transmission line and above-mentioned compensating current **I_c**, and it forms a compensating voltage for the series compensation generator.
 15 In a steady state, this compensating voltage **V_o** generates a component that is orthogonal to current **I** flowing in the transmission line, thereby regulating the equivalent reactance of the transmission line.

I_{cb} is a command value for the steady state
 20 compensating current of the compensation current generator, and by regulating this value, it is possible to regulate reactance **X** of the transmission line in such a manner that it becomes substantially zero.

On the other hand, if power oscillation arises in the
 25 transmission line, it is controlled and suppressed in the following manner.

Specifically, the three-phase AC voltage and current in the transmission line is detected by current detector **CT** and voltage detector **PT**, and active power **P** and reactive power **Q** are determined using these values. If power oscillation occurs, the values of **P** and **Q** change, and consequently amounts of change ΔP and ΔQ are derived and supplied to the subsequent power fluctuation suppression control circuit **DPCNT**. Compensating current (reactive) **I_{cq}** of the component in the same phase as (or the opposite phase to) current **I** flowing in the transmission line is regulated in accordance with active power change ΔP , and compensating current (active) **I_{cp}** of the component orthogonal to current **I** is regulated in accordance with reactive power change ΔQ . In the diagram, **I_{ca}** indicates the combined compensating voltage command. If power oscillation occurs, then compensating voltage **I_{ca}** is changed in accordance with ΔP and ΔQ , thereby suppressing the power oscillation.

DC current source **I_d** may be provided separately, but here, it is created integrally. In other words, DC reactor **DCL** is prepared as a DC current source, and current **I_d** thereof is controlled such that it maintains a uniform value (constant value). Firstly, DC command value **I_{dr}** and DC current detection value **I_d** are compared, and that deviation is amplified by DC current control circuit **ACR**. Output signal **I_{clr}** from **ACR** supplies a compensating current command

for the component orthogonal to current **I** flowing in the transmission line (the component having the same phase or opposite phase with respect to voltage **V_l** applied to series capacitor **CAP** : active component), thereby controlling DC
 5 current **I_d**.

FIG.20 is an equivalent circuit of a transmission line and a corresponding voltage/current vector diagram for the purpose of describing the operation of the system in FIG.18.

In the diagram, **V_s** is the transmitting-side voltage,
 10 **V_r** is the receiving-side voltage, **L** is the inductance of the transmission line, **CAP** is a series capacitor, **I** is the transmission current, **V_o** is the applied voltage (compensating voltage) of series capacitor **CAP**, **I_c** is the compensating current, and ω is the angular frequency of the power source.
 15 The resistance of the transmission line is sufficiently small to be ignored.

In the vector diagram in FIG.20(b), when current **I** flows, this produces a voltage drop of $j\omega L \cdot I$ due to inductance **L** of the transmission line. Furthermore, by
 20 supplying compensating current **I_c** of the same phase component as transmission current **I** from the compensation current generator to series capacitor **CAP**, a voltage of **V_o** = $(I + I_c) / (j\omega C)$ is applied. These two factors act in opposing directions, and hence the equivalent reactance of the
 25 transmission line is reduced. By regulating compensating

current $\mathbf{I_c}$ such that $\mathbf{V_o} = -j\omega\mathbf{L}\cdot\mathbf{I}$, it is possible to reduce equivalent reactance $\mathbf{X}$ of the transmission line substantially to zero, thereby enabling matching values to be achieved for transmitting-side voltage $\mathbf{V_s}$ and receiving-side voltage $\mathbf{V_r}$,
 5 as shown in the vector diagram in FIG.20(b).

If power oscillation arises in the transmission line, this oscillation is suppressed by means of the compensation current generator generating compensating current $\mathbf{I_c}$.

In this system, by making transmission current $\mathbf{I}$ flow
 10 through series capacitor $\mathbf{CAP}$, and cancelling out the greater part of inductance $\mathbf{L}$ of the transmission line by means of this series capacitor $\mathbf{CAP}$, steady state current $\mathbf{I_c}$ generated by the compensation current generator will only be small, and the capacity of the power converter (current source self-
 15 commutating inverter, or the like) used for this can be reduced.

Moreover, even if an overcurrent flows in the transmission line, due to an earthing fault, or the like, since almost all of this overcurrent will flow through the
 20 series capacitor, it will have little effect on the compensation current generator.

FIG.21 is a block diagram showing a further modification of the series compensation generator of the system in FIG.18;

25 In the diagram, $\mathbf{UVW}$ is a three-phase AC power transmission line, $\mathbf{L}$ is the inductance of the transmission

line, **CAP** is a series capacitor, **Tr** is a series transformer, **LCI** is an externally commutated inverter, **DCL** is a DC current source, **CT** is a current detector, **PT** is a voltage detector, **DPD** is a power detecting circuit, **DPCNT** is a power fluctuation suppressing circuit, **K** is a proportional element, **ACR** is a current control circuit, and **PHC** is a phase control circuit.

Series capacitor **CAP** acts in such a manner that it cancels out inductance **L** of the transmission line.

Furthermore, a compensation current generator is constituted by series transformer **Tr** and externally commutated inverter **LCI**, which regulates the reactance of the transmission line and suppresses and controls power oscillations in the transmission line.

The primary side of series transformer **Tr** is connected in parallel to each phase of series capacitor **CAP**, and the secondary side thereof is connected to externally commutated inverter **LCI**.

Externally commutated inverter **LCI** is constituted by six thyristors **T1 ~ T6**, and is connected to a three-phase bridge. This externally commutated inverter **LCI** performs natural commutation by utilising the applied voltage of series capacitor **CAP**, and it supplies required compensating current **Ic** to series capacitor **CAP** by regulating the magnitude of DC current **Id**. In FIG.21, since the direction of compensating current **Ic** is reversed, applied voltage **Vo** to

series capacitor **CAP** is determined by the current difference between current **I** flowing in the transmission line and above-mentioned compensating current **I_c**, and this forms the compensating voltage of the series compensation generator.

- 5 In a steady state, this compensating voltage **V_o** generates a component orthogonal to current **I** flowing in the transmission line, thereby regulating the equivalent reactance of the transmission line.

I_{cb} is a command value for the steady state compensating current of the compensation current generator, and by regulating this value, it is possible to regulate reactance **X** of the transmission line such that it becomes substantially zero.

DC current source **I_d** may be provided separately, but
 15 here a DC current source is created integrally. In other words, DC reactor **DCL** is prepared as a DC current source, and current **I_d** therefrom is controlled such that it maintains a uniform value. Firstly, DC command value **I_{dr}** and DC voltage detection value **I_d** are compared, and the deviation between
 20 them is amplified by DC current control circuit **ACR**. **ACR** output signal **v*** (in some cases, this becomes phase control input signal **v***) forms the phase control input signal for the externally commutated inverter, and it controls turning-on control angle α of the thyristors therein. This control
 25 angle α (also called phase angle α) is the angle of lag of

compensating current I_c with respect to voltage V_o applied to series capacitor **CAP**.

If $v^* = 0$, then $\alpha = 90^\circ$, and DC voltage V_d of **LCI** becomes zero.

5

If $I_{dr} > I_d$, then $v^* > 0$, control angle (phase angle) $\alpha < 90^\circ$, DC voltage V_d of **LCI** will be positive, and current I_d flowing in DC reactor **DCL** will be increased.

In addition, if $I_{dr} < I_d$, then $v^* < 0$, $\alpha > 90^\circ$, DC voltage V_d of **LCI** will be negative, and current I_d flowing in DC reactor **DCL** will be reduced.

By this means it is possible to control current I_d flowing in DC reactor **DCL**. If DC current I_d increases, the size of compensation current I_c can be varied in proportion to this.

In the steady state, $v^* = 0$ and compensation current I_c has a lag of about 90° relative to voltage V_o applied to series capacitor **CAP**. Accordingly, I_c is in reverse-phase relative to transmission current I , and voltage V_o applied to series capacitor **CAP** is proportional to $(I - I_c)/(j\omega C)$, so if I_c is increased, V_o increases.

Also, if power oscillation arises in the transmission line, this oscillation is inhibited and controlled as follows.

That is, the three-phase AC voltage and current are detected using current detector **CT** and voltage detector **PT**, and active power P and reactive power Q are found from these values. If power oscillation arises, the values of P and Q

change, so changes ΔP and ΔQ in these values are identified and supplied to the following power fluctuation inhibiting control circuit **DPCNT**. DC current command **Idr** is regulated in proportion to active power change ΔP , and phase control
 5 input signal v^* is regulated in proportion to reactive power change ΔQ . If power oscillation arises, it can be inhibited by changing the size of compensation current **Ic** and phase angle α in proportion to ΔP and ΔQ . FIG.21 shows a situation in which DC current command **Idr** is regulated in proportion to
 10 ΔP .

FIG.22 shows an equivalent circuit and a voltage-current vector diagram to explain the action of the series compensation generator in FIG.21.

If current **I** flows in the transmission line, voltage
 15 drop $j\omega L \cdot I$ is generated as a result of inductance **L**, and moreover, voltage $I/(j\omega C)$ is applied to series capacitor **CAP**. This voltage works in a direction that cancels out the above-mentioned voltage drop due to inductance **L**, and reduces the equivalent reactance of the transmission line. In relation
 20 to voltage **Vo** applied to series capacitor **CAP**, externally-commutated inverter **LCI** usually takes lag current **Ic** and, in the steady state, **Ic** is delayed 90° relative to **Vo**. Consequently, if the direction of compensation current **Ic** is fixed in the direction shown in FIG.21, **Ic** and the
 25 transmission current **I** will be in same phase. Accordingly,

by causing compensation current I_c to flow, current $I - I_c$ that flows in series capacitor **CAP** increases, and voltage V_o applied to series capacitor **CAP** (the compensation voltage) also increases.

5 FIG.23 is a block diagram that shows a further different modification of the series compensation generator of the system shown in FIG.18.

In this diagram, **UVW** is a three-phase AC transmission line, **L** is the inductance of the transmission line, **CAP** is a series capacitor, **Tr** is a series transformer, **Lf** is a filter reactor, **VSI** is a current-controlled voltage source inverter, **Ed** is a DC voltage source, **CT** and **CTc** are current detectors, **PT** is a voltage detector, **DPD** is a power detector, **DPCNT** is a power fluctuation inhibition control circuit, **AVR** is a voltage control circuit, **ACR** is a current control circuit, and **PWMC** is a pulse width modulation (PWM) control circuit.

The primary side of series transformer **Tr** is connected in parallel to series capacitor **CAP** separately for each phase, and the secondary side of the series transformer is connected to pulse width modulation control (PWM control) current-controlled voltage source inverter **VSI** via filter reactor **Lf**.

Current-controlled voltage source inverter **VSI** is composed of self-turn-off devices **S1 ~ S6**, for example GTOs, and diodes connected in inverse parallel with each of these devices, connected as a three-phase bridge. Current-controlled voltage source inverter **VSI** compares current

command value **I_{cr}** with the value detected for the current flowing in filter reactor **L_f**, and carries out feedback control. Inverter output current **I_c** is supplied to series capacitor **CAP**, and controls voltage **V_o** applied to series
 5 capacitor **CAP**.

Voltage **V_o** applied to series capacitor **CAP** is determined by the total current found by adding current **I** flowing in the transmission line and above-mentioned compensation current **I_c**, and forms the compensation voltage
 10 in relation to the series compensation generator. In the steady state, compensation voltage **V_o** generates a component orthogonal to current **I** flowing in the transmission line, and this regulates the equivalent reactance of the transmission line.

15 **I_{cb}** is the steady-state compensation current command value for the compensation current generator, and by regulating this value it is also possible to regulate reactance **X** of the transmission line to approximately zero.

Also, if power oscillation arises in the transmission
 20 line, this oscillation is inhibited and controlled as follows.

That is, the three-phase AC voltage and current are detected using current detector **CT** and voltage detector **PT**, and active power **P** and reactive power **Q** are found from these values. If a power fluctuation arises, the values of **P** and **Q**
 25 change, so changes **ΔP** and **ΔQ** in these values are identified and supplied to the following power fluctuation inhibition

control circuit **DPCNT**. Compensating current voltage component **I_{cq}** that is in-phase (or in reverse phase) with current **I** flowing in the transmission line, is regulated in proportion to change **ΔP** in the active power; whereas

5 compensating current component **I_{cp}** that is orthogonal to current **I** is regulated in proportion to reactive power change **ΔQ**. In the diagram **I_{ca}** indicates this composite compensation voltage command. If a power fluctuation arises, compensation voltage command **I_{ca}** changes in proportion to **ΔP** and **ΔQ**, and

10 the power oscillation is inhibited.

For DC voltage source **Ed**, a separate power source may be provided, but here, a custom DC voltage source has been produced. That is, DC smoothing capacitor **Cd** is provided as the DC voltage source and is controlled so that applied

15 voltage **Ed** is constant. Firstly, DC voltage command value **Edr** is compared to the actual DC voltage value detected, **Ed**, and the deviation is amplified using DC voltage control circuit **AVR**. **AVR** output signal **I_{clr}** controls DC voltage **Ed** by sending a command with respect to the compensation current

20 component orthogonal to current **I** flowing in the transmission line (the component in-phase (or in reverse phase) relative to voltage **Vo** applied to series capacitor **CAP**).

FIG.24 is a block diagram showing a further different modified example of the series compensation generator of the

25 system shown in FIG.18.

In this diagram, **UVW** is a three-phase AC transmission line, **L** is inductance of the transmission line, **Tr** is a series transformer, **CAP** is a series capacitor, **Lf** is a filter reactor, **VSI** is a current-controlled voltage source inverter, **Ed** is a DC voltage source, **SWu**, **SWv**, and **SWw** are bypass circuits constructed of thyristor switches, and **OCT** is an overcurrent detection circuit.

The primary side of series transformer **Tr** is connected in series to the transmission line separately for each phase, and the secondary side is connected to series capacitor **CAP**. Also, pulse width modulation control (PWM control) current-controlled voltage source inverter **VSI** is connected to series capacitor **CAP** via a filter reactor **Lf**.

Current-controlled voltage source inverter **VSI** is composed of self-turn-off devices **S1** ~ **S6**, for example GTOs, and diodes connected in inverse parallel with each of these devices, connected as a three-phase bridge. Current-controlled voltage source inverter **VSI** detects current **Ic** flowing in filter reactor **Lf**, and carries out feedback control to regulate this current to current command value **Icr**. Output current **Ic** of the inverter is supplied to series capacitor **CAP**, and controls voltage **Vo** applied to series capacitor **CAP**.

Voltage **Vo** applied to series capacitor **CAP** is determined by the total current found by adding current **I** flowing in the transmission line and above-mentioned

compensation current **I_c**, and forms the compensation voltage in relation to the series compensation generator. In a steady state, compensation voltage **V_o** generates a component orthogonal to current **I** flowing in the transmission line, and
5 this regulates the equivalent reactance of the transmission line.

U-phase bypass circuit **SW_u** is composed of two thyristors connected in inverse parallel, and is connected in parallel to the primary side of series transformer **Tr**. The
10 V-phase and W-phase bypass circuits are similarly constructed.

If an overcurrent flows due to an incident such as a line-to-earth fault in the transmission line, this is detected by overcurrent detection circuit **OCT** which sends a turn-on signal to thyristors **SW_u**, **SW_v**, and **SW_w**, and the
15 overcurrent flowing in the transmission line flows through the bypass circuits. In this way, increases in the current can be inhibited by increasing the equivalent reactance of the transmission line, and moreover, the series compensation generator can be protected from overcurrent.

20 In addition, at the point at which the overcurrent has been suppressed, the bypass circuits open and the power oscillation can be promptly inhibited by the operation of the series compensation generator.

The same outcome can also be obtained by placing the
25 bypass circuits on the secondary side of the series transformer.

FIG.25 is a block diagram showing an eighth embodiment of a long-distance AC transmission system of the present invention.

In this diagram, **G** is a power station, **SS1 ~ SS5** are substations, **LOAD1 ~ LOAD4** are loads, **C1** and **C2** are main series capacitors, **Ca1** and **Ca2** are auxiliary series capacitors, **CIG1** and **CIG2** are compensation current generators, and **X1 ~ X4** are transmission line reactances.

Power generated at power station **G** is transmitted via substations **SS1 → SS2 → SS4 → SS5** over a long distance to load **LOAD4** comprising a major consumption area.

Main series capacitor **C1**, auxiliary series capacitor **Ca1**, and compensation current generator **CIG1** generate compensation voltage that cancels out reactance **X2** of the transmission line, and the transmission capacity over that section is improved as a result of a reduction in the equivalent reactance. Similarly, main series capacitor **C2**, auxiliary series capacitor **Ca2**, and compensation current generator **CIG2** generate compensation voltage that cancels out reactance **X3** of the transmission line, and the transmission capacity over that section is improved as a result of a reduction in the equivalent reactance.

In addition, if power oscillation arises in the transmission line, the oscillation is inhibited by generating compensation currents from compensation current generators (**CIG1** and **CIG2**) in order to inhibit the fluctuation. That is,

main series capacitor **C1**, auxiliary series capacitor **Ca1**, and compensation current generator **CIG1** constitute the first series compensation generator, and main series capacitor **C2**, auxiliary series capacitor **Ca2**, and compensation current generator **CIG2** constitute the second series compensation generator.

FIG.26 is a block diagram that shows the embodiment of the series compensation generator of the system shown in FIG.25.

In this diagram, **UVW** is a three-phase AC transmission line, **L** is inductance of the transmission line, **CAP** is the main series capacitor, **CAPa** is an auxiliary series capacitor, **Tr** is a series transformer, **Lf** is a filter reactor, **VSI** is a current-controlled voltage source inverter, **Ed** is a DC voltage source, **CT** is a current detector, **PT** is a voltage detector, **DPD** is a power detector, **DPCNT** is a power fluctuation inhibition control circuit, **AVR** is a voltage control circuit, **ACR** is a current control circuit, and **PWMC** is a pulse width modulation (PWM) control circuit.

The primary side of series transformer **Tr** is connected in parallel to auxiliary series capacitor **CAPa** separately for each phase, and the secondary side of the series transformer is connected to pulse width modulation control (PWM control) current-controlled voltage source inverter **VSI** via the filter reactor **Lf**.

Current-controlled voltage source inverter **VSI** is

composed of self-turn-off devices **S1 ~ S6**, for example GTOs, and diodes connected in inverse parallel with each of these devices, connected as a three-phase bridge. Current-controlled voltage source inverter **VSI** compares current
 5 command value **I_{cr}** with the value detected for the current flowing in the filter reactor **L_f**, and carries out feedback control. Inverter output current **I_c** is supplied to auxiliary series capacitor **CAP_a**, and controls voltage **V_o** applied to auxiliary series capacitor **CAP_a**.

10 Voltage **V_o** applied to auxiliary series capacitor **CAP_a** is determined by the total current found by adding current **I** flowing in the transmission line and above-mentioned compensation current **I_c**, and forms the compensation voltage in relation to the series compensation generator. In a
 15 steady state, compensation voltage **V_o** generates a component orthogonal to current **I** flowing in the transmission line, and this regulates the equivalent reactance of the transmission line.

On the other hand, a voltage that cancels the voltage
 20 drop due to inductance **L** of the transmission line is produced by transmission current **I** flowing in main series capacitor **CAP**, and this works to reduce equivalent reactance **X** of the transmission line.

I_{cb} is the steady-state compensation current command
 25 value for the compensation current generator, and by regulating this value, in combination with main series

capacitor **CAP**, it is also possible to regulate equivalent reactance **X** of the transmission line to approximately zero.

Also, if power oscillation arises in the transmission line, this oscillation is inhibited and controlled as follows.

5 That is, the three-phase AC voltage and current are detected using current detector **CT** and voltage detector **PT**, and active power **P** and reactive power **Q** are found from these values. If power oscillation arises, the values of **P** and **Q** change, so changes ΔP and ΔQ in these values are identified
10 and supplied to the following power fluctuation inhibiting control circuit, **DPCNT**. Compensating current voltage component **I_{cq}** that is in-phase (or in reverse phase) with current **I** flowing in the transmission line is regulated in proportion to active power change ΔP ; whereas compensation
15 current component **I_{cp}** that is orthogonal to current **I** is regulated in proportion to reactive power change ΔQ . In the diagram **I_{ca}** indicates this composite compensation voltage command. If power oscillation arises, compensation voltage **I_{ca}** changes in proportion to ΔP and ΔQ , and the power
20 oscillation is inhibited.

For the DC voltage source **Ed**, a separate power source may be provided, but here, a custom DC voltage source has been produced. That is, DC smoothing capacitor **Cd** is provided as the DC voltage source, and is controlled so that
25 the voltage applied, **Ed**, is constant. Firstly, DC voltage

command value **E_{dr}** is compared with actually detected DC voltage value **E_d**, and the deviation is amplified using DC voltage control circuit **AVR**. **AVR** output signal **I_{clr}** controls DC voltage **E_d** by sending a compensating current command for
 5 the component orthogonal to current **I** flowing in the transmission line (the component in-phase (or in reverse phase) with voltage **V_o** applied to auxiliary series capacitor **CAP_a**).

FIG.27 shows a transmission line equivalent circuit and
 10 a voltage/current vector diagram to explain the working of the system shown in FIG.25.

In this diagram, **V_s** is the transmitting-side voltage, **V_r** is the receiving-side voltage, **L** is the inductance in the transmission line, **CAP** is a main series capacitor, **CAP_a** is an
 15 auxiliary series capacitor, **I** is the transmission current, **V_o** is the voltage applied to auxiliary series capacitor **CAP_a** (the compensation voltage), **I_c** is the compensation current, and ω is the power supply angular frequency. The resistance of the transmission line is considered to be small enough to
 20 be ignored.

In the vector diagram of FIG.27(b), if current **I** flows, voltage drop $j\omega L \cdot I$ is generated as a result of inductance **L** of the transmission line. In addition, voltage $I/(j\omega C)$ is generated in main series capacitor **CAP**. Both of these work
 25 in directions that cancel out, and the equivalent reactance

of the transmission line is reduced. Furthermore, as a result of supplying the component of compensation current $\mathbf{I_c}$ that is in-phase with the transmission current $\mathbf{I}$ to auxiliary series capacitor **CAPa** from the compensation current generator,
 5 voltage $\mathbf{V_o} = (\mathbf{I} + \mathbf{I_c}) / (j\omega\mathbf{C_a})$ is applied to auxiliary series capacitor **CAPa**.

Accordingly, if compensation current $\mathbf{I_c}$ is regulated so that $\mathbf{V_o} = -j(\omega\mathbf{L} - 1/\omega\mathbf{C}) \cdot \mathbf{I}$, it is possible to regulate equivalent reactance $\mathbf{X}$ of the transmission line to
 10 approximately zero and, as shown in the vector diagram of FIG.27(b), it is possible to make transmitting-side voltage $\mathbf{V_s}$ and receiving-side voltage $\mathbf{V_r}$ equal.

If power oscillation arises in the transmission line, the oscillation is inhibited by generating compensation
 15 current $\mathbf{I_c}$ from the compensation current generator.

In this system, if transmission current $\mathbf{I}$ is made to flow through main series capacitor **CAP** and most of inductance $\mathbf{L}$ of the transmission line is cancelled out by main series capacitor **CAP**, the steady-state current $\mathbf{I_c}$ produced from the
 20 compensation current generator only needs to be small, so the capacity of the power converter (for example, a current source self-commutating inverter) can be reduced.

In addition, if an overcurrent flows in the transmission line due to an incident such as a line-to-earth
 25 fault, most of this overcurrent will flow via auxiliary

series capacitor **CAPa**, so the effect on the compensation current generator will be small.

FIG.28 is a block diagram showing a different modified example of the series compensation generator of the system shown in FIG.25.

In this diagram, **UVW** is a three-phase AC transmission line, **L** is inductance of the transmission line, **CAP** is a main series capacitor, **CAPa** is an auxiliary series capacitor, **Tr** is a series transformer, **Lf** is a filter reactor, **LCI** is an externally-commutated inverter, **DCL** is a DC current source, **CT** is a current detector, **PT** is a voltage detector, **DPD** is a power detection circuit, **DPCNT** is a power fluctuation inhibiting circuit, **K** is a proportional element, **ACR** is a current control circuit, and **PHC** is a phase control circuit.

Main series capacitor **CAP** and auxiliary series capacitor **CAPa** operate to cancel out inductance **L** of the transmission line. Also, the primary winding of series transformer **Tr** is connected in parallel with auxiliary series capacitor **CAPa**, and the secondary side is connected to the externally-commutated inverter. The compensation current generator is composed of series transformer **Tr** and externally-commutated inverter **LCI**, and regulates the reactance of the transmission line, and also inhibits and controls transmission line power oscillation.

Externally-commutated inverter **LCI** is composed of six thyristors **T1 ~ T6** connected as a three-phase bridge.

Externally-commutated inverter **LCI** carries out natural commutation using the voltage applied to auxiliary series capacitor **CAPa**, and supplies required compensation current **Ic** to auxiliary series capacitor **CAPa** by regulating the size of
 5 DC current **Id**. If the orientation of the compensation current is set up in the direction shown in FIG.28, voltage **Vo** applied to auxiliary series capacitor **CAPa** will be determined by the difference in current between current **I** flowing in the transmission line and above-mentioned
 10 compensation current **Ic**. In the steady state, compensation voltage **Vo** generates a component orthogonal to current **I** flowing in the transmission line, and regulates the equivalent reactance of the transmission line.

Icb is the steady-state compensation current command value (reference value) for the compensation current
 15 generator, and by regulating this value, in combination with main series capacitor **CAP**, it is also possible to regulate reactance **X** of the transmission line to approximately zero.

For the source of DC current **Id**, a separate power
 20 source may be provided, but here a custom DC current source has been produced. That is, DC reactor **DCL** is provided as the DC current source and is controlled so that its current **Id** is constant. Firstly, DC command value **Idr** is compared to actually detected DC current value **Id**, and any deviation is
 25 amplified using DC current control circuit **ACR**. **ACR** output signal **v*** becomes the externally-commutated inverter's phase

control input signal, and controls firing (turning-on) control angle α of the thyristors. Control angle α (phase angle α) becomes the lag angle of compensation current I_c relative to voltage V_o applied to auxiliary series capacitor **CAPa**.

If $v^* = 0$, then $\alpha = 90^\circ$, and DC voltage V_d of **LCI** will be zero.

If $I_{dr} > I_d$, then $v^* > 0$, phase angle $\alpha < 90^\circ$, DC voltage V_d of **LCI** will be positive, and current I_d flowing in DC reactor **DCL** will be increased.

In addition, if $I_{dr} < I_d$, then $v^* < 0$, $\alpha > 90^\circ$, DC voltage V_d of **LCI** will be negative, and current I_d flowing in DC reactor **DCL** will be reduced.

By this means it is possible to control current I_d flowing in DC reactor **DCL**. If DC current I_d increases, the size of compensation current I_c can be varied in proportional to this.

In the steady state, $v^* = 0$ and compensation current I_c has a lag of about 90° relative to voltage V_o applied to auxiliary series capacitor **CAPa**. Accordingly, I_c is in reverse phase relative to I , and voltage V_o applied to auxiliary series capacitor **CAPa** is proportional to $(I - I_c)$, so if I_c is increased, V_o increases.

Also, if power oscillation arises in the transmission line, this oscillation is inhibited and controlled as follows.

That is, the three-phase AC voltage and current are detected using current detector **CT** and voltage detector **PT**, and active power **P** and reactive power **Q** are found from these values. If power oscillation arises, the values of **P** and **Q** change, so the changes in these values ΔP and ΔQ are identified and supplied to the following power fluctuation inhibition control circuit, **DPCNT**. DC current command **Idr** is regulated in proportion to active power change ΔP , and phase control input signal **v*** is regulated in proportion to reactive power change ΔQ . If power oscillation arises, it can be inhibited by changing the size and control angle α (phase angle α) of compensation current **Ic** in proportion to ΔP and ΔQ . FIG.28 shows a situation in which **Idr** is regulated in proportion to ΔP .

In this system, if transmission current **I** is made to flow through main series capacitor **CAP** and most of inductance **L** of the transmission line cancelled out by main series capacitor **CAP**, the steady-state current **Ic** produced from the compensation current generator only needs to be small, so the capacity of the power converter can be reduced.

In addition, if an overcurrent flows in the transmission line due to an incident such as a line-to-earth fault, most of this overcurrent will flow via auxiliary series capacitor **CAPa**, so the effect on the compensation current generator will be small.

FIG.29 is a block diagram showing a ninth embodiment of a long-distance AC transmission system of this invention.

In this diagram, **G** is a power station, **SS1** ~ **SS5** are substations, **LOAD1** ~ **LOAD4** are loads, **C1**, **C3** and **C4** are series capacitors, **CVG2** is a compensation voltage generator, and **X1** ~ **X4** are transmission line reactances.

Power generated at the power station **G** is transmitted via multiple substations **SS1** → **SS2** → **SS4** → **SS5** over a long distance to load **LOAD4** comprising a major consumption area.

The value of series capacitor **C1** is selected to compensate for reactance **X1** of the transmission line between power station **G** substation **SS1**, the value of series capacitor **C3** is selected to compensate for reactance **X3** of the transmission line between substation **SS2** and substation **SS4**, and the value of series capacitor **C4** is selected to compensate for reactance **X4** of the transmission line between substation **SS4** and substation **SS5**. In addition, compensation voltage generator **CVG2** produces a voltage that compensates for reactance **X2** between substation **SS1** and substation **SS2**, and also inhibits and controls power oscillation throughout the whole transmission route. This design leads to a reduction in the equivalent reactance of the whole of a long-distance transmission route that passes through multiple substations, and an improvement in transmission capability, and moreover, power system stabilization can be expected.

FIG.30 shows a transmission line equivalent circuit and

a voltage/current vector diagram to explain the working of the system shown in FIG.29,.

In this diagram, **I** is the transmission line current, **V1** ~ **V4** are the voltages at each substation, **X1** ~ **X3** are the reactances of each transmission line, **C1** and **C3** are series capacitors, **Vo** is the output voltage of the compensation voltage generator, **LOAD** is the load, and ω is the power supply angular frequency.

The vector diagram of FIG.30(b) shows that by this means it is possible to compensate the reactance of each transmission line to approximately zero, and to make voltages **V1** ~ **V4** at each substation equal.

That is, in the transmission line between substations **V1** and **V2**, reactance **X1** of the transmission line is compensated for by series capacitor **C1**. In other words, if the current flowing in the transmission line is **I**, the capacitance of capacitor **C1** is selected so that

$$\mathbf{I}/(\mathbf{j}\omega\mathbf{C1}) = -\mathbf{jX1}\cdot\mathbf{I}$$

By this means **V1** and **V2** can be made equal.

In addition, in the transmission line between substations **V2** and **V3** reactance **X2** of the transmission line is compensated for by compensation voltage **Vo** from a compensation voltage generator. In other words, if the current flowing in the transmission line is **I**, this gives compensation voltage **Vo** such that

$$V_o = -jX_2 \cdot I$$

By this means **V2** and **V3** can be made equal.

In the same way, in the transmission line between substations **V3** and **V4** reactance **X3** of the transmission line
 5 is compensated for by series capacitor **C3**. In other words, if the current flowing in the transmission line is **I**, the capacitance of capacitor **C3** is selected so that

$$I/(j\omega C_3) = -jX_3 \cdot I$$

By this means **V3** and **V4** can be made equal.

10 In this way, as shown in the vector diagram of FIG.30(b), the voltage at each substation can be made equal so that **V1 = V2 = V3 = V4**.

In a long-distance AC transmission system, if compensation of all of the transmission line reactances is
 15 attempted using series capacitors alone, the system becomes unstable due to LC resonance. The compensation voltage generator functions to stabilize the system. By using only the minimum number of compensation voltage generators necessary, the system cost can be reduced and it is possible
 20 to provide a more economical long-distance AC transmission system.

FIG.31 is a block diagram showing a tenth embodiment of a long-distance AC transmission system of this invention.

In this diagram, **G** is a power station, **SS1 ~ SS5** are
 25 substations, **LOAD1 ~ LOAD4** are loads, **C1**, **C3** and **C4** are series capacitors, **CVG2** is a compensation voltage generator,

SW1 ~ SW4 are bypass circuits, and **X1 ~ X4** are transmission line reactances.

Power generated at power station **G** is transmitted via multiple substations **SS1 → SS2 → SS4 → SS5** over a long
 5 distance to load **LOAD4** comprising a major consumption area.

The value of series capacitor **C1** is selected to compensate for reactance **X1** of the transmission line between power station **G** and substation **SS1**, the value of series capacitor **C3** is selected to compensate for reactance **X3** of
 10 the transmission line between substation **SS2** and substation **SS4**, and the value of series capacitor **C4** is selected to compensate for reactance **X4** of the transmission line between substation **SS4** and substation **SS5**. In addition, compensation voltage generator **CVG2** produces a voltage that compensates
 15 for reactance **X2** between substation **SS1** and substation **SS2**, and also inhibits and controls power oscillation throughout the whole transmission route.

By this means a reduction in the equivalent reactance of the whole of a long-distance transmission route that
 20 passes through multiple substations, an improvement in transmission capability, and moreover, power system stabilization can be expected.

If an overcurrent flows due to an incident such as a line-to-earth fault in the transmission line, bypass circuits
 25 **SW1**, **SW3** and **SW4** for series capacitors **C1**, **C3** and **C4**, and bypass circuit **SW2** for compensation voltage generator **CVG2**

close, and the overcurrent is made to flow through bypass circuits **SW1 ~ SW4**. As a result, the reactances of the transmission lines can be returned to their original values **X1 ~ X4**, and escalation of the overcurrent is prevented. In addition, the flow of overcurrent to the series capacitors, compensation voltage generator, and the like, can be prevented, and the reliability of the system can be improved.

FIG.32 is a block diagram showing an eleventh embodiment of a long-distance AC transmission system of this invention.

In this diagram, **G** is a power station, **SS1 ~ SS5** are substations, **LOAD1 ~ LOAD4** are loads, **C1, C3** and **C4** are series capacitors, **CVG2** is a compensation voltage generator, and **X1 ~ X4** are transmission line reactances.

Power generated at power station **G** is transmitted via multiple substations **SS1 → SS2 → SS4 → SS5** over a long distance to load **LOAD4** comprising a major consumption area.

The value of series capacitor **C1** is selected to compensate for reactance **X1** of the transmission line between power station **G** and substation **SS1**, the value of series capacitor **C3** is selected to compensate for reactance **X3** of the transmission line between substation **SS2** and substation **SS4**, and the value of series capacitor **C4** is selected to compensate for reactance **X4** of the transmission line between substation **SS4** and substation **SS5**. In addition, series capacitor **C2** and compensation voltage generator **CVG2** produce

a voltage that compensates for reactance **X2** between substation **SS1** and substation **SS2**, and also inhibits and controls power oscillation throughout the whole transmission route.

5 That is, when the reactance of the transmission route is regulated to approximately zero, compensation is carried out as follows.

First, in the transmission line between power station **G** and substation **SS1**, reactance **X1** of the transmission line is
10 compensated for by series capacitor **C1**. In other words, if the current flowing in the transmission line is **I**, the capacitance of capacitor **C1** is selected so that

$$I/(j\omega C1) = -jX1 \cdot I$$

The voltage at power station **G** and the voltage at substation
15 **SS1** can be made approximately equal by this means.

In addition, in the transmission line between substations **SS1** and **SS2**, reactance **X2** of the transmission line is compensated for by series capacitor **C2** and compensation voltage generator **CVG2**. In other words, if the
20 current flowing in the transmission line is **I**, the capacitance of capacitor **C2** and compensation voltage **Vo** are selected so that

$$Vo + I/(j\omega C2) = -jX2 \cdot I$$

The voltage at substation **SS1** and the voltage at substation
25 **SS2** can be made approximately equal by this means.

In the transmission line between substations **SS2** and **SS4**, reactance **X3** of the transmission line is compensated for by series capacitor **C3**. In other words, if the current flowing in the transmission line is **I**, the capacitance of capacitor **C3** is selected so that

$$I/(j\omega C3) = -jX3 \cdot I$$

The voltage at substation **SS2** and the voltage at substation **SS4** can be made approximately equal by this means.

In the transmission line between substations **SS4** and **SS5**, reactance **X4** of the transmission line is compensated for by series capacitor **C4**. In other words, if the current flowing in the transmission line is **I**, the capacitance of capacitor **C4** is selected so that

$$I/(j\omega C4) = -jX4 \cdot I$$

The voltage at substation **SS4** and the voltage at substation **SS5** can be made approximately equal by this means.

By this means, a reduction in the equivalent reactance of the whole of a long-distance transmission route that passes through multiple substations, an improvement in transmission capability, and moreover, power system stabilization can be expected.

In long-distance AC transmission systems, if compensation of all of the transmission line reactances is attempted using series capacitors alone, the system becomes unstable due to LC resonance. The compensation voltage

generator functions to stabilize the system. By using only the minimum number of compensation voltage generators necessary, the system cost can be reduced and it is possible to provide a more economical long-distance AC transmission system. Also, the capacity of the compensation voltage generator can be reduced if main series capacitor **C2** is set to cancel out most of reactance **X2** of the transmission line, because the steady-state current generated by the compensation current generator only needs to be small.

The diagram does not show them, but bypass circuits are provided for the series capacitors and the compensation voltage generator, so if an overcurrent is produced due to an incident such as a line-to-earth fault or the like in the transmission line, the overcurrent is made to flow via these bypass circuits. As a result, the reactances of the transmission lines can be returned to their original values, and escalation of the overcurrent prevented. In addition, the flow of overcurrent to the series capacitors, compensation voltage generator, and the like, can be prevented, and the reliability of the system improved.

FIG.33 is a block diagram showing a twelfth embodiment of a long-distance AC transmission system of this invention.

In this diagram, **G** is a power station, **SS1 ~ SS5** are substations, **LOAD1 ~ LOAD4** are loads, **C1, C2, C3** and **C4** are series capacitors, **CIG** is a compensation current generator, and **X1 ~ X4** are transmission line reactances.

Power generated at power station **G** is transmitted via multiple substations **SS1** → **SS2** → **SS4** → **SS5** over a long distance to load **LOAD4** comprising a major consumption area.

The value of series capacitor **C1** is selected to
 5 compensate for reactance **X1** of the transmission line between power station **G** and substation **SS1**, the value of series capacitor **C2** is selected to compensate for reactance **X2** of the transmission line between substation **SS1** and substation **SS2**, and the value of series capacitor **C4** is selected to
 10 compensate for reactance **X4** of the transmission line between substation **SS4** and substation **SS5**. In addition, series capacitor **C3** and compensation current generator **CIG** produce a voltage that compensates for reactance **X3** between substation **SS2** and substation **SS4**, and also inhibits and controls power
 15 oscillation throughout the whole transmission route.

That is, when the reactance of the transmission route is regulated to approximately zero, compensation is carried out as follows.

First, in the transmission line between power station **G**
 20 and substation **SS1**, reactance **X1** of the transmission line is compensated for by series capacitor **C1**. In other words, if the current flowing in the transmission line is **I**, the capacitance of capacitor **C1** is selected so that

$$I/(j\omega C1) = -jX1 \cdot I$$

25 The voltage at power station **G** and the voltage at substation

SS1 can be made approximately equal by this means.

In the transmission line between substations **SS1** and **SS2**, reactance **X2** of the transmission line is compensated for by series capacitor **C2**. In other words, if the current
5 flowing in the transmission line is **I**, the capacitance of capacitor **C2** is selected so that

$$I/(j\omega C2) = -jX2 \cdot I$$

The voltage at substation **SS1** and the voltage at substation **SS2** can be made approximately equal by this means.

10 In addition, in the transmission line between substations **SS2** and **SS4**, reactance **X3** of the transmission line is compensated for by series capacitor **C3** and compensation current generator **CIG**. In other words, if the current flowing in the transmission line is **I** and the
15 compensation current from the compensation current generator **CIG** is **Ic**, the capacitance of capacitor **C3** and compensation current **Ic** are selected so that

$$(Ic + I)/(j\omega C3) = -jX3 \cdot I$$

The voltage at substation **SS2** and the voltage at substation
20 **SS4** can be made approximately equal by this means.

In the transmission line between substations **SS4** and **SS5**, reactance **X4** of the transmission line is compensated for by series capacitor **C4**. In other words, if the current
flowing in the transmission line is **I**, the capacitance of
25 capacitor **C4** is selected so that

$$I/(j\omega C_4) = -jX_4 \cdot I$$

The voltage at substation **SS4** and the voltage at substation **SS5** can be made approximately equal by this means.

By this means, a reduction in the equivalent reactance
 5 of the whole of a long-distance transmission route that passes through multiple substations, an improvement in transmission capability, and moreover, power system stabilization can be expected.

In long-distance AC transmission systems, if
 10 compensation of all of the transmission line reactances is attempted using series capacitors alone, the system becomes unstable due to LC resonance. The compensation current generator functions to stabilize the system. By using only the minimum number of compensation current generators
 15 necessary, the system cost can be reduced and it is possible to provide a more economical long-distance AC transmission system.

FIG.34 is a block diagram showing a thirteenth
 embodiment of a long-distance AC transmission system of this
 20 invention.

In this diagram, **G** is a power station, **SS1 ~ SS5** are substations, **LOAD1 ~ LOAD4** are loads, **C1, C2, C3** and **C4** are series capacitors, **CIG** is a compensation current generator, **SW1 ~ SW4** are bypass circuits, and **X1 ~ X4** are transmission
 25 line reactances.

Power generated at power station **G** is transmitted via

multiple substations **SS1** → **SS2** → **SS4** → **SS5** over a long distance to load **LOAD4** comprising a major consumption area.

The value of series capacitor **C1** is selected to compensate for reactance **X1** of the transmission line between power station **G** and substation **SS1**, the value of series capacitor **C2** is selected to compensate for reactance **X2** of the transmission line between substation **SS1** and substation **SS2**, and the value of series capacitor **C4** is selected to compensate for reactance **X4** of the transmission line between substation **SS4** and substation **SS5**. In addition, series capacitor **C3** and compensation current generator **CIG** produce a voltage that compensates for reactance **X3** between substation **SS2** and substation **SS4**, and also inhibits and controls power oscillation throughout the whole transmission route.

By this means, a reduction in the equivalent reactance of the whole of a long-distance transmission route that passes through multiple substations, an improvement in transmission capability, and moreover, power system stabilization can be expected.

If an overcurrent flows due to an incident such as a line-to-earth fault or the like in the transmission line, bypass circuits **SW1**, **SW2**, **SW3** and **SW4** for series capacitors **C1**, **C2**, **C3** and **C4** close, and the overcurrent is made to flow through bypass circuits **SW1** ~ **SW4**. As a result, the reactances of the transmission lines can be returned to their original values, **X1** ~ **X4**, and escalation of the overcurrent

is prevented. In addition, the flow of overcurrent to the series capacitors, compensation voltage generator, and the like, can be prevented, and the reliability of the system can be improved.

5 FIG.35 is a block diagram showing a fourteenth embodiment of a long-distance AC transmission system of this invention.

In this diagram, **G** is a power station, **SS1 ~ SS5** are substations, **LOAD1 ~ LOAD4** are loads, **C1, C2, C3** and **C4** are
 10 main series capacitors, **Ca2** is an auxiliary series capacitor, **CIG** is a compensation current generator, and **X1 ~ X4** are transmission line reactances.

Power generated at power station **G** is transmitted via multiple substations **SS1 → SS2 → SS4 → SS5** over a long
 15 distance to load **LOAD4** comprising a major consumption area.

The value of main series capacitor **C1** is selected to compensate for reactance **X1** of the transmission line between power station **G** and substation **SS1**, the values of main series capacitor **C2**, auxiliary series capacitor **Ca2**, and
 20 compensation current generator **CIG** are selected to compensate for reactance **X2** of the transmission line between substation **SS1** and substation **SS2**, the value of main series capacitor **C3** is selected to compensate for reactance **X3** of the transmission line between substation **SS2** and substation **SS4**,
 25 and the value of main series capacitor **C4** is selected to compensate for reactance **X4** of the transmission line between

substation **SS4** and substation **SS5**. In addition, auxiliary series capacitor **Ca2** and compensation current generator **CIG** inhibit and control power oscillation throughout the whole transmission route.

5 That is, when the reactance of the transmission route is regulated to approximately zero, compensation is carried out as follows.

First, in the transmission line between power station **G** and substation **SS1**, reactance **X1** of the transmission line is
10 compensated for by main series capacitor **C1**. In other words, if the current flowing in the transmission line is **I**, the capacitance of main series capacitor **C1** is selected so that

$$I/(j\omega C1) = -jX1 \cdot I$$

The voltage at power station **G** and the voltage at substation
15 **SS1** can be made approximately equal by this means.

In addition, in the transmission line between substations **SS1** and **SS2**, reactance **X2** of the transmission line is compensated for by main series capacitor **C2**, auxiliary series capacitor **Ca2**, and compensation current
20 generator **CIG**. In other words, if the current flowing in the transmission line is **I** and the compensation current from the compensation current generator **CIG** is **Ic**, the capacitance of main capacitor **C2**, the capacitance of auxiliary series capacitor **Ca2**, and compensation current **Ic** are selected so
25 that

$$I/(j\omega C_2) + (I_c + I)/(j\omega C_{a2}) = -jX_2 \cdot I$$

The voltage at substation **SS1** and the voltage at substation **SS2** can be made approximately equal by this means.

In the transmission line between substations **SS2** and **SS4**, reactance **X3** of the transmission line is compensated for by main series capacitor **C3**. In other words, if the current flowing in the transmission line is **I**, the capacitance of main series capacitor **C3** is selected so that

$$I/(j\omega C_3) = -jX_3 \cdot I$$

The voltage at substation **SS2** and the voltage at substation **SS4** can be made approximately equal by this means.

In the transmission line between substations **SS4** and **SS5**, reactance **X4** of the transmission line is compensated for by main series capacitor **C4**. In other words, if the current flowing in the transmission line is **I**, the capacitance of main series capacitor **C4** is selected so that

$$I/(j\omega C_4) = -jX_4 \cdot I$$

The voltage at substation **SS4** and the voltage at substation **SS5** can be made approximately equal by this means.

By this means, a reduction in the equivalent reactance of the whole of a long-distance transmission route that passes through multiple substations, an improvement in transmission capability, and moreover, power system stabilization can be expected.

In long-distance AC transmission systems, if

compensation of all of the transmission line reactances is attempted using main series capacitors alone, the system becomes unstable due to LC resonance. The auxiliary series capacitor and the compensation current generator function to
 5 stabilize the system. By using only the minimum number of auxiliary series capacitors and compensation current generators necessary, the system cost can be reduced and it is possible to provide a more economical long-distance AC transmission system. Also, the capacity of the compensation
 10 current generator can be reduced if main series capacitor **C2** is set to cancel out most of reactance **X2** of the transmission line, because the steady-state current generated by the compensation current generator only needs to be small.

FIG.36 is a block diagram show a fifteenth embodiment
 15 of a long-distance AC transmission system of this invention.

In this diagram, **G** is a power station, **SS1 ~ SS5** are substations, **LOAD1 ~ LOAD4** are loads, **C1, C2, C3** and **C4** are main series capacitors, **Ca2** is an auxiliary series capacitor, **CIG** is a compensation current generator, **SW1 ~ SW4** and **Swa2**
 20 are bypass circuits, and **X1 ~ X4** are transmission line reactances.

Power generated at the power station **G** is transmitted via multiple substations **SS1 → SS2 → SS4 → SS5** over a long distance to load **LOAD4** comprising a major consumption area.

25 The value of main series capacitor **C1** is selected to compensate for reactance **X1** of the transmission line between

power station **G** and substation **SS1**, the values of main series capacitor **C2**, auxiliary series capacitor **Ca2**, and compensation current generator **CIG** are selected to compensate for reactance **X2** of the transmission line between substation **SS1** and substation **SS2**, the value of main series capacitor **C3** is selected to compensate for reactance **X3** of the transmission line between substation **SS2** and substation **SS4**, and the value of main series capacitor **C4** is selected to compensate for reactance **X4** of the transmission line between substation **SS4** and substation **SS5**. In addition, auxiliary series capacitor **Ca2** and compensation current generator **CIG** inhibit and control power oscillation throughout the whole transmission route.

By this means, a reduction in the equivalent reactance of the whole of a long-distance transmission route that passes through multiple substations, an improvement in transmission capability, and moreover, power system stabilization can be expected.

If an overcurrent flows due to an incident such as a line-to-earth fault or the like in the transmission line, bypass circuits **SW1**, **SW2**, **SW3** and **SW4** for main series capacitors **C1**, **C2**, **C3** and **C4** and bypass circuit **Swa2** for auxiliary series capacitor **Ca2** close, and the overcurrent is made to flow through bypass circuits **SW1** ~ **SW4** and **Swa2**. As a result, the reactances of the transmission lines can be returned to their original values, **X1** ~ **X4**, and escalation of

the overcurrent is prevented. In addition, the flow of overcurrent to the main series capacitors, auxiliary series capacitor, compensation voltage generator, and the like, can be prevented, and the reliability of the system can be improved.

FIG.37 is a block diagram showing a sixteenth embodiment of a long-distance AC transmission system of this invention.

In this diagram, **G** is a power station, **SS** is a substation, **L1** and **L2** are transmission line inductances, **Cq1** and **Cq2** are transmission line floating capacitances, **SVG** is a static var generator, **SCG** is a series compensation generator, **SW** is a bypass circuit, **CSI** is a current source inverter, **VSI** is a voltage source inverter, **PD** is a power detector, **CONT1** is a **VSI** control circuit, and **CONT2** is a **CSI** control circuit.

Floating capacitances exist between transmission lines and between transmission lines and earth, and when transmitting power over long distances these cannot be ignored. Floating capacitances are distributed constants, but here they will be expressed as centralized constants **Cq1** and **Cq2**. In addition, the transmission line inductance is also shown divided into two parts, **L1** and **L2**. Leading current **Iq** flows in floating capacitances **Cq1** and **Cq2**, and static var generator **SVG** is provided to compensate for these leading currents. Also, series compensation generator **SCG** is provided to compensate for transmission line inductance **L1+L2**.

Series compensation generator **SCG** outputs the following compensation voltage **V_o** in order to compensate for the voltage drop due to the transmission line inductance **L₁+L₂**. **I** is the current flowing in the transmission line.

$$5 \quad V_o = -j\omega (L_1 + L_2) \cdot I$$

In addition, static var generator **SVG** causes compensation current **I_o** to flow to cancel out leading current **I_q** that flows in floating capacitances **C_{q1}** and **C_{q2}**.

By this means the equivalent reactance of transmission
10 lines can be regulated, and the transmission capability of long-distance transmission lines greatly improved.

If an overcurrent flows due to an incident such as a line-to-earth fault or the like in the transmission line, bypass circuit **SW** connected in parallel with series
15 compensation generator **SCG** closes, and the overcurrent is caused to flow through bypass circuit **SW**. As a result, reactance **X** = $\omega (L_1 + L_2)$ of the transmission line can be returned to its original value, and escalation of the overcurrent prevented. In addition, the flow of overcurrent
20 to the series compensation generator can be prevented, and the reliability of the system can be improved.

FIG.38 is a block diagram that shows the embodiment of the static var generator of the system shown in FIG.37.

In this diagram, **UVW** is a three-phase AC transmission
25 line, **L** is the inductance of the transmission line, **C_q** is the

floating capacitance, **Tr** is a series transformer, **CSI** is a current source inverter, **DCL** is a DC reactor, **Cf** is a filter capacitor, **ACR** is a DC current control circuit, and **PWMC** is a pulse width modulation (PWM) control circuit.

5 The static var generator is composed of parallel transformer **Tr**, filter capacitor **Cf**, and current source inverter **CSI**, and supplies compensation current **Io** of any size and phase to the transmission line.

Current source inverter **CSI** is composed of six self-
10 turn-off devices (for example GTOs), and outputs compensation current **Io** proportional to current command value **Ior** by means of PWM control. Harmonic current arises in the output current of the inverter, due to switching, and filter capacitor **Cf** is provided to absorb this.

15 DC reactor **DCL** is connected as the DC current source for current source inverter **CSI**, and feedback control is carried out to make current **Id** that flows in DC reactor **DCL** equal to command value **Idr**. That is, when actual current **Id** falls to less than command value **Idr**, the deviation is a
20 positive value and is amplified via the current control circuit **ACR**. Output **Iop** from **ACR** is an active current command value, and if **Idr** > **Id**, deviation ε will be positive, **Iop** > 0, and DC current **Id** will be increased because active current is removed from the system. Conversely, if **Idr** < **Id**,
25 deviation ε will be negative, and **Iop** will be a negative

value. Accordingly, active current is released into the system so the DC current is reduced. In this way DC current I_d of the current source inverter can be kept approximately constant.

5 In the diagram, I_{oq} is the steady-state reactive current command value, and by regulating this value it is possible to cancel out leading current I_q that flows in the floating capacitance of the transmission line.

FIG.39 shows voltage/current vector diagrams provided
10 to explain the operation of the system shown in FIG.37. FIG.39(a) and (b) show an equivalent circuit and a voltage/current vector diagram for a transmission line without a static var generator, whereas FIG.39(c) and (d) show an equivalent circuit and a voltage/current vector
15 diagram for a transmission line which includes a static var generator.

In this diagram, V_s is the transmitting-side voltage, V_r is the receiving-side voltage, L is the inductance in the transmission line, I is the transmitting-side current, I_r is
20 the receiving-side current, V_o is the output voltage of the compensation voltage generator, I_q is the leading current that flows in the floating capacitance of the transmission line, I_o is the compensation current generated from the static var generator, and ω is the power supply angular
25 frequency.

In the vector diagram of FIG.39(b), receiving-side

current $\mathbf{I_r}$ and transmitting-side current $\mathbf{I}$ become different because leading current $\mathbf{I_q}$ flows in floating capacitance $\mathbf{C_q}$ of the transmission line. Hypothesizing from the equivalent circuit shown in FIG.39(a), the voltage drop $\mathbf{j\omega L \cdot I}$ due to inductance $\mathbf{L}$ of the transmission line will be approximately orthogonal to current $\mathbf{I}$. On the other hand, compensation is carried out so that the voltage drop due to inductance $\mathbf{L}$ of the transmission line is cancelled out by series compensation generator $\mathbf{SCG}$, in order to make transmitting-side voltage $\mathbf{V_s}$ and receiving-side voltage $\mathbf{V_r}$ approximately equal. To achieve this it is necessary that $\mathbf{V_o} = - \mathbf{j\omega L \cdot I}$, where $\mathbf{V_o}$ is the compensation voltage output from the series compensation generator. Because the vector of compensation voltage $\mathbf{V_o}$ is 90° out of phase relative to receiving-side current $\mathbf{I_r}$, active power must be constantly supplied (or regenerated) from the series compensation generator. Accordingly, an energy supply source (or an energy regeneration source) is needed in the compensation voltage generator, and this will require a larger generator and lead to higher costs.

In the vector diagram of FIG.39(d), compensation current $\mathbf{I_o}$ is supplied from static var generator $\mathbf{SVG}$ to cancel out leading current $\mathbf{I_q}$ flowing in the floating capacitance. As a result, transmitting-side current $\mathbf{I}$ and receiving-side current $\mathbf{I_r}$ become equal, and compensation voltage vector $\mathbf{V_o}$ supplied from series compensation generator

SCG to cancel out the voltage drop due to inductance **L** in the transmission line becomes orthogonal to the $\mathbf{I} = \mathbf{I_r}$ vector.

Accordingly, in the steady state, the active power exchanged with the series compensation generator is zero, and it is no longer necessary to include an energy supply source (or an energy regeneration source).

Static var generator **SVG** can also compensate for harmonic current flowing in the transmission line, and provide a compensation current that balances unbalanced three-phase current. As a result, the transmission capability of the transmission line will be improved, and moreover, the load on series compensation generator **SCG** will be reduced, and a more economical long-distance AC transmission system can be provided.

FIG.40 shows voltage/current vector diagrams provided to explain the power oscillation inhibiting action of the system shown in FIG.37. FIG.40(a) shows a transmission line equivalent circuit, (b) shows a voltage/current vector diagram in the steady state, and (c) shows a voltage/current vector diagram when the transmission line power has fluctuated.

In the diagrams, **Vs** is the transmitting-side voltage, **Vr** is the receiving-side voltage, **L** is the inductance in the transmission line, **I** is the transmitting-side current, **Ir** is the receiving-side current, **Vo** is the output voltage of the compensation voltage generator, **Iq** is the leading current

that flows in the floating capacitance of the transmission line, I_o is the compensation current generated from the static var generator, and ω is the power supply angular frequency.

5 In the steady-state situation shown in FIG.40(b), compensation current I_o is supplied from static var generator **SVG** to cancel out leading current I_q flowing in the floating capacitance. In addition, series compensation generator **SCG** outputs voltage V_o to compensate for voltage drop $j\omega L \cdot I$ due
10 to inductance L of the transmission line. As a result, the size and phase of transmitting-side voltage V_s and receiving-side voltage V_r are equal, and long-distance transmission that is unaffected by the inductance of the transmission line is achieved.

15 FIG.40(c) is a vector diagram showing a situation in which the power in the transmission line has fluctuated due to the effects of an incident such as a line-to-earth fault or the like, and explains, for example, the action that occurs when the phase of the transmitting-side voltage has
20 deviated, as in V_s' . If the phase of the transmitting-side voltage has deviated, as in V_s' , voltage difference $V_s' - V_r$ occurs, and the transmission current that up to this point was $I = I_r$ attempts to increase to I' . As a result, both active power P and reactive power Q of the transmission line
25 change. The changes are detected as ΔP and ΔQ , and these

changes control compensation voltage $\mathbf{V_o}$ of series compensation generator **SCG**. In concrete terms, the power fluctuation can be rapidly inhibited by controlling compensation voltage component $\mathbf{V_{oq}}$ orthogonal to the current $\mathbf{I_r}$ in the transmission line in proportion to active power change ΔP , and controlling compensation voltage component $\mathbf{V_{op}}$ in-phase (or in reverse phase) to current $\mathbf{I_r}$ in the transmission line in proportion to reactive power change ΔQ .

In other words, in FIG.40(c), it is possible to inhibit the power oscillation because, in response to the change in transmitting-side voltage $\mathbf{V_{s'}}$, compensation voltage $\mathbf{V_o}$ instantly changes to $\mathbf{V_{o'}}$, and as a result, the voltage applied to the inductance of the transmission line is maintained at its original value $j\omega L \cdot \mathbf{I}$, and the current becomes $\mathbf{I} = \mathbf{I_r}$. Even in this situation static var generator **SVG** works to cancel out leading current $\mathbf{I_q}$ flowing in the floating capacitance, and this assists the action of series compensation generator **SCG**.

FIG.41 is a block diagram that shows the modification of the static var generator of the system shown in FIG.37.

In this diagram, **UVW** is a three-phase AC transmission line, **L** is the inductance of the transmission line, **Cq** is the floating capacitance, **Tr** is a parallel transformer, **VSI** is a current-controlled voltage source inverter, **Ed** is a DC voltage source, **Lf** is a filter reactor, **AVR** is a DC voltage

control circuit, and **PWMC** is a pulse width modulation (PWM) control circuit.

The static var generator is composed of parallel transformer **Tr**, filter reactor **Lf**, and current controlled voltage source inverter **VSI**, and supplies compensation current **Io** of any size and phase to the transmission line.

Current controlled voltage source inverter **VSI** is composed of six self-turn-off devices (for example GTOs) and six diodes connected in parallel to these devices. Output current **Io** of inverter **VSI** is detected by current detector **CTo**, compared to command value **Ior**, and any deviation ε amplified by current control circuit **ACR**. The output of **ACR** is input into PWM control circuit **PWMC** as voltage command value **v***. Using PWM control, the inverter outputs voltage **Vi** proportional to voltage command value **v***. Filter reactors **Lf** are provided for each phase, and these perform the role of inhibiting pulsation in inverter output current **Io**.

In this way, current controlled voltage source inverter **VSI** controls output current **Io** so that it is equal to compensation current command value **Ior**, and supplies the necessary compensation current **Io** to the transmission line.

As DC voltage source **Ed** for current controlled voltage source inverter **VSI**, a separate power source may be provided, but here DC smoothing capacitor **Cd** is used, and this is controlled so that its voltage is approximately constant. That is, voltage **Ed** applied to DC smoothing capacitor **Cd** is

detected and compared with command value **Edr**, and feedback control is carried out to make these voltages equal. If actual voltage **Ed** is less than command value **Edr** the deviation is a positive value, and this is amplified via voltage control circuit **AVR**. Output **Iop** of **AVR** is an active current command value, so if **Edr** > **Ed**, deviation **sv** (not shown in the diagram) will be positive, **Iop** > 0, active current will be taken from the system, and DC voltage **Ed** will be increased. Conversely, if **Edr** < **Ed**, deviation **sv** will be negative, and active current command value **Iop** will be a negative value. Accordingly, active current is released into the system and DC voltage **Ed** will be reduced. In this way DC voltage **Ed** of the current controlled voltage source inverter can be kept approximately constant.

In the diagram, **Iog** is the steady-state reactive current command value, and by regulating this value it is possible to cancel out leading current **Iq** that flows in the floating capacitance of the transmission line.

FIG.42 is a block diagram that shows a different modification example of static var generator **SVG** of the system shown in FIG.37.

In this diagram, **UVW** is a three-phase AC transmission line, **L** is inductance of the transmission line, **Cq** is the floating capacitance, **Tr** is a parallel transformer, **LCI** is an externally-commutated inverter, **DCL** is a DC reactor, **K** is a

proportional element, **ACR** is a current control circuit, and **PHC** is a phase control circuit.

The static var generator is composed of parallel transformer **Tr** and externally-commutated inverter **LCI**, and
5 supplies compensation current **I_o** to the transmission line.

Current source externally-commutated inverter **LCI** is composed of six thyristors **T1~T6**, and using phase control, controls DC side voltage **V_d** of **DCL**. The size of compensation current **I_o** is proportional to DC current **I_d**, and phase angle
10 α of the compensation current relative to the voltage of the system is equal to the turning-on control angle of the **LCI**.

In externally-commutated inverter **LCI**, because thyristors **T1 ~ T6** cause natural commutation utilizing the power source voltage, above-mentioned phase angle α is
15 controlled to within the range $0^\circ \sim 180^\circ$, and usually takes lagging current **I_o**.

DC reactor **DCL** is connected as the DC current source for externally-commutated inverter **LCI**, and feedback control is carried out to make current **I_d** flowing in DC reactor **DCL**
20 equal command value **I_{dr}**. That is, DC current command value **I_{dr}** proportional to compensation current command value **I_{oq}** is given, this is compared with detected DC current value **I_d**, and any deviation ε amplified via current control circuit **ACR**. **ACR** output signal **vd*** is given to phase control circuit **PHC**,
25 and, using phase control, DC voltage **V_d** proportional to

signal $\mathbf{vd}^*$ is generated. If $\mathbf{Idr} > \mathbf{Id}$, deviation ϵ will be positive, $\mathbf{vd}^* > 0$, and DC current $\mathbf{Id}$ will be increased.

Conversely, if $\mathbf{Idr} < \mathbf{Id}$, deviation ϵ will be negative, $\mathbf{vd}^* < 0$, and DC current $\mathbf{Id}$ will be reduced. In this way DC current
 5 $\mathbf{Id}$ of externally-commutated inverter **LCI** can be controlled so that it equals command value $\mathbf{Idr}$. In the steady state, $\mathbf{Vd}^*$ will be approximately zero, phase angle α of compensation current $\mathbf{Io}$ will be approximately 90° , and compensation current $\mathbf{Io}$ will be a lagging current.

10 In the diagram, $\mathbf{Ioq}$ is the steady-state reactive current command value, and by regulating this value it is possible to cancel out leading current $\mathbf{Iq}$ that flows in the floating capacitance of the transmission line.

FIG.43 is a block diagram showing a seventeenth
 15 embodiment of a long-distance AC transmission system of this invention.

In this diagram, **G** is a power station, **SS** is a substation, **L1**, **L2** and **L3** are transmission line inductances, **Cq1** and **Cq2** are transmission line floating capacitances, **SVG1**
 20 and **SVG2** are static var generators, **SCG** is a series compensation generator, and **SW** is a bypass circuit.

Floating capacitances exist between transmission lines and between transmission lines and earth, and when transmitting power over long distances these cannot be
 25 ignored. Floating capacitances are distributed constants,

but here they will be expressed as centralized constants **Cq1** and **Cq2**. In addition, the transmission line inductance is also shown divided into three parts, **L1**, **L2** and **L3**. Leading currents **Iq1** and **Iq2** flow in floating capacitances **Cq1** and **Cq2**, and static var generators **SVG1** and **SVG2** are provided to compensate for these leading currents. Also, series compensation generator **SCG** is provided to compensate for transmission line inductance **L1+L2+L3**.

Series compensation generator **SCG** outputs the following compensation voltage **Vo** in order to compensate for the voltage drop due to transmission line inductance **L1+L2+L3**.

$$\mathbf{V_o} = -j\omega (\mathbf{L1} + \mathbf{L2} + \mathbf{L3}) \cdot \mathbf{I}$$

Here, the series compensation stated above works effectively when the same current **I** is flowing in the transmission line inductances **L1**, **L2** and **L3**.

As stated above, transmission line floating capacitances are actually distributed constants, and due to the leading current flowing in these floating capacitances, the current flowing in above-mentioned transmission line inductances **L1**, **L2** and **L3** will not be the same.

To deal with this situation, two static var generators **SVG1** and **SVG2** are used, and these are distributed to different locations. Accordingly, static var generator **SVG1** compensates for leading current **Iq1** flowing in transmission line floating capacitance **Cq1**, and static var generator **SVG2** compensates for leading current **Iq2** flowing in transmission

line floating capacitance **Cq2**. By this means, current **I** flowing in the transmission line can be equalized, and the above-mentioned compensation for the transmission line inductances using series compensation generator **SCG** can be used effectively. Even greater equalization of transmission current **I** can be expected if a larger number of static var generators are distributed along the transmission line. By this means the equivalent reactance of the transmission line can be regulated, and it is possible to greatly improve the transmission capability of long-distance transmission lines.

If an overcurrent flows due to an incident such as a line-to-earth fault or the like in the transmission line, bypass circuit **SW** connected in parallel with series compensation generator **SCG** closes, and the overcurrent is caused to flow through bypass circuit **SW**. As a result, reactance $X = \omega(L1+L2+L3)$ of the transmission line can be returned to its original value, and escalation of the overcurrent prevented. In addition, the flow of overcurrent to the series compensation generator can be prevented, and the reliability of the system can be improved.

FIG.44 is a block diagram showing an eighteenth embodiment of a long-distance AC transmission system of the present invention.

In this diagram, **G** is a power station, **SS** is a substation, **L1** and **L2** are transmission line inductances, **Cq1** and **Cq2** are transmission line floating capacitances, **SVG** is a

static var generator, **CAP** is a series capacitor, **CVG** is a compensation voltage generator, **SW1** and **SW2** are bypass circuits, **CSI** is a current source inverter, **PD** is a power detector, **CONT1** is a **CVG** control circuit, and **CONT2** is a **CSI** control circuit respectively.

Floating capacitances exist between transmission lines and between transmission lines and earth, and when transmitting power over long distances these cannot be ignored. Floating capacitances are distributed constants, but here for the sake of convenience they will be expressed as centralized constants **Cq1** and **Cq2**. In addition, the transmission line inductance is also shown divided into two parts, **L1** and **L2**. Leading current **Iq** flows in floating capacitances **Cq1** and **Cq2**, and static var generator **SVG** is provided to compensate for these leading currents. Also, series capacitor **CAP** and compensation voltage generator **CVG** are provided to compensate for transmission line inductance **L1+L2**.

The capacitance of series capacitor **CAP** is selected so that it cancels out most of inductance **L1+L2** of the transmission line. In addition, compensation voltage generator **CVG** generates compensation voltage **Vo** to regulate the equivalent reactance of the transmission line and inhibit power oscillation. When the equivalent reactance of the transmission line has been compensated to zero, compensation voltage **Vo** in the steady-state is expressed in the following

expression. Where **C** is the capacitance of series capacitor **CAP**, and **I** is the current flowing in the transmission line:

$$V_o = -jI \{ \omega (L_1 + L_2) - 1/(\omega C) \}$$

In addition, static var generator **SVG** causes
 5 compensation current **I_o** to flow to cancel out leading
 currents **I_q** that flow in floating capacitances **C_{q1}** and **C_{q2}**.
 As a result, the transmitting-side current and the receiving-
 side current are made approximately equal, and series
 capacitor **CAP** and compensation voltage generator **CVG** operate
 10 effectively.

By this means the equivalent reactance of transmission
 lines can be regulated, and the transmission capability of
 long-distance transmission lines greatly improved.

If an overcurrent flows due to an incident such as a
 15 line-to-earth fault or the like in the transmission line,
 series capacitor **CAP** bypass circuit **SW1** and bypass circuit
SW2 connected in parallel with compensation voltage generator
CVG close, and the overcurrent is caused to flow through
 bypass circuits **SW1** and **SW2**. As a result, reactance **X** = ω
 20 (**L₁**+**L₂**) of the transmission line can be returned to its
 original value, and escalation of the overcurrent prevented.
 In addition, the flow of overcurrent to series capacitor **CAP**
 and compensation voltage generator **CVG** can be prevented, and
 the reliability of the system can be improved.

25 If the power in the transmission lines fluctuates due

to the influence of an incident such as a line-to-earth fault or the like, change in active power P and reactive power Q are detected by power detector PD as ΔP and ΔQ , and these changes control output voltage V_o of compensation voltage generator CVG . In concrete terms, power oscillation can be rapidly inhibited by controlling compensation voltage component V_{oq} orthogonal to current I_r in the transmission line in proportion to active power change ΔP , and controlling compensation voltage component V_{op} in-phase (or in reverse phase) to current I_r in the transmission line in proportion to reactive power change ΔQ . Even in this situation static var generator SVG works to cancel out leading current I_q flowing in the floating capacitance, and this assists the action of compensation voltage generator CVG .

FIG.45 shows voltage/current vector diagrams provided to explain the operation of the system shown in FIG.44.

FIG.45(a) and (b) show an equivalent circuit and a voltage/current vector diagram for a transmission line without a static var generator, whereas FIG.45(c) and (d) show an equivalent circuit and a voltage/current vector diagram for a transmission line which includes a static var generator.

In this diagram, V_s is the transmitting-side voltage, V_r is the receiving-side voltage, L is the inductance in the transmission line, C is the series capacitor, I is the

transmitting-side current, $\mathbf{I_r}$ is the receiving-side current, $\mathbf{V_o}$ is the output voltage of the compensation voltage generator, $\mathbf{I_q}$ is the leading current that flows in the floating capacitance of the transmission line, $\mathbf{I_o}$ is the
 5 compensation current generated from the static var generator, and ω is the power supply angular frequency.

In the vector diagram of FIG.45(b), receiving-side current $\mathbf{I_r}$ and transmitting-side current $\mathbf{I}$ become different because leading current $\mathbf{I_q}$ flows in floating capacitance $\mathbf{C_q}$
 10 of the transmission line. Hypothesizing from the equivalent circuit shown in FIG.45 (a), voltage drop $\mathbf{j\omega L \cdot I}$ due to inductance $\mathbf{L}$ of the transmission line will be approximately orthogonal to current $\mathbf{I}$.

On the other hand, compensation is carried out so that
 15 the voltage drop due to inductance $\mathbf{L}$ of the transmission line is cancelled out by series capacitor $\mathbf{C}$ and compensation voltage generator $\mathbf{CVG}$, in order to make transmitting-side voltage $\mathbf{V_s}$ and receiving-side voltage $\mathbf{V_r}$ approximately equal. To achieve this it is essential voltage

$$20 \quad \mathbf{V_o} = - \mathbf{j\omega L \cdot I} - \mathbf{I_r / (j\omega C)}$$

is output as the compensation voltage from the series compensation generator. In this case, the current flowing in series capacitor $\mathbf{C}$ is receiving-side current $\mathbf{I_r}$, so it becomes impossible to effectively cancel out inductance $\mathbf{L}$ of
 25 the transmission line.

As a result of this, because output voltage $\mathbf{V_o}$ of the compensation voltage generator is 90° out of phase relative to receiving-side current $\mathbf{I_r}$, active power must be constantly supplied (or regenerated) from the compensation voltage generator. Accordingly, an energy supply source (or an energy regeneration source) is needed in the compensation voltage generator, and this will require a larger generator and lead to higher costs.

In the vector diagram of FIG.45(d), compensation current $\mathbf{I_o}$ is supplied from static var generator **SVG** to cancel out leading current $\mathbf{I_q}$ flowing in the floating capacitance. As a result, transmitting-side current $\mathbf{I}$ and receiving-side current $\mathbf{I_r}$ become equal, and it is possible to effectively cancel out transmission line inductance $\mathbf{L}$ using series capacitor **C**. Therefore, compensation voltage $\mathbf{V_o}$ output from compensation voltage generator **CVG** will be reduced, and moreover, vector $\mathbf{V_o}$ of this voltage will become orthogonal to the $\mathbf{I} = \mathbf{I_r}$ vector. Accordingly, a smaller capacity compensation voltage generator **CVG** can be used, and moreover, in the steady-state, the active power exchanged with compensation voltage generator **CVG** becomes zero, and it is no longer necessary to include an energy supply source (or an energy regeneration source).

As a result, the transmission capability of the transmission line will be improved, and moreover, the load on compensation voltage generator **CVG** will be reduced, and a

more economical long-distance AC transmission system can be provided.

FIG.46 is a block diagram showing a nineteenth embodiment of a long-distance AC transmission system of the present invention.

In this diagram, **G** is a power station, **SS** is a substation, **L1** and **L2** are transmission line inductances, **Cq1** and **Cq2** are transmission line floating capacitances, **SVG1** and **SVG2** are static var generators, **CAP1** and **CAP2** are series capacitors, and **CVG** is a compensation voltage generator.

Floating capacitances exist between transmission lines and between transmission lines and earth, and when transmitting power over long distances these cannot be ignored. Floating capacitances are distributed constants, but here they will be expressed as the centralized constants **Cq1** and **Cq2**. In addition, the transmission line inductance is also shown divided into two parts, **L1** and **L2**. Leading currents **Iq1** and **Iq2** flow in floating capacitances **Cq1** and **Cq2**, and static var generators **SVG1** and **SVG2** are provided to compensate for these leading currents. Also, series capacitors **CAP1** and **CAP2** are provided at separate locations to compensate for transmission line inductance **L1+L2**. Furthermore, compensation voltage generator **CVG** is provided to regulate the equivalent reactance of the transmission line as a whole, and also to inhibit power oscillation.

In this example, two static var generators **SVG1** and

SVG2 are used, and these are distributed to different locations. Accordingly, static var generator **SVG1** compensates for leading current **I_{q1}** flowing in transmission line floating capacitance **C_{q1}**, and static var generator **SVG2** compensates for leading current **I_{q2}** flowing in transmission line floating capacitance **C_{q2}**.

Next, series capacitors **CAP1** and **CAP2** are positioned separately immediately after the two static var generators **SVG1** and **SVG2**. As a result, the current flowing in transmission line inductance **L1** is approximately equal to the current flowing in series capacitor **CAP1**, and the current flowing in transmission line inductance **L2** is approximately equal to the current flowing in series capacitor **CAP2**. Accordingly, series capacitors **CAP1** and **CAP2** can effectively compensate for transmission line inductance **L1** and **L2**, and the capacity of compensation voltage generator **CVG** can be greatly reduced.

Even greater equalization of transmission current **I** can be expected if a larger number of static var generators and series condensers are distributed along the transmission line, the equivalent reactance of the transmission line as a whole can be regulated, and it is possible to greatly improve the transmission capability of long-distance transmission lines.

FIG.47 is a block diagram showing a twentieth embodiment of a long-distance AC transmission system of this invention.

In this diagram, **G** is a power station, **SS** is a substation, **L1** and **L2** are transmission line inductances, **Cq1** and **Cq2** are transmission line floating capacitances, **SVG** is a static var generator, **CAP** is a series capacitor, **CIG** is a compensation current generator, **SW** is a bypass circuit, **CSI** is a current source inverter, **PD** is a power detector, **CONT1** is a **CIG** control circuit, and **CONT2** is a **CSI** control circuit.

Floating capacitances exist between transmission lines and between transmission lines and earth, and when transmitting power over long distances these cannot be ignored. Floating capacitances are distributed constants, but here they will be expressed as centralized constants **Cq1** and **Cq2**. In addition, the transmission line inductance is also shown divided into two parts, **L1** and **L2**. Leading currents **Iq** flow in floating capacitances **Cq1** and **Cq2**, and static var generator **SVG** is provided to compensate for these leading currents. Also, series capacitor **CAP** and compensation current generator **CIG** are provided to compensate for transmission line inductance **L1+L2**.

The capacitance of series capacitor **CAP** is selected so that it cancels out most of inductance **L1+L2** of the transmission line. In addition, compensation current generator **CIG** is connected in parallel to series capacitor **CAP**, and supplies compensation current **Ic** to capacitor **CAP**. Voltage **Vo** applied to series capacitor **CAP** is determined from the sum of current **I** flowing in the transmission line and

above-mentioned compensation current **I_c**.

The equivalent reactance of the transmission line is regulated and power oscillation is inhibited by regulating voltage **V_o** applied to series capacitor **CAP**. When the
 5 equivalent reactance of the transmission line has been compensated to zero, voltage **V_o** applied to series capacitor **CAP** in the steady state is expressed in the following expression. Where **C** is the capacitance of series capacitor **CAP**, and **I** is the current flowing in the transmission line:

$$10 \quad V_o = -j\omega (L_1 + L_2) \cdot I = (I + I_c) / (j\omega C)$$

In addition, static var generator **SVG** causes compensation current **I_o** to flow to cancel out leading currents **I_q** that flow in floating capacitances **C_{q1}** and **C_{q2}**. As a result, the transmitting-side current and the receiving-
 15 side current become approximately equal, current **I** flowing in the transmission line and the current flowing in main series capacitor **CAP** become approximately equal, and the capacity of compensation current generator **CIG** can be reduced.

By this means the equivalent reactance of transmission
 20 lines can be regulated, and the transmission capability of long-distance transmission lines greatly improved.

If an overcurrent flows due to an incident such as a line-to-earth fault or the like in the transmission line, bypass circuit **SW** connected in parallel with series capacitor
 25 **CAP** closes, and the overcurrent is caused to flow through

bypass circuit **SW**. As a result, reactance $X = \omega (L1+L2)$ of the transmission line can be returned to its original value, and escalation of the overcurrent prevented. In addition, the flow of overcurrent to series capacitor **CAP** and
 5 compensation current generator **CIG** can be prevented, and the reliability of the system can be improved.

Also, if the power in the transmission lines fluctuates due to the influence of an incident such as a line-to-earth fault or the like, changes in active power **P** and reactive
 10 power **Q** are detected by power detector **PD** as ΔP and ΔQ , and these changes control output current **Ic** of the compensation current generator **CIG**. In concrete terms, power oscillation can be rapidly inhibited by controlling compensation current component **I_{oq}** orthogonal to current **I_r** in the transmission
 15 line in proportion to active power change ΔP , and controlling compensation current component **I_{op}** in-phase (or in reverse phase) to current **I_r** in the transmission line in proportion to reactive power change ΔQ . Even in this situation static var generator **SVG** works to cancel out leading current **I_q**
 20 flowing in the floating capacitance, and this assists the action of compensation current generator **CIG**.

FIG.48 shows voltage/current vector diagrams provided to explain the operation of the system shown in FIG.47.

FIGS.48(a) and (b) show an equivalent circuit and a
 25 voltage/current vector diagram for a transmission line

without a static var generator, whereas FIGS.48(c) and (d) show an equivalent circuit and a voltage/current vector diagram for a transmission line which includes a static var generator.

5 In this diagram, **Vs** is the transmitting-side voltage, **Vr** is the receiving-side voltage, **L** is in the inductance in the transmission line, **C** is the series capacitor, **I** is the transmitting-side current, **Ir** is the receiving-side current, **Ic** is the compensation current generator output current, **Iq** is the leading current that flows in the floating capacitance
10 of the transmission line, **Io** is the compensation current generated from the static var generator, and ω is the power supply angular frequency.

 In the vector diagram of FIG.48(b), receiving-side
15 current **Ir** and transmitting-side current **I** become different because leading current **Iq** flows in floating capacitance **Cq** of the transmission line. Hypothesizing from the equivalent circuit shown in FIG.48 (a), voltage drop $j\omega L \cdot I$ due to inductance **L** of the transmission line will be approximately
20 orthogonal to current **I**.

 On the other hand, compensation is carried out so that the voltage drop due to inductance **L** of the transmission line is cancelled out by series capacitor **C** and compensation current generator **CIG**, in order to make transmitting-side
25 voltage **Vs** and receiving-side voltage **Vr** approximately equal.

To achieve this it is essential voltage

$$\mathbf{V_o} = (\mathbf{I_r} + \mathbf{I_c}) / (j\omega\mathbf{C}) = -j\omega\mathbf{L} \cdot \mathbf{I}$$

is output as the voltage applied to the series capacitor. In this case, current $\mathbf{I_r}$ flowing in series capacitor $\mathbf{C}$ is the receiving-side current, so it becomes impossible to effectively cancel out inductance $\mathbf{L}$ of the transmission line.

As a result of this, output current $\mathbf{I_c}$ of the compensation current generator is

$$\mathbf{I_c} = \omega\mathbf{C} \cdot \omega\mathbf{L} \cdot \mathbf{I} - \mathbf{I_r}$$

and if, provisionally, a situation is selected in which $\mathbf{I} / (\omega\mathbf{C}) = \omega\mathbf{L}$, then $\mathbf{I_c} = \mathbf{I} - \mathbf{I_r}$. This current is equal to leading current $\mathbf{I_q}$ which flows in floating capacitance $\mathbf{C_q}$ of the transmission line, and it is constantly necessary to supply this current from compensation current generator **CIG**. In addition, compensation current $\mathbf{I_c}$ comes close to being in-phase (or in reverse phase) relative to the voltage applied to series capacitor **CAP**, and active power must be constantly supplied (or regenerated) from the compensation current generator. Accordingly, an energy supply source (or an energy regeneration source) is needed in the compensation current generator, and this will require a larger generator, and lead to higher costs.

In comparison, in the vector diagram of FIG.48(d), compensation current $\mathbf{I_o}$ is supplied from static var generator **SVG** to cancel out leading current $\mathbf{I_q}$ flowing in the floating

capacitance. As a result, transmitting-side current $\mathbf{I}$ and receiving-side current $\mathbf{I_r}$ are equalized, and it is possible to effectively cancel out transmission line inductance $\mathbf{L}$ using series capacitor $\mathbf{C}$. Therefore, compensation current $\mathbf{I_c}$ output from compensation current generator $\mathbf{CIG}$ is reduced, and moreover, vector $\mathbf{I_c}$ of this current is in-phase (or in reverse phase) relative to the $\mathbf{I} = \mathbf{I_r}$ vector, and is a component orthogonal to the voltage $\mathbf{V_o}$ applied to series capacitor $\mathbf{CAP}$. Accordingly, a smaller capacity compensation current generator $\mathbf{CIG}$ can be used, and moreover, in the steady-state the active power exchanged with compensation current generator $\mathbf{CIG}$ is zero, and it is no longer necessary to include an energy supply source (or an energy regeneration source).

By this means, the transmission capability of the transmission line is improved, and moreover, the load on compensation current generator $\mathbf{CIG}$ is reduced, and a more economical long-distance AC transmission system can be provided.

FIG.49 is a block diagram showing a twenty-first embodiment of a long-distance AC transmission system of this invention.

In this diagram, $\mathbf{G}$ is a power station, $\mathbf{SS}$ is a substation, $\mathbf{L1}$ and $\mathbf{L2}$ are transmission line inductances, $\mathbf{Cq1}$ and $\mathbf{Cq2}$ are transmission line floating capacitances, $\mathbf{SVG}$ is a static var generator, $\mathbf{CAP}$ is a main series capacitor, $\mathbf{CAPa}$ is

an auxiliary series capacitor, **CIG** is a compensation current generator, **SW** and **SWa** are bypass circuits, **CSI** is a current source inverter, **PD** is a power detector, **CONT1** is a **CIG** control circuit, and **CONT2** is a **CSI** control circuit.

5 Floating capacitances exist between transmission lines and between transmission lines and earth, and when transmitting power over long distances these cannot be ignored. Floating capacitances are distributed constants, but here, for the sake of convenience, they will be expressed
10 as centralized constants **Cq1** and **Cq2**. In addition, the transmission line inductance is also shown divided into two parts, **L1** and **L2**. Leading currents **Iq** flow in floating capacitances **Cq1** and **Cq2**, and static var generator **SVG** is provided to compensate for these leading currents. Also,
15 main series capacitor **CAP**, auxiliary series capacitor **CAPa**, and compensation current generator **CIG** are provided to compensate for transmission line inductance **L1+L2**.

The capacitance of main series capacitor **CAP** is selected so that it cancels out most of inductance **L1+L2** of
20 the transmission line. In addition, compensation current generator **CIG** is connected in parallel to auxiliary series capacitor **CAPa**, and supplies compensation current **Ic** to capacitor **CAPa**. Voltage **Vo** applied to auxiliary series capacitor **CAPa** is determined from the sum of current **I**
25 flowing in the transmission line and above-mentioned compensation current **Ic**.

The equivalent reactance of the transmission line is regulated and power fluctuations are inhibited by regulating voltage **V_o** applied to auxiliary series capacitor **CAP_a**. When the equivalent reactance of the transmission line has been compensated to zero, voltage **V_o** applied to auxiliary series capacitor **CAP_a** in the steady state is expressed in the following expression. Where **C** is the capacitance of main series capacitor **CAP**, **C_a** is the capacitance of auxiliary series capacitor **CAP_a**, and **I** is the current flowing in the transmission line:

$$\begin{aligned} V_o &= -jI \{ \omega (L_1 + L_2 - 1/(\omega C)) \} \\ &= (I + I_c) / (j\omega C_a) \end{aligned}$$

In addition, static var generator **SVG** causes compensation current **I_o** to flow to cancel out leading currents **I_q** that flow in floating capacitances **C_{q1}** and **C_{q2}**. As a result, the transmitting-side current and the receiving-side current become approximately equal, the current **I** flowing in the transmission line and the current flowing in main series capacitor **CAP** and auxiliary series capacitor **CAP_a** become approximately equal, and the capacity of compensation current generator **CIG** can be reduced.

By this means, the equivalent reactance of transmission lines can be regulated, and the transmission capability of long-distance transmission lines greatly improved.

If an overcurrent flows due to an incident such as a

line-to-earth fault or the like in the transmission line,
 bypass circuit **SW** connected in parallel with main series
 capacitor **CAP** and bypass circuit **SWa** connected in parallel
 with auxiliary series capacitor **CAPa** close, and the
 5 overcurrent is caused to flow through bypass circuits **SW** and
SWa. As a result, reactance $X = \omega (L1 + L2)$ of the
 transmission line can be returned to its original value, and
 escalation of the overcurrent prevented. In addition, the
 flow of overcurrent to main series capacitor **CAP**, auxiliary
 10 series capacitor **CAPa**, and compensation current generator **CIG**
 can be prevented, and the reliability of the system can be
 improved.

If the power in the transmission lines fluctuates due
 to the influence of an incident such as a line-to-earth fault
 15 or the like, changes in active power **P** and reactive power **Q**
 are detected by power detector **PD** as ΔP and ΔQ , and these
 changes control output current **Ic** of compensation current
 generator **CIG**. In concrete terms, power fluctuations can be
 rapidly inhibited by controlling compensation current
 20 component **I_{oq}** orthogonal to current **I_r** in the transmission
 line in proportion to active power change ΔP , and controlling
 compensation current component **I_{op}** in-phase (or in reverse
 phase) with current **I_r** in the transmission line in proportion
 to reactive power change ΔQ . Even in this situation, static
 25 var generator **SVG** works to cancel out leading current **I_q**

flowing in the floating capacitance, and this assists the action of compensation current generator **CIG**.

FIG.50 shows a voltage/current vector diagram provided to explain the operation of the system shown in FIG.49.

5 In this diagram, **Vs** is the transmitting-side voltage, **Vr** is the receiving-side voltage, **L** is the inductance in the transmission line, **C** is a main series capacitor, **Ca** is an auxiliary series capacitor, **I** is the transmitting-side current, **Ir** is the receiving-side current, **Ic** is the
10 compensation current generator output current, **Iq** is the leading current that flows in the floating capacitance of the transmission line, **Io** is the compensation current generated from the static var generator, and ω is the power supply angular frequency.

15 In the vector diagram of FIG.50(b), compensation current **Io** is supplied from static var generator **SVG** to cancel out leading current **Iq** flowing in the floating capacitance. As a result, transmitting-side current **I** and receiving-side current **Ir** are equalized, and it is possible
20 to effectively cancel out transmission line inductance **L** using main series capacitor **C** and auxiliary series capacitor **Ca**. Therefore, compensation current **Ic** output from compensation current generator **CIG** is reduced, and moreover, vector **Ic** of this current is in-phase (or in reverse phase)
25 relative to the **I = Ir** vector, and is a component orthogonal to voltage **Vo** applied to auxiliary series capacitor **Ca**.

Accordingly, a smaller capacity compensation current generator **CIG** can be used, and moreover, in the steady-state the active power exchanged with compensation current generator **CIG** is zero, and it is not necessary to include an
 5 energy supply source (or an energy regeneration source).

By this means, the transmission capability of the transmission line is improved, and moreover, the load on compensation current generator **CIG** is reduced, and a more economical long-distance AC transmission system can be
 10 provided.

FIG.51 is a block diagram showing a twenty-second embodiment of a long-distance AC transmission system of this invention.

In this diagram, **G** is a power station, **SS** is a
 15 substation, **L1** and **L2** are transmission line inductances, **Cq1** and **Cq2** are transmission line floating capacitances, **SVG1** and **SVG2** are static var generators, **CAP1** and **CAP2** are main series capacitors, **CAPa** is an auxiliary series capacitor, and **CIG** is a compensation current generator.

20 Floating capacitances exist between transmission lines and between transmission lines and earth, and when transmitting power over long distances these cannot be ignored. Transmission line floating capacitances are distributed constants, but here they will be expressed as
 25 centralized constants **Cq1** and **Cq2**. In addition, the transmission line inductance is also shown divided into two

parts, **L1** and **L2**. Leading currents **Iq1** and **Iq2** flow in floating capacitances **Cq1** and **Cq2**, and static var generators **SVG1** and **SVG2** are provided to compensate for these leading currents. Also, main series capacitors **CAP1** and **CAP2** are
 5 provided at separate locations to compensate for transmission line inductance **L1+L2**. Furthermore, auxiliary series capacitor **CAPa** and compensation current generator **CIG** are provided to regulate the equivalent reactance of the transmission line as a whole, and also to inhibit power
 10 oscillation.

In this example, two static var generators **SVG1** and **SVG2** are used, and these are distributed to different locations. Accordingly, static var generator **SVG1** compensates for leading current **Iq1** flowing in transmission
 15 line floating capacitance **Cq1**, and static var generator **SVG2** compensates for leading current **Iq2** flowing in transmission line floating capacitance **Cq2**.

Next, main series capacitors **CAP1** and **CAP2** are positioned separately immediately after the two static var
 20 generators **SVG1** and **SVG2**. As a result, the current flowing in transmission line inductance **L1** is approximately equal to the current flowing in main series capacitor **CAP1**, and the current flowing in transmission line inductance **L2** is approximately equal to the current flowing in main series
 25 capacitor **CAP2**. Accordingly, main series capacitors **CAP1** and **CAP2** can effectively compensate for the transmission line

inductance **L1+L2**, and the capacity of auxiliary series capacitor **CAPa** and compensation current generator **CIG** can be greatly reduced.

Even greater equalization of the transmission current **I** can be expected if a larger number of static var generators and series condensers are distributed along the transmission line, the equivalent reactance of the transmission line as a whole can be regulated, and it is possible to greatly improve the transmission capability of long-distance transmission lines.

FIG.52 is a block diagram showing a twenty-third embodiment of a long-distance AC transmission system of the present invention.

In the diagram, **A1** is a power station (transmitting end), **A2** is a substation (receiving end), **A3** is system transmission line reactance **X**, **A10** is a compensation voltage generator, **A11** is a compensation control circuit for the compensation voltage generator. **I** is the three-phase current flowing in the system transmission line. In practice, resistances, and the like, exist in system, in addition to the reactance, but these have been omitted to simplify the explanation.

FIG.53 is an equivalent circuit showing a situation where there is no compensation voltage generator. FIG.54 shows a voltage/current vector diagram for the system equivalent circuit shown in FIG.53.

When there is no compensation voltage generator, as shown in FIG.54, phase difference θ occurs between transmitting end voltage **Es** and receiving end voltage **Er**. Because this difference in voltage between transmitting-end voltage **Es** and receiving-end voltage **Er** occurs, current **I** flows in the transmission line due to the system reactance **X**.

In this case, in relation to transmission line current **I**, the relationship between the voltage difference and $j\omega LI$ is **Es** - **Er** = $j\omega LI$, and the phase is 90° advanced relative to the current.

FIG.55 is an equivalent circuit showing a situation of FIG.52 where there is a compensation voltage generator. FIG.56 shows a voltage/current vector diagram for the system equivalent circuit shown in FIG.55.

By producing compensation voltage **Vo**, which is a component orthogonal to the current **I** flowing in the transmission line, as output from the compensation voltage generator, receiving-end voltage **Er** becomes **Ern** relative to transmitting-end voltage **Es** and phase difference θ is reduced, in order to cancel out voltage drop $j\omega LI$ due to transmission line reactance **X**. That is, the equivalent reactance is reduced, so it is possible to increase the active power that can be transmitted. In this case, it is possible to make equivalent reactance **X** zero by making **Vo** = $-j\omega LI$, and **Es** can be made equal to **Er**.

With zero reactance power transmission, even if current I increases, no phase angle θ between E_s and E_r operates, so the system is strong with respect to power oscillations.

FIG.56 describes a steady-state compensation voltage.

5 Even when power fluctuation arises within the system due to power variations at the transmitting end or receiving end, it is possible to supply to the receiving end a voltage approximately equal to transmitting-end voltage E_s by controlling compensation voltage V_o with compensation voltage generator **A10**, so power oscillations can be controlled. The
10 operation of the system in this situation is shown in the vector diagram of FIG.57.

FIG.57 shows a situation in which in the phase of transmitting-end voltage E_s has changed.

15 When transmitting-end voltage E_s changes, current I flowing in the transmission line changes to I' , as shown in FIG.57(1). That is, active current component ΔI_p in-phase with E_r is produced, so compensation voltage ΔV_{oq} , orthogonal to current I , is generated in the opposite direction to
20 original compensation voltage V_o , in order to inhibit ΔI_p . In addition, compensation voltage ΔV_{op} is generated in reverse phase relative to current I , in order to inhibit the increase in reactive current component ΔI_q . The sum of ΔV_{oq} and ΔV_{op} constitute compensation voltage V_o' when
25 transmitting-end voltage E_s changes.

As shown in FIG.57(2), system current **I** and receiving-end voltage **Er** are kept constant by changing **Vo** to **Vo'** in order to satisfy the expression, **Es - Er = jωLI + Vo**.

As in the example shown in FIG.52, by compensating for the voltage drop due to system reactance, reactance **X** is made approximately zero, and active power **P** that can be transmitted becomes infinite:

$$P = \frac{E_s \cdot E_r}{X} \sin \theta$$

(this is the same as $P = \frac{V_s \cdot V_r}{X} \sin \theta$, stated earlier)

That is, power transmission unrestricted by reactance **X** becomes possible, and it is possible to increase transmission (distribution) capability in existing AC transmission (distribution) systems.

FIG.58 shows a practical block diagram of the twenty-third embodiment of this invention.

A1 is a power station, **A2** is a substation, **A3** is system transmission line reactance **X**, **A10** is a compensation voltage generator, **A11** is a compensation control circuit for the compensation voltage generator, **A21** is a system current detector, and **A21** is a system voltage detector.

Compensation voltage generator **A10** is composed of self-turn-off devices (for example GTOs) with diodes connected in parallel to these devices, and is connected in a three-phase bridge structure. In addition, compensation voltage generator **A10** is connected to a DC transformer via a reactor,

and the primary side of the DC transformer is connected to the system separately for each phase.

FIG.59 is a block diagram of the compensation voltage generator compensation control circuit.

5 In the steady state, compensation voltage generator compensation control circuit **A11** outputs compensation voltage **V_o** orthogonal to current **I** flowing in the transmission line to the primary side connected to the system, and so gives voltage command **V_p** and carries out PWM control.

10 That is, as shown in FIG.50, a voltage component 90° out of phase relative to the system current **I** drives compensation voltage generator **A10** as compensation voltage command **V_p**. If triangular wave comparison PWM control is carried out relative to compensation voltage command **V_p**, as shown in
15 FIG.61, output voltage **V_o** is output from compensation voltage generator **A10** in response to the carrier signal and compensation voltage command **V_p**. As a result, a voltage corresponding to the voltage drop due to the reactance is output from compensation voltage generator **A10**.

20 By compensating for the voltage drop due to the system reactance, reactance **X** is made approximately zero, and active power **P** that can be transmitted becomes infinite:

$$25 \quad P = \frac{E_s \cdot E_r}{X} \sin \theta$$

That is, power transmission unrestricted reactance **X** becomes possible, and it is possible to increase transmission

(distribution) capability in existing AC transmission
(distribution) systems.

On the other hand, if power oscillation occurs in the
transmission line, inhibition and control are carried out as
5 follows.

Active power **Pp** and reactive power **Pq** are found from
the output of system current detector **A21** and the output of
system voltage detector **A22**. If power oscillation occurs,
both active power **Pp** and reactive power **Pq** change and these
10 changes are detected as **ΔP** and **ΔQ**.

Compensation voltage **Voq** orthogonal to the current **I** in
the transmission line is regulated in proportion to active
power change **ΔP**, and compensation voltage component **Vop** in-
phase (or in reverse phase) to current **Ir** in the transmission
15 line is regulated in proportion to in reactive power change
ΔQ.

Power oscillation is inhibited by adding compensation
voltages **Vop** and **Voq** in response to compensation voltage
commands **Vp** and **Vq**.

20 Next, a twenty-fourth embodiment of the present
invention will be described.

FIG.62 is a block diagram showing a twenty-fourth
embodiment of an AC power transmission (distribution) system
of the present invention.

25 In the diagram, **A1** is a power station (transmitting

end), **A2** is a substation (receiving end), **A3** is system
 transmission line reactance **X**, **A10** is a compensation voltage
 generator, **A11** is a compensation control circuit for the
 compensation voltage generator, and **A12** is a capacitor
 5 connected to the system in series. **I** is the three-phase
 current flowing in the system transmission line. In practice,
 resistances, and the like, exist in system, in addition to
 the reactance, but these have been omitted to simplify the
 explanation.

10 FIG.63 is a vector diagram showing a situation in which
 the system reactance is constantly compensated for.

Phase difference θ occurs between transmitting-end
 voltage **Es** and receiving-end voltage **Er**. Because this
 difference in voltage between transmitting-end voltage **Es** and
 15 receiving-end voltage **Er** occurs, current **I** flows in the
 transmission line due to system reactance **X**. In this case,
 in relation to transmission line current **I**, the relationship
 between the voltage difference and $j\omega LI$ is **Es - Er = $j\omega LI$** ,
 and the phase is 90° advanced relative to the current.

20 In response to this, the voltage indicated in the
 following expression is generated in reverse phase to the
 system reactance **A3** by a capacitor **A12** connected in series.

25
$$V_c = j \frac{1}{\omega C}$$

As a result of this voltage, voltage drop $j\omega XI$ due to
 system reactance **A3** can be inhibited.

Moreover, by producing compensation voltage $\mathbf{V_o}$, which is a component orthogonal to the current $\mathbf{I}$ flowing in the transmission line, as output from the compensation voltage generator, receiving-end voltage $\mathbf{E_r}$ becomes $\mathbf{E_{rn}}$ relative to transmitting-end voltage $\mathbf{E_s}$, and phase difference θ reduces and the size of the voltage increases, in order to cancel out voltage drop $\mathbf{j\omega XI}$ due to the transmission line reactance $\mathbf{X}$. That is, the equivalent reactance is reduced, so it is possible to increase the active power that can be transmitted. In this case, it is possible to make equivalent reactance $\mathbf{X}$ zero by making

$$\mathbf{V_o} = -(\mathbf{j\omega LI} - \mathbf{j \frac{1}{\omega C}})$$

and $\mathbf{E_s}$ can be made equal to $\mathbf{E_r}$.

If transmission power fluctuations occur at transmitting end $\mathbf{A1}$ or load power fluctuations occur at receiving end $\mathbf{A2}$, system power fluctuations can be inhibited by carrying out control involving the output of compensation voltage from compensation voltage generator $\mathbf{A10}$. FIG.64 shows a vector diagram of the situation when the transmitting-end voltage has fluctuated.

As shown in FIG.64, if the phase angle relative to receiving-end voltage $\mathbf{E_r}$ increases due to fluctuations in transmitting-end voltage $\mathbf{E_s}$, system current $\mathbf{I}$ and receiving-end voltage $\mathbf{E_r}$ can be maintained at a constant level by controlling voltage $\mathbf{V_o}$ output from compensation voltage

generator **A10** in proportion to the value of **Es** - **Er**. That is, power oscillations in the system can be inhibited even if the transmitting-end voltage fluctuates.

In addition, in the steady state, the voltage drop due to the system reactance is compensated for by series capacitor **A12** and compensation voltage generator **A10**, so the capacity of compensation voltage generator **A10** can be reduced relative to the compensation voltage generator used in the twenty-third embodiment, in which the voltage drop due to the system reactance is compensated for by the compensation voltage generator **A10** alone.

FIG.65 shows a practical block diagram of the twenty-fourth embodiment of an AC power transmission (distribution) system of the present invention.

A1 is a power station, **A2** is a substation, **A3** is system transmission line reactance **X**, **A10** is a compensation voltage generator, **A11** is a compensation control circuit for the compensation voltage generator, **A12** is a capacitor, **A21** is a system current detector, and **A21** is a system voltage detector.

Compensation voltage generator **A10** is composed of self-turn-off devices (for example GTOs) with diodes connected in parallel to these devices, and is connected in a three-phase bridge structure. In addition, compensation voltage generator **A10** is connected to a DC transformer via a reactor, and the primary side of the DC transformer is connected to the system separately for each phase.

The structure of the compensation voltage generator compensation control circuit is similar to that of the twenty-third embodiment shown in FIG.59, but it is somewhat different because capacitor **A12** is connected to the system in series. In the steady state, the compensation voltage generator compensation acts to compensate for that portion that cannot be compensated for by capacitor **A12**.

In the steady-state, compensation voltage generator compensation control circuit **A11** outputs compensation voltage **V_o** orthogonal to current **I** flowing in the transmission line to the primary side connected to the system, and so gives voltage command **V_p** and carries out PWM control. In this case, a voltage is generated by capacitor **A12** in reverse phase to the system reactance, so compensation voltage **V_o** becomes:

$$\mathbf{V_o} = -(\mathbf{j\omega LI} - \mathbf{j \frac{1}{\omega C}})$$

That is, a voltage component 90° out-of-phase relative to the system current **I** drives compensation voltage generator **A10** as compensation voltage command **V_p**. If triangular wave comparison PWM control is carried out relative to compensation voltage command **V_p**, as shown in FIG.66, output voltage **V_o** is output from compensation voltage generator **A10** in response to the carrier wave signal and compensation voltage command **V_p**. As a result, the voltage drop due to the reactance is compensated for by the sum of the voltage output by capacitor **A12** and the voltage output by compensation

voltage generator **A10**.

By compensating for the voltage drop due to the system reactance, reactance **X** is made approximately zero, and active power **P** that can be transmitted becomes infinite:

$$5 \quad P = \frac{E_s \cdot E_r}{X} \sin \theta$$

10 That is, power transmission unrestricted by reactance **X** becomes possible, and it is possible to increase transmission (distribution) capability in existing AC transmission (distribution) systems.

On the other hand, if power oscillation occurs in the
15 transmission line, inhibition control is carried out as follows.

Active power **Pp** and reactive power **Pq** are found from the output of system current detector **A21** and the output of system voltage detector **A22**. If power oscillations occur,
20 both active power **Pp** and reactive power **Pq** change, and these changes are detected as **ΔP** and **ΔQ**.

Compensation voltage **Voq** orthogonal to current **I** in the transmission line is regulated in proportion to active power change **ΔP**, and the compensation voltage component **Vop** in-
25 phase (or in reverse phase) with current **I** in the transmission line is regulated in proportion to reactive power change **ΔQ**.

Power oscillation is inhibited by adding these compensation voltages **Voq** and **Vop** in response to compensation

voltage commands V_p and V_q .

FIG.67 shows a different modification of the twenty-fourth embodiment of an AC power transmission (distribution) system of the present invention. Here, only the aspects that
 5 differ from the AC power transmission system shown in FIG.65 will be explained, and elements that are identical will not be explained.

The point of difference from the AC power transmission system shown in FIG.65 is that capacitor **A12** is connected to
 10 the system via a transformer, instead of being connected to the system directly.

Even when capacitor **A12** is connected via a transformer in this way, as in the AC power transmission system shown in FIG.65, in the steady state, the voltage drop due to system
 15 reactance can be compensated for by the sum of the voltage output by capacitor **A12** and the voltage output by compensation voltage generator **A10**, power transmission unrestricted by reactance **X** becomes possible, and it is
 possible to increase transmission (distribution) capability
 20 in existing AC transmission (distribution) systems.

In addition, if power oscillation occurs in the transmission line, this power oscillation can be inhibited by regulating compensation voltage V_{oq} orthogonal to current **I**
 in the transmission line in proportion to active power change
 25 ΔP , and by regulating compensation voltage component V_{op} in-phase (or in reverse phase) with current **I** in the

transmission line in proportion to reactive power change ΔQ .

In this way, in the twenty-fourth embodiment, the voltage drop due to system reactance can be compensated for by connecting capacitor **A12** to the system in series. Also, 5 power oscillation due to power variations from the transmitting end or the receiving end can be inhibited by compensation voltage generator **A10**. Moreover, by compensating for the system voltage drop using both series capacitor **A12** and the compensation voltage generator, it is 10 possible to increase transmission (distribution) capability in existing AC transmission (distribution) systems using a small capacity compensation voltage generator.

Next, a twenty-fifth embodiment of the present invention will be described.

15 FIG.68 is a block diagram showing a twenty-fifth embodiment of an AC power transmission (distribution) system of the present invention.

In the diagram, **A1** is a power station (transmitting end), **A2** is a substation (receiving end), **A3** is system 20 transmission line reactance **X**, **A10** is a compensation voltage generator, **A11** is a compensation control circuit for the compensation voltage generator. **A13** is multiple capacitors connected to the system in series, which are provided with switches so that both terminals of any of the capacitors can 25 be independently short-circuited. **I** is the three-phase current flowing in the system transmission line. In practice,

resistances, and the like, exist in system, in addition to the reactance, but these have been omitted to simplify the explanation.

Phase difference θ occurs between transmitting-end voltage **Es** and receiving-end voltage **Er**. Because this difference in voltage between transmitting-end voltage **Es** and the receiving-end voltage **Er** occurs, current **I** flows in the transmission line due to system reactance **X**. In this case, in relation to transmission line current **I**, the relationship between the voltage difference and $j\omega XI$ is **Es - Er = $j\omega LI$** , and the phase is 90° advanced relative to the current.

In response to this, the voltage indicated in the following expression is generated in reverse phase to system reactance **A3** by multiple capacitors **A13** connected to the system in series. In this expression **C** is the total capacitance of multiple capacitors **A13**.

$$V_c = j \frac{1}{\omega C}$$

As a result of this voltage, voltage drop $j\omega XI$ due to system reactance **A3** can be inhibited.

Moreover, by producing compensation voltage **Vo**, which is a component orthogonal to the current **I** flowing in the transmission line, as output from the compensation voltage generator, receiving-end voltage **Er** becomes **Ern** relative to transmitting-end voltage **Es**, and phase difference θ reduces and the size of the voltage increases, in order to cancel out

voltage drop $j\omega XI$ due to transmission line reactance X . That is, the equivalent reactance is reduced, so it is possible to increase the active power that can be transmitted. In this case, it is possible to make equivalent reactance X zero by
 5 making

$$V_o = -(j\omega LI - j \frac{1}{\omega C})$$

10 and E_s can be made equal to E_r .

If transmission power fluctuations occur at transmitting end **A1** or load power fluctuations occur at receiving end **A2**, system power oscillation can be inhibited
 15 by carrying out control involving the output of compensation voltage from compensation voltage generator **A10**.

For example, if the phase angle relative to receiving-end voltage E_r increases due to fluctuations in transmitting-end voltage E_s , system current I and receiving-end voltage E_r
 20 can be maintained at a constant level by controlling voltage V_o output from compensation voltage generator **A10** in proportion to the value of $E_s - E_r$. That is, power fluctuations in the system can be inhibited even if the transmitting-end voltage fluctuates.

25 In addition, if transmission power fluctuations occur at transmitting end **A1** or load power fluctuations occur in receiving end **A2**, fluctuation of oscillation can also be inhibited by changing the capacitance of the capacitors by short-circuiting both terminals of any of multiple capacitors

A13.

By connecting capacitors **A13** to the system in series so that the capacitance can be changed step-wise in this way, the voltage drop due to system reactance **A3** can be compensated for step-wise. Also, in the steady state, the voltage drop due to the system reactance is compensated for by both compensation voltage generator **A10** and capacitors **A13** together, so the capacity of compensation voltage generator **A10** can be reduced, and since voltage fluctuations from the transmitting end or the receiving end can be inhibited by compensation voltage generator **A10**, it is possible to increase transmission (distribution) capability in existing AC transmission (distribution) systems.

FIG.69 shows a different modification of the twenty-fifth embodiment of an AC power transmission (distribution) system of the present invention. Here, only the aspects that differ from the AC power transmission system shown in FIG.68 will be explained, and elements that are identical will not be explained.

FIG.69 is an example in which the switches that short-circuit both terminals of capacitors **A13** in the AC power transmission system shown in FIG.68 have, in practical terms, been replaced by thyristor switches that are connected in inverse parallel to each other.

With this construction also, as in the AC power transmission system shown in FIG.68, by connecting capacitors

A13 to the system in series so that the capacitance can be changed step-wise, the voltage drop due to system reactance **A3** can be compensated for step-wise. Also, in the steady state, the voltage drop due to the system reactance is compensated for by both compensation voltage generator **A10** and capacitors **A13** together, so the capacity of compensation voltage generator **A10** can be reduced, and since voltage fluctuations from the transmitting end or the receiving end can be inhibited by compensation voltage generator **A10**, it is possible to increase transmission (distribution) capability in existing AC transmission (distribution) systems.

Next, a twenty-sixth embodiment of the present invention will be described.

FIG.70 is a block diagram showing a twenty-sixth embodiment of an AC power transmission (distribution) system of this invention.

In the diagram, **A1** is a power station (transmitting end), **A2** is a substation (receiving end), **A3** are system transmission line reactances $X \sim X_n$, **A10** is a compensation voltage generator, **A11** is a compensation control circuit for the compensation voltage generator. **A14** is multiple capacitors connected to the system in series and which are distributed to multiple locations in system. **I** is the three-phase current flowing in the system transmission line.

In the AC power transmission system of the twenty-sixth embodiment shown in FIG.70, the point of difference from the

AC power transmission system of the twenty-fourth embodiment shown in FIG.62 is that capacitors **A14** are distributed to multiple locations. Apart from this, the system is identical to the AC power transmission system of the twenty-fourth
5 embodiment, and the elements that are identical will not be explained.

By distributing capacitors **A14** to multiple locations in this way, it is possible to actively compensate for the voltage drop due to the reactance of the system, the voltage
10 distribution of the system can be made uniform, and it is possible to increase transmission (distribution) capability in existing AC transmission (distribution) systems.

Next, a twenty-seventh embodiment of the present invention will be described.

15 FIG.71 is a block diagram showing a twenty-seventh embodiment of an AC power transmission (distribution) system of the present invention.

In the diagram, **A1** is a power station (transmitting end), **A2** is a substation (receiving end), **A3** is system
20 transmission line reactance **X**, **A10** is a compensation voltage generator, **A11** is a compensation control circuit for the compensation voltage generator, **A12** is a capacitor connected to the system in series, and **A15** is a switch for bypassing the above-mentioned capacitor connected in series.

25 If an overcurrent flows due to an incident such as a line-to-earth fault or the like in the system, switch **A15** for

bypassing capacitor **A12** closes, and the overcurrent is caused to flow through switch **A15**. As a result, the reactance of the system can be returned to its original value **X**, and escalation of the overcurrent prevented. In addition, the flow of overcurrent to the series capacitor can be prevented, and the reliability of the system can be improved.

Apart from this, the operation of this system is identical to that of the twenty-fourth embodiment, and the elements that are identical will not be explained.

FIG.72 shows a different modification of the twenty-seventh embodiment of an AC power transmission (distribution) system of this invention. Here, only the aspects that differ from the AC power transmission system shown in FIG.71 will be explained, and elements that are identical will not be explained.

FIG.72 is an example in which the switch that short-circuits both terminals of capacitor **A12** in the AC power transmission system shown in FIG.71 has, in practical terms, been replaced by thyristor switches **A15b** that are connected in inverse parallel to each other.

With this construction also, as in the AC power transmission system shown in FIG.71, if an overcurrent flows due to an incident such as a line-to-earth fault or the like in the system, switches **A15b** for bypassing capacitor **A12** close, and the overcurrent is caused to flow through these switches **A15b**. As a result, the reactance of the system can

be returned to its original value **X**, and escalation of the overcurrent prevented. In addition, the flow of overcurrent to the series capacitor can be prevented, and the reliability of the system can be improved.

5 Next, a twenty-eighth embodiment of the present invention will be described.

FIG.73 is a block diagram showing a twenty-eighth embodiment of an AC power transmission system of the present invention.

10 In the diagram, **A1** is a power station (transmitting end), **A2** is a substation (receiving end), **A3** is system transmission line reactance **X**, **A10** is a compensation voltage generator, **A11** is a compensation control circuit for the compensation voltage generator, **A12** is a capacitor connected
15 to the system in series, **A15b** is a thyristor switch which bypasses the above-mentioned capacitor connected in series, and **A16** is a circuit to bypass the above-mentioned compensation voltage generator.

If an overcurrent flows due to an incident such as a
20 line-to-earth fault or the like in the system, switch **A15b** for bypassing capacitor **A12** closes, furthermore circuit **A16** for bypassing the output terminals of compensation voltage generator **A10** short-circuits, and the overcurrent is caused to flow through switch **A15b** and bypass circuit **A16**. As a
25 result, the reactance of the system can be returned to its original value **X**, and escalation of the overcurrent prevented.

In addition, the flow of overcurrent to series capacitor **A12** and compensation voltage generator **A10** can be prevented, and the reliability of the system can be improved.

Apart from this, the operation of this system is
5 identical to that of the twenty-fourth embodiment, and the elements that are identical will not be explained.

Next, a twenty-ninth embodiment of the present invention will be described.

FIG.74 is a block diagram showing a twenty-ninth
10 embodiment of an AC power transmission (distribution) system of the present invention.

In the diagram, **A1** is a power station (transmitting end), **A2** is a substation (receiving end), **A3** is system transmission line reactance **X**, **A17** is a capacitor connected
15 to the system, **A18** is a compensation current generator connected in parallel to capacitor **A17**, **A19** is a compensation control circuit for the compensation current generator, and **I_u** is the U-phase current flowing in the system transmission line. In practice, resistances, and the like, exist in
20 system, in addition to the reactance, but these have been omitted to simplify the explanation.

Compensation current generator **A18** is composed of self-turn-off devices (for example GTOs) with diodes connected in parallel to these devices, and is connected in a three-phase
25 bridge structure. In addition, the compensation current generator **A18** is connected to a DC transformer via a reactor,

and the primary side of the DC transformer is connected in parallel to capacitor **A17** separately for each phase.

FIG.75 is a block diagram showing the compensation control circuit for the compensation current generator, and operation of this circuit is explained using the vector diagrams of FIG.76 and FIG.77.

FIG.76 is a vector diagram showing a situation in which the system reactance is constantly compensated for. Phase difference θ occurs between transmitting-end voltage **Es** and receiving-end voltage **Er**. Because this difference in voltage between transmitting-end voltage **Es** and receiving-end voltage **Er** occurs, current **Iu** flows in the transmission line due to system reactance **X**. In this case, in relation to transmission line current **Iu**, the relationship between the voltage difference and $j\omega X \cdot Iu$ is **Es - Er = $j\omega L Iu$** , and the phase is 90° advanced relative to the current.

In response to this, the current at the output terminals of capacitor **A17**, that is connected in series, and compensation current generator **A18** connected in parallel to capacitor **A17** compensates, in the steady state, for voltage drop $j\omega L \cdot Iu$ due to the reactance, as a result of the control carried out by compensation current control circuit **A19**. Voltage **Ec** generated by capacitor **A17** is in reverse phase to the reactance. Taking the current output from compensation current generator **A18** as **iu**, voltage **Ec** generated by

capacitor **A17** is:

$$5 \quad \mathbf{E_c} = -j \frac{\mathbf{I_u} + \mathbf{i_u}}{\omega \mathbf{C}}$$

Therefore, in the steady state, the difference between voltage **E_c** generated by capacitor **A17** and voltage drop $j\omega L \cdot \mathbf{I_u}$ due to the reactance becomes the voltage difference between the transmitting end and the receiving end. Thus, the transmission (distribution) capability of an existing AC transmission (distribution) system can be improved.

Also, even in the case of power fluctuation occurring at the transmitting end and the receiving end, that fluctuation can be suppressed by controlling the output current of compensation current generator **A18**. A vector diagram for the case of transmitting-end voltage **E_s** fluctuating is shown in FIG.77. When the transmitting-end voltage fluctuates from **E_s** to **E_{s'}**, system current **I_u** and receiving-end voltage **E_r** can be kept constant by controlling the size and phase of output current **i_u** from compensation current generator **A18** according to the value of **E_{s'} - E_r**. In other words, even if the transmitting end voltage fluctuates, system power fluctuation can be suppressed.

In this way, the voltage drop of the system is compensated by capacitor **A17** that is connected in series with the system and compensation current generator **A18** that is connected in parallel with capacitor **A17**. Also, because

voltage fluctuation at the transmitting end and the receiving end can be suppressed, the transmission (distribution) capability of an existing AC transmission (distribution) system can be improved.

5 The following is a description of a thirtieth embodiment of the present invention.

FIG.78 is a block diagram of a thirtieth embodiment of an AC transmission (distribution) system of the present invention.

10 In the diagram, **A1** is a power station (transmitting end); **A2** is a substation (receiving end); **A3** is reactance **X** of the system transmission line; **A12** is a first capacitor connected in series with the system; **A17** is a second capacitor connected to the system; **A18** is a compensation
15 current generator connected in parallel with second capacitor **A17**; **A19** is a compensation control circuit for the compensation current generator; **Iu** is the U-phase current flowing in the system transmission line. In fact, as well as reactance, resistance and the like are also present in the
20 system, but these have been omitted to simplify the description.

Phase difference θ occurs between transmitting end voltage **Es** and receiving end voltage **Er**. Because of this voltage difference between transmitting end voltage **Es** and
25 receiving end voltage **Er**, current **I** flows in the transmission line due to system reactance **X**. For current **I** in the

transmission line at this time, the relationship between the voltage difference and $j\omega X \cdot I_u$ becomes $E_s - E_r = j\omega L \cdot I_u$, and the phase is advanced 90° in relation to the current.

In response to this, the current at the output terminals of series-connected first capacitor **A12** and compensation current generator **A18** that is connected in parallel with second capacitor **A17** is controlled by compensating current control circuit **A19**. Thus, voltage drop $j\omega L \cdot I_u$ due to reactance **X** is compensated in the steady state.

When the capacitance of capacitor **A12** is taken as **C1**, the voltage generated by serially-connected first capacitor **A12** is in reverse phase to system capacitance **A3**, as in the following expression.

$$V_c = -j \frac{1}{\omega C_1}$$

Voltage drop $j\omega X \cdot I_u$ of system reactance **A3** can be suppressed by this voltage.

Also, when the current outputted from compensation current generator **A18** is taken as **iu**, and the capacitance of second capacitor **A17** as **C2**, voltage **Ec** generated by second capacitor **A17** becomes

$$E_c = -j \frac{(I_u + i_u)}{\omega C}$$

Therefore, in the steady state, the difference between the voltage generated by the first and second capacitors and voltage drop $j\omega L \cdot I_u$ due to and the reactance becomes the

voltage difference between the transmitting end and the receiving end. Thus, the transmission (distribution) capability of an existing AC transmission (distribution) system can be improved.

5 Also, even in the case of power fluctuation occurring at the transmitting end and the receiving end, that fluctuation can be suppressed by controlling the output current of compensation current generator **A18**. When the transmitting-end voltage fluctuates from **Es** to **Es'**, system
10 current **Iu** and receiving end voltage **Er** can be kept constant by controlling the size and phase of output current **iu** from compensation current generator **A18** according to the value of **Es' - Er**. In other words, even if the transmitting end voltage fluctuates, system power fluctuation can be
15 suppressed.

 Moreover, because, in the steady state, the system reactance voltage drop is compensated for by series capacitor **A12** and compensation current generator **A18**, the capacity of compensation current generator **A18** can be reduced.

20 In this way, the system voltage drop is compensated for by first capacitor **A12** and second capacitor **A17** that are connected in series with the system and compensation current generator **A18** that is connected in parallel with second capacitor **A17**. Because, in this case, there is combined
25 compensation by first capacitor **A12**, second capacitor **A17** and

compensation current generator **A18**, it is possible to use a smaller capacity compensation current generator **A18**. Also, because voltage fluctuation at the transmitting end and the receiving end can be suppressed, the transmission
5 (distribution) capability of an existing AC transmission (distribution) system can be improved.

The following is a description of a thirty-first embodiment of the present invention.

FIG.79 is a block diagram of a thirty-first embodiment
10 of an AC transmission (distribution) system of the present invention.

In the diagram, **A1** is a power station (transmitting end); **A2** is a substation (receiving end); **A3** is reactance **X** of the system transmission line; **A13** is a first capacitor
15 connected in series with the system, and the capacitance of this capacitor can be varied step-wise by switches **A15** that are connected in parallel with it; **A17** is a second capacitor connected to the system; **A18** is a compensation current generator connected in parallel with second capacitor **A17**;
20 **A19** is a compensation control circuit for the compensation current generator. In fact, as well as reactance, resistance and the like are also present in the system, but these have been omitted to simplify the description.

Here, only the point of difference from the thirtieth
25 embodiment is described, and descriptions of like parts have been omitted.

The point of difference from the thirtieth embodiment is that the first capacitor that is connected in series with the system is composed of multiple capacitors. Switches **A15** are connected to the two ends of each capacitor. Thus, by
5 operating switches **A15**, the capacitance of the first capacitor can be varied step-wise.

By this means, the system reactance voltage drop and fluctuation of power oscillation can be suppressed by causing step-wise variation of the capacitor capacitance by shorting
10 the two ends of any of the first capacitors.

The following is a description of a thirty-second embodiment of the present invention.

FIG.80 is a block diagram of a thirty-first embodiment of an AC transmission (distribution) system of the present
15 invention.

In the diagram, **A1** is a power station (transmitting end); **A2** is a substation (receiving end); **A3** is reactance **X** of the system transmission line; **A14** is a first capacitor connected in series with the system, and this is split and
20 installed in multiple locations in the system; **A17** is a second capacitor connected to the system; **A18** is a compensation current generator connected in parallel with second capacitor **A17**; **A19** is a compensation control circuit for the compensation current generator. In fact, as well as
25 reactance, resistance and the like are also present in the

system, but these have been omitted to simplify the description.

The point of difference of the thirty-second embodiment of an AC transmission (distribution) system, shown in FIG.80, from the thirtieth embodiment of an AC transmission system, shown in FIG.78, is that capacitor **A14** is split and installed in multiple locations. Apart from that, the system is the same as the thirtieth embodiment of an AC transmission system, and descriptions have been omitted.

By splitting capacitor **A14** and installing it in multiple locations in the system in this way, the system reactance voltage drop can readily be compensated, and the system voltage distribution can be made uniform. Furthermore, the transmission (distribution) capability of an AC transmission (distribution) system can be improved.

The following is a description of a thirty-third embodiment of the present invention.

FIG.81 is a block diagram of a thirty-third embodiment of an AC transmission (distribution) system of the present invention.

In the diagram, **A1** is a power station (transmitting end); **A2** is a substation (receiving end); **A3** is reactance **X** of the system transmission line; **A12** is a first capacitor connected in series with the system; **A15** is a switch for bypassing the capacitor that is connected in series with the system; **A17** is a second capacitor connected to the system;

A18 is a compensation current generator connected in parallel with second capacitor **A17**; **A19** is a compensation control circuit for the compensation current generator. In fact, as well as reactance, resistance and the like are also present
5 in the system, but these have been omitted to simplify the description.

When an overcurrent due to an earth fault or the like occurs in the system, the overcurrent is made to flow through switch **A15** by closing switch **A15** to bypass capacitor **A12**. By
10 this means, system reactance **X** returns to its original value, and the overcurrent can be prevented from increasing. Also, the overcurrent is prevented from flowing through the series capacitor, and system reliability can be increased.

Apart from that, the operation is the same as in the
15 thirtieth embodiment. Therefore, further description has been omitted here.

The following is a description of a thirty-fourth embodiment of the present invention.

FIG.82 is a block diagram of a thirty-fourth
20 embodiment of an AC transmission (distribution) system of the present invention.

In the diagram, **A1** is a power station (transmitting end); **A2** is a substation (receiving end); **A3** is reactance **X** of the system transmission line; **A12** is a first capacitor
25 connected in series with the system; **A15b** is a thyristor switch for bypassing the capacitor that is connected in

series with the system; **A16** is a bypass circuit for bypassing the compensation current generator; **A17** is a second capacitor connected to the system; **A18** is a compensation current generator connected in parallel with second capacitor **A17**;
5 **A19** is a compensation control circuit for the compensation current generator. In fact, as well as reactance, resistance and the like are also present in the system, but these have been omitted to simplify the description.

When an overcurrent due to an earth fault or the like
10 occurs in the system, switch **A15b** is closed to bypass capacitor **A12**. Moreover, the output terminals of compensation current generator **A18** are shorted by bypass circuit **A16**. Thus, the overcurrent is made to flow through switch **A15b** and bypass circuit **A16**. By this means, system
15 reactance **X** returns to its original value, and the overcurrent can be prevented from increasing. Also, the overcurrent is prevented from flowing through the series capacitor **A12** and compensation current generator **A18**, and system reliability can be increased.

20 Apart from that, the operation is the same as in the thirtieth embodiment. Therefore, further description has been omitted here.

As described in detail above, with the AC transmission system of the present invention long-distance transmission
25 via multiple substations becomes possible. Loads can also be taken from each of those substations, and links can be made

with multiple systems that were difficult with DC. Also,
existing transmission lines can be put to use, and it becomes
possible to improve the transmission capability of the
transmission lines. Moreover, the design is such that power
5 oscillation, too, can speedily be suppressed, and an
economical and highly reliable AC transmission system can be
provided.

Also, when using the present invention, by connecting
compensation voltage circuits or compensation current
10 circuits and capacitors to the system to compensate system
inductance in long-distance AC transmission lines or AC
distribution lines, an AC transmission system can be provided
that can improve the transmission capability of transmission
lines or distribution lines.

15 Obviously numerous additional modifications and
variations of the present invention are possible in light of
the above teachings. It is therefore to be understood that
within the scope of the appended claims, the present
invention may be practised otherwise than as specially
20 described herein.

29606-7

CLAIMS:

1. An AC transmission system that transmits electric power via a plurality of substations, comprising:

5 a series compensation generator, of which at least one or more is provided in said AC transmission system, that generates a compensating voltage to regulate an equivalent reactance of transmission lines between said substations and to suppress power oscillation, and

10 wherein said series compensation generator is designed also to regulate the reactance of neighbouring transmission lines.

2. An AC transmission system according to claim 1, wherein:

15 said series compensation generator is designed also to regulate the reactance of neighbouring transmission lines.

3. An AC transmission system that transmits electric power via a plurality of substations, comprising:

20 a series compensation generator that generates a compensation voltage so that an equivalent reactance of transmission lines that connect between all said substations on a transmission path becomes substantially zero, and

wherein said series compensation generator is designed also to regulate the reactance of neighbouring transmission lines.

25 4. An AC transmission system that transmits electric power via a plurality of substations, comprising:

a series compensation generator that selects, out of

transmission lines that link between said substations, said
transmission line having the largest percentage reactance $\%XI$
and generates a compensating voltage so that said series
compensation generator reduces an equivalent reactance of
5 said transmission line.

5. An AC transmission system that transmits electric
power via a plurality of substations, comprising:

a series compensation generator that selects, out of
10 transmission lines that link between said substations, said
transmission line for which the product of a reactance X of
said transmission line and a power flow P flowing in said
transmission line is the largest, and generates a
compensating voltage so that said series compensation
15 generator reduces an equivalent reactance of said
transmission line.

6. An AC transmission system according to any of
Claim 1 to Claim 5, wherein said series compensation
20 generator comprises:

a means for detecting an active power and a reactive
power fluctuations of said transmission line; and

a means for regulating a compensation voltage of the
component that is orthogonal to a current flowing in said
25 transmission line responding to said active power
fluctuation, and regulating said compensating voltage of the

29606-7

in-phase component of said current flowing in said transmission line responding to said reactive power fluctuation to suppress power oscillation of said AC transmission system.

7. An AC transmission system according to any one of
5 Claim 1 to Claim 6, wherein said series compensation generator comprises:

a means for detecting said power flow of said transmission line and regulating said equivalent reactance of said transmission line responding to said power flow.

10 8. An AC transmission system according to Claim 1, wherein said series compensation generator comprises:

a bypass circuit that bypasses an overcurrent when said overcurrent occurs due to a ground fault or the like in said transmission line.

15 9. An AC transmission system according to any of Claim 1 to Claim 8, wherein said series compensation generator comprises:

a series transformer; and

a voltage source self-commutating inverter that is
20 connected to a secondary side of said series transformer.

10. An AC transmission system according to any of Claim 1 to Claim 8, wherein said series compensation generator comprises:

a series capacitor; and

5 a compensation voltage generator that is connected in series with said series capacitor.

11. An AC transmission system according to any of Claim 1 to Claim 8, wherein said series compensation generator comprises:

a series capacitor; and

a compensation current generator that is connected in parallel with said series capacitor.

12. An AC transmission system according to any of Claim 1 to Claim 8, wherein said series compensation generator comprises:

a main series capacitor;

an auxiliary series capacitor that is connected in series with said main series capacitor; and

a compensation current generator that is connected in parallel with said auxiliary series capacitor.

13. An AC transmission system that transmits electric power via a plurality of substations, comprising:

a plurality of series capacitors that are connected in

29606-7

series with a transmission line to cancel out the greater part of the transmission line inductances between said substations; and

5 a compensation voltage generator that generates a compensating voltage to regulate a reactance of said transmission line and suppress power oscillation.

14. An AC transmission system that transmits electric power via a plurality of substations, comprising:

10 a plurality of series capacitors that are connected in series with a transmission line to cancel out the greater part of said transmission line inductances between said substations; and

a compensation voltage generator that is connected in series with any of said series capacitors, and generates a compensating voltage to suppress power oscillation in said transmission line.

15. An AC transmission system according to Claim 13, wherein:

20 said plurality of series capacitors and said compensation voltage generator are provided with bypass circuits that bypass an overcurrent when said overcurrent occurs due to a ground fault or the like in said transmission line.

16. An AC transmission system that transmits electric power via a plurality of substations, comprising:

a plurality of series capacitors that are connected in series with a transmission line to cancel out the greater

29606-7

part of the transmission line inductances between said substations; and

a compensation current generator that is connected in parallel with any of said series capacitors, and generates a compensating current to suppress power oscillation in said transmission line.

17. An AC transmission system according to Claim 16, wherein:

said series capacitors are provided with bypass circuits that bypass an overcurrent when said overcurrent occurs due to a ground fault or the like in said transmission line.

18. An AC transmission system that transmits electric power via a plurality of substations, comprising:

a plurality of main series capacitors that are connected in series with a transmission line to cancel out the greater part of said transmission line inductances between said substations;

an auxiliary series capacitor that is connected in series with any of said main capacitors; and

a compensation current generator that is connected in parallel with said auxiliary series capacitor.

19. An AC transmission system according to Claim 18, wherein:

said main series capacitors and said auxiliary series capacitor are provided with bypass circuits that bypass an

29606-7

overcurrent when said overcurrent occurs due to a ground fault or the like in said transmission line.

20. An AC transmission system, comprising:

a transmission line;

5 a series compensation generator that generates a compensating voltage to regulate an equivalent reactance of said transmission line, wherein said series compensation generator is designed also to regulate the reactance of neighbouring transmission lines; and

10 a static var generator that compensates a reactive current or a harmonic current flowing in floating capacitance of said transmission line.

21. An AC transmission system, comprising:

a transmission line;

15 a series compensation generator that generates a compensating voltage so that an equivalent inductance of said transmission line becomes substantially zero, wherein said series compensation generator is designed also to regulate the reactance of neighbouring transmission lines; and

20 a static var generator that compensates a reactive current or a harmonic current flowing in floating capacitance of said transmission line.

22. An AC transmission system according to Claim 20 or Claim 21, wherein:

25 said series compensation generator is provided with a power oscillation suppression means that detects power

29606-7

fluctuation in said transmission line, and suppresses said power fluctuation.

23. An AC transmission system according to Claim 20, Claim 21 or Claim 22, wherein:

5 said series compensation generator is provided with a bypass circuit that bypasses an overcurrent when said overcurrent occurs due to an earth fault or the like in said transmission line.

24. An AC transmission system according to Claim 20 or
10 Claim 23, wherein:

said series compensation generator or said static var generator is split and installed in multiple locations in said transmission line.

25. An AC transmission system, comprising:

15 a transmission line;

a series capacitor that is connected in series with said transmission line to cancel out the greater part of the inductance of said transmission line;

20 a compensation voltage generator that is connected in series with said series capacitor; and

a static var generator that compensates a reactive current or a harmonic current flowing in floating capacitance of said transmission line.

26. An AC transmission system according to Claim 25,
25 wherein:

29606-7

said series capacitor and said compensation voltage generator are connected with bypass circuits that bypass an overcurrent when said overcurrent occurs due to a ground fault or the like in said transmission line.

- 5 27. An AC transmission system according to Claim 25 or Claim 26, wherein:

said compensation voltage generator is provided with a power oscillation suppression means that detects power fluctuation in said transmission line, and suppresses said
10 power fluctuation.

28. An AC transmission system according to Claim 25 or Claim 26, wherein:

said series capacitor or said static var generator is split and installed in multiple locations in said transmission
15 line.

29. An AC transmission system, comprising:

a transmission line;

a series capacitor that is connected in series with said transmission line to cancel out the greater part of
20 inductance of said transmission line;

a compensation current generator that is connected in parallel with said series capacitor; and

a static var generator that compensates a reactive current or a harmonic current flowing in floating capacitance
25 of the said transmission line.

30. An AC transmission system according to Claim 29, wherein:

29606-7

said series capacitor is connected with a bypass circuit that bypasses an overcurrent when said overcurrent occurs due to a ground fault or the like in said transmission line.

5 31. An AC transmission system, comprising:

a transmission line;

a main series capacitor that is connected in series with said transmission line to cancel out the greater part of inductance of said transmission line;

10 an auxiliary series capacitor that is connected in series with said main series capacitor;

a compensation current generator that is connected in parallel with said auxiliary series capacitor; and

15 a static var generator that compensates a reactive current or a harmonic current flowing in floating capacitance of said transmission line.

32. An AC transmission system according to Claim 31, wherein:

20 said main series capacitor and said auxiliary series capacitor are connected with bypass circuits that bypass an overcurrent when said overcurrent occurs due to a ground fault or the like in said transmission line.

33. An AC transmission system according to Claim 31 or Claim 32 wherein:

25 said main series capacitor or said static var generator is split and installed in multiple locations in said transmission line.

29606-7

34. An AC transmission system according to Claim 29 or Claim 33, wherein:

said compensation current generator is provided with means that detect power fluctuation in said transmission line,
5 and suppress said power fluctuation.

35. An AC transmission system, comprising:

a transmission line; and

a compensation voltage generation means for being connected in series with said transmission line and generating
10 a compensating voltage, a phase angle of which is shifted 90° (ninety degrees) to transmission current, so that equivalent inductance of said transmission line becomes substantially zero.

36. An AC transmission system, comprising:

15 a transmission line; and

a compensation voltage generation means for being connected in series with said transmission line and generating a compensating voltage, a phase angle of which is shifted 90° (ninety degrees) to transmission current, so that equivalent
20 inductance of said transmission line becomes substantially zero and generating a compensating voltage to suppress an electrical oscillation when said oscillation occurs in said AC transmission line.

37. An AC transmission system, comprising:

25 a transmission line;

29606-7

a capacitor that is connected in series with said transmission line; and

a compensation voltage generation means for being connected in series with said transmission line and generating
5 a compensating voltage so that equivalent inductance of said transmission line becomes substantially zero and generating a compensating voltage to suppress an electrical oscillation when said oscillation occurs in said transmission line.

38. An AC transmission system according to Claim 37,
10 wherein:

said capacitor may vary capacitance of said capacitor step-wise.

39. An AC transmission system according to Claim 37 or Claim 38, wherein:

15 said capacitor is split and installed in multiple locations in said transmission line.

40. An AC transmission system according to any of Claim 37 to Claim 39, further comprising:

20 a bypass circuit that shorts out said capacitor when an overvoltage or an overcurrent occurs in said transmission line.

41. An AC transmission system according to any of Claim 35 to Claim 40, further comprising:

25 a bypass circuit that shorts out said compensation voltage generation means when an overcurrent flows in said transmission line.

29606-7

42. An AC transmission system, comprising:
- a transmission line;
 - a capacitor that is connected in series with said

transmission line; and

a compensation current generation means for being connected in parallel with said capacitor and generating a compensating current so that equivalent inductance of said transmission line becomes substantially zero.

43. An AC transmission system, comprising:

a transmission line;

a capacitor that is connected in series with said transmission line; and

a compensation current generation means for being connected in parallel with said capacitor and generating a compensating current so that equivalent inductance of said transmission line becomes substantially zero and generating a compensating current to suppress an electrical oscillation when said oscillation occurs in said transmission line.

44. An AC transmission system, comprising:

a transmission line;

a first capacitor that is connected in series with said AC transmission line;

a second capacitor that is connected in series with said first capacitor; and

a compensation current generation means for being connected in parallel with said second capacitor and generating a compensating current so that equivalent

inductance of said transmission line becomes substantially zero and generating a compensating current to suppress an electrical oscillation when said oscillation occurs in said transmission line.

5

45. An AC transmission system according to Claim 44, wherein:

said first capacitor may vary capacitance of said first capacitor step-wise.

10

46. An AC transmission system according to Claim 44 or Claim 45, wherein:

said first capacitor is split and installed in multiple locations in said transmission line.

15

47. An AC transmission system according to any of Claim 44 to Claim 46, further comprising:

a bypass circuit that shorts out said first capacitor when an overvoltage or an overcurrent occurs in said

20 transmission line.

48. An AC transmission system according to any of Claim 42 to Claim 47, further comprising:

a bypass circuit that shorts out said second capacitor when an overcurrent flows in said transmission line.

25

Herstonhaugh & Co.
Ottawa, Canada
Patent Attorneys

1/41

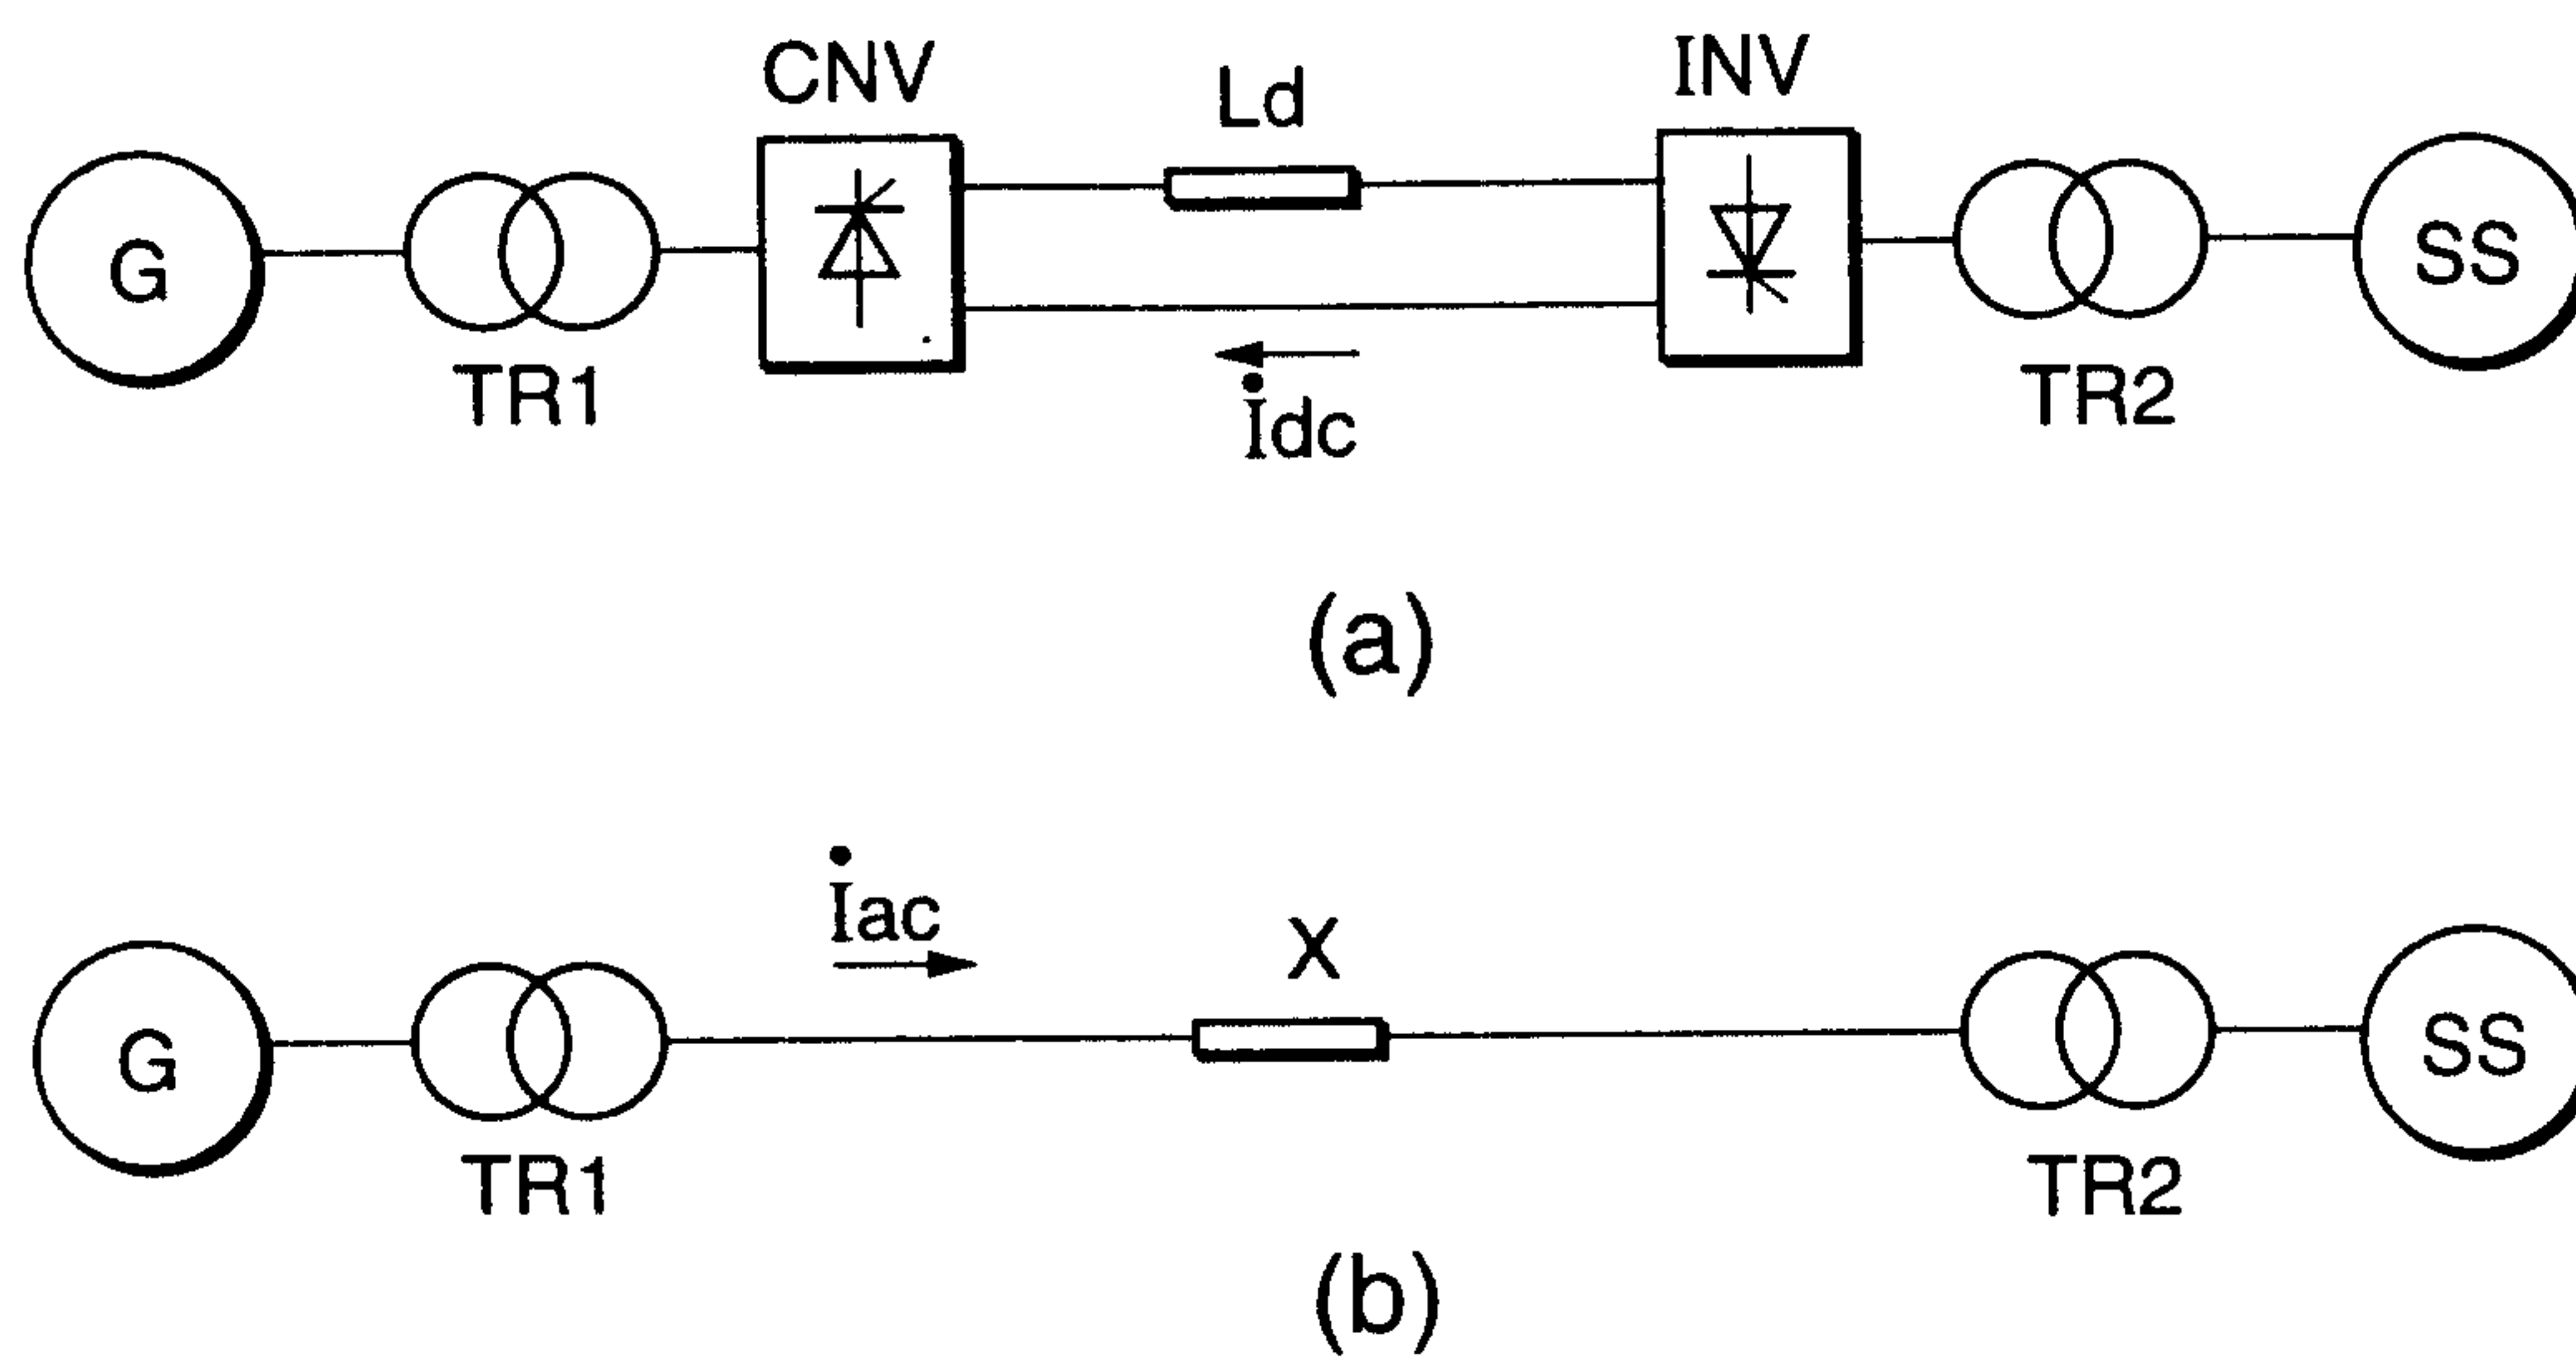


FIG. 1 (PRIOR ART)

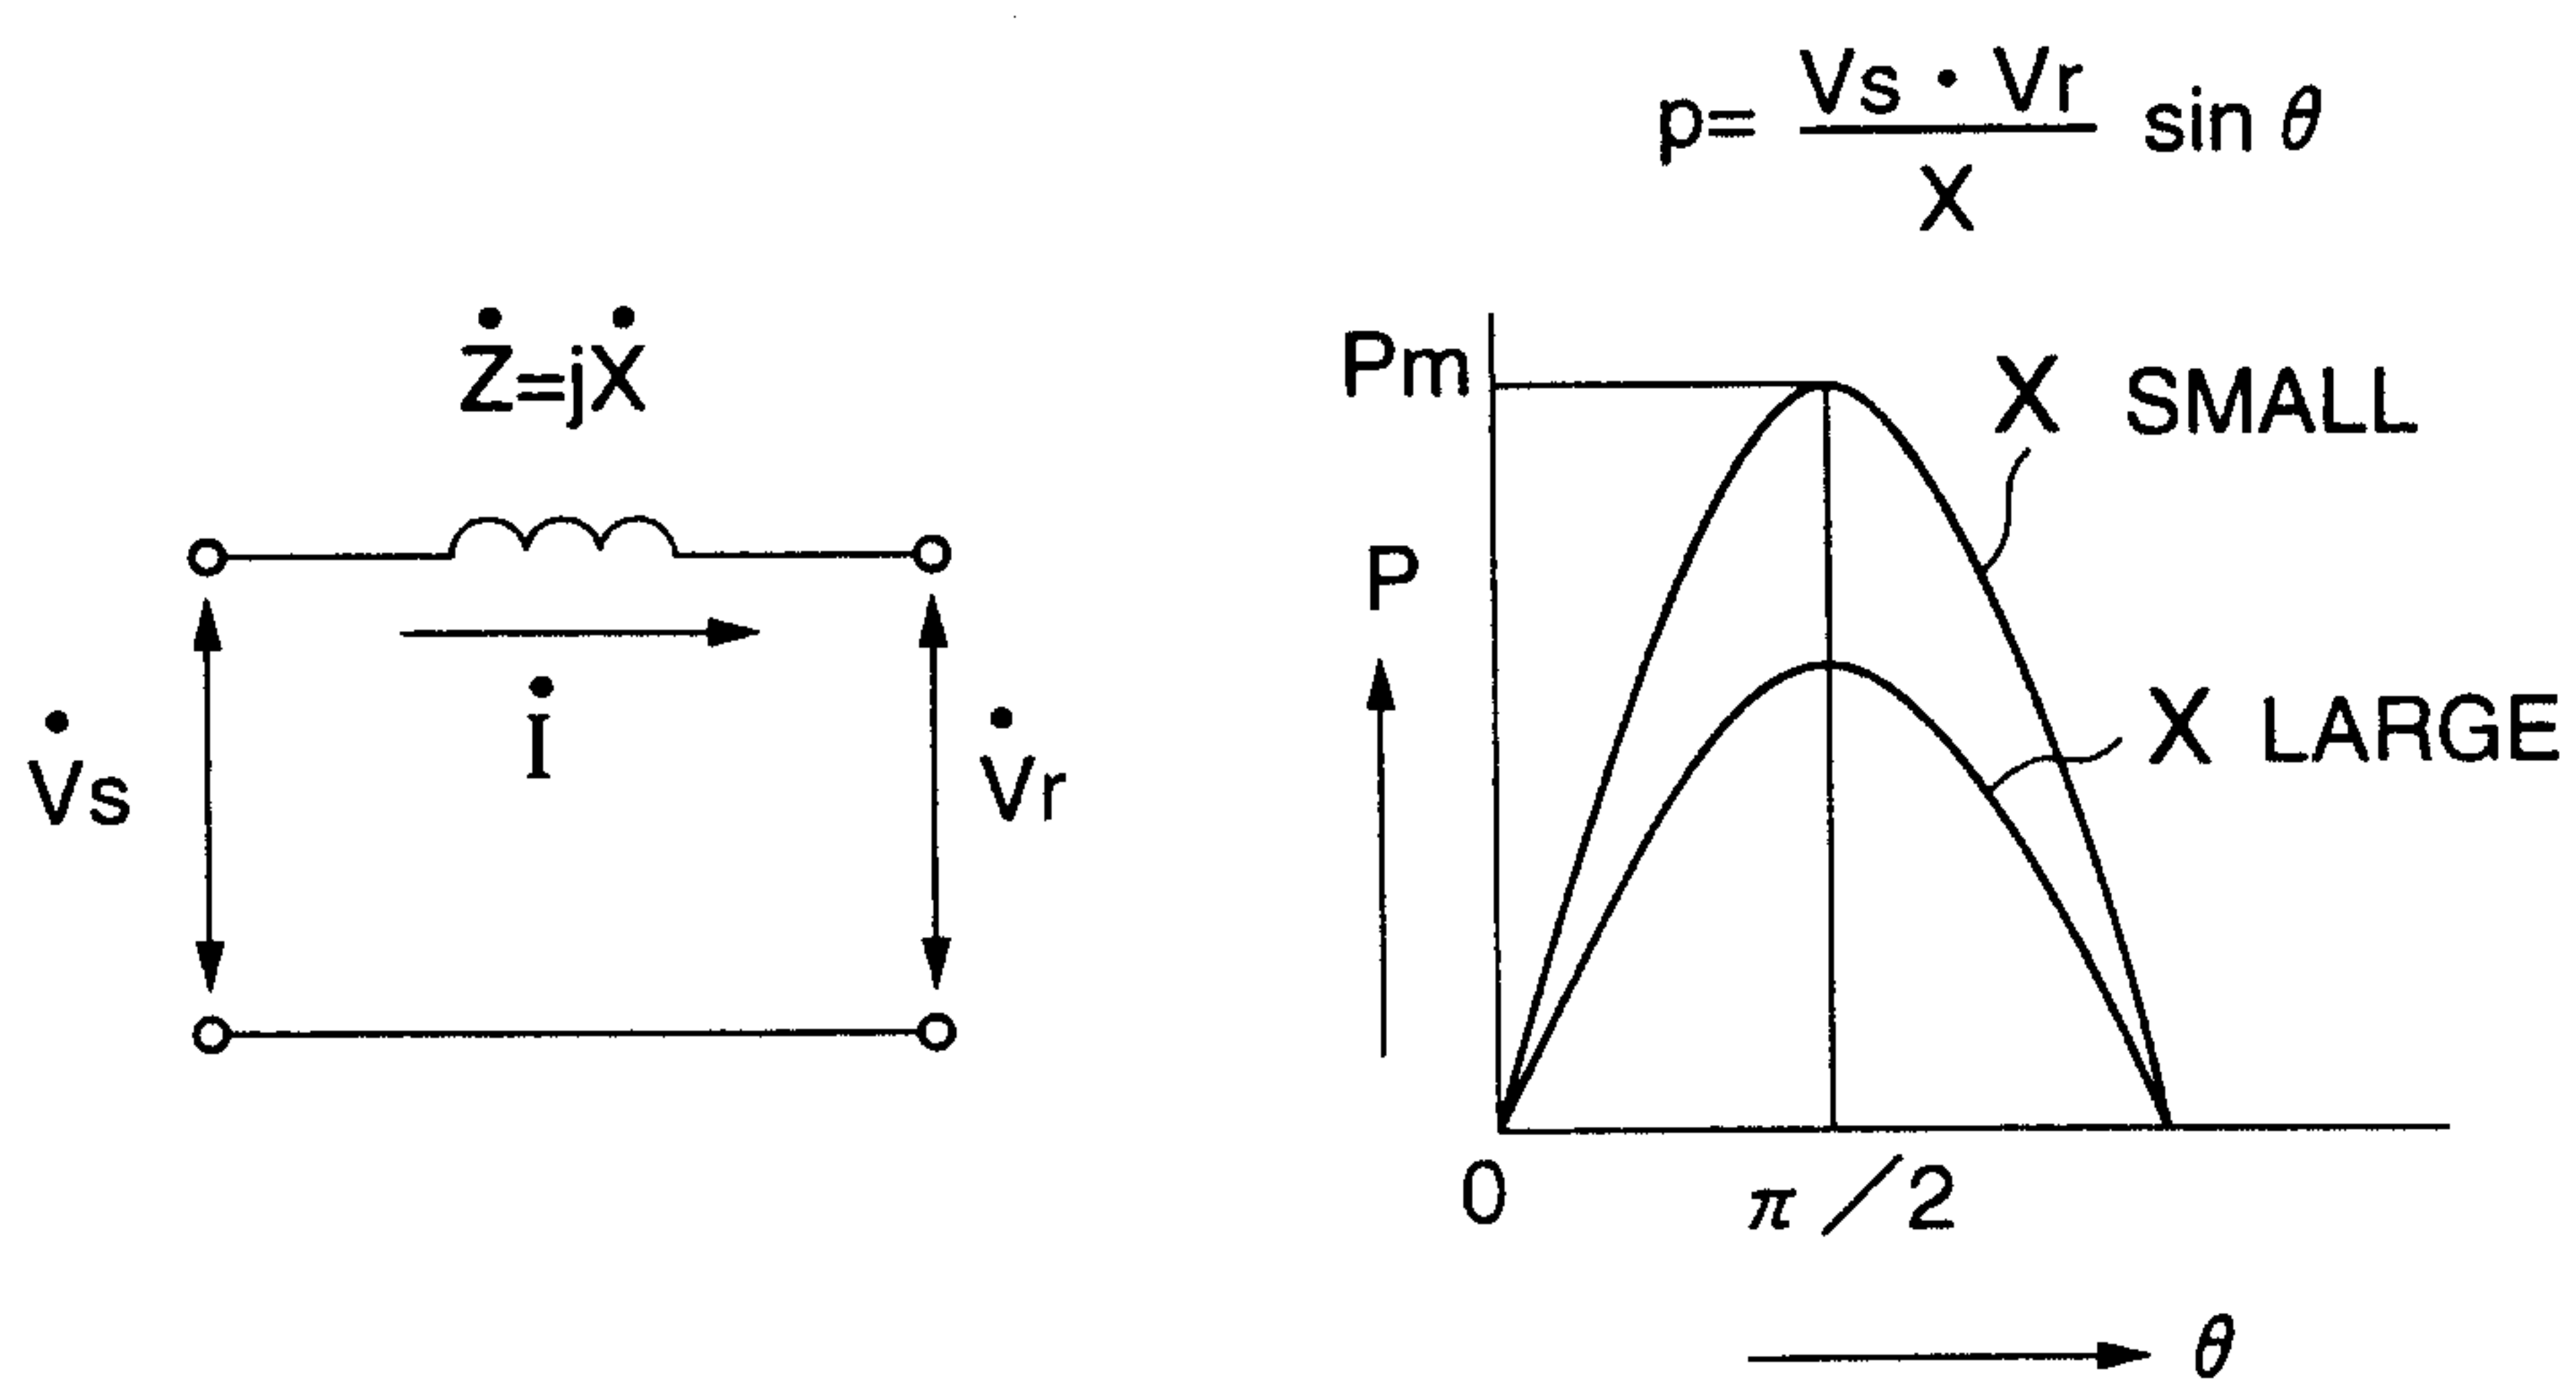


FIG. 2 (PRIOR ART)

2/41

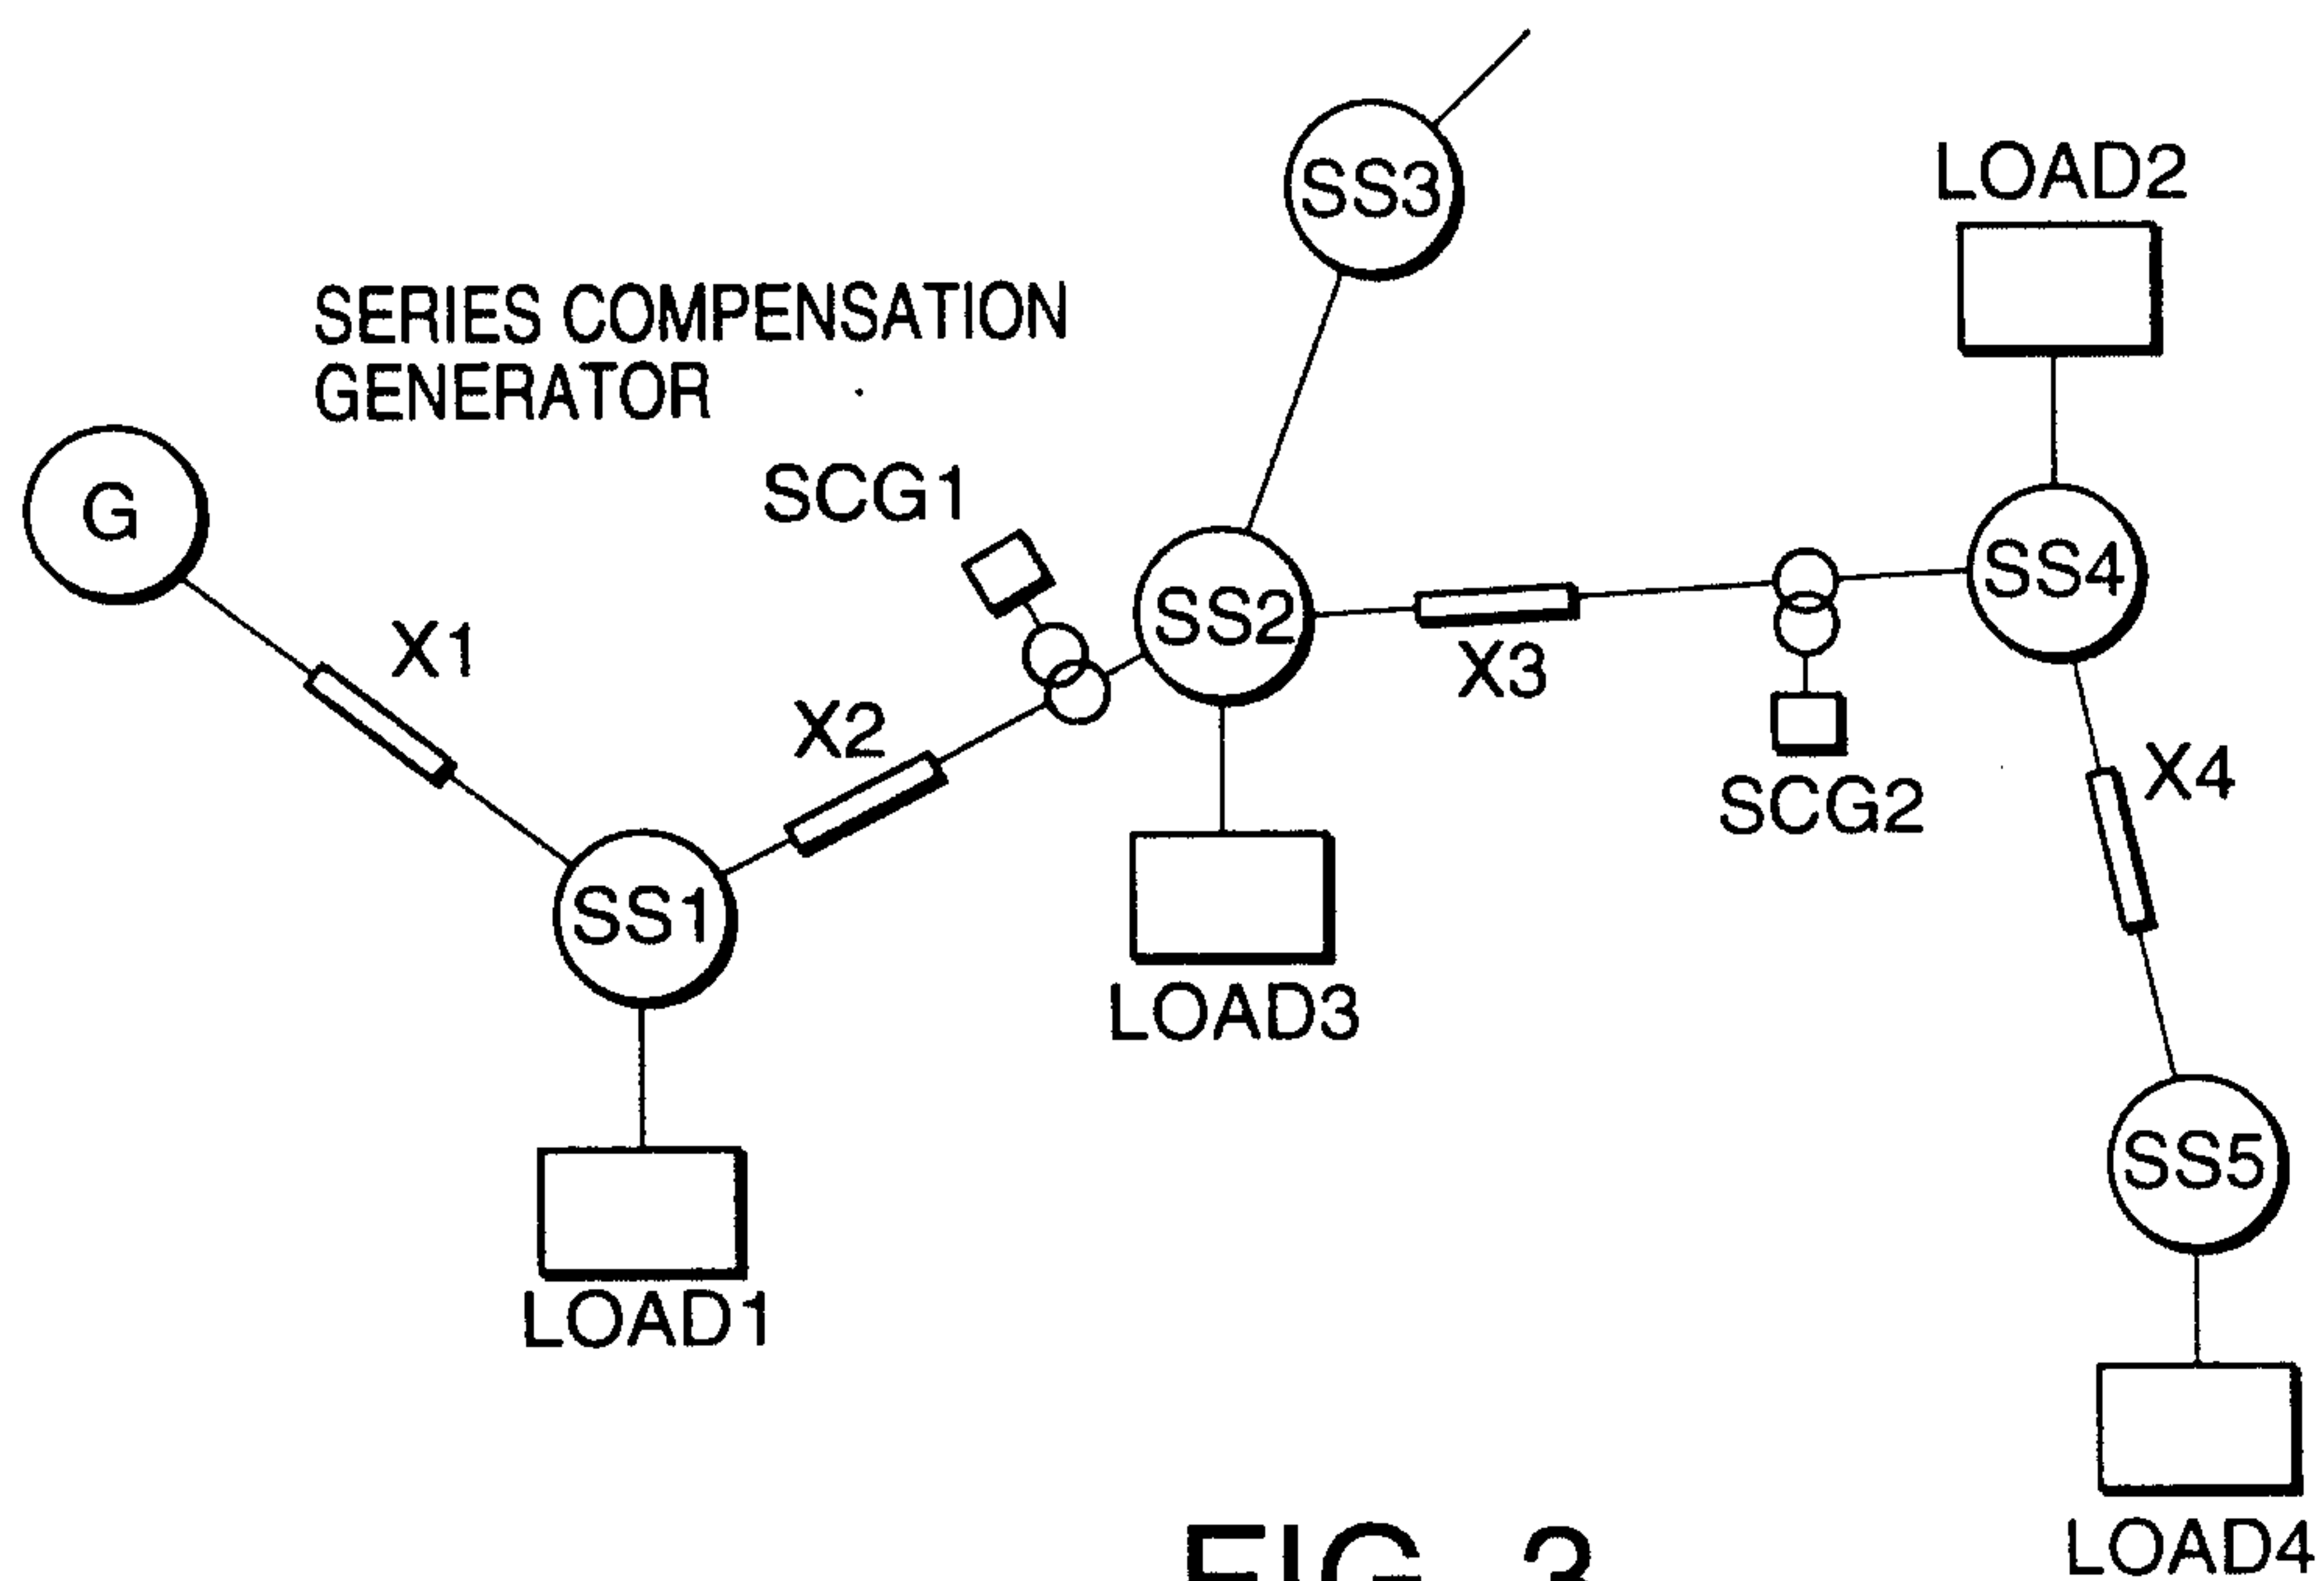


FIG. 3

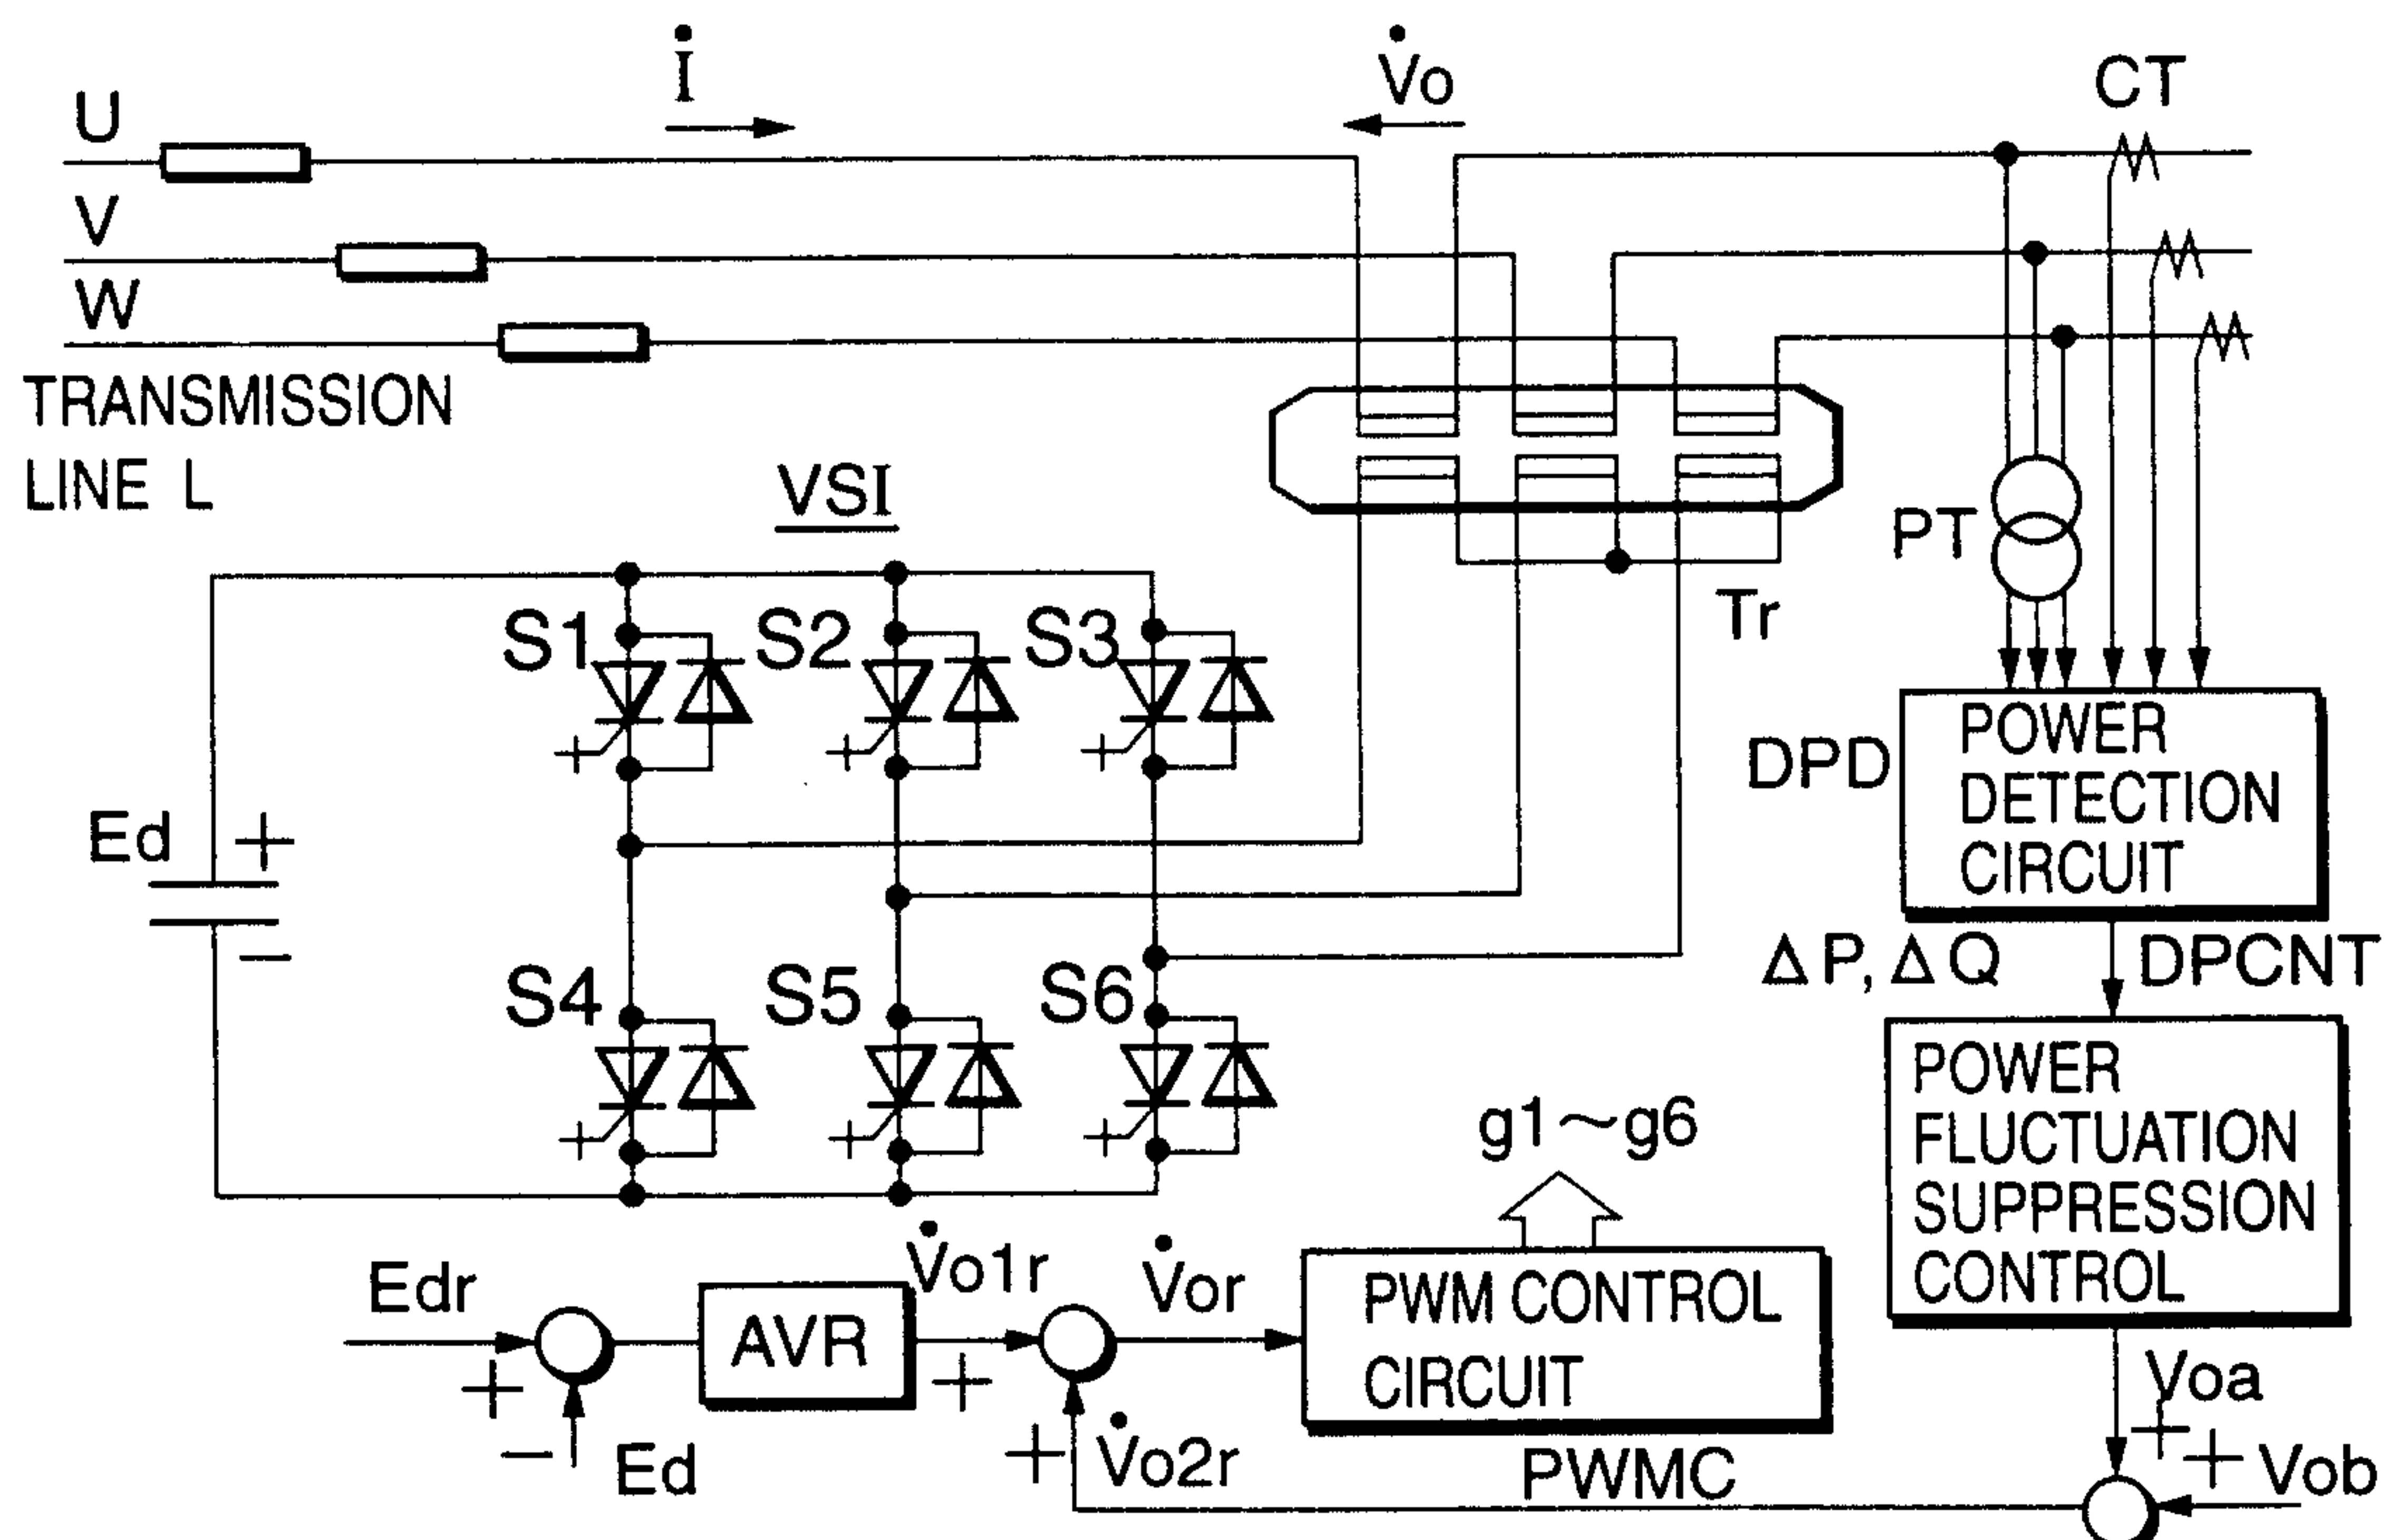


FIG. 4

3/41

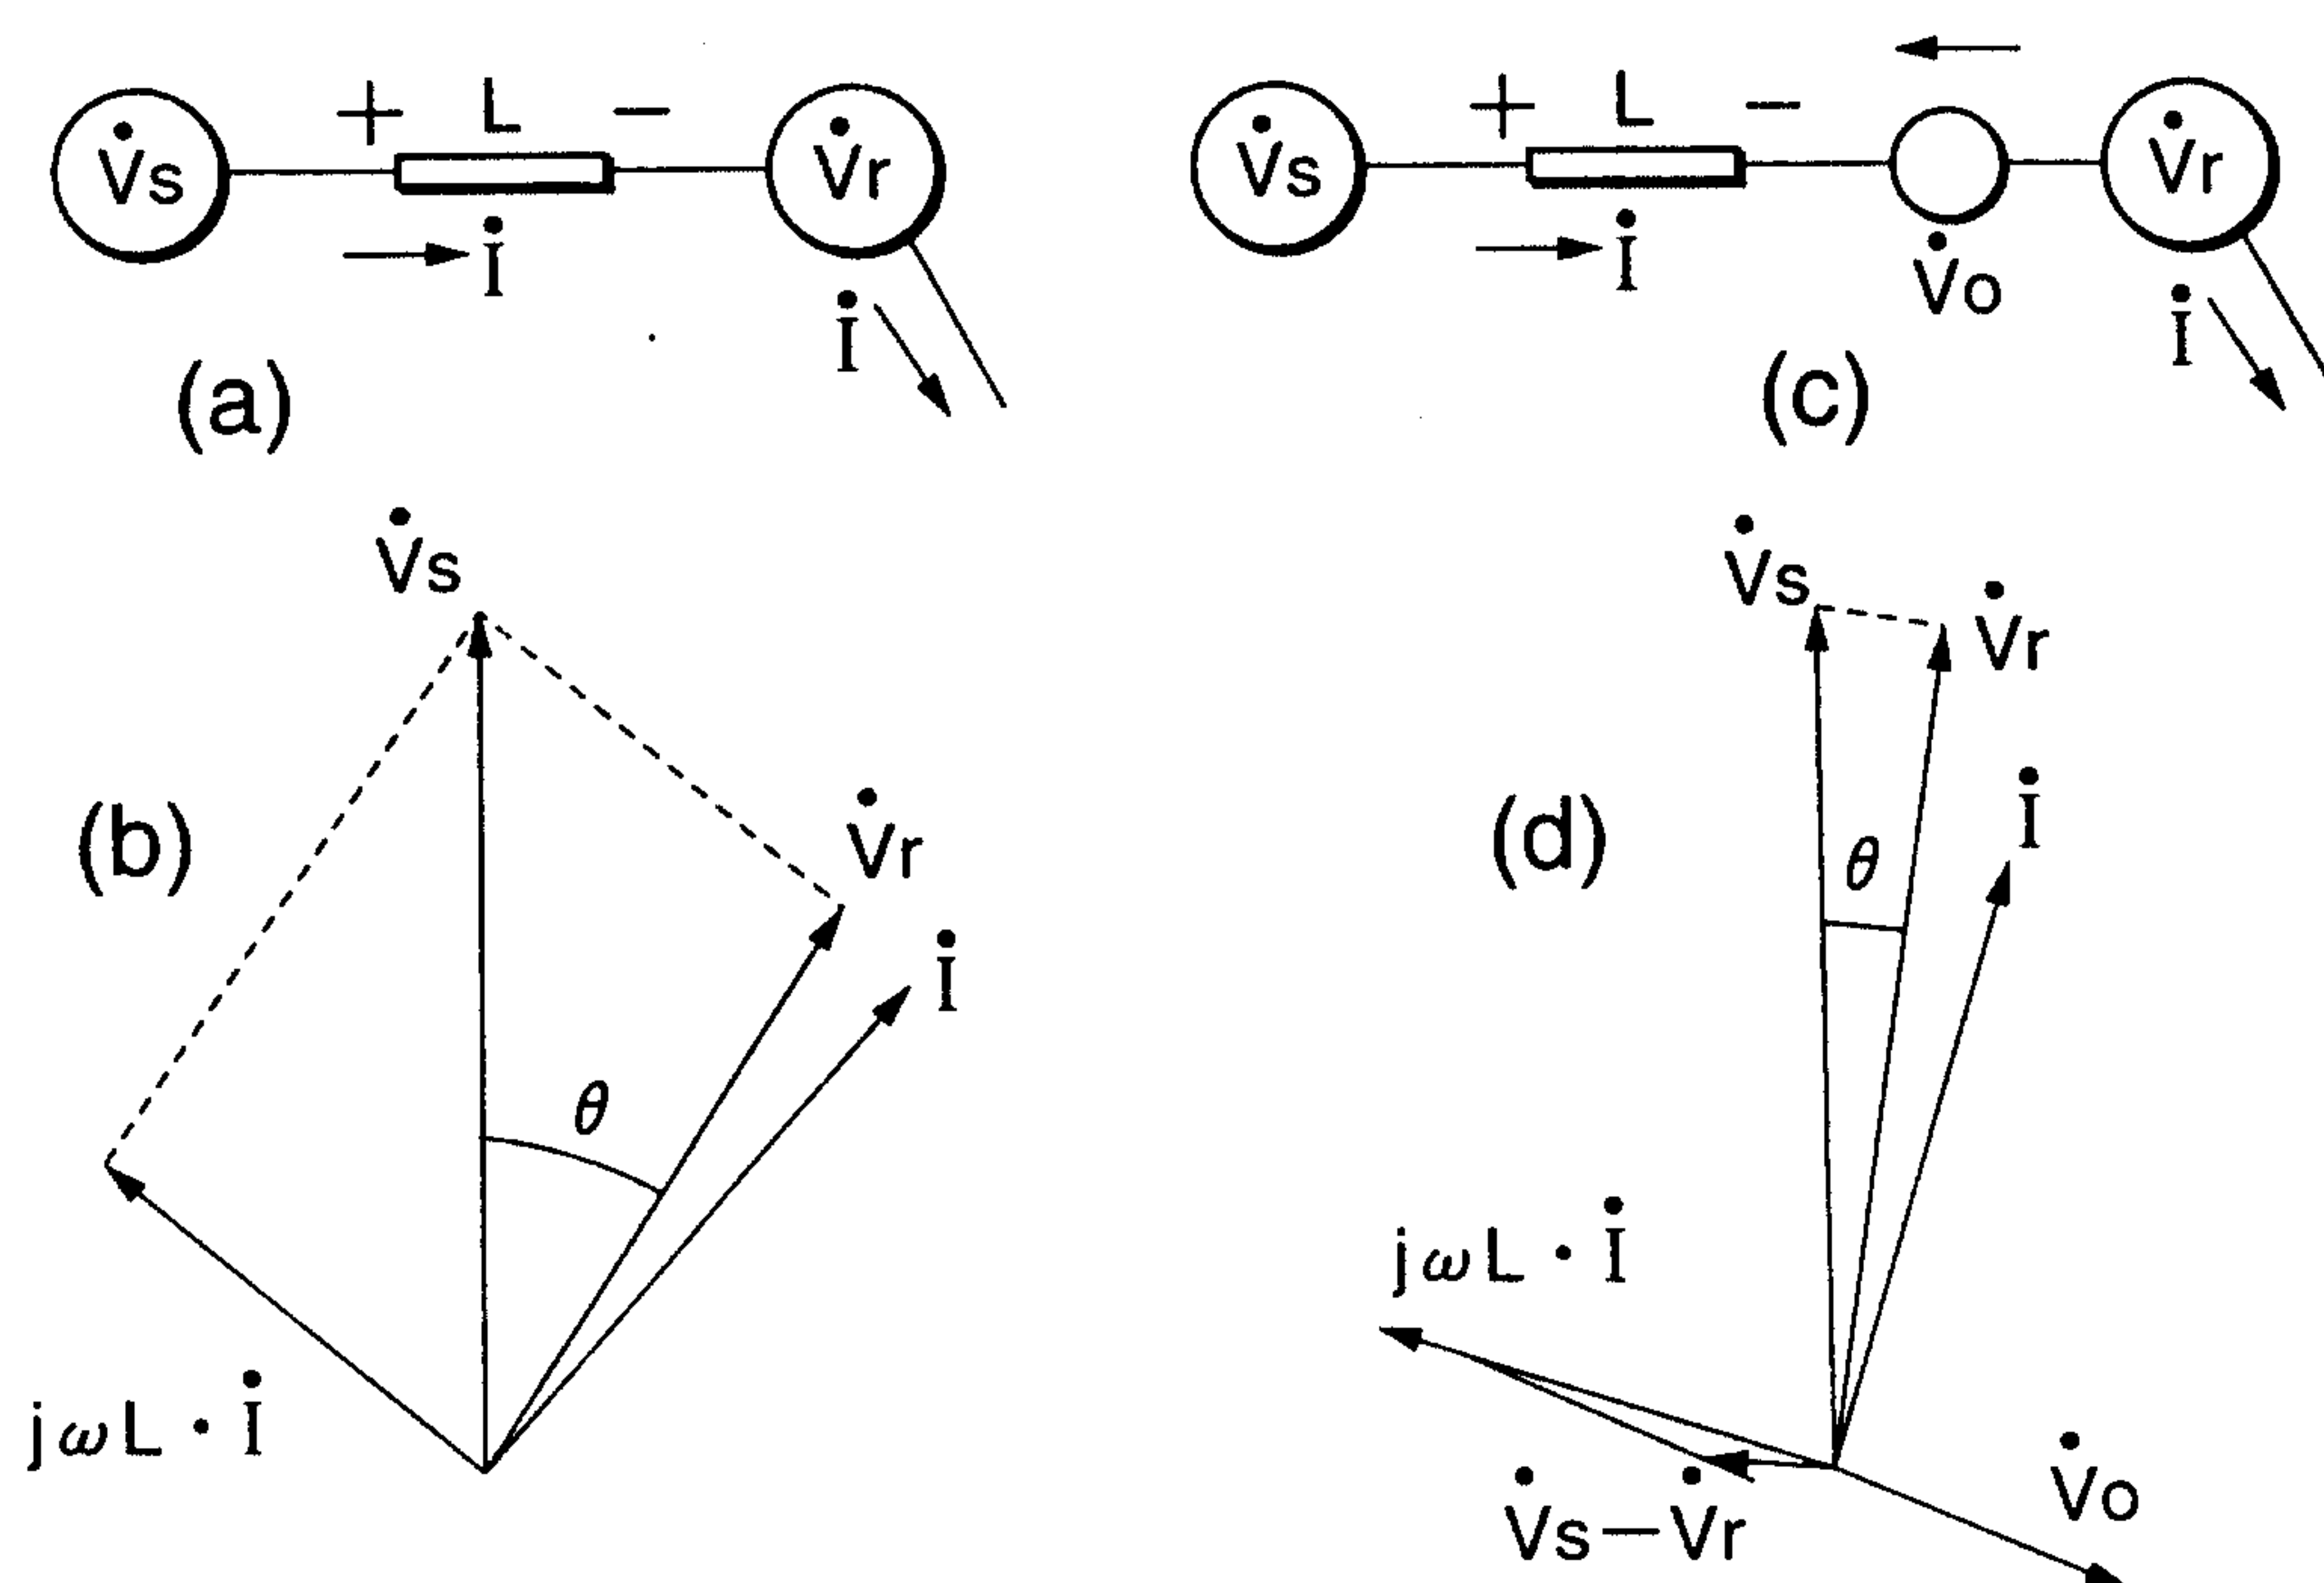


FIG. 5

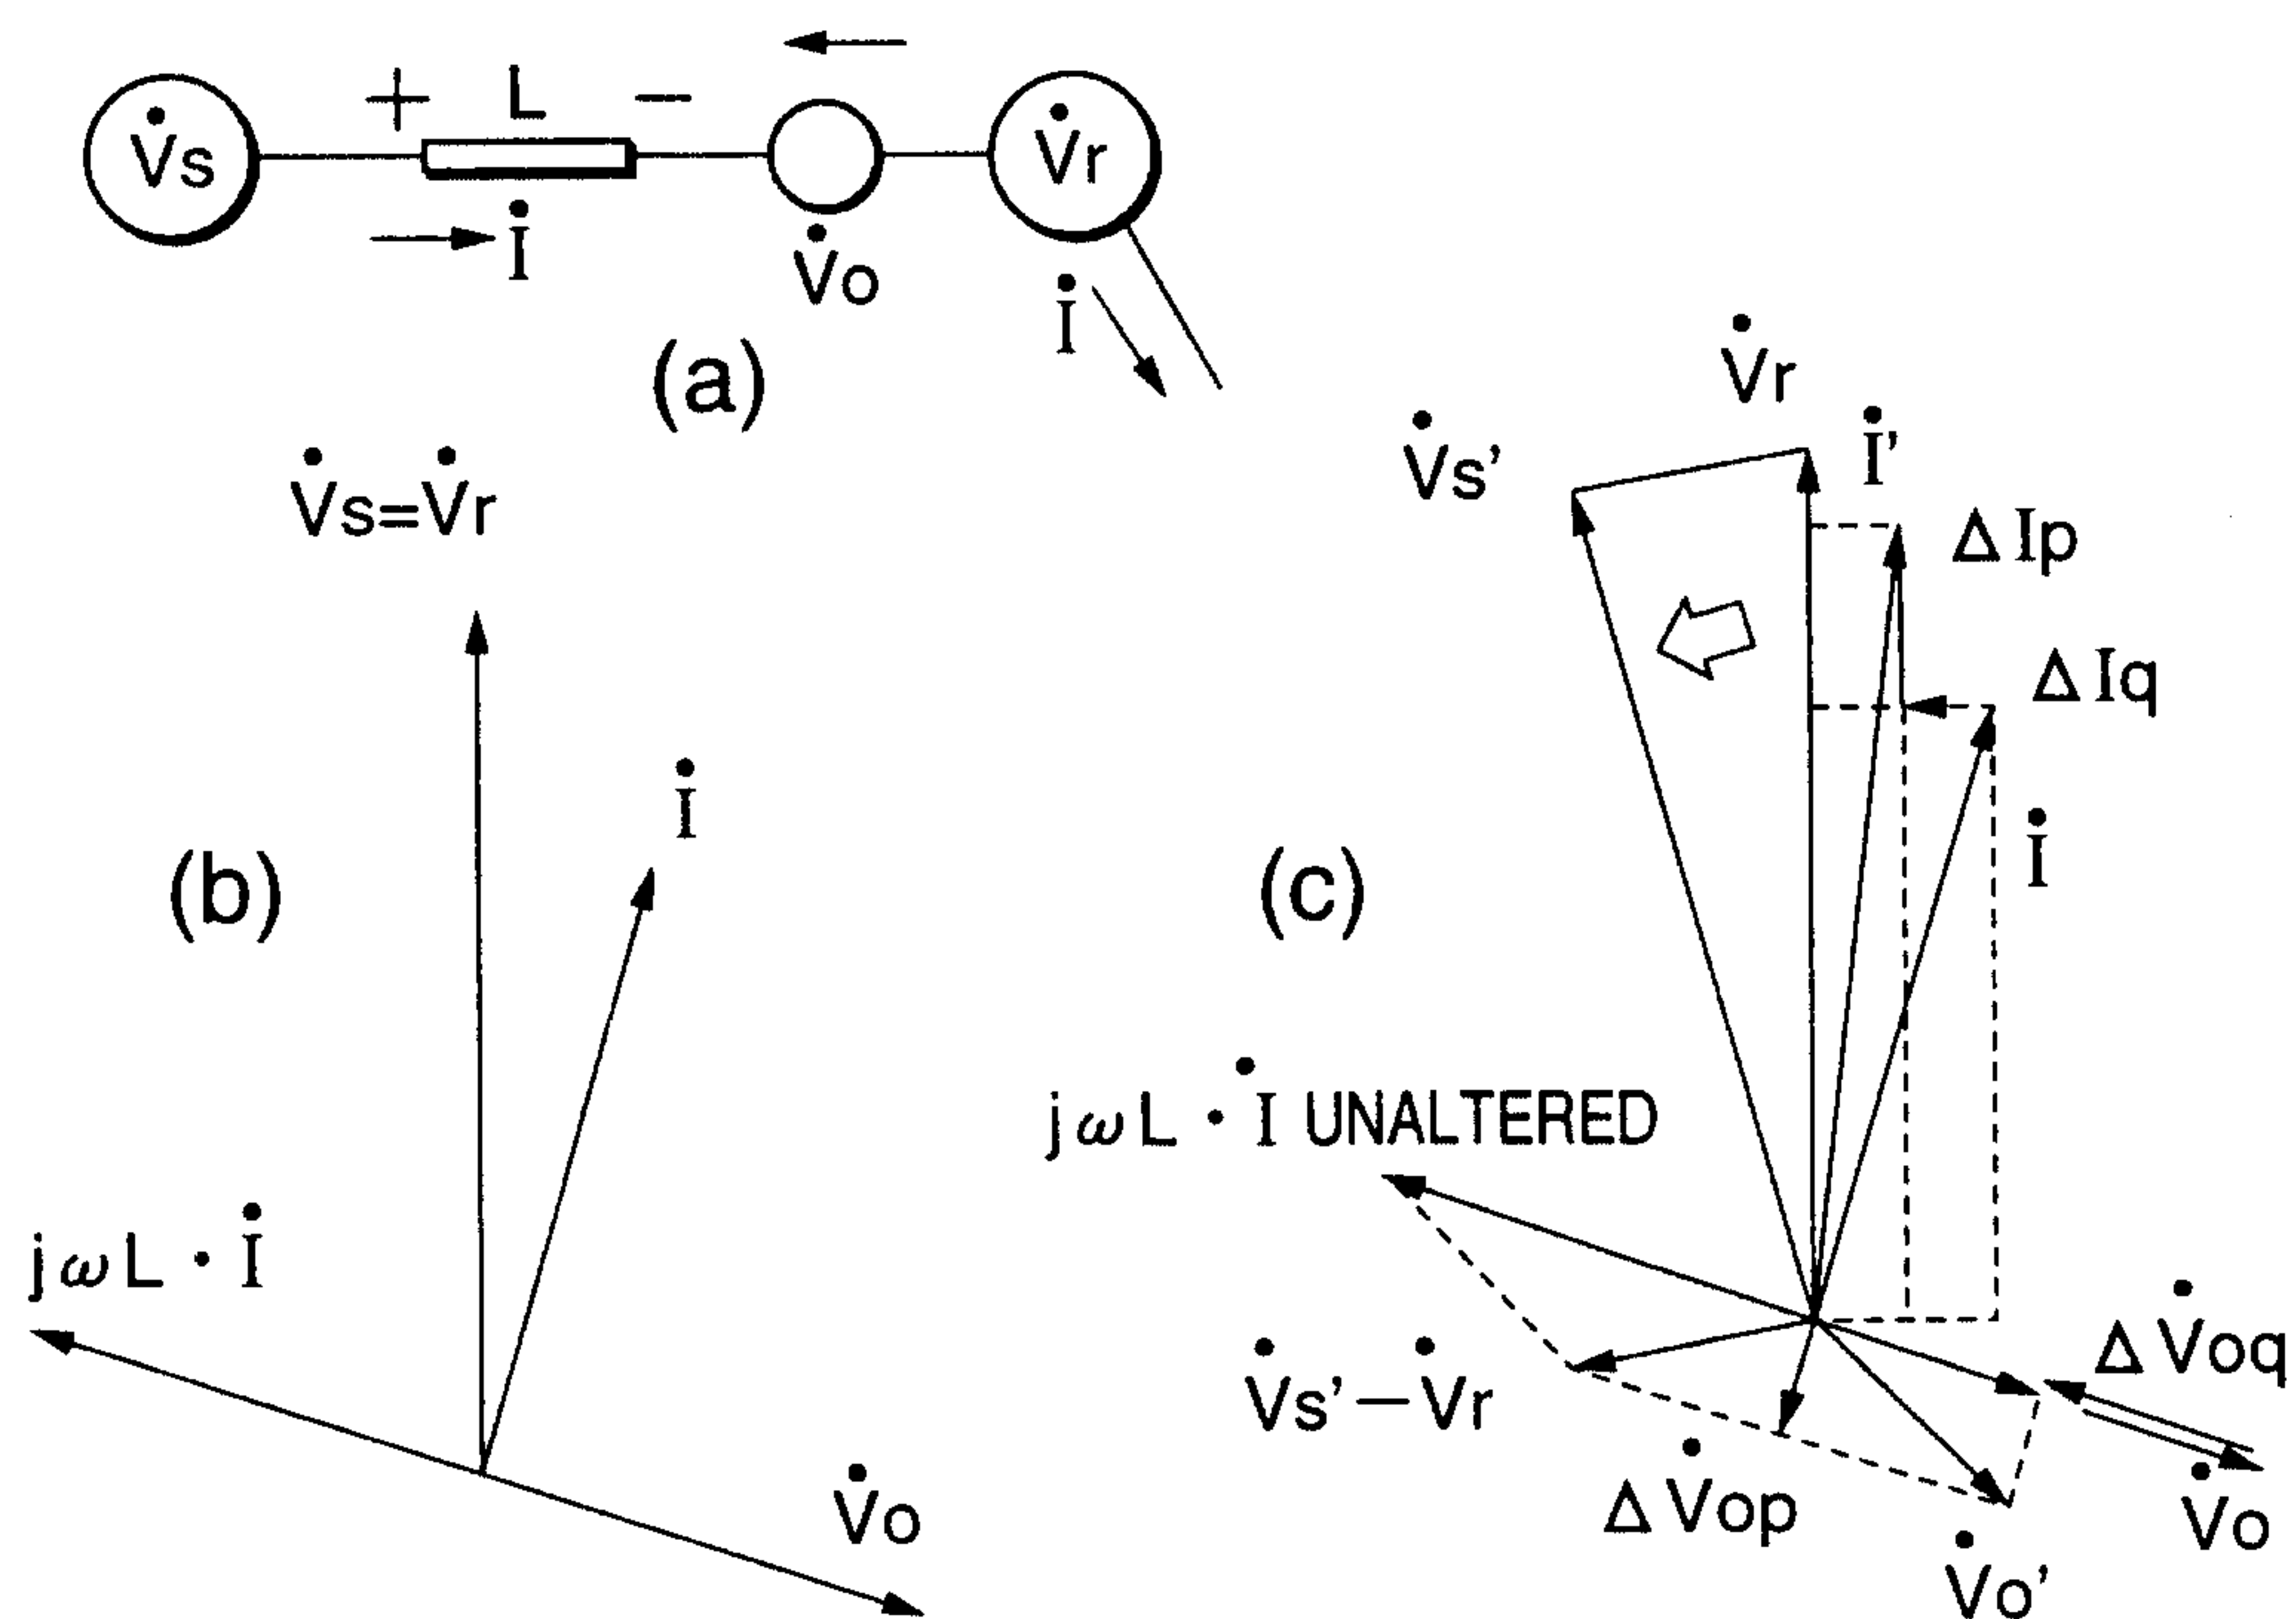


FIG. 6

4/41

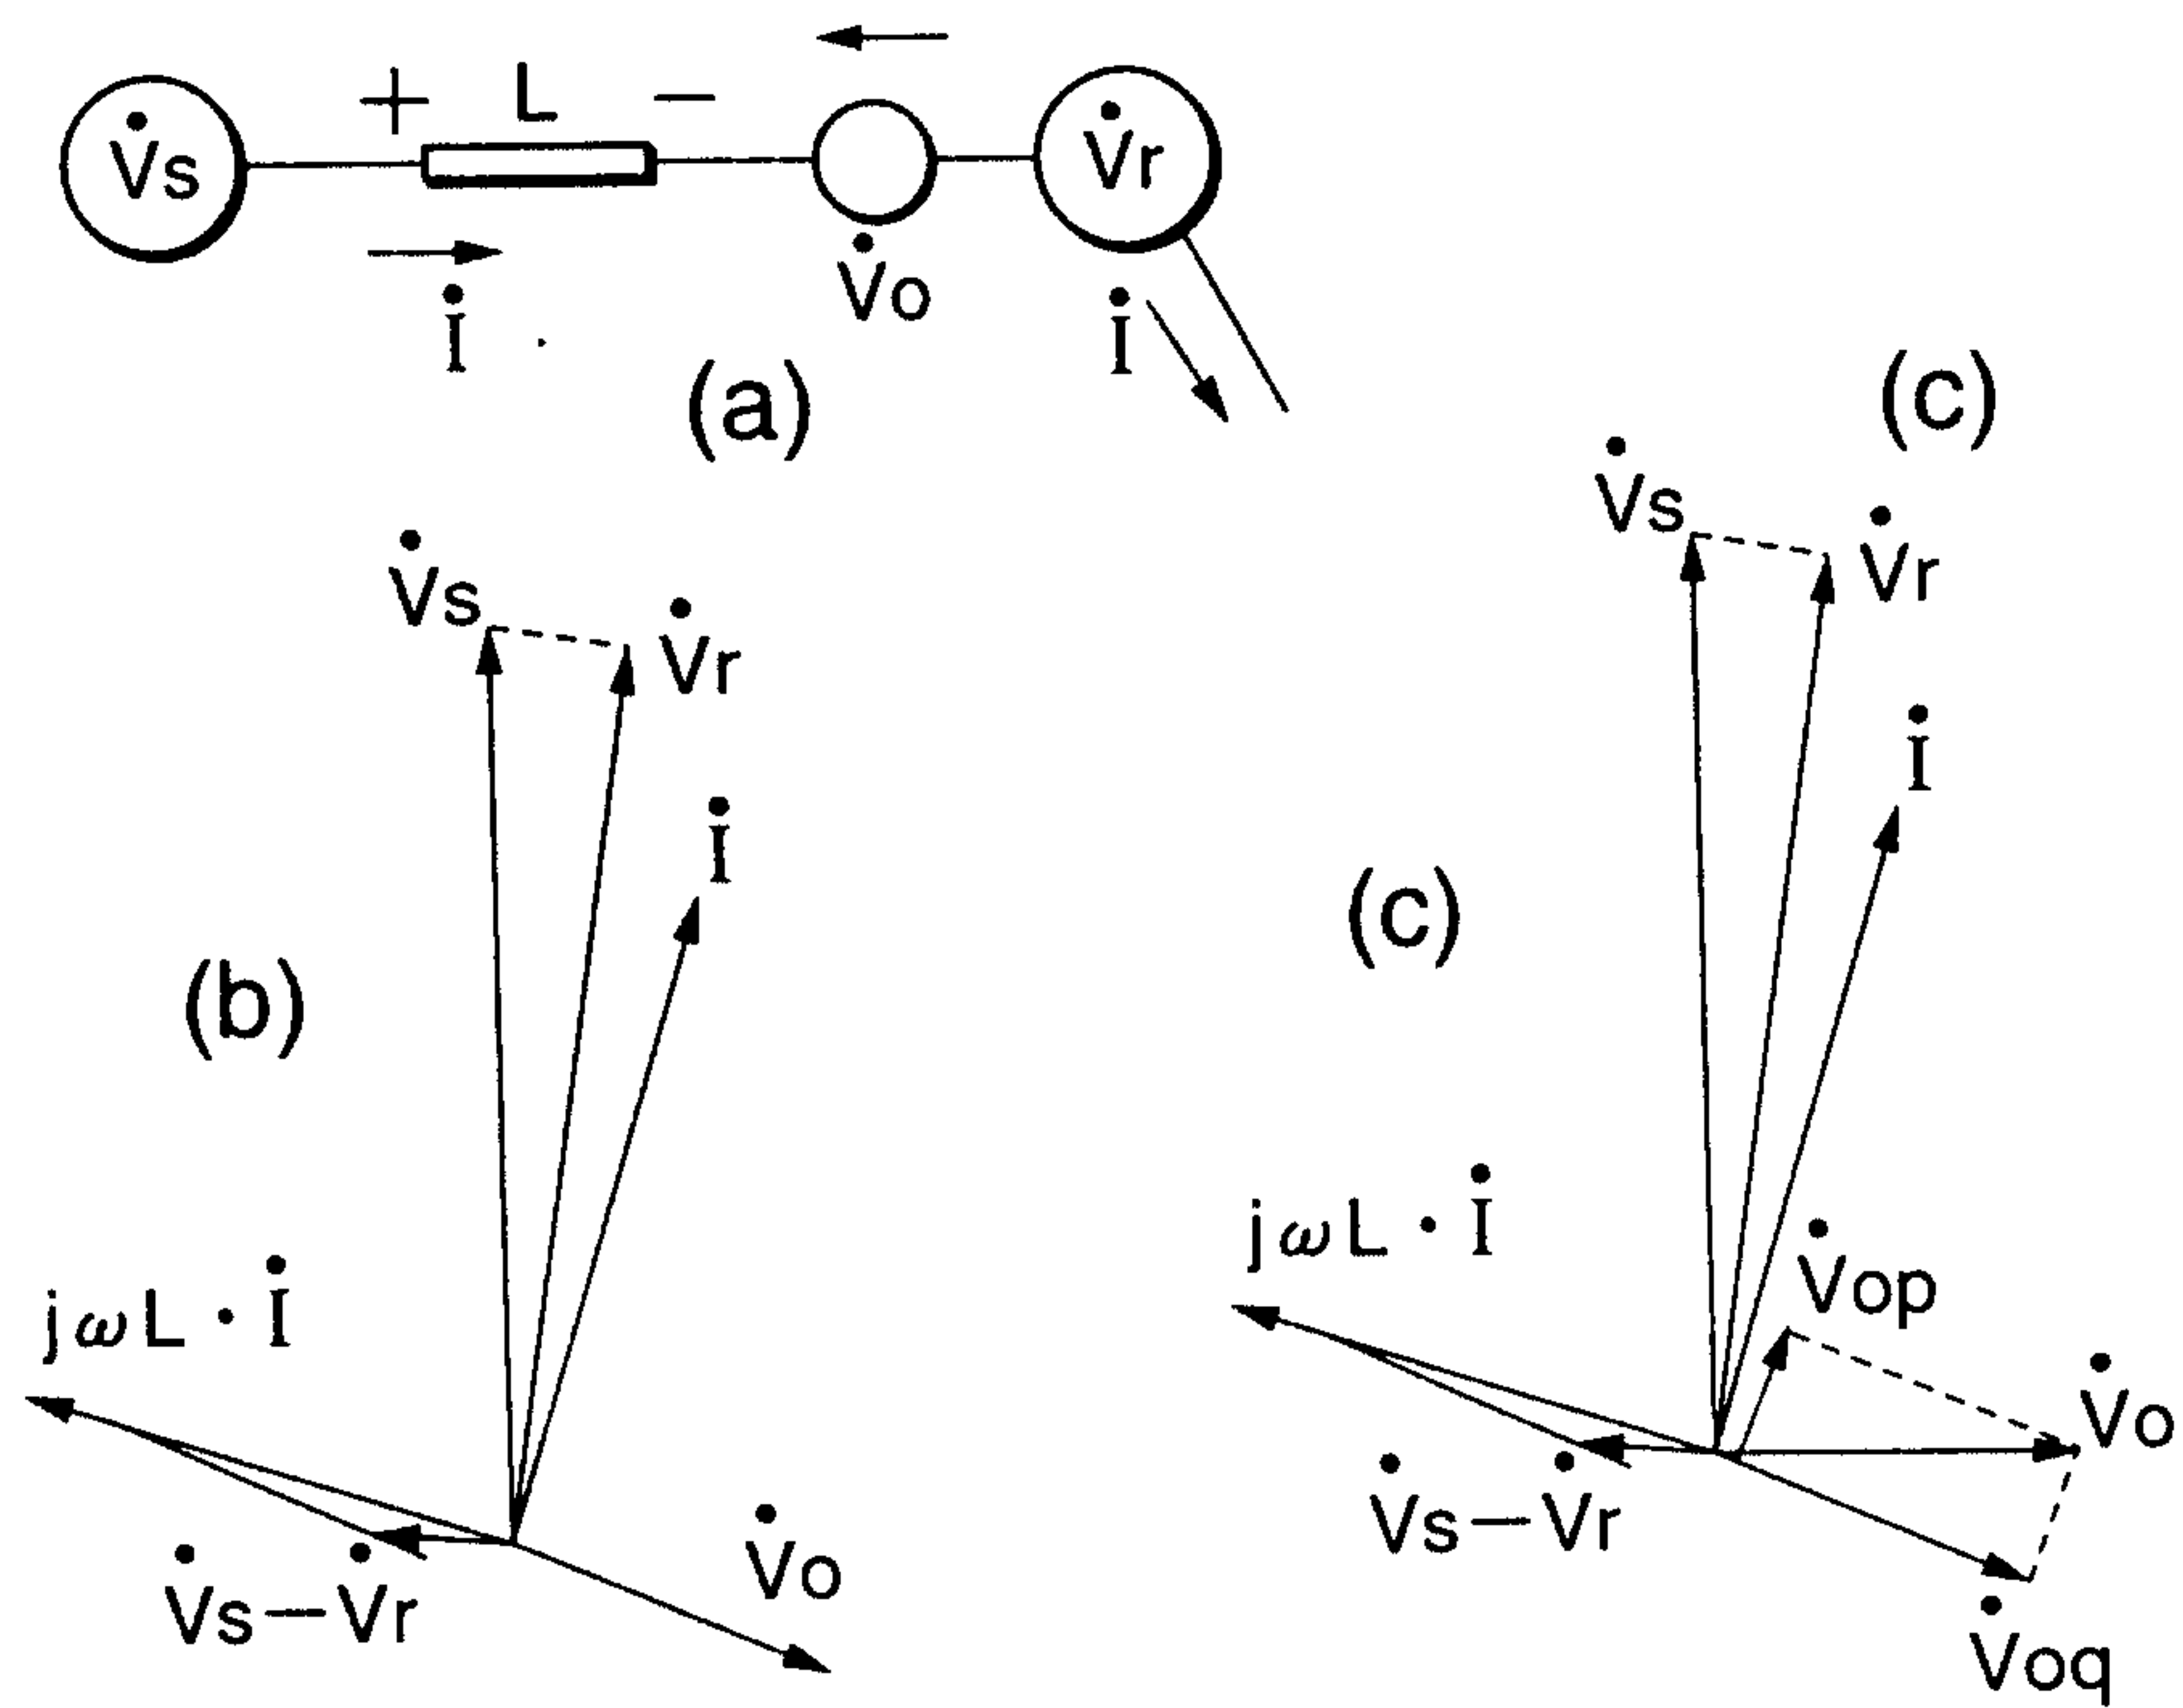


FIG. 7

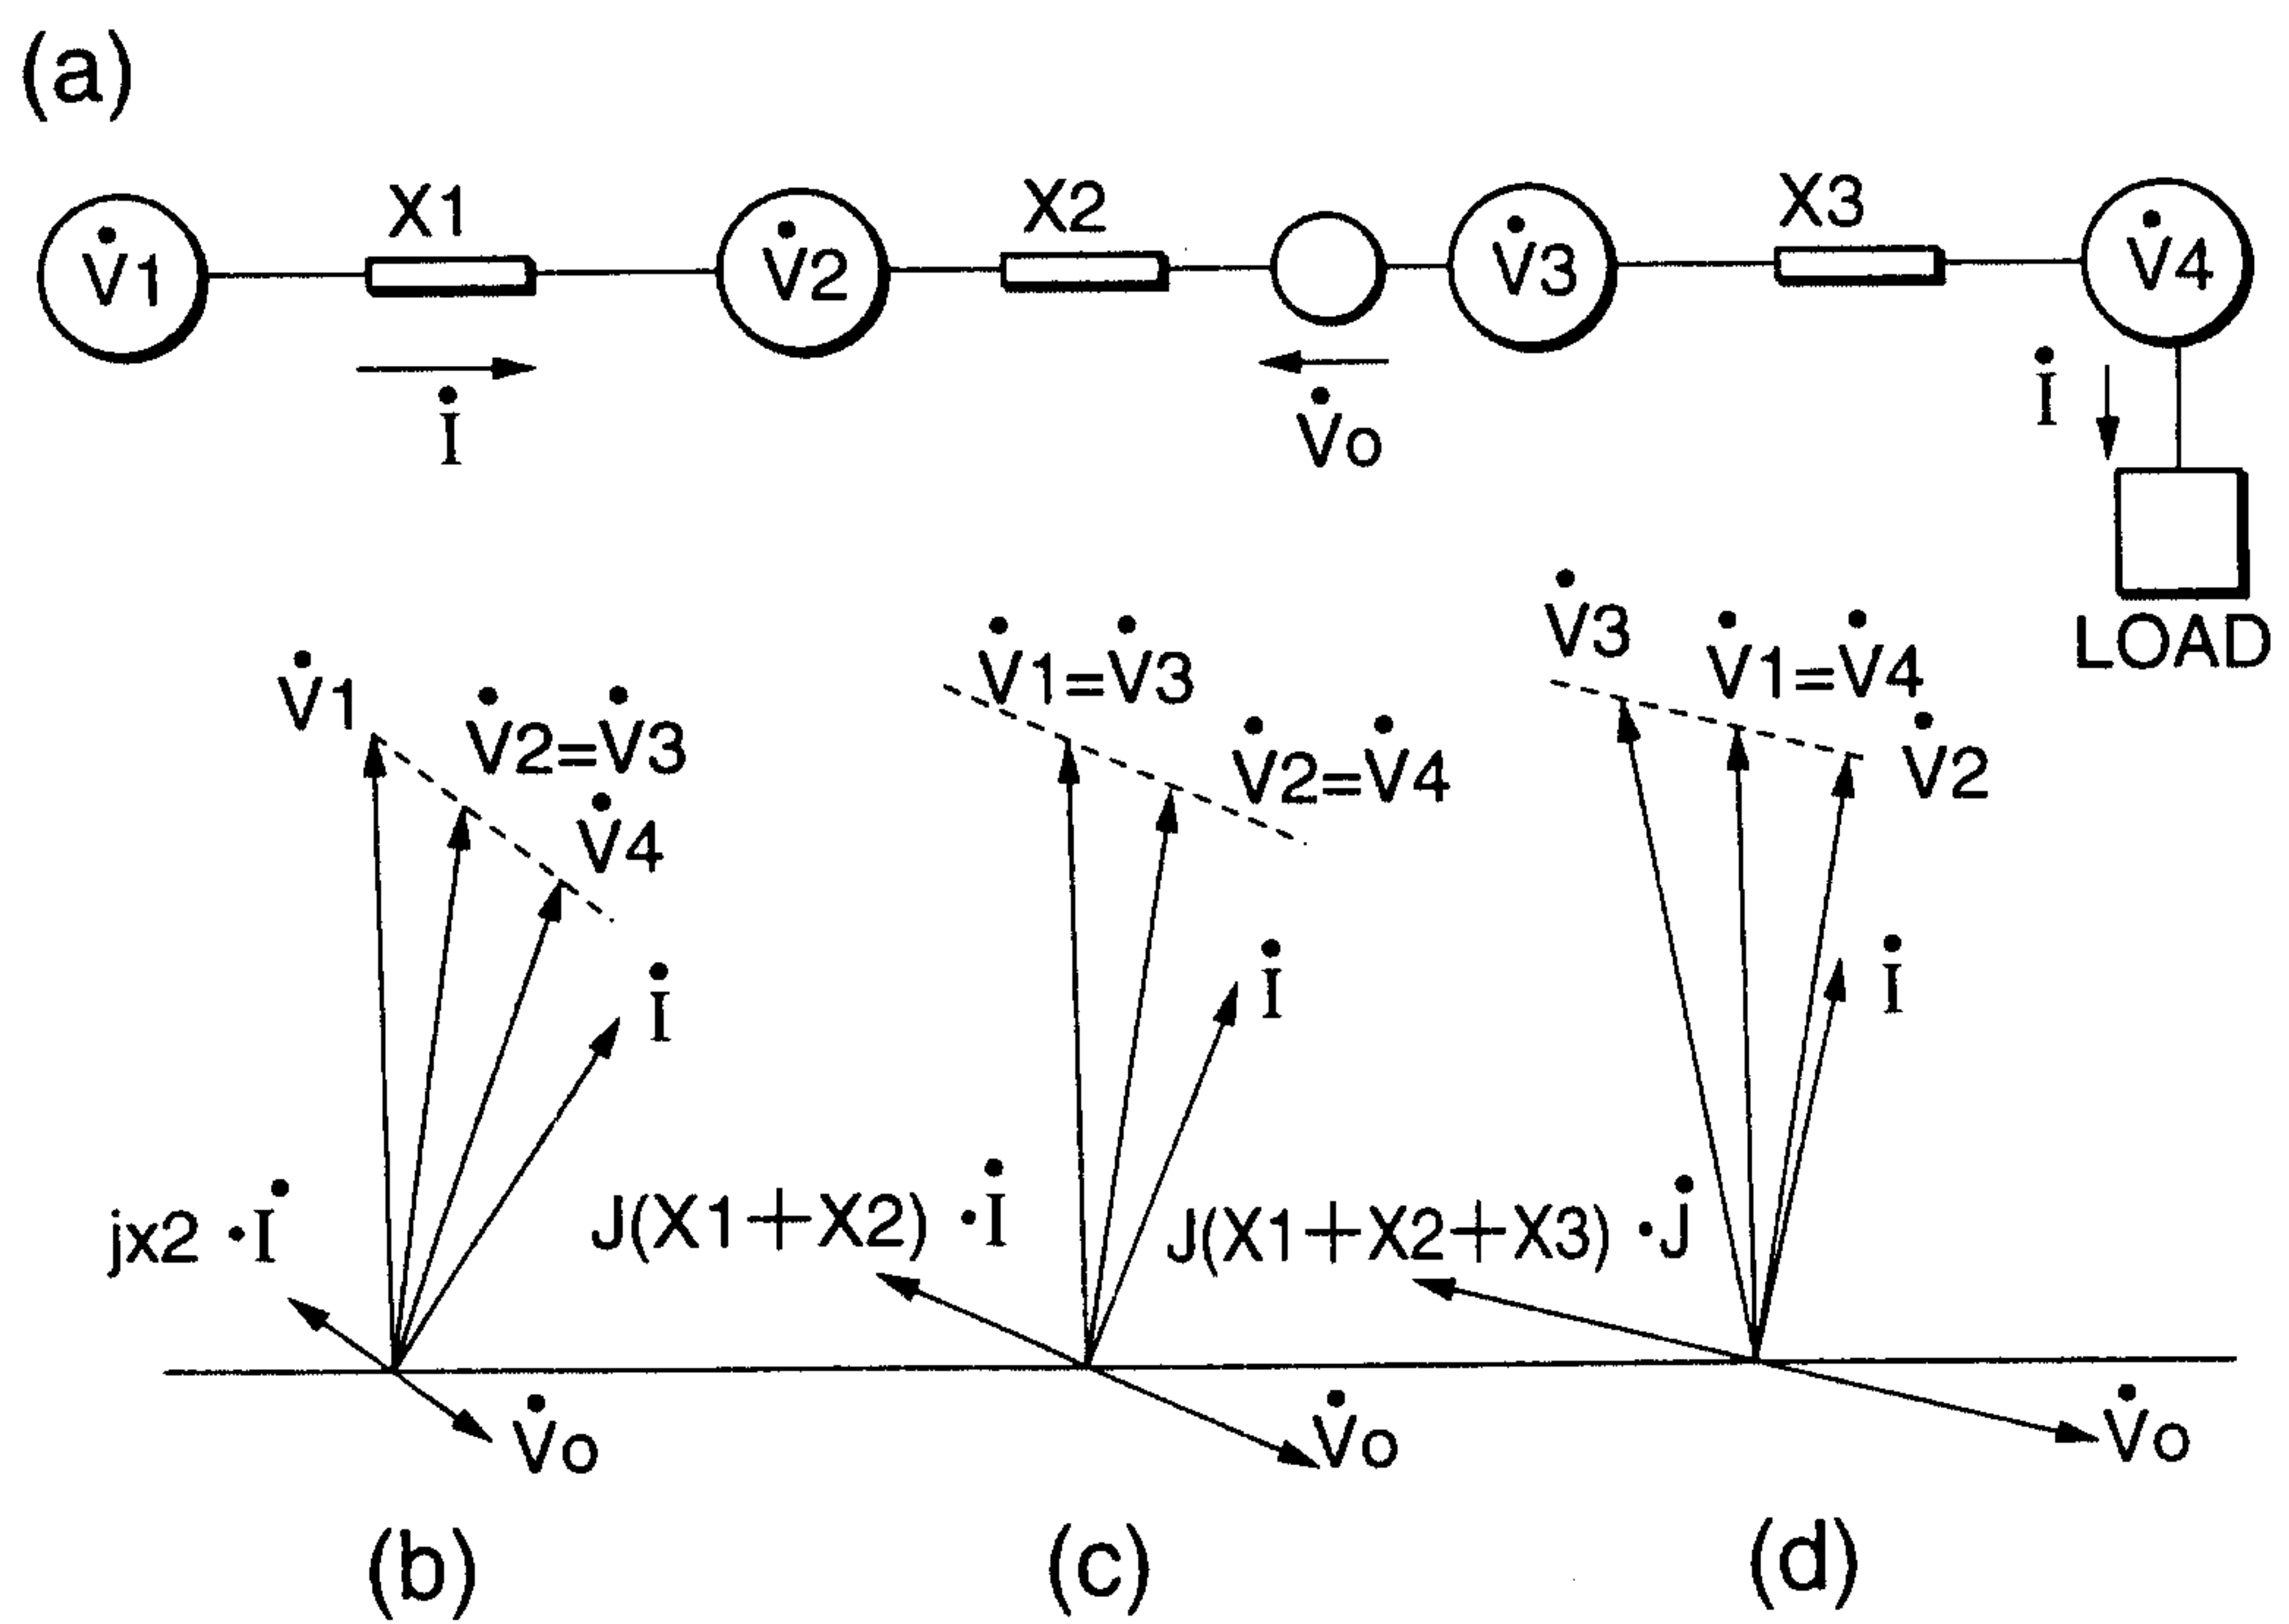


FIG. 8

5/41

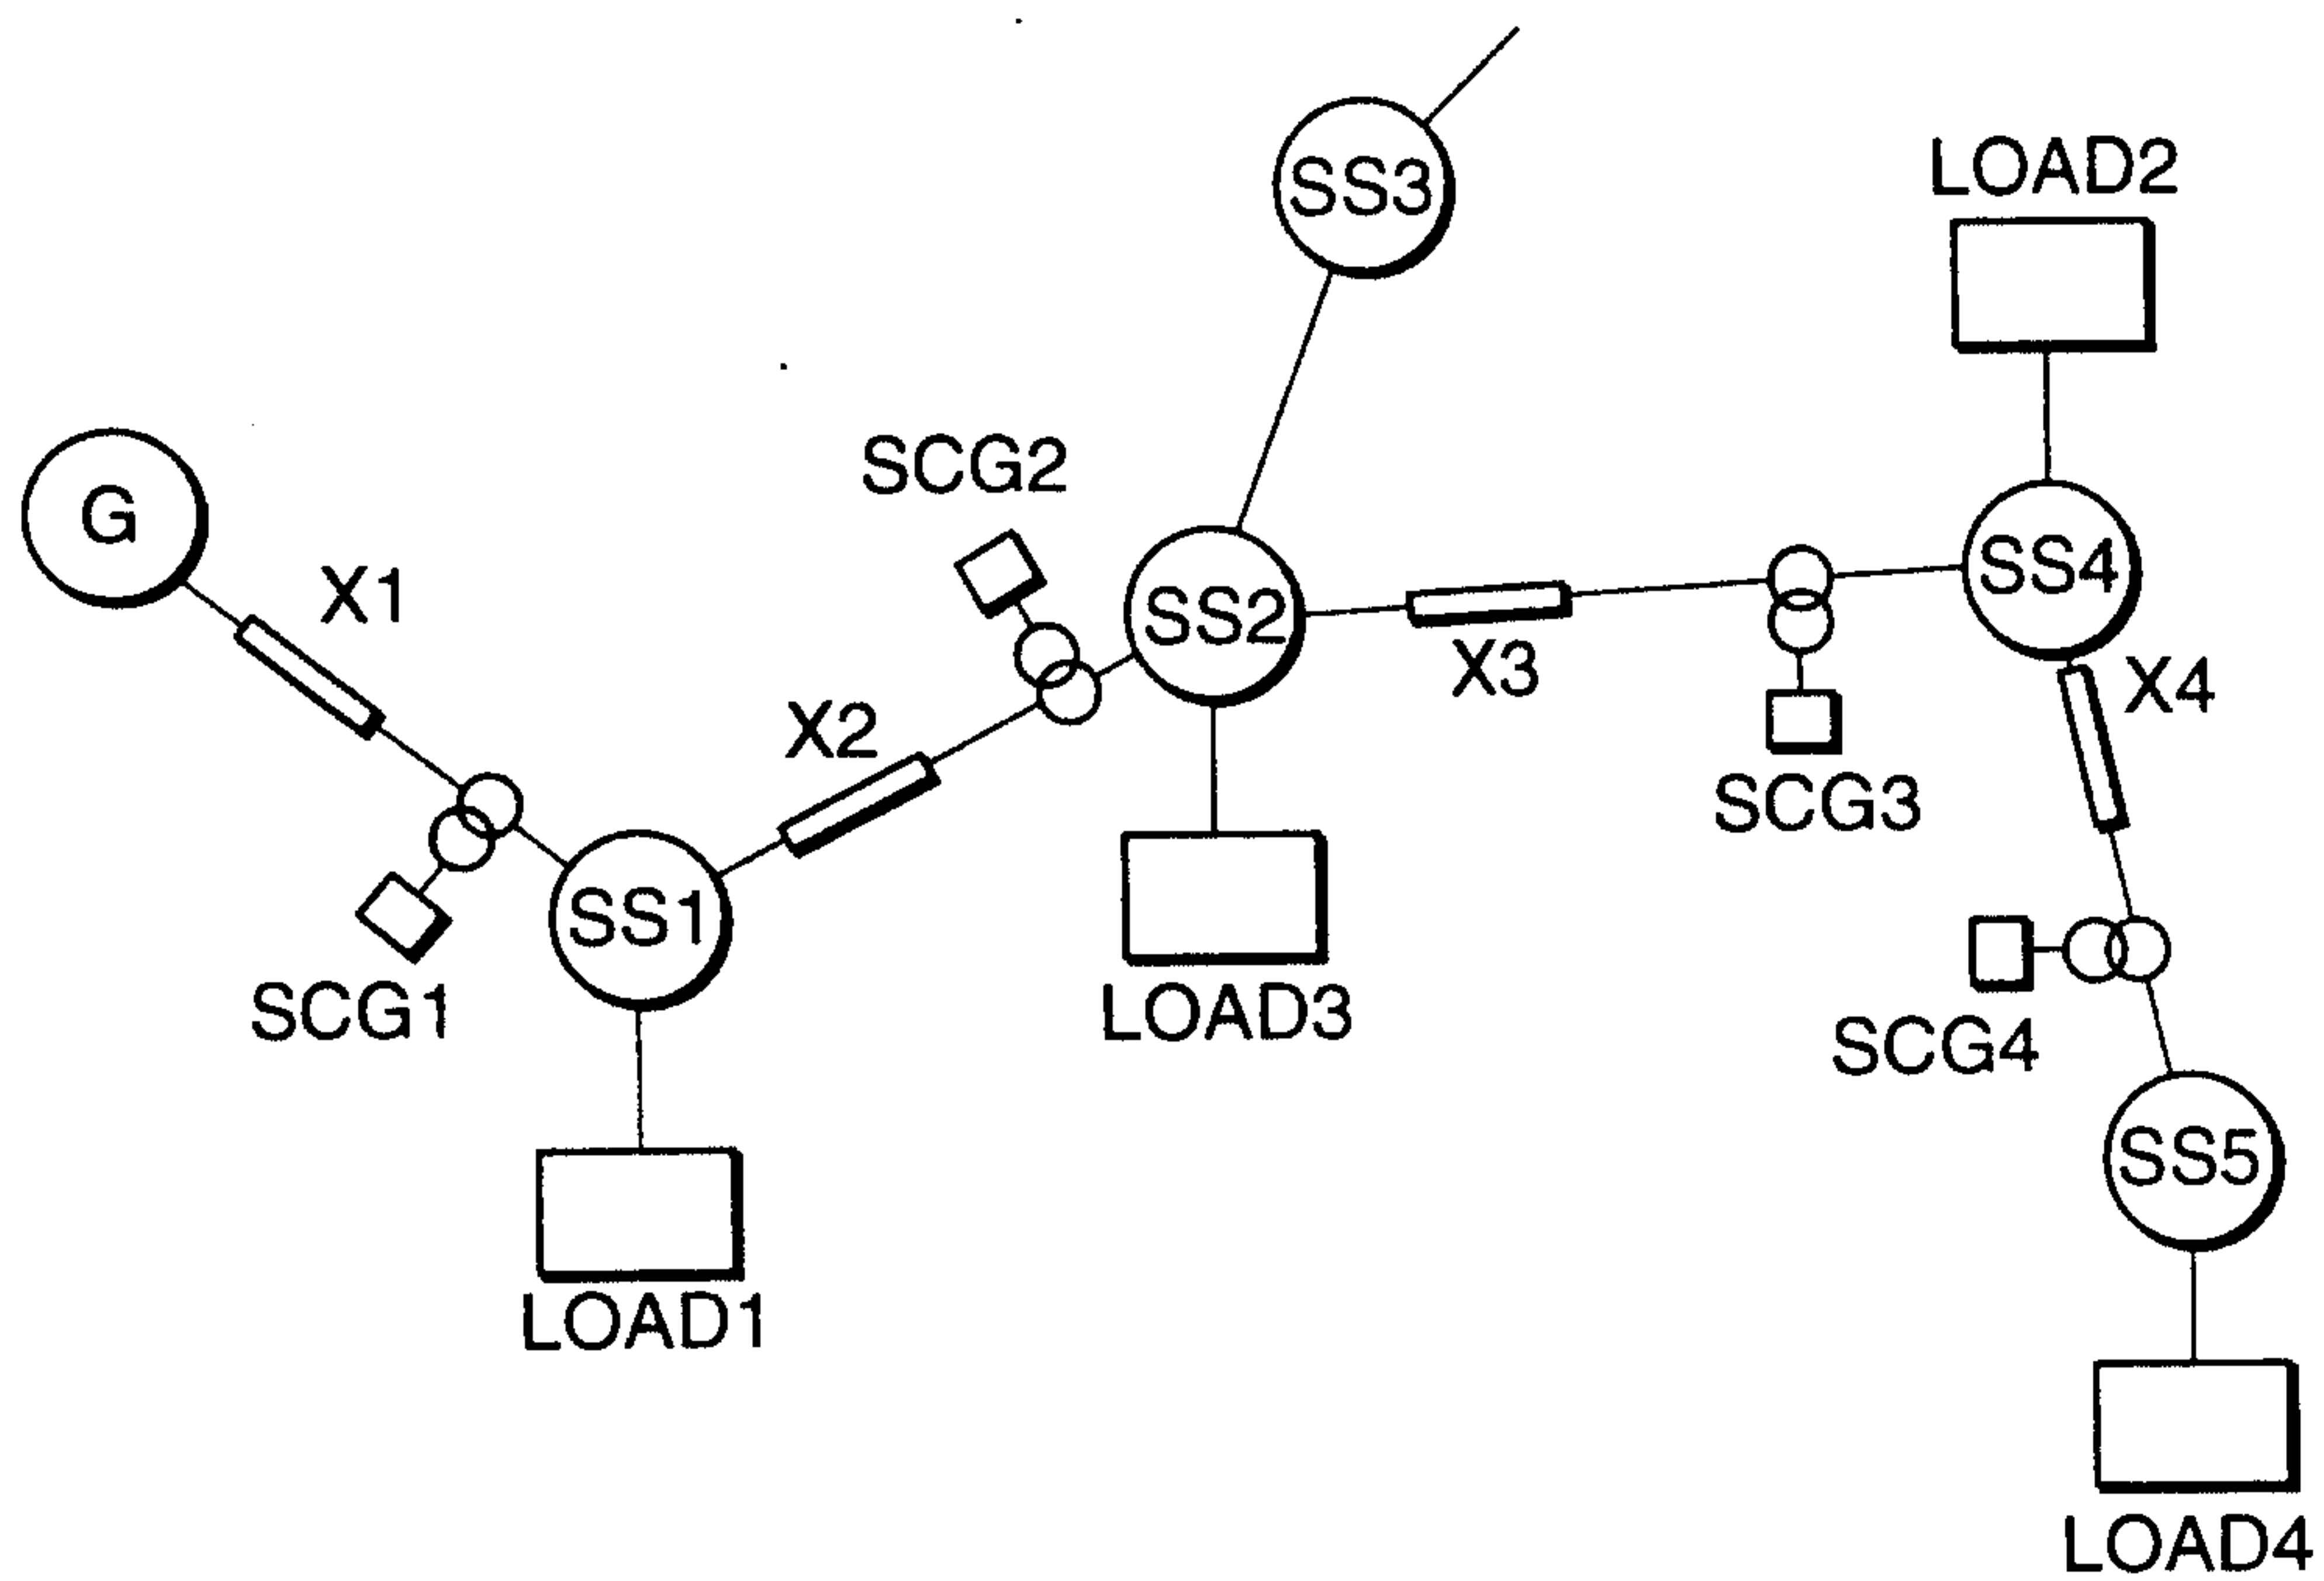


FIG. 9

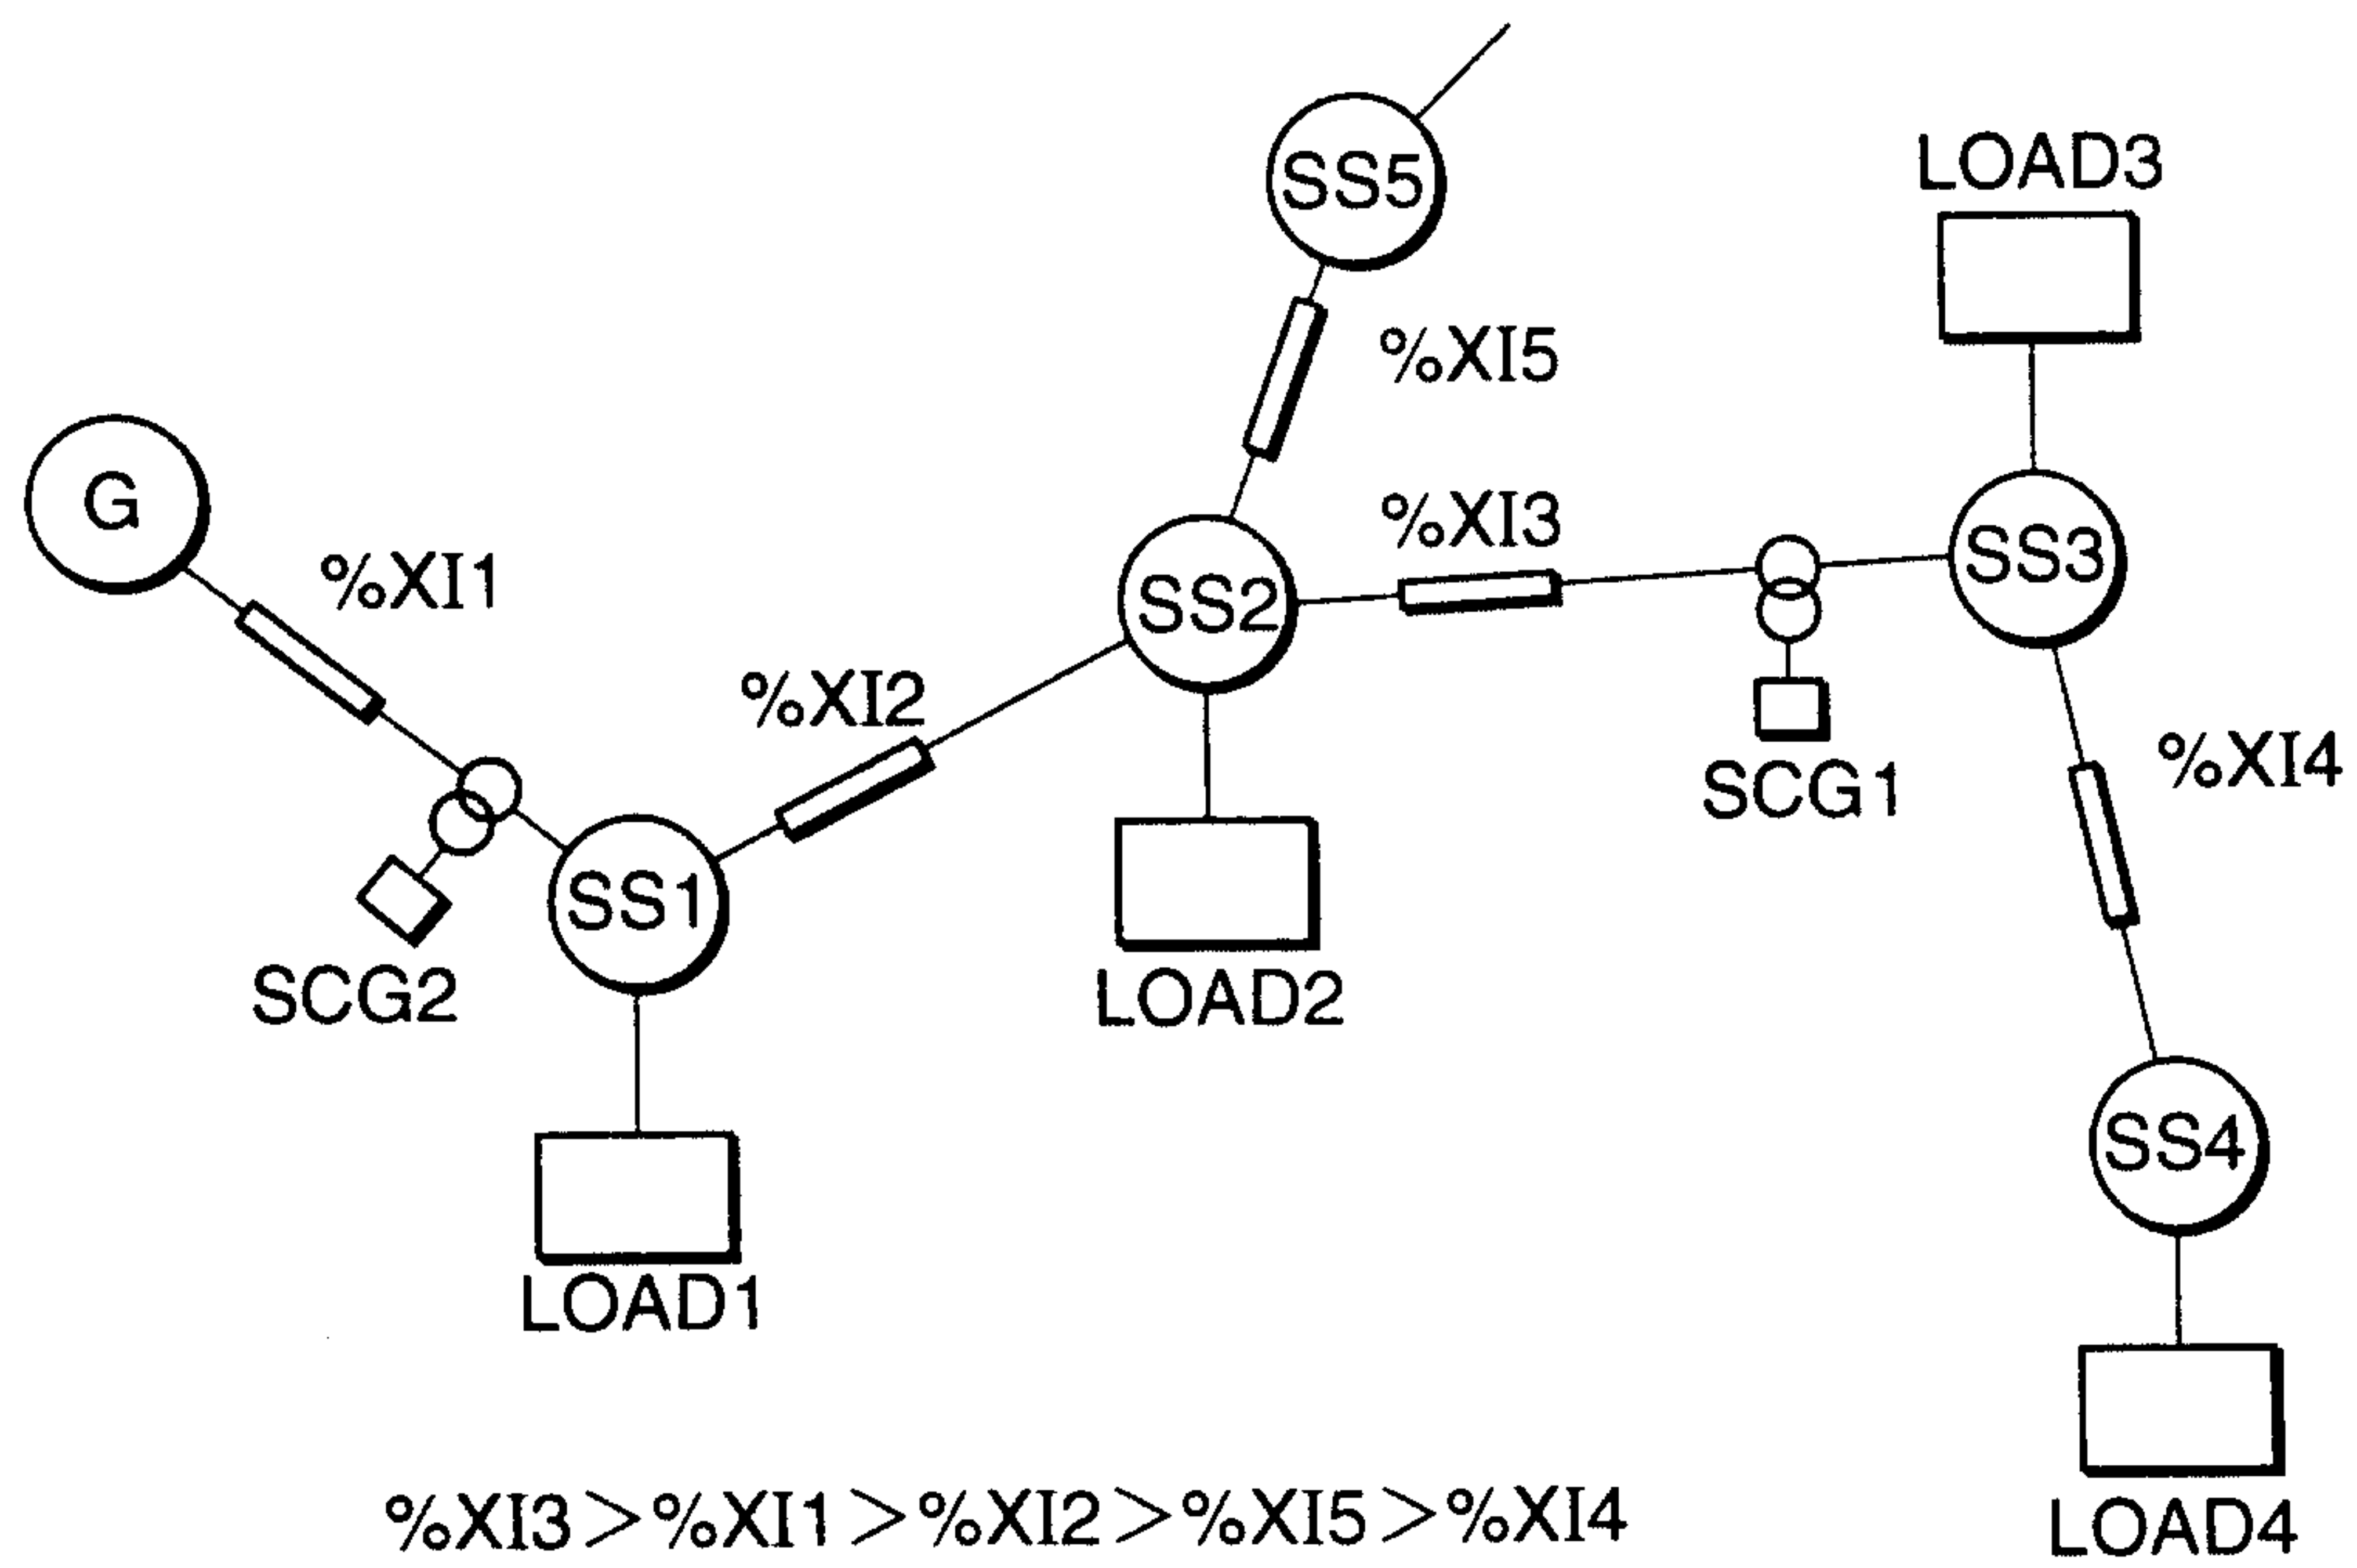


FIG. 10

6/41

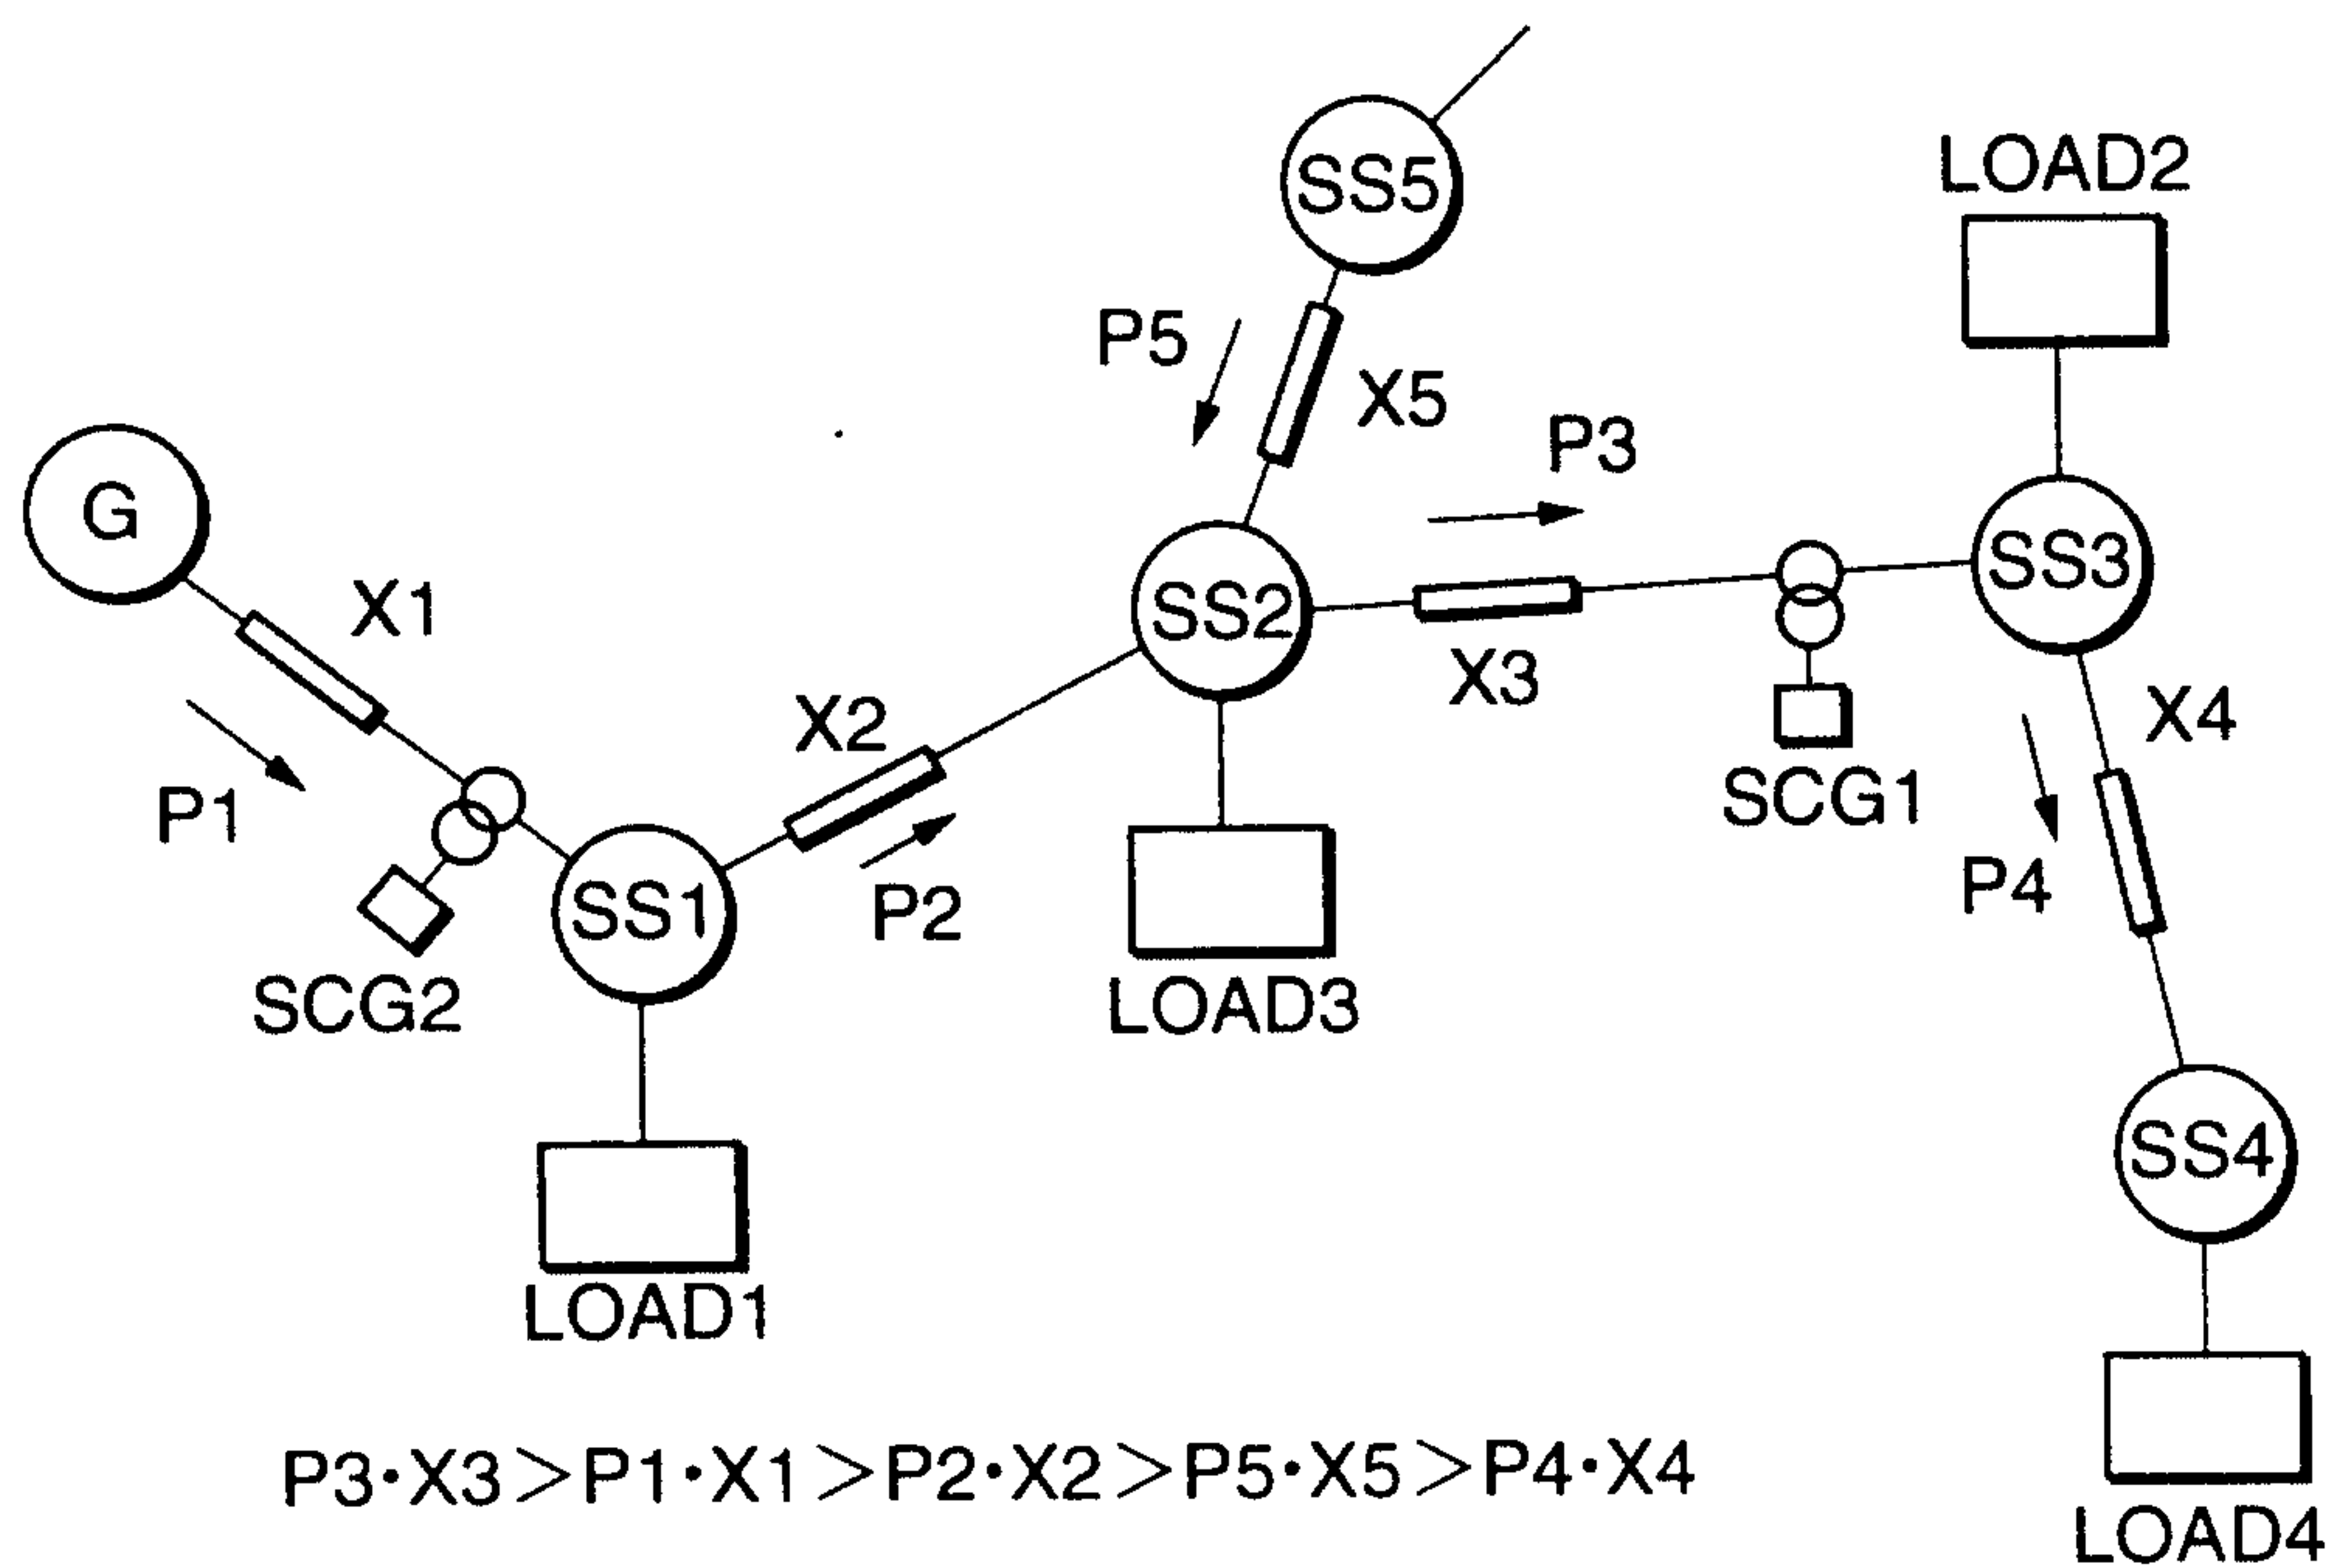


FIG. 11

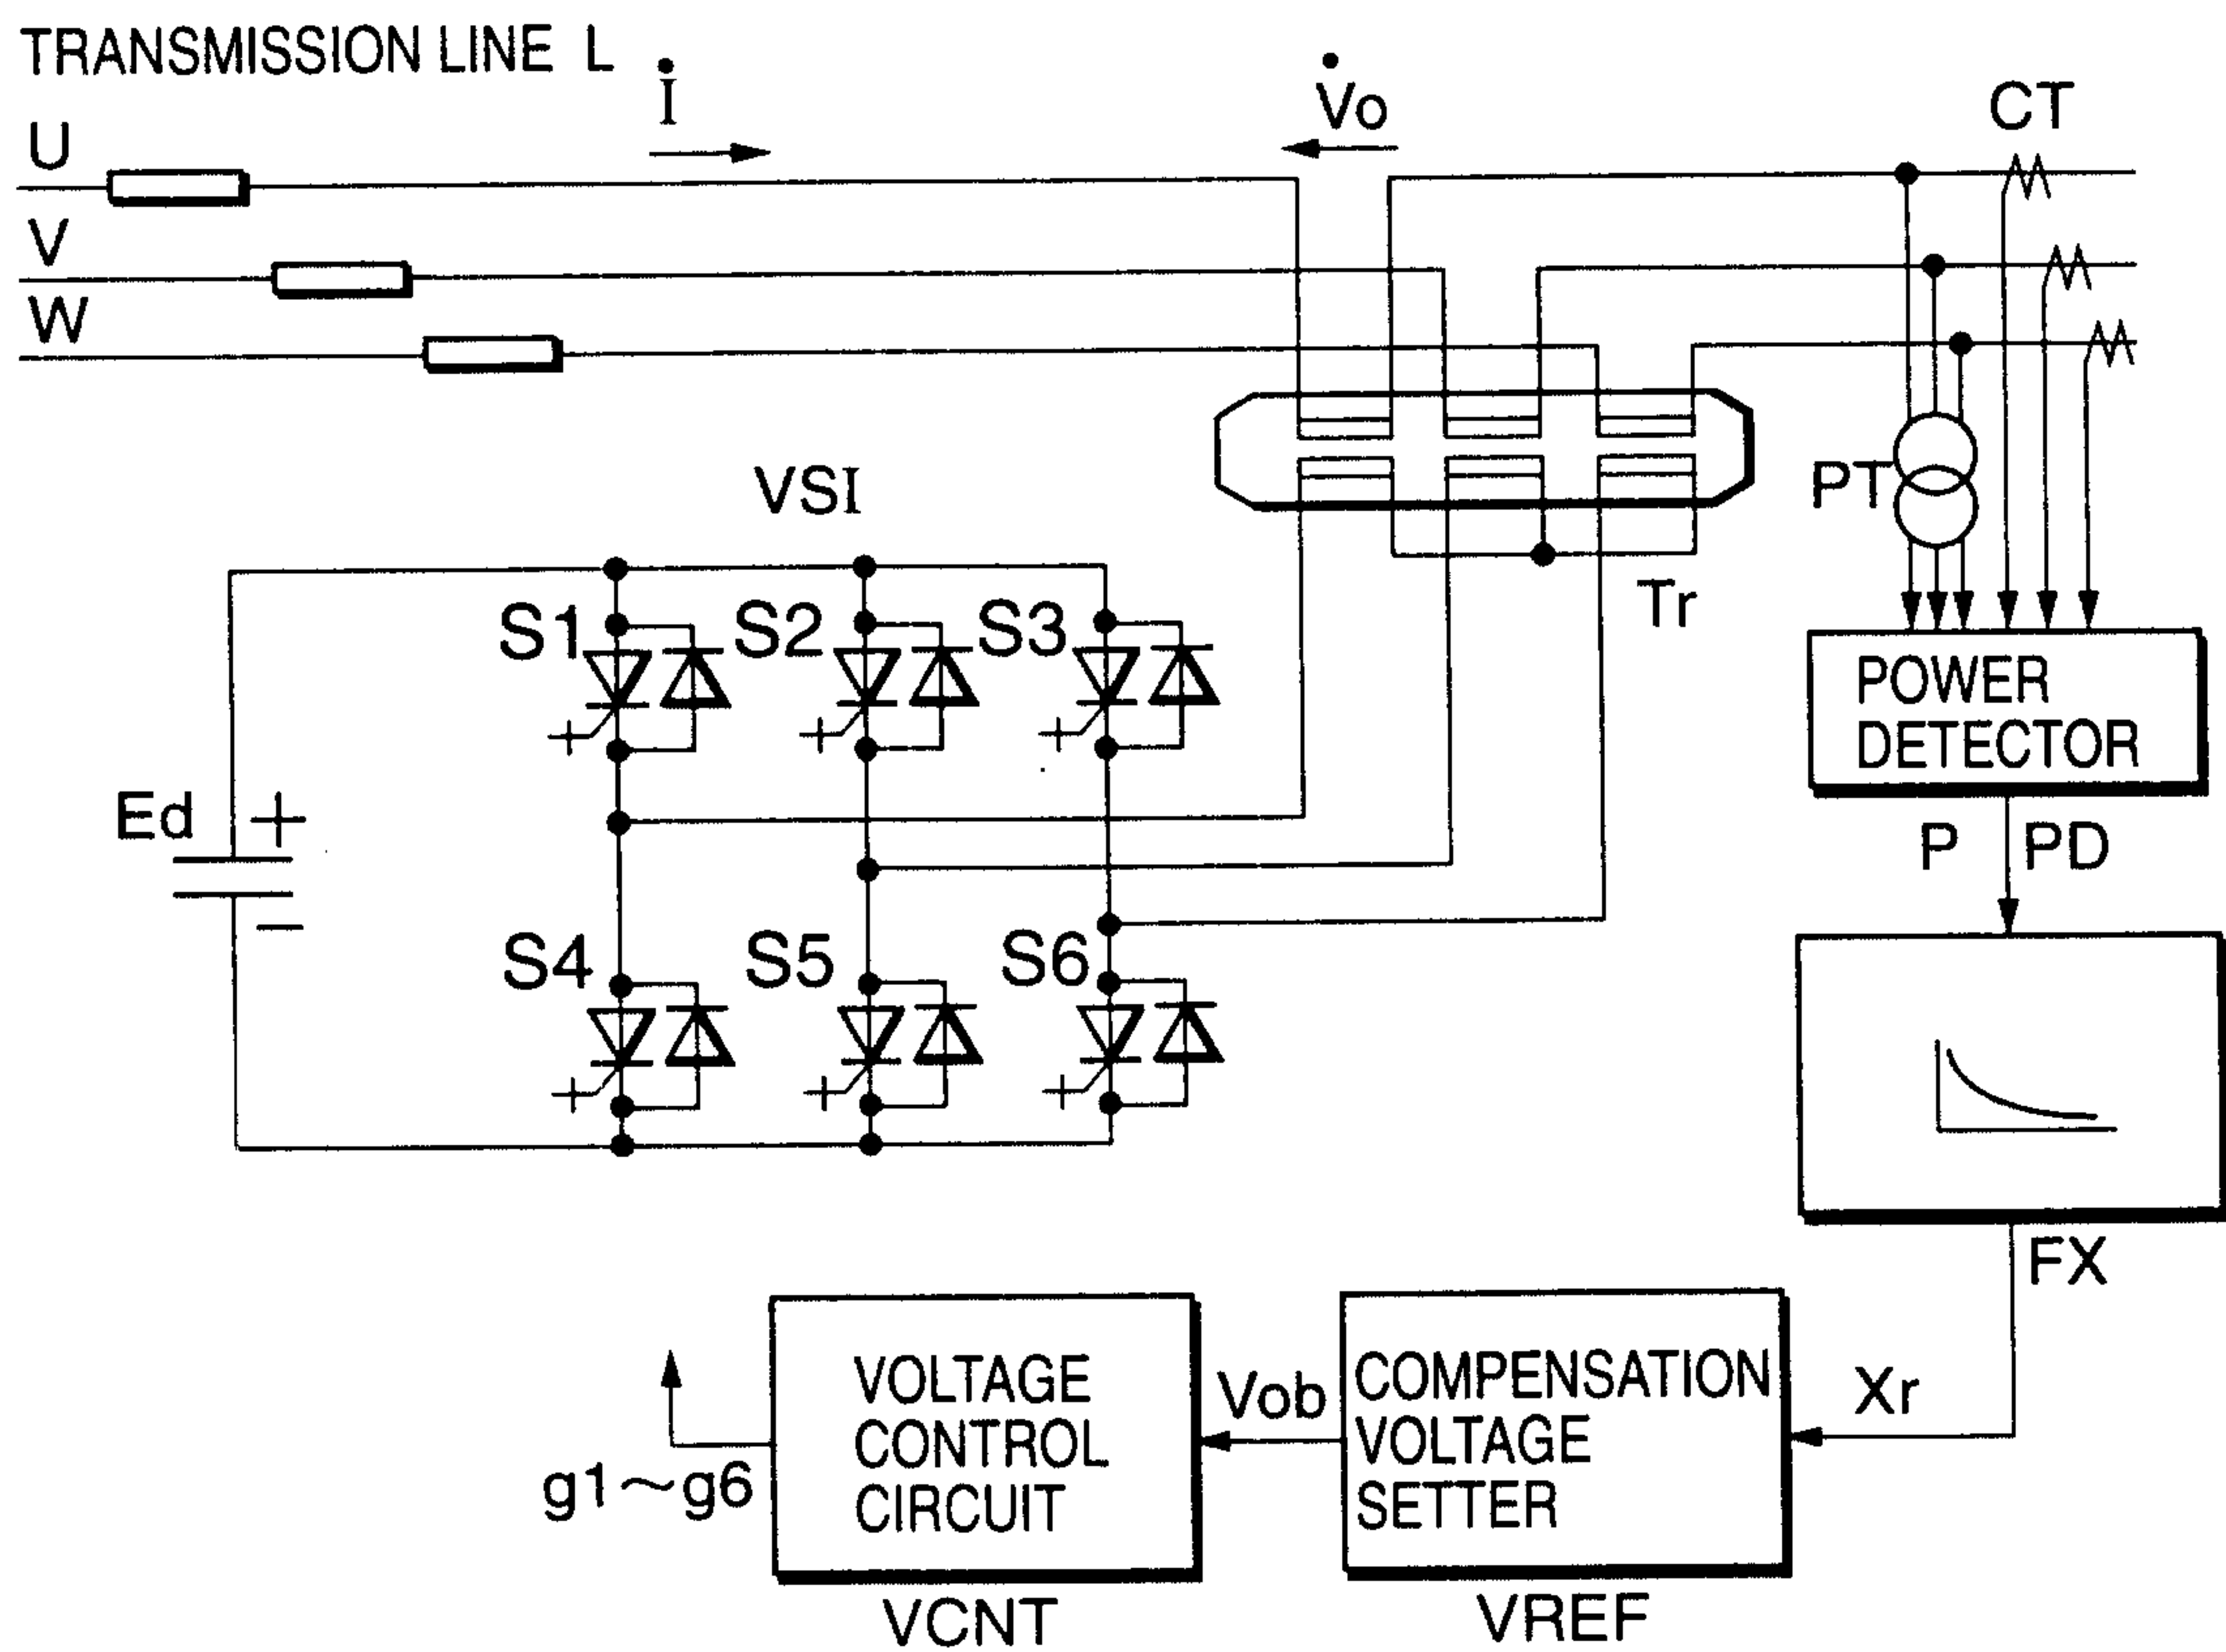


FIG. 12

7/41

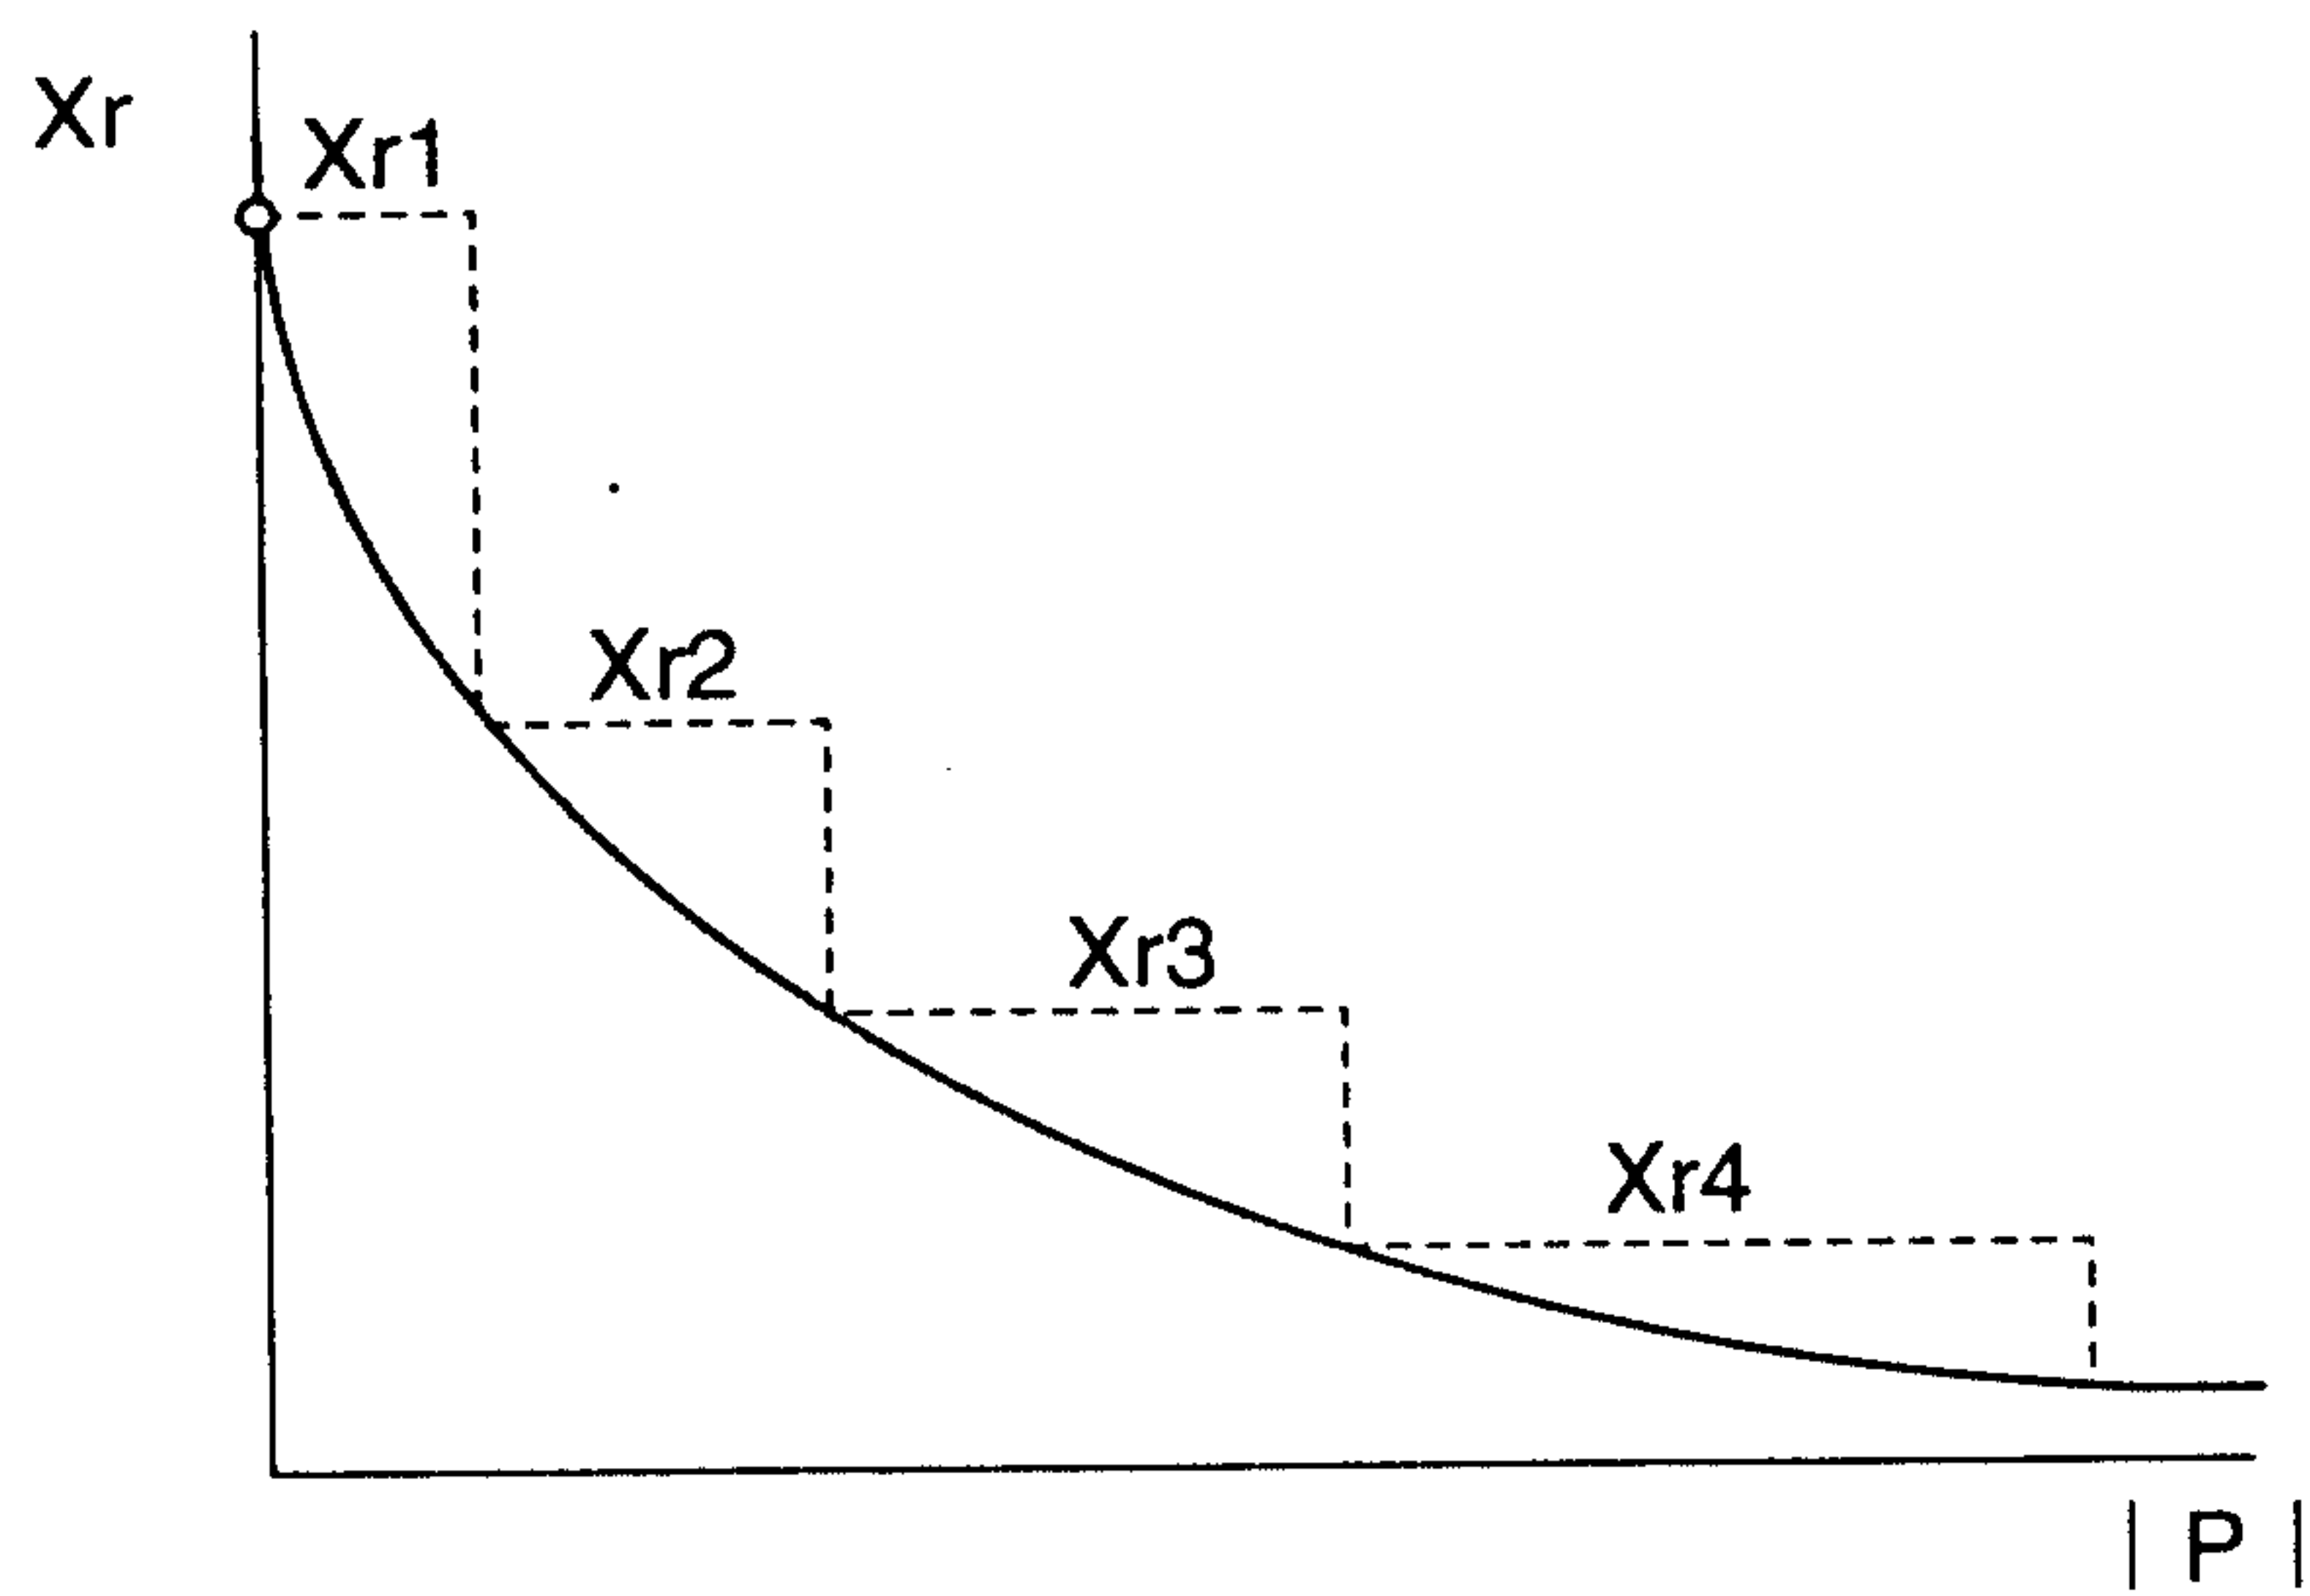


FIG. 13

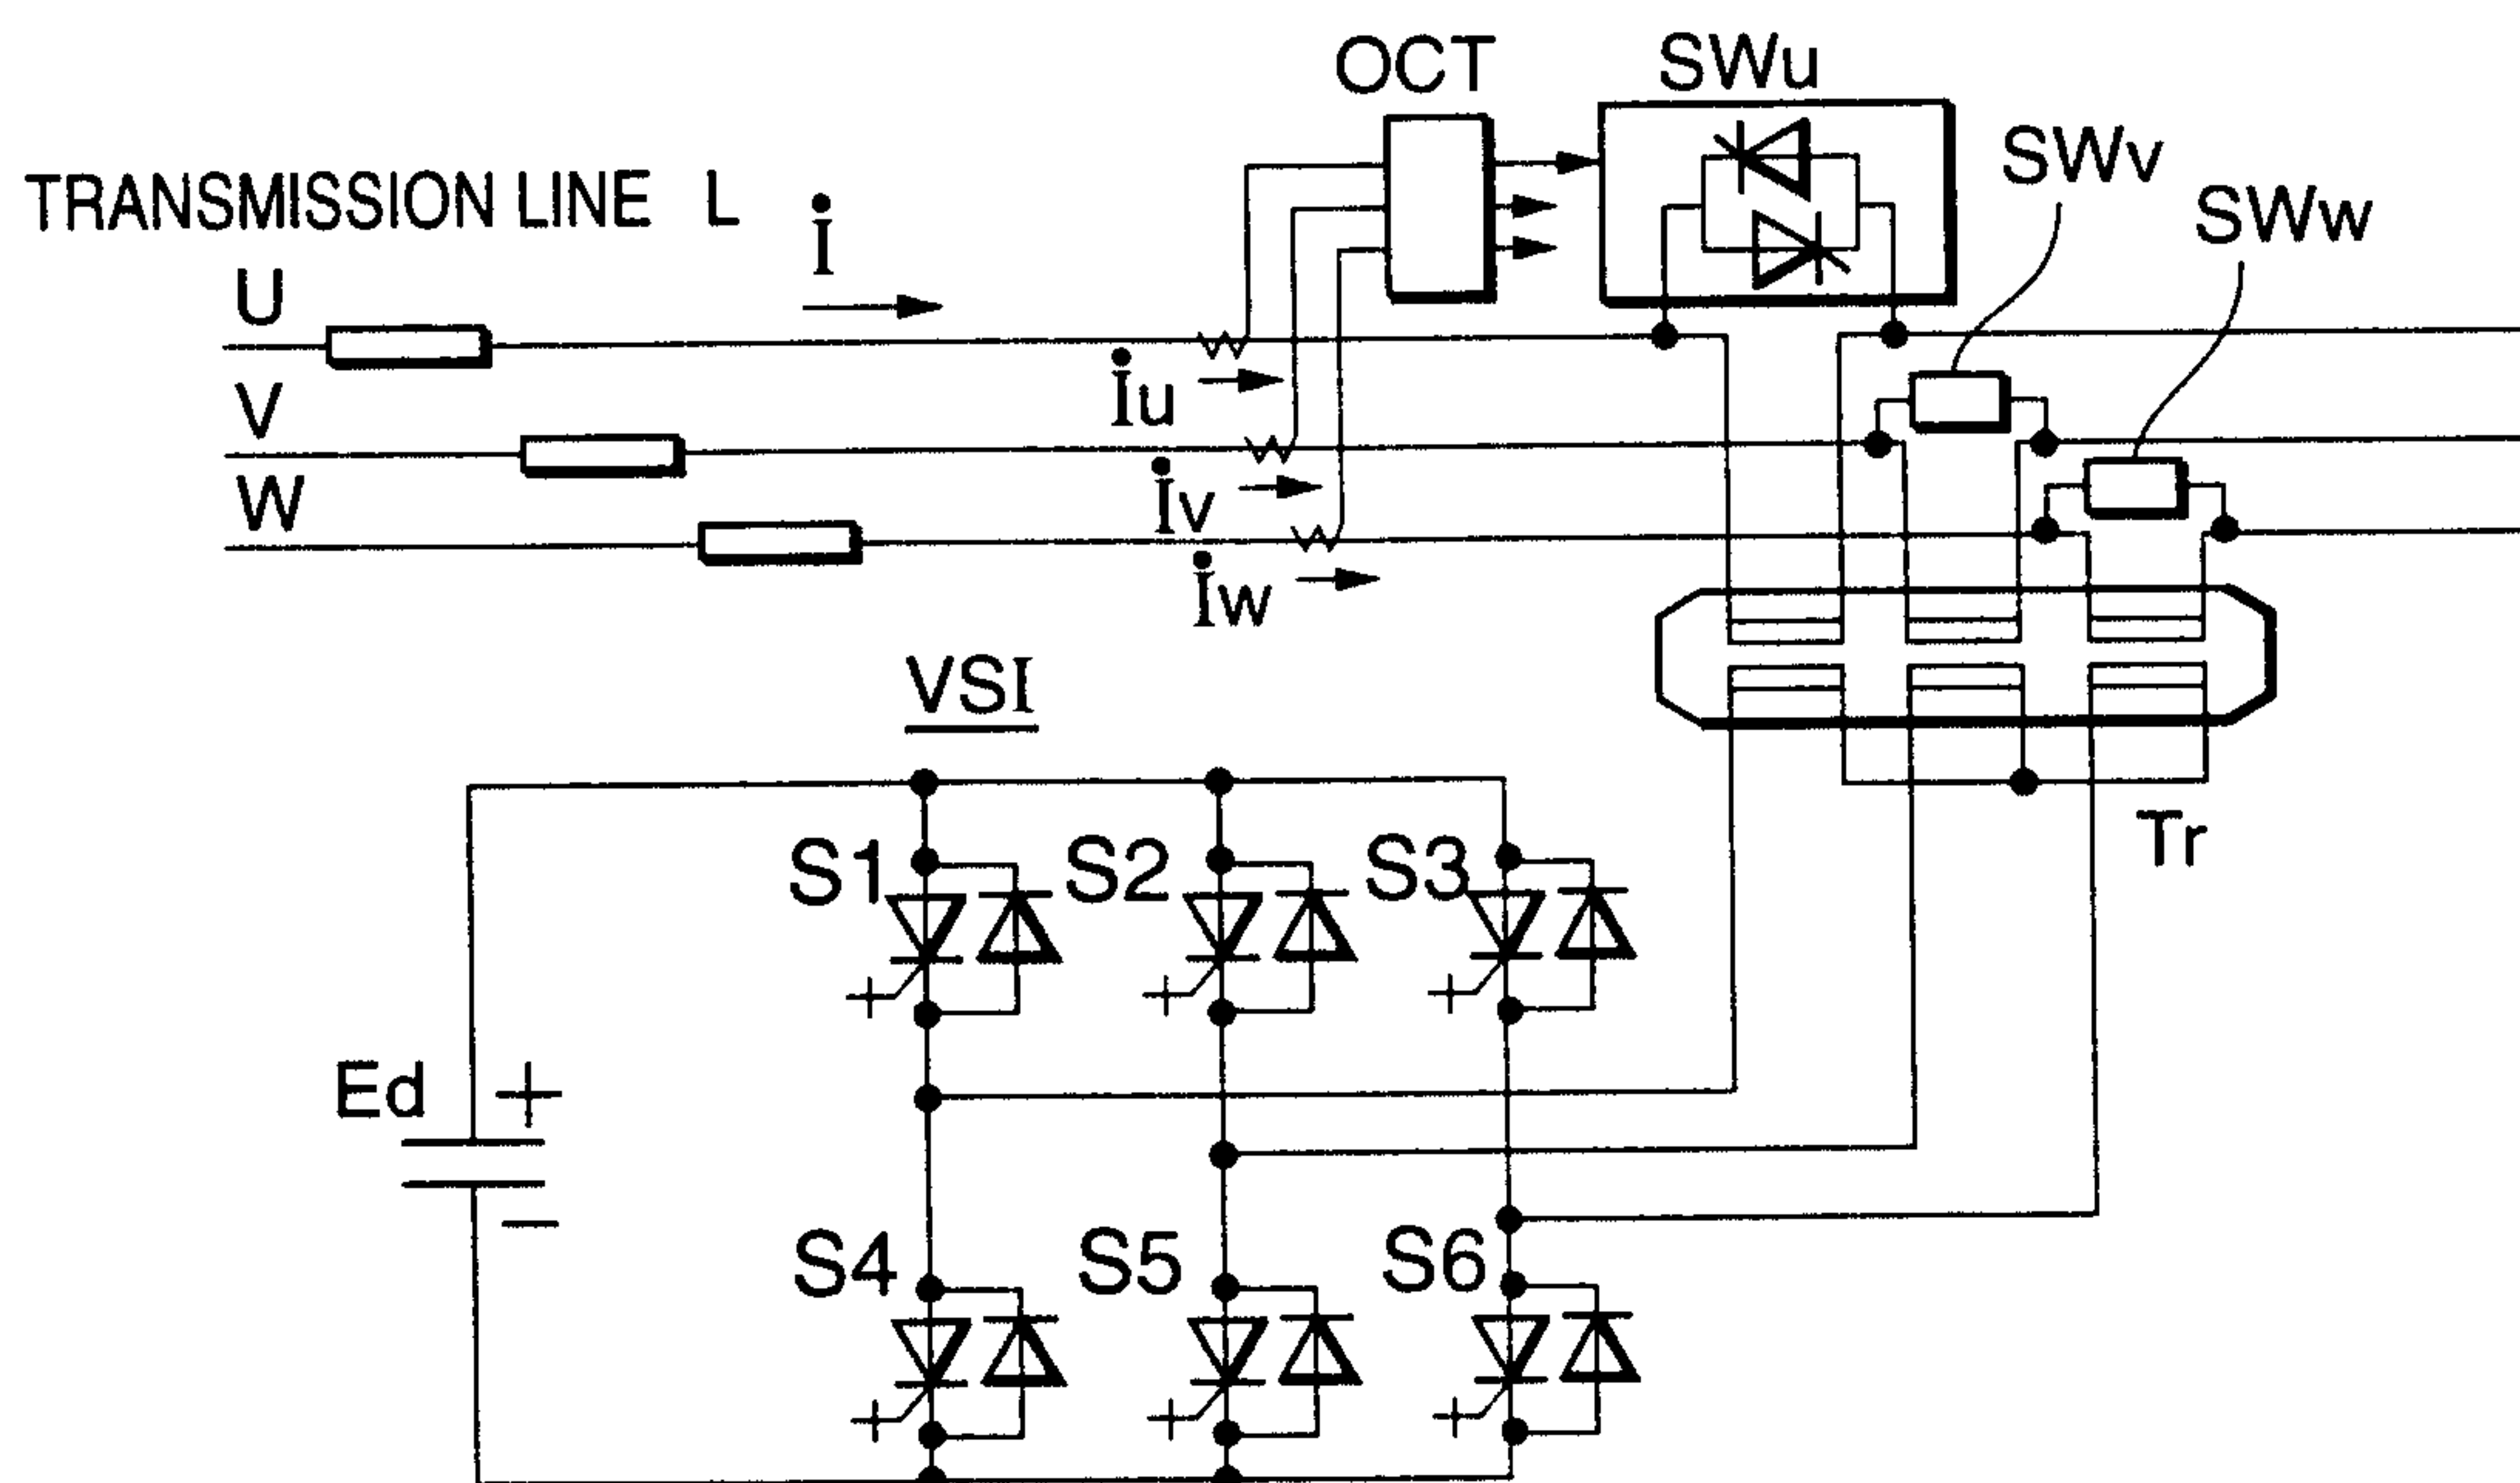


FIG. 14

8/41

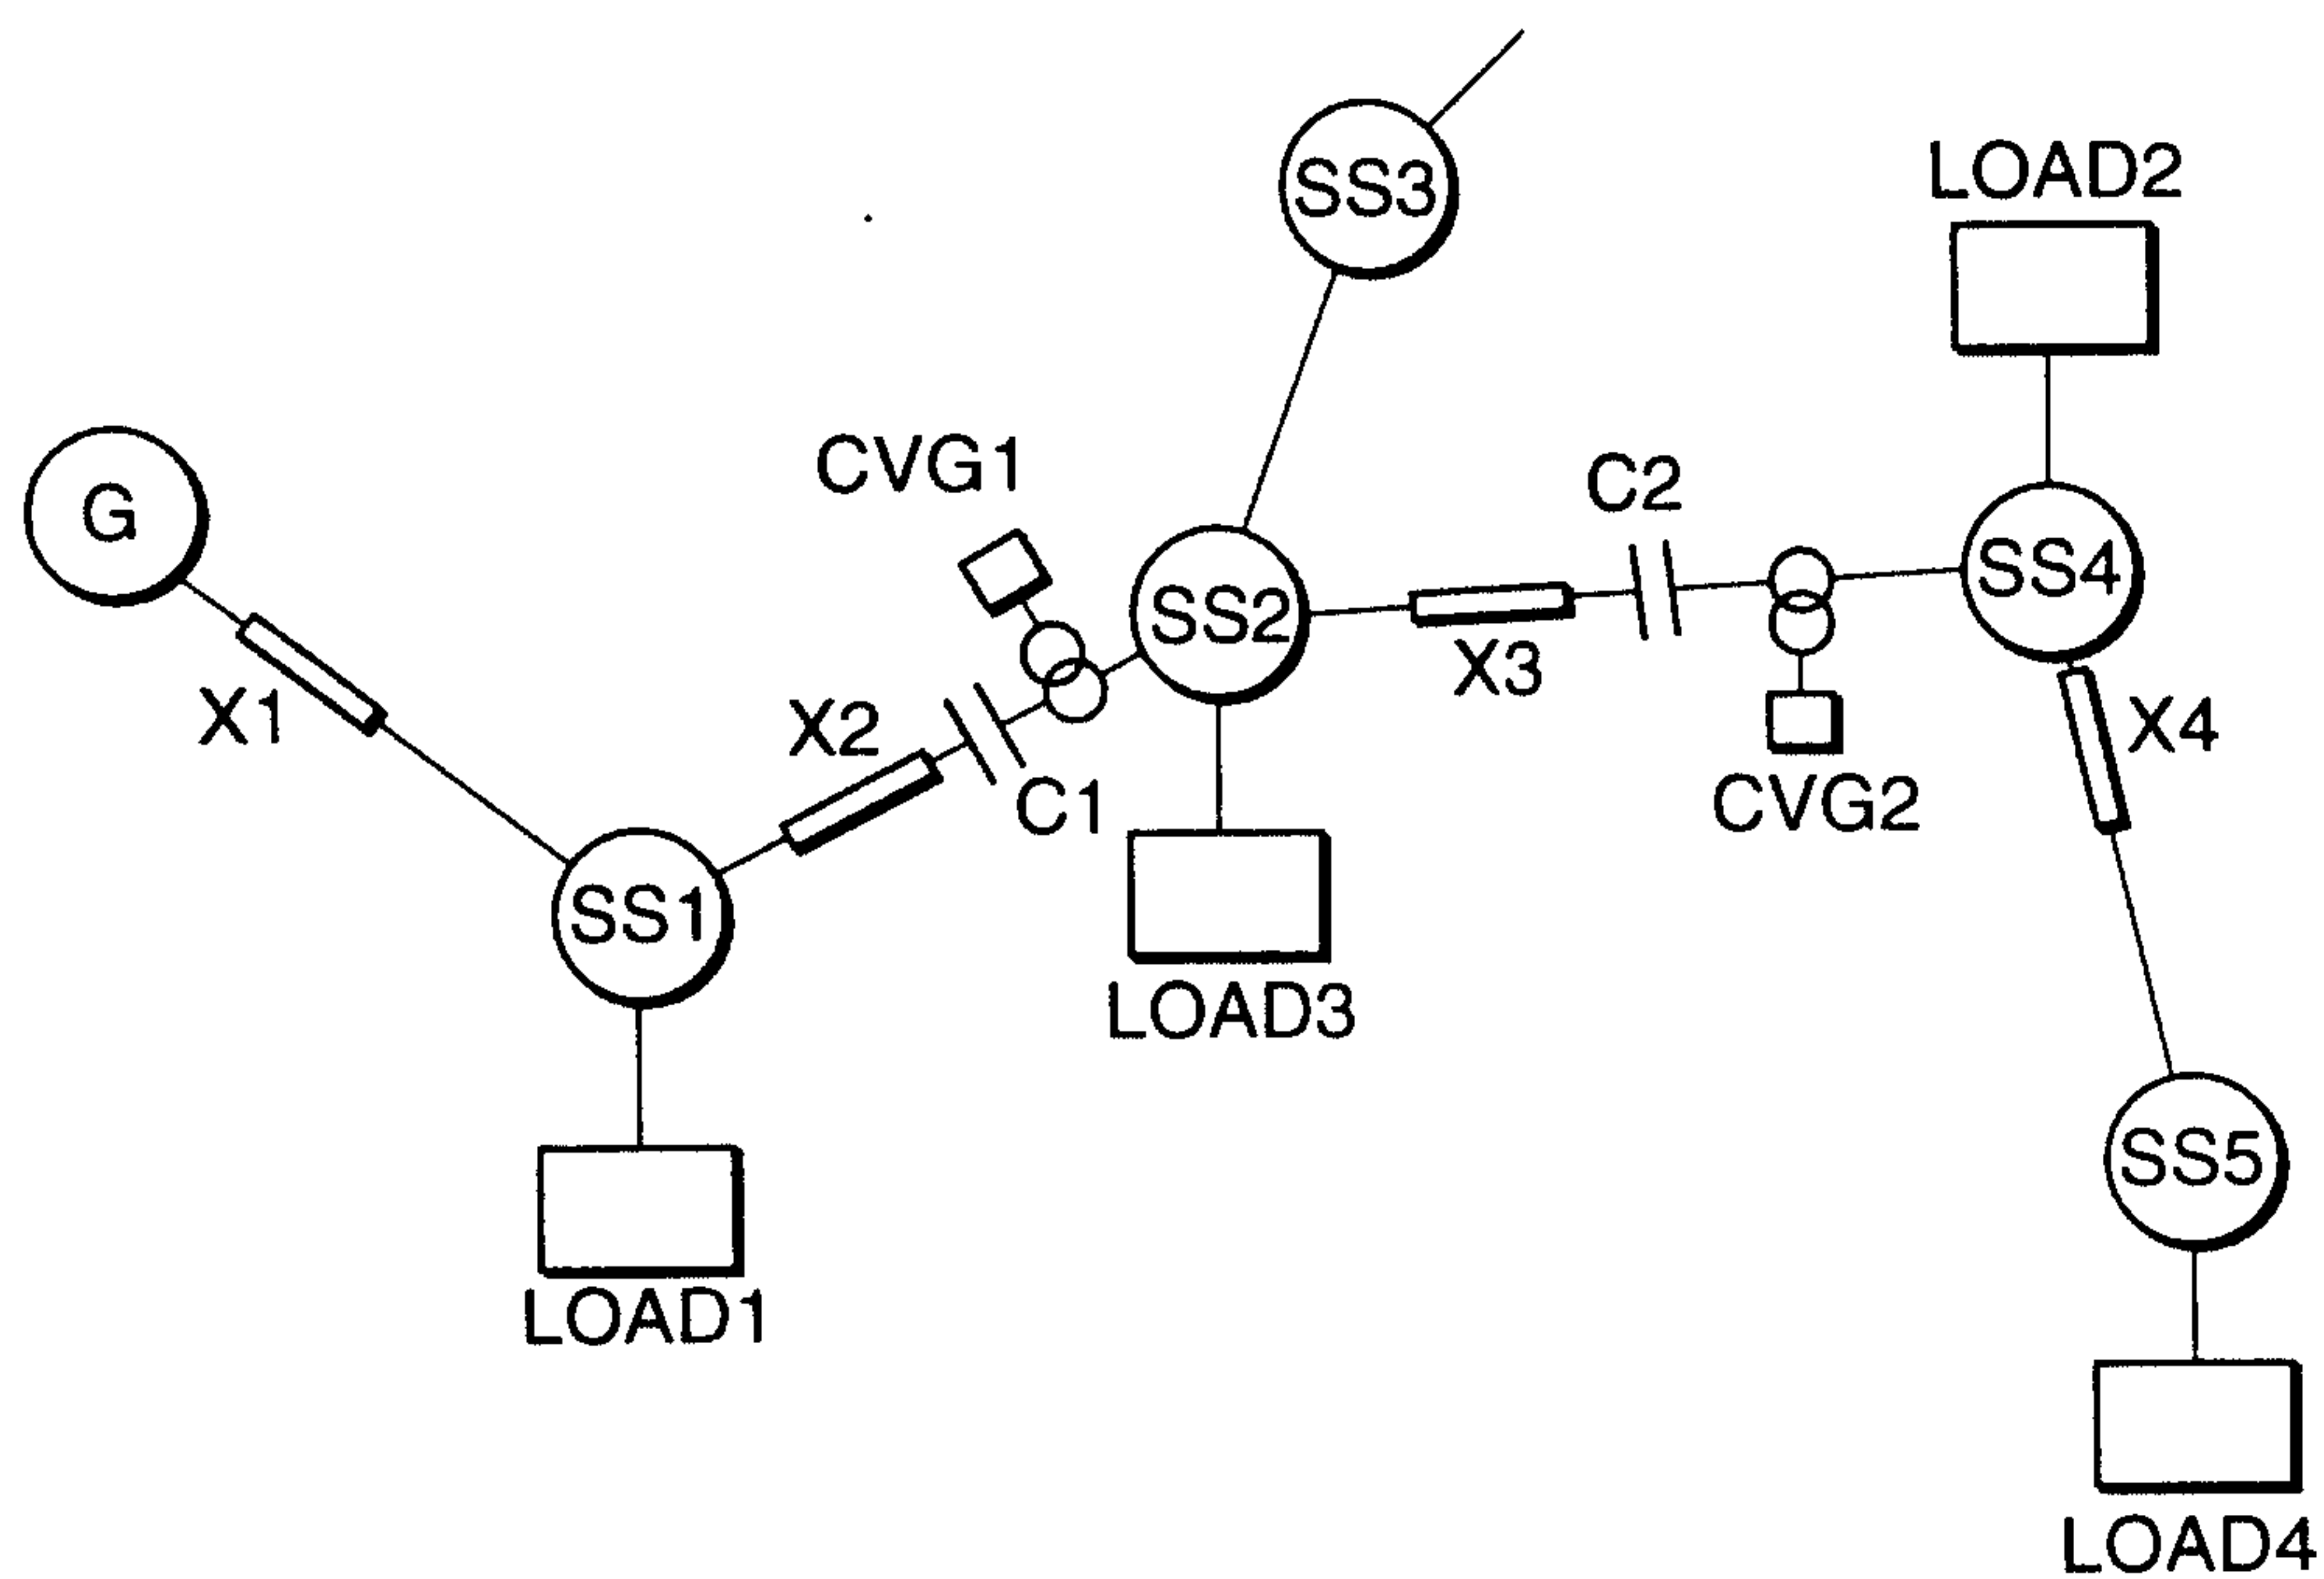


FIG. 15

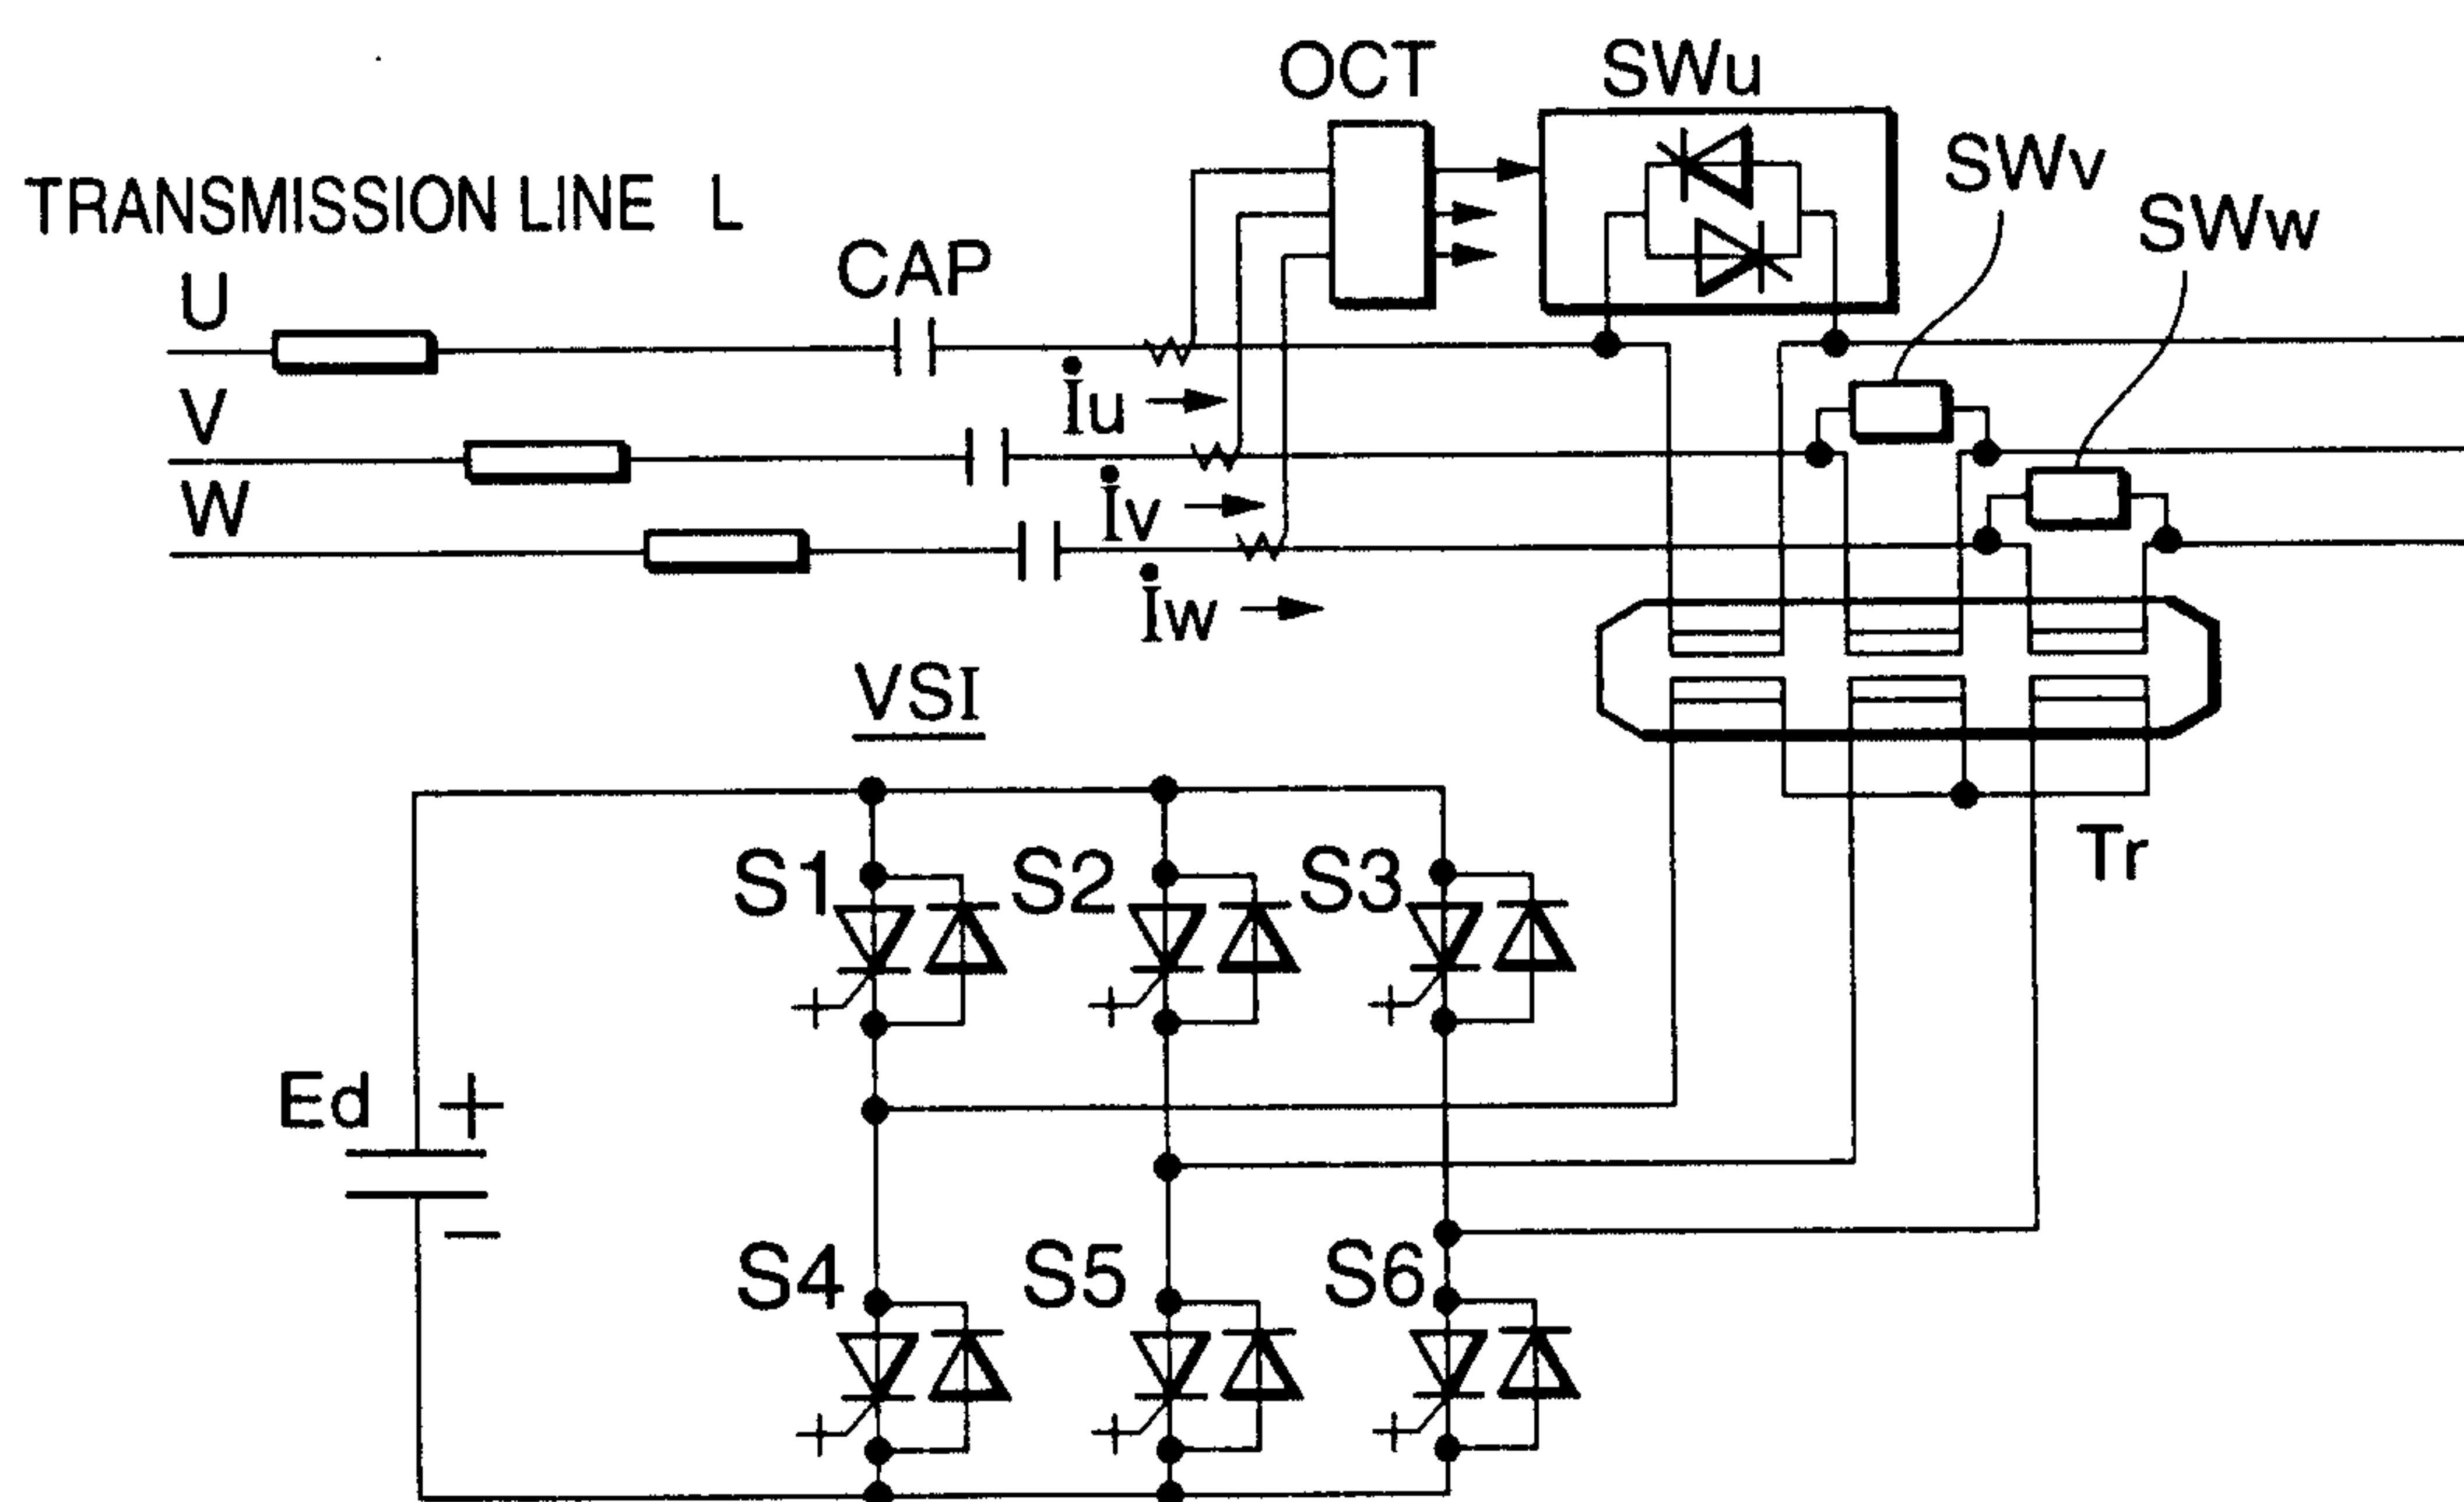


FIG. 16

9/41

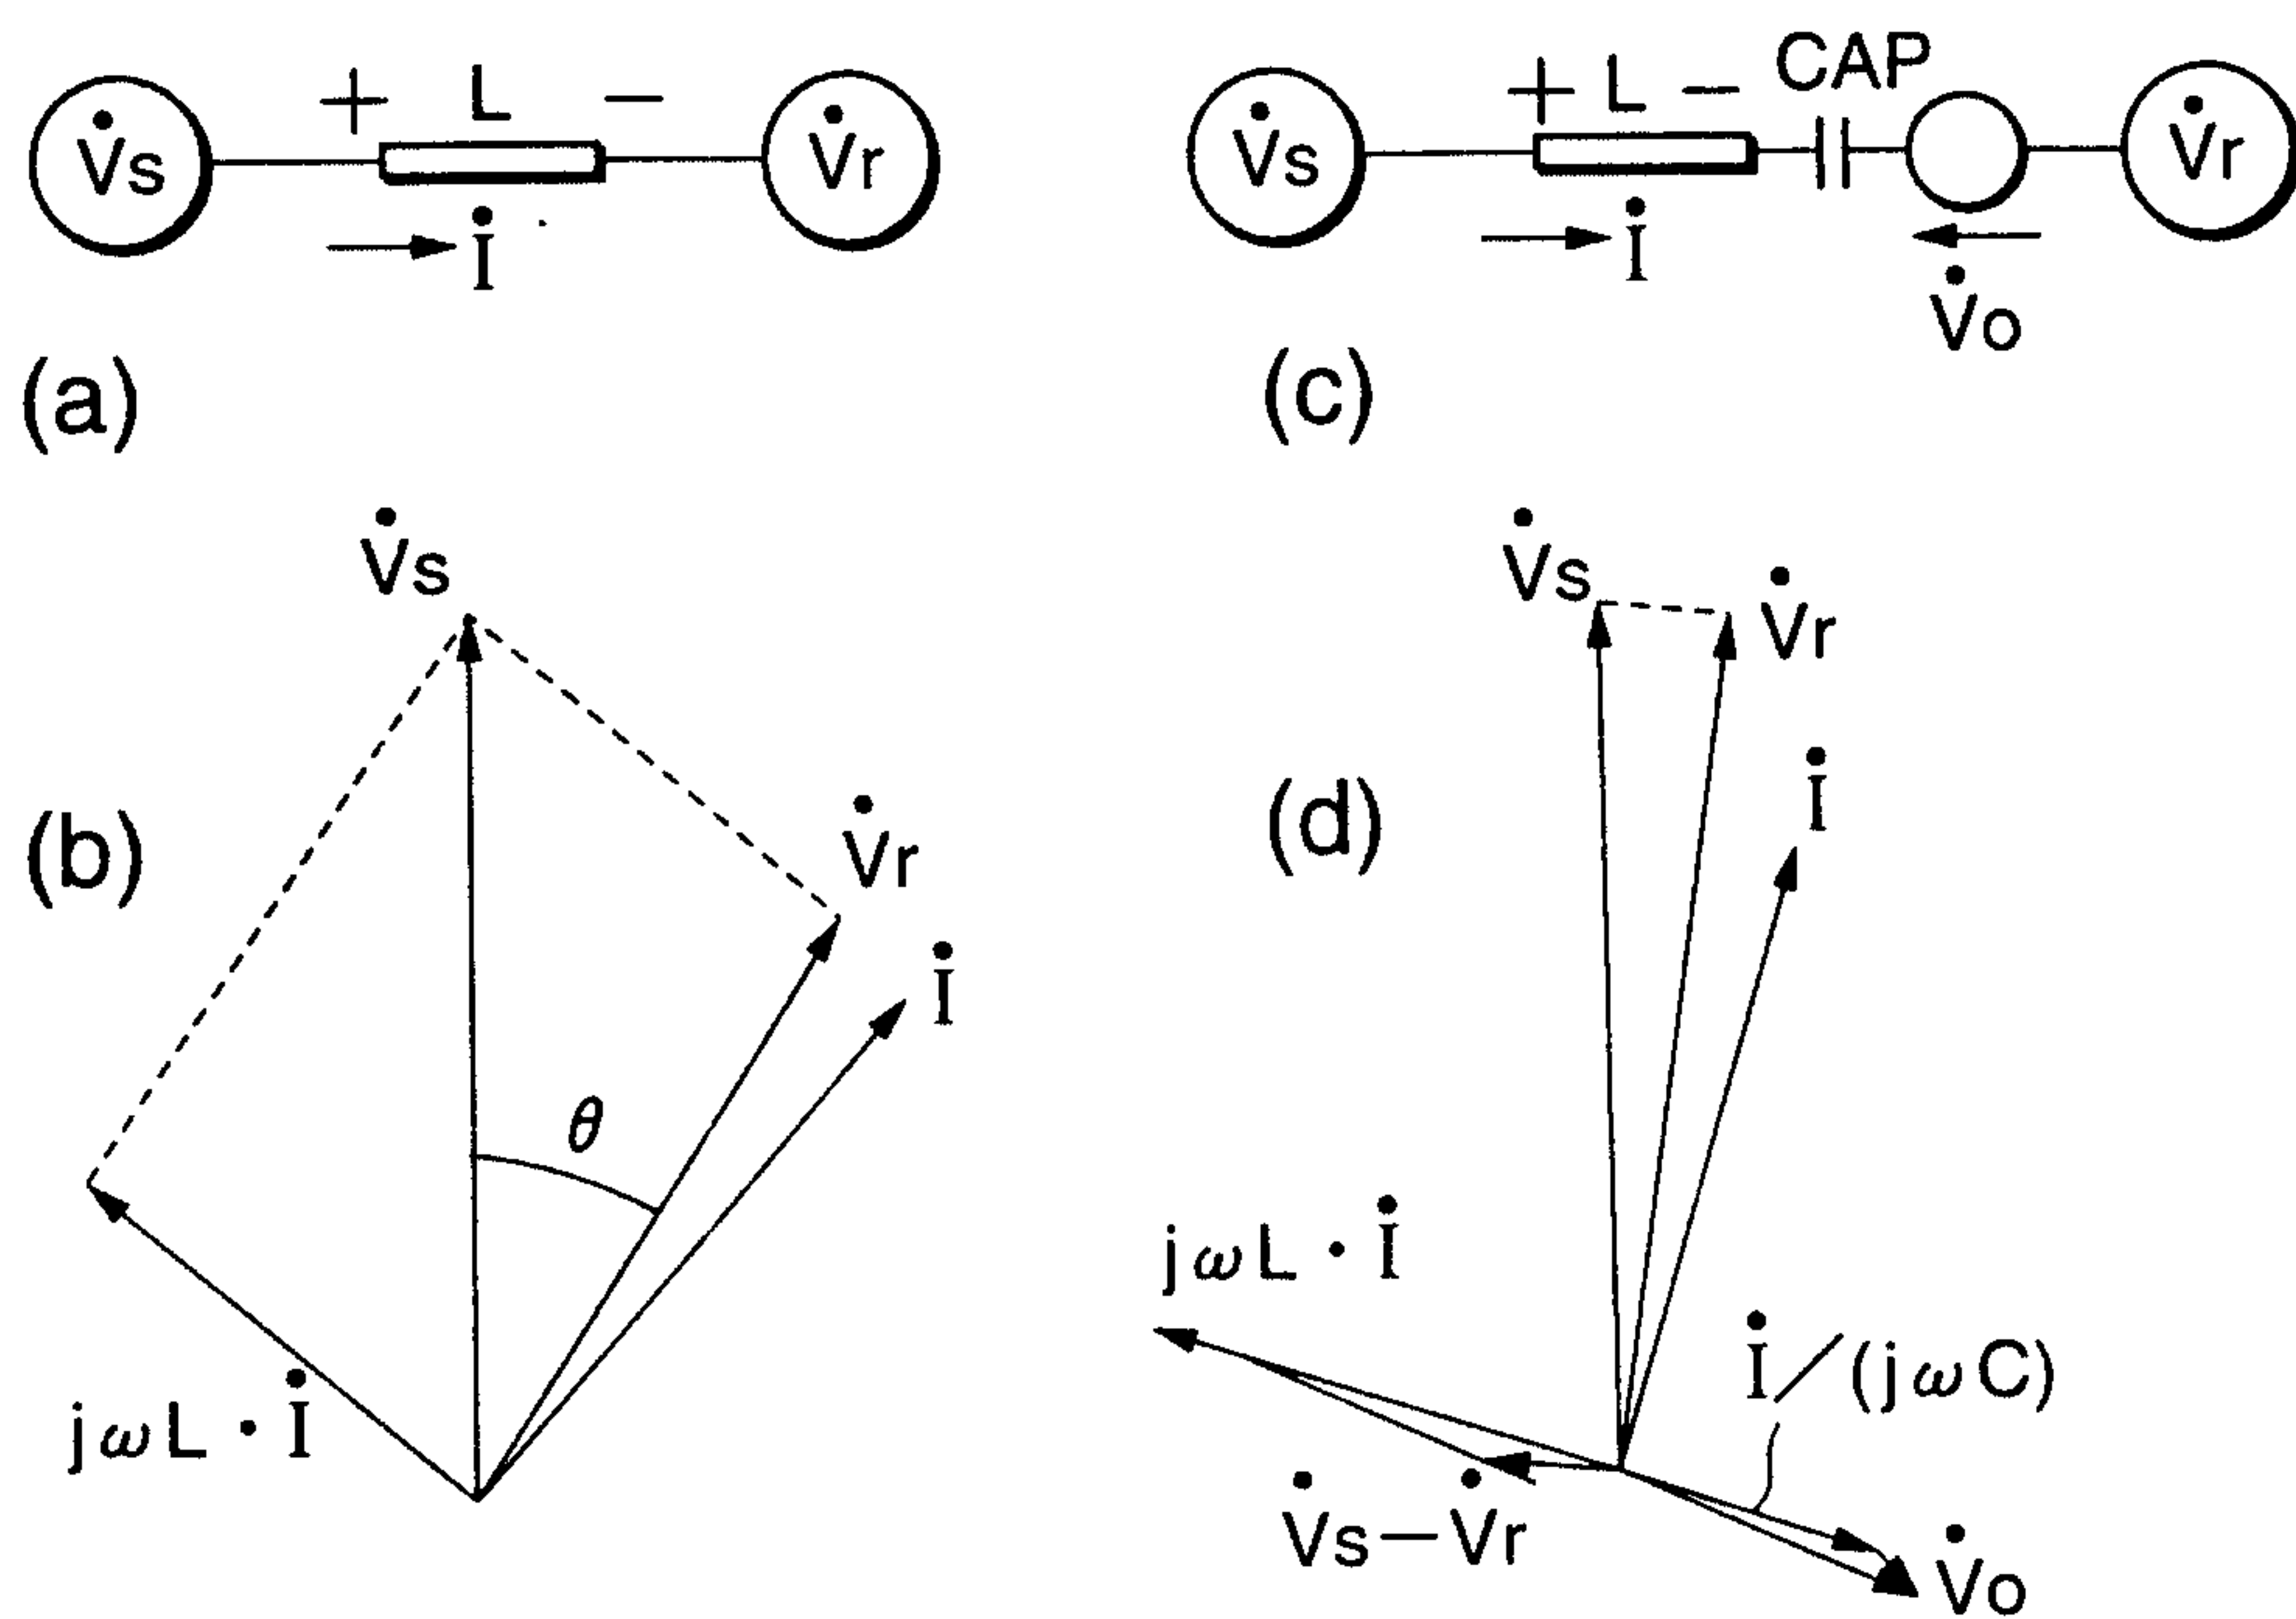


FIG. 17

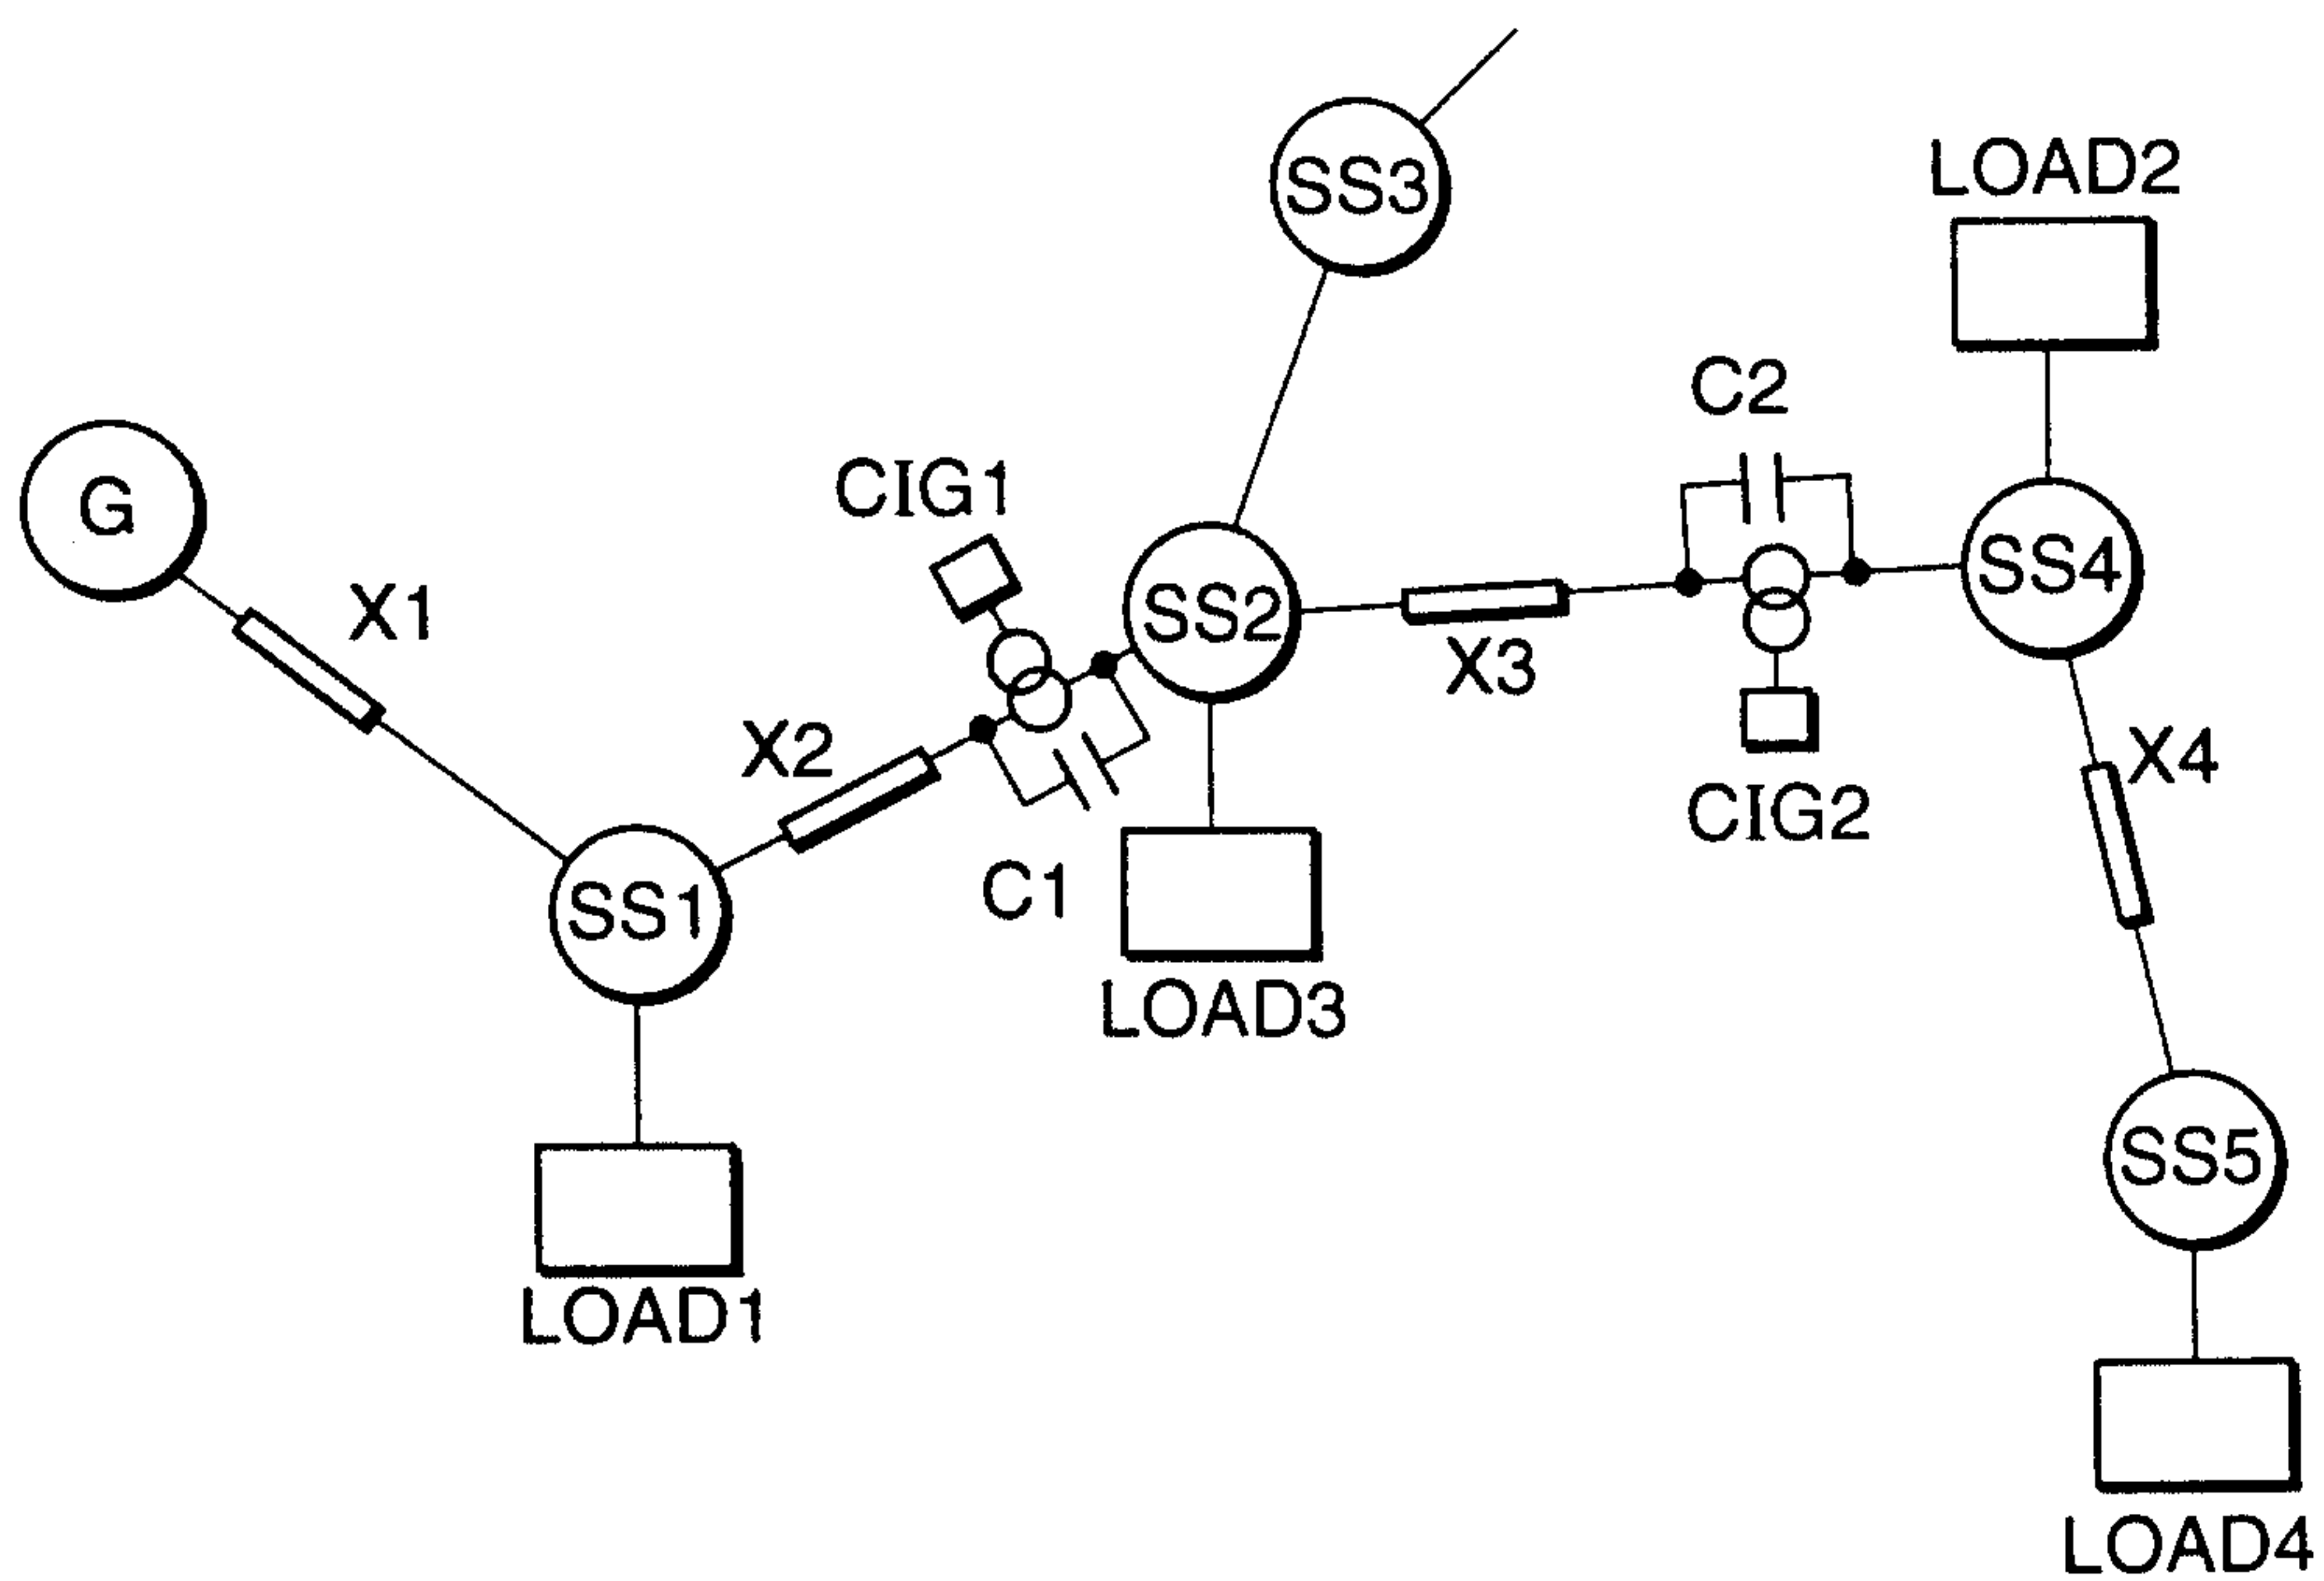


FIG. 18

10/41

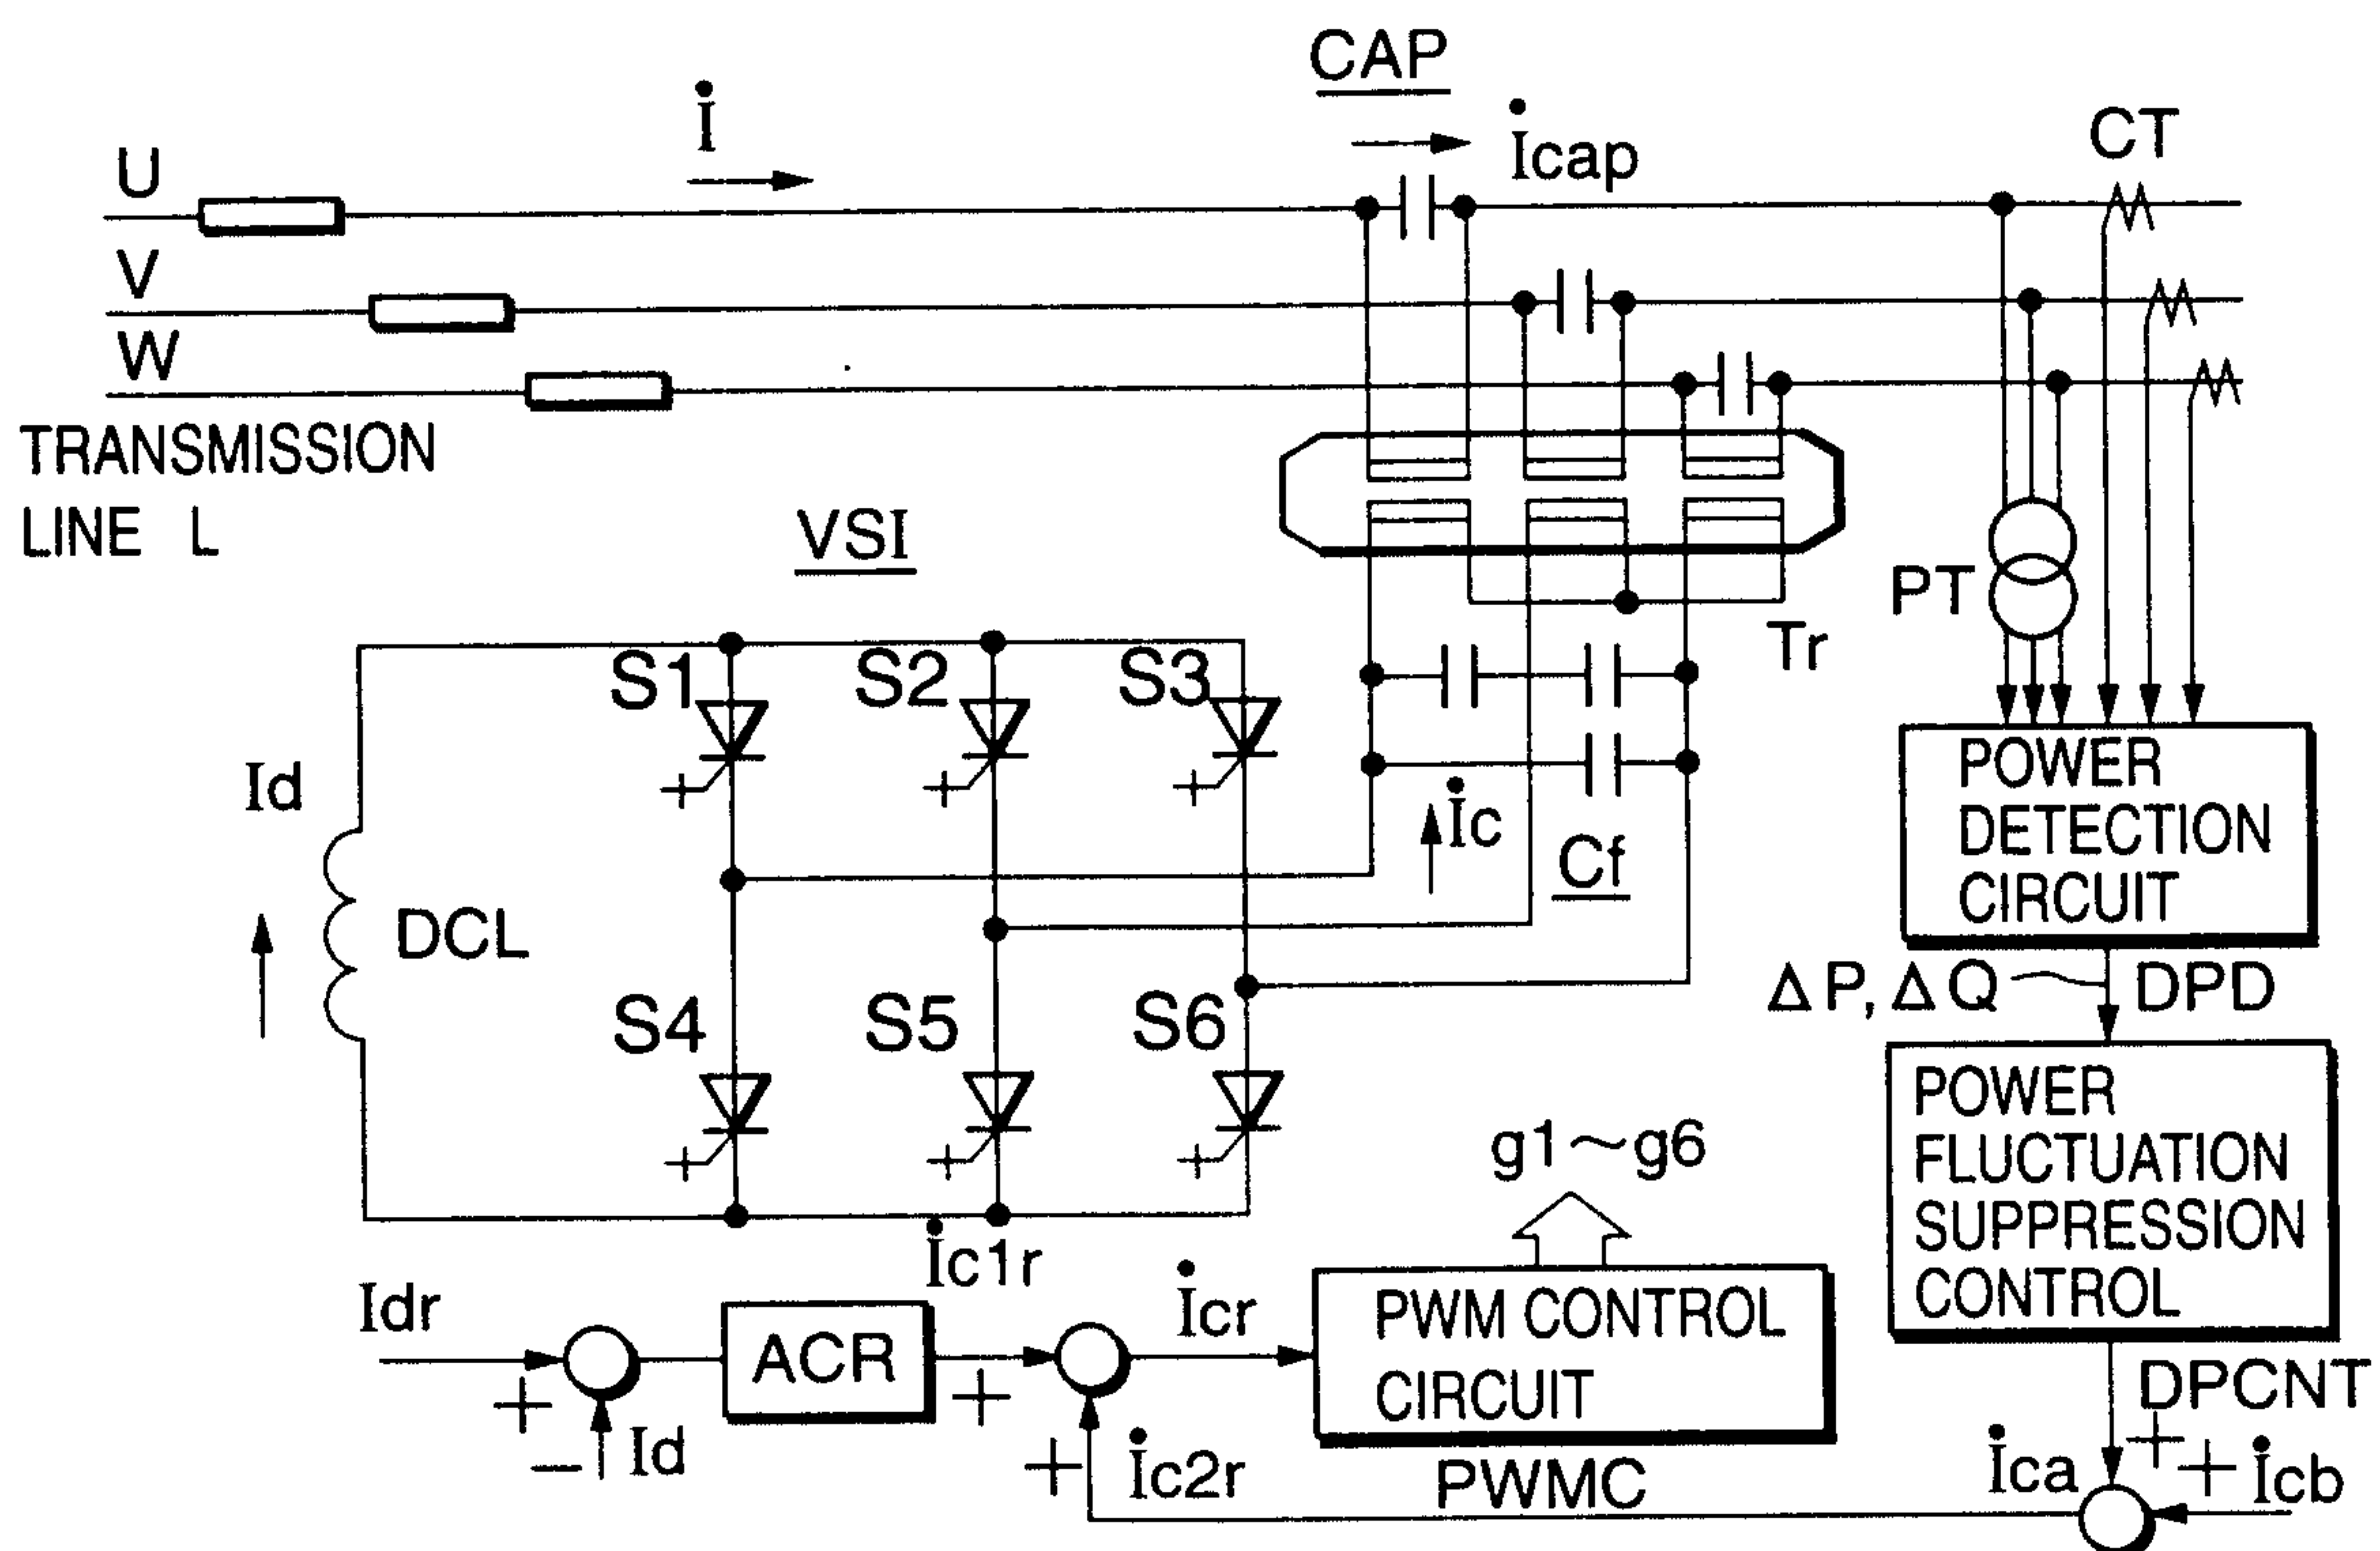


FIG. 19

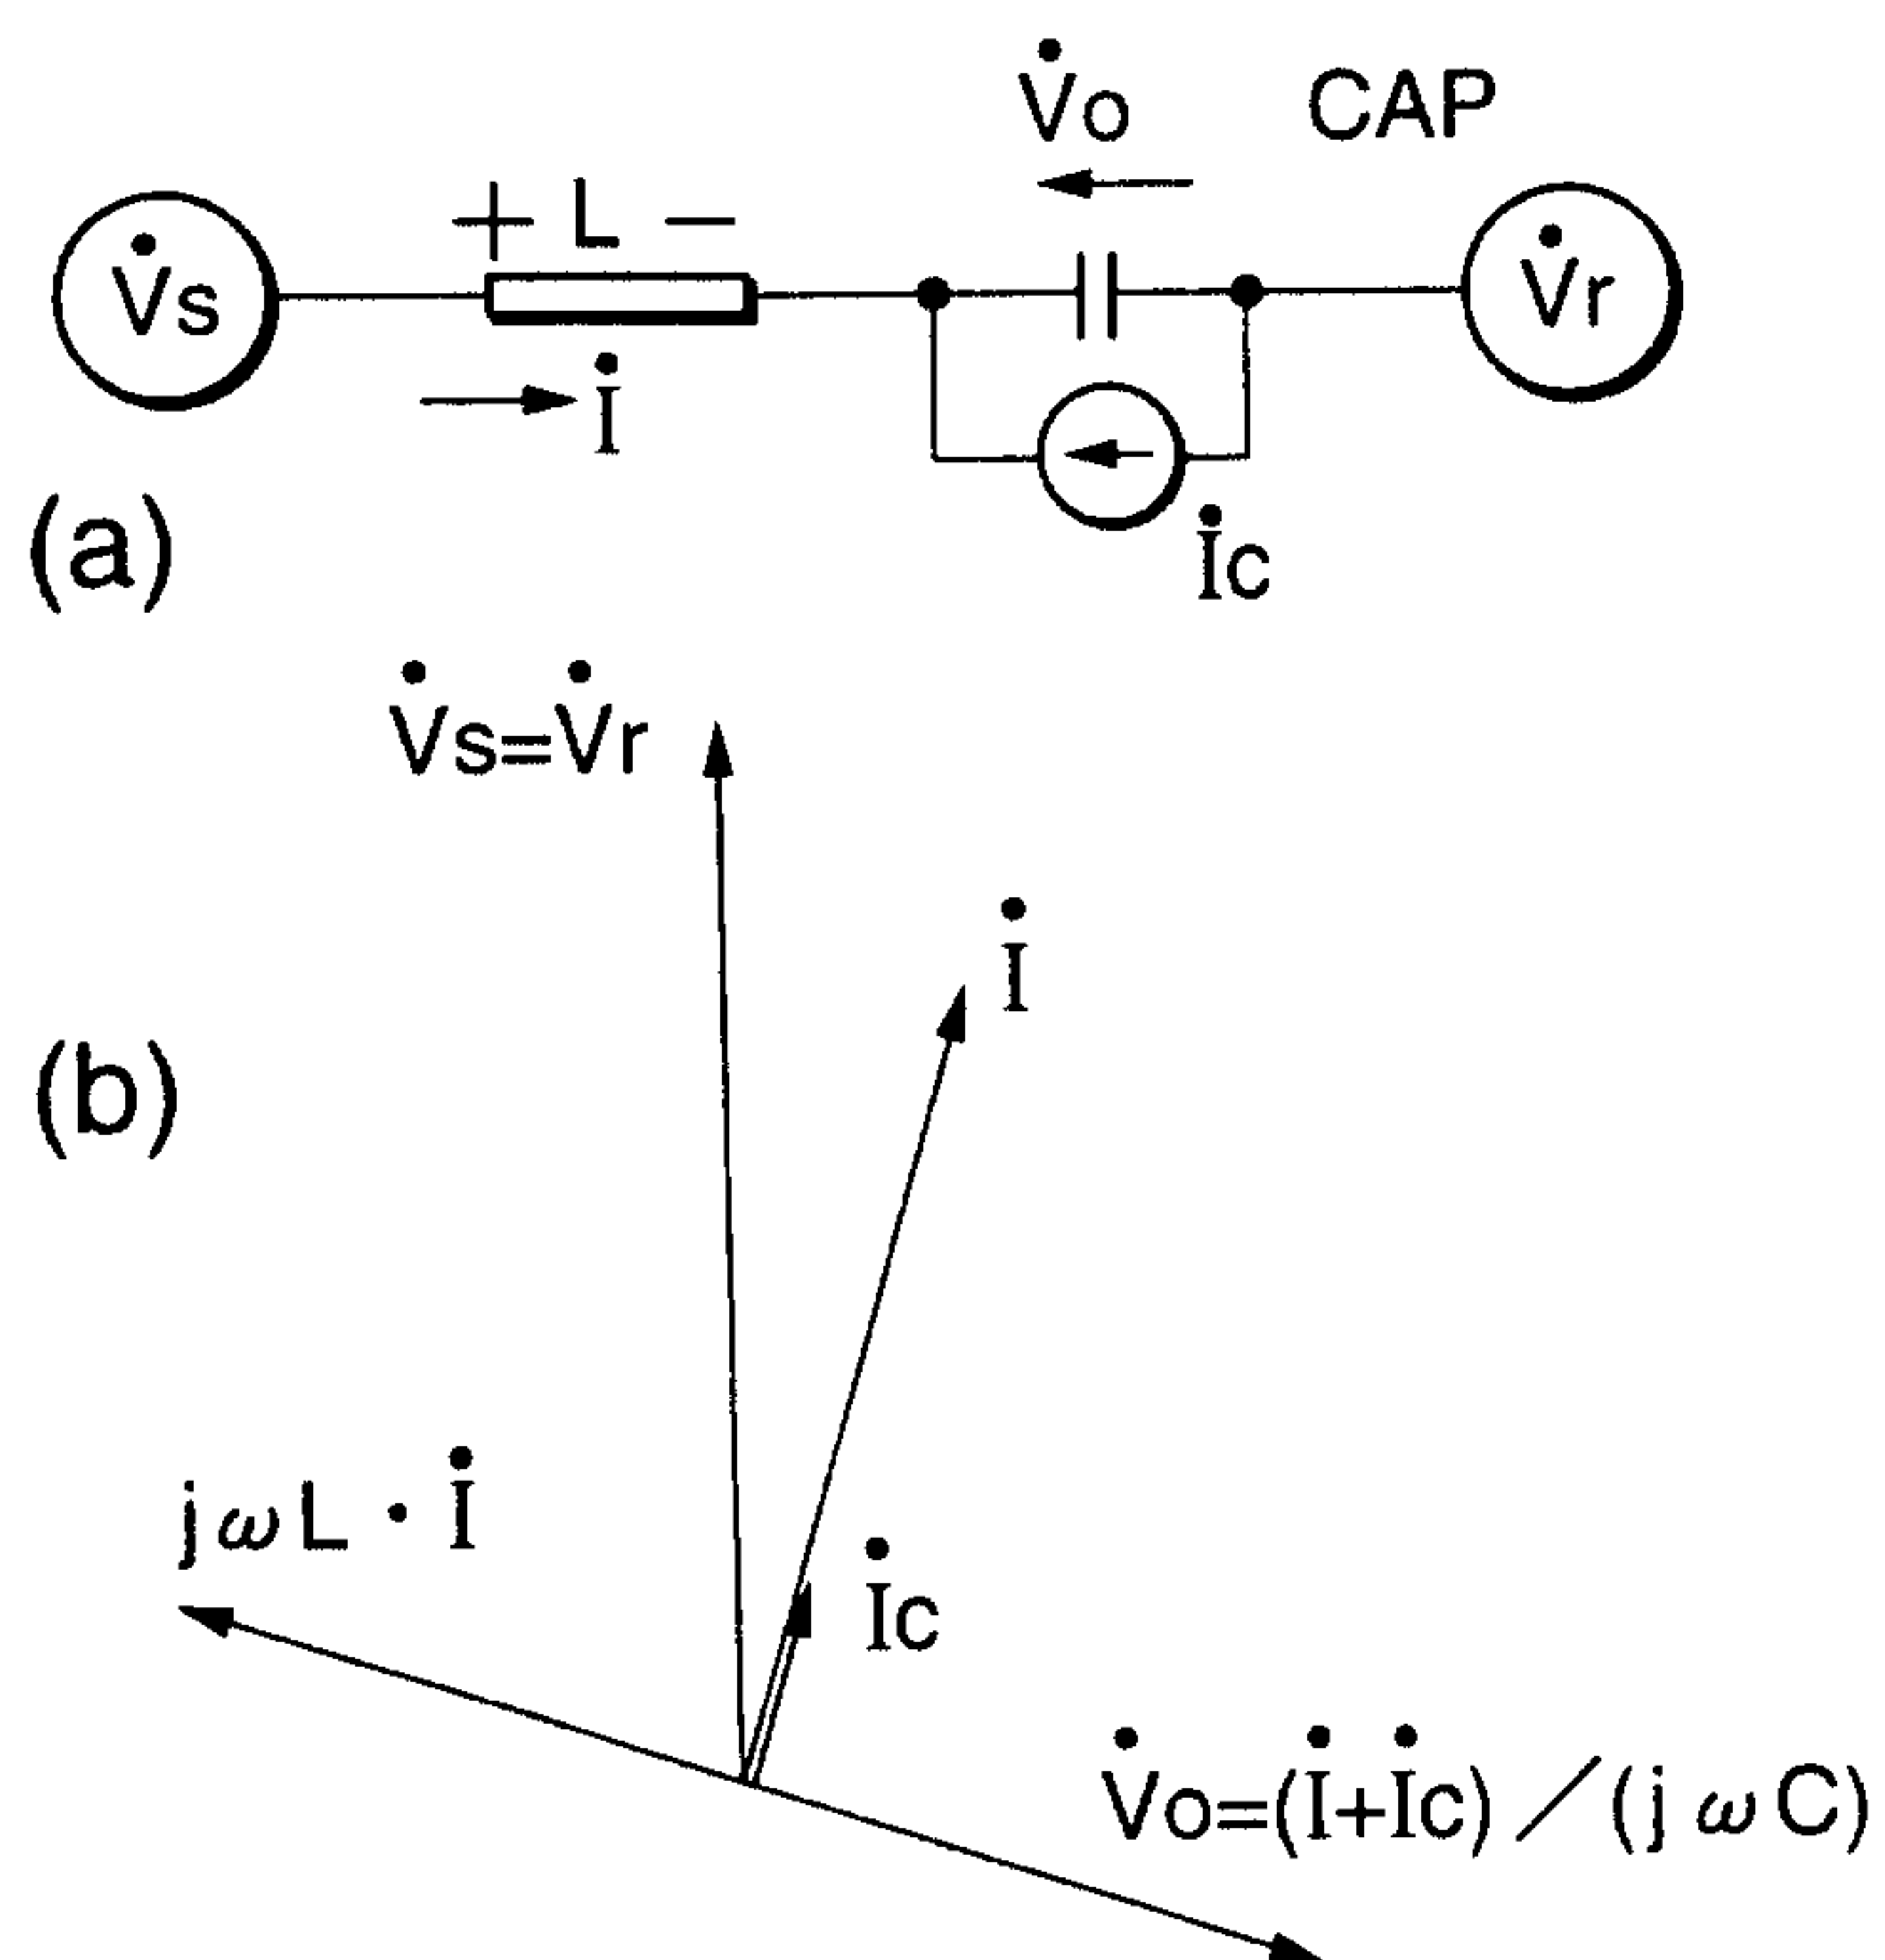


FIG. 20



12/41

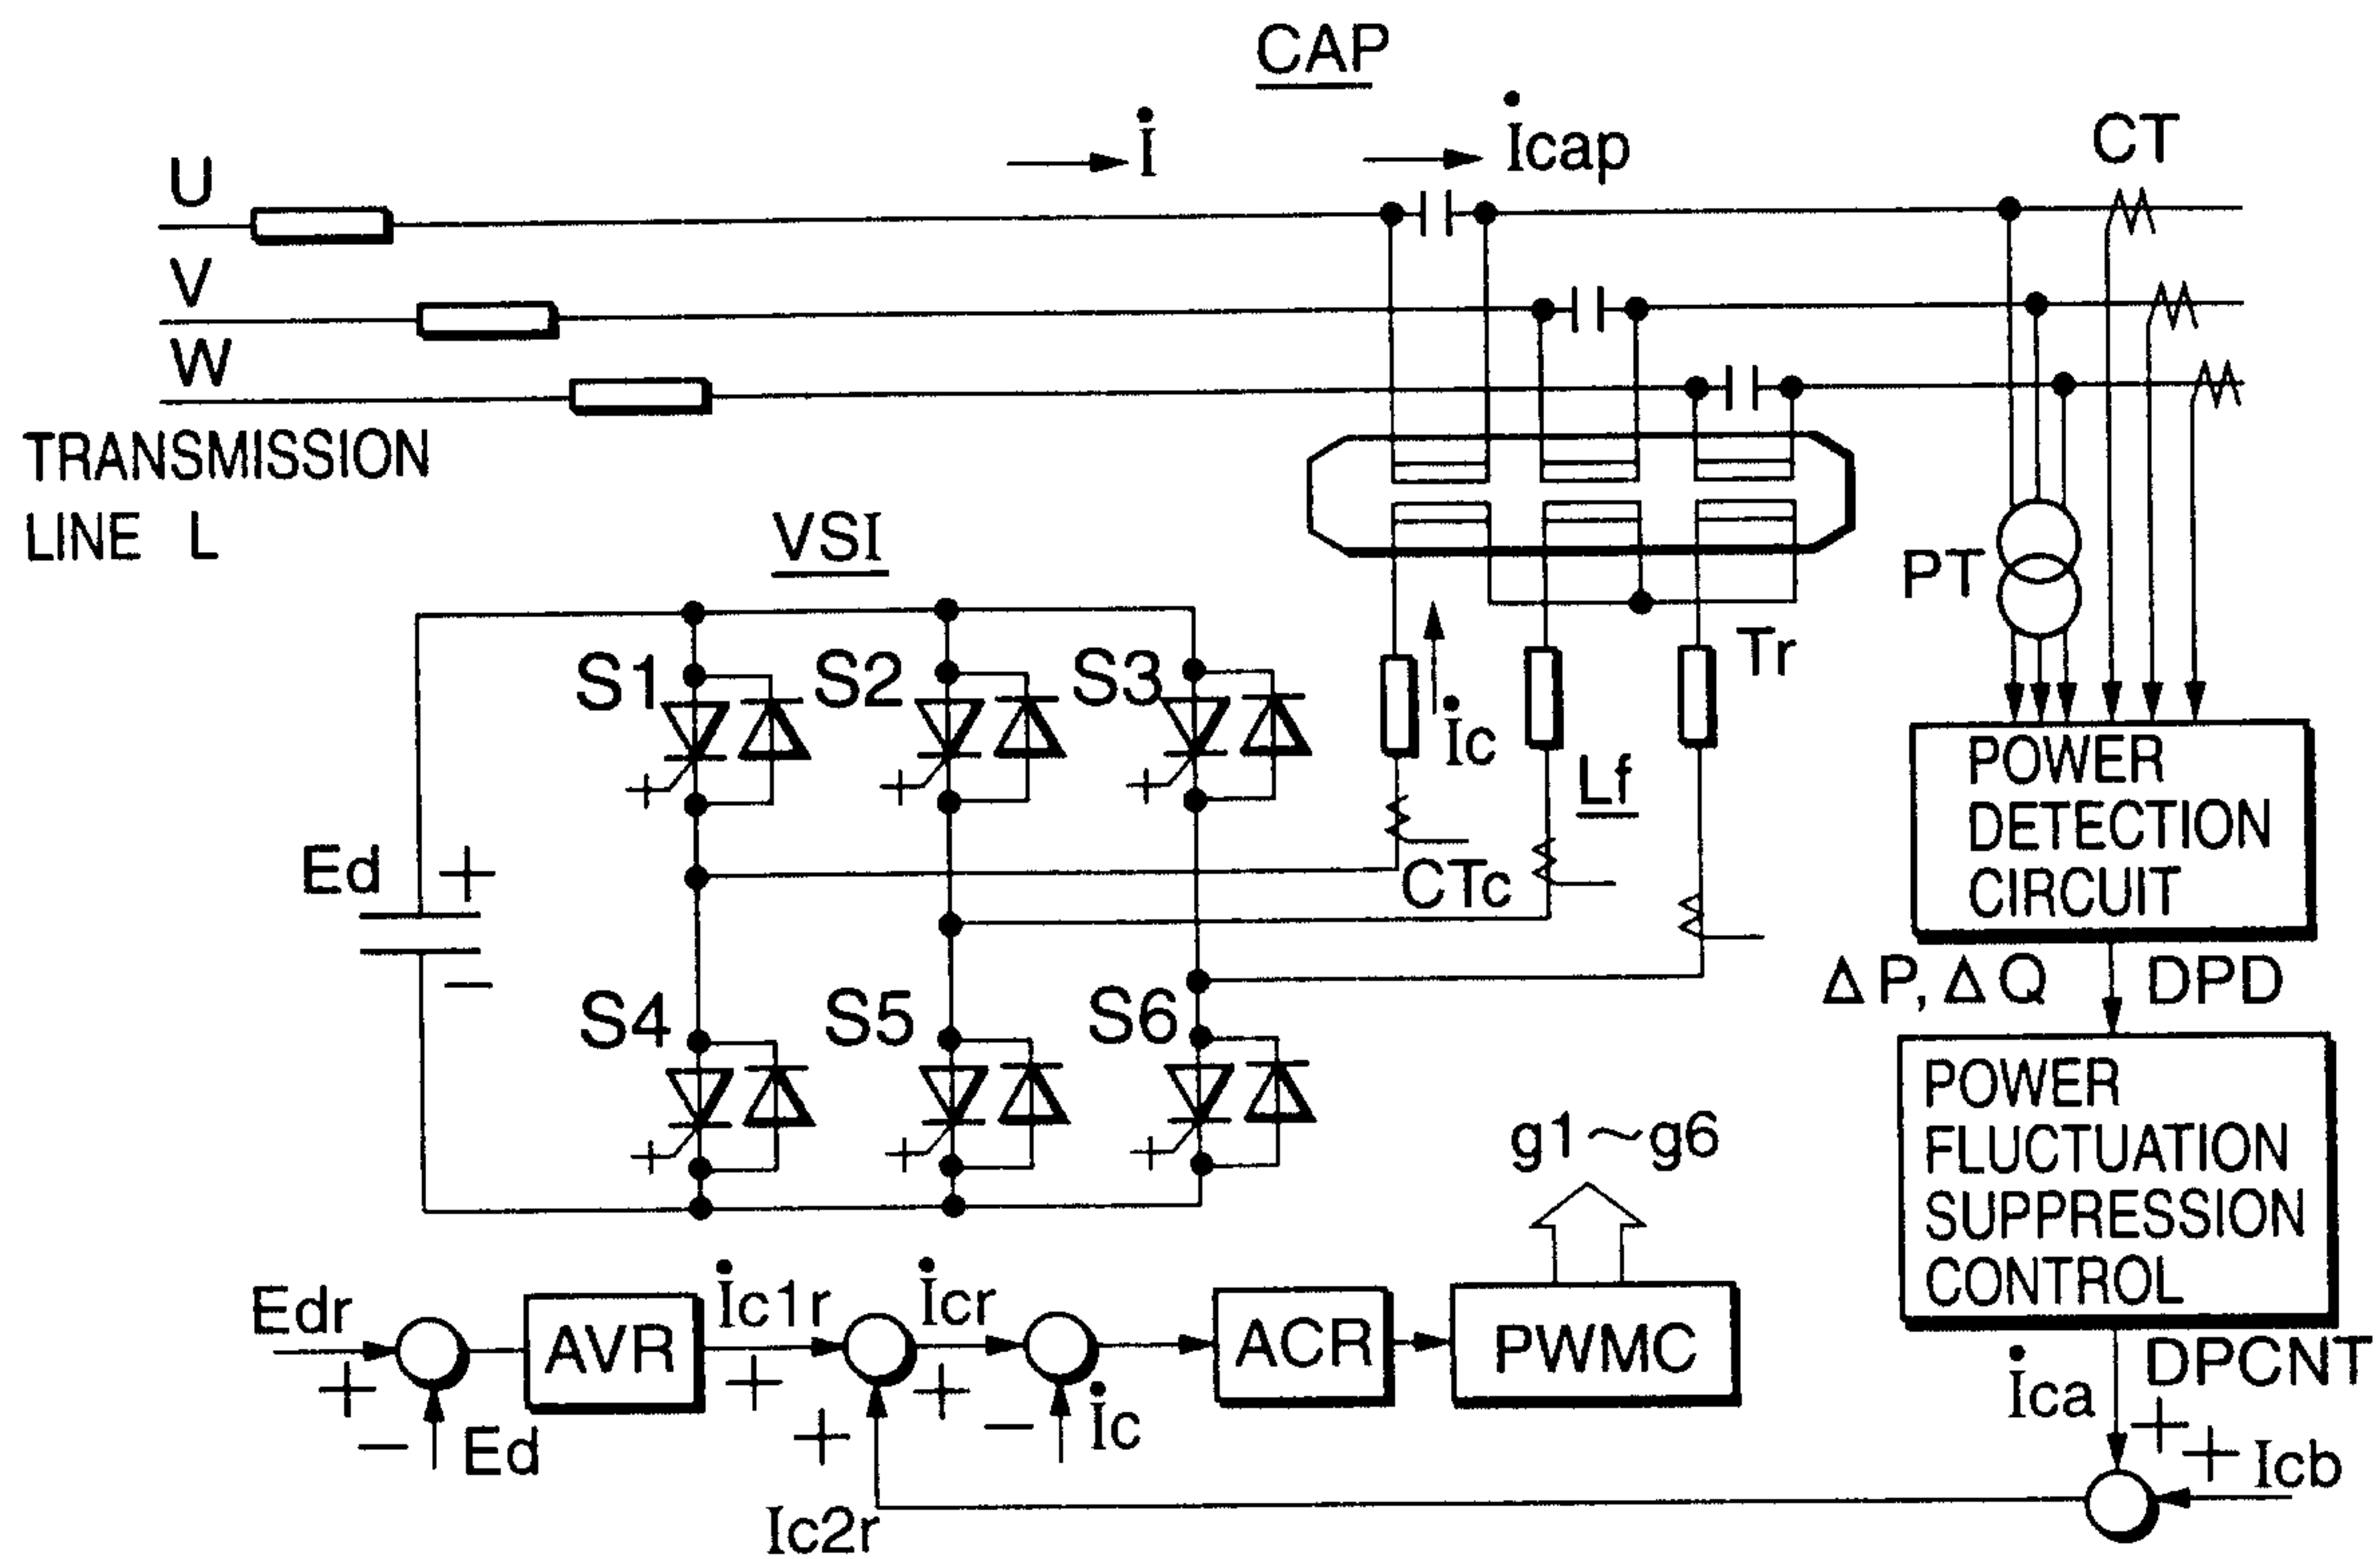


FIG. 23

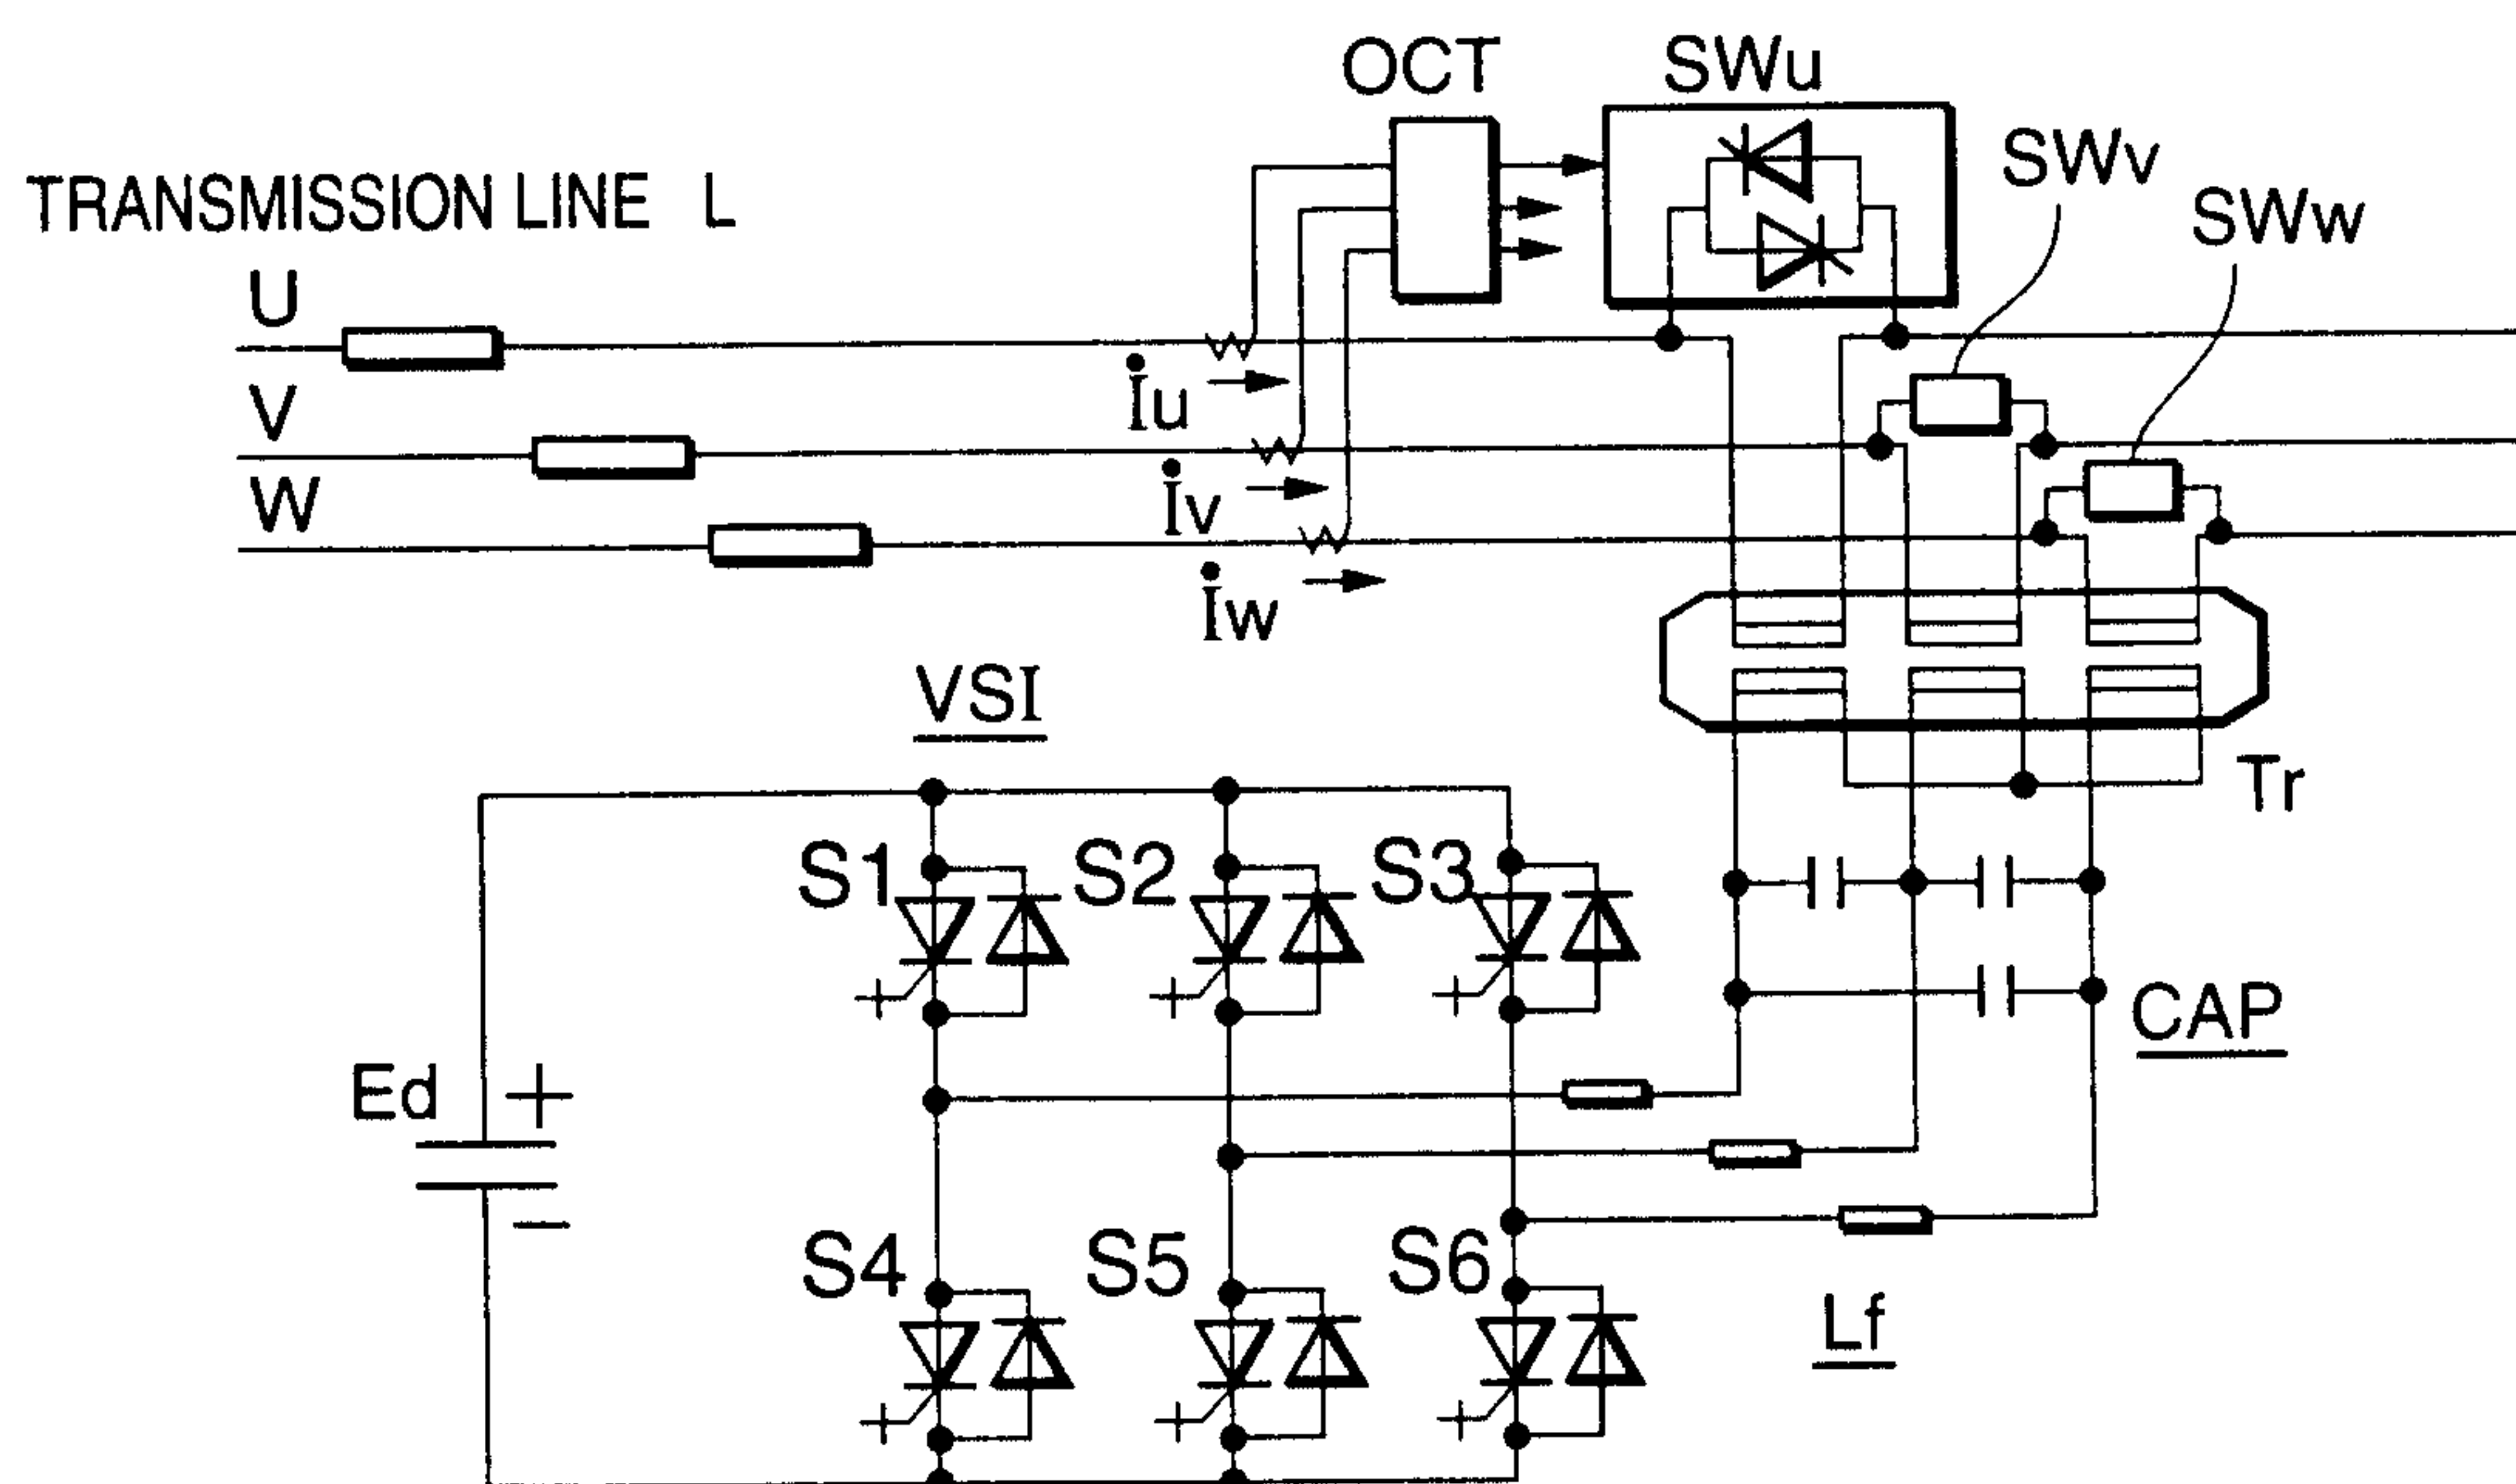


FIG. 24

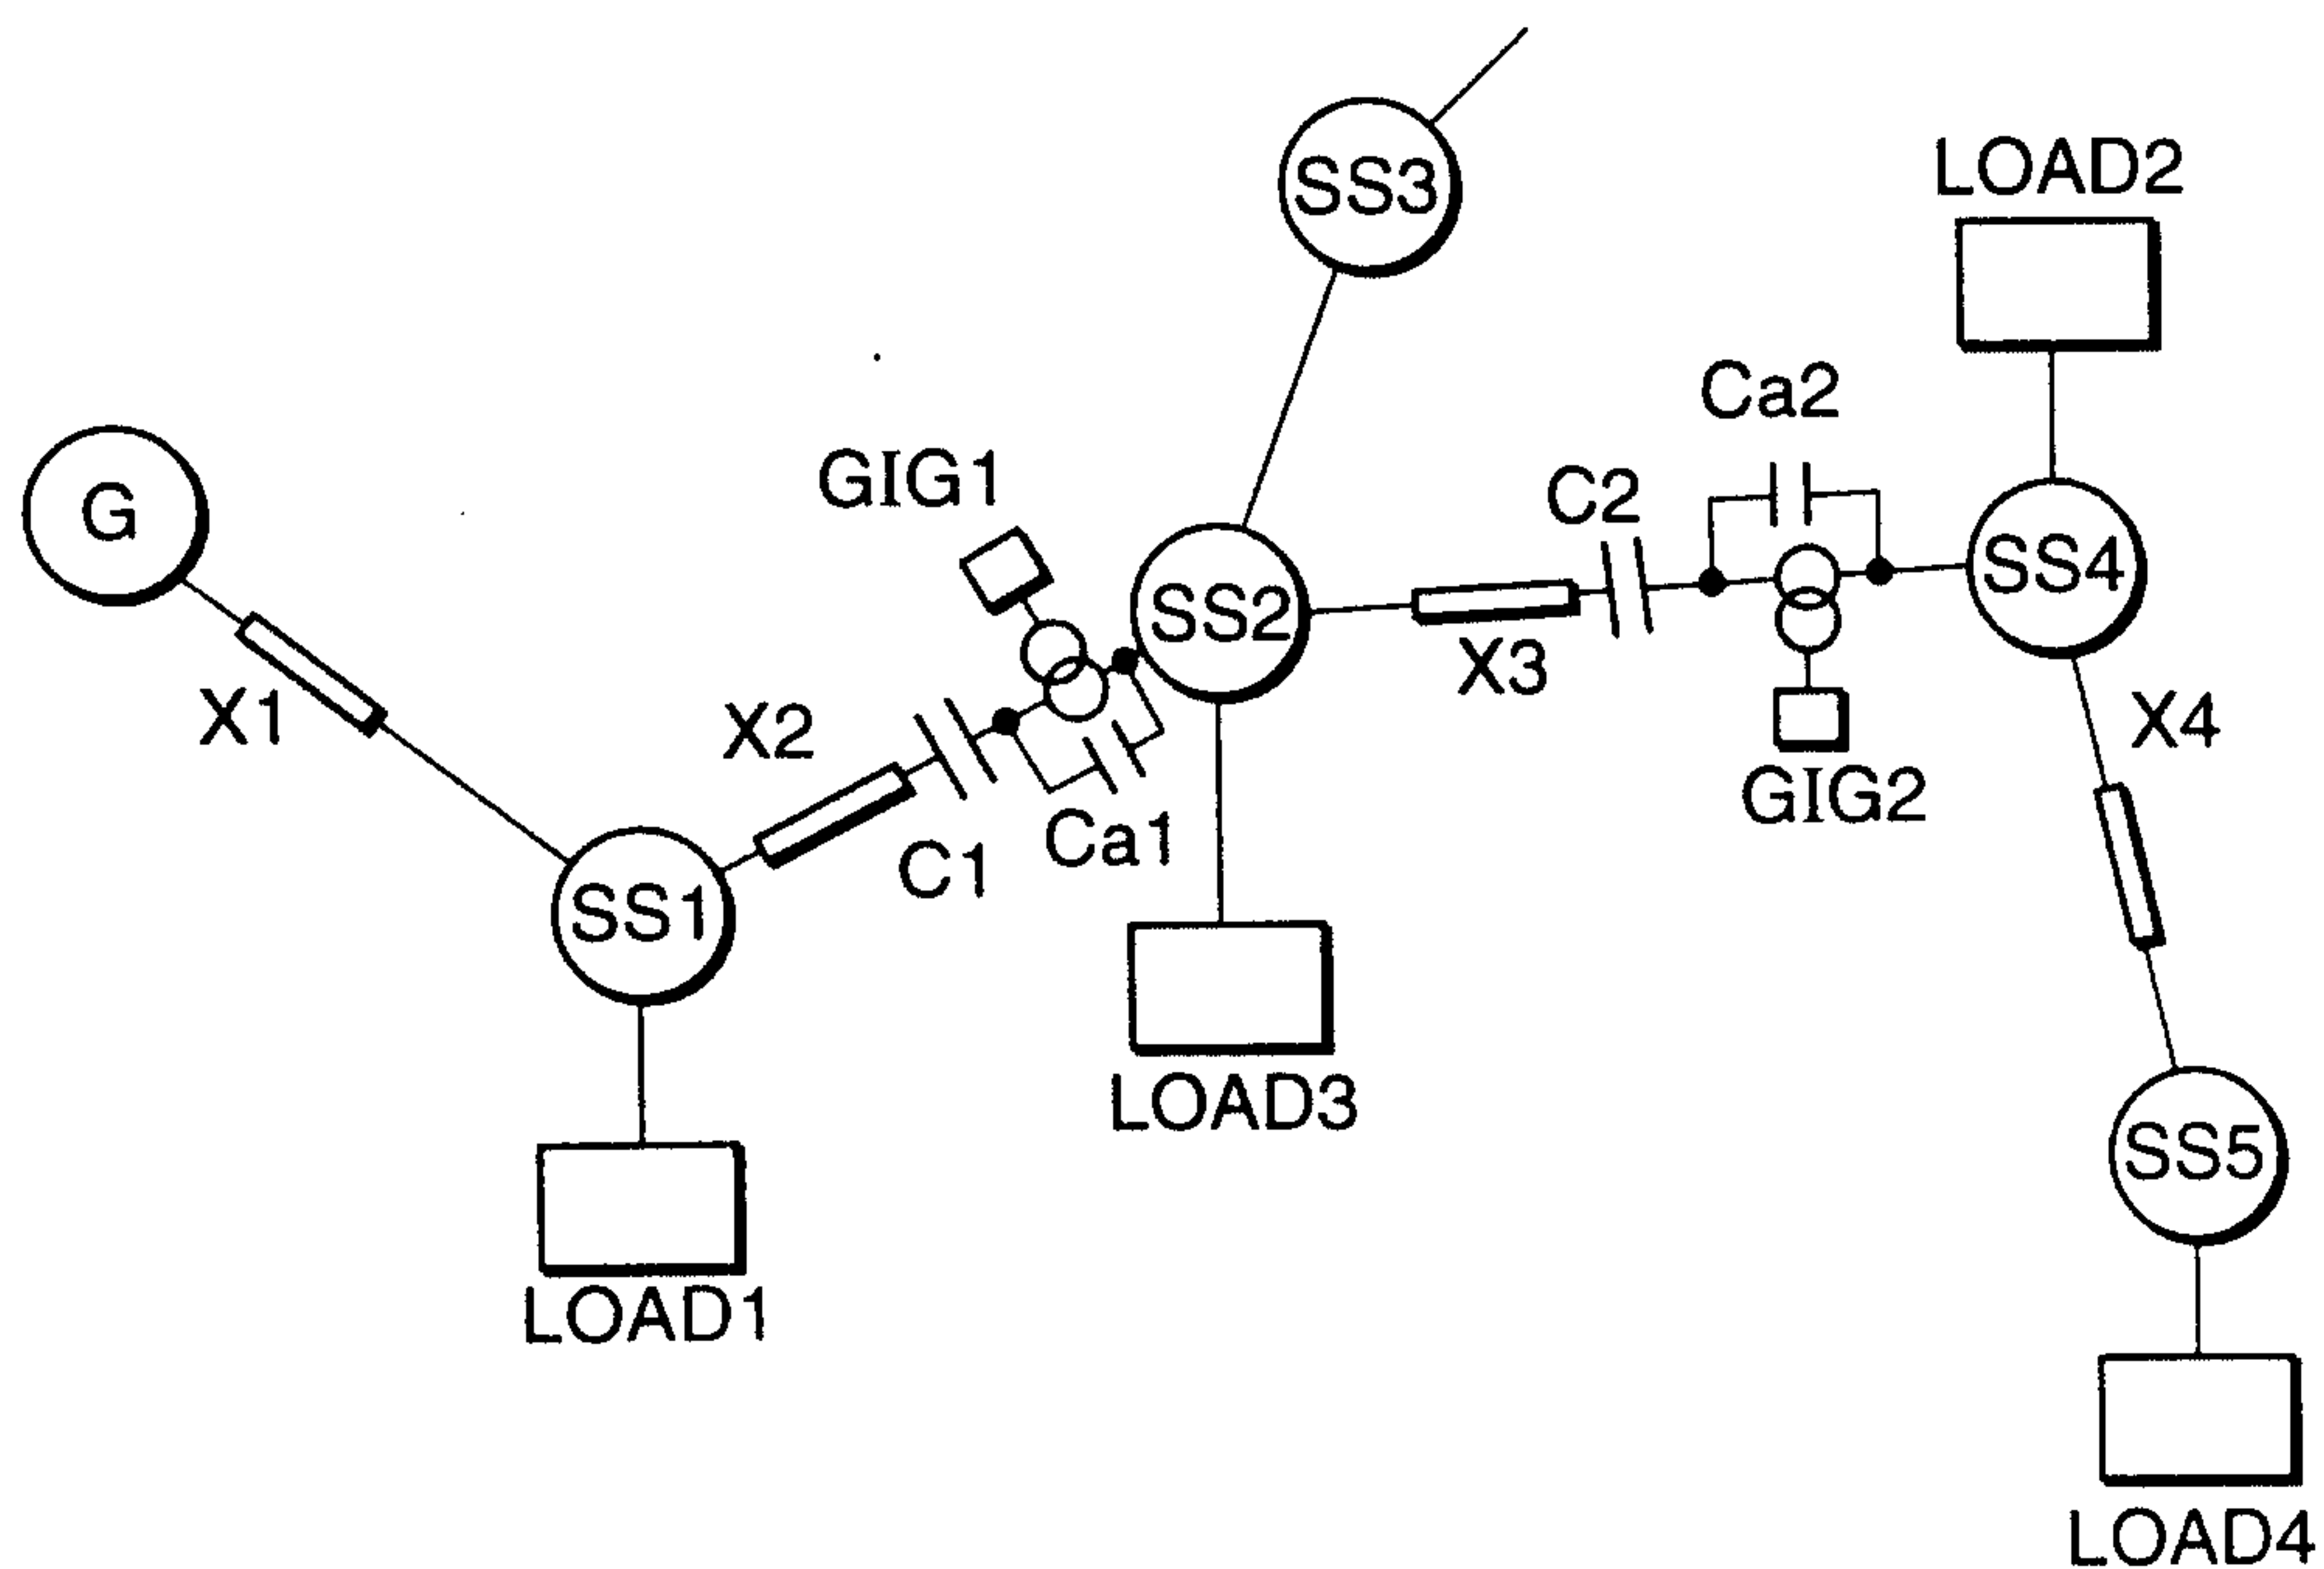


FIG. 25

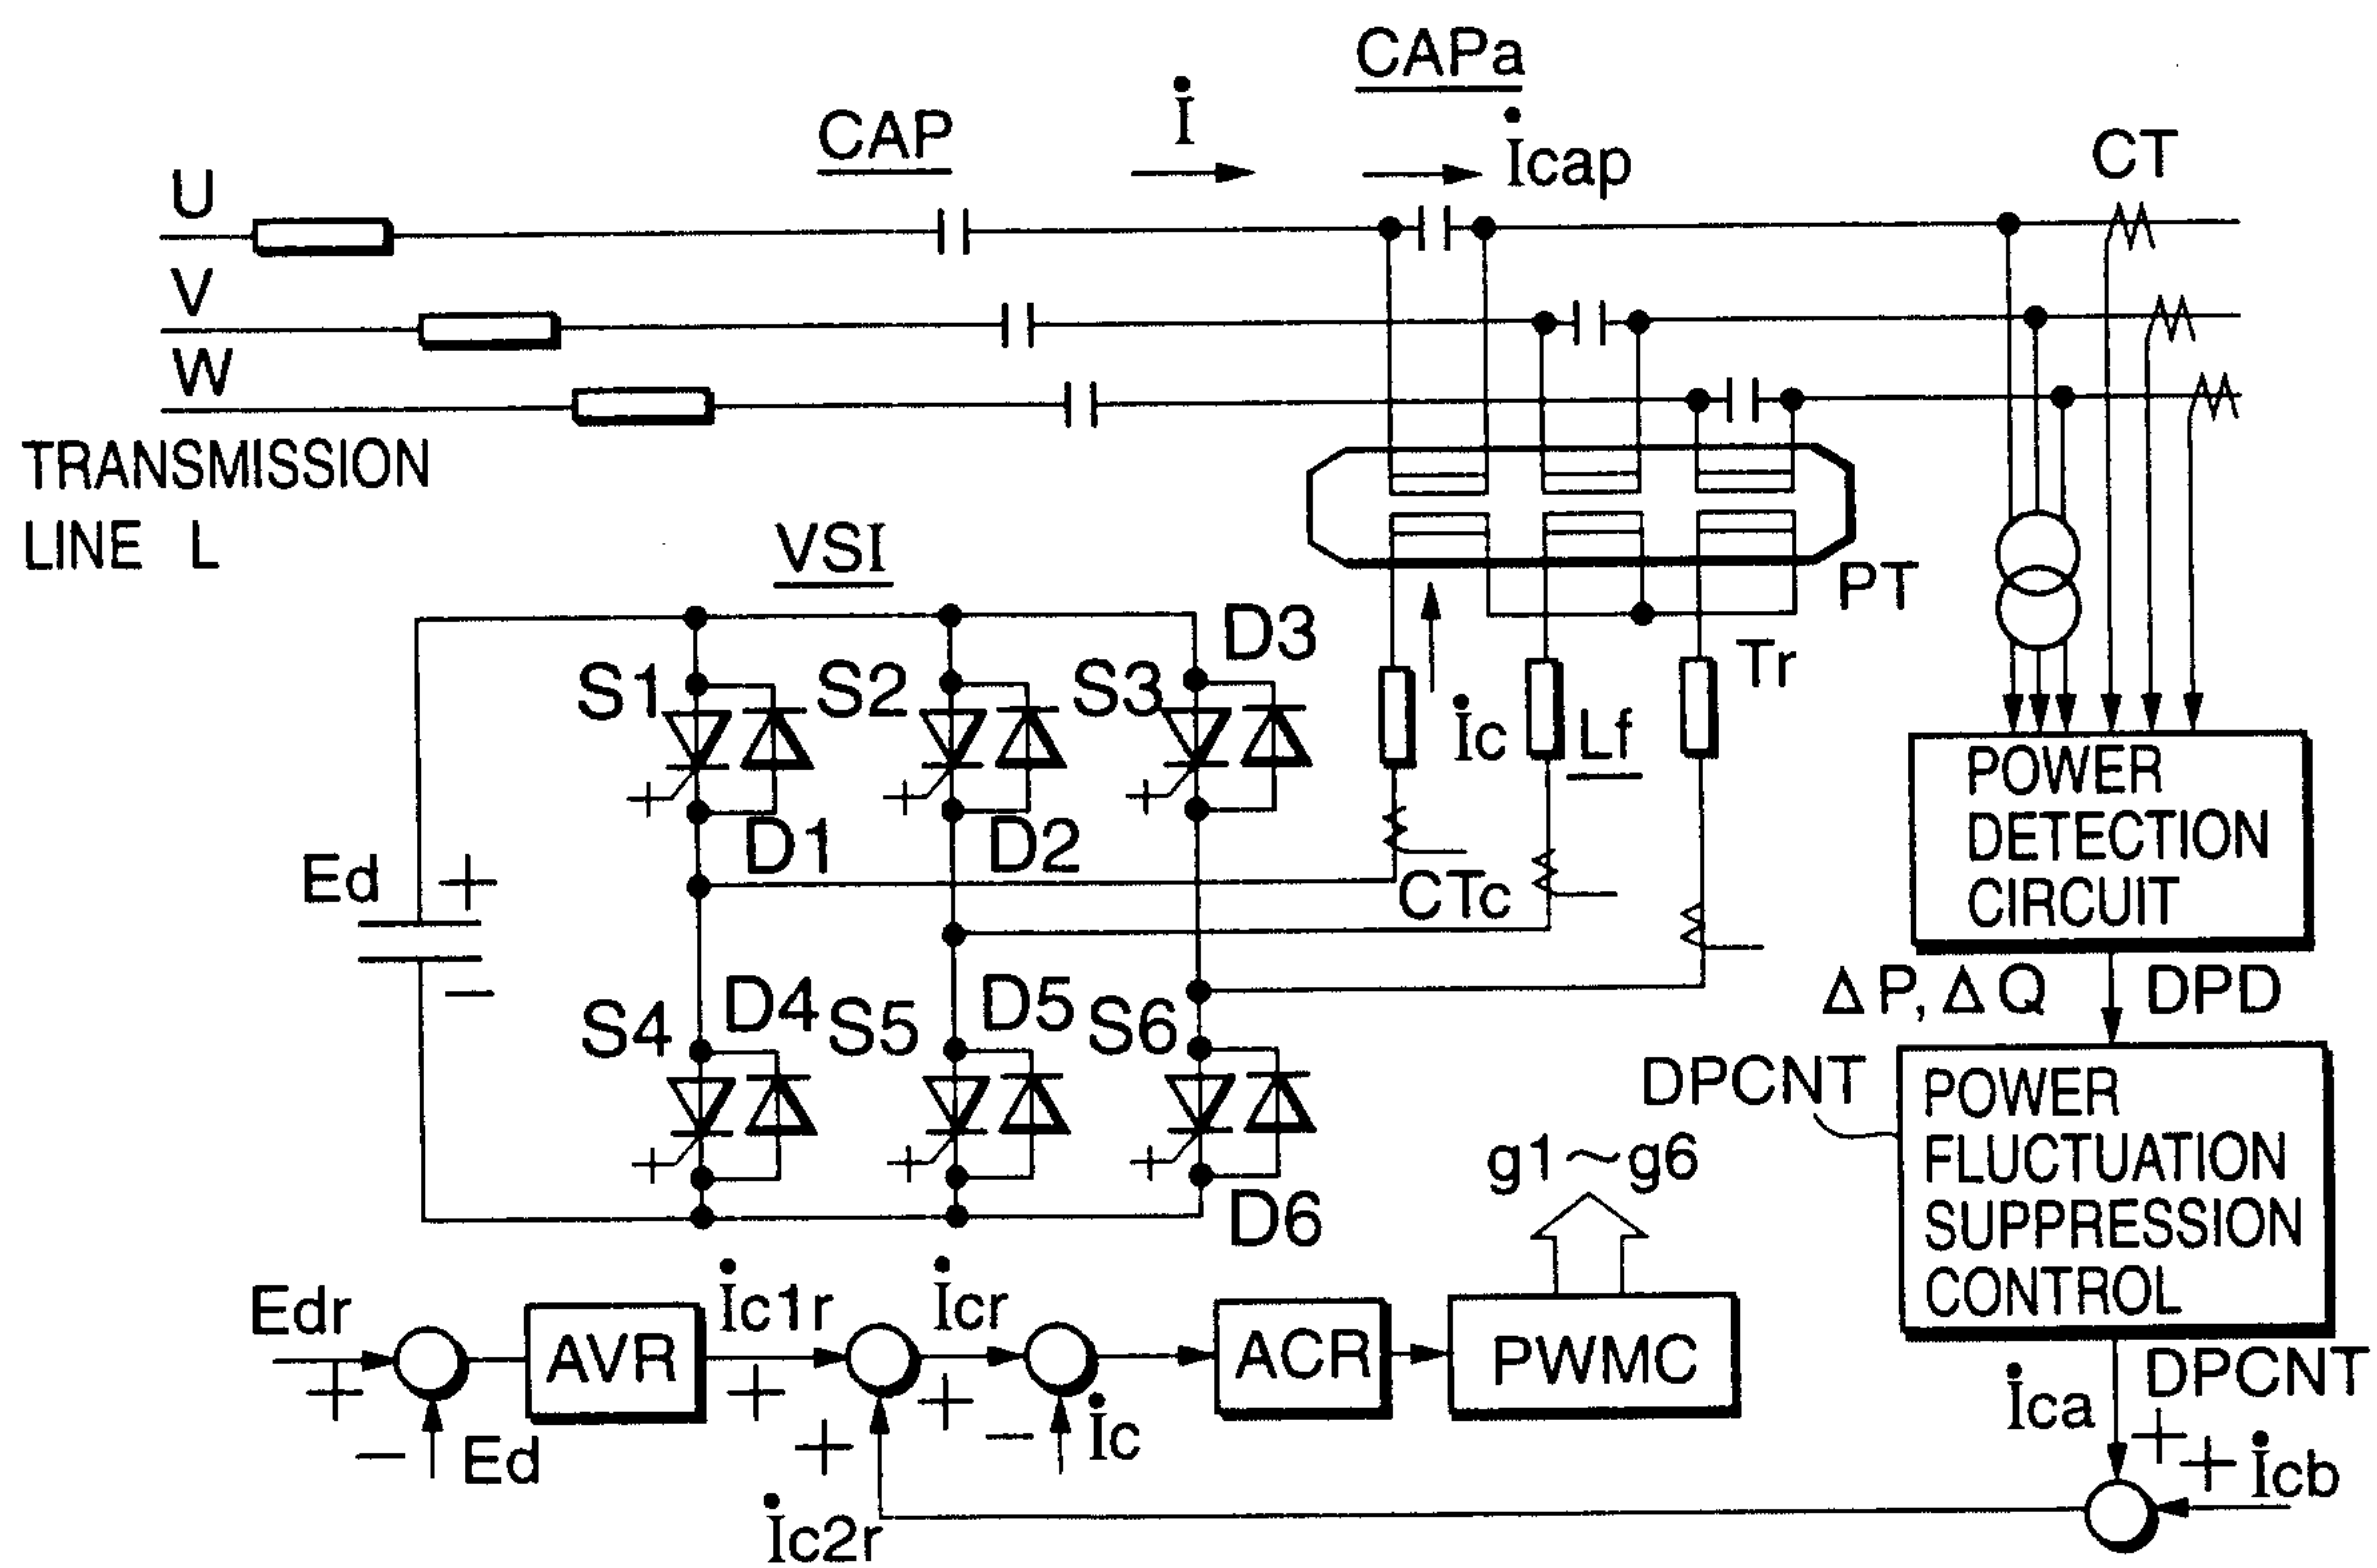


FIG. 26



15/41

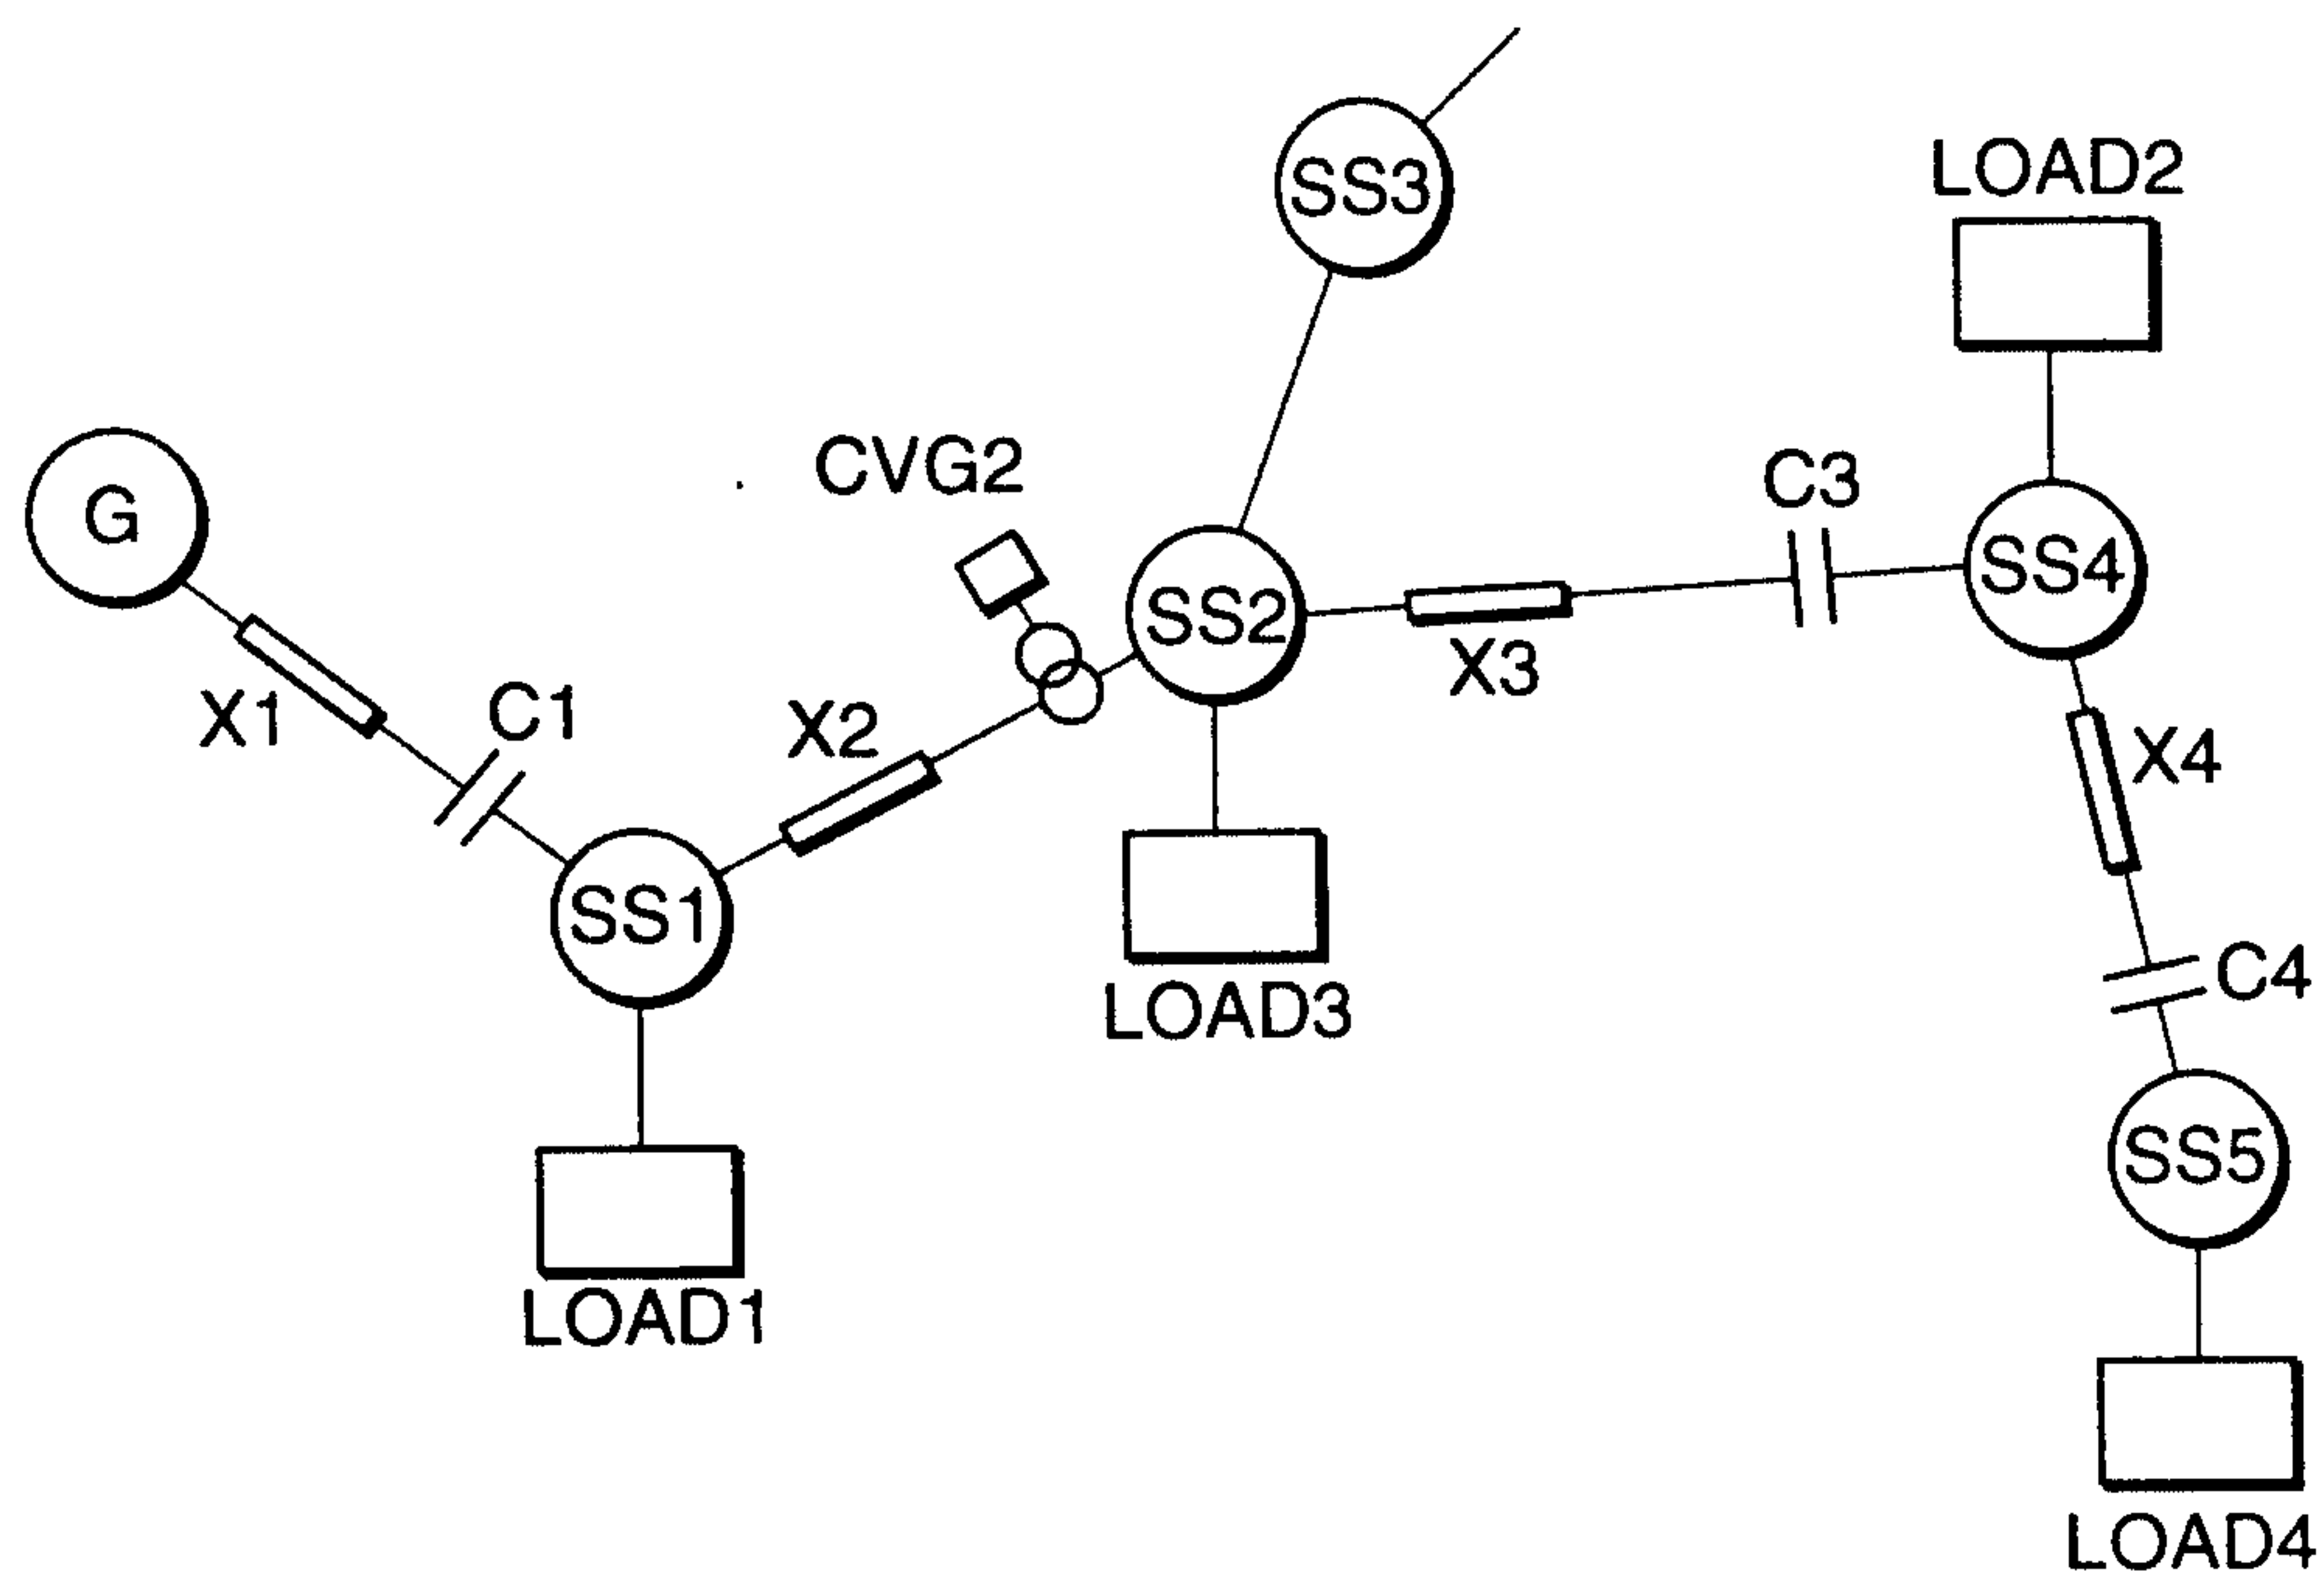


FIG. 29

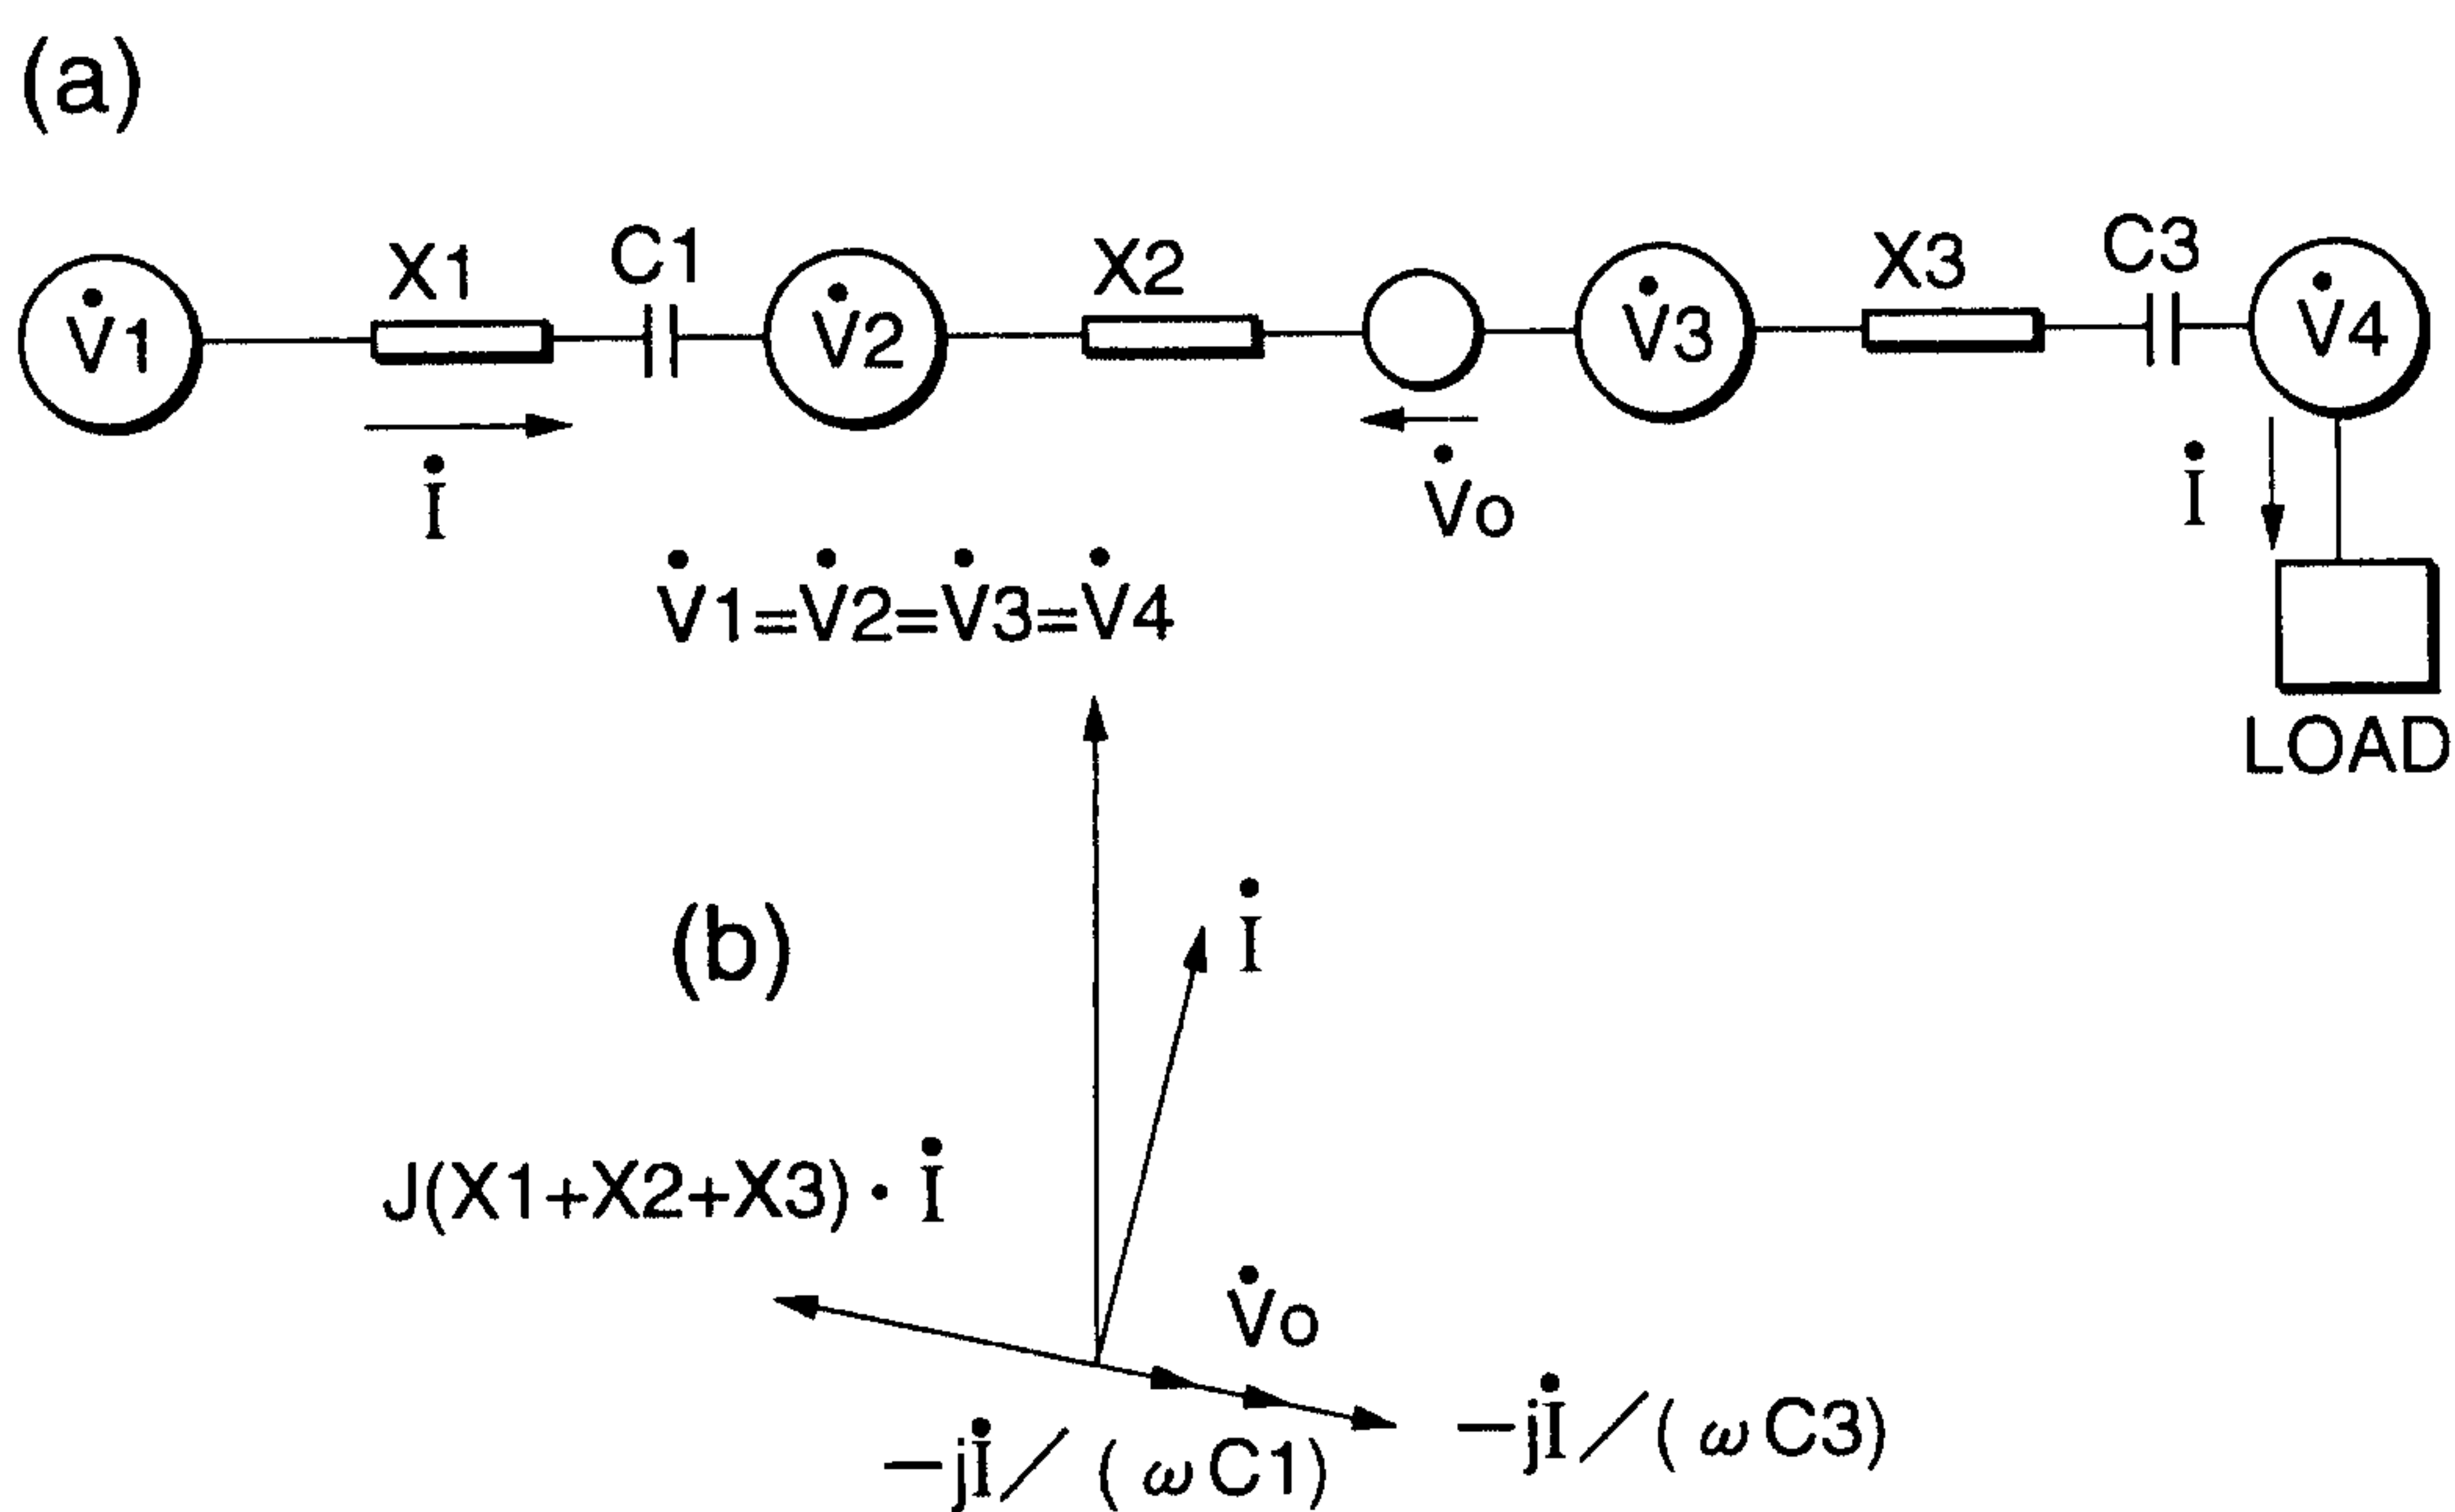


FIG. 30

16/41

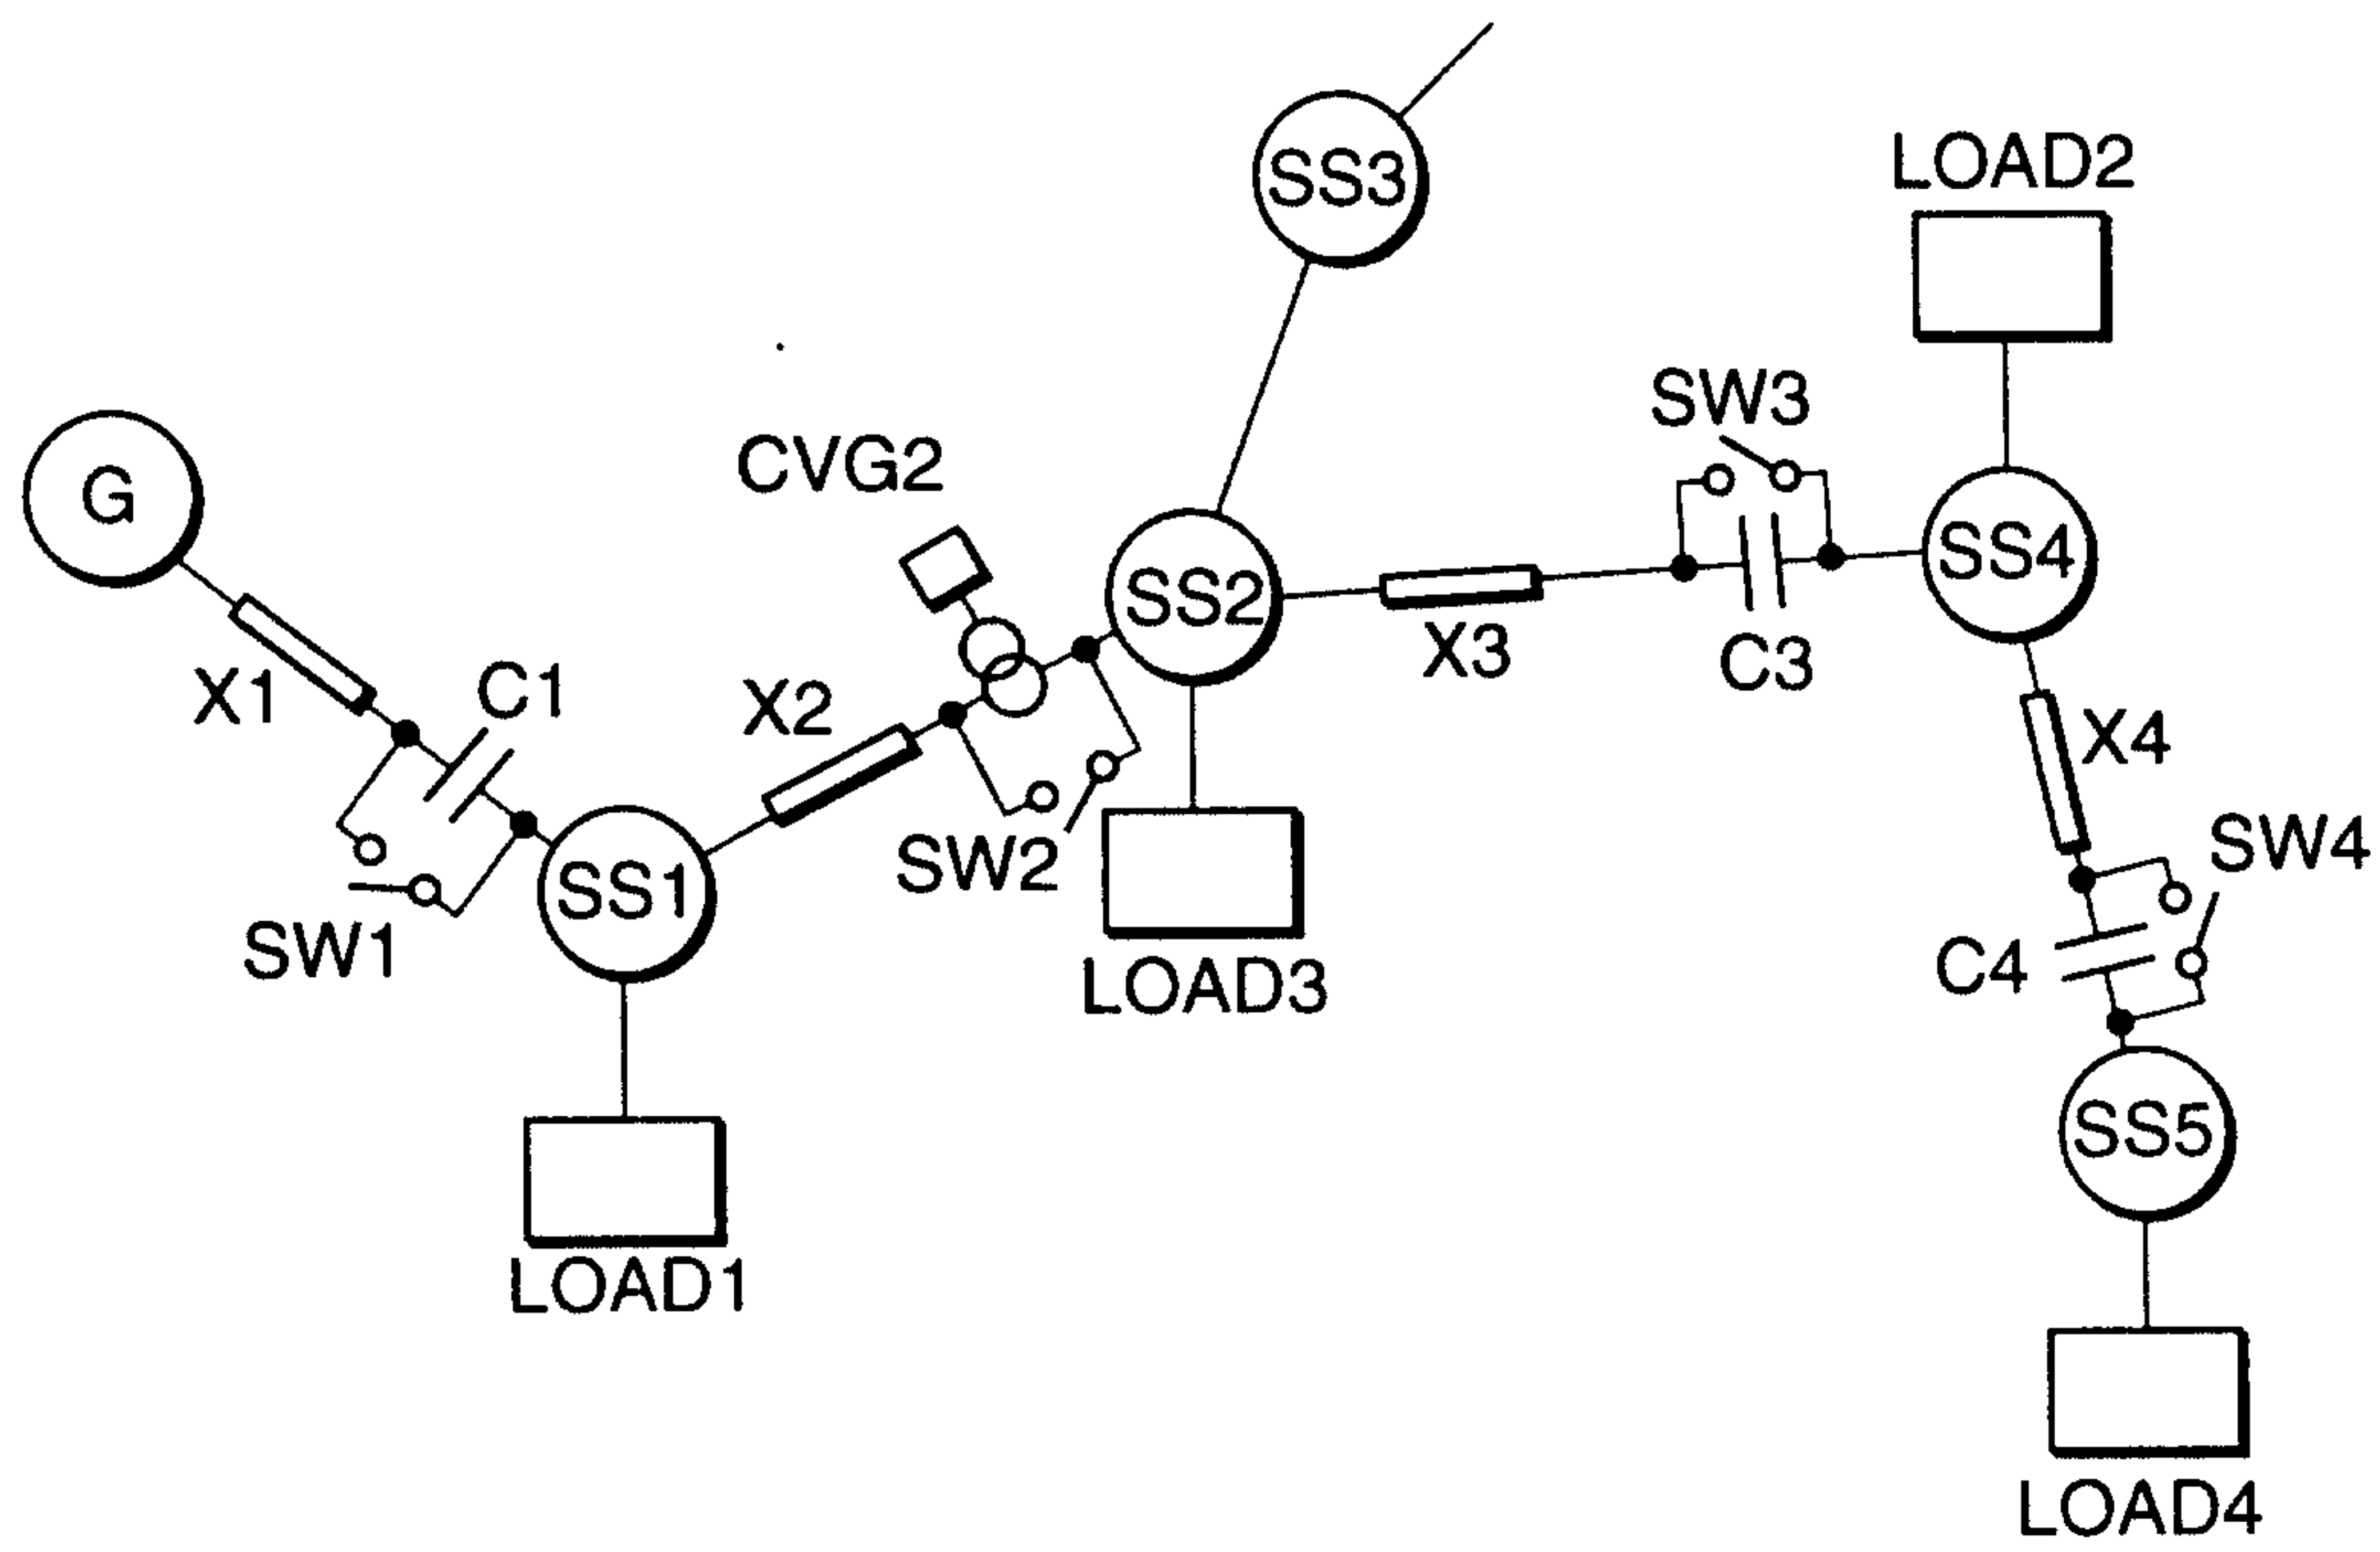


FIG. 31

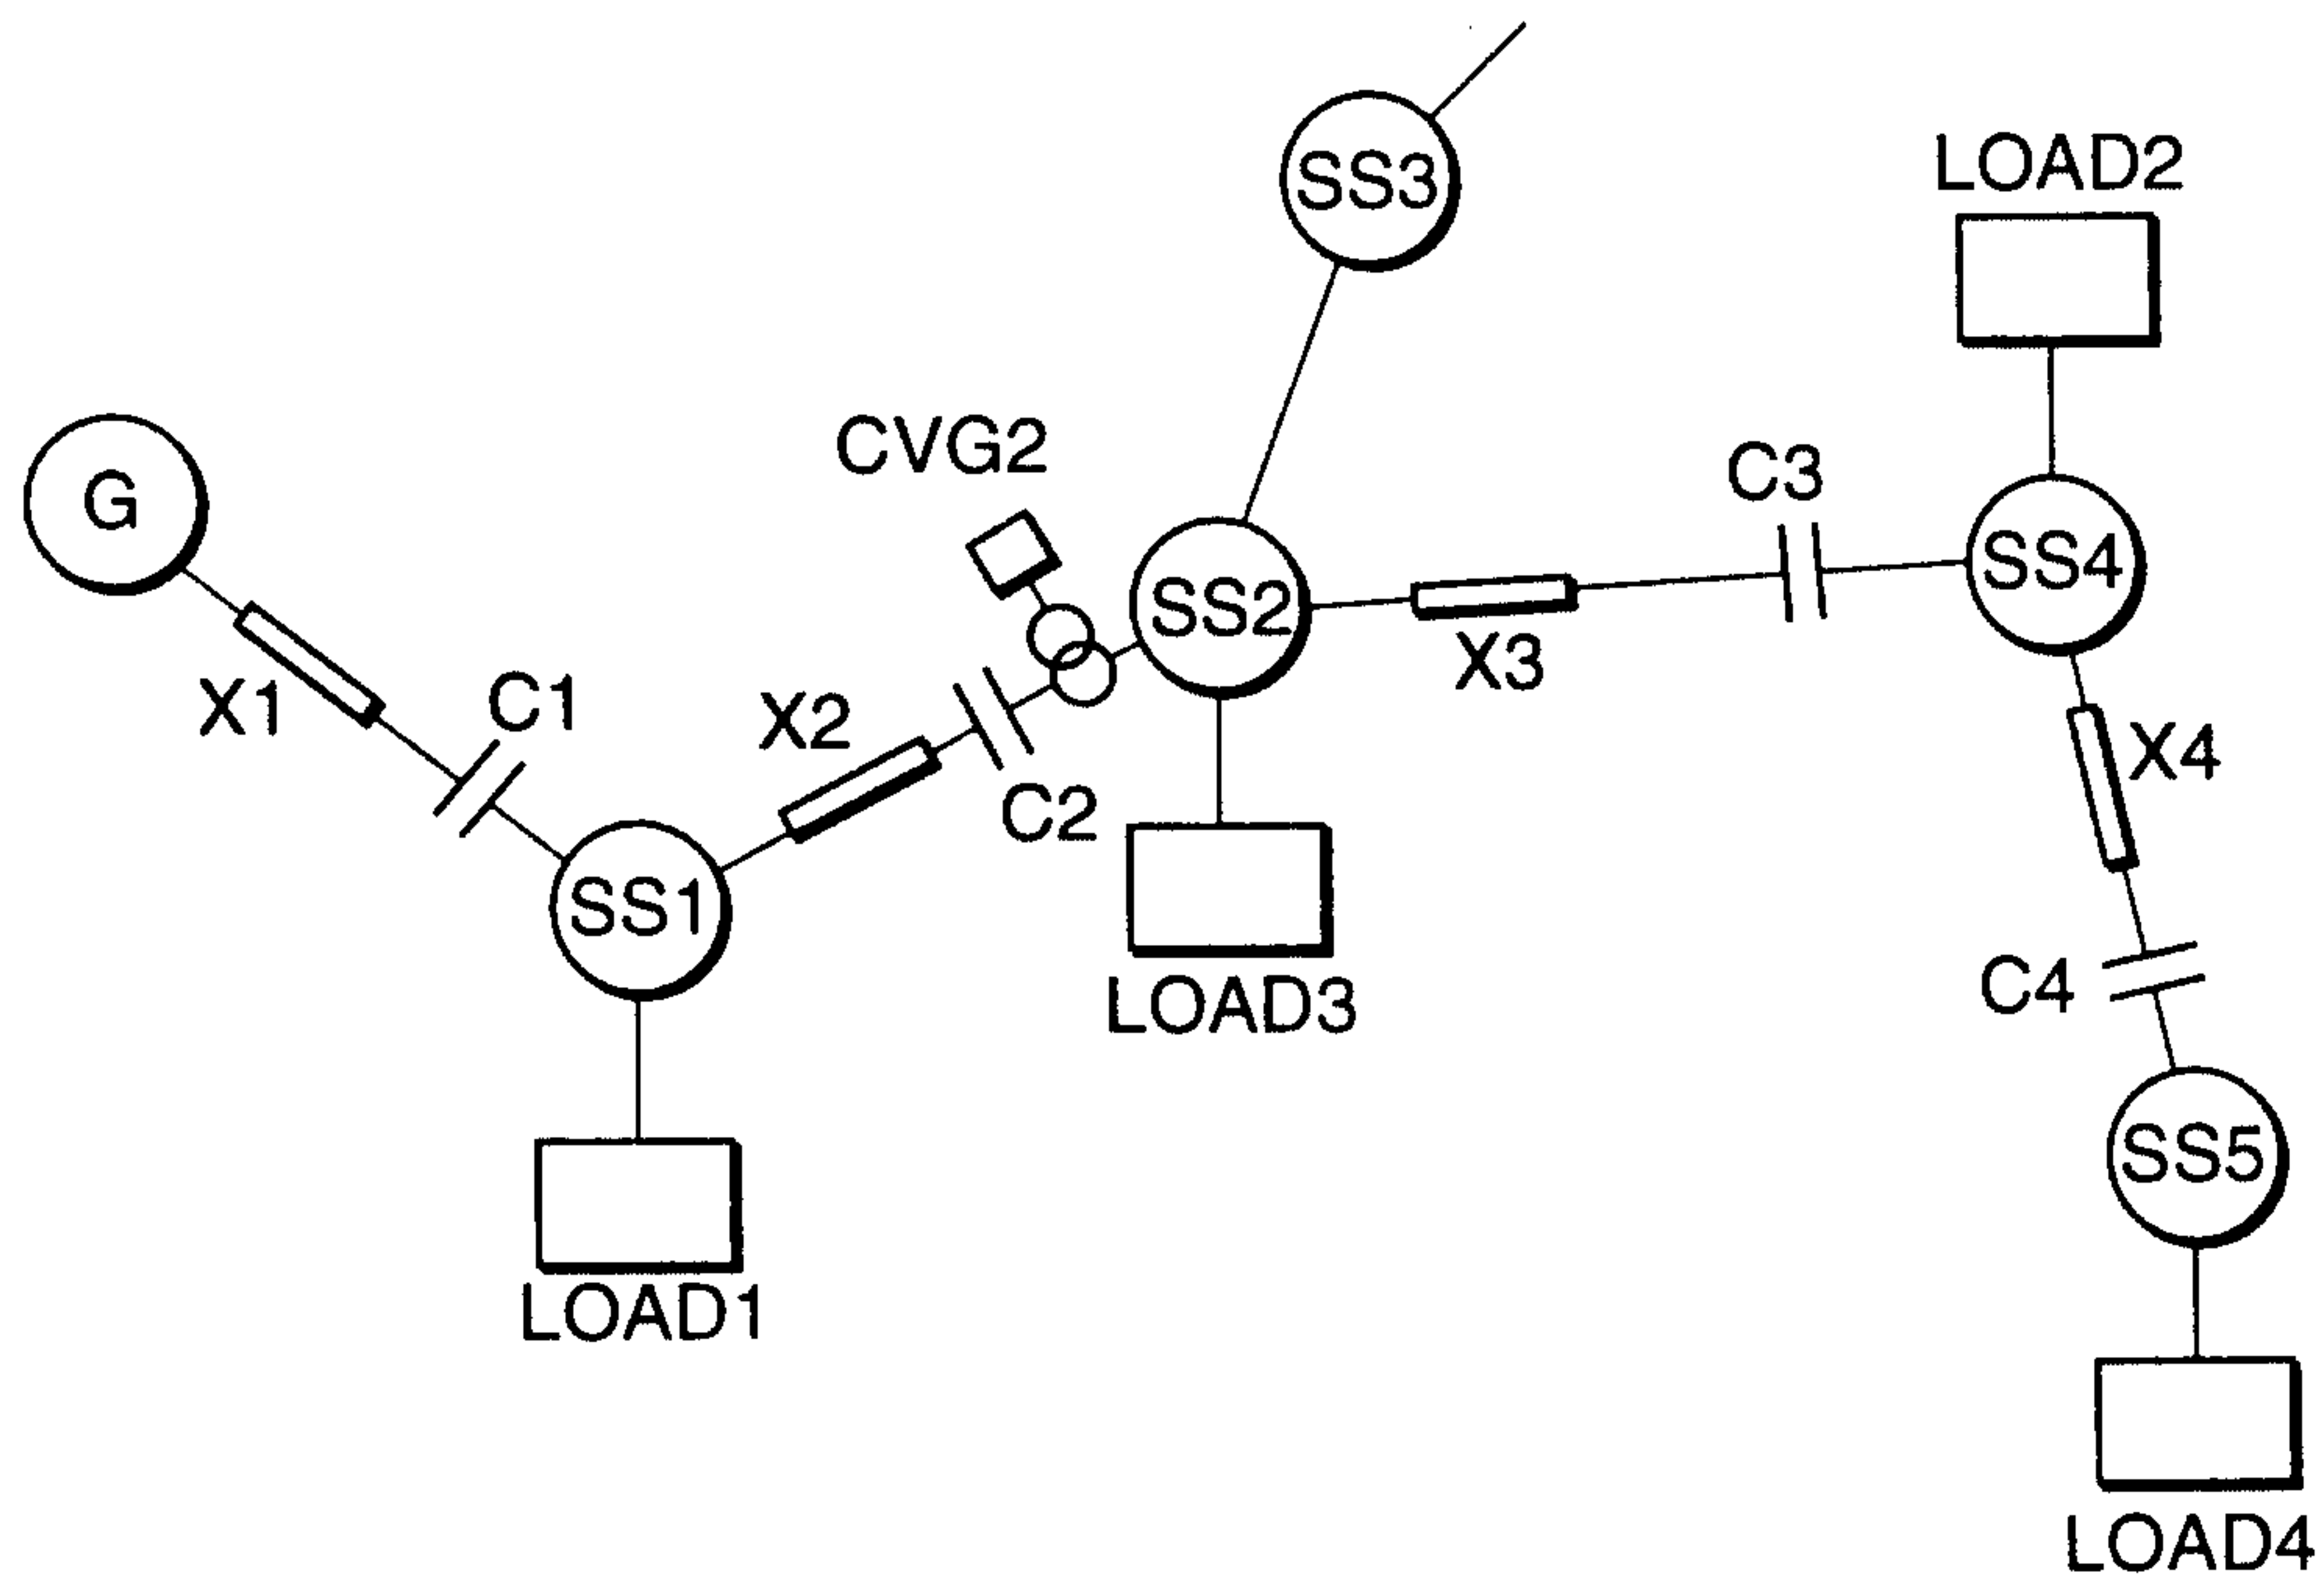


FIG. 32

17/41

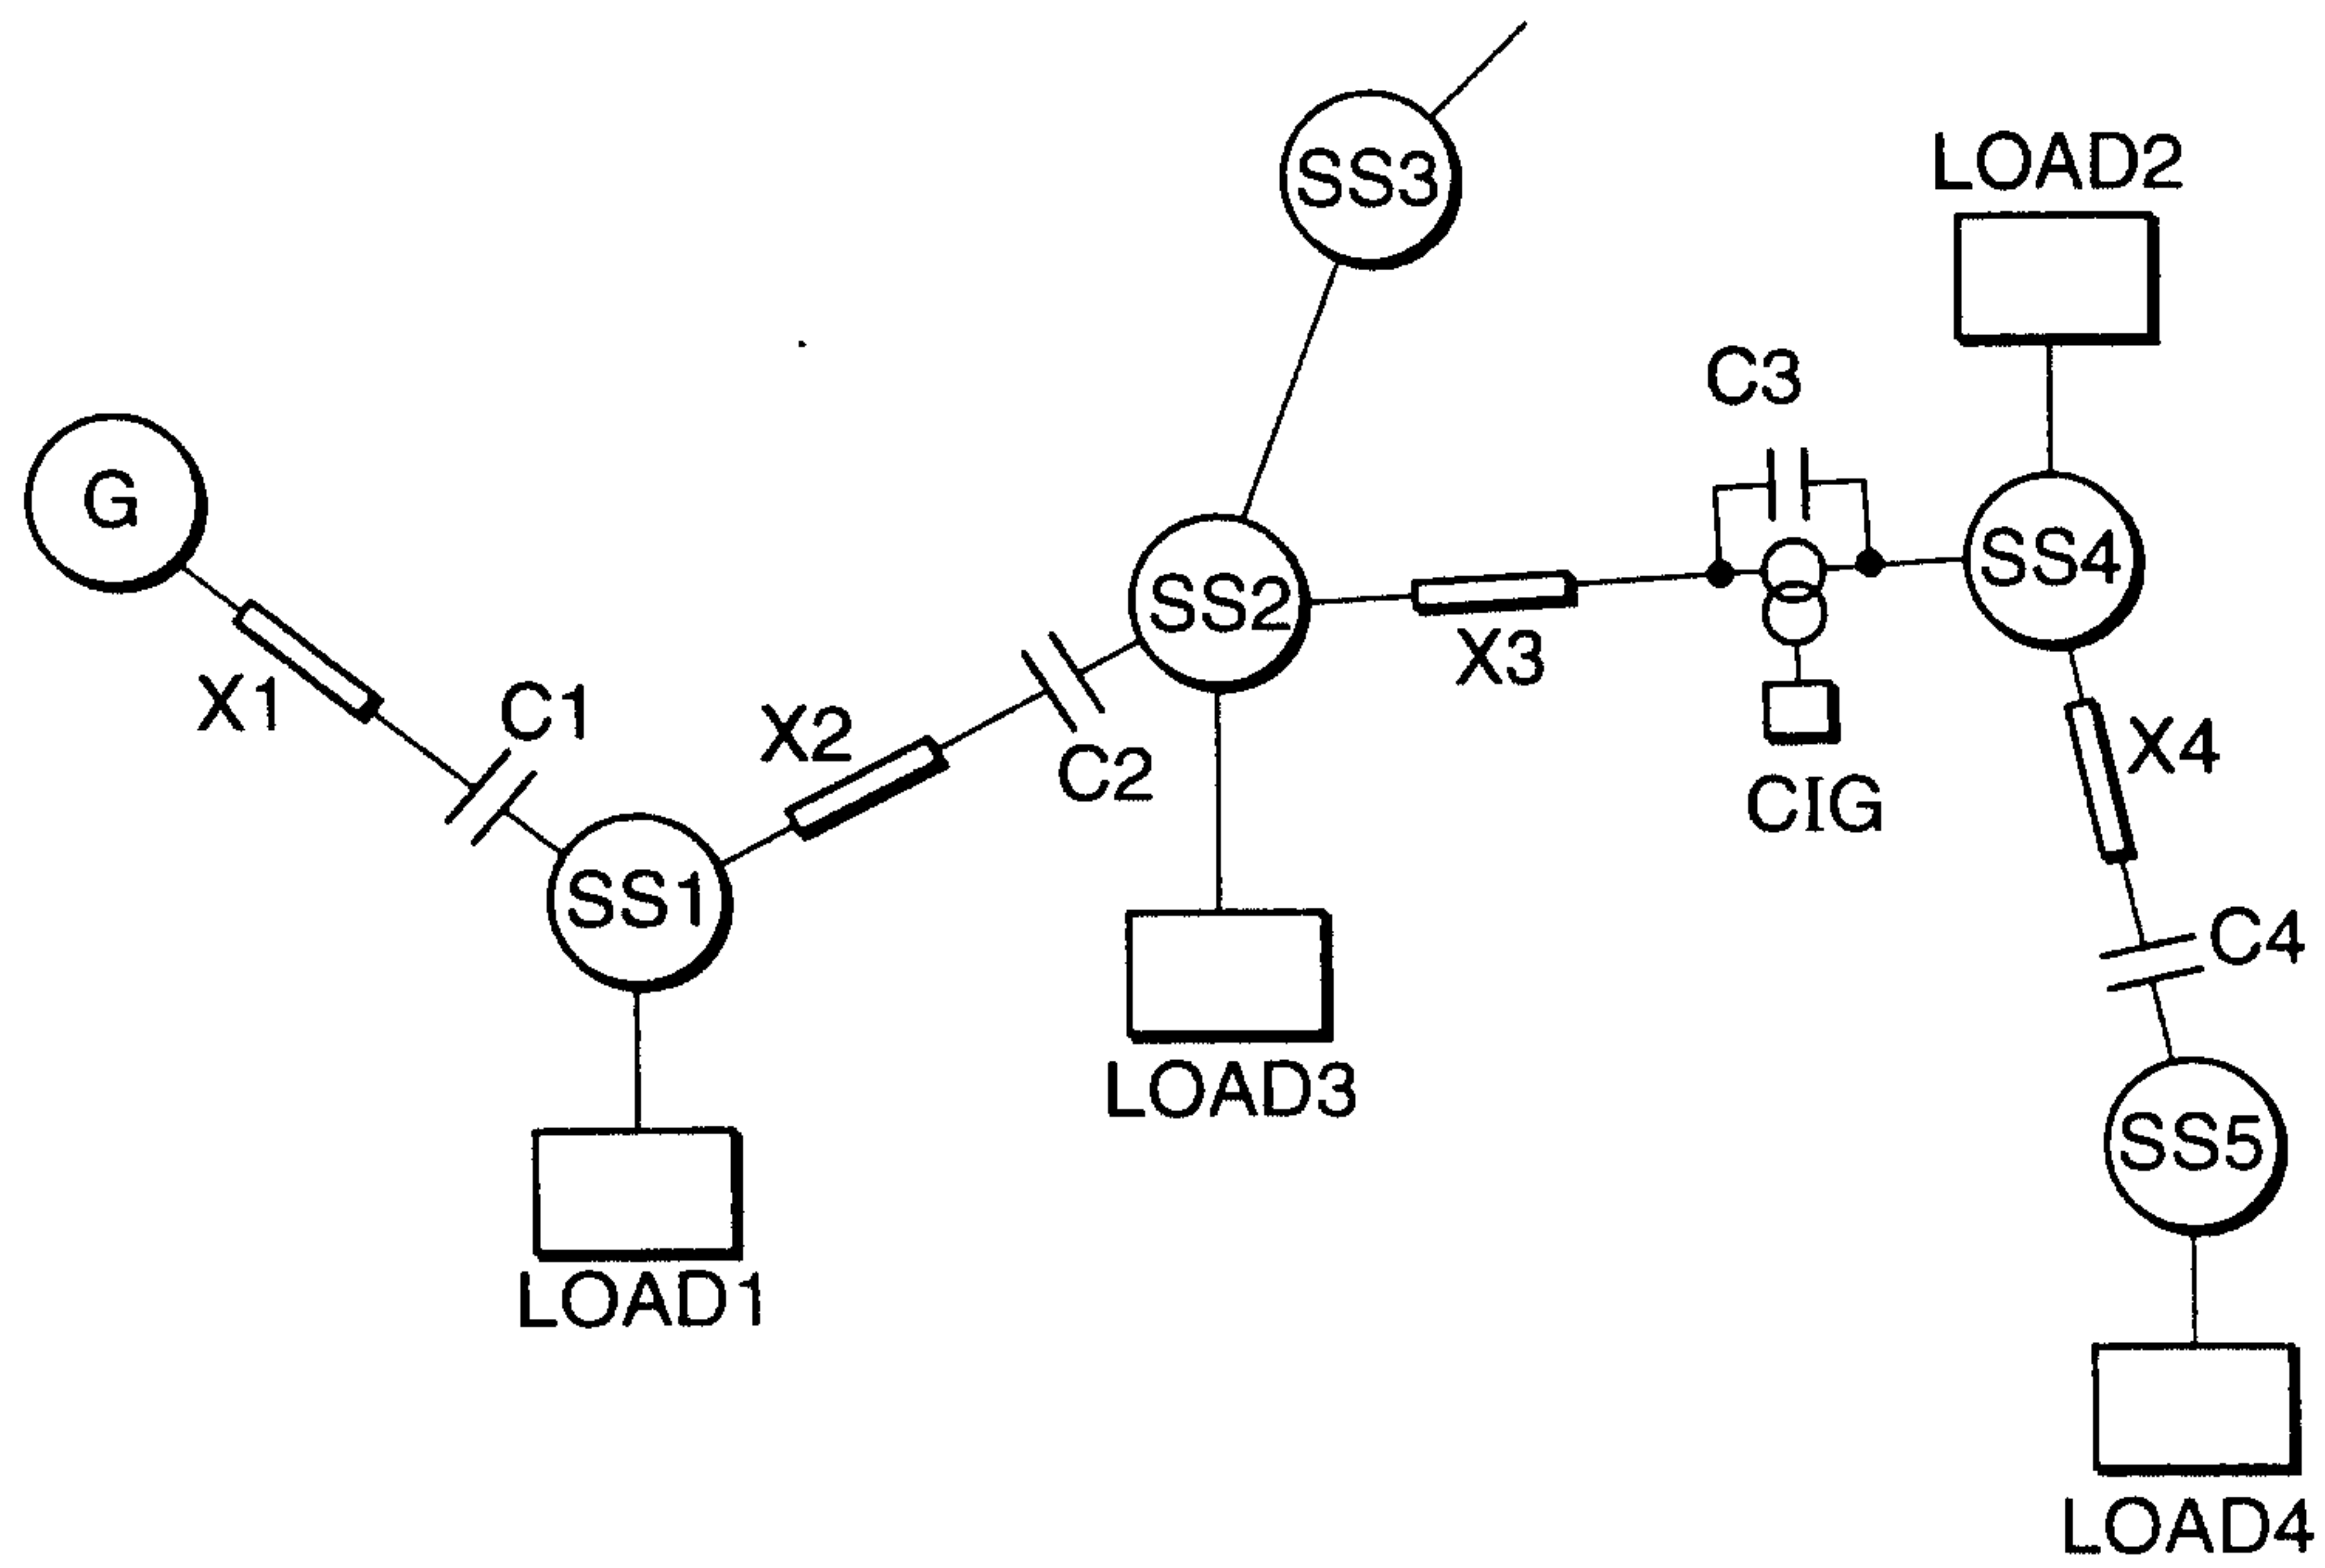


FIG. 33

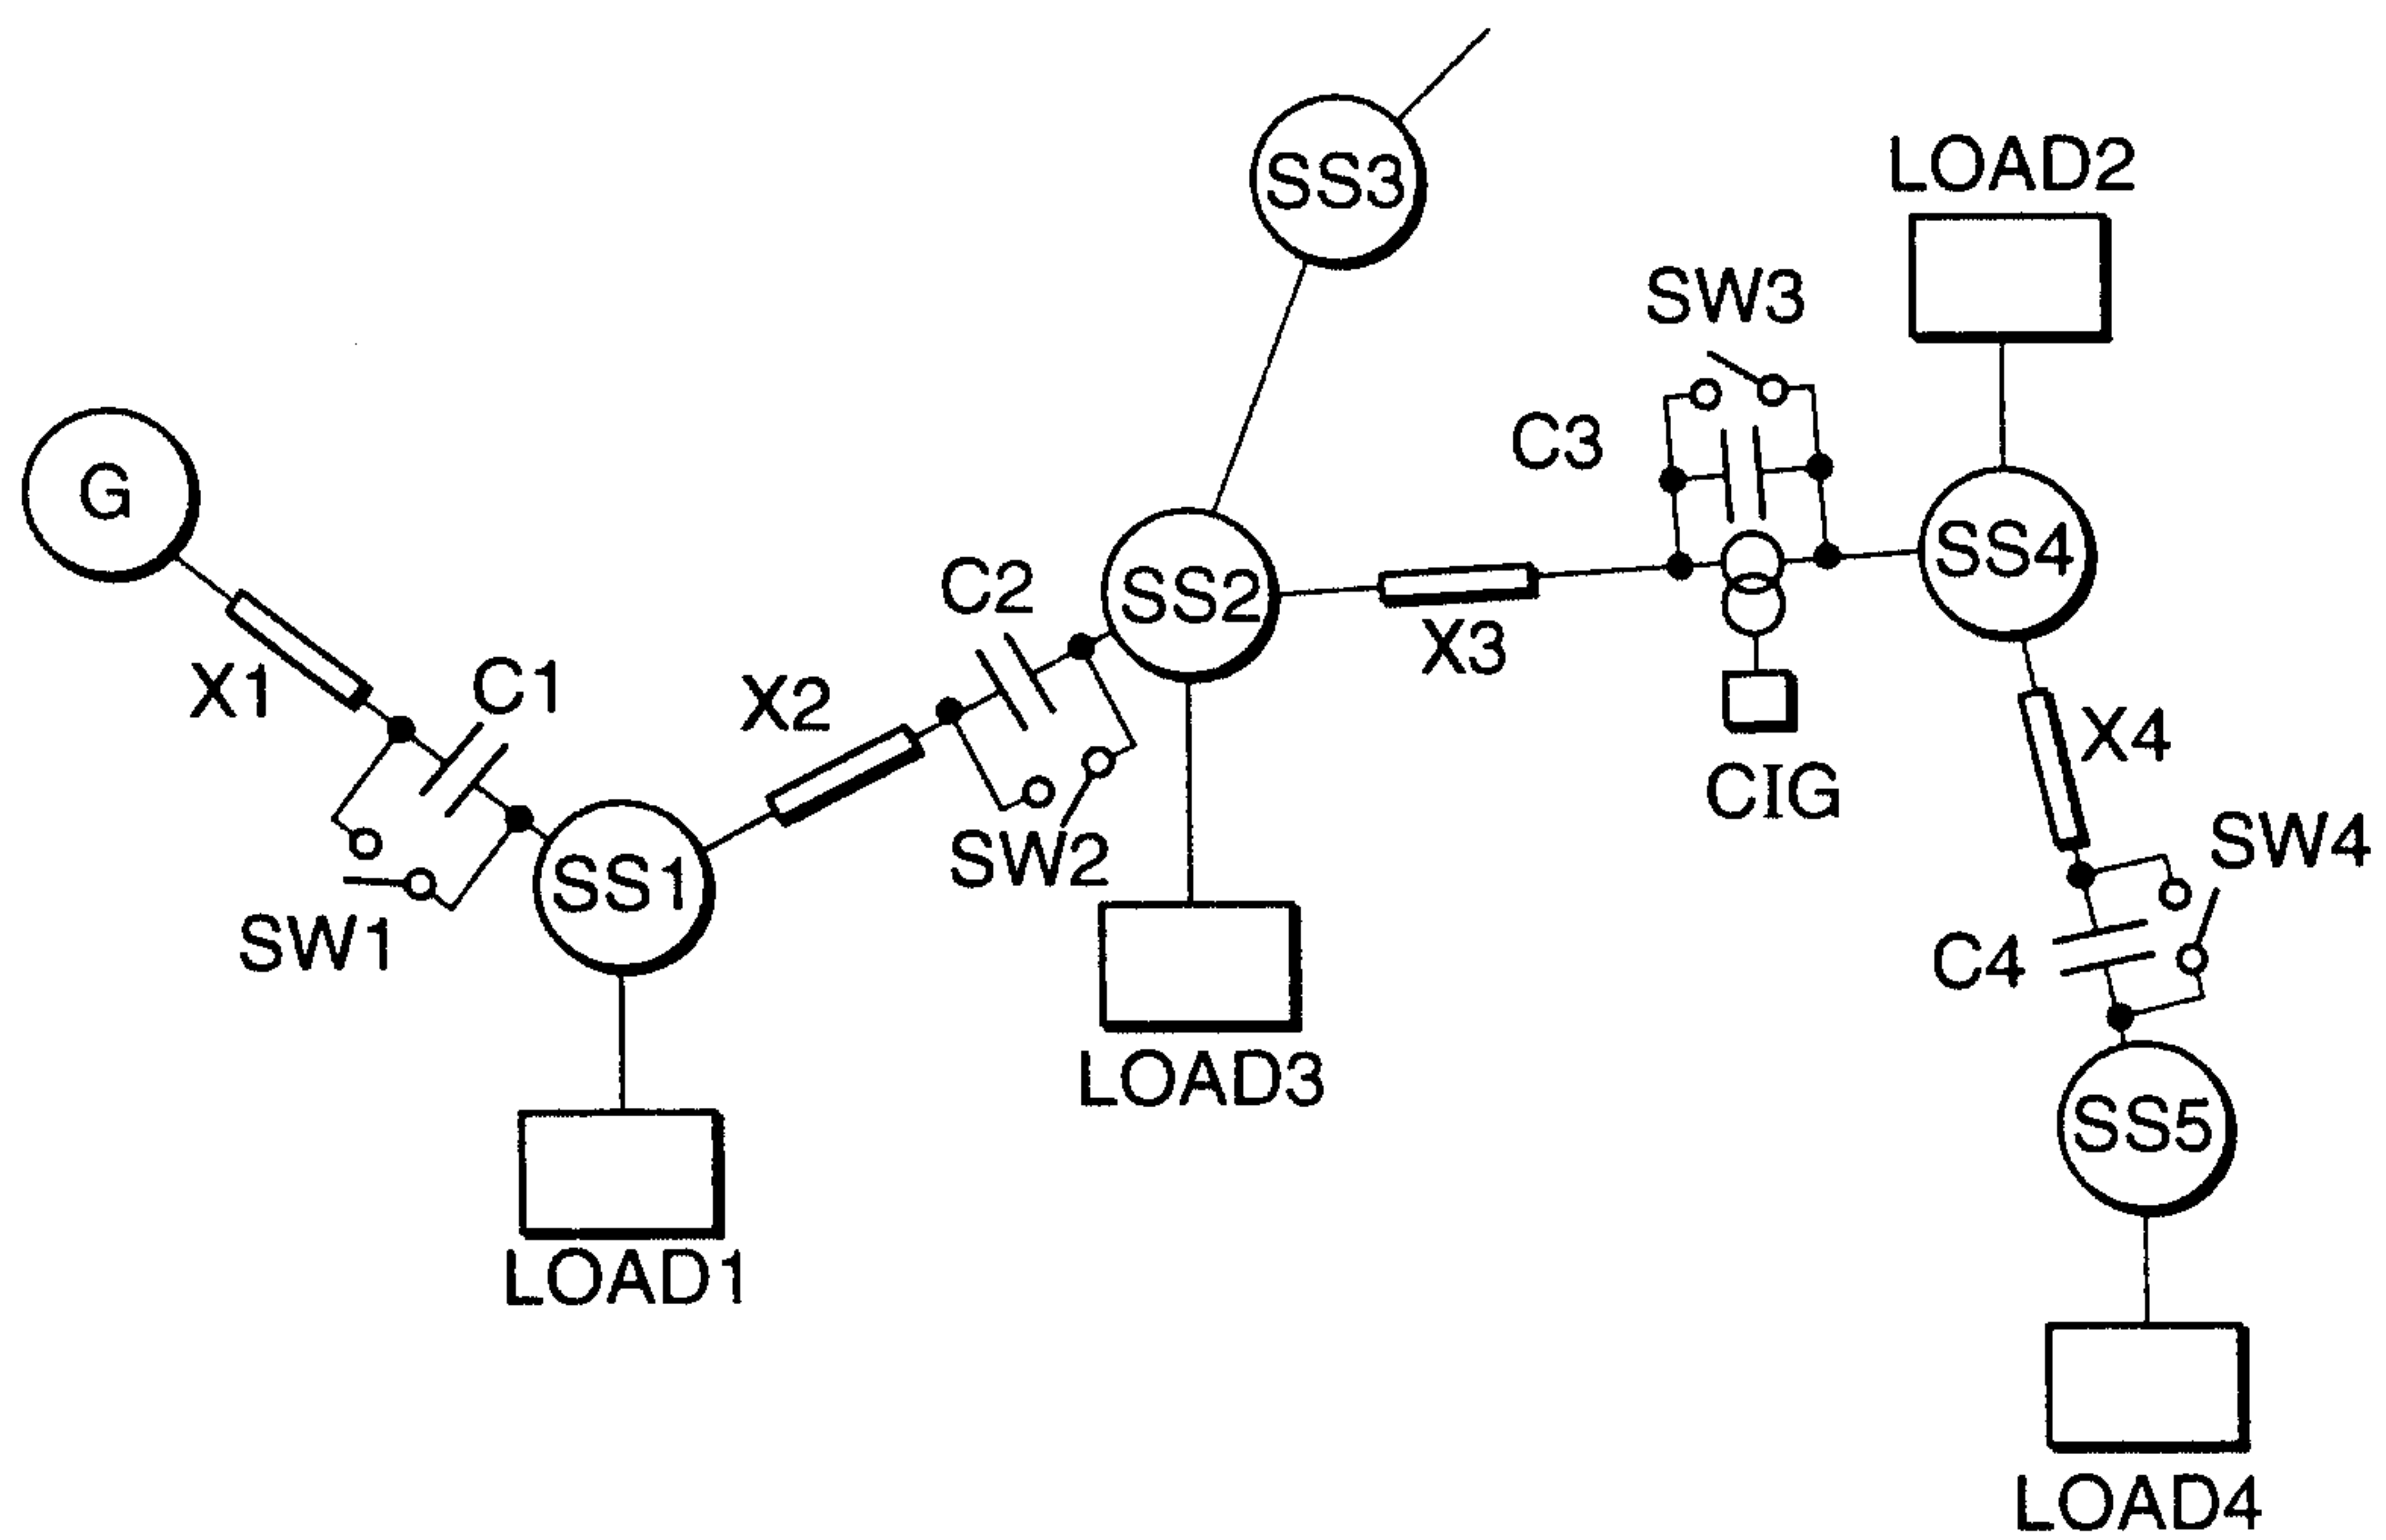


FIG. 34

18/41

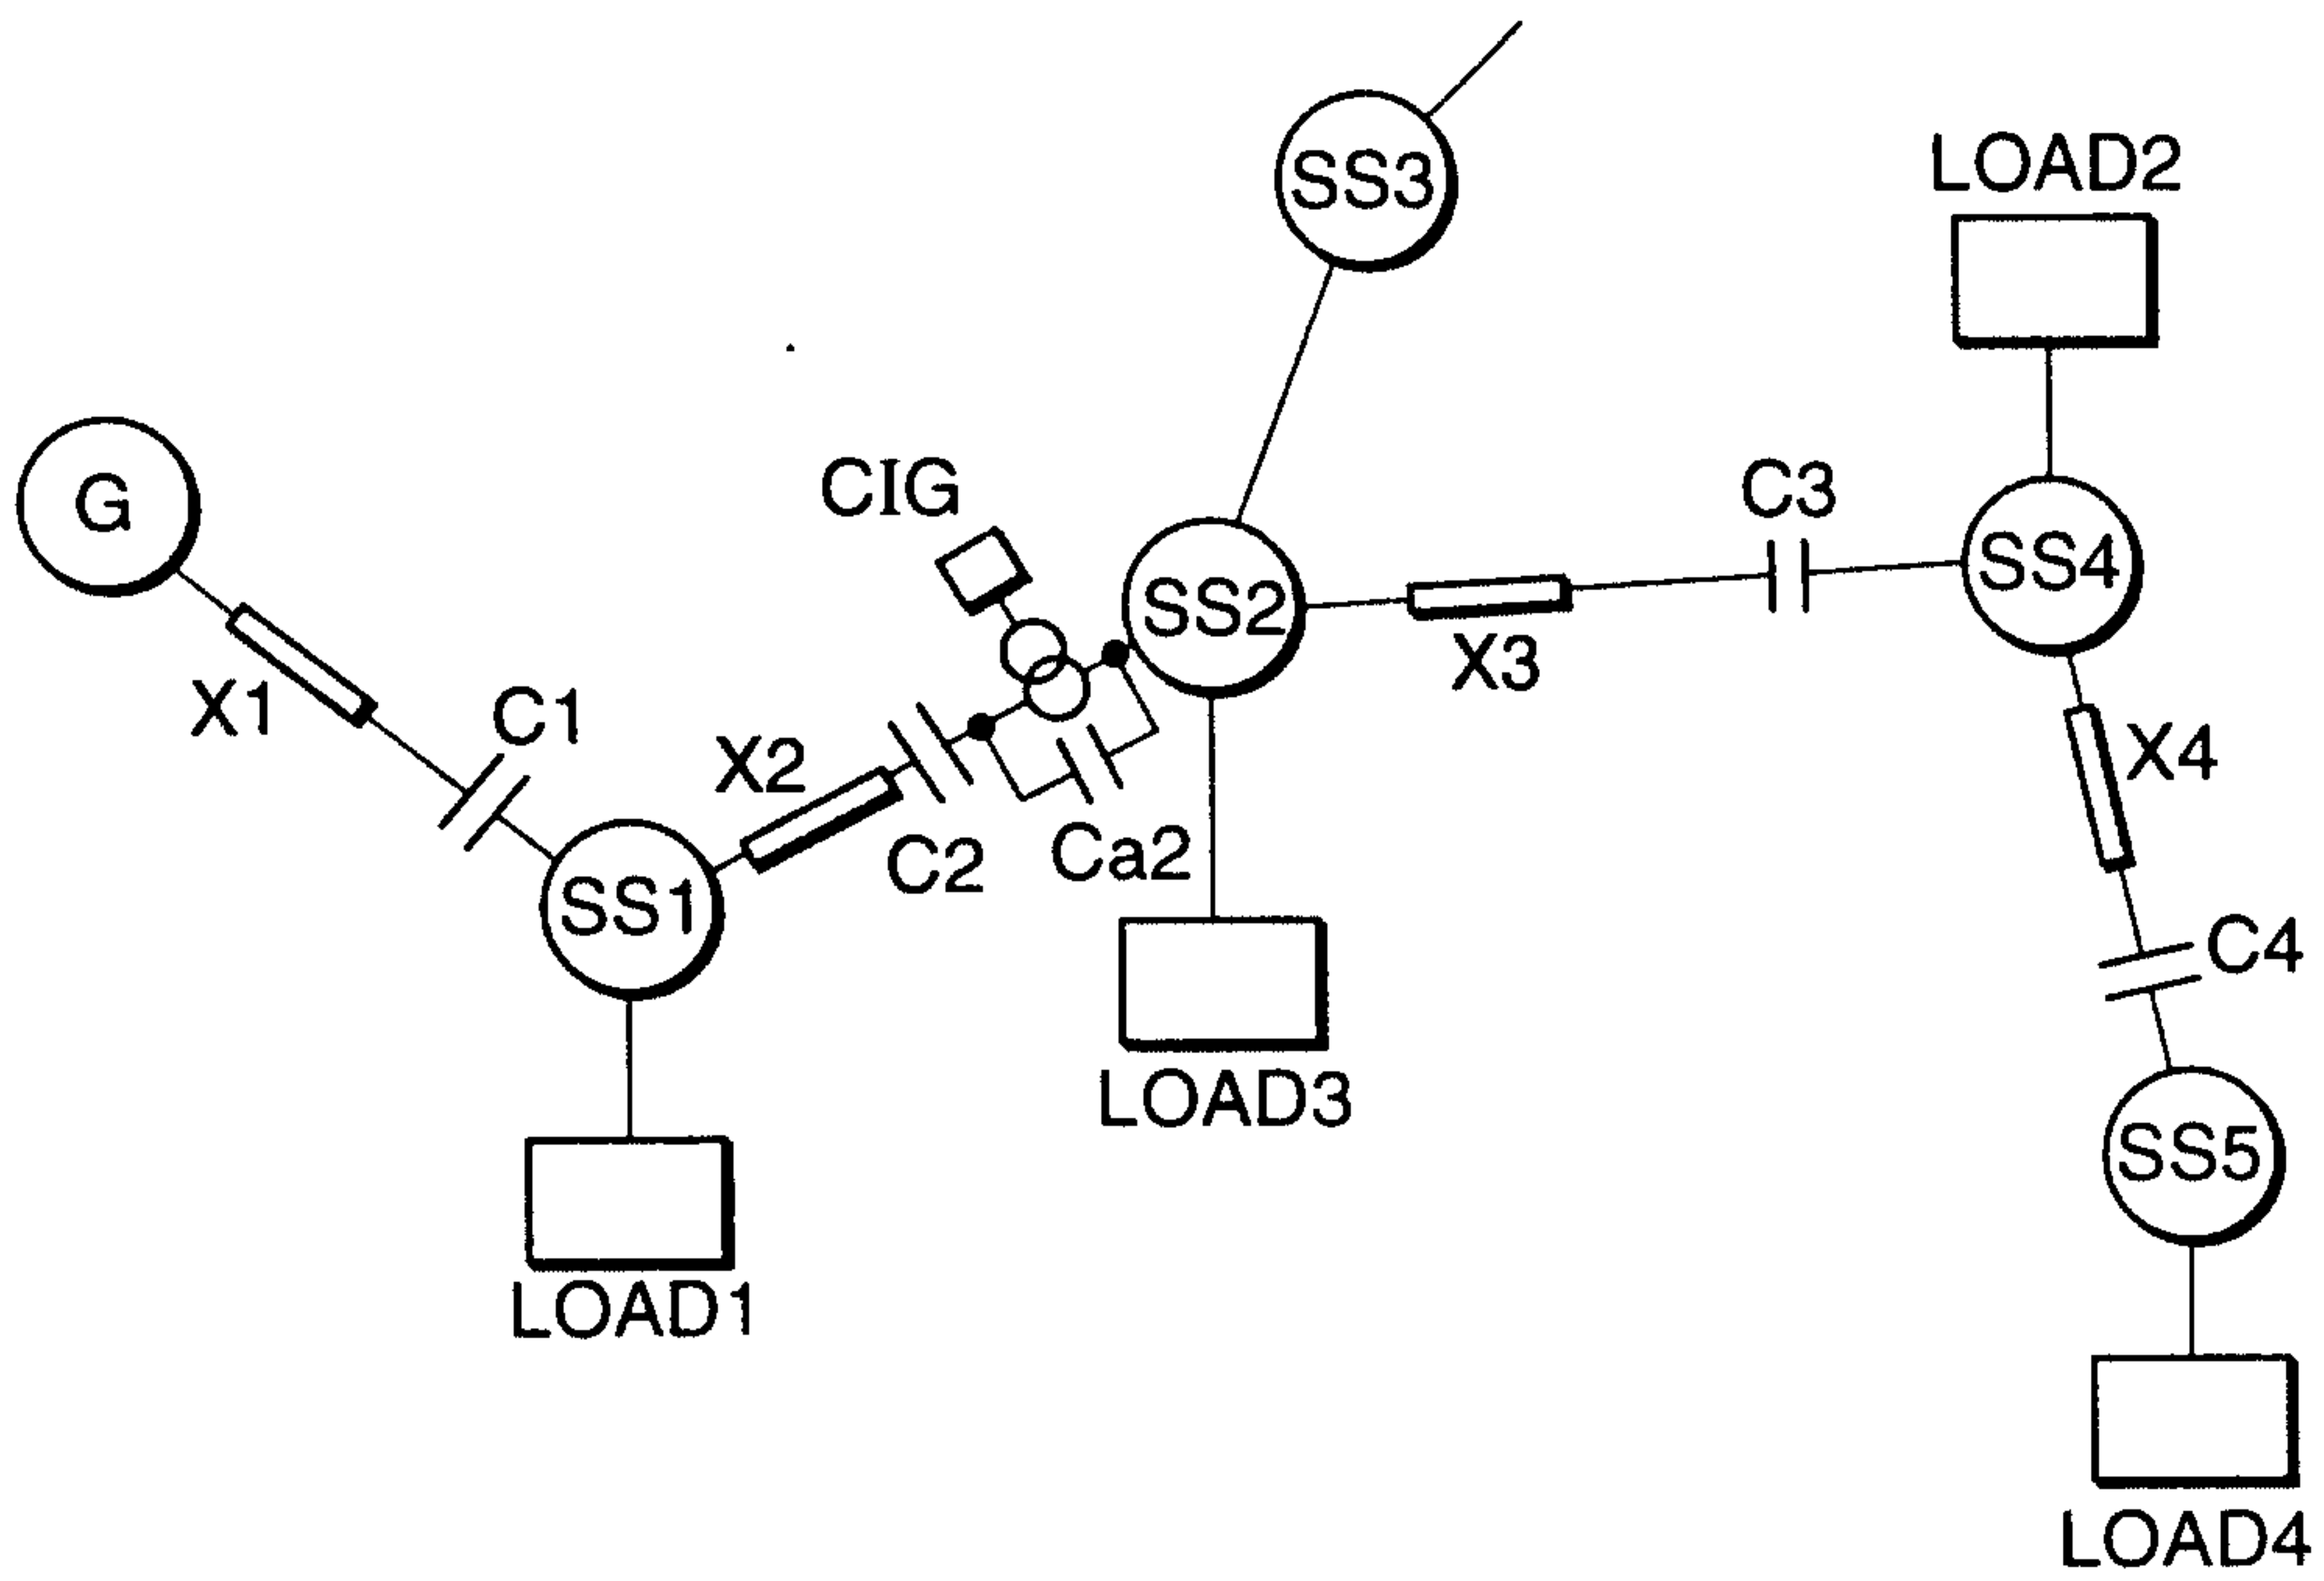


FIG. 35

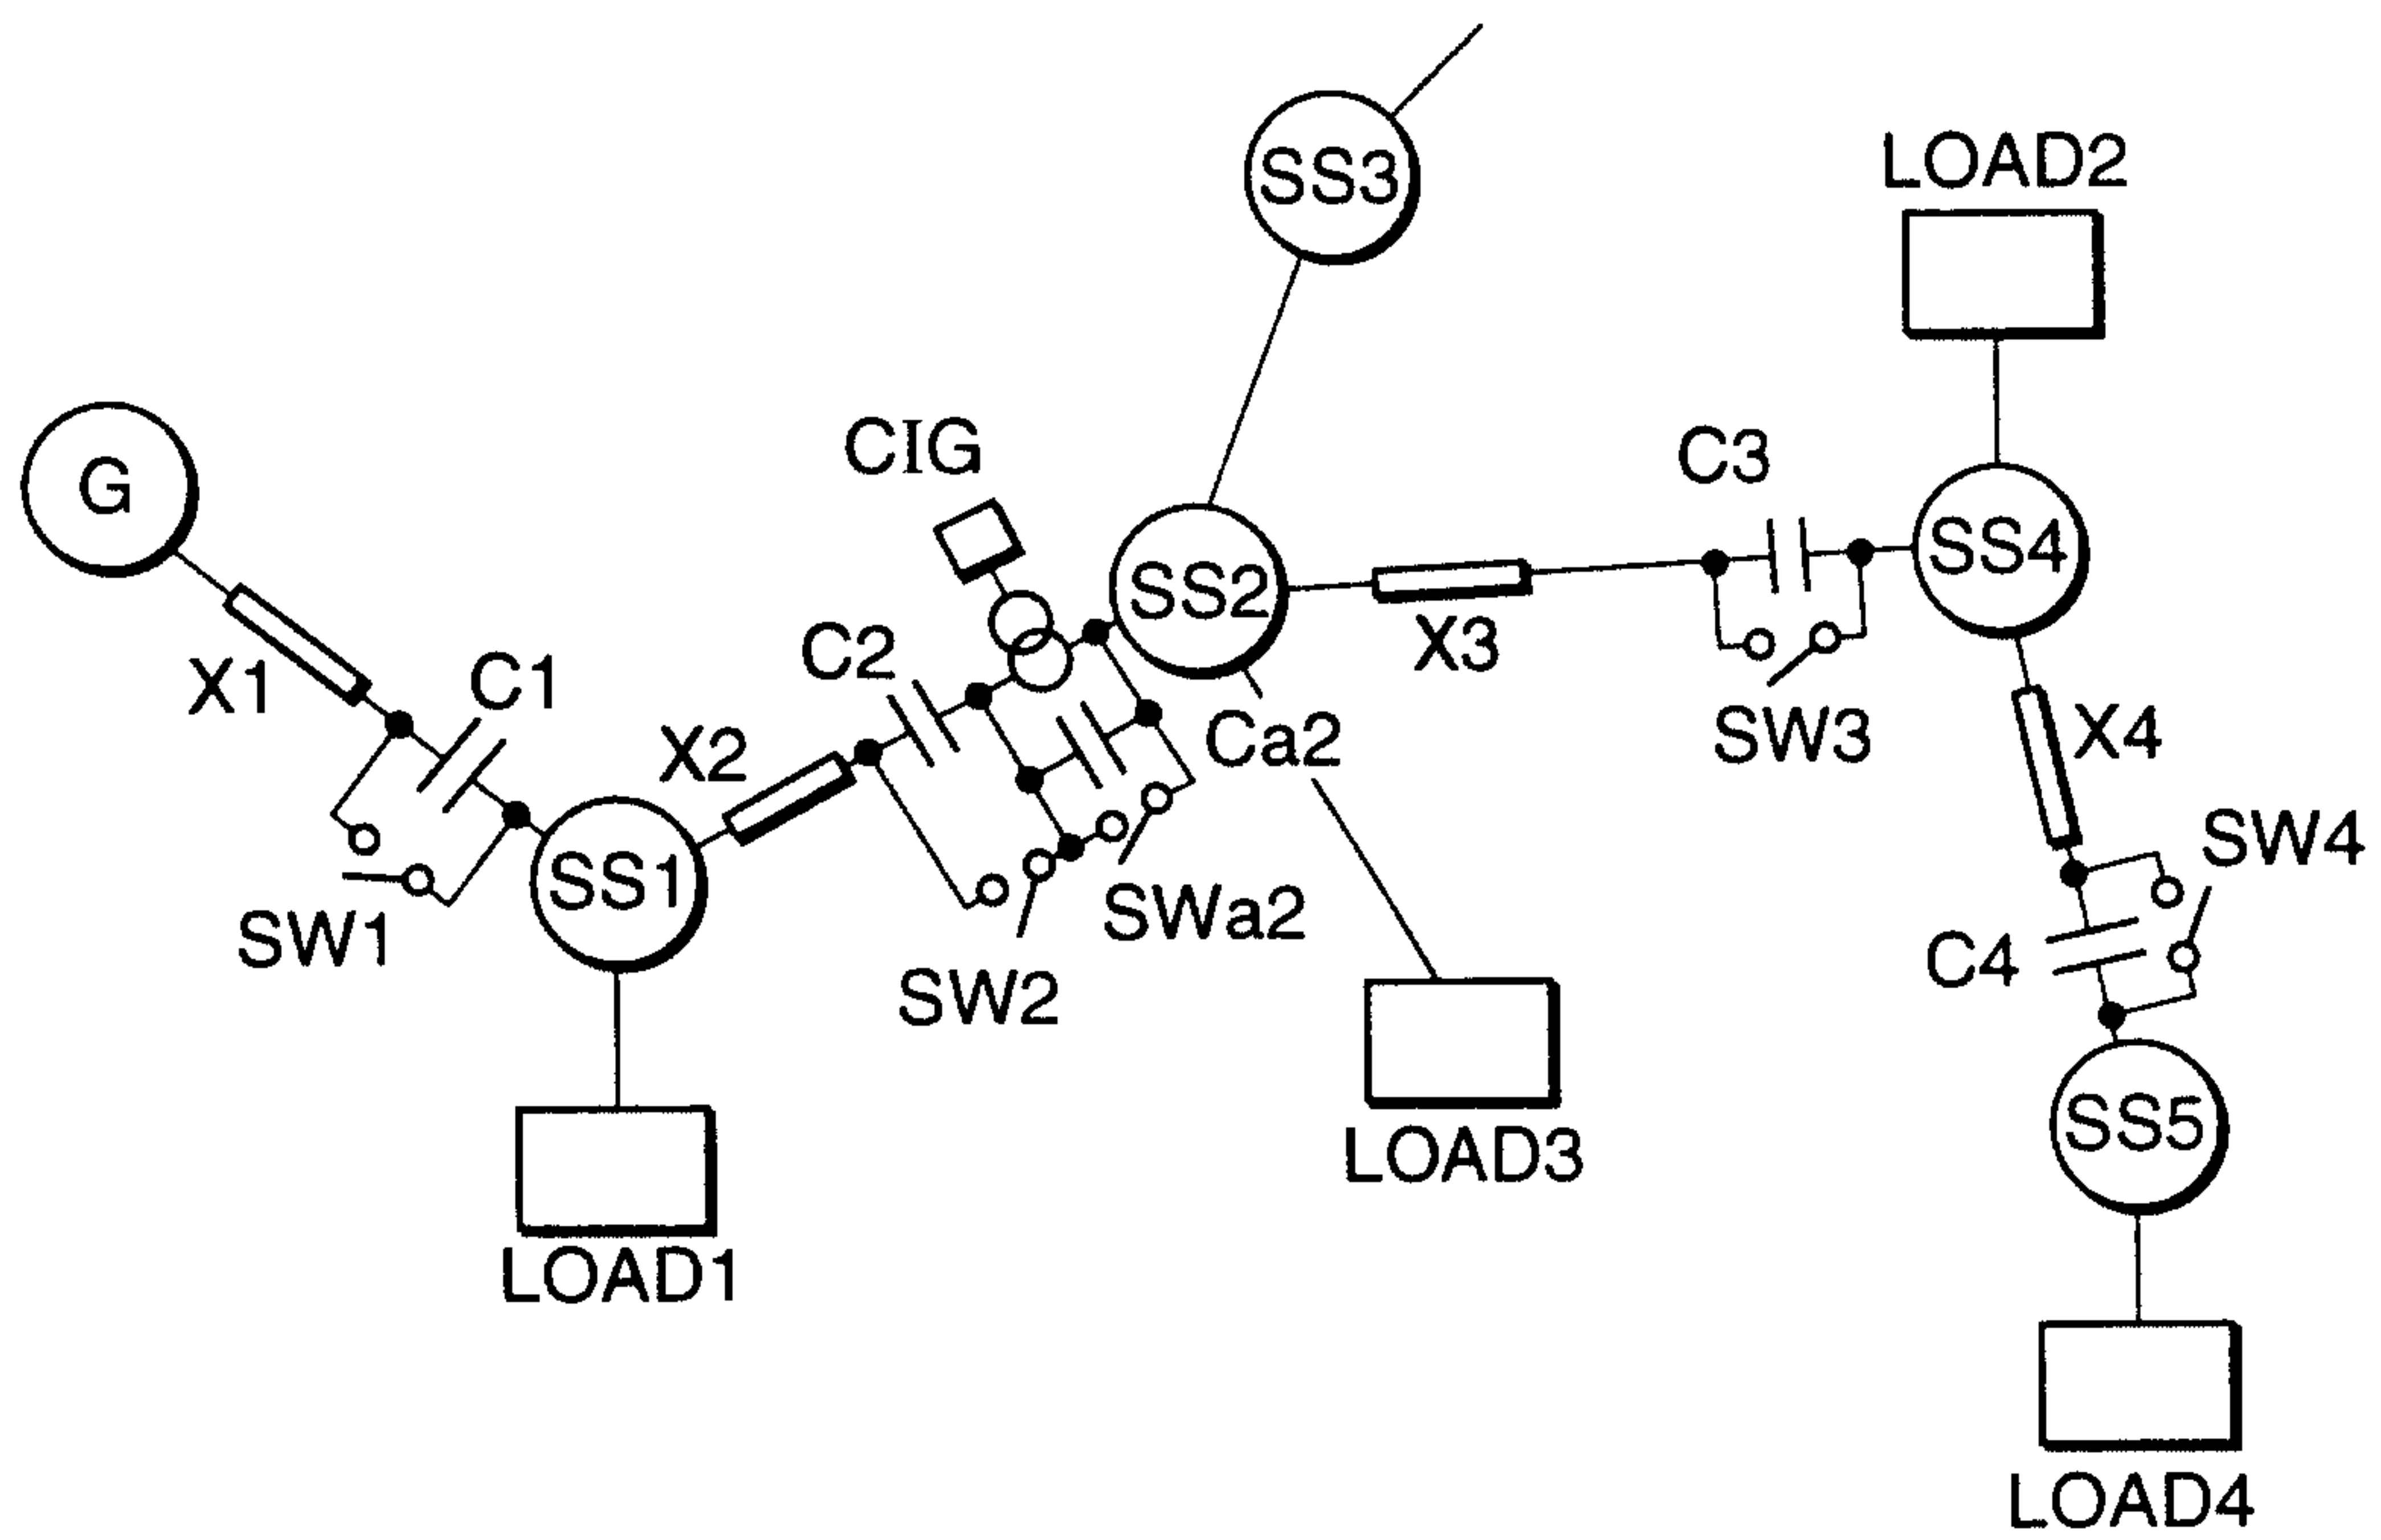


FIG. 36



20/41

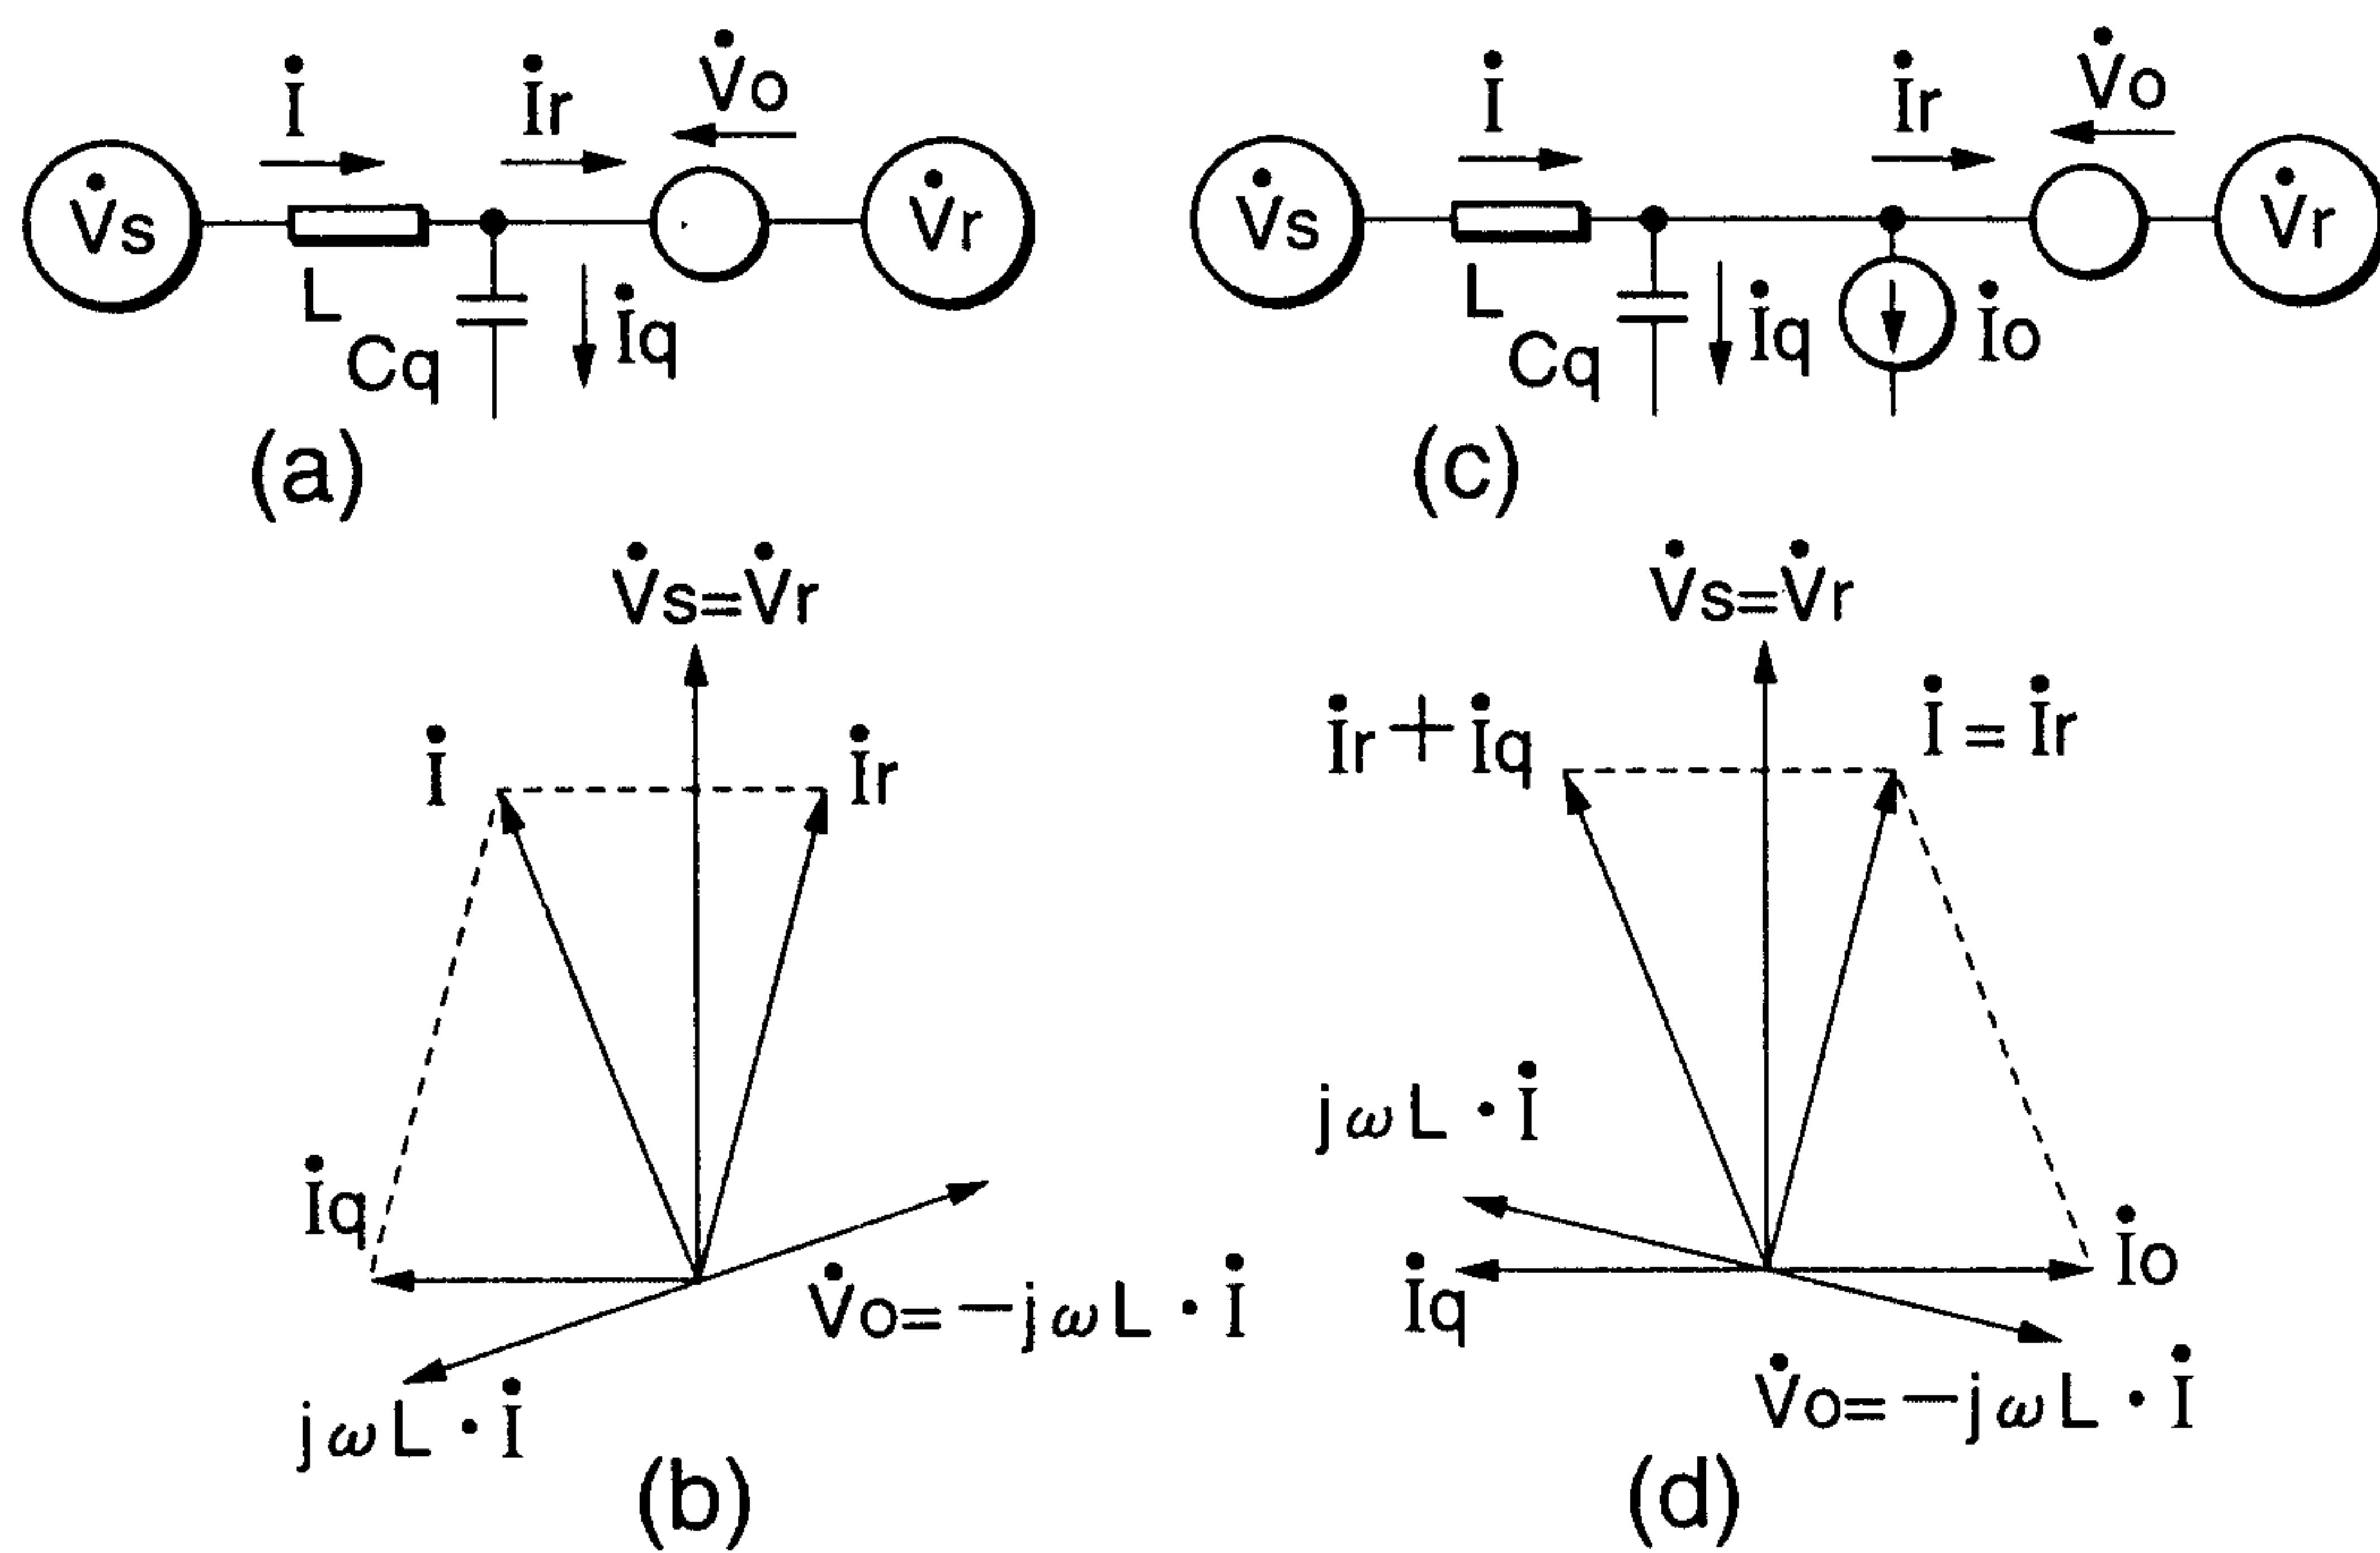


FIG. 39

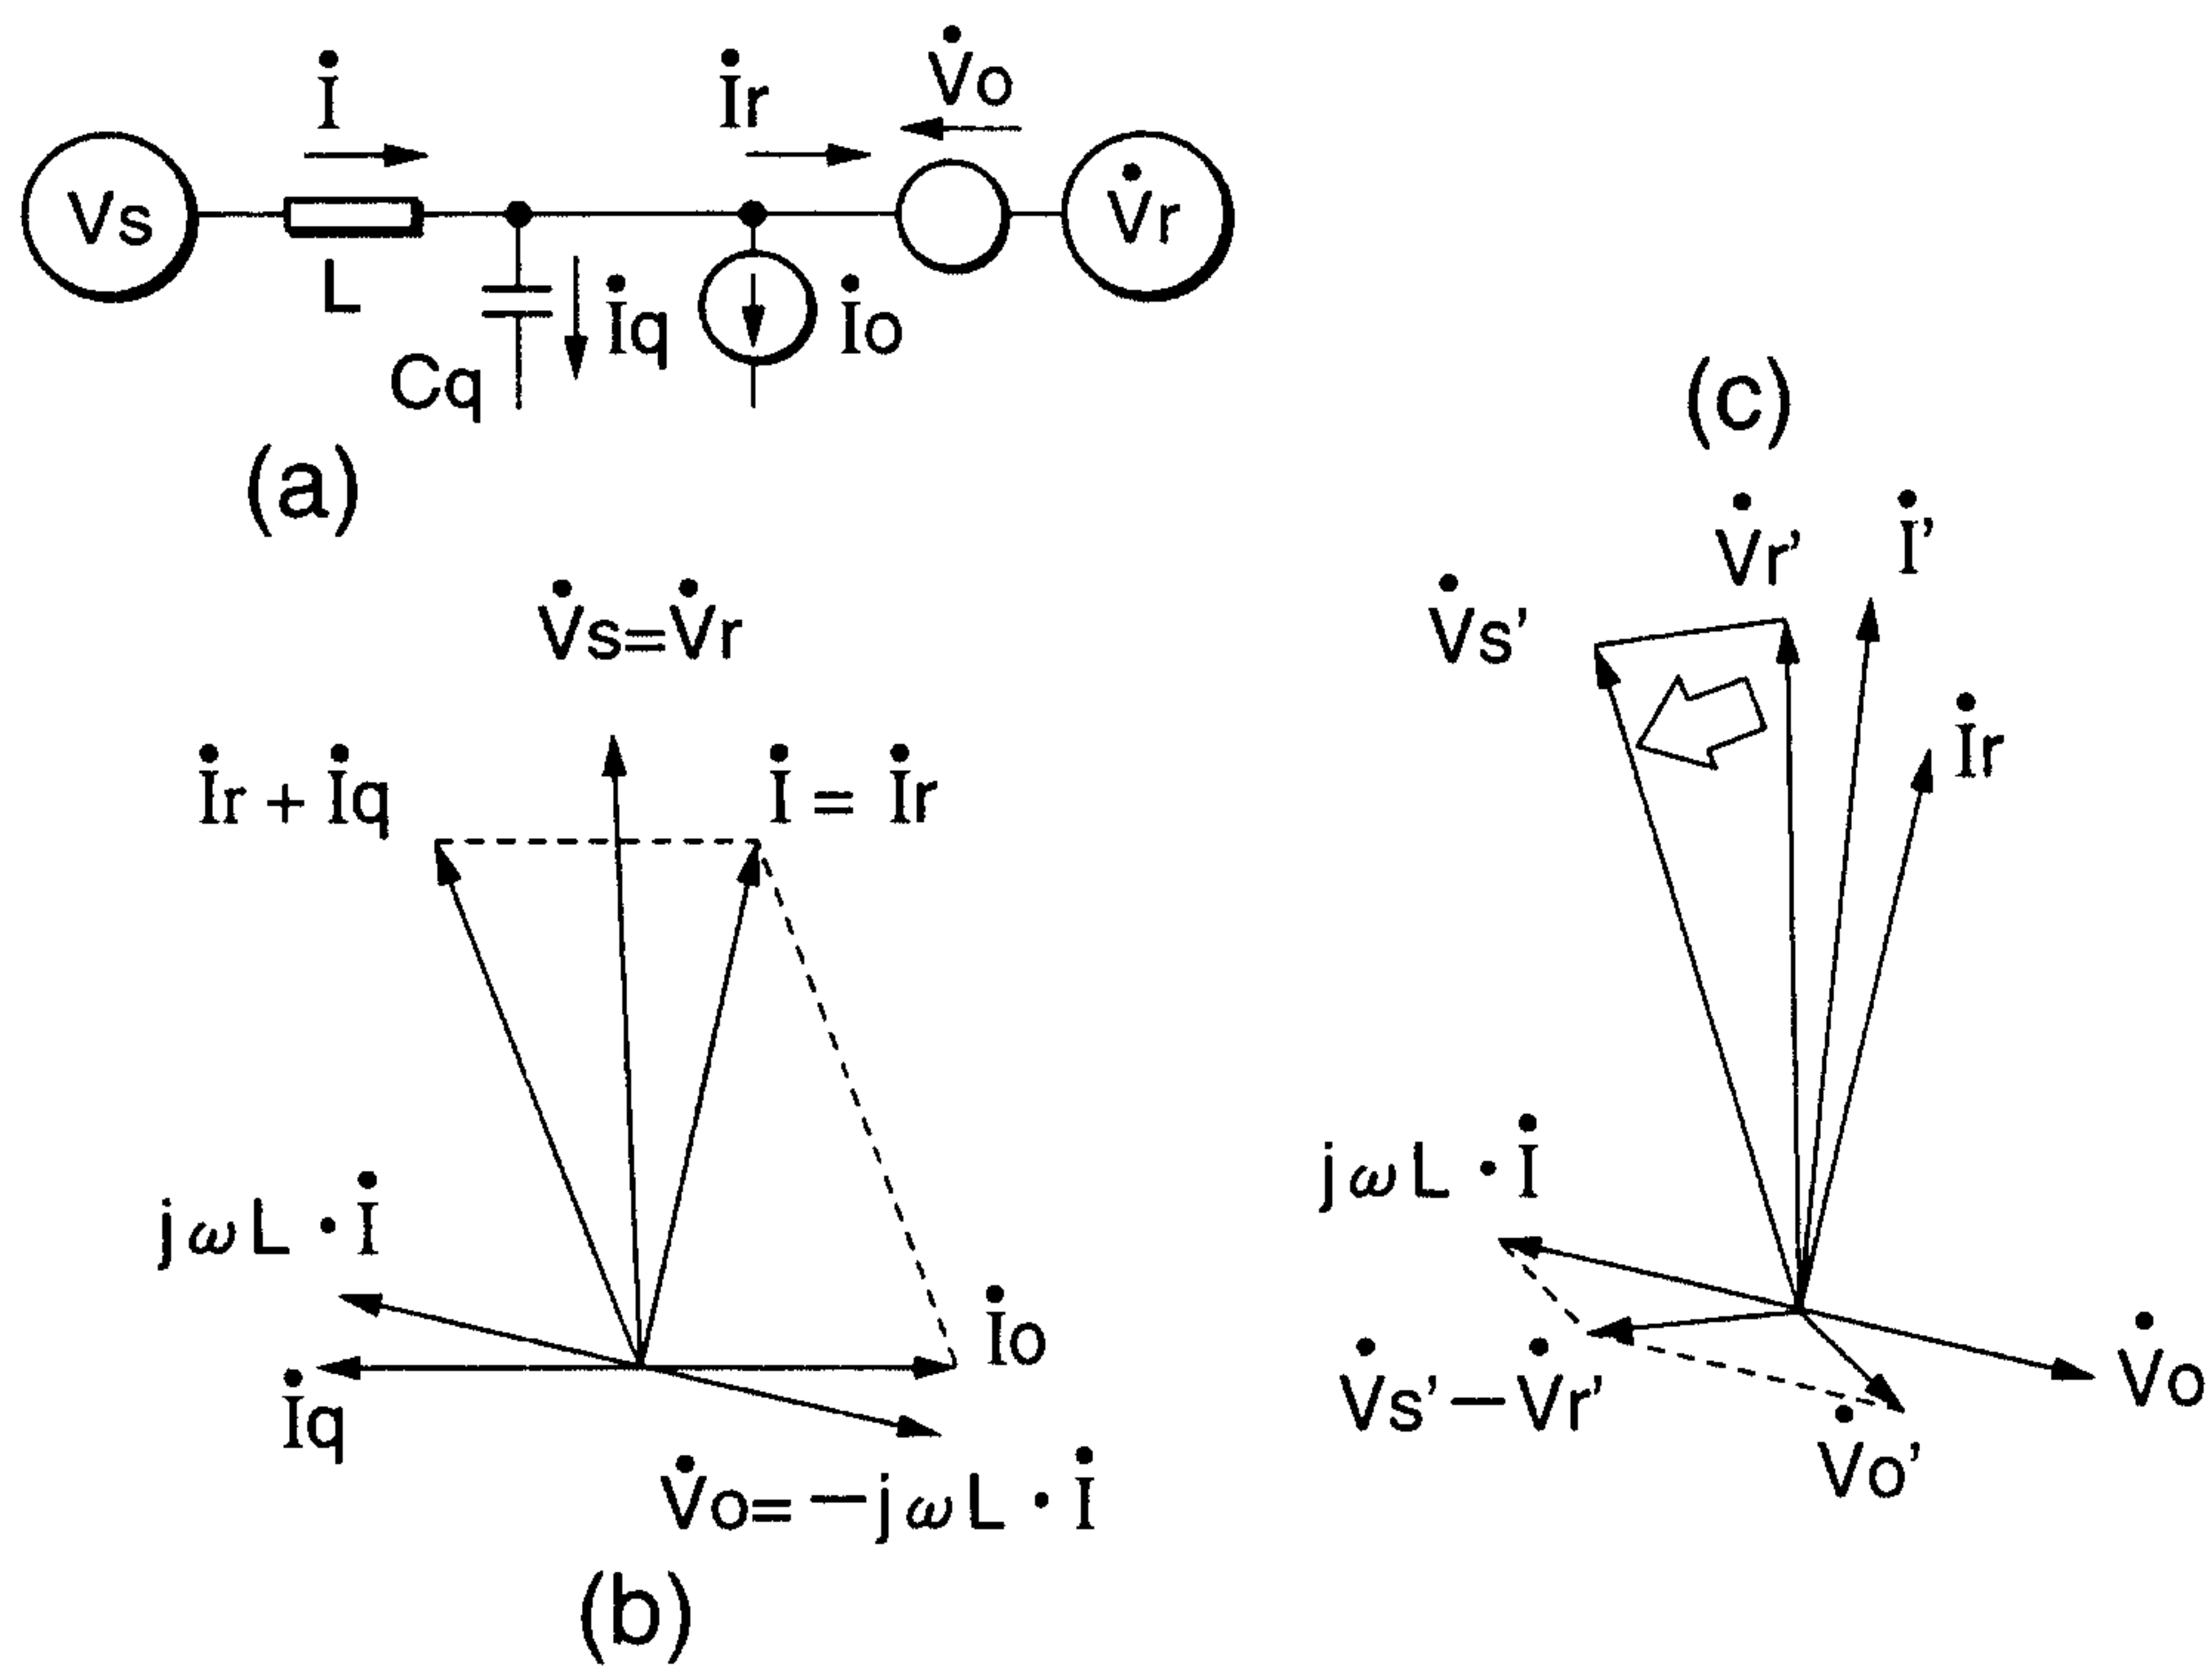


FIG. 40

21/41

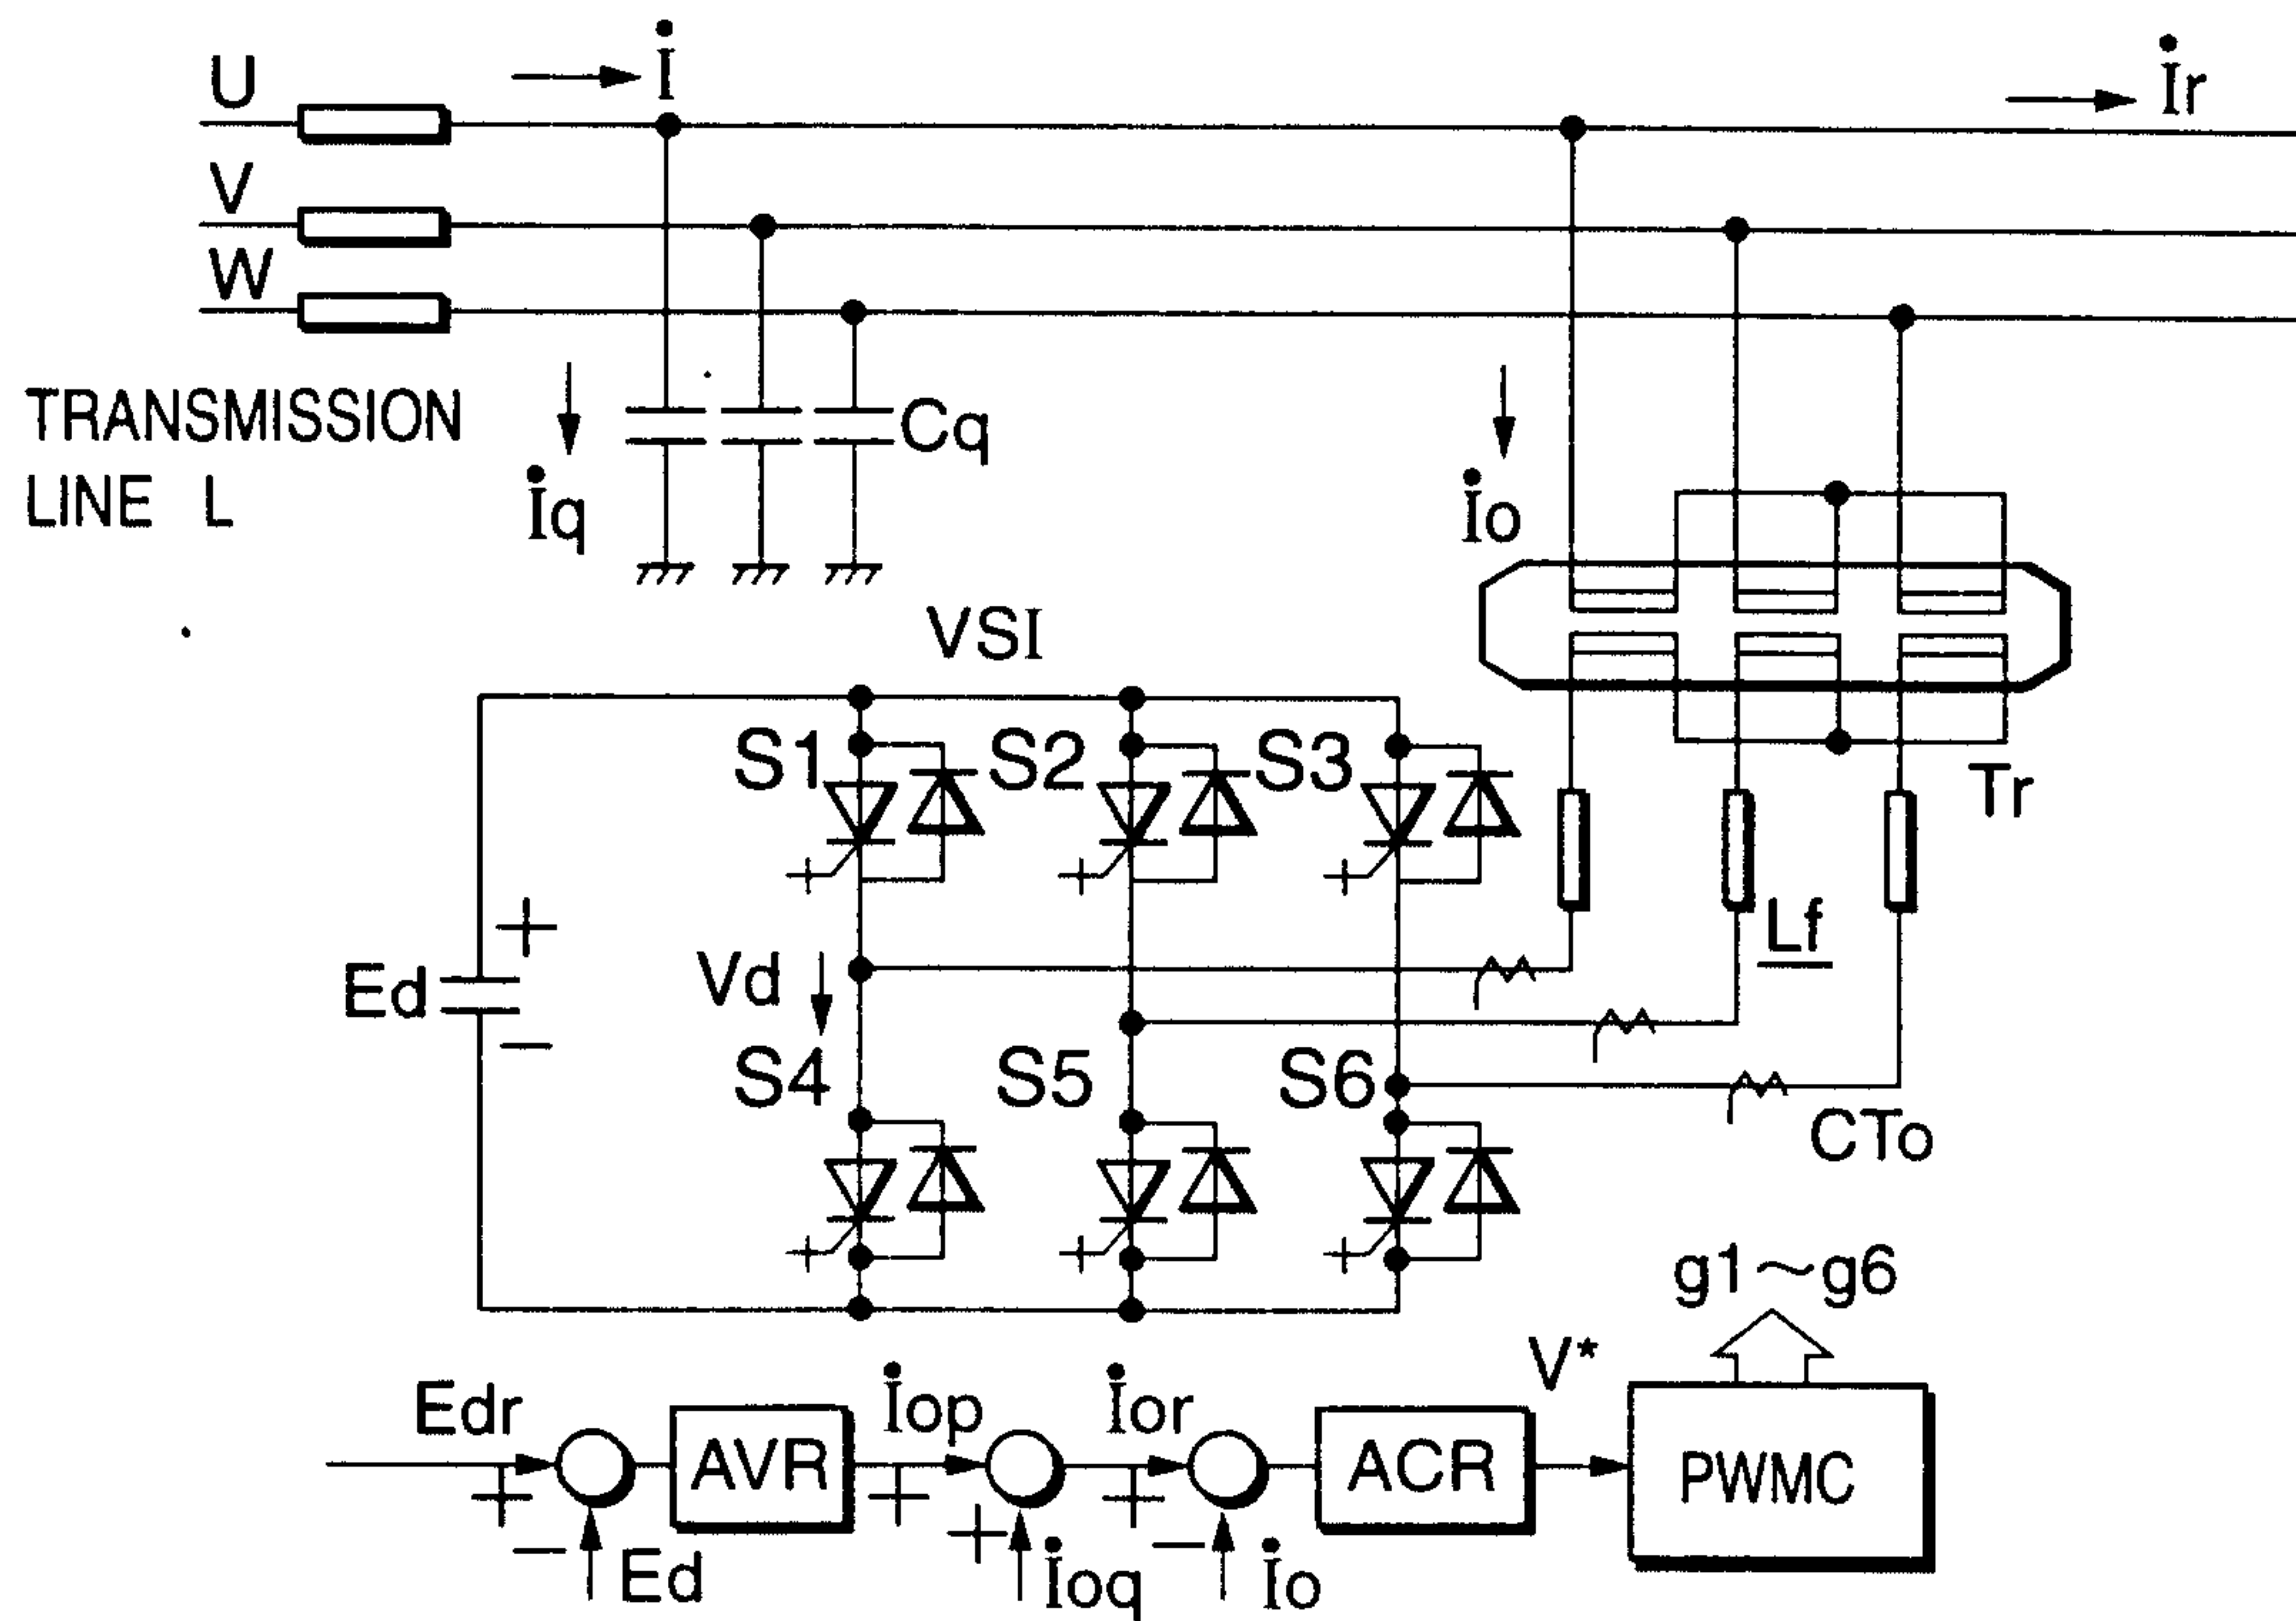


FIG. 41

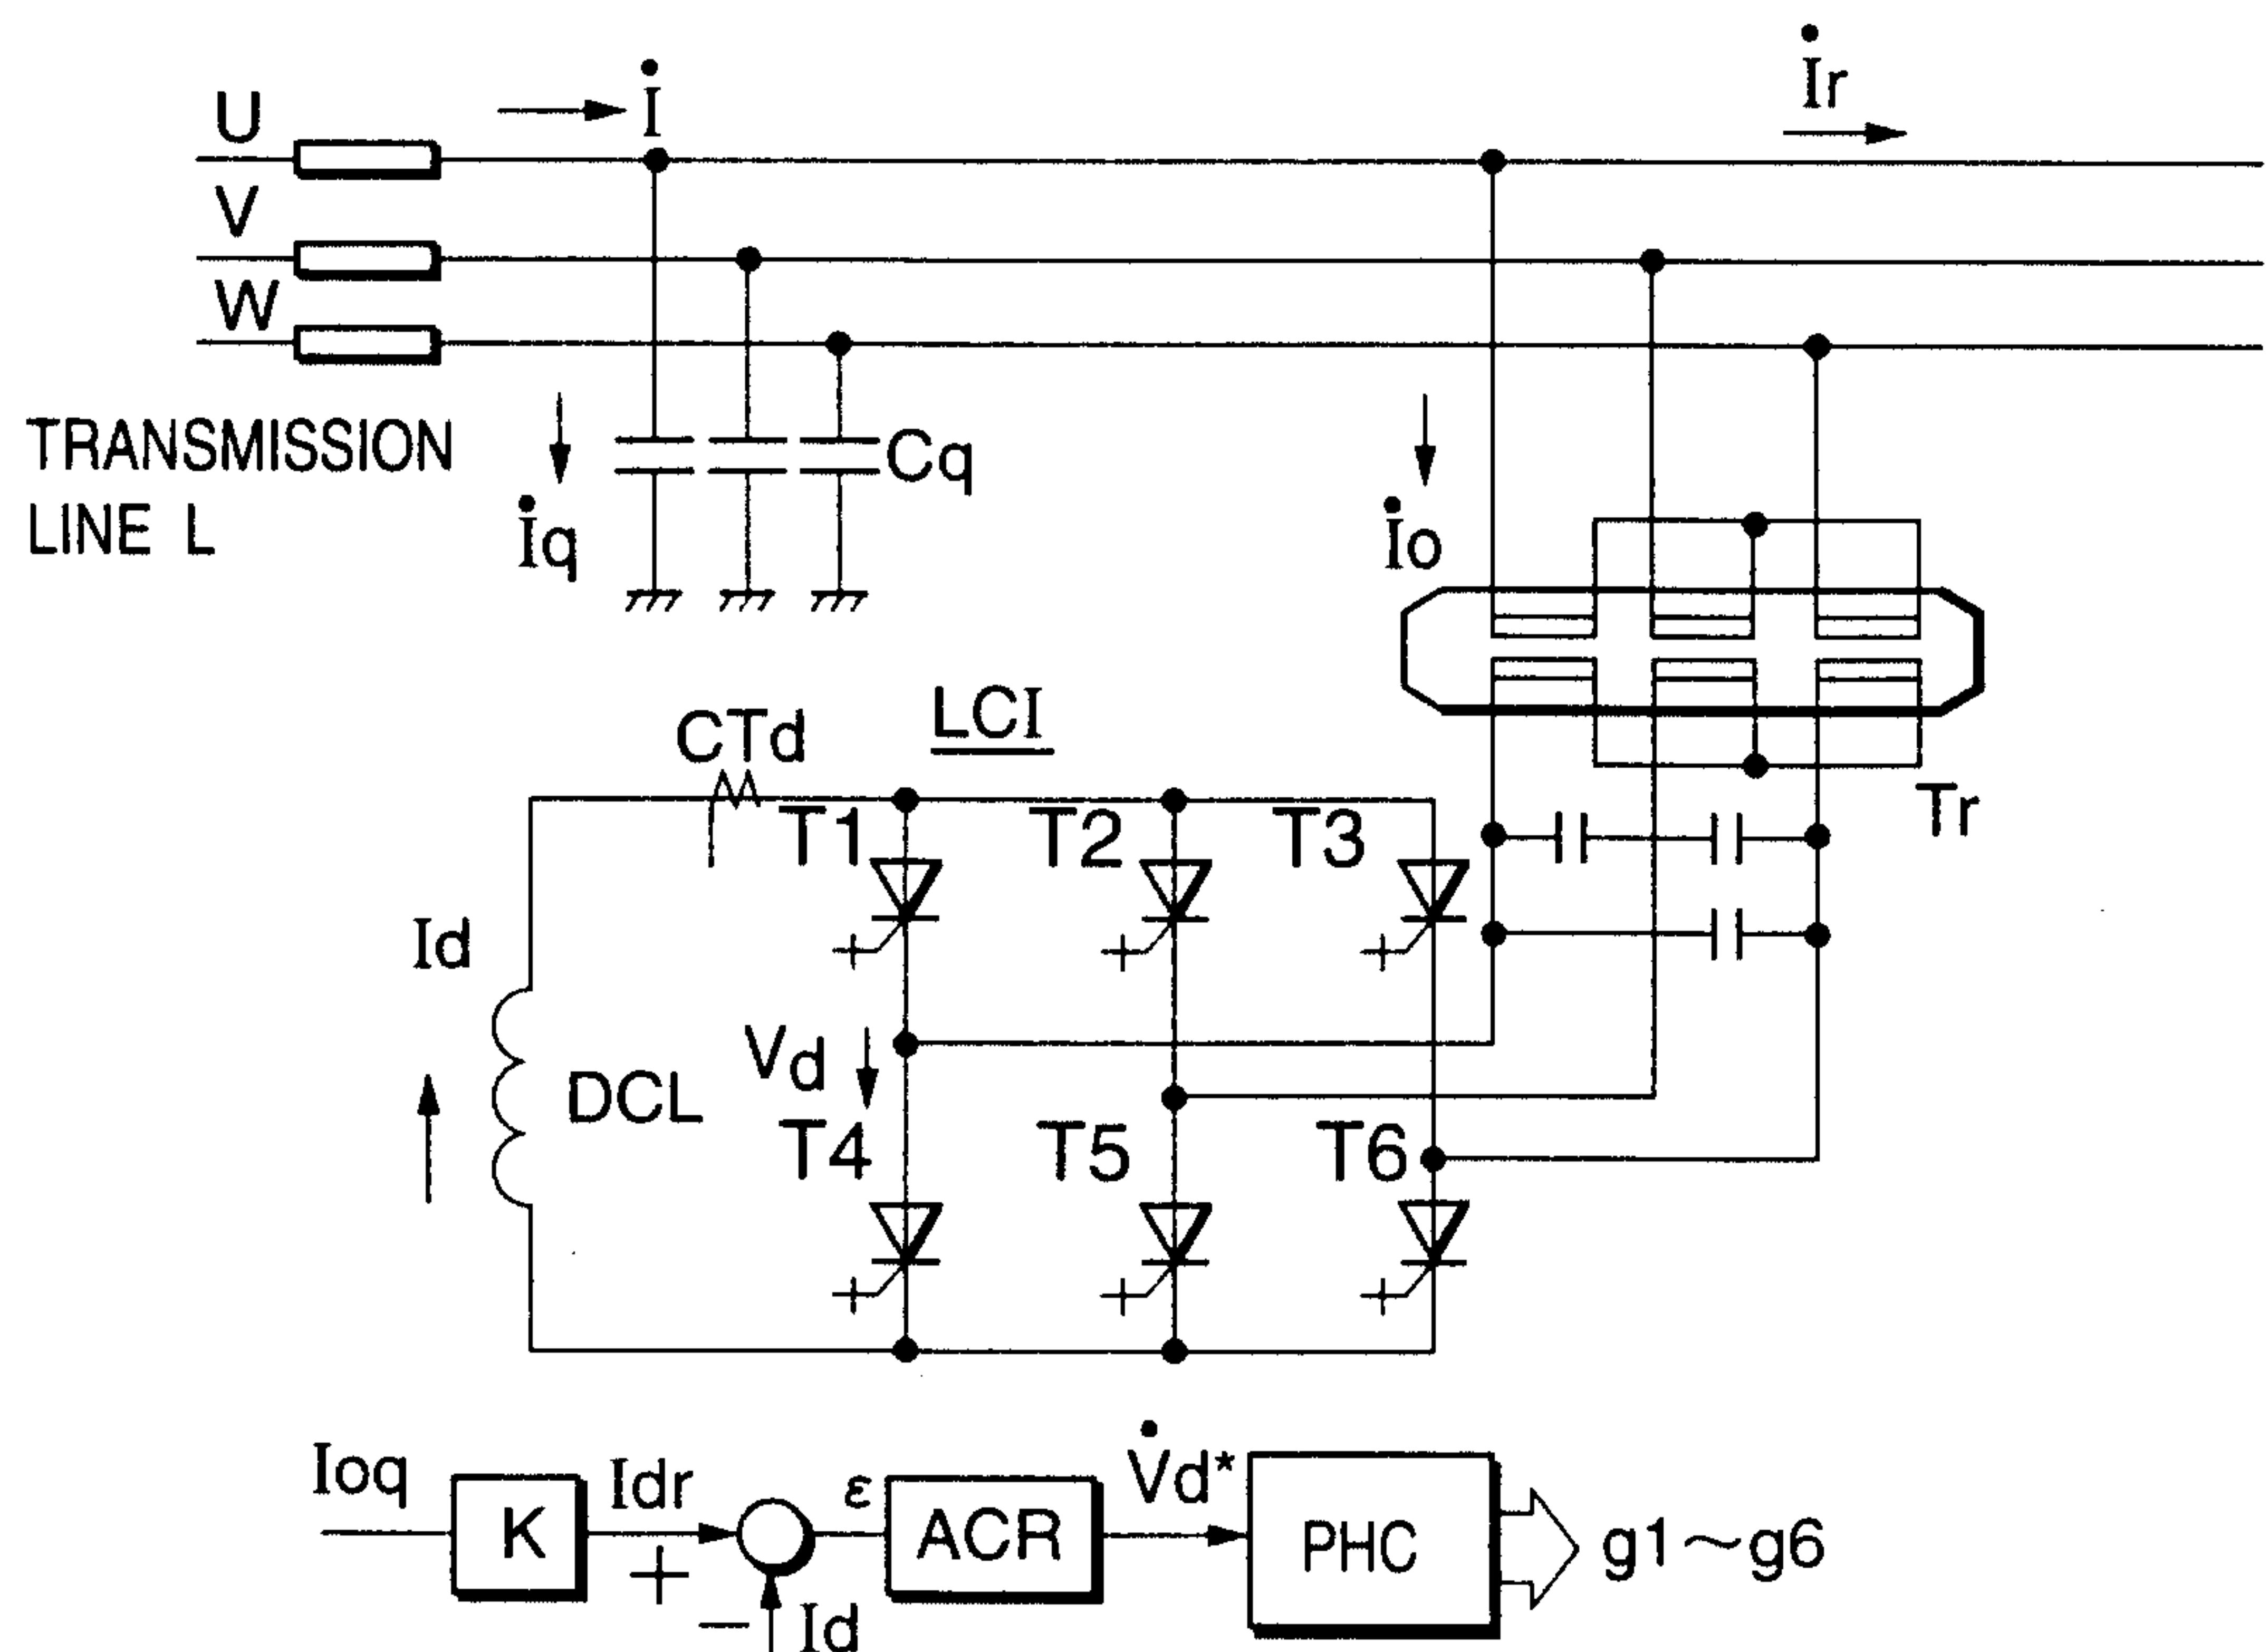


FIG. 42

22/41

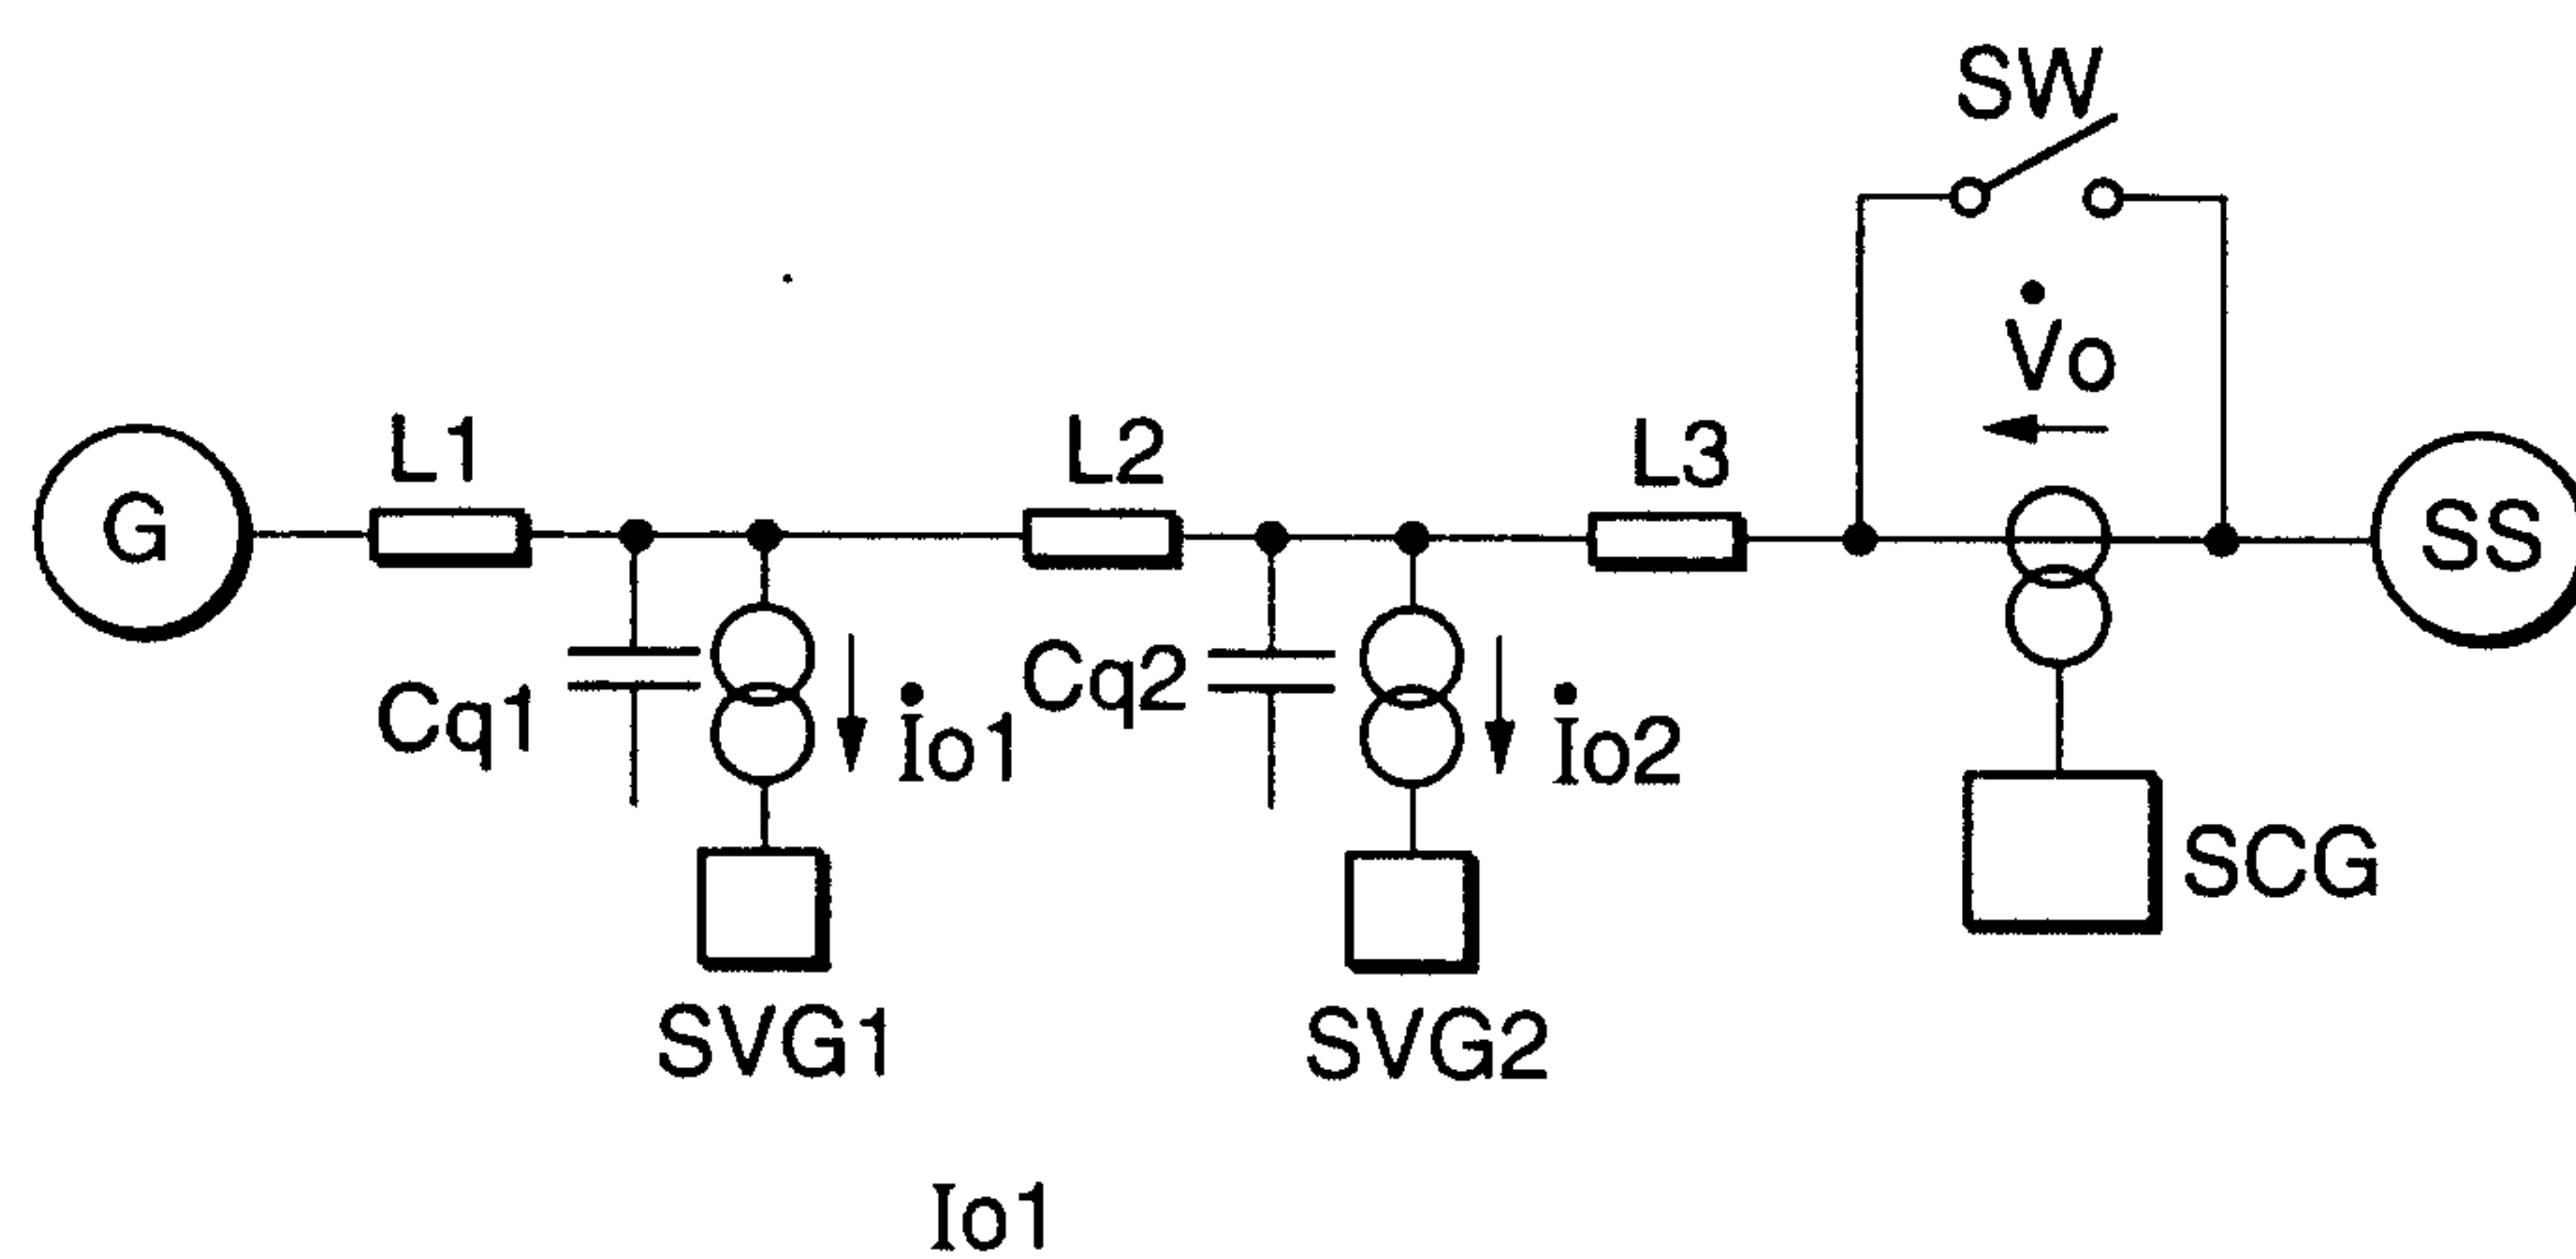


FIG. 43

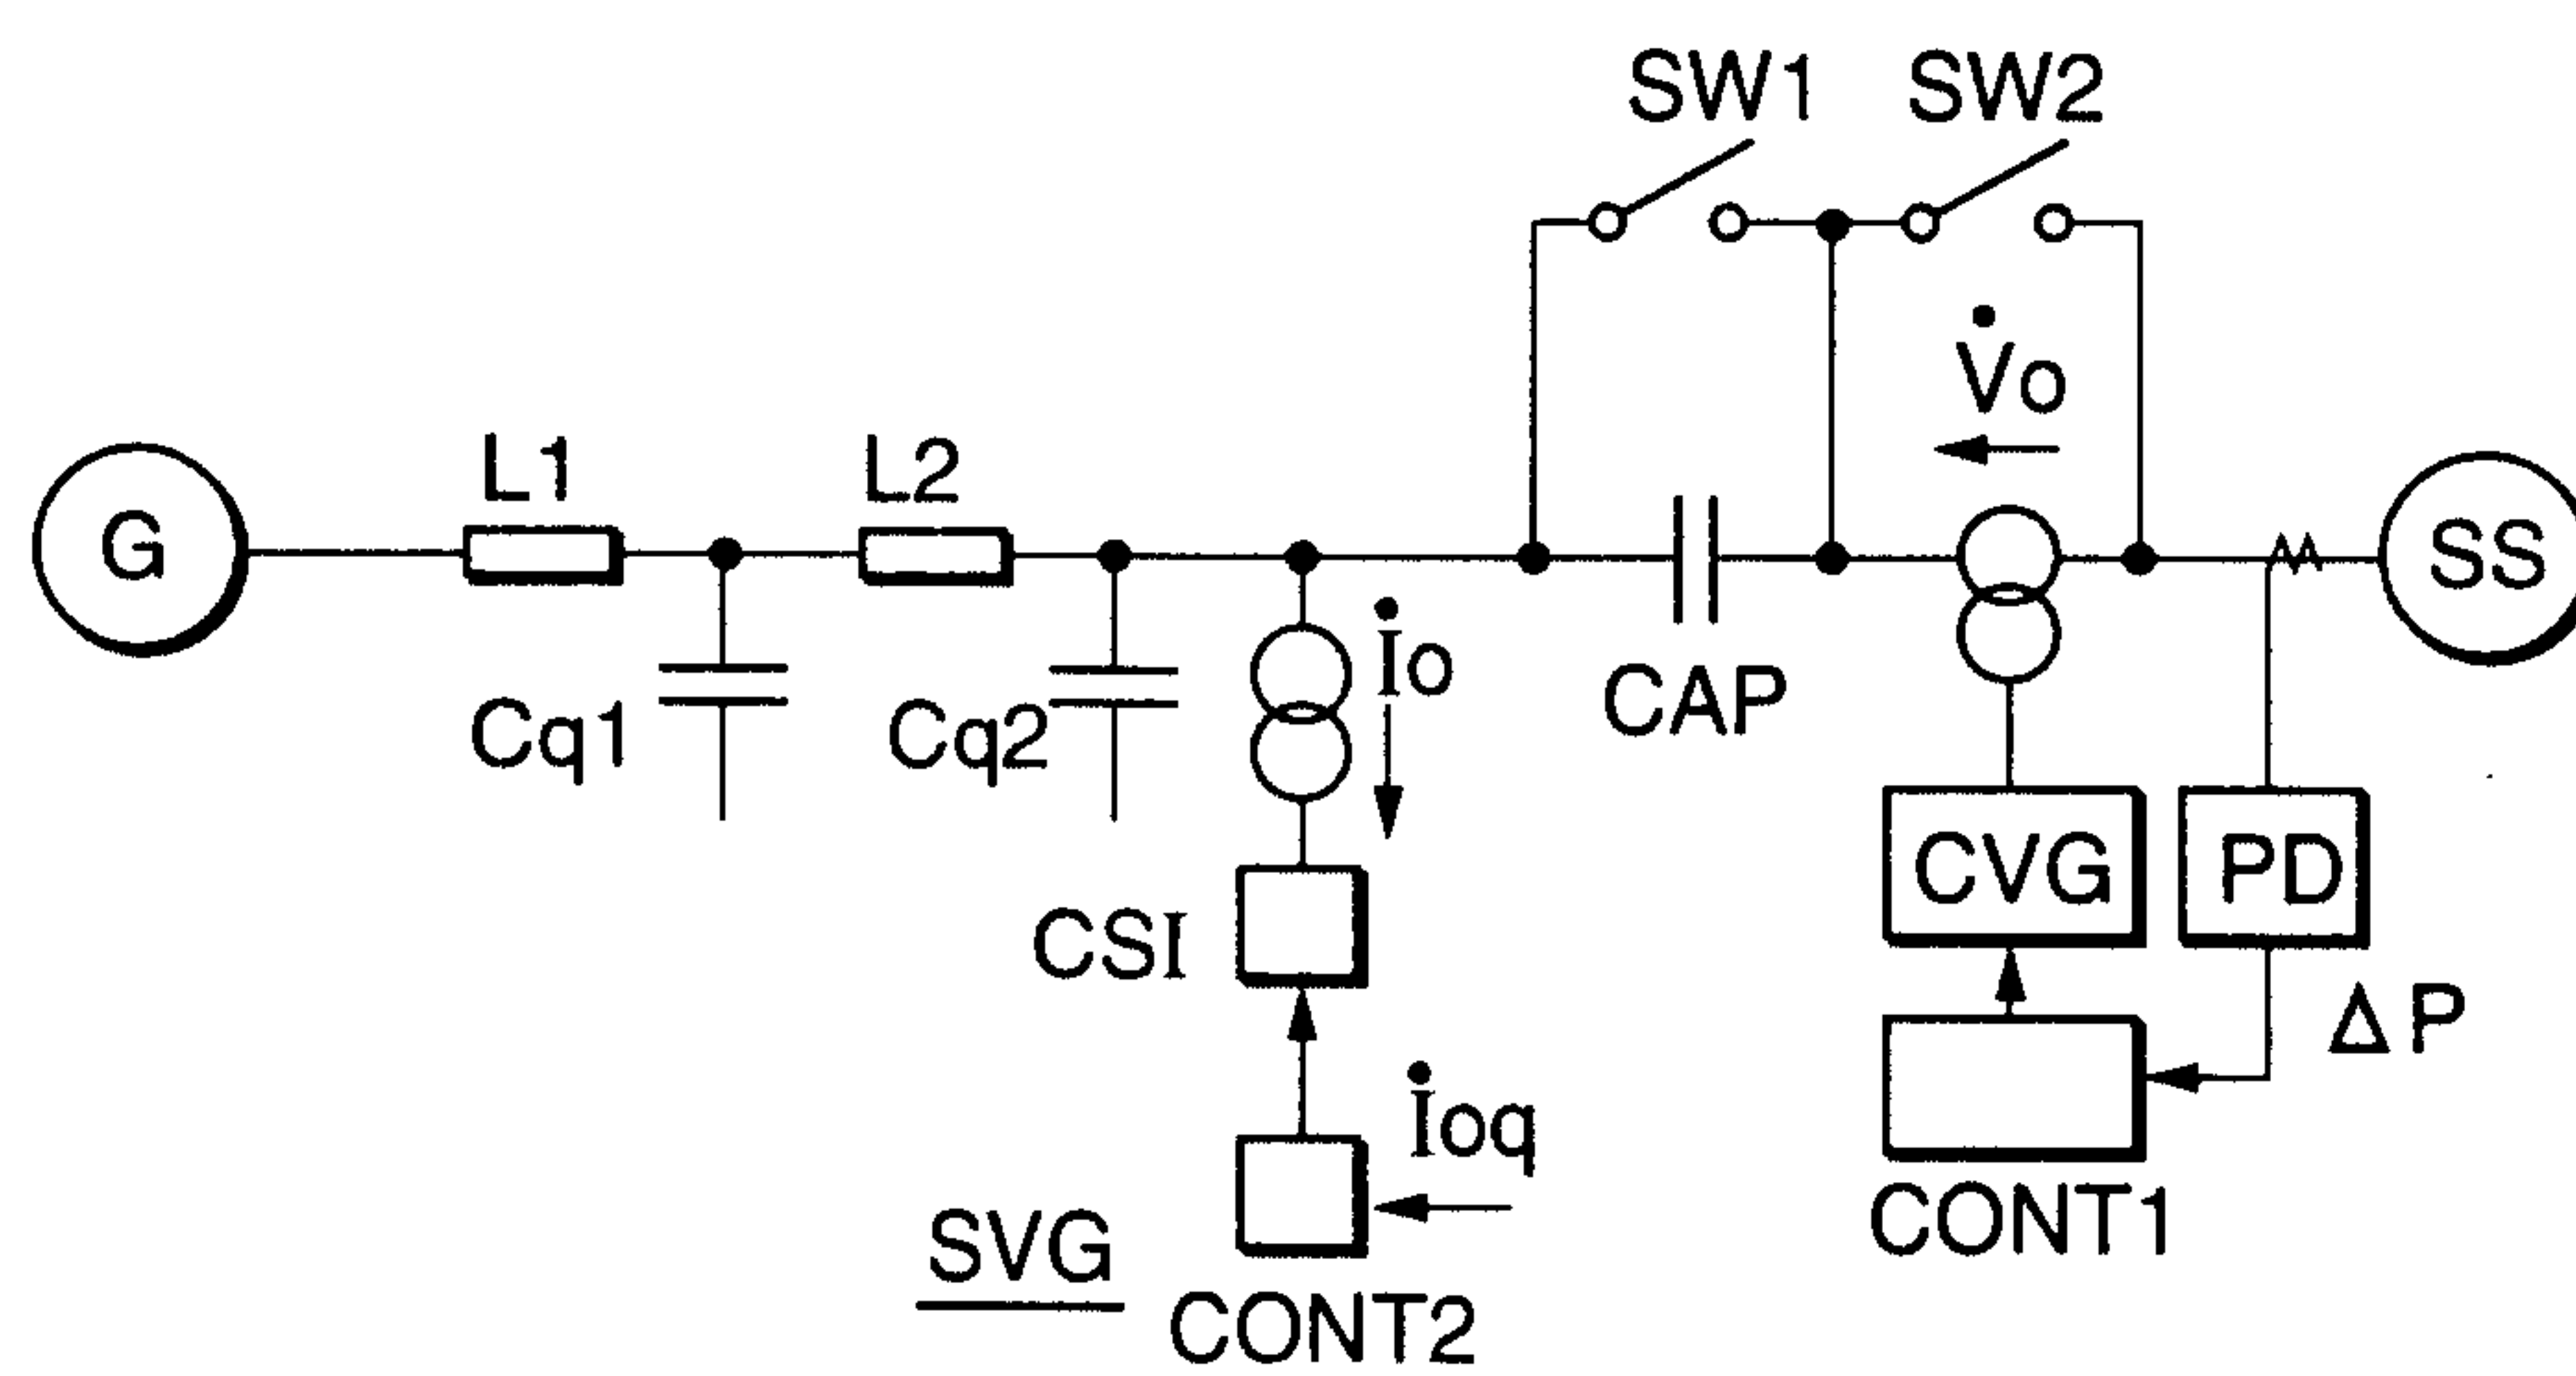


FIG. 44

23/41

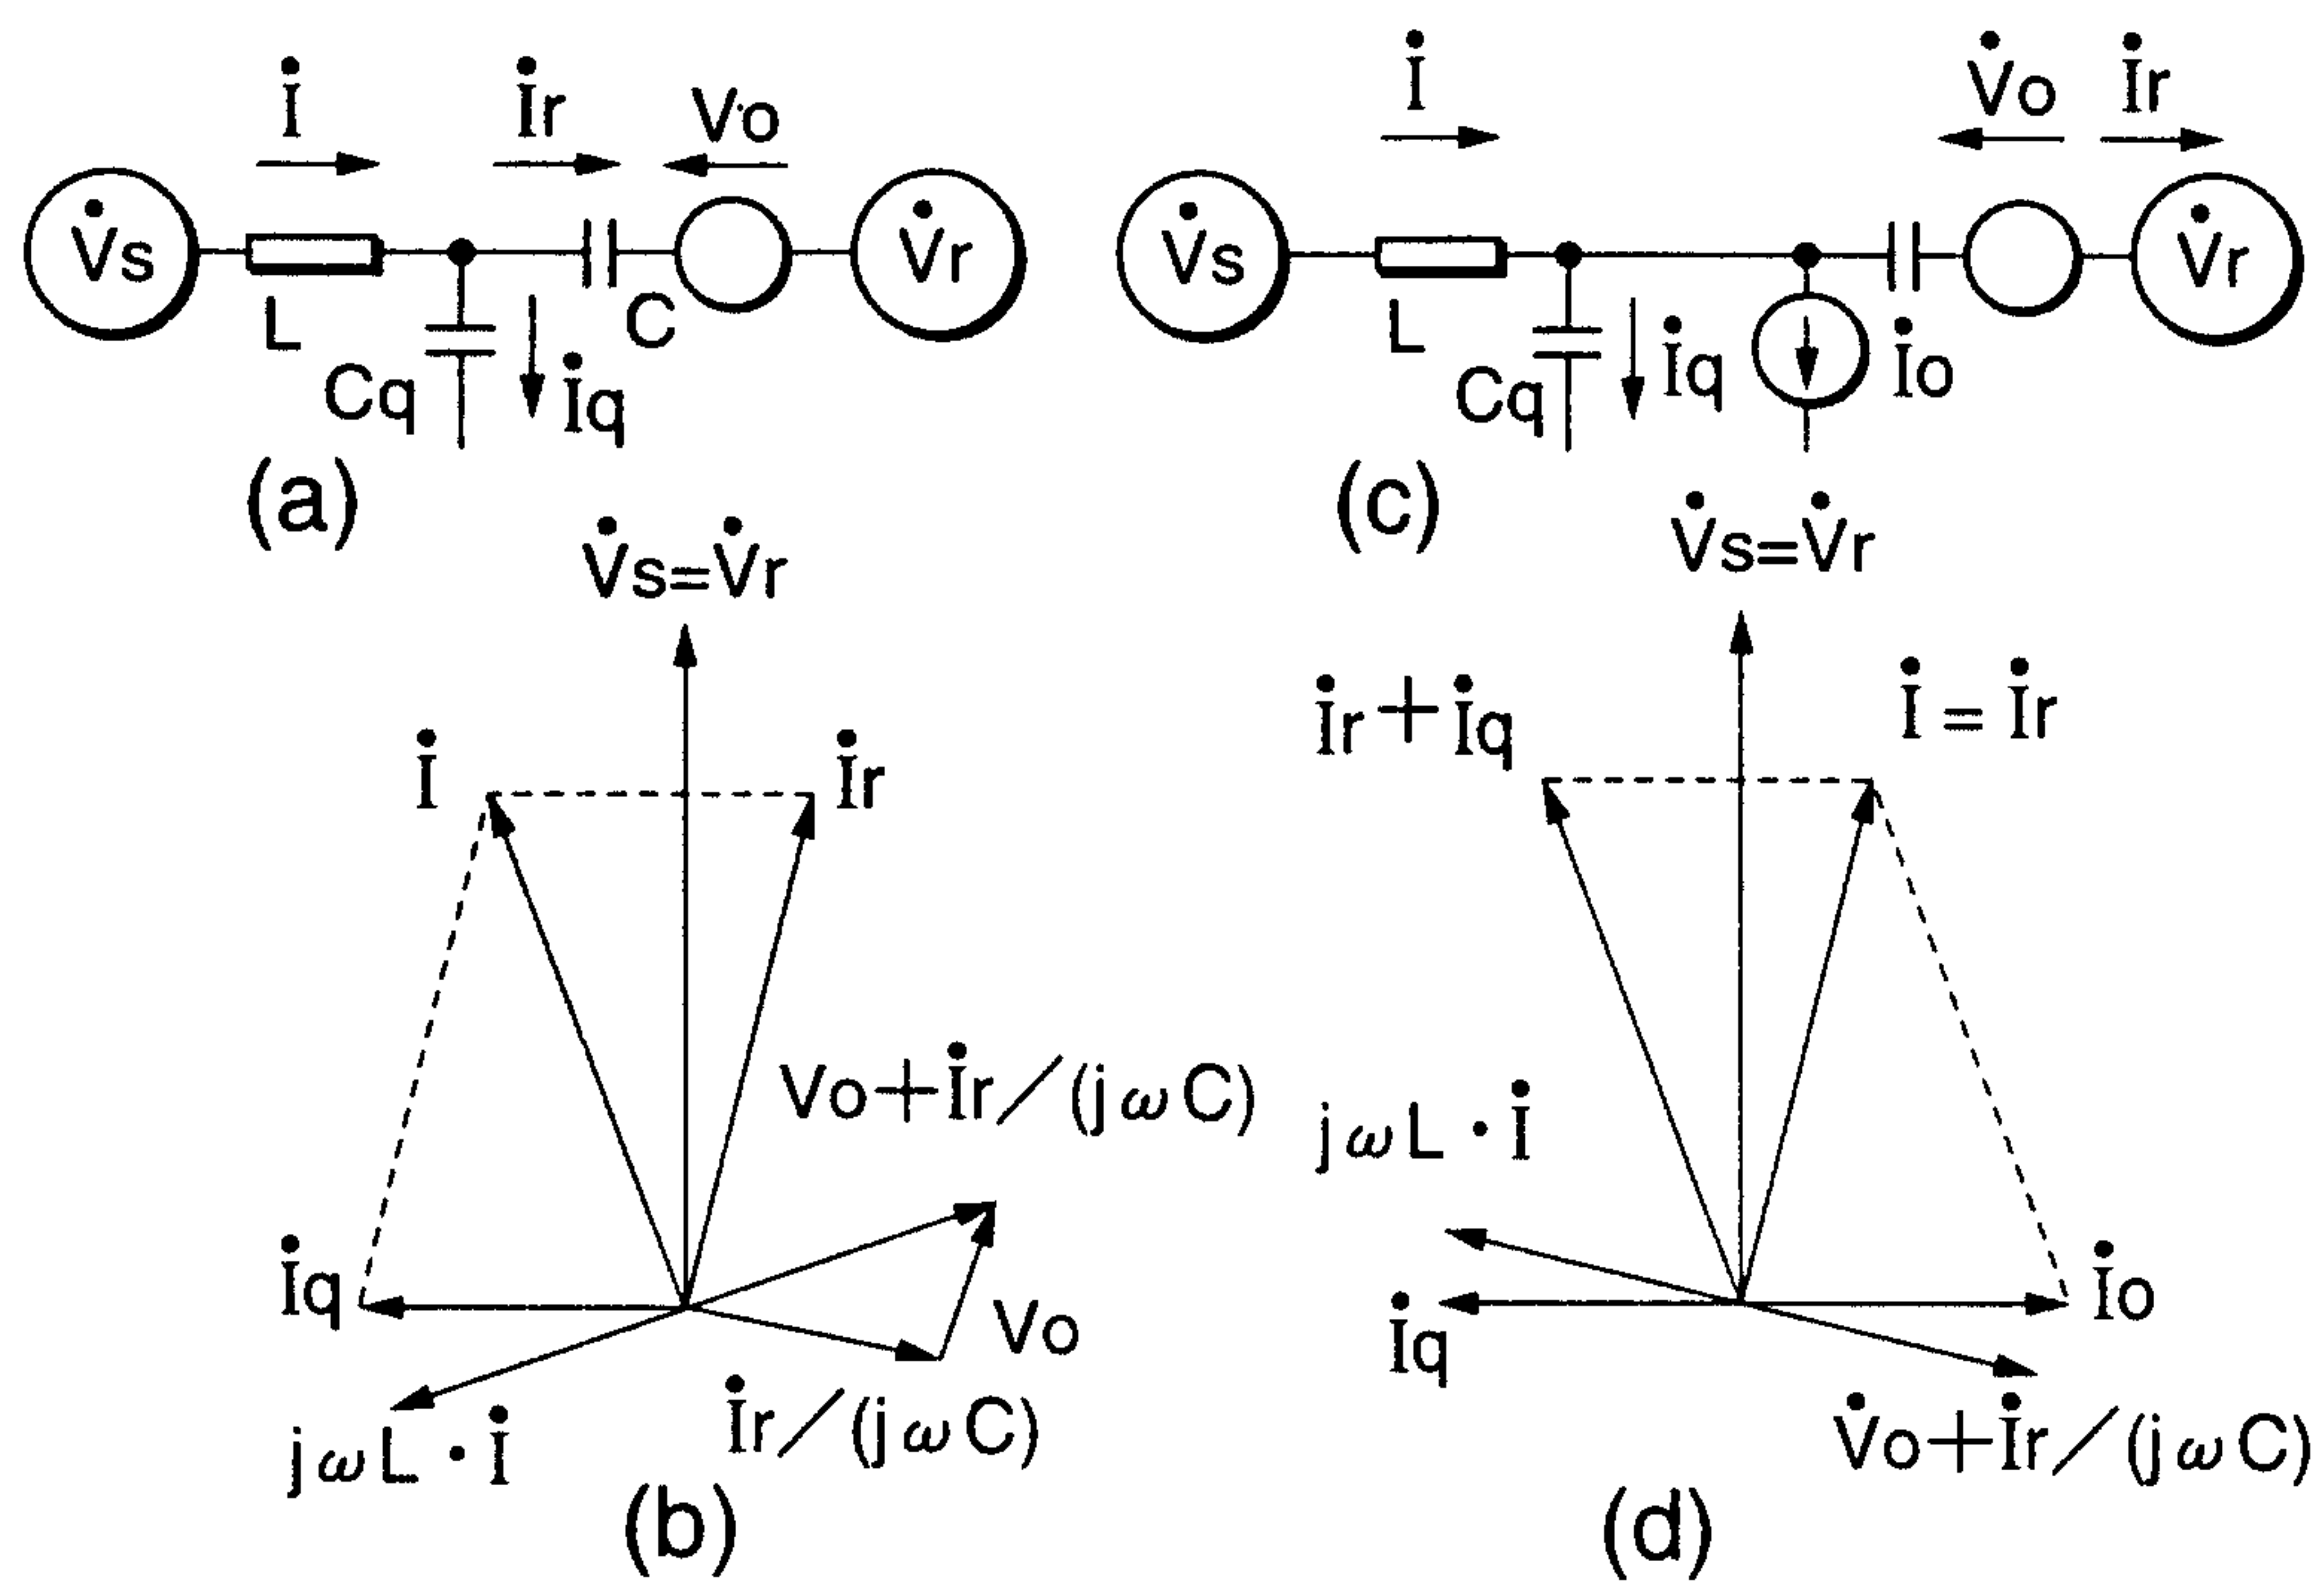


FIG. 45

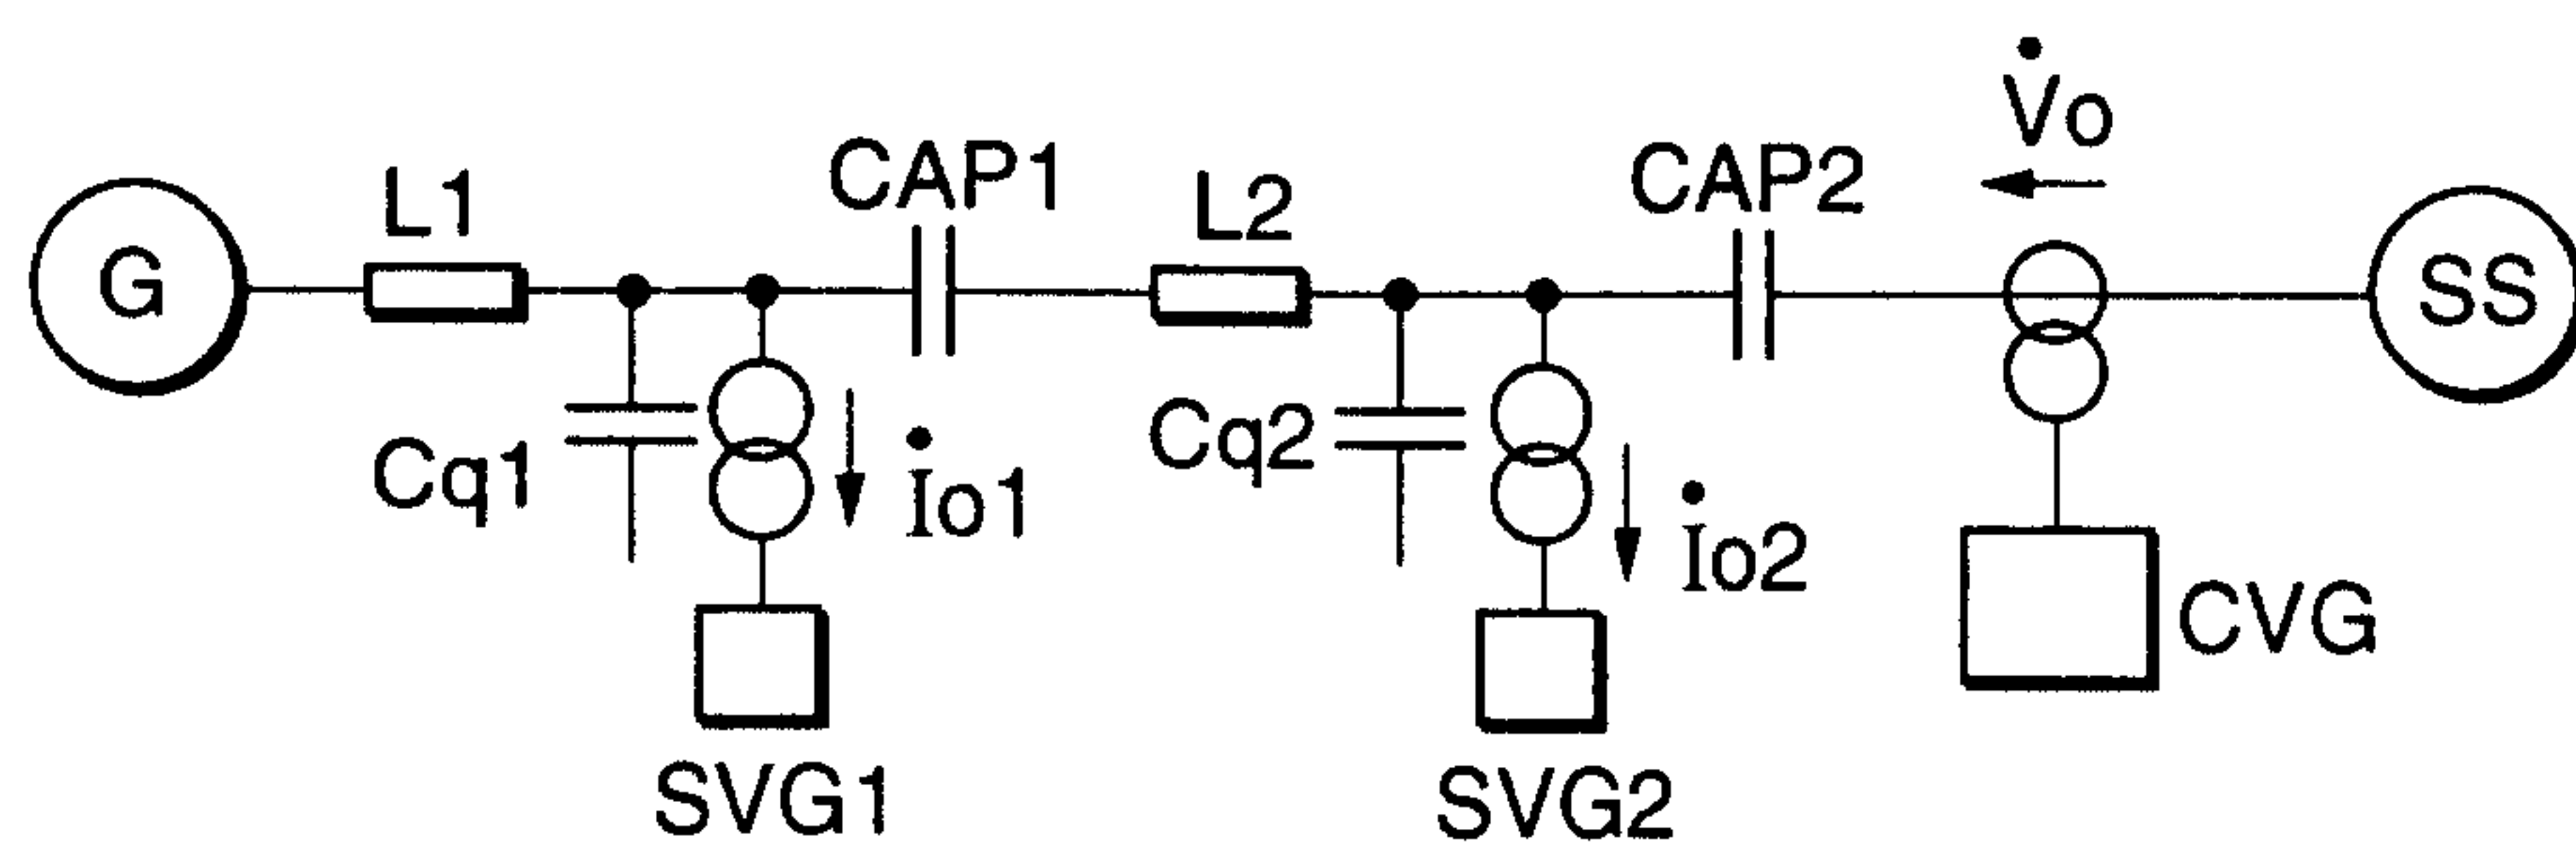


FIG. 46

24/41

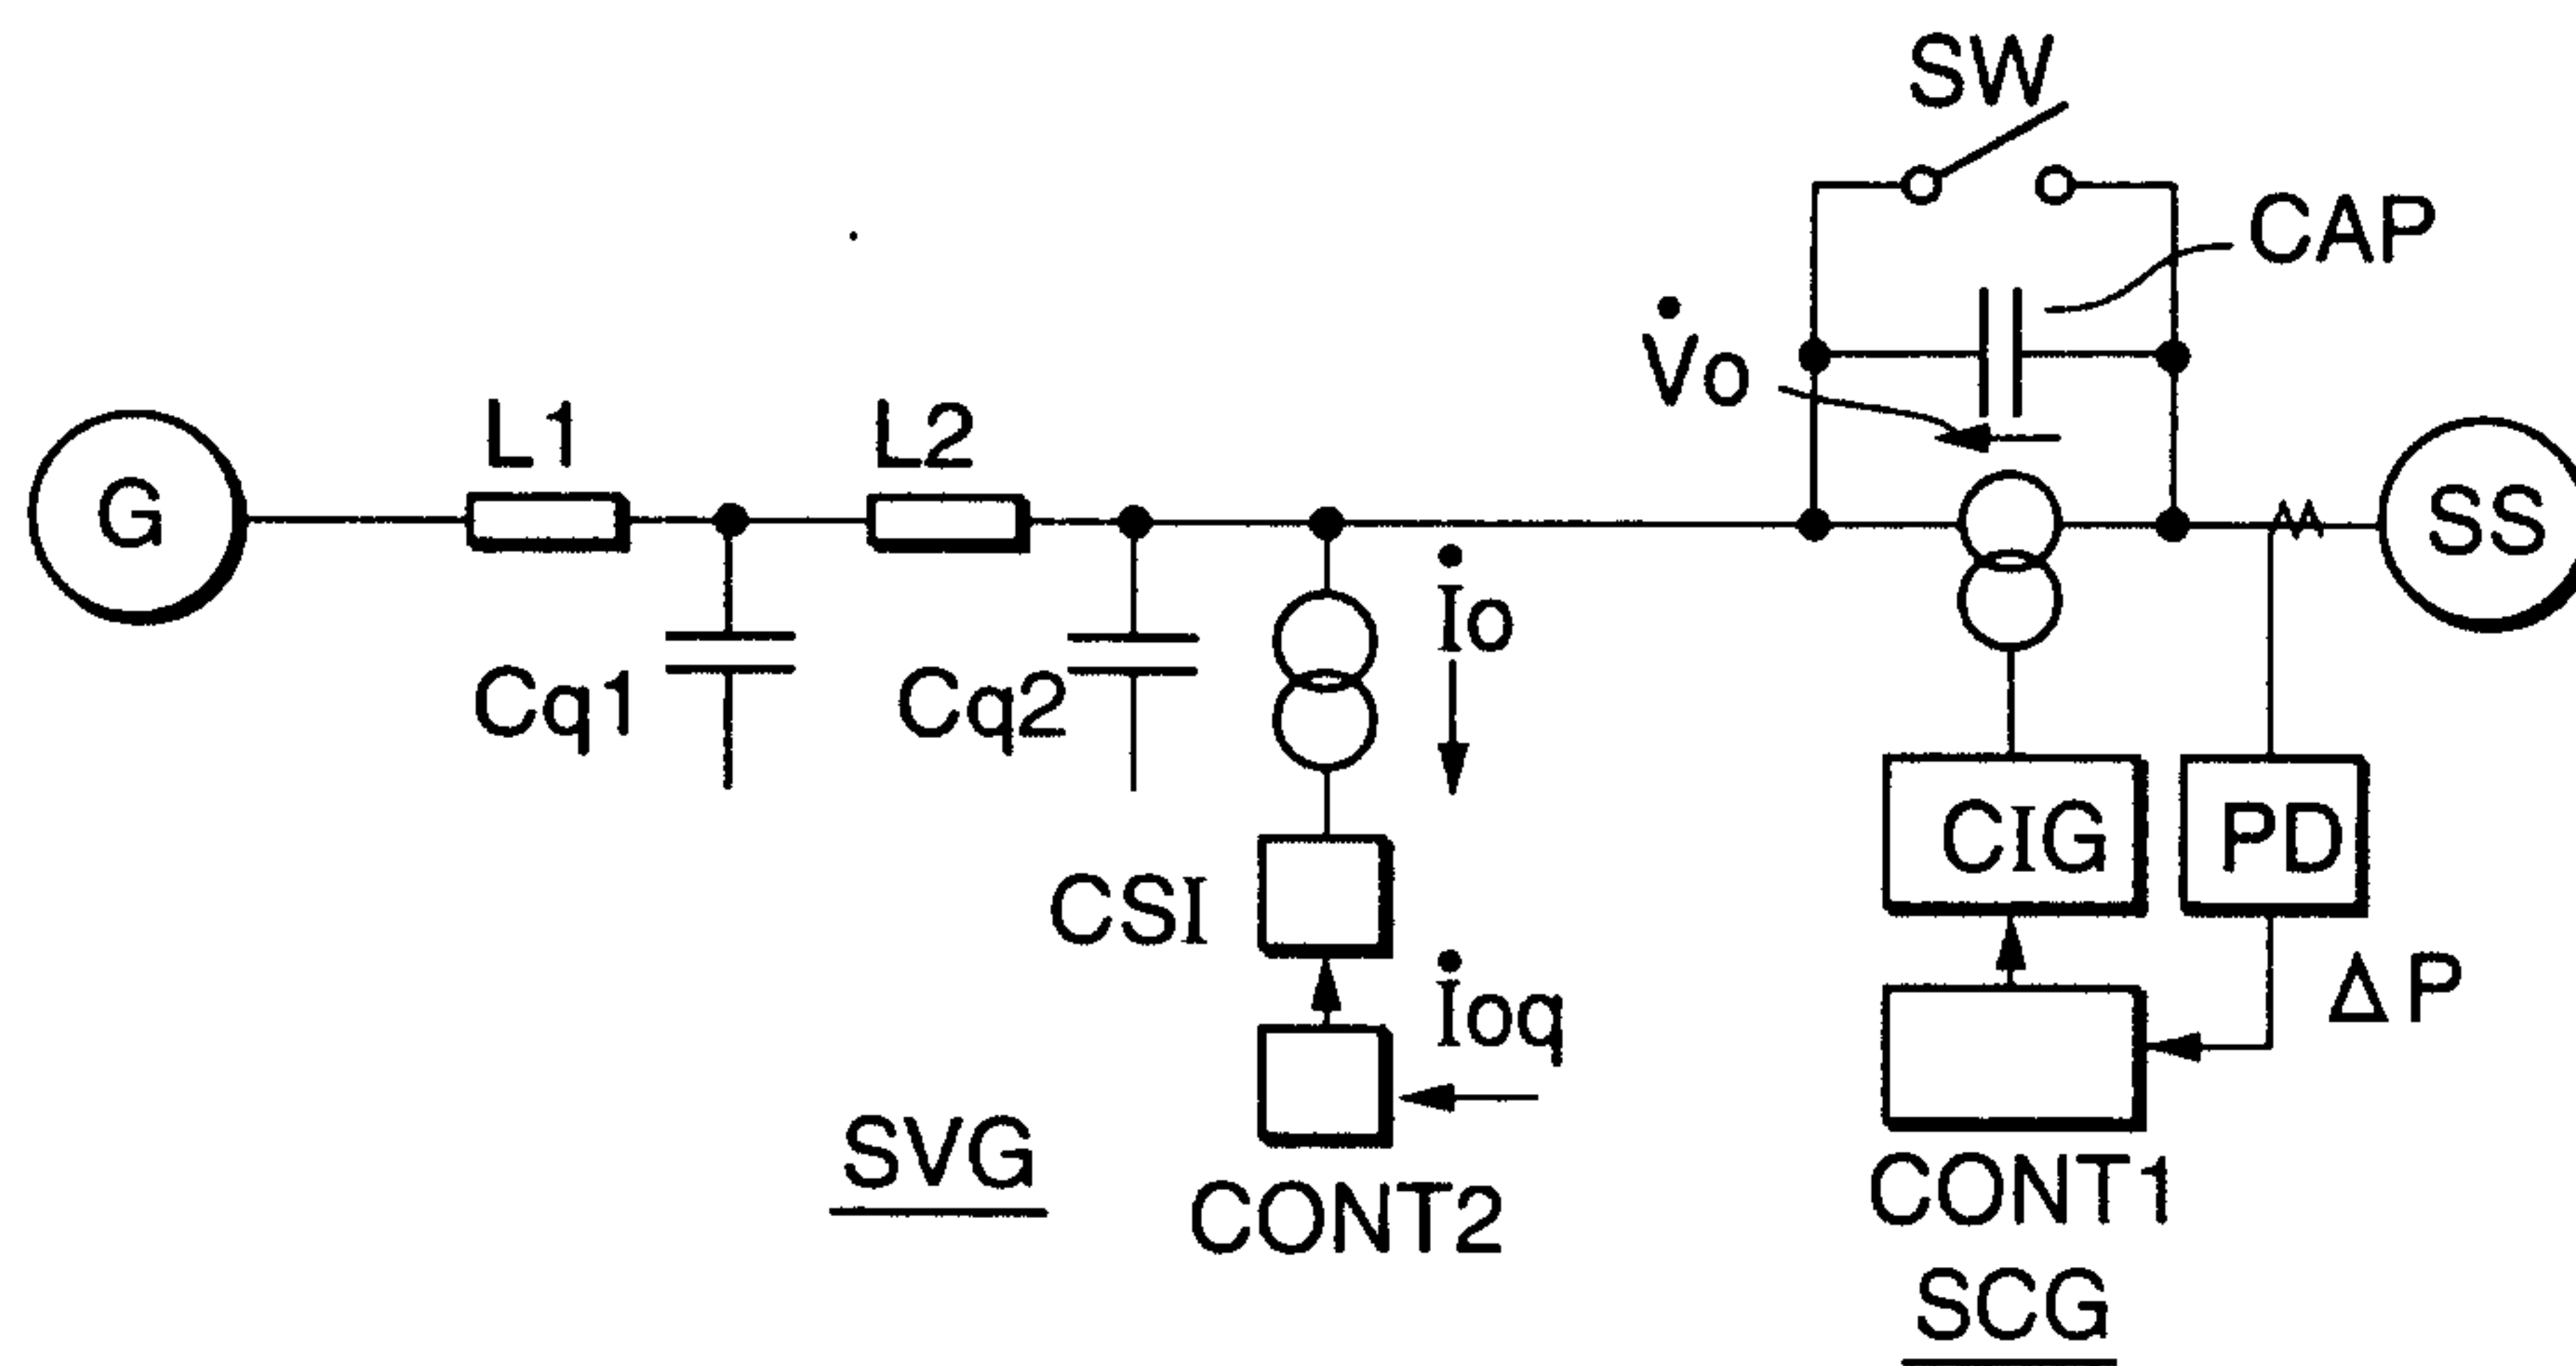


FIG. 47

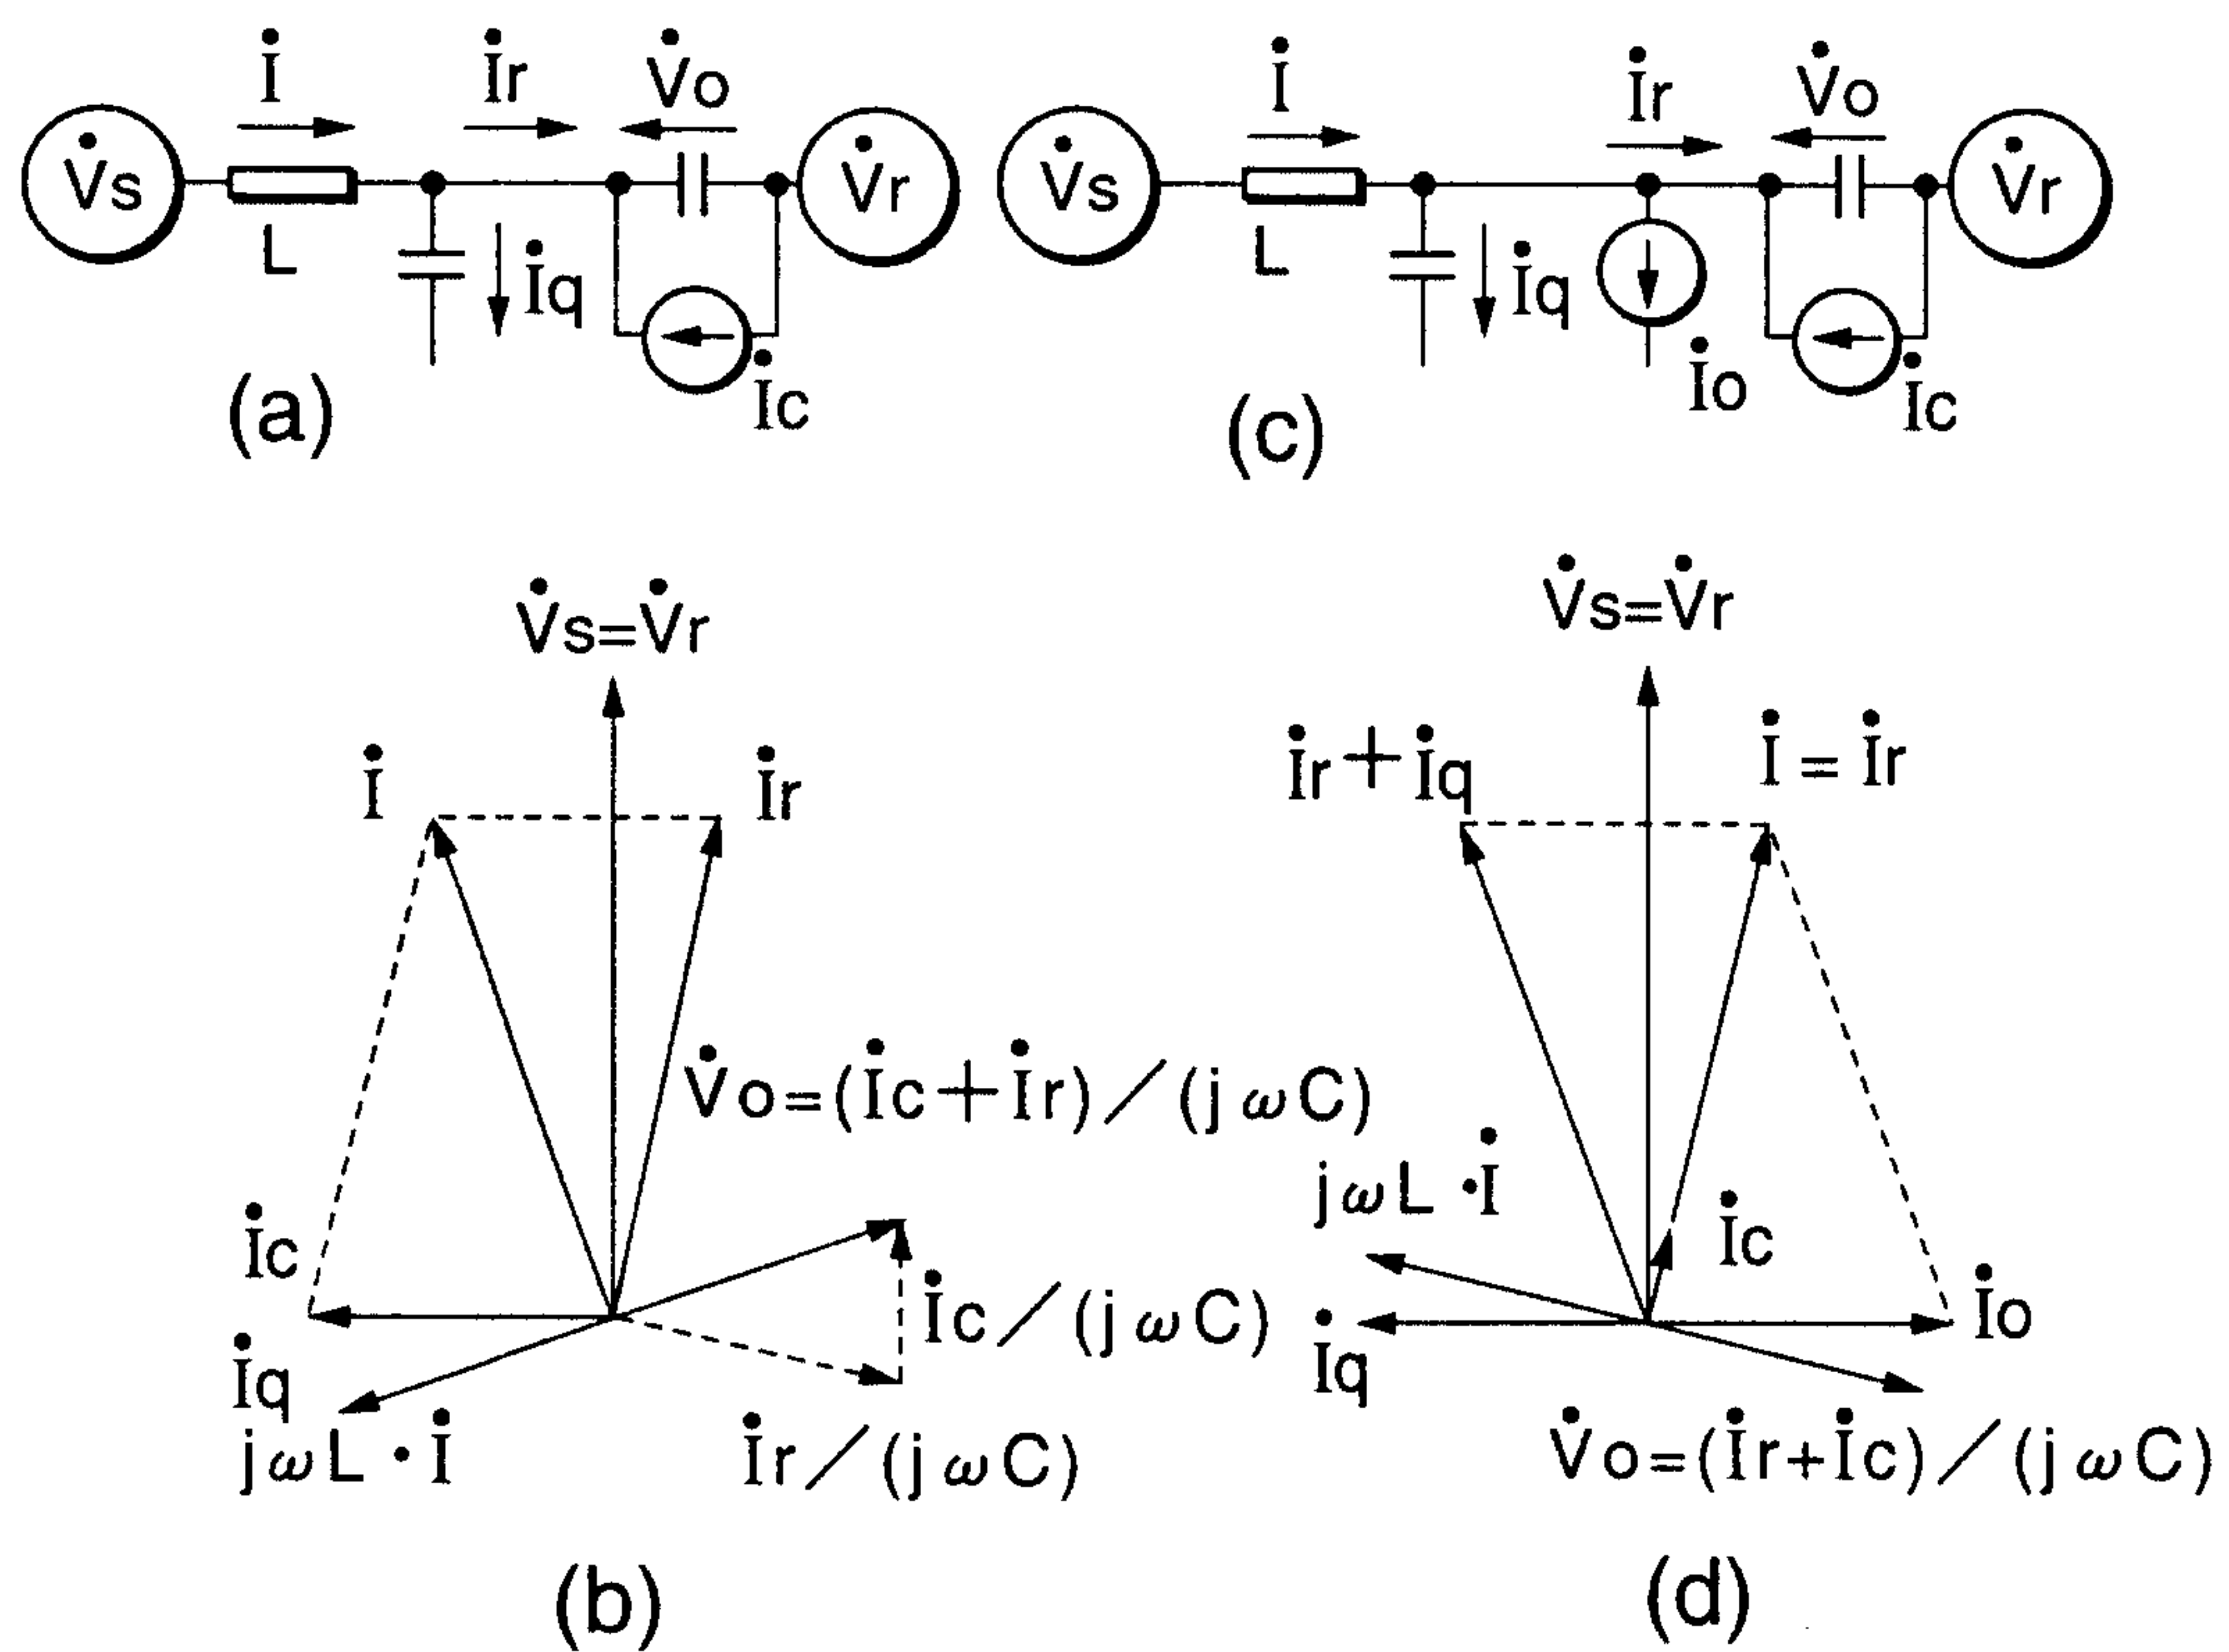


FIG. 48

25/41

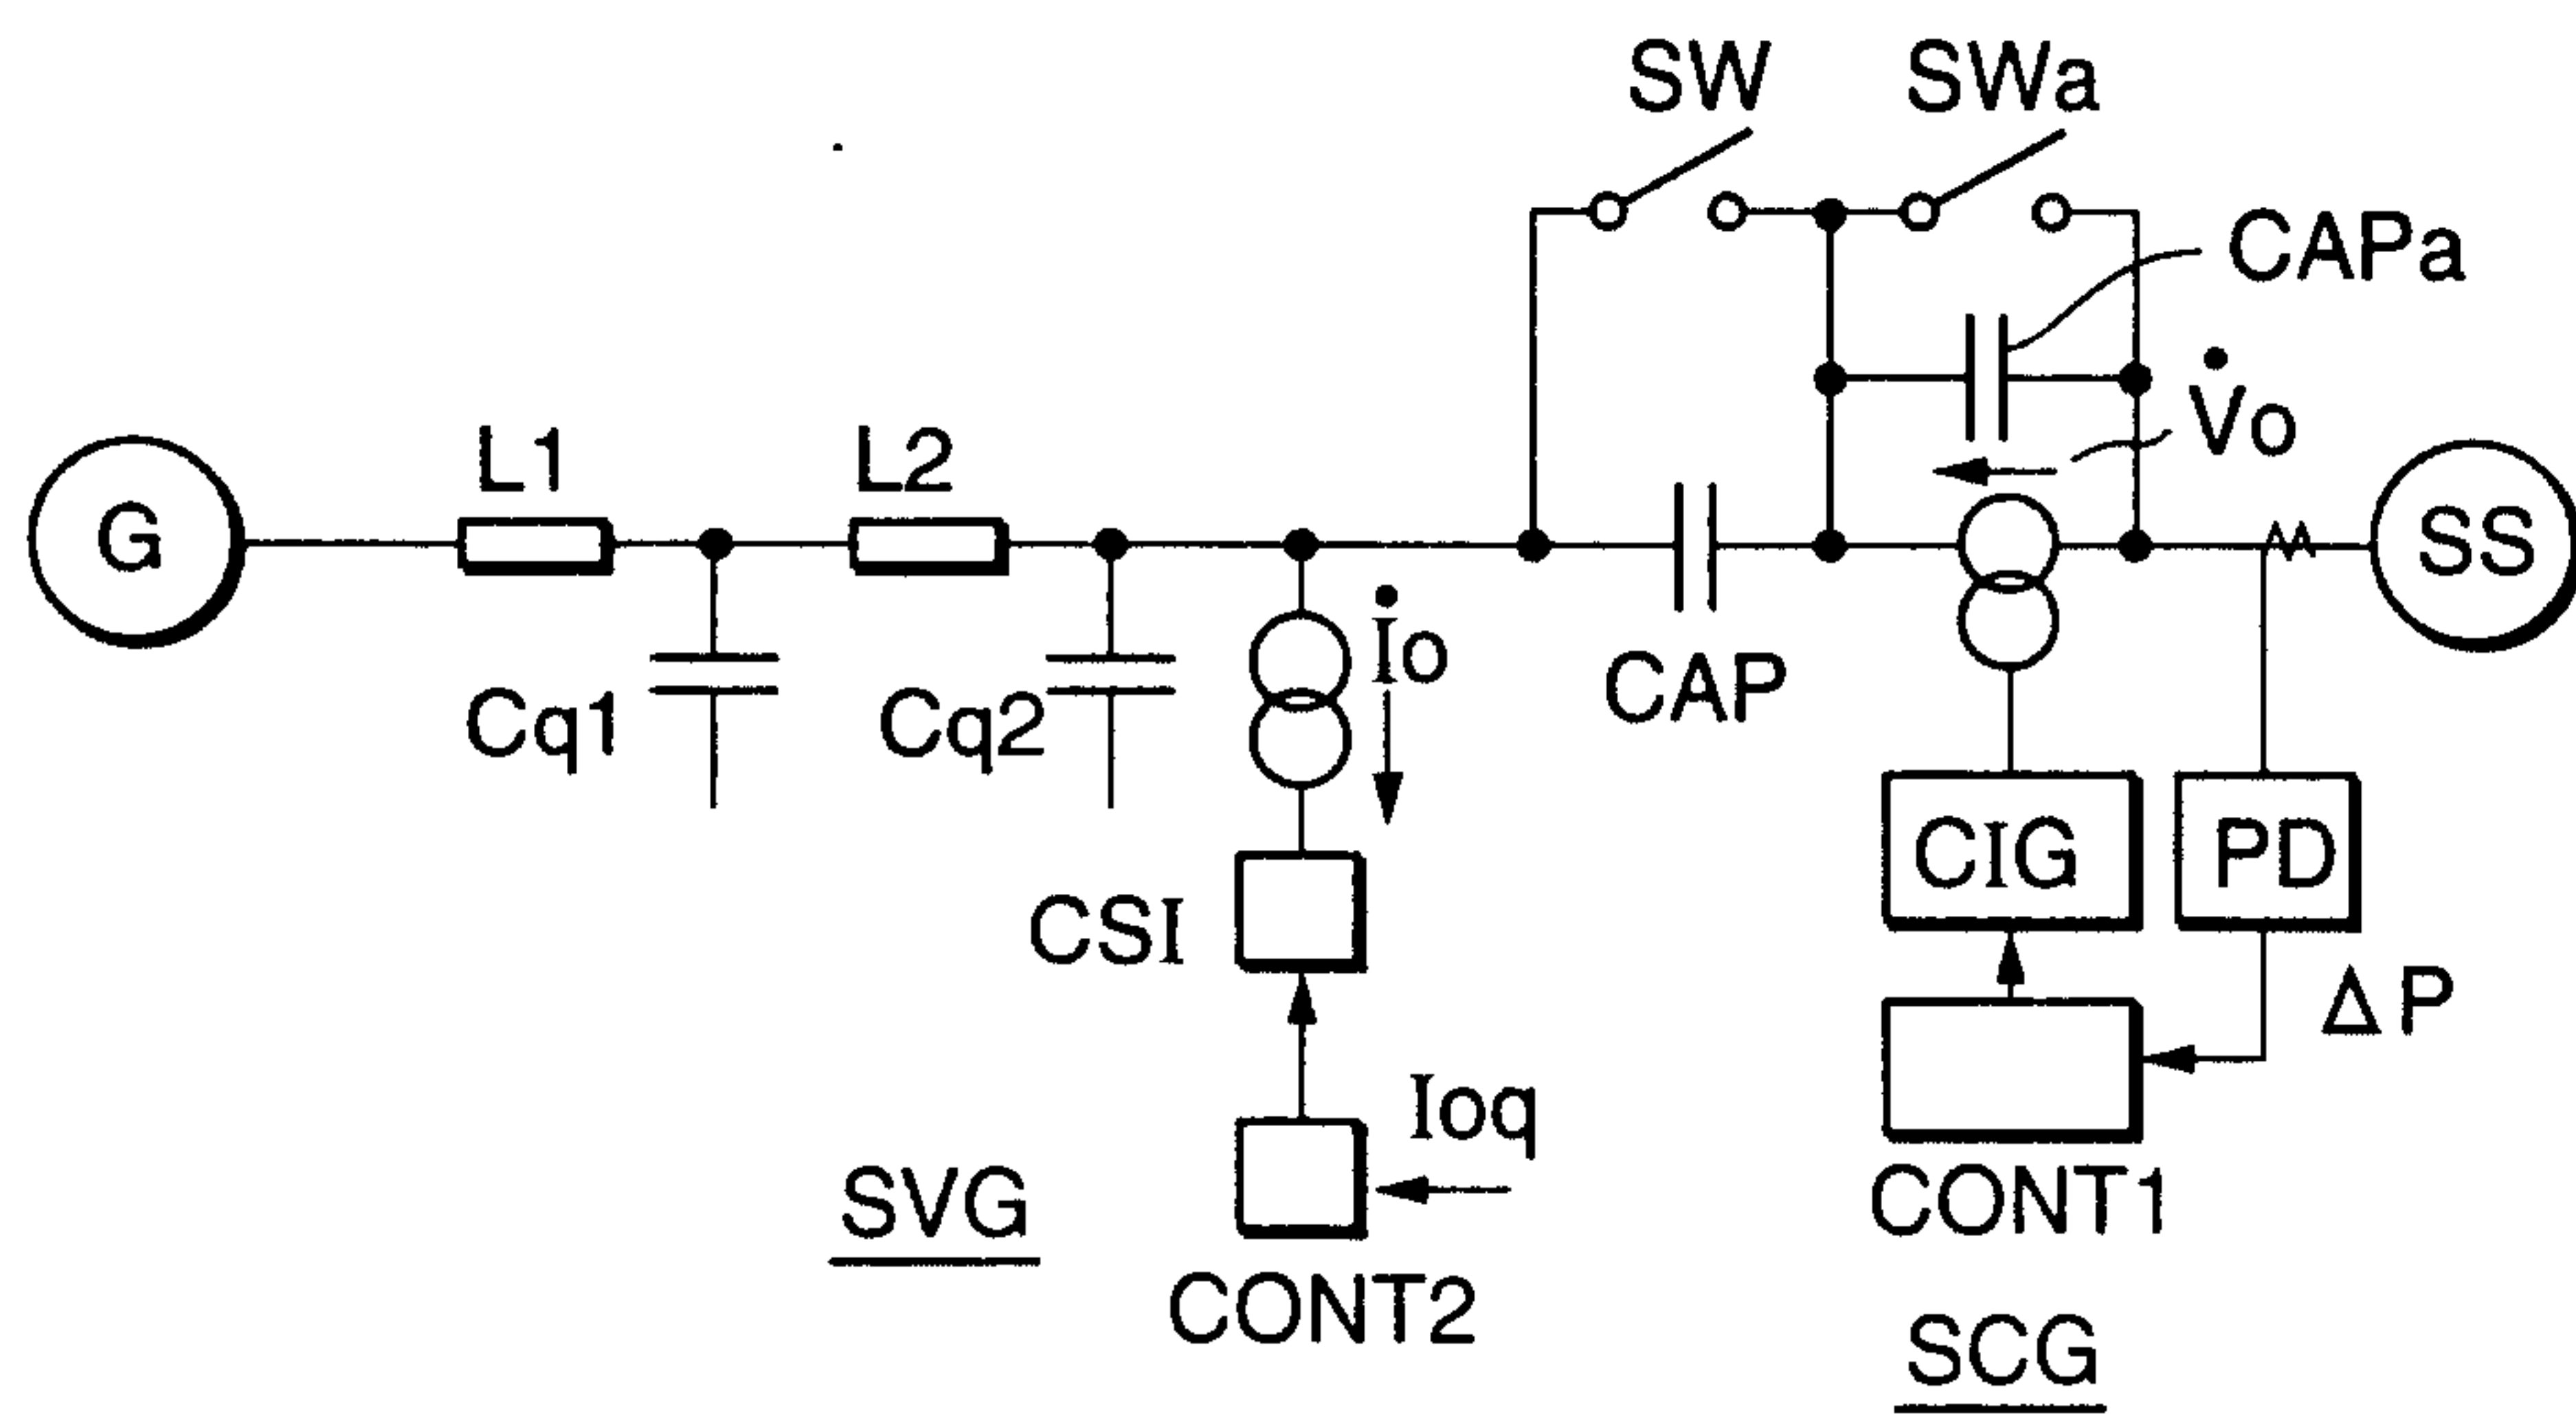


FIG. 49

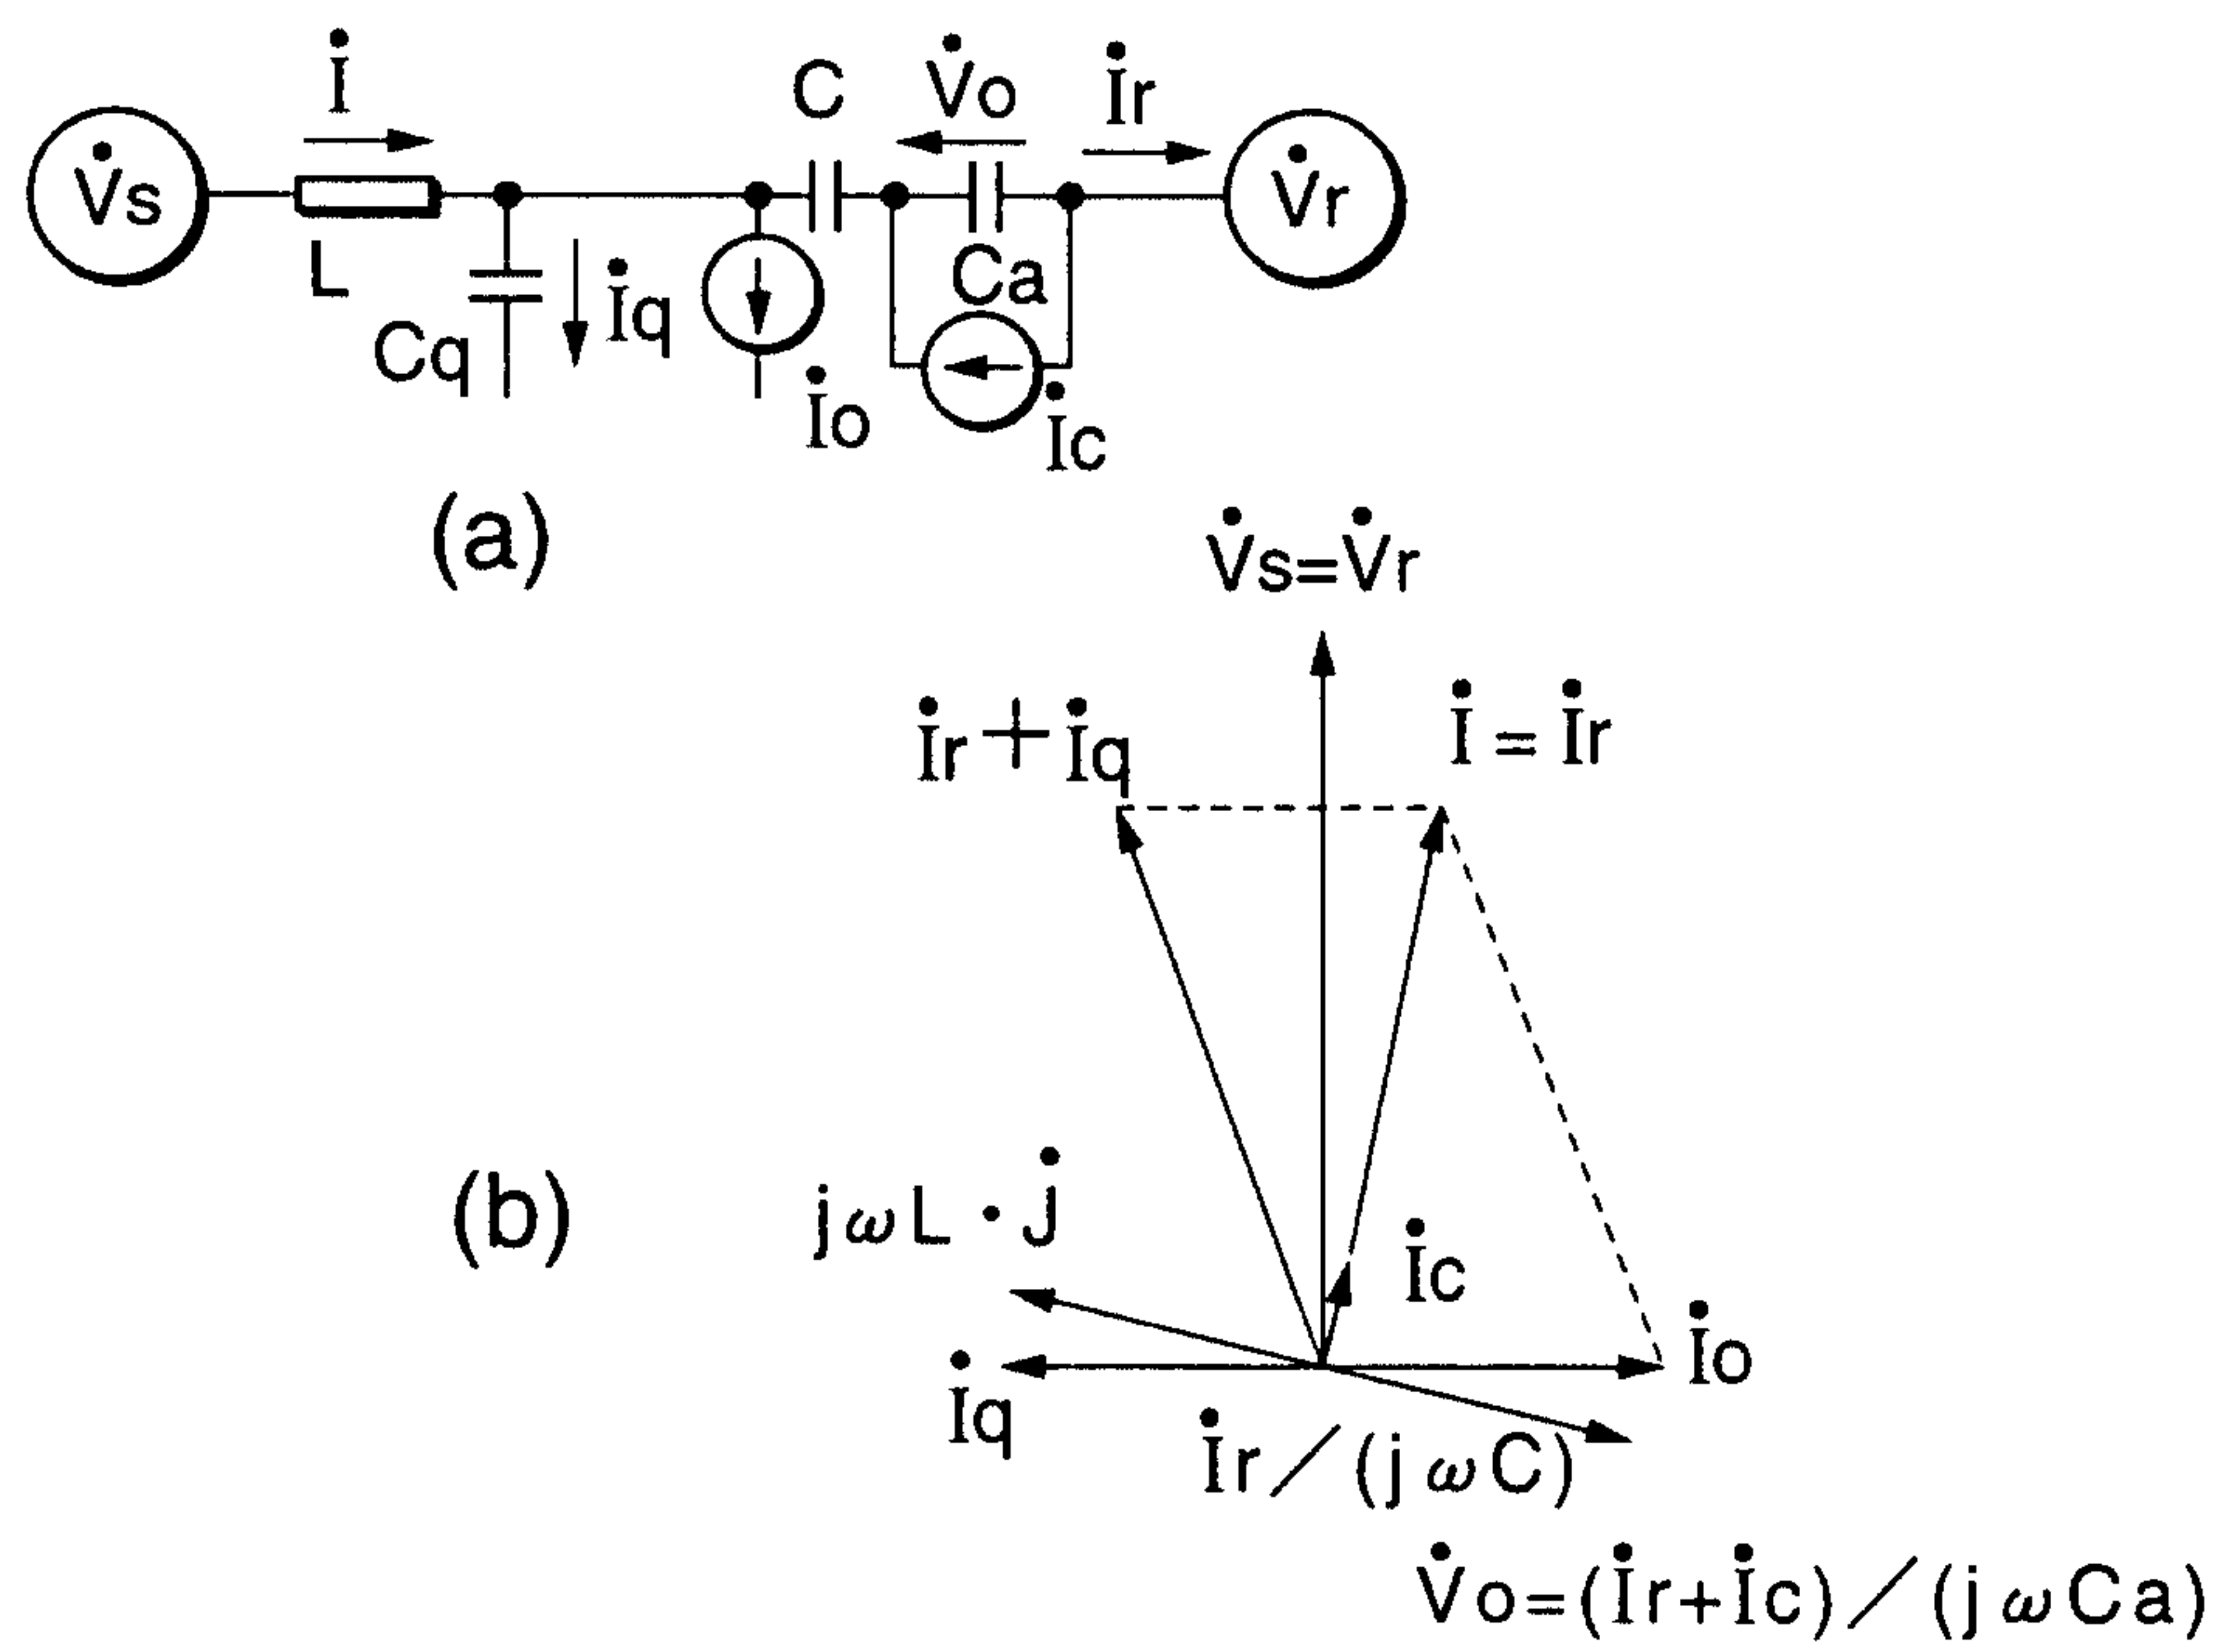


FIG. 50

26/41

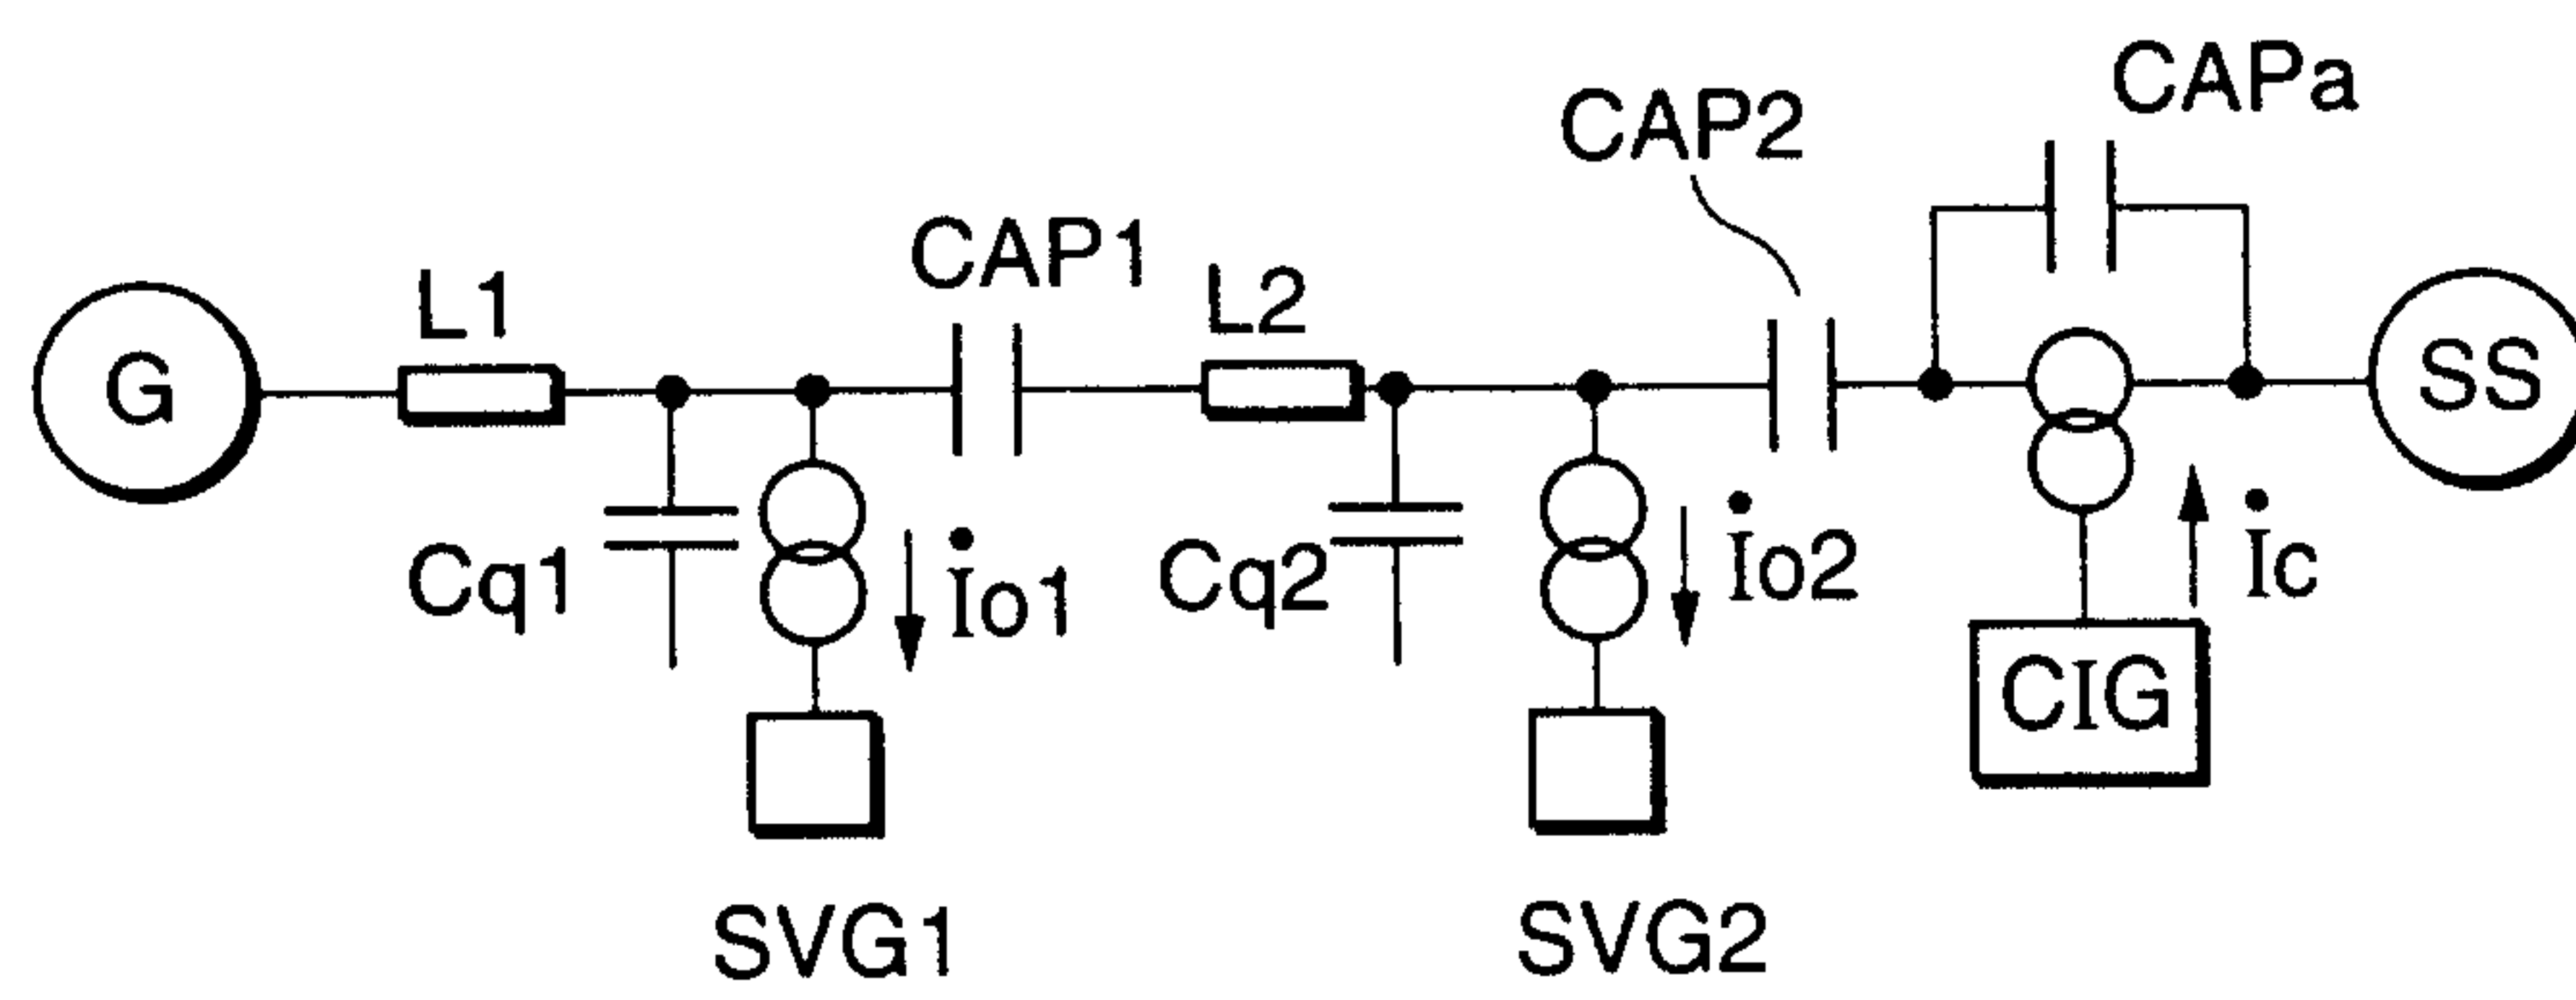


FIG. 51

27/41

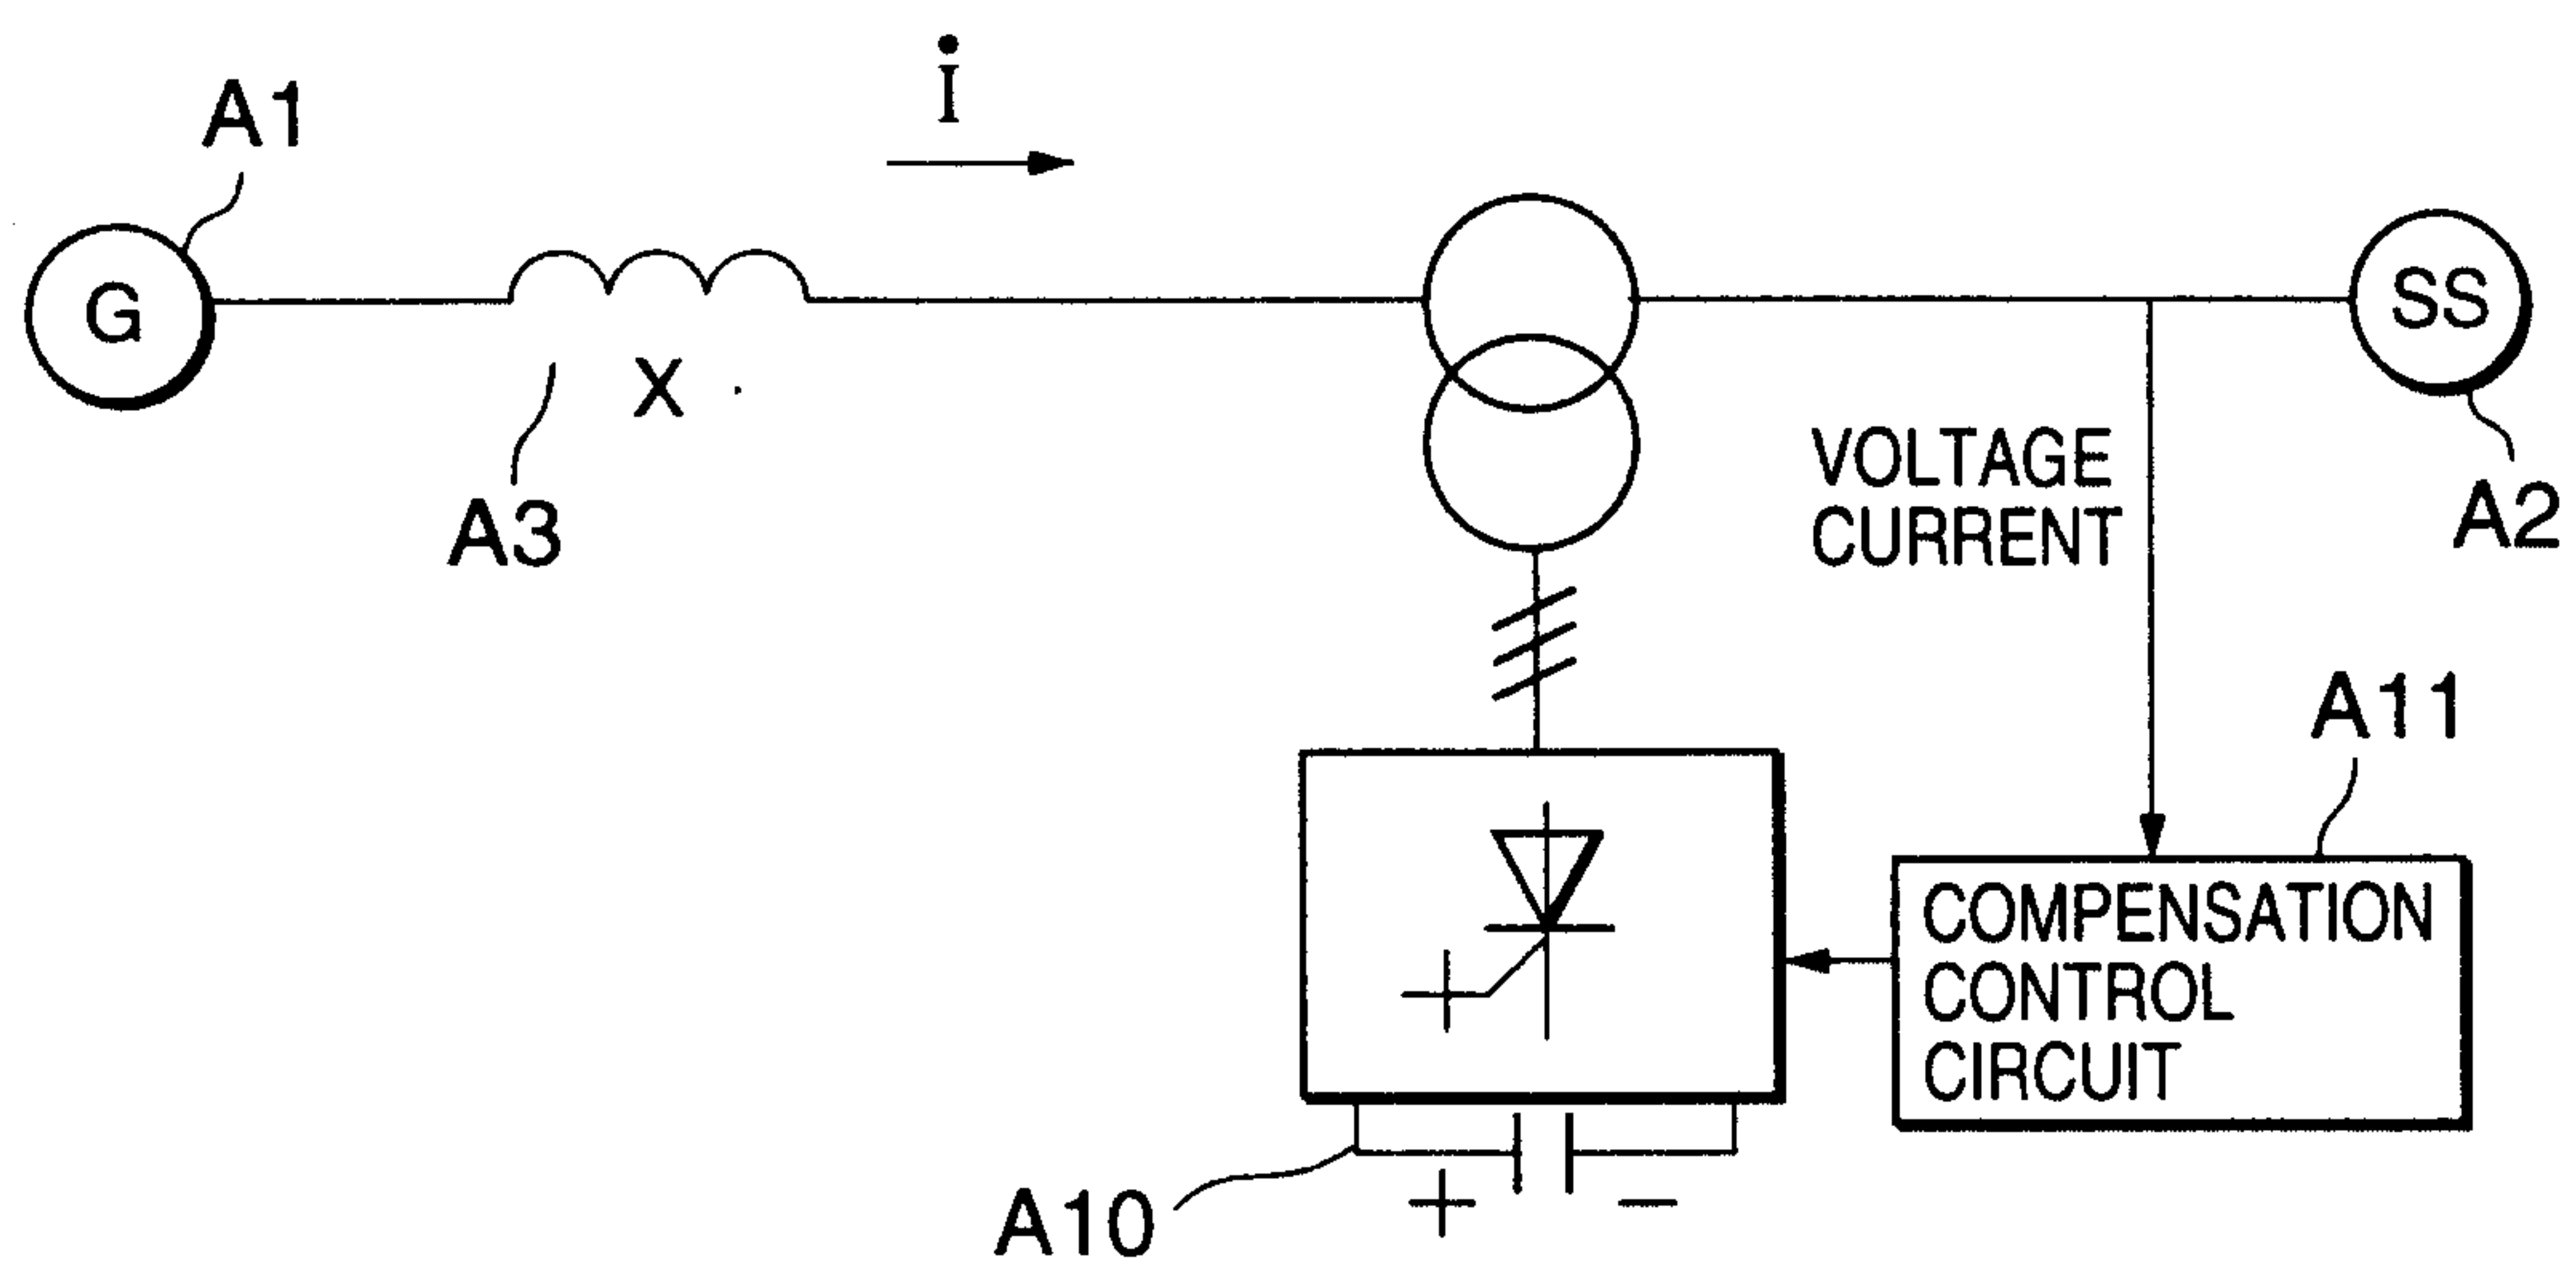


FIG. 52

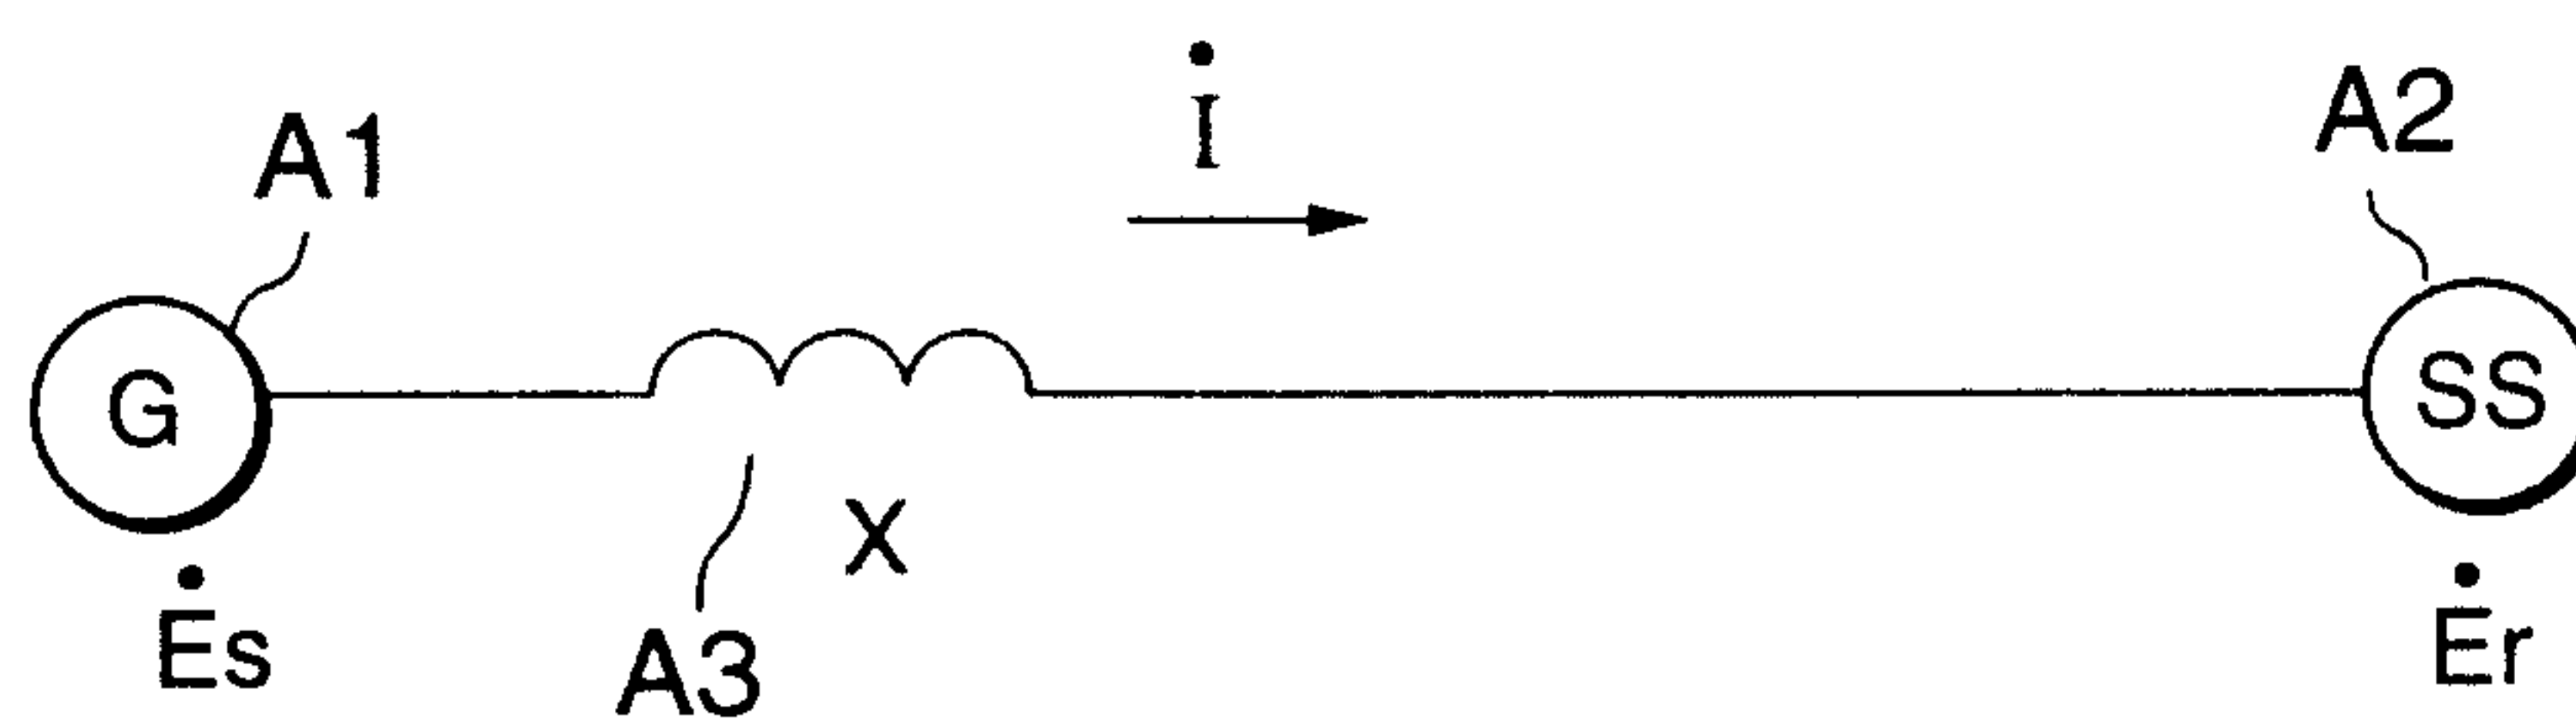


FIG. 53

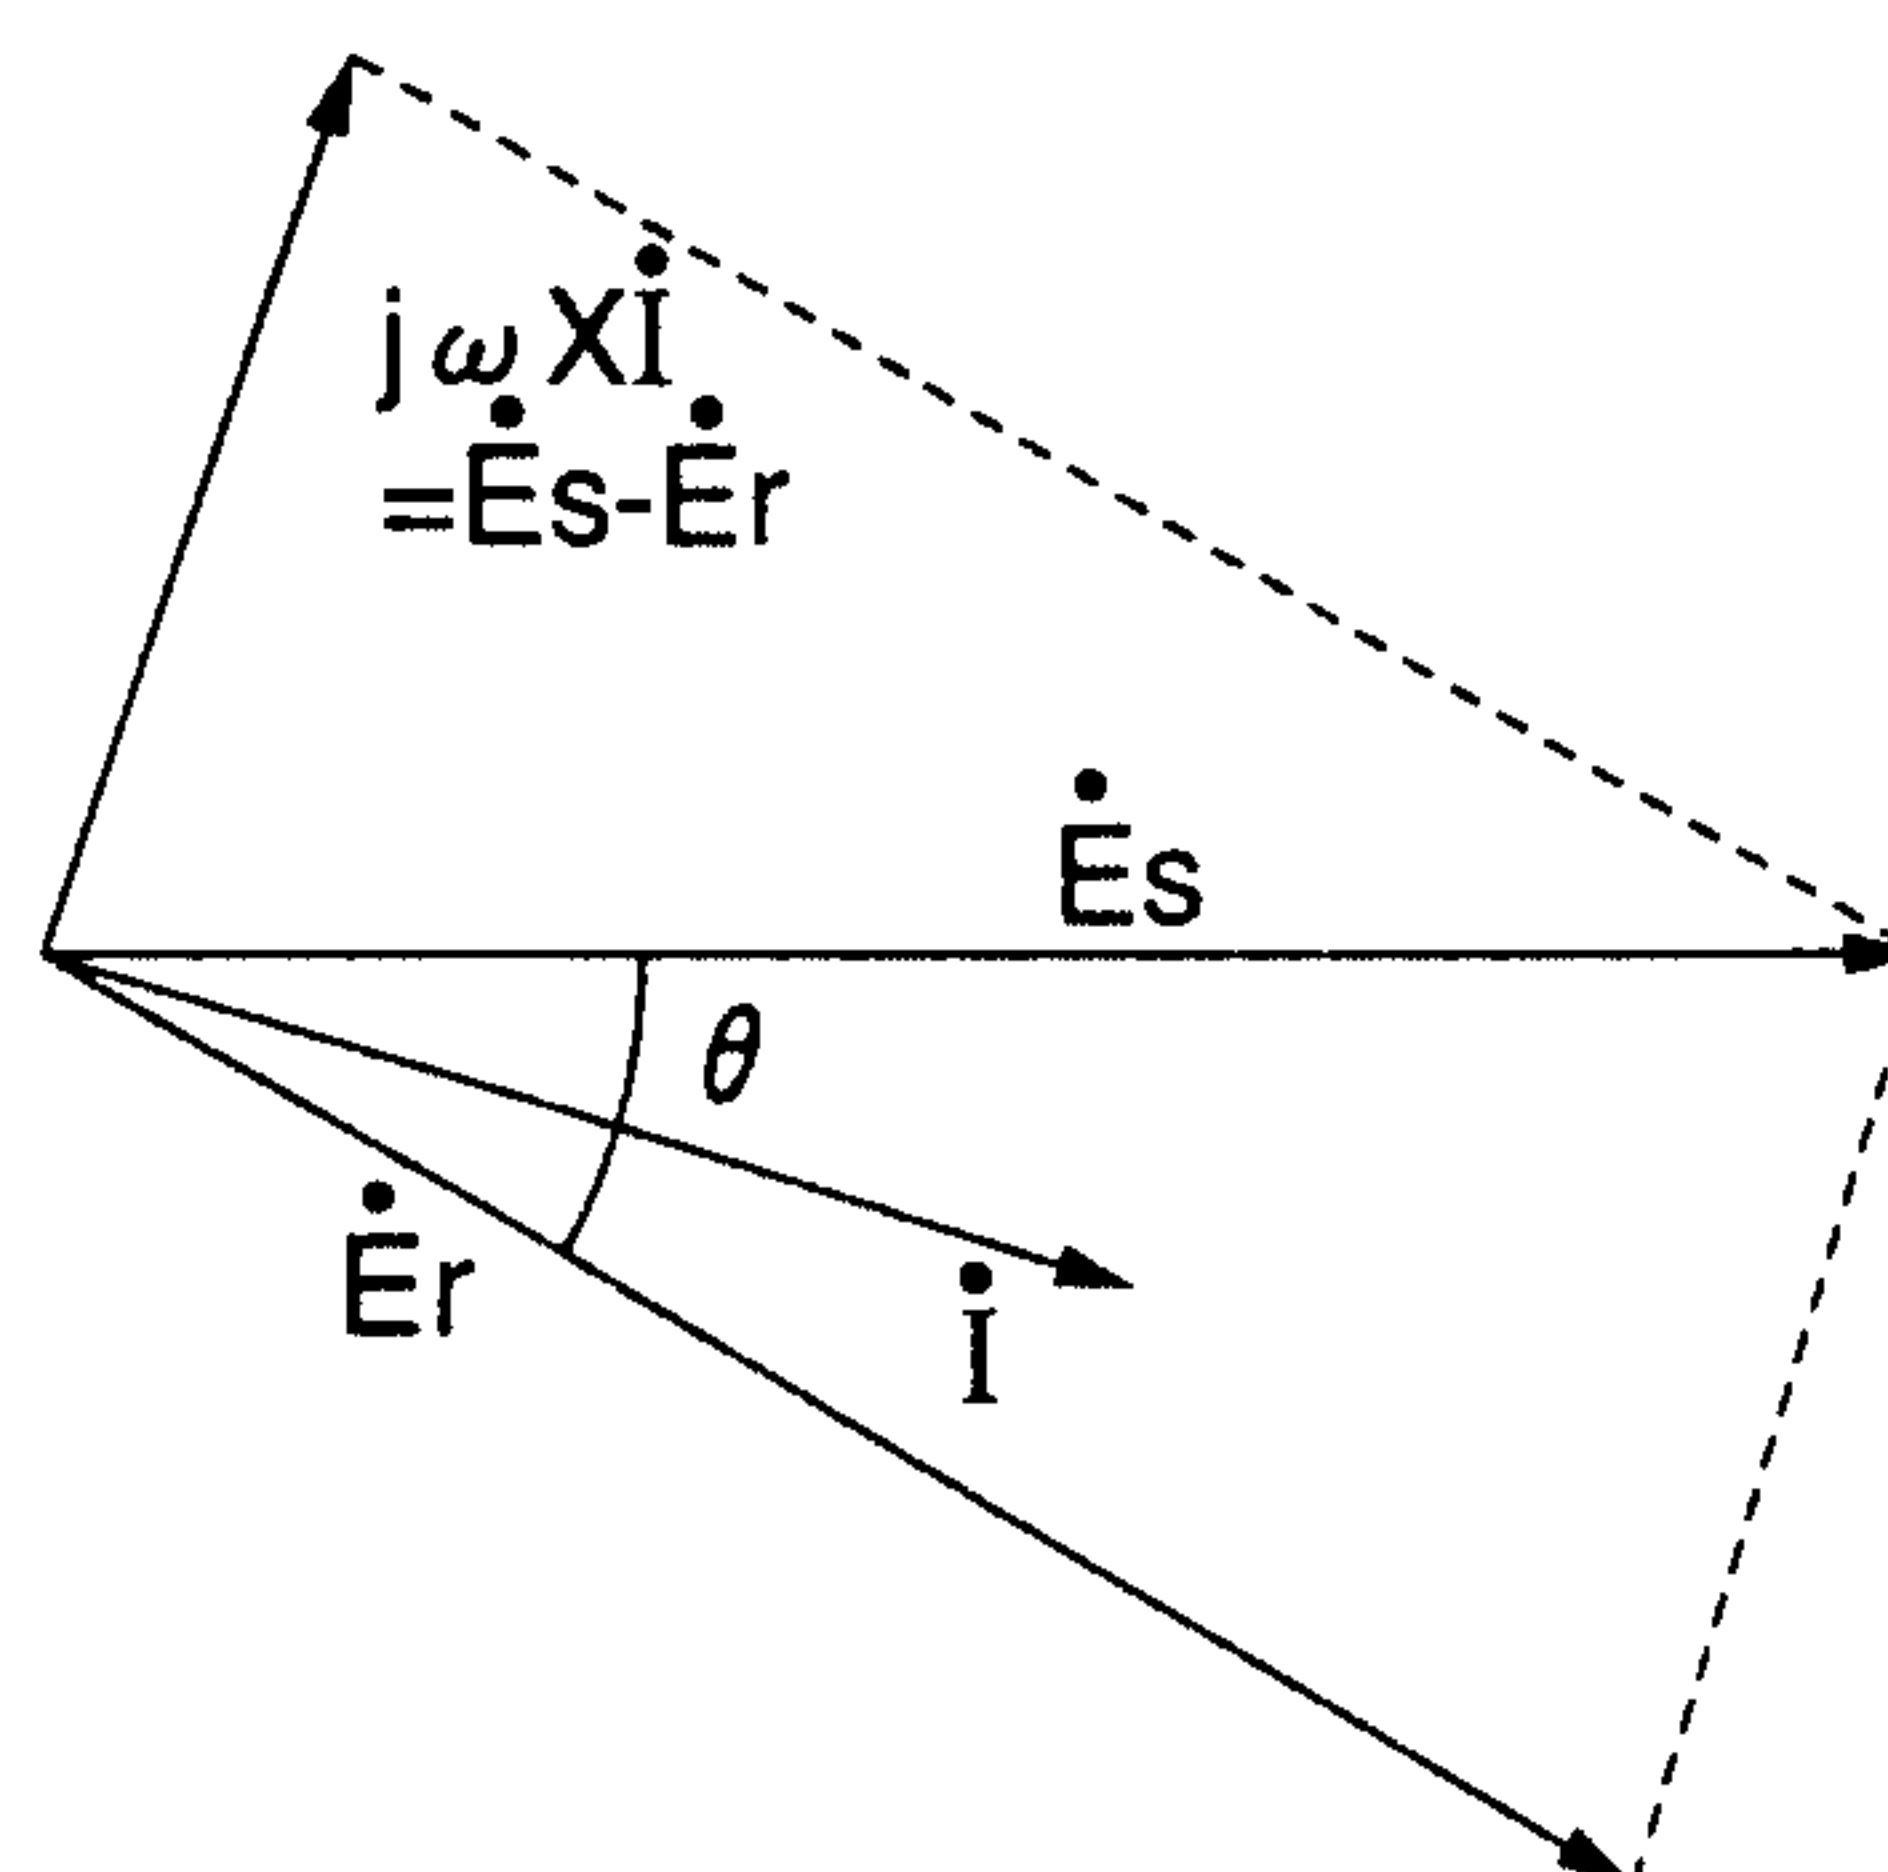


FIG. 54

28/41

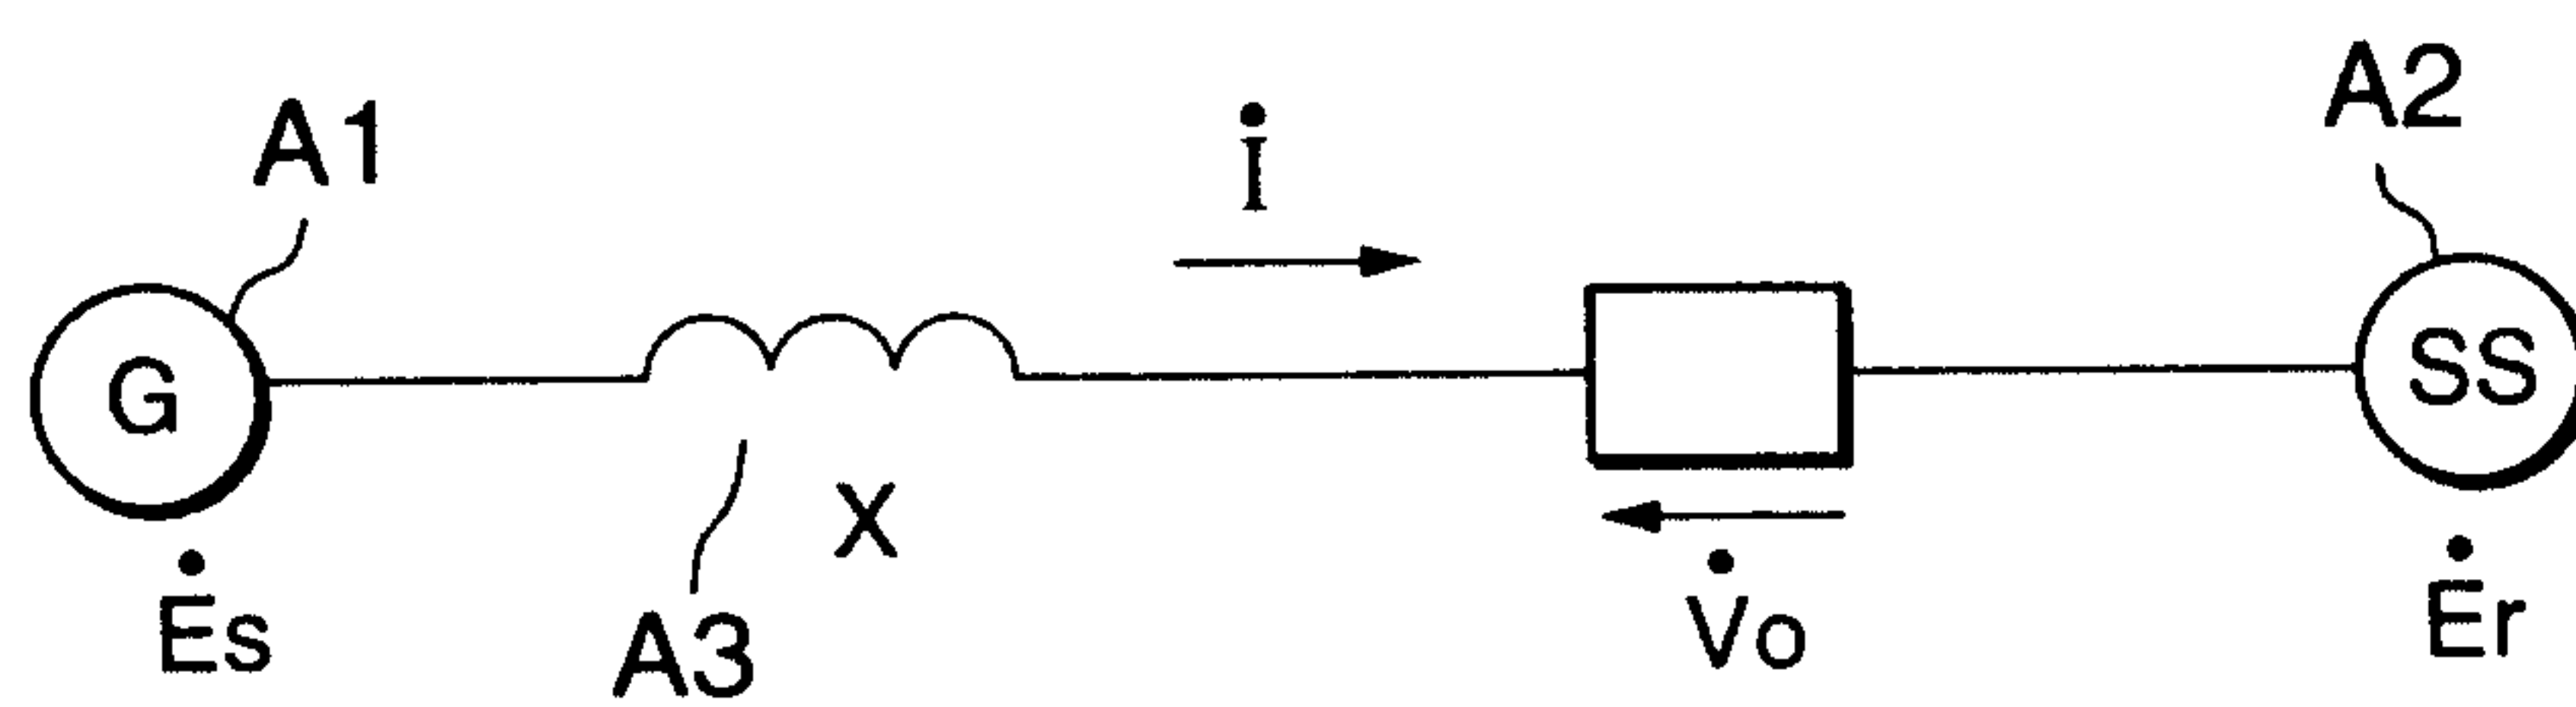


FIG. 55

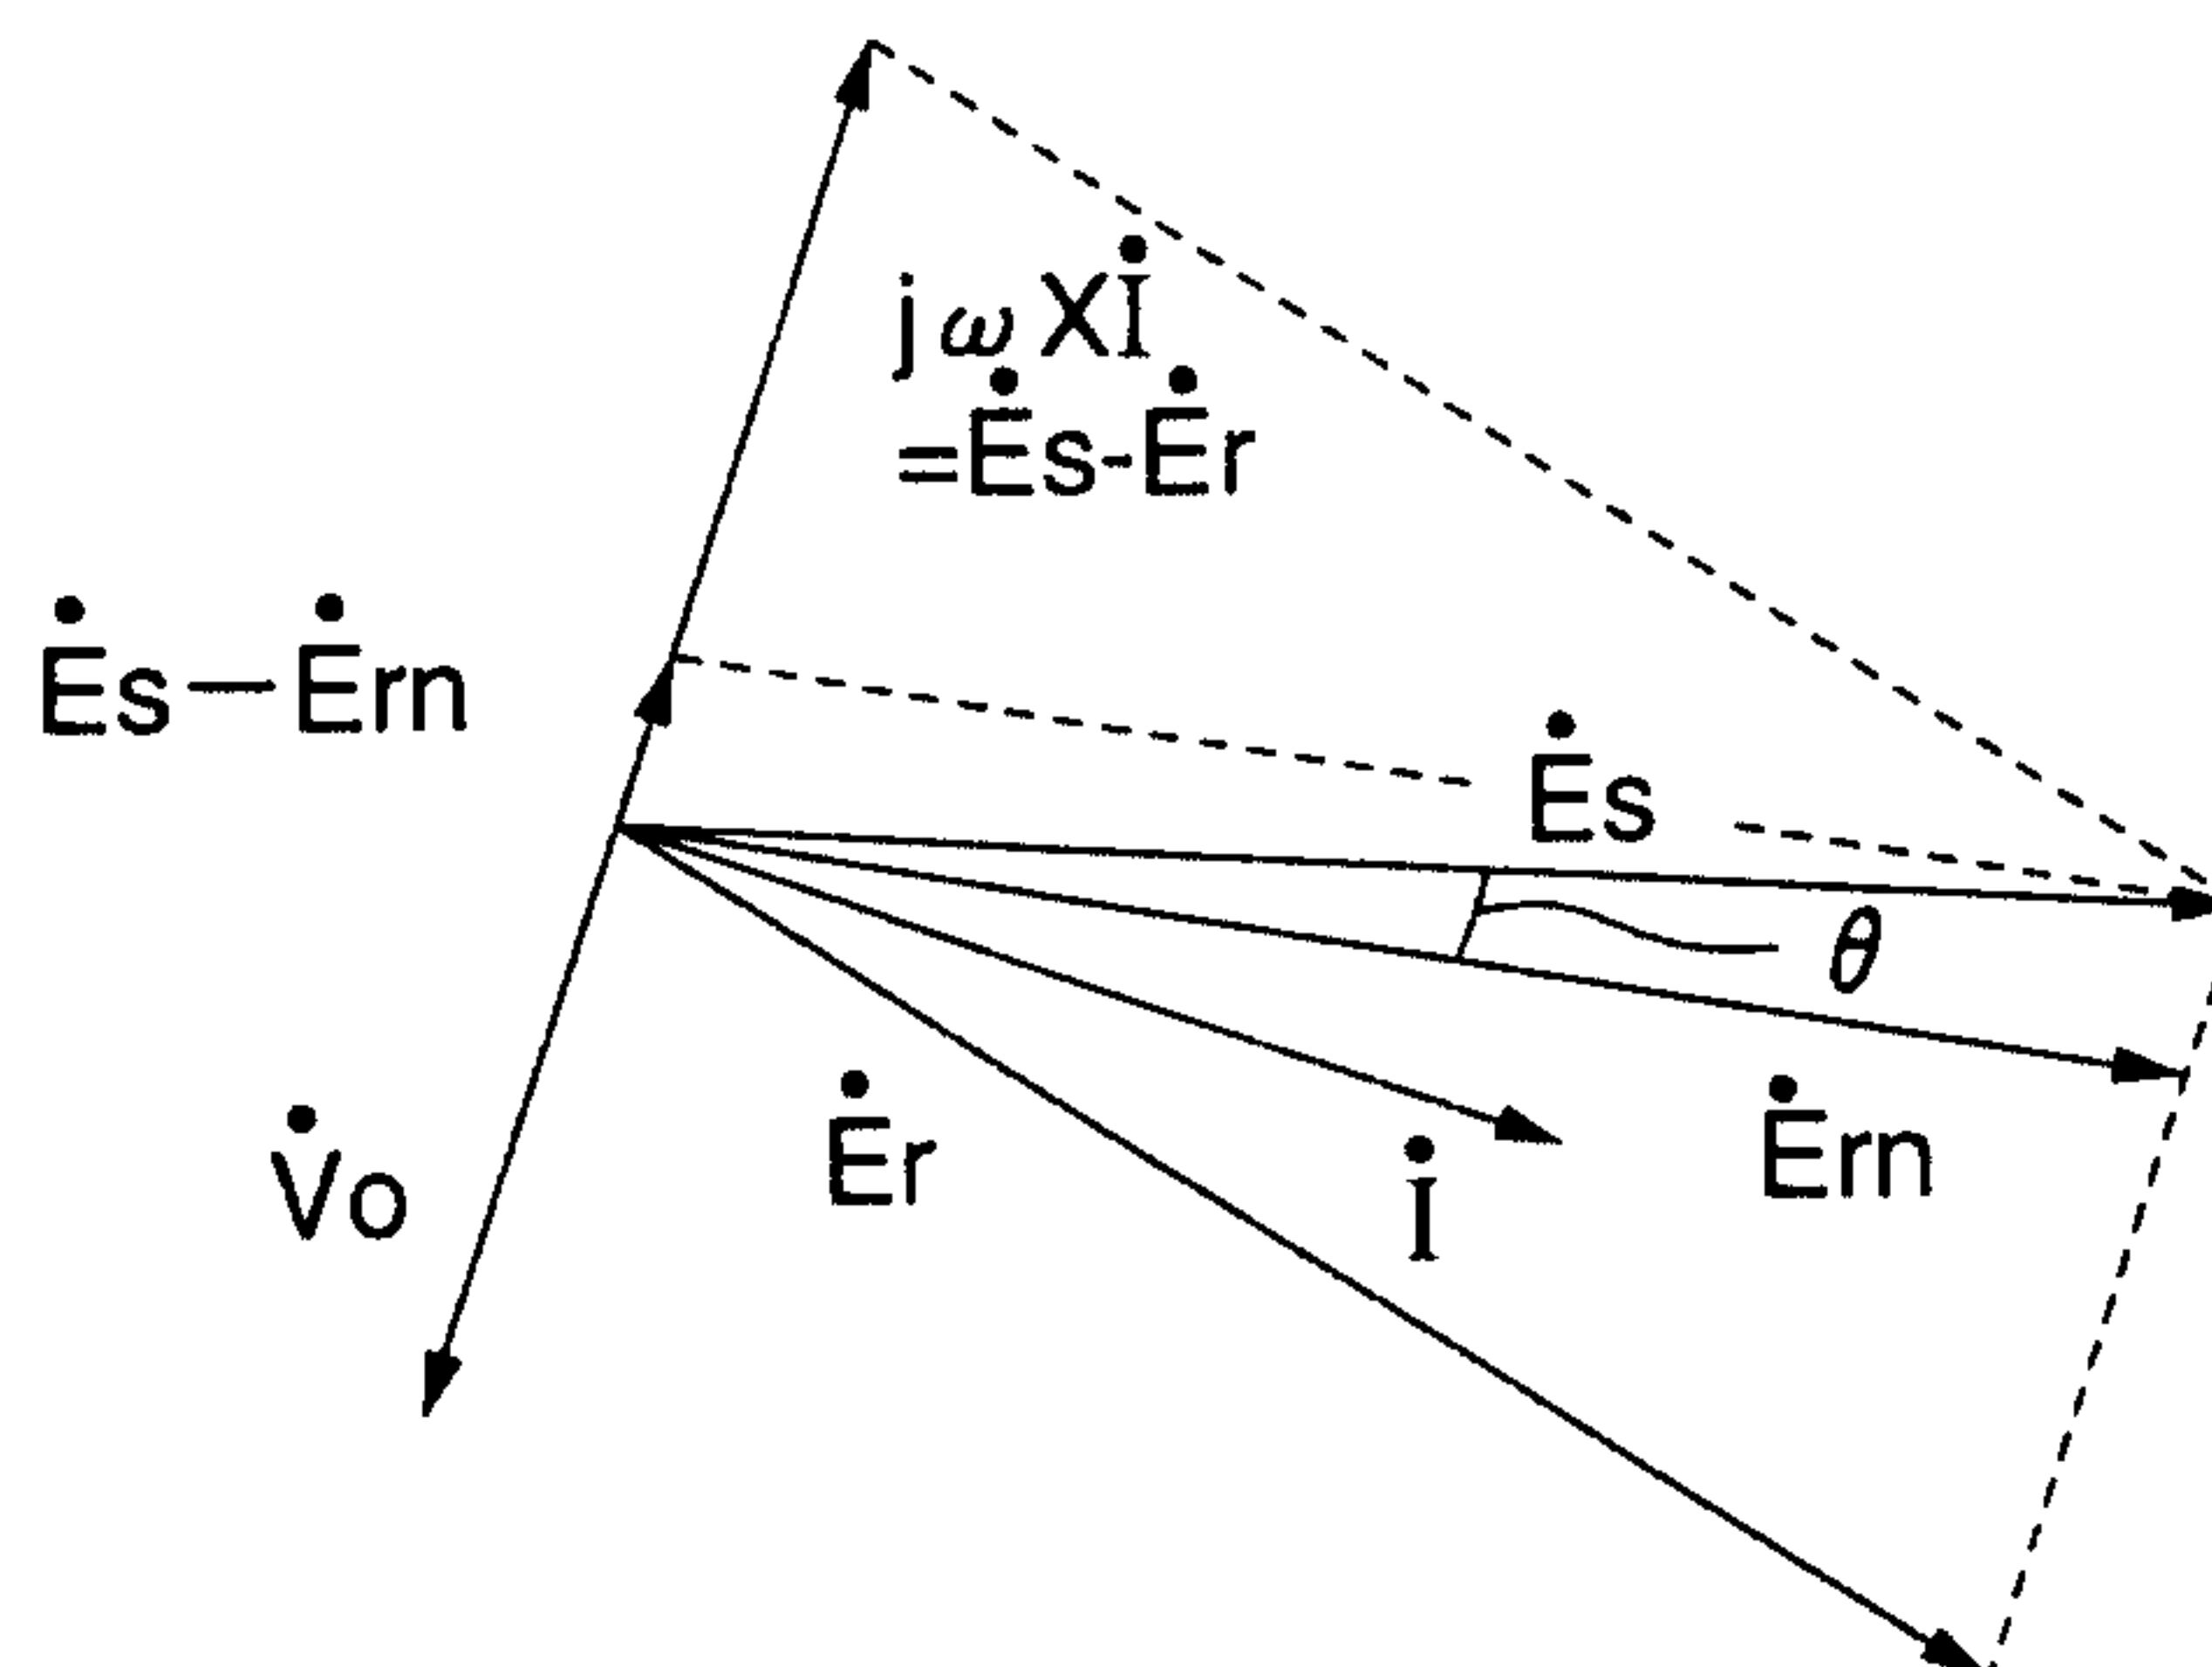


FIG. 56

29/41

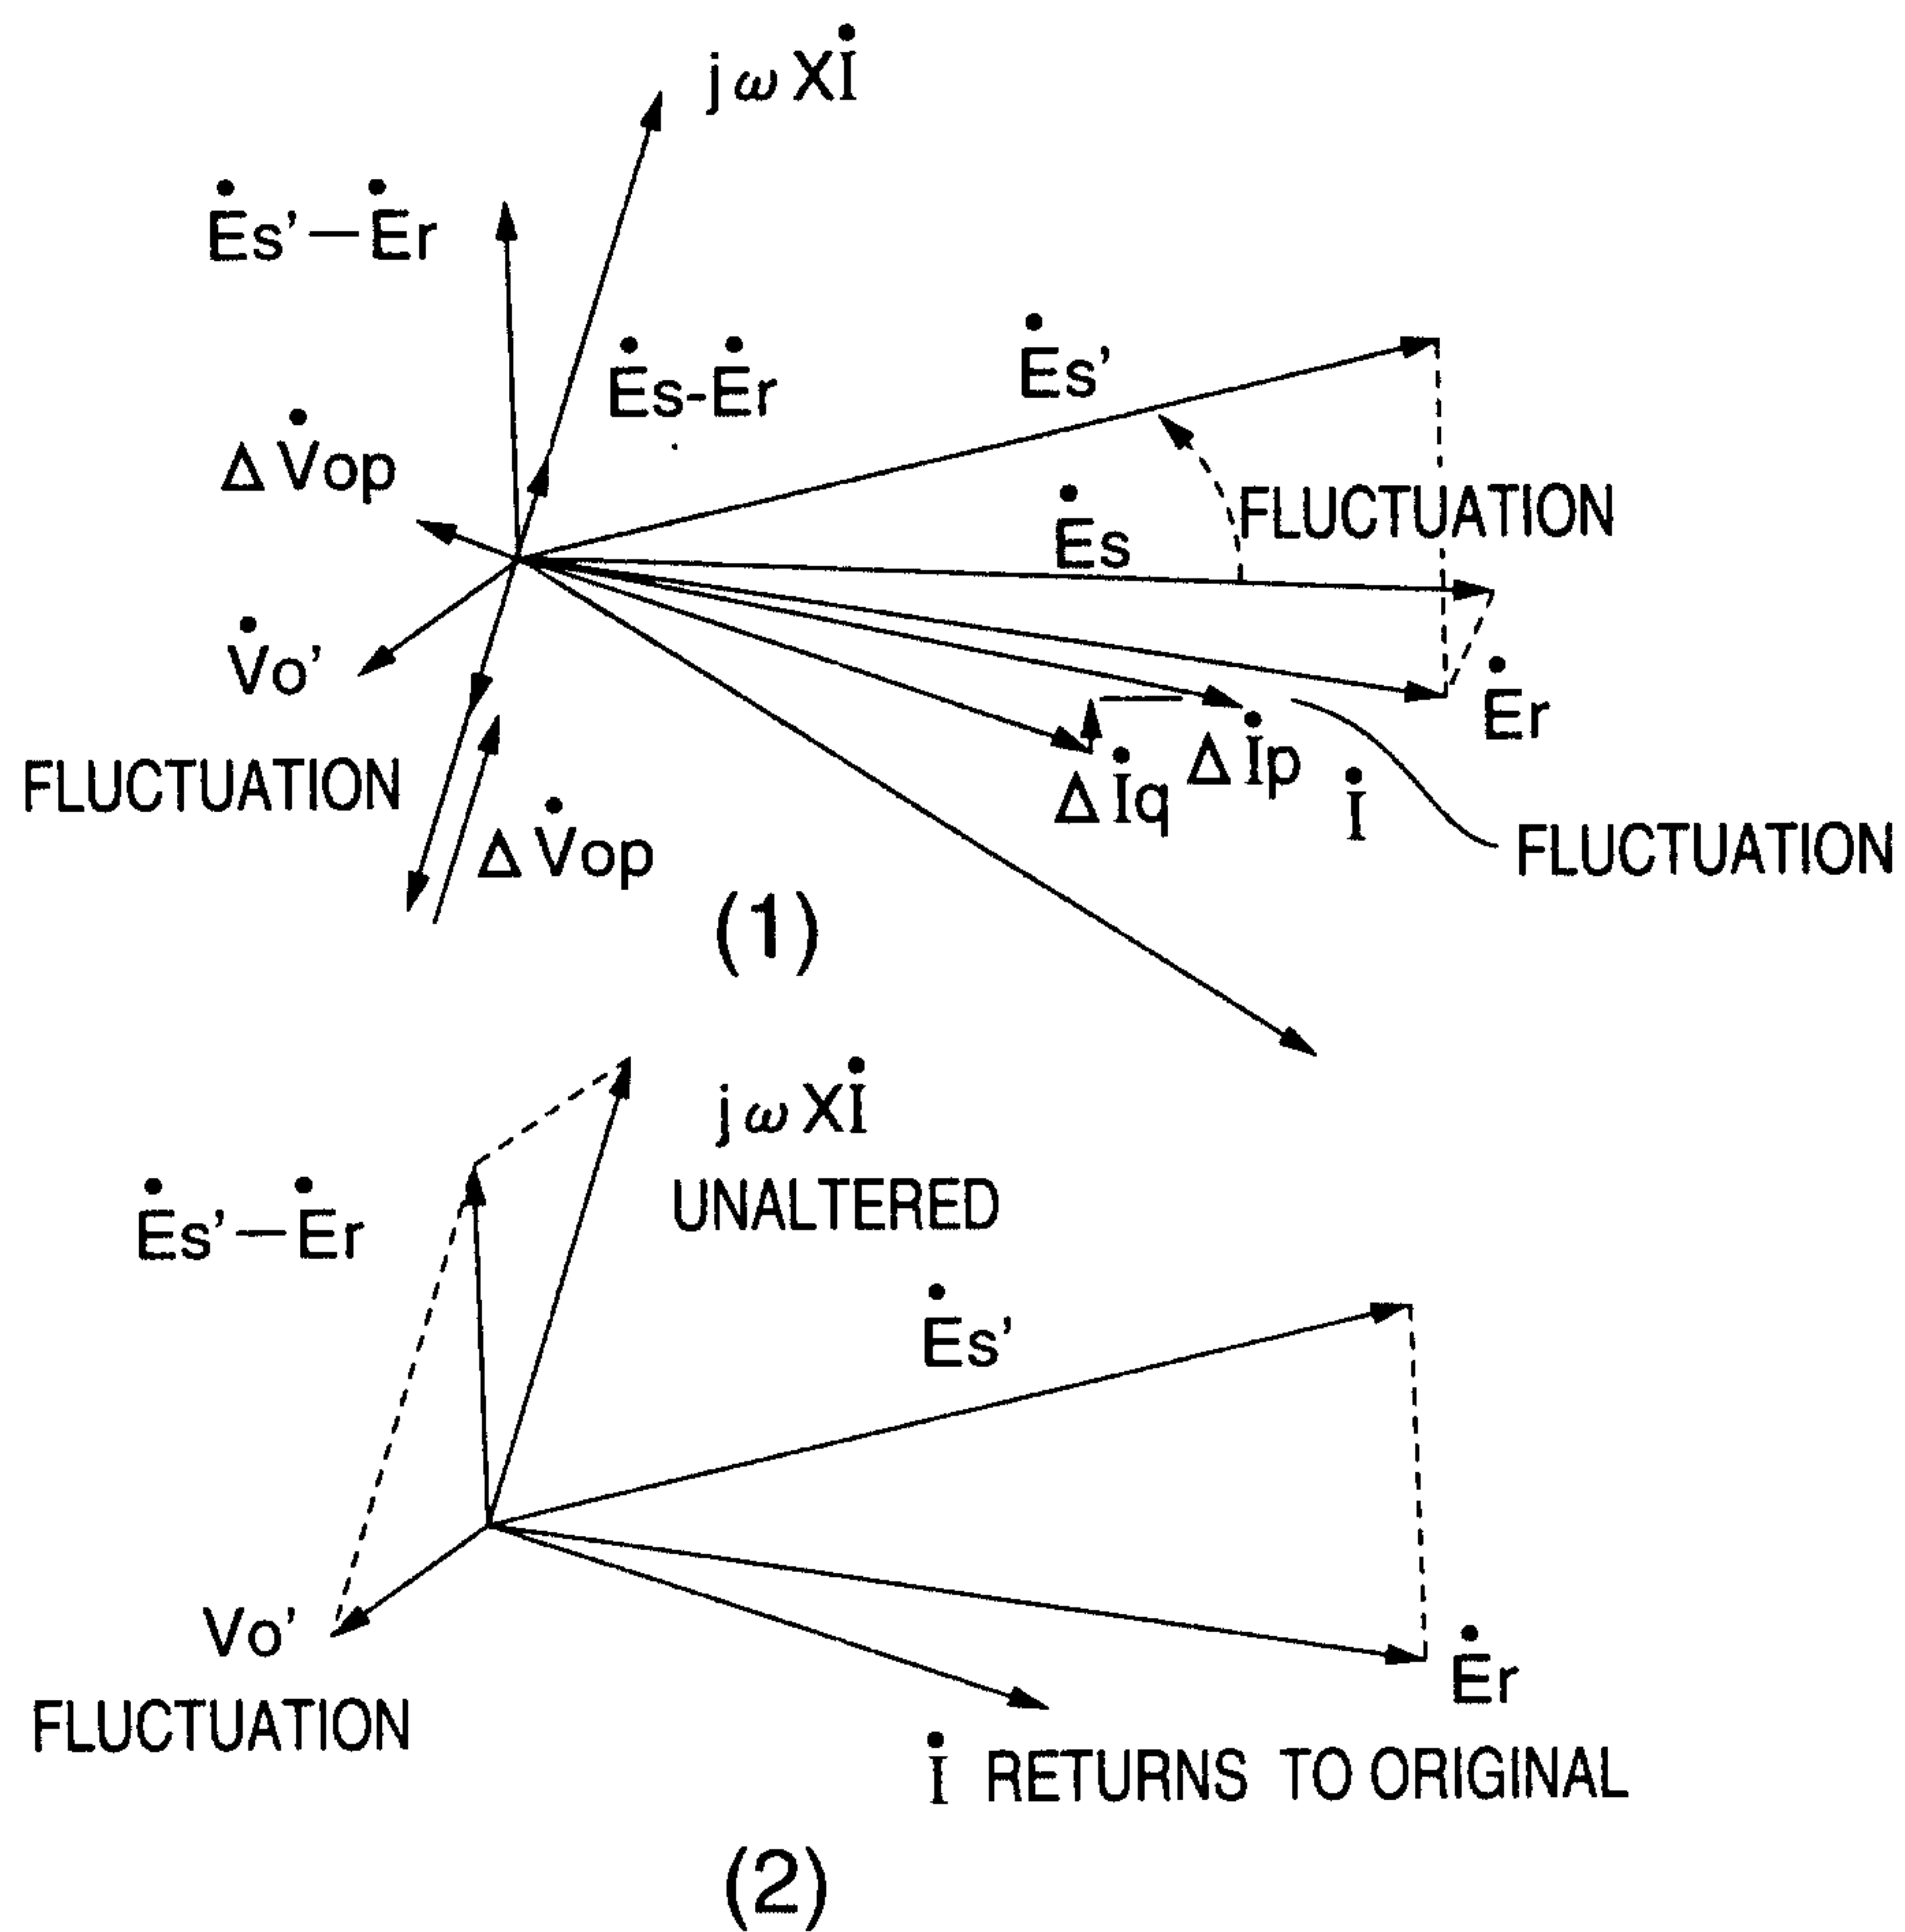


FIG. 57

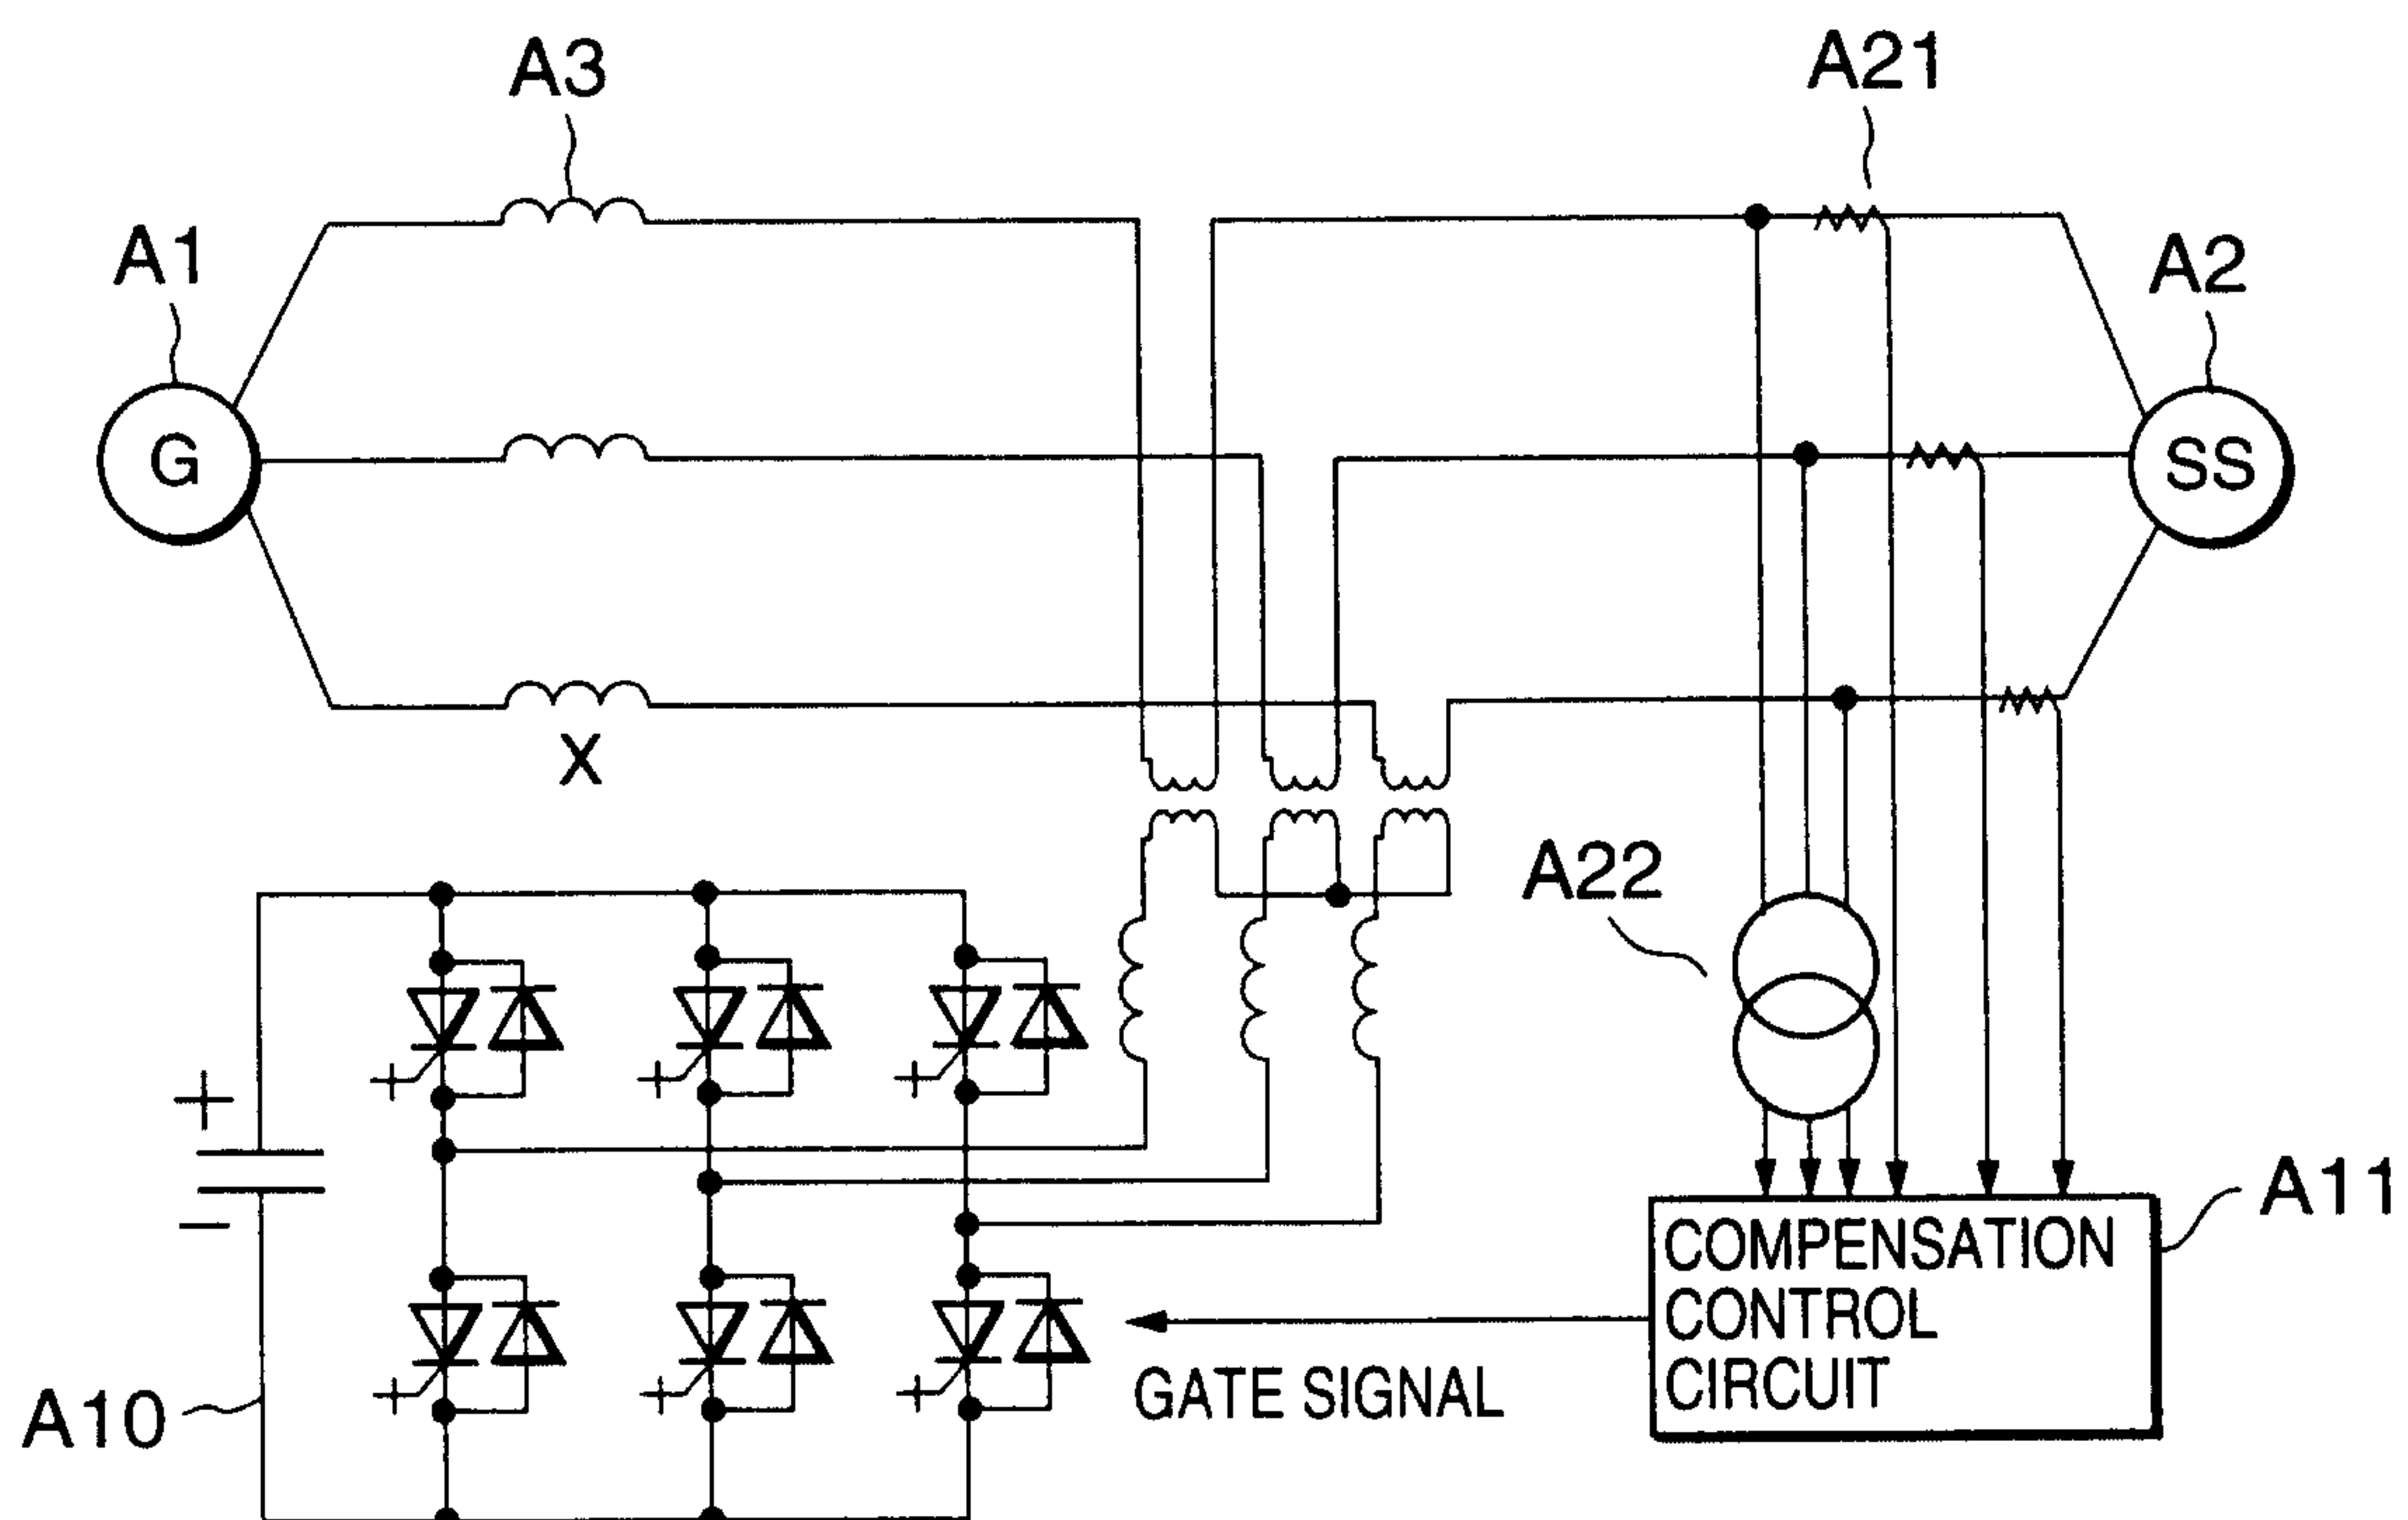


FIG. 58

30/41

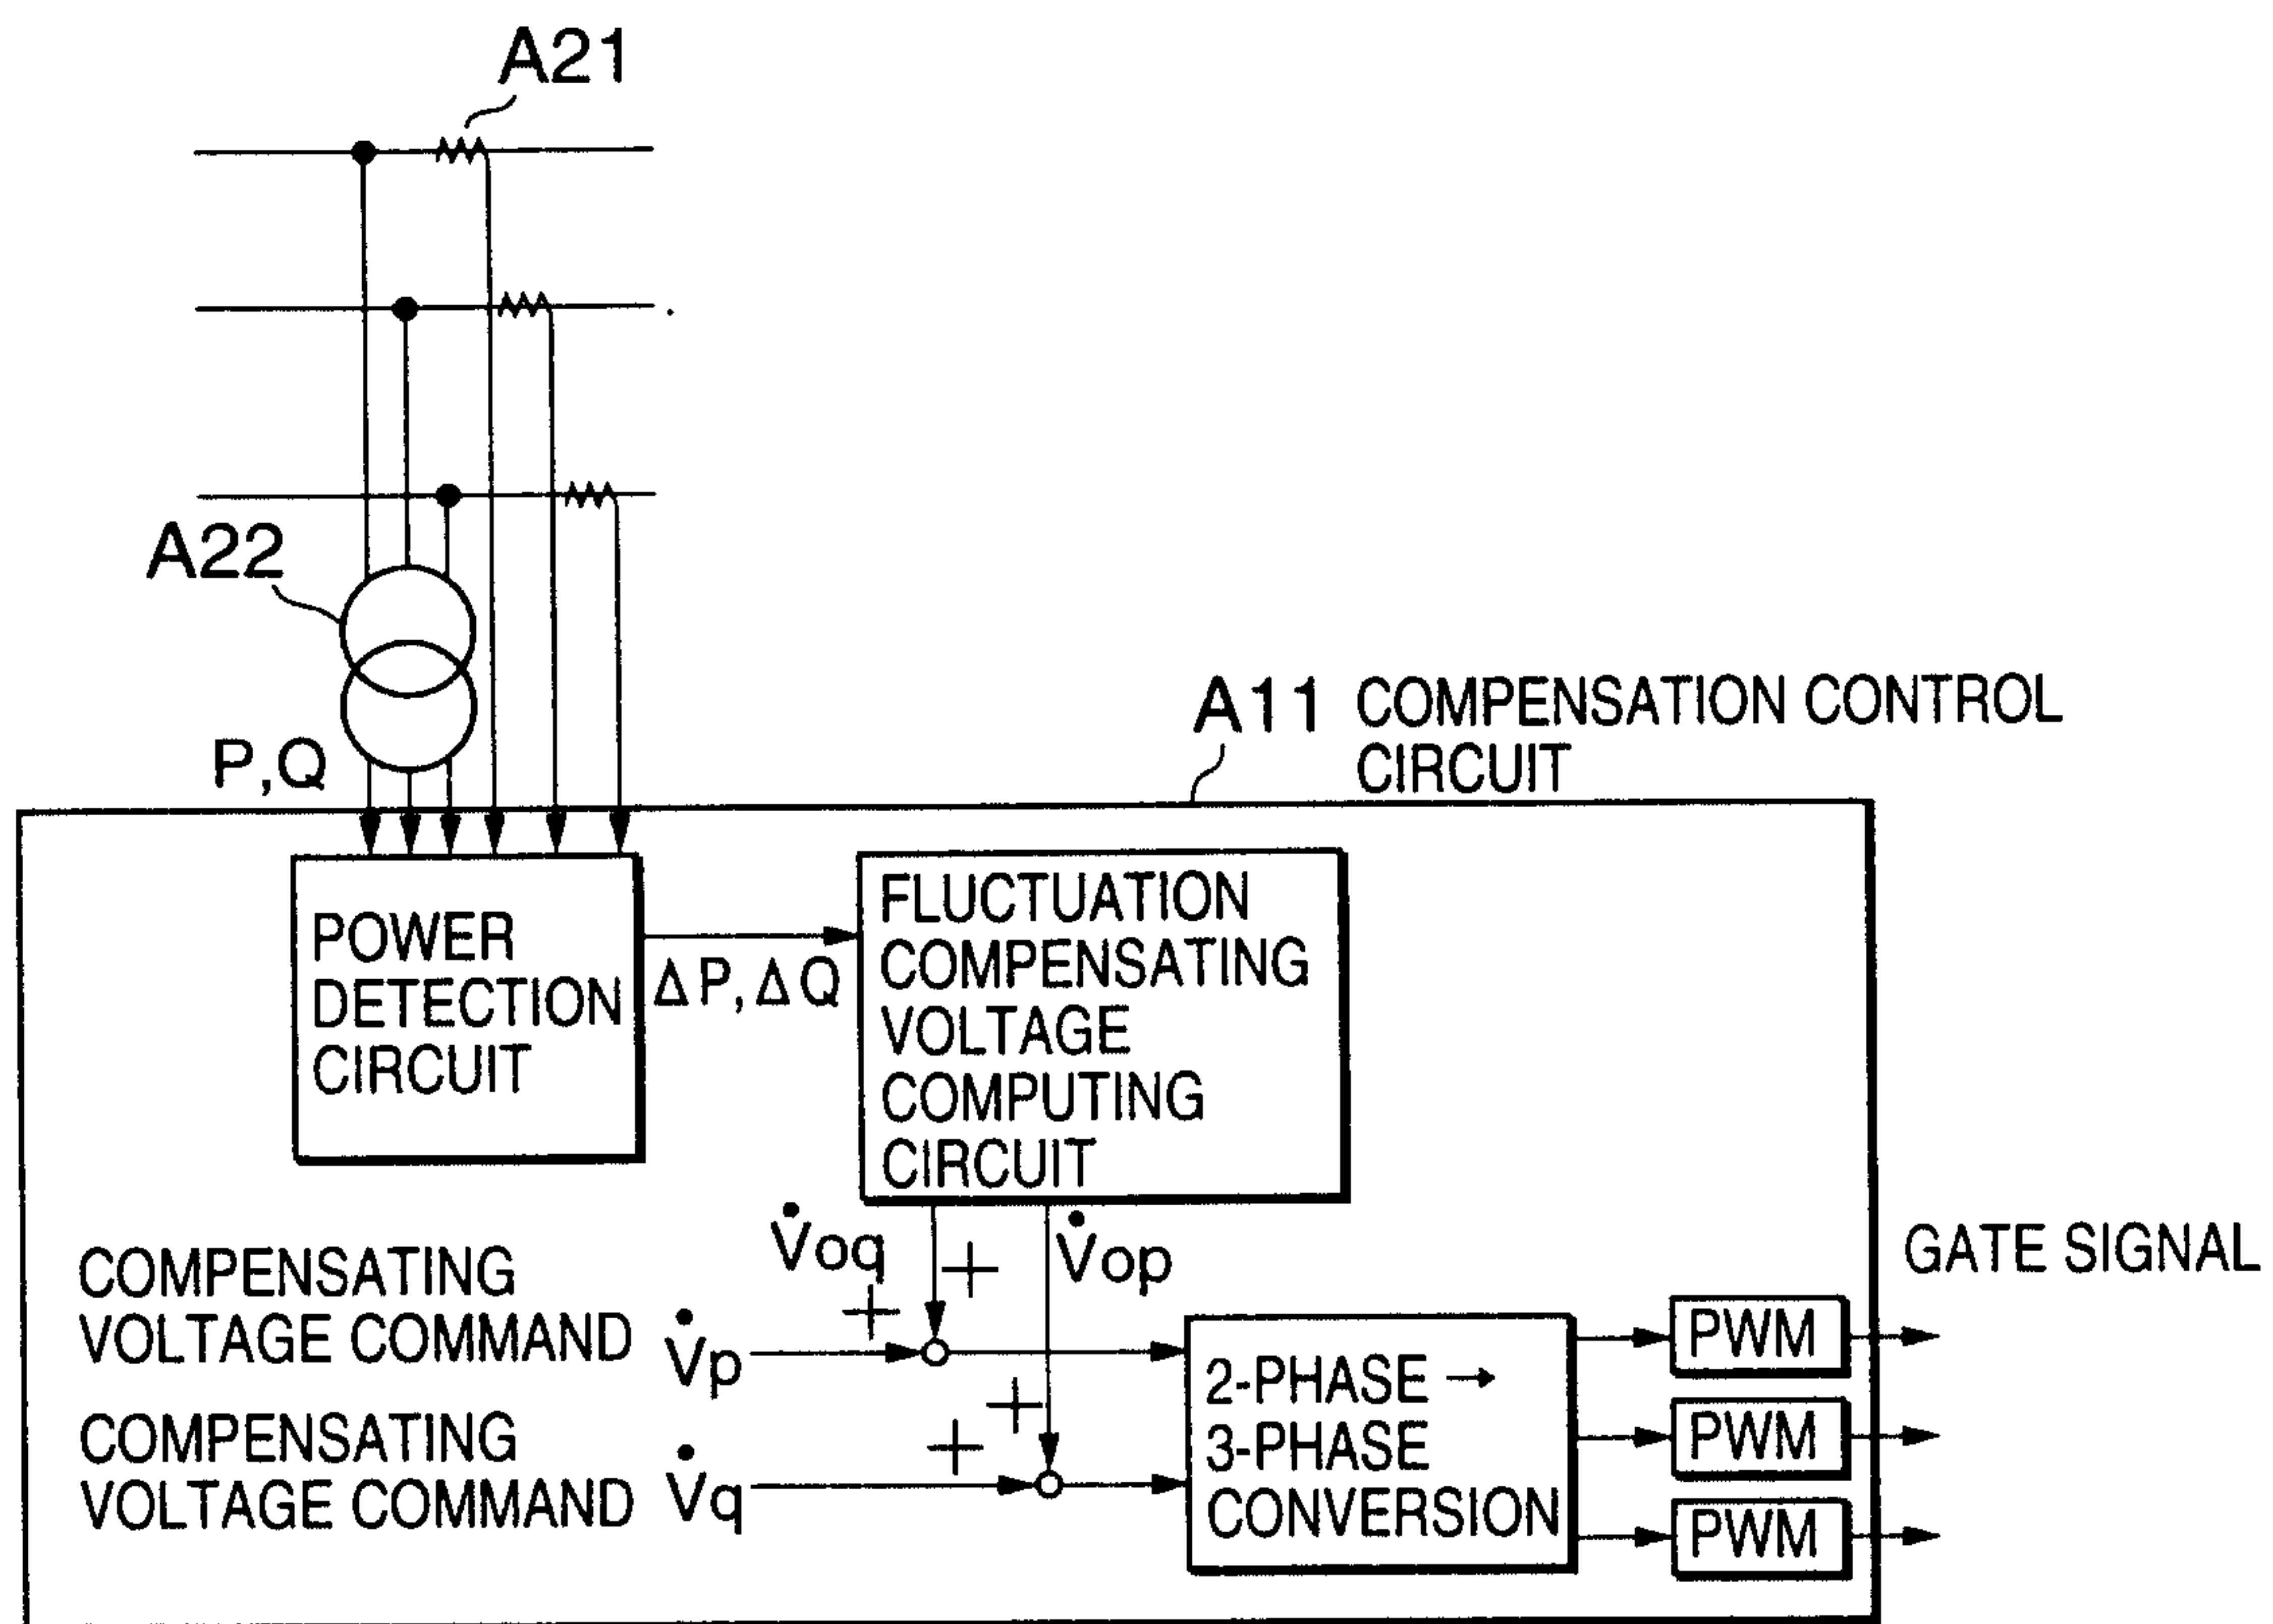


FIG. 59

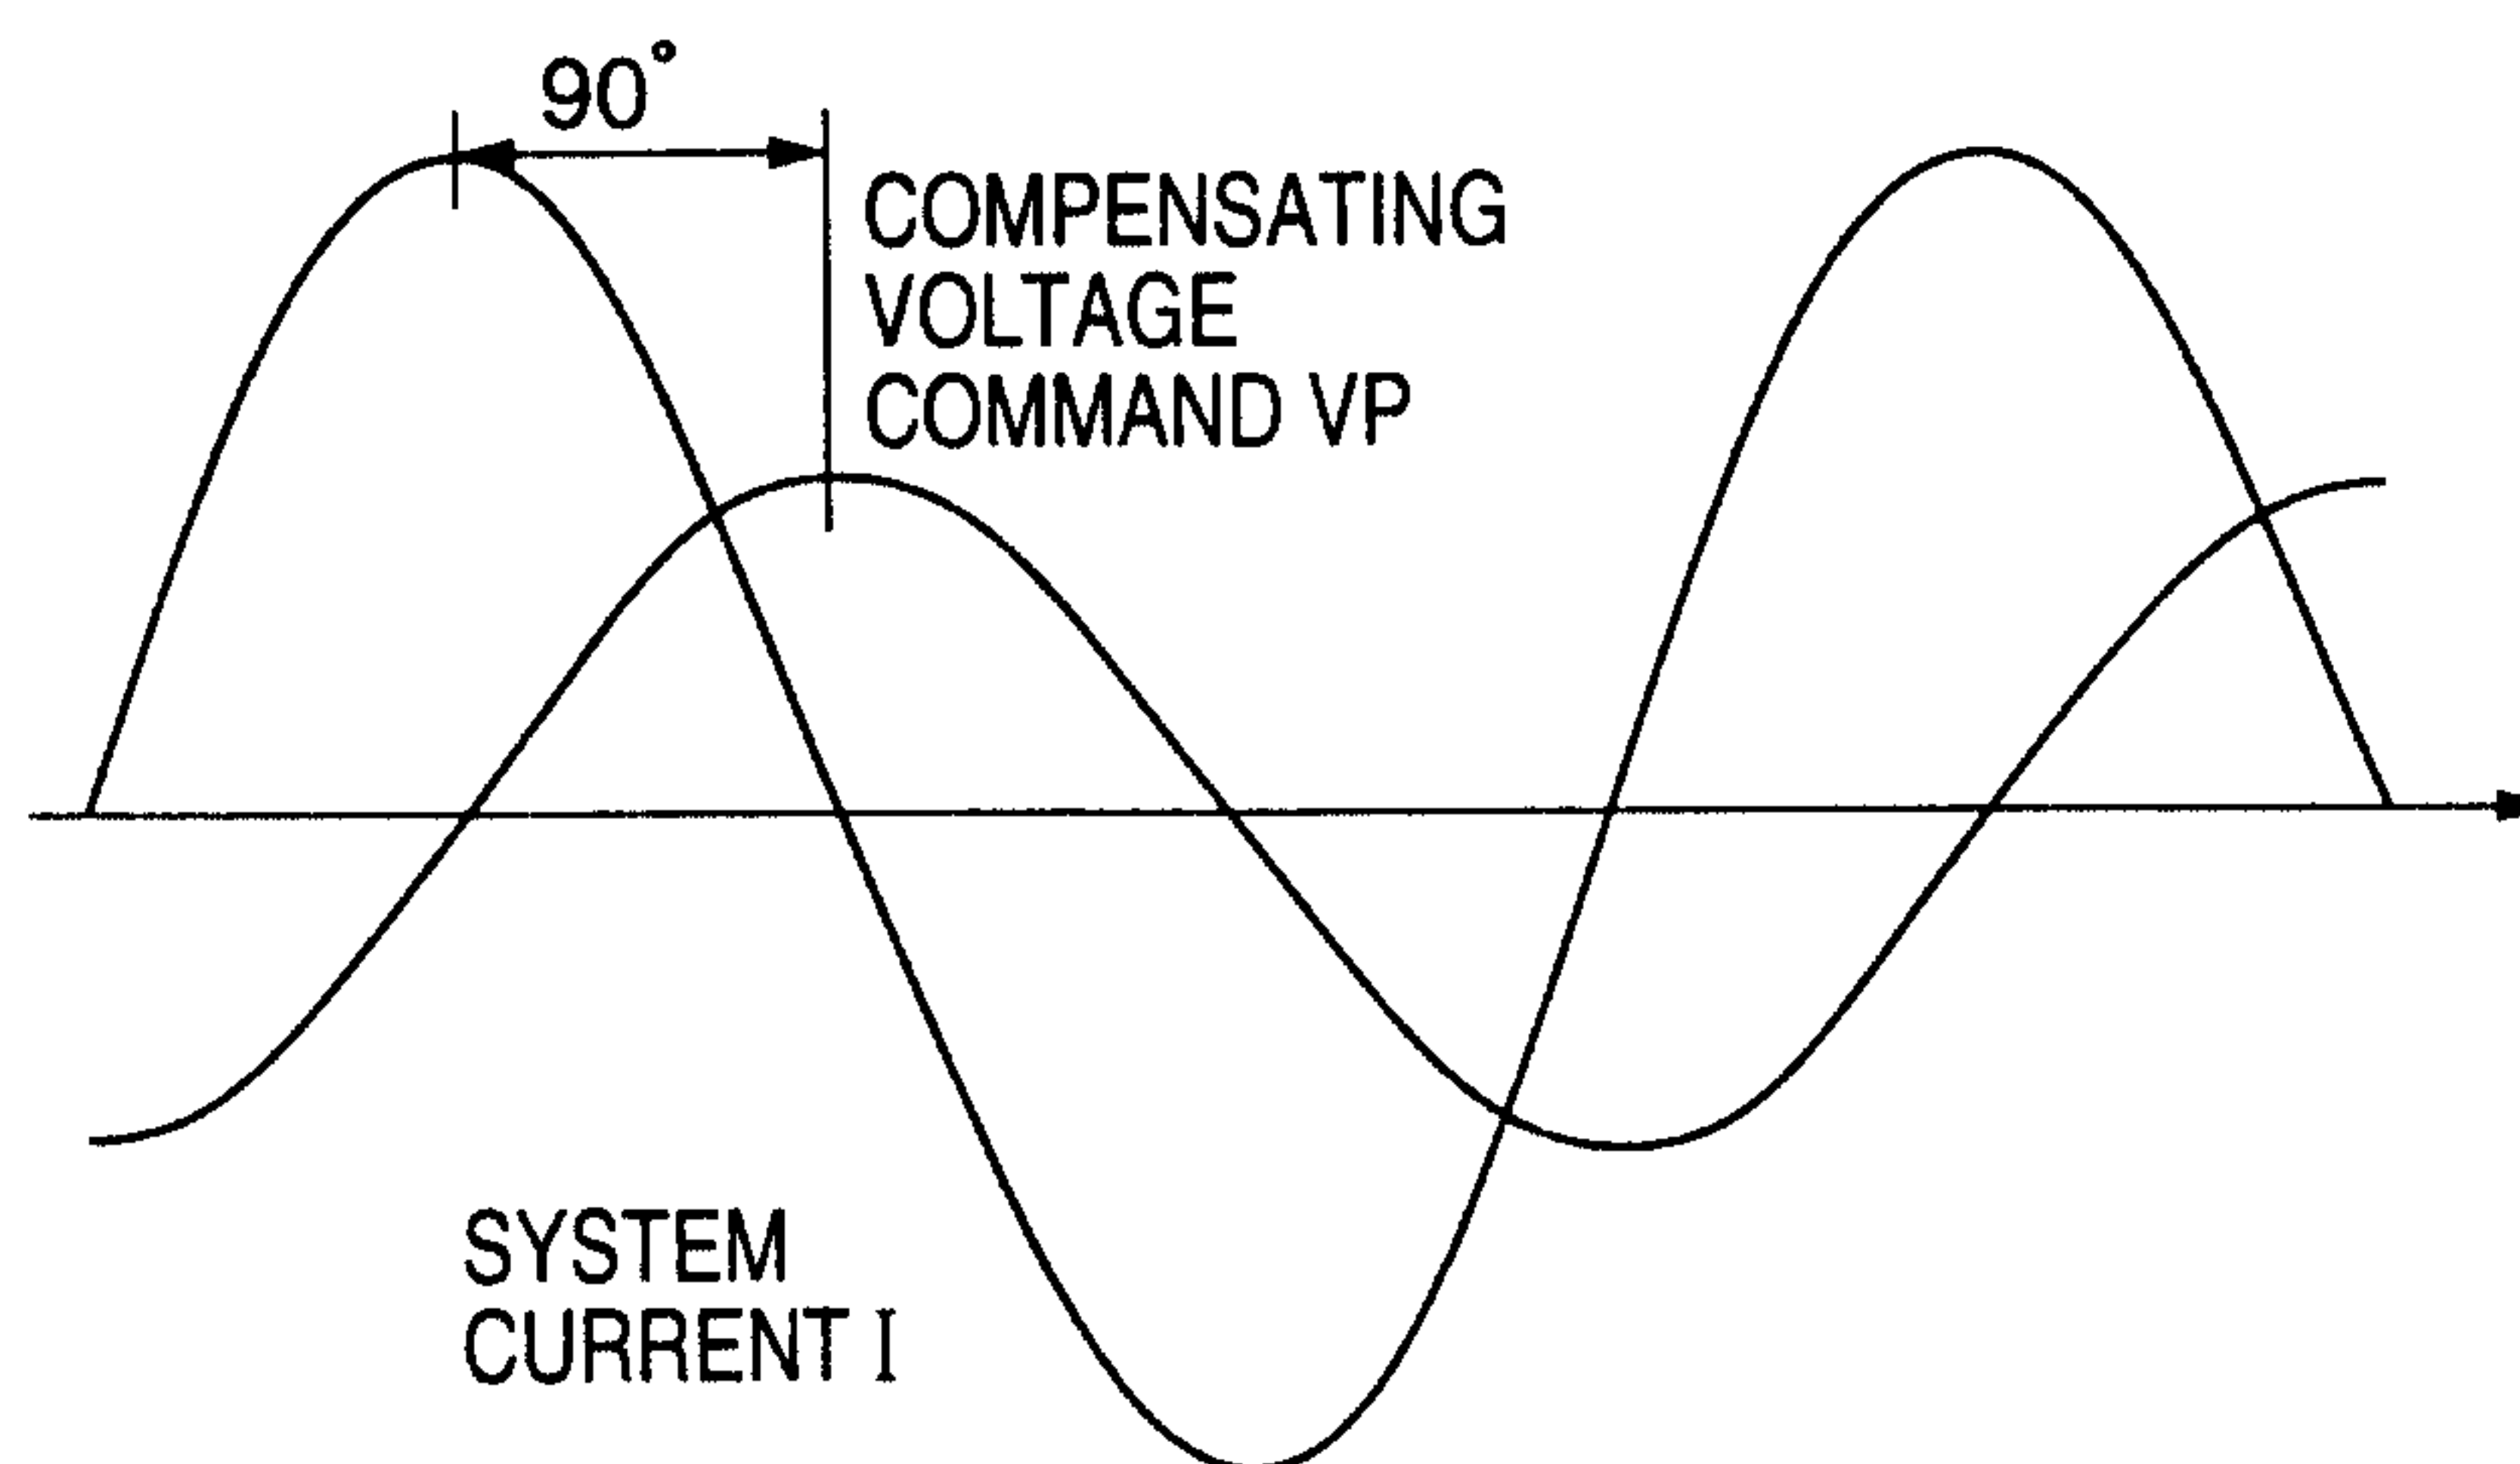


FIG. 60

31/41

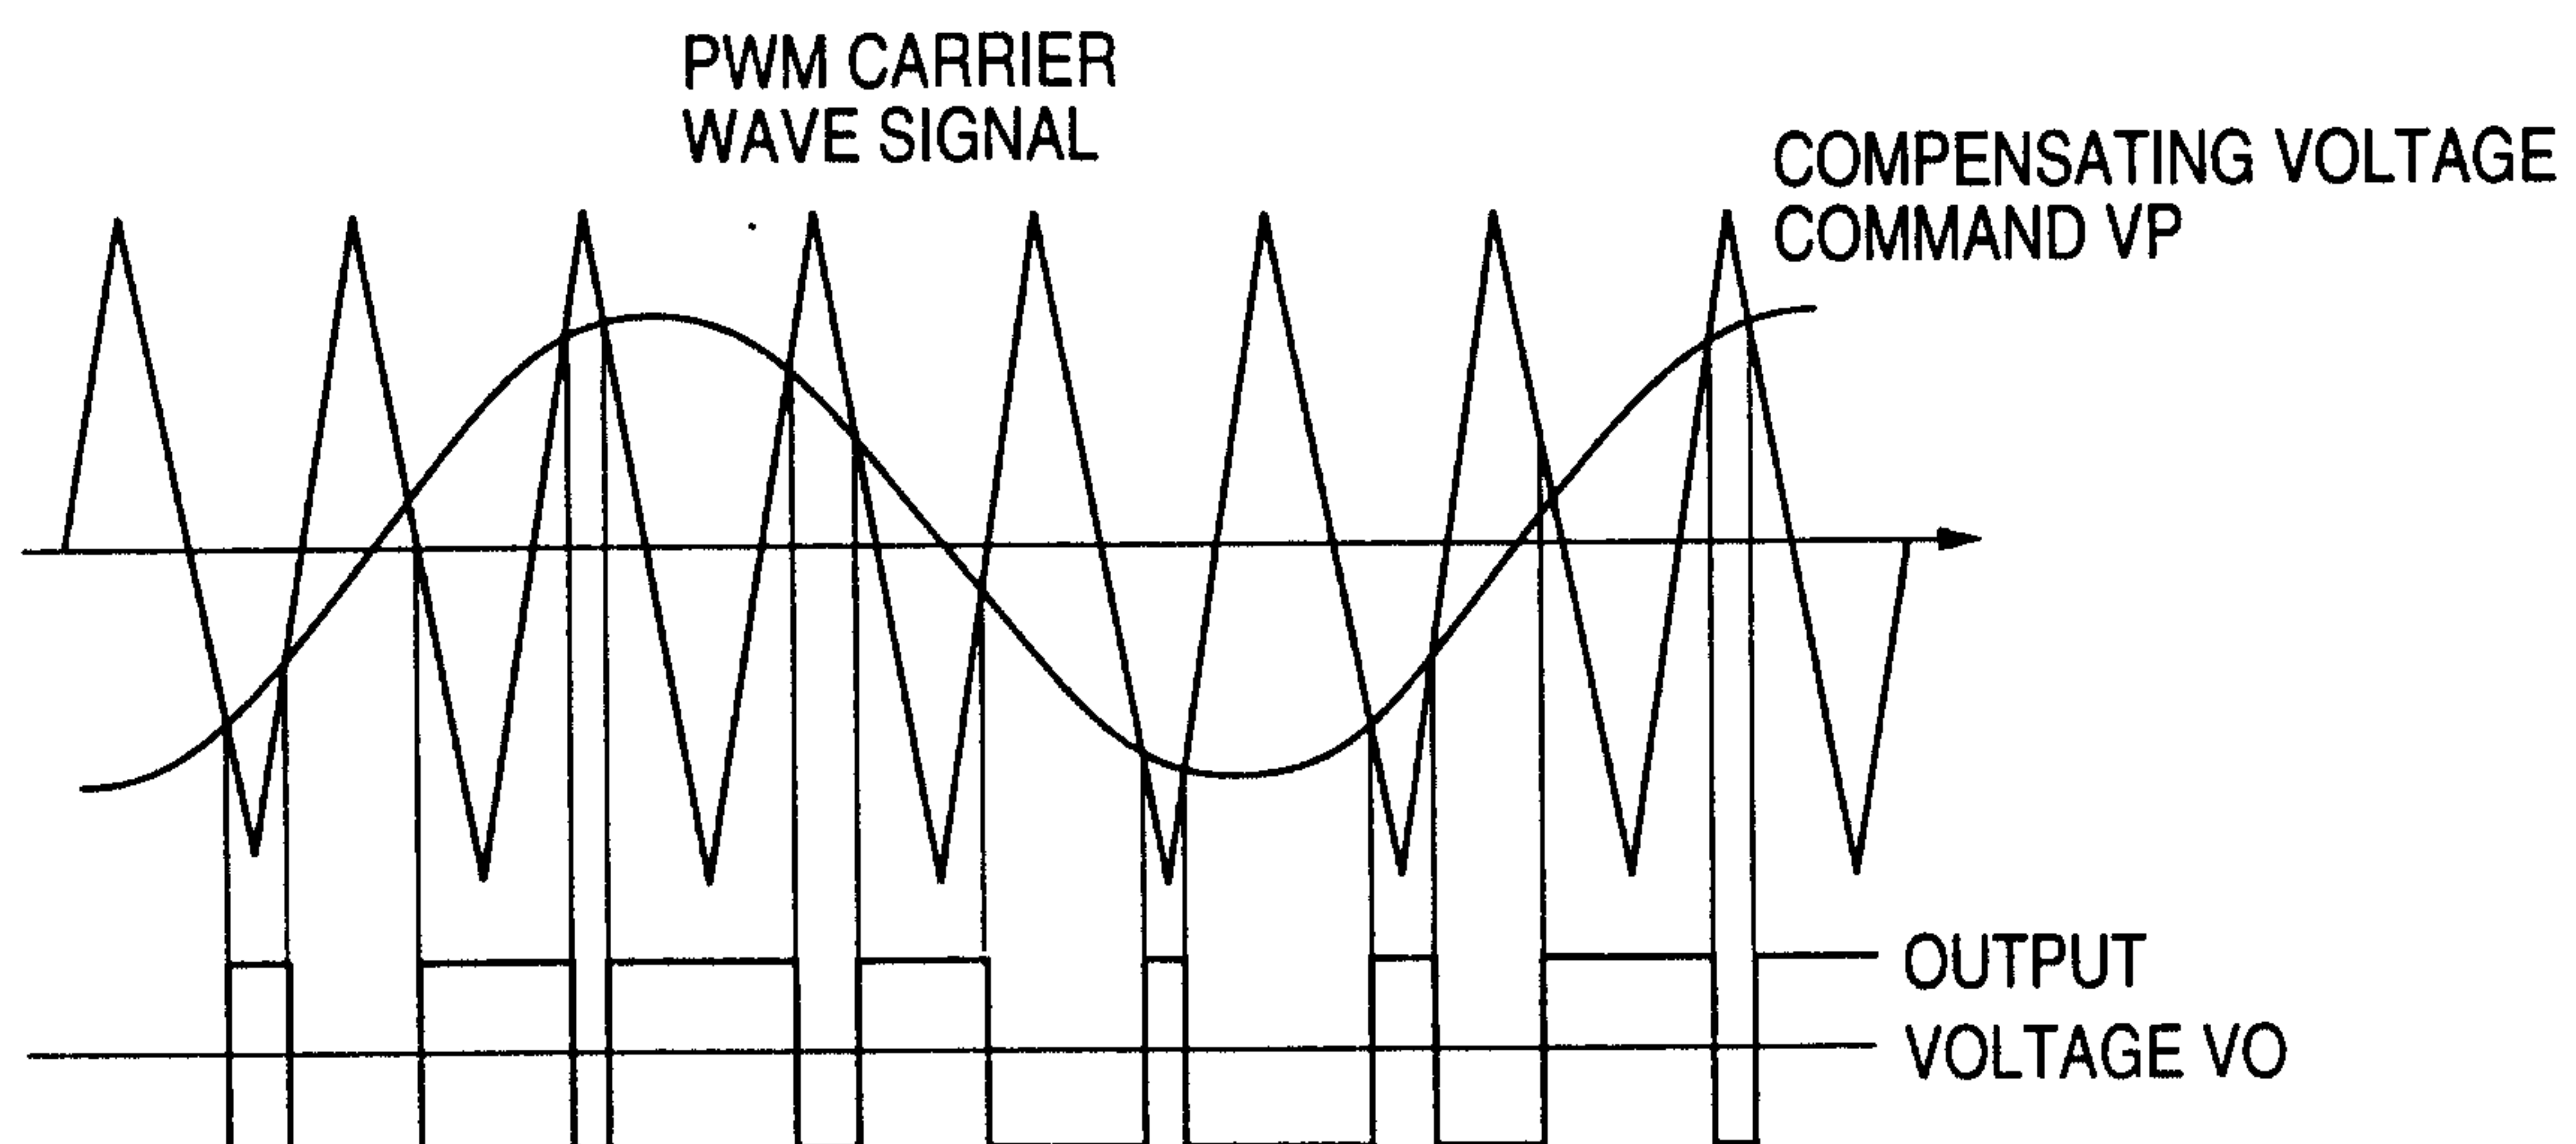


FIG. 61

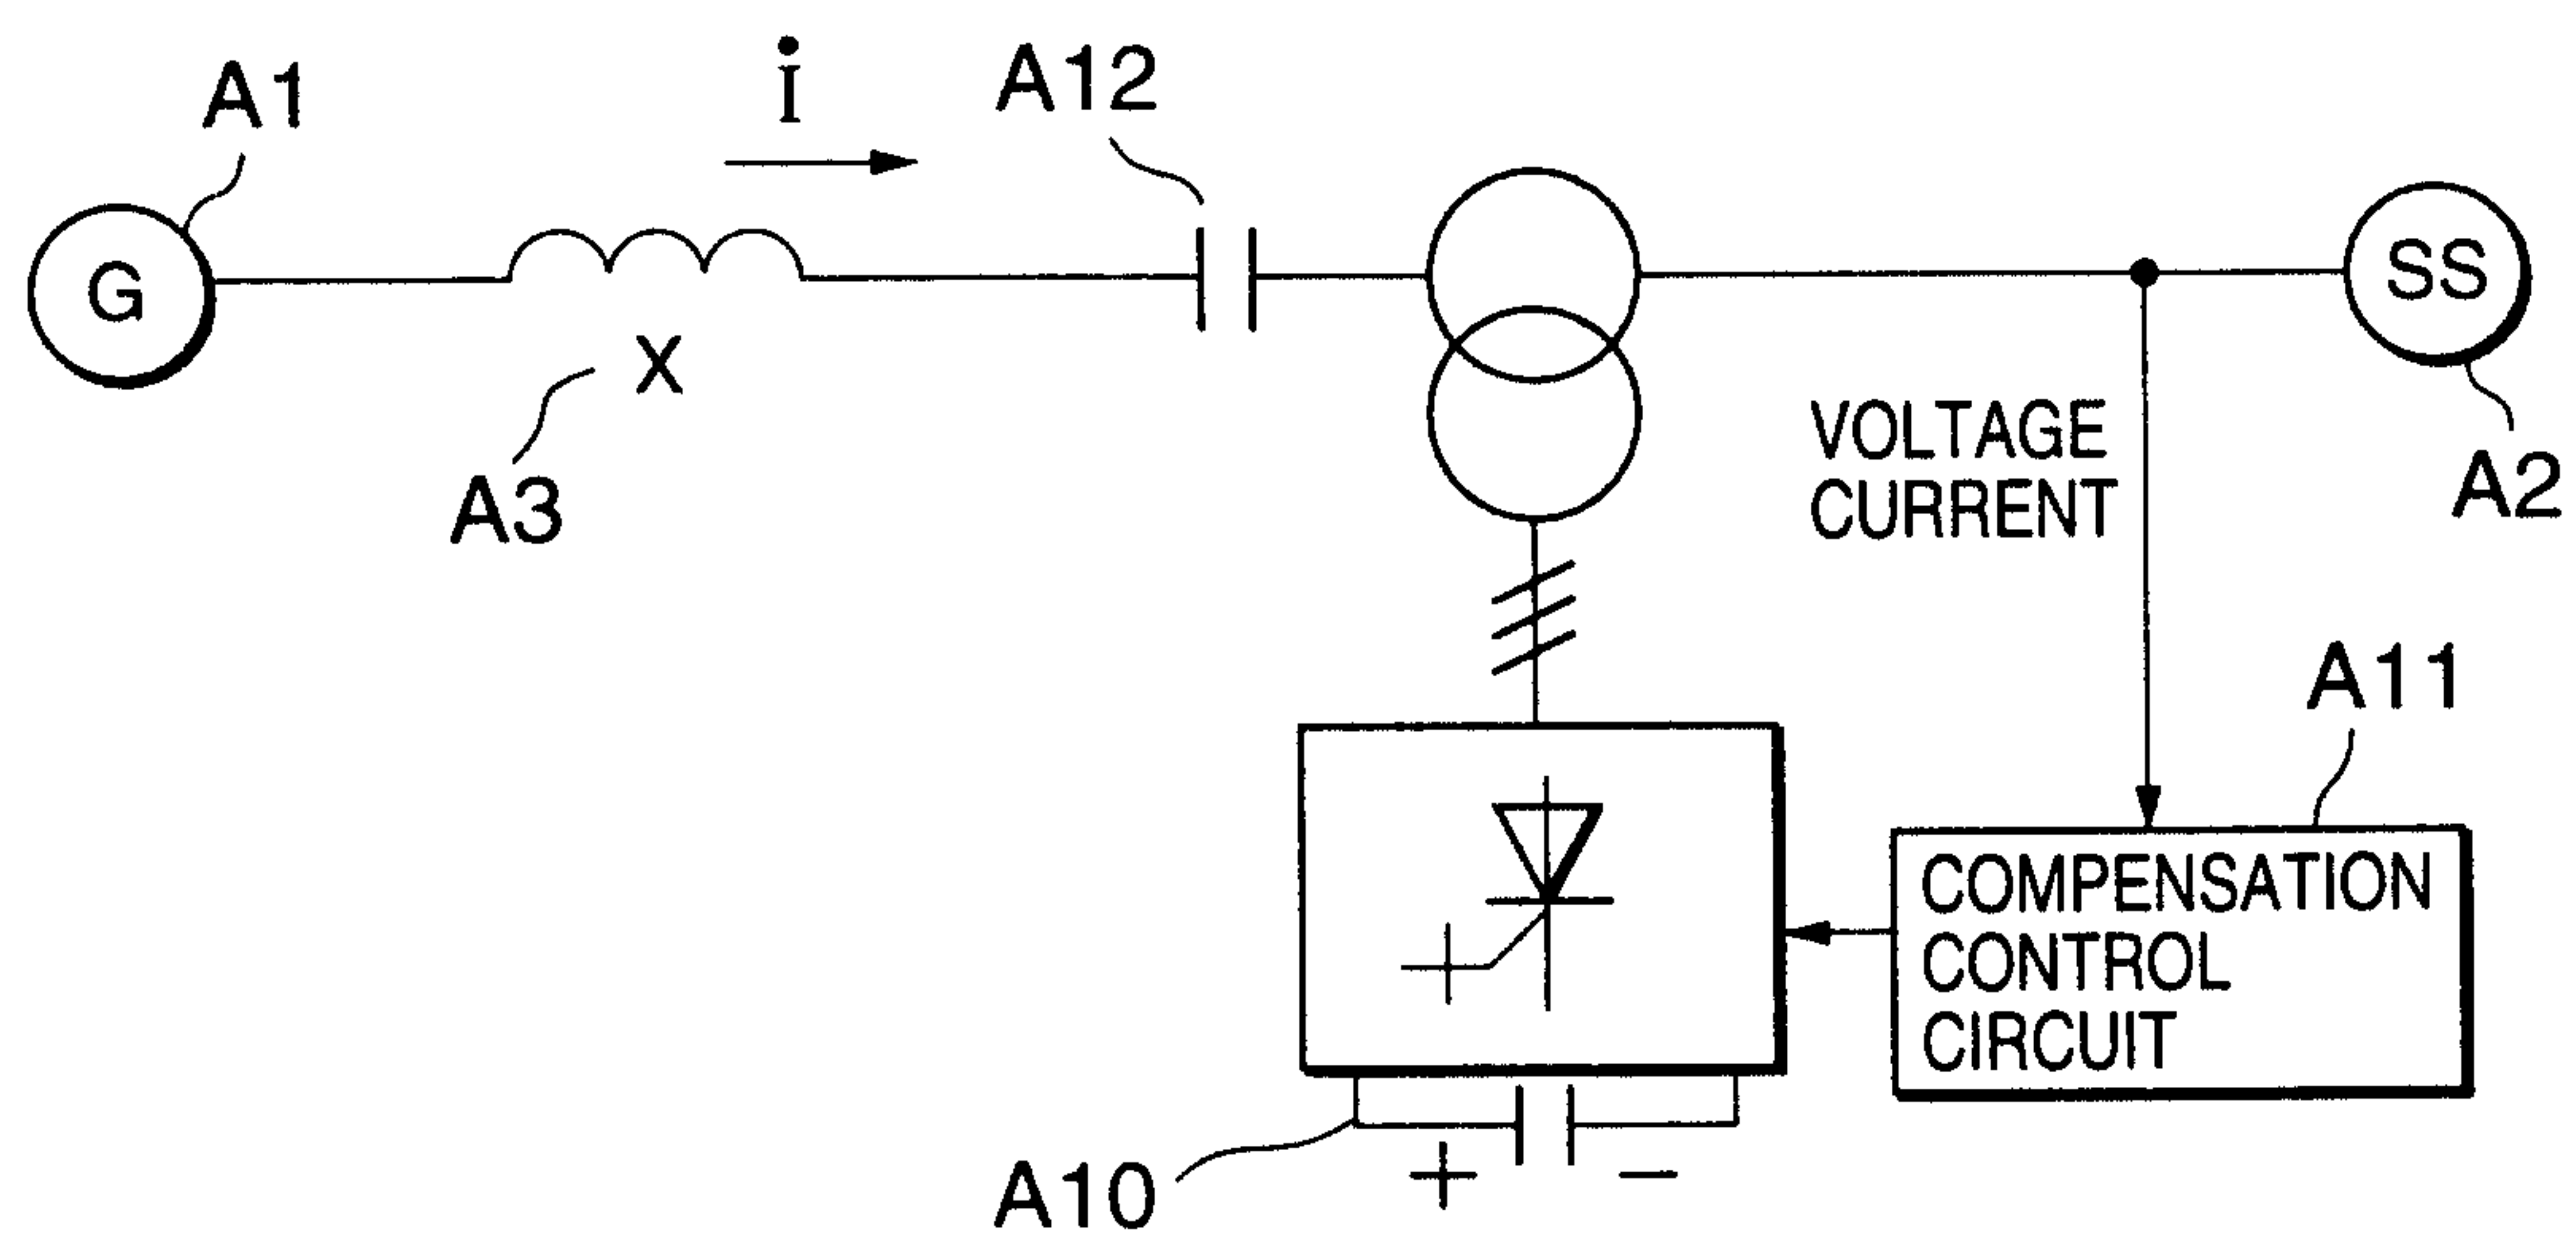


FIG. 62

32/41

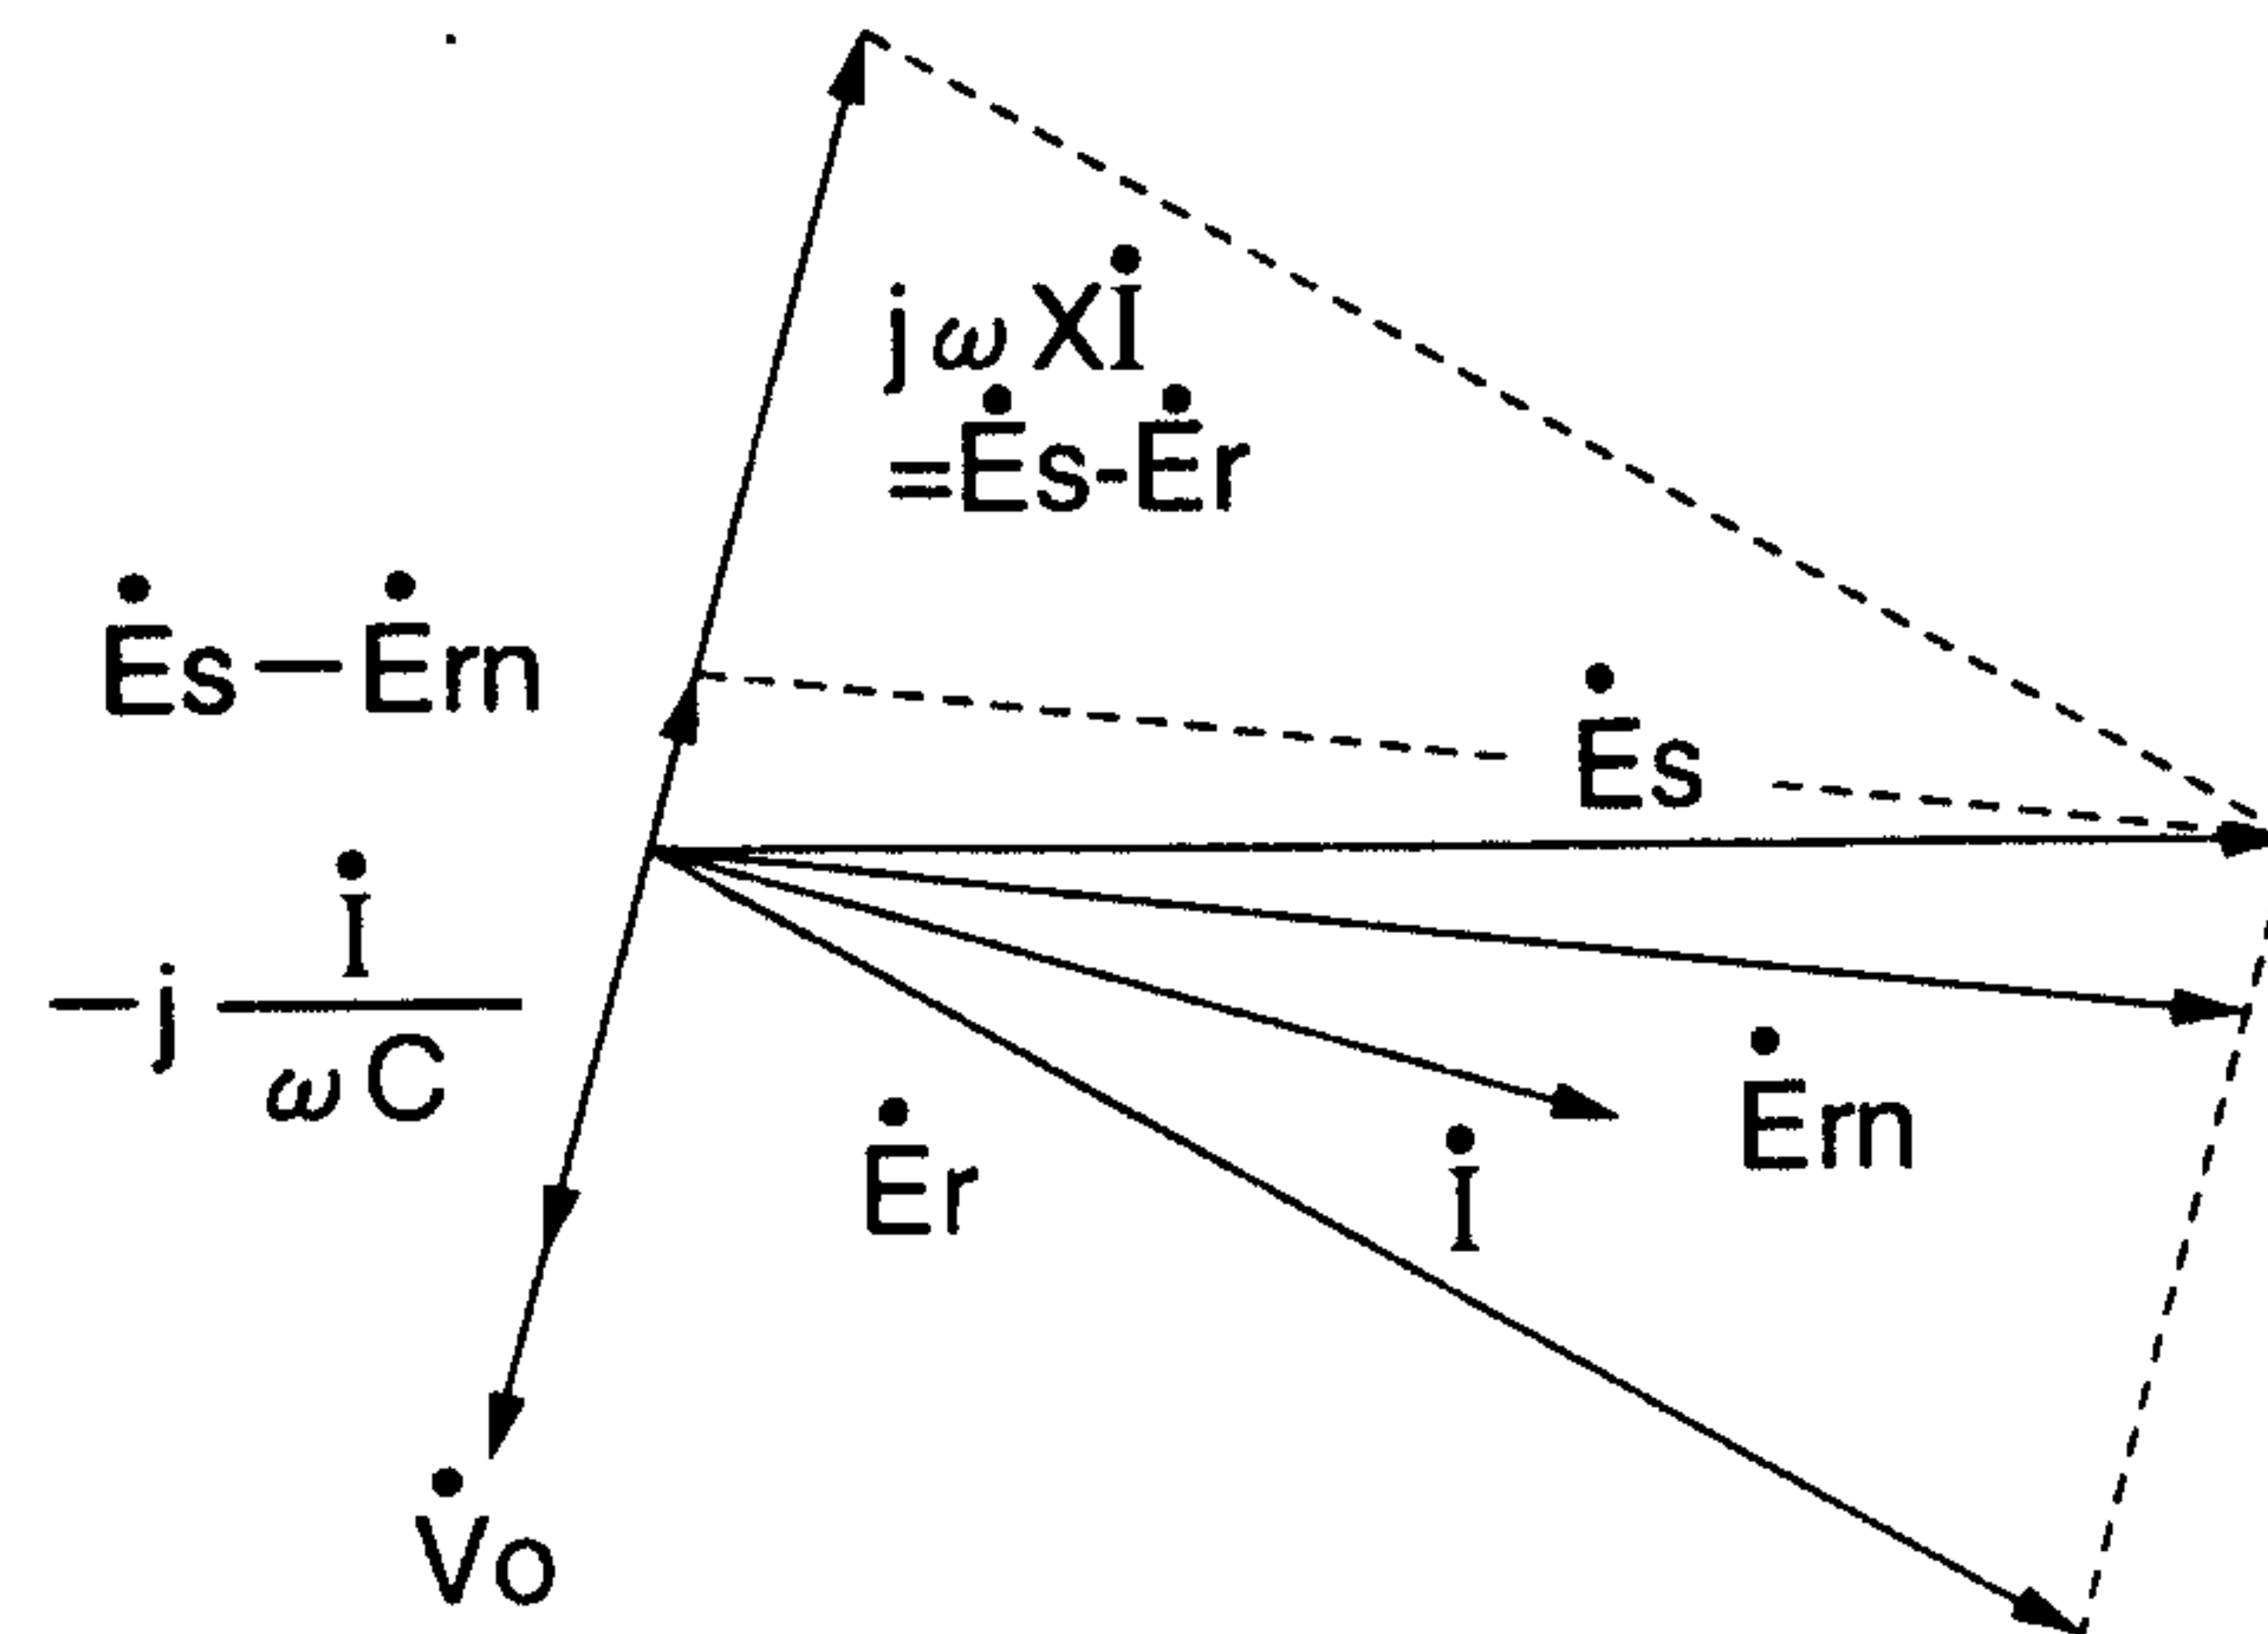


FIG. 63

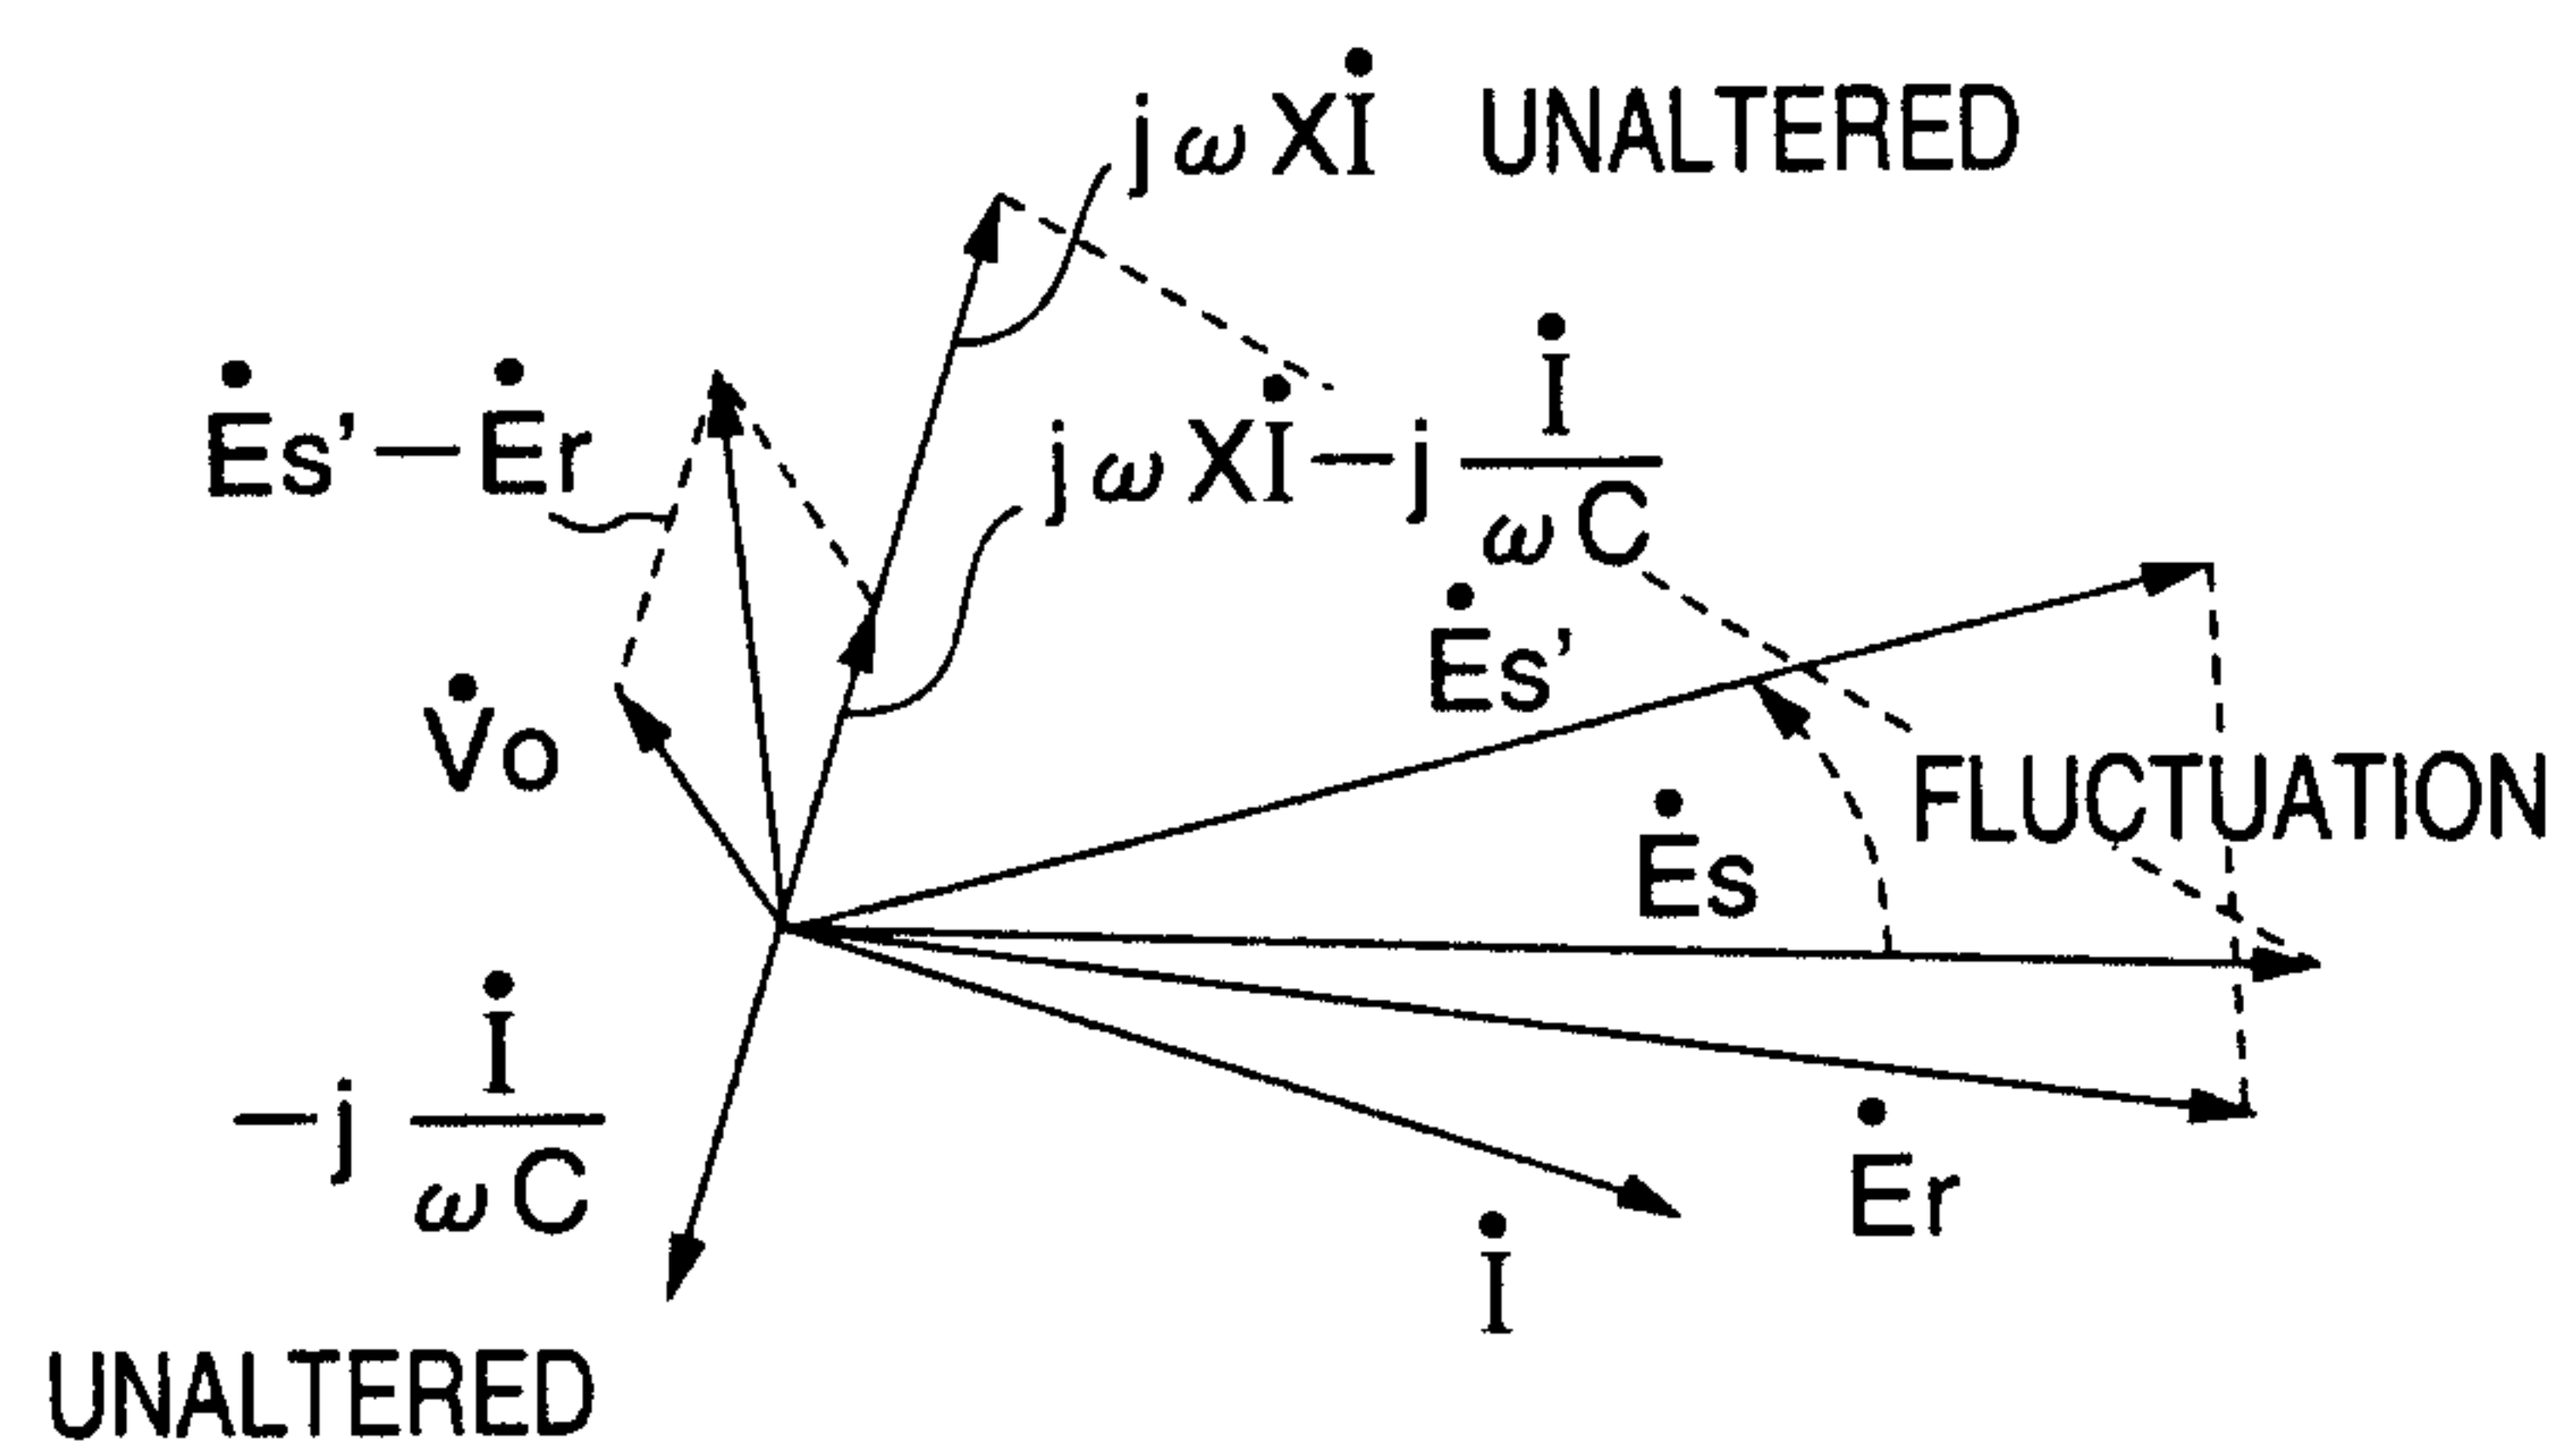


FIG. 64

33/41

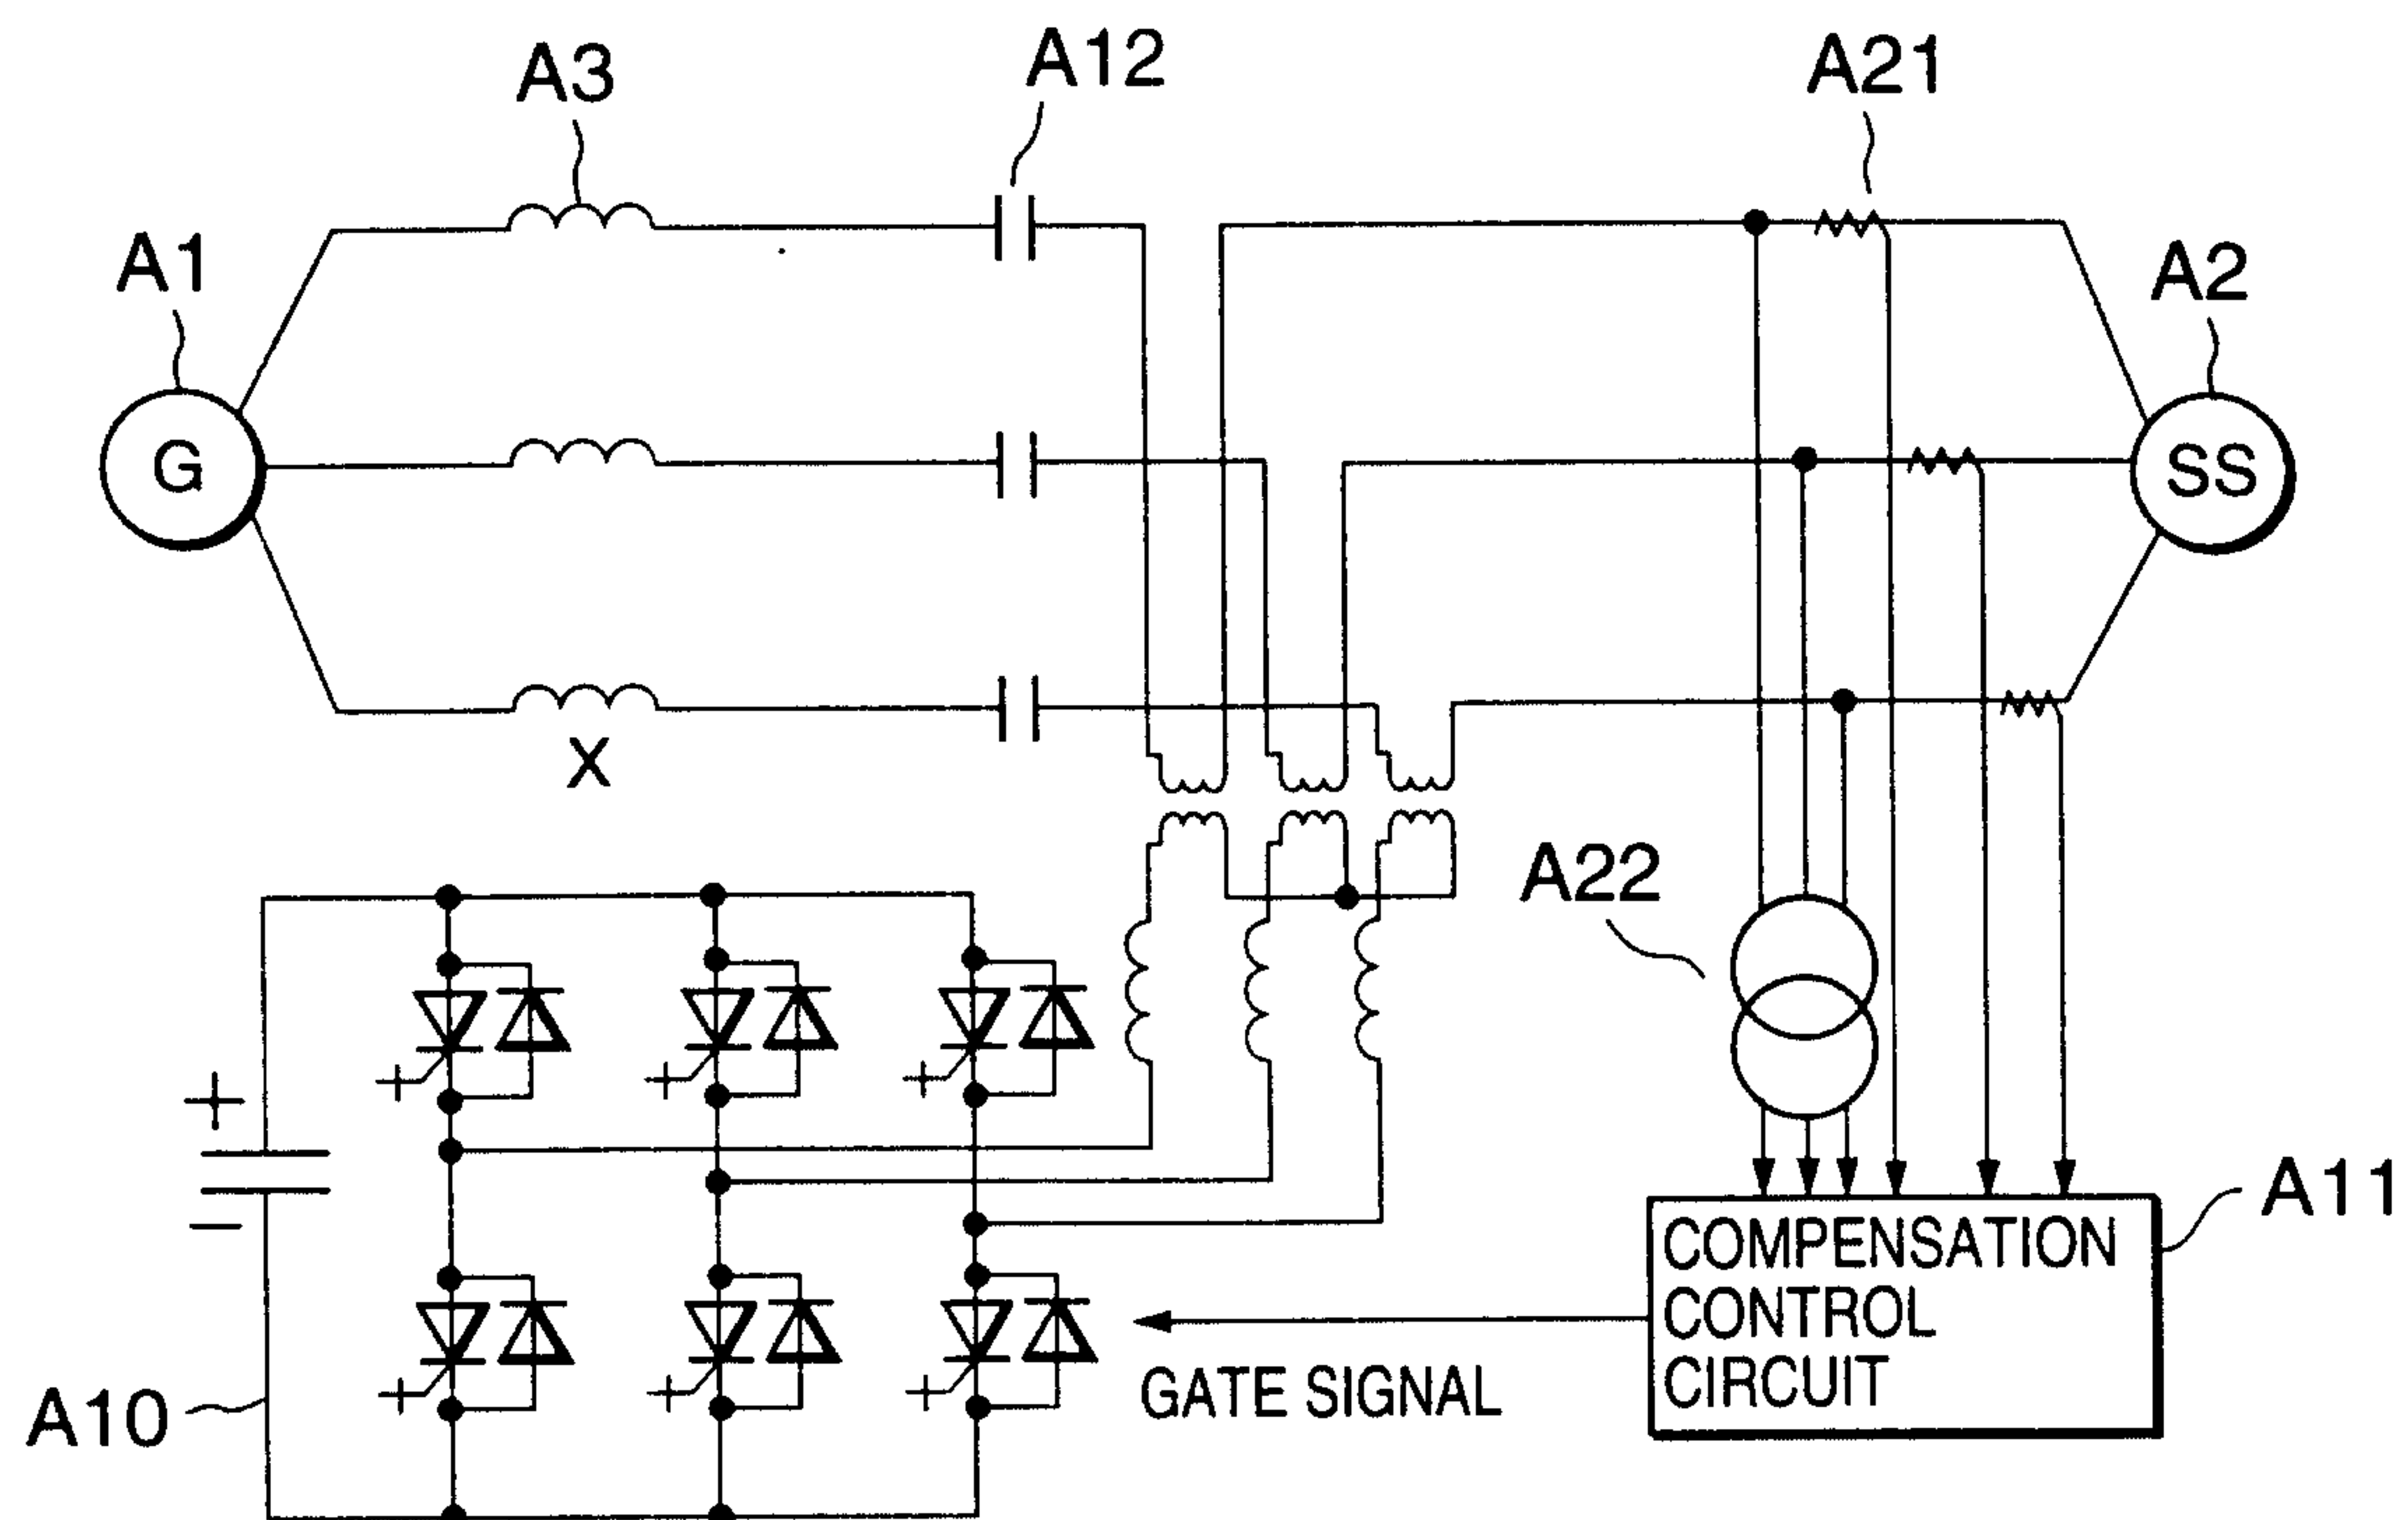


FIG. 65

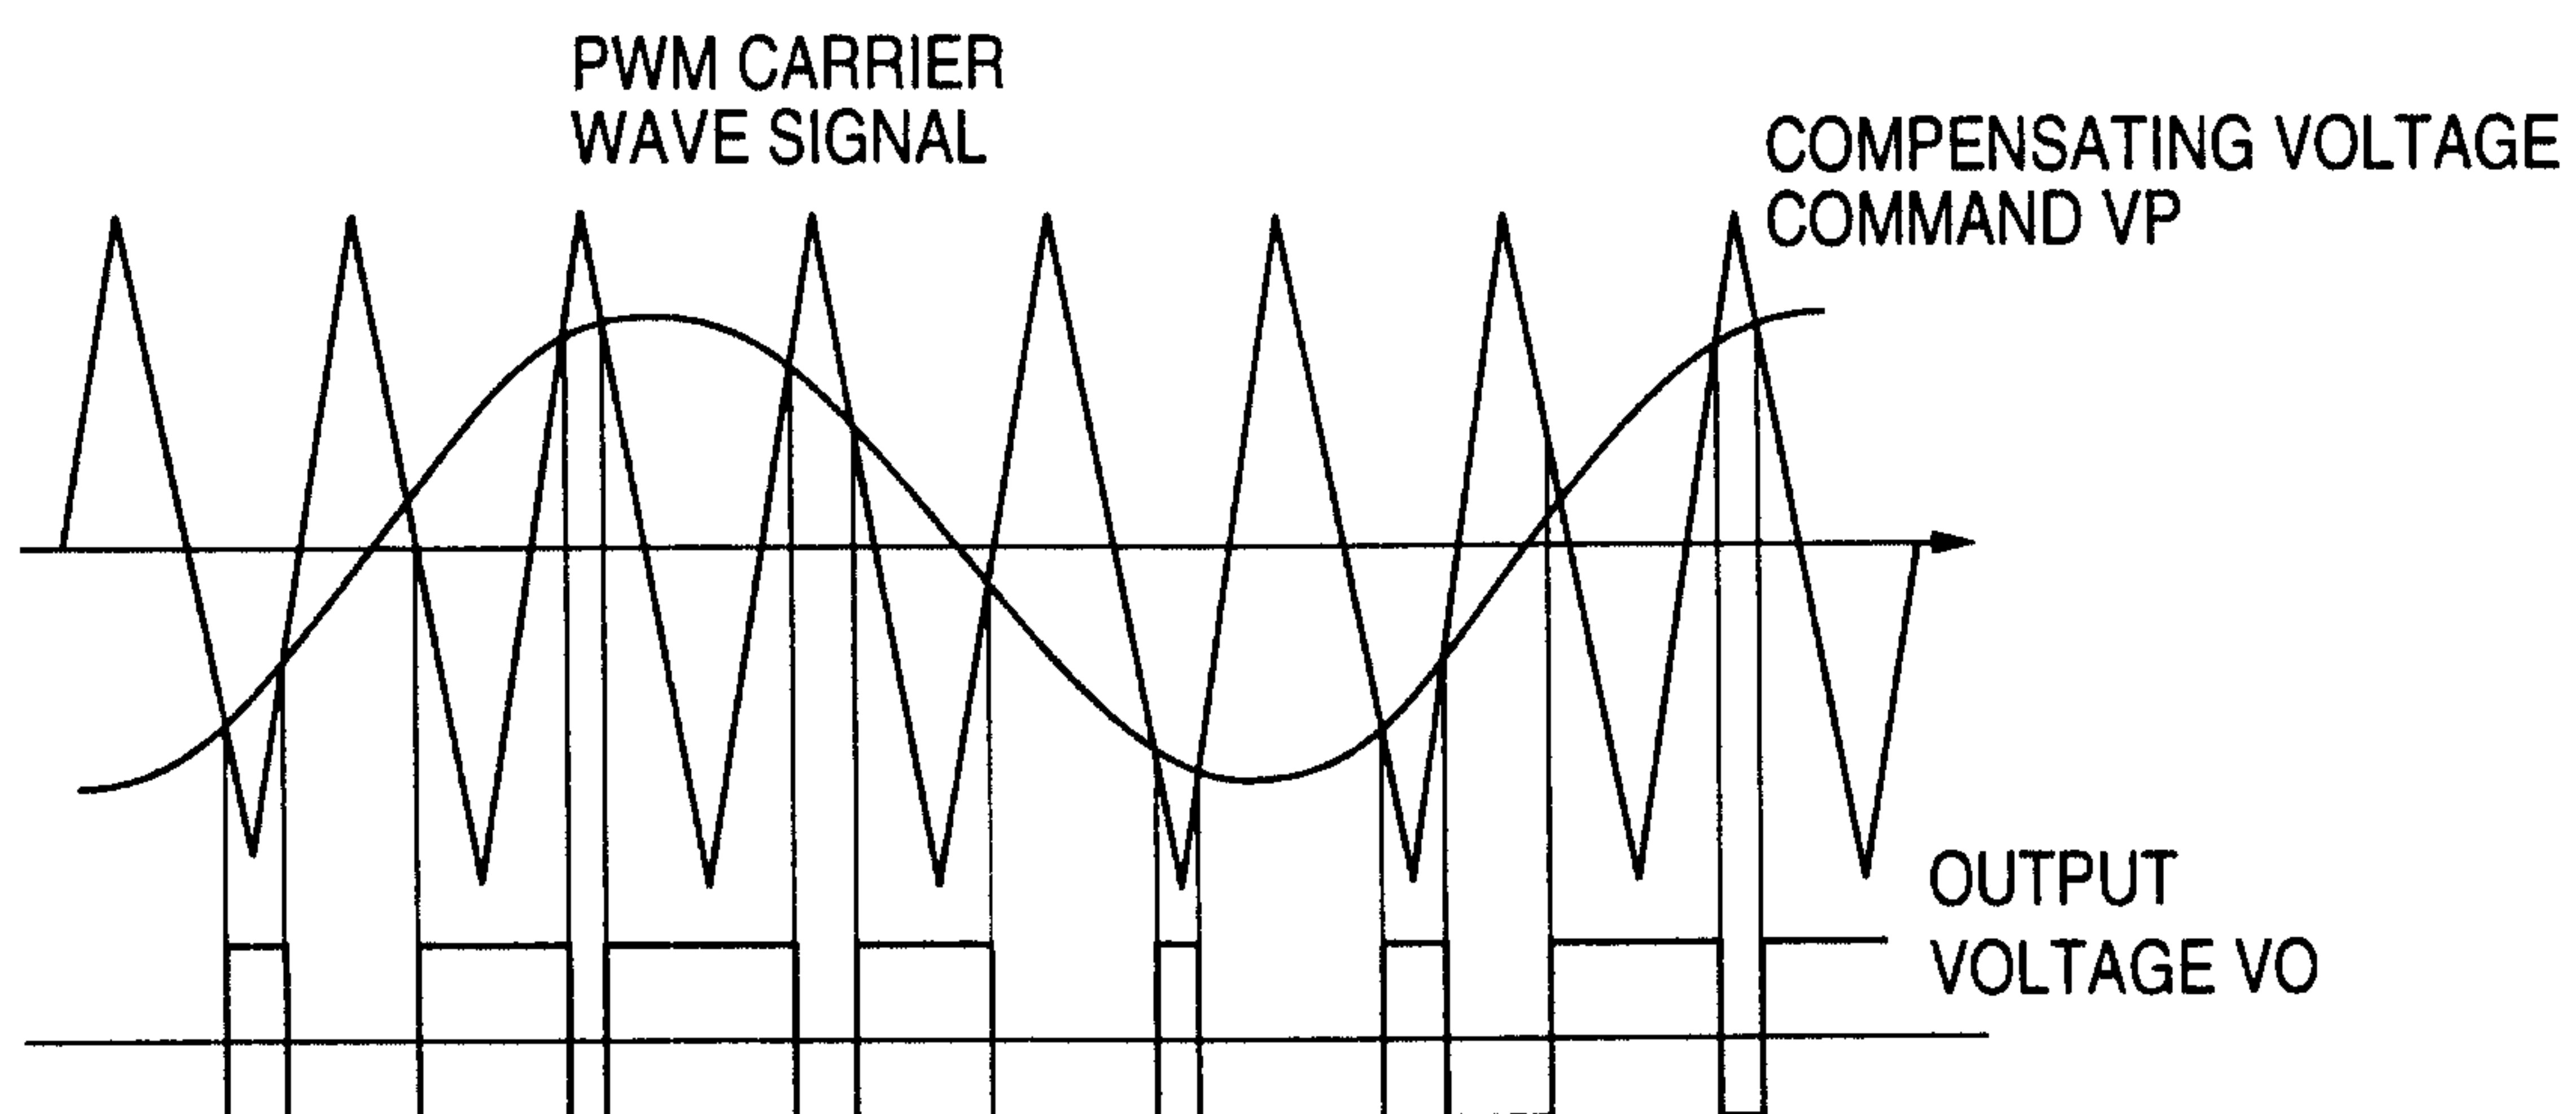


FIG. 66

34/41

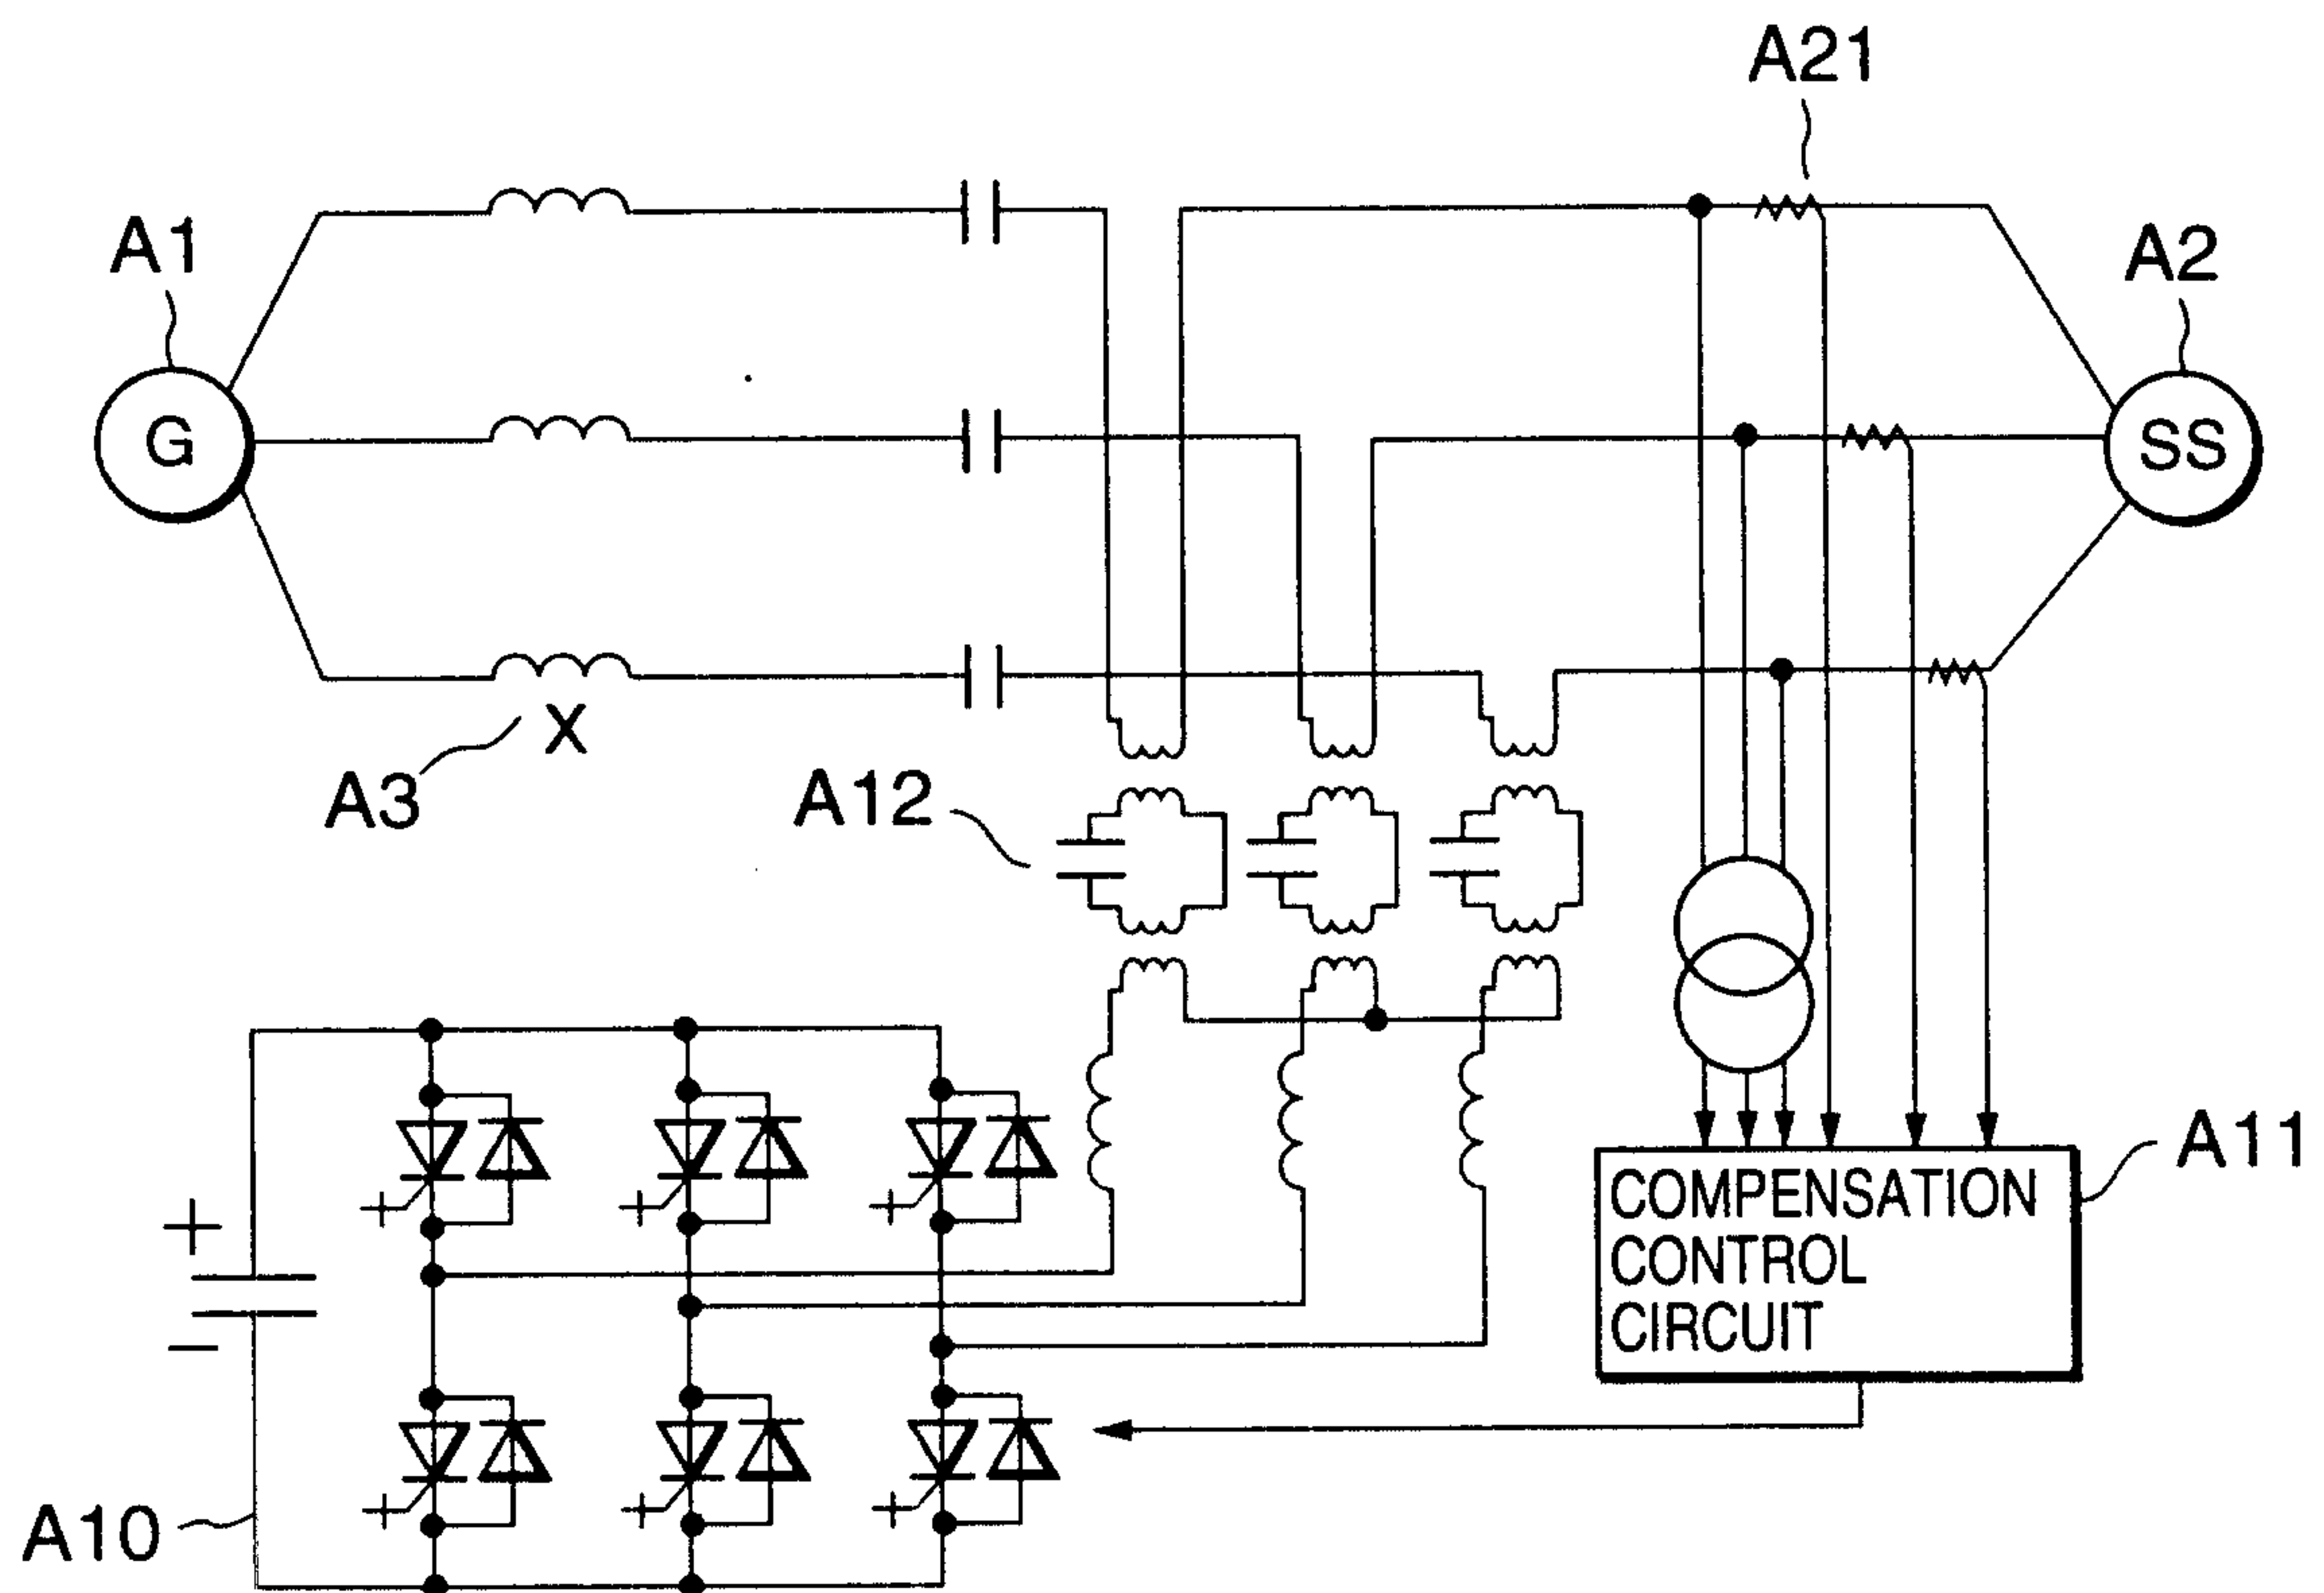


FIG. 67

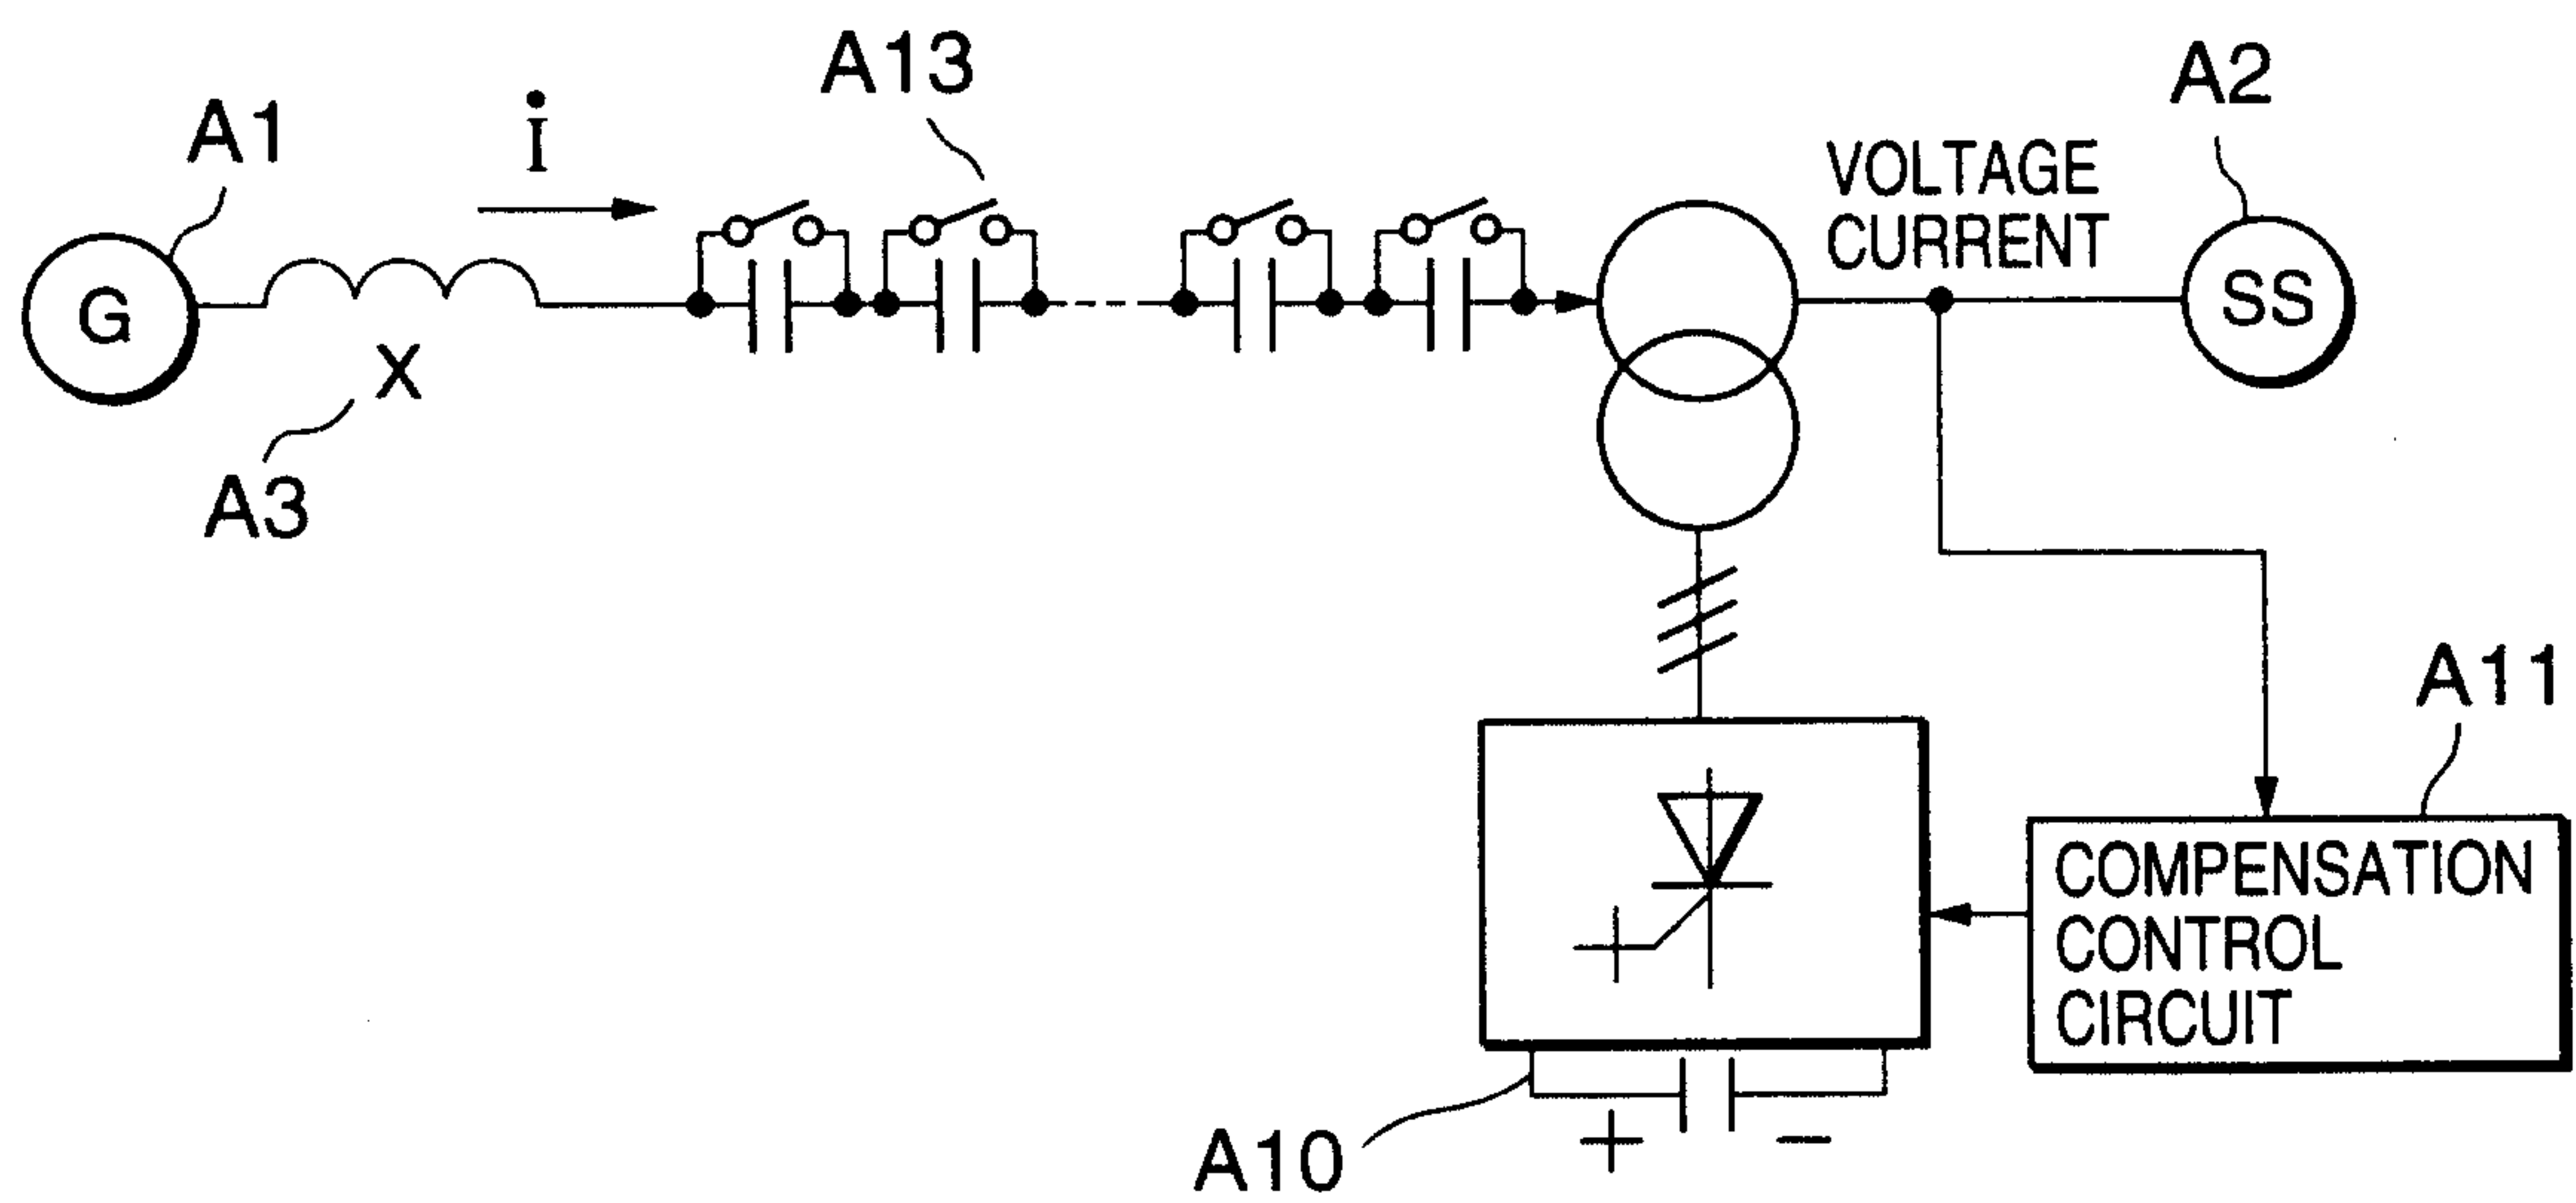


FIG. 68

35/41

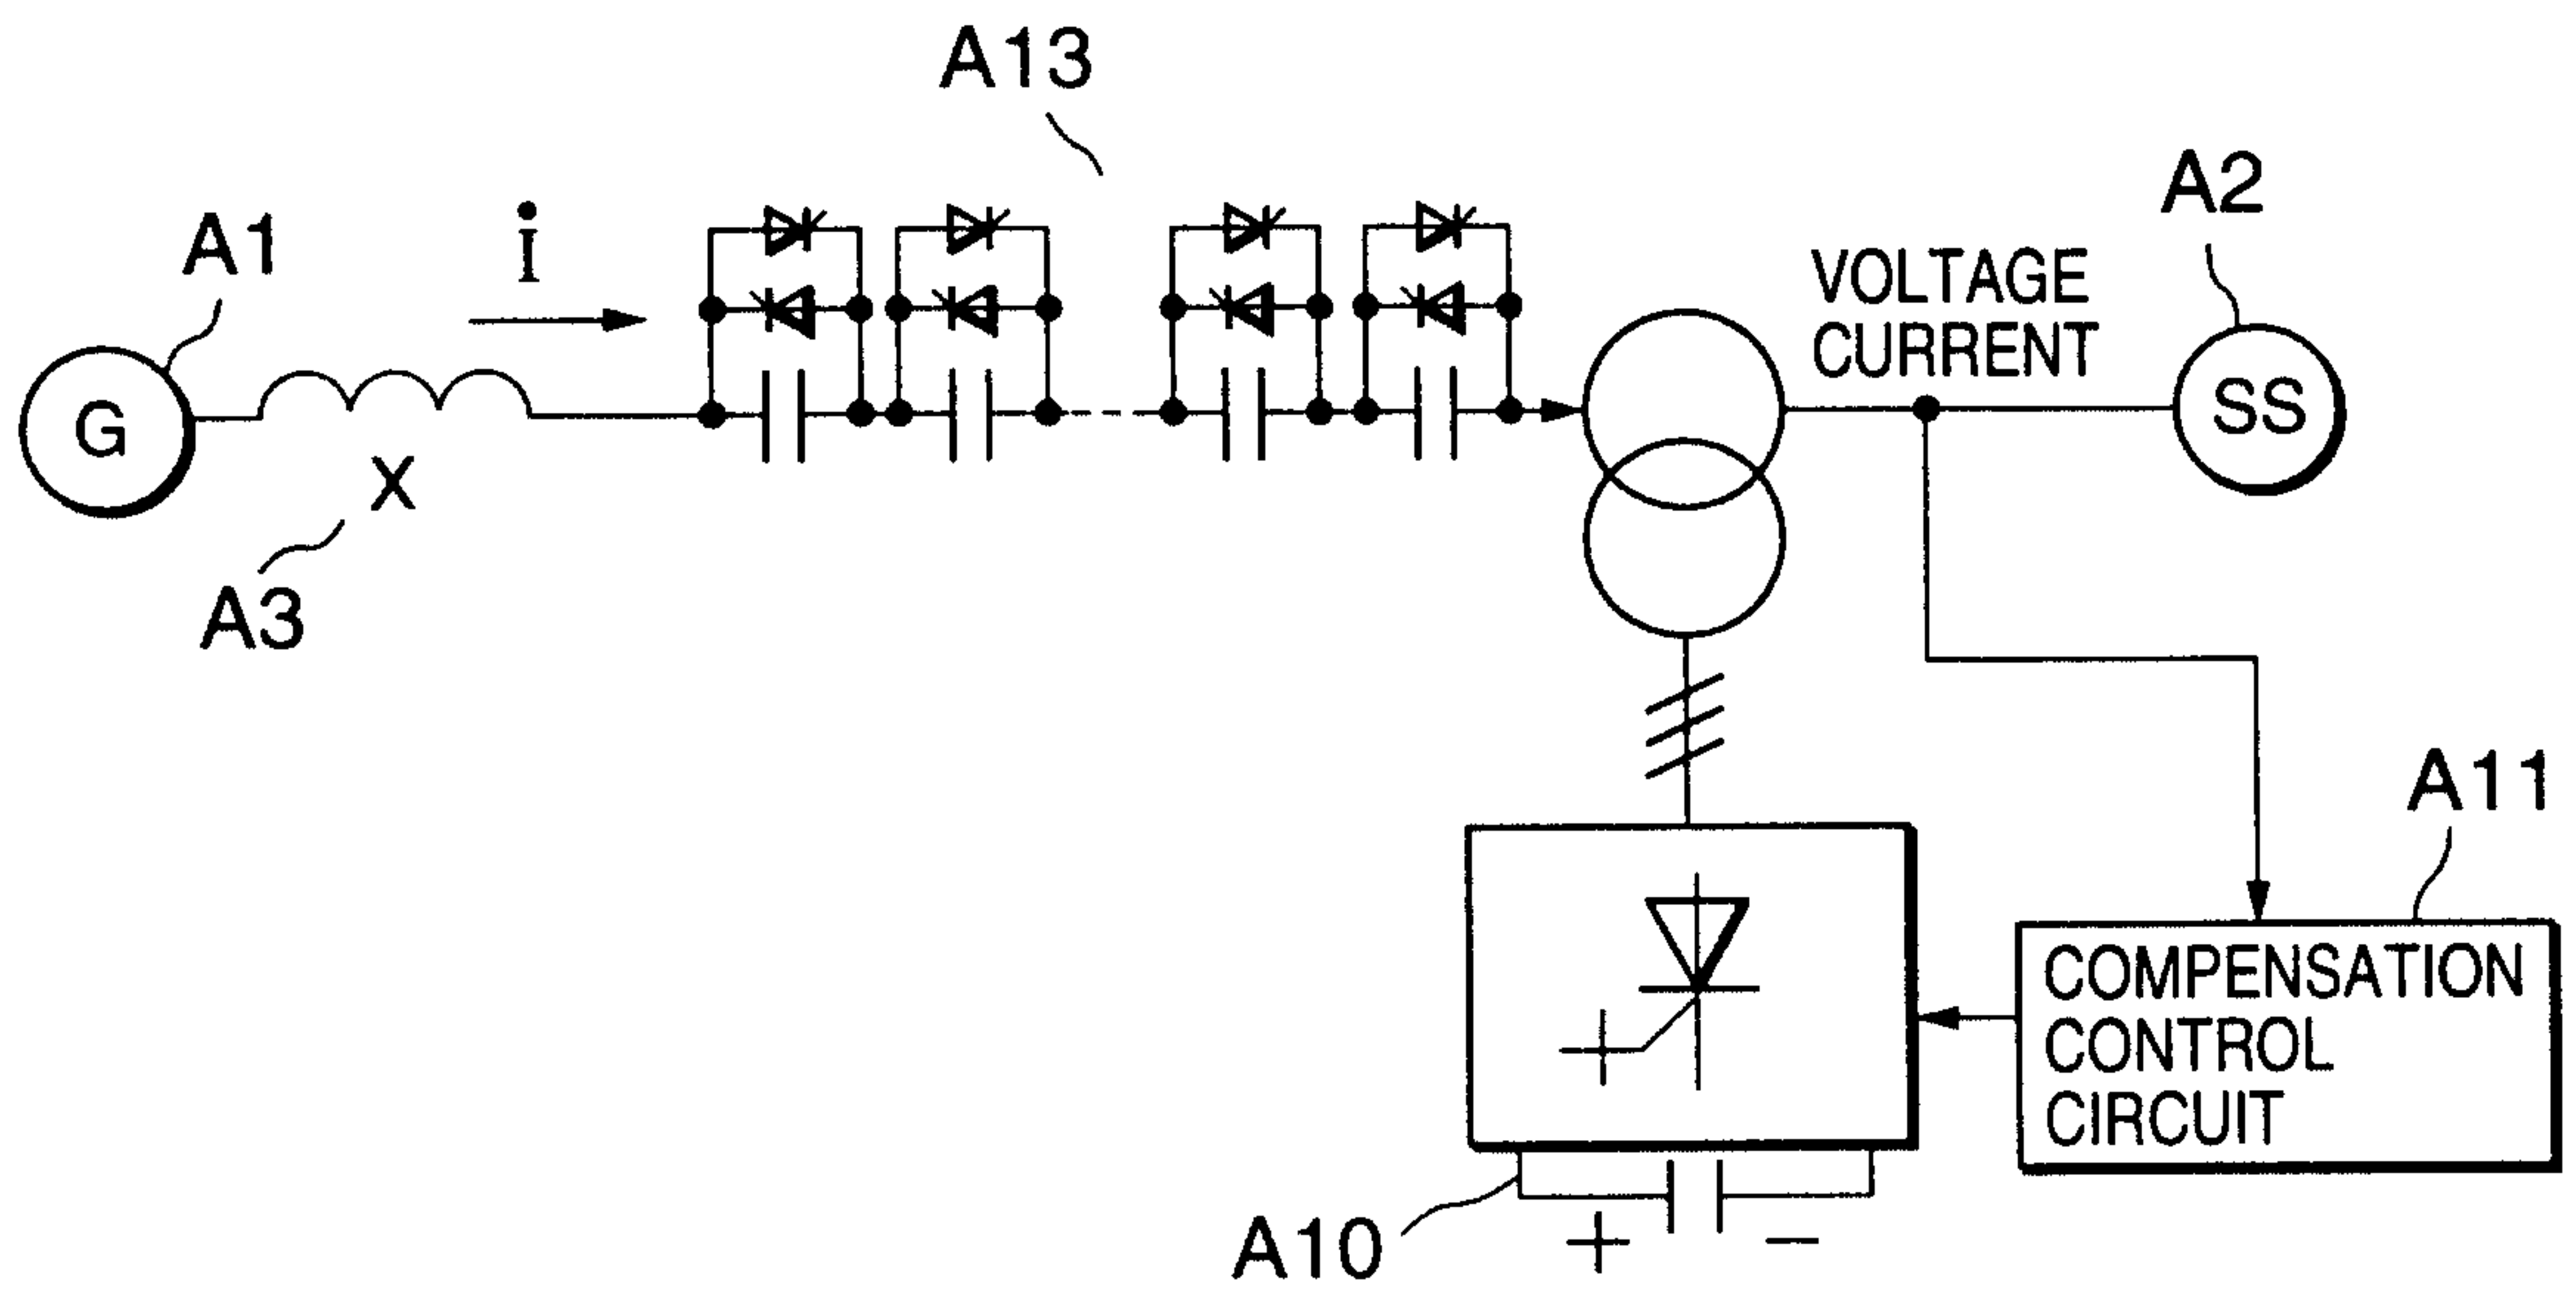


FIG. 69

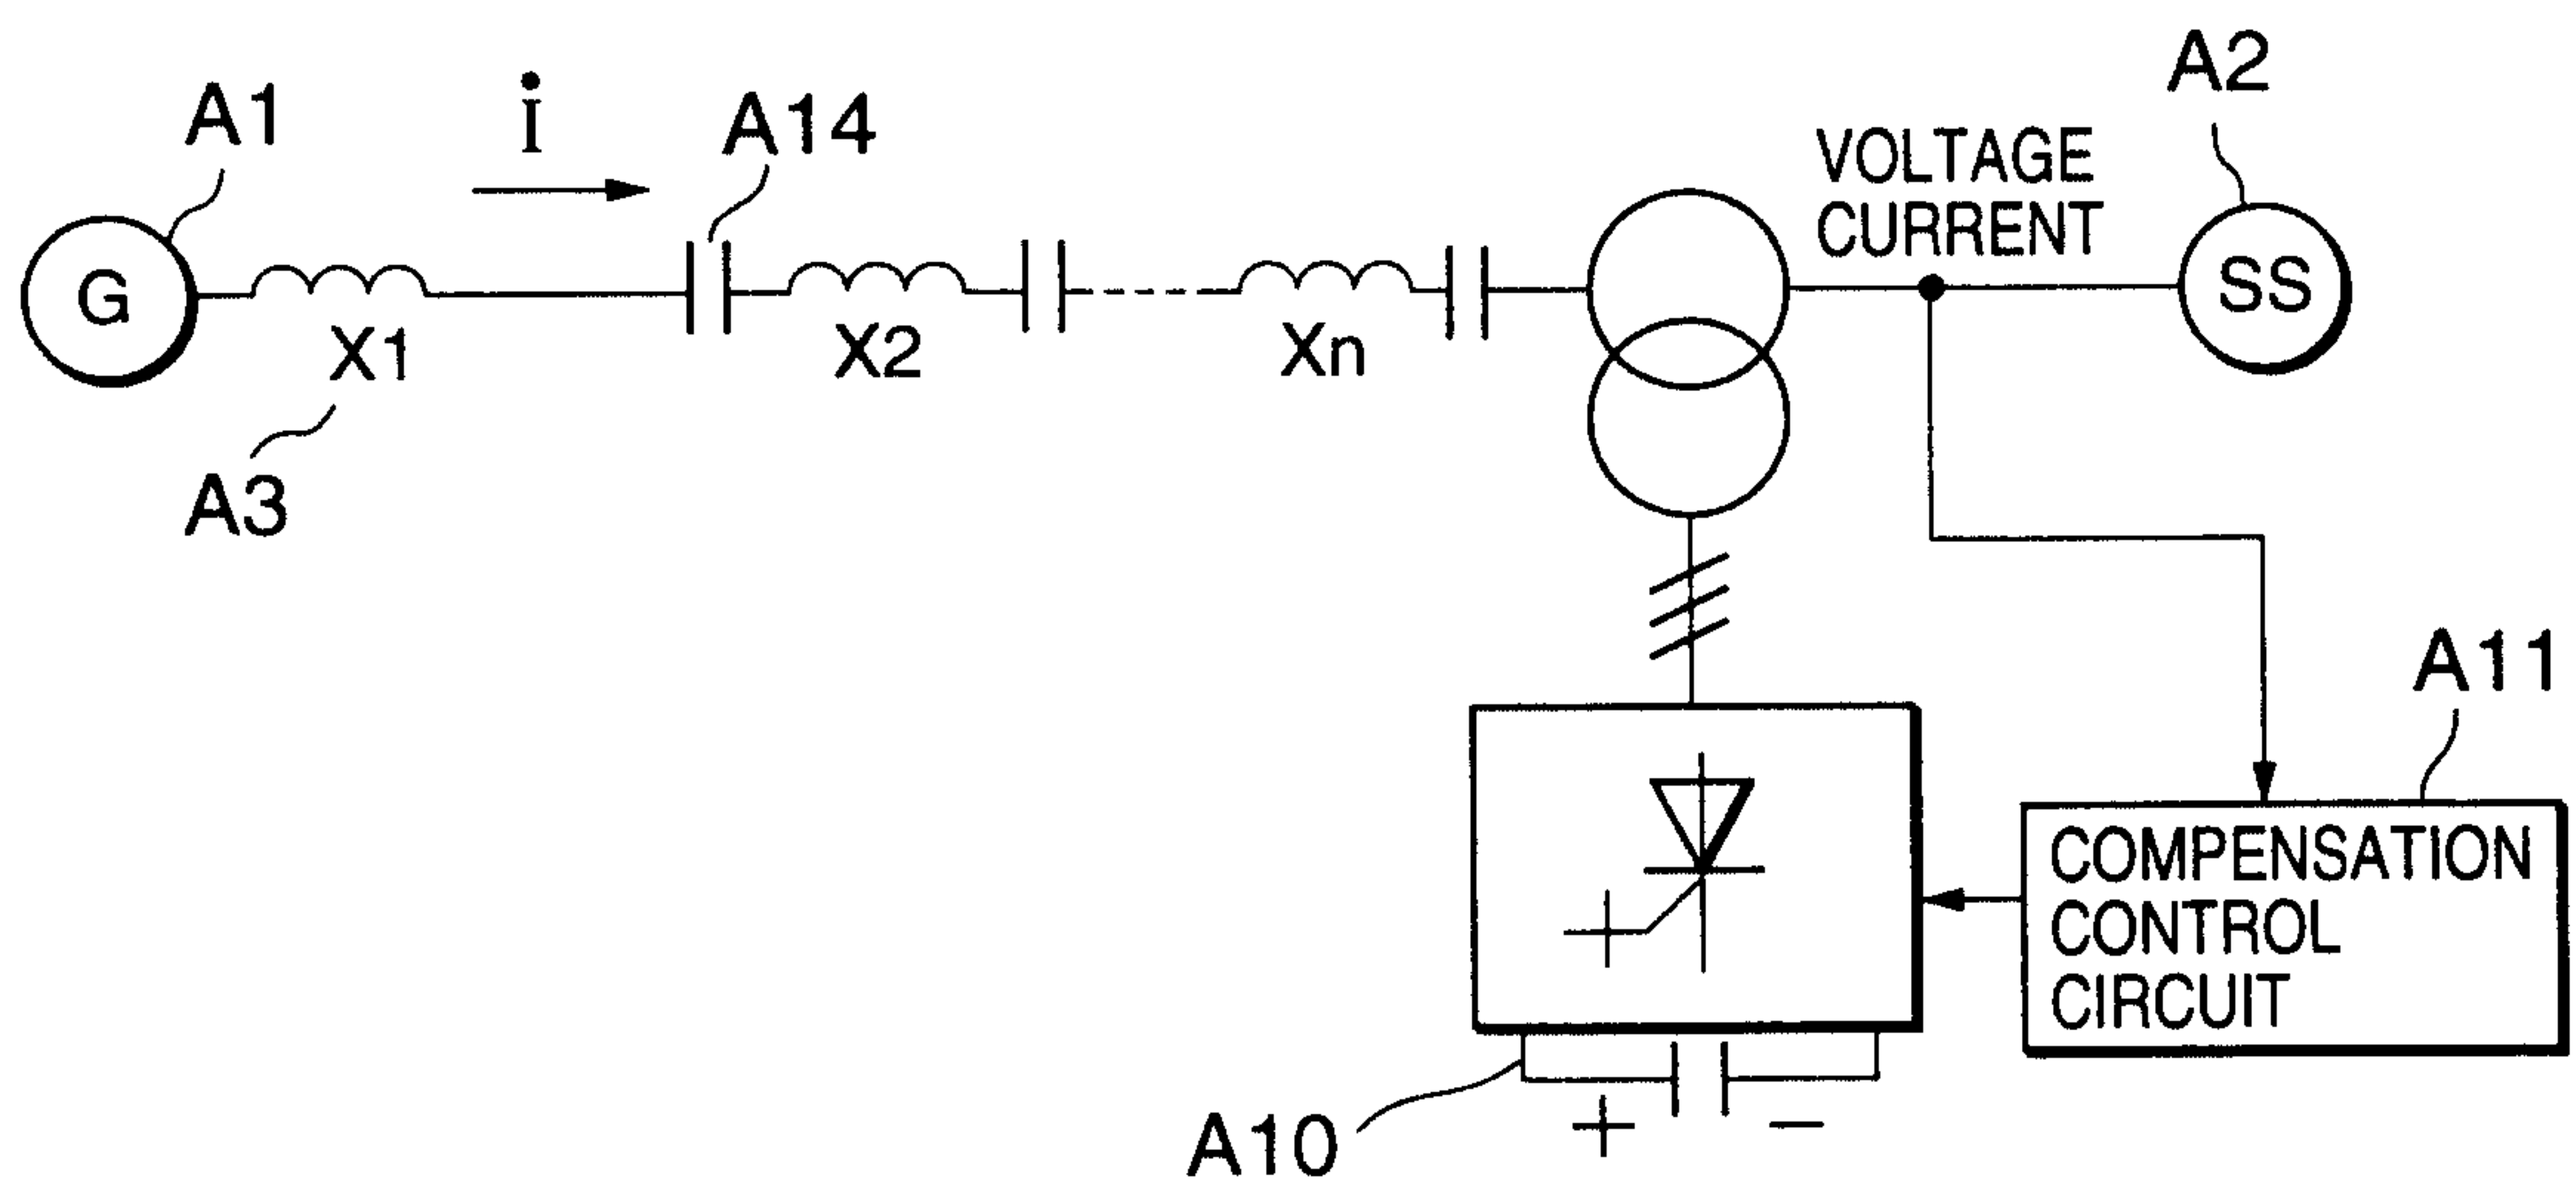


FIG. 70

36/41

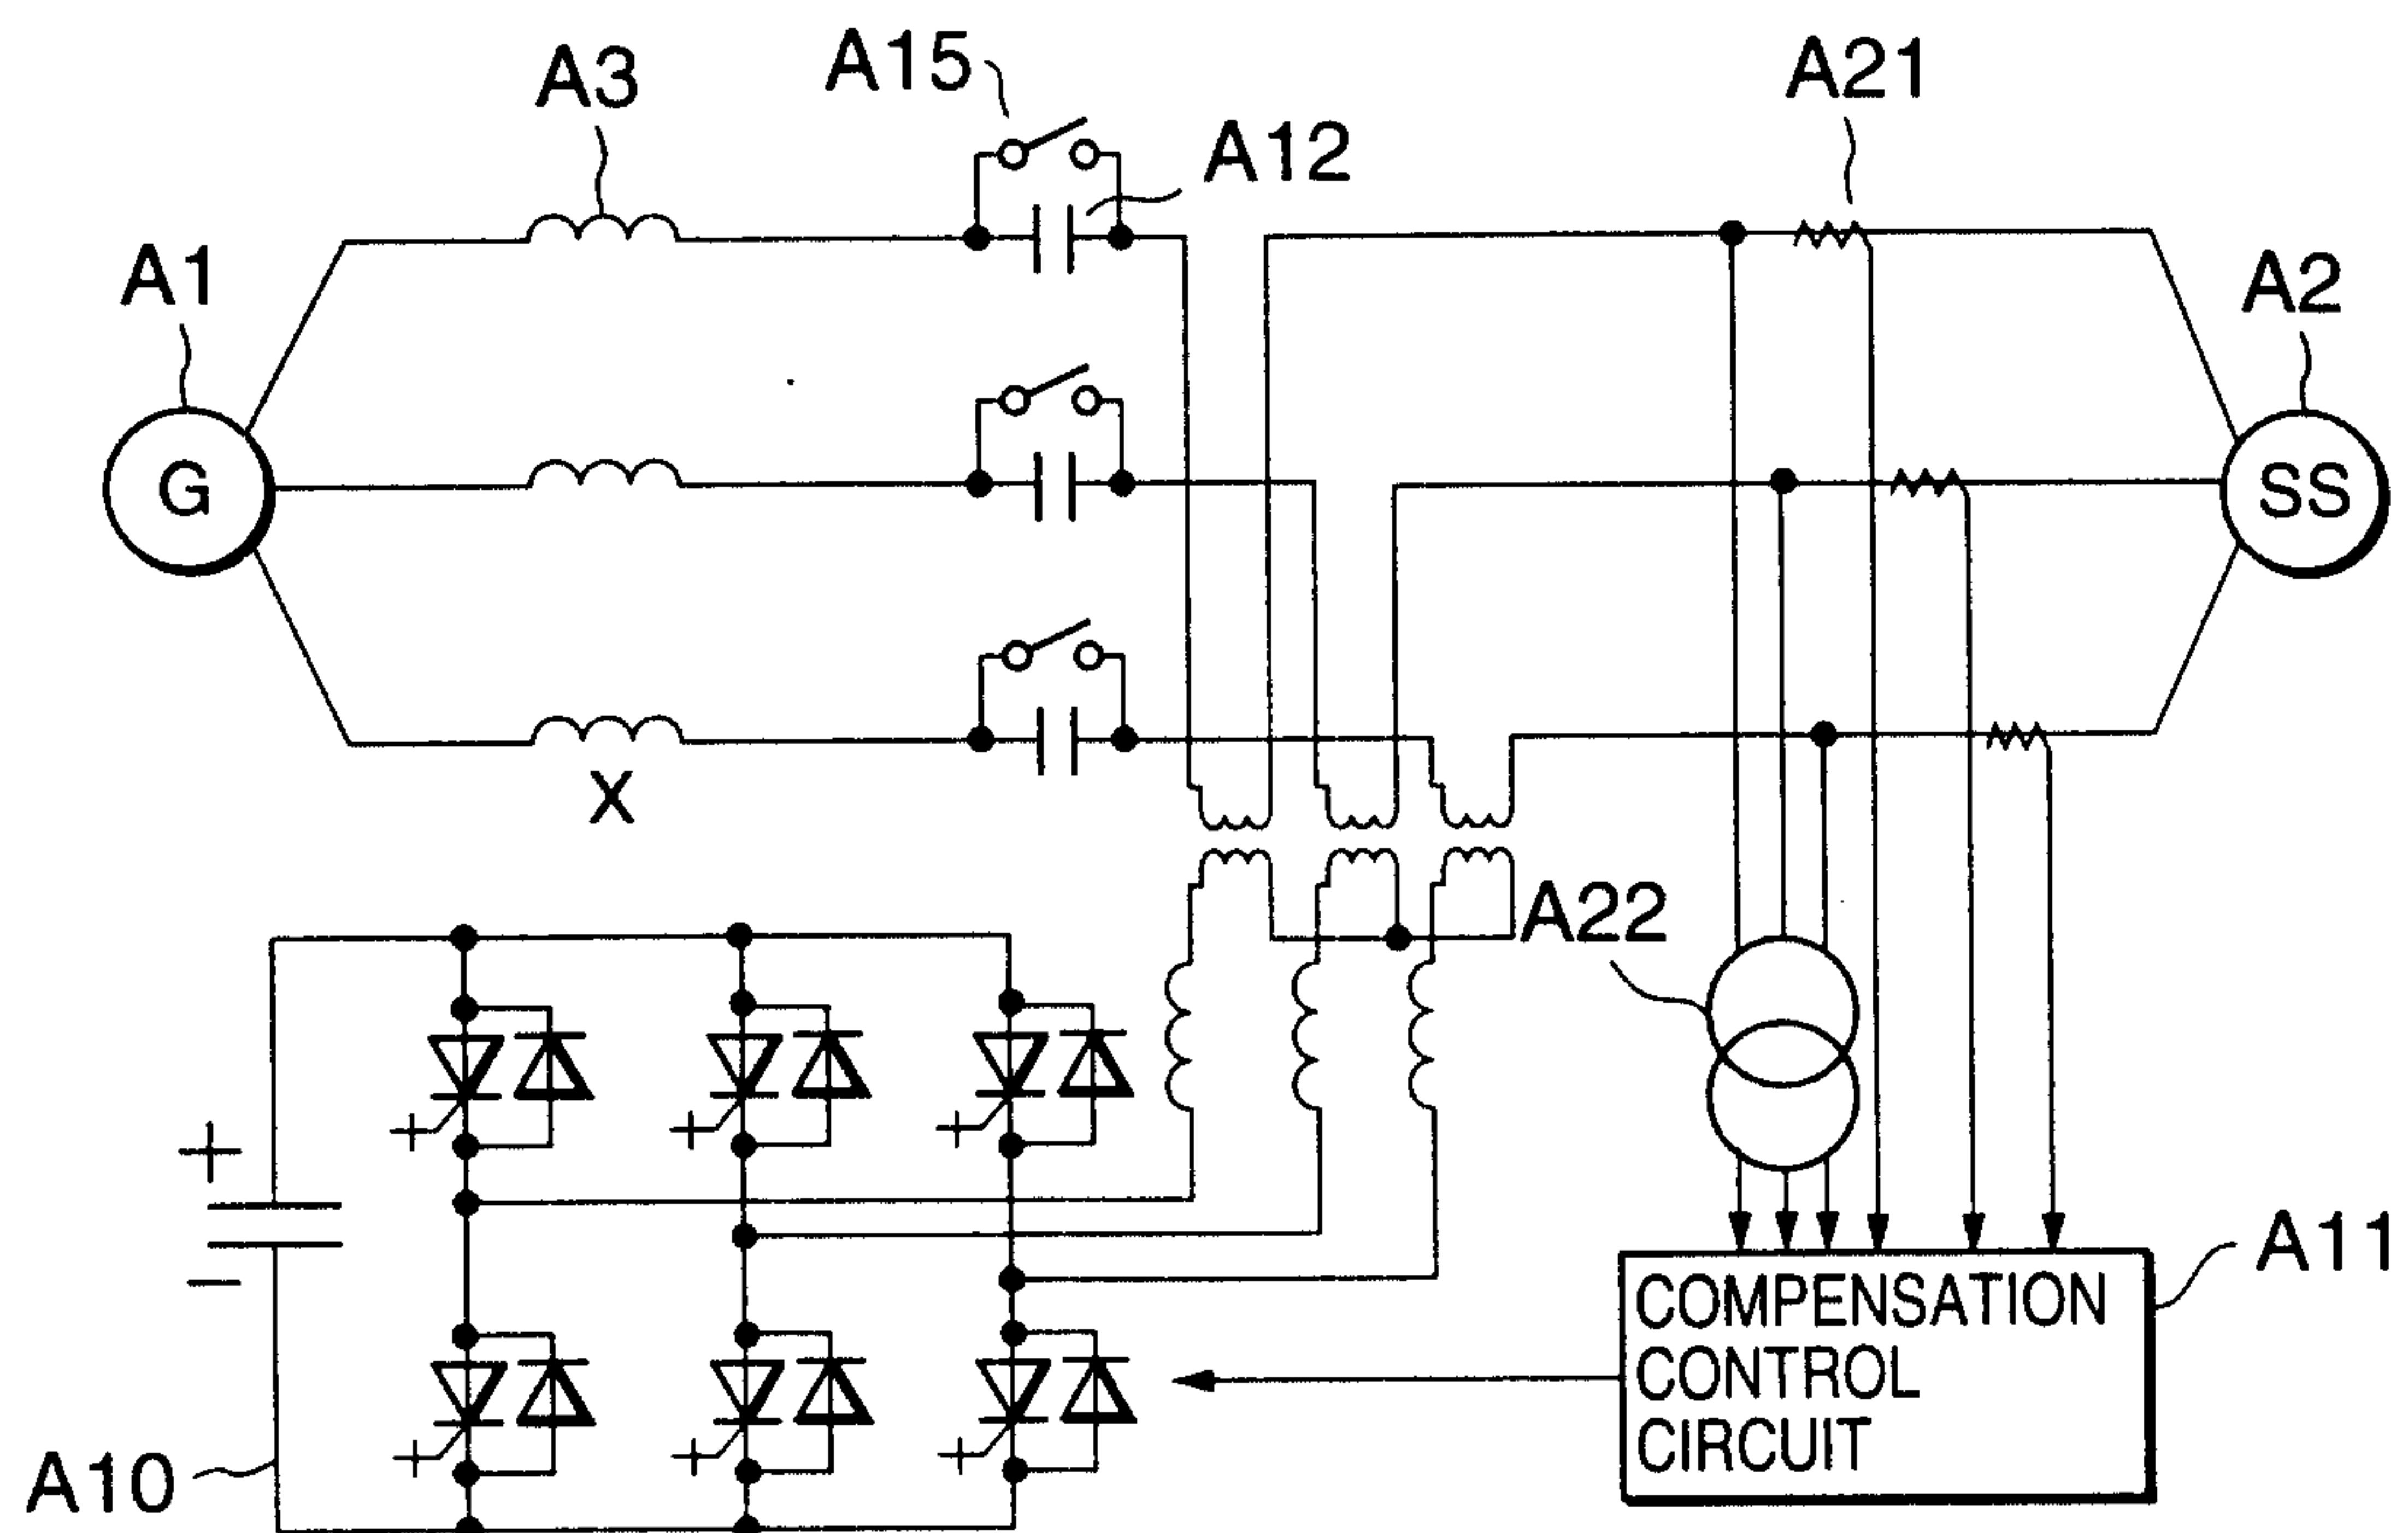


FIG. 71

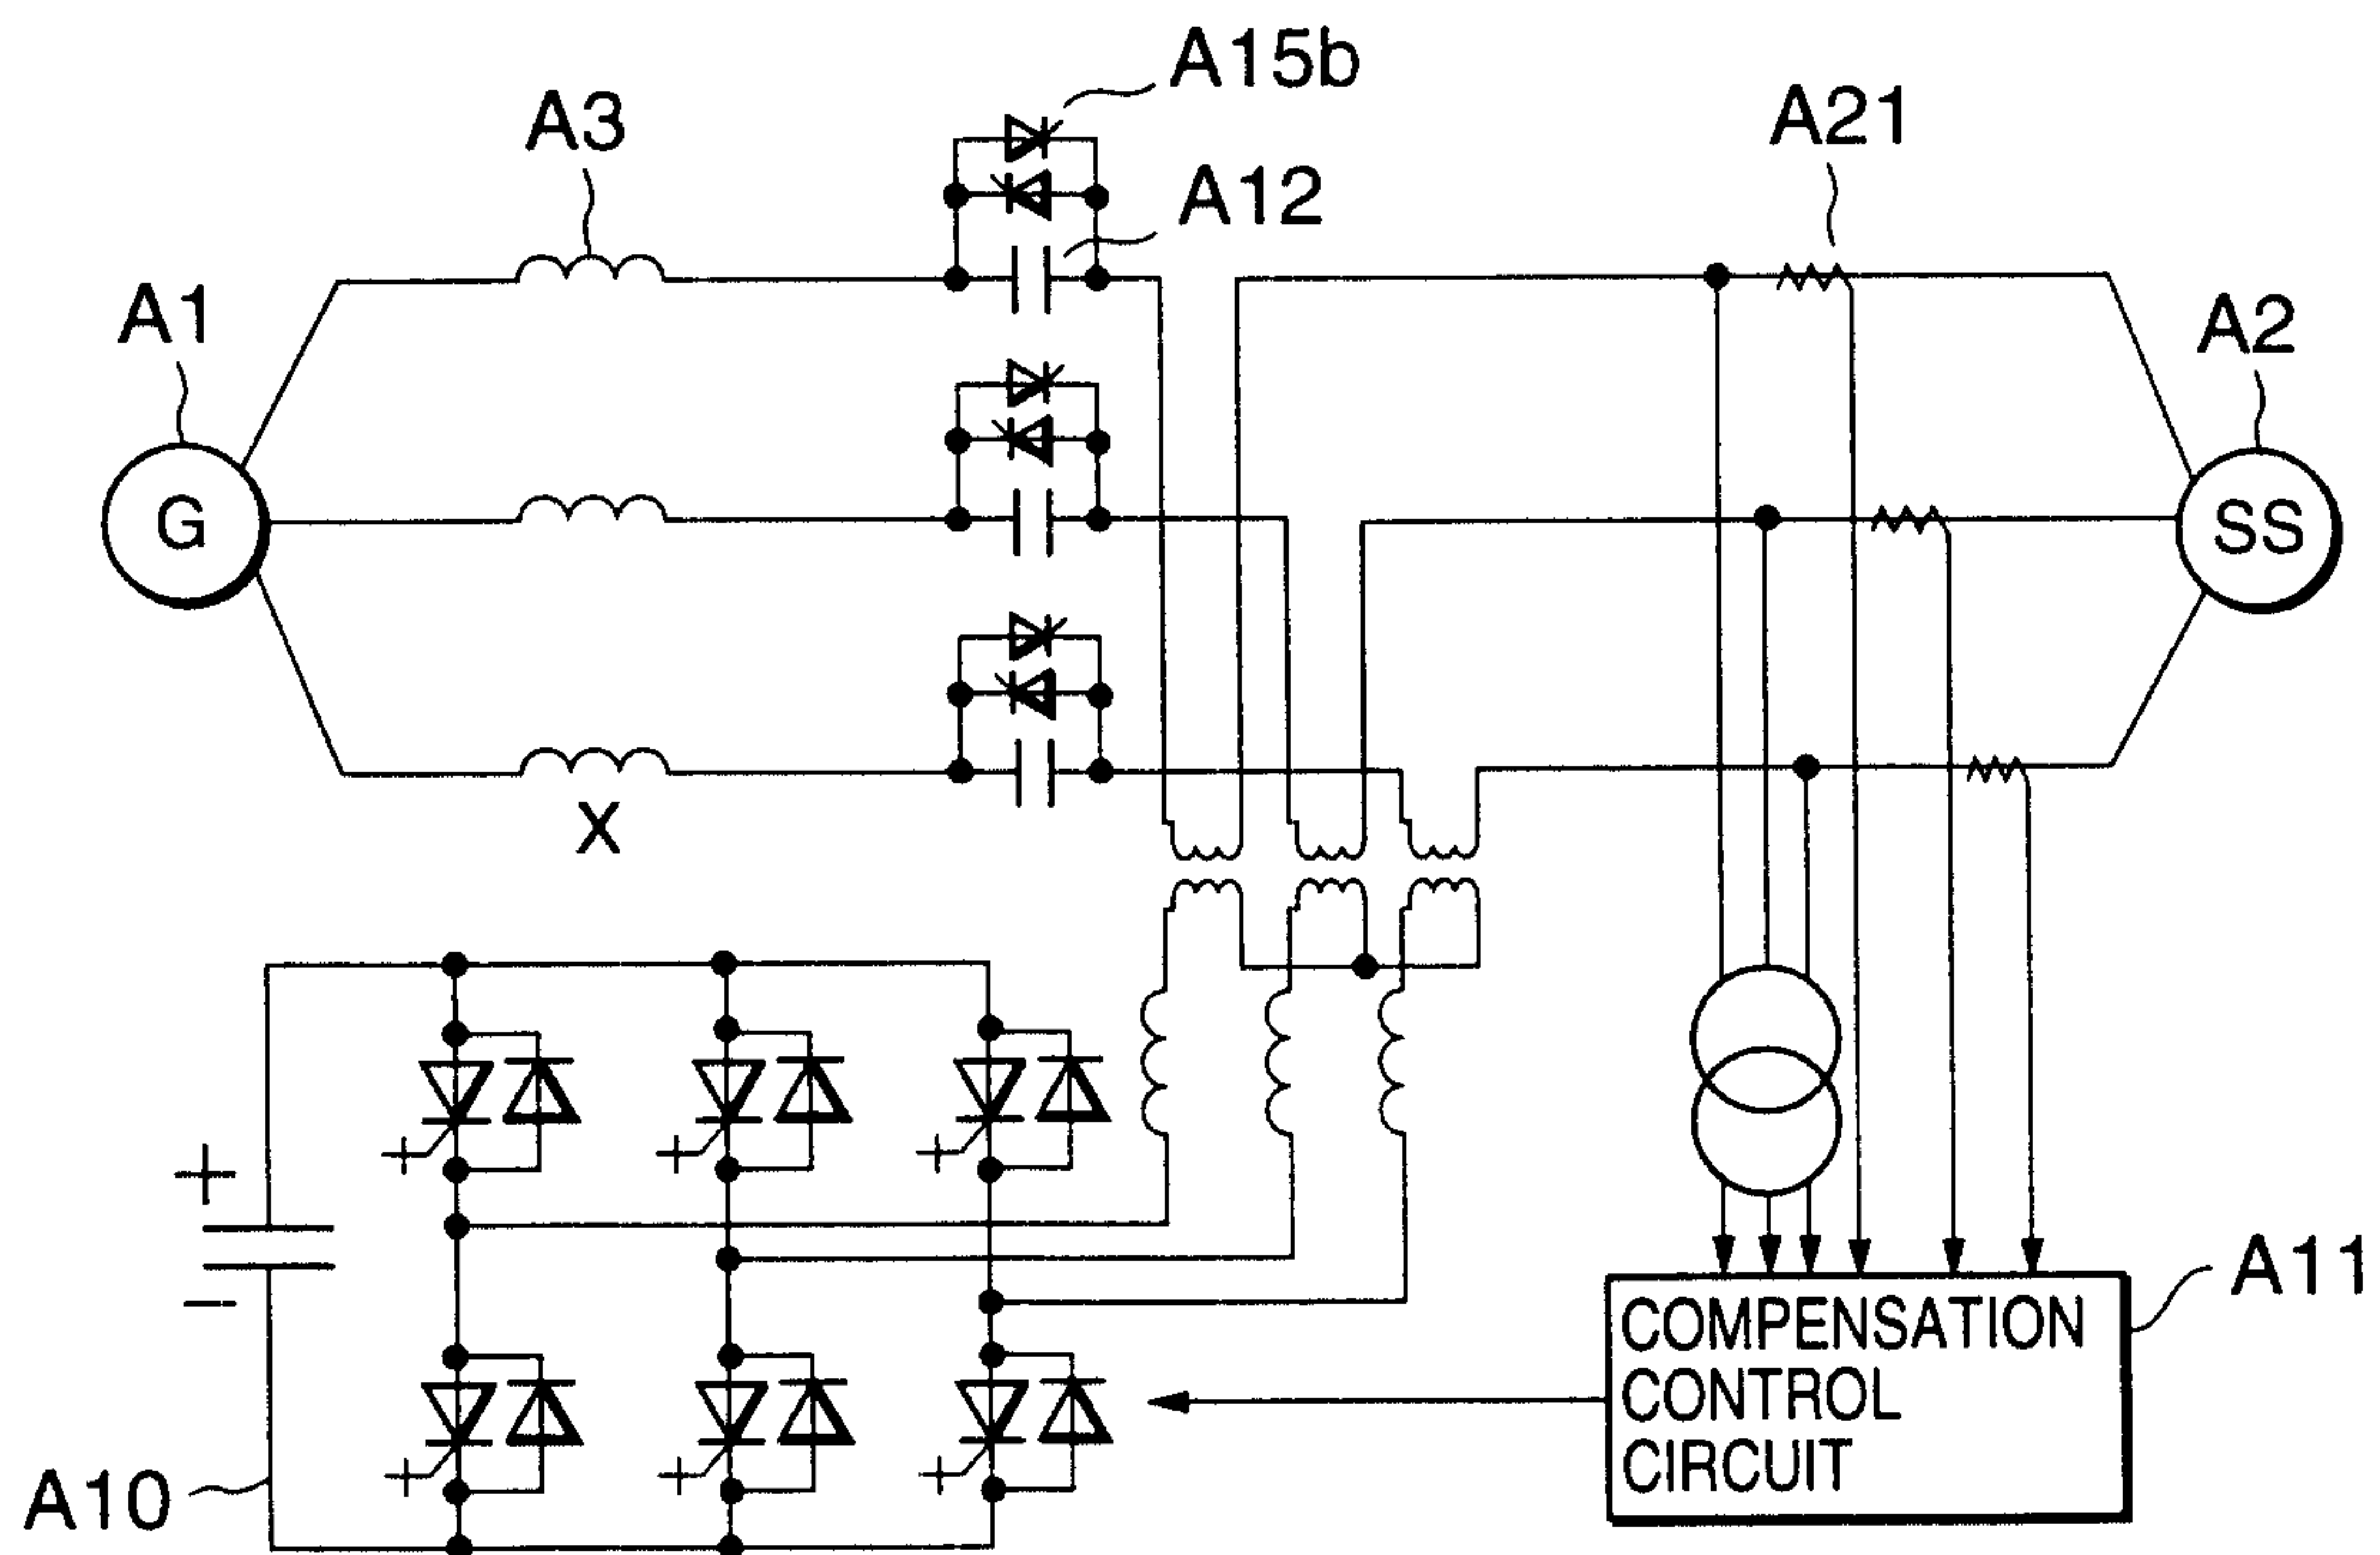


FIG. 72

37/41

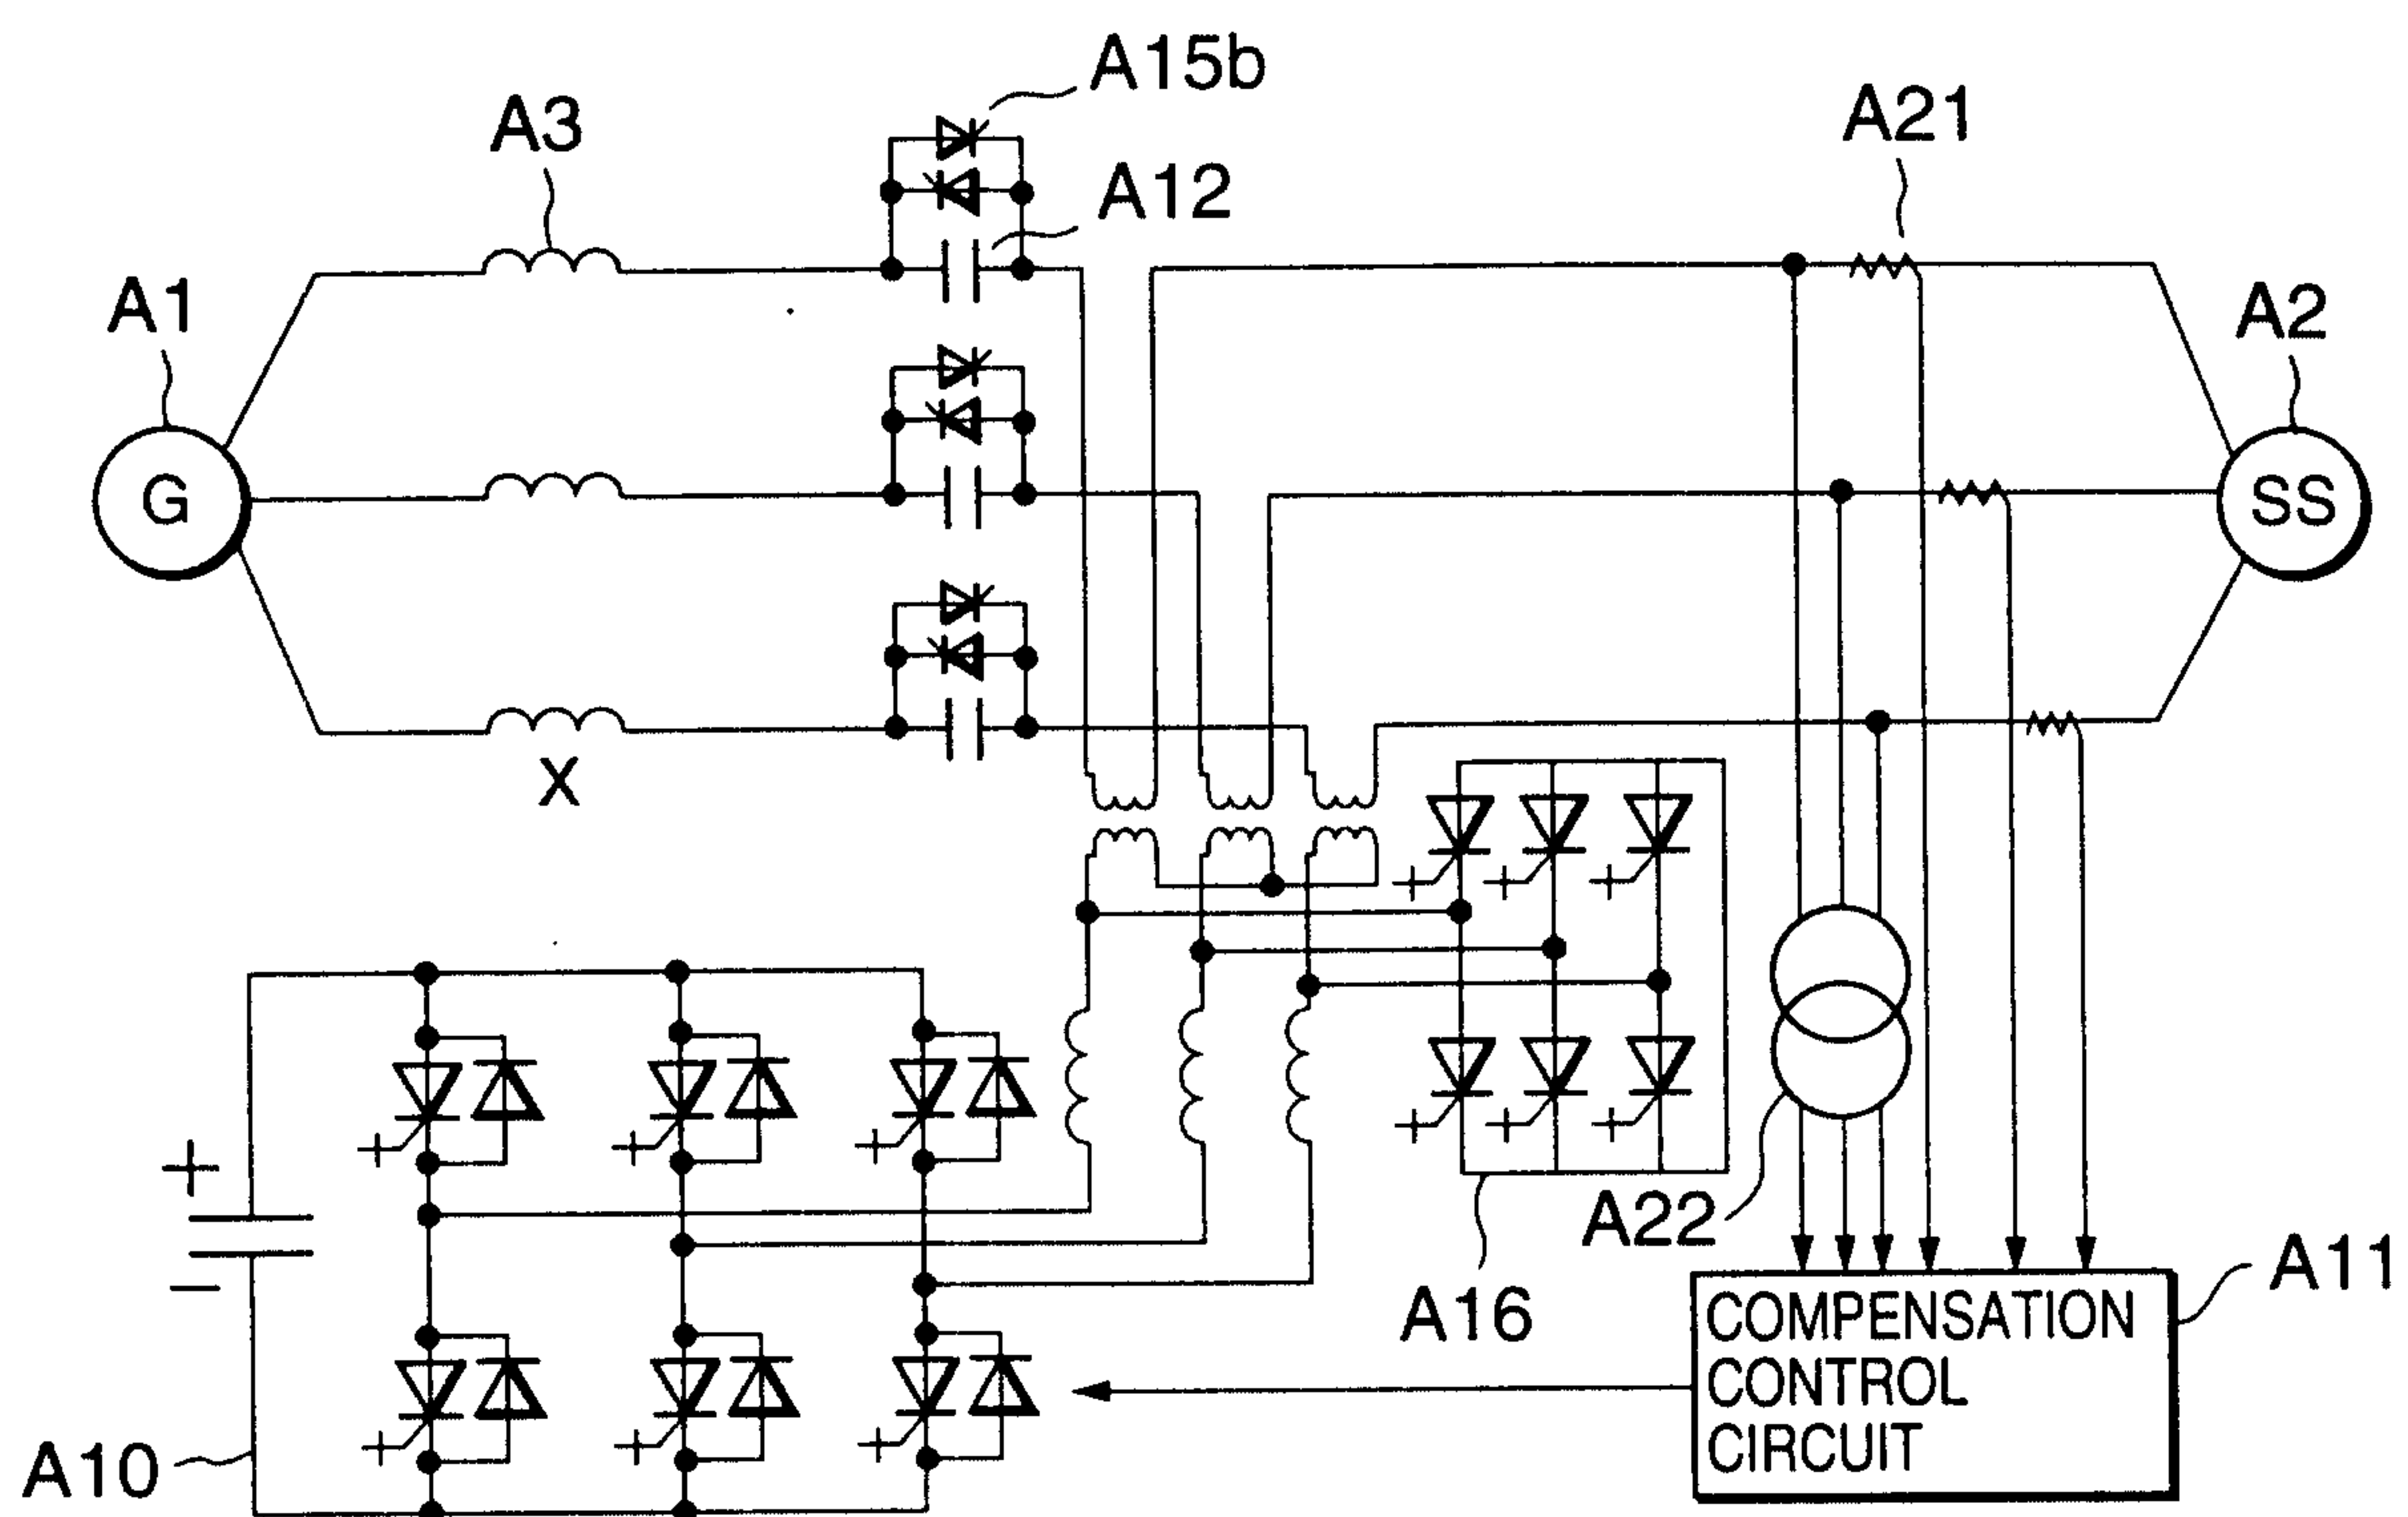


FIG. 73

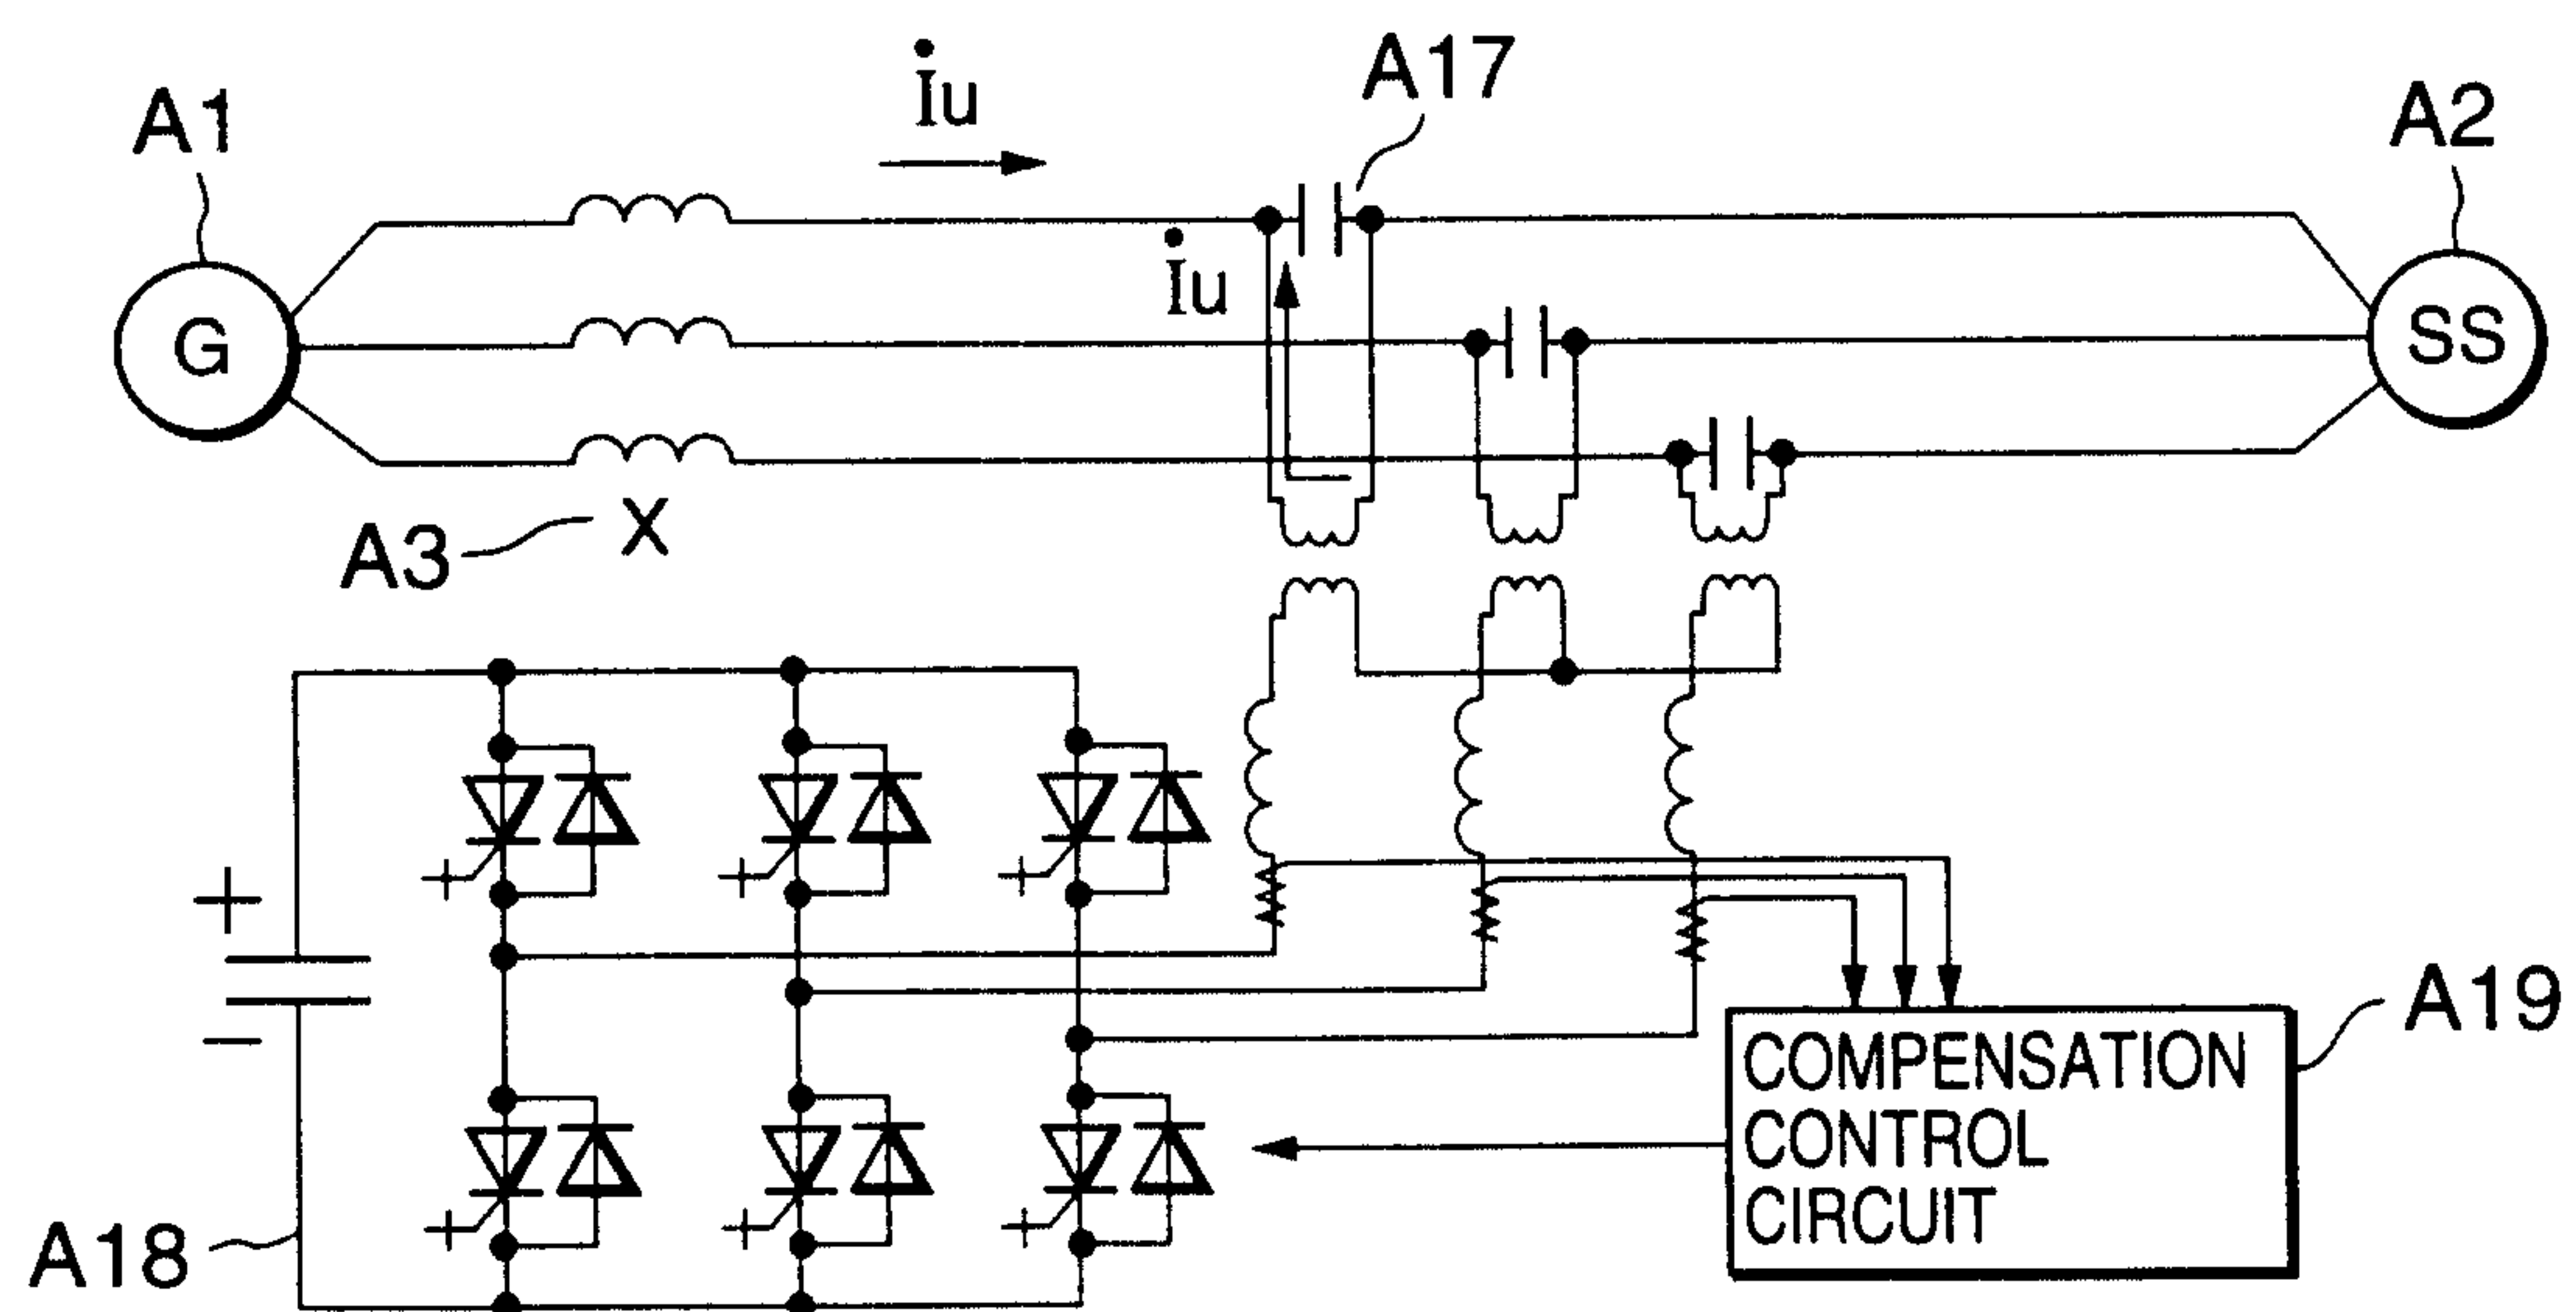


FIG. 74

38/41

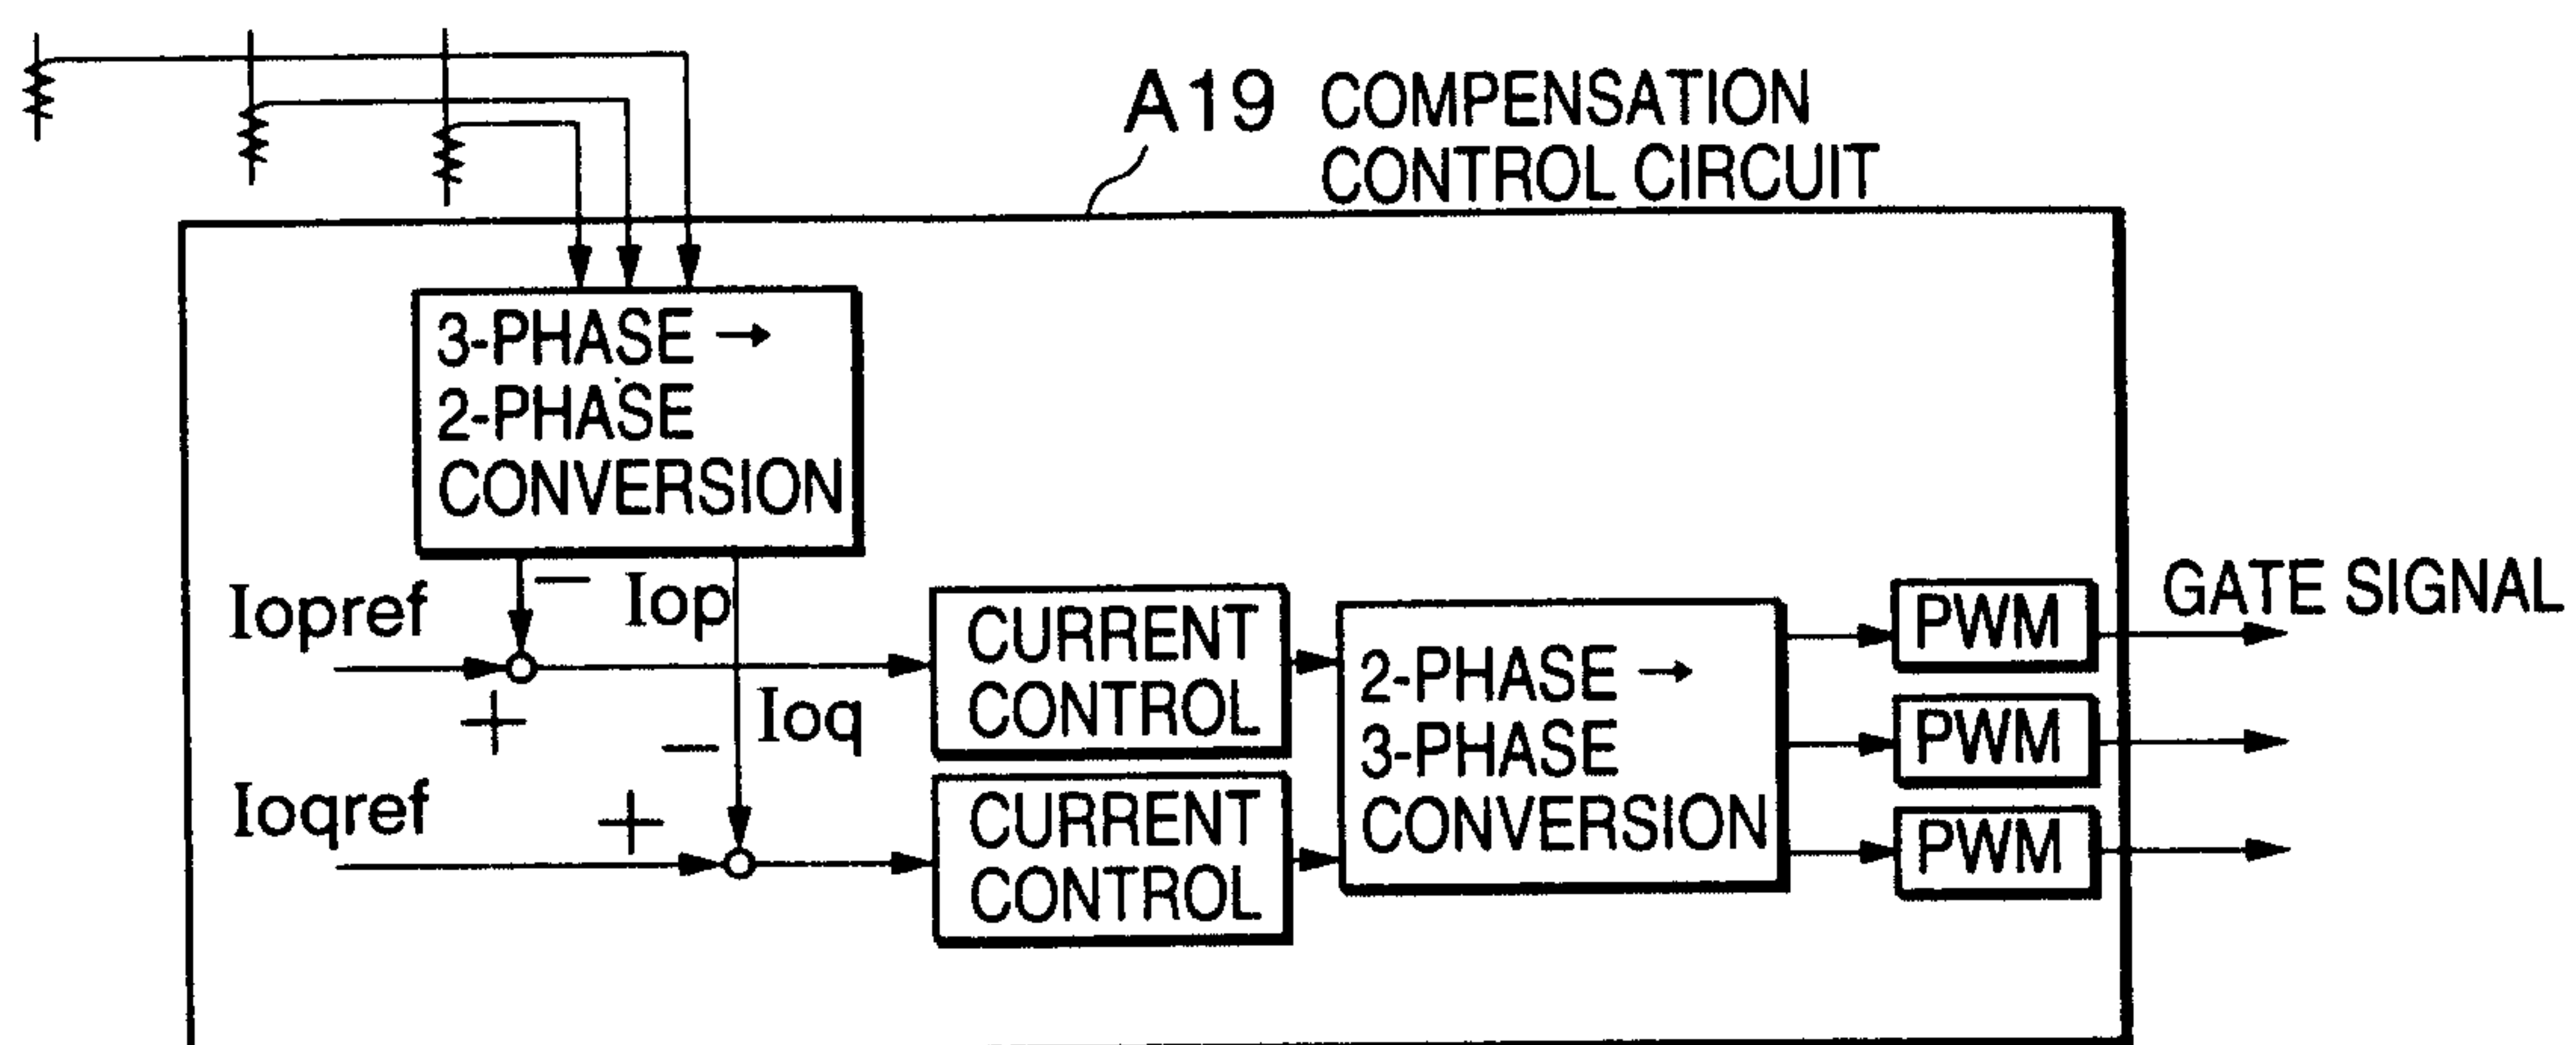


FIG. 75

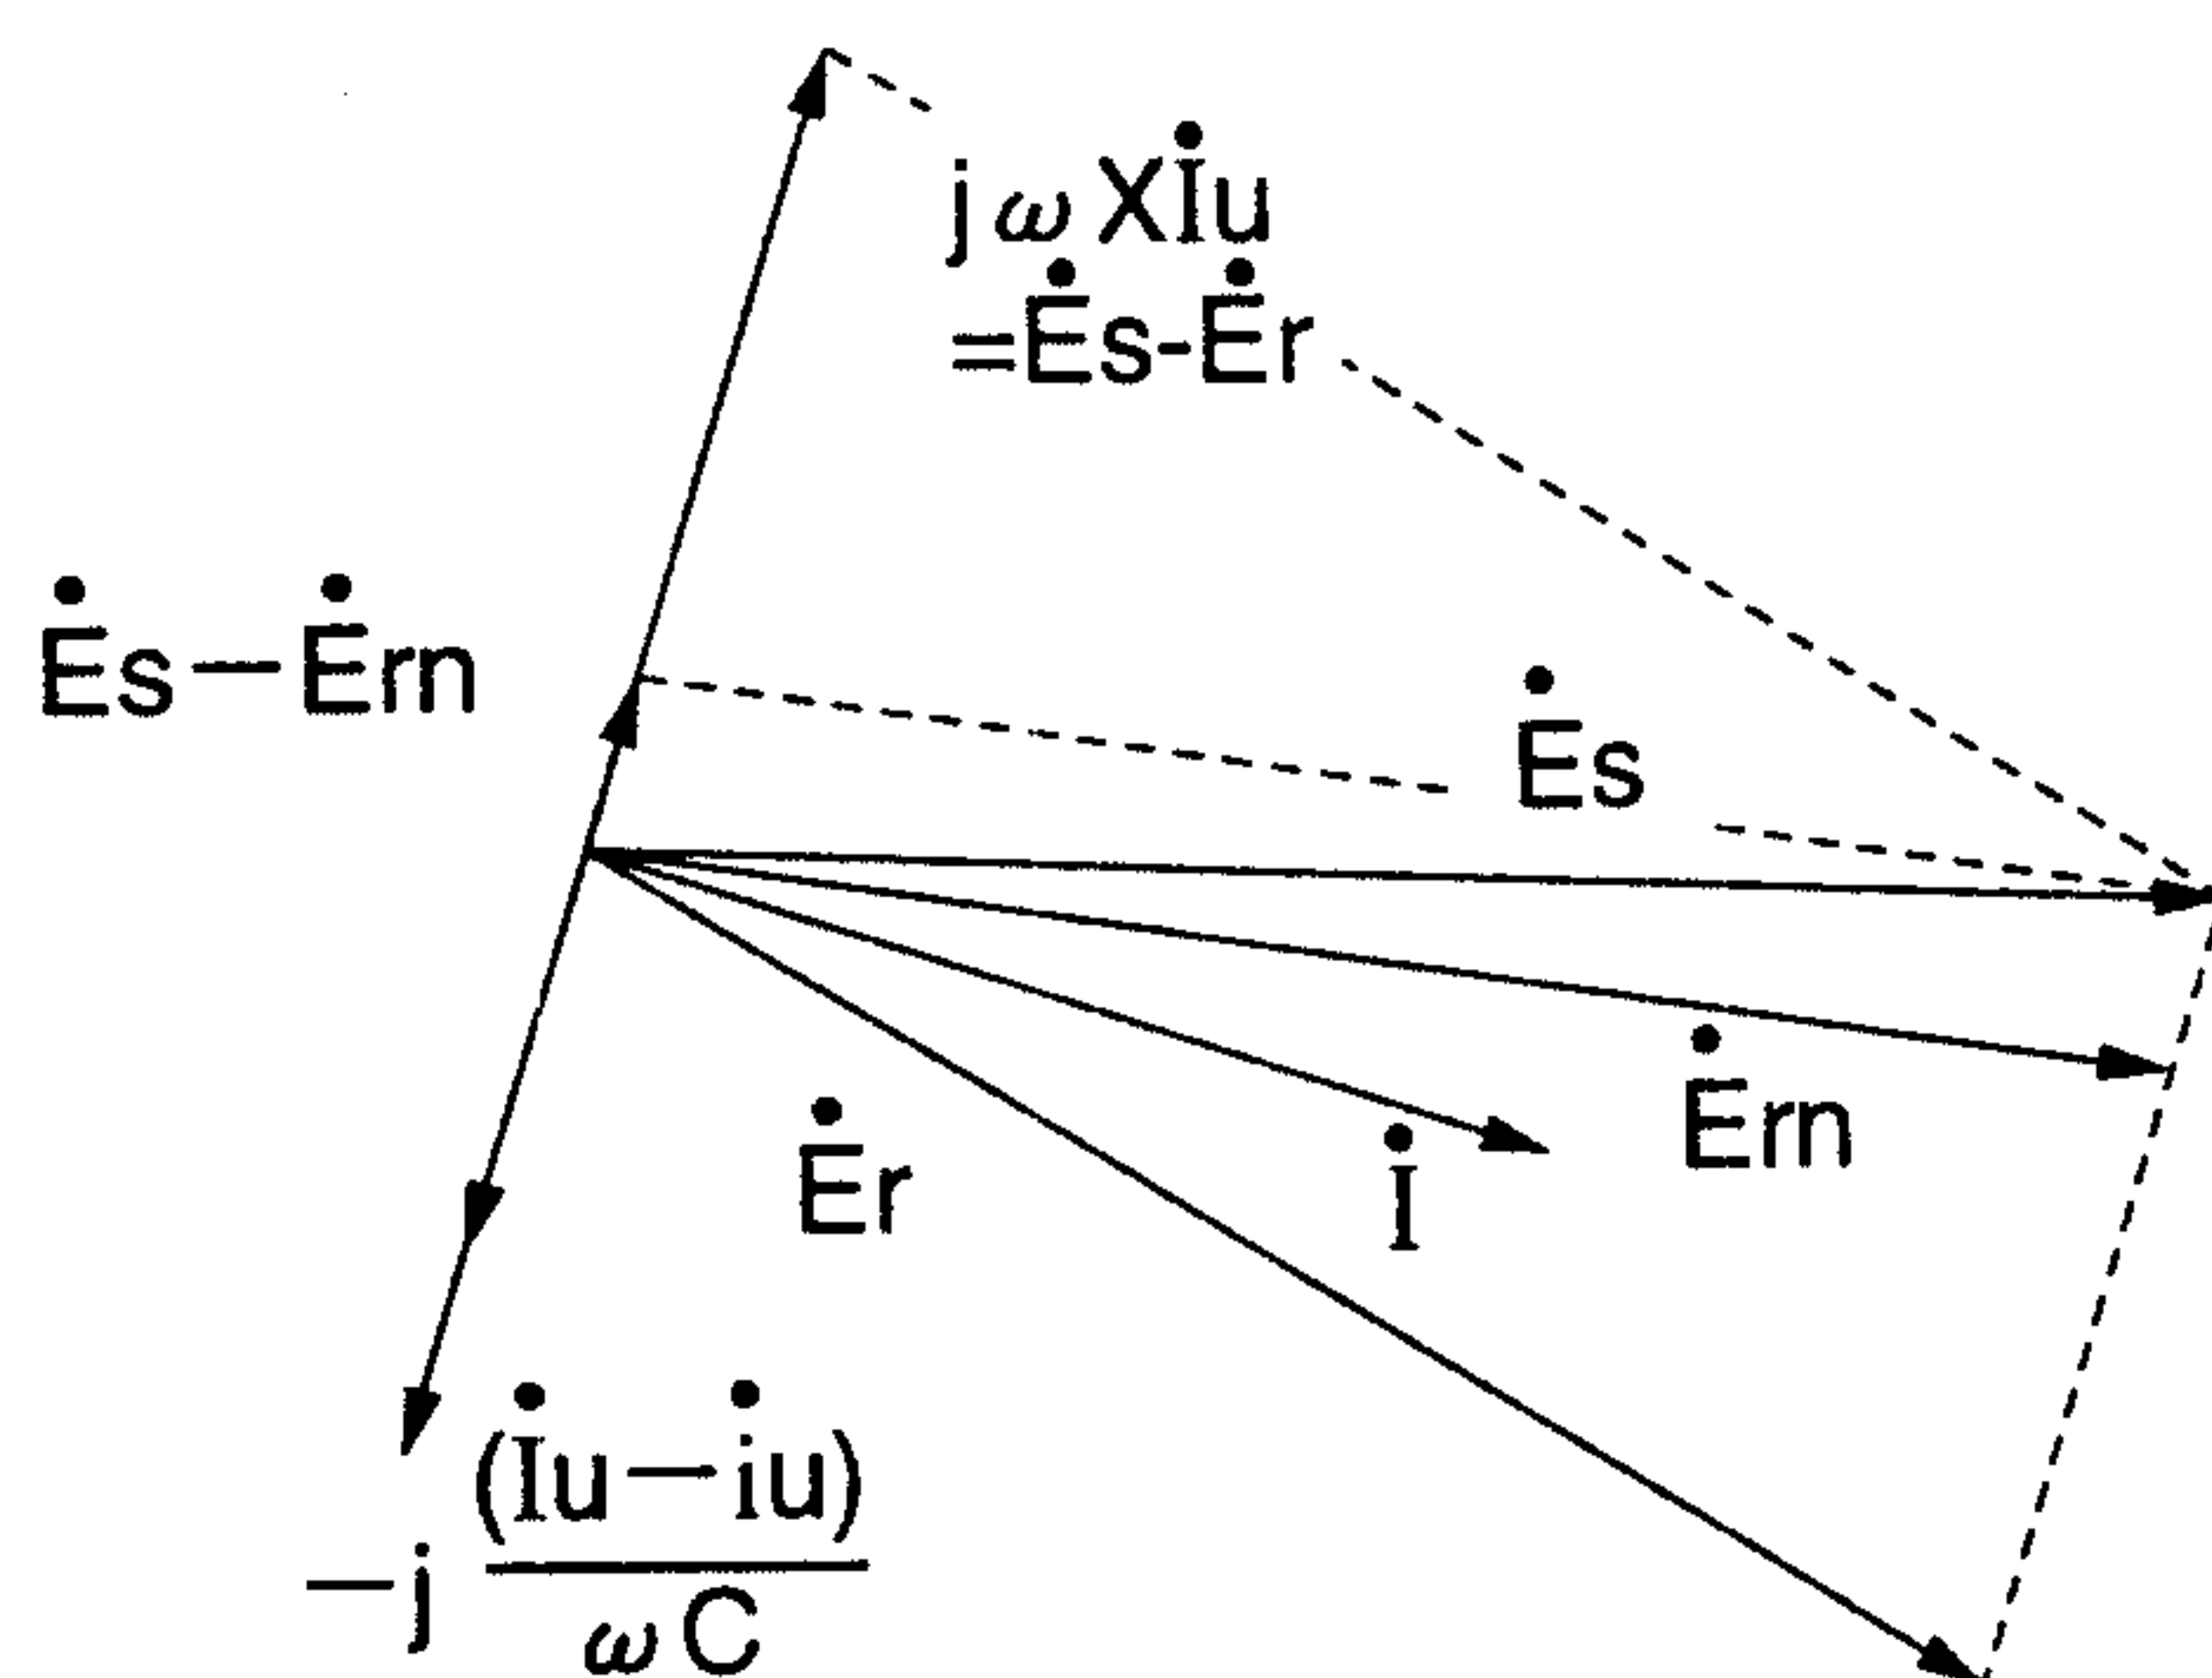


FIG. 76

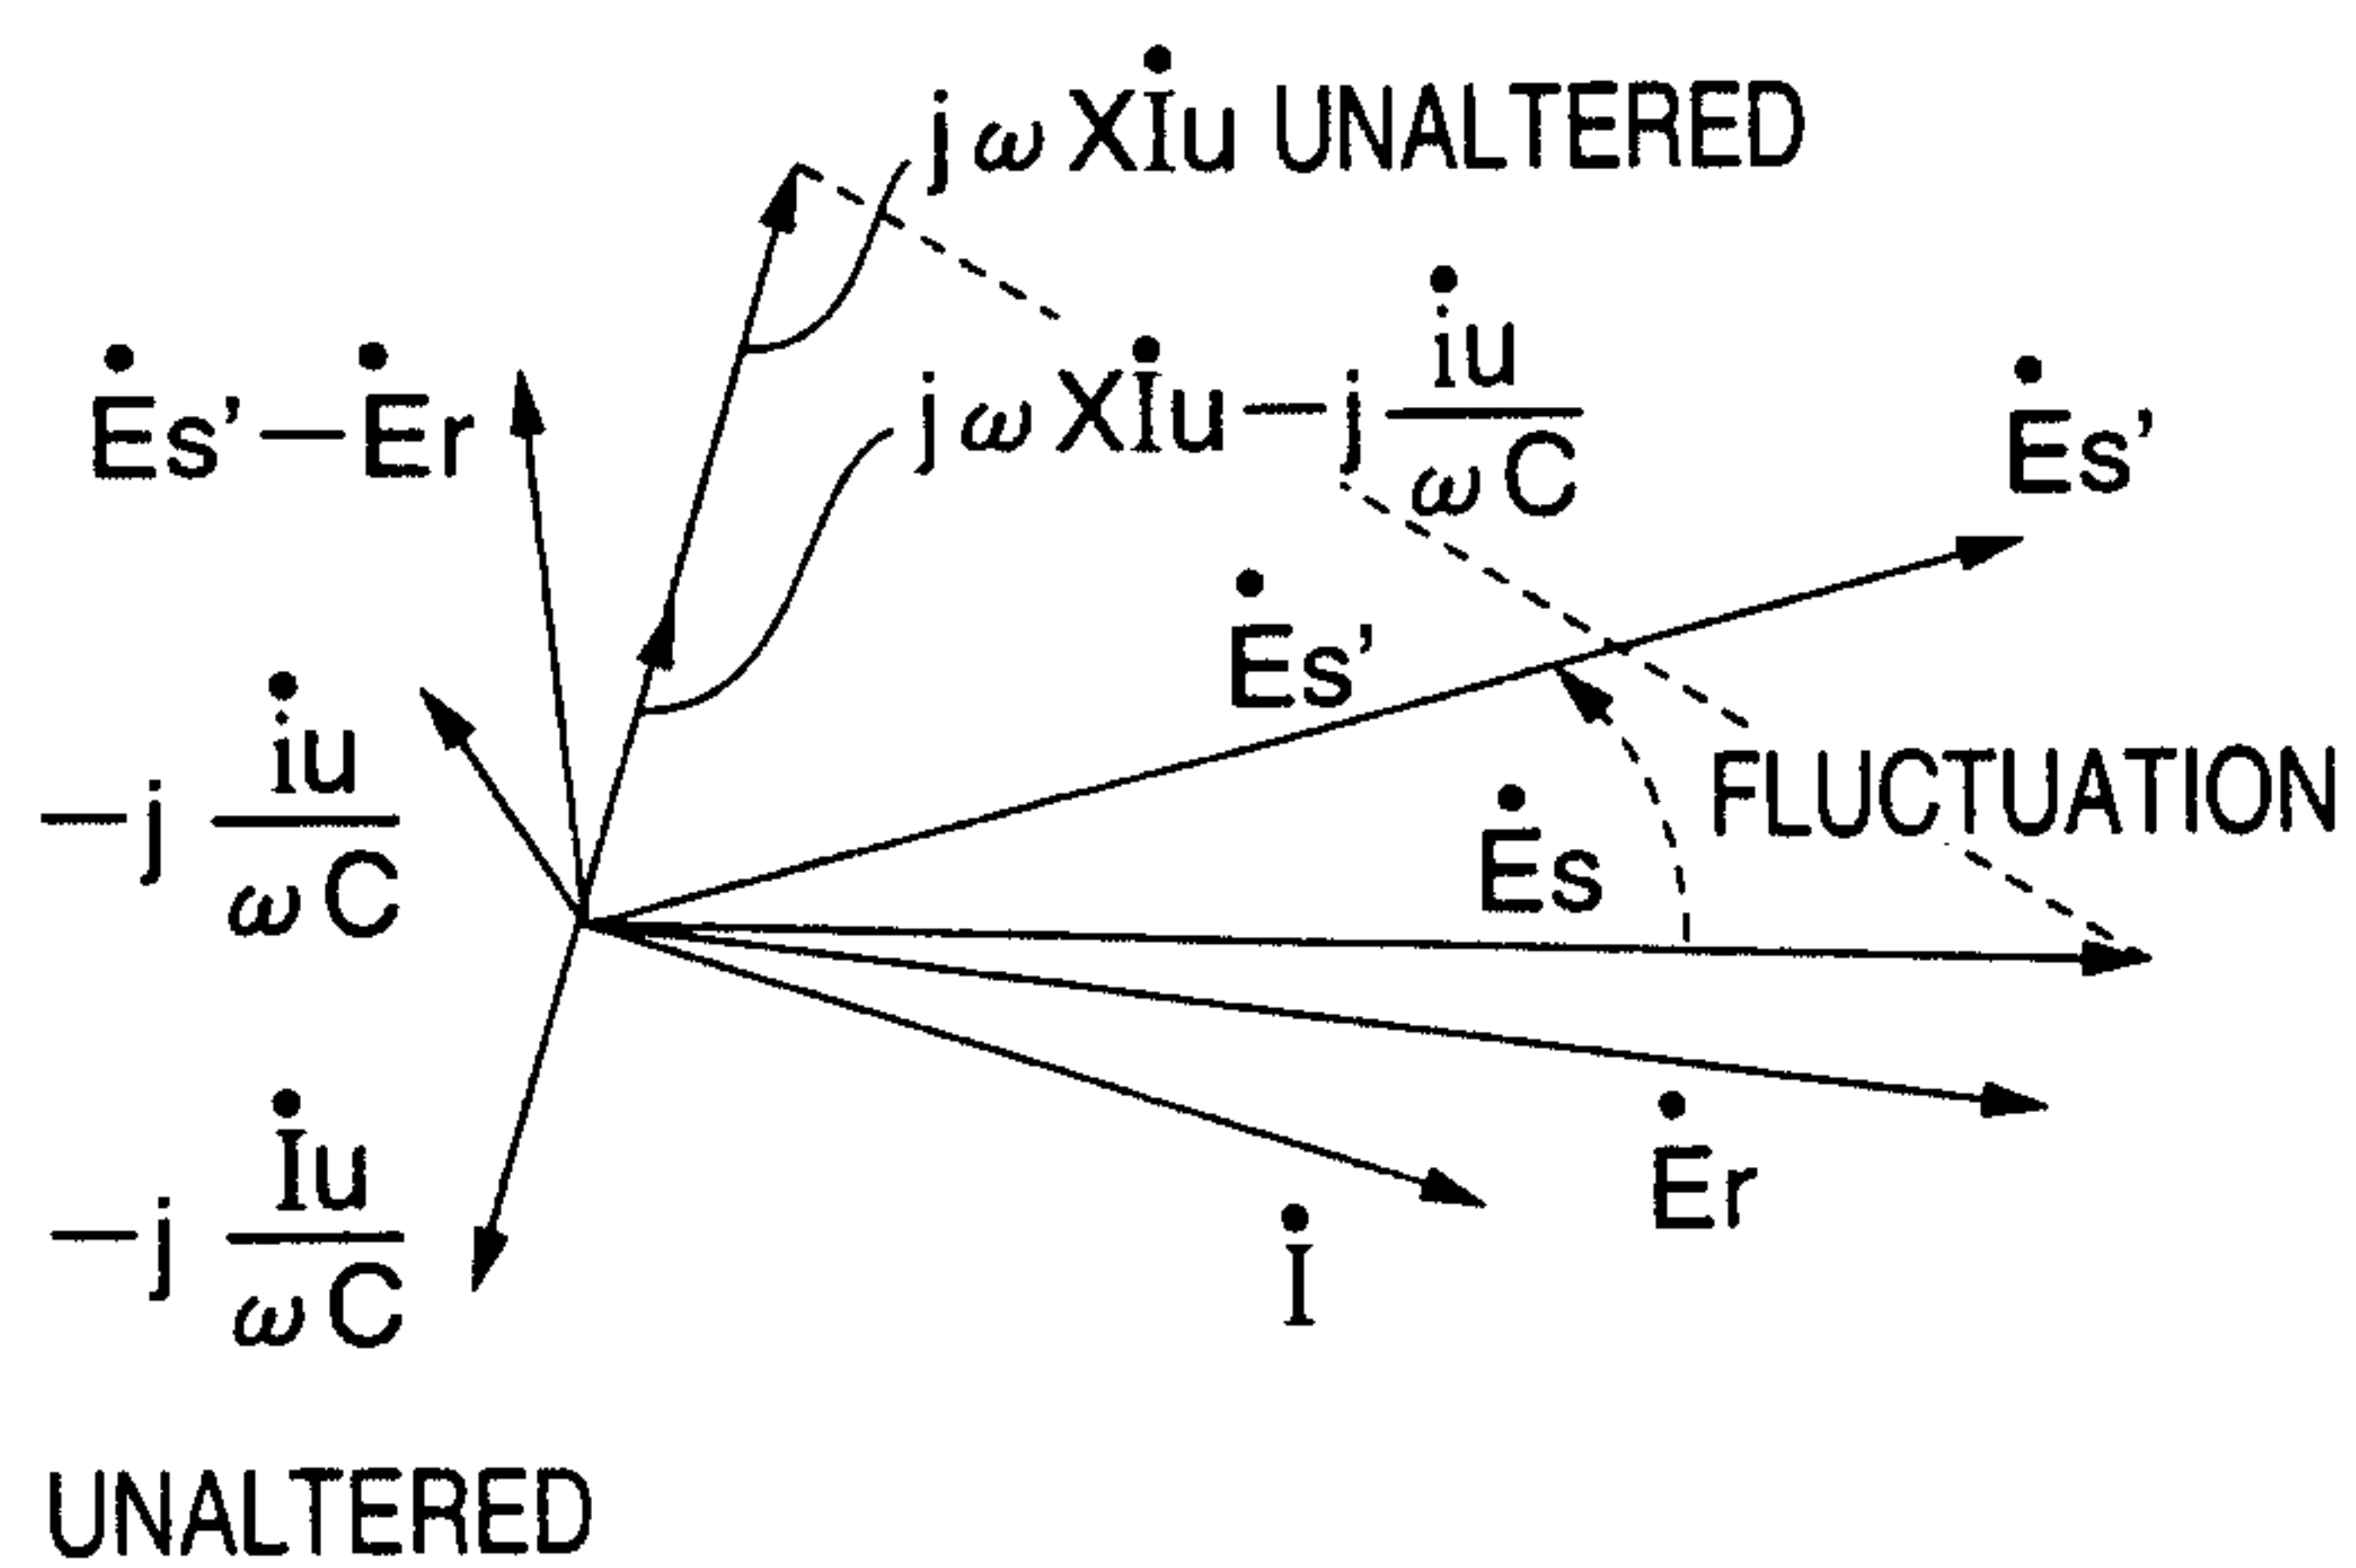


FIG. 77

39/41

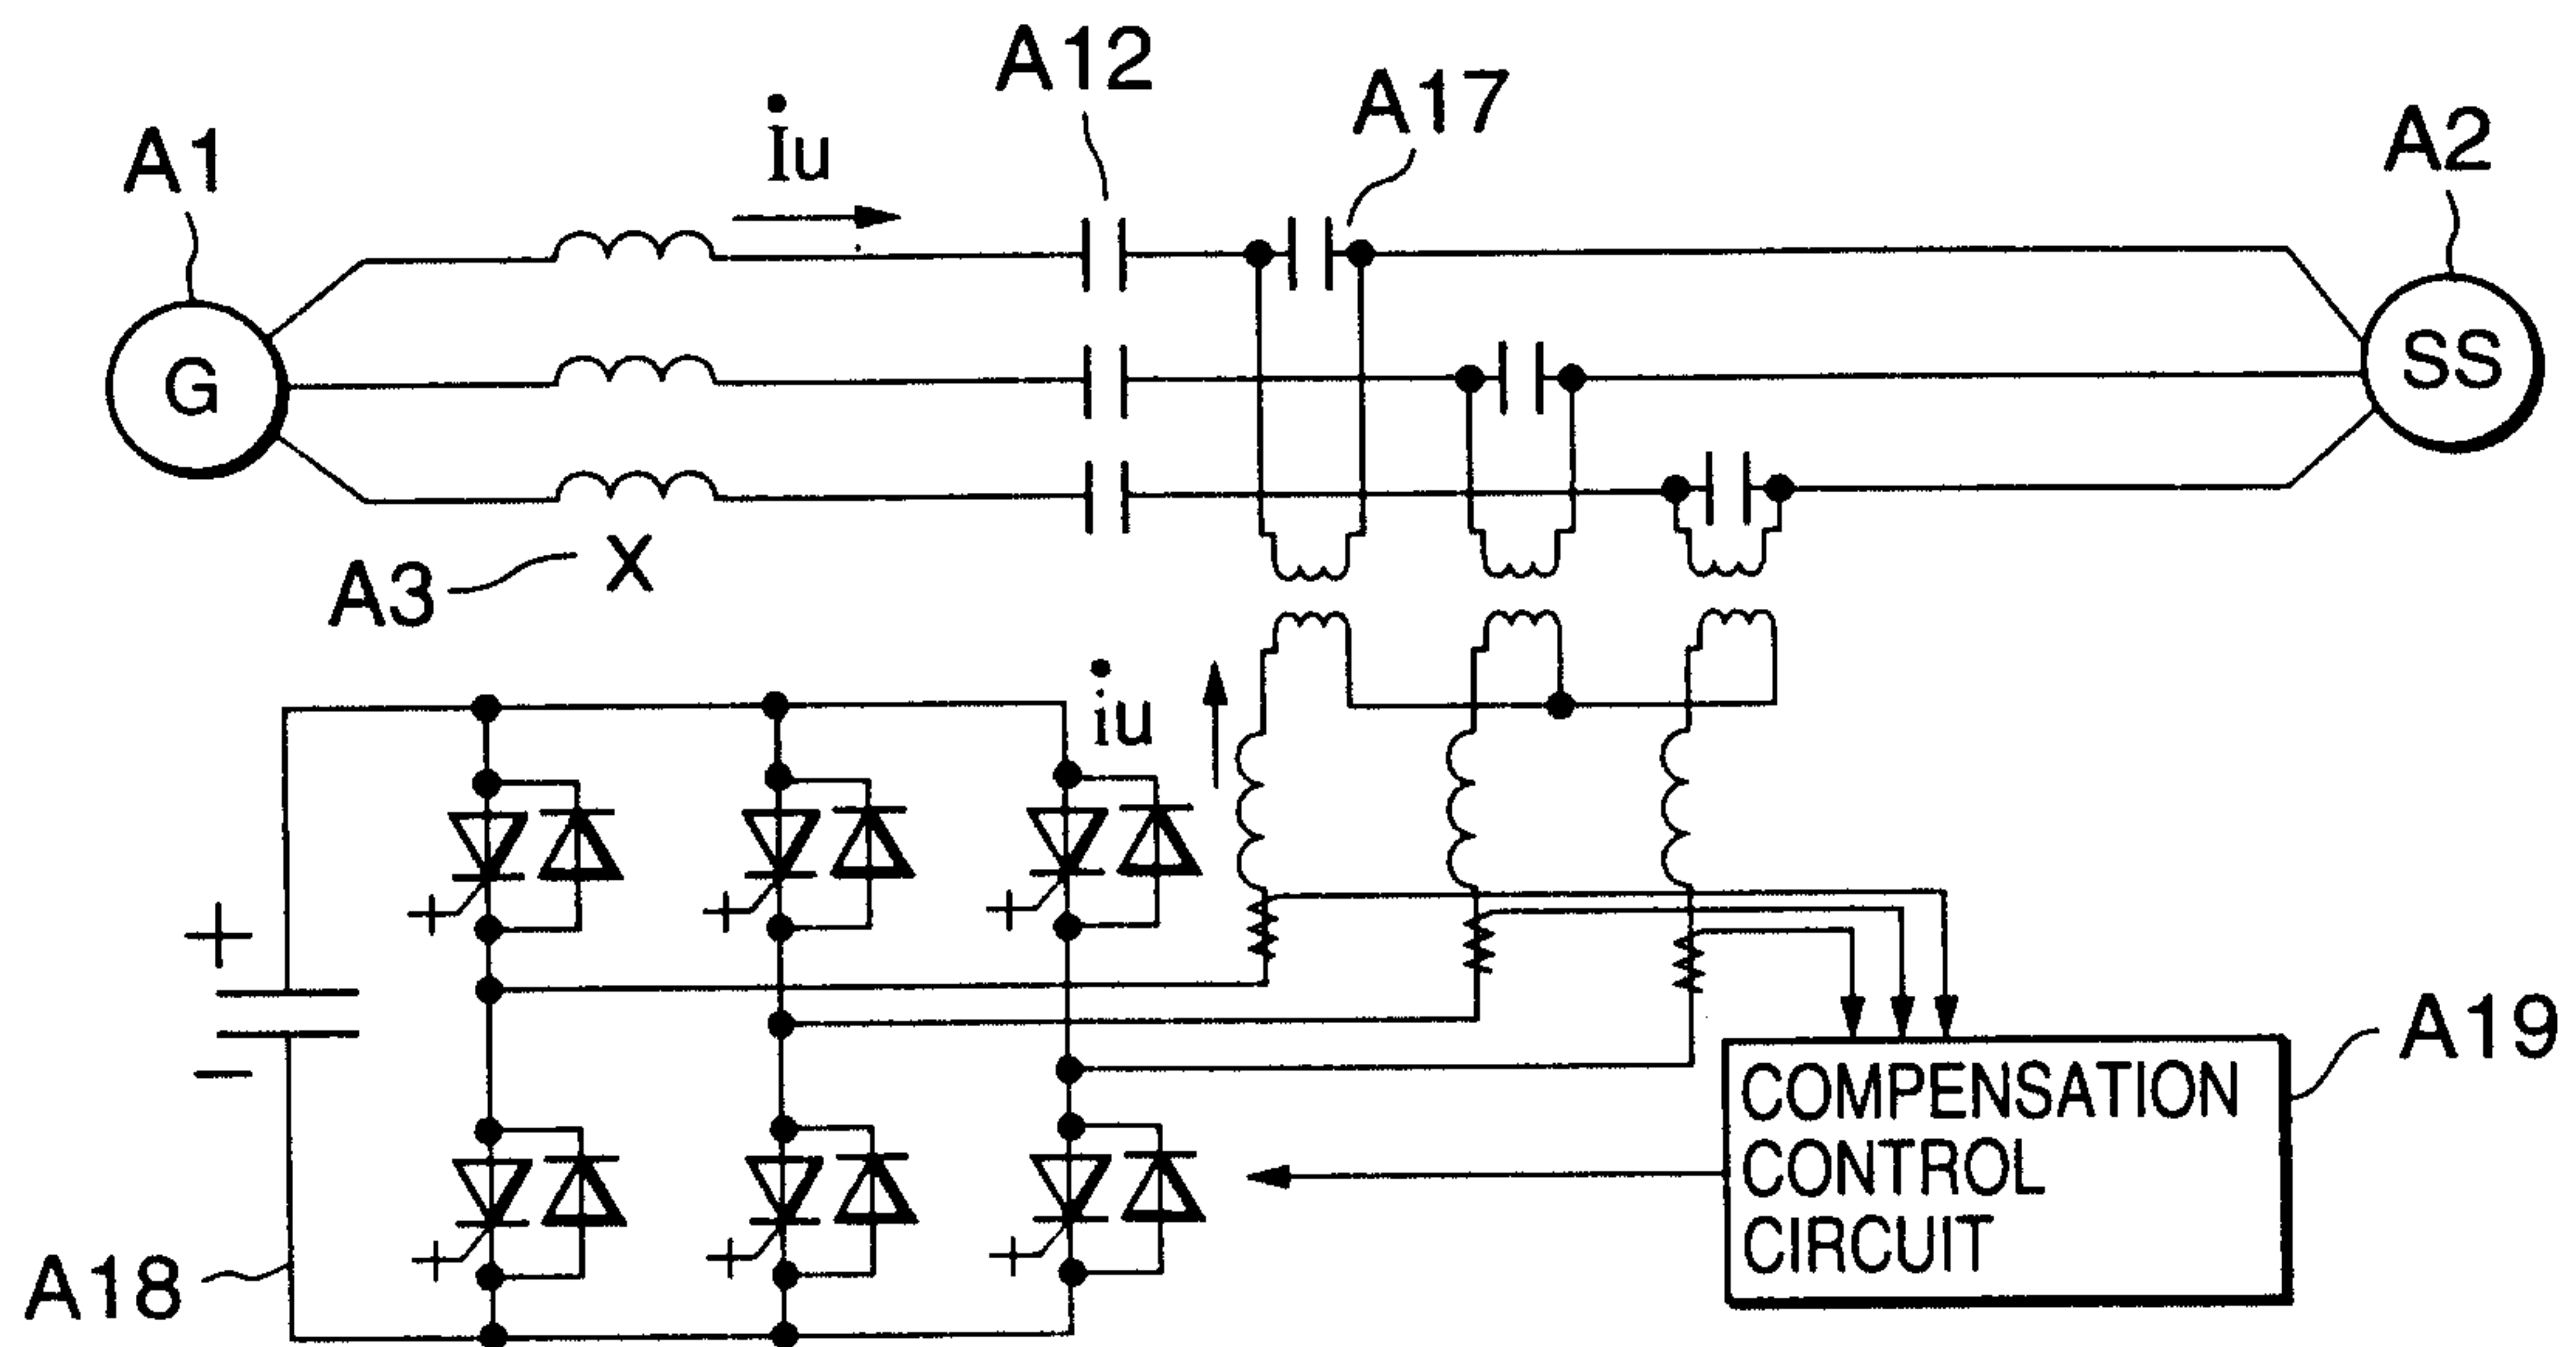


FIG. 78

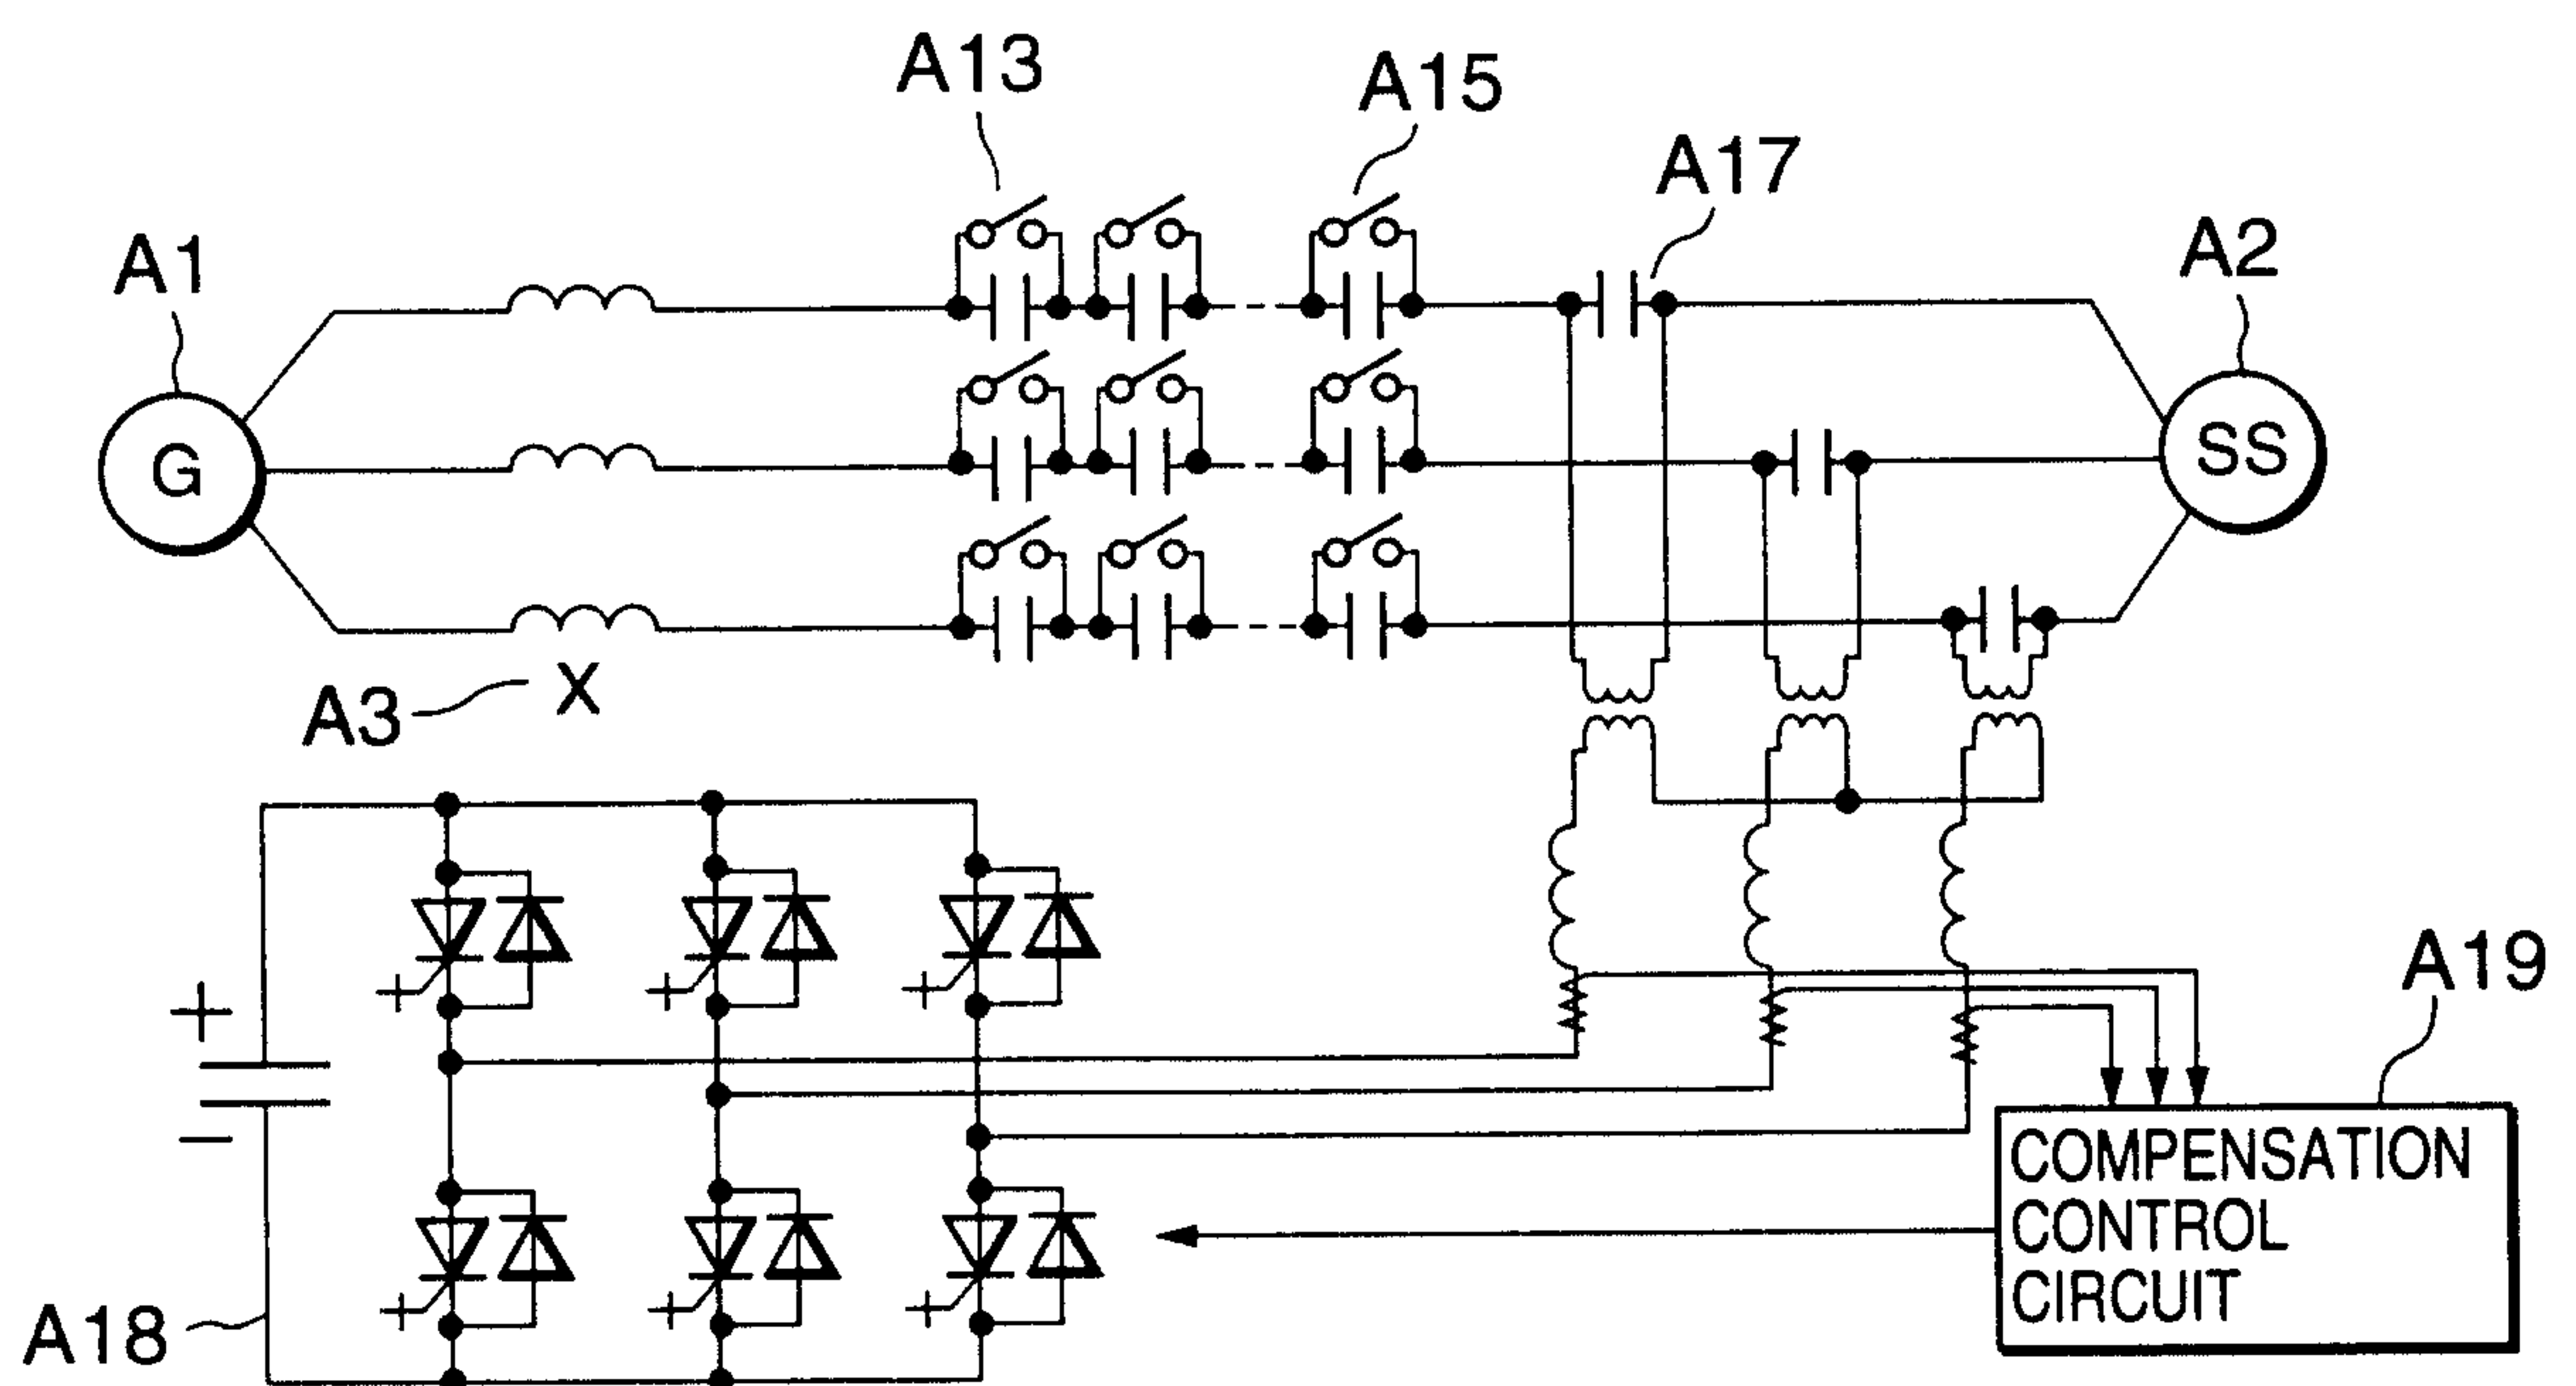


FIG. 79

40/41

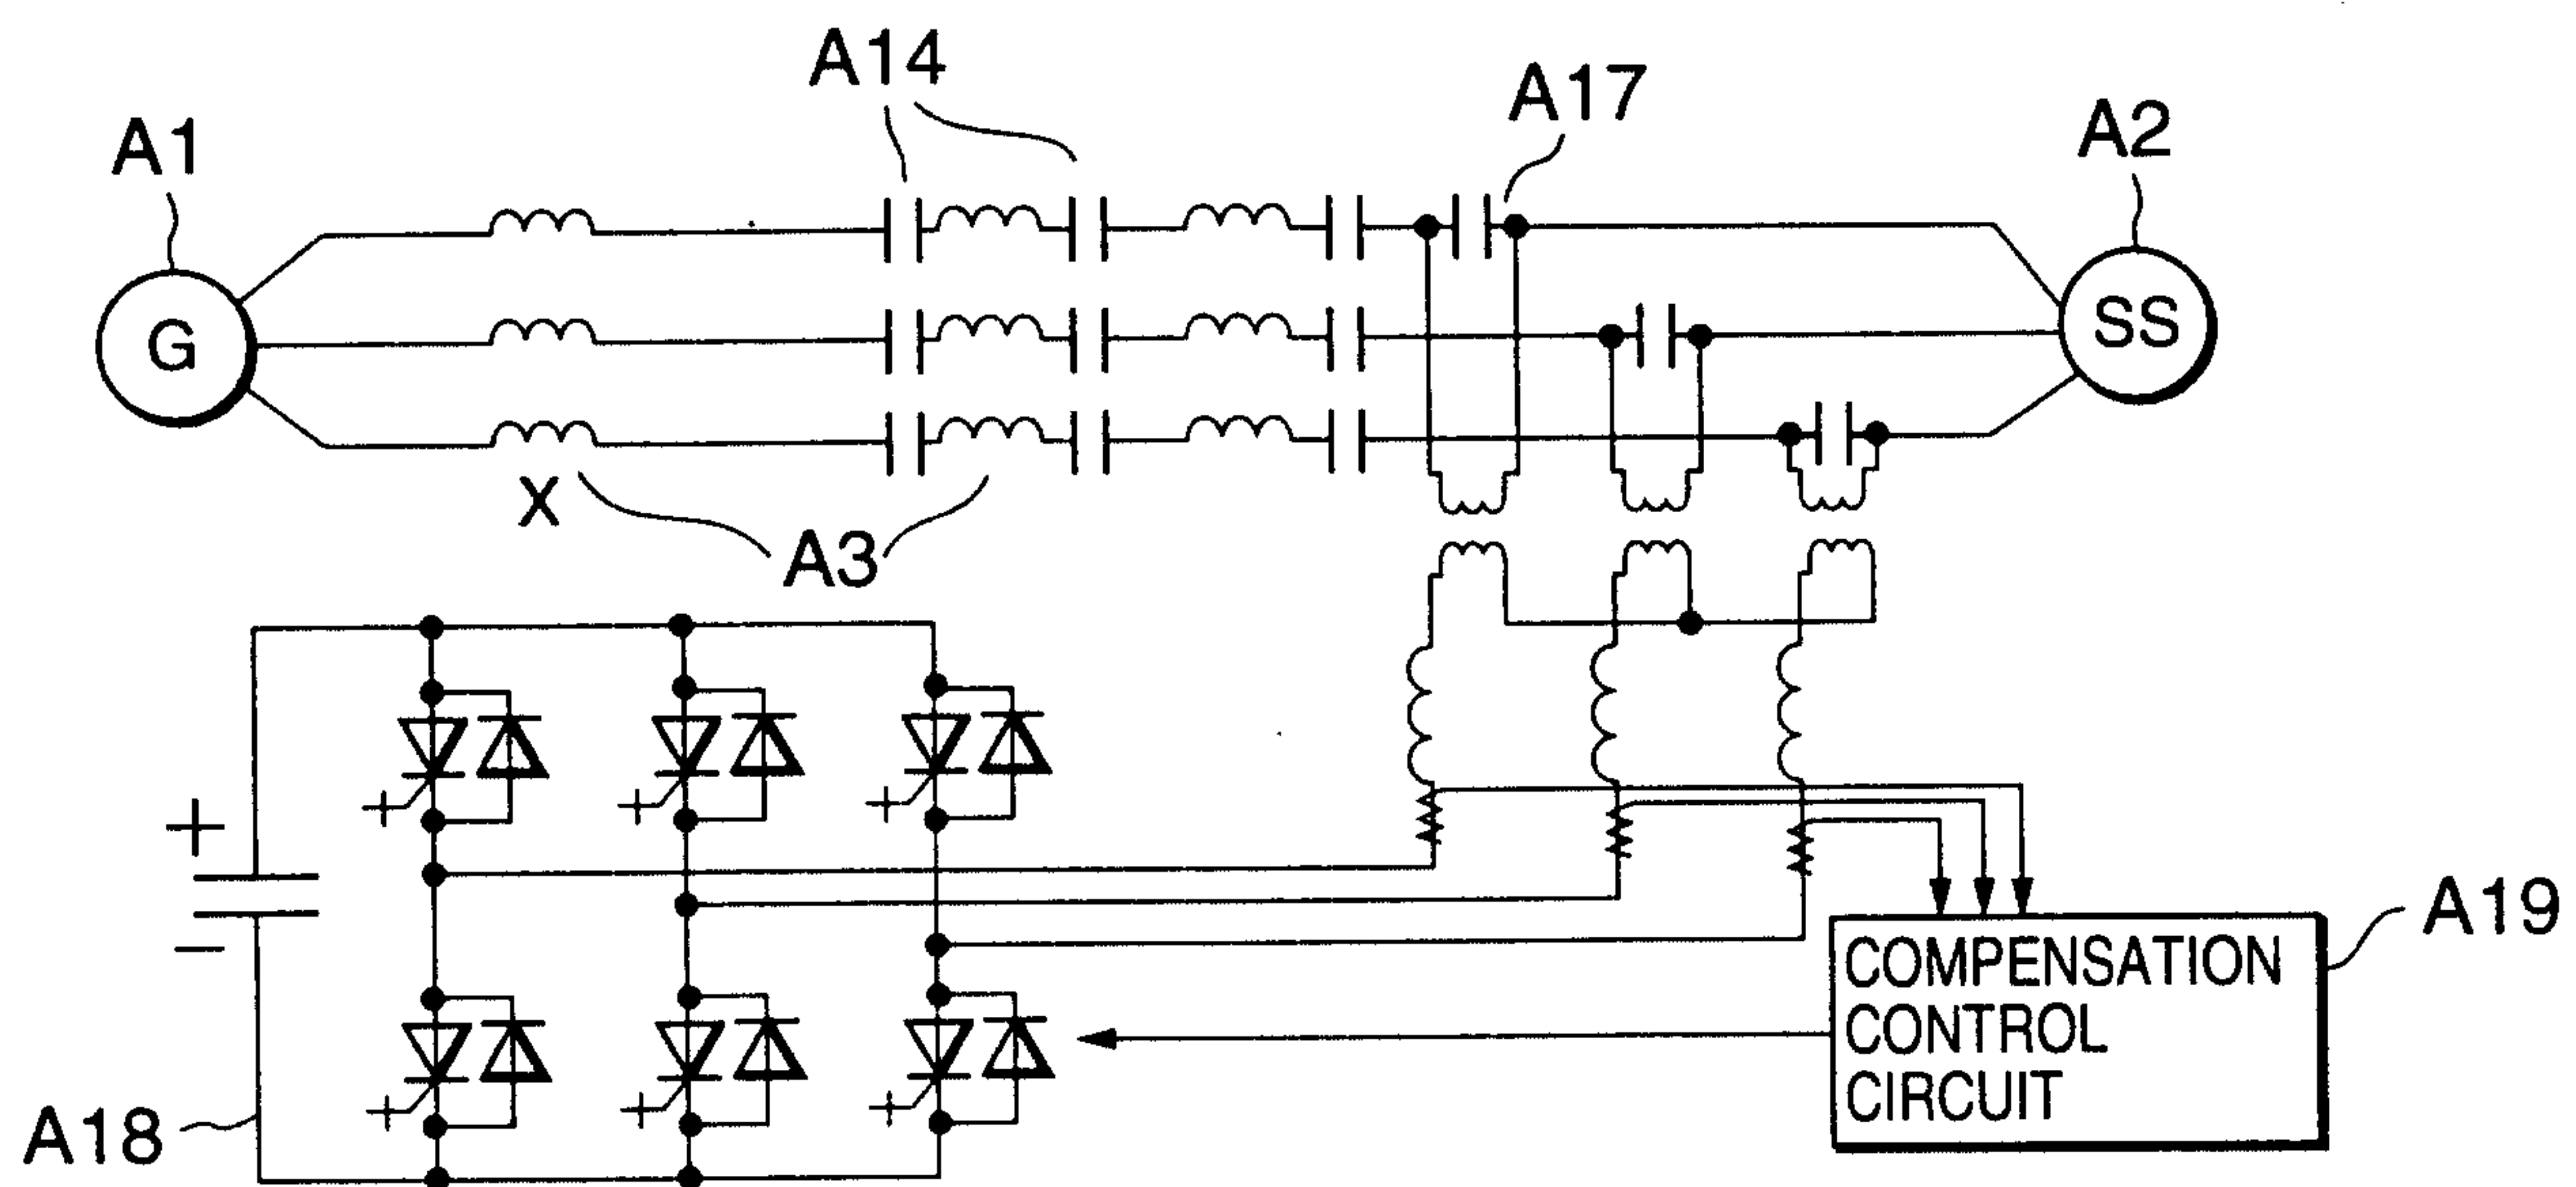


FIG. 80

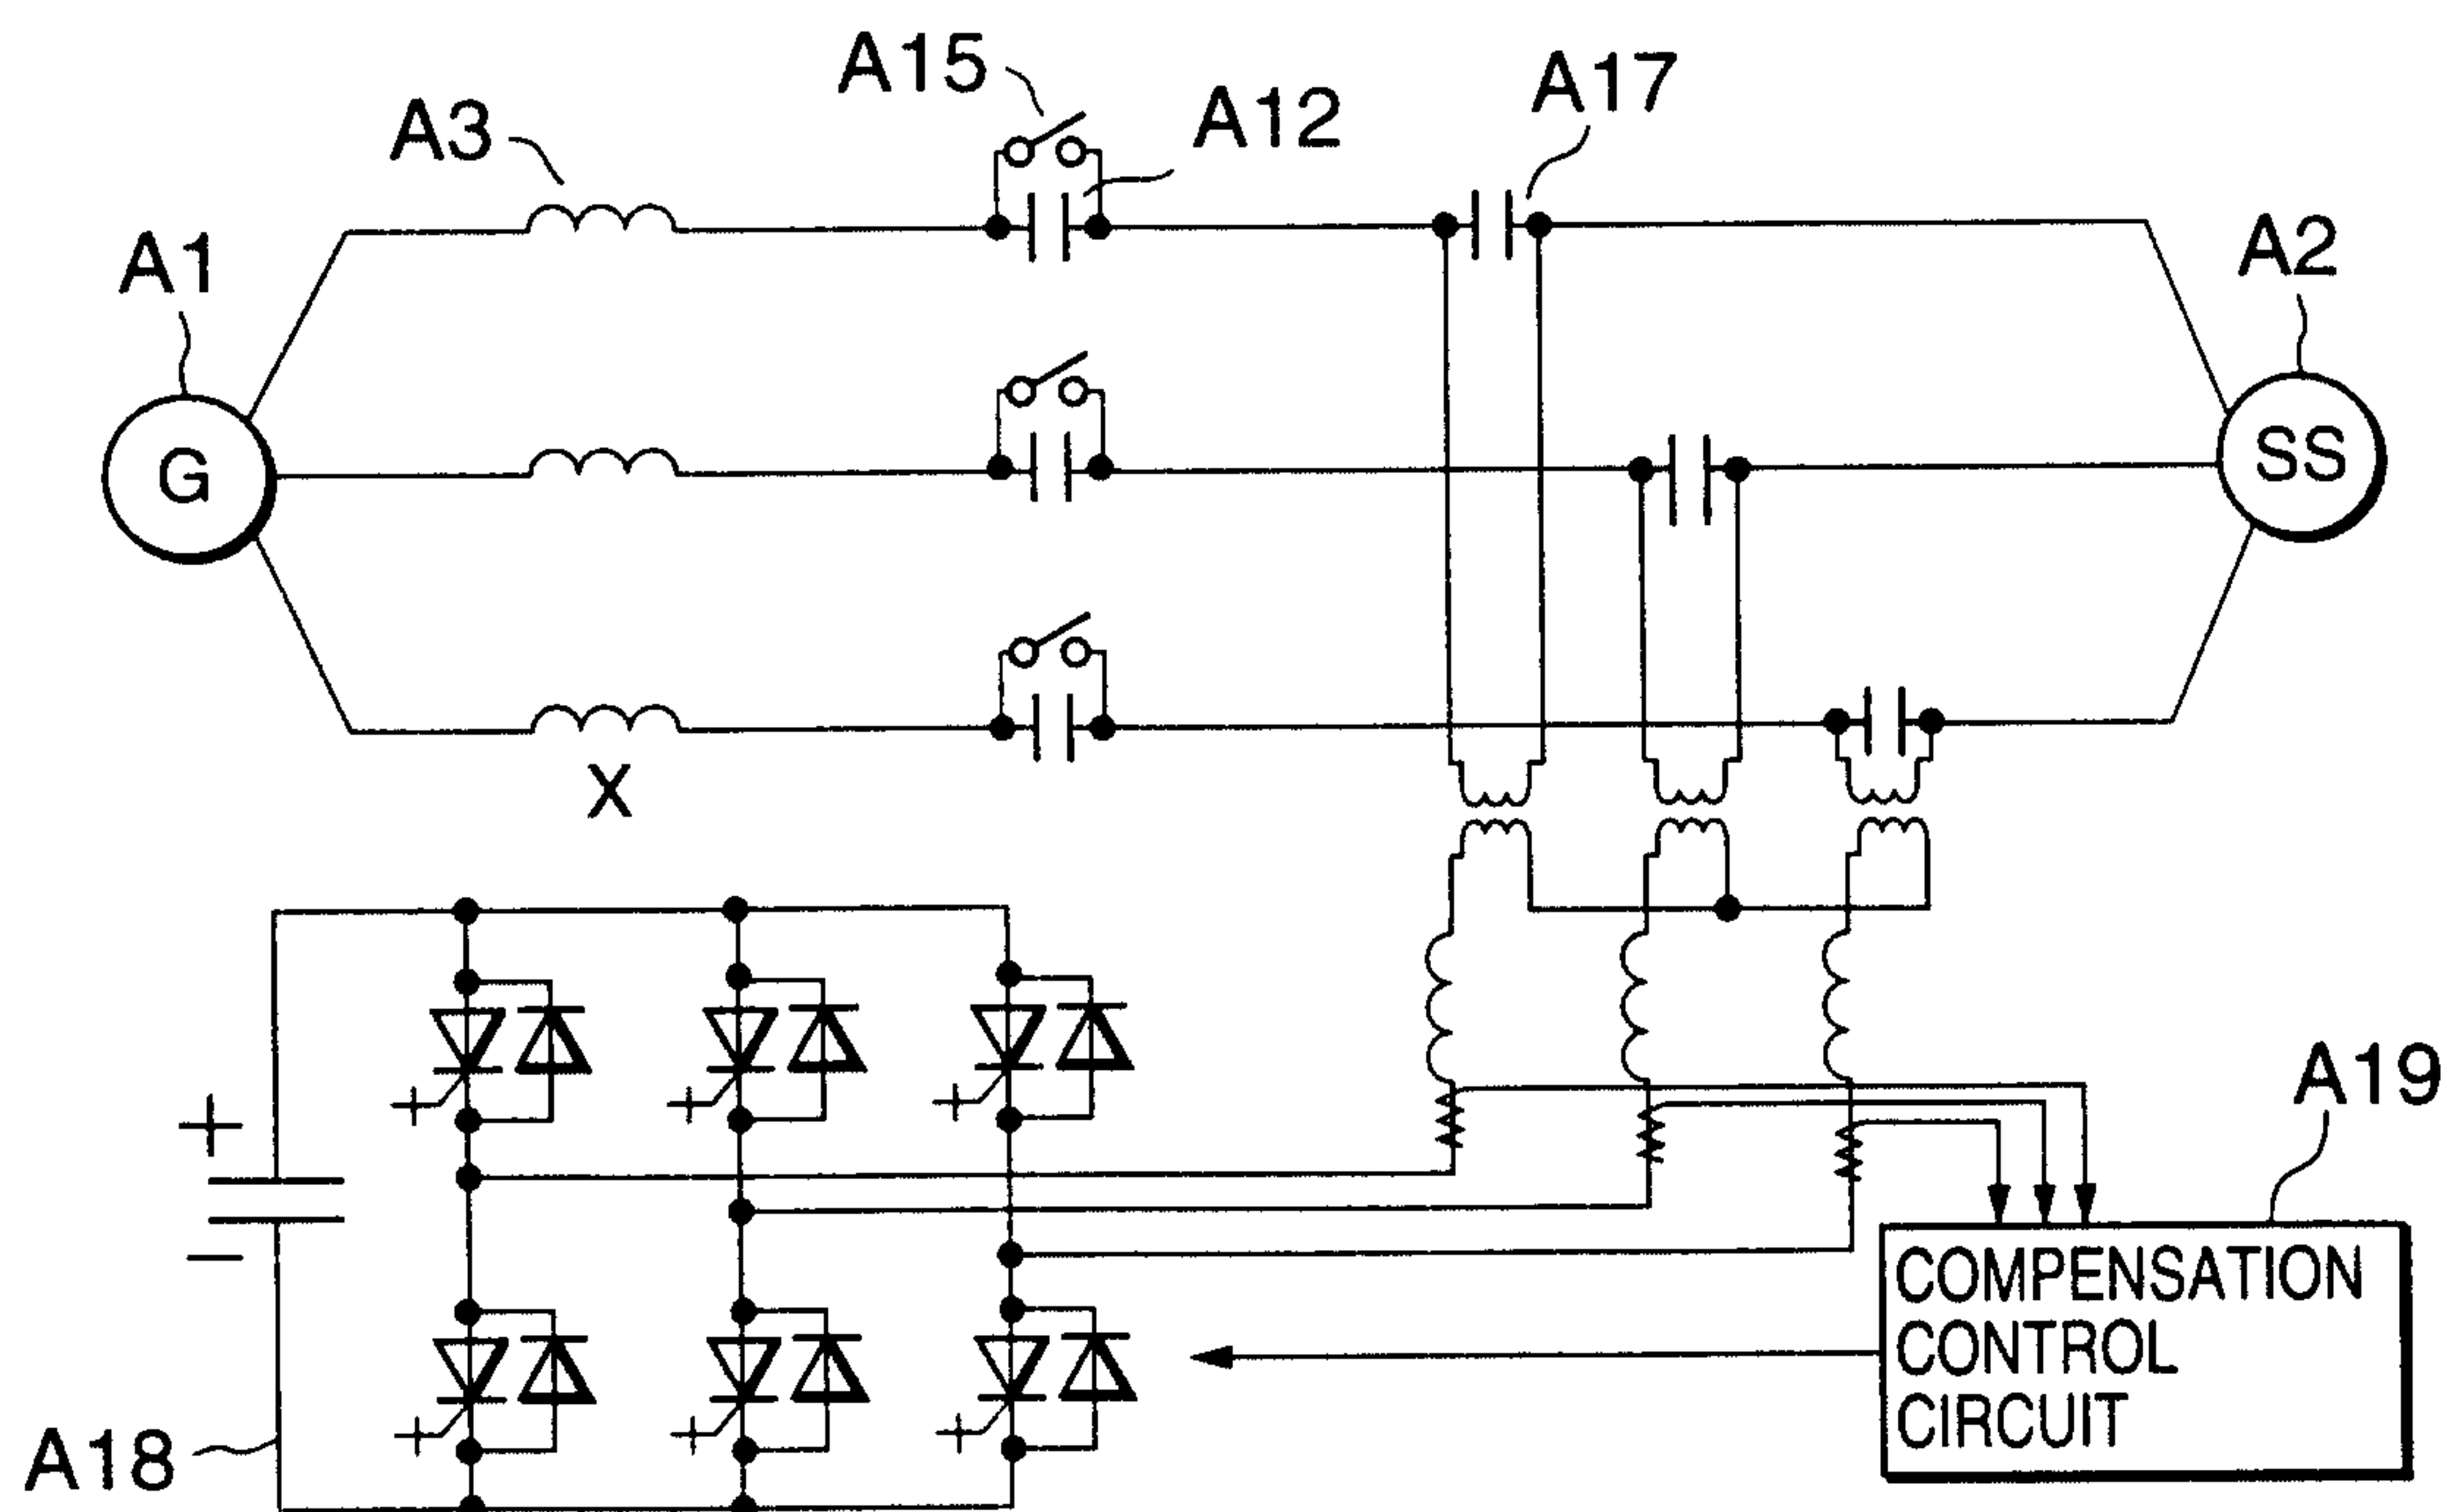


FIG. 81

41/41

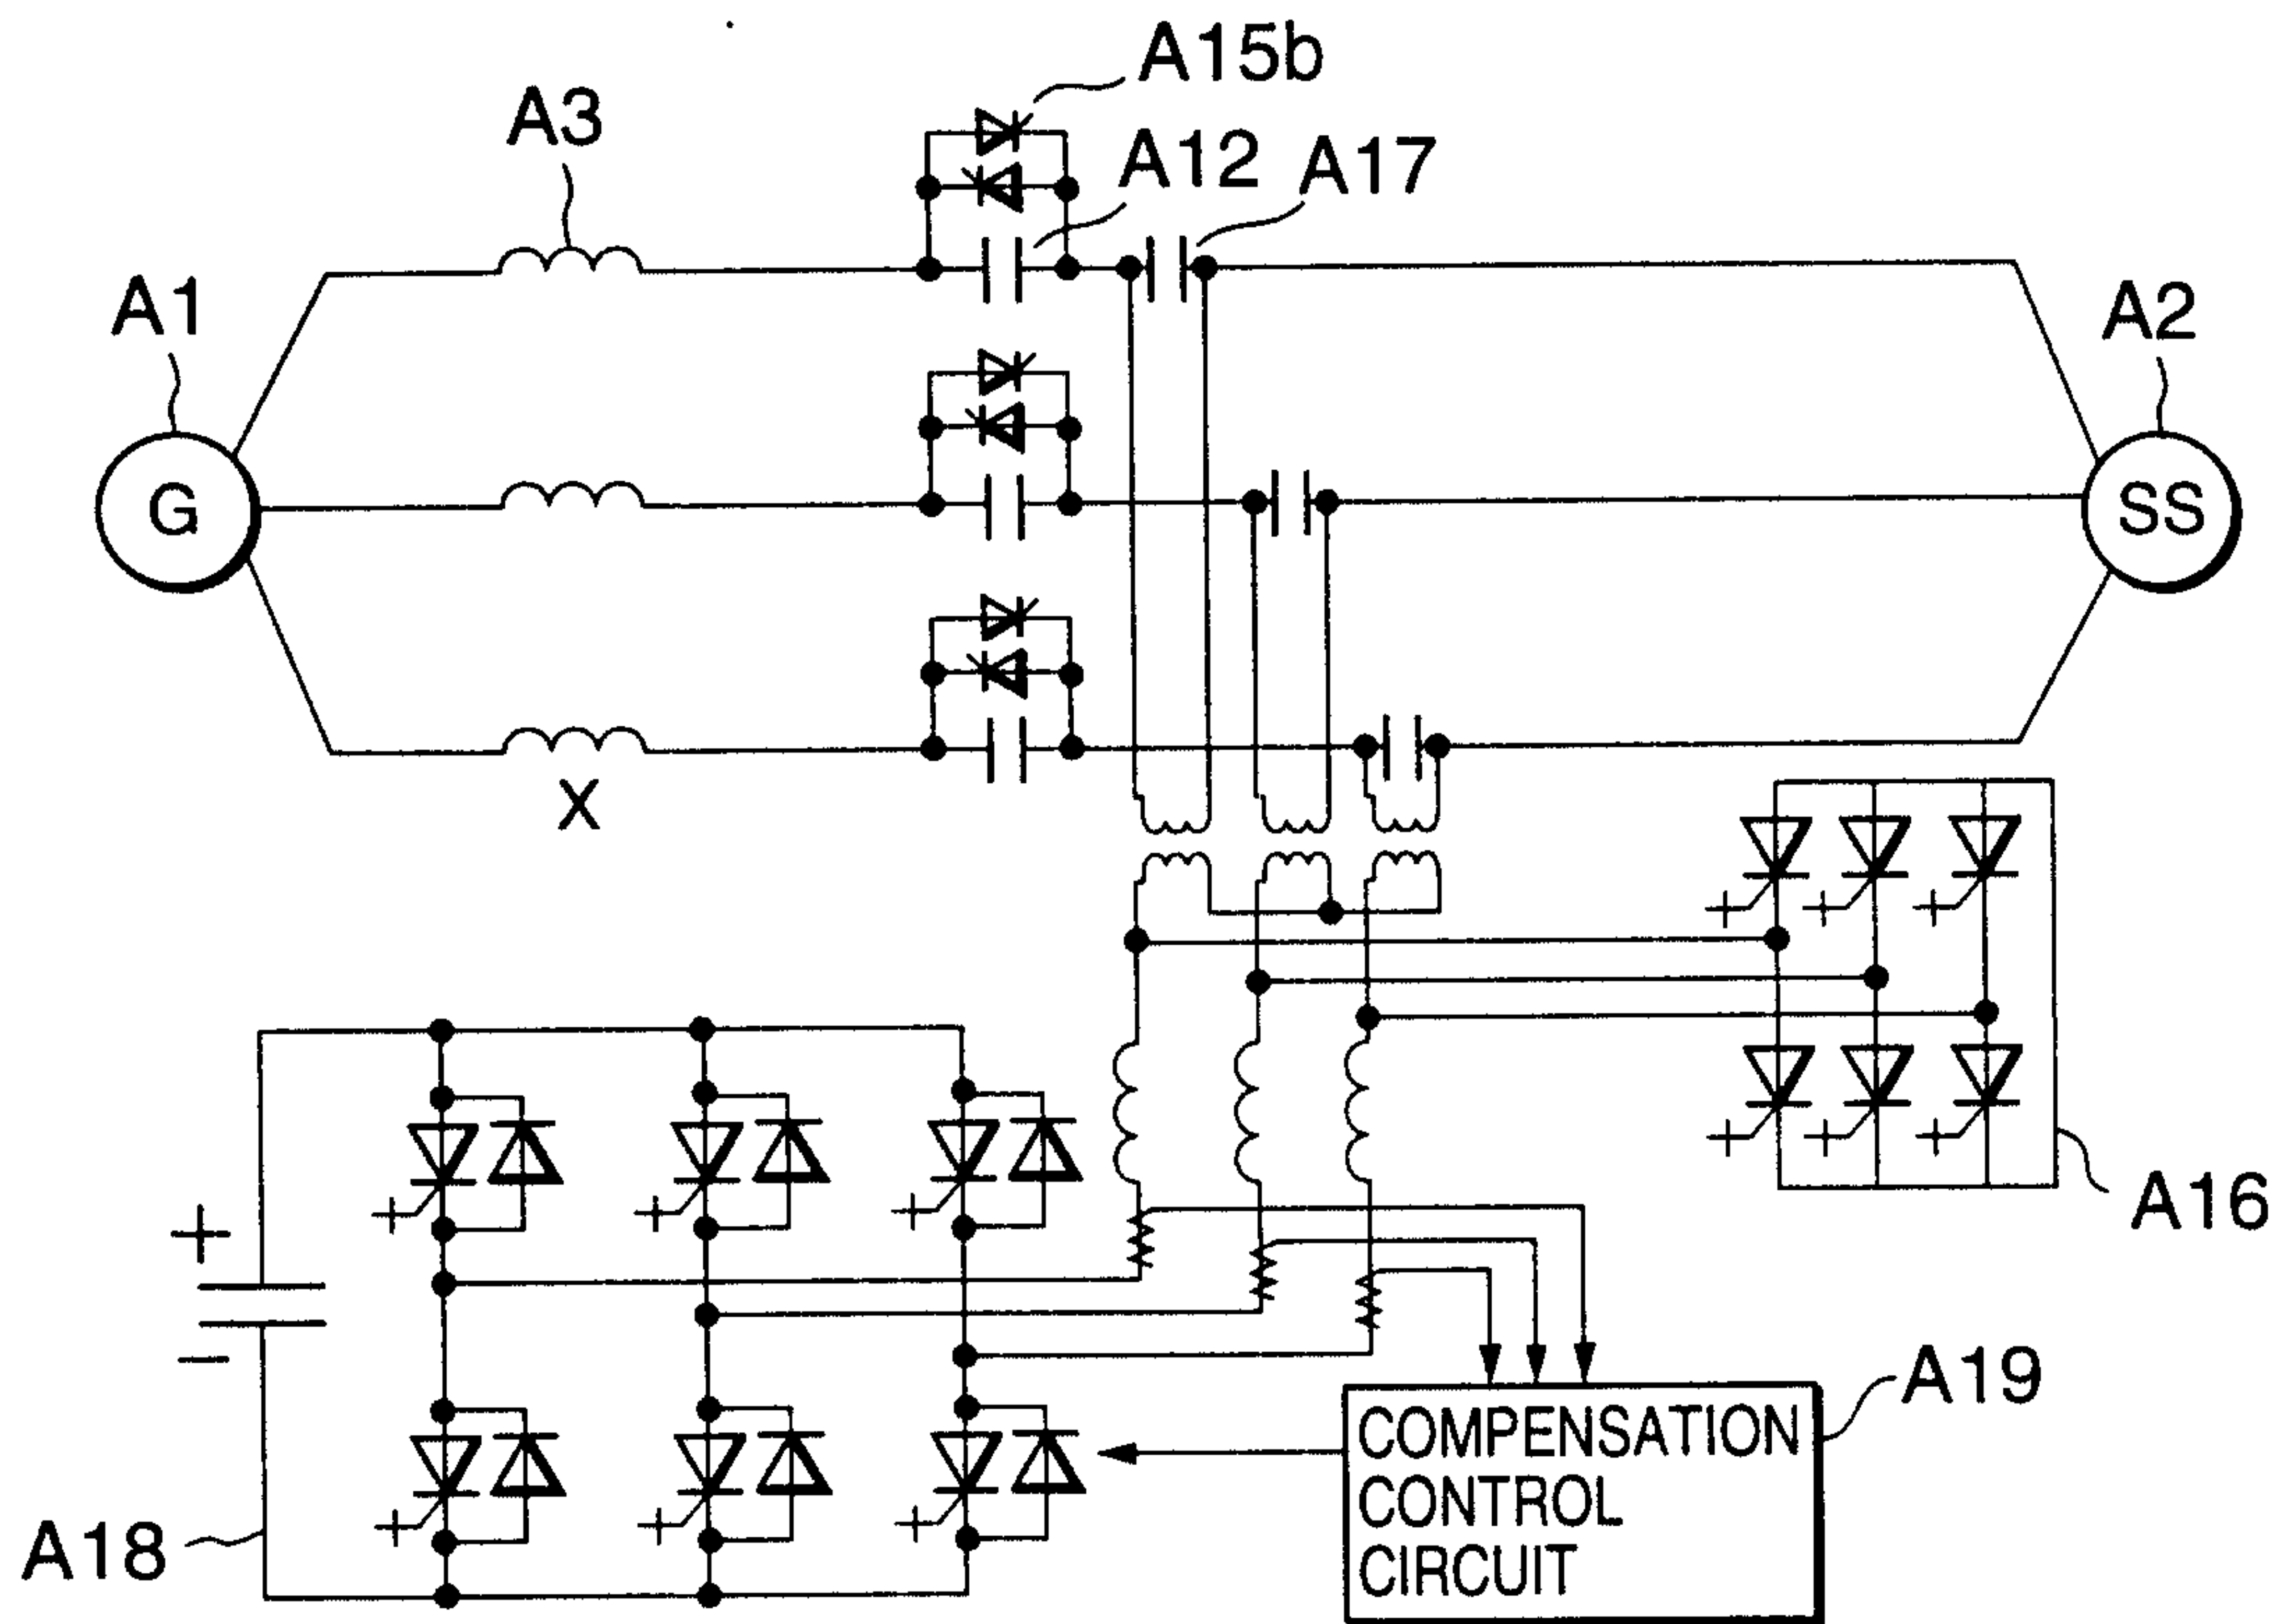


FIG. 82

