



US 20050241880A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2005/0241880 A1****Nawamoto et al.**(43) **Pub. Date: Nov. 3, 2005**(54) **METHOD OF SUPPLYING A LUBRICANT TO A ROLLING BEARING OF A HIGH-SPEED SPINDLE**(75) Inventors: **Taikou Nawamoto**, Kanagawa (JP);
Kenichi Sugiyama, Kanagawa (JP);
Satoshi Dairokuno, Kanagawa (JP);
Yukiyoshi Okazaki, Kanagawa (JP)

Correspondence Address:

SUGHRUE MION, PLLC**2100 PENNSYLVANIA AVENUE, N.W.****SUITE 800****WASHINGTON, DC 20037 (US)**(73) Assignee: **NSK LTD.**(21) Appl. No.: **11/169,810**(22) Filed: **Jun. 30, 2005****Related U.S. Application Data**

(63) Continuation of application No. 10/464,638, filed on Jun. 19, 2003, which is a continuation of application No. 09/939,578, filed on Aug. 28, 2001, now Pat. No. 6,623,251, which is a continuation-in-part of application No. 09/522,909, filed on Mar. 10, 2000, now Pat. No. 6,398,509.

(30) **Foreign Application Priority Data**

Jun. 21, 1999 (JP) P.HEI.11-174305

Aug. 4, 1999 (JP) P.HEI.11-221435

Feb. 29, 2000 (JP) P.2000-54539

Oct. 13, 2000 (JP) P.2000-313844

Oct. 24, 2000 (JP) P.2000-324113

Oct. 24, 2000 (JP) P.2000-324202

Oct. 24, 2000 (JP) P.2000-324213

Oct. 26, 2000 (JP) P.2000-327252

Publication Classification(51) **Int. Cl.⁷ F01M 1/00**(52) **U.S. Cl. 184/6**(57) **ABSTRACT**

A method of supplying a lubricant to a roller bearing of a high-speed spindle includes pressuring the lubricant in a pump chamber and discharging the pressurized lubricant within the pump chamber from the nozzle. Also, the method includes bringing a fine quantity of lubricant discharged from the nozzle into direct contact with a lubricating surface of a rotary body of the roller bearing.

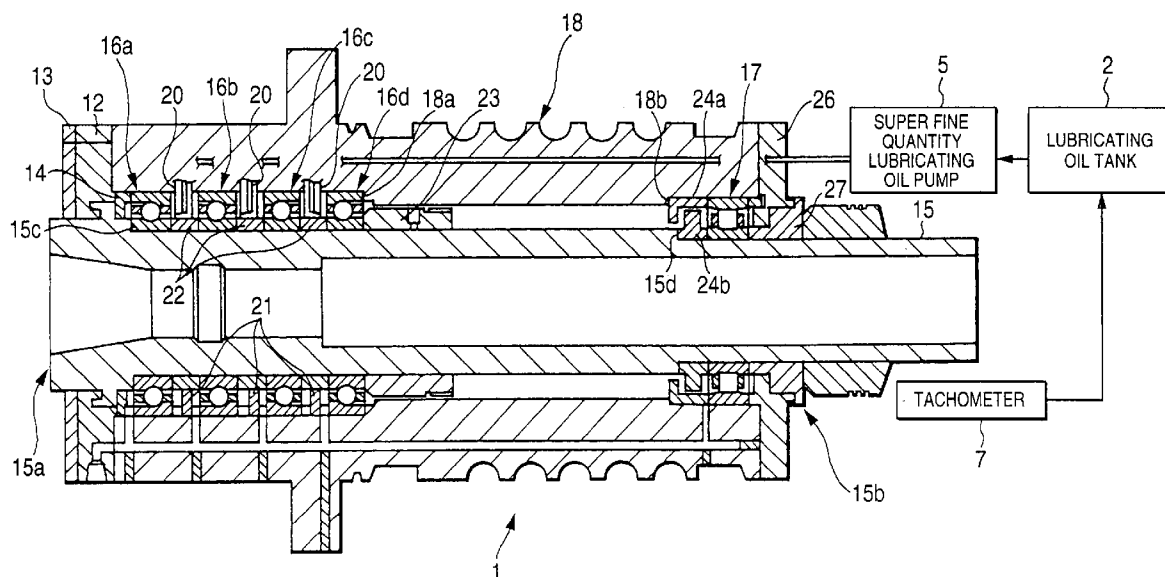


FIG. 1

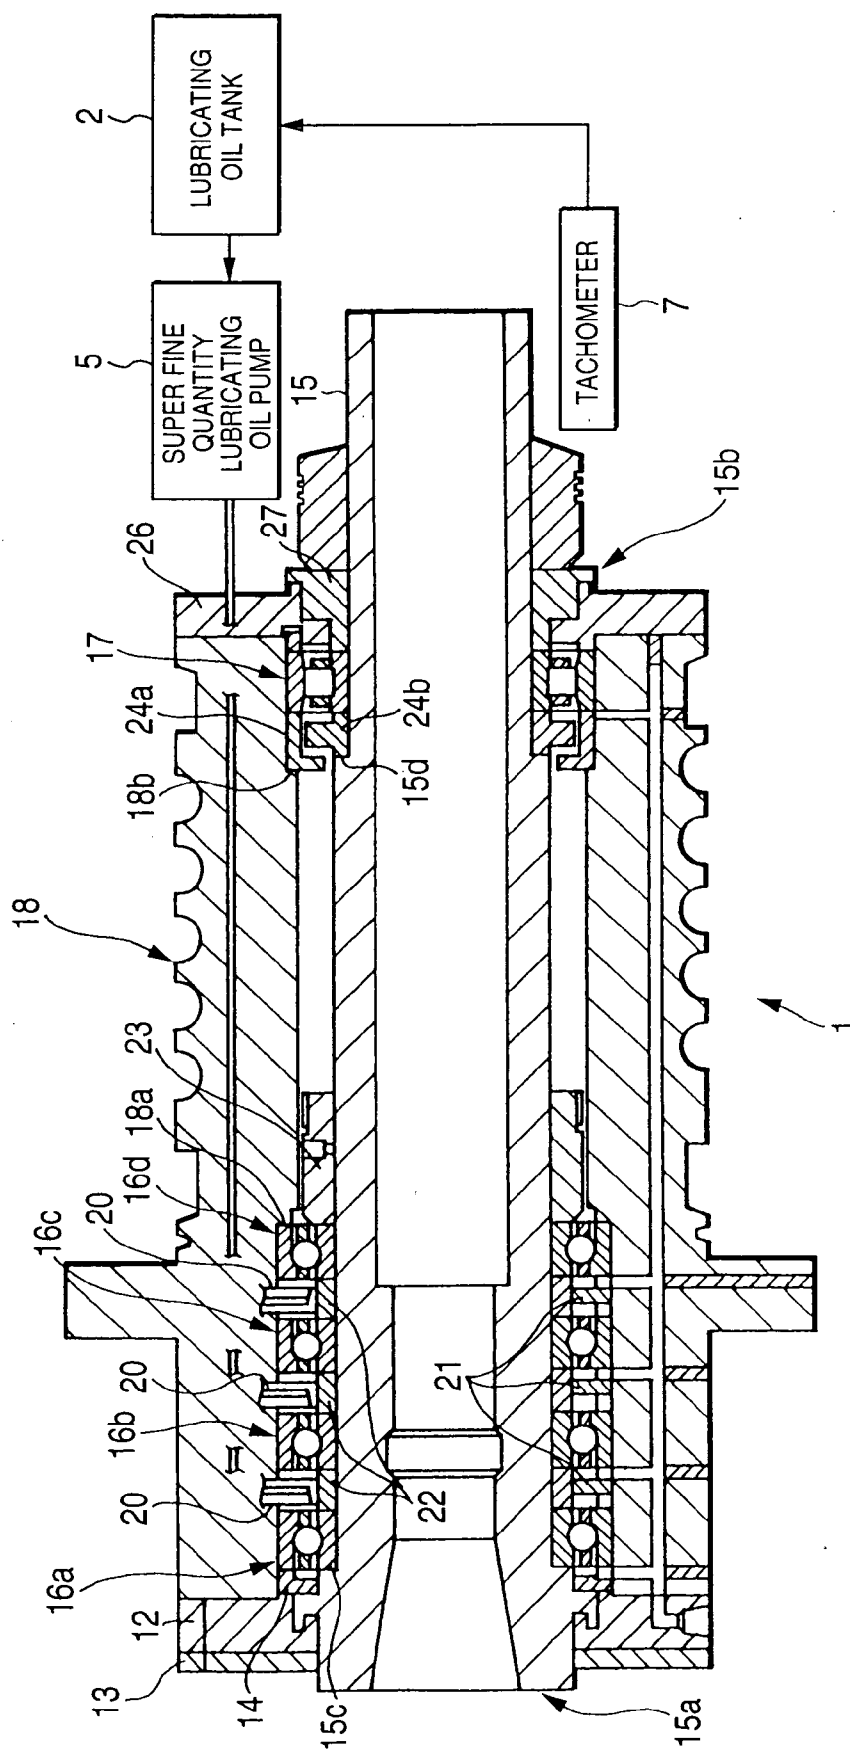


FIG. 2


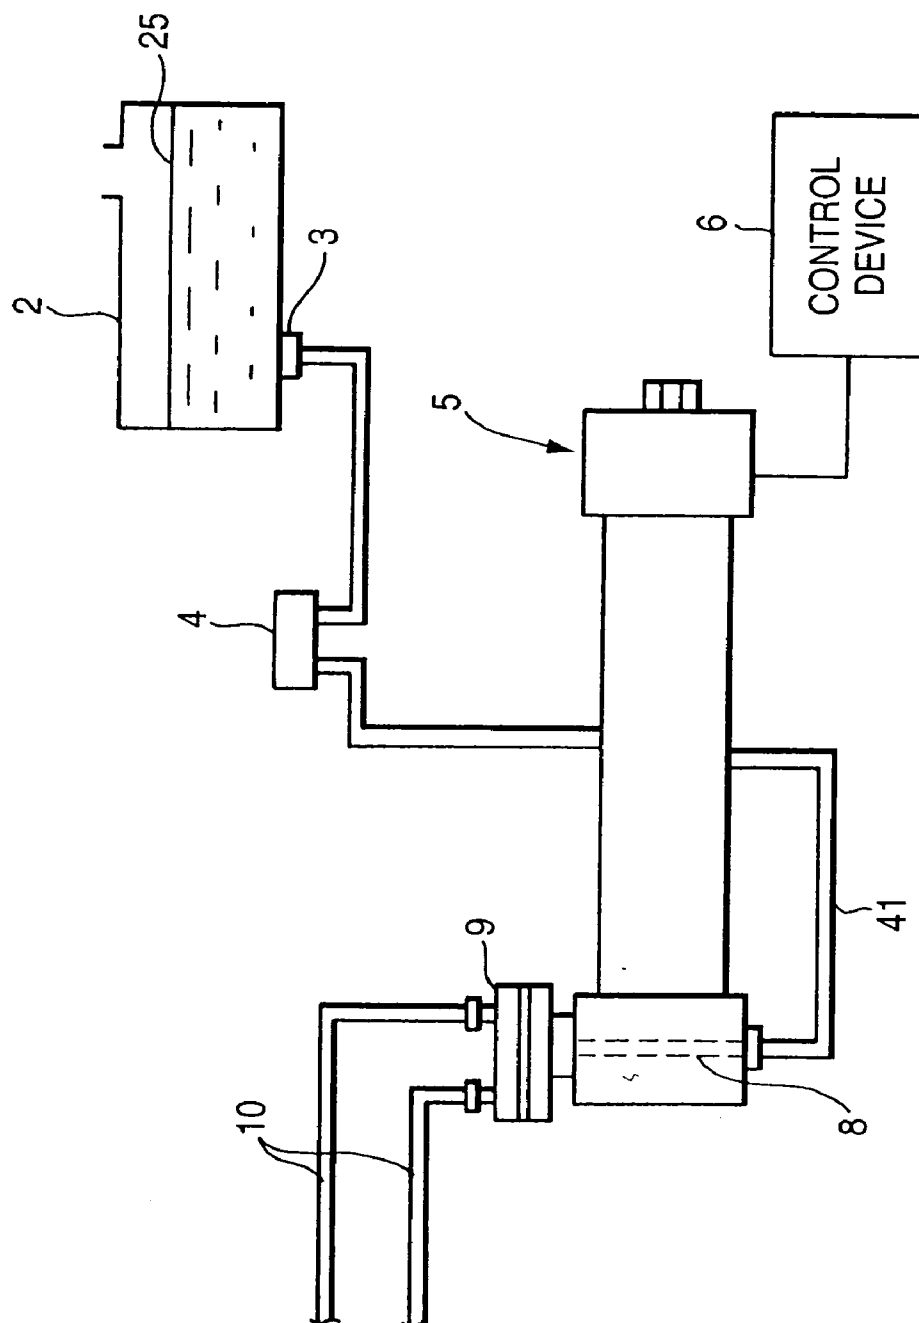


FIG. 4

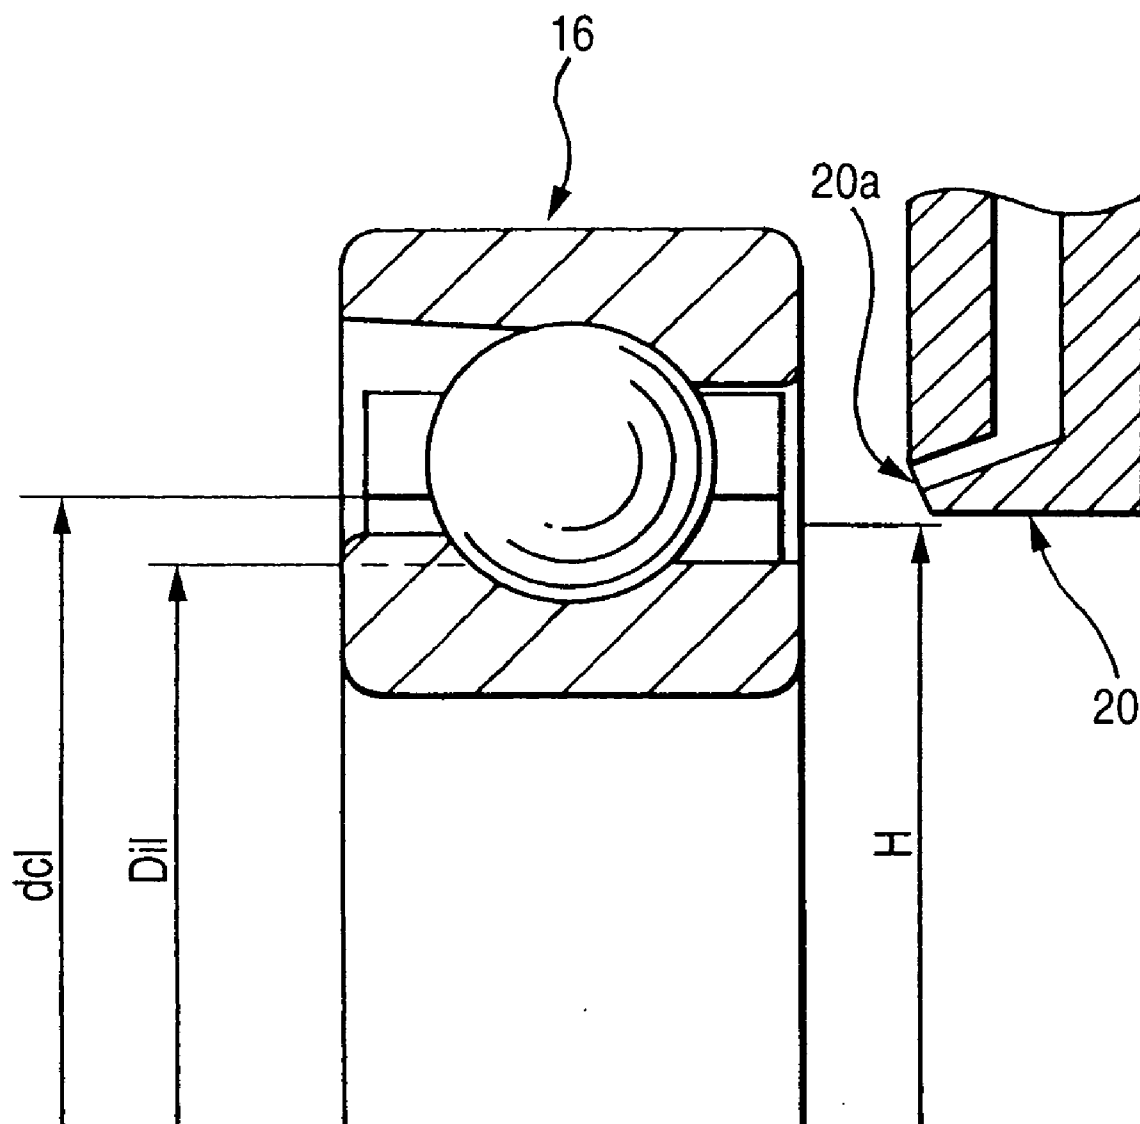

dcl : RETAINER INSIDE DIAMETER
 Dil : INNER RACE OUTSIDE DIAMETER
 H : OIL SUPPLY TARGET POSITION

$$H = (dcl + Dil) / 2$$

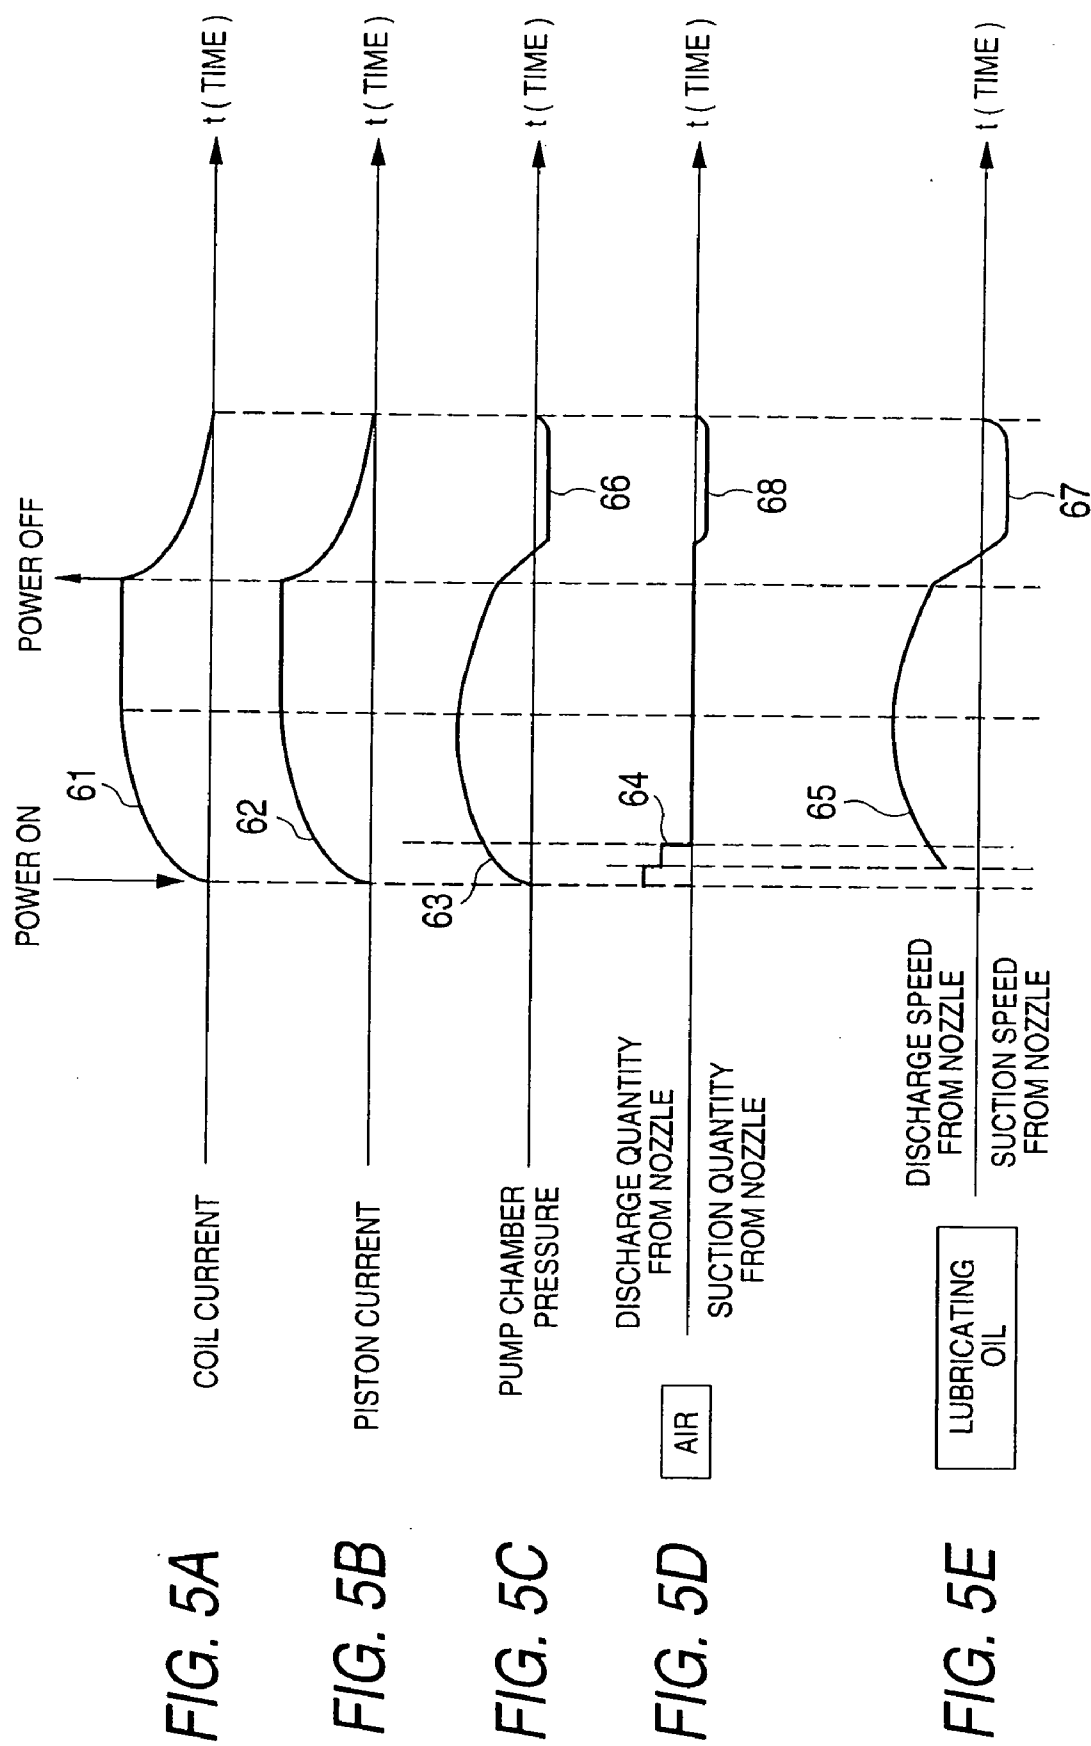


FIG. 6

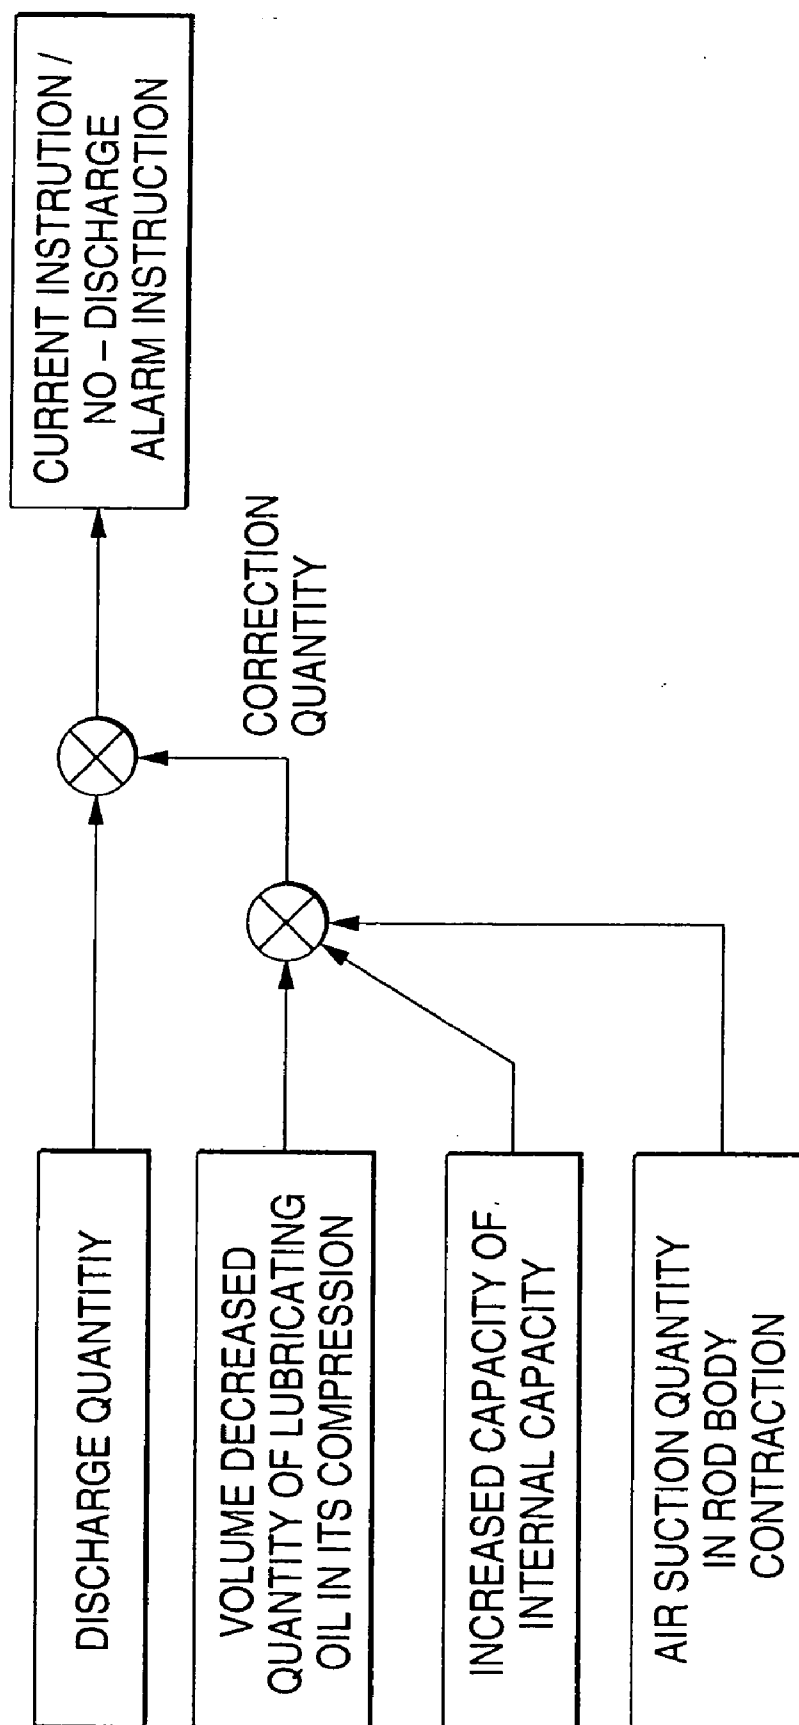


FIG. 7

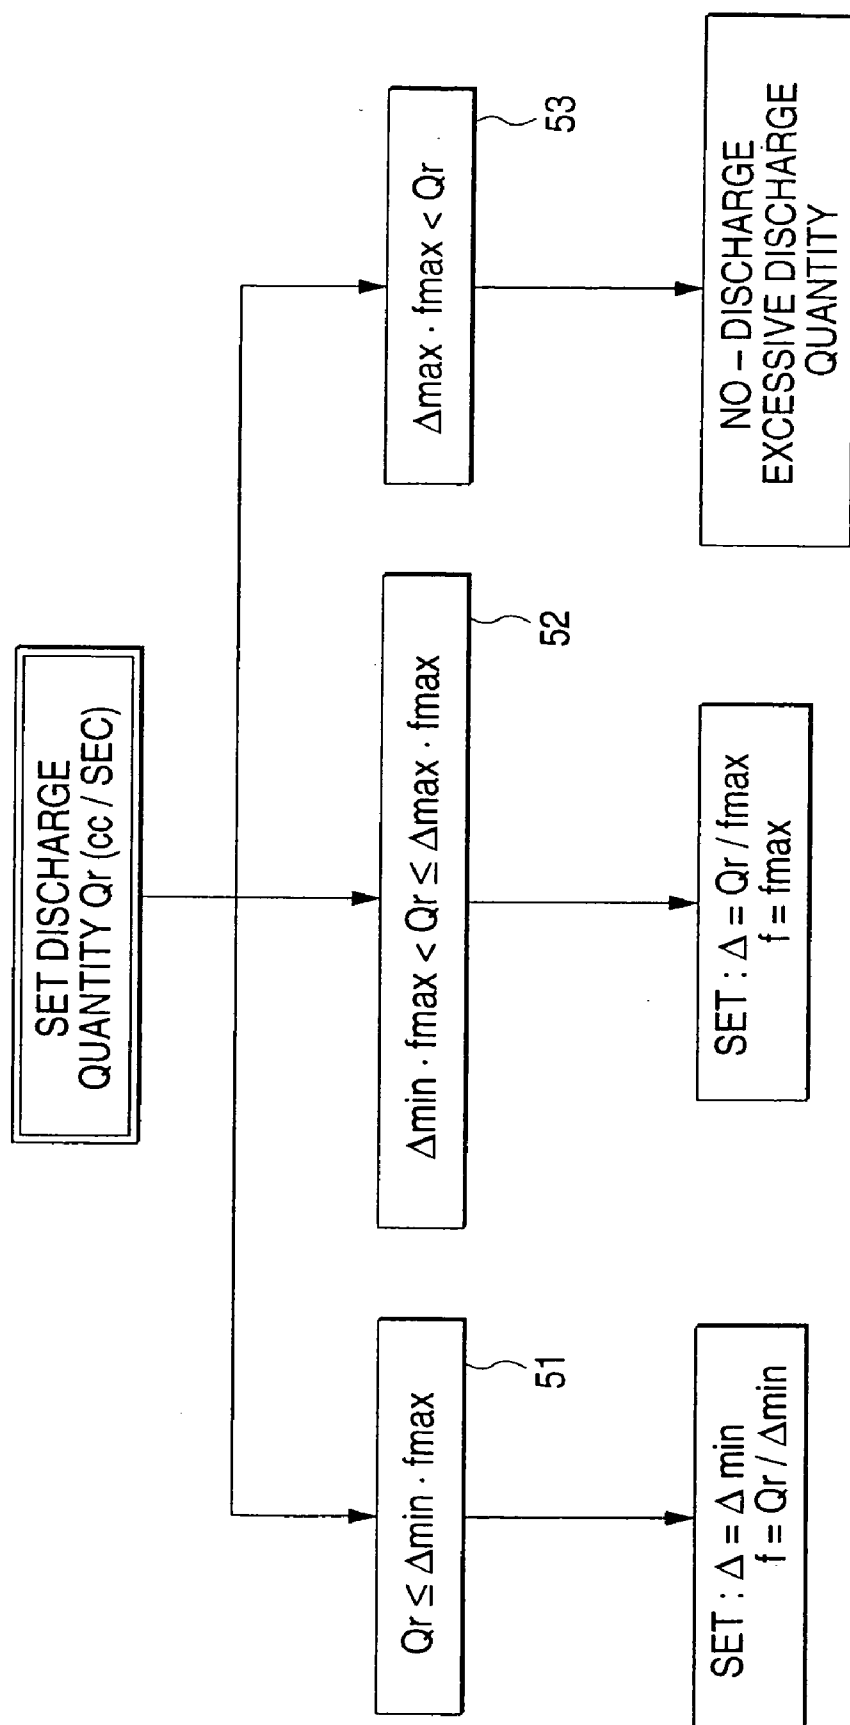


FIG. 8

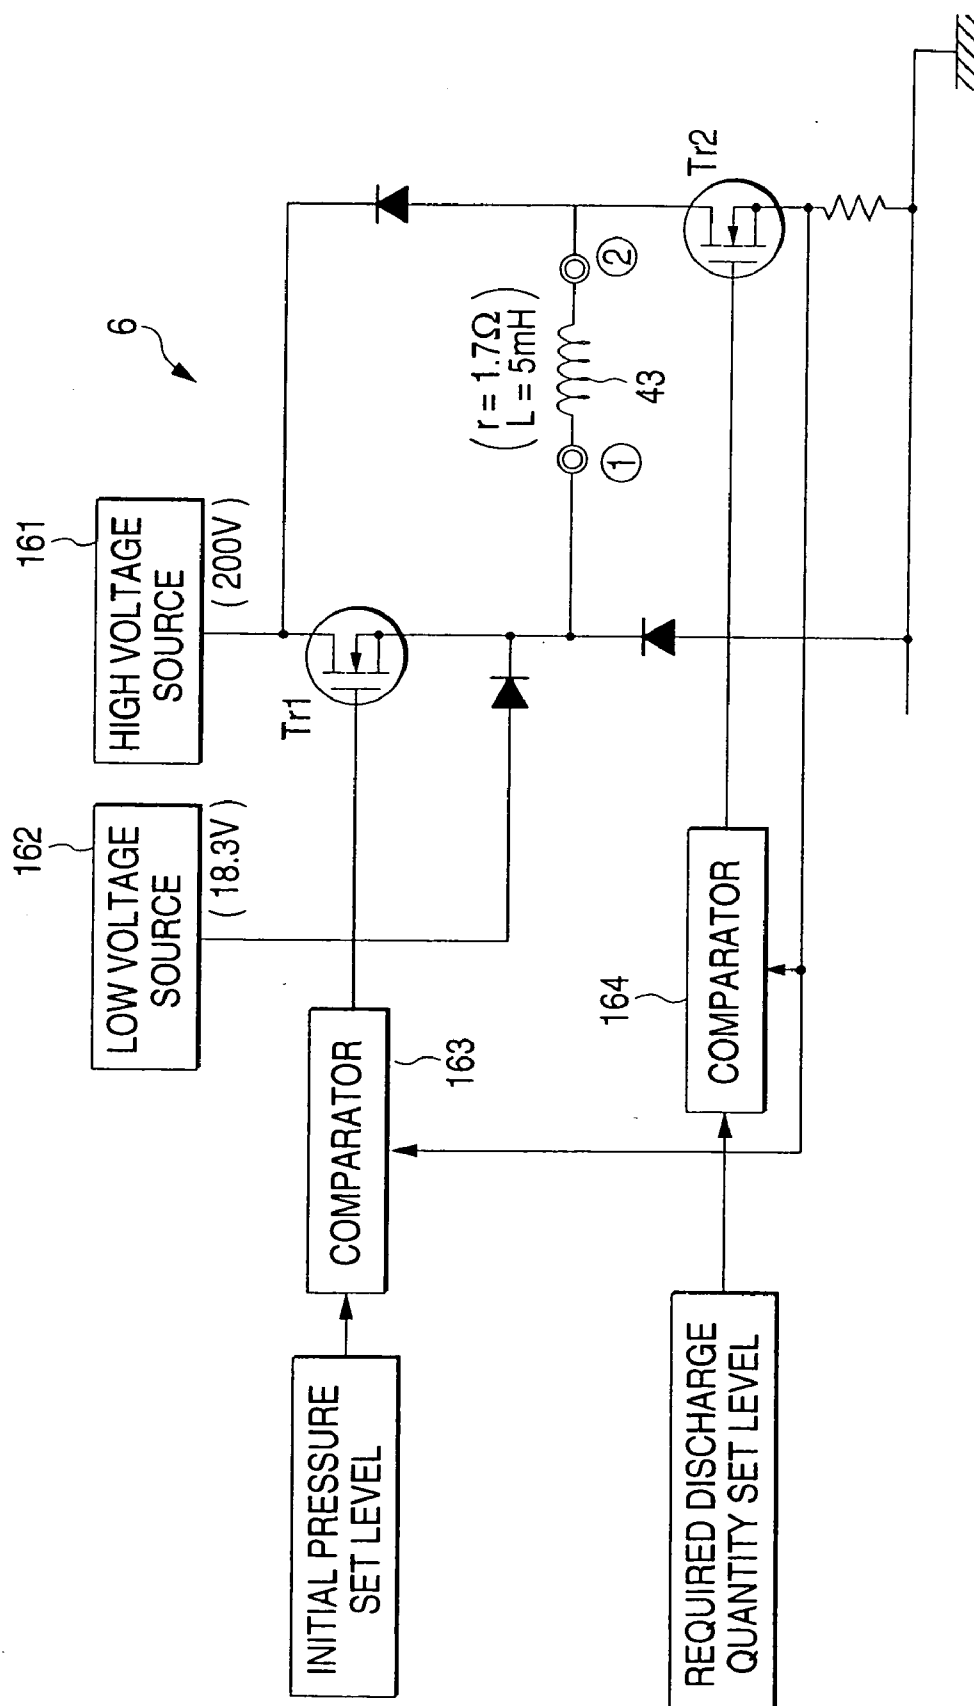


FIG. 9

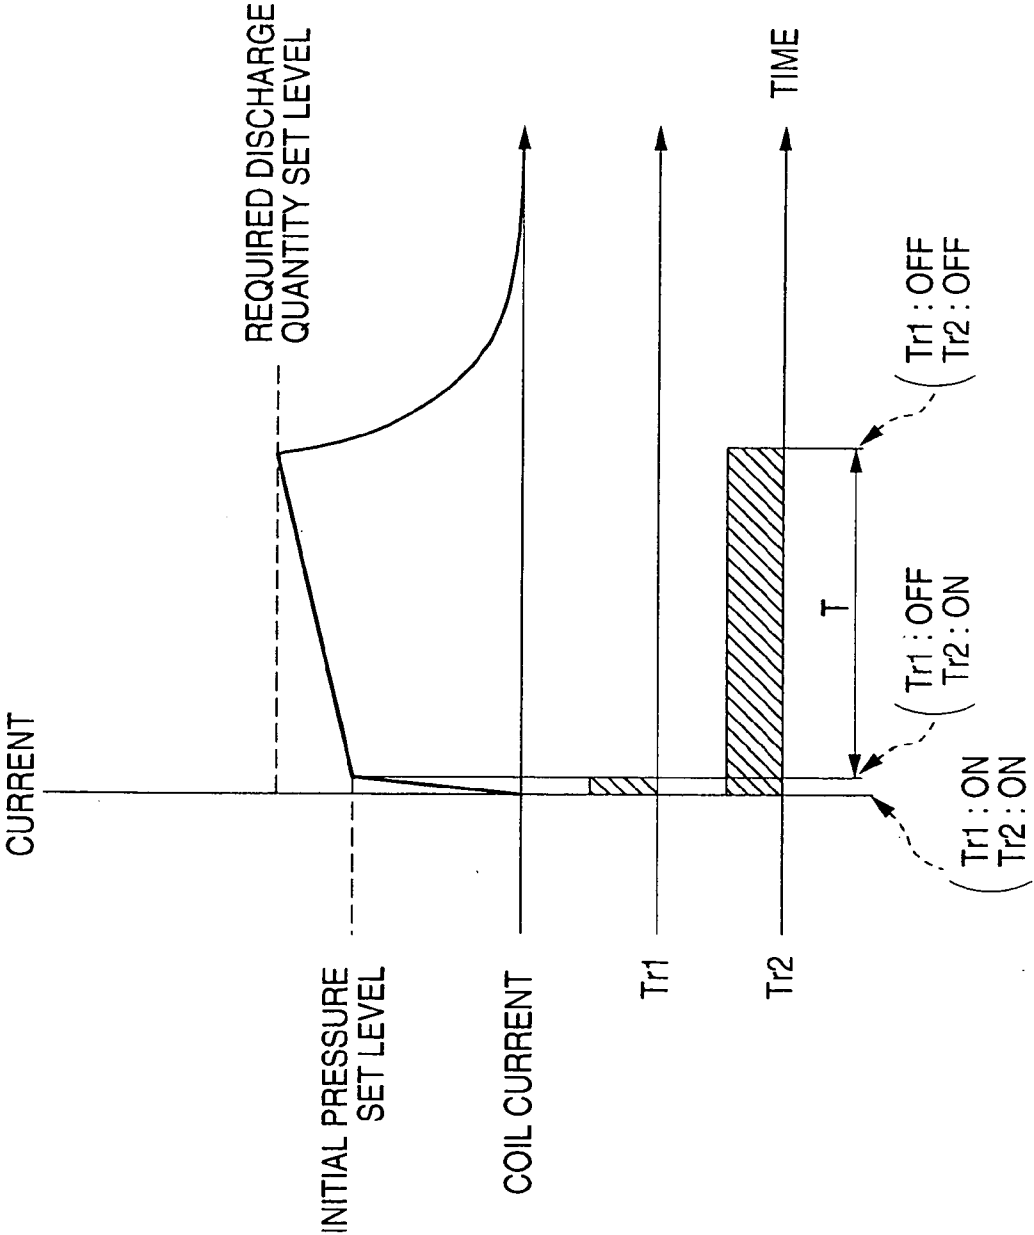


FIG. 10

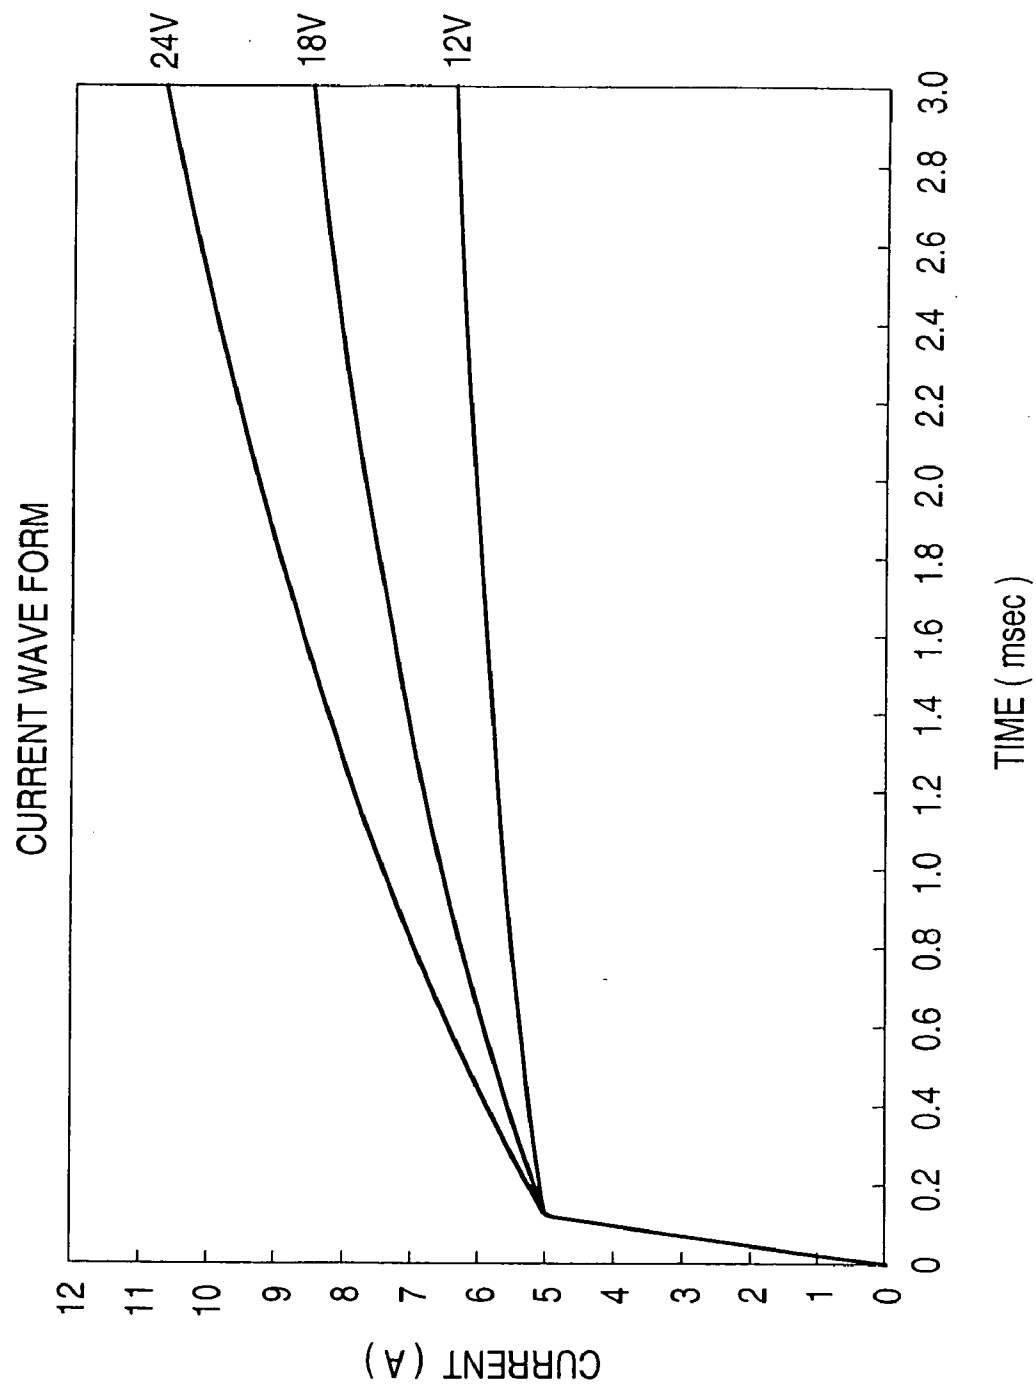


FIG. 11

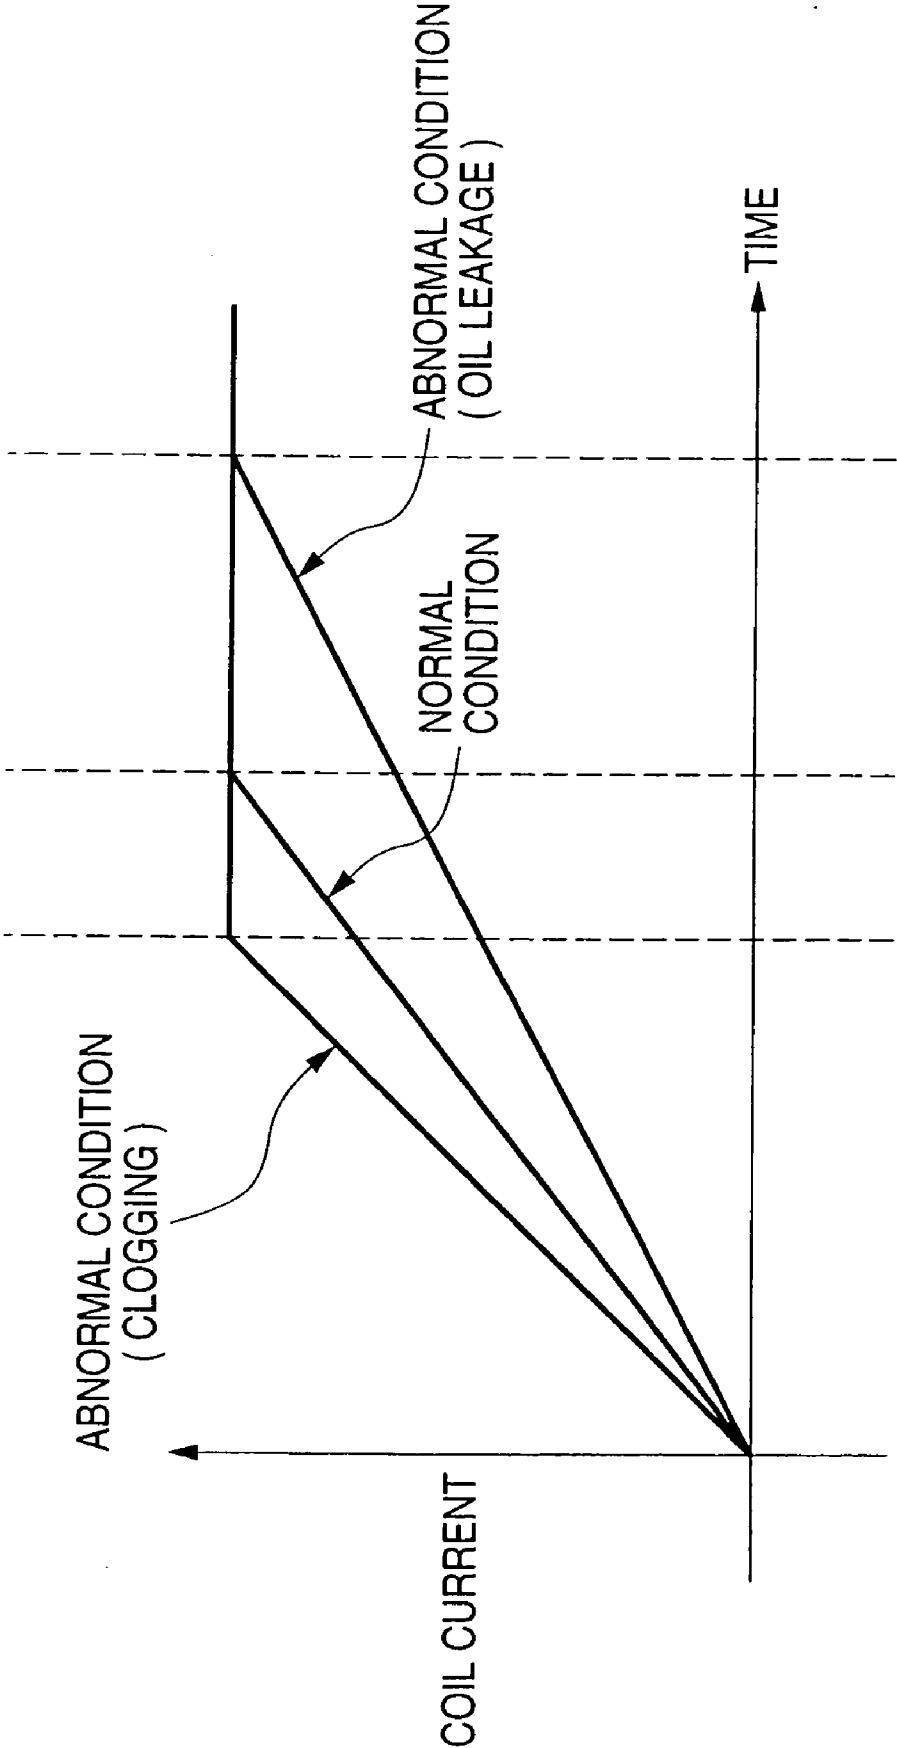


FIG. 12

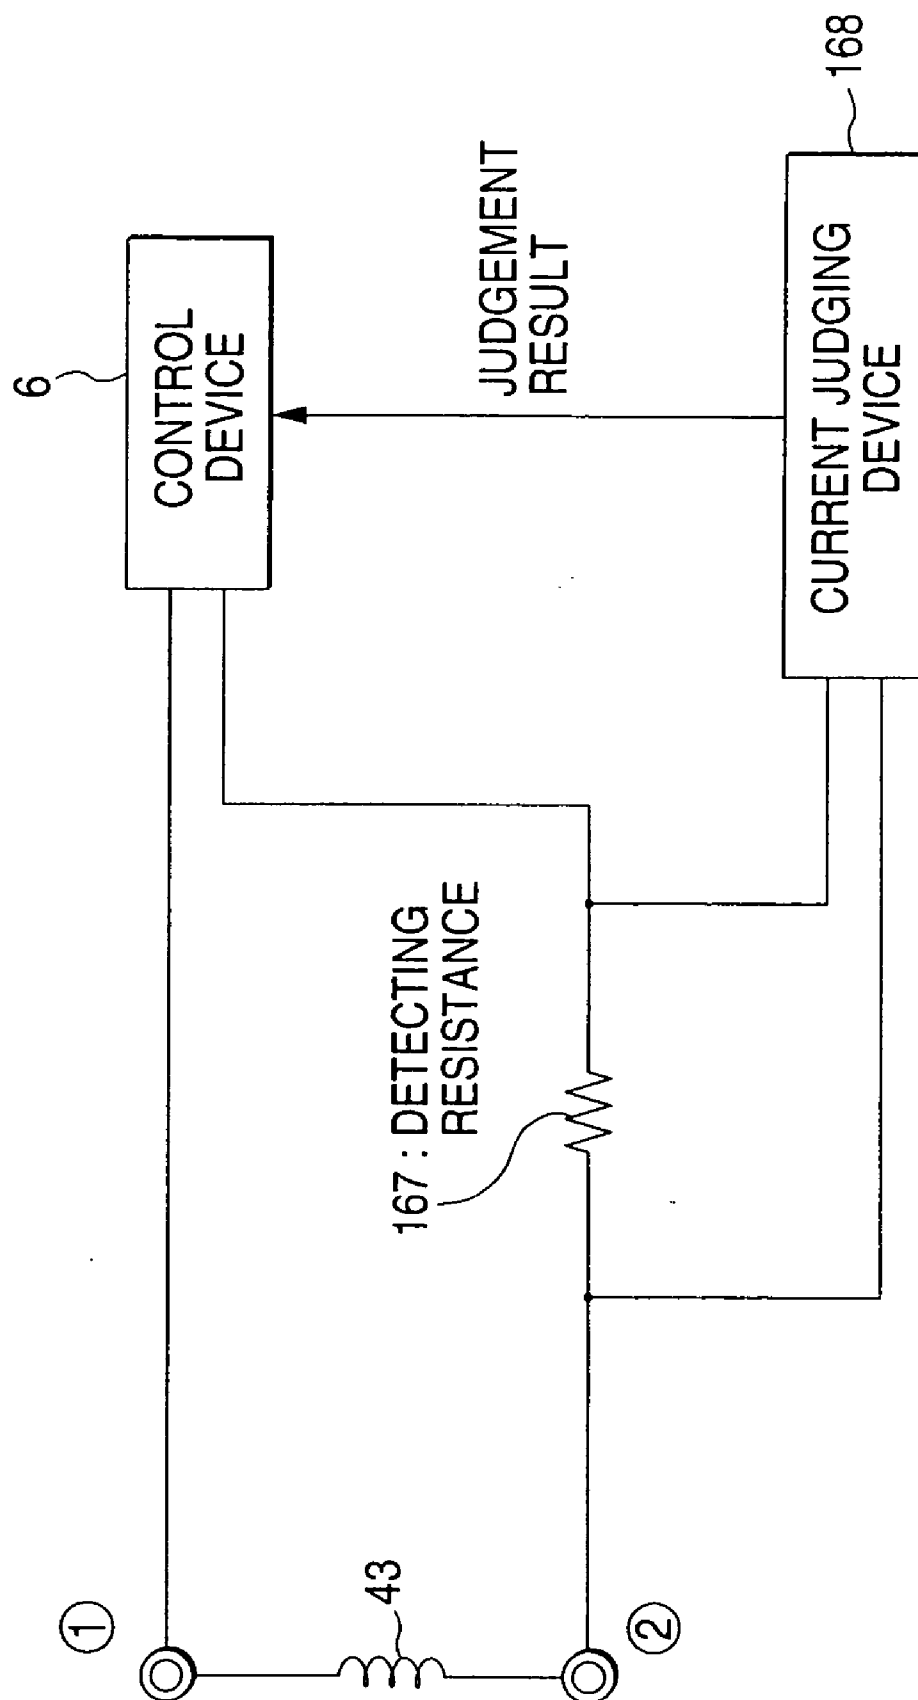


FIG. 13

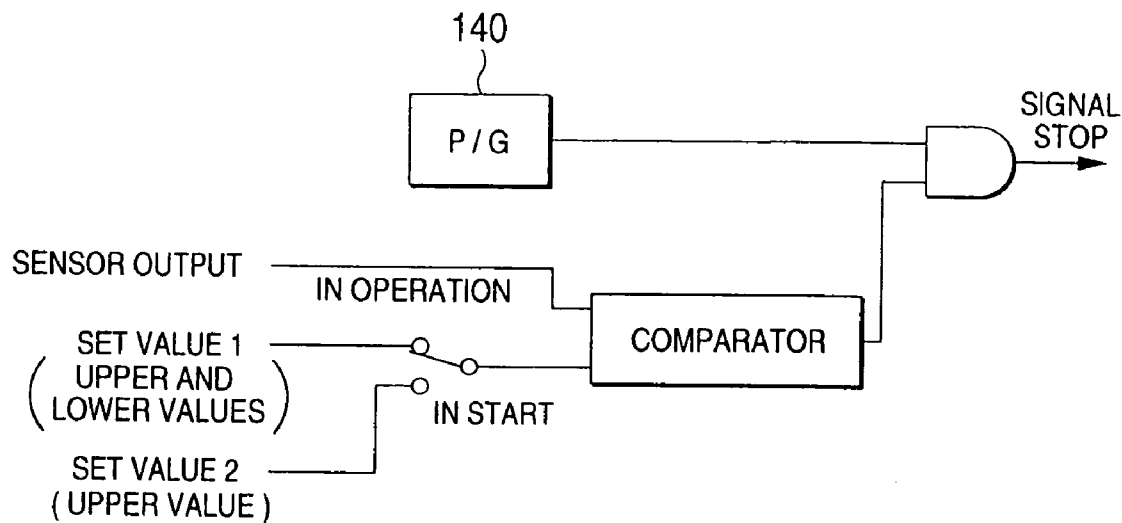


FIG. 14

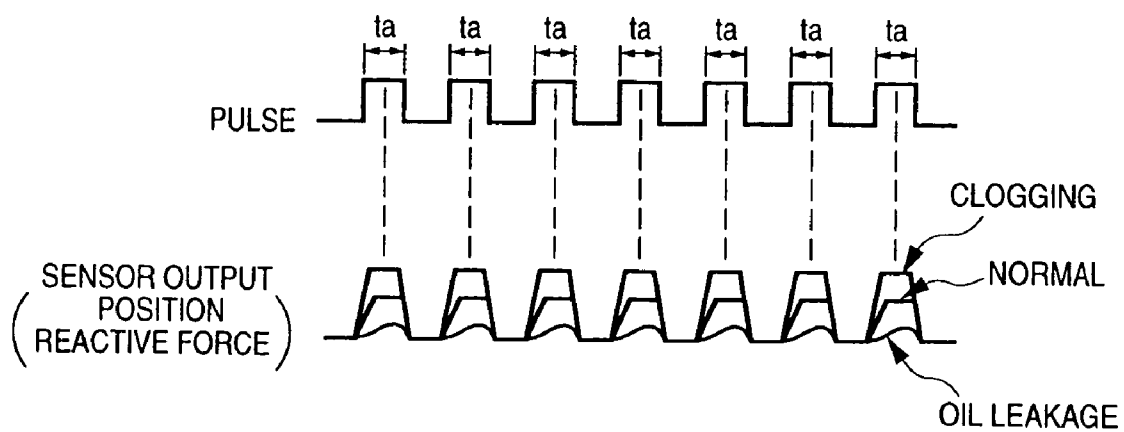


FIG. 15

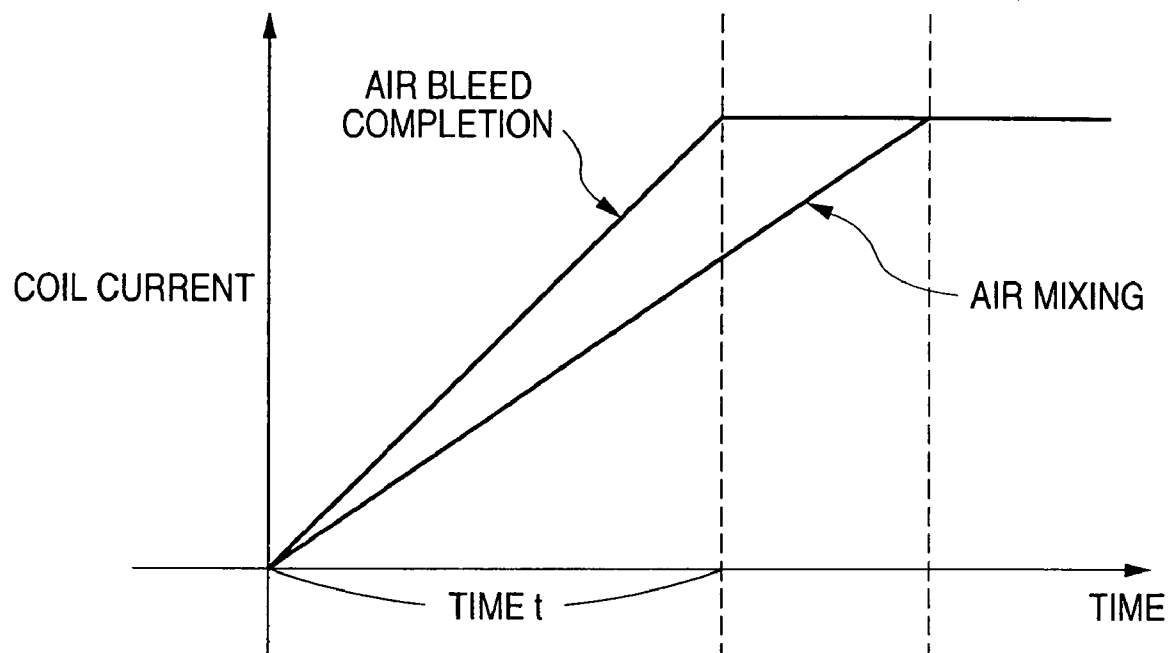


FIG. 16

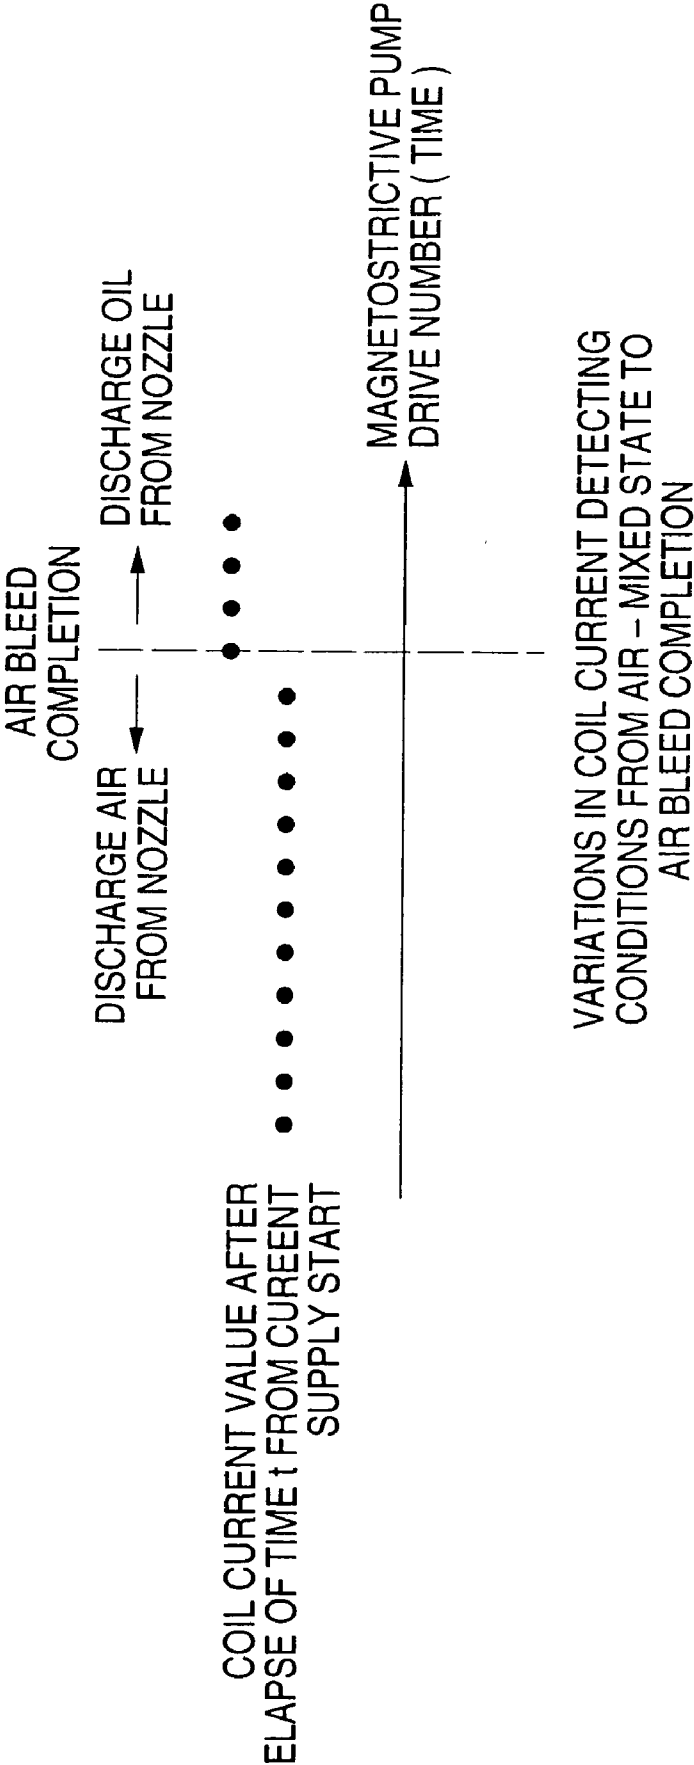


FIG. 17

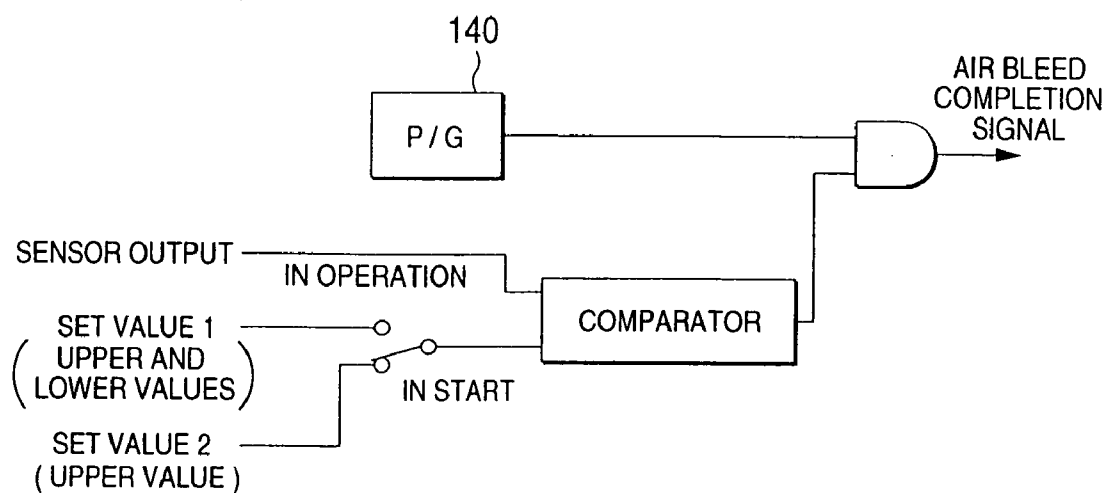


FIG. 18

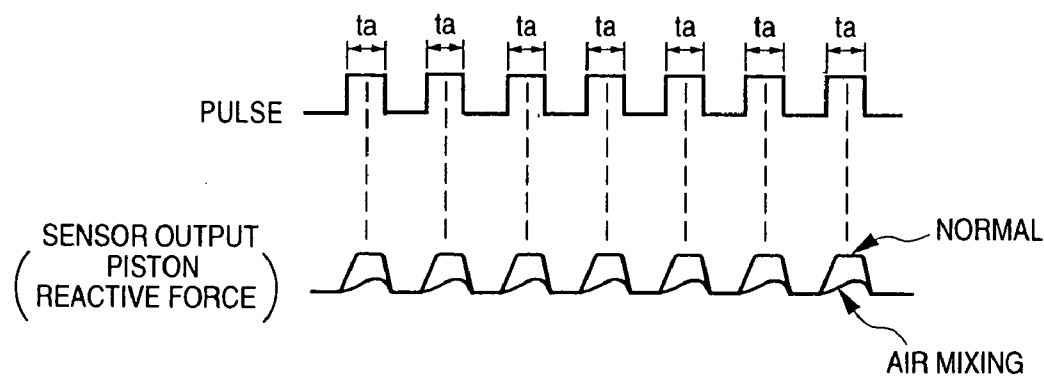


FIG. 19

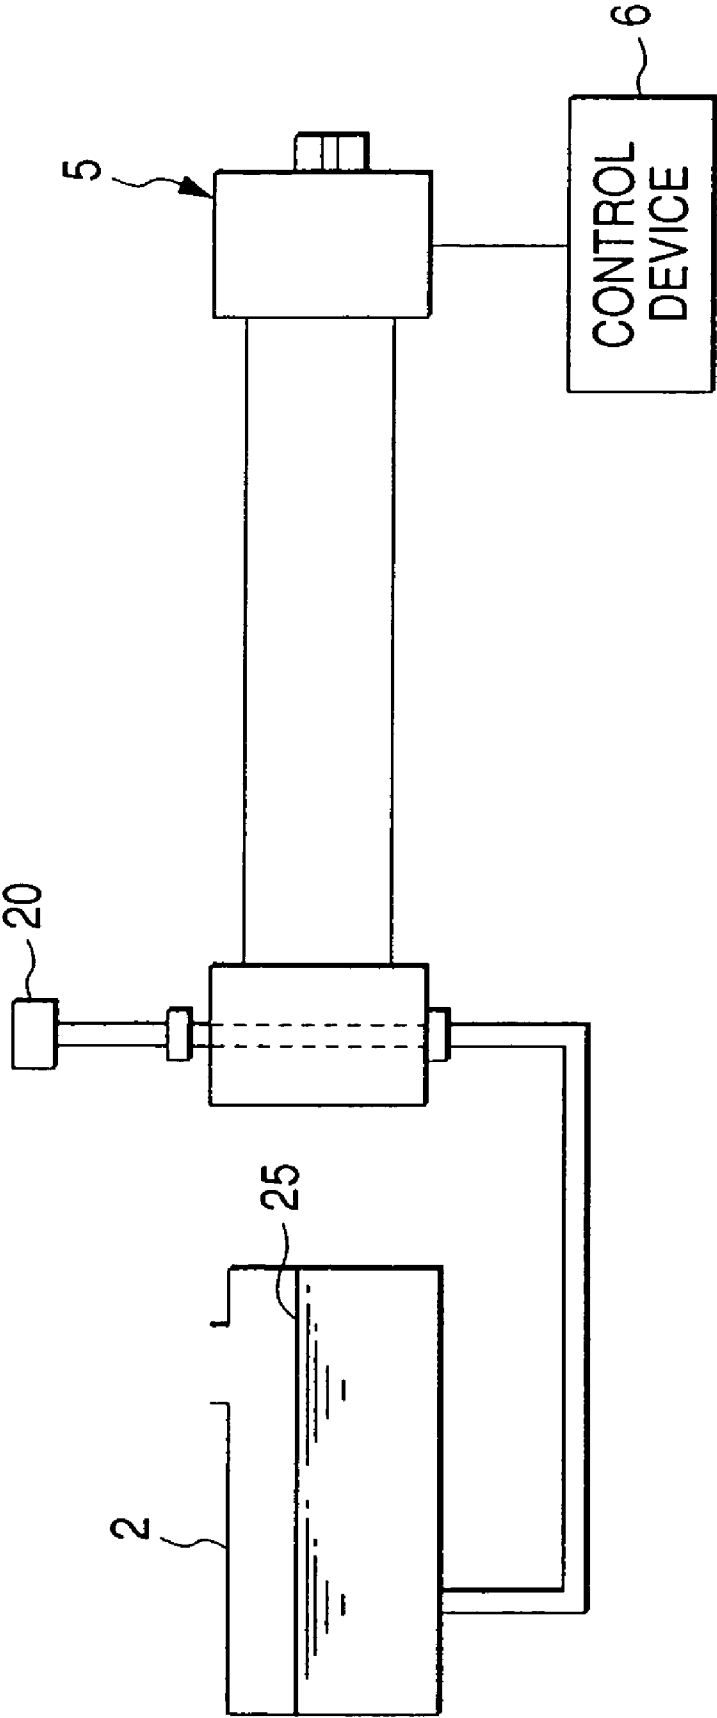


FIG. 20



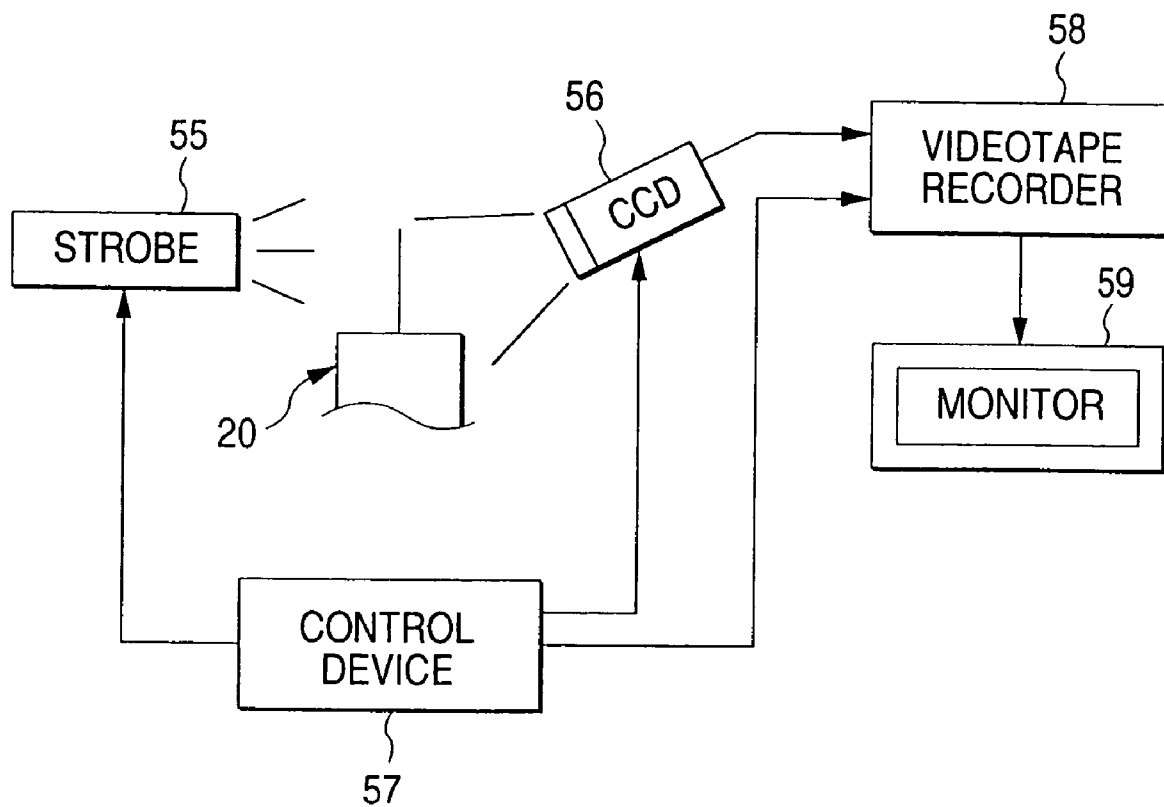


FIG. 21

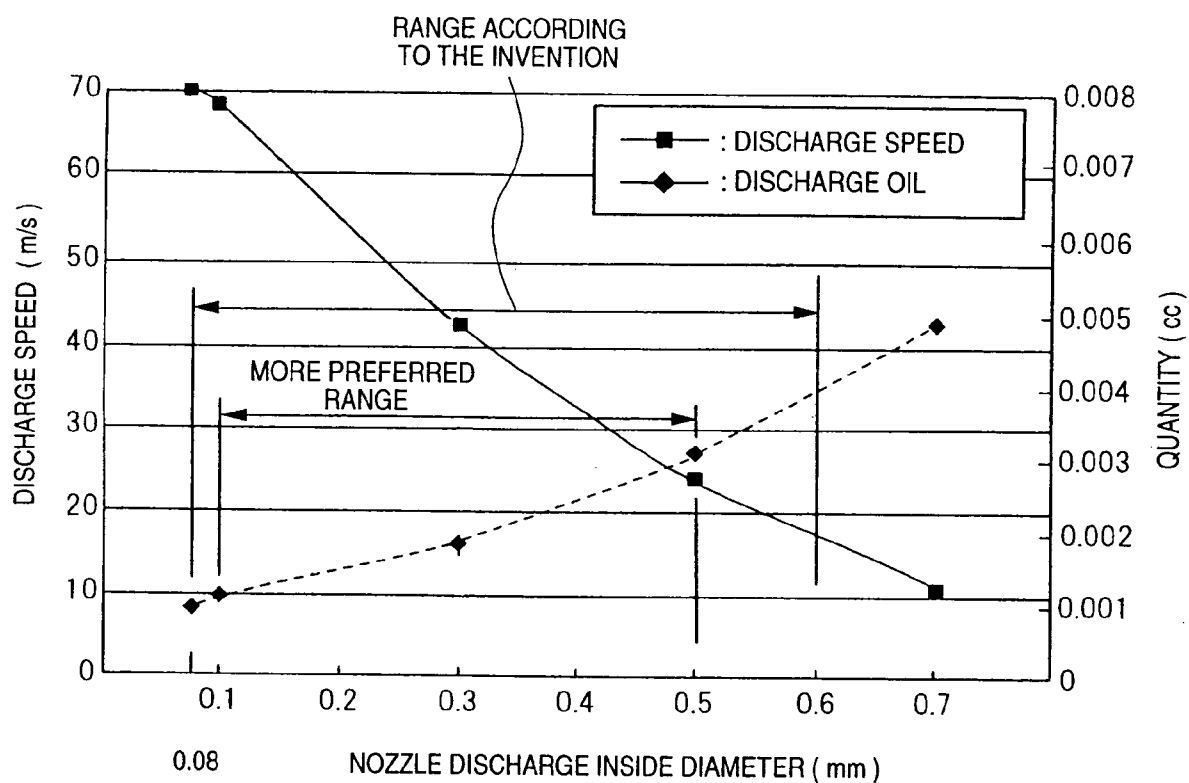

RELATIONSHIP OF NOZZLE DISCHARGE INSIDE DIAMETER WITH RESPECT TO DISCHARGE SPEED AND DISCHARGE OIL QUANTITY

FIG. 22

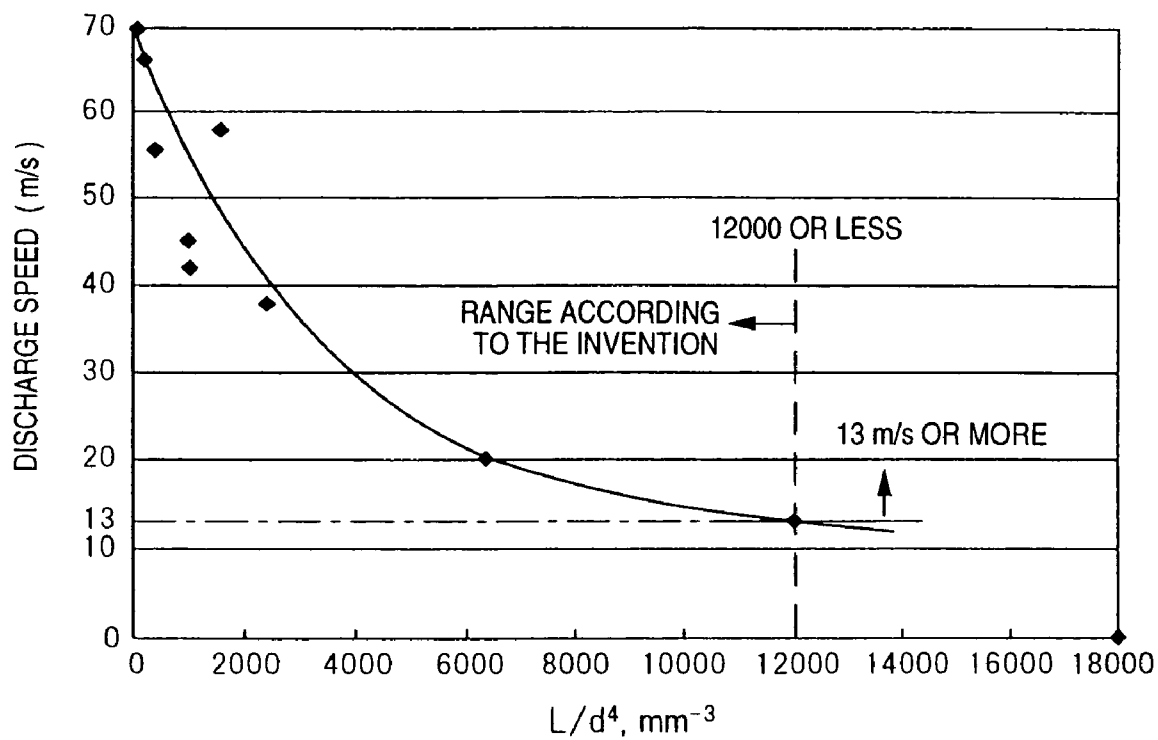

RELATIONSHIP BETWEEN
 L/d^4 AND DISCHARGE SPEED

FIG. 23

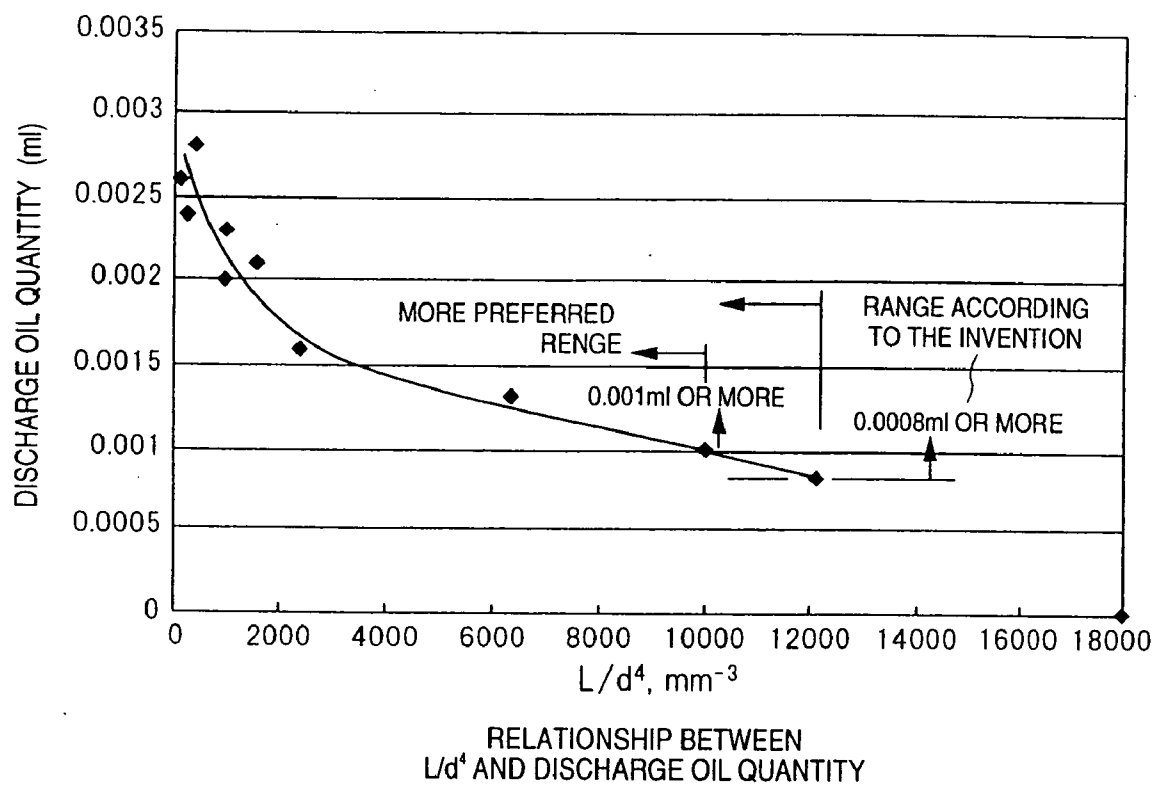


FIG. 24



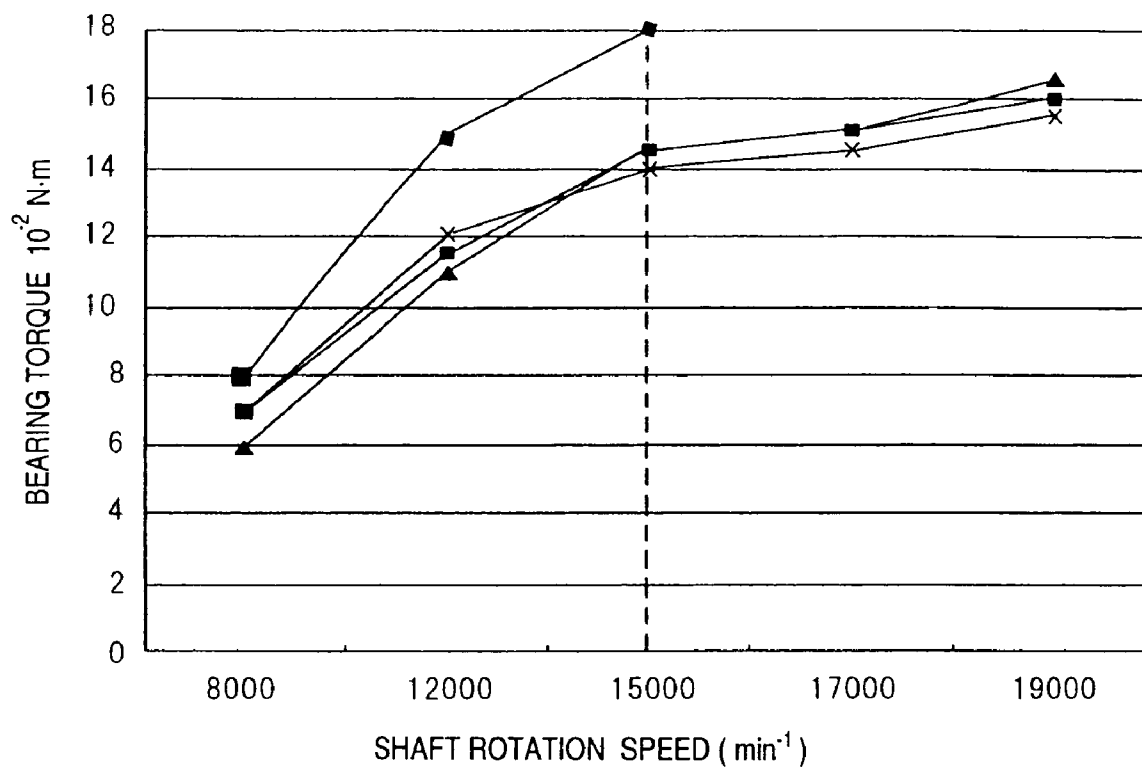
RELATIONSHIP BETWEEN SHAFT ROTATION
SPEED AND BEARING TORQUE

FIG. 25

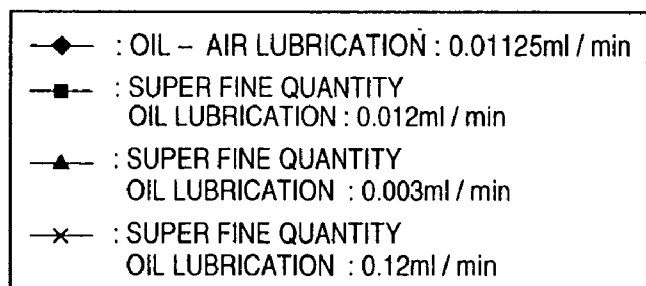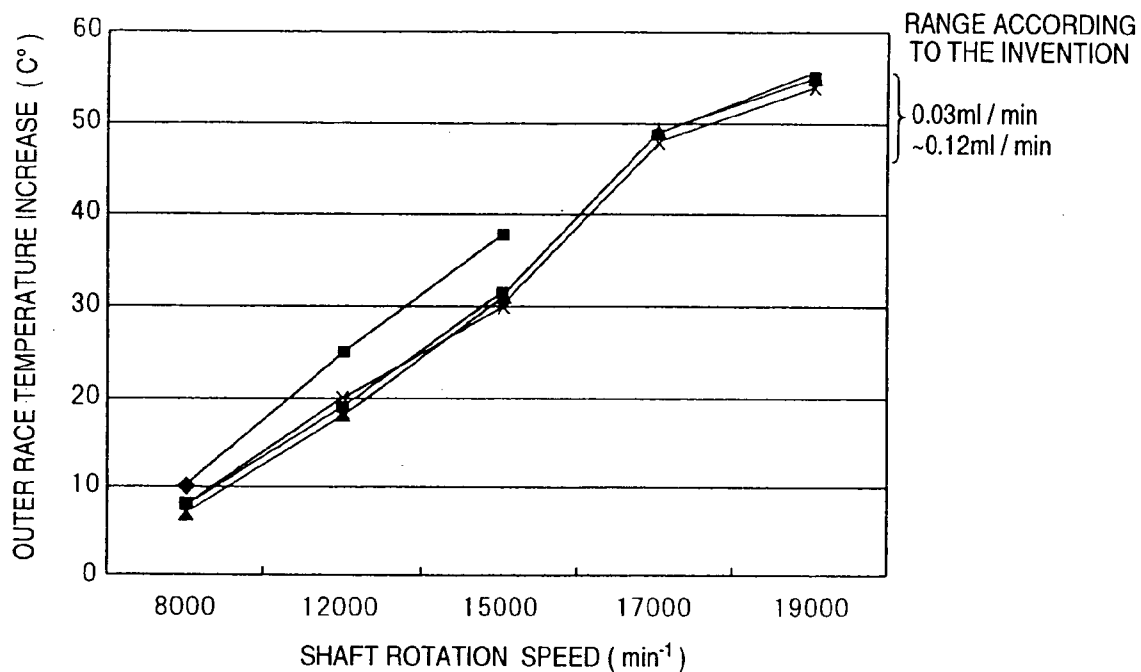

RELATIONSHIP BETWEEN SHAFT ROTATION SPEED AND OUTER RACE TEMPERATURE INCREASE

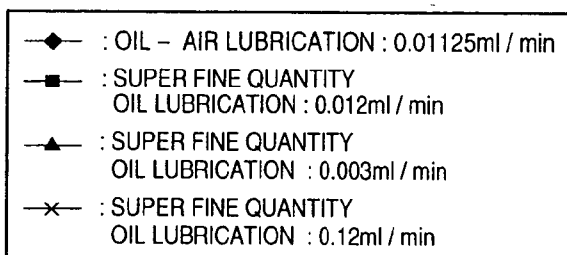


FIG. 26A

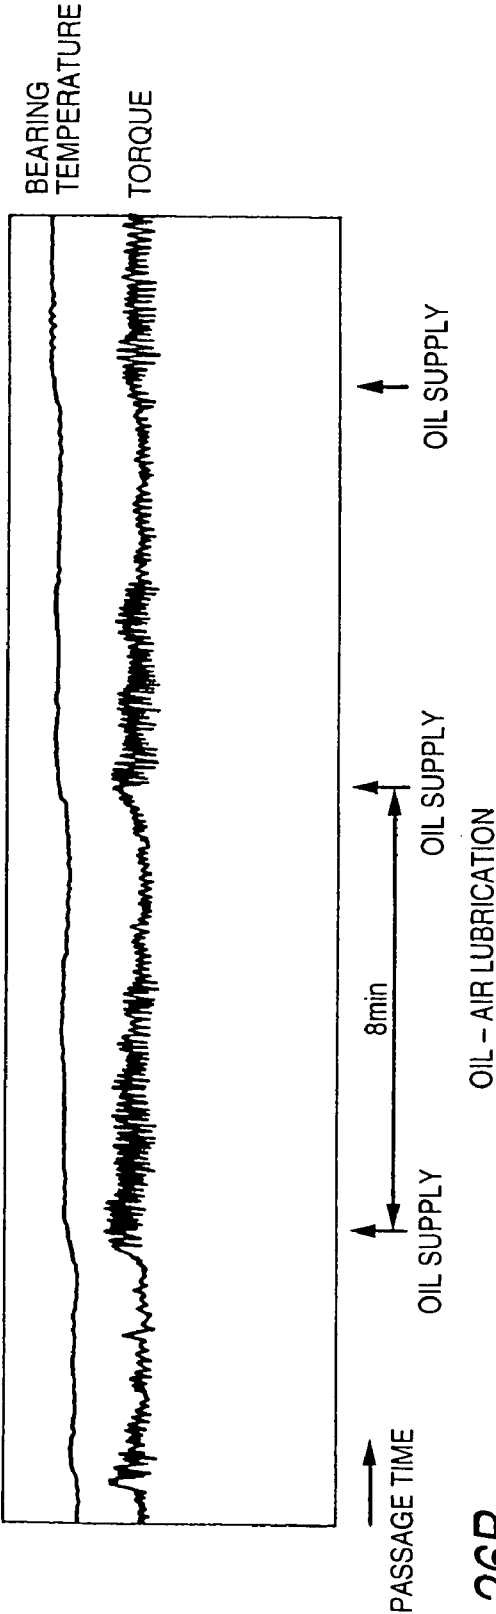


FIG. 26B

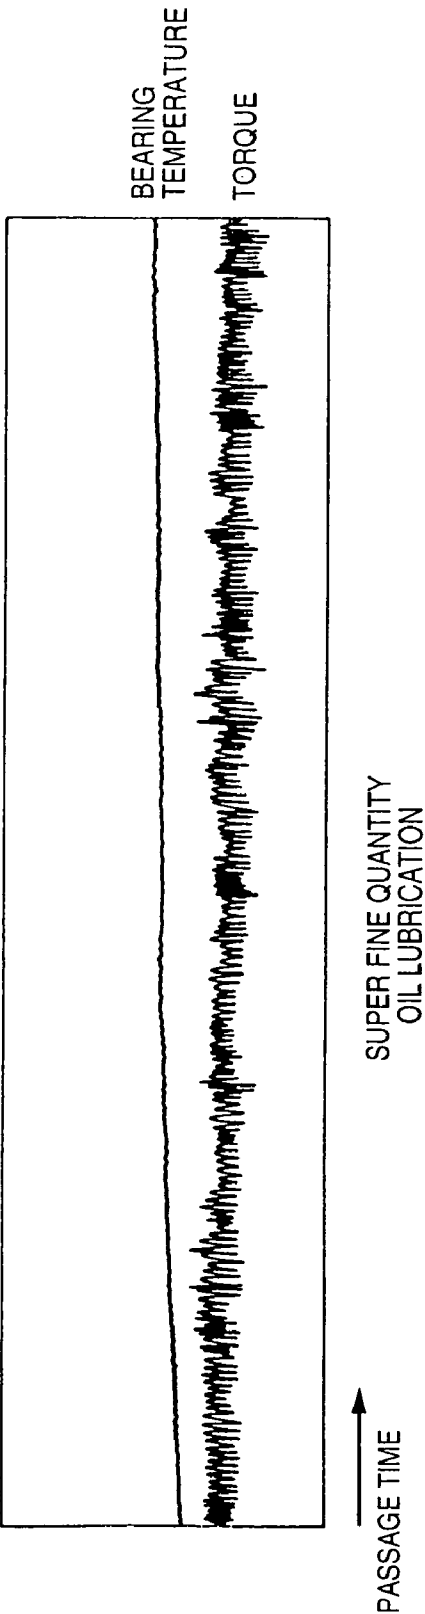


FIG. 27

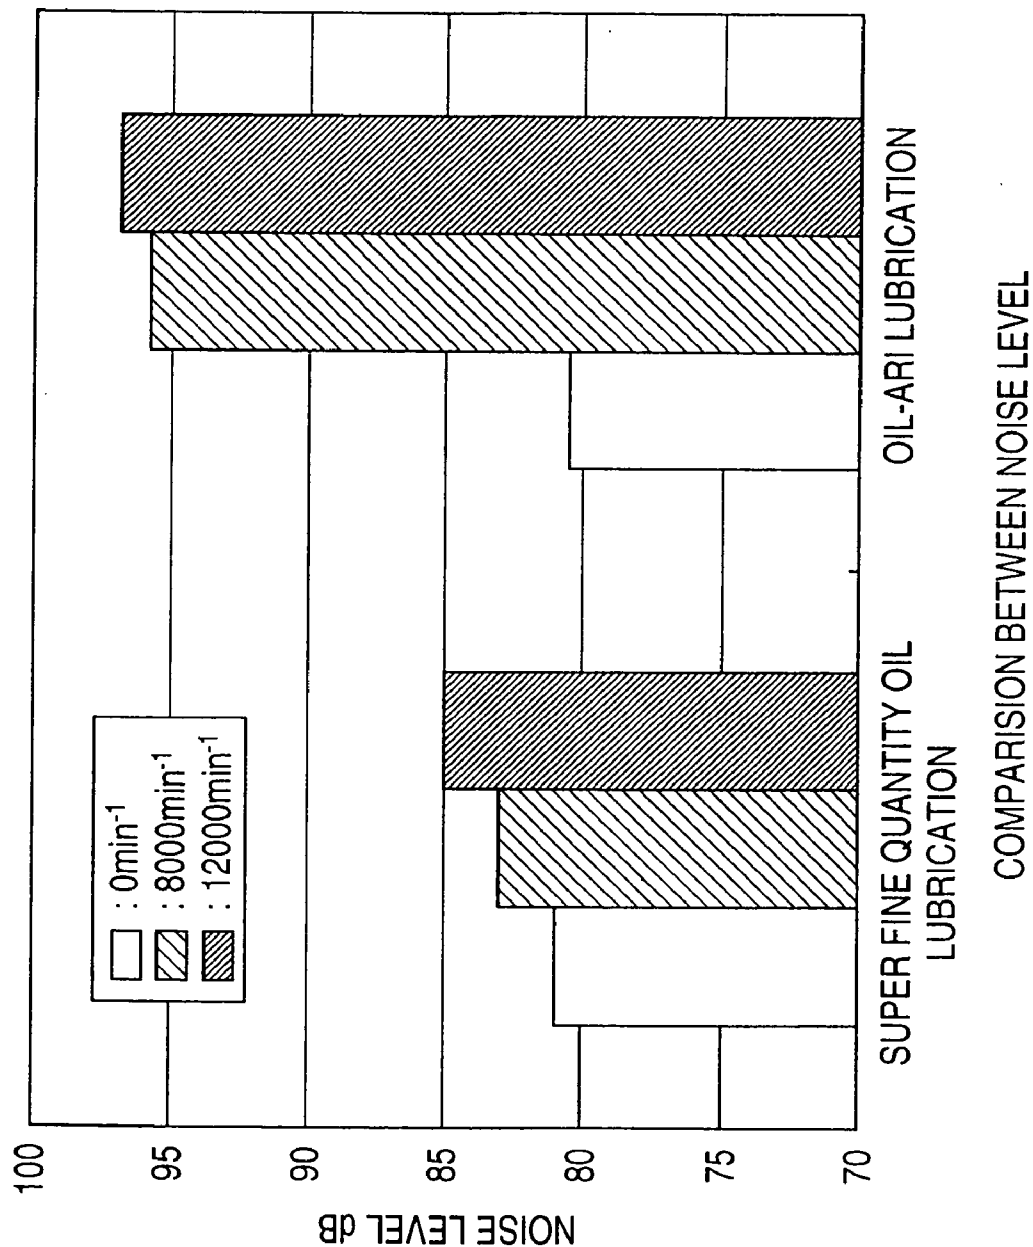


FIG. 28

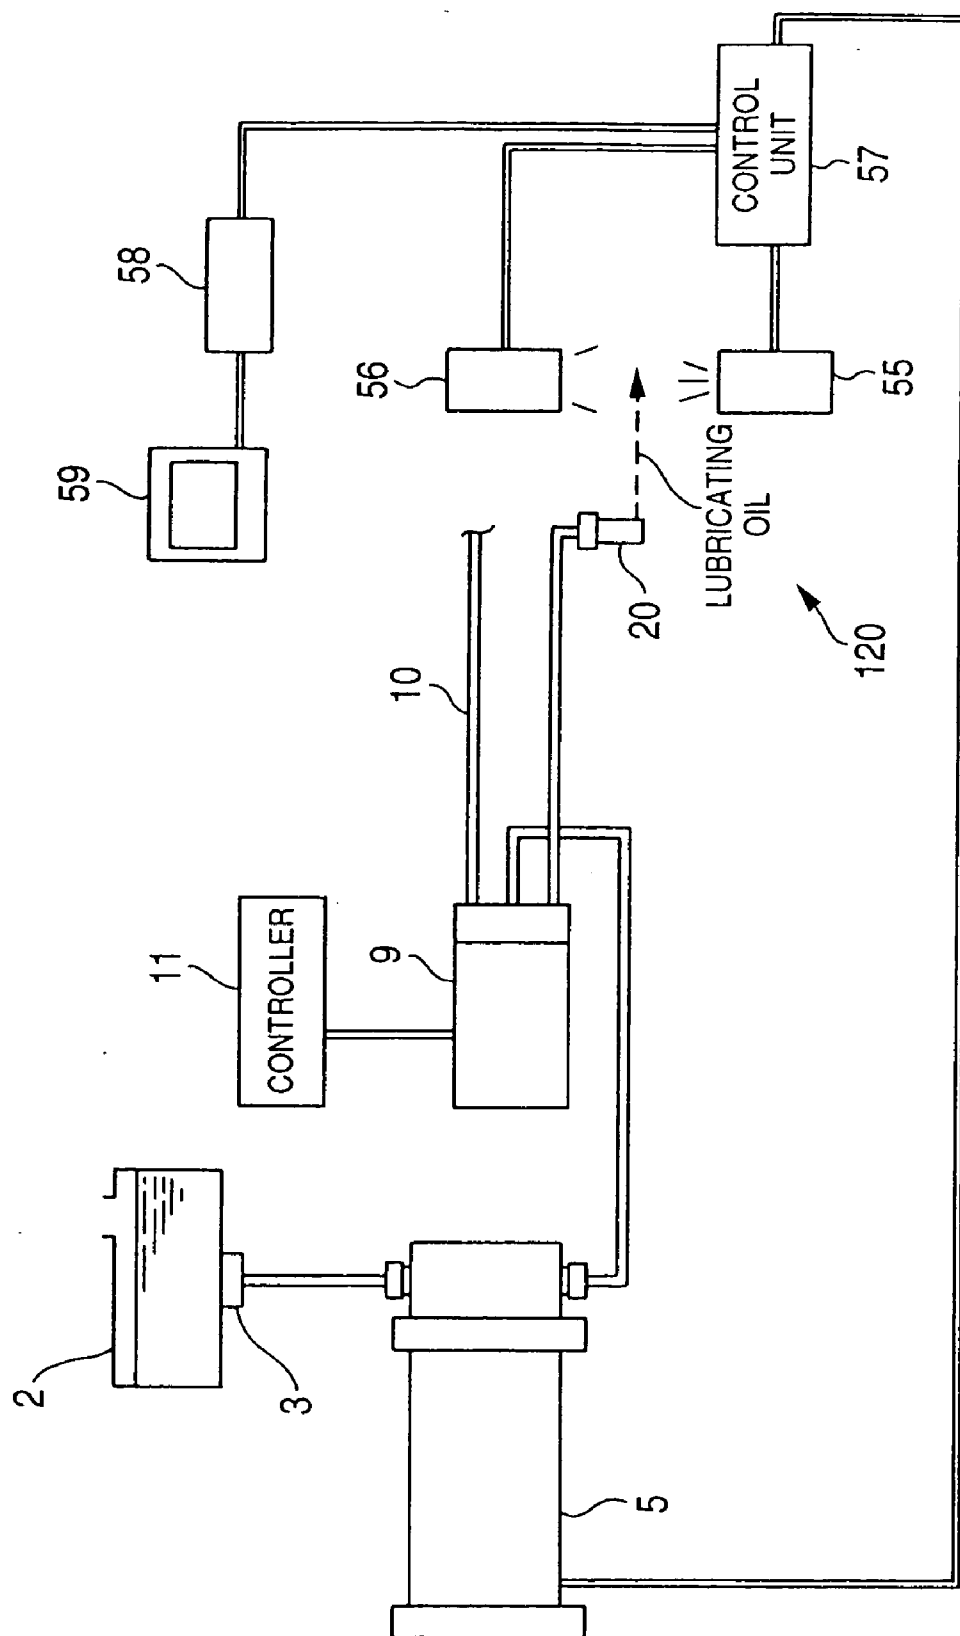


FIG. 29

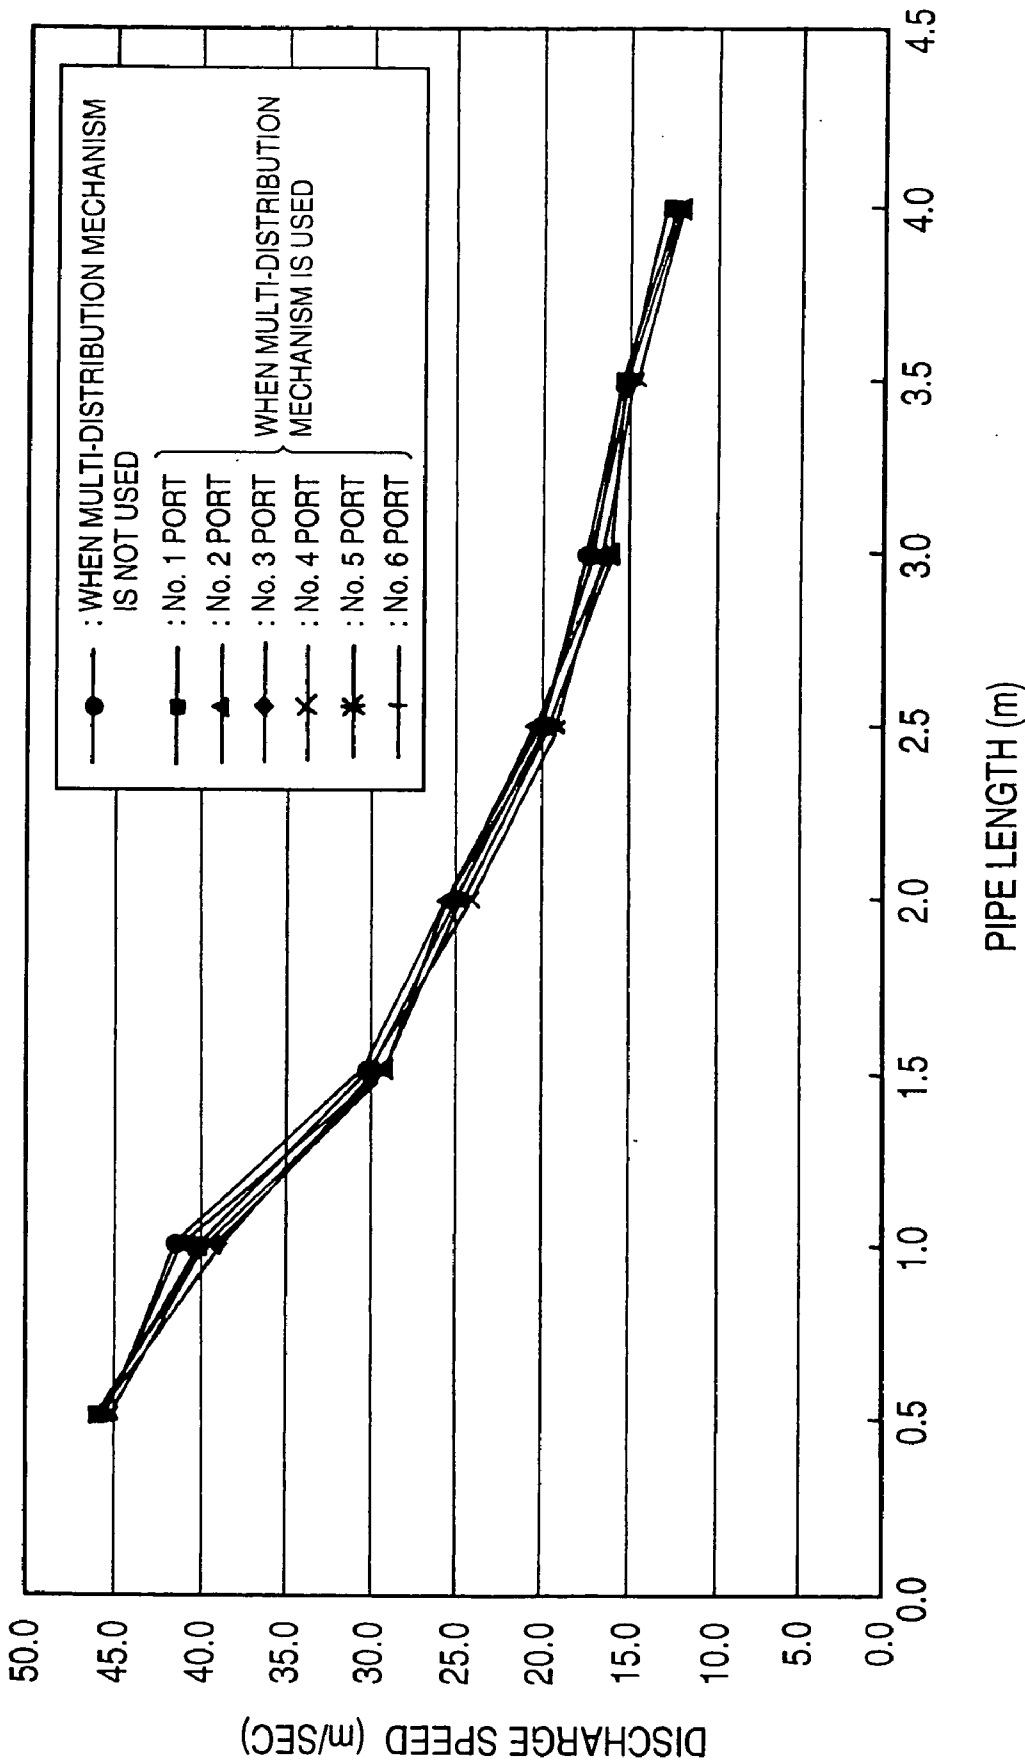


FIG. 30

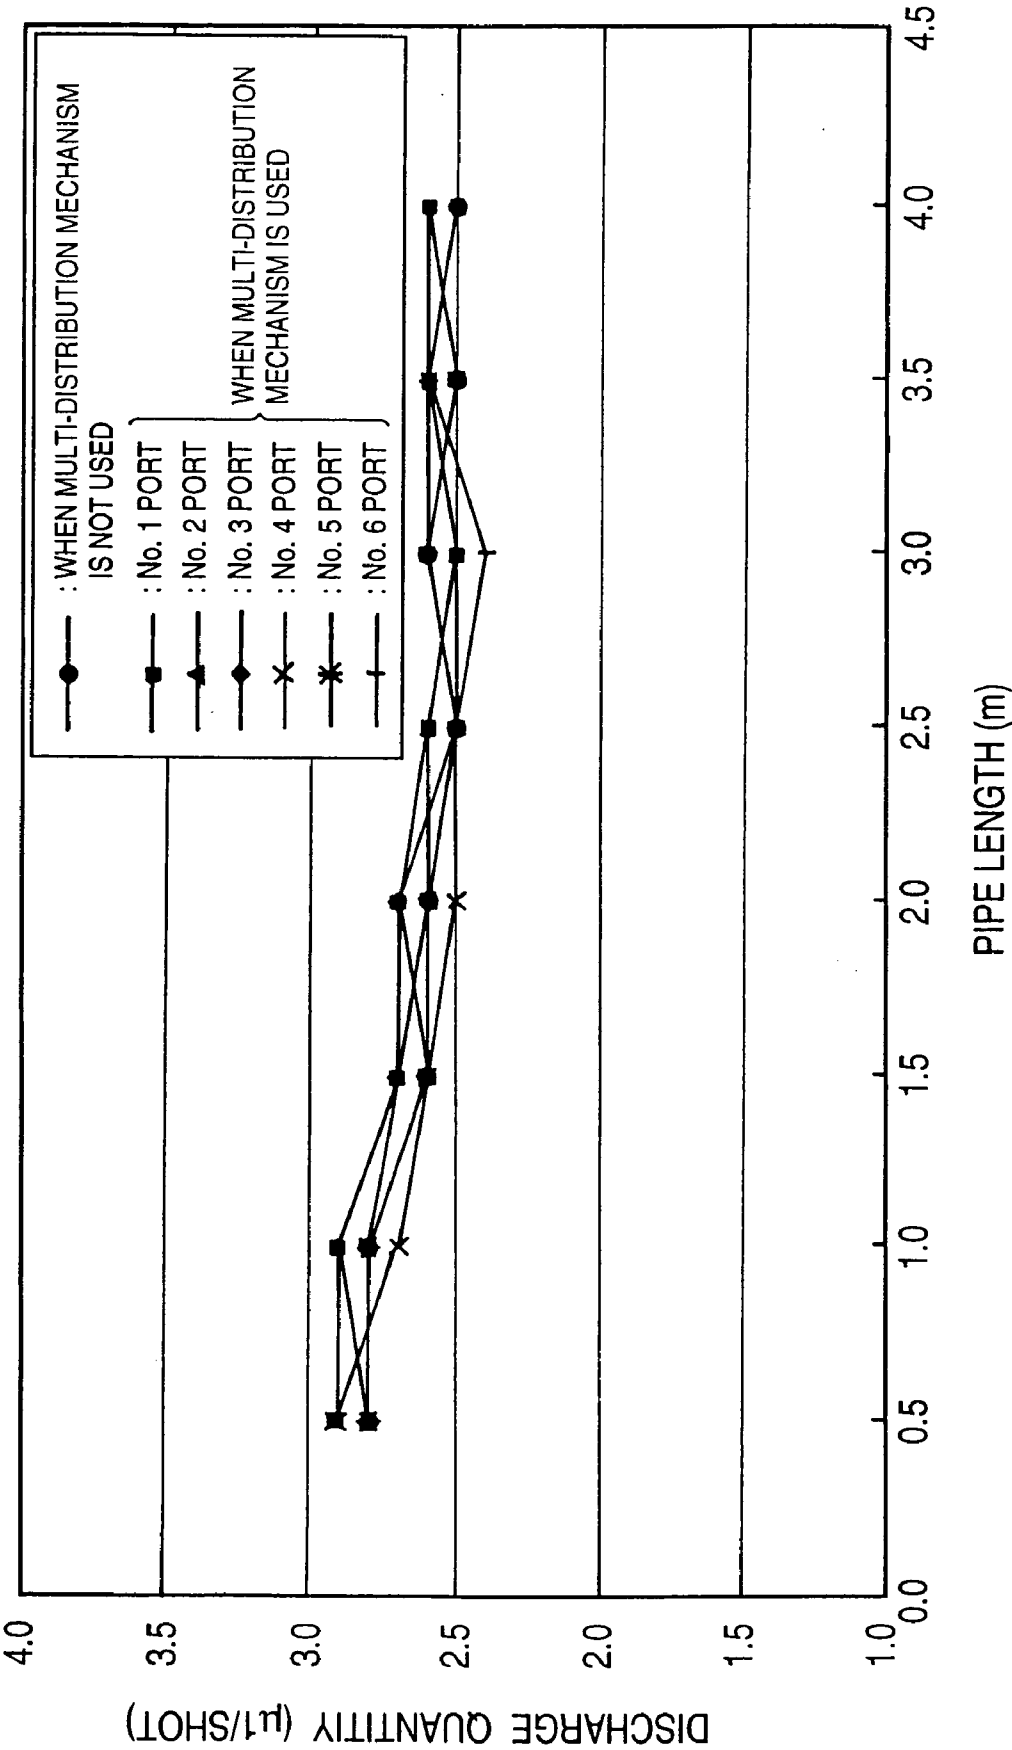


FIG. 31

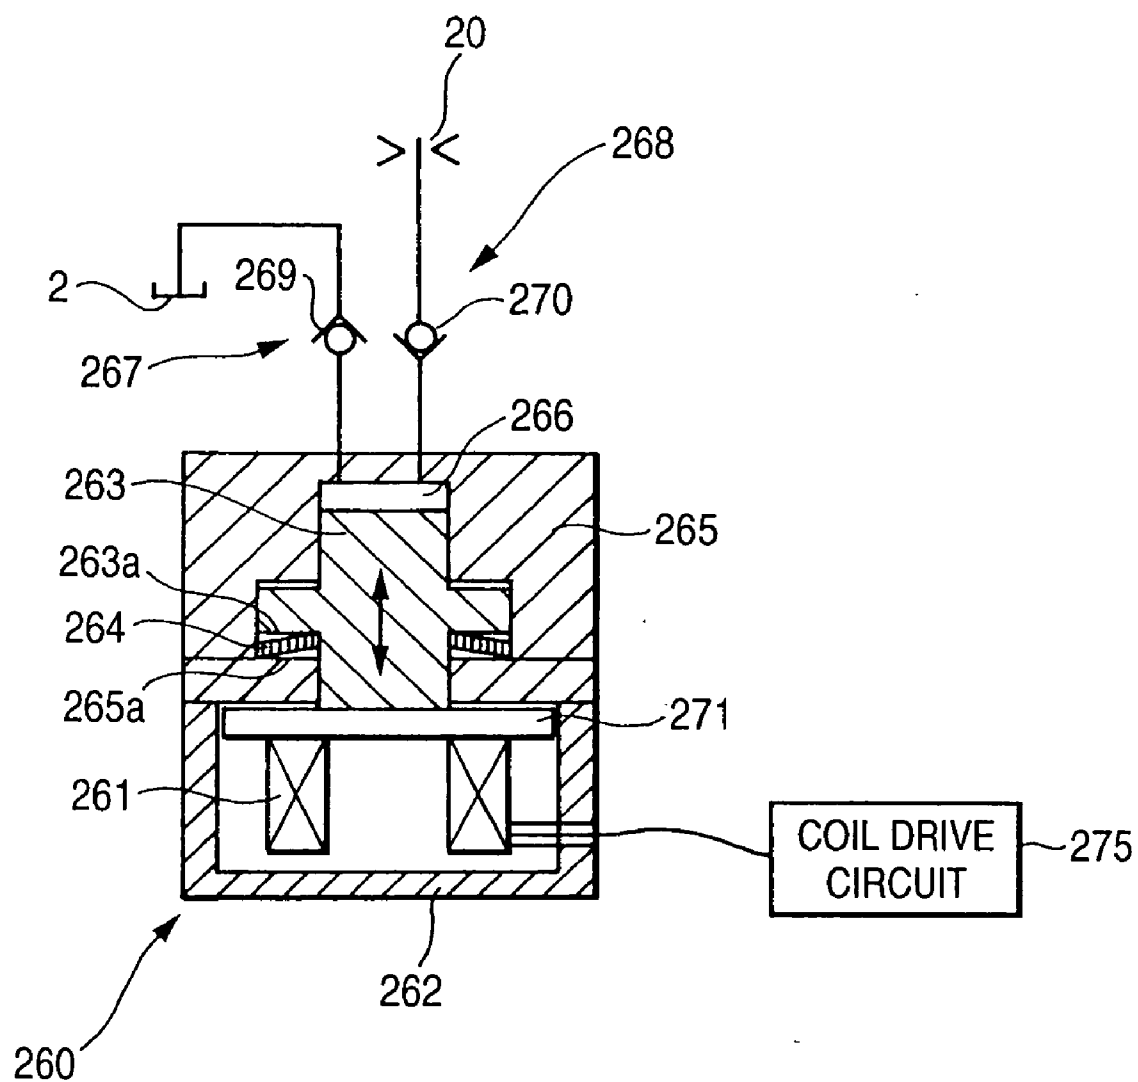


FIG. 32

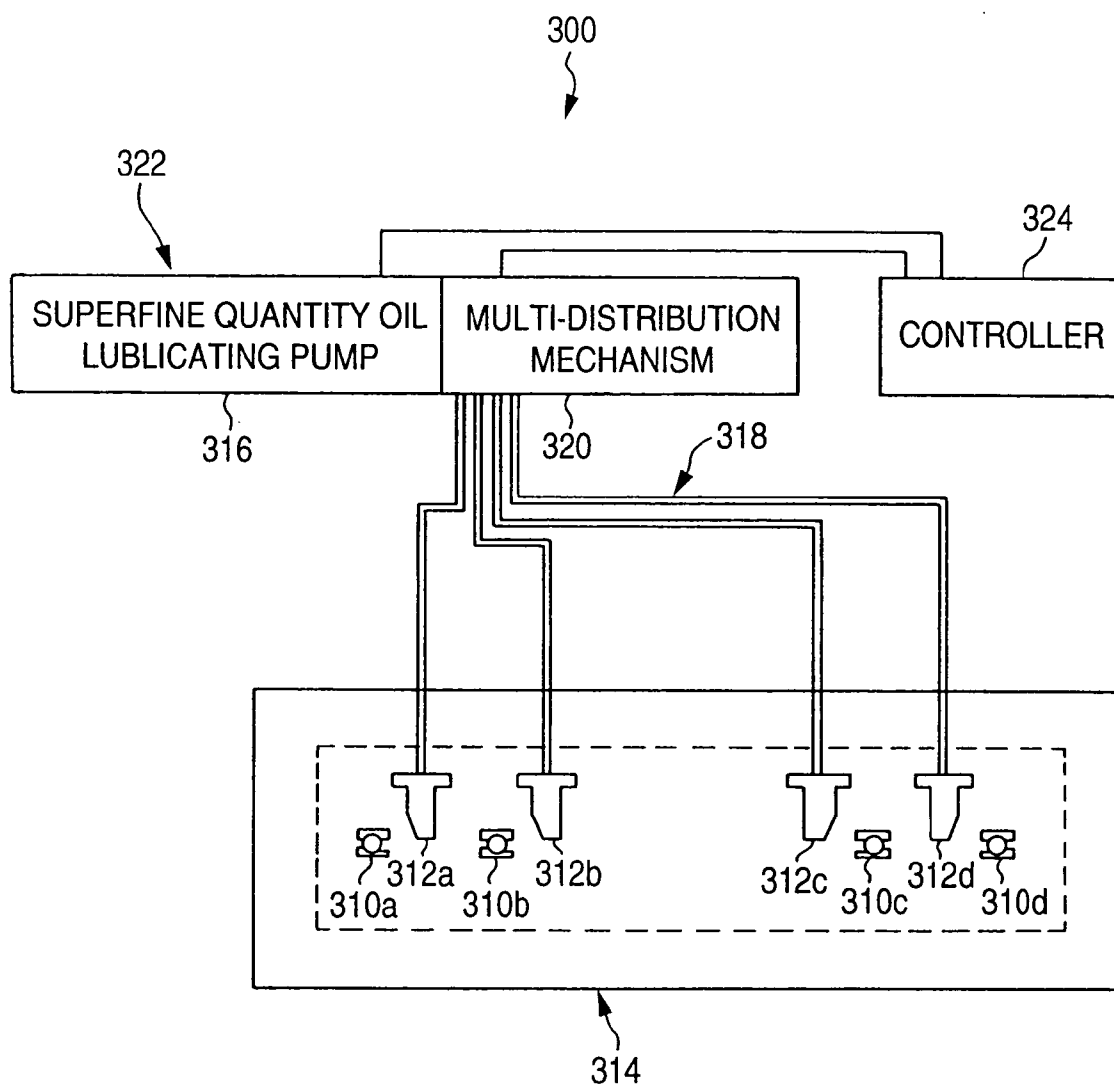


FIG. 33

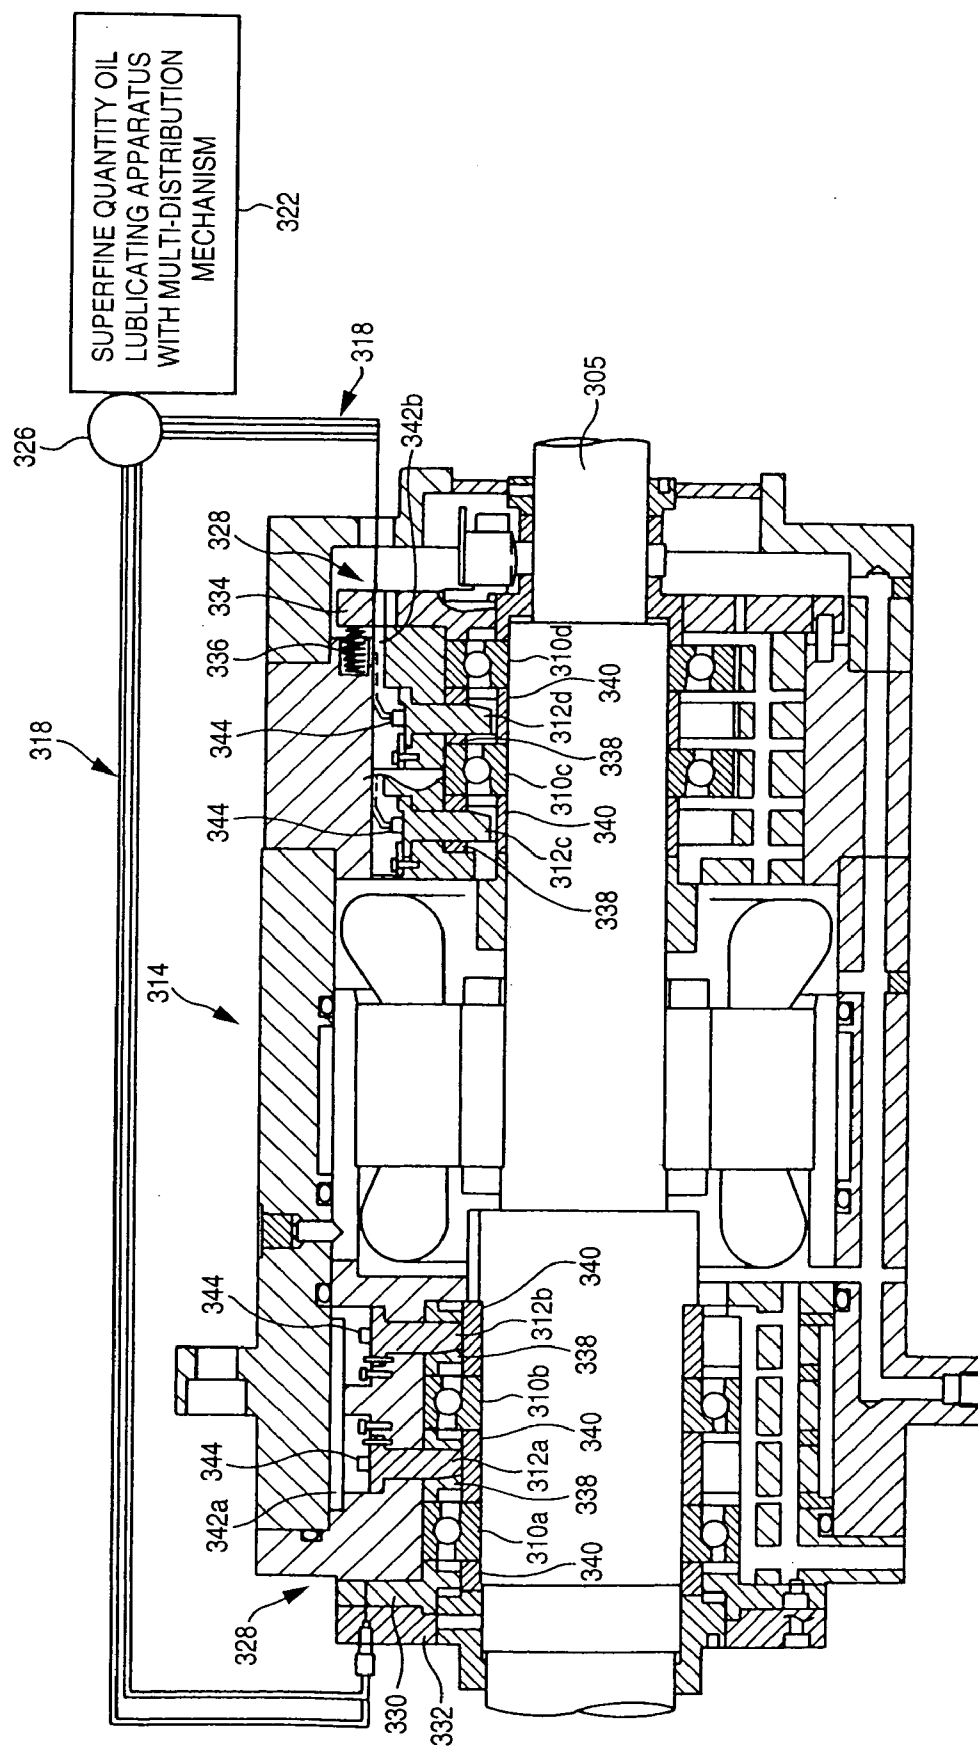


FIG. 34

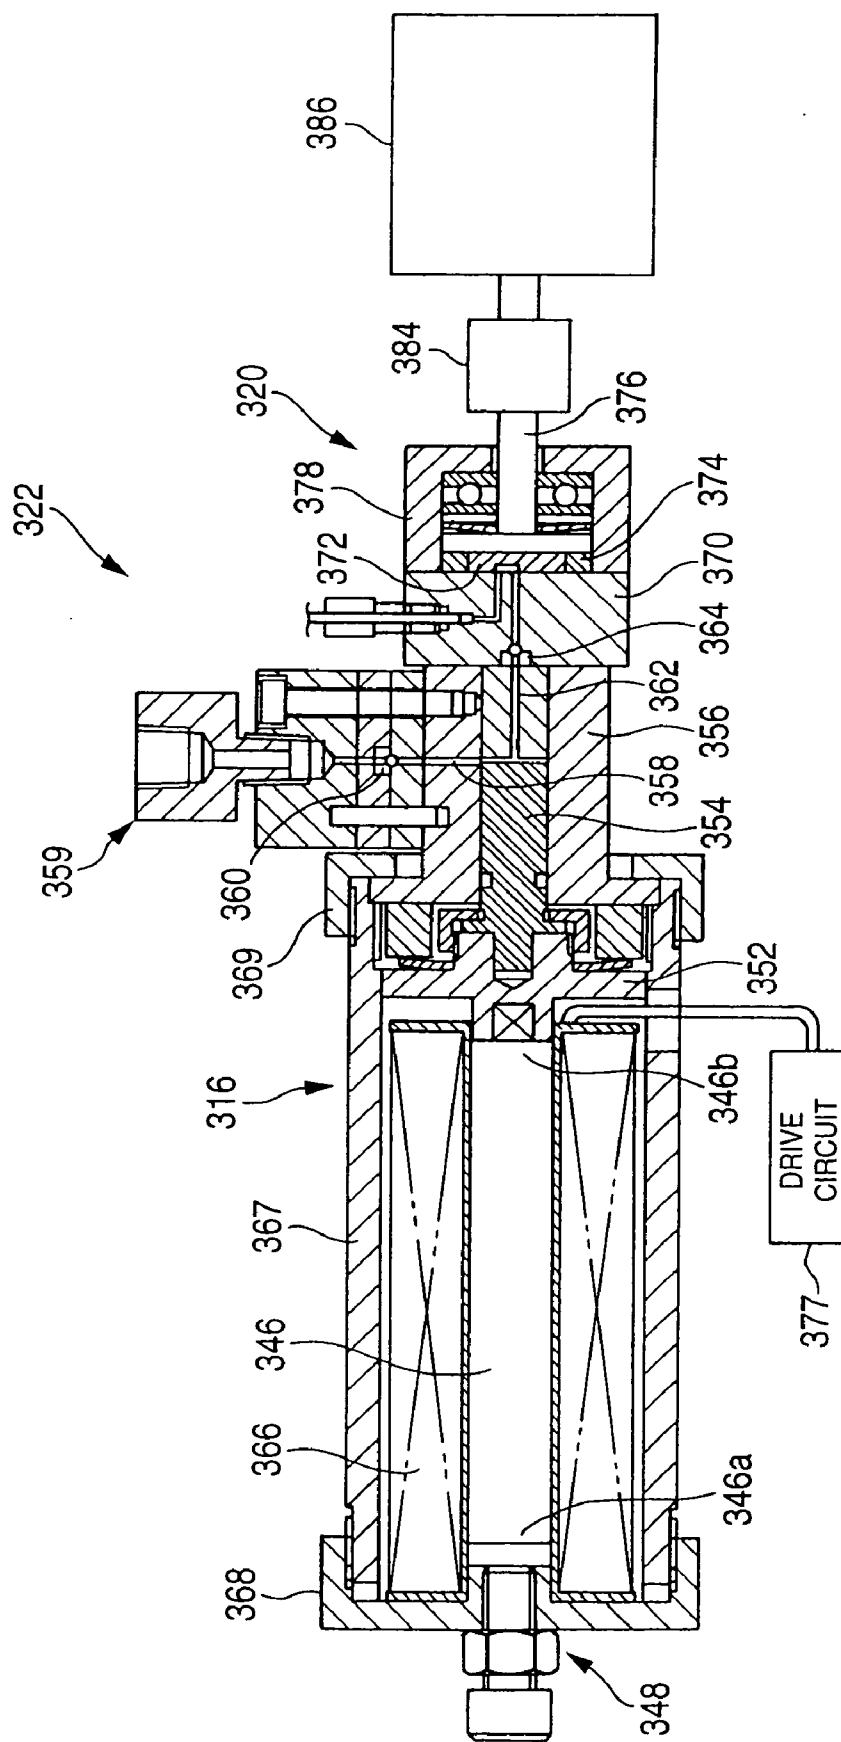


FIG. 35

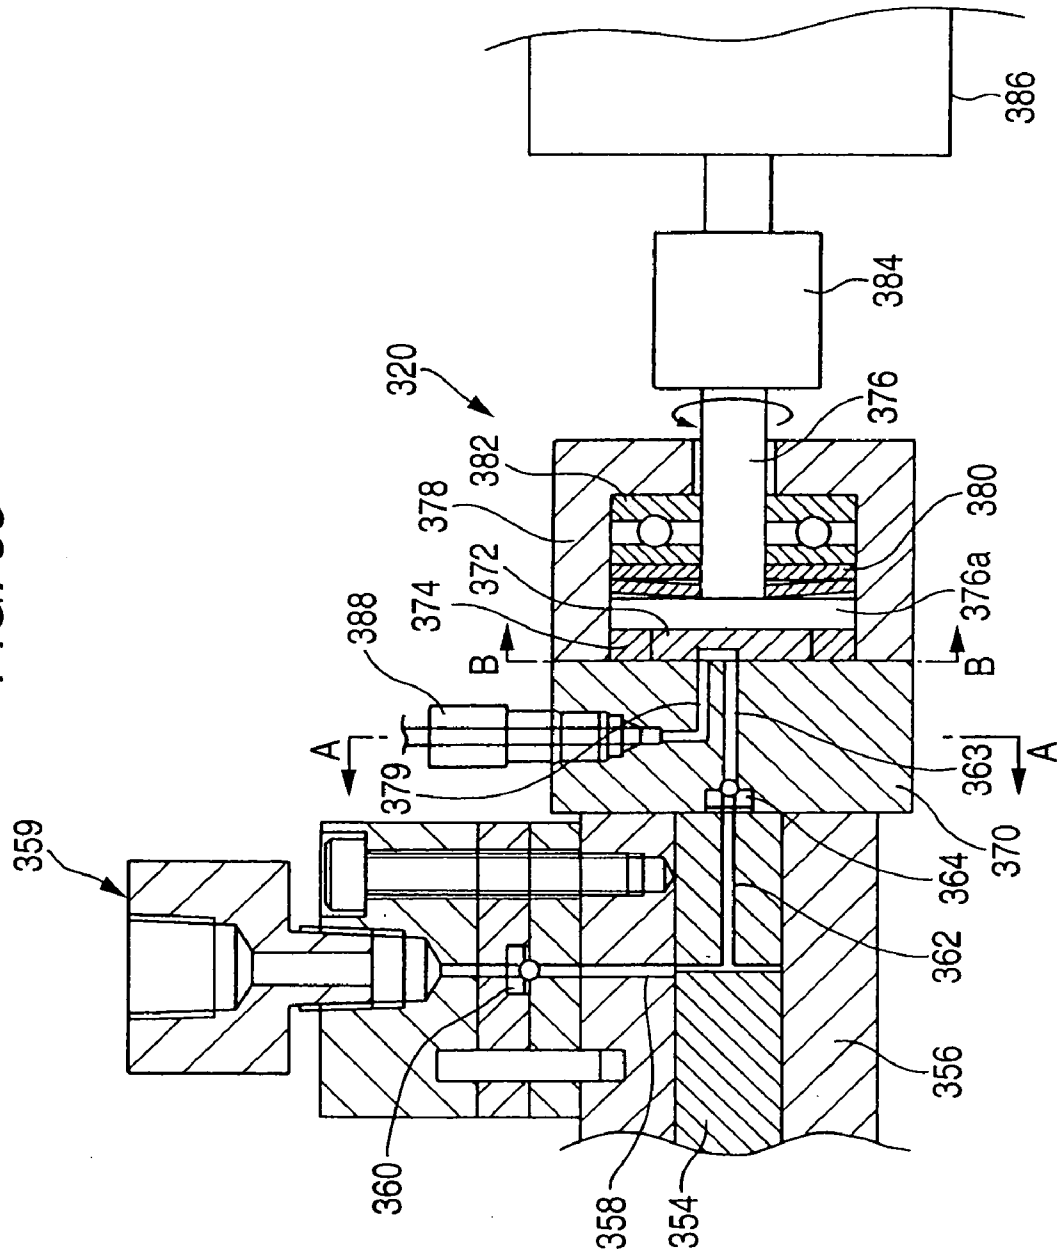


FIG. 36

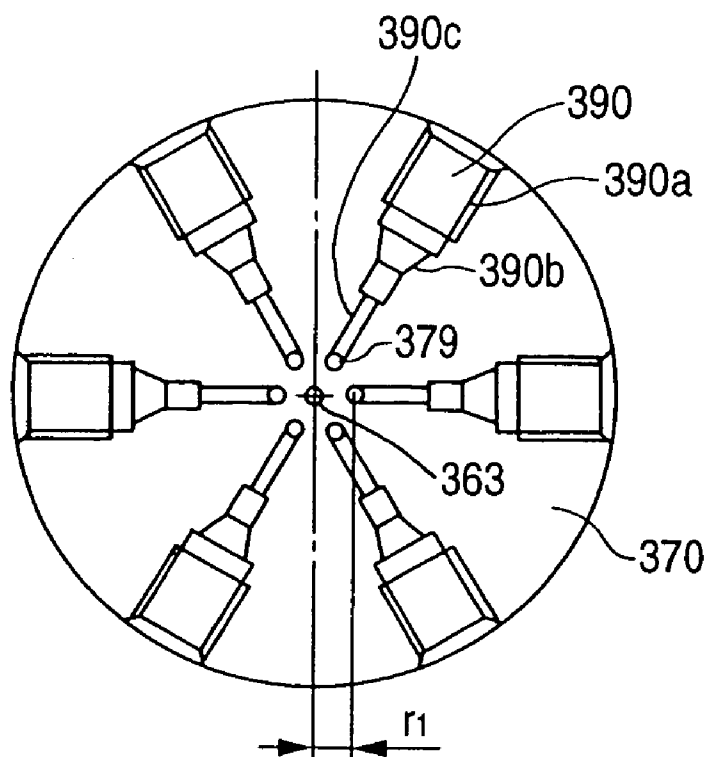


FIG. 37

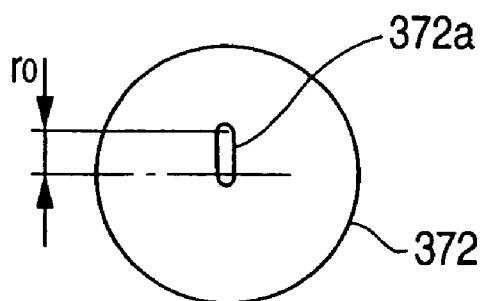


FIG. 38

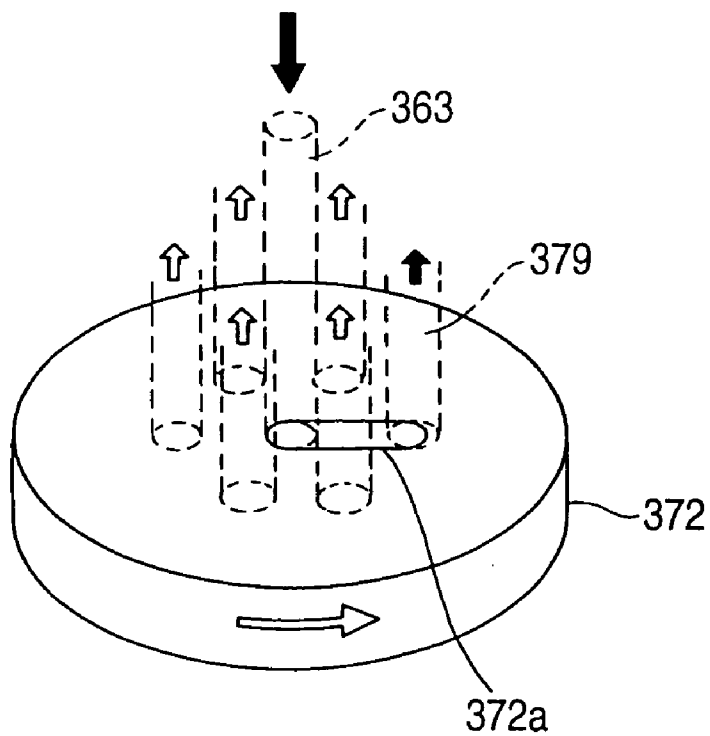


FIG. 39A

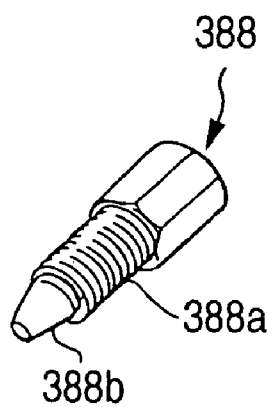


FIG. 39B

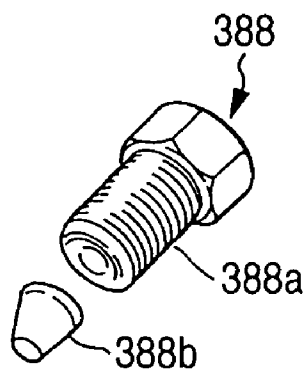


FIG. 40

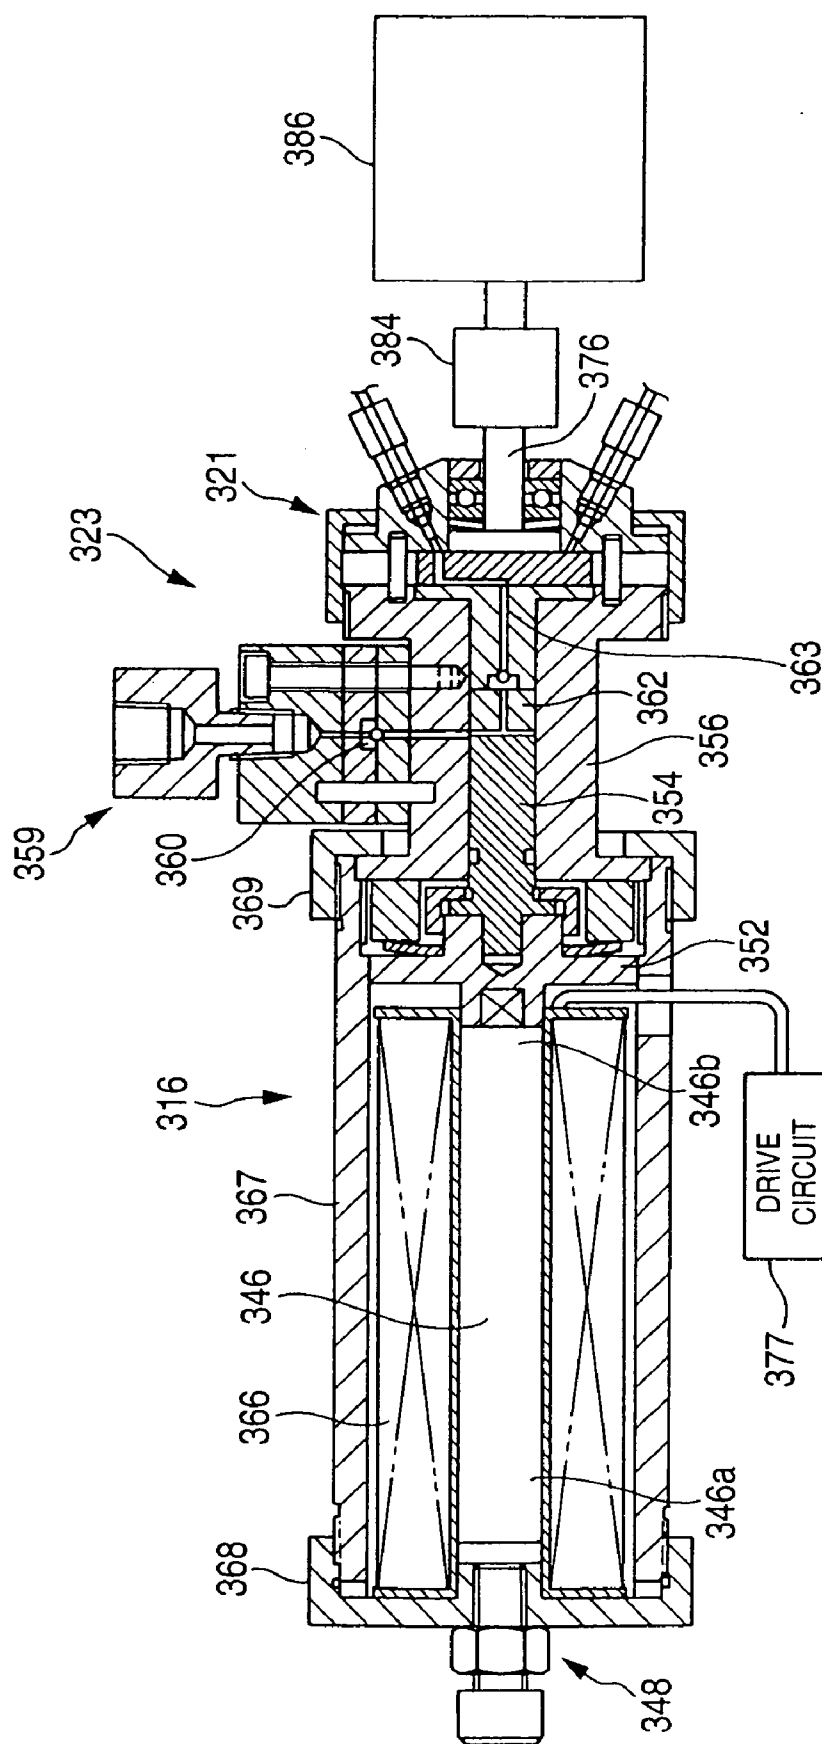


FIG. 41

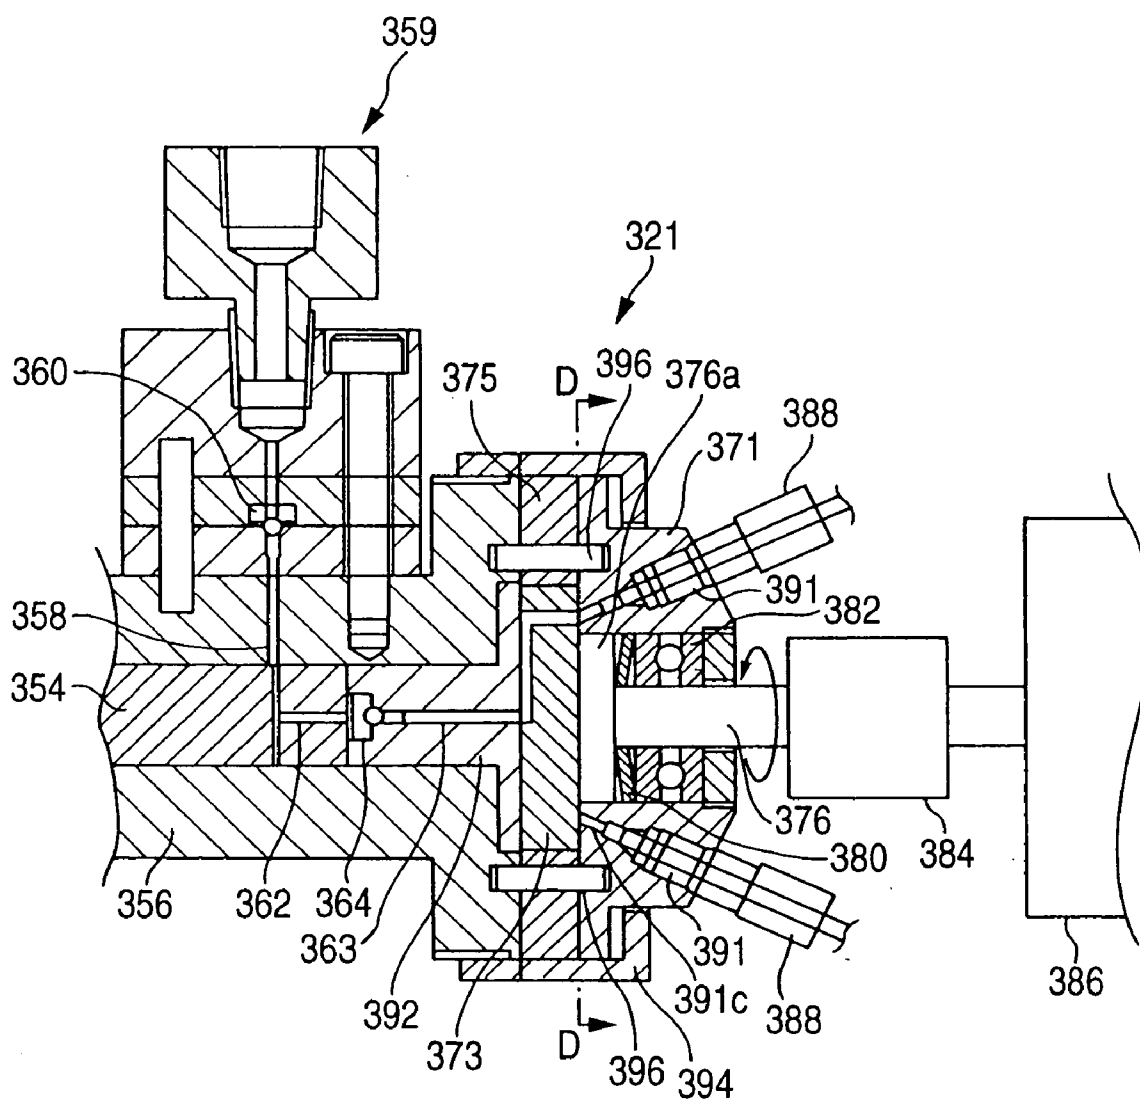


FIG. 42A

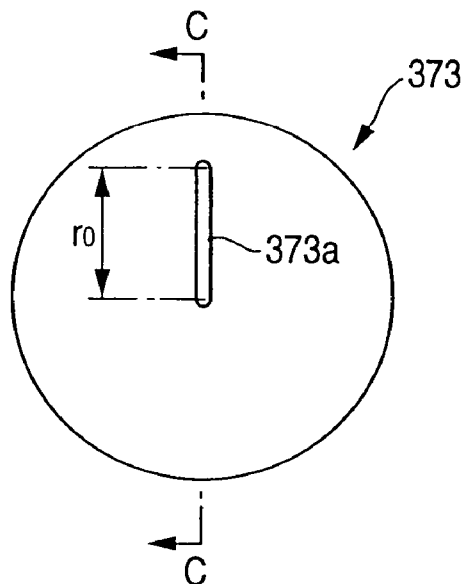


FIG. 42B

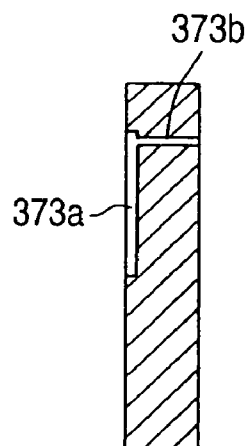


FIG. 43

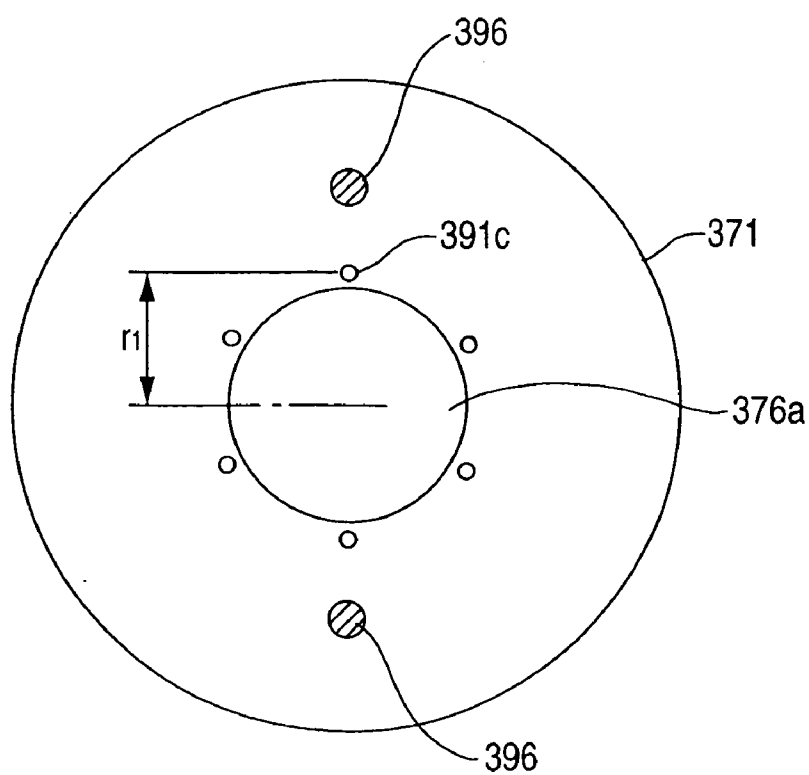


FIG. 44

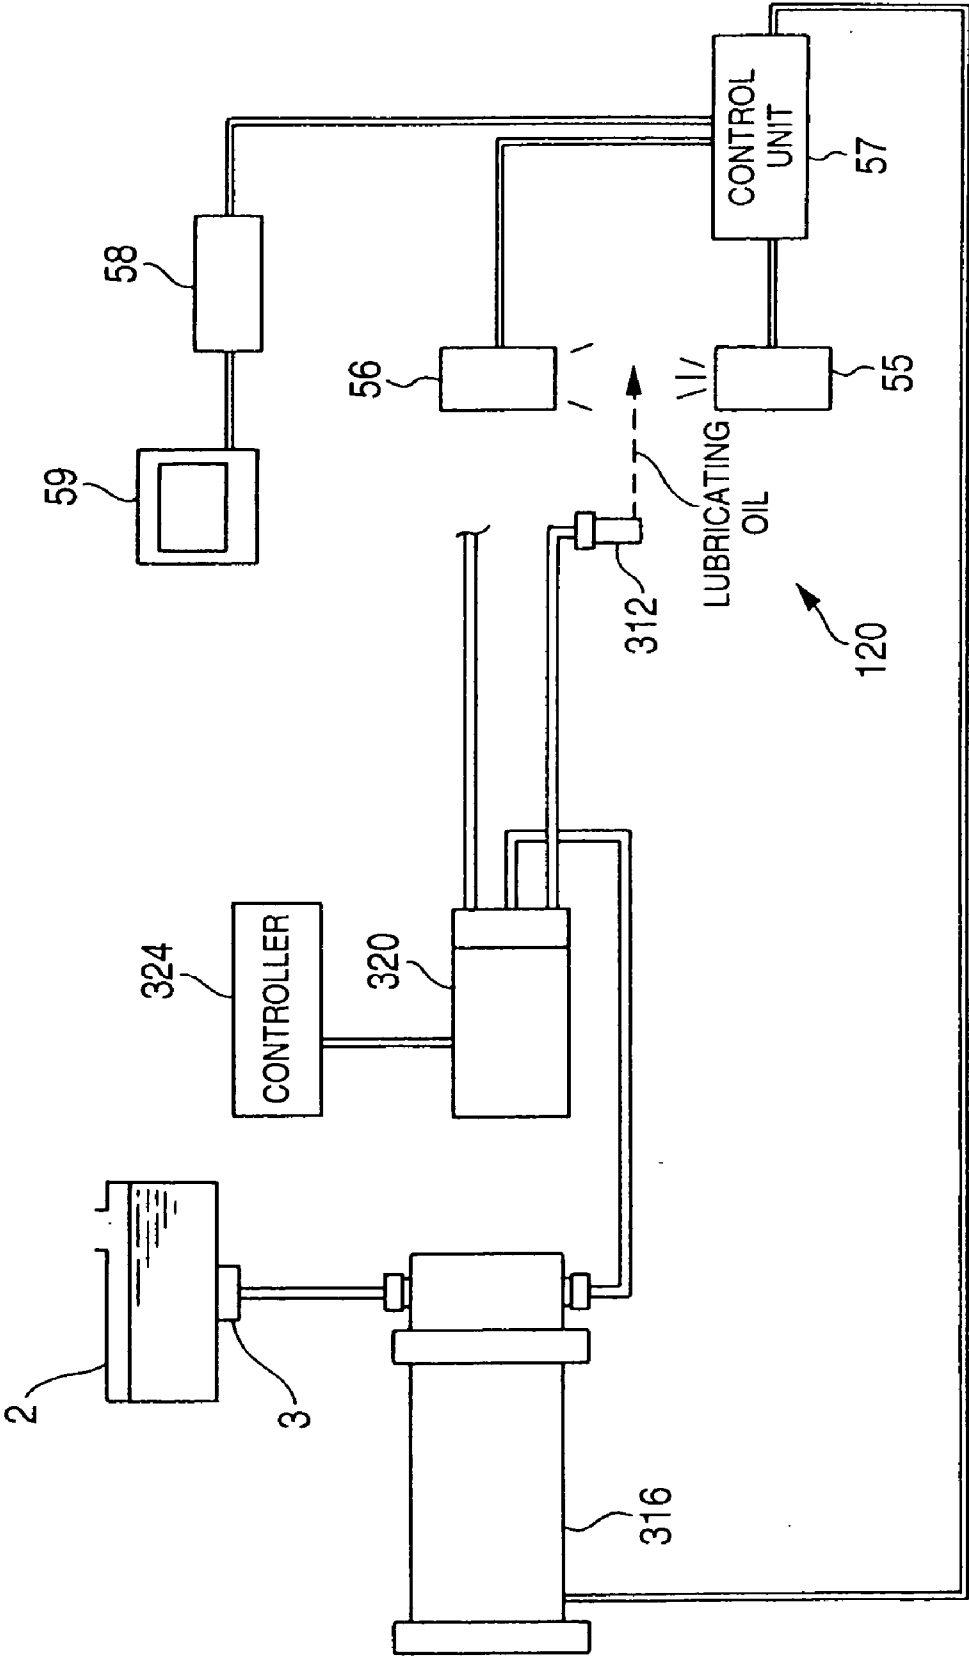


FIG. 45

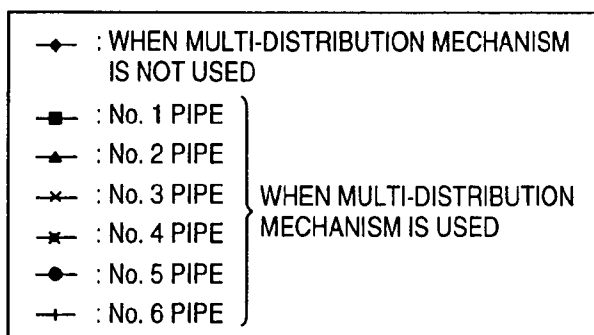
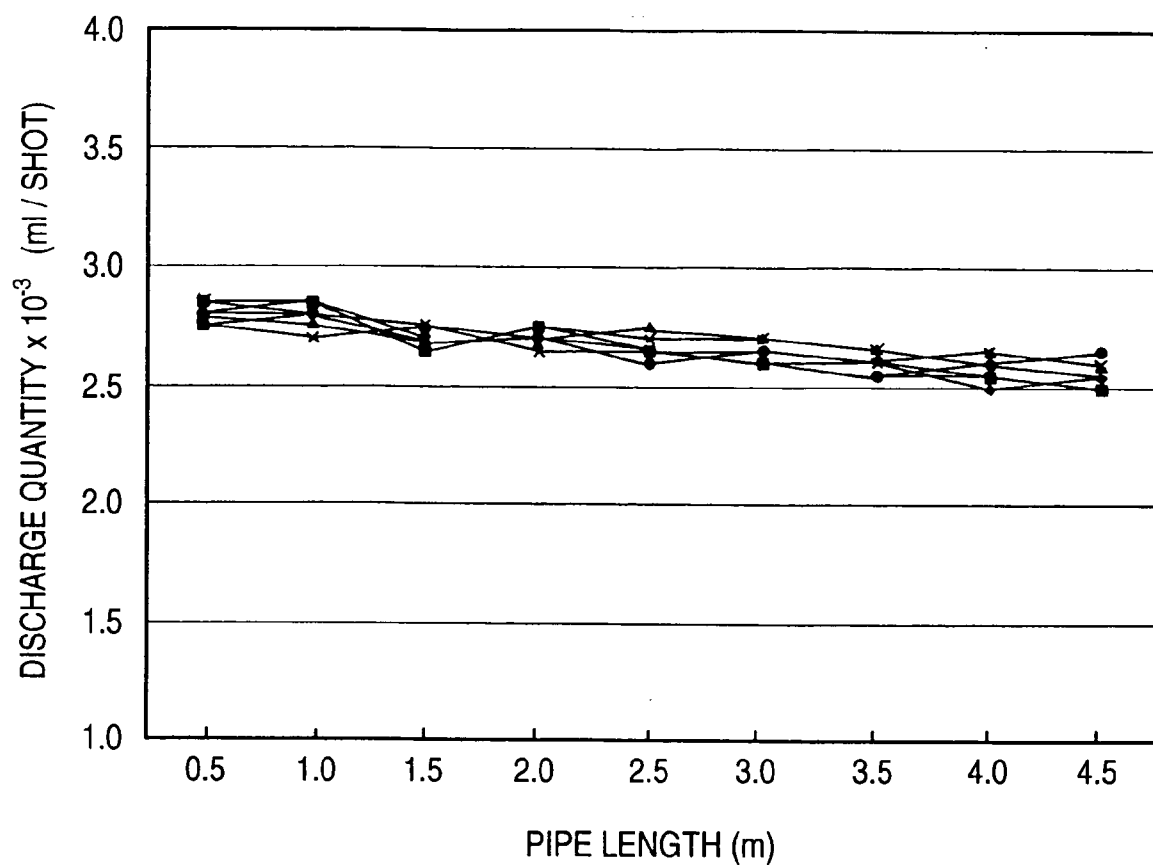


FIG. 46

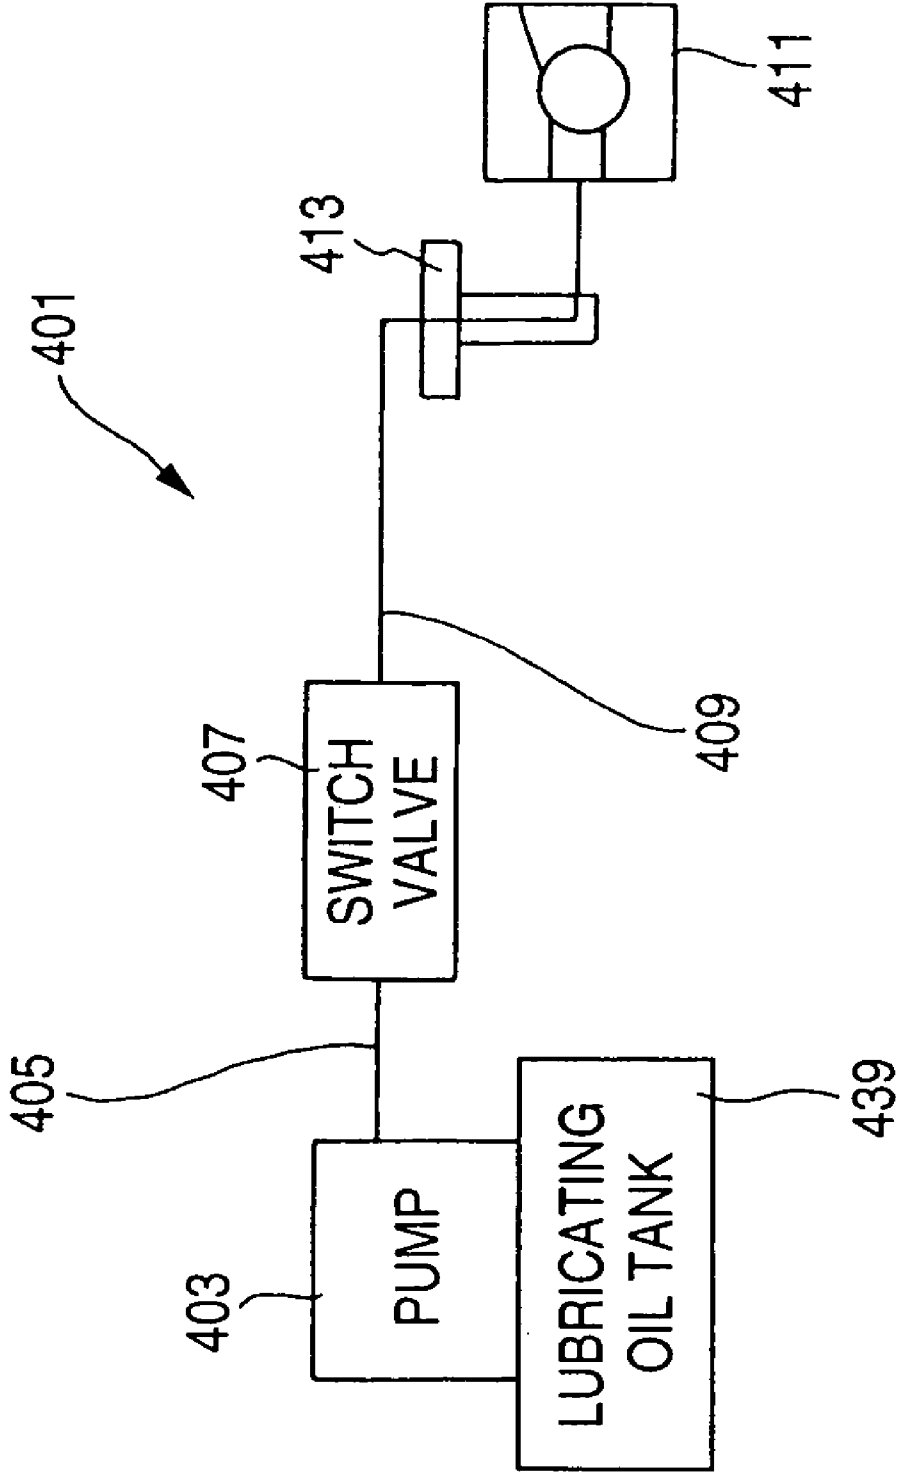


FIG. 47

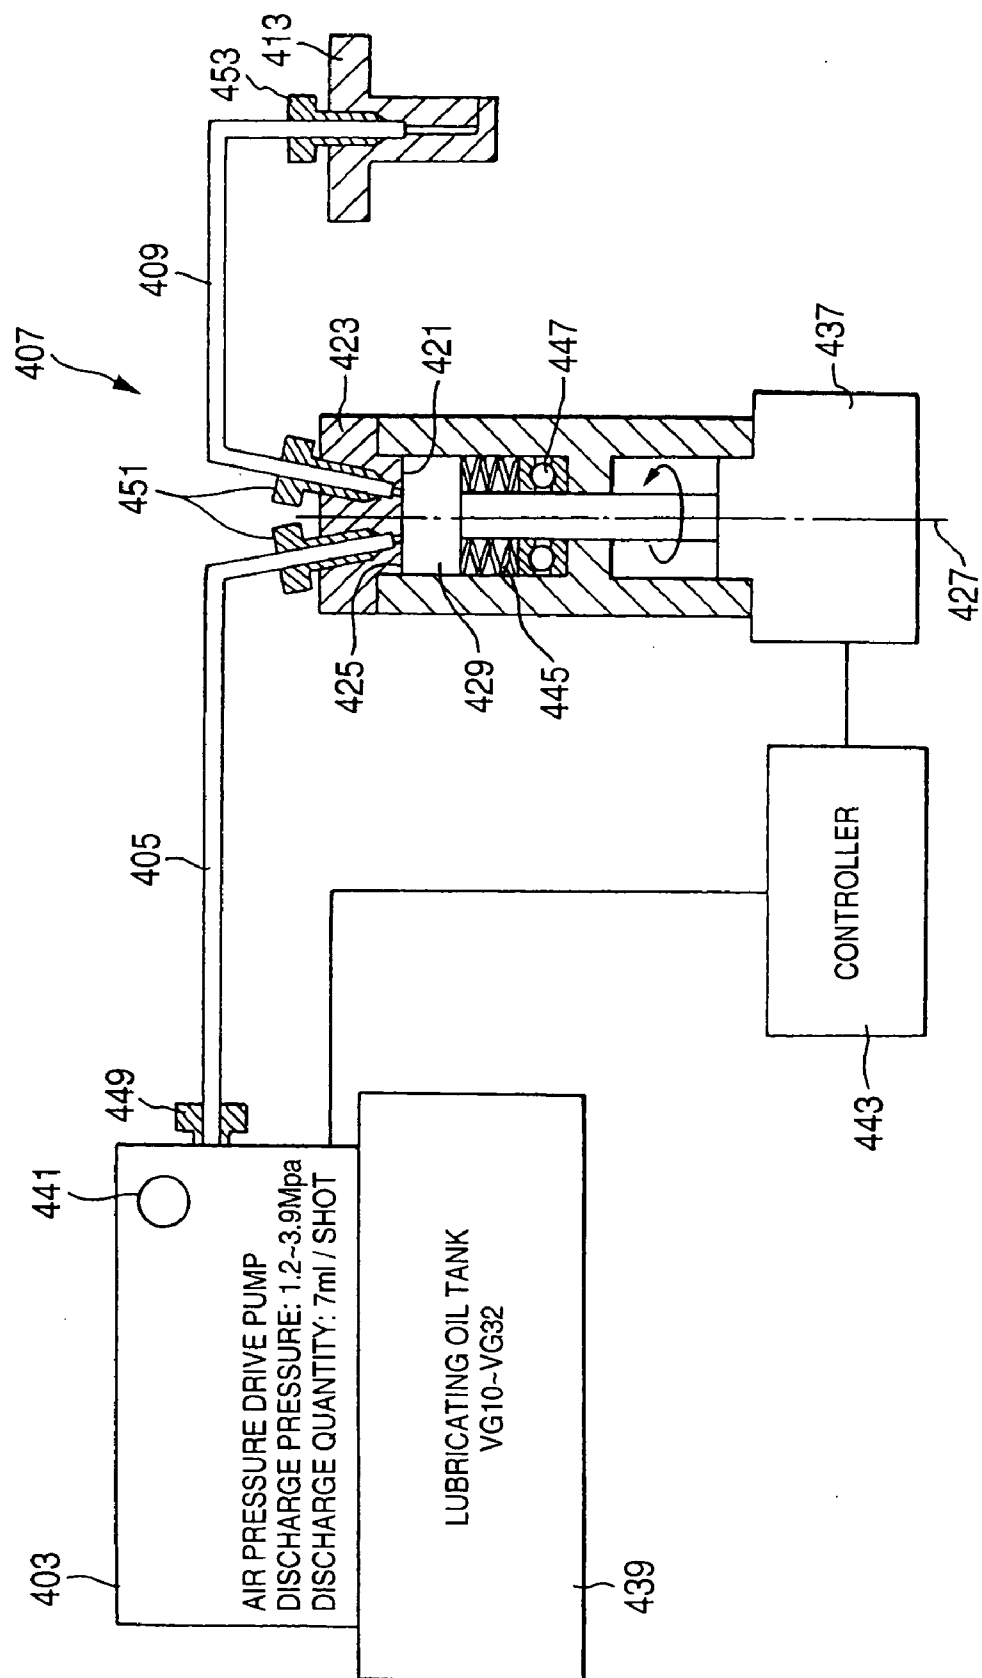


FIG. 48A

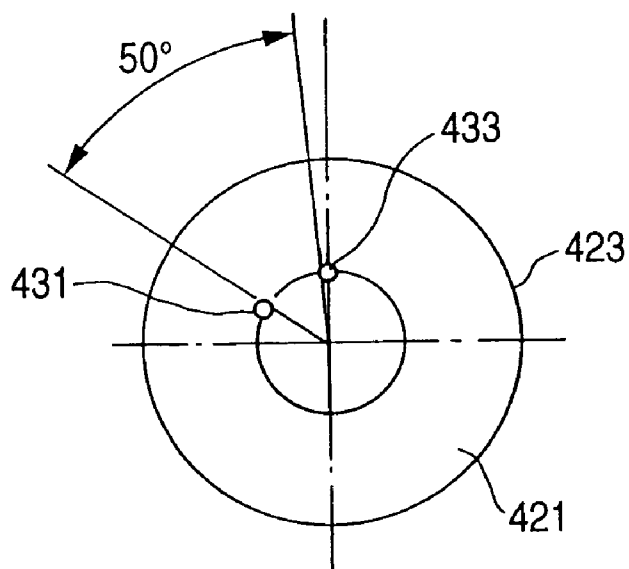


FIG. 48B

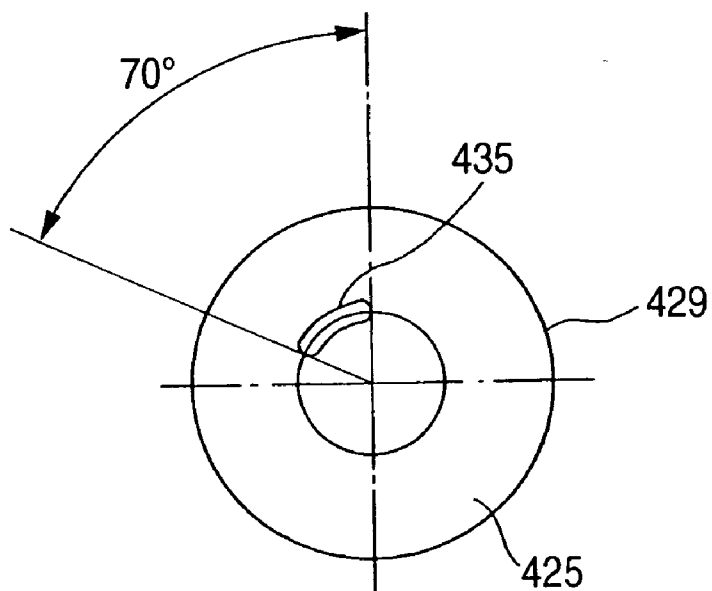


FIG. 49

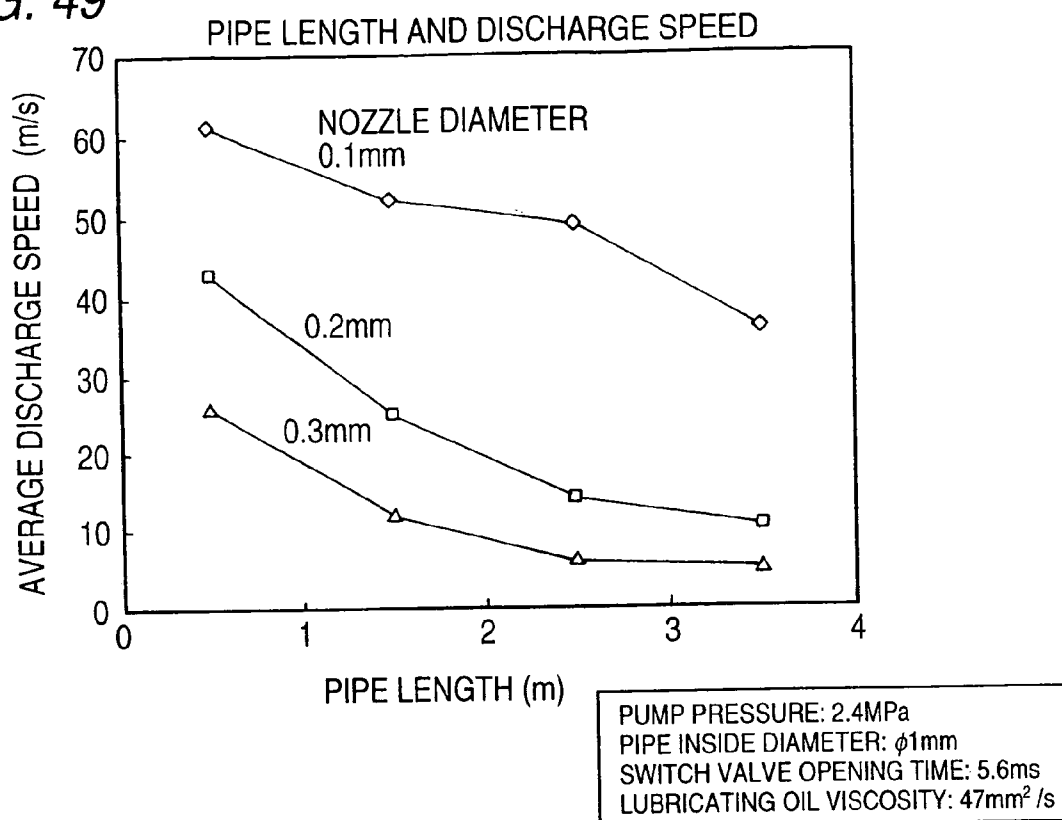


FIG. 50


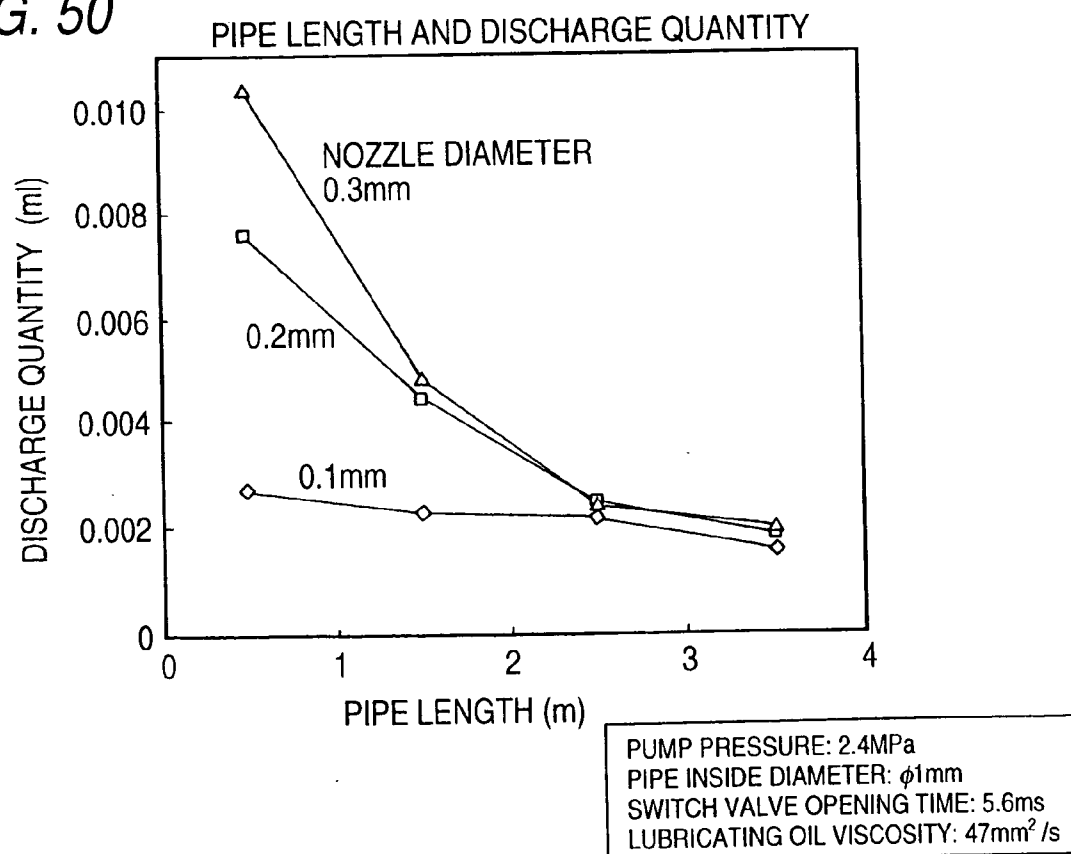


FIG. 51


RELATIONSHIP BETWEEN VISCOSITY AND DISCHARGE SPEED

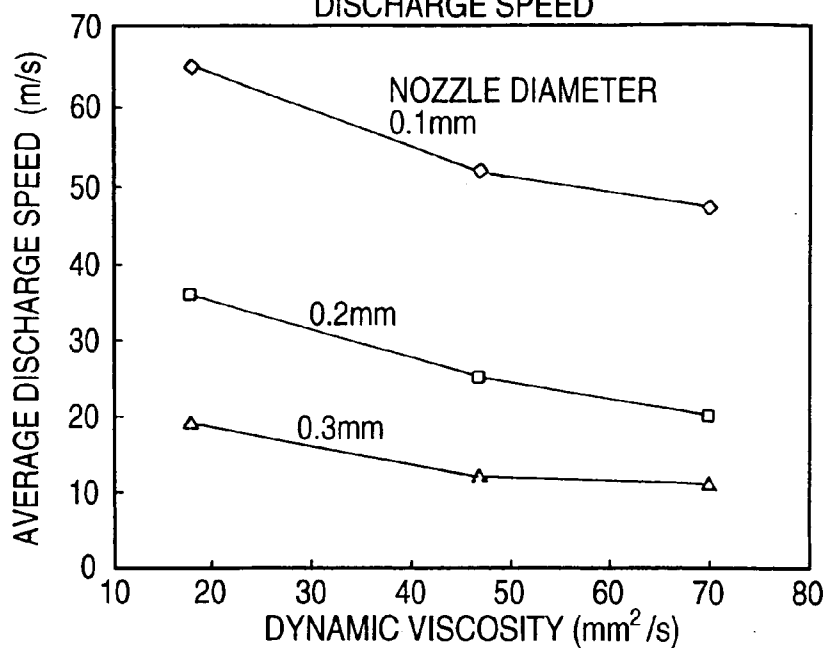

PUMP PRESSURE: 2.4MPa
PIPE INSIDE DIAMETER: $\phi 1\text{mm} \sim 1.5\text{m}$
SWITCH VALVE OPENING TIME: 5.6ms


FIG. 52

RELATIONSHIP BETWEEN VISCOSITY AND DISCHARGE QUANTITY

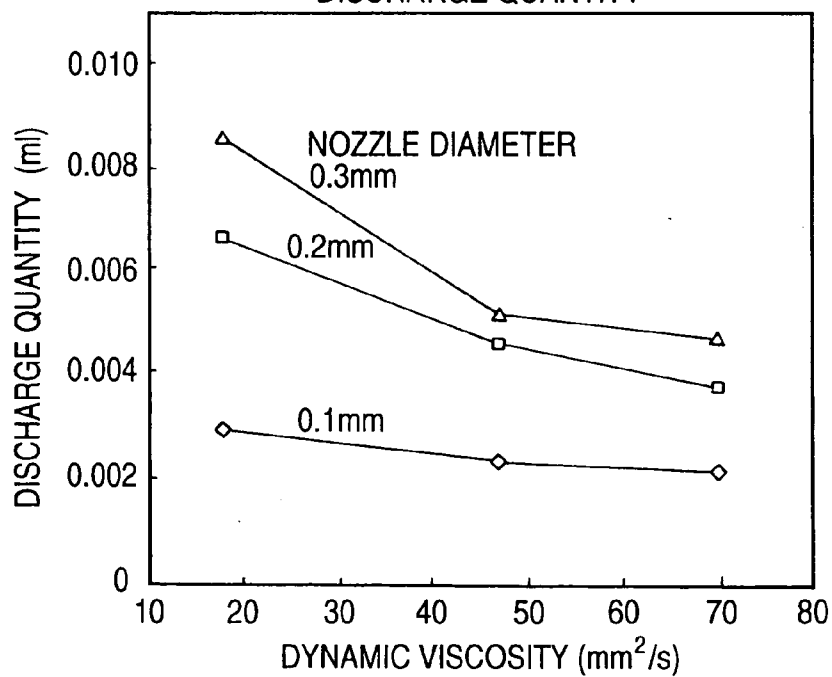


PUMP PRESSURE: 2.4MPa
PIPE INSIDE DIAMETER: $\phi 1\text{mm} \sim 1.5\text{m}$
SWITCH VALVE OPENING TIME: 5.6ms

FIG. 53

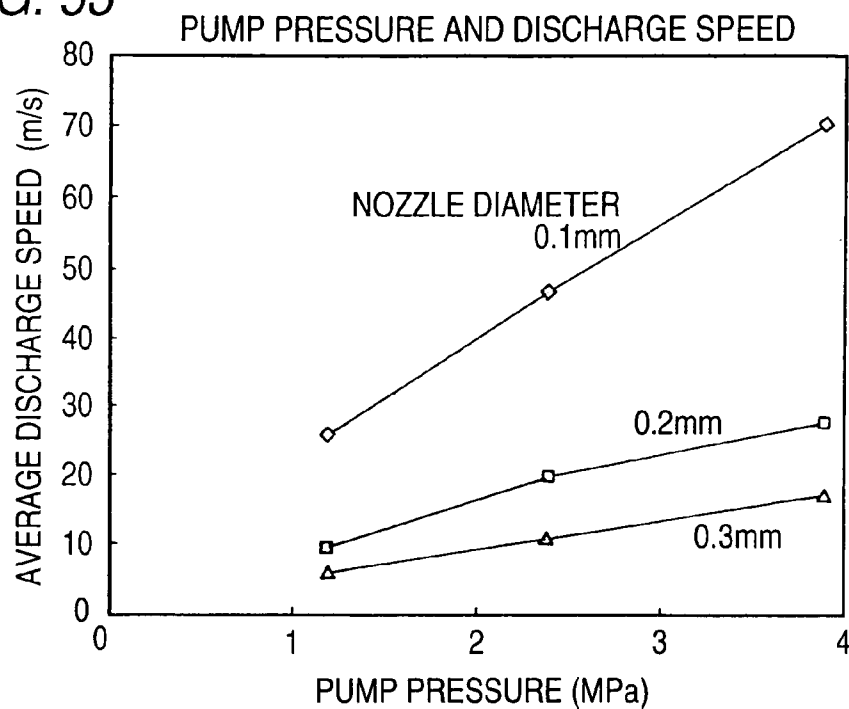

PIPE INSIDE DIAMETER: $\phi 1\text{mm} \sim 1.5\text{m}$
 SWITCH VALVE OPENING TIME: 5.6ms
 LUBRICATING OIL VISCOSITY: $70\text{mm}^2/\text{s}$

FIG. 54

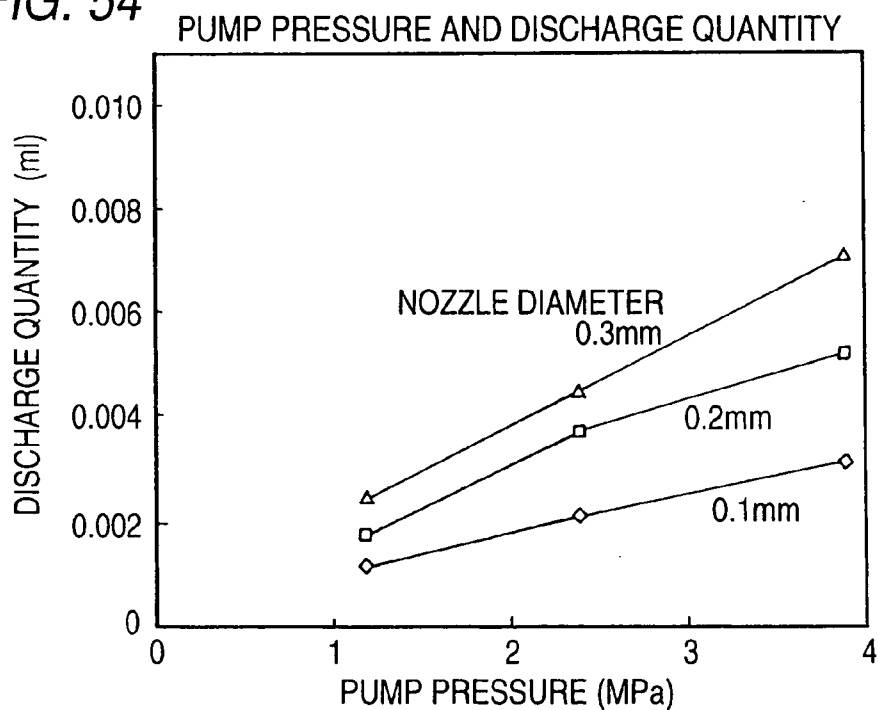

PIPE INSIDE DIAMETER: $\phi 1\text{mm} \sim 1.5\text{m}$
 SWITCH VALVE OPENING TIME: 5.6ms
 LUBRICATING OIL VISCOSITY: $70\text{mm}^2/\text{s}$

FIG. 55

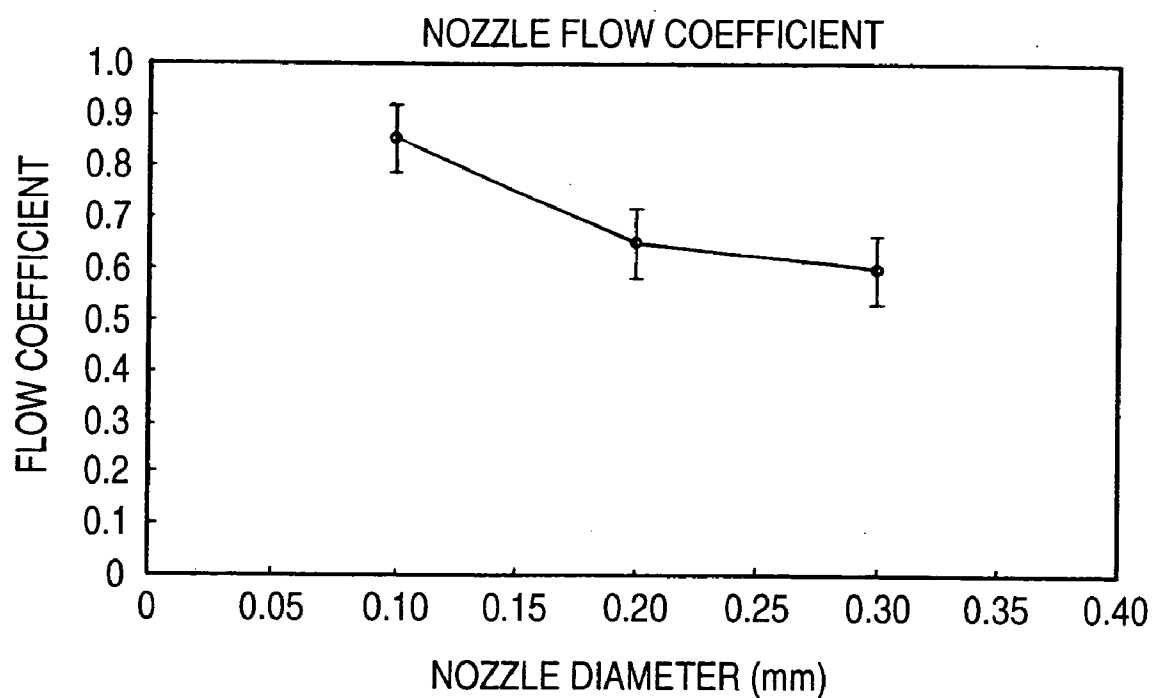


FIG. 56

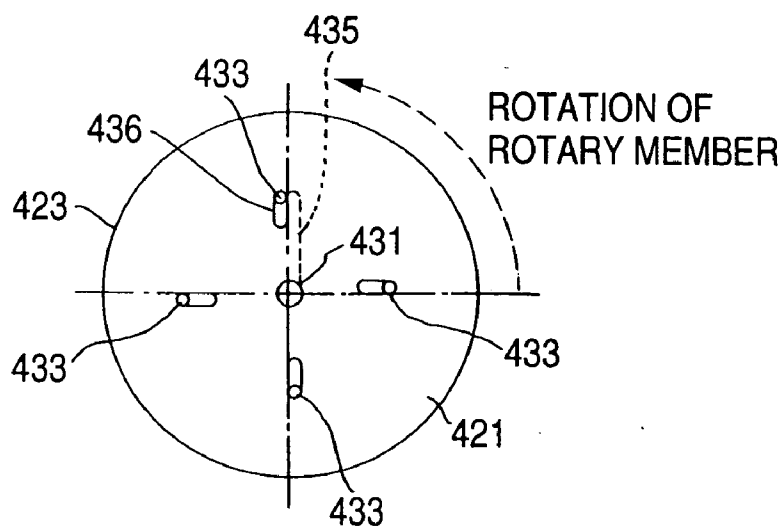


FIG. 57

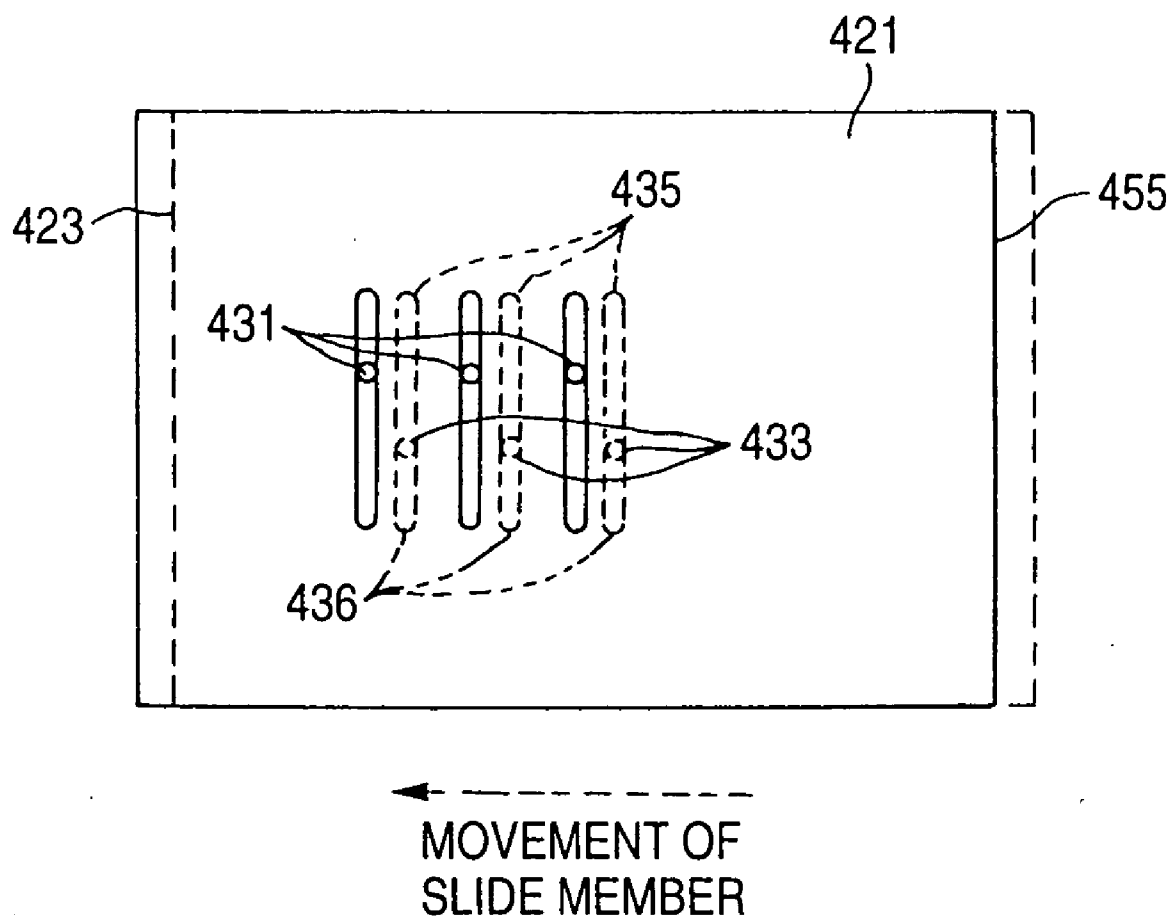


FIG. 59A

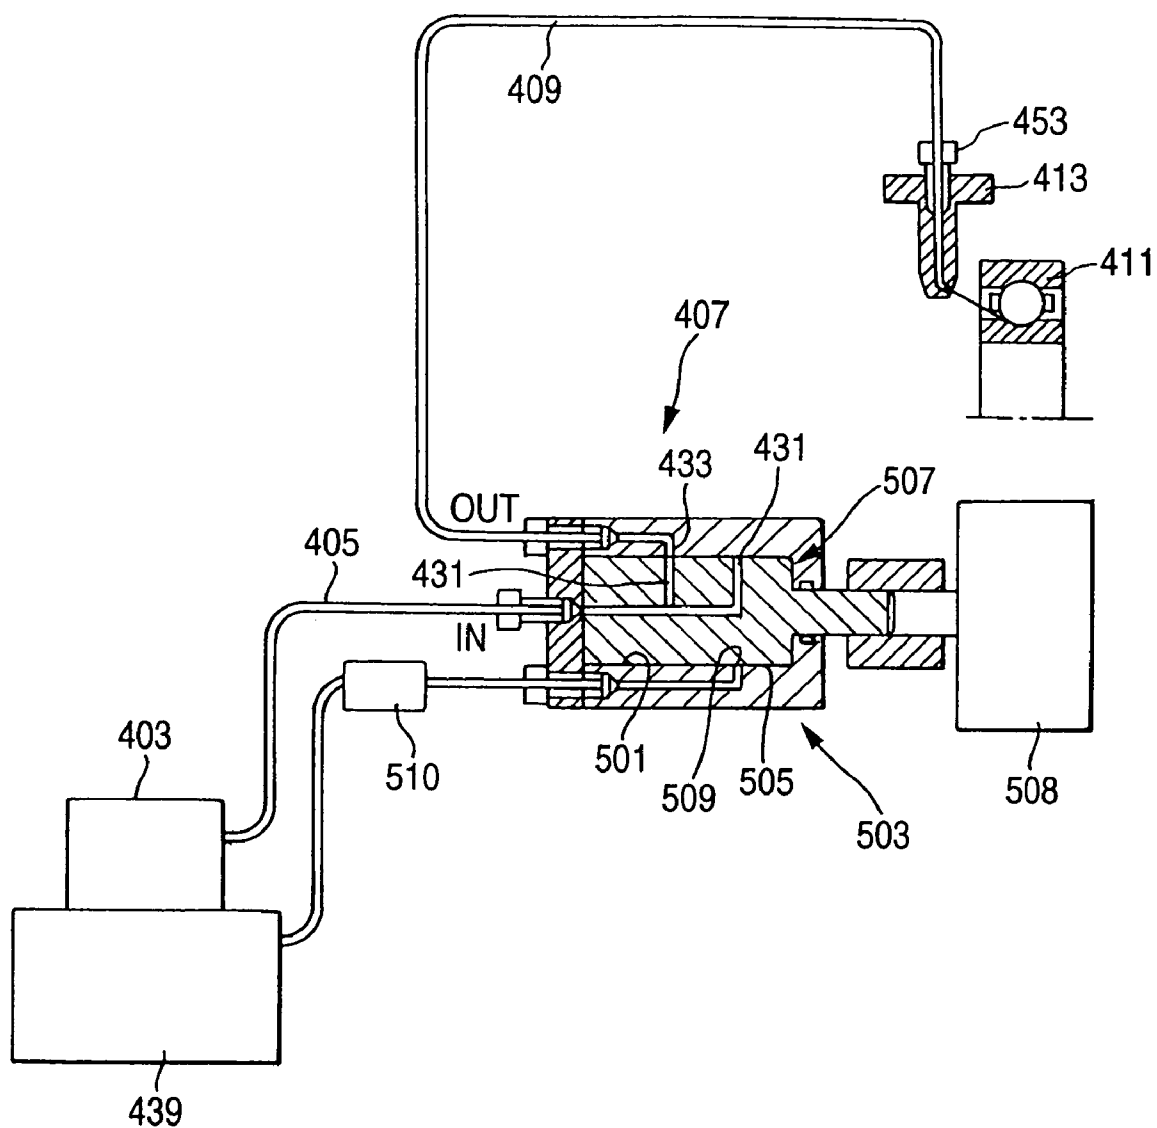


FIG. 59B

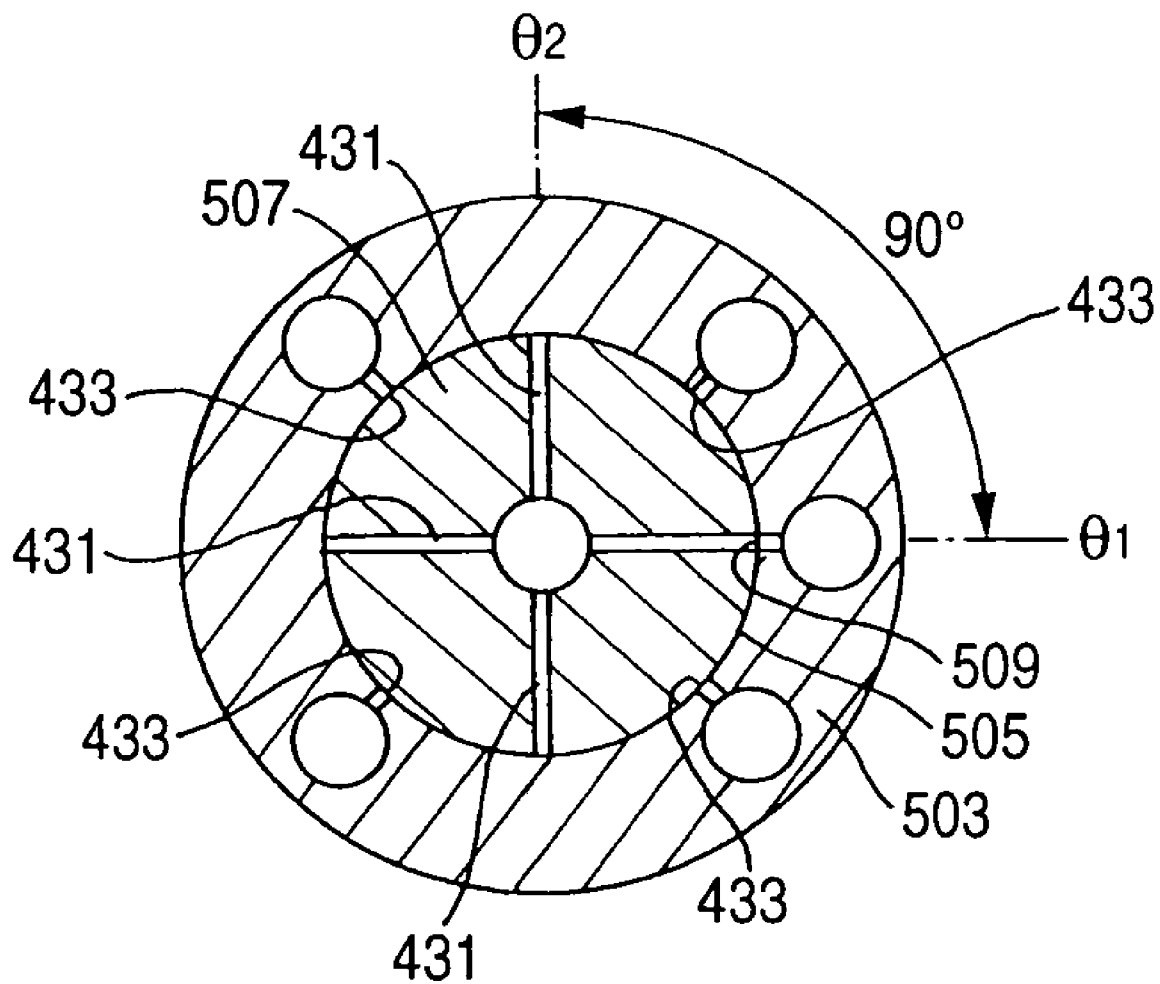


FIG. 60B

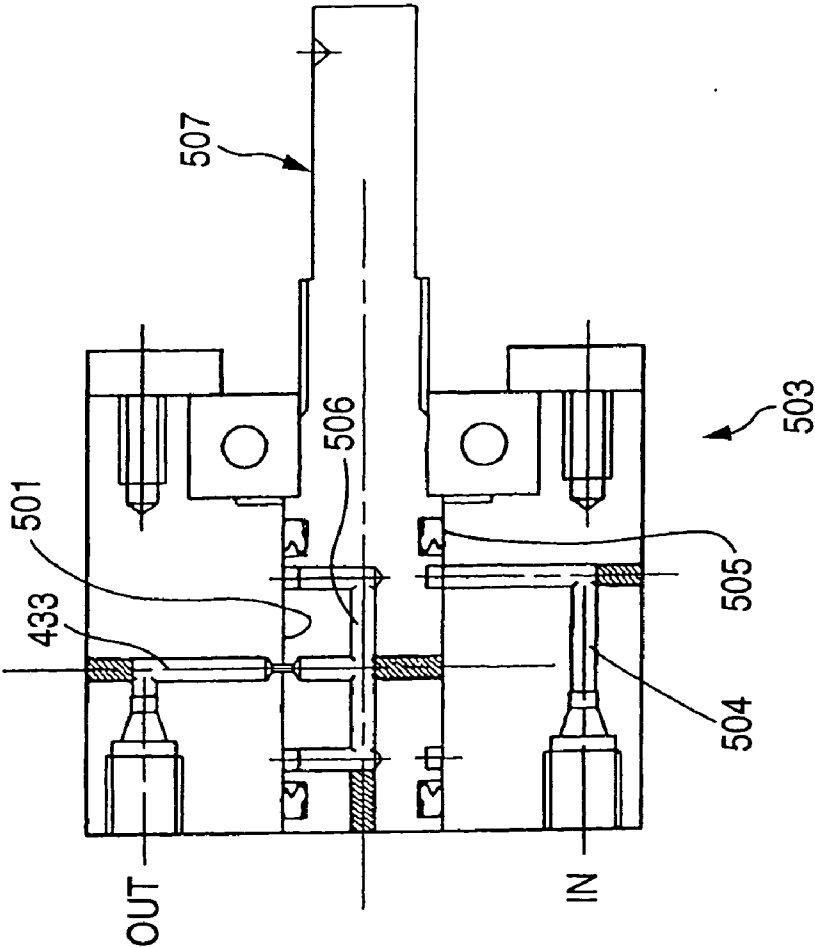


FIG. 60A

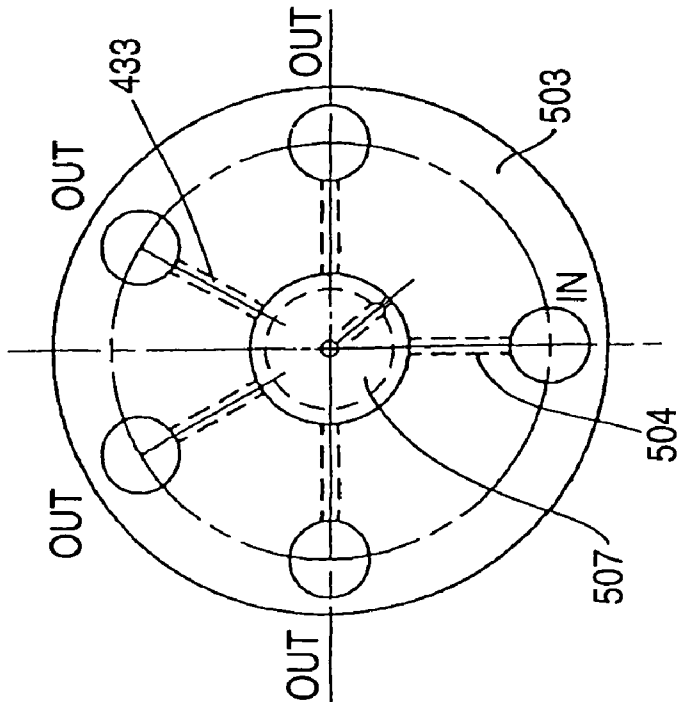


FIG. 61

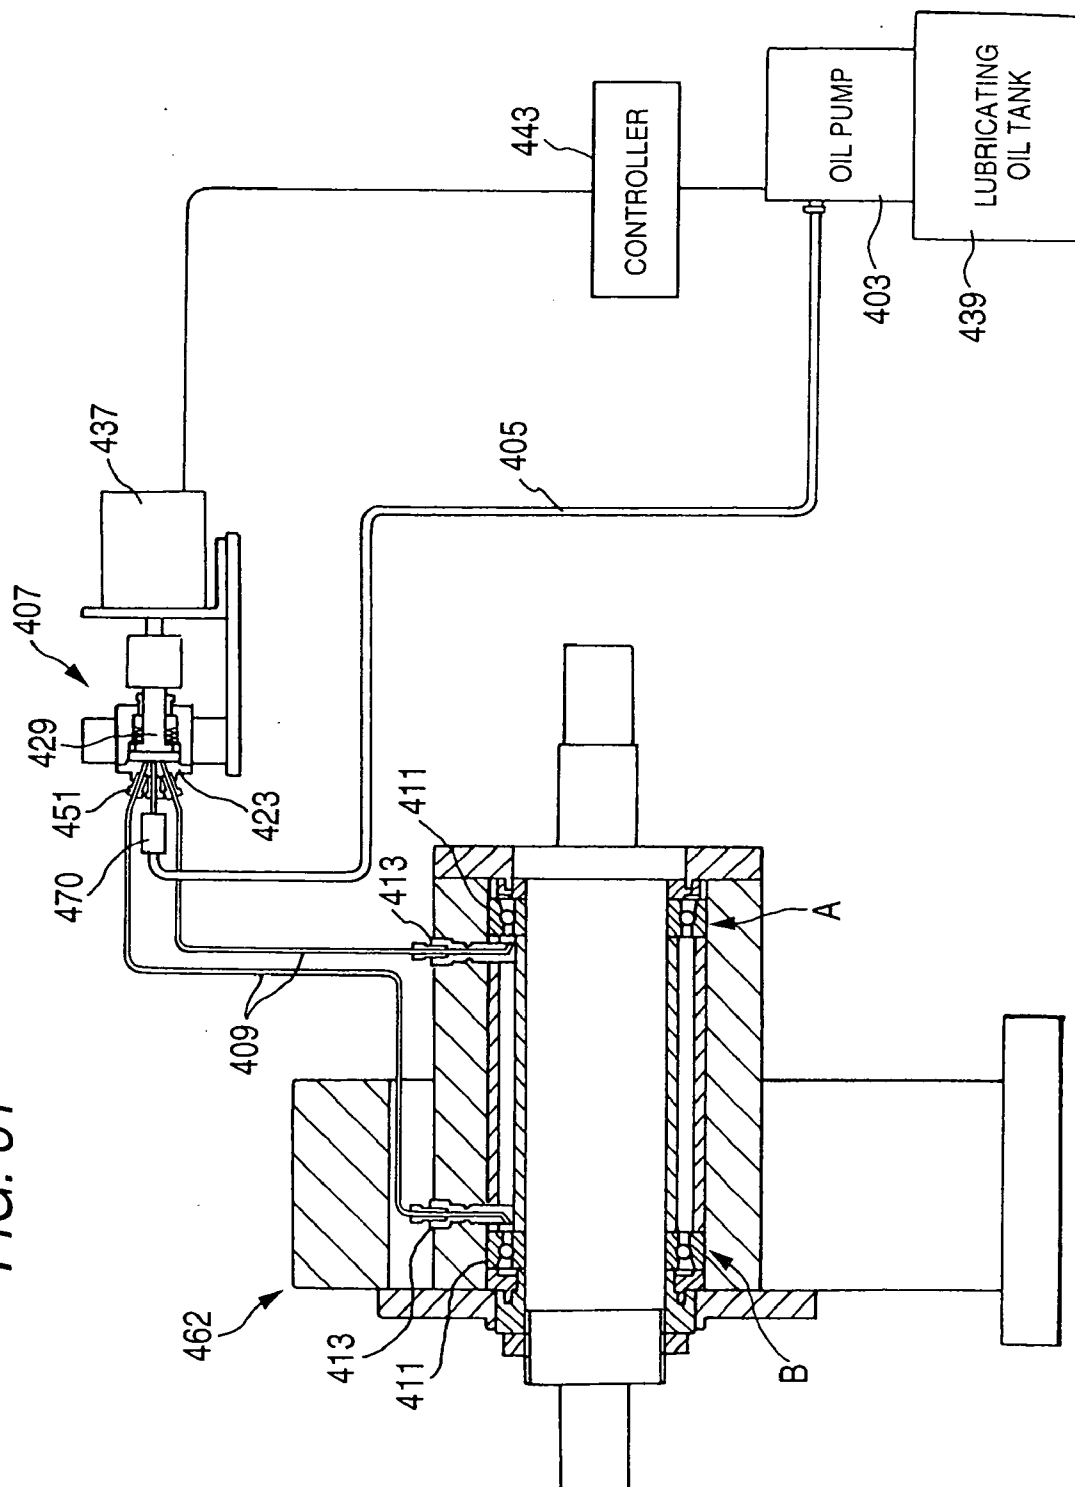


FIG. 62A

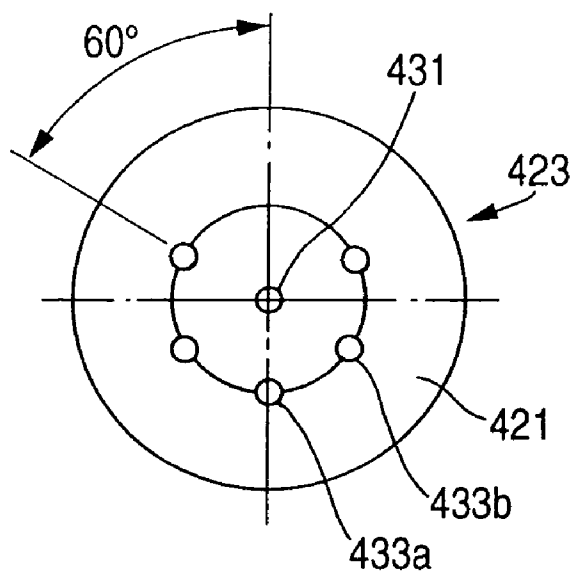


FIG. 62B

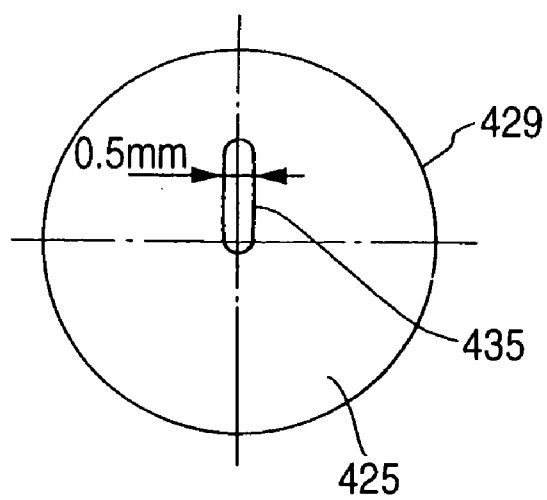


FIG. 63

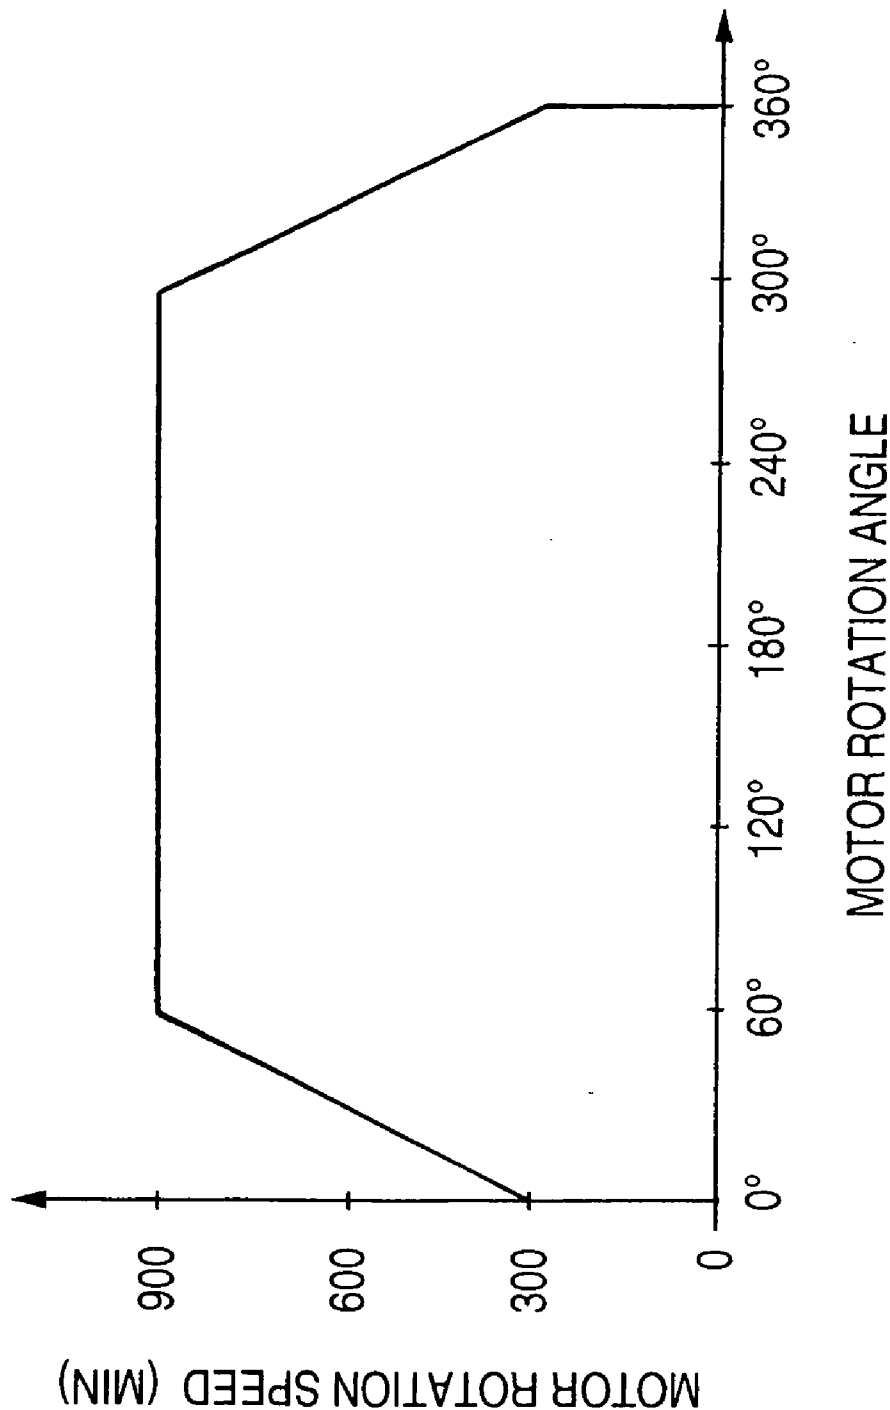


FIG. 64A

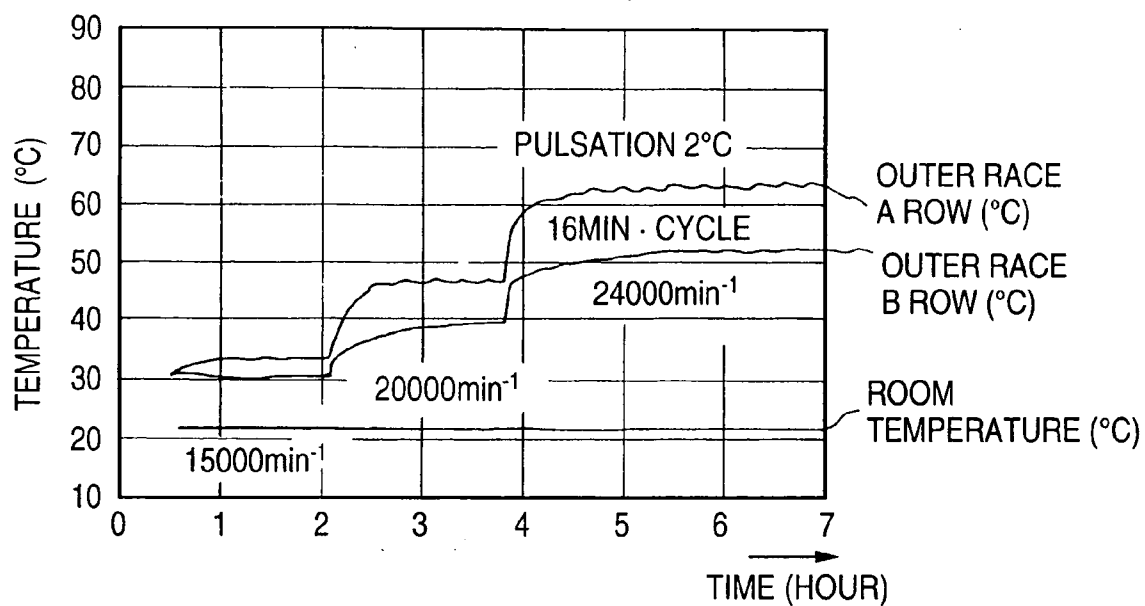


FIG. 64B

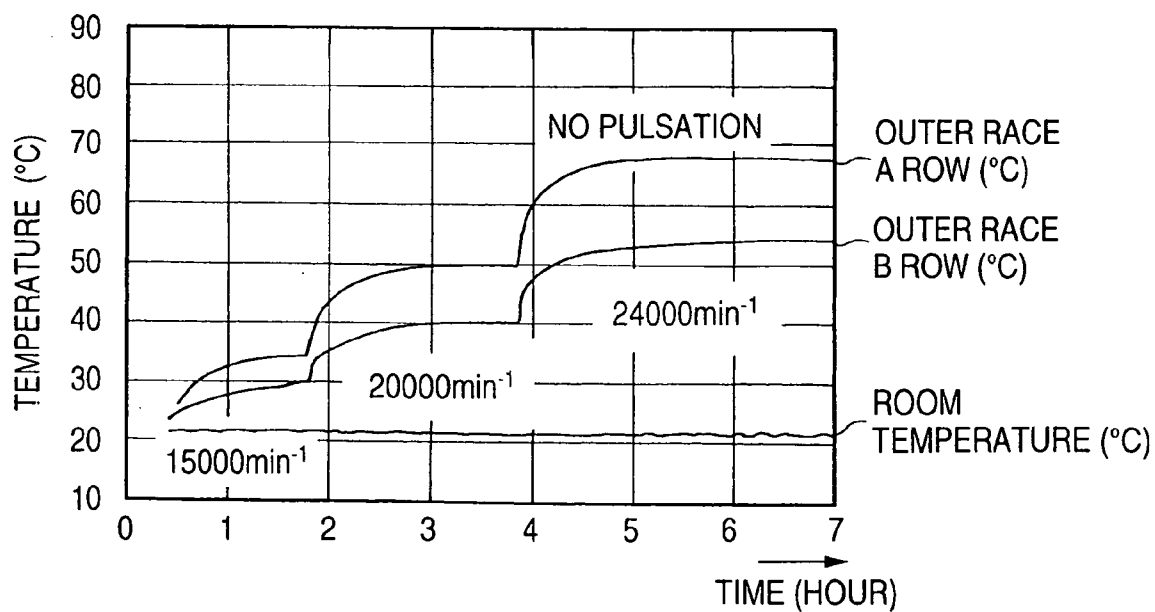


FIG. 65

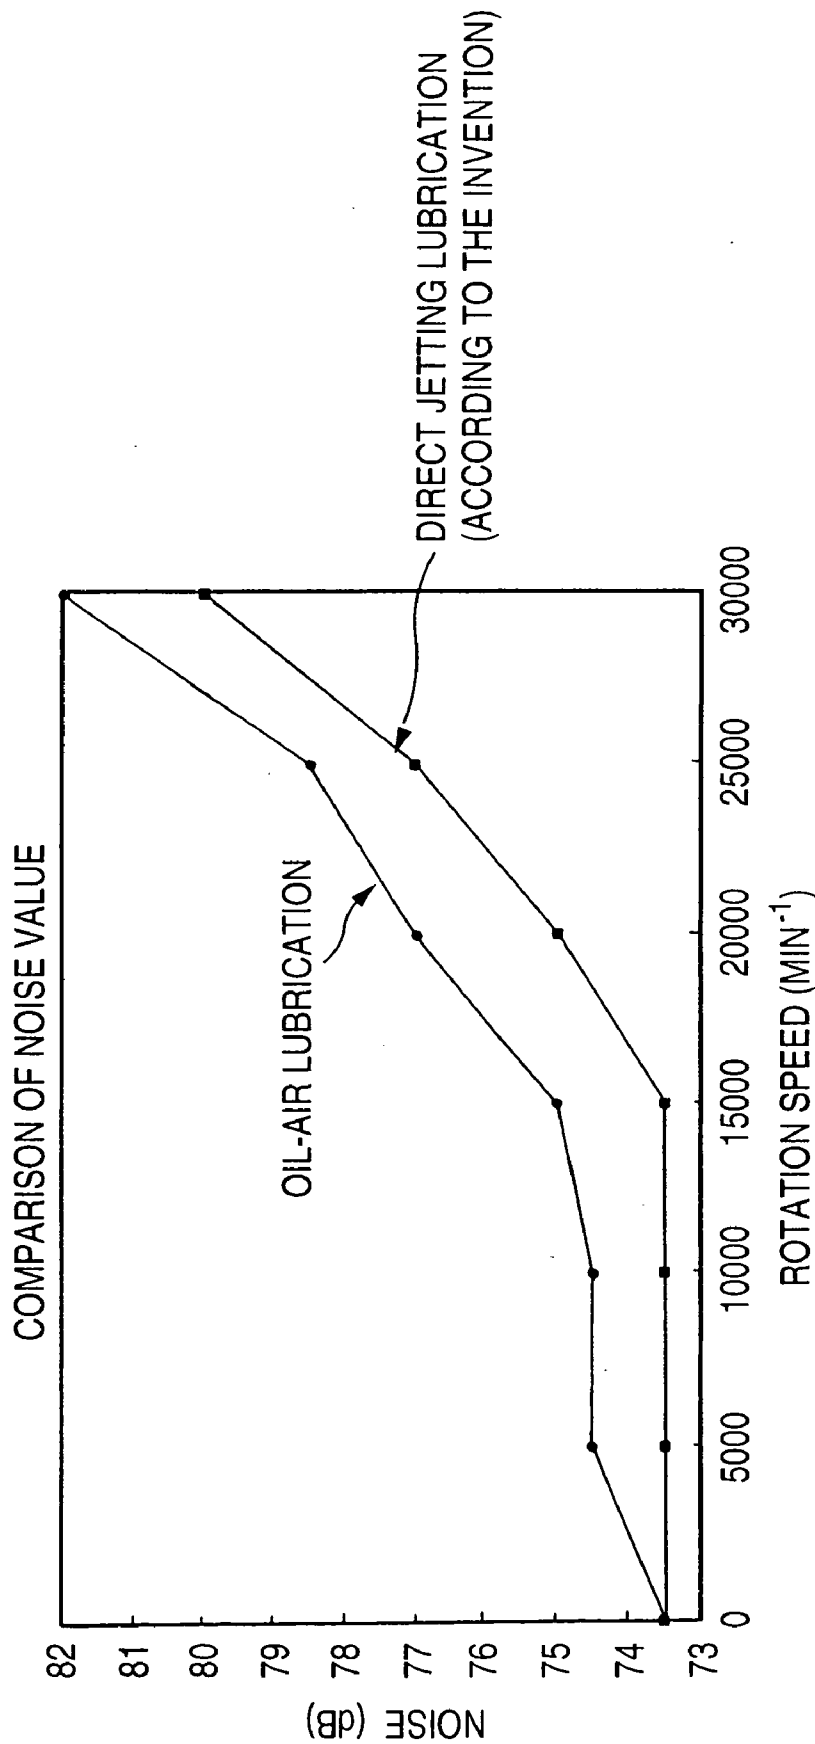


FIG. 66

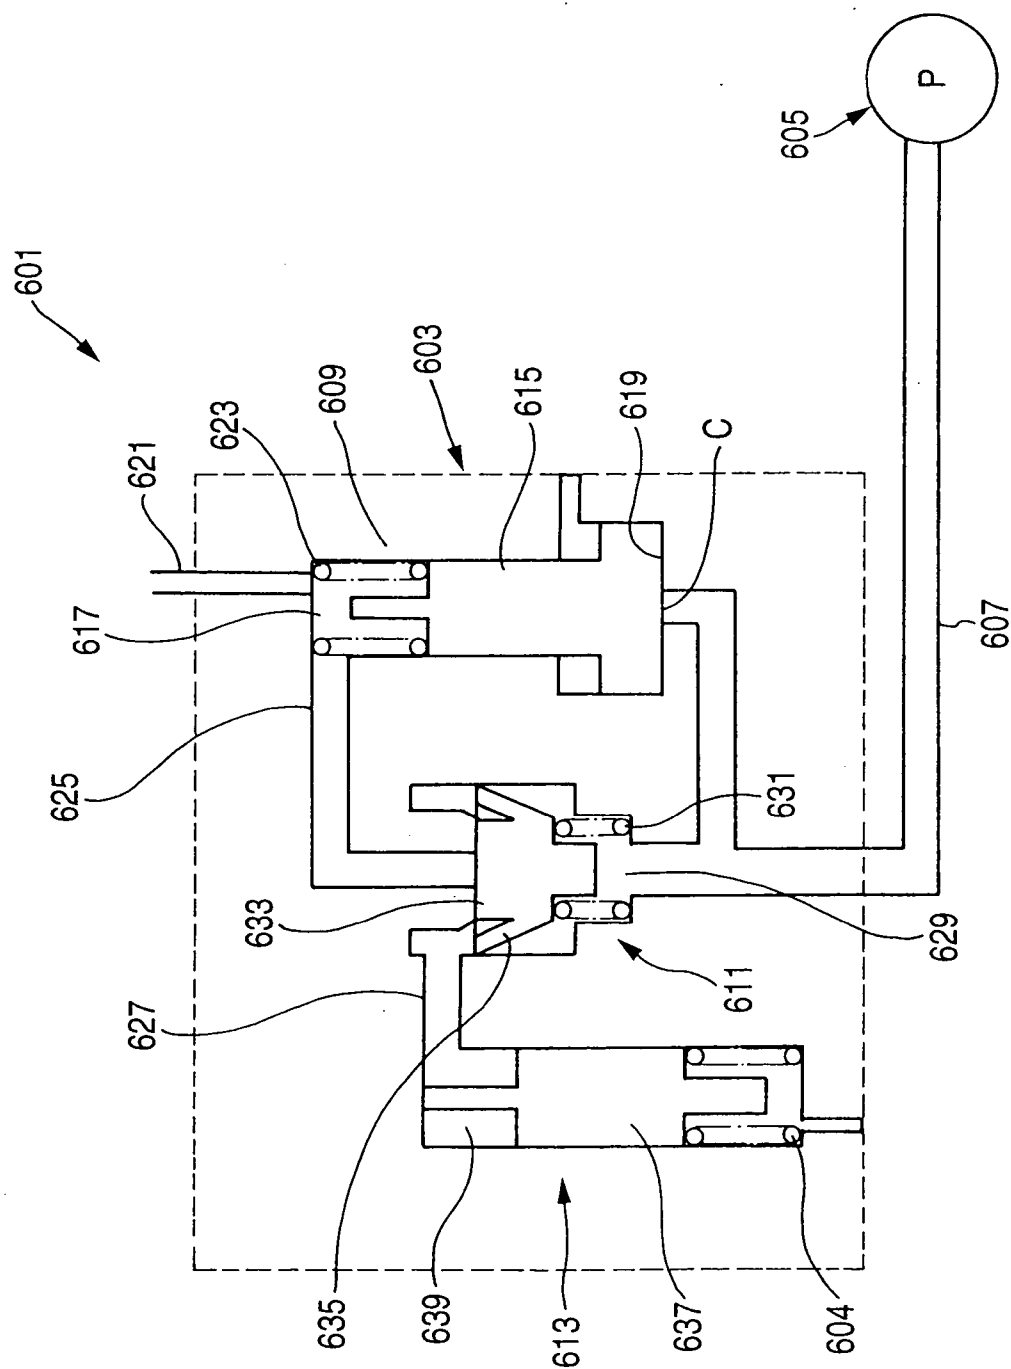


FIG. 67

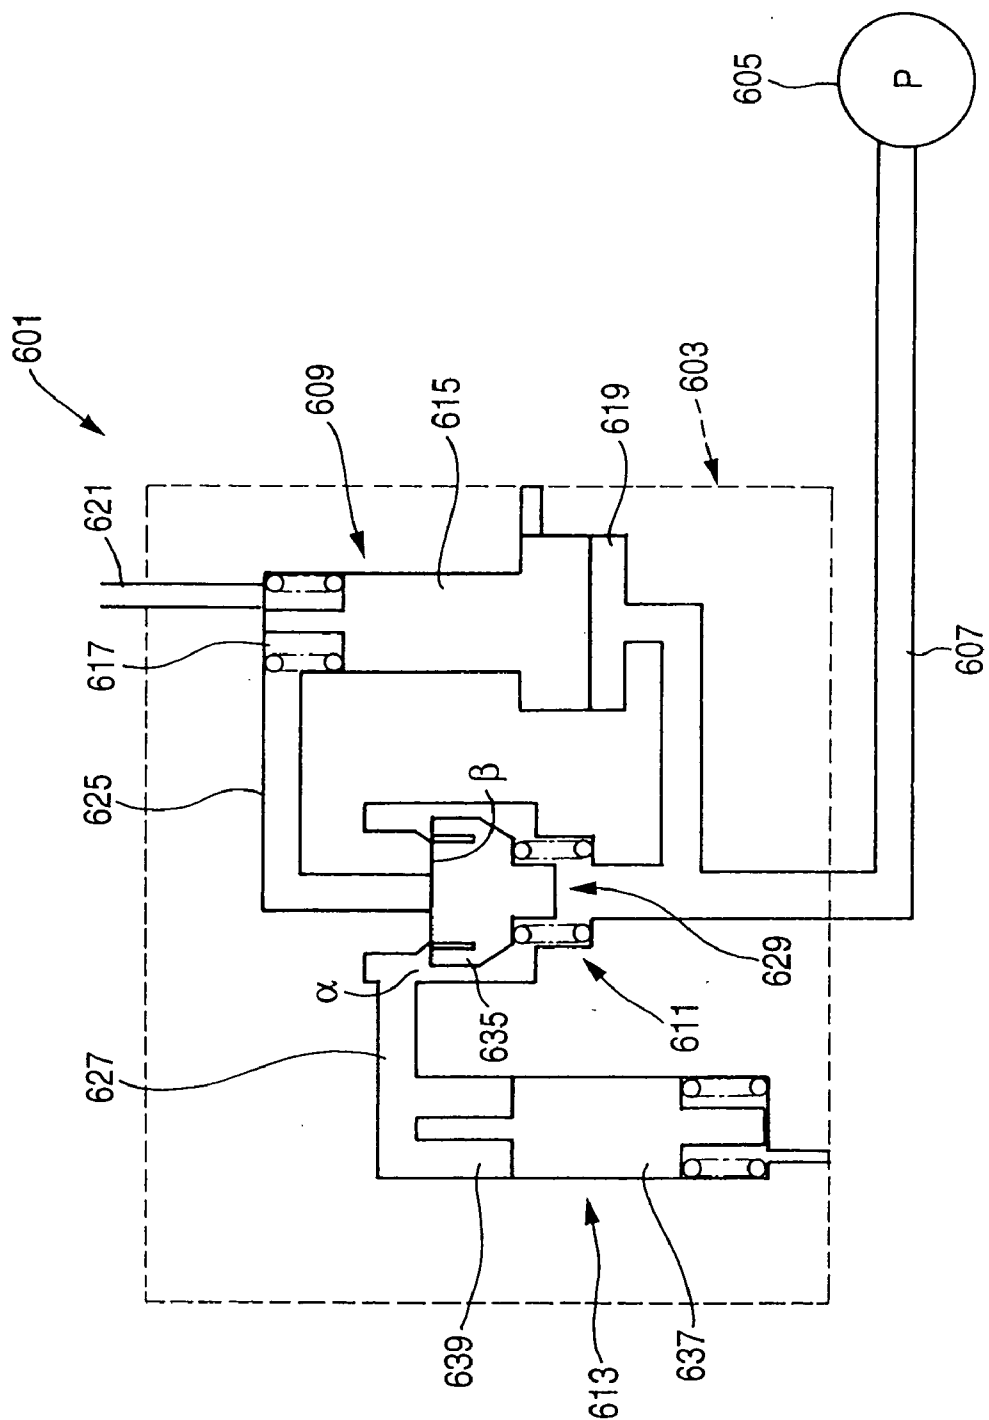


FIG. 68

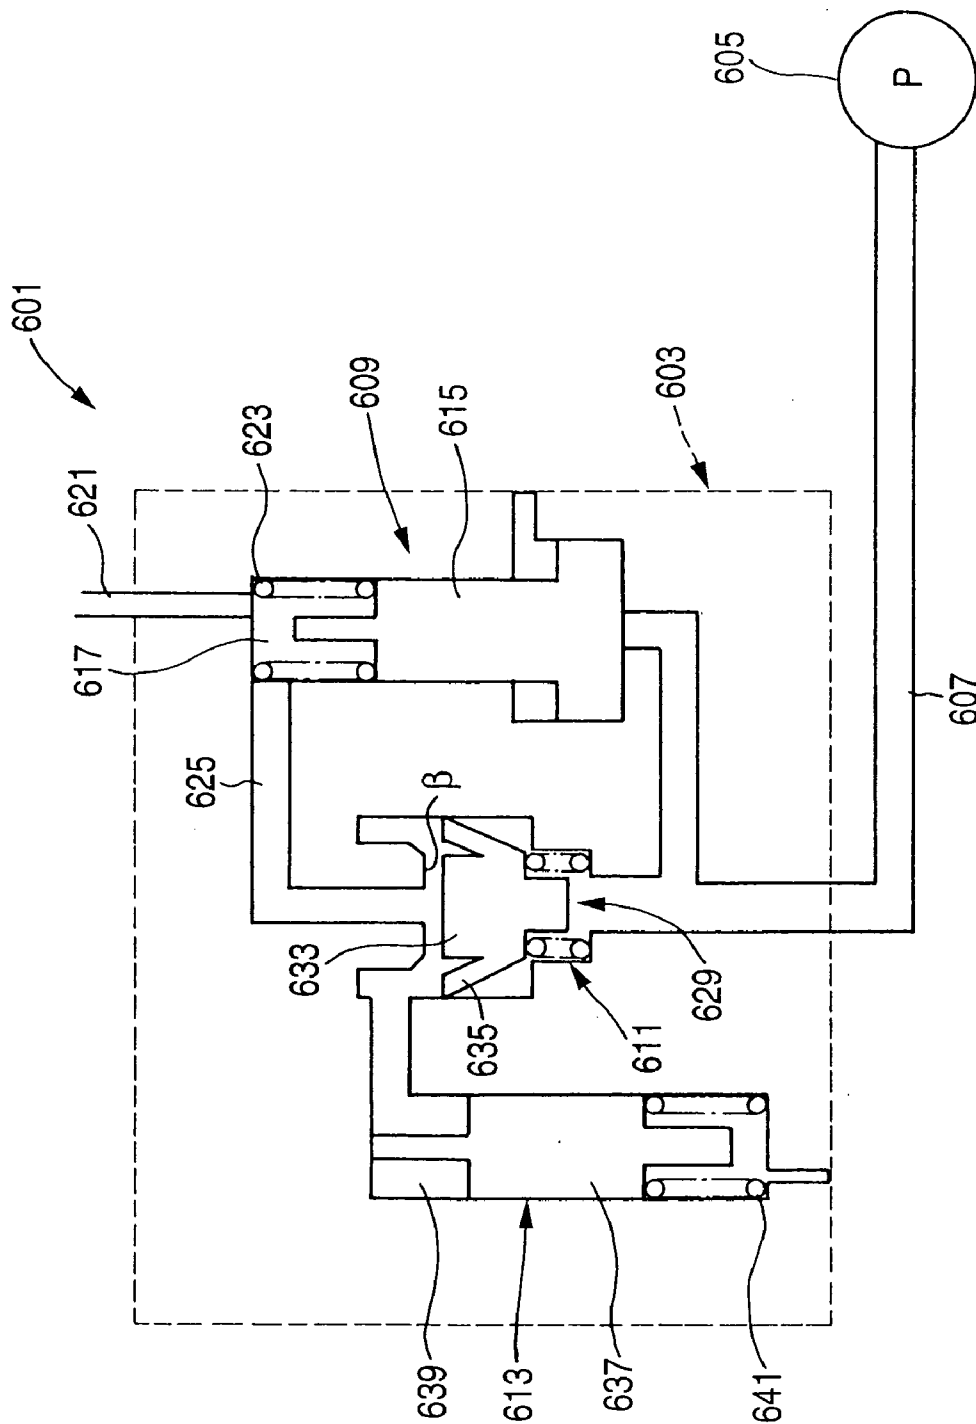


FIG. 69

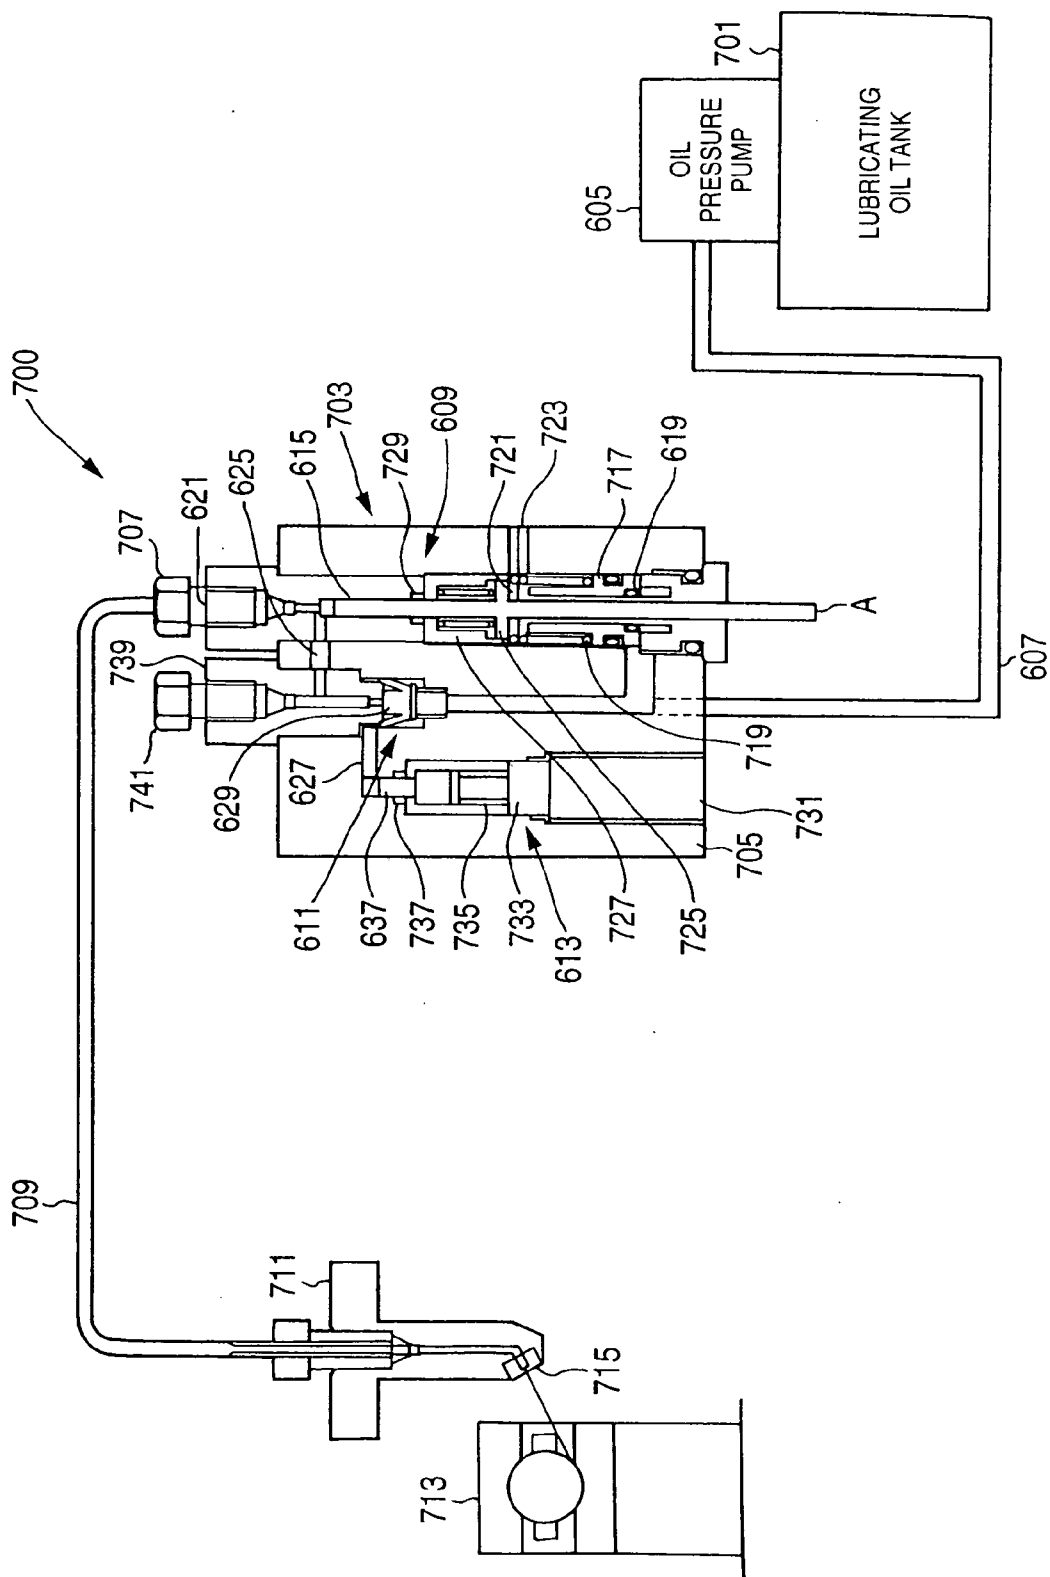


FIG. 70A

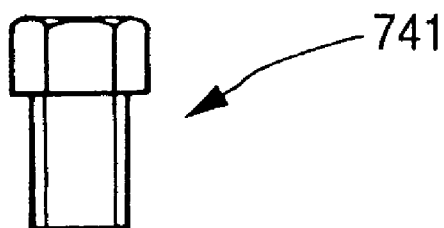


FIG. 70B

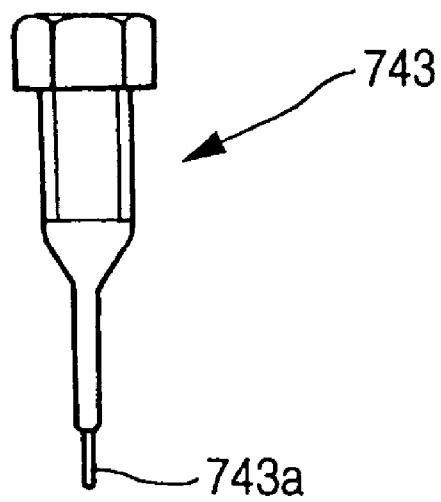


FIG. 71

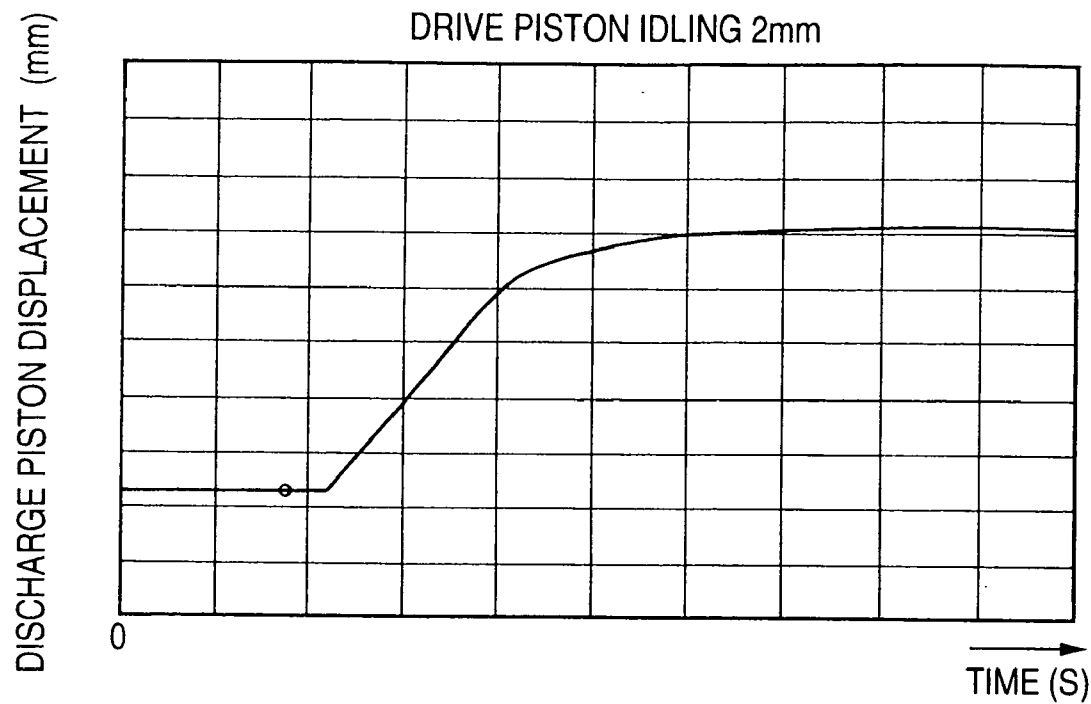


FIG. 72

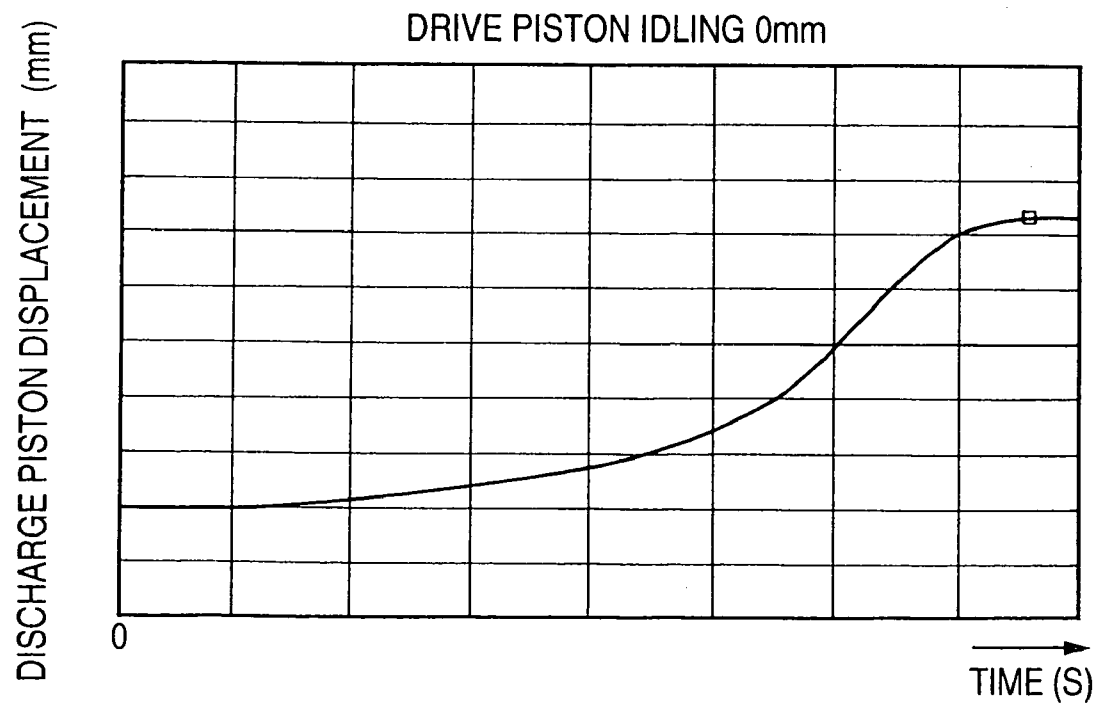


FIG. 73

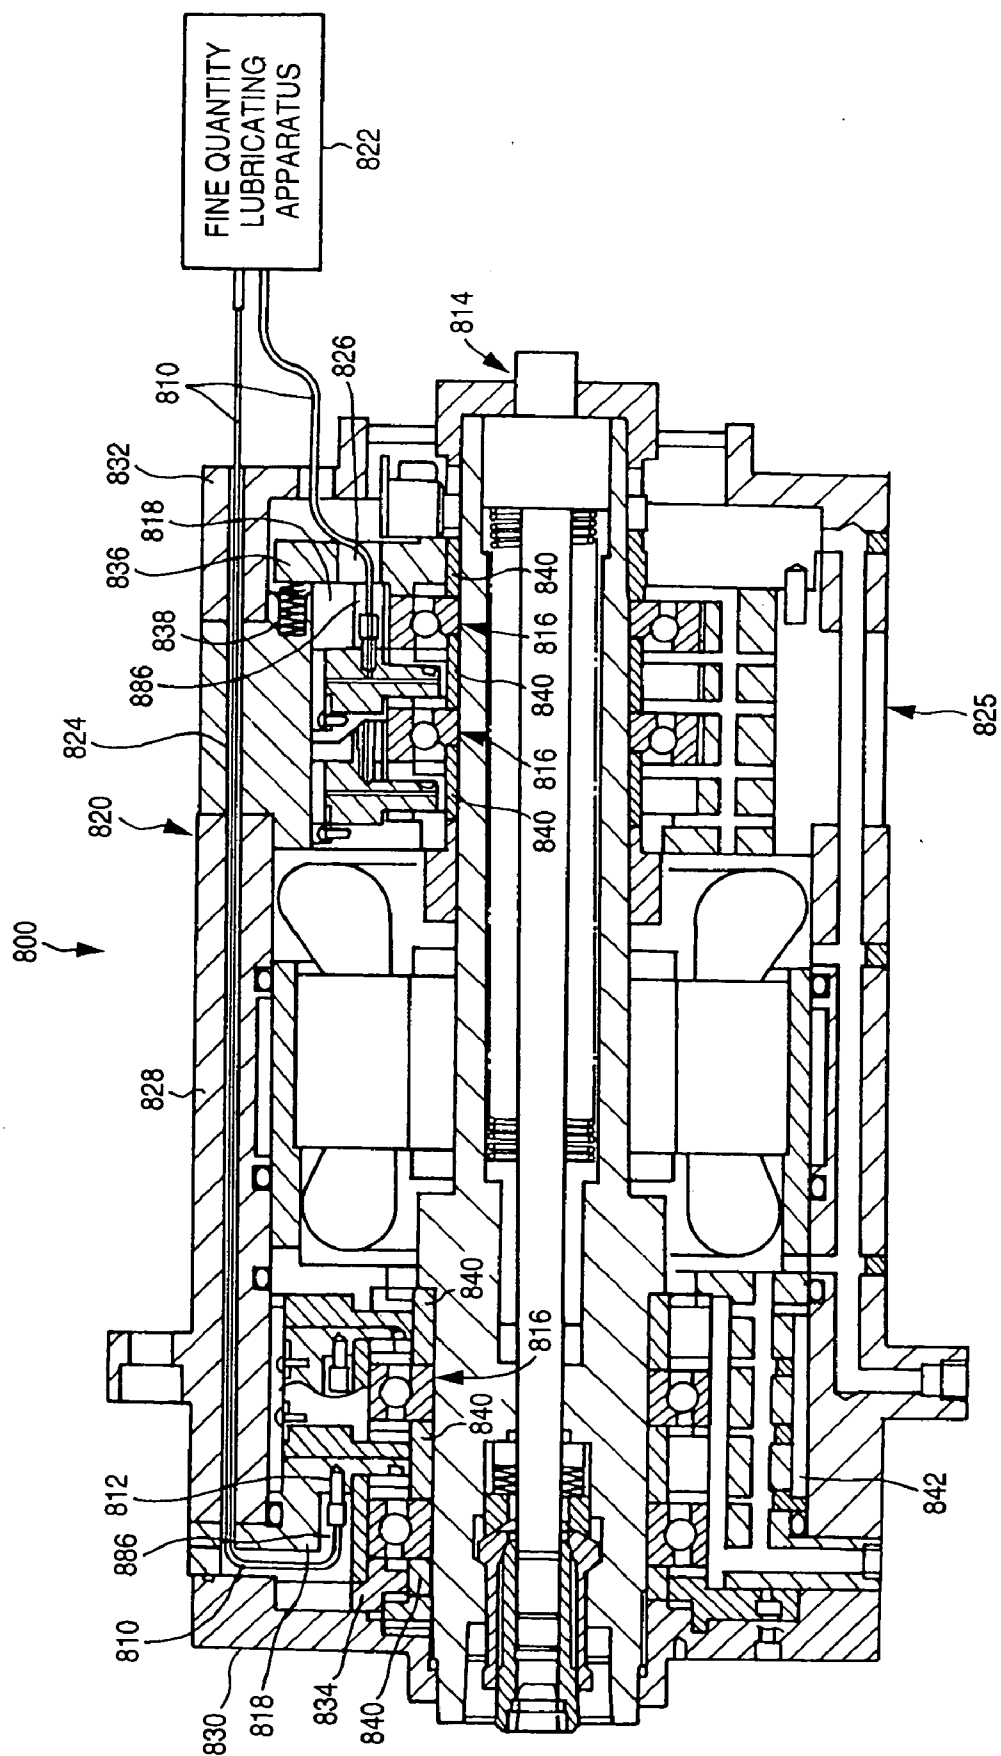


FIG. 74

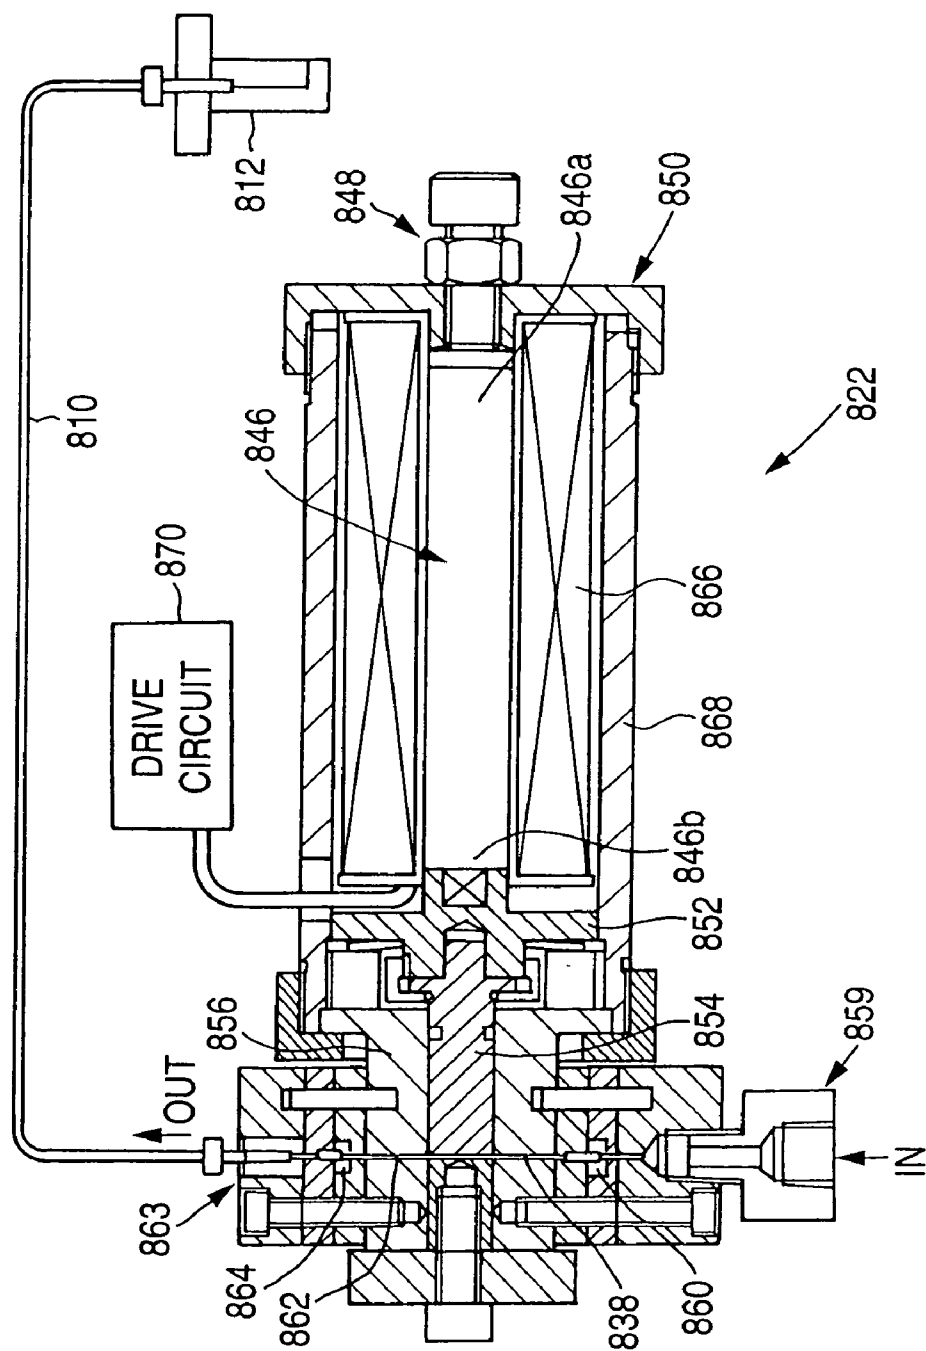


FIG. 75

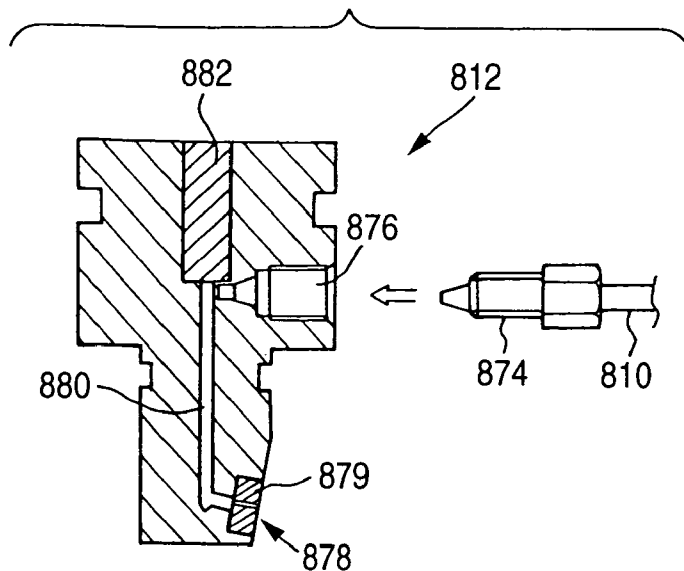


FIG. 76A




FIG. 76B




FIG. 77

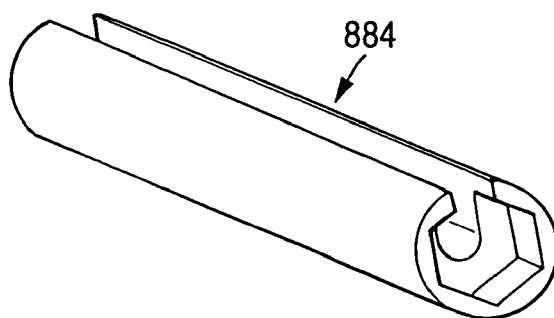


FIG. 78

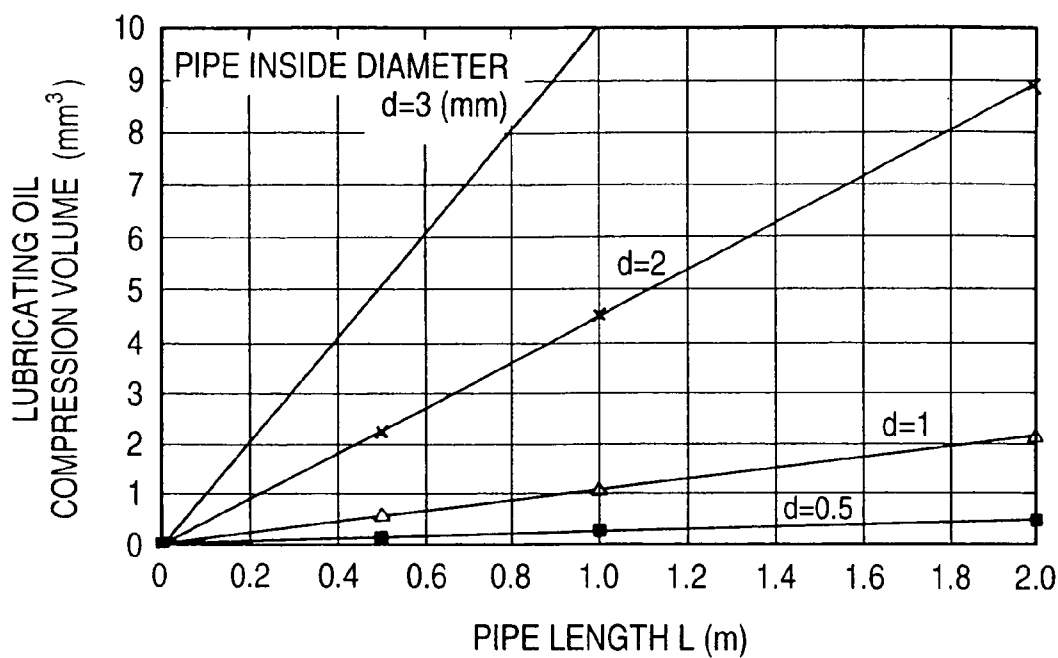


FIG. 79

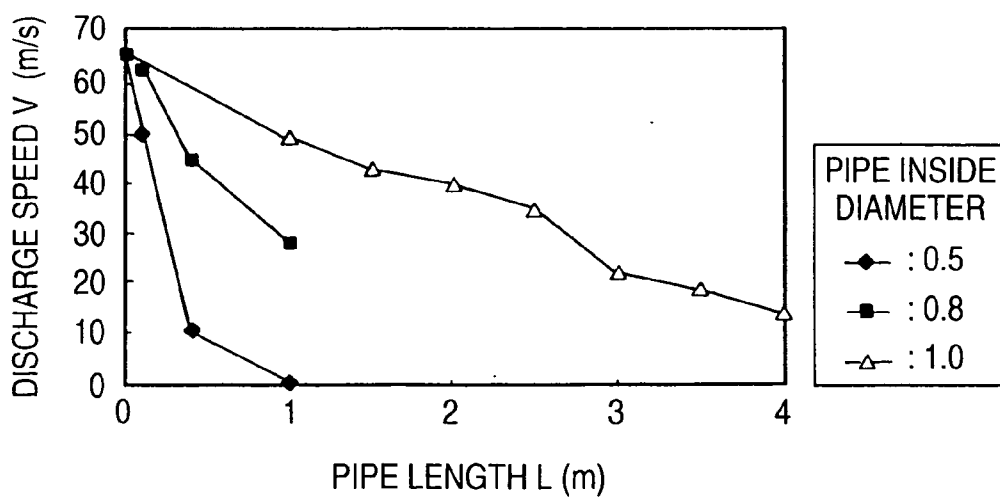


FIG. 80


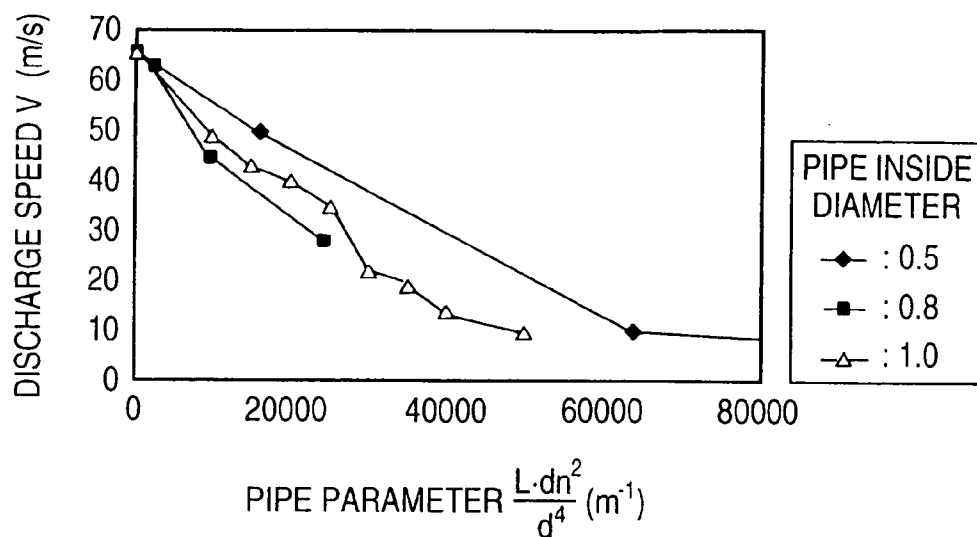


FIG. 81

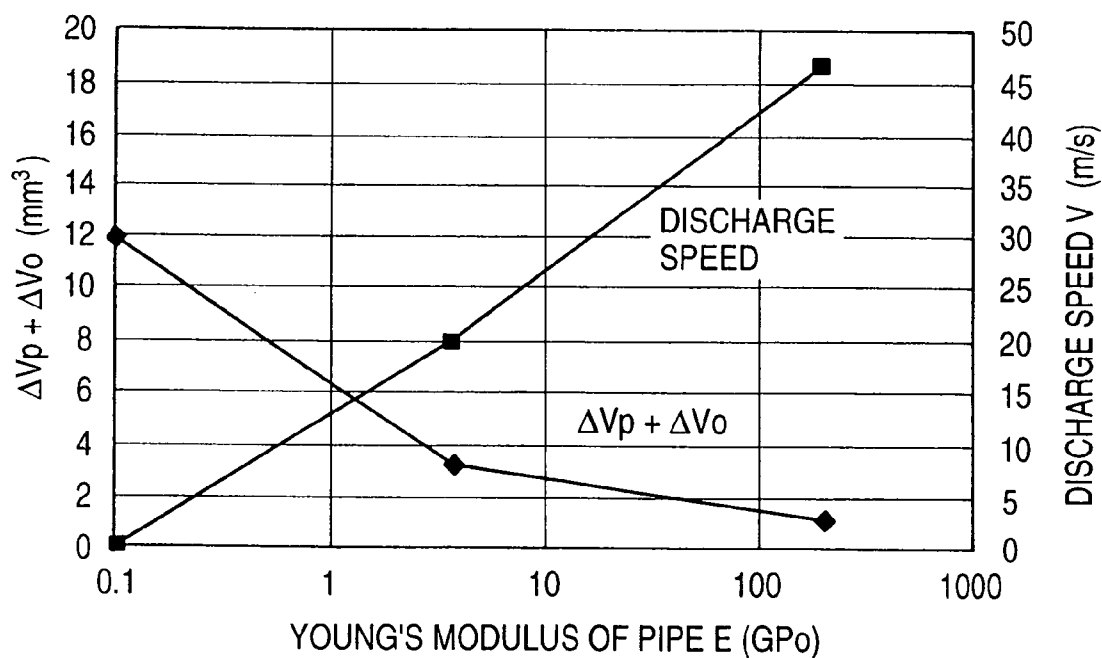

PIPE DIAMETER
 OUTSIDE DIAMETER: $\phi 1.6$ mm
 INSIDE DIAMETER: $\phi 1.0$ mm
 PIPE LENGTH: 1m
 NOZZLE DIAMETER: $\phi 0.1$ mm
 LUBRICATING OIL: VG22
 DISCHARGE QUANTITY: APPROX. 3mm³

FIG. 82

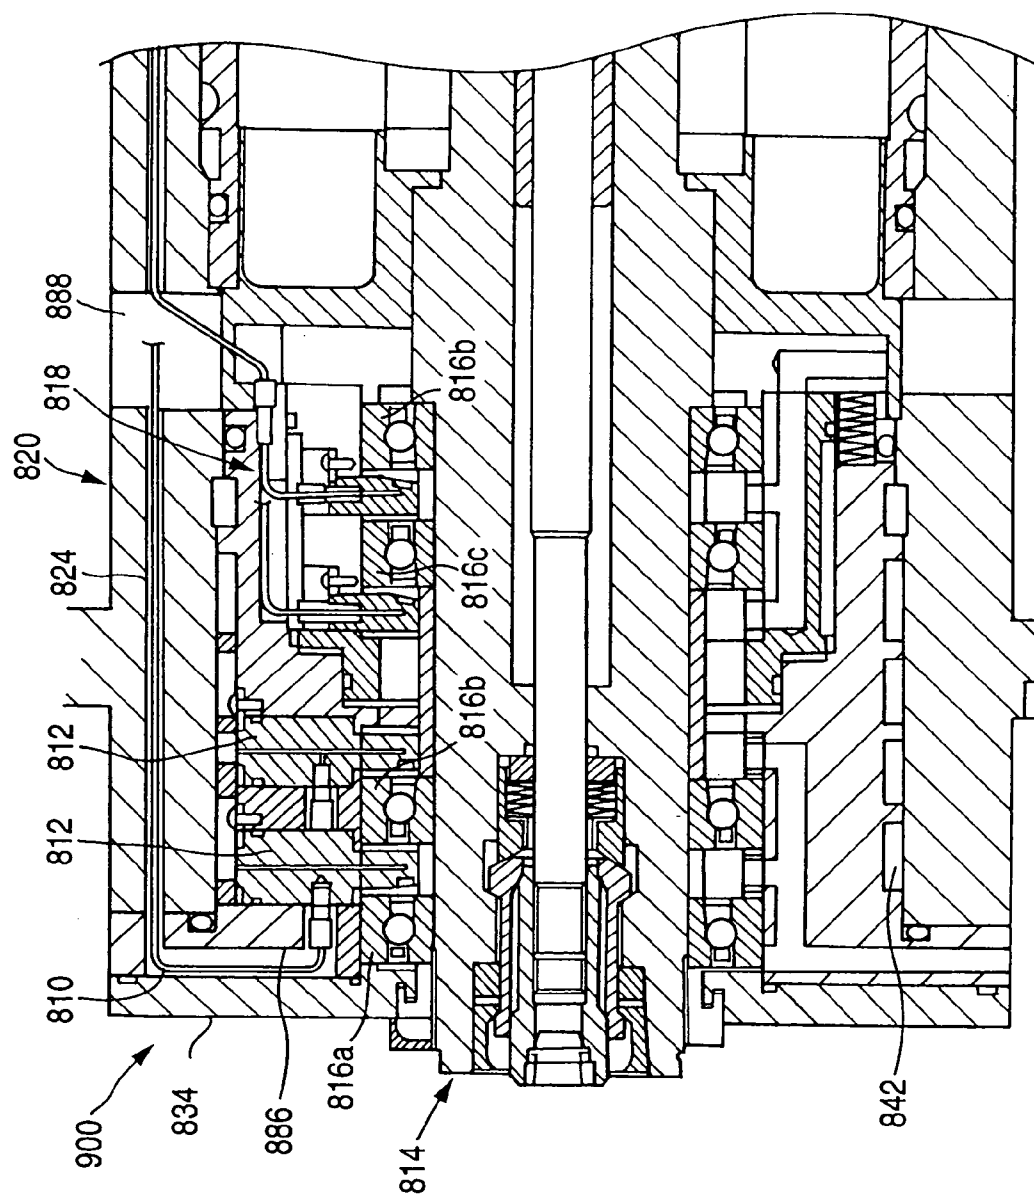


FIG. 83

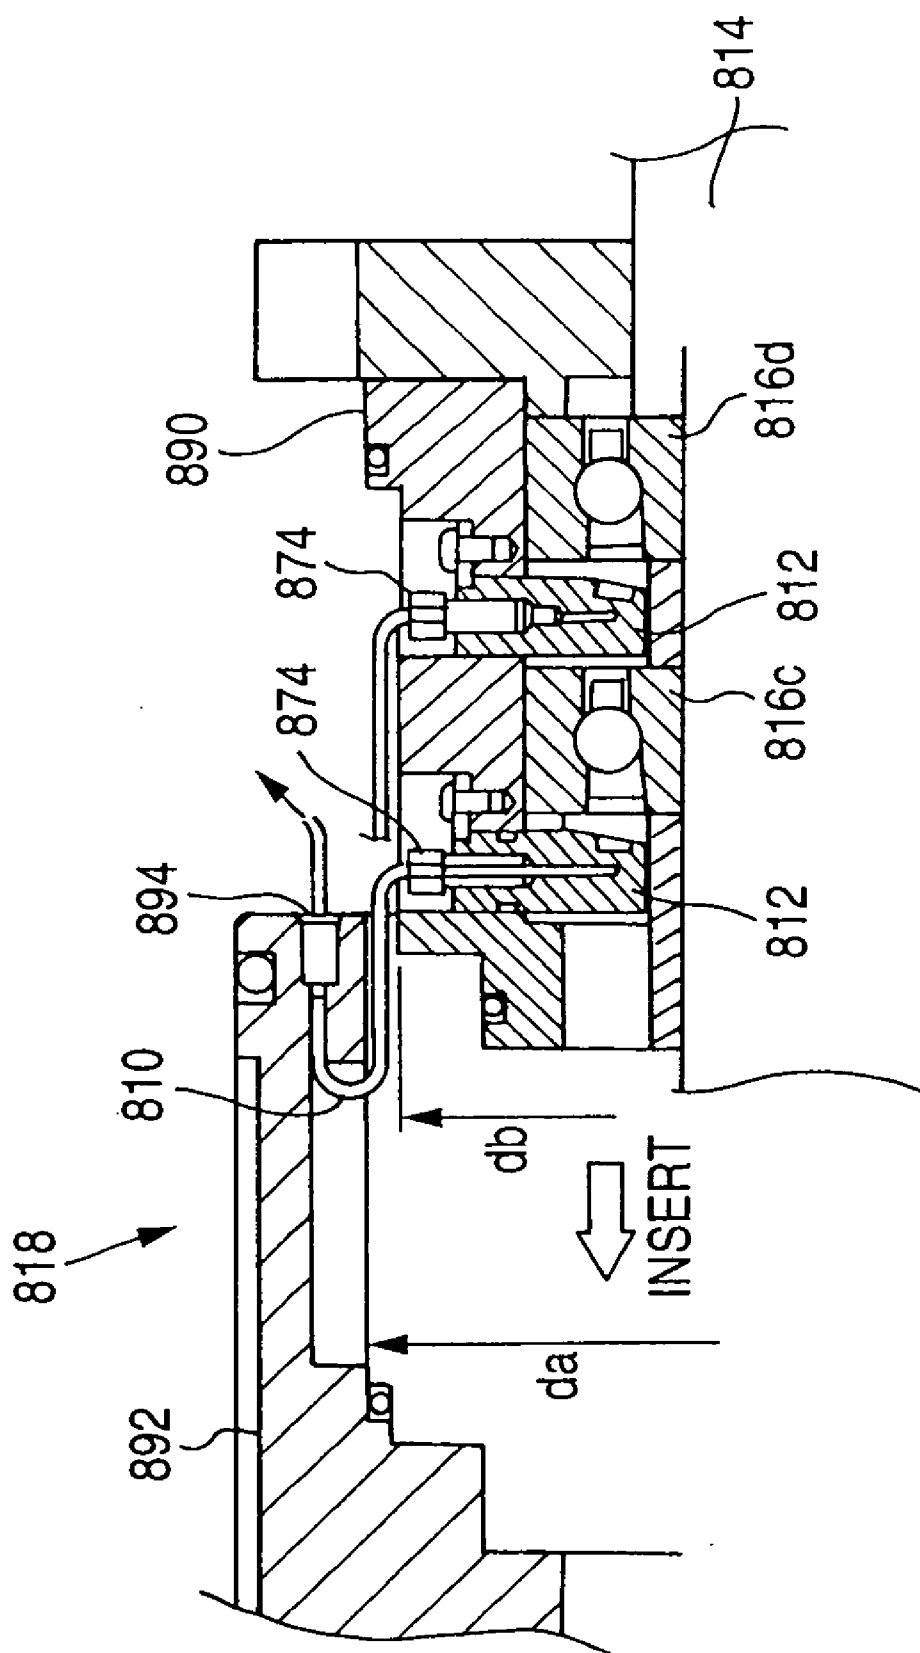


FIG. 84

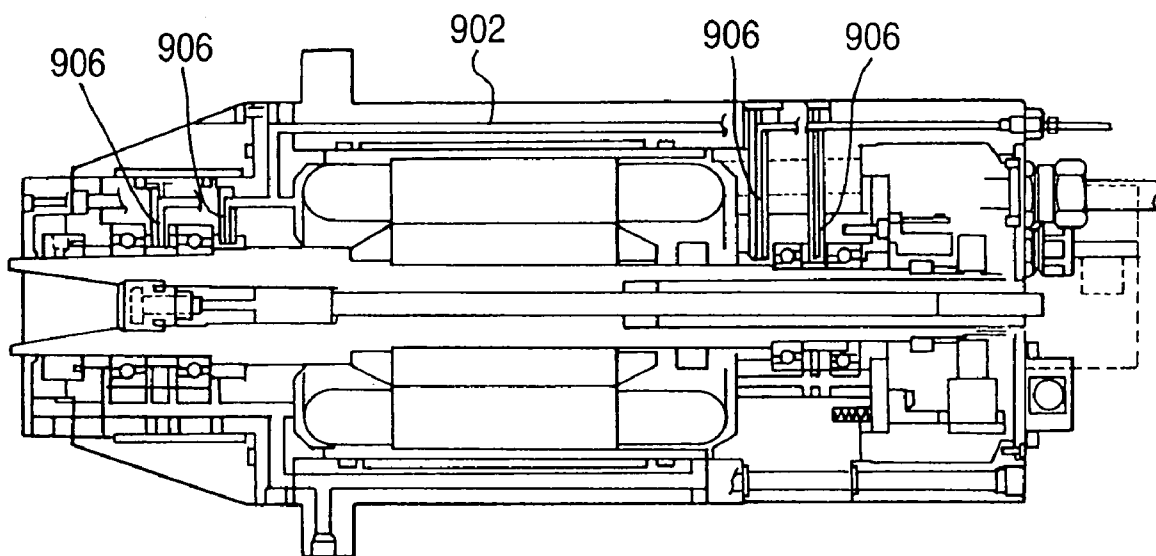


FIG. 85A


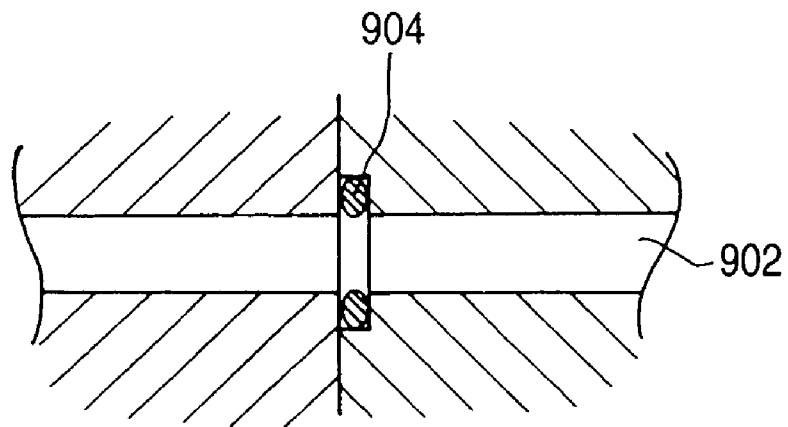


FIG. 85B

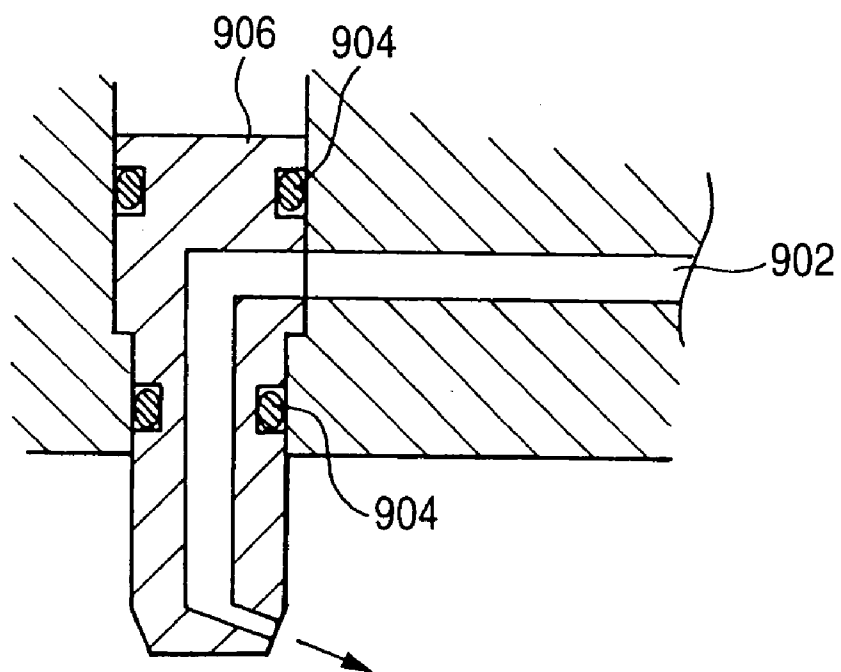

METHOD OF SUPPLYING A LUBRICANT TO A ROLLING BEARING OF A HIGH-SPEED SPINDLE

BACKGROUND OF THE INVENTION

[0001] This application is a Continuation-in-Part of U.S. patent application Ser. No. 09/522,909, filed on Mar. 10, 2001.

[0002] 1. Field of the Invention

[0003] The present invention relates to a lubricating device which discharges lubricating oil to a spindle apparatus provided in various high-speed rotary machines such as a machine tool and, especially, to the bearing of the spindle.

[0004] 2. Description of the Related Art

[0005] Conventionally, in lubricating the bearing of a high-speed rotary spindle, normally, there are used lubricating devices of various types such as an oil mist type, an oil-air type, and a jet type.

[0006] The lubricating device of an oil mist type comprises an oil tank, a pump, a plunger, a pressure divider, compressed air, an electromagnetic valve, and a nozzle; and, in this device, lubricating oil is turned into a fine mist-like form, it is delivered through an air pipe using the compressed air, and it is jetted out to the interior portion of the bearing.

[0007] The lubricating device of an oil-air type comprises an oil tank, a pump, a distributor, a compressed air source, a plunger, and a nozzle; and, in this device, lubricating oil drops (0.01-0.03 ml) adjusted to a given quantity by the mechanical mechanism of the plunger is discharged into an air pipe, is delivered up to the nozzle by the compressed air, and is jetted out to the interior portion of the bearing.

[0008] The lubricating device of a jet type is a device which does not use the air source but turns lubricating oil into high pressure one using a high-pressure pump and jets out the high-pressure lubricating oil at a high speed into the interior portion of the bearing from a nozzle of which discharge diameter is narrowed.

[0009] By the way, while a current trend requests an increase in the rotation speed of the spindle device, in the lubricating devices of various types used for lubrication of the spindle device, there are found the following problems:

[0010] Firstly, in the lubricating device of an oil mist type, due to use of the compressed air, not only there arises a noise problem but also the mist-like lubricating oil scatters into the air to worsen an operation environment. Also, because of the scattering of the mist-like lubricating oil into the air, the quantity of lubricating oil to be supplied to the interior portion of the bearing is indefinite. Especially, in case where the bearing is rotated at a high speed, due to the effect of an air curtain, when $dm \cdot N$ is equal to or larger than 2000000 (dm expresses the pitch circle diameter of the bearing (mm), and N expresses the rotation speed (min^{-1}) of the bearing), the lubricating oil can be little supplied to the interior portion of the bearing, thereby raising a fear that the bearing can cause seizure.

[0011] In the lubricating device of an oil-air type, similarly to the above-mentioned oil mist type lubricating device, since the compressed air is used, not only there arises a noise

problem but also the mist-like lubricating oil scatters into the air to thereby worsen the operation environment. Also, in the high-speed rotation of the bearing, as the result of the rotation of the spindle, there is produced an air curtain. Therefore, similarly, the lubricating oil can be little supplied to the interior portion of the bearing, thereby raising a fear that the bearing can cause seizure.

[0012] Also, in the lubricating device of an oil-air type, because it is difficult to supply a fine amount of lubricating oil continuously and stably, the lubricating oil must be supplied intermittently and thus the lubricating oil is supplied at a given quantity (normally, in the range of 0.01-0.03 ml) every given interval time (normally, in the range of 8-16 min.) into the air pipe. Therefore, since the quantity of lubricating oil to be supplied to the interior portion of the bearing varies every given time, the lubricating condition of the interior portion of the bearing varies all the time and, especially, just after the lubricating oil is supplied, a large quantity of lubricating oil enters the interior portion of the bearing, thereby causing a phenomenon that the torque of the bearing and the temperature of the bearing can vary. There is a fear that this phenomenon can have ill effects on the working precision of a machine tool.

[0013] On the other hand, in a lubricating device of a jet type, when compared with the above lubricating devices of oil mist and oil-air types, there is little found the effect of the above-mentioned air curtain but, not only because there is required an attendant device such as a high-pressure pump but also because the quantity of lubricating oil to be supplied to the bearing increases to thereby increase drag resistance, there is necessary a large motor which is used to drive the spindle, which results in the increased cost.

[0014] As a device which has solved the difficulty in the above-mentioned fine quantity adjustment of a lubricant, there are known devices which are respectively disclosed in the following patent publications.

[0015] That is, in Japanese Patent Examined Publication No. 2-15003 of Heisei, there is disclosed a device for supplying a fine fixed quantity of liquid. In this supply device, a piezo-electric element is used to allow the fine quantity adjustment of the liquid and a lubricant is delivered to a nozzle by compressed air.

[0016] In a flow control valve disclosed in Japanese Patent Examined Publication No. 7-65695, a diaphragm is disposed in one end of a magnetostrictive element and an orifice is adjusted by the expansion and contraction of the magnetostrictive element to thereby adjust the flow quantity and pressure of fluid.

[0017] In a giant magnetostrictive material pump disclosed in Japanese Patent Unexamined Publication No. 3-222877 of Heisei, the displacement of a giant magnetostrictive material is enlarged by a lever, and a diaphragm is driven by the lever to turn the pressure of the interior portion of the pump into a negative pressure or a positive pressure, thereby sucking or discharging a fluid.

[0018] In a magnetic precision pump (Magnetostrictive Pump) disclosed in U.S. Pat. Nos. 4,795,318 and 4,804,314, in the interior portion of a cylinder, there is disposed a piston which is formed of a magnetostrictive material and a voltage is applied to a coil, which is disposed in such a manner that

it encloses the piston, to thereby expand and contract the piston so as to discharge a fluid in the interior portion of the cylinder.

[0019] In a giant magnetostrictive material type injection pump disclosed in Japanese Patent Unexamined Publication No. 4-81565 of Heisei, a needle valve is opened and closed by a giant magnetostrictive material to thereby inject a fixed quantity of high-pressure liquid.

[0020] However, in the above-mentioned pump using a giant magnetostrictive material or flow control valve, there are found the following problems.

[0021] The fine fixed quantity liquid supply device disclosed in Japanese Patent Examined Publication No. 2-15003 of Heisei has not solved yet a drawback caused by delivering the lubricant to the nozzle using the high-pressure air.

[0022] In the flow control valve disclosed in Japanese Patent Examined Publication No. 7-65695, the diaphragm area, to which the pressure of the liquid is applied, is larger than the sectional area of the giant magnetostrictive material and the liquid pressure is smaller than the pressure of the giant magnetostrictive material.

[0023] In the giant magnetostrictive material pump disclosed in Japanese Patent Unexamined Publication No. 3-222877 of Heisei, since the displacement is enlarged by the lever, the liquid pressure is smaller than the pressure of the giant magnetostrictive material. The output of the giant magnetostrictive material increases as a magnetic field by a coil is increased. However, in case where the coil magnetic field is increased, the required volume of the coil increases accordingly. As a result of this, a device using such coil increases in size.

[0024] In the magnetic precision pump disclosed in U.S. Pat. Nos. 4,795,318 and 4,804,314, since the piston itself is made of a drive element, the pressure of the lubricant cannot be made larger than the pressure of the giant magnetostrictive material.

[0025] The giant magnetostrictive material type injection pump disclosed in Japanese Patent Unexamined Publication No. 4-81565 of Heisei does not have a function to turn the pressure of the liquid into high pressure.

[0026] Further, in the oil-air lubricating method, there is used a fixed-quantity valve which is capable of mixing lubricating oil of the order of 0.01-0.03 ml per shot with air at given time intervals. As an example of the fixed-quantity valve, for example, there is known a valve which is disclosed in JP-B-8-2578U. This type of fixed-quantity valve is conventionally structured such that a fixed quantity of lubricating oil can be stored therein and can be discharged therefrom by making use of the reciprocating motion of a piston; specifically, the lubricating oil is stored in a cylinder disposed on one side of the piston and the lubricating oil is discharged on the opposite side of the piston. To reduce the oil discharge quantity, there can be expected a technique of reducing the diameter and stroke of the piston. However, in the conventional oil-air lubricating method, there are dimensional limits, for example, the sizes of sealing parts such as an O-ring and the size of a return spring, which makes it difficult to reduce the diameter and stroke of the piston. For

this reason, it has been believed difficult to discharge a quantity of less than 0.01 ml of lubricating oil.

[0027] In addition, since the conventional lubricating apparatus employing the above-mentioned oil-air lubricating method is structured such that a given quantity of lubricating oil is stored therein and is discharged therefrom by use of the reciprocating motion of a single piston, a supply oil quantity per shot is normally large, that is, of the order of 0.03 ml and the lubricating oil is discharged at time intervals of approx. 15 min., thereby raising a problem that the temperature of the constantly rotating bearing can pulsate at the oil shot intervals. Also, in some cases, there are generated whizzing sounds between the rolling bodies and the mixed oil-air. The whizzing sounds between the rolling bodies and the mixed oil-air, when their frequencies are in the range of 2-3 KHz or less, in most cases, provide harsh noises. This raises a problem even in the case of a spindle which does not rotate at a very high speed, that is, when the product (dm·N) of the shaft diameter [mm] and the shaft rotation speed [min^{-1}] is 1500000 or less.

[0028] On the other hand, regarding a pipe structure for supply of a fine quantity of lubricating oil, FIG. 84 shows a lubricating apparatus of an oil-air type using an air flow as a medium. As the state of connection of the end faces of two housings is shown in FIG. 85A, a pipe passage 902 serving as an oil flow passage formed in a housing is sealed by O-rings 904 which are disposed on the housing end faces. Also, as the state of connection between the nozzle frame 906 and pipe passage 902 is shown in FIG. 85B, oil-air is supplied to the nozzle frame 106 through the pipe passage 902. However, in the case of a fine quantity of lubricating oil being supplied, in a pipe arrangement structure using such O-rings 104, when the lubricating oil is jetted out, the volume of the interior portion of the pipe passage is caused to vary due to the elastic deformation of the O-rings 904, which makes it impossible to supply a given quantity of lubricating oil.

SUMMARY OF THE INVENTION

[0029] The present invention aims at eliminating the drawbacks found in the above-mentioned circumstances. Accordingly, it is an object of the invention to provide a lubricating device which injects a high-precision set fine quantity of lubricant onto the lubricating surface of a rotary body at a high speed to thereby minimize an increase in torque and bearing temperature so as to be able not only to provide high torque stability and reduce the generation of noises but also to reduce the size and cost thereof, and a spindle apparatus using such lubricating device.

[0030] In attaining the above object, according to the invention, there is provided a spindle apparatus comprising a shaft, at least two bearings disposed spaced apart from the shaft in the axial direction of the shaft, each of the bearings having an inner race fitted with the shaft, and a housing fitted with the outer races of the bearings, with the inner races and outer races of the bearings being rotatable with respect to each other with rolling elements between them, the spindle apparatus further including: a lubricating device for supplying lubricating oil to the bearings at a discharge speed in the range of 10 m/sec. -100 m/sec. and in a fine discharge oil quantity in the range of 0.0005 ml/shot -0.01 ml/shot.

[0031] According to the above structure, since the discharge speed of the lubricating oil to be discharged from the

nozzle is high, that is, 10 m/sec -100 m/sec., the lubricating oil can be supplied to the interior portion of the bearing positively without being influenced by an air curtain which can occur in the high-speed rotation. Also, because the discharge quantity of the lubricating oil is fine, that is, in the range of 0.0005 ml/shot -0.01 ml/shot, an increase in the temperatures of the bearings can be controlled down to a low level. Further, since there are not used attendant devices including a high-pressure pump such as a jet type, there is eliminated an increase in drag resistance which could be caused due to an increase in the quantity of the oil supplied to the bearings, so that, as a motor for driving the spindle, there can be used a motor which is inexpensive and compact.

[0032] Also, in addition to the above structure, there may be disposed a shaft rotation speed detector (tachometer) for detecting the shaft rotation speed. In this case, by controlling the supply interval and supply quantity of the lubricating oil discharged from the lubricating device based on the detect results of the shaft rotation speed detector (tachometer), a proper oil quantity of lubrication is possible with respect to the spindle rotation regardless of the spindle rotation speed, so that an ideal lubricating condition can be always obtained in the interior portion of the bearing. Also, the increase in the bearing temperature can also be controlled down to a further lower level. Further, since the lubricating oil is supplied to the interior portion of the bearing positively, a lubricating oil supply efficiency can be enhanced and the lubricating oil consumption can be reduced. Moreover, since compressed air supplied by a compressor is not used as in the lubricating device of an oil mist system or an oil-air system, the noise level is low and the oil mist can be little produced.

[0033] And, in addition to the above structure, there may be disposed a lubricating oil filter, an air bleeding sensor, and a clogging detect pressure sensor. In this case, there can be avoided troubles such as a clogged condition.

[0034] Further, in addition to the above structure, there may be disposed a multi-branch piping device (a multi-distribution mechanism) between a superfine quantity oil lubricating pump and the nozzle, for distributively supplying lubricating oil from the superfine quantity oil lubricating pump to the plurality of bearings, so that the lubricating oil is supplied to each bearing from the multi-branch piping device.

[0035] With this structure, the lubricating oil supplied from the superfine quantity oil lubricating pump is distributively supplied to each bearing stably without reducing the discharge speed and the discharge quantity, and without causing vibrations of the discharge speed and the discharge quantity. Further, this structure provides a supply of the lubricating oil for the spindle apparatus having a plurality of bearings with only a lubricating apparatus.

[0036] That is, according to the present spindle lubricating apparatus, thanks to the multi-distribution mechanism, not only a fine quantity of lubricating oil can be distributively supplied to the plurality of bearings at the discharge speed of 10 m/sec. -100 m/sec. in a discharge quantity of 0.0005 ml/shot -0.01 ml/shot accurately and stably, but also the structure of the spindle lubricating apparatus can be made simple and compact. Therefore, an ideal lubricating state can be always obtained in each of the bearings, the stability of the bearing torque can be enhanced, and an increase in the bearing temperature can be controlled down to a low level.

[0037] Also, the multi-distribution mechanism includes a distribution housing having such a number of lubricating oil supply holes as to corresponds to the number of distribution of the lubricating oil, a rotor valve which can be rotatably contacted with the distribution housing to thereby bring a flow passage into communication with the lubricating oil supply holes sequentially, and a motor for rotating the rotor valve.

[0038] More specifically, in the distribution housing, the lubricating oil supply holes are disposed in a circular ring manner, and a center flow passage is formed in the center of this circular ring. The rotor valve has a groove serving as a flow passage in such a manner that it extends from the center of rotation thereof up to a diameter position larger than a pitch circle diameter (PCD) at the positions of the lubricating oil supply holes.

[0039] According to this structure, in case where the rotor valve is rotated, the center flow passage and lubricating oil supply holes of the distribution housing are allowed to communicate with each other by the groove of the rotor valve sequentially, so that the lubricating oil can be supplied to the respective lubricating oil supply holes.

[0040] Also, the distribution housing may also be structured such that such a number of longitudinal holes as to corresponds to the number of bearings (number of distributions) are formed in the radial direction thereof and lubricating oil supply holes are formed so as to extend from the thrust direction thereof as well as be in phase with and penetrate through the longitudinal holes.

[0041] According to this structure, when the center flow passage and lubricating oil supply holes of the distribution housing are made to communicate with each other, the lubricating oil can be supplied to the radial-direction longitudinal holes.

[0042] Further, the distribution housing may also be structured in the following manner: that is, such a number of lubricating oil supply holes as to corresponds to the number of bearings (number of distributions) are formed such that they can be made to communicate with the groove formed in the rotor valve from a direction oblique with respect to the axial direction of the distribution housing.

[0043] According to this structure, since the lubricating oil supply holes are formed in the oblique direction with respect to the axial direction of the distribution housing, the projecting amount of the distribution housing in the radial direction is reduced, thereby being able to provide a structure which is excellent in space efficiency.

[0044] And, the multi-distribution mechanism may also be composed of a distribution housing having such a number of lubricating oil supply holes as corresponds to the number of distributions, a rotor valve which can be rotatably contacted with the distribution housing to thereby bring a flow passage into communication with the lubricating oil supply holes sequentially, a shaft for rotationally driving the rotor valve, a spring member for energizing the shaft toward the rotor valve side, and a thrust bearing for supporting the shaft in a freely rotatable manner.

[0045] According to this structure, while reducing the rotation resistance by the thrust bearing, the elastic compression force of the spring member can prevent the lubri-

cating oil from leaking from the contact portions between the rotor valve and distribution housing, so that the lubricating oil can be positively supplied from the groove of the rotor valve to the lubricating oil supply holes of the distribution housing.

[0046] By the way, the oil supply quantity to the interior portion of the bearing, in case where $dm \cdot N$ is equal to or larger than 1000000, preferably, may be in the range of 0.0005 ml/min. -0.12 ml/min., and, more preferably, in the range of 0.003 ml/min. -0.12 ml/min.

[0047] Also, the inside diameter of the nozzle outlet, preferably, may be in the range of 0.08 mm -0.6 mm and, more preferably, in the range of 0.1 mm-0.5 mm.

[0048] Further, a ratio of the length L (mm) of the pipe up to the nozzle to the pipe diameter d (mm), preferably, may be $5 \leq L/d^4 \leq 12000 \text{ mm}^{-3}$, and, more preferably, $5 \leq L/d^4 \leq 10000 \text{ mm}^{-3}$.

[0049] Still further, according to another aspect of the invention, there is provided a lubricating device which uses a magnetostrictive pump including a pump chamber for pressurizing lubricant by means of the expanding and contracting operations of a rod body formed of magnetostrictive material to be executed by applying a magnetic field to the rod body and removing the magnetic field therefrom, thereby discharging the pressurized lubricant, the lubricating device comprising: a check valve disposed in the intermediate portion of a flow passage for supplying the lubricant to the magnetostrictive pump to prevent the lubricant from flowing out from the magnetostrictive pump, and a nozzle disposed on the lubricating discharge side of the magnetostrictive pump and having a flow passage sectional area smaller than the lubricant flow passage sectional area of the check valve.

[0050] According to the present lubricating device, the rod body can be expanded due to the application of the magnetic field, and the lubricant within the magnetostrictive pump can be thereby compressed. Due to the compression of the lubricant, the pressure of the flow passage for supplying the lubricant is increased, the check valve is closed, and the lubricant is discharged externally at a high speed from the nozzle. In case where the magnetic field application is cut off, the rod body is contracted to thereby increase the internal capacity of the pump, so that the lubricant is supplied into the pump through the check valve. In this operation, the air also flows in from the leading end of the nozzle. However, since the flow-in quantity ratio of the lubricant to the air is proportional to the square of the flow passage sectional area ratio of the check valve to the nozzle, the flow-in quantity of the lubricant becomes larger than that of the air, so that, in the next operation as well, the lubricant can be discharged similarly.

[0051] Further, according to the above lubricating device, the one end side of the rod body is fixed, a piston is connected to the other end side of the rod body, and the piston is slidably disposed within a cylinder to thereby form a pump chamber, while the cross sectional area of the inner surface of the cylinder is set smaller than the cross sectional area of the rod body.

[0052] In the present lubricating device, due to the expansion and contraction of the rod body, the piston within the cylinder is moved to thereby form the pump. And, the

pressure of the lubricant within the cylinder is higher than the pressure generated by the rod body, which makes it possible to discharge the lubricant at a high speed.

[0053] Also, in the lubricating device, the decreased area of the pump chamber due to the expansion of the rod body is set equal to the sum of the quantity of the air flowing in from the nozzle when the rod body is contracted, a decreased volume due to compression of the lubricant that is present within the internal capacity between the check valve and the outlet of the nozzle, the increased capacity of the internal capacity due to the pressure deformation of parts forming the internal capacity, and a required discharge quantity of lubricant.

[0054] In the lubricating device, the magnetic field to be applied to the rod body is controlled while correcting it using values with variable elements taken into account, while the variable elements respectively relate to the quantity of air flowing in from the nozzle, the decreased volume due to the compression of the lubricant, and the increased capacity of the internal capacity due to the pressure deformation of parts forming the internal capacity. This can avoid a discharge quantity error which could otherwise be caused by the variable elements, so that a desired discharge quantity can be obtained with high accuracy.

[0055] Further, in the lubricating device, the magnetostrictive pump includes a coil for applying a magnetic field and a control device for controlling a current to be supplied to the coil to thereby expand and contract the rod body; and, the control device, in the initial excitation stage of the coil, supplies a current until the lubricant within the pump chamber reaches such a pressure as to allow the magnetostrictive pump to obtain a desired discharge speed, after reaching this pressure, supplies a current for maintaining the pressure of the lubricant constant according to the discharge quantity of the lubricant, and further, after a desired lubricant discharge quantity is obtained, cuts off the supply current.

[0056] According to the present lubricating device, when the current is supplied to the coil from the control device, the rod body is expanded to thereby allow the piston to compress the lubricant within the pump chamber. As a result of this, the pressure within the cylinder is increased, the suction valve is closed, and the lubricant is thereby discharged externally at a high speed from the nozzle. At the then time, the control device, for example, in the initial excitation stage of the coil, supplies a current to the coil until the current reaches such a current value for the magnetostrictive pump as to be able to obtain a desired discharge speed, that is, the control device raises the current up to this current value quickly. During this, a high voltage is applied to the coil to thereby raise the current quickly against the time constant of the coil. And, after reaching the current value to be able to obtain the desired discharge speed, in order to maintain the pressure of the lubricant which decreases according to the discharge quantity of the lubricant constant, the control device supplies the current in such a manner that the capacity of the cylinder decreases by a capacity equal to the discharge quantity of the lubricant. During this, due to the time constant of the coil, the voltage is switched over to a voltage which can obtain a desired current increasing speed. Next, after the desired lubricant discharge quantity is obtained, the supply current to the coil is cut off. Thanks to

this, a required lubricant pressure can be obtained in and from the early discharge stage of the lubricant and, after the start of discharge of the lubricant, the discharge speed can be maintained constant, so that the discharge of the lubricant can be carried out accurately and stably. Also, when the current is cutoff, the rod body is contracted to thereby increase the internal capacity of the pump chamber, so that the lubricant can be supplied into the pump chamber through the suction valve.

[0057] Also, the above lubricating device further includes a measuring device for measuring any one of the value of a current to be supplied to the coil, a voltage value proportional to this current, and the value of a magnetic flux caused by this current; and, an abnormal condition judging device for comparing a measured value with respect to an elapsed time measured by the measuring device with a measured value in a normal condition time to thereby judge whether an abnormal condition has occurred or not, whereby, when the abnormal condition judging device judges that an abnormal condition has occurred, the lubricating device issues an abnormal signal.

[0058] According to the present lubricant device, for example, assuming that a target to be measured is a current value, in case where a current value measured at the time when a certain time has passed after the start of the supply of a current is larger than a current value (a design value) in a normal operation time, that is, in case where a time required for a current to increase up to a certain current value is shorter than a design value, it can be judged that an abnormal condition such as the clogged condition of the nozzle has occurred. On the other hand, in case where the current value measured at the time when a certain time has passed after the start of the supply of the current is smaller than the design value, that is, in case where the time required for the current to increase up to a certain current value is longer than the design value, it can be judged that an abnormal condition such as lubricant leakage has occurred. Also, assuming that the target to be measured is a voltage value or a magnetic flux value, an abnormal condition can be judged similarly. And, by issuing the abnormal signal at the time when the abnormal condition occurs, feedback control can be carried out, for example, the operation of the supply target of the lubricant can be stopped.

[0059] Further, the above-mentioned lubricating device further includes a measuring device for measuring any one of the value of a current to be supplied to the coil, a voltage value proportional to this current, and the value of a magnetic flux caused by this current; and, an air mixture judging device for comparing a measured value with respect to an elapsed time measured by the measuring device with a measured value in an air non-mixture time to thereby judge whether the air is mixed or not, whereby, in the start of the operation of the lubricant device, until the air mixture judging device judges that the air is not mixed, the lubricant device increases the current to be supplied to the coil or increases the supply frequency of the current.

[0060] According to the present lubricating device, assuming that the target to be measured is a current, in case where the air is mixed into the lubricant, the rising time of the current to be measured is long, which makes it possible to judge the presence or absence of the mixed air. Also, assuming that the target to be measured is a voltage value or

a magnetic flux value, an abnormal condition can be judged similarly. And, in the start of the operation of the lubricating device, until it is judged that the mixed air is not present, by increasing the current to be supplied to the coil or by increasing the supply frequency of the current, or by increasing both the current and the supply frequency of the current, the discharge quantity and discharge cycle of the magnetostrictive pump can be increased, so that the lubricant can be quickly sucked into the pump from the tank and the air bleed can be completed in a short time.

[0061] To sum up the above facts, by using the super fine quantity oil lubricating system, a lubricating oil forced circulating device, a heat exchanger, a lubricating oil collecting device, and other attendant devices such as compressed air, which are used in the conventional lubricating systems such as a lubricating system of an oil mist, a lubricating system of an oil-air type and a lubricating system of a jet type, can be simplified; the noise level can be controlled down to a low level, which can be consideration for environment. And, the consumption of the lubricating oil can be reduced, the bearing torque can be enhanced in stability, and the bearing temperature increase can be controlled down to a low level, thereby being able to enhance the rotation accuracy of the spindle. Therefore, according to the present invention, there can be provided a spindle apparatus which is more advantageous than the conventional spindle apparatus using the related lubricating methods.

[0062] Further, the lubricating apparatus for discharging a fine quantity of lubricating oil from a nozzle directly to the interior portion of a bearing at given time intervals at a high speed, may include: a pump having a larger discharge quantity than that from the nozzle; and, a switch valve interposed between oil pipes for connecting together the pump and nozzle and structured such that, in case where a discharge oil pressure from the pump is less than a given pressure, it shuts off the oil pipes to thereby stop the discharging of the lubricating oil from the nozzle, in case where the discharge oil pressure from the pump is equal to or more than the given pressure, it opens the oil pipes to thereby allow the lubricating oil supplied from the pump to be discharged from the nozzle for a given period of time, and it is capable of repeating the execution of this series of operations.

[0063] According to the present lubricating apparatus, in case where a discharge oil pressure from the pump is less than a given pressure, the switch valve shuts off the oil pipes to thereby stop the discharging of the lubricating oil from the nozzle and, on the other hand, in case where the discharge oil pressure from the pump is equal to or more than the given pressure, the switch valve opens the oil pipes to thereby allow the lubricating oil supplied from the pump to be discharged from the nozzle for a given period of time. Therefore, without using an expensive fine quantity lubricating pump using an electromagnet or a giant-magnetostrictive material, a sufficient discharge speed can be obtained using an inexpensive pump and thus, in a spindle which is rotated at a high speed, stable lubricating characteristics, that is, enhanced seizure resistance and reduced torque variations can be realized. Also, it is possible to eliminate the generation of the whizzing noises of the rolling bodies that raises a problem in the conventional oil-air and oil mist lubricating methods. Further, in the portion of the pipe that extends up to the switch valve, there can be used

a resin-made pressure resisting tube, which can enhance the design freedom of the pipe arrangement.

[0064] And, in the lubricating apparatus, preferably, the discharge quantity of lubricating oil to be discharged from the nozzle per shot may be in the range of 0.0001-0.01 ml.

[0065] In the lubricating apparatus, since the discharge quantity of lubricating oil to be discharged from the nozzle per shot is set larger than 0.0001 ml, it is possible to prevent the lowered flow speed of the lubricating oil which could be caused under the great influence of the compression characteristic of the lubricating oil, the pressure deformation of the pipes, and the response characteristic of the switch valve; that is, a sufficient flow speed can be obtained. Also, since the discharge quantity of lubricating oil to be discharged from the nozzle per shot is set smaller than 0.01 ml, torque variations occurring in the bearing can be prevented.

[0066] Also, the discharge speed of the lubricating oil to be discharged from the nozzle, preferably, may be set equal to or more than 10 % of the peripheral speed of the inner ring of the bearing.

[0067] According to the thus structure, since the discharge speed of the lubricating oil to be discharged from the nozzle is set equal to or more than 10 % of the peripheral speed of the inner ring of the bearing, there can be secured a discharge speed necessary for the lubricating oil to reach the interior portion of the bearing. As a practical advantage, the lubricating apparatus can use an inexpensive oil pressure pump having a pump pressure of the order of 2.5 MPa.

[0068] Further, the opening time of the switch valve may be preferably set in the range of 0.1-50 ms.

[0069] With the above structure, a required discharge quantity of 0.0001-0.01 ml can be satisfied. That is, in case where the pump pressure, lubricating oil and pipes are set according to the following expressions, the relationship between the opening time t of the switch valve and discharge quantity can be determined and thus the opening time t of the switch valve, which is requested to meet the required discharge quantity of 0.0001-0.01 ml, can be set in the range of 0.1-50 ms.

$$v = Cd \cdot (2(p - \Delta p) / \rho)^{0.5}$$

$$q = v \cdot \pi d^2 \cdot t / 4$$

$$\Delta p = 32 \cdot \mu \cdot L \cdot d^2 \cdot v / D^4$$

[0070] where, Cd expresses a flow coefficient, p : a pump pressure (Pa), Δp : a pressure loss (Pa), ρ : a lubricating oil density (kg/m^3), d : a nozzle diameter (m), t : the opening time (s) of the switch valve, μ : a lubricating oil viscosity coefficient (Pa·s), L : a pipe length (m), and D : a pipe inside diameter (m), respectively.

[0071] Also, the lubricating apparatus may also be structured such that the switch valve includes a fixed member having a fixed sliding contact surface and a rotary member which has a movable sliding contact surface to be closely contactable with the fixed sliding contact surface and rotates the movable sliding contact surface in sliding contact with the fixed sliding contact surface about an axial line perpendicular to the fixed sliding contact surface. In the fixed sliding contact surface of the fixed member, more specifically, on the circumference of the fixed sliding contact surface with the axial line as the center thereof, there are opened up a discharge hole to be connected to the pump and

an oil feed hole to be connected to the nozzle. And, in the movable sliding contact surface of the rotary member, more specifically, on the circumference of the movable sliding contact surface with the axial line as the center thereof, there is formed an arc-shaped slit having a center angle larger than at least a center angle formed between the discharge hole and oil feed hole.

[0072] According to the thus-structured lubricating apparatus, in case where the rotary member of the switch valve is rotated with respect to the fixed member thereof and the arc-shaped slit formed in the movable sliding contact surface of the rotary member is matched to the discharge hole and oil feed hole respectively formed in the fixed sliding contact surface of the fixed member, the discharge hole and oil feed hole are allowed to communicate with each other through the arc-shaped slit. Therefore, only while the discharge hole and oil feed hole are both matched to the arc-shaped slit at the same time, the switch valve is opened (the oil pipes are opened), so that the lubricating oil from the pump can be discharged from the nozzle for a given period of time.

[0073] Also, the lubricating apparatus may be structured such as to have: a motor for rotating the rotary member; a pressure switch for detecting the discharge oil pressure of the pump; and, a controller which sends a drive signal to the pump, on receiving a detect signal from the pressure switch issued when the discharge oil pressure is equal to or more than a given pressure, sends a one-rotation drive signal to the motor, after then, sends a drive stop signal to the pump, and is capable of repeating the execution of this series of operations at given time intervals.

[0074] According to the thus-structured lubricating apparatus, in case where the pump is switched on by the controller, the oil pressure is raised; and, in case where the controller detects through the pressure switch that the oil pressure is equal to or higher than a given pressure, the controller rotates the motor once and, after then, the controller switched off the pump. This series of operations are executed repeatedly at given time intervals by the controller, whereby the lubricating oil from the pump can be discharged from the nozzle at given time intervals.

[0075] Also, the lubricating apparatus may be structured as follows. That is, the switch valve includes a fixed member having a fixed sliding contact surface and a rotary member which has a movable sliding contact surface closely contactable with the fixed sliding contact surface and rotates the movable sliding contact surface in sliding contact with the fixed sliding contact surface about an axial line perpendicular to the fixed sliding contact surface. In the fixed sliding contact surface of the fixed member, more specifically, on the circumference of the fixed sliding contact surface with the axial line as the center thereof, there are opened up a plurality of oil feed holes to be connected to the nozzle and, at the position of the axial line, there is opened up a discharge hole connected to the pump; and, in the movable sliding contact surface of the rotary member, there is formed a slit in such a manner that it extends from the axial line position along the radial direction of the rotary member up to the position of the oil feed hole.

[0076] According to the thus-structured lubricating apparatus, in case where the rotary member of the switch valve is rotated with respect to the fixed member thereof and the slit formed in the movable sliding contact surface of the

rotary member is matched to the oil feed hole formed in the fixed sliding contact surface of the fixed member, the switch valve is opened (the oil pipes are opened), with the result that the lubricating oil from the pump can be discharged from the nozzle for a given period of time. In this case, since the plurality of oil feed holes are formed on the circumference of the fixed sliding contact surface, each time the rotary member is rotated, the lubricating oil from the discharge hole is supplied to the respective oil feed holes, that is, one rotation of the rotary member can supply the lubricating oil to a plurality of portions.

[0077] And, the lubricating apparatus may be structured in the following manner. That is, the switch valve includes a fixed member having a fixed sliding contact surface and a slide member which has a movable sliding contact surface closely contactable with the fixed sliding contact surface and reciprocates the movable sliding contact surface in the linear direction in sliding contact with the fixed sliding contact surface with respect to the fixed sliding contact surface. In the fixed sliding contact surface of the fixed member, there are opened up a plurality of discharge holes to be connected to the pump in such a manner that they are spaced from each other in the linear direction; and, in the movable sliding contact surface of the slide member, there are opened up a plurality of oil feed holes to be connected to the nozzle in such a manner that they are arranged in the linear direction at the same intervals as the discharge holes.

[0078] According to the thus-structured lubricating apparatus, in case where the fixed member and slide member are reciprocated in the linear direction in sliding contact with each other and the plurality of discharge holes formed in the fixed sliding contact surface of the fixed member and the plurality of oil feed holes formed in the movable sliding contact surface of the slide member are allowed to communicate with each other or are shut off from each other at the same time, the lubricating oil from the pump can be discharged from the nozzle for a given period of time. That is, according to this lubricating apparatus, since the slide member is reciprocated in the linear direction in a sliding contact manner, a movable member of a solenoid serving as a drive source and a linear drive device such as a cylinder can be used as they are.

[0079] Still further, the lubricating apparatus may be structured in the following manner. That is, the switch valve includes: a cylindrical-shaped stator having a fixed sliding contact surface on the inner peripheral surface thereof; and, a rotor which has a rotary sliding contact surface to be closely contacted with the fixed sliding contact surface and rotates while the rotary sliding contact surface is in sliding contact with the fixed sliding contact surface. In the fixed sliding contact surface of the stator, there are opened up a plurality of oil feed holes to be connected to the nozzle in such a manner that they are spaced from each other in the inner peripheral circle direction; and, in the rotary sliding contact surface of the rotor, there are formed a plurality of discharge holes to be connected to the pump in such a manner that they are arranged in the outer peripheral circle direction at the same intervals as the oil feed holes.

[0080] According to the thus-structured lubricating apparatus, in case where the rotor is rotated within the stator and the plurality of oil feed holes formed in the fixed sliding contact surface of the stator are matched to the plurality of

discharge holes formed in the rotary sliding contact surface of the rotor, the lubricating oil from the pump can be discharged from the nozzle for a given period of time. The stator and rotor can be structured in a movable fit manner, so that high-speed switching can be realized easily using low torque. For example, a rotary solenoid using a permanent magnet and an electromagnet can be used, a high-speed response characteristic can be obtained, a drive circuit can be simplified when compared with an ordinary motor, and the reduced cost of an actuator can be realized.

[0081] Moreover, the lubricating apparatus according to the present invention may include: a pump for switching on and off the pressure of oil to be discharged to a hydraulic main pipe; a discharge cylinder in which a discharge piston is mounted, an oil supply chamber is formed on one end side of the discharge piston in the moving direction thereof, and a hydraulic chamber to be connected to the hydraulic main pipe is formed on the other end side of the discharge piston, while the discharge piston is disposed so as to be energized toward the hydraulic chamber side by spring means; a three-way valve connected to the hydraulic main pipe, an oil supply passage to be connected to the oil supply chamber, and an oil storage passage, for allowing the hydraulic main pipe and oil storage passage to communicate with each other when the oil pressure is switched on and, on the other hand, when the oil pressure is switched off and the oil pressure from the oil storage passage is given to the three-way valve, for allowing the oil storage passage and the oil supply passage to communicate with each other; and, an oil storage cylinder in which an oil storage piston is mounted and, on one end side of the oil storage piston in the moving direction thereof, there is formed an oil storage chamber to be connected to the oil storage passage, while the oil storage piston is disposed so as to be energized toward the oil storage chamber side by spring means.

[0082] According to the present lubricating apparatus, since the discharge cylinder and oil storage cylinder are disposed separately, when compared with the conventional lubricating apparatus in which oil is stored within a cylinder disposed on one side end of a single piston and the oil is discharged on the opposite side, the limits on the dimensions of the seal member and return spring can be reduced, which can facilitate the reduction of the diameters of the discharge cylinder and oil storage cylinder. Also, due to provision of two pistons, the oil operation area of the discharge piston can be set larger than the oil pressurizing area, so that the discharge piston can be pushed with a large force and thus a high-speed stroke can be realized. As a result of this, when compared with a lubricating apparatus using an electromagnet or a giant-magnetostrictive material, a fine quantity of the order of 0.001 ml of oil can be discharged at a high speed using a low-cost and simple structure.

[0083] And, the lubricating apparatus may also be characterized in that, when the discharge port is closed and the oil pressure of the hydraulic main pipe is on, the oil pressure of the oil supply chamber becomes larger than the oil pressure of the hydraulic chamber.

[0084] According to the present lubricating apparatus, when the discharge port is closed and the oil pressure of the hydraulic main pipe is on, the oil pressure of the oil supply chamber becomes larger than the oil pressure of the hydraulic chamber, thereby being able to discharge oil at a high

speed. That is, in the conventional lubricating apparatus using a single piston, due to the influence of the return spring for energizing the piston, the oil discharge pressure depending on the restitutive force of the return spring is always lower than the oil supply pressure obtained when the return spring is compressed. However, in the present lubricating apparatus, the oil pressure of the oil supply chamber (that is, oil discharge pressure) can be increased, with the result that discharging of oil at a high speed can be realized.

[0085] Also, the lubricating apparatus may also be structured such that, on the hydraulic chamber side of the discharge cylinder, there is mounted a drive piston movable by the oil of the hydraulic chamber to thereby push and drive the discharge piston, and the oil operation area of the drive piston is larger than the oil pressurizing area of the discharge piston.

[0086] According to the present lubricating apparatus, since the oil operation area of the drive piston is larger than the oil pressurizing area of the discharge piston, in case where the oil pressure from the hydraulic main pipe is applied to the drive piston, the discharge piston can be driven with a large force. Thanks to this, the high-speed stroke of the discharge piston can be realized and thus oil can be discharged from the discharge cylinder at a high speed.

[0087] Further, the lubricating apparatus may also be structured such that, between the discharge piston and drive piston, there is formed an idling section where the drive piston can be moved in a direction to approach the discharge piston.

[0088] According to the present lubricating apparatus, in case where the oil pressure from the hydraulic main pipe is applied to the drive piston, the drive piston is allowed to move the idling section by itself with no contact with the discharge piston. That is, without a start load which is otherwise generated in the start time of the drive piston due to its contact with the discharge piston, the drive piston is able to start under small movable resistance. Thanks to this, while the drive piston is moving in the idling section, the pressure of the oil pressure pump is raised up to a sufficient level, and there is generated inertia in the drive piston, so that the discharge piston can be driven with a large and high-speed force.

[0089] And, the lubricating apparatus may also be structured such that an umbrella valve is mounted in the three-way valve; and, the umbrella valve is structured such that, when the oil pressure is switched on, the main body of the umbrella valve closes the oil supply passage and a flexible umbrella piece disposed on the outer periphery of the umbrella valve main body is reduced in diameter to thereby allow the hydraulic main pipe and oil storage passage to communicate with each other and, on the other hand, when the oil pressure is switched off and the umbrella valve receives the oil pressure from the oil storage passage, the umbrella valve main body is moved in a direction to open the oil supply passage and the flexible umbrella piece is enlarged in diameter to thereby allow only the oil storage passage and oil supply passage to communicate with each other.

[0090] According to the present lubricating apparatus, in case where the oil pressure of the hydraulic main pipe connected to the three-way valve is switched on, the

umbrella valve main body closes the oil supply passage and the flexible umbrella piece disposed on the outer periphery of the umbrella valve main body is reduced in diameter due to the present oil pressure, thereby allowing the hydraulic main pipe and oil storage passage to communicate with each other. Therefore, oil from the hydraulic main pipe reaches the oil storage cylinder through the oil storage passage, moves the oil storage piston against the energizing force of spring means for energizing the oil storage piston, and then flows into the oil storage chamber of the oil storage cylinder. That is, storage of the oil into the oil storage cylinder is completed. On the other hand, in case where the oil pressure of the hydraulic main pipe is switched off, the diameter reduced state of the flexible umbrella piece due to the oil pressure is removed and thus the flexible umbrella piece is enlarged in diameter, thereby shutting off the hydraulic main pipe and oil storage passage from each other. At the same time, due to the returning energizing force of the spring means for energizing the oil storage piston, the umbrella valve main body receives the oil pressure from the oil storage passage is thereby moved in a direction to open the oil supply passage. As a result of this, only the oil storage passage and oil supply passage are allowed to communicate with each other and the oil stored in the oil storage chamber is supplied through the oil storage passage and oil supply passage and is filled into the oil supply chamber of the discharge cylinder, thereby completing the preparation for the next discharging operation.

[0091] Also, the lubricating apparatus may also be structured such that, with the three-way valve, there is threadedly engaged an air bleeding plug for moving the umbrella valve in a direction to open the oil supply passage, or a stop plug in such a manner it can be removed from the three-way valve.

[0092] According to the present lubricating apparatus, on the three-way valve, there is disposed the air bleeding plug which can move the umbrella valve in a direction to open the oil supply passage. This air bleeding plug is used to deflate air within the portion of the pipe existing upstream of the oil supply passage. In order to be able to discharge a fine quantity of oil, it is important that the air within the pipe can be deflated completely. That is, in case where the oil discharge quantity is very small, it is difficult to deflate the air within the pipe only by repeating normal oil dischargings. Therefore, in case where the air bleeding plug having a fine pin in the leading end thereof is threadedly engaged with the three-way valve and oil when the oil pressure pump is switched on due to the movement of the umbrella valve is forced to flow into the oil supply passage, the air bleeding can be achieved simply. After completion of the air bleeding, the air bleeding plug is replaced with the stop plug and a normal operation is executed.

[0093] Also, the lubricating apparatus may also be structured such that lubricating oil of 0.0005-0.01 ml per shot is directly jetted to a rolling bearing at the discharge speed of 10% or more of the peripheral speed of the inner ring of the rolling bearing.

[0094] According to the present lubricating apparatus, a quantity of 0.0005-0.01 ml per shot of lubricating oil is directly jetted to the rolling bearing at the discharge speed of 10% or more of the inner ring peripheral speed of the rolling bearing. In lubrication of the rolling bearing, the discharge

speed necessary for the lubricating oil to reach the interior portion of the bearing is about 10% of the inner race peripheral speed and, therefore, the discharge speed provided by the present lubricating apparatus is enough to lubricate the interior portion of the bearing.

[0095] Additionally, in the spindle apparatus according to the present invention, a pipe for supplying the lubricating oil is set such that a pipe parameter ($L \cdot d_n^2/d^4$), which expresses the relationship between the length L of the pipe, a nozzle diameter d_n (m), and a pipe inside diameter d (m), is smaller than $5 \times 10^{-4} [\text{m}^{-1}]$, and also that, the sum of the quantity of pipe expansion due to the pressure of lubricating oil in the interior portion of the pipe and the compression volume of the lubricating oil is equal to or less than the discharge quantity of said lubricating oil.

[0096] According to the spindle apparatus of the invention, when supplying a fine quantity of lubricating oil to the spindle apparatus, the pipe for the lubricating oil is set so as to satisfy the given conditions. Thanks to this, even when the present invention is applied to a spindle apparatus which is narrow and limited in the space for installation of a nozzle and arrangement of the pipe, the nozzle and pipe can be disposed in a compact structure, so that a fine quantity of lubricating oil can be supplied accurately and stably and, at the same time, generation of noises due to the whizzing sounds and poor lubrication due to the air curtain, which have been problems to be solved in the conventional oil-air lubricating apparatus, can be prevented.

[0097] In more detail, the present spindle apparatus is structured such that, the nozzle frame for jetting out the lubricating oil to the given positions of the interior portion of the spindle apparatus and the lubricating apparatus are connected together by the pipe which satisfies the following conditions:

[0098] pipe outside diameter D : 1.0×10^{-3} - 3.2×10^{-3} [m]
 pipe inside diameter d : 0.8×10^{-3} - 2.0×10^{-3} [m] Young's modulus of pipe material: 3 [GPa] or more Pipe length L :

$$L > 0.5 [\text{m}]$$

$$L \cdot d_n^2/d^4 < 5 \times 10^{-4} [\text{m}^{-1}]$$

$$L \cdot p \cdot \{\pi \cdot d^2/(4K) + \pi \cdot d^2 \cdot \{(D^2 + d^2)/(D^2 - d^2) + \nu\}/(2E)\} < q [\text{m}^3]$$

[0099] where, d_n : nozzle diameter (0.08×10^{-3} - 0.3×10^{-3} [m])

[0100] K : bulk modulus [Pa] of lubricating oil

[0101] ν : Poisson's ratio of pipe material

[0102] p : average pressure [Pa] in pipe

[0103] q : discharge quantity [m^3].

[0104] Also, the present spindle apparatus is a spindle apparatus having a cooling function using a jacket cooling system. In the jacket cooling system, as a thermal displacement measure, cooling oil is charged into an outer housing (outer cylinder) of a bearing (outer cylinder cooling system).

[0105] According to the present spindle apparatus, even in the case of a spindle apparatus of a jacket cooling system being narrow and limited in the space for arrangement of a pipe for lubricating oil and installation of a nozzle, a fine quantity of lubricating oil can be supplied.

[0106] The present spindle apparatus may be structured such as to include a spindle shaft, a plurality of rolling bearings for supporting the spindle shaft in a freely rotatable manner, an inner housing for covering the outside of the rolling bearings, and an outer housing for covering the outside of the spindle apparatus; and, a pipe is arranged so as to extend from the lubricating apparatus up to a nozzle frame disposed within the inner housing through a communication hole for supply of lubricating oil formed in the outer housing along the axial direction thereof and also through an opening formed in the inner housing.

[0107] And, the present spindle apparatus is also structured such that the pipe is connected to the nozzle frame in the axial direction of the housing.

[0108] According to the present spindle apparatus, even in a structure which cannot provide a space for arrangement of a pipe in a direction perpendicular to the axial direction of the housing, the pipe can be installed by arranging the pipe in the axial direction of the housing.

[0109] Also, the pipe may also be connected from the lubricating apparatus to the nozzle frame through an opening formed in the inside diameter surface of the outer housing.

[0110] In this case, even in a structure which cannot provide a space for arrangement of a pipe in the axial direction of the spindle shaft, the pipe can be installed by arranging it in a direction perpendicular to the axial direction of the housing.

[0111] Further, in the present spindle apparatus, the inner housing may include a first inner housing to which the outer races of the rolling bearings are to be fixed, and a second inner housing including an insertion portion for storing therein the first inner housing in the axial direction thereof, while the inside diameter of the inner peripheral surface of the insertion portion of the second inner housing is set larger than the outside diameter of the outer peripheral surface of the first inner housing.

[0112] According to this structure, when the first inner housing is inserted into the second inner housing in the axial direction thereof, since the pipe cannot be caught by and between them, the first inner housing can be inserted smoothly. Thanks to this, even in the deep and limited-space portion of the spindle apparatus, the pipe can be arranged while the spindle apparatus is structured so as to be easy to assemble.

[0113] Also, in case where a cut-out groove for arrangement of the pipe is formed in the insertion portion of the second inner housing, when the first housing is slid in the axial direction, the pipe can be stored in the cut-out groove, so that the pipe can be inserted smoothly.

BRIEF DESCRIPTION OF THE DRAWINGS

[0114] FIG. 1 is a section view of the internal structure of a spindle apparatus according to a first embodiment of the invention;

[0115] FIG. 2 is a structure view of a lubricating unit employed in the spindle apparatus;

[0116] FIG. 3 is a section view showing a super fine quantity lubricating oil pump;

[0117] FIG. 4 is an enlarged view showing the angle and position of a nozzle;

[0118] FIG. 5 is a view of a time chart showing the time relationship between currents to be applied to a coil and the discharge of lubricating oil;

[0119] FIG. 6 is a block diagram showing a procedure for a discharge quantity correction to be operated by a control device in order to obtain a fixed discharge quantity;

[0120] FIG. 7 is a block diagram of an example of a current control function by discharge quantity;

[0121] FIG. 8 is a circuit diagram of a coil control device employed in a lubricating device;

[0122] FIG. 9 is an explanatory view showing coil current waveforms in conjunction with the operation of a transistor;

[0123] FIG. 10 is a graphical representation of an example of variations in the coil current with respect to the lapse of time;

[0124] FIG. 11 is an explanatory view of the rising characteristic of the coil current in abnormal and normal conditions;

[0125] FIG. 12 is a view of a structure for detecting the coil current;

[0126] FIG. 13 is a block diagram of a schematic structure of a judging device;

[0127] FIG. 14 is a time chart of the operation of the judging device;

[0128] FIG. 15 is an explanatory view of the rising characteristic of the coil current in an air mixing condition and after an air bleed completed condition;

[0129] FIG. 16 is a view of a coil current detect condition from the air mixing condition to the air bleed completed condition;

[0130] FIG. 17 is a block diagram of a schematic structure of an air bleed completion judging device;

[0131] FIG. 18 is a time chart of the operation of the air bleed completion judging device;

[0132] FIG. 19 is a schematic view of an embodiment in testing the performance of a super fine quantity oil lubricating pump;

[0133] FIG. 20 is a schematic view of an embodiment of a visualizing device used when testing the performance of a super fine quantity oil lubricating pump;

[0134] FIG. 21 is a graphical representation of the relationship between the discharge inside diameter of a nozzle outlet and discharge speed from a nozzle;

[0135] FIG. 22 is a graphical representation of the relationship between the parameter L/d^4 of pipe resistance and the speed of oil discharged;

[0136] FIG. 23 is a graphical representation of the relationship between the parameter L/d^4 of pipe resistance and the quantity of oil discharged;

[0137] FIG. 24 is a graphical representation of the relationship between the rotation speed of the spindle and the torque of the bearing;

[0138] FIG. 25 is a graphical representation of the relationship between the rotation speed of the spindle and increases in the temperature in the outer race of the bearing;

[0139] FIG. 26 is a graphical representation of the results obtained when the transitions of the bearing torque are checked;

[0140] FIG. 27 is a graphical representation of a comparison of noise levels between a super fine quantity lubricating oil pump according to the invention and a conventional device;

[0141] FIG. 28 is a schematic view of the super fine quantity lubricating oil pump, showing a state in which the performance test of the multi-branch piping device is executed;

[0142] FIG. 29 is a graphical representation showing the comparison results of the lubricating oil discharge speeds between a case where the multi-branch piping device is used and a case where it is not used;

[0143] FIG. 30 is a graphical representation showing the comparison results of the lubricating oil discharge quantities between a case where the multi-branch piping device is used and a case where it is not used;

[0144] FIG. 31 is a section view of a super fine quantity lubricating oil pump employed in a spindle apparatus according to a second embodiment of the invention;

[0145] FIG. 32 is a schematic view showing a structure of a spindle lubricating apparatus according to a third embodiment of the invention;

[0146] FIG. 33 is a view of a specific structure of a spindle apparatus shown in FIG. 32;

[0147] FIG. 34 is a section view showing the structure of a superfine quantity oil lubricating apparatus with a multi-distribution mechanism shown in FIG. 32;

[0148] FIG. 35 is an enlarged view of the structure of a multi-distribution mechanism shown in FIG. 34;

[0149] FIG. 36 is a section view taken along the arrow lines A-A shown in FIG. 35;

[0150] FIG. 37 is a section view taken along the arrow lines B-B shown in FIG. 35;

[0151] FIG. 38 is a typical view of a rotor valve, showing its operating state;

[0152] FIGS. 39A and 39B are perspective views of a pipe fixing joint;

[0153] FIG. 40 is a section view showing the structure of a superfine quantity oil lubricating apparatus with a multi-distribution mechanism according to a modification of the third embodiment;

[0154] FIG. 41 is an enlarged view of the structure of a multi-distribution mechanism shown in FIG. 40;

[0155] FIG. 42A is a front view of a rotor valve shown in FIG. 41;

[0156] FIG. 42B is a section view of the rotor valve taken along the arrow lines C-C shown in FIG. 42A;

[0157] FIG. 43 is a section view of the multi-distribution mechanism taken along the arrow lines D-D shown in FIG. 41;

[0158] FIG. 44 is a schematic view of an embodiment of a test conducted on the performance of the superfine quantity oil lubricating pump according to the third embodiment;

[0159] FIG. 45 is a graphical representation of variations in the oil discharging quantity with respect to the pipe length according to the third embodiment;

[0160] FIG. 46 is a block diagram of the principles of a lubricating apparatus according to a fourth embodiment of the invention;

[0161] FIG. 47 is a schematic view of the structure of a lubricating apparatus according to a first example of the fourth embodiment;

[0162] FIGS. 48A and 48B are plan views of the main portions of the lubricating apparatus shown in FIG. 47;

[0163] FIG. 49 is a graphical representation of the relationship of the discharge speed with the pipe length with the nozzle diameter as a parameter;

[0164] FIG. 50 is a graphical representation of the relationship of the discharge quantity with respect to the pipe length with the nozzle diameter as a parameter;

[0165] FIG. 51 is a graphical representation of the relationship between the viscosity and the discharge speed with the nozzle diameter as a parameter;

[0166] FIG. 52 is a graphical representation of the relationship between the viscosity and the discharge quantity with the nozzle diameter as a parameter;

[0167] FIG. 53 is a graphical representation of the relationship between the pump pressure and the discharge speed with the nozzle diameter as a parameter;

[0168] FIG. 54 is a graphical representation of the relationship between the pump pressure and the discharge quantity with the nozzle diameter as a parameter;

[0169] FIG. 55 is a graphical representation of the relationship between the flow coefficient and the nozzle diameter found from the measurement results shown in FIGS. 49-54;

[0170] FIG. 56 is a plan view of the main portions of a lubricating apparatus according to a second example of the fourth embodiment;

[0171] FIG. 57 is a plan view of the main portions of a lubricating apparatus according to a modification of the second example of the fourth embodiment;

[0172] FIG. 58 is a plan view of a lubricating apparatus according to a third example of the fourth embodiment, showing a state in which it is applied to an actually used spindle;

[0173] FIG. 59A is a plan view of the structure of a lubricating apparatus according to a fourth example of the fourth embodiment;

[0174] FIG. 59B is a plan view of the main portions of a switch valve used in the fourth example of the fourth embodiment;

[0175] FIG. 60A and 60B are views showing a stator and a rotor of a lubricating apparatus according to a modification of the fourth example of the fourth embodiment;

[0176] FIG. 61 is a plan view of the structure of a lubricating apparatus according to a fifth example of the fourth embodiment of the invention;

[0177] FIGS. 62A and 62B are plan views of a fixed member and a rotary member respectively forming a switch valve;

[0178] FIG. 63 is graphical representation of a speed instruction to be outputted from a controller to a motor;

[0179] FIGS. 64A and 64B are graphical representations of the results of a test (temperature record chart) conducted on the rotation in the fifth example of the fourth embodiment;

[0180] FIG. 65 is graphical representation of the results of measured noises generated from a spindle apparatus according to a conventional oil-air lubricating method and a spindle apparatus according to the lubricating method employed in the fifth example of the fourth embodiment;

[0181] FIG. 66 is a schematic view of the principles of a lubricating apparatus according to a fifth embodiment of the invention;

[0182] FIG. 67 is an explanatory view of the operation of the lubricating apparatus shown in FIG. 66, showing a state thereof when an oil pressure pump is on;

[0183] FIG. 68 is an explanatory view of the operation of the lubricating apparatus shown in FIG. 66, showing a state thereof when an oil pressure pump is off;

[0184] FIG. 69 is a schematic view of the structure of a lubricating apparatus according to the fifth embodiment of the invention;

[0185] FIG. 70A is an explanatory view of a stop plug being a fitting;

[0186] FIG. 70B is an explanatory view of an air bleeding plug being the fitting;

[0187] FIG. 71 is a graphical representation of the discharge piston displacement quantity per unit time in a lubricating apparatus including a drive piston having an idling section;

[0188] FIG. 72 is a graphical representation of the discharge piston displacement quantity per unit time in a lubricating apparatus including a drive piston having no idling section;

[0189] FIG. 73 is a schematic view of the structure of a spindle apparatus according to a sixth embodiment of the invention;

[0190] FIG. 74 is a schematic view of the structure of a fine quantity lubricating apparatus according to the sixth embodiment;

[0191] FIG. 75 is a section view of a nozzle frame according to the sixth embodiment;

[0192] FIG. 76A is a perspective view of a joint formed of resin material such as PEEK resin;

[0193] FIG. 76B is a perspective view of a joint formed of stainless steel;

[0194] FIG. 77 is a perspective view of a tool for fixing a joint;

[0195] FIG. 78 is a graphical representation of the variations of the lubricating oil compression volume with respect to the lengths of pipes, while the relationship between them are plotted with respect to various inside diameters of the pipes;

[0196] FIG. 79 is a graphical representation of the measured variations of the discharge speed of lubricating oil with respect to the pipe lengths, with the pipe inside diameters as a parameter;

[0197] FIG. 80 is a graphical representation of the results shown in FIG. 79 with the pipe parameter $L \cdot d_n^2/d^4$ shown in the abscissas axis thereof;

[0198] FIG. 81 is a graphical representation of the measured results of the variations of the discharge speed v occurring when the Young's modulus of the pipe is changed;

[0199] FIG. 82 is a partially enlarged section view of a spindle apparatus according to a seventh embodiment of the invention;

[0200] FIG. 83 is a section view of a housing according to the seventh embodiment, showing the state of assembly thereof;

[0201] FIG. 84 is a schematic view of a conventional lubricating apparatus of an oil-air type using an air flow as a medium; and,

[0202] FIG. 85A is a view explaining how the end faces of two housings are connected together; and

[0203] FIG. 85B is a view explaining how a nozzle frame and the pipe passages of the housings are connected together.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS OF THE INVENTION

[0204] Now, a description will be given below in detail of the preferred embodiments of a spindle apparatus according to the invention with reference to the accompanying drawings.

[0205] (First Embodiment)

[0206] FIGS. 1 and 2 show the structure of a spindle apparatus according to a first embodiment of the invention. The spindle apparatus 1 comprises bearings for spindle 16a, 16b, 16c, 16d and 17 respectively shown in FIG. 1 as well as a lubricating oil tank 2, a lubricating oil filter 3, an air bleed device 4, a super fine quantity lubricating oil pump 5, a control device 6 for controlling the super fine quantity lubricating oil pump 5, a clogging sensor (a pressure sensor) 8, a multi-branch piping device 9, and a pipe 10, respectively shown in FIG. 2 and a tachometer 7 (see FIG. 1).

[0207] FIG. 1 is a longitudinal section view of the internal structure of the spindle apparatus 1. As shown in FIG. 1, the spindle apparatus 1 comprises a plurality of angular ball bearings 16a, 16b, 16c and 16d respectively used to support the front portion 15a of a spindle 15 horizontally in a freely

rotatable manner, a cylindrical roller bearing 17 for supporting the rear portion 15b of the spindle 15, and a housing 18 for covering the respective outside portions of these bearings 16a, 16b, 16c, 16d and 17. By the way, on a front cover 12, there is mounted a cover 13.

[0208] Of the plurality of angular ball bearings, the outer ring of the rear-most bearing 16d is secured to the inside diameter stepped portion 18a of the housing 18, while the outer ring of the front-most bearing 16a is secured to the front cover 12 through an outer ring holder 14. Also, between the respective outer rings of the angular ball bearings 16a, 16b, 16c and 16d, there are interposed cylindrical-shaped outer ring spacers 21 respectively. In this manner, the respective outer rings of the angular ball bearings 16a, 16b, 16c and 16d are fixed to the inner peripheral surface of the housing 18.

[0209] Referring now to the inner rings of the angular ball bearings 16a, 16b, 16c and 16d, the front end of the inner ring of the front-most bearing 16a is secured to the outside diameter stepped portion 15c of the spindle 15. Between the inner races of the angular ball bearings 16a, 16b, 16c and 16d, there are interposed cylindrical-shaped inner ring spacers 22 respectively, while the rear end of the inner ring of the rear-most bearing 16d is secured to a hold ring-23 fitted with the spindle 15 and is pressed forwardly (in FIG. 1, to the left) in the axial direction thereof. The respective inner rings of the angular ball bearings 16a, 16b, 16c and 16d are fixed to the outside diameter surface of the spindle 15 in such a manner that they can be rotated integrally therewith. By the way, although the spindle 15 in the present embodiment is supported horizontally, for example, when it is used in a machining center, it can be used in such a manner that it is supported vertically or inclinedly.

[0210] The front end of the outer ring of the cylindrical roller bearing 17 is secured to the inside diameter stepped portion 18b of the housing 18 through the outer ring spacer 24a, while the rear end of the outer ring is secured to a rear cover 26 and is fixed to the inner peripheral surface of the housing 18. Also, the front end of the inner ring is secured to the outside stepped portion 15d of the spindle 15 through the inner ring spacer 24b, while the rear end thereof is secured to a hold ring 27 fitted with the spindle 15 and is pressed forwardly in the axial direction thereof. The inner ring of the cylindrical roller bearing 17 is fixed to the outside diameter surface of the spindle 15 in such a manner that it can be rotated integrally therewith.

[0211] To the angular ball bearings 16a, 16b, 16c and 16d as well as to the cylindrical roller bearing 17, there is supplied lubricating oil from the super fine quantity oil lubricating pump 5 through nozzles 20 which are respectively mounted within the housing 18. The respective nozzles 20 are disposed in the interior portion of the housing 18, and are fixed in such a manner that they are inserted through mounting holes extending through the respective outer race spacers 21 from the outside diameter surface. Also, the leading ends of the respective nozzles 20 extend through the outer ring spacers 21 and project into a clearance space formed between the inner ring spacers 22 and inter-outer-ring seats 21. In the present embodiment, there are disposed three nozzles 20 for each bearing. However, the number of nozzles 20 is not limited.

[0212] Next, description will be given below of the operation of the spindle apparatus **1** with reference to **FIGS. 1 and 2**.

[0213] Lubricating oil **25**, which is filled into the lubricating oil tank **2**, flows through the lubricating oil filter **3** and the air bleed device **4** into the super fine quantity oil lubricating pump **5**. The super fine quantity oil lubricating pump **5** is controlled by the control device **6** for an intermittent time adjustment, a lubricating oil quantity adjustment, and a multi-branch piping mechanism respectively for supply of the lubricating oil, so that the super fine quantity oil lubricating pump **5** allows the multi-branch piping device **9** to feed the lubricating oil **25** to the respective pipes **10**. Also, the number of pipes **10** is not limited to the number of bearings. When the number of pipes is equal to the number of bearings, the control device **6** is used to control the flow quantity of the lubricating oil flowing into the individual pipes **10** and the oil discharging intervals, thereby adjusting the quantity of the lubricating oil to be supplied to the bearings. By the way, in case where the lubricating oil is supplied to five pipes **10** in a quantity of 0.002 ml/shot at 2-second intervals from the super fine quantity oil lubricating pump **5** to thereby lubricate five bearings, the lubricating oil is supplied in a quantity of 0.002 ml to each of the five bearings at 10-second intervals.

[0214] Also, the quantity of the lubricating oil to be supplied to the bearings and the oil supply intervals may also be changed for every bearings and the lubricating oil may be supplied from some or all of the pipes. Further, when the number of pipes is larger than the number of bearings, the quantity of the lubricating oil to be supplied to the bearings is set equal to the sum of the pipes that are connected to the bearings. Also, when the number of pipes is smaller than the number of bearings, the pipes are made to branch from their intermediate portions and then the lubricating oil is supplied to the bearings through the branching portions of the pipes.

[0215] The lubricating oil **25**, which is fed to the respective pipes **10**, is positively supplied from the nozzles **20** into the interior portions of the spindle bearings **16a**, **16b**, **16c**, **16d**, and **17**. In this case, the respective nozzles **20** are adjusted to the optimum angles and positions, so that a proper quantity of the lubricating oil **25** can be supplied into the interior portions of the bearings for spindle **16a**, **16b**, **16c**, **16d**, and **17**. Also, the intermittent time adjustment and lubricating oil quantity adjustment are made in accordance with the output of the tachometer **7** for detection of the rotation speed of the spindle. By the way, the lubricating oil quantity can also be adjusted using a flow sensor of a super fine quantity type.

[0216] In supplying the lubricating oil, the lubricating oil filter **3** removes dust which gives rise to a clogged condition. However, in case where dust is mixed into the lubricating oil for some reason or other to thereby cause a clogged condition, that is, in case where the lubricating oil is not supplied normally for some reason or other to thereby cause an abnormal discharge, the clogging sensor (pressure sensor) **8** is actuated to thereby avoid the occurrence of a trouble. Also, in case where the air is mixed, the air bleed device **4**, which is formed of porous material, removes the mixed air.

[0217] Next, description will be given below of the super fine quantity oil lubricating pump **5**.

[0218] **FIG. 3** is a section view of the super fine quantity oil lubricating pump **5**. As shown in **FIG. 3**, there is disposed

a rod body **30** which is made of giant magnetostrictive material having a positive characteristic, and one end portion **30a** of the rod body **30** in the axial direction thereof is fixed to a case **32** through a preload adjust mechanism **31**. As the giant magnetostrictive material of the rod body **30**, for example, there can be suitably used material having a trade name Terfenol-D manufactured by Edge Technologies Co. (ETREMA division), or magnetostrictive material manufactured by TDK Co. When a magnetic field is applied to the rod body **30** by a coil (which will be discussed later) disposed coaxially therewith, the rod body **30** is expanded in the axial direction thereof due to a magnetostrictive phenomenon (Joule effect).

[0219] The preload adjust mechanism **31** may provide, for example, a screw mechanism which, when it is rotated, can project in the axial direction of the rod body **30** to press against one end portion **30a** of the rod body **30**. In the other end portion **30b** of the rod body **30** in the axial direction thereof, there is disposed a pressure transmission member **34** which can energize the rod body **30** to the preload adjust mechanism **31** side by a Belleville spring **33** to transmit the pressure without producing a clearance with respect to the axial direction of the rod body **30**, while the rod body **30** is connected to a piston **35** through the pressure transmission member **34**. The piston **35** is slidably disposed in the interior portion of a cylinder **36**. The cylinder **36** is formed in such a manner that the transverse area **S** of its piston sliding space in a direction extending at right angles to the axial direction thereof is set smaller than the transverse area **A** of the rod body **30** in a direction extending at right angles to the axial direction thereof; and, in the interior portion of the cylinder **36**, there is formed a pump chamber **37**. The cylinder **36** is connected through a pipe **38** to the clogging sensor **8** (see **FIG. 2**). Here, although a check valve is not interposed between the pump chamber **37** and clogging sensor **8**, the check valve may also be provided.

[0220] Also, in the cylinder **36**, there is formed a suction port **39** which is used to suck the lubricating oil **25** into the pump chamber **37**. In the suction port **39**, there is disposed a suction valve **40**; and, the suction valve **40** provides a check valve which prevents the lubricating oil **25** from flowing externally of the pump chamber **37**. Also, the flow passage sectional area **Y** of the suction valve **40** is set larger than the sectional area of the discharge opening **20a** of the nozzle **20** enlargedly shown in **FIG. 4**, while the suction port **39** is pipe-connected through a lubricating oil delivery pipe **41** to the lubricating oil tank **2**. Therefore, the lubricating oil **25** can be delivered from the lubricating oil tank **2** to the pump chamber **37** through the lubricating oil delivery pipe **41**, whereas the lubricating oil **25** is prevented from flowing reversely from the pump chamber **37** to the lubricating oil tank **2**.

[0221] On the outer periphery of the rod body **30**, there is coaxially disposed a coil **43** and, further, on the outer periphery of the coil **43**, there is disposed a yoke **44** which is formed of magnetic material and forms a magnetic circuit in conjunction with the rod body **30**. The yoke **44**, the base end of the cylinder **36** on the rod body **30** side thereof, and part of the lubricating oil delivery pipe **41** are stored in the interior portion of the case **32**.

[0222] To the coil **43**, there is electrically connected the control device **6**. The control device **6** outputs to the coil **43**

a current which is used to generate a magnetic field. Due to application of this current to the coil 43, the rod body 30 receives the magnetic field generated from the coil 43 and is thereby expanded, so that the lubricating oil 25 within the pump chamber 37 is passed through the pipe 38 and is discharged out from the nozzle 20.

[0223] Referring to the shape of the nozzle 20, as shown in FIG. 4, the discharge opening portion 20a of the nozzle 20 in the leading end of the flow passage is formed in an inclined manner, so that a pipe can be arranged even in a narrow space. In case where there is room in the pipe installation space, the nozzle can be formed in a straight manner and the pipe can be installed obliquely or horizontally at an oil supply target position. Referring to the lubrication in the interior portion of the bearing, since the oil supply quantity is very fine, the oil supply target position is important. As the oil supply target position, as shown in FIG. 4, the contact portion between the inner race and ball is preferred. Thanks to this, a retainer and outer race way surface can be lubricated by the lubricating oil 25 which is allowed to flow outside due to a centrifugal force generated with respect to the inner raceway surface. For example, the diameter H of the oil supply target position can be set such that $H = (dc1 + Di1)/2$. Here, dc1 expresses the inside diameter of the retainer, and Di1 expresses the outside diameter of the inner race. In this manner, by designing the angle and position of the nozzle 20 optimally, the lubricating oil can be accurately supplied at a desired position in the interior portion of the bearing in a pin-spot supply manner.

[0224] Next, description will be given below of the operation of the super fine quantity oil lubricating pump 5.

[0225] FIG. 5 shows a time chart representing the time relationship between currents to be applied to the coil 43 and the discharge of the lubricating oil, and FIG. 6 shows a block diagram displaying the procedure for the discharge quantity correction to be operated by the control device 6 in order to obtain a fixed quantity of oil discharge.

[0226] In case where a current is output from the control device 6 to the coil 43 in accordance with a pattern (61) shown in (a) of FIG. 5, the coil 43 generates a magnetic field to thereby expand the rod body 30 formed of giant magnetostrictive material. Since one end portion 30a side of the rod body 30 is fixed, the rod body 30 is expanded in the axial direction thereof on the other end portion 30b side thereof; and, the piston 35 follows this expanding operation and thus moves in a pattern (62) similar to a current shown in (b) of FIG. 5.

[0227] As the piston 35 moves, the lubricating oil 25 within the pump chamber 37 is compressed and, as shown in a pressure increase pattern in (c) of FIG. 5, the pressure within the cylinder 36 is increased. Due to such increase in the pressure, the suction valve 40 in the suction port 39 is closed so that the air accumulated in the leading end portion of the nozzle 20 in the previous discharge was discharged from the nozzle 20 in such a manner as shown by a discharge pattern (64) in (d) of FIG. 5. After then, the lubricating oil 25 is discharged out to the outside from the nozzle 20 at high speed in such a discharge pattern (65) as shown in (e) of FIG. 5. And, in case where the current to the coil 43 becomes steady, the expansion of the rod body 30 is caused to stop and the pressure of the pump chamber 37 is lowered due to the discharge of the lubricating oil 25.

[0228] After then, in case where the output of the current from the control device 6 to the coil 43 is stopped, the expanded rod body 30 contracts so as to return back to its original condition, so that the internal capacity of the pump chamber 37 is increased. At the then time, as shown by a pressure pattern (66) in (c) of FIG. 5, the pump chamber 37 becomes negative in pressure, with the result that, as shown in a discharge pattern (67) in (e) of FIG. 5, the lubricating oil 25 is supplied through the suction valve 40 to the pump chamber 37. At the same time, as shown by a discharge pattern (68) in (d) of FIG. 5, a slight quantity of air also flows in from the leading end of the nozzle.

[0229] The flow-in quantity of this air is sufficiently small when compared with the supply quantity of the lubricating oil 25. Referring further to the flow-in quantity of the lubricating oil 25 and the flow-in quantity of the air, because the sectional area of the nozzle flow passage in a direction at right angles to the axial direction of the nozzle is sufficiently smaller than the sectional area of the suction valve flow passage in a direction at right angles to the axial direction of the suction valve 40, and also because the suction valve 40 is situated closer to the piston 35 than the nozzle 20, the negative pressure transmission time is shortened, with the result that the quantity of the lubricating oil from the suction valve 40 becomes larger than the flow-in quantity of the air. Therefore, in the next discharge operation time as well, similarly, the lubricating oil discharge is possible.

[0230] Preferably, the volume of the nozzle hole of the nozzle 20 may be equal to or greater than the volume of the air flowing from the nozzle hole in the above-mentioned suction step. The reason for this is as follows: that is, because the resistance of the air when the air passes through the nozzle hole is smaller than the resistance of the lubricating oil 25 when it passes through nozzle hole, in case where the nozzle hole is completely filled with the air, the fluid resistance of the nozzle hole is smaller than that of the suction side check valve, which raises a fear that the lubricating oil 25 is difficult to be sucked in from the suction side check valve.

[0231] There may also be interposed a check valve between the pump chamber 37 and the discharge side pipe. By the way, in this case as well, due to delay in the response of the discharge side check valve as well as due to the closing operation of the valve, a slight quantity of air flows in through the nozzle hole; that is, it can be expected to avoid a fear that the lubricating oil 25 can drip down from the leading end of the nozzle, but the oil dripping preventive effect is lowered.

[0232] Now, since there are present the flow-in of the air from the nozzle 20 when the rod body 30 is contracted, a decrease in the volume of the lubricating oil 25 caused by the compression of the lubricating oil 25 within the internal capacity between the suction valve 40 and the exit of the nozzle, and an increase in the internal capacity caused by the pressure deformation of parts defining the internal capacity such as a cylinder and a pipe, although they are respectively very small in quantity. In order to be able to discharge the lubricating oil 25 in a desired quantity from the nozzle 20 with accuracy, it is necessary to set the discharge quantity with these variable elements taken into account.

[0233] In view of this, the super fine quantity oil lubricating pump 5 according to the present embodiment is

characterized in that a current is applied to the coil 43 from the control device 6 with these variable elements taken into account. That is, in the present embodiment, as shown in FIG. 6, "the volume decrease quantity of the lubricating oil when compressed", "increase in the internal capacity", and "air suction quantity when the rod body is contracted" are regarded as main variable elements; and, the current is set with these variable elements taken into account. The variable elements may further include other elements such as the temperature of the lubricating oil 25 and the viscous resistance of the lubricating oil 25.

[0234] A decrease in the capacity of the pump chamber 37 caused when the rod body 30 is expanded, as shown in an equation (1), is equal to the sum of the quantity of the air flowing in from the nozzle 20 when the rod body 30 is compressed, the volume decrease quantity of the lubricating oil 25 within the internal capacity between the suction valve 40 and nozzle exit when the lubricating oil 25 is compressed, an increase in the internal capacity due to the pressure deformation of the parts defining the internal capacity, and a required discharge quantity of the lubricating oil 25 to be discharged from the nozzle 20.

$$\begin{aligned} \text{Decrease in the capacity of the pump chamber 37} & \quad (1) \\ & (\text{piston cross sectional area} \times \text{piston movement length}) = \\ & (\text{quantity of the air flowing in from the nozzle when} \\ & \quad \text{the rod body is contracted}) + (\text{volume decrease} \\ & \quad \text{quantity of the lubricating oil due to high pressure}) + \\ & (\text{increase in the internal capacity due to high pressure}) + \\ & \quad (\text{required discharge quantity } Q_{rf}) \end{aligned}$$

[0235] By controlling the current to be applied to the coil 43 in such a manner as to satisfy the equation (1), a very small quantity, that is, of the order of 0.0005-0.01 ml of the lubricating oil 25 can be discharged out intermittently at the high speeds of approx. 10 m/sec. -100 m/sec.

[0236] By the way, as the values of the respective items in the equation (1), the measured or set values can be used depending on a spindle apparatus used.

[0237] The discharge quantity of the lubricating oil 25 can be found according to an equation (2).

$$Q_r = \Delta f \quad (2)$$

[0238] Here, Q_r [ml/sec.] expresses a required discharge quantity (a set discharge quantity), Δ [ml/shot] expresses a discharge quantity per operation when a rated current is supplied, and f [shot/sec.] expresses an operation frequency (a supply frequency) to be applied to the coil 43.

[0239] The set discharge quantity Q_r is classified to three conditions shown in FIG. 7 according to the value thereof, then can be controlled as follows.

[0240] At first, in case where the set discharge quantity Q_r is equal to or smaller than a discharge quantity when the minimum shot is carried out at the highest operation frequency, that is, in the case of (51) where $Q_r \leq \Delta_{\min} \cdot f_{\max}$, a discharge quantity Δ per operation and an operation frequency f are respectively set in the following manner:

That is, $\Delta = \Delta_{\min}$, $f = Q_r / \Delta_{\min}$.

[0241] Here, $\Delta_{\min}$ [ml/shot] expresses the minimum discharge quantity per operation at the minimum current that can be controlled, in the present embodiment, it is set as 0.001 [ml/shot]. Also, $f_{\max}$ [shot/sec.] expresses the highest operation frequency that can be output in the present apparatus.

[0242] Therefore, a final set discharge quantity (a required discharge quantity) Q_{rf} in this case is set according to an equation (3).

$$Q_{rf} = \Delta_{\min} \times (Q_r / \Delta_{\min}) \quad (3)$$

[0243] Also, in the case of (52) where a set discharge quantity Q_r is $\Delta_{\min} \cdot f_{\max} < Q_r \leq \Delta_{\max} \cdot f_{\max}$ (here, $\Delta_{\max}$ [ml/shot] is the maximum discharge quantity per operation at the controllable maximum current), a discharge quantity Δ per operation and an operation frequency f in a position operation are respectively set in the following manner:

That is, $\Delta = Q_r / f_{\max}$, $f = f_{\max}$.

[0244] Therefore, a final set discharge quantity (a required discharge quantity) Q_{rf} in this case is set according to an equation (4).

$$\text{That is, } Q_{rf} = (Q_r / f_{\max}) \times f_{\max} \quad (4)$$

[0245] And, in the case of (53) where a set discharge quantity Q_r is set such that $\Delta_{\max} \cdot f_{\max} < Q_r$, since this quantity exceeds the discharge ability of the present apparatus, a discharge disapproval signal is output from the control device 6 (see FIG. 6).

[0246] As a result, according to the above-mentioned super fine quantity oil lubricating pump 5, there can be provided the following effects.

[0247] That is, in the contracted condition of the rod body 30, since the air flows in from the nozzle 20 and the leading end of the liquid surface of the lubricating oil is there by moved to the interior portion of the nozzle, the lubricating oil can be prevented from dripping down when the present pump is out of operation.

[0248] Also, in the expanded condition of the rod body 30, during the time when the air in the leading end of the nozzle is pushed out, the pressure of the lubricating oil 25 within the cylinder 36 is increased. For this reason, there is produced a slight delay in the time necessary for the lubricating oil 25 to be discharged from the nozzle end. However, this delay time is cancelled by the time necessary for the lubricating oil 25 to be increased up to a given pressure. As a result of this, at the discharge time of the lubricating oil 25, there can be obtained a high discharge speed which is close to a given speed, which makes it possible to reduce a possibility that the lubricating oil 25 can be discharged at a speed less than the given speed.

[0249] Further, since the cross sectional area S of the cylinder 36 in a direction at right angles to the axial direction thereof is set smaller than the cross sectional area A of the rod body 30, the pressure of the lubricating oil 25 within the cylinder can be made higher than the pressure generated in the rod body 30 itself, which makes it possible to discharge the lubricating oil 25 at a higher pressure.

[0250] And, by bringing the lubricating oil 25 into direct contact with the surface to be lubricated, there is eliminated the need for provision of an air pump which is used to deliver the lubricating oil 25.

[0251] Also, when increasing the pressure of the lubricating oil 25 within the cylinder up to a high pressure, the compression of the lubricating oil 25 and the expansion of the cylinder 36 cannot be neglected; however, because the current to be applied to the coil 43 is corrected by these variable elements, a desired discharge quantity can be obtained with high accuracy.

[0252] Further, since the coil current is controlled to thereby be able to adjust the lubricating surface contact quantity of the lubricating oil 25 easily, there is no need for provision of a fixed quantity valve. This makes it possible to realize a lubricating device which is simple in structure and compact in size.

[0253] Also, the control device 6 may also be a device which detects the rotation speed of a rotary body to be lubricated, and supplies to the coil 43 a current having a current value corresponding to the detect signal and/or a current supply frequency corresponding to the detect signal, thereby adjusting a lubricating oil discharge quantity. In this case, the lubricating oil 25 can be supplied in the optimum quantity that can vary according to the rotation speed of the rotary body. This not only can prevent the excessive supply of the lubricating oil 25 but also can always provide the optimum lubricating effect.

[0254] For example, the rotation speed of a shaft (a rotary body) of a bearing, to which the lubricating oil is to be supplied, is detected by an encoder, and the thus obtained rotation speed is input to the control device 6. The control device 6 outputs a coil current while adjusting the current value and operation frequency of a drive current to be applied to the coil 43 in such a manner that, when the rotation speed is high, the lubricating oil 25 can be supplied in a large quantity and, for the slow rotation speed, the lubricating oil 25 can be supplied in a small quantity.

[0255] Now, FIG. 8 shows the circuit configuration of the coil control device employed in the lubricating device according to the present embodiment. The control device according to the present embodiment is connected to the coil 43 which is used to expand the rod body 30 made of the giant magnetostrictive element shown in FIG. 3, and controls the application of a current to the coil 43.

[0256] As shown in FIG. 8, the control device 6 comprises a high voltage source 161 for causing an applying current to rise suddenly, a low voltage source 162 for obtaining a required lubricant discharge quantity after the rise of the applied current, and two transistors (FET) Tr1 and Tr2 which are respectively used to switch these voltage sources 161 and 162 according to the outputs of two comparators 163 and 164.

[0257] Referring now to the operation of the control device 6, in case where Tr1 and Tr2 are both firstly turned on, a current is supplied to the coil by the high voltage source 161 and low voltage source 162. At the then time, as shown by a current waveform in FIG. 9, the coil current rises suddenly up to an initial pressure set level (a first current value). The rising characteristic of the coil current is shown by an equation (5).

$$I(t) = E/r [1 - \exp \{-rt/L\}] \quad (5)$$

[0258] where, I: current, E: voltage, r: resistance, and L: inductance.

[0259] For example, assuming that the coil resistance r is 1.7 [Ω], the inductance L is 5 [mH] and the voltage is 200 [V], the current I(t) reaches 5[A] with the passage time t of 128 [μ s] according to the above equation.

[0260] As shown in FIG. 9, in case where 5[A] is set as the initial pressure set level, the control device 6 detects that the current reaches 5[A] and thus the control device 6 turns off Tr1. In response to this, the current is supplied to the coil only from the low voltage source side thereof. The then voltage E of the low voltage source can be found in the following manner.

[0261] If the sectional area of the nozzle is expressed as Sn [mm²], the cross sectional area of the cylinder internal capacity is expressed as Sc [mm²] and the expansion of the giant magnetostrictive element is expressed as ΔL [mm/A], then the expansion speed vm [mm/s] of the giant magnetostrictive element necessary to obtain a required discharge speed v [mm/s] can be expressed by an equation (6).

$$vm = v \cdot Sn / Sc \quad (6)$$

[0262] Also, the required increase speed I' [A/s] of the current can be expressed by an equation (7).

$$I' = vm / \Delta L \quad (7)$$

[0263] For example, assuming that the sectional area Sn of the nozzle is 0.008 [mm²], a required discharge speed v is 50,000 [mm/s], and the cross sectional area Sc of the cylinder internal capacity is 30 [mm²], the required expansion speed vm of the giant magnetostrictive element is 13.3 [mm/s].

[0264] At the then time, assuming that the expansion ΔL of the giant magnetostrictive element is 0.01 [mm/A], the required increase speed ΔI of the current is 1330 [A/s].

[0265] Also, assuming that the discharge quantity is 1 [mm³], the required current increase ΔI can be obtained in the following manner: that is,

$$\Delta I = 1 / (Sc \cdot \Delta L) = 3.3 [A].$$

[0266] A required time T necessary to reach this current value can also be obtained in the following manner: that is,

$$T = 3.3 / 1330 = 2.48 \times 10^{-3} [s].$$

[0267] If the above respective parameters are substituted into the equation (5), then the voltage E is 18.3 [V]. Therefore, under the above condition, this voltage E may be set as the voltage value of the low voltage source 162.

[0268] In this manner, by setting the voltage of the low voltage source as a voltage value to be determined according to the discharge speed, there can be obtained a desired discharge speed in a given pump. And, when the time T passes after the current value reaches an initial stress set level, that is, when a desired discharge quantity is obtained, Tr2 is also turned off to thereby cut the coil current. In case where the generation of the coil current due to the on and off

operations of Tr1 and Tr2 is achieved at a given operation frequency, the lubricant can be discharged intermittently from the lubricating device.

[0269] According to the present system, when compared with a dropper system in which a current is controlled by feeding back the current, and a pulse width control system, the circuit of the control device can be configured in such a manner that power can be saved and the cost thereof can be reduced.

[0270] By the way, the circuit according to the present embodiment is a circuit in which the voltage value can be switched and turned off automatically according to the current value of the coil. However, the voltage value may also be switched and turned off by a timer.

[0271] Also, in FIG. 9, the current is turned off after the current value reaches a required discharge quantity level. In this case, preferably, the current value may be lowered little by little in order to prevent cavitation from occurring within the pump chamber.

[0272] Now, FIG. 10 is a graphical representation of an example of variations in the coil current with respect to the elapsed time. By the way, in this case as well, the inductance L of the coil is 5 [mH] and the resistance r is 1.7 [Ω].

[0273] As shown in FIG. 9, by turning on both of Tr1 and Tr2 of the control device 6 to thereby apply a high voltage, the coil current is caused to rise suddenly.

[0274] Next, Tr1 is turned off to thereby discharge the lubricant at a given discharge speed only by the low voltage source. In FIG. 10, the voltage values of the low voltage source is shown in three kinds, that is, 24 [V], 18 [V], and 12 [V]; and, the voltage E in the above-mentioned calculation example, which is 18.3 [V], is almost equal to the present calculation example which is 18 [V].

[0275] Also, the lubricating device according to the present embodiment is structured in such a manner that it can detect a trouble such as lubricant leakage or a clogged condition to thereby monitor the operating condition of the pump.

[0276] At first, description will be given below of the properties of the magnetostrictive element. As the typical properties of the magnetostrictive element, there can be given the following two properties.

[0277] One of them is a property which is referred to as a Joule effect due to which the magnetostrictive element can be distorted by a magnetic field acting on the magnetostrictive element. As described above, the magnetostrictive pump is structured such that it applies a magnetic field to a magnetostrictive element using this property to thereby expand the magnetostrictive element so as to be able to drive a piston.

[0278] The other is a property which is referred to as a Villari effect. The Villari effect is an effect in which the permeability of a magnetostrictive element is changed according to stresses applied to the magnetostrictive element. When a coil for driving is disposed in a magnetostrictive element, the inductance of the coil can be varied due to the Villari effect. Generally, in giant magnetostrictive material, in case where the stress increases up to about 1 [MPa],

the inductance decreases about 30% with respect to the inductance when the stress is zero.

[0279] Trouble detection is possible by using this Villari effect in the following manner. That is, assuming that when a lubricating device is in normal operation, the pressure within a cylinder is, for example, about 4 [MPa] and the cross sectional area of a piston is $\frac{1}{4}$ of the cross sectional area of a giant magnetostrictive element, the stress of the giant magnetostrictive element is about 1 [MPa]. In this case, the decrease rate of the inductance of the coil including the giant magnetostrictive element is equal to a decrease rate corresponding to the present stress, that is, about 30%.

[0280] Here, in case where a trouble occurs in the lubricating device and the nozzle is thereby clogged, the pressure within the cylinder increases up to a high pressure in the range of 30-40 [MPa], and the stress of the giant magnetostrictive element also increases correspondingly to this cylinder pressure, with the result that the decrease rate of the inductance of the coil is about 40%. On the other hand, in case where lubricant leakage occurs within the giant magnetostrictive material pump, the pressure within the cylinder and the stress of the giant magnetostrictive element are both almost zero, and the decrease rate of the inductance of the coil is also almost zero.

[0281] In this manner, in case where any trouble occurs in the operating condition of the giant magnetostrictive material pump of the lubricating device, the decrease rate of the inductance of the coil varies greatly from 0% to 40%.

[0282] By the way, the rising characteristic of a current flowing in a coil, as described above, can be expressed by the equation (5).

[0283] According to the equation (5), as shown in FIG. 11, when the decrease in the inductance of the coil is small, a current I flowing in the coil rises later than a design value; and, on the other hand, when the decrease in the inductance of the coil is large, the current I rises earlier than the design value.

[0284] In this manner, by detecting the rising time of the current flowing in the coil, the decrease rate of the inductance of the coil, that is, the stress of the giant magnetostrictive element can be detected.

[0285] Thanks to the rising characteristic of the current, as shown in FIG. 12, by monitoring a current flowing in the coil 43 using a detecting resistance 167 and a current judging device 168, it is possible to judge whether the operating condition of the giant magnetostrictive material pump is good or not. The detecting resistance 167 and current judging device 168 respectively correspond to a current measuring device and a trouble judging device.

[0286] That is, in case where the rising time of the current flowing in the coil 43 is almost equal to the design value, it can be found that the giant magnetostrictive material pump is operating properly. In case where the rising time of the current is earlier than the design value, it can be found that the pressure within the cylinder 36 is caused to increase, for example, due to the clogged condition of the nozzle 20 and a great stress has been generated in the giant magnetostrictive element. Also, in case where the rising time of the current is later than the design value, it can be found that there has occurred a trouble such as the leakage of the

lubricant from the lubricant flow passage and only a small stress has been generated in the giant magnetostrictive element.

[0287] Now, FIG. 13 is a block diagram of the schematic structure of the judging device 168, and FIG. 14 is a time chart showing pulse signals respectively generated in correspondence to discharge intervals as well as sensor outputs in steady and abnormal operations of the lubricating device. In this case, signals in the time when the lubricating device is in the discharging condition and detect signals are different in the normal and abnormal conditions, that is, signals in the time corresponding to the pulse issuing time t_a shown in FIG. 14 are detected.

[0288] When detecting the abnormal condition occurrence during the steady operation of the lubricating device, at first, whether the present operating condition is in an air bleed condition in the start stage or not is judged by comparing the cycle number and stroke of the piston 35 with their respective set values. When it is found that the present operating condition is not in the start stage, the output of the coil current is compared with a set value 1 which is a set value for the normal operation. In case where the output of the coil current falls within the range of the lower to upper limits of the set value 1, the current operation continues on as it is; and, on the other hand, in case where it is out of the range of the set value 1, the judging device 168 issues a stop signal for stopping the operation of the lubricating device. Due to this, the detection of the abnormal condition occurrence in the steady operation and the stop of the lubricating device are possible.

[0289] A pulse generator 140 shown in FIG. 13 links a signal for controlling the intermittent operation of the lubricating device with the judging device 168, or links such signal with a timer built in the judging device 168 or a separately provided timer to thereby be able to monitor an output signal from a sensor corresponding to the pulse issuing time t_a shown in FIG. 14. Also, as the judging device 168, there can be used not only the lubricating device but also a computer which controls the operation of a machine in which the lubricating device is used.

[0290] As described above, since there is a close relationship between the pressure of the interior portion of the cylinder 36 and the discharge of the lubricant from the nozzle 20, when the rising of the current of the coil 43 is shifted from the designed target value, it is supposed that the discharge of the lubricant from the nozzle 20 is also out of order.

[0291] Here, referring to an example where the lubricating device according to the invention is used as a device for supplying the lubricant to the rolling bearing of a high-speed spindle, when it is detected that the rising characteristic of the coil current is shifted from the target value, the current judging device 168 is allowed to issue an abnormal signal to thereby be able to enforce a feed back control, for example, to stop the rotation of the high-speed spindle urgently.

[0292] Also, the present embodiment is structured such that completion of air bleed from the nozzle can be detected.

[0293] As described before, thanks to the Villari effect that is one of the main properties of a magnetostrictive element, with respect to the inductance when a stress given to a giant

magnetostrictive element is zero, the inductance when the stress is 1 [MPa] decreases about 30%.

[0294] Due to the above relationship, the quickness of the rising of a current flowing in a coil shown in FIG. 15 is connected with a stress which a giant magnetostrictive element receives, that is, is connected with the pressure in the interior portion of a cylinder. Therefore, by detecting a current flowing in a coil as shown in FIG. 16 using the detecting resistance 167 and current judging device 168 (which respectively correspond to a current measuring device and an air mixture judging device) shown in FIG. 12, completion of air bleed of a giant magnetostrictive material pump can be judged.

[0295] In other words, when detecting the air bleed completion in the start time of the operation of the lubricating device, when the rising characteristic of the current is compared with the characteristic of the current in the normal state thereof, in case where the current rising time is longer than a given steady time, that is, when the current value after the time t is small, it is judged that the air remains within the cylinder 36 and within the lubricant flow passage. When the air remains still, in order to remove the air in a short time, the giant magnetostrictive material pump is operated by the control device 6 shown in FIG. 3 in such a manner that the piston 36 can be driven at a faster cycle than the steady state thereof as well as with a large stroke. After then, when the air bleed is completed, that is, when the current value becomes the steady value, the giant magnetostrictive material pump is returned back to its steady state operation.

[0296] Due to this, for example, when the lubricating device is operated for the first time or when the operation of the lubricating device is started in the morning, the air bleed can be automatically completed in a short time.

[0297] Now, FIG. 17 is a block diagram of the schematic structure of the judging device 168 which is used to judge the air bleed completion, and FIG. 18 is a time chart pulse signals to be generated correspondingly to discharge intervals as well as sensor outputs in the air mixing time and in the air bleed completion time when the lubricating device is started. In this case, the judging device 168 detects a signal which corresponds to the time when not only the lubricating device is in the discharge state but also there is a difference in a detect signal between the normal state and the air mixed state, that is, a signal which corresponds to the pulse issuing time t_a shown FIG. 18. Similarly to the above, in case of detecting the completion of air bleed, whether the present operating state is the air bleed state in the start time of the lubricating device or not is judged by comparing the number of cycles and strokes of the piston 35 with their respective set values. When the operating state is the start time, the output of the pressure sensor is compared with the set value 2 that is a set value in the normal state. In case where the output of the pressure sensor is smaller than the set value 2 and out of the set range, the current operation is allowed to continue on. On the other hand, in case where it is equal to or larger than the set value 2, there is generated a signal which shows that the operation is in the steady state.

[0298] In this manner, whether the air bleed is completed or not can be detected as well as the cycle number and stroke of the piston 5 can be switched to the steady operating state.

[0299] A pulse generator 140 shown in FIG. 17 links a signal for controlling the intermittent operation of the lubri-

cating device with the judging device **168**, or links such signal with a timer built in the judging device **168** or a separately provided timer to thereby be able to monitor an output signal from a sensor corresponding to the pulse issuing time as shown in **FIG. 18**. Also, as the judging device **168**, there can be used not only the present lubricating device but also a computer which controls the operation of a machine in which the lubricating device is used.

[0300] Next, description will be given below of a performance test conducted on the super fine quantity oil lubricating pump **5**.

[0301] **FIGS. 19 and 20** are respectively schematic views of an embodiment in which the performance of the super fine quantity oil lubricating pump **5** was conducted. Here, description will be given of the results obtained by checking the influence of an air curtain on the nozzle **20** in the high-speed rotation of the spindle when the discharge state of the lubricating oil **25** was visualized by a CCD camera **56** and videotape recorded, the relationship of the pipe inside diameter and length with the discharge speed, and the relationship between the pipe inside diameter and discharge oil quantity, respectively. By the way, as the pipe material, there are used metal such as austenite stainless steel SUS 316, and plastics such as PEEK (polyether-ether-keton). However, there can also be used other material such as ordinary iron/steel material, aluminium/copper non-metallic material, plastic material, and ceramic material.

[0302] The present performance test was conducted under a severer condition (that is, under a condition that is easy to be influenced by the air curtain) by setting the distance between the nozzle leading end and the bearing as about 50 mm which is much longer than the normal distance (about 10 mm).

[0303] Supply of the lubricating oil to the interior portion of the bearing was set such that the lubricating oil can lubricate the contact portion between the inner race and rolling elements, while the lubricating oil supply state was visualized and was videotape recorded. A visualizing apparatus is composed of a strobe **55**, a CCD camera **56**, a control device **57** for controlling the strobe **55** and CCD camera **56**, a videotape recorder **58** for recording video signals from the CCD camera **56**, and a monitor **59** for displaying the images that have been recorded by the videotape recorder **58**.

[0304] The visualizing apparatus was used to strobe observed the lubricating state in which the lubricating oil **25** was discharged from the nozzle **20**. As the lubricating oil, there was used mineral oil VG22 (kinematic viscosity: 22 mm²/s at a temperature of 40° C).

[0305] In this manner, the discharge state of the lubricating oil **25** was visualized and was tested under various conditions. As a result of this, it could be confirmed that the lubricating oil **25** can be supplied in a fine quantity by the super fine quantity lubricating pump **5** without being influenced by an air curtain which occurs in the interior portion of the bearing. Also, the optimum discharge condition could also be found out. Here, the discharge speed that is free from the influence of the air curtain occurring in the interior portion of the bearing was set equal to or more than 10% of the inner ring shoulder peripheral speed based on previous results. For example, in a bearing with an outer ring outside diameter of 160 mm, an inner ring inside diameter of 100

mm, and a rolling element pitch circle diameter $d_m=132.5$ mm, a peripheral speed at a position of the rolling element pitch circle diameter d_m provides 131.8 m/sec. in the case of the rotational speed $N=19000$ min⁻¹. That is, the discharge speed 13 m/sec., which is about 10% of the peripheral speed, provides a standard and, as this value is larger and the discharge quantity is larger, the discharge condition can be set more widely.

[0306] Now, **FIGS. 21 to 23** respectively show the test results of the discharge state of the lubricating oil.

[0307] **FIG. 21** is a graphical representation of the relationship between the discharge inside diameter of the nozzle **20** and the discharge speed, showing the results obtained by conducting the test with the discharge inside diameter of the nozzle as a parameter. As shown in **FIG. 21**, the smaller the discharge inside diameter of the nozzle is, the smaller the discharge quantity is and the larger the discharge speed is. And, as a result of the test, in case where the discharge diameter of the nozzle was smaller than 0.08 mm, variations in the discharge oil quantity increased; and, in the case of the nozzle discharge diameter being larger than 0.6 mm, the discharge speed showed an insufficient value which is equal to or less than 13 m/sec. Therefore, it is preferred that the effective range value of the discharge diameter of the nozzle may range from 0.08 to 0.6mm. In this range, the lubricating oil is discharged at a discharge speed of 13-70 m/sec., and in a discharge oil quantity of 0.0008-0.004 ml per shot. Further, when balance between a discharge speed and a discharge oil quantity at a high speed is taken into account, it is especially preferred that the nozzle discharge diameter may be set in the range of 0.1-0.5 mm. In this case, the lubricating oil is discharged at a discharge speed of 25-68 m/sec., and in a discharge oil quantity of 0.001 ml -0.003 ml per shot.

[0308] Also, the discharge speed and discharge oil quantity are also influenced by the kinematic viscosity characteristic of lubricating oil; for example, in lubricating oil having a kinematic viscosity of 5 mm²/s -50 mm²/s at a temperature of 40° C., the discharge speed is in the range of 10 m/sec. -100 m/sec., while the discharge oil quantity is in the range of 0.0005 ml per shot -0.01 ml per shot.

[0309] Now, **FIG. 22** show the results obtained when the discharge state of the lubricating oil **25** from the nozzle **20** was visualized and the discharge speed thereof was checked. Here, the respective discharge speeds, which were obtained when the pipe inside diameter d was set in the range of 0.5-1.5 mm and the pipe length L was set in the range of 100 mm -3000 mm, are graphically represented with the parameter L/d^4 of the pipe resistance as the abscissa. As can be seen from this graphical representation, in the case of $L/d^4 \leq 12000$ (mm⁻³), the discharge speed is equal to or more than 13 m/sec., which satisfies the required discharge speed.

[0310] **FIG. 23** is a graphical representation of the relationship between the parameter L/d^4 of the pipe resistance and the discharge oil quantity. As can be seen from this graphical representation, in the range of $L/d^4 \leq 12000$ (mm⁻³), a fine oil quantity of 0.0008 ml/shot or more can be supplied; and, in the range of $L/d^4 \leq 10000$ (mm⁻³), a fine oil quantity of 0.001 ml/shot or more can be supplied. Therefore, by combining L with d in the range of $L/d^4 \leq 12000$ (mm⁻³), it is possible to set the discharge speed equal to or larger than 13 m/sec. and the discharge oil quantity equal to

or larger than 0.0008 ml/shot. Further, in the range of $L/d^4 \leq 10000 \text{ (mm}^{-3}\text{)}$, it is possible to set the discharge speed equal to or larger than 13 m/sec. and the discharge oil quantity equal to or larger than 0.001 ml/shot. Also, L/d^4 is restricted by the fact that the pipe length cannot be shortened due to the condition of the apparatus and thus $L/d^4 \geq 5 \text{ (mm}^{-3}\text{)}$ is the practical range. In case where the pipe diameter is changed on the way, as d , there is used a mean diameter for the whole pipe length.

[0311] Next, a rotation test was conducted using a spindle apparatus according to the present embodiment; and, the performance of the angular ball bearing 16a when using the super fine quantity oil lubricating pump 5 was compared with the performance thereof when using a conventional oil-air lubricating system.

[0312] As the test bearing, there was used a bearing which has the following contents: that is, outer ring outside diameter: 160 mm, inner ring inside diameter: 100 mm, rolling element pitch circle diameter d_m : 132.5 mm, outer/inner race groove radius of curvature: 52-56% of the ball diameter, contact angle: 20 degrees, inner/outer ring material: SUJ2, and rolling element material: Si_3N_4 . And, under the conditions of lubricating oil: mineral oil VG22 (kinematic viscosity: 22 mm^2/s at a temperature of 40° C.), axial load: 980N, nozzle number per bearing: in the case of the conventional oil-air lubrication, three nozzles and, in the case of the super fine quantity oil lubricating pump, one nozzle, and 0-15000 min^{-1} (in part, 19000 min^{-1} , $d_m \cdot N = 2500000$), there were conducted tests respectively on the relationship between the spindle rotation speed and bearing torque, the relationship between the spindle rotation speed and outer ring temperature rise, a comparison of bearing torque variations, a comparison of noise levels, and observation of visualization (videotape recorded images) of the state of the super fine quantity oil lubricating pump.

[0313] FIG. 24 is a graphical representation which shows the relationship between the spindle rotation speed and bearing torque. In FIG. 24, the oil-air lubricating system corresponds to the data obtained when three nozzles respectively discharge lubricating oil of 0.03 ml per shot at the interval of 8 min.; the super fine quantity oil lubricating system corresponds to the data obtained when one nozzle discharges lubricating oil of 0.002 ml per shot at the intervals of 10 sec., 40 sec., and 1 sec.; and, discharged oil quantities per unit time are respectively 0.01125 ml/min., 0.012 ml/min., 0.003 ml/min., and 0.12 ml/min.

[0314] In the conventional oil-air lubricating system, at the rotation speed of 15000 min^{-1} ($d_m \cdot N = 2000000$), the bearing torque is 0.18 N·m, whereas, in the super fine quantity oil lubricating system according to the invention, the bearing torque is 0.14 N·m which is lower than in the conventional system. Further, at the rotation speed of 19000 min^{-1} ($d_m \cdot N = 2500000$) as well, the bearing torque according to the invention is 0.16 N·m. That is, the apparatus according to the invention is lower in the bearing torque than the conventional apparatus.

[0315] From the torque characteristics shown in FIG. 24, in case where the supply oil quantity is in the range of 0.003 ml/min. -0.12 ml/min., the torque in the case of the super fine quantity oil lubrication, at a rotation speed equal to or higher than the rotation speed of 12000-15000 min^{-1} , becomes smaller as the supply interval is shorter, that is, as

the supply oil quantity per unit time is larger. This is because, in order that the lowering of the oil film forming performance due to an increase in the temperature at a high speed can be prevented, there is required a certain degree of lubricating oil quantity. That is, for the respective rotation speeds used, there are present the optimum lubrication oil quantity, the optimum lubricating oil supply interval, and the optimum discharge oil quantity. The optimum lubrication oil quantity, lubricating oil supply interval and discharge oil quantity at the highest rotation speed can also be set according to the highest rotation speed. However, in case where the lubricating oil quantity is large, in the low speed rotation, the bearing torque can be too large. In this case, it is preferable that the control device may supply the lubricating oil in such a manner that it selects the optimum lubrication oil quantity, lubricating oil supply interval and discharge oil quantity to each of the rotation speeds.

[0316] By the way, in the case of the cylindrical roller bearing 17, not only because there is no spin as in the angular ball bearing but also because the contact surface pressure thereof is smaller than the angular ball bearing, even when the supply oil quantity is small, the bearing 17 can keep its oil film forming performance, while a range of 0.0005 ml/min. -0.12ml/min. is the optimum condition of the supply oil quantity.

[0317] Next, FIG. 25 is a graphical representation of the relationship between the spindle rotation speed and outer race temperature increase.

[0318] As can be seen from this graphical representation, with respect to the outer ring temperature rise, the super fine quantity oil lubricating system is low in temperature when compared with the conventional oil-air lubricating system. In the present FIG. 25 and in the previous FIG. 24, in the case of the oil-air lubricating system, there are shown only the data up to the rotation speed of 15000 min^{-1} . This is because, when the temperature was increasing into the range of 15000 min^{-1} -17000 min^{-1} , the gradient of the temperature rise was steep and the outer ring temperature rise exceeds 60° C., so that the test was interrupted. That is, when compared with the conventional oil-air lubricating system, the super fine quantity oil lubricating system produces less torque, can restrict the temperature increase, and can rotate the spindle at a high speed. By the way, in case where, in the low speed rotation, the bearing temperature and torque increase due to the excessive supply of the lubricating oil provides a problem, as a counter measure against this, in the case of the super fine quantity lubricating oil pump 5, it is able to control lubricating oil supply quantity.

[0319] Next, FIG. 26 is a graphical representation of the results obtained by checking the changes of the bearing torque and bearing temperature when the lubricating oil is supplied. Here, in the oil-air lubricating system of FIG. 26A, there are shown data obtained when three nozzles respectively discharged the lubricating oil in a quantity of 0.03 ml per shot at the intervals of 8 min., a total of 0.01125 ml/min. And, in the super fine quantity oil lubricating system of FIG. 26B, there are shown the data obtained when a single nozzle discharged the lubricating oil in a quantity of 0.002 ml of per shot at the interval of 10 sec., a total of 0.012 ml/min.

[0320] In the conventional oil-air lubricating system, the three nozzles respectively supply the lubricating oil in a

quantity of 0.03 ml per shot at the intervals of 8 min. However, as shown in **FIG. 26A**, after the lubricating oil is supplied, the bearing torque varies outstandingly and, in response to this, the bearing temperature increases. On the other hand, in the super fine quantity oil lubricating system, although the lubricating oil quantity per unit time is almost equal to the conventional oil-air lubricating system, the supply oil quantity per shot is extremely small and the supply interval is short, so that the bearing torque and bearing temperature vary in such a slight manner that the oil supply time cannot be distinguished.

[0321] Next, **FIG. 27** is a graphical representation of the results obtained by comparing the noise levels of the super fine quantity oil lubricating pump according to the present embodiment with those of the conventional device. The lubricating conditions in this comparison are also the same as in **FIG. 26**. As can be seen from this graphical representation, in the spindle apparatus according to the present embodiment, since there is not used compressed air, the noise level thereof is low when compared with the conventional oil-air lubricating system.

[0322] Next, description will be given below of the results of a test conducted on the performance of the spindle apparatus a multi-branch piping device in a case where there is disposed, in a spindle apparatus including a plurality of bearings according to the invention, a multi-branch piping device for supplying the lubricating oil from the superfine quantity lubricating oil pump **5** distributively to the plurality of bearings.

[0323] Now, **FIG. 28** is a schematic view of an embodiment of the super fine quantity lubricating oil pump **5**, showing a state in which the performance test of the multi-branch piping device is executed. In this embodiment, there is employed a structure in which lubricating oil from the superfine quantity lubricating oil pump **5** is distributed and supplied to the plurality of bearings using a multi-branch piping device **9** interposed between the superfine quantity lubricating oil pump **5** and a nozzle **20**. And, in this performance test, the discharge states of the lubricating oil were visualized and video recorded and the multi-branch piping device **9** was checked for its performance, specifically, the relationship between the pipe length and the discharge speed of the nozzle **20** as well as the relationship between the pipe length and the discharge quantity of the nozzle **20** when the spindle is rotated at a high speed.

[0324] In the present test, as the multi-branch piping device **9**, there was used a six-way valve which belong to the "AUTOMATIC VALVE UNIT 401 SERIES" manufactured by LABO SYSTEM Mfg. Co. and as a pipe **10**, there was used a pipe which is formed of stainless steel and has an outside diameter of the order of 1.59 mm ($\frac{1}{16}$ inch) and an inside diameter of 1 mm. The multi-branch piping device **9** is structured such that six units of the pipe **10** can be connected thereto. In case where one nozzle is used for one bearing, one unit of the multi-branch piping device **9** can cope with up to six bearings. By the way, the selection of the pipes **10** used to supply lubricating oil is made by a controller **11** which is connected to the multi-branch piping device **9**.

[0325] A visualizing apparatus **120** includes the electronic flash **55**, the CCD camera **56**, a control unit **57** for controlling the electronic flash **55** and CCD camera **56**, the video-

tape recorder **58** for recording image signals given from the CCD camera **56**, and the monitor **59** for displaying the image signals that are recorded by the videotape recorder **58**.

[0326] To evaluate the performance of the multi-branch piping device **9**, the lubricating oil discharge state from the nozzle **20** was visualized and the lubricating oil discharge speed and discharge quantity from the nozzle **20** were compared between a case where the multi-branch piping device **9** is used and a case where it is not used. In this comparison, as the comparison conditions, a nozzle discharge diameter was set at 0.2 mm and a pipe length was set in the range of 0.5-4.0 m.

[0327] In this comparison test, a total of six pipes were connected to the first to sixth ports (not shown) of the multi-branch piping device **9**, the lengths of these six pipes were varied in the range of 0.5-4.0 mm, and the lubricating oil discharge speeds and lubricating oil quantities from the nozzle **20** connected to the pipes were measured respectively. Also, referring to the lubricating oil supply positions into the interior portions of the bearings, in this test, the contact portions between the rolling bodies and the raceways of the inner rings of the bearings were set as aiming positions.

[0328] Now, **FIG. 29** shows the comparison results of the lubricating oil discharge speeds between a case where the multi-branch piping device **9** is used and a case where it is not used (a pump and a nozzle are directly connected to each other using a pipe). Here, the term "pipe length" used in the abscissa axis of **FIG. 29** expresses a length from the exit of the pump to the entrance of the nozzle. According to **FIG. 29**, it can be found that there is few difference in the lubricating oil discharge speeds between the case where the multi-branch piping device **9** is used and the case where it is not used.

[0329] Now, **FIG. 30** shows the comparison results of the lubricating oil discharge quantities between a case where the multi-branch piping device **9** is used and a case where it is not used. In this comparison, the evaluation conditions thereof were set so as to be similar to those in **FIG. 29**. According to **FIG. 30**, it can be found that there is few difference in the lubricating oil discharge quantities between the case where the multi-branch piping device **9** is used and the case where it is not used. Therefore, use of the multi-branch piping device **9** can generate little loss in supply of lubricating oil within the pipes.

[0330] The above test results show that, due to use of the multi-branch piping device **9**, a single lubricating apparatus is able to supply lubricating oil sufficiently to a spindle apparatus including a plurality of bearings, and also that, even when compared with the case where the multi-branch piping device **9** is not used, there is found no difference in the lubricating oil discharge speeds from the nozzle and in the lubricating oil discharge quantities from the nozzle. That is, use of a multi-branch piping device makes it possible not only to execute stable lubricating oil distributive supply but also to provide equivalent performance to the case where the multi-branch piping device is not used.

[0331] By the way, in the above-mentioned multi-branch piping device **9** of the spindle apparatus, there is used a six-way valve which belong to the "AUTOMATIC VALVE UNIT 401 SERIES" manufactured by LABO SYSTEM

Mfg. Co. However, this is not limitative but, for example, as other commercial automatic valve device, there can also be used a twelve-way valve belonging to the "AUTOMATIC VALVE UNIT 401 SERIES" manufactured by LABO SYSTEM Mfg. Co., or a valve called "LabPRO 6" and a valve called "LabPRO 10" both manufactured by SHIMAZU Mfg. Co. Also, as a multi-branch piping device, the above-mentioned multi-branch piping device **9** is not limitative but any other device may also be used, provided that it has similar mechanism and performance to the multi-branch piping device **9**.

[0332] As has been described heretofore in detail, according to the spindle apparatus of the present embodiment, since there is provided the super fine quantity oil lubricating pump **5** and the angle and position of the nozzle **20** are designed optimally, the lubricating oil **25** can be pin-spot supplied in a super fine quantity (0.0005-0.01 ml/shot) directly to a desired portion within the bearing at the intervals of dozens of seconds.

[0333] Also, because the discharge speed (10-100 m/sec.) from the nozzle **20** is fast, the lubricating oil **25** can be supplied to the interior portion of the bearing accurately without being influenced by the air curtain which can occur when the spindle apparatus rotates at a high speed.

[0334] And, since the lubricating oil supply interval and lubricating oil quantity can be changed by the control device in accordance with the rotation speeds, the lubricating oil can be always supplied in a proper quantity for the rotation of the spindle regardless of the spindle rotation speed.

[0335] This can always provide an ideal lubricating condition in the interior portion of the bearing, which in turn makes it possible to provide a structure which is very excellent in torque stability. Also, an increase in the bearing temperature can also be controlled to a low level. Further, since the lubricating oil **25** is positively supplied to the interior portion of the bearing, there can be obtained a good lubricating oil supply efficiency and the quantity of consumption of the lubricating oil can be reduced. Therefore, the super fine quantity oil lubricating system allows rotation up to a higher speed area than that in the conventional oil-air lubricating system.

[0336] Also, because no compressed air is used, the noise level is low and an oil mist can occur little. And, since the lubricating oil discharge sensor and nozzle clogging sensor are built into the main body of the apparatus, the occurrence of a trouble can be avoided.

[0337] To sum up the above facts, by using the super fine quantity oil lubricating system, a lubricating oil forced lubricating device, a heat exchanger, a lubricating oil collecting device, and other attendant devices such as compressed air, which are used in the conventional lubricating systems including an oil mist lubricating system, an oil-air lubricating system and a jet lubricating system, can be simplified; the noise level can be controlled down to a low level; the consumption of the lubricating oil can be reduced to thereby be consideration for the environment; the bearing torque can be reduced down to a low torque level and can be enhanced in stability; and, the bearing temperature increase can be controlled down to a low level, thereby being able to enhance the rotation accuracy of the spindle. Therefore, according to the present super fine quantity oil lubricating

system, there can be provided a spindle apparatus which is more advantageous and more compact than a spindle apparatus using the conventional lubricating methods.

[0338] By the way, in the present embodiment, in the super fine quantity lubricating oil pump **5**, there is used a giant magnetostrictive element. However, the giant magnetostrictive element is not limitative but, even in other super fine quantity lubricating systems respectively using a piezoelectric element or a combination of an electromagnet and a belleville spring, provided that the lubricating oil is discharged in a fine quantity of 0.0005-0.01 ml/shot is discharged at the discharge speed of 10-100 m/sec., a spindle apparatus is able to obtain a rotation performance equivalent to the spindle apparatus using the giant magnetostrictive element.

[0339] Also, besides the giant magnetostrictive material having a positive characteristic, even magnetostrictive material having a positive and negative characteristic can also be similarly used to form a pump which uses the expansion and contraction of the rod body.

[0340] Further, the use of the above-mentioned lubricating device is not limited to the spindle apparatus shown in FIG. 1, but it can also be used in a spindle apparatus of high speed rotation which is required to be small in various torque variations and temperature increase.

[0341] (Second Embodiment)

[0342] Next, description will be given below of a second embodiment of a spindle apparatus including a super fine quantity lubricating oil pump composed of an electromagnet and a belleville spring according to the invention. By the way, a structure employed in the present embodiment is similar to that of the spindle apparatus according to the first embodiment except for a lubricating device, and thus the duplicate description thereof is omitted here.

[0343] In the case of a super fine quantity lubricating oil pump according to the first embodiment, as a drive source for driving a piston which is used to increase the pressure within a pressurizing chamber (pump chamber), as shown in FIG. 3, there is used the rod-shaped giant magnetostrictive material. As the material of this rod-shaped body, piezoelectric element can also be used depending on the lubricating conditions. A magnetic field or a voltage is applied to the giant magnetostrictive material or piezo-electric element which is connected to the piston **35** to thereby strain the giant magnetostrictive material or piezo-electric element, the giant magnetostrictive material or piezo-electric element is pressed against the piston **35** due to its strain to thereby increase the pressure within the pressurizing chamber (pump chamber) **37**, whereby a super fine quantity of lubricating oil is discharged intermittently from the nozzle. Here, to obtain desired discharge speed and discharge oil quantity, there is required a given strain quantity of the rod body. For example, in case where the desired discharge speed and discharge oil quantity of lubricating oil discharged from a nozzle, which is connected to a pump and having an opening with an inside diameter of 0.1 mm, are respectively set approximately in the range of 10-100 mm/sec. and of the order of 0.0005-0.01 ml/shot, there is required giant magnetostrictive material which is formed in a cylindrical shape and has an outside diameter: 12 mm and a length: about 100 mm (the rod body produces a strain of about 100 μ m, while the strain of the giant magnetostrictive material is about 1000 ppm).

[0344] Now, in the present embodiment, instead of the element formed of the magnetostrictive material or piezo-electric element, an electromagnet and a spring are used to drive a piston, thereby being able to provide a structure which is reduced in both size and cost.

[0345] FIG. 31 is a section view of a super fine quantity lubricating oil pump 260 employed in a spindle apparatus according to the second embodiment of the invention. As shown in FIG. 31, the super fine quantity lubricating oil pump 260 comprises an electromagnet 261, a first housing 262 for storing the electromagnet 261 therein, a movable body (piston) 263 including a collar in the cylindrical-shaped intermediate portion thereof, and a second housing 265 for storing the movable body and a movable body pressing belleville spring 264 therein; and, the super fine quantity lubricating oil pump 260 further includes a pressurizing chamber 266 interposed between the movable body 263 and the second housing 265, a suction-side flow passage 267 and a discharge-side flow passage 268 respectively communicating with the pressurizing chamber 266, and check valves 269 and 270 respectively disposed on the suction-side flow passage 267 and discharge-side flow passage 268.

[0346] In the above-structured super fine quantity lubricating oil pump 260, the belleville spring 264, which is used to push out the movable body 263 to the pressurizing chamber 266 side, is interposed between the collar end face 263a of the movable body 263 and the end face 265a of the second housing 265. The movable body 263, when a current is supplied to the coil of the electromagnet 261 from a coil drive circuit 275, can be attracted toward the electromagnet 261 side and can be thereby contacted with an electromagnet portion 271 formed within the first housing 262. In this state, since the belleville spring 264 is contracted, there is generated a compression force.

[0347] After then, in case where the supply of the current from the control device 275 is cut off, the attracting force of the electromagnet 261 disappears and the movable body 263 is pushed out toward the pressurizing chamber 266 side due to the repulsive force of the belleville spring 264. As a result of this, the pressurizing chamber 266, in which the lubricating oil 25 is stored, is pressurized so that the lubricating oil 25 stored within the pressurizing chamber 266 is discharged from the nozzle 20 through the check valve 270 on the discharge-side oil passage 268. At the then time, the belleville spring 264 is adjusted in the clearance thereof in such a manner that it can be used in the 10-60% area of the whole flexing quantity of the belleville spring 264.

[0348] On the other hand, in the suction process, by supplying a current to the coil of the electromagnet 261 from the control device 275, there is generated a magnetic field in the electromagnet 261, so that the movable body 263 is attracted by the magnetic field. As a result of this, the pressurizing chamber 266 is expanded and thus the lubricating oil 25 is sucked in from the lubricating oil tank 2 through the check valve 269 on the suction-side flow passage 267. Also, as the movable body 263 is attracted, the belleville spring 264 is contracted to thereby generate a compression force which can generate such a pressuring chamber pressure as can obtain a desired discharge speed.

[0349] By repeating the above-mentioned suction and discharge operations, the lubricating oil 25 is discharged

intermittently from the nozzle 20. Also, the electromagnet 261 is formed of a ferromagnetic body and, of course, the attracting force of the electromagnet 261 is set larger than the compression force that is generated by the contraction of the belleville spring 264.

[0350] In the present embodiment, assuming that, for the nozzle diameter of 0.1 mm, the discharge speed is set of the order of 60 m/sec., the discharge oil quantity is set 0.006 ml per shot, the pressure of the pressurizing chamber 266 is set on the order of 4 MPa, the outside diameter of the movable body 263 in the pressurizing chamber portion is set 10 mm, and the movable body stroke length is set 80 μ m, as the belleville spring 64, there may be used a belleville spring for a heavy load which has a nominal size of 12 or larger, which is under the classification of JIS B 2706.

[0351] Also, when designing generally the electromagnet 261 suitable for this arrangement, the dimensions of the electromagnet portion thereof are set such that outside diameter: 50 mm and length: about 40 mm; and, the size of the movable portion drive mechanism portion is about 40% of that obtained when the giant magnetostrictive element according to the first embodiment is used, so that the electromagnet 261 can be made compact. Also, to drive the electromagnet 261, a small power of a direct current having 6 V and about 0.1 A may be supplied. Therefore, in case where the electromagnet 261 is designed in this manner, the present embodiment can have the same function as the first embodiment as well as can reduce the size and cost of the spindle apparatus. Also, in case where a mechanically-operated movable stopper mechanism is disposed in the spindle apparatus, the power supply to the electromagnet 261 may be executed only when contracting the movable body 263, which can save the power consumption as well.

[0352] By the way, in the present embodiment, although no pipe is connected to the spindle apparatus, in case where a pipe is connected, a pipe to be connected, provided it has an inside diameter of about 1 mm and a length of 2 m or less, is sufficiently able to fulfill such performance as about 50% of the above-mentioned discharge speed.

[0353] In this manner, the super fine quantity lubricating oil pump 260 employed in a spindle apparatus according to the present embodiment, using the compression force to be generated by compressing the belleville spring 264, drives the movable body 263 disposed within the cylinder to compress the capacity of the pressurizing chamber 266 to thereby discharge the lubricating oil 25 and, on the other hand, in order to return the movable body 263, the attracting force of the electromagnet 261 is used. Since the super fine quantity lubricating oil pump 260 does not use expensive elements such as magnetostrictive material and piezo-electric element but uses the belleville spring and electromagnet, the spindle apparatus can be manufactured at a low cost and simply, so that the size and cost thereof can be reduced.

[0354] By the way, the super fine quantity lubricating oil pumps 5 and 260 respectively employed in the spindle apparatus according to the above-mentioned first and second embodiments can also be suitably applied to, for example, a machining center of which high precision and high-speed rotation are required.

[0355] Also, in the first embodiment, by detecting the coil current, the abnormal condition and air bleed completion

can be judged. However, the abnormal condition and air bleed completion can also be detected by the following methods:

[0356] (1) A voltage value proportional to a current value is detected by measuring the voltage drop of a detecting resistance using a voltage meter and the current value is detected based on the thus obtained voltage value.

[0357] (2) The intensity of a magnetic field proportional to a current value is measured using a Hall element and the current value is detected based on the thus obtained magnetic field value. In this case, the Hall element may preferably be disposed in the vicinity of the rod body, which makes it possible to detect the expansion and contraction operation of the rod body more directly, thereby being able to enhance the measuring accuracy.

[0358] (3) A pressure sensor is installed within a cylinder and the pressure of the interior portion of the cylinder is detected by the pressure sensor.

[0359] (4) Using a displacement meter for measuring the displacement of a piston, the displacement quantity is detected.

[0360] (5) Using a vibration sensor, vibrations in accordance with the reactive force of a piston are detected.

[0361] Also, as the other use of the spindle apparatus according to the first and second embodiments, for example, there is available the supply of cutting oil in semi-dry work.

[0362] According to the spindle apparatus of the invention, since it includes a super fine quantity oil lubricating pump, a lubricating oil forced circulating device, a heat exchanger, a lubricating oil collecting device, and other attendant facilities such as compressed air, which are used in the conventional lubricating systems such as an oil mist lubricating system, oil-air lubricating system and jet lubricating system, can be simplified; and, the noise level can be controlled down to a low level, the lubricating oil consumption can be reduced to thereby be consideration for the environment, the bearing torque stability can be enhanced, and the bearing temperature increase is small, thereby being able to enhance the rotation accuracy of the spindle.

[0363] (Third Embodiment)

[0364] Now, description will be given below in detail of a third embodiment of a spindle lubricating apparatus with reference to the accompanying drawings.

[0365] Here, FIG. 32 is a schematic view of a spindle lubricating apparatus according to a third embodiment of the invention, and FIG. 33 is a specific structure of a spindle apparatus shown in FIG. 32.

[0366] A spindle lubricating apparatus 300 according to the present embodiment includes a spindle apparatus 314, a superfine quantity oil lubricating apparatus with a multi-distribution mechanism 322 and a controller 324. The spindle apparatus 314 includes a plurality of bearings 310a, 310b, 310c, 310d for rotationally supporting a shaft 305 and a plurality of nozzles 312a, 312b, 312c, 312d respectively for discharging lubricating oil to their associated bearings 310a, 310b, 310c, 310d. The superfine quantity oil lubricating apparatus with a multi-distribution mechanism 322 includes a multi-distribution mechanism 320 for distributing lubricating oil, which is supplied from a superfine quantity

oil lubricating pump (lubricating oil supply device) 316, to pipes 318 which are connected to the plurality of bearings 310a, 310b, 310c, 310d. The controller 324 controls the number of times of supply shots (intermittent times) of the lubricating oil to be supplied to the respective bearings 310a, 310b, 310c, 310d, and also selects the pipes 318 to supply the lubricating oil.

[0367] The lubricating oil discharged from a superfine quantity oil lubricating apparatus with a multi-distribution mechanism 322 flows through the pipes 318 connected to the multi-distribution mechanism 320 and is then supplied from the nozzles 312a, 312b, 312c, 312d to the respective bearings 310a, 310b, 310c, 310d within the spindle apparatus 314 in a superfine quantity (0.0005-0.01 ml/shot).

[0368] As described above, in the present embodiment, since the lubricating oil is supplied to the respective bearings 310a, 310b, 310c, 310d, there is required a lubricating apparatus which includes a multi-distribution mechanism.

[0369] As a specific example of the spindle apparatus 314, FIG. 33 shows a spindle apparatus which is employed in an ordinary machine tool. The spindle apparatus 314 includes a shaft 305, a plurality of bearings 310a, 310b, 310c, 310d (in the illustrated example, four angular ball bearings in total) for supporting the shaft 305 in a freely rotatable manner, and a housing 328 for covering the outer surfaces of the respective bearings.

[0370] The bearings 310a, 310b, 310c, 310d are disposed at given intervals in the axial direction of the shaft 305 so that they form in two sets of two bearings respectively support the front and rear sides of the shaft 305. The outer races of the respective bearings are fixed to the inner peripheral surface of the housing 328, the outer ring of the bearing 310a disposed in the front-most position is contacted with and is secured to a front cover 332 through an outer race holder 330, and the outer ring of the bearing 310d disposed in the rear-most position is secured to the housing 328 through an outer ring holder 334 while it is elastically energized in the axial direction of the shaft 305 by a spring 336. Also, between the respective bearings, there are interposed cylindrical-shaped outer ring spacers 338 which are respectively used to fix their associated bearings in the axial direction.

[0371] On the other hand, the inner rings of the respective bearings are fitted with the outer peripheral surface of the shaft 305; and, between the respective bearings, there are interposed cylindrical-shaped inner ring spacers 340 which are respectively used to fix their associated bearings in the axial direction.

[0372] The lubricating oil is supplied to the spindle apparatus 314 having the above-mentioned structure in the following manner. That is, the four pipes 318, which are connected to the superfine quantity oil lubricating apparatus with a multi-distribution mechanism 322 through a supply-side pipe fixing joint 326, are respectively penetrated through pipe guide grooves 342a, 342b formed in the housing 328 of the spindle apparatus 314 and are then connected through their associated discharge-side pipe fixing joints 344 to nozzles 312a, 312b, 312c, 312d respectively disposed in the vicinity of their associated bearings 310a, 310b, 310c, 310d. These nozzles 312a, 312b, 312c, 312d are respectively inserted through and fixed to mounting

holes, which are respectively formed so as to penetrate through their associated outer ring spacers **338**, from the outer peripheral surface side of the housing **328**, while the leading ends of the respective nozzles are penetrated through the outer ring spacers **338** and are projected out into gap spaces existing between the outer ring spacers **338** and inner ring spacers **340**.

[0373] In this case, the four nozzles are disposed for the four bearings, one to one, and thus supply of the lubricating oil is distributed to four sections by the superfine quantity oil lubricating apparatus with a multi-distribution mechanism **322**. By the way, the number of distributions (the number of pipes) may be equal to or more than the number of bearings used in the spindle apparatus **314**. In the present embodiment, the shaft **305** is supported in the horizontal direction but, for example, in case where the shaft **305** is used in a machining center, the shaft **305** can be used in such a manner that it is supported in the vertical direction or in an inclined manner.

[0374] Next, description will be given below of the specific structure of the superfine quantity oil lubricating apparatus with a multi-distribution mechanism **322**. Here, **FIG. 34** is a section view of the structure of the superfine quantity oil lubricating apparatus with a multi-distribution mechanism **322** according to the present embodiment.

[0375] As shown in **FIG. 34**, the superfine quantity oil lubricating pump **316** of the superfine quantity oil lubricating apparatus with a multi-distribution mechanism **322** includes a rod body **346** which is formed of a giant-magnetostriuctive material having a positive characteristic, while one end portion **346a** of this rod body **346** in the axial direction thereof is fixed through a preload adjust mechanism **348** to a case **350**. In case where a magnetic field is applied to the rod body **346**, the rod body **346** is expanded in the axial direction due to a magnetic strain phenomenon (Joule effect)

[0376] As the preload adjust mechanism **348**, there can be used a screw mechanism which is structured such that, for example, in case where it is rotated, it is projected out in the axial direction of the rod body **346** to thereby be able to press against one end portion **346a** of the rod member **346**. On the other end portion **346b** of the rod body **346** in the axial direction thereof, there is disposed a pressure transmission member **352** which energizes the rod body **346** toward the preload adjust mechanism **348** to thereby transmit pressure without producing a gap (play) in the axial direction of the rod body **346**; and, the rod body **346** is connected to a piston **354** through the pressure transmission member **352**. The piston **354** is slidably disposed in the interior portion of a cylinder **356**, while the cylinder **356** and piston **354** cooperate together in defining a pump chamber.

[0377] In the cylinder **356**, there is formed a suction flow passage **358** which is used to supply the lubricating oil to the pump chamber and, in the intermediate portion of the suction flow passage **358** to a suction opening **359**, there is disposed a suction-side check valve **360** consisting of a check valve which prevents the lubricating oil from flowing out from the pump chamber.

[0378] Also, in the cylinder **356**, there is formed a discharge flow passage **362** for discharging the lubricating oil which is discharged from the pump chamber and, in the

intermediate portion of the discharge flow passage **362** to the multi-distribution mechanism **320**, there is disposed a discharge check valve **364** consisting of a check valve which prevents the lubricating oil from flowing in to the pump chamber.

[0379] On the outer periphery of the rod body **346**, there is disposed a coil **366** coaxially with the rod body **346** and also, on the outside of the coil **366**, there is disposed a cylinder body **367** which is formed of magnetic material and cooperates with the rod body **346** in completing a magnetic circuit. The cylinder body **367** is secured by a front cover **368** and a rear cover **369**. Also, to the coil **366**, there is electrically connected a drive circuit **377**, while the drive circuit **377** outputs a current which is used to generate a magnetic field. In case where this current is applied to the coil **366**, the rod body **346** receives a magnetic field generated from the coil **366** and is thereby expanded, so that the lubricating oil within the pump chamber supplied through the suction flow passage **358** can be guided into the multi-distribution mechanism **320** through the discharge flow passage **362**. In this case, the discharge quantity of the lubricating oil per shot is a fine quantity, that is, a quantity in the range of 0.0005 [ml]-0.01 [ml], and the discharge pressure of the lubricating oil is equal to or higher than 1 [MPa]; and, the lubricating oil is discharged intermittently. And, the lubricating oil discharged from the superfine quantity oil lubricating pump **316** is distributed to the respective nozzles **312a**, **312b**, **312c**, **312d** by the multi-distribution mechanism **320**, and the lubricating oil is supplied from the leading ends of these nozzles to their respective bearings at a discharge speed of 10 [m/sec]-100 [m/sec].

[0380] Here, description will be given below in detail of the multi-distribution mechanism **320**. **FIG. 35** is an enlarged view of the structure of the multi-distribution mechanism **320** shown in **FIG. 34**. The multi-distribution mechanism **320** is a mechanism which is used to distribute lubricating oil discharged using a valve of a revolver type. Specifically, the multi-distribution mechanism **320** includes a distribution housing **370** in which the discharge flow passage **362** is formed, a rotor valve **372**, a rotor valve fixing ring **374**, a shaft **376**, a shaft housing **378**, a Belleville spring **380** and a thrust bearing **382**. The rotor valve fixing ring **374** has an inner periphery with which the rotor valve **372** can be fitted. The shaft **376** has a flange portion **376a** in the leading end portion thereof and is capable of rotationally driving the rotor valve **372**. The shaft housing **378** supports the shaft **376**. The Belleville spring **380** presses against the flange portion **376a** of the shaft **376** toward the distribution housing **370**. The thrust bearing **382** supports the shaft **376** in the axial direction thereof through the Belleville spring **380** within the shaft housing **378** in such a manner that the shaft **376** can be rotated.

[0381] Also, the shaft **376** of the multi-distribution mechanism **320** is connected through a coupling **384** to a motor **386**. As the motor **386**, there can be used any type of motor, provided that it is able to control a rotation phase (rotation angle); for example, a stepping motor, a DC motor, a synchronous motor and an induction motor can be used. The motor **386** is controlled by the controller **324** (see **FIG. 32**) and can be indexingly rotated at an equal distribution angle (360°/number of distributions) according to the number of distributions.

[0382] In the distribution housing 370, as shown in FIG. 36 which is a section view of the distribution housing 370 taken along the arrow marks A-A shown in FIG. 35, a proper number (a number equal to the number of distributions) of mounting holes 390, which are used to mount a pipe fixing joint 388, are formed in the radial direction of the distribution housing 370 according to the number of distributions of lubricating oil. In the structure shown in FIG. 36, since the lubricating oil is distributed to six bearings, six mounting holes 390 are formed. In each mounting hole 390, there are formed a screw portion 390a for tightening, a taper portion 390b and a longitudinal hole 390c in this order from the outer periphery of the distribution housing 370 to the axis thereof. Also, the longitudinal holes 390c of the respective mounting holes 390 are respectively allowed to communicate with transverse holes 379 (see FIG. 35); and, each of the transverse holes 379 is formed at a position of a radius r_1 from the center of the distribution housing 370 in such a manner that it extends a long the thrust direction from the surface of the distribution housing 370 contacted with the rotor valve 372 in phase with the longitudinal hole 390c. On the other hand, in the center of the distribution housing 370, there is formed a center flow passage 363 which is connected to the discharge flow passage 362 from the pump chamber and extends linearly along the thrust direction.

[0383] The rotor valve 372, as shown in FIG. 37 which is a section view of the distribution housing 370 taken along the arrow marks B-B shown in FIG. 35, is a cylindrical-shaped valve and, on the side of the rotor valve 372, which can be contacted with the distribution housing 370, there is formed a groove 372a which extends outwardly in the radial direction from the central portion of the rotor valve 372.

[0384] Here, the half value r_1 of the PCD (pitch circle diameter: $2r_1$) at the positions of the transverse holes 379 formed in a circle in the distribution housing 370 is set such that it is substantially equal to the length r_0 of the groove 372a in the radially outward direction of the rotor valve 372 ($r_0 \approx r_1$). Thanks to this, the lubricating oil exit portion of the groove 372a is substantially coincident with the transverse hole 379. That is, in the distribution housing 370, the transverse holes 379, which provide the lubricating oil supply holes, are formed in a circle and, in the center of the circle, there is formed the center flow passage 363; and, in the rotor valve 372, from the center of rotation thereof up to the diameter position which is equal to the pitch circle diameter (PCD) at the position of the lubricating oil supply hole (transverse hole 379), there is formed the groove 372a which serves as a flow passage.

[0385] Also, the contact surface of the distribution housing 370 with the rotor valve 372 is polish finished and, as the surface roughness thereof is smaller, the contact surface is more advantageous in a wetted condition; however, in case where the center line average roughness thereof is of the order of $0.4 \mu\text{m}$ or less, no problem can arise.

[0386] The rotor valve 372 is structured such that, as the operation state thereof is typically shown in FIG. 38, the lubricating oil is guided from the center flow passage 363 to the central portion of the groove 372 and the thus guided lubricating oil can be discharged through the transverse hole 379 from the terminal end portion of the groove 372a existing outside in the radial direction of the groove 372a. And, since the rotor valve 372 is indexingly rotated in the

direction of an arrow mark shown in FIG. 38, the transverse holes 379 formed in the distribution housing 370 and communicating with the terminal portion of the groove 372a are sequentially switched over to one another, so that the lubricating oil can be distributed to the respective transverse holes.

[0387] Also, while the shaft 376, Belleville spring 380 and thrust bearing 382 are respectively inserted into the shaft housing 378, the shaft housing 378 and distributing housing 370 are respectively fixed to a cylinder housing (not shown). Therefore, because of compression of the Belleville spring 380, the rotor valve 372 and distributing housing 370 can be contacted with each other with a desired pressing pressure. This can prevent the lubricating oil from leaking from the contact portions between the rotor valve 372 and distributing housing 370. Also, the pressing pressure can be adjusted not only by the rigidity of the Belleville spring 380 but also by a gap adjusting intermediate spacer and can be controlled by measuring the rotation torque of the shaft 376. Further, provision of the thrust bearing 382 reduces the rotation resistance of the shaft 376.

[0388] In the case of the present embodiment, the rotor valve 372 is formed in a cylindrical shape having an outside diameter of 15 mm and a thickness of 3 mm, on the surface of the rotor valve 372 that can be contacted with the distribution housing 370, there is formed the groove (having a key groove shape) 372a having a depth of 1 mm and a width of 1 mm. The lubricating oil exit portion of the groove 372a is set so as to coincide in position with the PCD (pitch circle diameter) of the transverse hole 379 formed in the distribution housing 370. By the way, the dimensions of the rotor valve 372 and groove 372a are not limited to the above-described dimensions but can be determined properly according to the size of the rotor valve 372 and the number of distributions of the lubricating oil.

[0389] Also, the rotor valve 372 is formed of PEEK (polyether ether-ketone). However, as the material of the rotor valve 372, there can be used another material, provided that it has a low coefficient of friction and is excellent in the deformation resistance, friction resistance and oil resistance. For example, polymer material such as polyamide-imide can be used.

[0390] By the way, as the pipe fixing joint 388, as shown in FIG. 39A, there can be used a joint which is formed of resin material such as PEEK resin, or, as shown in FIG. 39B, there can be used a joint which is formed of stainless steel material. In the case of the PEEK resin joint 388 shown in FIG. 39A, when the male nut portion 388a thereof is threadedly engaged with the screw portion 390a of the mounting hole 390, a ferrule portion 388b formed in the leading end portion of the joint 388 is tightened, so that the joint 388 can be sealed. On the other hand, in the case of the stainless steel joint 388 shown in FIG. 39B, a ferrule portion 388b consisting of an elastic body formed of stainless steel or PEEK resin is manufactured as a separate body and is then mounted onto the leading end portion of the male nut portion 388a of the joint 388; and, by tightening the ferrule portion 388b by the male nut portion 388a, the joint 388 can be sealed. Thanks to this, up to the pressure of 20 MPa (200 kgf/cm^2), there is eliminated the fear that the lubricating oil can leak in the connecting portions between the joint 388 and mounting hole 390.

[0391] Next, description will be given below of the process for supplying the lubricating oil to the bearings **310a**, **310b**, **310c**, **310d** using the spindle lubricating apparatus **300** according to the present embodiment.

[0392] Firstly, the pipe, to which the lubricating oil is to be supplied, is selected by the controller **324**. That is, the rotor valve **372** is driven or rotated by the motor **386** so that the exit portion of the groove **372a** of the rotor valve **372** is allowed to coincide in position with the transverse hole **379** of the distribution housing **370** that communicates with the selected pipe. And, with the forward movement of the piston **354** disposed within the cylinder **356**, the pressure of the lubricating oil within the cylinder **356** increases, so that the lubricating oil is guided through the discharge-side check valve **364**, the center flow passage **363** of the distribution housing **370**, the groove **372a** of the rotor valve **372**, the selected pipe of the distribution housing **370** (the transverse hole **379** for supply of the lubricating oil, mounting hole **390**), and the pipe fixing joint **388** in this order up to the nozzles; and, the lubricating oil is supplied from the respective nozzles **312a**, **312b**, **312c**, **312d** to the target positions of the interior portions of the bearings **310a**, **310b**, **310c**, **310d** in a pin spot manner.

[0393] By the way, this series of operations is controlled by the controller **324**. Also, it is also possible to control the lubricating oil discharge interval to a desired interval according to the rotation speed of the spindle apparatus **314**. Therefore, the lubricating oil supply interval can be varied according to the rotation speed of the shaft **305**, so that ideal supply of the lubricating oil to the interior portions of the bearings can be always realized.

[0394] As described above, according to the spindle lubricating apparatus **300** of the present embodiment, the superfine quantity oil lubricating apparatus with a multi-distribution mechanism **322** is simple and compact in structure as well as it is positively connected to the pipes so as to be free from leakage of the lubricating oil, so that the superfine quantity oil lubricating apparatus with a multi-distribution mechanism **322** is able to make full use of its ability. Also, the place to which the lubricating oil should be supplied can be selected freely by the controller **324** connected to the superfine quantity oil lubricating apparatus **322**, and the lubricating oil can be supplied to the respective bearings **310a**, **310b**, **310c**, **310d** at the desired intermittent time (at the desired supply intervals). Further, the lubricating oil supply intervals can be varied according to the rotation speed of the shaft **305** and thus the interior portions of the bearings can be always kept in an ideally lubricated state. Therefore, the present spindle lubricating apparatus **300** is very excellent in the stability of the bearing torque, can control an increase in the bearing temperature down to a low level, and can reduce the noise level. And, in the spindle apparatus **314** that is actually used, when the number of bearings used is taken into consideration, a single unit of the superfine quantity oil lubricating apparatus with a multi-distribution mechanism **322** is able to sufficiently cover the lubricating oil supply that corresponds to a single unit of the spindle apparatus **314**.

[0395] Next, description will be given below of a modification of the superfine quantity oil lubricating apparatus with a multi-distribution mechanism according to the present embodiment.

[0396] Here, **FIG. 40** is a section view of a superfine quantity oil lubricating apparatus with a multi-distribution mechanism according to the present modification, and **FIG. 41** is an enlarged view of the structure of a multi-distribution mechanism shown in **FIG. 40**. By the way, in the present modification, parts thereof having the same functions as those described in the above embodiment shown in **FIGS. 32** to **39** are given the same designations and thus the description thereof is omitted here.

[0397] The multi-distribution mechanism **321** of the superfine quantity oil lubricating apparatus with a multi-distribution mechanism **323** according to the present modification is also a mechanism which is used to distribute the lubricating oil that is discharged by a valve of a revolver type: that is, in a rotor valve **373** employed in the present modification, there are formed a groove **373a** and a transverse hole **373b** to be connected to the groove **373a**; and, the lubricating oil guided from the front surface side of the rotor valve **373** is discharged from the opposite side, that is, the rear surface side of the rotor valve **373**.

[0398] Specifically, the multi-distribution mechanism **321** includes: a discharge housing **392**, the rotor valve **373**, a rotor valve guide ring **375**, a distribution housing **371**, a distribution housing fixing ring **394** and a plurality of positioning pins **396**. The discharge housing **392** is connected to a discharge flow passage **362** formed on the opposing side of a piston **354** in a pump chamber formed inside a cylinder **356** and also includes a center flow passage **363** formed at the center position of the discharge housing **392** so as to extend along the axial direction of the discharge housing **392**. The rotor valve guide ring **375** has the inner periphery of which the rotor valve **373** can be fitted. The distribution housing **371** fixes a pipe fixing joint **388** obliquely with respect to the axial direction thereof and also supports a shaft **376** in the interior portion thereof. The distribution housing fixing ring **394** holds the rotor valve guide ring **375** between the cylinder **356** and distribution housing **371**. The plurality of positioning pins **396** are used to position flow passages respectively formed in the discharge side housing **392** and in the distribution housing **371** and also can be inserted into holes opened up in the discharge side housing **392** and the distribution housing **371** as well as holes opened up in the rotor valve fixing ring **375**. In the illustrated structure, the positioning pins **396** are disposed at two portions; however, it is also possible to employ a structure in which the positioning pins **396** are disposed at three or more portions.

[0399] Here, **FIG. 42A** is a front view of the rotor valve **373** according to the present modification, and **FIG. 42B** is a section view thereof taken along the arrow marks C-C shown in **FIG. 42A**. As shown in **FIGS. 42A and 42B**, the rotor valve **373** is formed in a cylindrical shape: specifically, on the side of the rotor valve **373** that can be contacted with the discharge housing **392**, there is formed a groove **373a** which extends outwardly in the radial direction thereof from the central portion thereof; and, in the terminal portion of the groove **373a** existing outside in the radial direction thereof, there is formed a transverse hole **373b** which penetrates entirely through the cylindrical-shaped rotor valve **373** in the axial direction thereof.

[0400] Now, **FIG. 43** is a section view of the distribution housing **371**, taken along the arrow marks D-D shown in

FIG. 41. As shown in **FIG. 43**, in the distribution housing **371**, there are formed a plurality of (in this case, a total of six) longitudinal holes **391c** which can be connected to the mounting holes **391** of the pipe fixing joint **388**. Also, due to the positioning pins **396**, the positions of the longitudinal holes **391c** of the distribution housing **371** can be matched to the positions of the transverse holes **373b** of the rotor valve **373**. In this case, the half value r_1 of the PCD ($2r_1$) at the position of each longitudinal hole **391c** of the distribution housing **371** is set so as to be substantially coincident with the length r_0 of each transverse hole **373b** of the rotor valve **373**.

[0401] According to the present multi-distribution mechanism **321**, since the lubricating oil discharged from the discharge flow passage **362** is introduced to the central portion of the groove **373a**, the thus introduced lubricating oil can be discharged through the transverse hole **373b** from the terminal portion of the groove **373a** that is situated outside in the radial direction thereof. And, because the rotor valve **373** is indexingly rotated by a motor **386**, the longitudinal holes **391c** of the distribution housing **371** in communication with the transverse hole **373b** are sequentially switched over to one another, so that the lubricating oil can be distributed to the respective longitudinal holes **391c**.

[0402] In the case of the present modification, the rotor valve **373** is formed in a cylindrical shape having an outside diameter of 15 mm and a thickness of 5 mm, on the surface of the rotor valve **373** that can be contacted with the discharge housing **392**, there is formed the groove (having a key groove shape) **373a** having a depth of 1 mm and a width of 1 mm; and, in the lubricating oil exit portion of the groove **373a**, there are formed the transverse holes **373b** each having an inside diameter of 1 mm in such a manner that the transverse holes **373b** extend in the axial direction of the rotor valve **373**. By the way, the dimensions of the rotor valve **373**, groove **373a** and transverse hole **373b** are not limited to the above-described dimensions but can be determined properly according to the size of the distribution housing **371** and the number of distributions of the lubricating oil.

[0403] Also, the rotor valve **373** is formed of PEEK (polyether ether-ketone). However, as the material of the rotor valve **373**, there can be used another material, provided that it has a low coefficient of friction and is excellent in the deformation resistance, friction resistance and oil resistance. For example, polymer material such as polyamide-imide can be used.

[0404] In the present modification as well, not only there can be obtained similar effects to those obtained in the previously described embodiment but also, because the pipe fixing joint **88** is connected from the oblique direction with respect to the axial direction, there can be supplied a structure which is excellent in space efficiency, so that the superfine quantity oil lubricating apparatus with a multi-distribution mechanism can be made more compact.

[0405] Now, description will be given below of the results of a test conducted on the rotation performance of a bearing in the case of the above-described superfine quantity oil lubricating apparatus with a multi-distribution mechanism according to the third embodiment.

[0406] In the bearing rotation performance test, firstly, a rotation test was conducted using the spindle apparatus **314**

according to the present embodiment, while a lubricating method employed in the superfine quantity oil lubricating pump **316** of the spindle apparatus **314** was compared with a conventionally known oil-air lubricating method.

[0407] As a bearing to be tested, as well as the first embodiment, there was used a bearing having the following specifications: that is, an outer ring diameter of 160 mm; an inner ring bore of 100 mm; a rolling body pitch circle diameter d_m of 132.5 mm; an outer/inner race groove curvature of 52-56%; a contact angle of 20°; SUJ2 as inner/outer ring material; and, Si_3N_4 as rolling body material. And, as lubricating oil, there was used mineral oil VG22 (kinematic viscosity: 22 mm²/s at a temperature of 40° C.) and axial load was set as 980N. Referring to the number of nozzles used, in the case of the conventional oil-air lubricating method, three nozzles were used; and, in the case of the superfine quantity oil lubricating pump, there was used one nozzle. Under these conditions, while rotating the shaft at the speed of 0-15000 min⁻¹ (in part, 19000 min⁻¹, $d_m \cdot N = 2500000$), there were conducted tests on the following articles: that is, relationship between shaft rotation speed and bearing torque; relationship between shaft rotation speed and outer ring temperature rise; comparison of variations in bearing torque; comparison of noise levels; and, visualized observation (observation of videotape recorded pictures) of superfine quantity lubricating oil discharge state.

[0408] In the test conducted on the rotation performance of a bearing by using the superfine quantity oil lubricating apparatus with the multi-distribution mechanism according to the third embodiment under the same conditions as the first embodiment, graphical representations showing relationship between shaft rotation speed and bearing torque; relationship between shaft rotation speed and outer ring temperature rise; comparison of variations in bearing torque; comparison of noise levels; and, visualized observation of superfine quantity lubricating oil discharge state were substantially same as the results shown in **FIGS. 24 to 27**.

[0409] Thus, according to the spindle apparatus **314** of the present embodiment, since there is used the superfine quantity oil lubricating pump **316** as well as the angle and position of the nozzle are designed optimally, a superfine quantity (0.0005-0.01 ml/shot) of lubricating oil can be supplied in a pin spot manner directly at the desired spot of the interior portion of the bearing at the interval of dozens of seconds.

[0410] Also, because the discharge speed (10-100 m/sec.) from the nozzle is fast, the lubricating oil can be positively supplied to the interior portion of the bearing free from the influence of the air curtain that could occur in the high speed rotation.

[0411] And, since the lubricating oil supply intervals and lubricating oil supply quantity can be varied according to the rotation speed by the control unit, a proper quantity of lubricating oil can always be supplied for the spindle rotation regardless of the spindle rotation speed.

[0412] Thanks to this, an ideal lubricating state can always be obtained in the interior portion of the bearing and, therefore, the spindle apparatus **314** can be structured such that the stability of the bearing torque is very excellent. Also, an increase in the bearing temperature can also be controlled down to a low level. Further, because the lubricating oil is

positively supplied into the interior portion of the bearing, the lubricating oil supply efficiency can be enhanced and the lubricating oil consumption can be reduced. Therefore, according to the superfine quantity oil lubricating method, the shaft can be rotated up to a higher speed than the conventional oil-air lubricating method.

[0413] By the way, in the present embodiment, for the superfine quantity oil lubricating pump 316, there is used the giant-magnetostrictive material. However, the invention is not limited to the giant-magnetostrictive material as well as the first embodiment. For example, there can also be employed an electrostrictive element, a combination of an electromagnet and a belleville spring, and mechanical elastic elements. That is, even in a superfine quantity oil lubricating method using any one of them, in case where a fine quantity (0.0005-0.01 ml/shot) of lubricating oil is discharged at the speed of 10-100 m/sec., there can be obtained the same performance.

[0414] Also, in the case of not only a giant-magnetostrictive material having a forward characteristic but also a magnetostrictive material having a bi-directional characteristic, a pump can be similarly produced using the expansion and contraction action of these materials.

[0415] Further, the above-mentioned lubricating apparatus can be applied not only to the spindle apparatus shown in FIG. 32 but also to a high-speed-rotation spindle apparatus in which various kinds of torque variations can occur and an increase in the temperature must be small.

[0416] Next, description will be given below of a test conducted on the performance of the superfine quantity lubricating pump 316.

[0417] FIG. 44 is a schematic view of an embodiment of the test on the performance of the superfine quantity lubricating pump 316. In the performance test, the discharge state of the lubricating oil from the nozzle 312 in the spindle high-speed rotation is visualized using a CCD camera and is then videotape recorded. Here, description will be given of the test results of the influences of the air curtain, the relationship of the pipe inside diameter and pipe length to the discharge speed, and the relationship of the pipe inside diameter to the discharge oil quantity. By the way, as the material of the pipe, there were used metal such as austenite stainless steel SUS316 and resin material such as PEEK. However, this is not limitative but, for example, ordinary iron/steel material, aluminum/copper non-iron metal material, plastic material, and ceramic material can also be used.

[0418] In the test, the distance between the nozzle leading end and bearing was set approx. 50 mm which is longer than the ordinarily employed distance (approx. 10 mm). This means that the test was conducted under a severer condition, that is, under the condition that the performance of the pump 16 can be easily influenced by the air curtain.

[0419] The lubricating oil was supplied to the interior portion of the bearing so as to be able to lubricate the contact portions of the raceway surface of the inner race of the bearing with which rolling bodies can be contacted; and the state of supply of the lubricating oil was visualized and was then videotape recorded. The visualizing apparatus 120 is disposed to have the same construction as that of FIG. 28.

[0420] Using the visualizing apparatus 120, the lubricating state when the lubricating oil was discharged from the

nozzle 312 was observed with an electronic flash. As the lubricating oil, there was used mineral oil VG22 (kinematic viscosity: 22 mm²/s at a temperature of 40° C.)

[0421] The results of the performance test conducted under the above environment are shown in FIG. 45. Here, FIG. 45 is a graphical representation which shows variations in the discharge oil quantity with respect to the pipe length. Specifically, FIG. 45 shows not only the variations of the discharge oil quantities with respect to the lengths of six pipes when a multi-distribution mechanism is used but also the variations of the discharge oil quantity with respect to the length of a pipe when a multi-distribution mechanism is not used.

[0422] As shown in FIG. 45, little difference is found between the case using the multi-distribution mechanism and the case not using the multi-distribution mechanism; and, similarly, little difference is found between the six pipes in the case using the multi-distribution mechanism. That is, even in case where a multi-distribution mechanism is additionally equipped, the superfine quantity lubricating pump 316 can maintain equivalent performance and also can distribute the lubricating oil to the respective pipes substantially uniformly.

[0423] The spindle lubricating apparatus according to the third embodiment includes a multi-distribution mechanism which is interposed between a lubricating oil supply unit and a nozzle and distributively supplies a fine quantity of lubricating oil to a plurality of bearings, that is, in a discharge quantity of 0.0005 ml/shot -0.01 ml/shot, at a discharge speed of 10 m/sec. -100 m/sec. Thanks to this, not only a fine quantity of lubricating oil can be distributively supplied to the plurality of bearings accurately and stably but also the structure of the lubricating apparatus can be made simple and compact. Therefore, an ideal lubricating state can always be obtained in the interior portions of the bearings, the stability of the bearing torque can be enhanced, and an increase in the bearing temperature can be controlled down to a low level.

[0424] (Fourth Embodiment)

[0425] Now, description will be given below in detail of a lubricating apparatus according to a fourth embodiment of the invention with reference to the accompanying drawings.

[0426] FIG. 46 is a block diagram of the principles of a lubricating apparatus according to the fourth embodiment.

[0427] The lubricating apparatus 401 according to the fourth embodiment includes a pump 403 for discharging lubricating oil, a switch valve 407 connected to the lubricating oil discharge port of the pump 403 through an oil pipe (a pump-side pipe) 405, and a nozzle 413 connected to the lubricating oil discharge port of the switch valve 407 through an oil pipe (a nozzle-side pipe) 409 for discharging lubricating oil to a bearing 411.

[0428] The pump 403 may also be disposed in such a manner that it is attached to a lubricating oil tank 439. This pump 403 has a discharge quantity which is larger than the discharge quantity of the nozzle 413. As the pump 403, there can be used a pump of a piston type which can be driven using air pressure or oil pressure, and an ordinary oil pressure pump such as a gear pump.

[0429] The switch valve 407 is interposed between the oil pipes (pump-side pipe 405 and nozzle-side pipe 409), which connect together the pump 403 and nozzle 413. The switch valve 407 operates to close or open the oil pipes according to the discharge pressure of the lubricating oil from the pump 403. That is, in case where the discharge pressure of the lubricating oil from the pump 403 is less than a given pressure, the switch valve 407 closes the oil pipes to thereby stop the discharge of the lubricating oil from the nozzle 413. On the other hand, in case where the discharge pressure of the lubricating oil from the pump 403 is equal to or more than the given pressure, the switch valve 407 opens the oil pipes to thereby discharge the lubricating oil, which is supplied from the pump 403, from the nozzle 413 for a given period of time. As the switch valve 407, for example, there is used a so called rotary valve which closes and opens these oil pipes using the rotation of a rotary member and, therefore, the switch valve 407 is capable of repetitively executing a series of operations to close and open the above-mentioned oil pipes.

[0430] Next, description will be given below of the operation of the lubricating apparatus 401.

[0431] To discharge the lubricating oil to the bearing 411 using the lubricating apparatus 401, firstly, the pump 403 is driven. The pressure of the pump 403 is transmitted through the pump-side pipe 405 to the switch valve 407. Then, the oil pipes are closed (OFF) by the switch valve 407 and the pressure within the pump-side pipe 405 is increased by the pump 403.

[0432] The switch valve 407 maintains the shut-off state until the pressure within the pump-side pipe 405 increases up to a sufficiently high level. That is, the switch valve 407 maintains the shut-off state until parts such as an O-ring within the pump-side pipe 405 and pump 403, which can be deformed greatly, are deformed sufficiently. This maintaining operation is carried out by confirming an increase in the pressure using a pressure switch, or by waiting for several seconds after the start of driving of the pump 403.

[0433] After the oil pressure rise, by opening (turning on) the switch valve 407 by a short time t , the pump pressure is applied to the nozzle 413, so that the lubricating oil can be discharged into the bearing 411 at a flow speed v and in a discharge quantity q . That is, the switch valve 407 has not only the function of cutting off the oil pressure to the nozzle 413 side but also the function of transmitting the oil pressure to the nozzle 413.

[0434] In some cases, to the front side of the switch valve 407, there are connected a plurality of oil pipes and nozzles. In such case, oil pressure may be applied to the plurality of nozzles at a time but, preferably, in case where the oil pressure is switchingly applied to the nozzles one after another, the oil supply quantities of the respective nozzles can be stabilized. As the downstream-side parts (the switch valve 407 itself, nozzle-side pipe 409, nozzle 413, and connecting parts such as a joint for connecting them together) of the switch valve 407, there are used parts which are hard to deform against the pressure because a fine quantity of lubricating oil flows through these parts in a short time.

[0435] Next, description will be given below of the relationship between the discharge quantity from the nozzle 413

and the opening time t of the switch valve 407. The flow speed v (m/s) and discharge quantity q (m³/S shot) of the lubricating oil to be discharged from the nozzle 13 are expressed by the following expressions.

$$v = C_d \cdot (2(p - \Delta p) / \rho)^{0.5} \quad (8)$$

$$q = v \cdot \pi d^2 \cdot t / 4 \quad (9)$$

[0436] where, C_d expresses a flow coefficient, p : a pump pressure (Pa), Δp : a pressure loss (Pa), ρ : a lubricating oil density (kg/m³), d : a nozzle diameter (m), and t : the opening time (s) of the switch valve, respectively.

[0437] Here, C_d is a flow coefficient, that is, a constant which is determined by the shape of the nozzle and the viscosity of the lubricating oil. In the case of a nozzle which is used to lubricate a spindle, C_d is a constant which can be substantially determined by the diameter of the nozzle, and it takes a value of 0.9-0.5. And, Δp is a pressure loss consisting mostly of the pressure loss of the oil pipe, whereas the pressure loss of the switch valve 407 is normally small. The pressure loss of the oil pipe, according to the experimental results, corresponds well to an expression (10) relating to the pipe friction of a laminar-flow viscous fluid.

$$\Delta p = 32 \mu \cdot L \cdot d^2 \cdot 19 \cdot v / D^4 \quad (10)$$

[0438] where μ expresses a lubricating oil viscosity coefficient (Pa·s), L : a pipe length (m), and D : a pipe inside diameter (m), respectively.

[0439] In case where the pump pressure, lubricating oil (lubricating oil density, lubricating oil viscosity coefficient) and pipe (length, inside diameter) are set according to the above expressions (8)-(10), the relationship between the opening time t of the switch valve 407 and the discharge quantity from the nozzle 413 is determined.

[0440] Normally, the opening time t of the switch valve 407 is assumed to be constant. The reason for this is as follows. That is, in the operating condition of a spindle used in a machine tool, the ambient temperature varies little and the influence of variations in the viscosity of the lubricating oil can almost be neglected and, therefore, the flow speed and the oil supply quantity do not vary greatly and thus stable lubrication is possible.

[0441] Also, the nozzle diameter, most preferably, may be in the range of 0.08-0.3 mm. That is, in case where the nozzle diameter is less than 0.08 mm, there is a possibility that the nozzle 413 can be clogged with foreign objects; and, in case where the nozzle diameter is equal to or more than 0.3 mm, it is difficult to secure the flow quantity of the switch valve 407 and also the discharge quantity is caused to vary greatly due to the influences of the oil pipe and lubricating oil viscosity, which makes it difficult to secure stable lubrication.

[0442] And, in order for the discharged lubricating oil to be able to reach the interior portion of the bearing, the flow speed v must be approximately 10-20% or more of the inner ring peripheral speed of the bearing 411. In this case, the higher the flow speed is, the better the lubricating condition is. The pump pressure depends on the necessary flow speed. Practically, use of an inexpensive oil pressure pump having a pump pressure of approx. 2.5 MPa can provide a sufficient discharge speed.

[0443] While the oil supply quantity necessary for the bearing 411 varies greatly according to the conditions, the

necessary oil supply quantity Q is approximately in the range of 0.01-10 ml /hour ($Q=0.01-10$ ml/hour). Here, the oil supply quantity per shot, preferably, may be in the range of 0.0001-0.01 ml. The reason for this is as follows: that is, in case where the oil supply quantity is 0.01 ml or less, the torque variations of the bearing 411 in one oil supply shot do not raise any problem; and, in case where the oil supply quantity is less than 0.0001 ml, there is a possibility that a sufficient flow speed cannot be obtained due to the compressibility of the lubricating oil, the pressure deformation of the oil pipe and the response characteristic of the switch valve 407.

[0444] Also, the opening time t of the switch valve 407, which is requested from the necessary discharge quantity, is 0.1-50 ms. For a valve which allows a fine quantity of lubricating oil to flow there through, this opening time t is an opening time which can be sufficiently realized.

[0445] Therefore, in case where the above-mentioned operations, that is, the actuation of the pump 403, the increase of the pressure within the pump-side pipe 405 due to the closure of the switch valve 407, the opening of the switch valve 407, and the deactuation of the pump 403 are repeated at the time intervals satisfying the necessary oil supply quantity Q (0.01-10 ml/hour) in accordance with the opening time t of the switch valve 407 (0.1-50 ms) and the discharge quantity q (0.01-0.0001 ml) per shot, stable lubrication can be realized.

[0446] As described above, according to the lubricating apparatus 401, in case where the discharge oil pressure from the pump 403 is less than a given pressure, the oil pipe is shut by the switch valve 407. On the other hand, in case where the discharge oil pressure from the pump 403 is equal to or more than the given pressure, the oil pipe is opened by the switch valve 407, so that the lubricating oil from the pump 403 can be discharged from the nozzle 413 for a given time. For this reason, an expensive fine quantity lubricating pump using an electromagnet or giant-magnetostriuctive material is not used but the inexpensive pump 403 is used to be able to obtain a sufficient discharge speed. Thanks to this, in a spindle which rotates at a high speed, stable lubricating characteristics, that is, enhanced seizure resistance and torque variation reduction can be realized. Also, the generation of the whizzing sounds of the rolling bodies, which raises a problem in the oil-air lubricating apparatus and in the oil mist lubricating apparatus, can be prevented. Further, for the portion of the pump-side pipe 405 up to the switch valve 407, there can be used a resin-made pressure-resistant tube, which can enhance the design freedom of the pipe arrangement.

[0447] Next, description will be given below of a first example of the fourth embodiment, in which, using a lubricating apparatus manufactured so as to have a similar structure to the basic structure of the lubricating apparatus 401, the discharge of the lubricating oil is confirmed.

[0448] Here, FIG. 47 is a schematic view of the structure of a lubricating apparatus according to the first example of the fourth embodiment, and FIGS. 48A and 48B are plan views of the main portions of the lubricating apparatus shown in FIG. 47. By the way, in the present example, parts thereof equivalent to those shown in FIG. 46 are given the same designations and thus the duplicate description thereof is omitted here.

[0449] In the present example, a switch valve 407 includes a fixed member 423 having a fixed sliding contact surface 421, and a rotary member 429 which has a movable sliding contact surface 425 closely contactable with the fixed sliding contact surface 421 and rotates the movable sliding contact surface 425 in sliding contact with the fixed sliding contact surface 421 about an axial line 427 perpendicular to the fixed sliding contact surface 421. In the fixed sliding contact surface 421 of the fixed member 423, more specifically, on the circumference of the fixed sliding contact surface 421 with the axial line 427 as the center thereof, there are opened up a discharge hole 431 to be connected to a pump 403 and an oil feed hole 433 to be connected to a nozzle 413. In the movable sliding contact surface 425 of the rotary member 429, more specifically, on the circumference of the movable sliding contact surface 425 with the axial line 427 as the center thereof, there is formed an arc-shaped slit 435 having a center angle (in the present example, 70°) which is larger than at least a center angle (in the present example, 50°) formed between the discharge hole 431 and the oil feed hole 433.

[0450] The rotary member 429 can be rotated by a motor 437 which includes a transmission mechanism using a gear. The pump 403 is attached to a lubricating oil tank 439. On the pump 403, there is mounted a pressure switch 441 which detects a discharge oil pressure from the pump 403. Also, a controller 443 is connected to the motor 437, pump 403 and pressure switch 441. The controller 443 sends a drive signal to the pump 403; and, in case where it receives a detect signal from the pressure switch 441 when the discharge oil pressure is equal to or more than a given pressure, the controller 443 sends a one-rotation drive signal to the motor 437 and, after then, it sends a drive stop signal to the pump 403. Further, the controller 443 is able to repeat this series of operations at given time intervals. As the controller 443, there can be used a programmable sequencer or a personal computer.

[0451] In the present example, as the pump 403, there is used a pump of a piston type which can be driven by air pressure. However, as the pump 403, there can also be used an ordinary oil pressure pump.

[0452] In the present example, as a pump-side pipe 405, there is used a stainless steel pipe. However, this is not limitative but, for example, it is also possible to use a pressure-resisting tube which is formed of resin.

[0453] By the way, in FIG. 47, reference numeral 445 designates a spring for pressing the rotary member 429 against the fixed member 423, 447: a thrust bearing for supporting the rotation shaft of the rotary member 429, and 449, 451, 453: pipe joints, respectively.

[0454] The switch valve 407 is structured such that, when the close contact surfaces of the fixed sliding contact surface 421 and movable sliding contact surface 425 are matched to each other by the force of the spring 445, the oil pressure can be shut off and, when the discharge hole 431 and oil feed hole 433 of the fixed member 423 are superimposed on the slit 435 of the rotary member 429, the oil pressure can be transmitted to the nozzle side. Since the close contact surfaces of the fixed sliding contact surface 421 and movable sliding contact surface 425 are requested to shut off the oil pressure through their surface matching, the flatness thereof is set at $0.5\ \mu\text{m}$ or less and the surface roughness

thereof is set at $0.4 \mu\text{m Ra}$ or less. In order that the operation can be executed at a high speed, the discharge hole **431** and oil feed hole **433** are formed small in size, that is, they are respectively formed as a port having a hole diameter of 0.5 mm slightly larger than the diameter of the nozzle.

[0455] By the way, as the power for opening and closing the switch valve **407**, instead of the motor, there can also be used an actuator of an oil pressure type, or an actuator of an air pressure type.

[0456] The switch valve **407** is structured such that the opening time t thereof can be controlled by controlling the rotation speed N (min^{-1}) of the rotary member **429**.

$$\text{Opening time } t = \theta / 360 / (N/60) \quad (\text{s})$$

[0457] where, θ expresses an angle at which the switch valve **407** operates.

[0458] In the present example, $\theta = 70 - 50 = 20^\circ$.

[0459] In the present example, N is set at 600 min^{-1} and the opening time t is set at 5.6 ms .

[0460] As the nozzle-side pipe **409**, there is used a stainless steel pipe which has an inside diameter of 1 mm and an outside diameter of 1.6 mm . Since this stainless steel pipe can be bent relatively freely, it can be effectively arranged in an actual spindle. Also, because this stainless steel pipe is little expanded when pressure is applied thereto, it is suitable as a pipe to be arranged in the present lubricating apparatus.

[0461] Using the lubricating apparatus manufactured in the above manner, the discharge conditions of the lubricating oil were confirmed. In this case, the lubricating oil was discharged **300** shots, the total weight of the lubricating oil discharged from the nozzle was measured, and the average discharge quantity and discharge speed per shot were found according to the specific gravity of the lubricating oil.

[0462] The discharge speed, as the average speed during the opening time of the switch valve **407**, was found from (the discharge quantity)/(nozzle section area)/(opening time). The measurement was made using the nozzle diameter, pipe length and lubricating oil viscosity as parameters.

[0463] The results of the measurement are shown in FIGS. 49-54. Specifically, FIG. 49 is a graphical representation of the relationship of the discharge speed with respect to the pipe length with the nozzle diameter as a parameter; FIG. 50 is a graphical representation of the relationship of the discharge quantity with respect to the pipe length with the nozzle diameter as a parameter; FIG. 51 is a graphical representation of the relationship between the viscosity and discharge speed with the nozzle diameter as a parameter; FIG. 52 is a graphical representation of the relationship between the viscosity and discharge quantity with the nozzle diameter as a parameter; FIG. 53 is a graphical representation of the relationship between the pump pressure and discharge speed with the nozzle diameter as a parameter; and, FIG. 54 is a graphical representation of the relationship between the pump pressure and discharge quantity with the nozzle diameter as a parameter. By the way, as the lubricating oil, there were used three kinds of lubricating oil, VG10, VG22 and VG32, and the kinematic viscosity of the lubricating oil at the room temperature of 25°C . in the measurement was taken as the horizontal axis.

[0464] From the measurement results shown in FIGS. 49-54, it can be found that, by selecting the pressure, viscosity, pipe length and nozzle diameter properly, a sufficient discharge speed and a proper discharge quantity can be obtained. For example, the peripheral speed of the inner ring in $d_m N = 3000000$ is approx. 130 m/s and, in this case, the minimum necessary speed is 10% of the inner ring peripheral speed and thus it is equal to or more than 13 m/s .

[0465] Also, from the measurement results shown in FIGS. 49-54, it can also be found that, as the nozzle diameter decreases, the variations of the discharge quantity with respect to the pipe length, lubricating oil viscosity and pump pressure is small. That is, in the lubricating apparatus **401** according to the first example of the fourth embodiment, by reducing the nozzle diameter, stable oil discharge can be executed. This means that, in the above-mentioned expression (10), variations in the pressure loss Δp are small; and, practically, in case where the parameter $L \cdot d^2 / D^4$ relating to the pipe in the expression (10) is set $533 \cdot 10^{-4} (\text{m}^{-1})$ or less, stable discharge speed and discharge quantity can be obtained.

[0466] Here, FIG. 55 is a graphical representation of the relationship between the flow coefficient, which is obtained from the measurement results shown in FIGS. 49-54, and the nozzle diameters. The flow coefficient makes it possible to calculate the flow speed. In case where the discharge speed found from the flow coefficient and the expression (8) exceeds 10-20% of the inner ring peripheral speed, stable lubrication can be realized.

[0467] Next, description will be given below of a lubricating apparatus according to a second example of the fourth embodiment.

[0468] Here, FIG. 56 is a plan view of the main portions of the lubricating apparatus according to the second example, and FIG. 57 is a plan view of the main portions of a lubricating apparatus according to a modification of the second example.

[0469] In the second example, the arrangement pattern of the discharge hole **431**, oil feed hole **433** and slit **435** of the switch valve **407** in the previously described first example is changed.

[0470] That is, in the fixed sliding contact surface **421** of the fixed member **423**, more specifically, on the circumference of the fixed sliding contact surface **421** with the axial line **427** as the center thereof, there are opened up a plurality of oil feed holes **433** to be connected to a nozzle **413**; and, at the position of the axial line **427**, there is formed a discharge hole **431** to be connected to a pump **403**. In the movable sliding contact surface **425** of the rotary member **429**, more specifically, there is formed a slit **435** which extends along the radial direction from the axial line **427** position up to the position of the oil feed hole **433**. That is, in the present example, there is employed an arrangement which includes one input and four outputs; and, when the rotary member **429** is rotated once, four nozzles **413** sequentially discharge the lubricating oil.

[0471] Further, in the second example, in order to improve the excessive response of the switch valve **407**, there is formed a slit **436** on the periphery of each of the oil feed holes **433** of the fixed member **423** and thus, when the rotary member **429** is rotated, the increment of the opening area of

the switch valve **407** with respect to the increment of the rotation angle of the initial stage of the opening of the switch valve **407** can be increased. According to this structure, especially in case where the opening time of the switch valve **407** is reduced, an improvement effect can be provided.

[0472] Therefore, in the present example, in case where the rotary member **429** is rotated with respect to the fixed member **423** and the slit **435** formed in the movable sliding surface **425** of the rotary member **429** is matched to the oil feed hole **433** formed in the fixed sliding contact surface **421** of the fixed member **423**, the switch valve **407** is opened (the oil pipe is released), where by the lubricating oil from the pump is discharged from the nozzle for a given period of time. In this operation, since two or more units of the oil feed hole **433** are formed on the circumference, each time the rotary member **429** is rotated, the lubricating oil from the discharge hole **431** can be supplied to the respective oil feed holes **433**; that is, in each rotation of the rotary member **429**, the lubricating oil can be supplied to two or more bearings.

[0473] Also, in the present example, there can also be employed a structure of a type that, as shown in FIG. 57, uses a linear movement. In this structure, a switch valve **407** is composed a fixed member **423** having a fixed sliding contact surface **421** and a slide member **455** which has a movable sliding contact surface **425** closely contactable with the fixed sliding contact surface **421** and also allows the movable sliding contact surface **425** to reciprocate in the linear direction with respect to the fixed sliding contact surface **421** in sliding contact with the fixed sliding contact surface **421**. And, in the fixed sliding contact surface **421** of the fixed member **423**, there are opened up a plurality of (in the present structure, three) discharge holes **431** which are spaced from each other in the linear direction of the fixed member **423**. The discharge hole **431** is formed within an oblong-shaped slit **436** which extends at right angles to the above-mentioned linear direction. Also, in the movable sliding contact surface **425** of the slide member **455**, there are opened up a plurality of (in the present structure, three) oil feed holes **433** to be connected to the nozzle **413** in such a manner that they are formed in the linear direction at the same intervals of the discharge holes **431**. The oil feed hole **433** is formed within an oblong-shaped slit **435** which extends at right angles to the above linear direction.

[0474] Therefore, the switch valve **407** has three inputs and three outputs. In the switch valve **407** according to the present modification, the fixed member **423** and slide member **455** are moved reciprocatingly in the linear direction while they are in sliding contact with each other; and, the plurality of discharge holes **431** formed in the fixed slide contact surface **421** of the fixed member **423** and the plurality of oil feed holes **433** formed in the movable sliding contact surface **425** of the slide member **455** are made to communicate or are shut off at the same time. In this case, the lubricating oil from the pump **403** can be discharged from the nozzle **413** for a given period of time. According to the present modification, since the slide member **455** is reciprocatingly moved in the linear direction in a sliding contact manner, as a drive source, a movable member of a solenoid or a linear drive device such as a cylinder can be used as it is.

[0475] Also, in the case of the switch valves respectively shown in FIGS. 56 and 57, in case where the thicknesses of

their respective slits are changed, the oil supply quantities to the respective nozzles **413** can be changed. In a cylindrical roller bearing, in some cases, the necessary oil supply quantity thereof can be about $\frac{1}{3}$ that of an angular bearing; and, such change of the oil supply quantity according to the second example is effective in such cases.

[0476] Next, description will be given below of a third example of the invention in which the lubricating apparatus discussed in the above first example is applied to an actually used spindle with reference to FIG. 58.

[0477] A spindle apparatus **461** is a spindle apparatus for use in a machine tool which is used to cool an outer cylinder; and, in the interior portion of the spindle apparatus **461**, there is arranged a stainless-steel-made pressure resistant tube **463** flexible with respect to a bending action and having a diameter in the range of 1-3.2 mm (here, as an example, an outside diameter of 1.6 mm and an inside diameter of 1.0 mm). The pressure resistant tube **463** is connected to a nozzle frame **465**. The stainless-steel-made pressure resistant tube **463** can be easily bent by hand, can be little expanded when pressure is applied thereto, and is suitable for supply of a fine quantity of lubricating oil.

[0478] The spindle apparatus **461** includes a spindle shaft **469**, a plurality of (in the illustrated example, four) rolling bearings **471** for supporting the spindle shaft **469** in a freely rotatable manner, an inside housing **473** for covering the outside of the rolling bearings **471**, and an outside housing **475** for covering the outside of the spindle apparatus **461**. A switch valve **407**, which is a lubricating oil supply source, is connected by the pressure-resistant tube **467** to the nozzle frame **465** disposed within the inside housing **473** through a communication hole **481** formed in the outside housing **475** along the axial direction thereof and an opening **479** formed in the inside housing **473**.

[0479] The outside housing **475** includes an outer cylinder **477** for enclosing the outer peripheries of the inner housing **473** as well as a rear cover **485** fixed to the end face of the outer cylinder **477**.

[0480] The rolling bearings **471** are arranged at given intervals in the axial direction of the spindle apparatus **461** in such a manner that the two sets of two rolling bearings **471** respectively share and support the front and rear sides of the spindle shaft **469**; the outer rings of the rolling bearings **471** are respectively fixed to the inner peripheral surface of the inside housing **473**; the outer ring of the front-most rolling bearing **471** is contacted with and secured to the front cover **487**; and, the outer ring of the rear-most rolling bearing **471** is secured to the inner housing **473** through the outer ring cover **474** while it is elastically energized in the axial direction of the spindle apparatus **461** by a spring **489**.

[0481] Also, the inner rings of the rolling bearings **471** are respectively fitted with the outer peripheral surface of the spindle shaft **469**; and, in the front and rear groups of the rolling bearings **471**, between the rolling bearings **471**, there are interposed spacers for fixing the bearings **471** in the axial direction of the spindle apparatus **461**.

[0482] Also, as shown in FIG. 58, in the outside diameter surface of the inside housing **473**, there is formed a cooling groove and thus cooling oil supplied from a cooling unit (not shown) is allowed to circulate through the cooling groove,

thereby being able to cool the spindle apparatus 461. That is, the present spindle apparatus 461 is structured such that it has a cooling function using a jacket cooling system. By the way, in the present example, the spindle shaft 469 is supported horizontally. However, this is not limited but, for example, in a case where the spindle apparatus is used in a machining center, the spindle shaft 469 can also be used in such a manner that it is supported vertically or obliquely.

[0483] As described above, since the lubricating apparatus having the switch valve 407, pump 403, and nozzle frame 465 is applied to the spindle apparatus 461 which is actually used, it is not necessary to use an expensive fine quantity lubricating pump using an electromagnet or a giant-magnetostrictive material, but a sufficient discharge speed can be obtained using the inexpensive pump 403. For this reason, in a spindle which is rotated at a high speed, stable lubricating characteristics such as enhanced seizure resistance and reduced torque variations can be realized. And, up to the intermediate portion of the pipe arrangement, a resin pipe 464 can be used and, therefore, the design freedom of the pipe arrangement can be enhanced, which makes it possible to apply the spindle apparatus 461 to various spindle systems.

[0484] Next, description will be given below of a lubricating apparatus according to a fourth example of the fourth embodiment with reference to FIGS. 59A and 59B.

[0485] In the present example, as shown in FIG. 59A, a switch valve 407 includes a cylindrical-shaped stator 503 having a fixed sliding contact surface 501 on the inner peripheral surface thereof, and a rotor 507 which has a rotary sliding contact surface 505 formed on the outer peripheral surface thereof so as to be closely contacted with the fixed sliding contact surface 501 and also can be rotated while the rotary sliding contact surface 505 is in sliding contact with the fixed sliding contact 501. Also, as shown in FIG. 59B, in the fixed sliding contact surface 501 of the stator 503, more specifically, in the radial direction of the fixed sliding contact surface 501, there is opened up an oil feed hole 433 to be connected to a nozzle 413, while a plurality of oil feed holes 433 are formed at intervals in the circumferential direction of the stator 503. On the other hand, in the rotary sliding contact surface 505 of the rotor 507, more specifically, in the radial direction of the rotary sliding contact surface 505, there are opened up a plurality of discharge holes 431 to be connected to a pump 403, while the discharge holes 431 are formed at the same intervals as those of the oil feed holes 433 in the circumferential direction of the rotor 507.

[0486] In the present lubricating apparatus 401, the rotor 507 is driven and rotated in the interior portion of the stator 503 and, in case where the plurality of oil feed holes 433 formed in the fixed sliding contact surface 501 of the stator 503 are matched to the discharge holes 431 formed in the rotary sliding contact surface 505 of the rotor 507, the lubricating oil from the pump 403 can be discharged from the nozzle 413 for a given period of time. The stator 503 and rotor 507 can be structured in a movable fit manner, whereby high-speed switching with low torque can be executed easily. For example, it is possible to use a rotary solenoid 508 using a permanent magnet and an electromagnet. In this case, there can be obtained a high-speed response charac-

teristic and, when compared with an ordinary motor, a drive circuit can be simplified, which makes it possible to reduce the cost of an actuator.

[0487] In the present example, in order that many outputs can be provided in the range of the operation angle of the rotor 507 up to 90°, the rotor 507 is structured in the form of a rotary valve which has one input and four outputs. The rotor 507 can be driven and rotated from a θ_1 position to a θ_2 position or from the θ_2 position to the θ_1 position. In case where the rotation angle from the initial position of the rotor 507 is in the position of approx. 40-50°, the discharge hole 431 and oil feed hole 433 are allowed to communicate with each other and thus the lubricating oil can be discharged from the nozzle 413. At the θ_1 position or θ_2 position, the discharge hole 431 and a relief port 509 are allowed to communicate with each other, so that the lubricating oil is returned through a relief valve 510 to a lubricating oil tank 439. Since the rotary valve is structured such that it seals the lubricating oil with a fitting clearance, the relief port 509 is formed so as to be able to prevent a slight quantity of lubricating oil from leaking to the oil feed hole 433. By the way, in case where the time to turn on the pump 403 is shortened, the leakage of the lubricating oil to the oil feed hole 433 is very small and, therefore, in this case, it is not necessary to form the relief port 509.

[0488] In addition, as a modification of the fourth example, there is proposed a lubricating apparatus with a rotor and a stator shown in FIGS. 60A and 60B, that is different from those of FIGS. 59A and 59B, so that we refrain detailed explanation of the structure and operation thereof. Specifically, a discharge hole 504 connected to the pump 403 is formed in the stator 503, and the lubricating oil discharged from the discharge hole 504 is fed to the four oil feed holes 433 through an oil passage 506 formed in the rotor 507.

[0489] Next, description will be given below of a lubricating apparatus according to a fifth example of the fourth embodiment.

[0490] FIG. 61 is a schematic view of the structure of a lubricating apparatus according to the fifth example, FIGS. 62A and 62B are schematic views of a fixed member and a rotary member employed in a switch valve, and FIG. 63 is a graphical representation of a speed instruction to be outputted to a motor from a controller.

[0491] In the fifth example, using a switch valve 407, lubricating oil is supplied to a spindle apparatus 462 which employs two ceramic-ball angular contact ball bearings 411 each having an inside diameter of 65 mm.

[0492] The two bearings 411 are disposed respectively on the two end sides (A row, B row) of the spindle apparatus 462 such that they are spaced from each other in the axial direction of the spindle apparatus, while a nozzles 413 is disposed on each of the bearings 411 in such a manner that the discharge port of the nozzle 413 faces the interior portion of the bearing 411.

[0493] Referring here to the structure of the switch valve 407, as the fixed member 423 thereof is shown in FIG. 62A and the rotary member 429 thereof is shown in FIG. 62B, the switch valve 407 uses the two outputs of a rotary valve having one input and five outputs. That is, in the central portion of the fixed member 423, there is formed a discharge

hole 431 and, at given radius positions thereof, there are formed total of five oil feed holes 433 at the interval of 60°. On the other hand, in the rotary member 429, from the center thereof up to the above-mentioned radius position, there is formed a slit having a width of 0.5 mm in the radial direction of the rotary member 429. And, in case where the rotary member 429 is driven and rotated, the lubricating oil supplied from the discharge hole 431 of the fixed member 423 is introduced into the slit 435 of the rotary member 429; and, when the oil feed hole 433 is superimposed on the outside of the slit 435 in the radial direction thereof, the lubricating oil is fed from the oil feed hole 433.

[0494] A controller 443 increases the pressure of an oil pump 403 intermittently (in the present example, once a minute) and, after confirmation of the increased pressure, gives a motor 437 a speed instruction corresponding to the rotation angle of the motor 437 to thereby rotate the motor 437 once. That is, as shown in FIG. 63, in case where the rotation angle of the motor 437 is 0° (360°), the rotation speed of the motor 437 is set at 300 min⁻¹; for the rotation angle of 60°, the rotation speed is increased up to 900 min⁻¹; and, in case where the rotation angle is in the range of 60°-300°, the rotation speed of 900 min⁻¹ is maintained.

[0495] And, when the rotary member 429 rotates and the slit 435 of the rotary member 429 is superimposed on the oil feed hole 433, pressure is applied to the leading end portion of the nozzle connected to the oil feed hole 433 so that the lubricating oil can be discharged. According to our test, it is found that, in case where the discharge quantity per shot is 0.0014 ml, the discharge speed is 50 m/s.

[0496] Also, in the present example, in front of the switch valve 407, there is disposed a lubricating oil filter 470. As the lubricating filter 470, there can be used a glass-wool or quartz-wool filter of a small pressure loss or a sintered-material filter of the granularity of about 0.5 μm having a large flow capacity. Use of such filter 470 can prevent the fixed sliding contact surface 421 and movable sliding contact surface 425 from being roughened by foreign substances, which makes it possible to extend the life of the valve. In order to secure the sealing performance, preferably, the respective sliding contact surfaces 421, 425 may have a flatness deviation of 0.5-less than 1.0 μm and a surface roughness of less than 0.02 Ra.

[0497] Referring to the material of the respective sliding contact surfaces 421, 425, since the fixed member 423 is made of hardened steel such as tool steel (SK) and stainless steel (SUS), the high hardness of the fixed member 423 can prevent the sliding contact surfaces 421, 425 against wear. Also, in case where a nitriding treatment, a WC/C coating, or a DLC (diamond-like hard carbon) coating is applied to the sealing surface of the fixed member 423, the wear proof of the fixed member 423 can be enhanced further. Because a WC/C coated surface, or a DLC coated surface has a small coefficient of friction, the drive torque of the motor can be reduced. Also, as the material of the rotary member 429, there can be used similar material or, in order not to damage its mating surface, there can also be used resin such as PEEK (polyether ether-ketone) which is lower in hardness than the fixed member 423.

[0498] Now, FIGS. 64A and 64B are graphical representations of the results (temperature record chart) of a rotation test conducted on the fifth example; specifically, in the

rotation test, the present example was compared with the conventional oil-air lubricating method. In the conventional oil-air lubricating method shown in FIG. 64A, a quantity of 0.03 ml of lubricating oil is discharged every 16 minutes, which causes the temperature to pulsate every 16 minutes. On the other hand, in the lubricating method according to the present example shown in FIG. 64B, since a discharge quantity per shot is 0.0014 ml, that is, very small, variations in the quantity of the lubricating oil within the bearing are reduced, which in turn reduces variations in the rolling resistance thereof. As a result of this, the temperature can be prevented against pulsation and thus stable rotation can be realized.

[0499] Now, FIG. 65 is a graphical representation of the results of noises respectively generated from a spindle apparatus using the conventional oil-air lubricating method and a spindle apparatus using a lubricating method according to the present example, while the noises were respectively measured at a place 1 m before the spindle and were compared with each other. In the lubricating method according to the present example, since no air is sprayed onto the bearing, the generation of the whizzing noise could be eliminated, so that the noise value could be reduced.

[0500] By the way, in the present example, instead of a specific-purpose electromagnetic valve, there can also be used an ordinary electromagnetic valve having a high response characteristic such as a high-speed electromagnetic valve using a commercial poppet valve.

[0501] As has been described in detail heretofore, according to a lubricating apparatus of the fourth embodiment of the invention, a switch valve is interposed between oil pipes for connecting together a pump and a nozzle, the switch valve closes the oil pipes when the discharge oil pressure from the pump is less than a given pressure, and, when the discharge oil pressure from the pump is equal to or higher than the given pressure, the switch valve opens the oil pipes to thereby allow the oil supplied from the pump to be discharged from the nozzle for a given period of time. Thanks to this, without using an expensive fine quantity lubricating pump using an electromagnet or a giant-magnetostrictive material, there can be obtained a sufficient discharge speed using an inexpensive pump and, in a spindle of high-speed rotation, stable lubrication characteristics, that is, enhanced seizure resistance and reduced torque variations can be realized. And, it is also possible to eliminate the generation of the whizzing noises of the rolling bodies that raises a problem in the conventional oil-air and oil mist lubricating methods. Further, in the portion of the pipe that extends up to the switch valve, there can be used an O-ring or a resin-made pressure resisting tube, which can enhance the design freedom of the pipe arrangement.

[0502] (Fifth Embodiment)

[0503] Now, description will be given below in detail of a lubricating apparatus according to a fifth embodiment of the invention with reference to the accompanying drawings.

[0504] FIG. 66 is a schematic view of the principles of a lubricating apparatus according to the fifth embodiment of the invention; FIG. 67 is an explanatory view of the operation of the lubricating apparatus shown in FIG. 66, showing a state thereof in which a oil pressure pump is on; and, FIG. 68 is an explanatory view of the operation of the

lubricating apparatus shown in **FIG. 66**, showing a state thereof in which the oil pressure pump is off.

[0505] A lubricating apparatus **601** according to the present embodiment is structured such that an oil pressure pump **605** is connected to a fixed quantity valve **603**. The oil pressure pump **605** is connected to the fixed quantity valve **603** through a hydraulic main pipe **607** and, when in operation, can pressurize (ON) or depressurize (OFF) the oil to be discharged into the hydraulic main pipe **607**.

[0506] The fixed quantity valve **603** is mainly composed of a discharge cylinder **609**, a three-way valve **611** and an oil storage cylinder **613**. In the interior portion of the discharge cylinder **609**, there is mounted a discharge piston **615**. On one-end side of the discharge piston **615** in the moving direction thereof, there is formed an oil supply chamber **617**; and, on the other end side thereof, there is formed a hydraulic chamber **619**. To the oil supply chamber **617**, there is connected a discharge port **621**, whereas the hydraulic main pipe **607** is connected to the hydraulic chamber **619**. Also, the discharge piston **615** is normally energized by spring means **623** toward the hydraulic chamber **619** formed in the discharge cylinder **609**.

[0507] The energizing force of the spring means **623** is set smaller than the moving force of the discharge piston **615** when the oil pressure from the oil pressure pump **605** is applied to the hydraulic chamber **619**. That is, in case where the oil pressure pump **605** is on, the discharge piston **615** can be moved toward the oil supply chamber **617** side. Due to the movement of the discharge piston **615** toward the oil supply chamber **617** side, oil filled in the oil supply chamber **617** can be discharged from the discharge port **621** onto a bearing (not shown).

[0508] To the three-way valve **611**, there are connected the hydraulic main pipe **607**, an oil supply passage **625** to be connected to the oil supply chamber **617**, and an oil storage passage **627** to be connected to the oil storage cylinder **613**. In the present embodiment, the three-way valve **611** is structured such that an umbrella valve **629** is mounted in the interior portion thereof. The umbrella valve **629** is normally energized by spring means **631** in a direction to close the oil supply passage **625** and oil storage passage **627**. The umbrella valve **629** includes an umbrella valve main body **633** and, on the outer periphery of the umbrella valve main body **633**, there is disposed a flexible umbrella piece **635**. The operation of the flexible umbrella piece **635** is as follows: that is, in a state that the umbrella valve main body **633** is energized by the spring means **631**, when the oil pressure from the hydraulic main pipe **607** is applied to the flexible umbrella piece **635**, the flexible umbrella piece **635** is reduced in diameter to thereby allow the hydraulic main pipe **607** and oil storage passage **627** to communicate with each other.

[0509] On the other hand, when the oil pressure from the hydraulic main pipe **607** disappears from the umbrella valve **629** and thus the umbrella valve **629** receives the oil pressure from the oil storage passage **627**, the umbrella valve main body **633** is moved against the energizing force of the spring means **631** in a direction to move away from the oil supply passage **625** (a direction to open the oil supply passage **625**). Also, at the then time, the flexible umbrella piece **635** is enlarged in diameter to thereby close the hydraulic main pipe **607**. That is, the umbrella valve main body **633**, which

has closed the hydraulic main pipe **607**, is moved in the direction to open the oil supply passage **625**, whereby the oil storage passage **627** and oil supply passage **625** are allowed to communicate with each other.

[0510] An oil storage piston **637** is mounted in the interior portion of the oil storage cylinder **613**. On one-end side of the oil storage cylinder **613** in the moving direction of the oil storage piston **637**, there is formed an oil storage chamber **639**. The oil storage chamber **639** is connected to the oil storage passage **627**. The oil storage piston **637** is normally energized toward the oil storage chamber **639** side by spring means **641**.

[0511] That is, the oil storage chamber **639** of the oil storage cylinder **613** can be made to communicate with the oil supply chamber **617** of the discharge cylinder **609** due to the flow passage switching operation by the three-way valve **611**. Also, the oil storage chamber **639** and oil supply chamber **617** are formed such that they have the same internal capacity.

[0512] Next, description will be given below of the operation of the thus-structured lubricating apparatus **601**.

[0513] Firstly, when the oil pressure from the oil pressure pump **605** is on, as shown in **FIG. 67**, the umbrella valve **629** is pressed against a β surface to thereby shut off the hydraulic main pipe **607** and oil supply passage **625** from each other. Also, the discharge piston **615** is moved toward the oil supply chamber **617** side (upper side in **FIG. 67**) due to the oil pressure from the hydraulic main pipe **607** to thereby allow the oil stored in the oil supply chamber **617** to be discharged from the discharge port **621**.

[0514] At the same time, the flexible umbrella piece **635** of the umbrella valve **629** is reduced in diameter (closed up) to thereby open an a portion, the oil flows through the oil storage passage **627** into the oil storage cylinder **613** to press against the oil storage piston **637** downward in **FIG. 67**, and the oil is stored into the oil storage chamber **639** formed within the oil storage cylinder **613**.

[0515] In this case, the quantity of oil stored into the oil storage chamber **639** becomes equal to the quantity of oil discharged from the oil supply chamber **617**. When the oil pressure is switched off by the oil pressure pump **605**, as shown in **FIG. 68**, the oil storage piston **637** is returned to its original position (a position on the upper side in **FIG. 68**) due to the spring means **641**. Also, in case where the oil pressure is switched off, the flexible umbrella piece **635** of the umbrella valve **629** is enlarged in diameter to thereby close the a portion and, therefore, the oil, when the oil storage piston **637** returns to its original position, presses against the umbrella main body **633** slightly downward in **FIG. 68** to thereby open the β surface, so that the oil moves through the oil supply passage **625** into the discharge cylinder **609**.

[0516] The discharge cylinder **609** is returned to its original position (a position on the lower side in **FIG. 68**) due to the oil from the oil storage cylinder **613** as well as due to the energizing force of the spring means **623**. In this manner, the oil to be discharged next is filled into the oil supply chamber **617** and thus preparation for the next discharge of oil is completed. From now on, similar operations are executed repeatedly so that a given quantity of oil is discharged from the discharge port **621**.

[0517] According to the present lubricating apparatus 601, in the fixed quantity valve 603 using the umbrella valve 629, the discharge cylinder 609 and oil storage cylinder 613 are disposed separately and two pistons are used. Therefore, it is easy to reduce the diameters of the respective cylinders, so that a fine quantity of the order of 0.001 ml of oil can be discharged stably.

[0518] In the direct jet lubrication, not only a fine quantity of oil must be discharged but also the oil must be discharged at a high speed. For example, in order that a quantity of 0.003 ml of oil can be discharged from the nozzle at a discharge speed of 30 m/s, the operation of the piston must be executed for the below-mentioned time: that is,

[0519] $(\text{discharge quantity})/(\text{nozzle area})/(\text{discharge speed})$ 13 ms.

[0520] In the conventional lubricating apparatus, since only one piston is used, the oil discharge pressure is always lower than the oil supply pressure due to the spring of the piston, which makes it difficult to discharge oil at a high speed. On the other hand, in the lubricating apparatus 601 according to the present embodiment, due to use of two pistons, the oil discharge pressure can be raised, so that the high-speed discharge of the oil is possible. For example, in case where the area of the C surface of the drive part of the discharge cylinder 609 shown in FIG. 66 is set larger than the area of the discharge part (oil pressurizing surface), the discharge piston 615 can be pushed with a large force and thus the discharge piston 615 can be moved at a high speed. This can realize the high-speed discharge of oil that has been difficult in the conventional lubricating apparatus.

[0521] Therefore, according to the lubricating apparatus 601, since the discharge cylinder 609 and oil storage cylinder 613 are disposed separately, when compared with the conventional lubricating apparatus in which oil is stored within a cylinder disposed on one end side of a piston and the oil is discharged on the opposite side of the piston, there are eliminated limits on the dimensions of a seal member and a return spring, thereby being able to facilitate the reduction of the diameters of the discharge cylinder 609 and oil storage cylinder 613. Also, use of two pistons makes it possible to set the oil operation area of the discharge piston 615 larger than the oil pressurizing area thereof; and, therefore, the discharge piston 615 can be pushed with a large force and thus a high-speed stroke can be realized. Thanks to this, discharge of a fine quantity of (of the order of 0.001 ml) of oil at a high speed can be realized using a low-cost and simple structure when compared with the lubricating apparatus which uses an electromagnet or a giant-magnetostrictive material.

[0522] Next, description will be given below of the results of a test conducted on the performance of a lubricating apparatus actually manufactured in such a manner that it employs, as a basic structure thereof, a structure based on the above-mentioned principles.

[0523] FIG. 69 is a schematic view of the structure of a lubricating apparatus according to the present embodiment. FIG. 70A is an explanatory view showing a stop plug being a fitting and FIG. 70B is an explanatory view showing an air bleeding plug being the fitting. FIG. 71 is a graphical representation of the displacement amounts of a discharge piston per unit time in a lubricating apparatus which

includes a drive piston having an idling section. FIG. 72 is a graphical representation of the displacement amounts of a discharge piston per unit time in a lubricating apparatus which includes a drive piston having no idling section.

[0524] The structure of the lubricating apparatus 700 manufactured according to the present embodiment is basically the same as the structure of the previously described lubricating apparatus 601. Therefore, in the present embodiment, the same parts thereof as those employed in the lubricating apparatus 601 are given the same designations and thus the description thereof is omitted here.

[0525] An oil pressure pump 605 is annexed to a lubricating oil tank 701. The hydraulic main pipe 607 of the oil pressure pump 605 is connected to the housing 705 of a fixed quantity valve 703. To the discharge port 621 of a discharge cylinder 609, there is connected a discharge pipe 709 through a fitting 707. The discharge pipe 709 is made of a stainless steel pipe having an outside diameter of 1.6 mm and an inside diameter of 1 mm. On the leading end portion of the discharge pipe 609, there is disposed a nozzle frame 711, while the nozzle frame 711 is mounted in such a manner that a nozzle 715 is disposed opposed to a bearing 713.

[0526] On the hydraulic chamber 619 side of the discharge cylinder 609, there is mounted a drive piston 717 which can be moved by the oil of the hydraulic chamber 619 to thereby press and drive a discharge piston 615. The oil operation area of the drive piston 717 is set larger than the oil pressurizing area of the discharge piston 615. The drive piston 717 is energized by a drive piston return spring 719 in a direction to part away from the discharge piston 615. Between the discharge piston 615 and drive piston 717, there is formed an idling section 721. This idling section 721 is opened through an air bend 723 to the outside of the housing 705.

[0527] Oil from the hydraulic main pipe 607 connected to the housing 705 pressurizes the hydraulic chamber 619 side of the drive piston 717 and thus the drive piston 717 is moved toward the discharge piston 615 side; and, after the drive piston 717 moves through the idling section 721, it is butted against and contacted with the discharge piston 615. In FIG. 69, reference numeral 725 designates a suction stopper, 727: a discharge stopper, and 729: an O-ring, respectively.

[0528] On the other hand, an oil storage cylinder 613 is disposed in the housing 705. After an oil storage piston 637 is mounted into the oil storage cylinder 613, the oil storage cylinder 613 is sealed by a setscrew 731. In FIG. 69, reference numeral 733 designates a stop pin, 735: a piston sleeve, and 737: an O-ring, respectively.

[0529] On the housing 705, there is disposed an air bleeding joint 739 which is in communication with the three-way valve 611. A stop plug 741 or an air bleeding plug 743 shown in FIGS. 70A and 70B can be selectively engaged threadedly with the air deflation joint 739 in a removable manner. In case where the air deflation plug 743 is threadedly engaged with the air bleeding joint 739, the pin portion 743a of the air deflation plug 743 presses against the umbrella valve 629 downward in FIG. 69, thereby allowing the hydraulic main pipe 607 and oil supply passage 625 to communicate with each other.

[0530] The basic operation of the lubricating apparatus 700 is the same as the operation of the previously described

lubricating apparatus **601**. The discharge cylinder **609** and oil storage cylinder **613** respectively have the diameter of 2 mm and the stroke of them is 1 mm, while a theoretical discharge quantity is 0.0031 ml/shot. This is a small cylinder diameter that cannot be realized in the conventional fixed quantity valve, while such small cylinder diameter makes it possible to discharge a fine quantity of oil.

[0531] For realization of high-speed discharge of oil, in the present embodiment, there is used the drive piston **717**. The oil operation area of the drive piston **717** is about ten times the oil pressurizing area of the discharge piston **615** and, therefore, the discharge piston **615** can be driven with a large force. Also, the stroke of the drive piston **717** is 3 mm. The front half section of the stroke, 2 mm, is the idling section **721**, while the rear half section thereof, 1 mm, is a section where the drive piston **717** pushes the discharge piston **615**. Therefore, due to the fact that the pressure of the oil pressure pump **605** can be raised sufficiently in the idling section **721** to thereby generate inertia in the drive piston **717**, the discharge piston **615** can be moved at a high speed.

[0532] In the oil flow passage from the oil supply passage **625** to the nozzle frame **711**, in order to be able to discharge a fine quantity of oil at a high speed, use of parts such as an O-ring which can be deformed greatly due to pressure is avoided as much as possible. The discharge cylinder **609** and air bleeding joint **739** are pressure inserted into the housing **705** without using any O-ring. Between the discharge port **621** and nozzle frame **711**, there is used an SUS pipe which is deformed only slightly against pressure. In the discharge piston **615**, there is used an O-ring. However, a fitting clearance between the discharge cylinder **609** and discharge piston **715** is set small, that is, of the order of 5 μm and the fitting portion is formed long, that is, approx. 10 mm, thereby reducing the deformation of the O-ring in the oil discharging operation.

[0533] The air bleeding joint **739** is used to bleed air within the portion of the pipe existing upstream of the oil supply passage **625**. In order to be able to discharge a fine quantity of oil at a high speed, it is important to deflate air within the pipe completely. In the present lubricating apparatus **700**, since the oil discharge quantity is very small, it is difficult to deflate air within the pipe only by repetition of normal dischargings. Here, provision of the air bleeding joint **739** can facilitate the deflation of air. That is, such an air deflation plug **743** as shown in FIG. 70B, which includes a fine pin portion **743a** in the leading end thereof, is threadedly engaged with the air bleeding joint **739**; and, after then, in case where the umbrella valve **629** is depressed downward in FIG. 69, when the oil pressure pump **605** is on, oil is allowed to flow into the oil supply passage **625**, so that the air bleeding can be carried out simply. After the air bleeding is completed, the air bleeding plug **743** is replaced with the pin-less stop plug **741** and a normal operation is executed. By the way, air can also be bled from the air bleeding joint **739** by feeding oil using a hand-operated pump such as a syringe.

[0534] Also, for prevention of the poor air bleeding, no spring is used in the oil flow passage of the three-way valve **611** and in its following oil flow passages. In the conventional fixed quantity valve, since only one piston is provided, a spring must be disposed within oil. For this reason, air is easy to attach to the coil portion of the spring, which makes

it difficult to deflate air completely. On the other hand, in the present lubricating apparatus **700**, it is not necessary to use a coiled spring in the oil discharge passage at all, which makes it possible to employ a structure capable of deflating air from the fixed quantity valve completely: that is, the air deflation can be executed simply and positively.

[0535] The confirmed results of the dischargings in the present lubricating apparatus **700** are as follows:

[0536] [Conditions]

[0537] Oil pressure pump: Air pressure driven pump (discharge pressure=2 MPa)

[0538] Lubricating oil: VG 22

[0539] Nozzle diameter: 0.1 mm

[0540] Pipe: Inside diameter of 1 mm, length of 1 m

[0541] Discharge quantity measured result: 0.0022 ml/shot (average value of 50 shots)

[0542] Piston moving speed: 90 mm/s (MAX)

[0543] Discharge speed: approx. 27 m/s

[0544] The above discharge quantity was obtained in such a manner that the weights of 50 shots were measured and the average of the measured weights was regarded as the discharge quantity. The moving speed of the piston was obtained by measuring the A position of the discharge piston **615** shown in FIG. 69 using a displacement sensor. The discharge speed from the nozzle frame **711** can be found according an expression; that is, (the piston moving speed) $\times$ (piston area)/(nozzle area) $\times$ (discharge efficiency). Here, the discharge efficiency was obtained from (the measured discharge quantity)/(theoretical discharge quantity).

[0545] Referring to the displacement of the discharge piston **615**, it was confirmed that the movement of the discharge piston **615** when the idling stroke of the drive piston **717** is set 2 mm as shown in FIG. 71 is faster than when the idling stroke is set 0 mm as shown in FIG. 72.

[0546] In lubrication of a rolling bearing, a discharge speed necessary for oil to reach the interior portion of the bearing is about 10% of the peripheral speed of the inner race of the bearing. Therefore, in the case of $\text{dm} \cdot \text{N}$ is 3000000 (where dm expresses the pitch circle diameter (unit is mm) of the bearing and N expresses the rotation speed (unit is min^{-1}) of the bearing, the inner ring peripheral speed at the high-speed rotation is 150 m/s. This shows that the bearing can be lubricated sufficiently at the discharge speed of the present lubricating apparatus **700** (15 m/s<approx. 27 m/s).

[0547] Also, in the present lubricating apparatus **700**, in case where there is formed in front of the discharge port **621**, a portion in which air and oil can be mixed together, it can also be used as a mixing valve in the oil-air lubricating method. In this case, oil can be discharged in a quantity which is about $\frac{1}{10}$ of the conventional shot quantity in the range of 0.01-0.03 ml, thereby being able to prevent the pulsation of the bearing temperature that has been caused every shot interval in the conventional lubricating method. In case where the present lubricating apparatus **700** is used as a fixed quantity valve in the oil-air lubricating method, the drive piston **717** can be omitted, thereby being able to

simplify the present structure into a structure in which the discharge piston **615** can be pushed directly with the oil pressure.

[0548] In the oil-air lubrication, preferably, in addition to the present structure, there may be disposed in front of the discharge port **621**, a check valve for preventing air from flowing backward. In case where the present lubricating apparatus **700** is used in the oil-air lubricating method, it can be simplified further in structure; for example, the discharge piston **615** shown in FIG. 69 can be omitted and the oil supply passage **625** as it is can be used as the discharge port **621** (in this case, when the oil pressure is off, the oil storage piston **637** is returned due to the spring, which causes oil to be discharged).

[0549] As has been described heretofore in detail, according to the lubricating apparatus of the fifth embodiment, since the discharge cylinder and oil storage cylinder are disposed separately, when compared with the conventional lubricating apparatus in which oil is stored within the cylinder on one side end of a single piston and the oil is discharged on the opposite side, the limits on the dimensions of the seal member and return spring can be reduced, which can facilitate the reduction of the diameters of the discharge cylinder and oil storage cylinder. Also, due to provision of two pistons, the oil operation area of the discharge piston can be set larger than the oil pressurizing area, so that the discharge piston can be pushed with a large force and thus a high-speed stroke can be realized. As a result of this, using a low-cost and simple structure when compared with a lubricating apparatus using an electromagnet or a giant-magnetostriuctive material, a fine quantity of the order of 0.001 ml of oil can be discharged at a high speed.

[0550] (Sixth Embodiment)

[0551] Now, description will be given below in detail of a spindle apparatus according to a sixth embodiment of the invention with reference to the accompanying drawings.

[0552] FIG. 73 is a schematic view of the structure of a first embodiment of a spindle apparatus according to the invention. A spindle apparatus **800** according to the sixth embodiment is a spindle apparatus for a machine tool of a jacket cooling type structured such that a pressure-resisting tube **810**, which is made of stainless steel and has 1-3.2 mm (here, as an example, outside diameter of 1.6 mm and inside diameter of 1.0 mm) so as to be flexible against bending, is arranged in the spindle apparatus **800** and is connected to a nozzle frame **812**. This stainless-steel-made pressure-resisting tube, especially bright annealed stainless tube **810**, can be easily bent by hand and is little expanded against pressure, that is, this is a tube suitable for supply of a fine quantity of lubricating oil.

[0553] The spindle apparatus **800** comprises a spindle shaft **814**, a plurality of (in the illustrated embodiment, four) rolling bearings **816** for supporting the spindle shaft **814** rotatably, an inner housing **818** for covering the outside of the rolling bearings **816**, and an outer housing **820** for covering the outside of the spindle apparatus **800**; and, in the spindle apparatus **800**, a fine quantity lubricating apparatus **822** serving as a supply source of lubricating oil is connected by the pressure-resisting tube **810** up to the nozzle frame **812** disposed within the inner housing **818** through a communication hole **824** formed in the outer housing **820** along the

axial direction thereof for supply of the lubricating oil and an opening **886** formed in the inner housing **818**.

[0554] The outer housing **820** includes an outer cylinder **825** for enclosing the outer peripheries of the inner housing **818** and a rear cover **832** fixed to the end face of the outer cylinder **825**.

[0555] The rolling bearings **816** are arranged at given intervals in the axial direction of the spindle shaft **814** to form themselves in front and rear groups of two so that the front and rear groups can share and support the front and rear sides of the spindle shaft **814**. The outer rings of the respective rolling bearings **816** are respectively fixed to the inner peripheral surface of the inner housing **818**. The outer ring of the front-most rolling bearing **816** is contacted with and secured to the front cover **834**, whereas the outer ring of the rear-most rolling bearing **816** is secured to the outer ring cover **836** while it is elastically energized in the axial direction of the outer cylinder **828** by a spring **838**.

[0556] Also, the inner rings of the rolling bearings **816** are respectively fitted with the outer peripheral surface of the spindle shaft **814** and, on the front and rear sides thereof, between the rolling bearings **816**, there are interposed spacers for fixing the bearings **816** in the axial direction of the spindle shaft **814**.

[0557] Also, as shown in FIG. 73, there is formed a cooling groove **842** in the outside diameter surface of the inner housing **818**; and, by allowing cooling oil from a cooling unit (not shown) to circulate through the cooling groove, the outer housing **820** can be cooled. That is, the present spindle apparatus **800** has a cooling function using a jacket cooling system. By the way, in the present embodiment, the spindle shaft **814** is supported horizontally. However, this is not limitative but, for example, in the case of a spindle apparatus for use in a machining center, the spindle shaft **814** can be used in such a manner that it is supported vertically or obliquely.

[0558] Next, description will be given below of the fine quantity lubricating apparatus **822**.

[0559] FIG. 74 is a schematic view of the structure of the fine quantity lubricating apparatus **822**. As shown in FIG. 74, the fine quantity lubricating apparatus **822** includes a rod body **846** made of a giant-magnetostriuctive element having a positive characteristic, while one end portion **846a** of the rod body **846** in the axial direction thereof is fixed through a preload adjust mechanism **848** to a case **850**. This rod body **846**, when a magnetic field is applied thereto, can be expanded in the axial direction thereof due to a magnetostriuctive phenomenon (Joule effect).

[0560] As the preload adjust mechanism **848**, for example, there can be used a screw mechanism which, when it is rotated, is projected in the axial direction of the rod body **846** to thereby be able to press against the one end portion **846a** of the rod body **846**. On the other end portion **846b** of the rod body **846** in the axial direction thereof, there is disposed a pressure transmission member **852** which energizes the rod body **846** toward the preload adjust mechanism **848** side to thereby transmit pressure without producing a clearance (play) in the rod body **846** in the axial direction thereof; and, the rod body **846** is connected to a piston **854** through this pressure transmission member **852**. The piston **854** is slid-

ably disposed in the interior portion of a cylinder **856**, while the cylinder **856** and piston **854** cooperate together in forming a pump chamber.

[0561] In the cylinder **856**, there is formed a suction flow passage **838** for supplying lubricating oil to the pump chamber and, in the intermediate portion of the suction flow passage **838** to a suction port **859**, there is disposed a suction-side check valve **860** consisting of a check valve which prevents the lubricating oil from flowing out from the pump chamber.

[0562] Also, in the cylinder **856**, there is formed a discharge flow passage **862** for discharging the lubricating oil jetted out from the pump chamber and, in the intermediate portion of the discharge flow passage **862** to a discharge port **863**, there is disposed a discharge-side check valve **864** consisting of a check valve which prevents introduction of the lubricating oil into the pump chamber.

[0563] On the outer periphery of the rod body **846**, there is disposed a coil **866** coaxially with the rod body **846** and, further, on the outside of the coil **866**, there is disposed a yoke **868** which is formed of magnetic material and cooperates with the rod body **846** in forming a magnetic circuit. Also, to the coil **866**, there is electrically connected a drive circuit **870** which outputs a current for generation of a magnetic field. In case where this current is applied to the coil **866**, the rod body **846** receives a magnetic field generated from the coil **866** and is thereby expanded, with the result that the lubricating oil within the pump chamber, which has been supplied into the pump chamber through the suction flow passage **838** and stored there, is discharged from the discharge port **863** through the discharge flow passage **862**. The thus discharged lubricating oil is jetted out from the nozzle frame **812** through the pressure-resisting tube **810**. In this case, the discharge quantity of the lubricating oil per shot is a fine quantity in the range of 0.5-10 [mm³] and the discharge pressure is 1 [MPa] or more, while the lubricating oil is jetted out intermittently.

[0564] Next, description will be given below of the nozzle frame **812**.

[0565] FIG. 75 is a section view of the nozzle frame **812**. The nozzle frame **812** includes a fixing hole **876** for connecting a joint **874** which is connected to a pressure-resisting tube, a discharge portion **878** for jetting out lubricating oil supplied thereto, and a flow passage **880** for connecting together the fixing hole **876** and discharge portion **878**. In the illustrated embodiment, the joint **874** is connected to the side surface side of the nozzle frame **812** in such a manner that it is connected substantially at right angles to the flow passage **880**. Also, on the side of the flow passage **880** where the joint **874** is connected, there is disposed a plug **882**.

[0566] As the joint **874**, there can be used a joint which, as shown in FIG. 76A, is formed of resin material such as PEEK (polyether ether-ketone) material, or a joint which, as shown in FIG. 76B, is formed of stainless steel material. The PEEK-resin-made joint shown in FIG. 76A can be sealed by tightening it when the taper portion **874a** of the joint formed in the leading end portion thereof is mounted into the nozzle frame **812**. Also, on the leading end portion of the stainless-steel-made joint shown in FIG. 76B, there is mounted a taper piece **874b**, the leading end portion of which is formed of elastic material such as stainless steel or PEEK resin; and, this joint can be sealed by tightening the taper piece **874b**.

[0567] Also, a nozzle chip **879** having a nozzle diameter d_n of 0.1 [mm] is pressure-inserted into a discharge portion **878**.

[0568] In assembling the joint **874** to the nozzle frame **812**, even in case where the nozzle frame **812** is disposed at the deep position of the spindle apparatus **800**, by using a joint fixing tool **884** shown in FIG. 77, the joint **874** can be threadedly engaged with the screw portion of the fixing hole **876** simply. That is, in the inner housing **818** of the spindle apparatus **800**, there is formed an axial hole **886** having a diameter of 9 [mm] in such a manner that it penetrates through the inner housing **818** from the end face to the fixing hole **876** of the nozzle frame **812**; and thus, in case where the tool **884** is inserted into the axial hole **886** and the joint **874** is then rotated, the joint **874** can be tightened or removed from the fixing hole **876**.

[0569] Since the nozzle frame **812** is structured in the above-mentioned manner, it can prevent lubricating oil against leakage from the sealed portion of the joint and is free from deformation against pressure, so that there can be provided a pipe joint which is suitable for supply of a fine quantity of lubricating oil. Also, because the nozzle frame **812** has such a structure that allows the pipe to be connected at the final stage of the spindle assembly, the present nozzle frame is excellent in assembling efficiency.

[0570] Next, description will be given below of a pipe of the spindle apparatus **800**.

[0571] When fine-quantity lubrication is executed using a pipe, the reduced discharge speed of the lubricating oil caused by a pressure loss raises a problem. In the case of the pressure loss of a pipe, an expression on the pipe passage friction of a laminar flow coincides well with the test results; and, where a lubricating oil flow speed in the leading end portion of a nozzle is expressed as v [m/s], the pipe pressure loss Δp [Pa] due to the pipe passage friction can be expressed by the following expression (1):

$$\text{that is, } \Delta p = 32\mu \cdot L \cdot d_n^{-2} \cdot v / d^4 \quad (11)$$

[0572] where, μ expresses a lubricating oil viscosity coefficient [Pa·s], L : a pipe length [m], d : a pipe inside diameter [m], v : the discharge speed [m/s] of a nozzle, and d_n : a nozzle diameter [m], respectively.

[0573] In the expression (11), the influence of the pipe on the pressure loss Δp is expressed as a parameter of $L \cdot d_n^{-2} / d^4$ and this parameter is referred to as a pipe parameter. By reducing the pipe parameter, the pressure loss Δp of the pipe can be controlled down to a low level. According to our experimental confirmation of the discharge state of the lubricating oil occurring when the pipe parameter is caused to vary, it is found that, in case where the condition expressed by the following expression (12) is satisfied, there can be obtained a sufficient discharge speed to be able to discharge a fine quantity of lubricating oil.

$$L \cdot d_n^{-2} / d^4 < 5 \times 10^{-4} [\text{m}^{-1}] \quad (12)$$

[0574] where, the pipe length L must satisfy the condition, $L > 0.5$ [m], because a pipe must be arranged in a spindle of the spindle apparatus **800**.

[0575] Next, description will be given below of the compressibility of lubricating oil in the interior portion of a pipe and the expansion of the pipe.

[0576] As the volume of lubricating oil in a pipe increases, due to the compressibility of the lubricating oil, the discharge pressure of the fine quantity lubricating apparatus is unable to reach the leading end of the nozzle, which makes it impossible to supply a fine quantity of lubricating oil stably. Also, in case where the expansion of the pipe due to pressure is large, there arises a similar problem.

[0577] The compression amount of the lubricating oil and the expansion amount of the pipe depends on the average pressure in the pipe, and the volume Δv_o [m³] of the lubricating oil to be compressed due to the average pressure p can be found according to the following expression (13):

$$\Delta v_o = \pi \cdot L \cdot d^2 \cdot p / (4K) \quad (13)$$

[0578] Also, the volume Δv_p of the pipe to be expanded due to the average pressure p can be found according to the following expression (14) by using an expression on an ordinary thickness cylinder:

$$\Delta v_p = \pi \cdot L \cdot d^2 \cdot p \cdot \{ (D^2 + d^2) / (D^2 - d^2) + \nu \} / (2E) \quad (14)$$

[0579] In case where the sum of Δv_o and Δv_p is equal to or less than the discharge quantity q , the influences of the compressibility of the lubricating oil and the pipe expansion are small. Generally, in the fine quantity lubricating oil supply, an average pressure in the pipe is on the order of 0.8-2.0 [MPa]. Especially, for the pipe pressure of 2.0 [MPa], in case where the sum of Δv_o and Δv_p is set equal to or less than the discharge quantity q , stable supply of a fine quantity of lubricating oil can be realized. That is, the sum of Δv_o and Δv_p may be preferably set so as to satisfy the following expression (15):

$$L \cdot p \cdot \{ \pi \cdot d^2 / (4K) + \pi \cdot d^2 \cdot \{ (D^2 + d^2) / (D^2 - d^2) + \nu \} / (2E) \} < q \quad (15)$$

[0580] The reason why the average pressure in the pipe is on the order of 0.8-2.0 [MPa] is as follows. That is, generally, the discharge speed of lubricating oil necessary for lubrication of a rolling bearing is about 10-20% of the peripheral speed of the inner ring of the bearing. Also, in the case of the number of rotations of the bearing, the product (dm·n) of the diameter [mm] and rotation speed [min⁻¹] is in the range of 1000000-3500000; and, in order to realize such high-speed rotation, there is necessary a discharge speed of the order of 5-33 [m/s]. On the other hand, the discharge speed v of the lubricating oil is expressed by the following expression (16) as a function of the lubricating oil pressure P_n [Pa] just before the nozzle.

$$v = C_d \cdot \sqrt{(2P_n / \rho)} \text{ [m/s]} \quad (16)$$

[0581] where, C_d expresses a nozzle flow coefficient and ρ expresses a lubricating oil density [kg/m³]. As for the nozzle flow coefficient C_d , in a nozzle having a nozzle diameter of 0.3-0.08 [mm], $C_d = 0.70-0.95$. In view of the necessary discharge speed, from the pressure just before the nozzle required by the expression (16) and from the pipe pressure loss Δp required by the expression (11), the average pressure in the pipe provides 0.8-2.0 [MPa]. From this, the discharge pressure of the lubricating apparatus must be at least 1 [MPa].

[0582] In the expression (14), in case where the Young's modulus E of the material of the pipe is small, the pipe is easy to expand and the volume Δv_p of the pipe is large. In the case of resin material having a Young's modulus E of less than 3 [GPa] being used as the material of the pipe, the expansion of the pipe is large, which makes it difficult to

take a large pipe length L necessary for arrangement of the pipe in the spindle. This is shown by a graphical representation in FIG. 78. Specifically, FIG. 78 is a graphical representation in which the variations of the lubricating oil compression volume Δv_p with respect to the pipe length L are plotted with respect to the inside diameter d of the pipe. According to FIG. 78, in case where the inside diameter d of the pipe exceeds 2.0 [mm], the lubricating oil volume in the pipe increases and the volume Δv_p of the lubricating oil to be compressed increases. Therefore, it is necessary to set the pipe inside diameter d equal to or less than 2.0 [mm]. The lubricating oil to be used for supply of a fine quantity of lubricating oil is lubricating oil belonging to VG10-VG32, the volume elastic modulus K of such lubricating oil is approx. 1.4 [GPa].

[0583] FIG. 79 is a graphical representation of the measured results of the variations of the discharge speed v of the lubricating oil with respect to the pipe length L with the pipe inside diameter of 0.5-1.0 as a parameter. In this graphical representation, as the pipe length L increases and the pipe inside diameter decreases, the discharge speed v lowers. For example, in the case of the pipe inside diameter d being 0.5 [mm], when the pipe length L is 0.5 [m], the discharge speed v is several m/s, that is, a sufficient discharge speed cannot be obtained; and, thus, the pipe inside diameter d must be set at least 0.8 [mm]. Therefore, it is the necessary condition that the pipe inside diameter d is to be set in the range of 0.8 [mm] to 2.0 [mm]. Also, in accordance with this, the outside diameter D of the pipe, from its strength point of view, must be set in the range of 1.0 [mm]-3.2 [mm].

[0584] Now, FIG. 80 is a graphical representation of the results shown in FIG. 79, while the pipe parameter $L \cdot d_n^2 / d^4$ is shown in the abscissas axis thereof. This graphical representation shows that the discharge speed v varies in proportion to the pipe parameter, which means that the discharge speed is substantially determined by the pipe parameter. By using the pipe parameter of 5×10^4 or less, there can be obtained a discharge speed which is necessary for supply of a fine quantity of lubricating oil at a discharge speed v of 5-15 [m/s] or more.

[0585] Now, FIG. 81 is a graphical representation of the measured results of the variations of the discharge speed v occurring when the Young's modulus of the pipe is changed. This graph shows the calculated results of $\Delta v_p + \Delta v_o$ and the measured results of the discharge speed v , where three kinds of pipes, that is, a pipe formed of stainless steel (Young's modulus $E \approx 190$ [GPa]), a pipe formed of PEEK resin ($E \approx 4$ [GPa]), and a pipe formed of polyurethane resin ($E \approx 0.1$ [GPa]) are used, the outside diameter D of each pipe is 1.6 [mm], pipe inside diameter d is 1.0 [mm], pipe length L is 1 [m], and the average pressure p in the above-mentioned expressions (13) and (14) is set to be 2 [MPa]. By the way, the discharge quantity q in the present embodiment is set at approx. 3 [mm³] and lubricating oil VG22 is used.

[0586] According to this graphical representation, in case where the Young's modulus E of the pipe is small, the expansion volume Δv_p of the pipe increases and thus $\Delta v_p + \Delta v_o$ increases; and, in case where $\Delta v_p + \Delta v_o$ is equal to or more than 3 [mm³], the discharge speed v lowers suddenly. Especially, in the case of polyurethane resin being used, the discharge speed v is substantially 0, which shows that material having a low elasticity modulus, specifically, a

Young's modulus E of less than 3 [GPa] is not suitable for the material of a pipe for supply of a fine quantity of lubricating oil. On the other hand, in the case of a stainless-steel pipe having a Young's modulus E of the order of 190 [GPa], the expansion volume ΔV_p of the pipe is 0.01 [mm³] or less by calculation and, therefore, the influence of the expansion of the pipe can be neglected.

[0587] According to the spindle apparatus **800** of the present embodiment, even when it is applied as a spindle apparatus which has a cooling function using a jacket cooling system and also has a limited space for nozzle installation and pipe arrangement, in case where a nozzle and a pipe are installed in such a compact structure that the outside diameter of the pipe is set in the range of 1.0 [mm]-3.2 [mm], pipe inside diameter is set in the range of 0.8 [mm]-2.0 [mm], the Young's modulus of the material of the pipe is set at 3 [GPa] or more, and the pipe length L is set so as to satisfy the expressions (12) and (15) and $L > 0.5$ [m], not only supply of a fine quantity of lubricating oil can be realized, but also generation of noises due to the whizzing sounds and poor lubrication due to the air curtain, which have been problems to be solved in the conventional oil-air lubricating apparatus, can be prevented.

[0588] (Seventh Embodiment)

[0589] Next, description will be given below of a seventh embodiment of a spindle apparatus according to the invention.

[0590] FIG. 82 is a partially enlarged section view of a spindle apparatus **900** according to the seventh embodiment of the invention. In FIG. 82, parts having the same functions as those shown in FIG. 73 are given the same designations and thus the description thereof is omitted here.

[0591] The spindle apparatus **900** according to the present embodiment is an example of a spindle structure including a four-row combination of bearings. As in the present embodiment, in a spindle including a multi-row combination of bearings, in some cases, it is difficult to arrange a pipe up to the respective nozzle frames **812** through an opening hole **886** which is an axial hole formed in a housing. In the case of the present embodiment, for space reasons, it is difficult that the opening hole **886** is opened up from the left end of an inner housing **818** and a pipe is arranged through the opening hole **886** up to rolling bearings **816c**, **816d** which are disposed on third and fourth rows when viewed from the left side of FIG. 82.

[0592] In view of this, in the present embodiment, as the state of assembly of the housing is shown in FIG. 83, the inner housing **818** includes a first inner housing **890** and a second inner housing **892**. In the first inner housing **890**, the outer rings of the rolling bearings **816** are to be fixed. In the second inner housing **892**, the inner peripheral surface inside diameter d_a of an insertion portion capable of storing the first inner housing **890** in the axial direction thereof is set larger than the outside diameter d^b of the outer peripheral surface of the first inner housing **890** by at least a size equivalent to the diameter of a pressure-resisting tube **810**.

[0593] When assembling the inner housing **818**, firstly, a joint **874** is connected to the top portion of a nozzle frame **812** disposed on the rolling bearing **816** side of the first inner housing **890**, and the pressure-resisting tube **810** is pulled out from an opening **894** formed in the second inner housing

892. The pulled-out pressure-resisting tube **810** is then taken out externally of the spindle apparatus **900** through an opening **888** (see FIG. 82) formed in an outer housing **820**. In this manner, by connecting the joint **874** through the top portion of the nozzle frame **812**, a pipe can be arranged even in case where the space of the housing in the axial direction is narrow.

[0594] And, the first inner housing **890** is inserted into the insertion portion of the second inner housing **892** while sliding the first inner housing **890** in the axial direction thereof. At the then time, since the inside diameter d_a of the second inner housing **892** is set larger than the outside diameter d^b of the first inner housing **890**, there is eliminated a possibility that the pressure-resisting tube **810** can be intervened between the first and second inner housings **890**, **892**, so that the first inner housing **890** can be inserted smoothly. Therefore, even in the deep and narrow space of the spindle apparatus, the pipe, that is, the pressure-resisting tube **810** can be arranged there while the spindle apparatus is structured so as to be easy to assemble.

[0595] Also, there can also be employed another structure in which a cut-out groove for arrangement of the pressure-resisting tube **810** is formed in the insertion portion of the second inner housing **892**. In this case, when the first inner housing **890** is slid in the axial direction thereof, since the pressure-resisting tube **810** is stored into the cut-out groove, smooth insertion of the first inner housing **890** can be realized.

[0596] According to the spindle apparatus of the sixth and seventh embodiments, since, in order to be able to supply a fine quantity of lubricating oil to the spindle apparatus, a pipe for supply of lubricating oil is set so as to satisfy the given conditions. Therefore, even when the present invention is applied to a spindle apparatus which is narrow and limited in the space for nozzle installation and pipe arrangement, a nozzle and a pipe can be installed in a compact structure, so that a fine quantity of lubricating oil can be supplied accurately and stably and, at the same time, generation of noises due to the whizzing sounds and poor lubrication due to the air curtain, which have been problems to be solved in the conventional oil-air lubrication, can be prevented.

What is claimed is:

1. A method of supplying a lubricant to a rolling bearing of a high-speed spindle, the method comprising the steps of:

pressuring the lubricant in a pump chamber;

discharging the pressurized lubricant within the pump chamber from the nozzle; and

bringing a fine quantity of lubricant discharged from the nozzle into direct contact with a lubricating surface of a rotary body of the rolling bearing.

2. The method of supplying a lubricant according to claim 1, further comprising:

supplying the lubricant from a lubricant tank to the pump chamber via a first flow passage;

supplying the lubricant from the pump chamber to the nozzle via a second flow passage; and

discharging the lubricant from the nozzle in a discharge quantity of 0.0005 cc/shot-0.01 cc/shot at a speed of 10 m/sec-100 m/sec.

3. The method of supplying a lubricant according to claim 1, further comprising:

supplying the lubricant from a lubricant tank to the pump chamber via a first flow passage;

supplying the lubricant from the pump chamber to the nozzle via a second flow passage; and

discharging the lubricant from the nozzle in a discharge quantity of 0.001 ml/shot as the minimum discharge quantity per operation.

4. The method of supplying a lubricant according to claim 2, wherein a flow passage sectional area of the first flow passage is larger than a sectional area of a discharge opening of the nozzle.

5. The method of supplying a lubricant according to claim 3, wherein a flow passage sectional area of the first flow passage is larger than a sectional area of a discharge opening of the nozzle.

6. The method of supplying a lubricant according to claim 1, wherein the nozzle discharges the lubricant in a pin-spot manner so that the lubricant is brought into direct contact with the lubricating surface of the rotary body of the rolling bearing without force of air.

7. The method of supplying a lubricant according to claim 1, further comprising:

sucking the lubricant into the pump chamber via a cylinder, wherein the cylinder has a piston slidably disposed in an interior portion thereof and has the pump chamber disposed in the interior portion thereof, the cylinder having a suction port for sucking the lubricant into the pump chamber, the cylinder being connected to the nozzle via a pipe,

compressing the lubricant within the pump chamber with the piston to increase the pressure within the cylinder, and thereby discharging the lubricant externally from the nozzle.

8. The method of supplying a lubricant according to claim 7, further comprising a check valve interposed between the pump chamber and the pipe.

9. The method of supplying a lubricant according to claim 1, further comprising:

detecting a rotation speed of rotary body of a roller bearing using a rotation speed detector; and

adjusting a discharge quantity of the lubricant in accordance with the detected rotation speed.

10. The method of supplying a lubricant according to claim 1, wherein the nozzle discharges the fine quantity of lubricant, as the lubricant, intermittently when the fine quantity of lubricant is compressed and its pressure increases.

11. A method of supplying a lubricant to a rolling bearing of a high-speed spindle, the method comprising the steps of:

pressuring the lubricant in a pump chamber, the pump chamber being filled with the lubricant;

discharging the pressurized lubricant within the pump chamber from the nozzle; and

bringing a fine quantity of lubricant discharged from the nozzle into direct contact with a lubricating surface of a rotary body of the rolling bearing.

12. The method of supplying a lubricant according to claim 11, wherein the nozzle discharges the fine quantity of lubricant, as the lubricant, by its own pressure intermittently.

13. The method of supplying a lubricant according to claim 11, wherein the nozzle discharges the fine quantity of lubricant, as the lubricant, intermittently when the fine quantity of lubricant is compressed and its pressure increases.

* * * * *