




US 20160020072A1

(19) **United States**(12) **Patent Application Publication**
Brouk et al.(10) **Pub. No.: US 2016/0020072 A1**(43) **Pub. Date: Jan. 21, 2016**(54) **ION ENERGY BIAS CONTROL APPARATUS**(71) Applicant: **Advanced Energy Industries, Inc.**, Fort Collins, CO (US)(72) Inventors: **Victor Brouk**, Fort Collins, CO (US);
Daniel J. Hoffman, Fort Collins, CO (US);
Daniel Carter, Fort Collins, CO (US);
Dmitri Kovalevskii, Fort Collins, CO (US)(21) Appl. No.: **14/803,815**(22) Filed: **Jul. 20, 2015****Related U.S. Application Data**

(63) Continuation of application No. 14/011,305, filed on Aug. 27, 2013, now Pat. No. 9,105,447.

Publication Classification(51) **Int. Cl.**
H01J 37/32 (2006.01)
H01J 37/24 (2006.01)(52) **U.S. Cl.**CPC **H01J 37/32091** (2013.01); **H01J 37/241** (2013.01); **H01J 37/32146** (2013.01)(57) **ABSTRACT**

This disclosure describes systems, methods, and apparatus for operating a plasma processing chamber. In particular, a periodic voltage function combined with an ion current compensation can be provided as a bias to a substrate support as a modified periodic voltage function. This in turn effects a DC bias on the surface of the substrate that controls an ion energy of ions incident on a surface of the substrate. A peak-to-peak voltage of the periodic voltage function can control the ion energy, while the ion current compensation can control a width of an ion energy distribution function of the ions. Measuring the modified periodic voltage function can provide a means to calculate an ion current in the plasma and a sheath capacitance of the plasma sheath. The ion energy distribution function can be tailored and multiple ion energy peaks can be generated, both via control of the modified periodic voltage function.

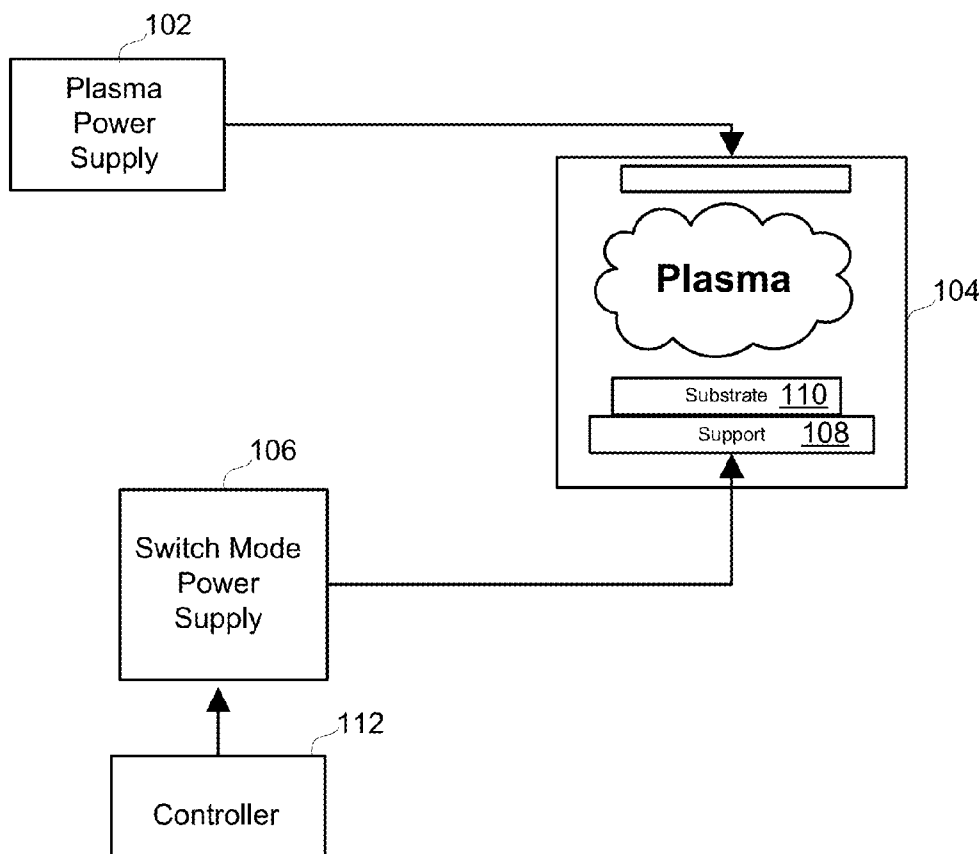

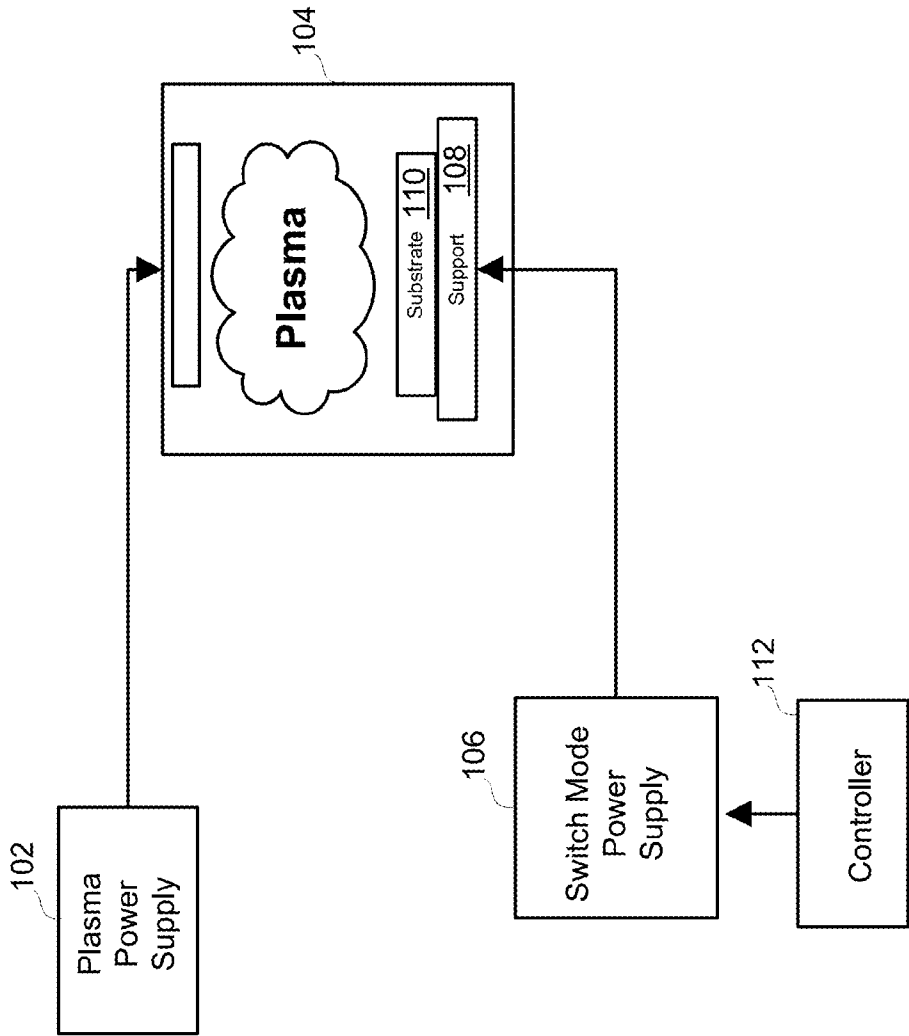


FIG. 1

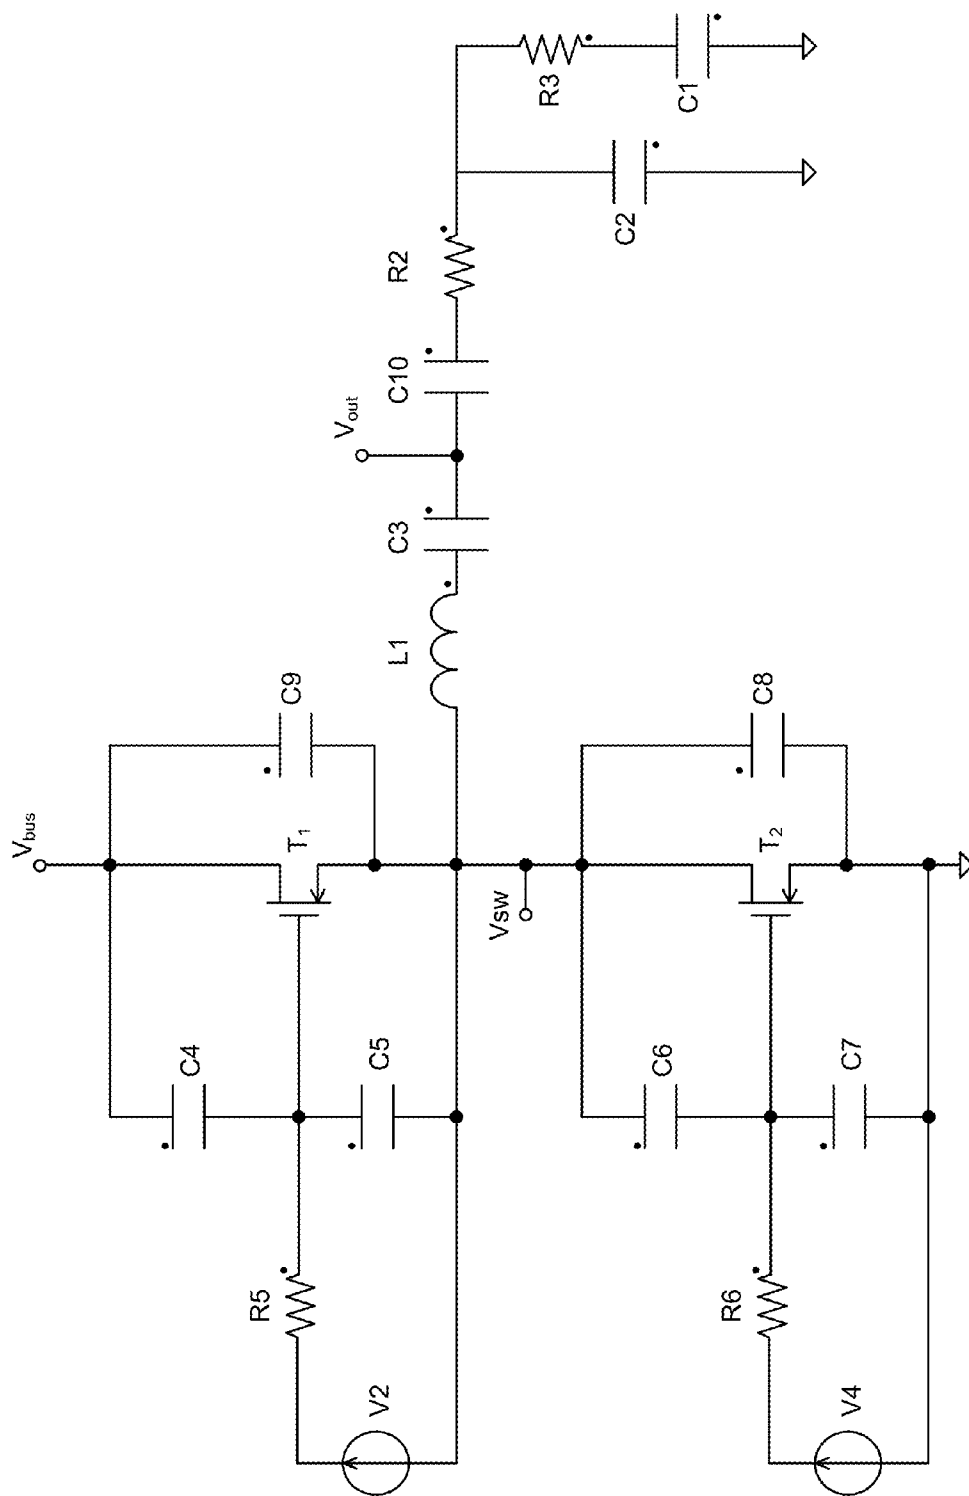


FIG. 2

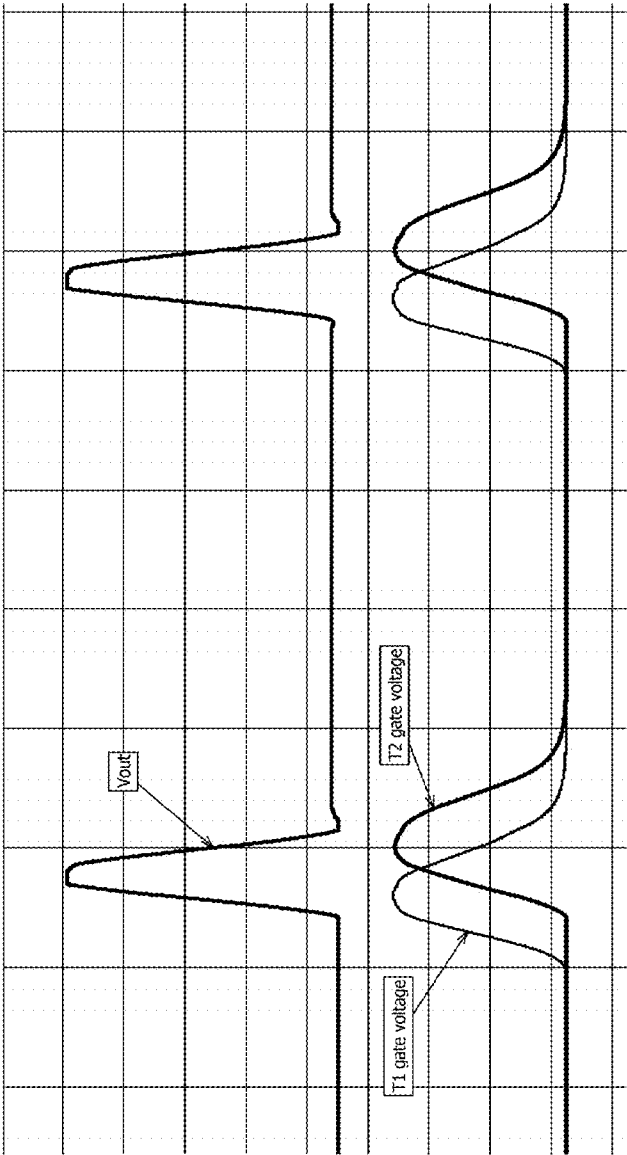
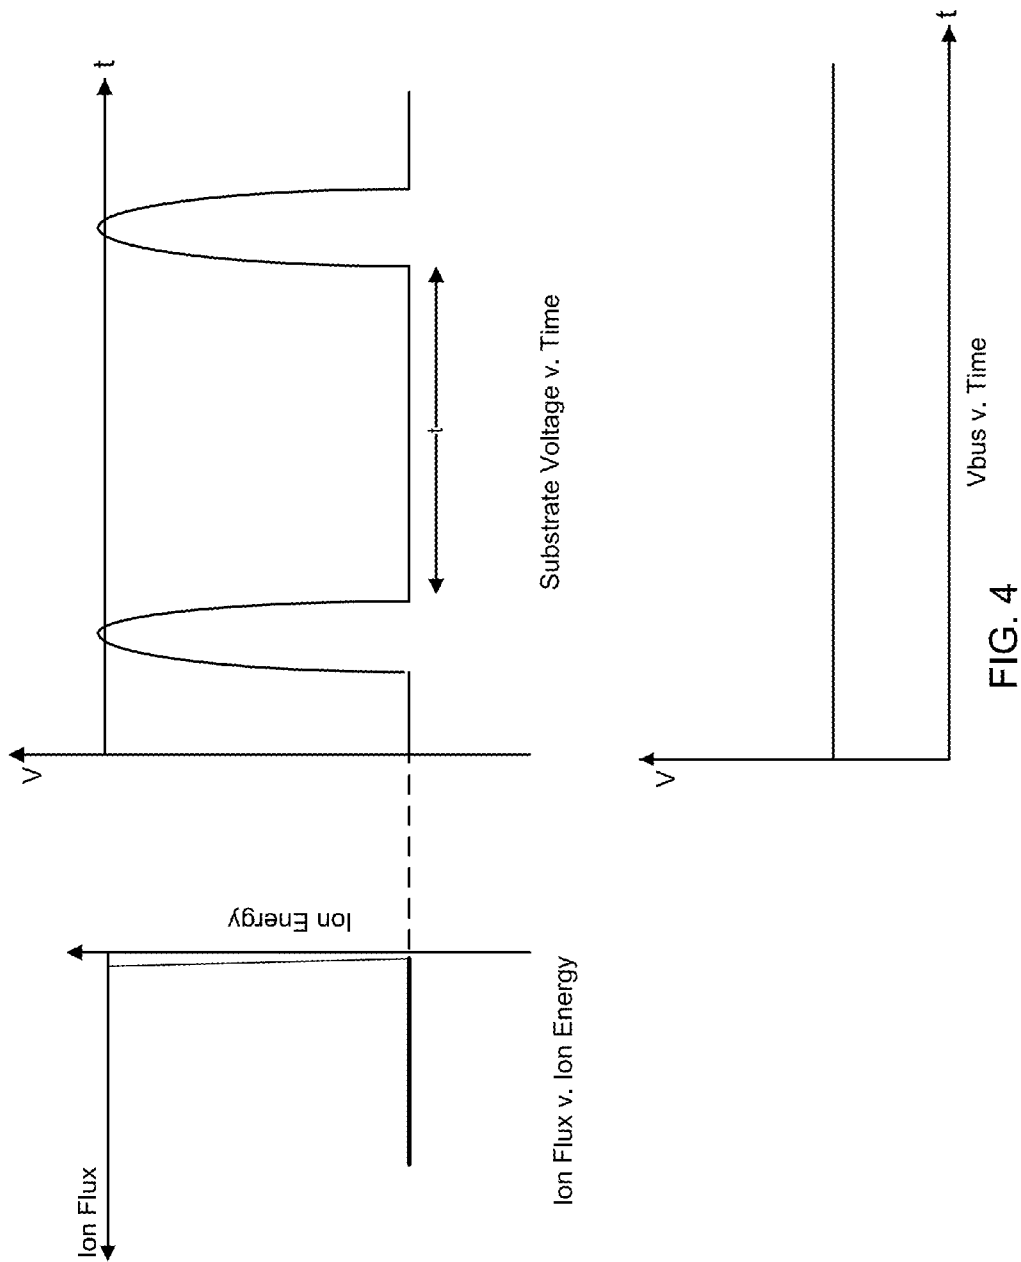


FIG. 3



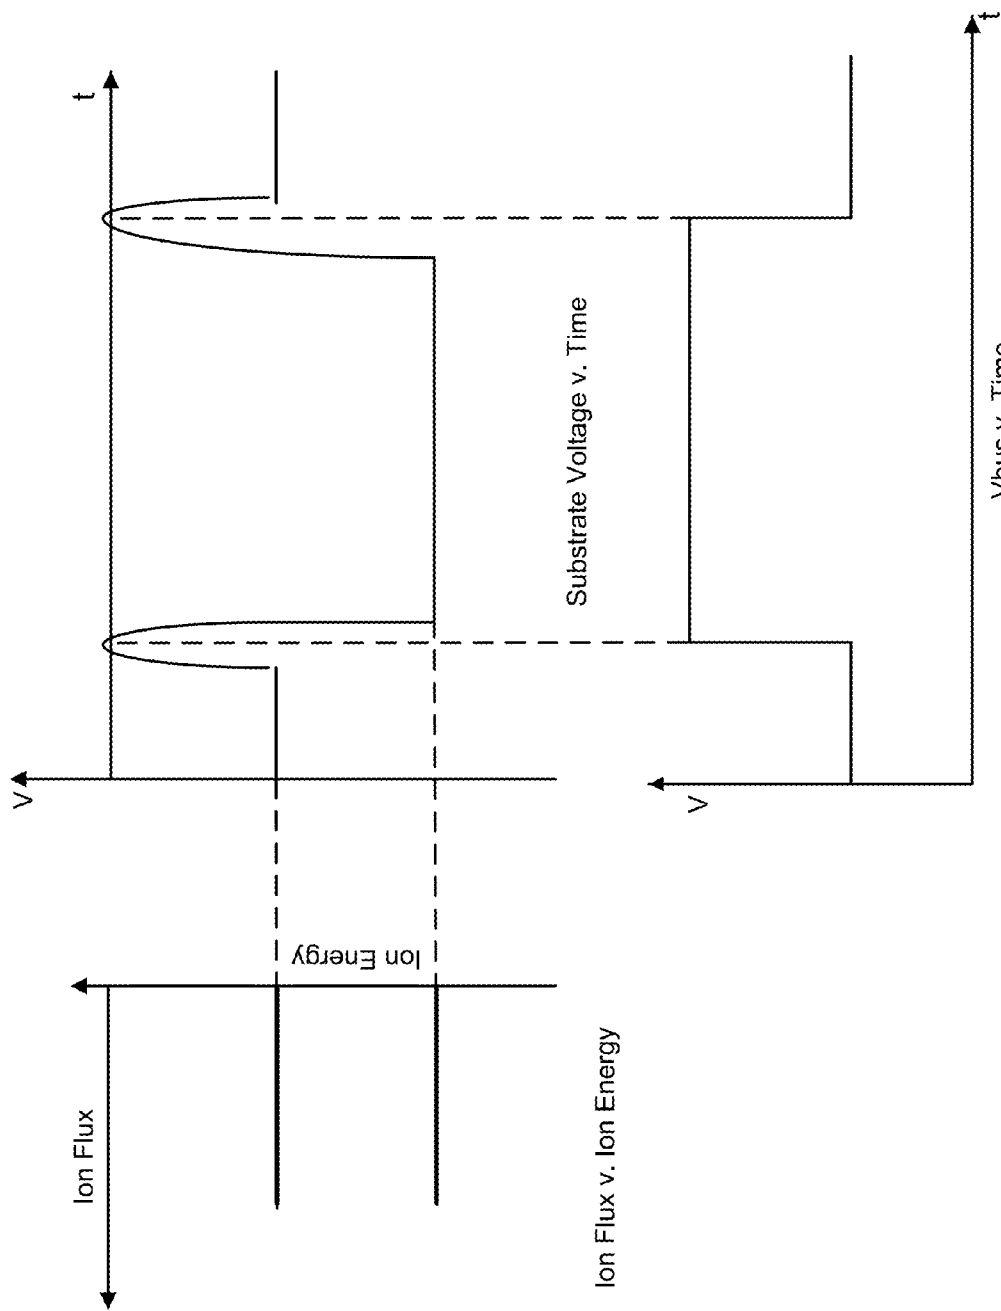


FIG. 5

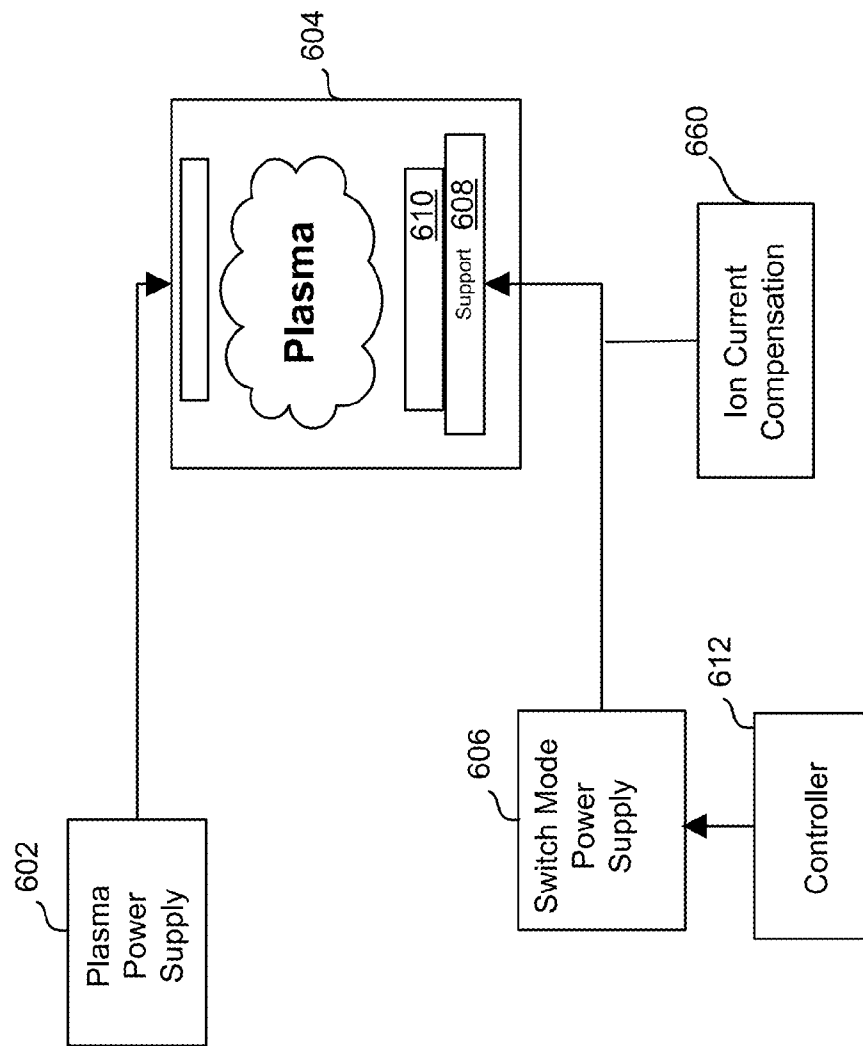


FIG. 6

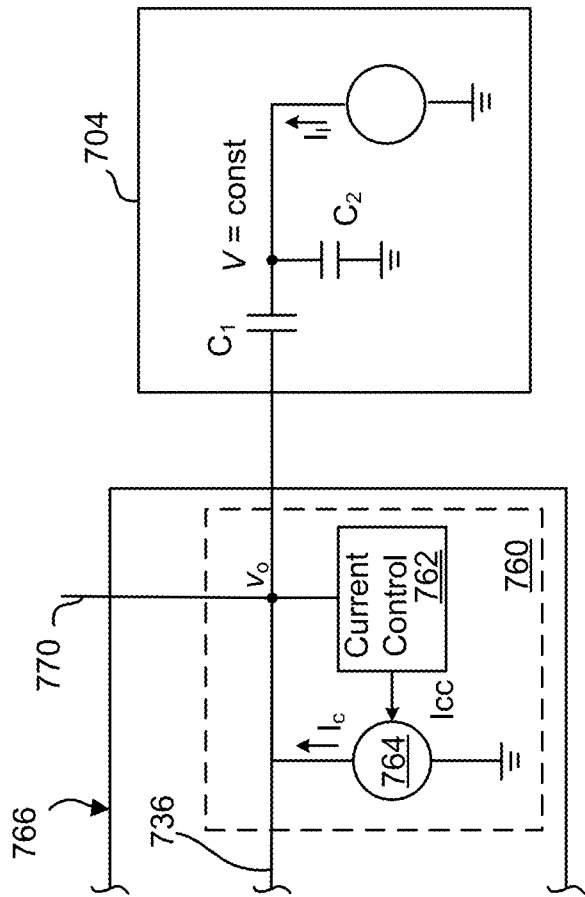


FIG. 7

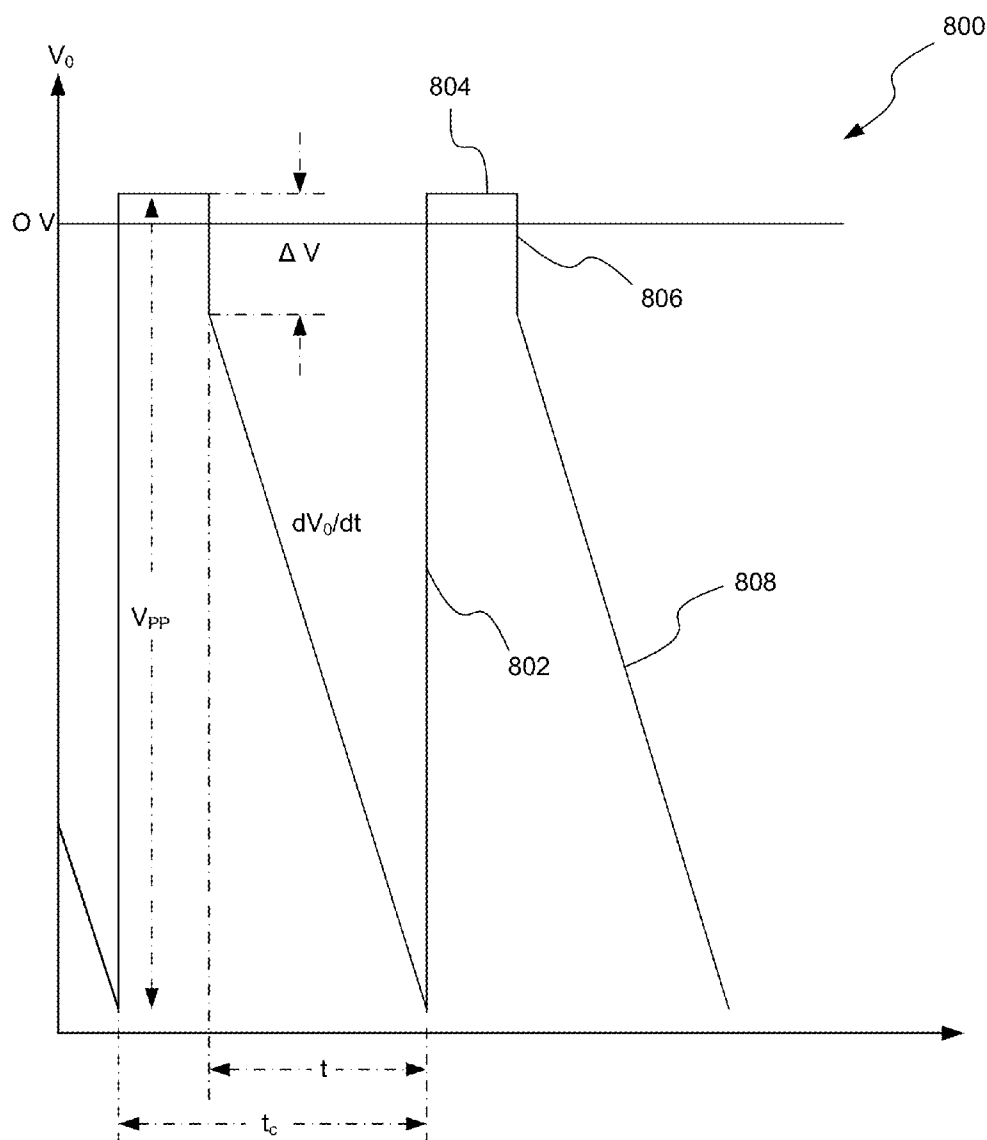


FIG. 8

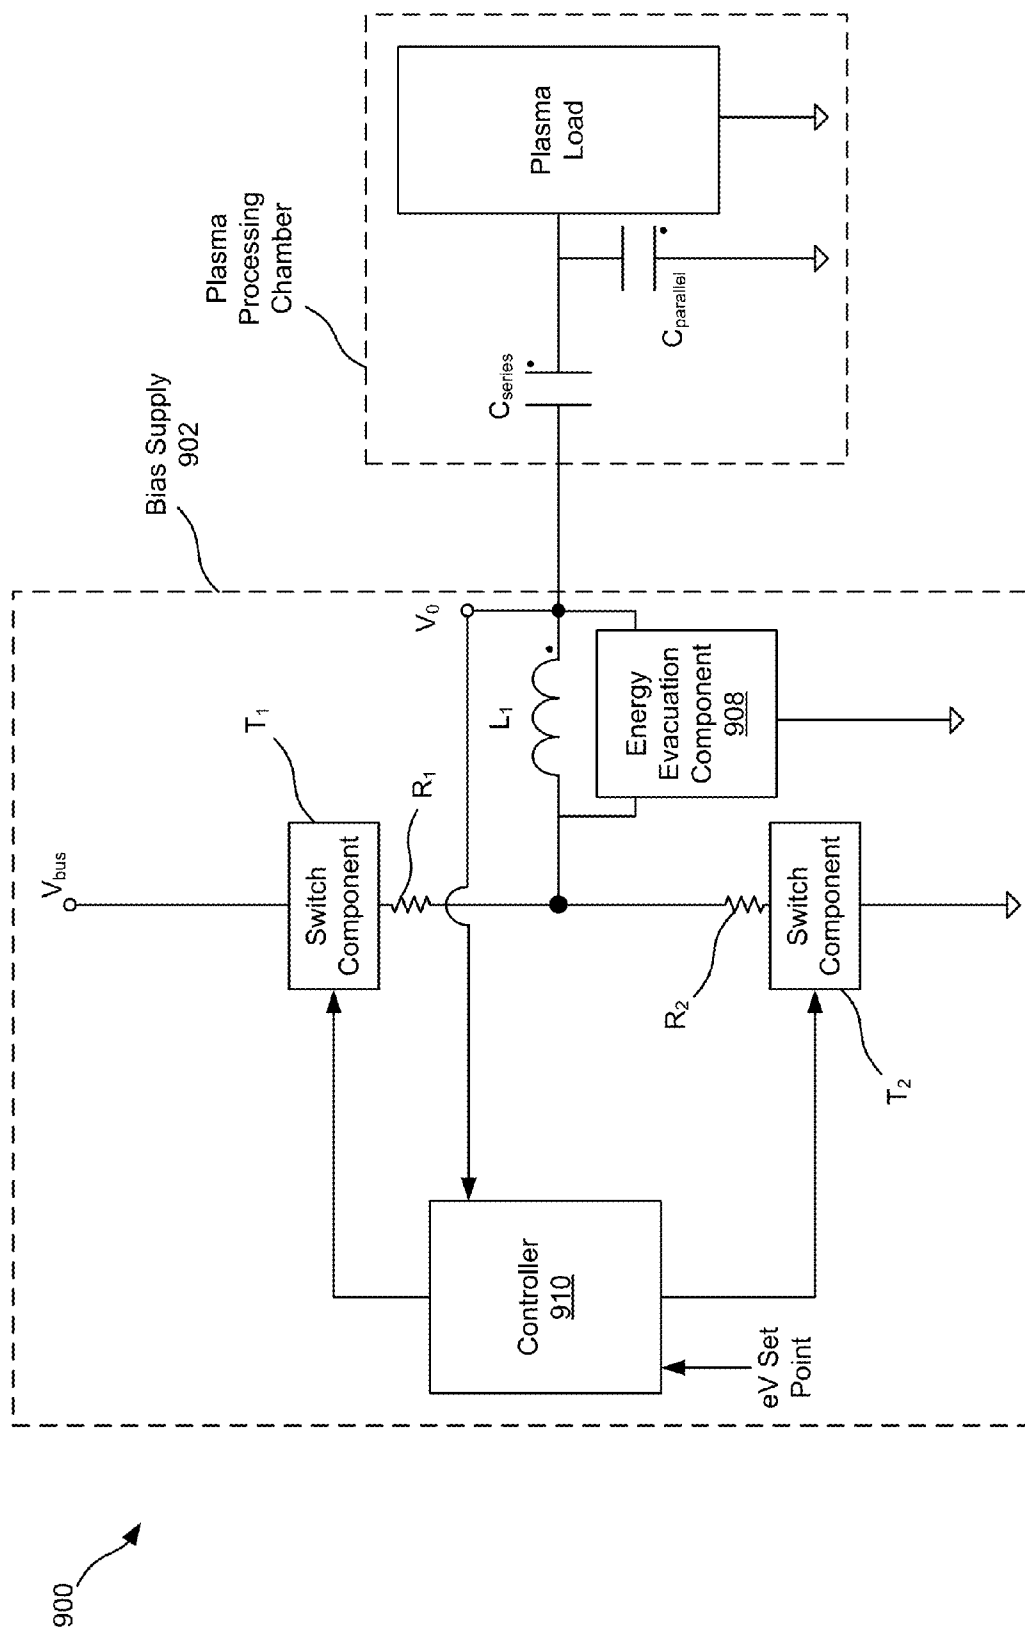


FIG. 9

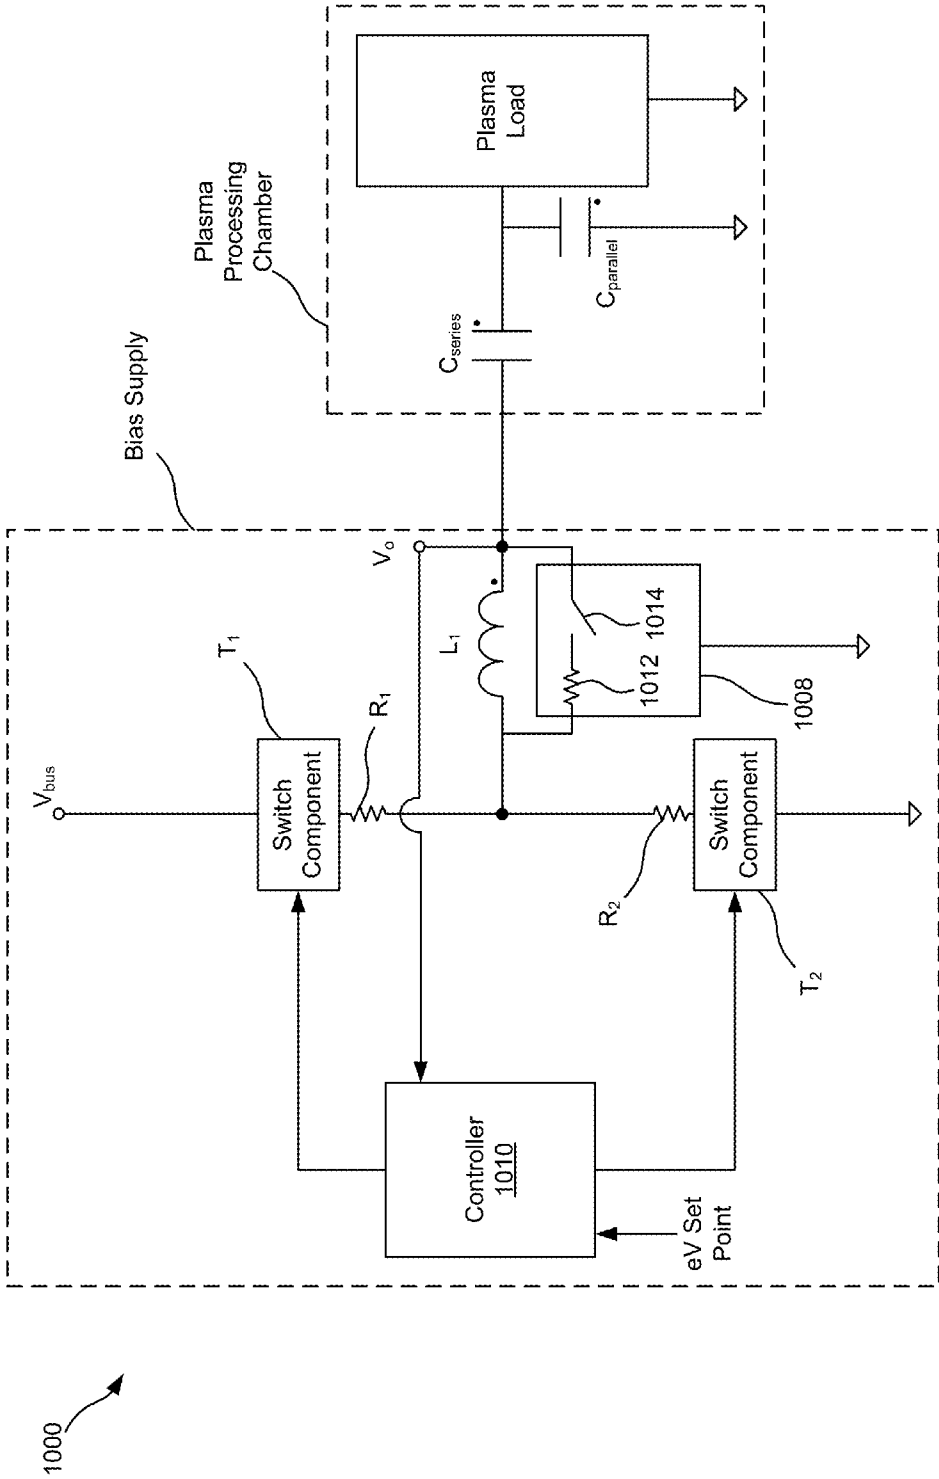
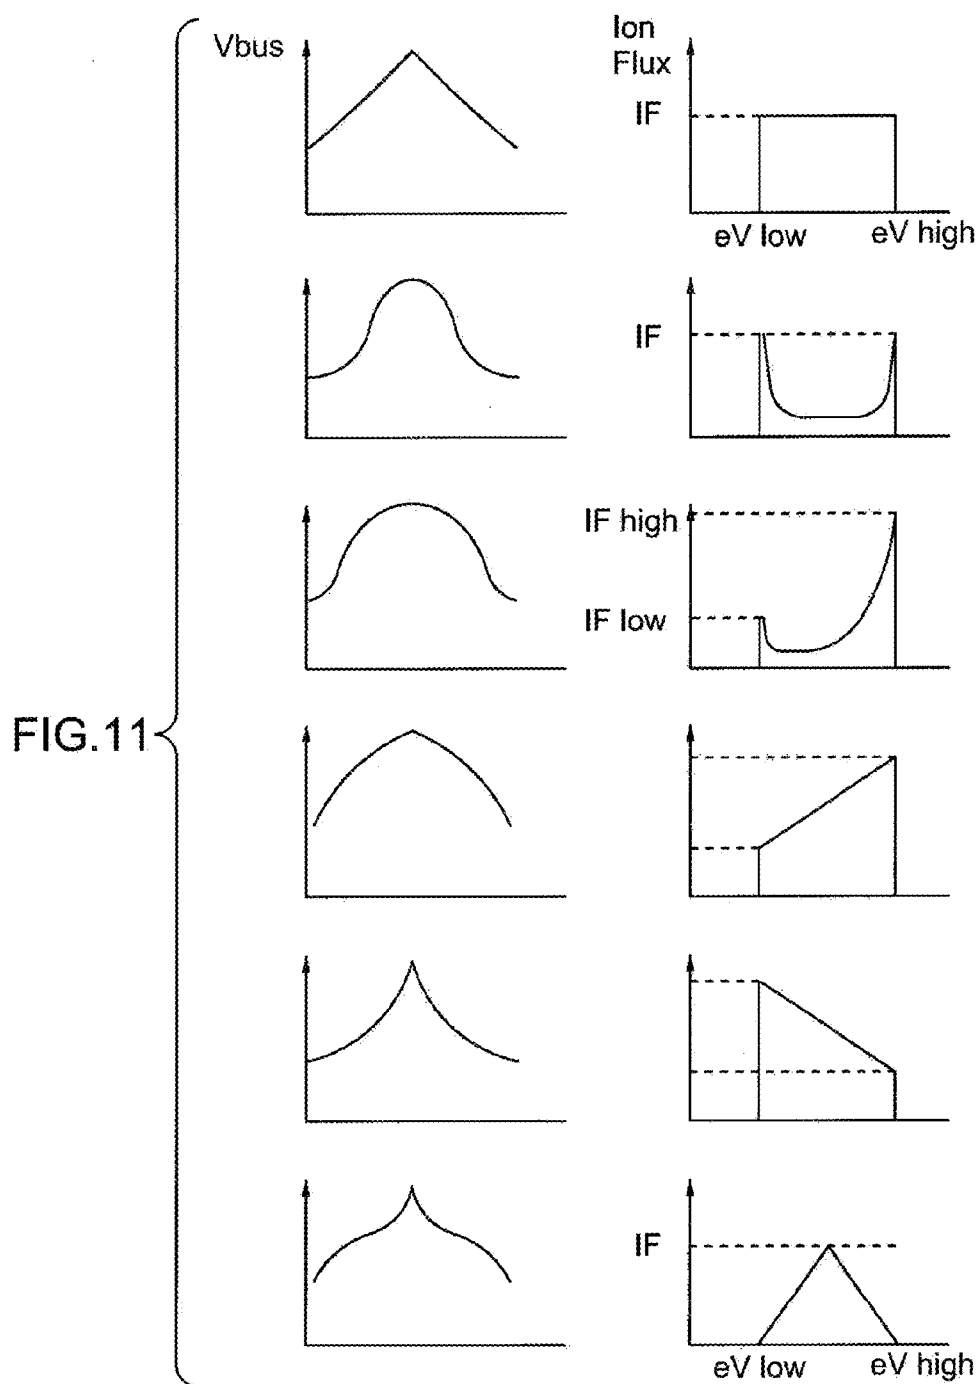
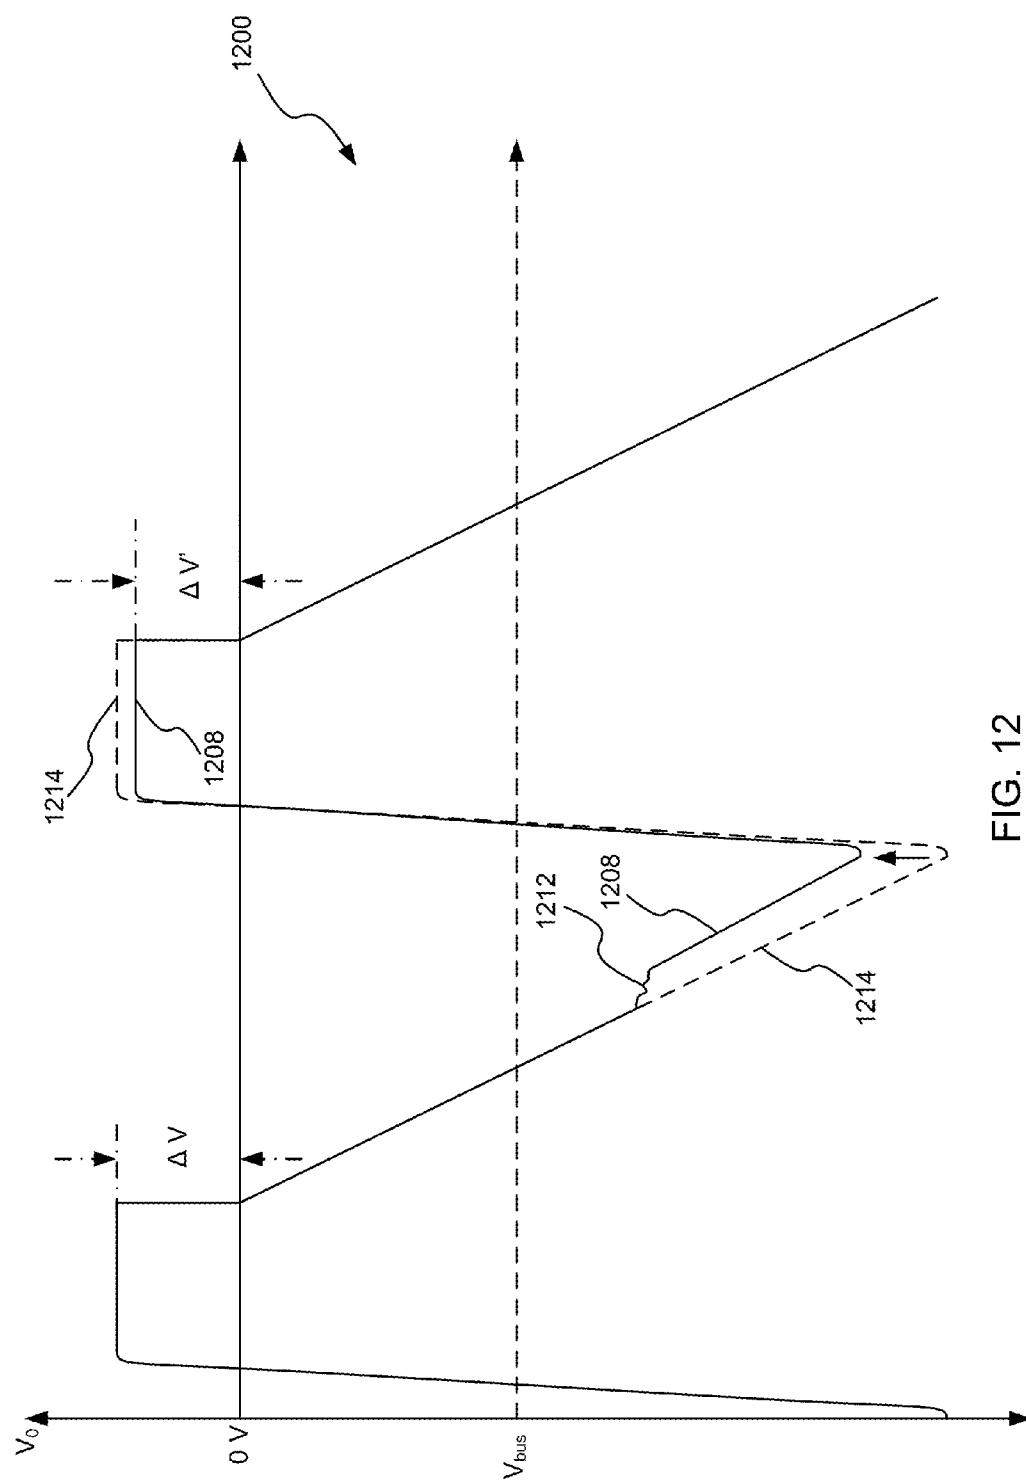
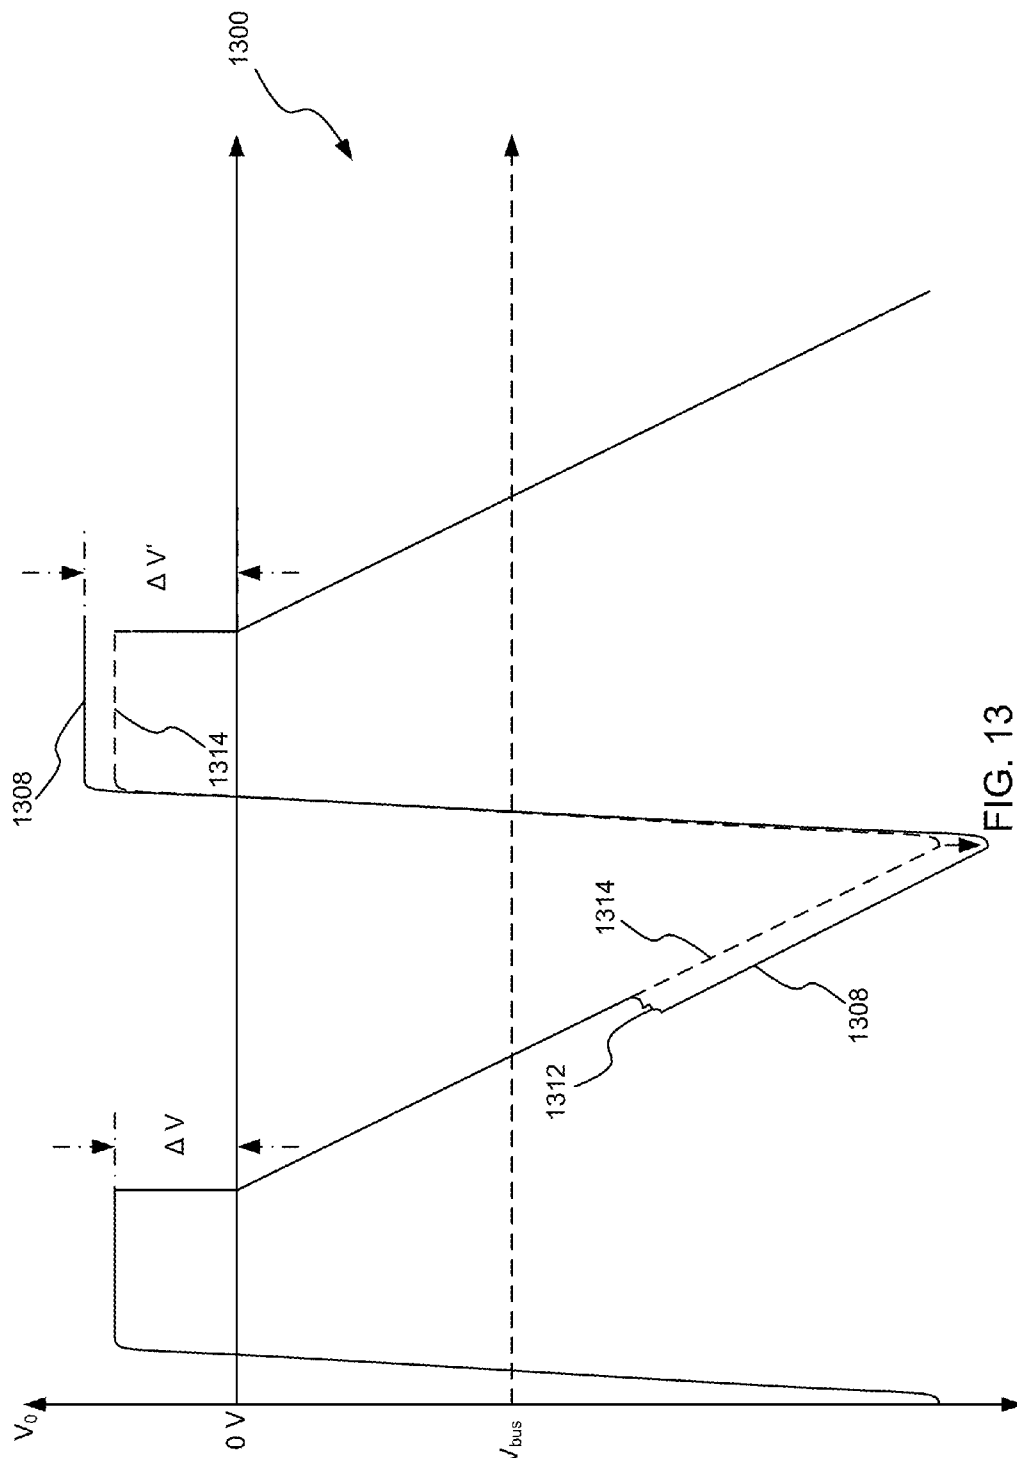
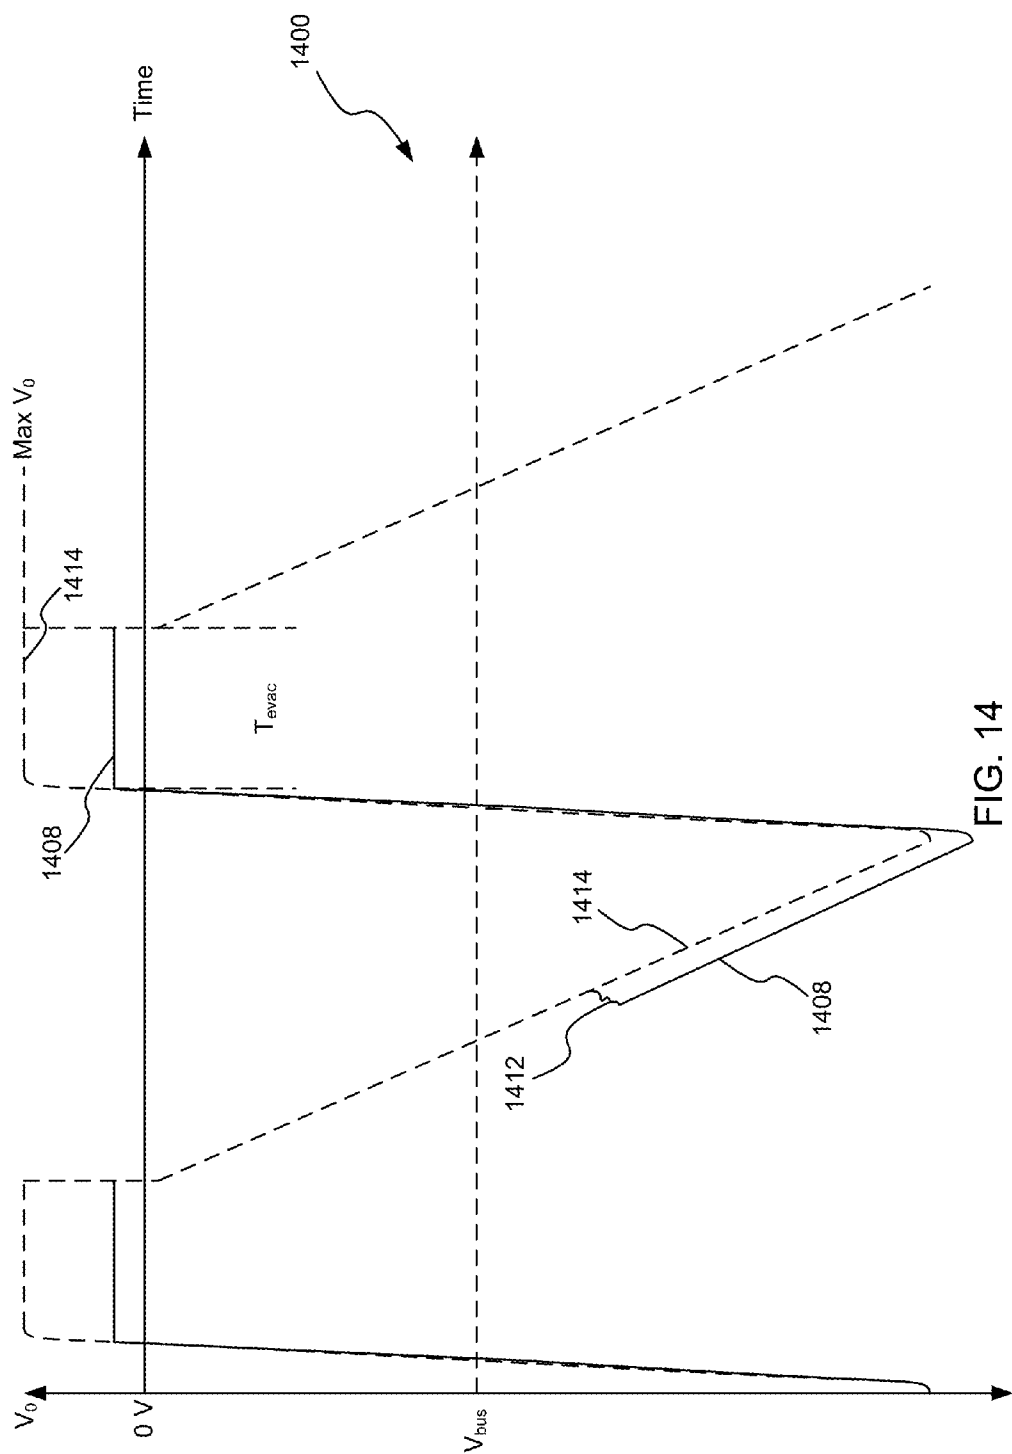



FIG. 10









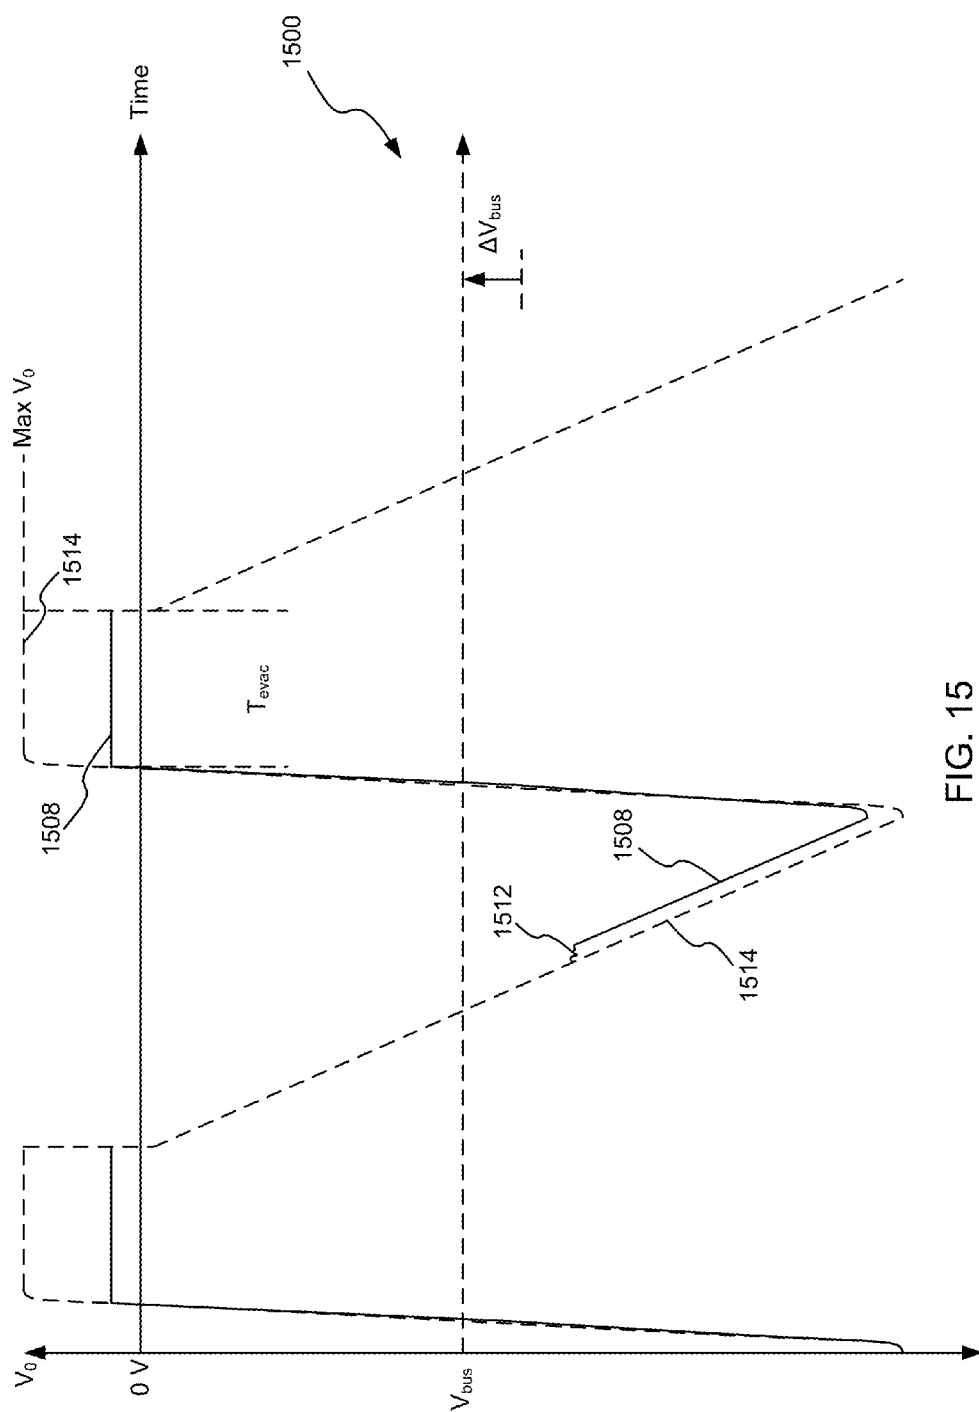

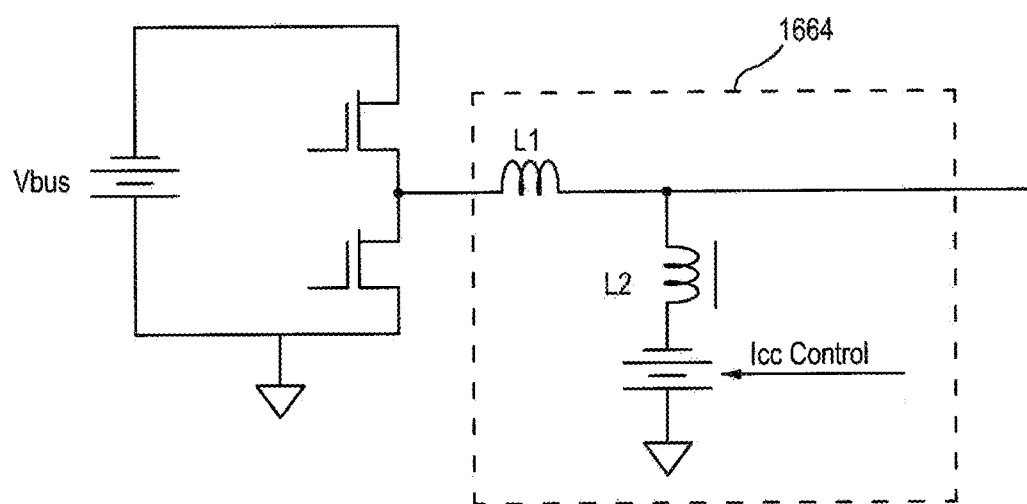


FIG.16

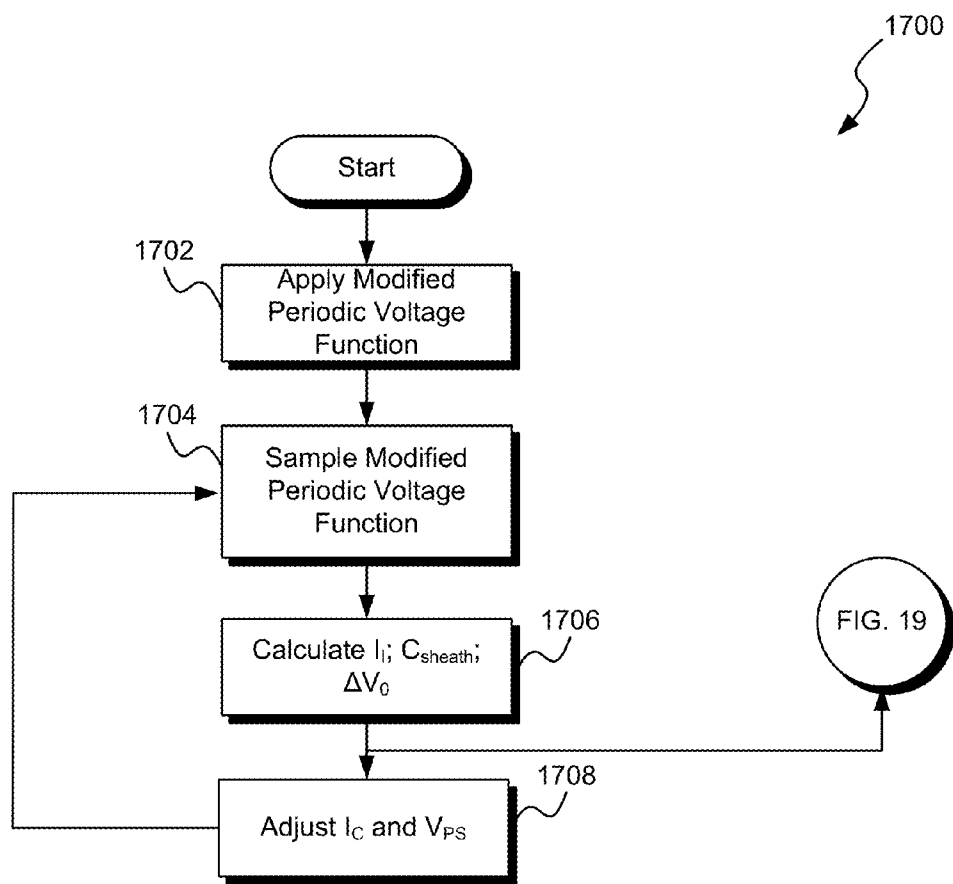


FIG. 17

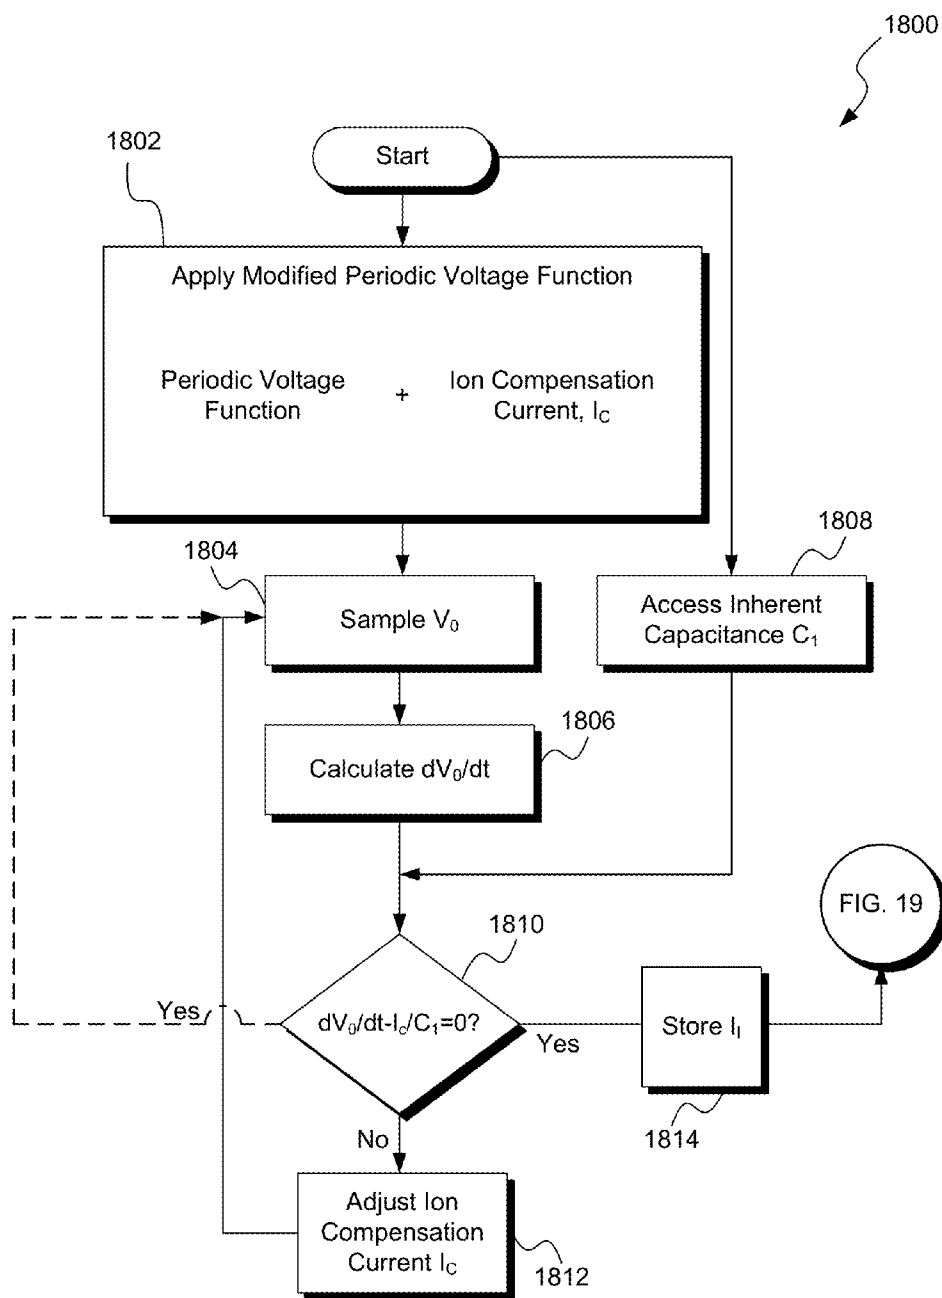


FIG. 18

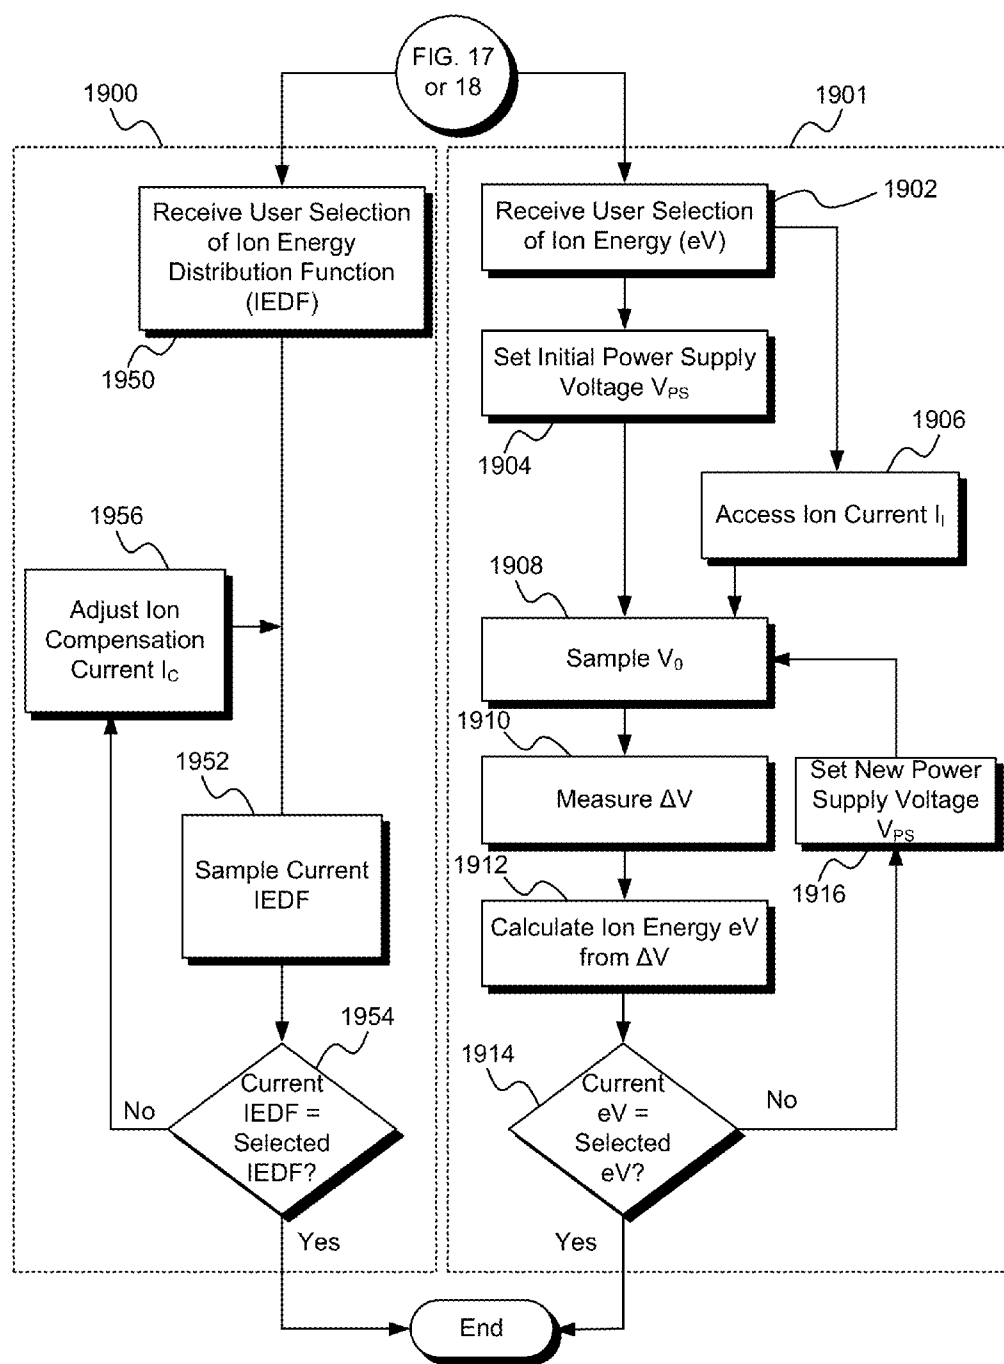


FIG. 19

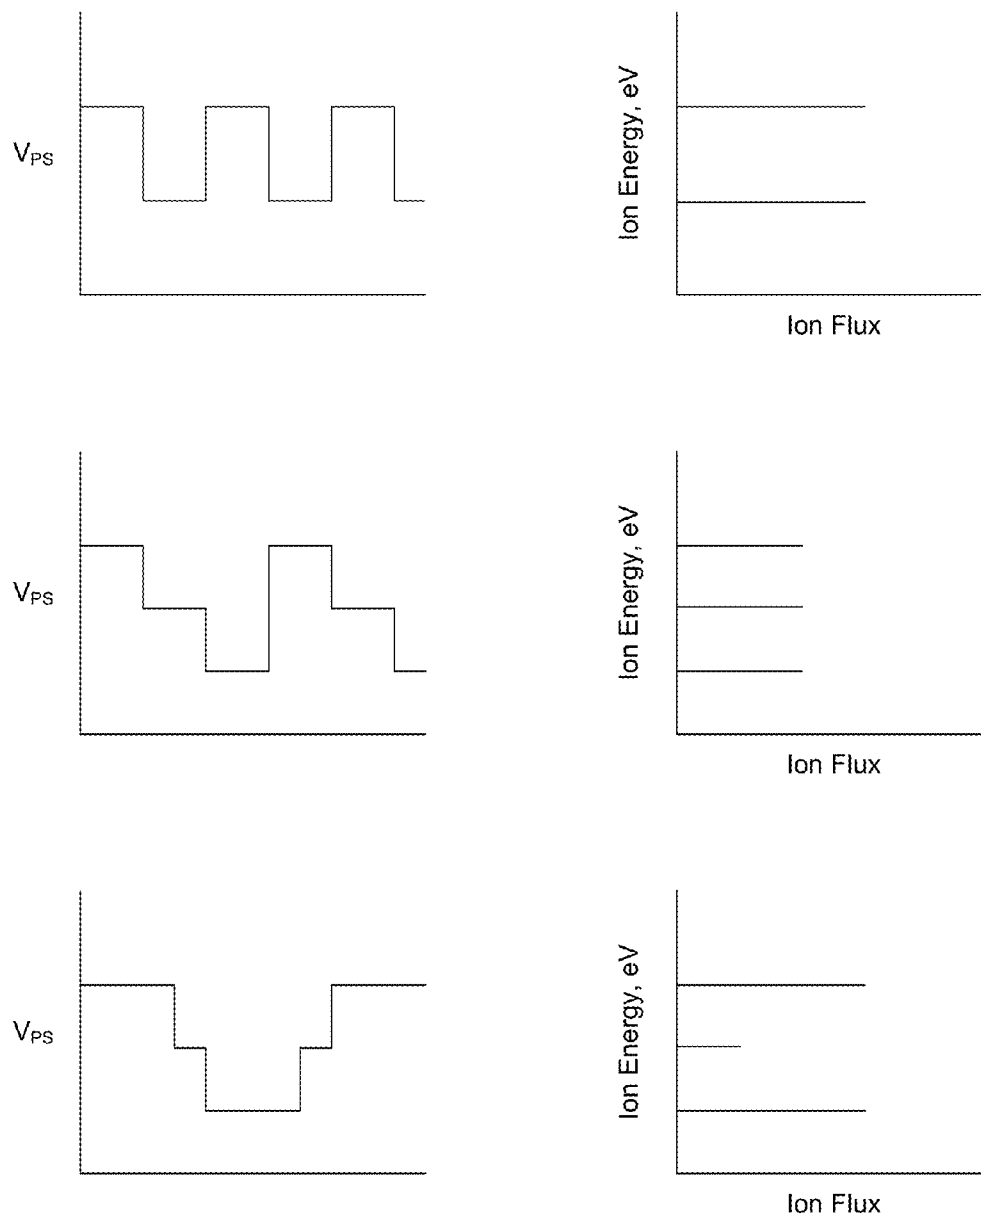
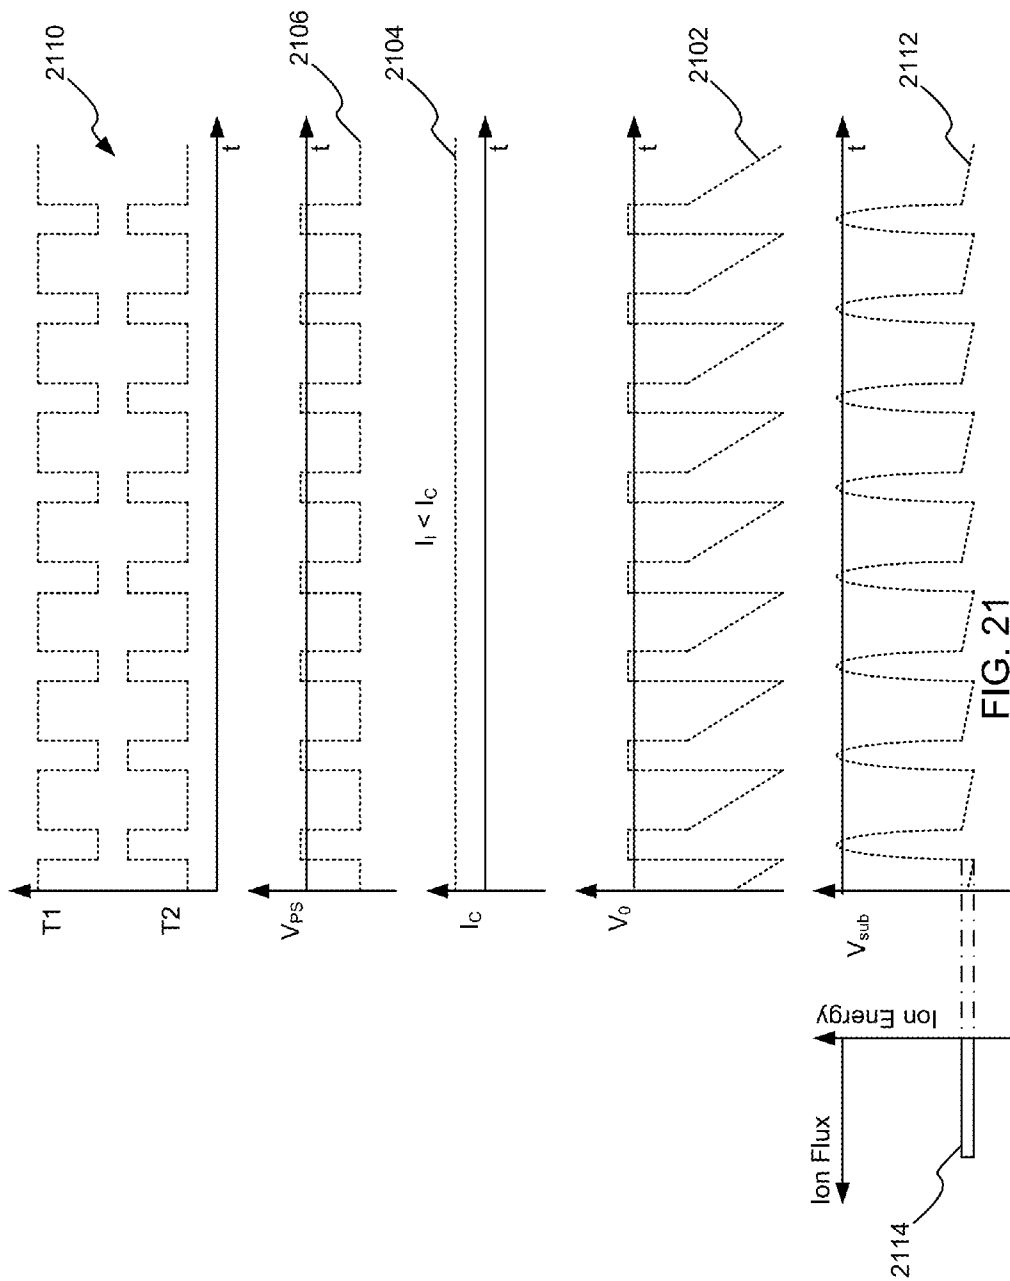
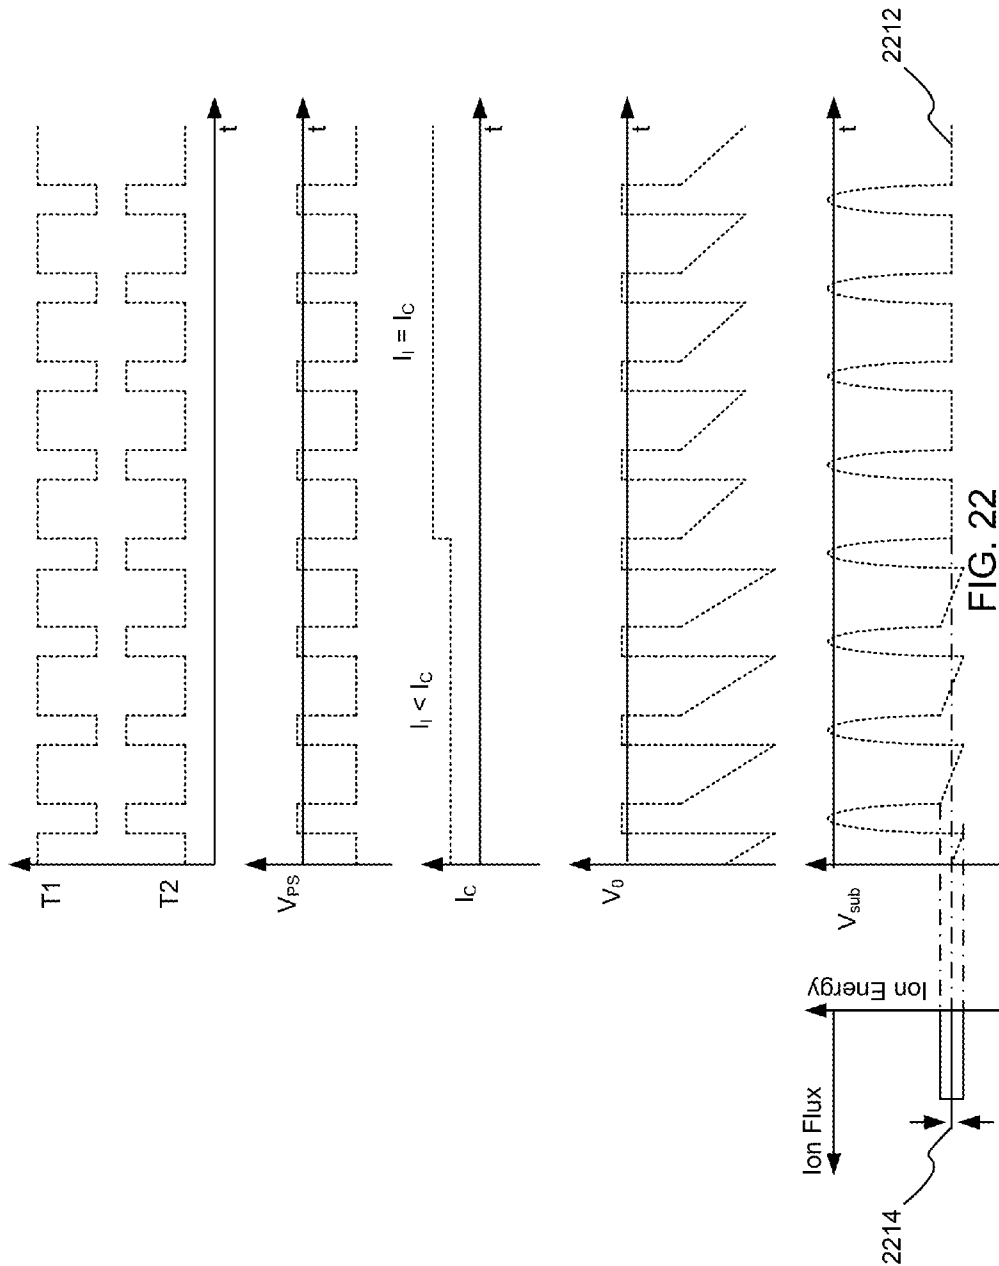
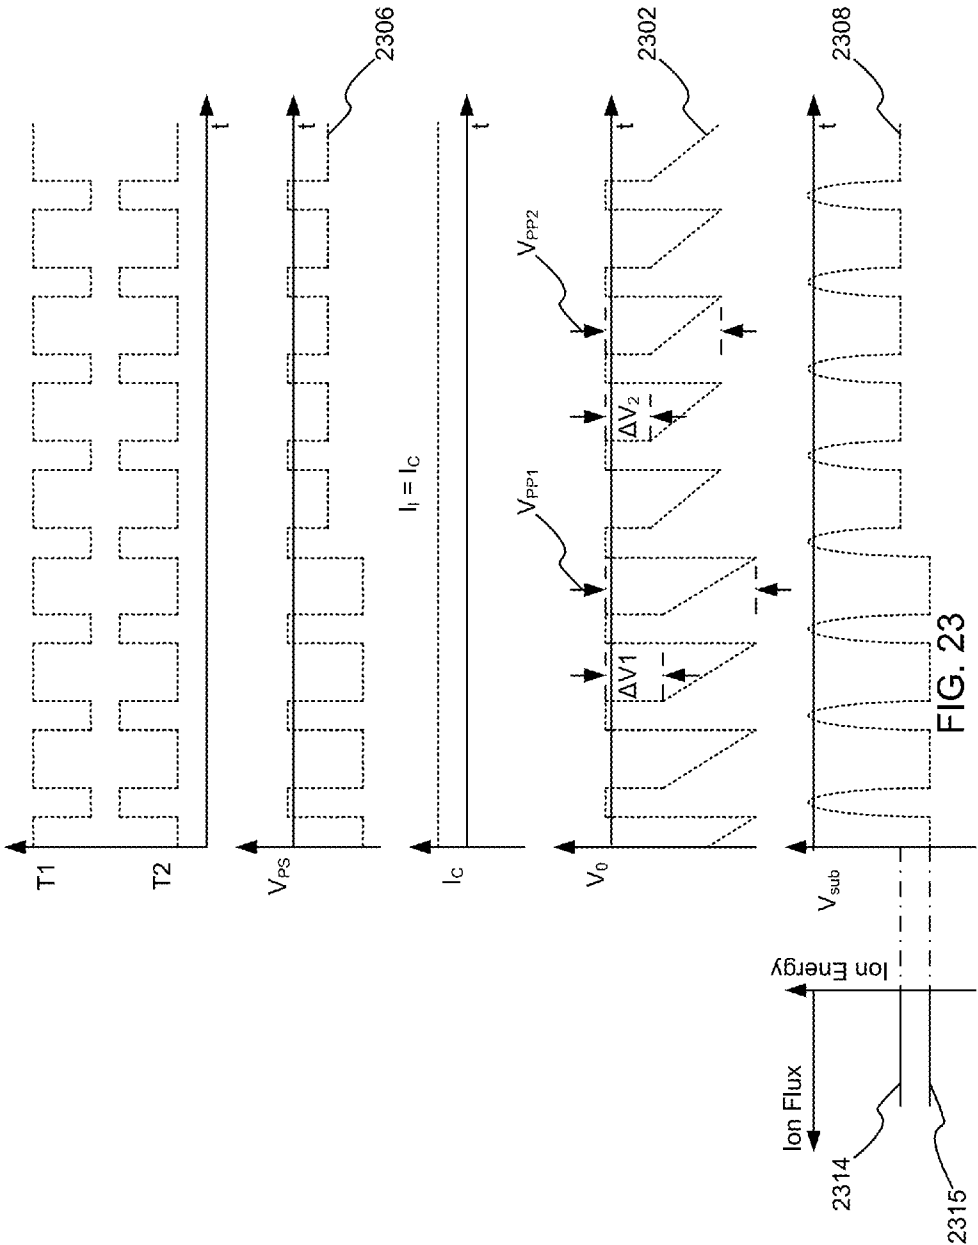
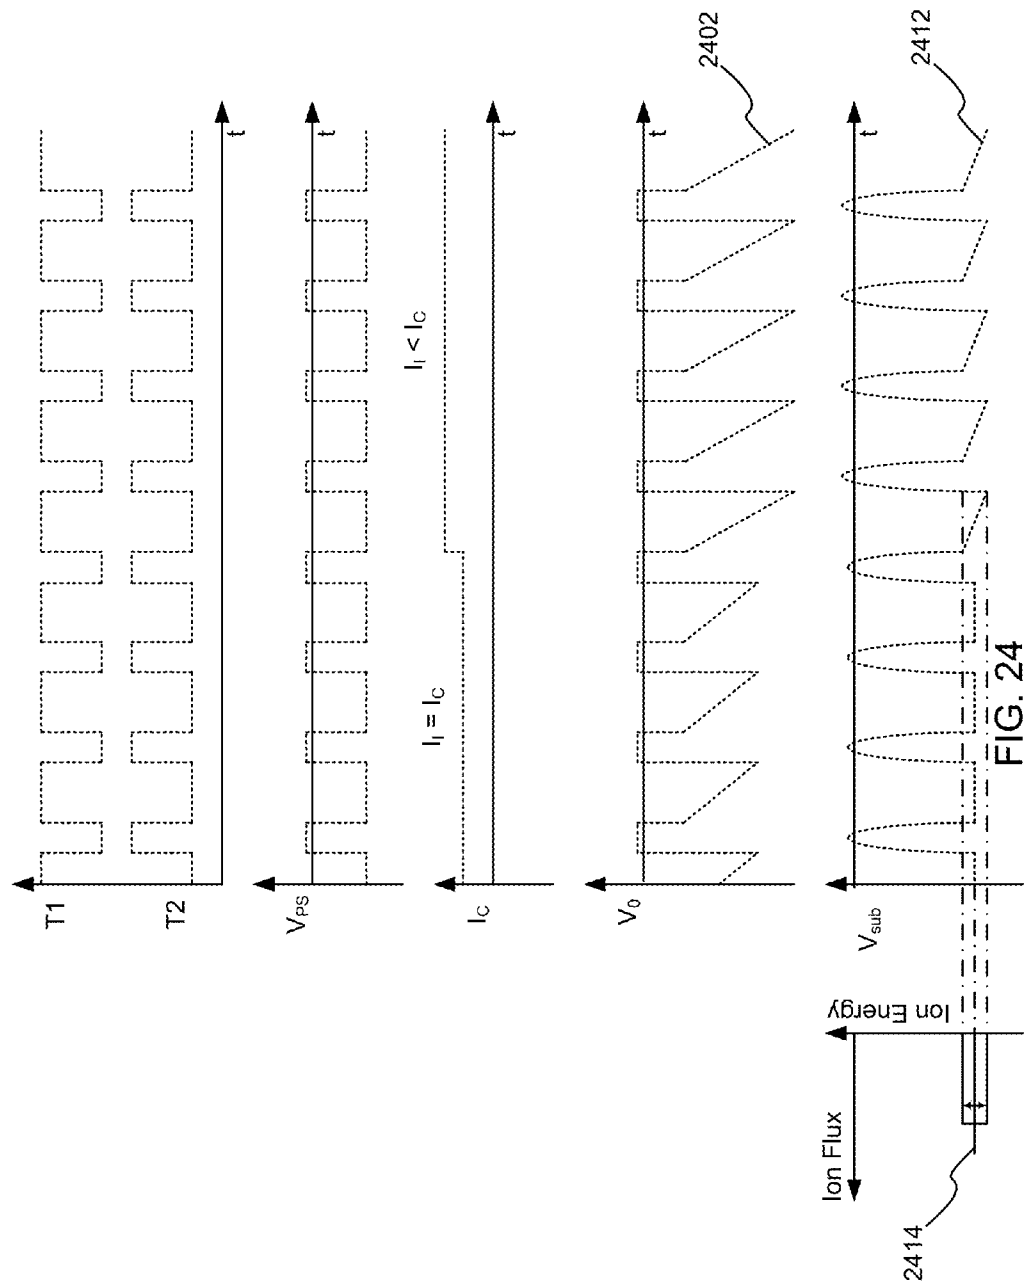



FIG. 20











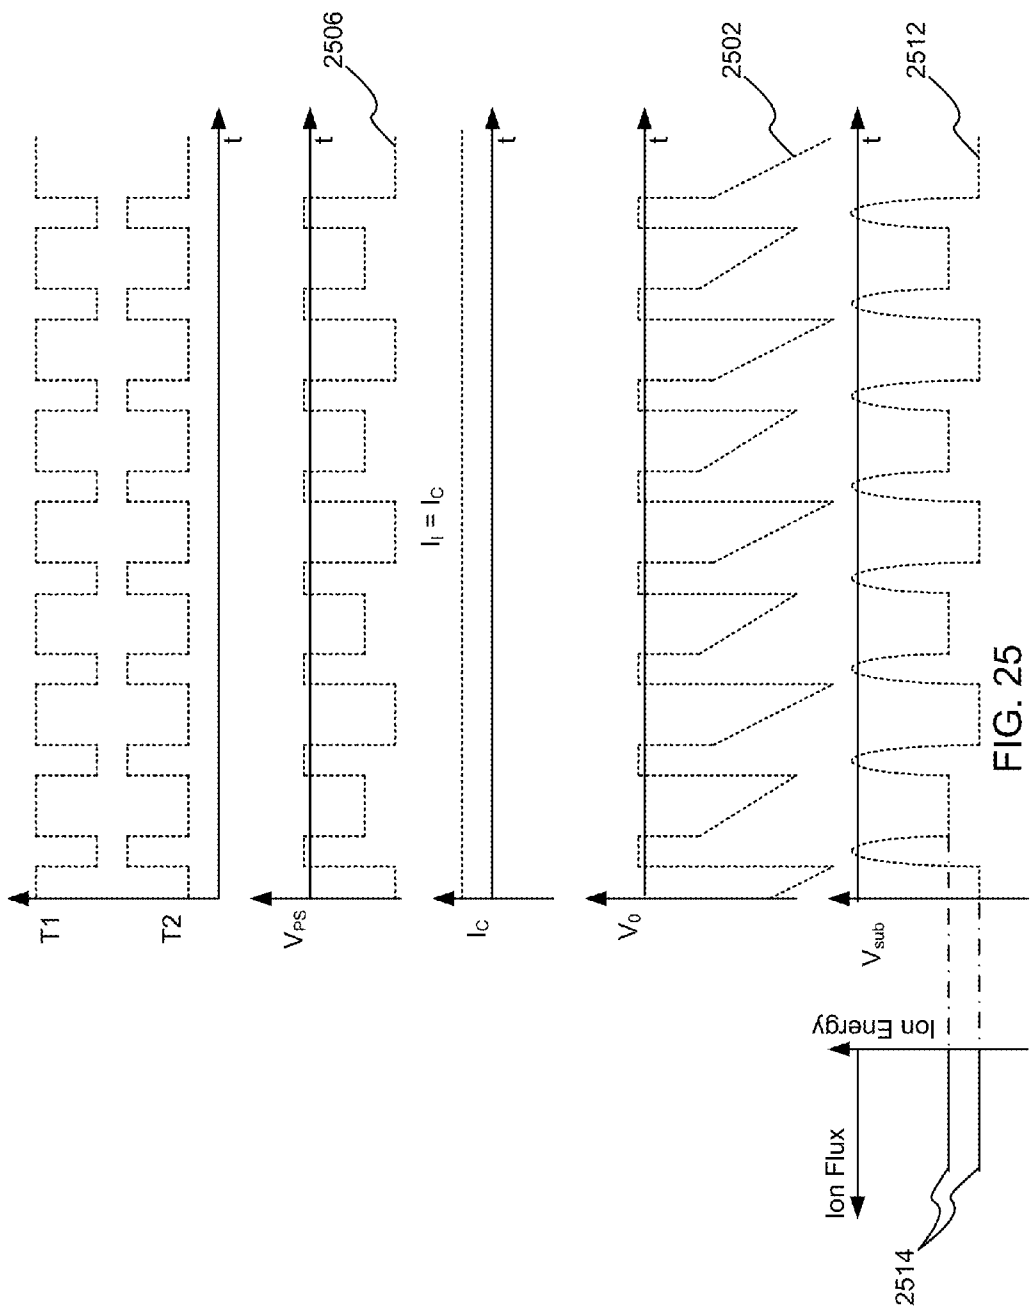

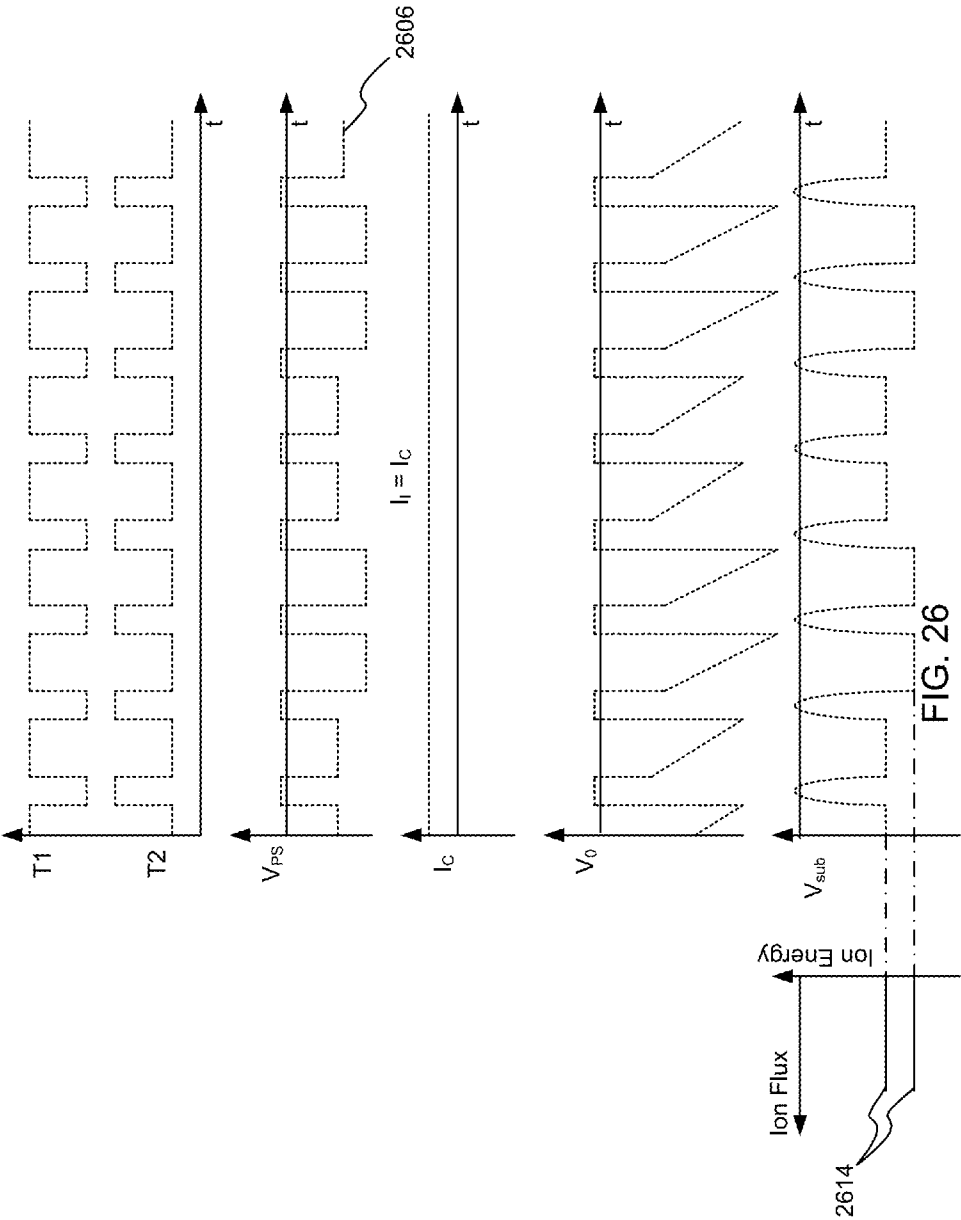

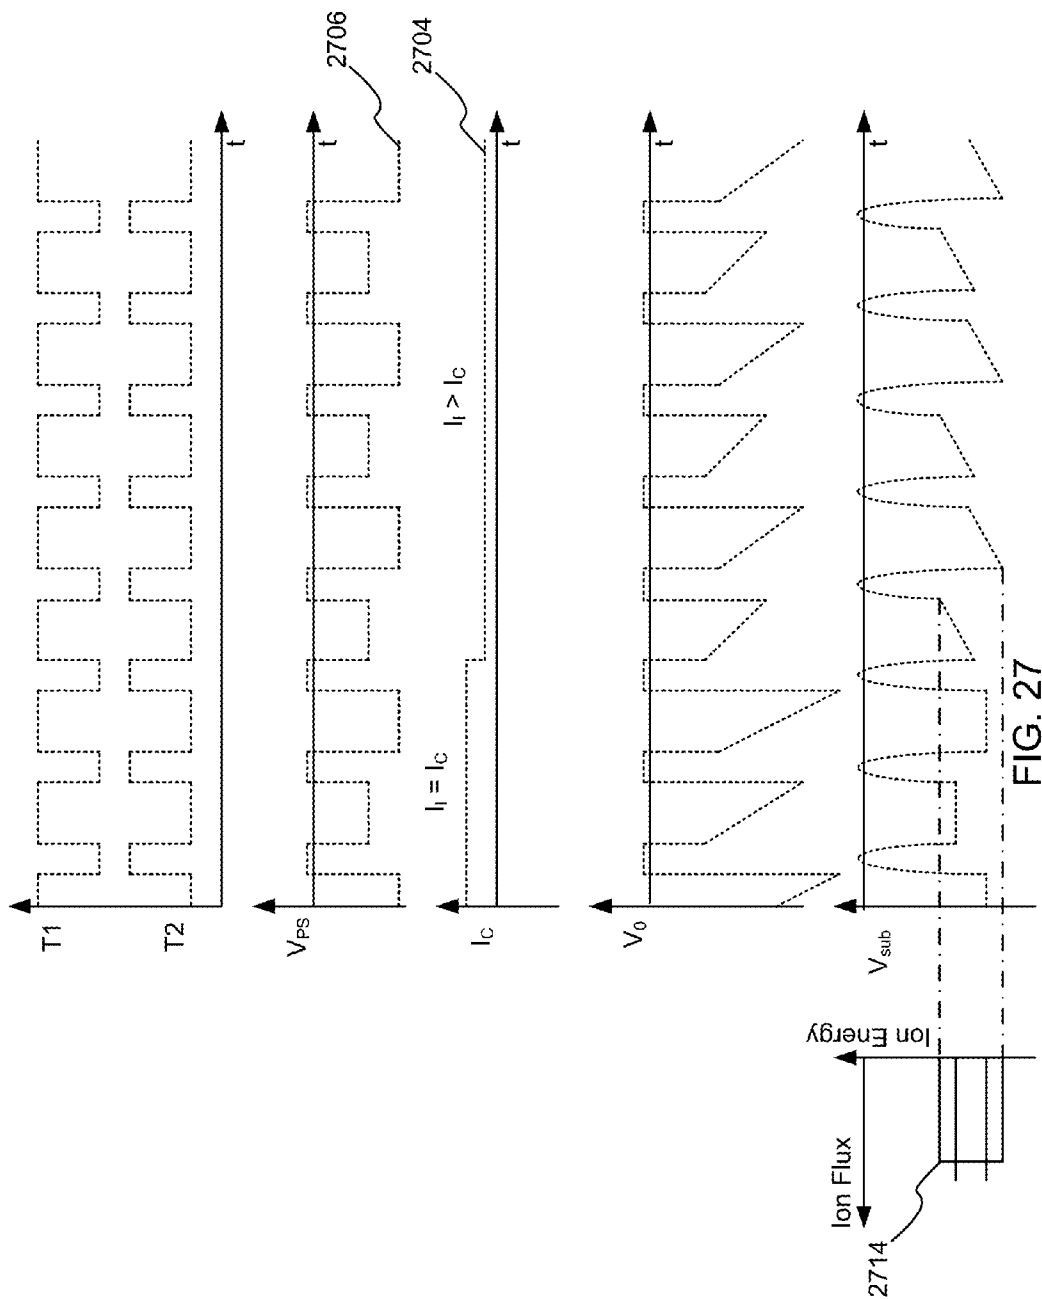

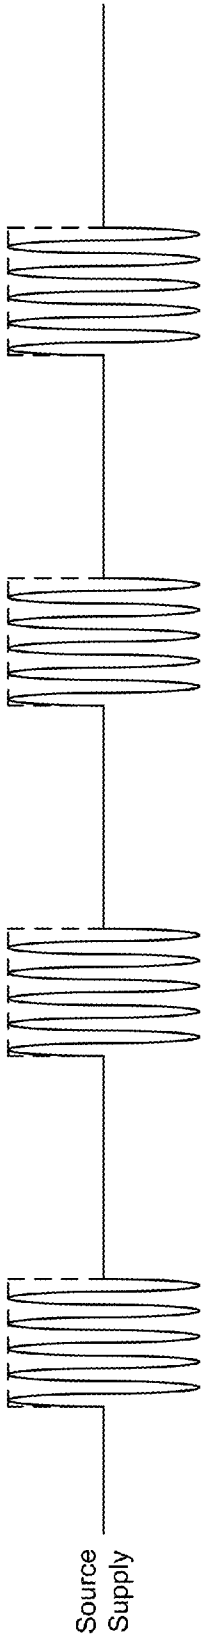


FIG. 28

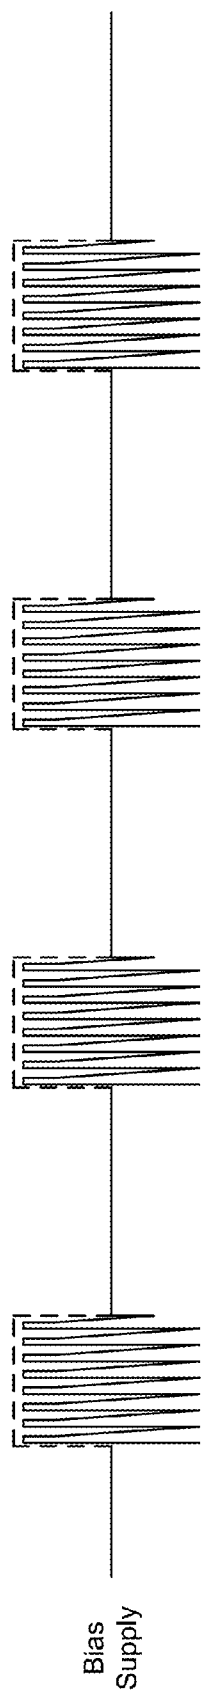


FIG. 29



FIG. 30

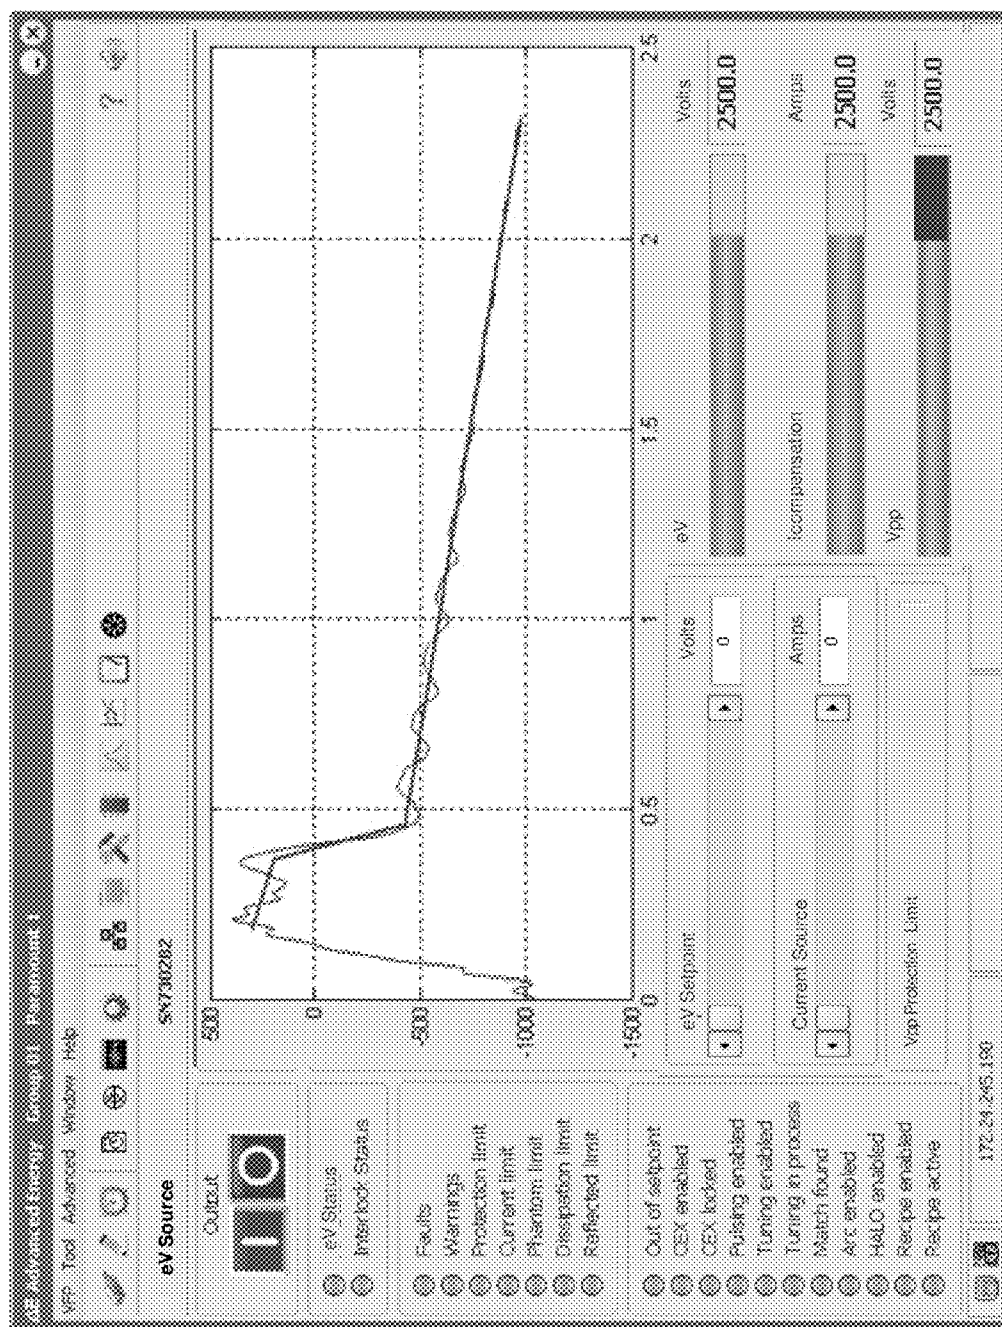


FIG. 31

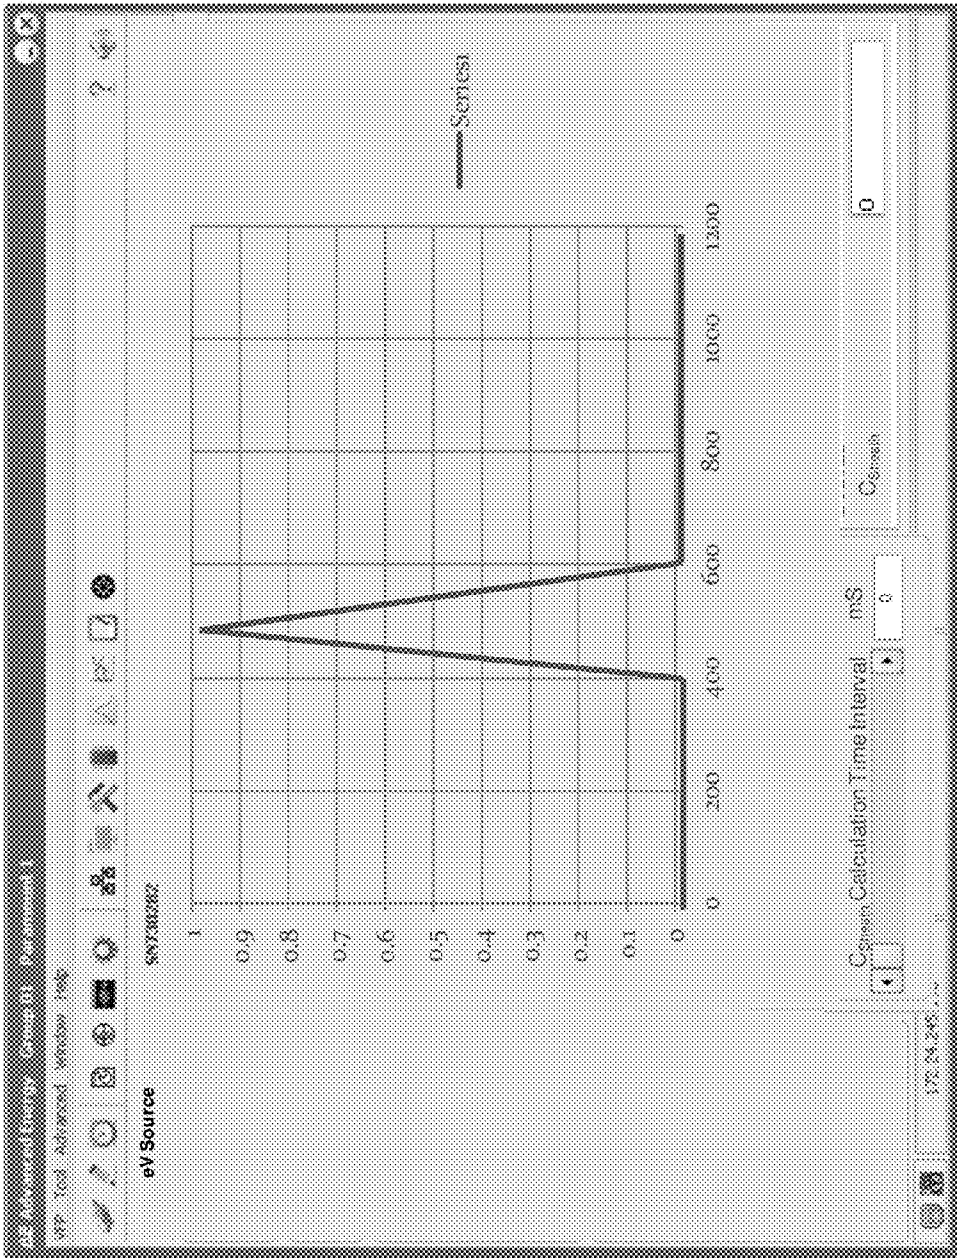


FIG. 32

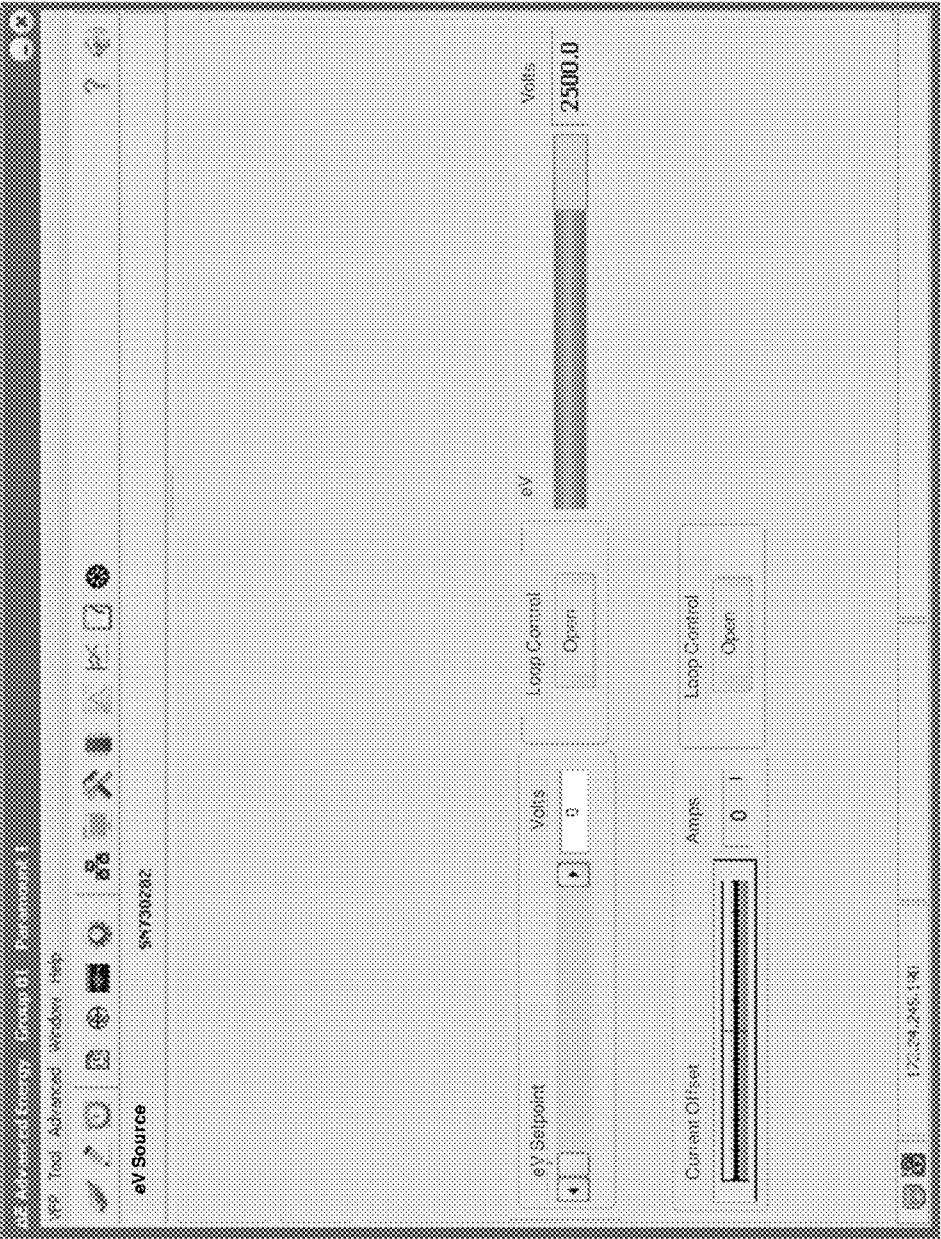


FIG. 33

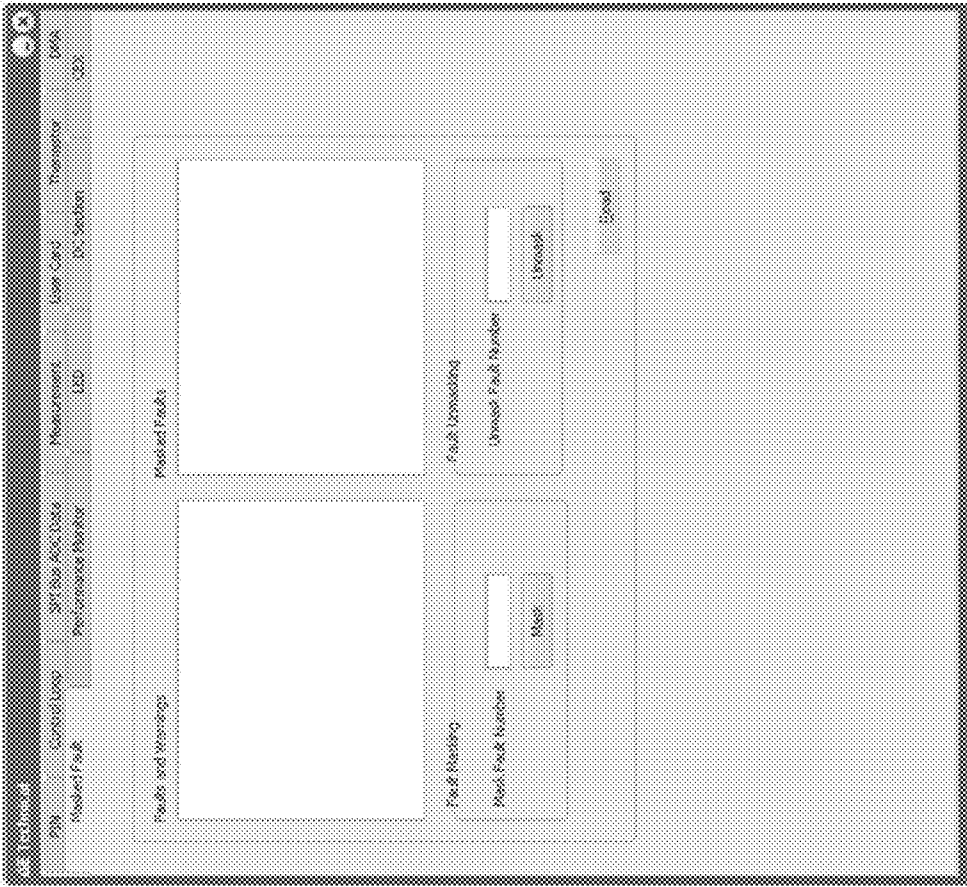




FIG. 34



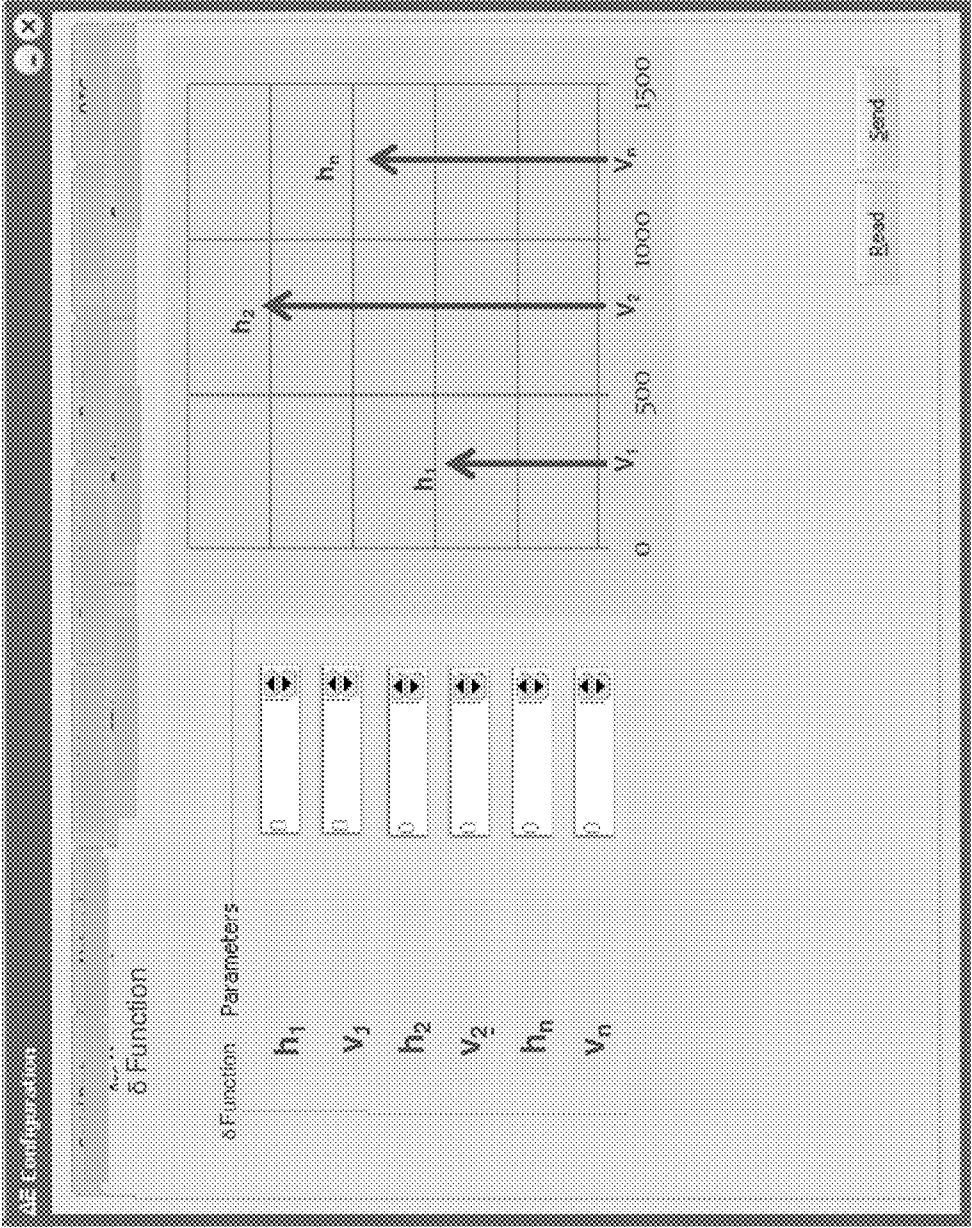


FIG. 35

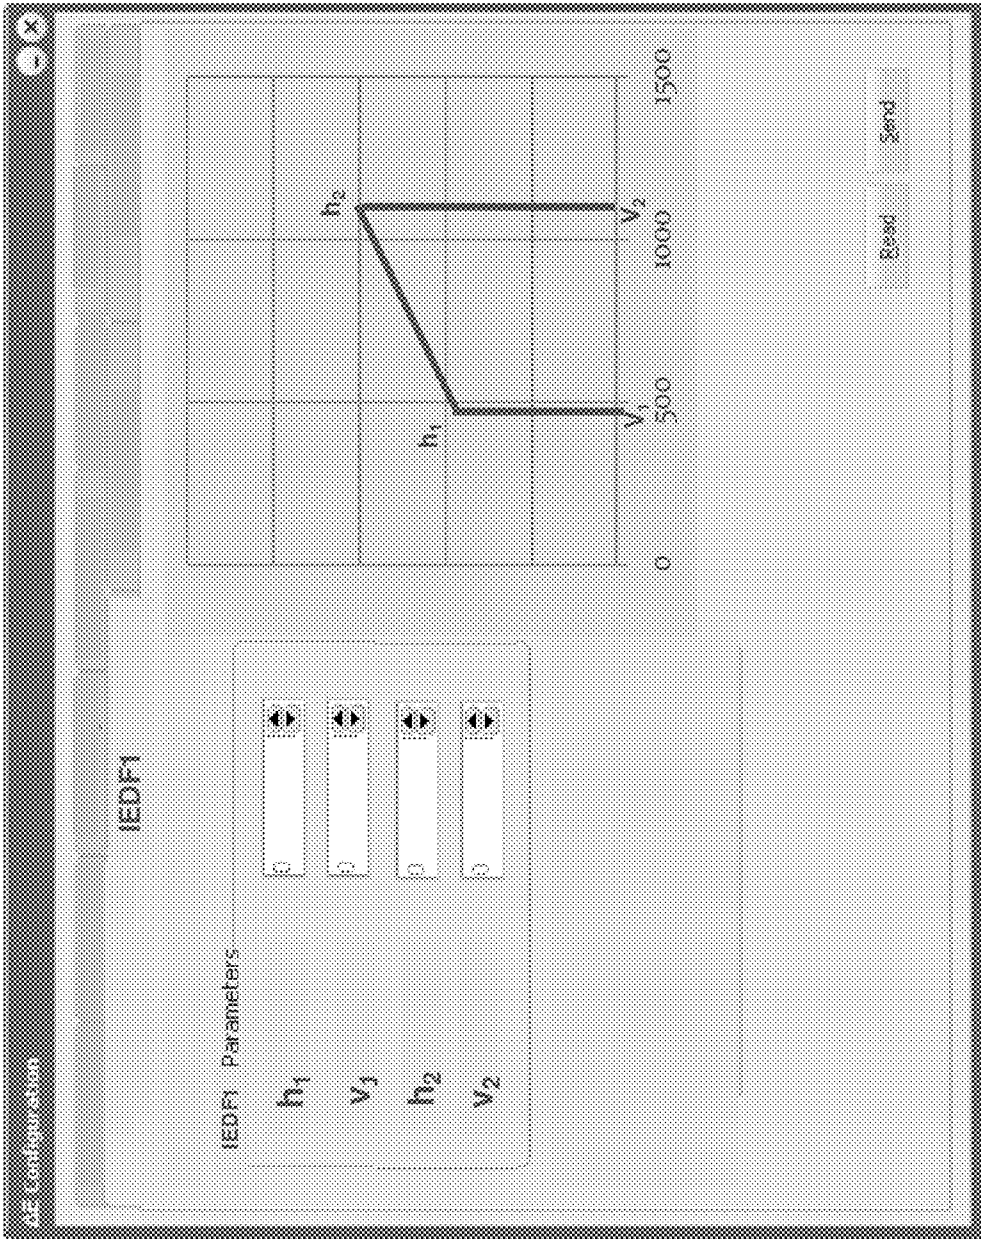


FIG. 36

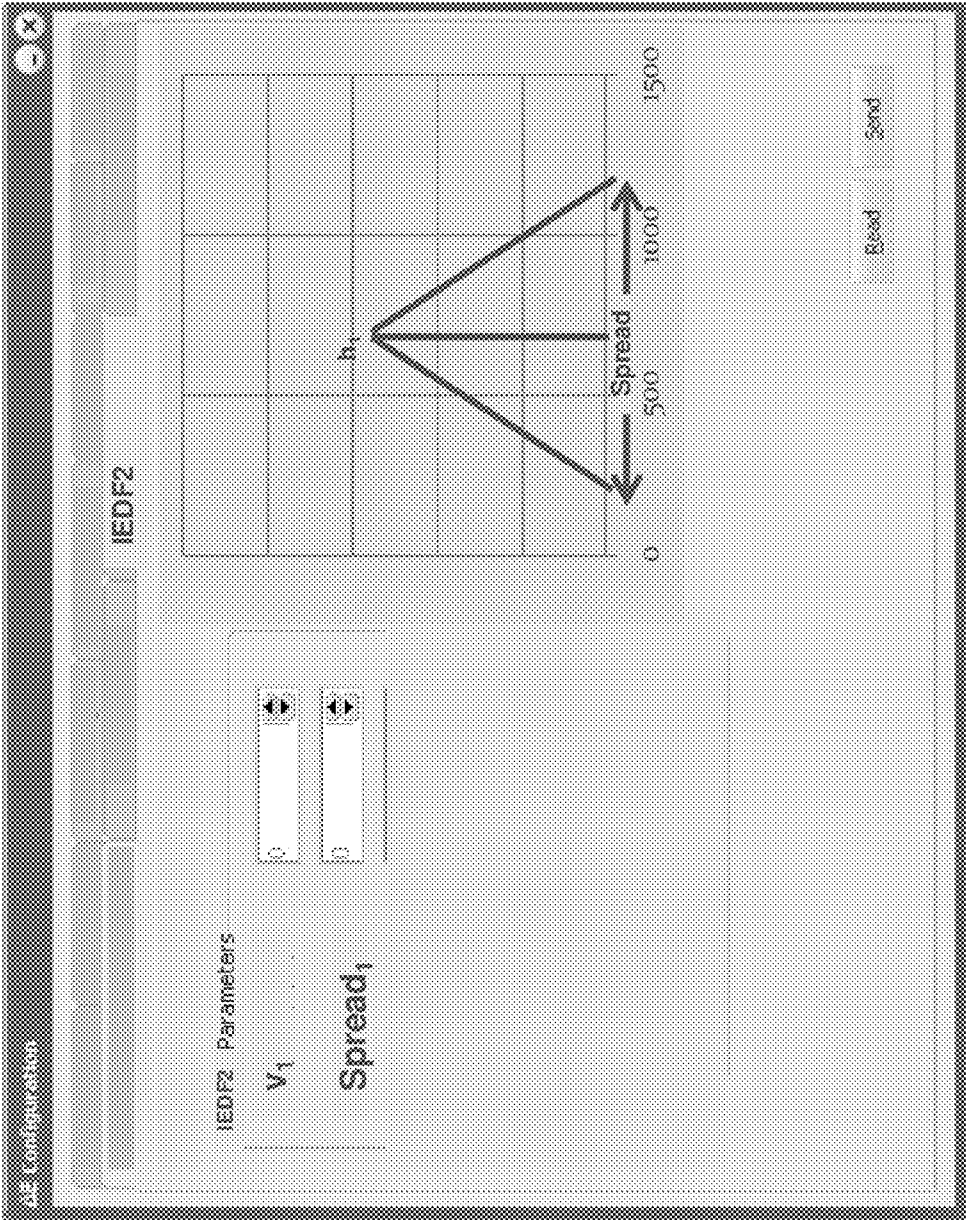


FIG. 37

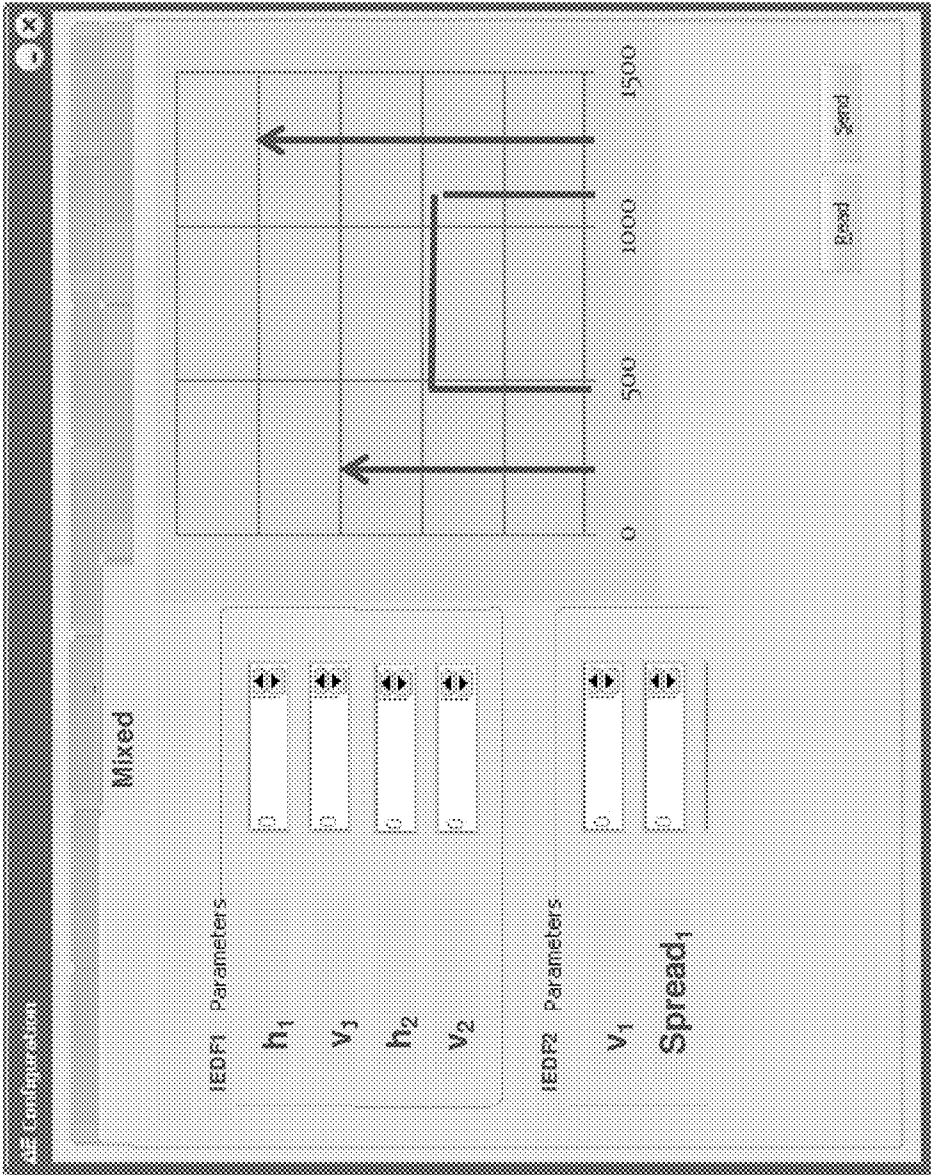


FIG. 38

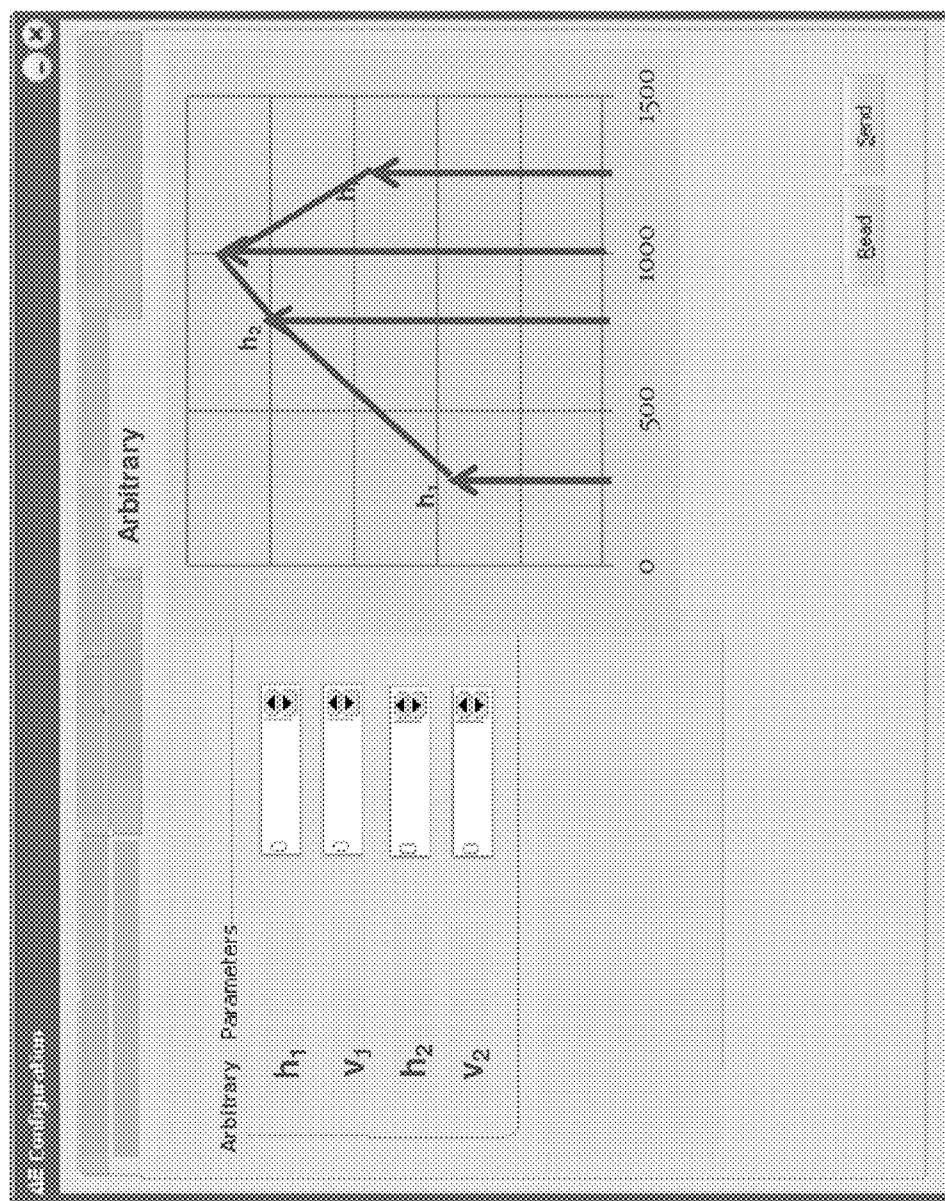


FIG. 39

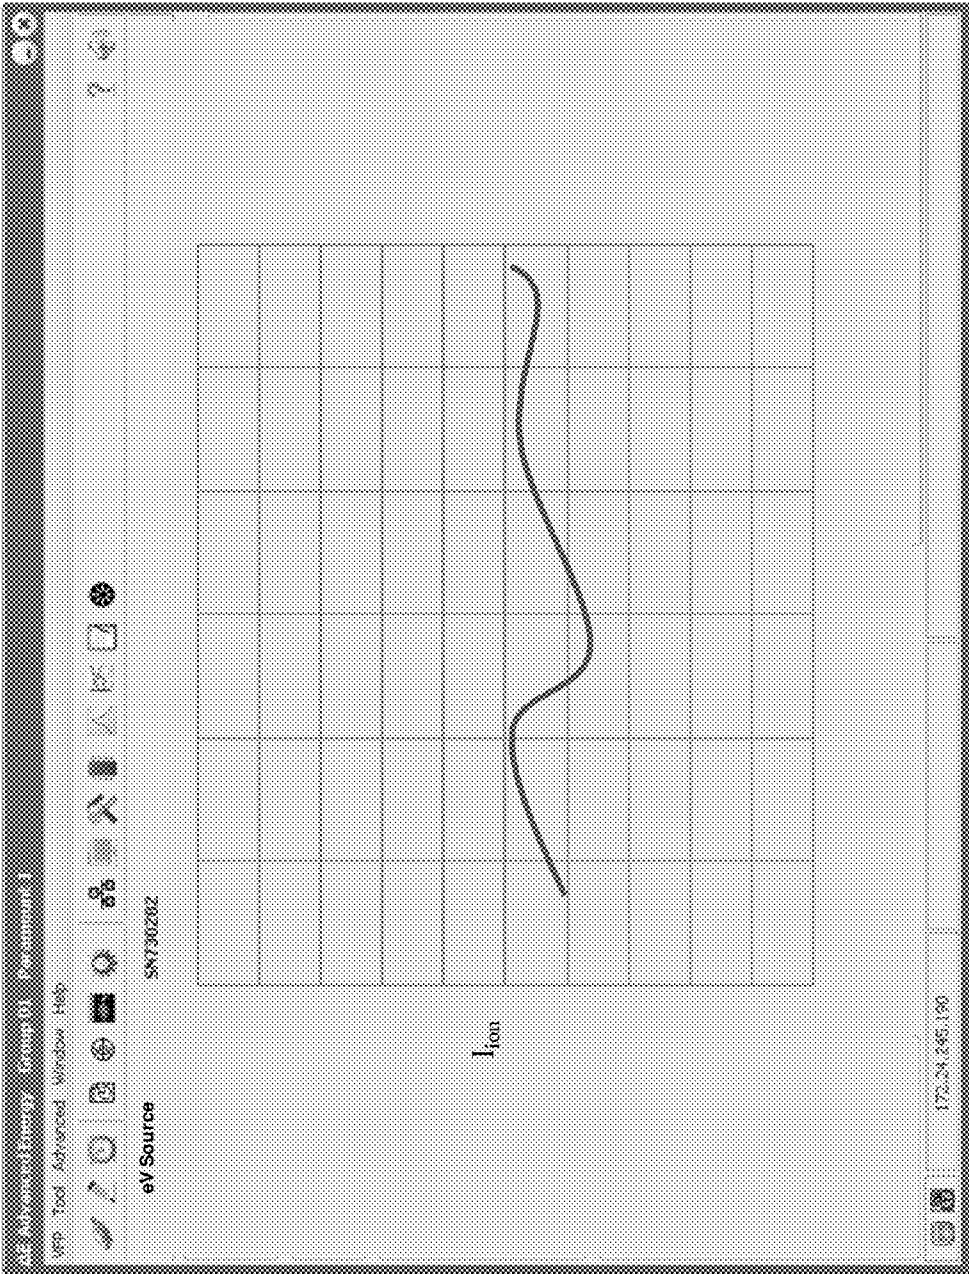


FIG. 40

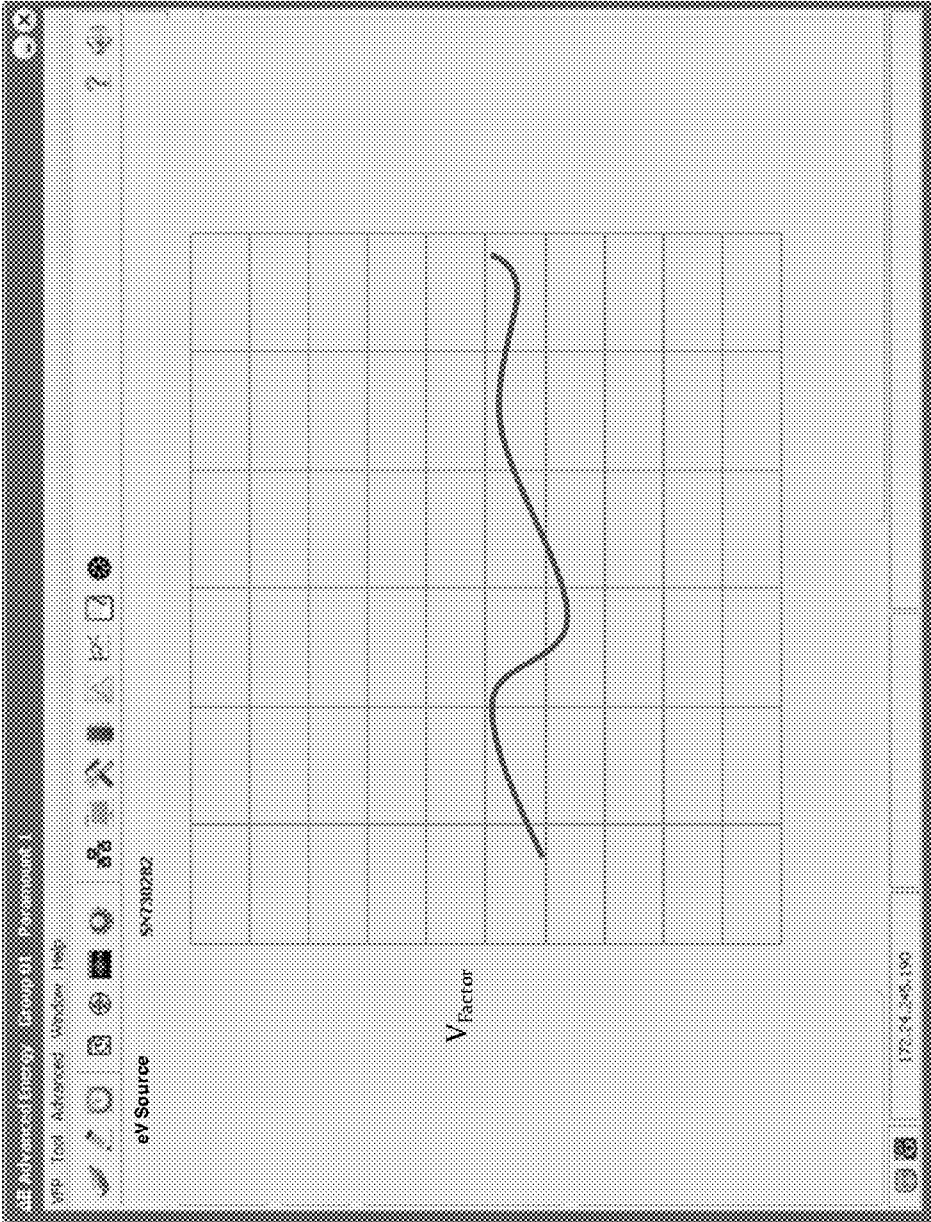


FIG. 41

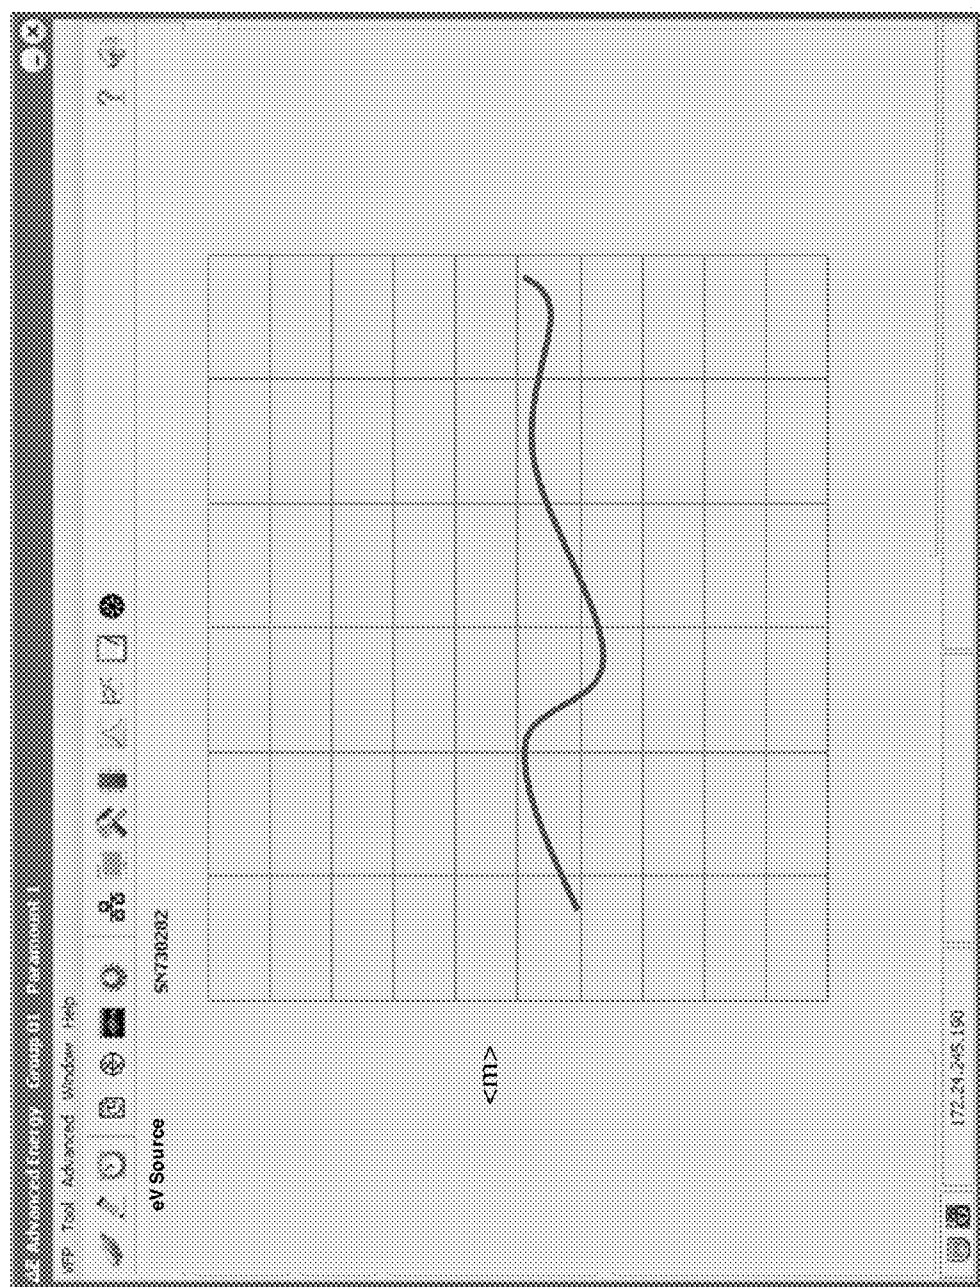


FIG. 42

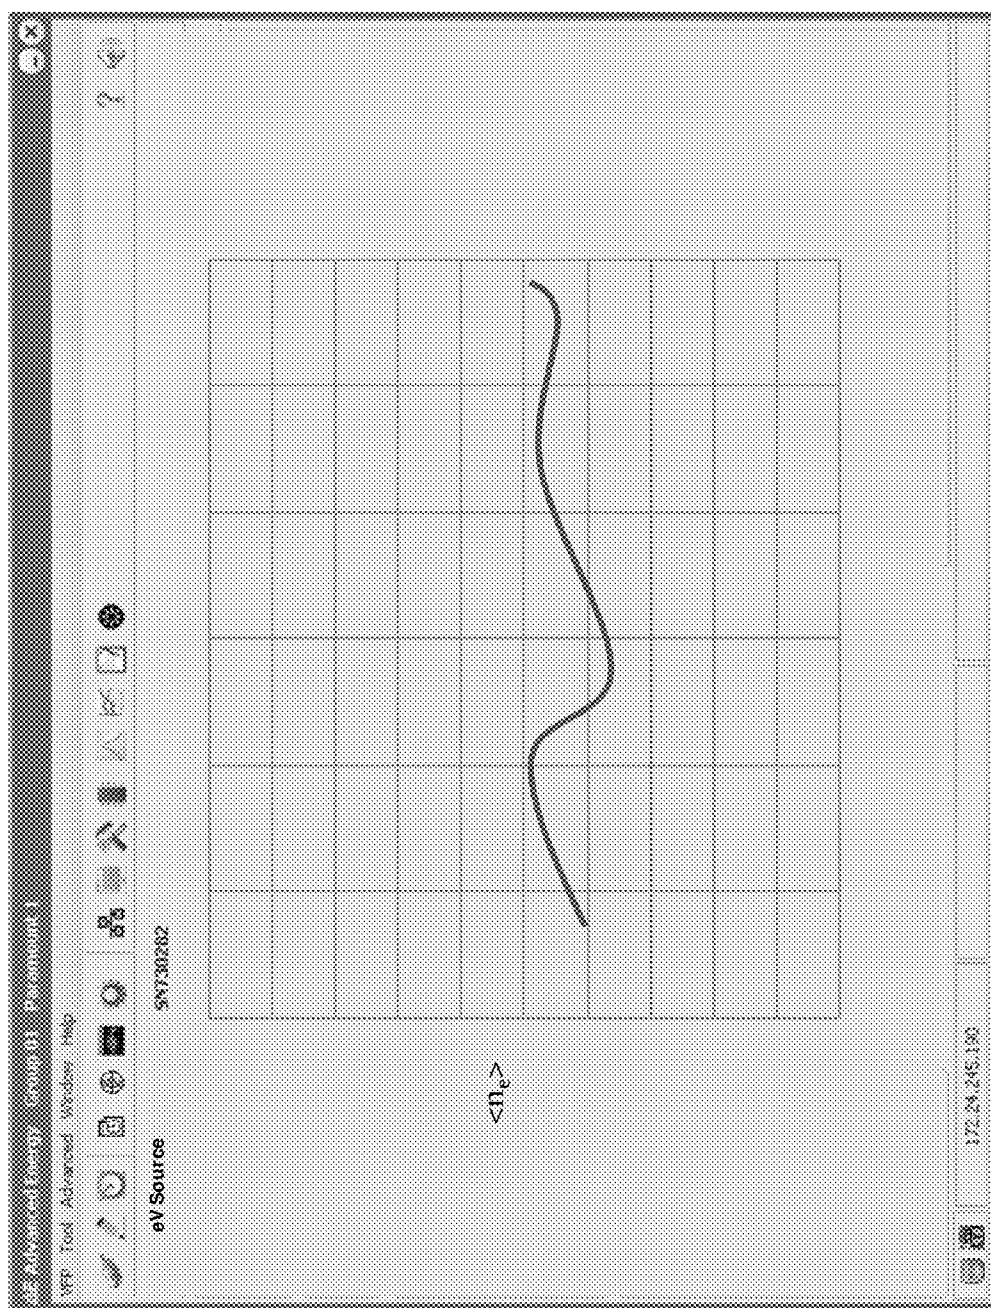


FIG. 43

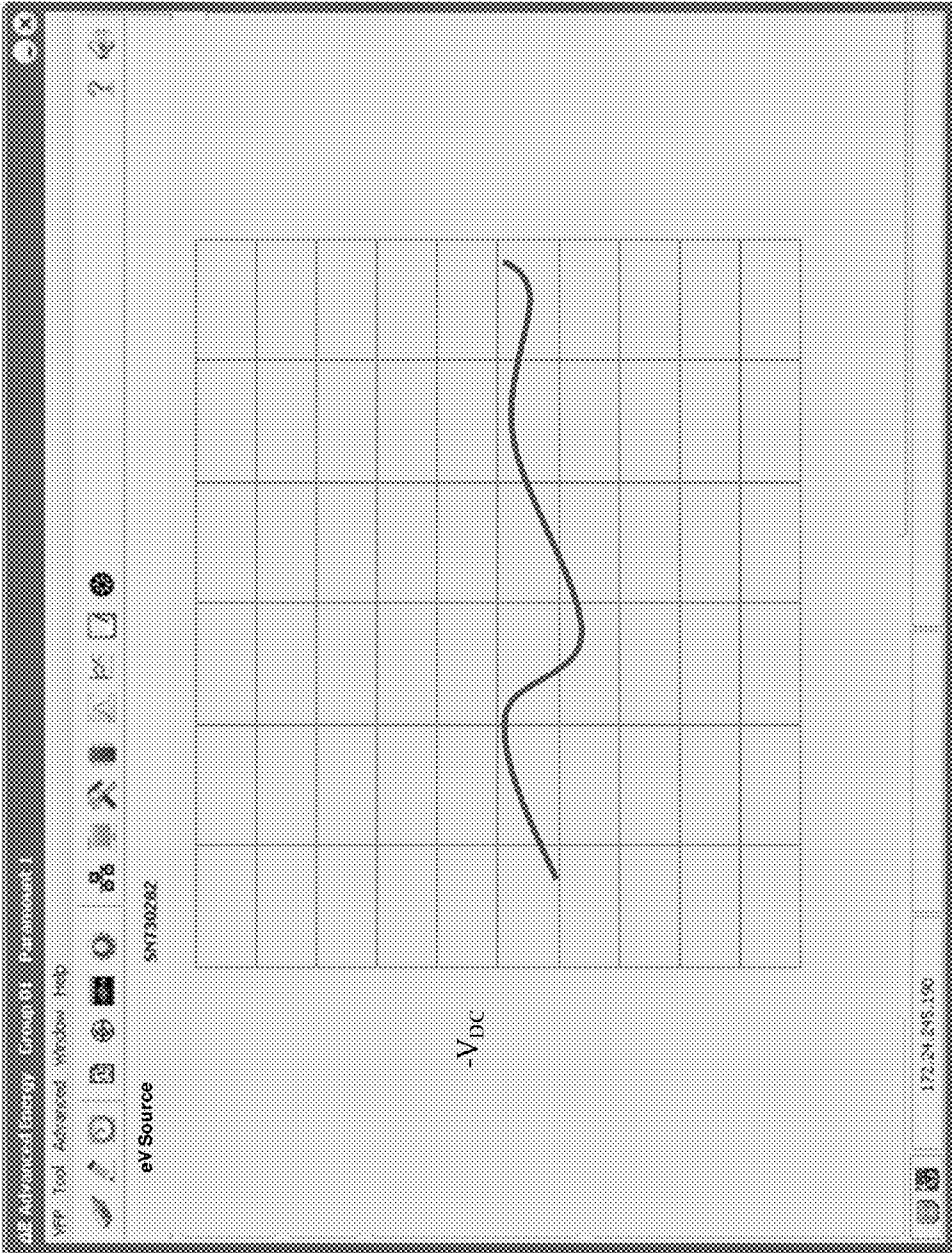


FIG. 44

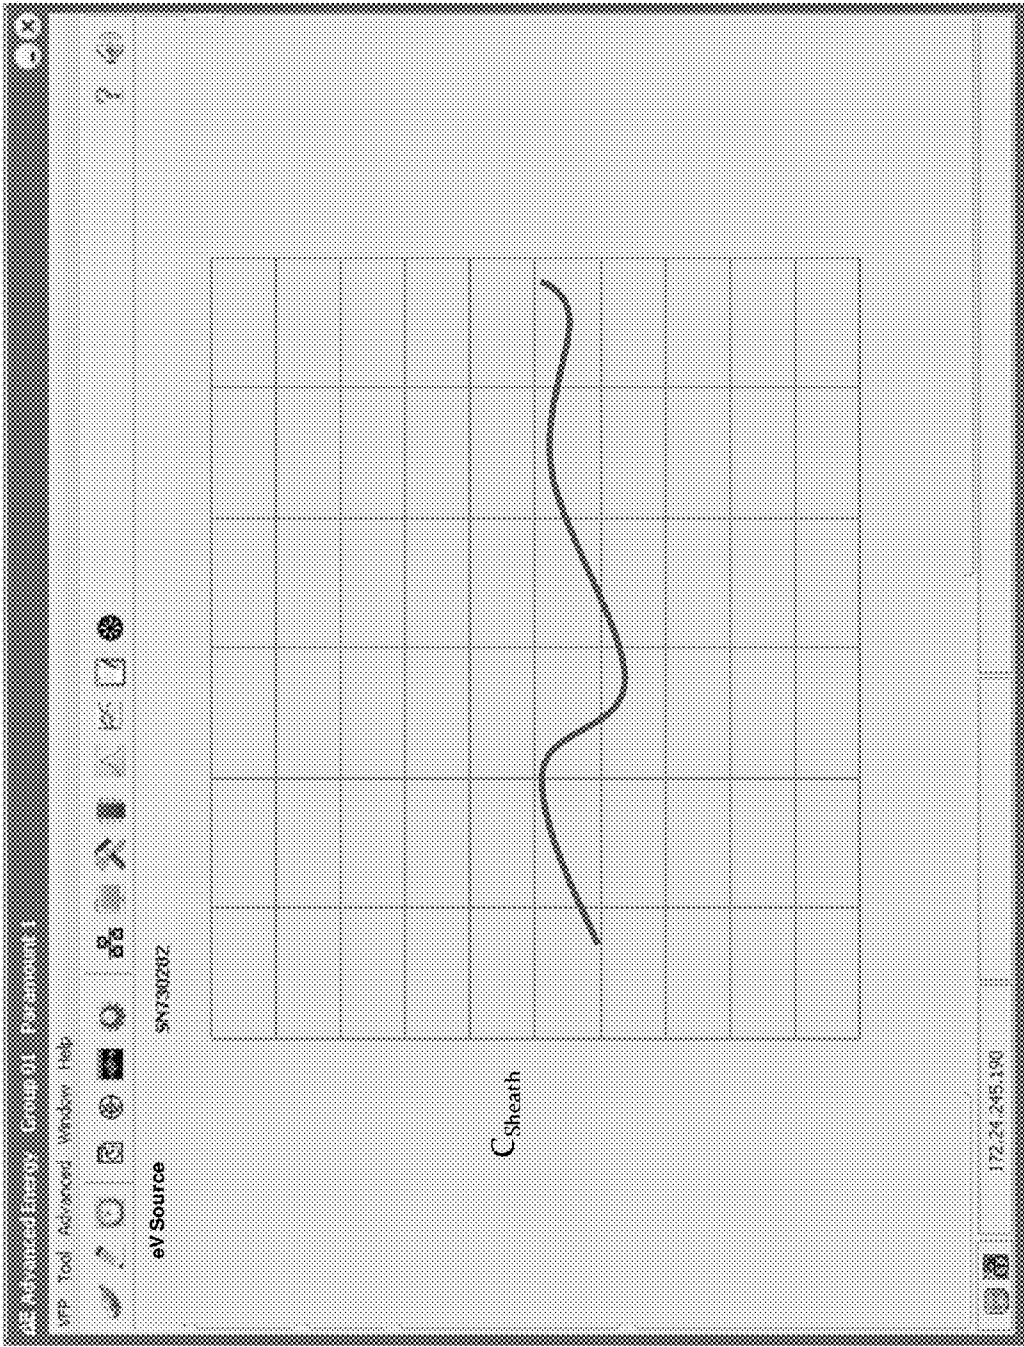


FIG. 45

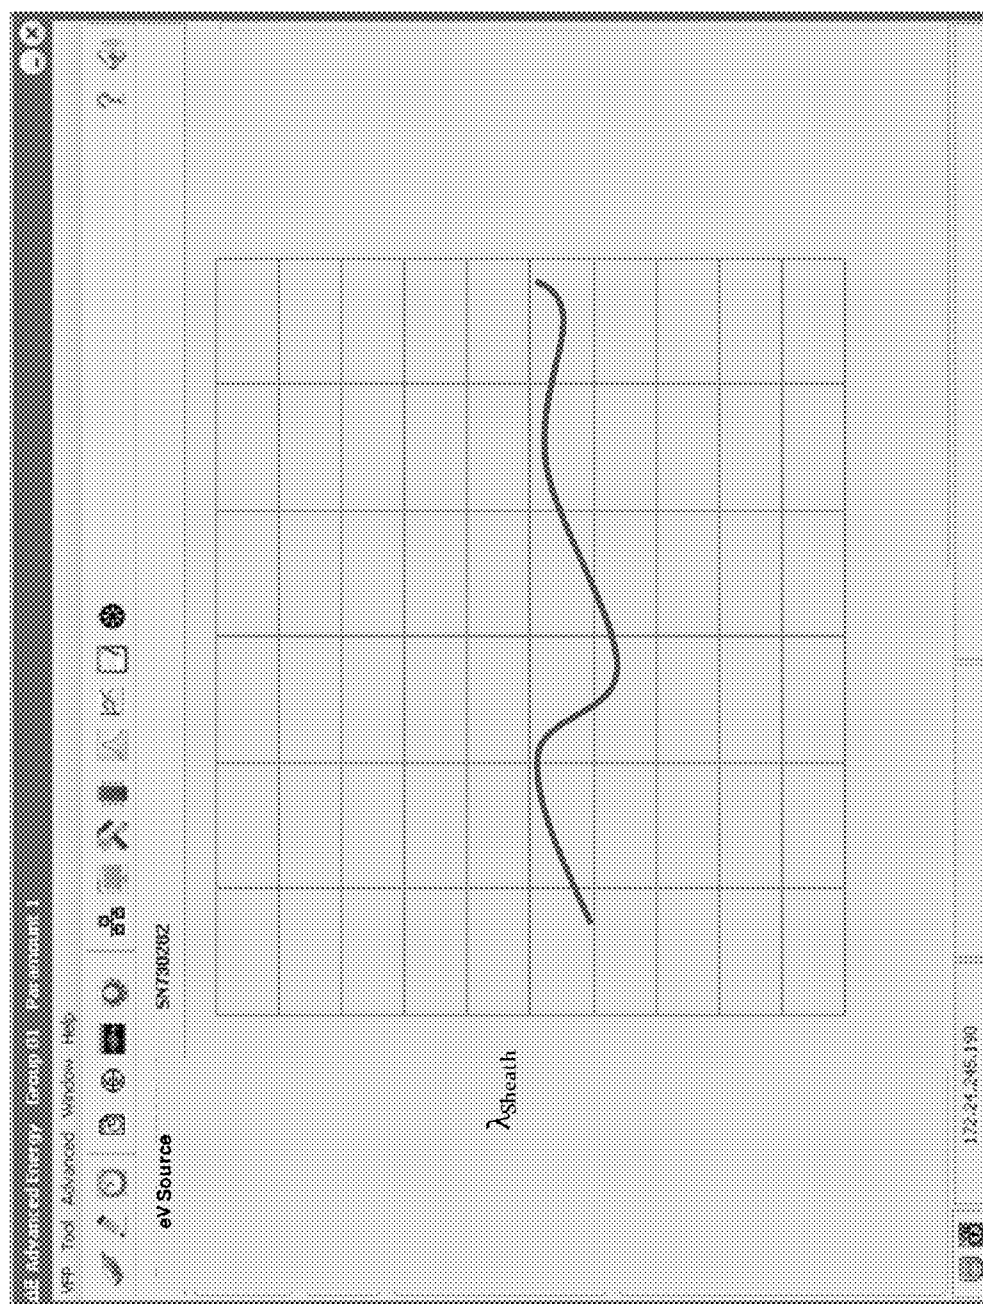


FIG. 46

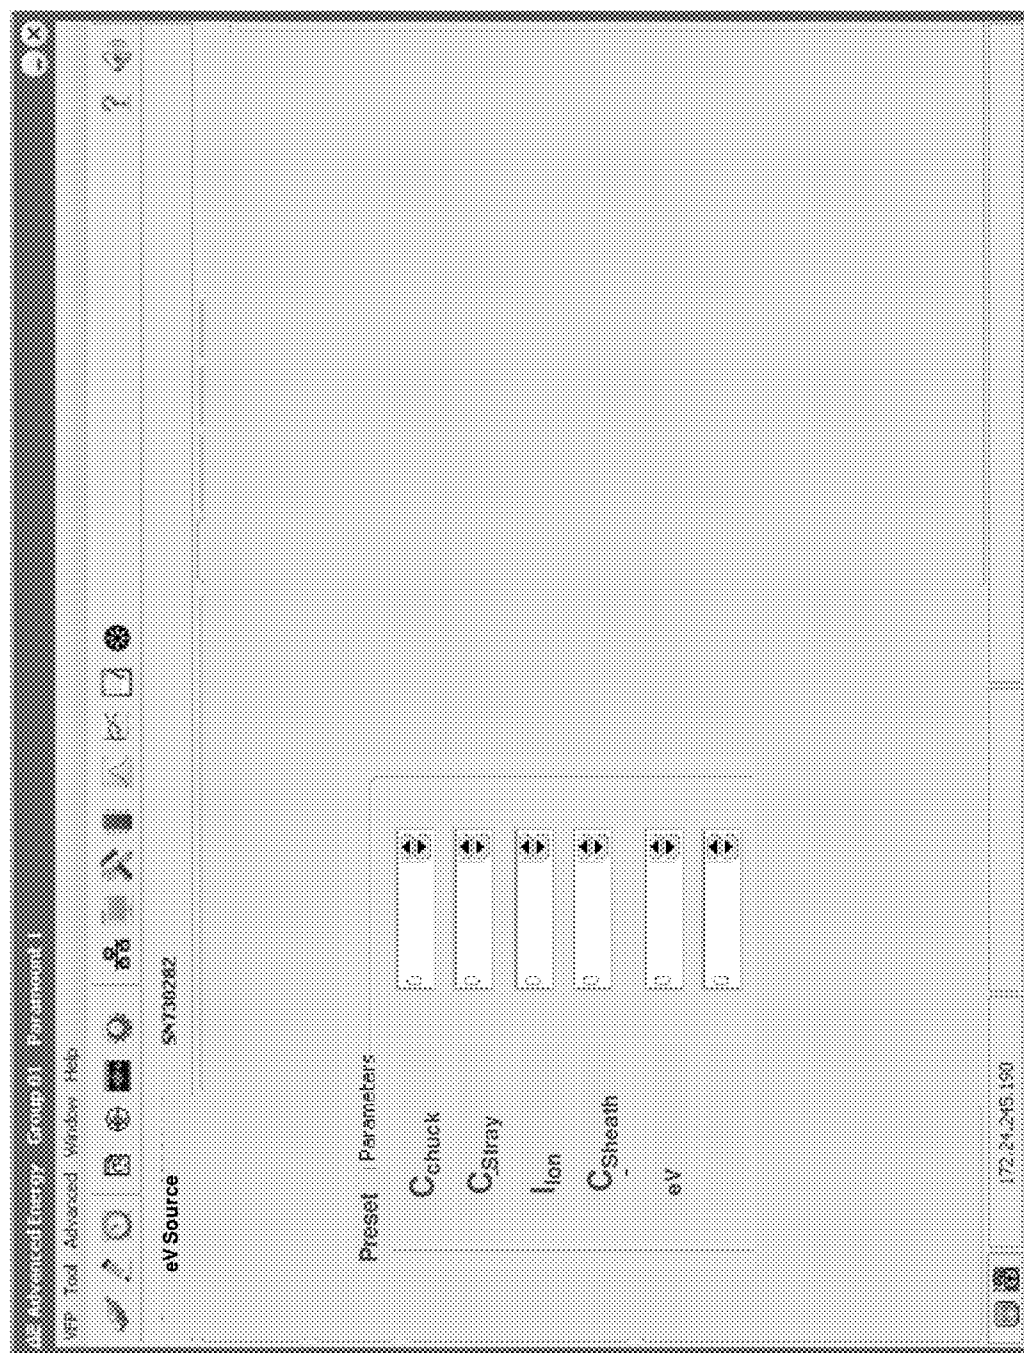


FIG. 47

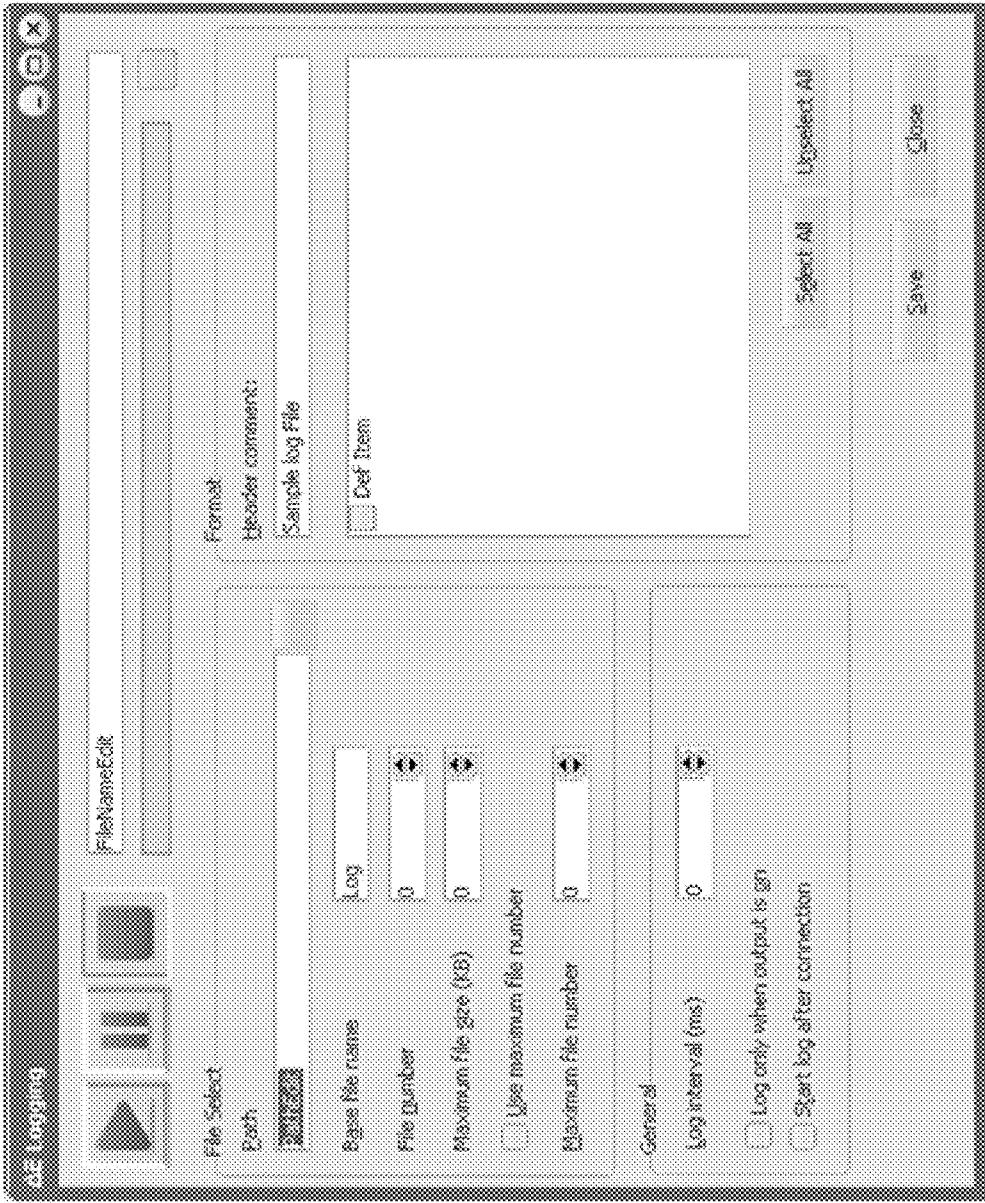


FIG. 48

The screenshot displays the 'AE Configuration' window with the following components:

- Top Tabs:** Serial port, Network, Watchdog, Power Limits, Pacing, RTC Frequency.
- Serial port Tab (Active):**
 - Mode:**
 - Pulsing:
 - Master/Slave:
 - Memory mode:
 - Pulsing Parameters:**
 - Frequency (Hz):
 - Duty cycle (%):
 - Enable mode:
 - Explicit pulsing enable:
 - Slave:**
 - Slave max on time (µs):
 - Slave input delay (µs):
 - Output Control:**
 - Pulse sync output:
- Bottom Buttons:**

FIG. 49

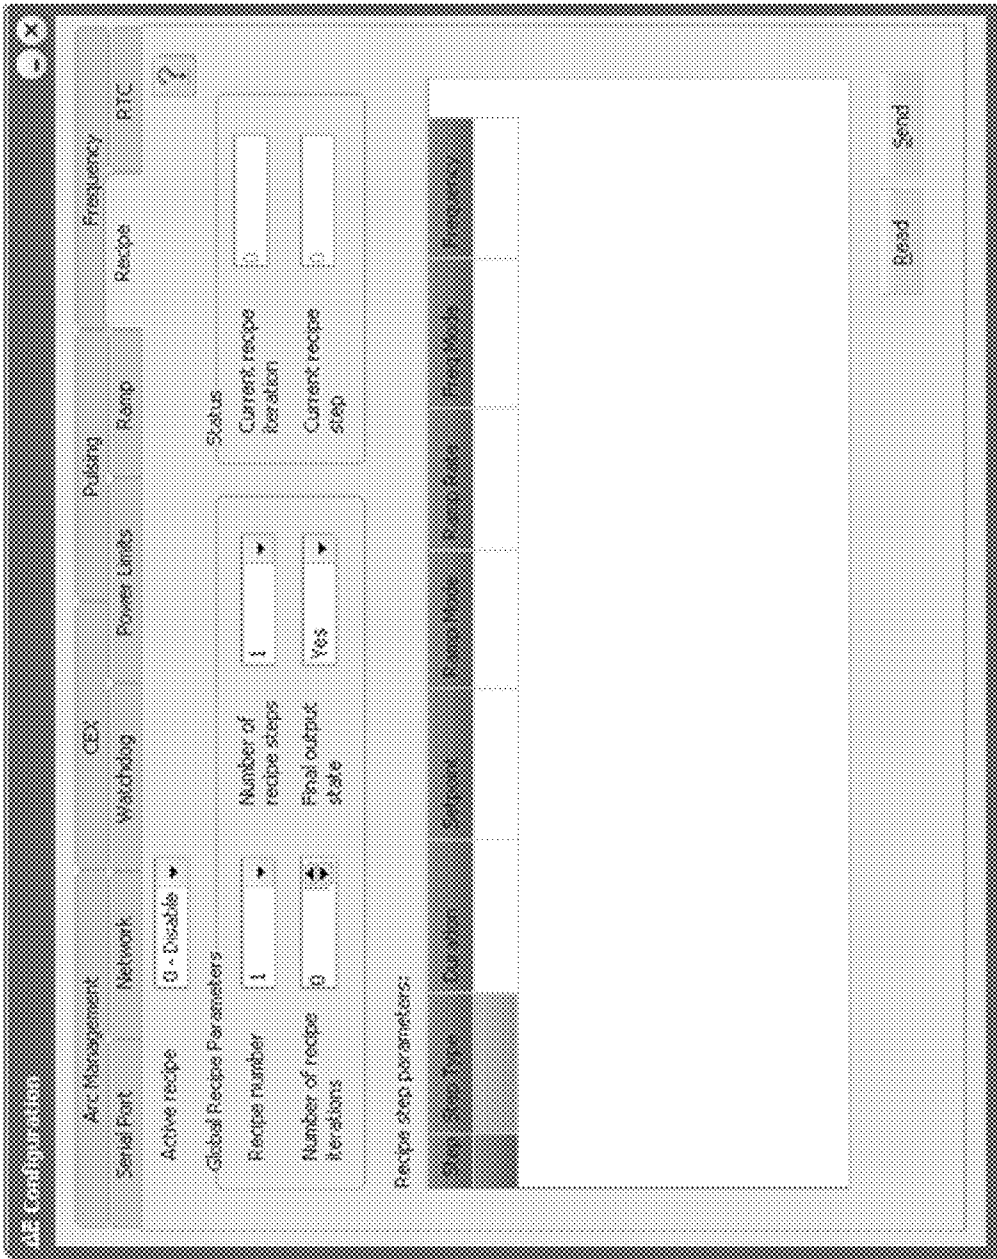


FIG. 50

The screenshot displays a software window titled "Technical" with a menu bar and two main panels. The menu bar includes "Masked Fault", "Performance Monitor", "LED", "DC Section", and "CEX". Below the menu bar, there are sub-menus: "PIN", "Control Loop", "SPI Bus ADC Data", "Measurement", "User Card", "Thermistor", and "DMA".

The "Measurement" sub-menu is active, showing two panels:

- Measurement Data:**
 - Data Selection:**
 - ☒ Uncorrected Voltage Measurements
 - ☐ Corrected Voltage Measurements
 - ☐ Corrected Power Measurements
 - Reflected Q:
 - Reflected I:
 - Forward Q:
 - Forward I:
 - ☐ Auto Refresh

- Measurement Correction Factors:**
- Source:
- Destination:
- Matrix:
- Real K11:
- Real K12:
- Real K21:
- Real K22:
- Reac K11:
- Reac K12:
- Reac K21:
- Reac K22:
-

FIG. 51

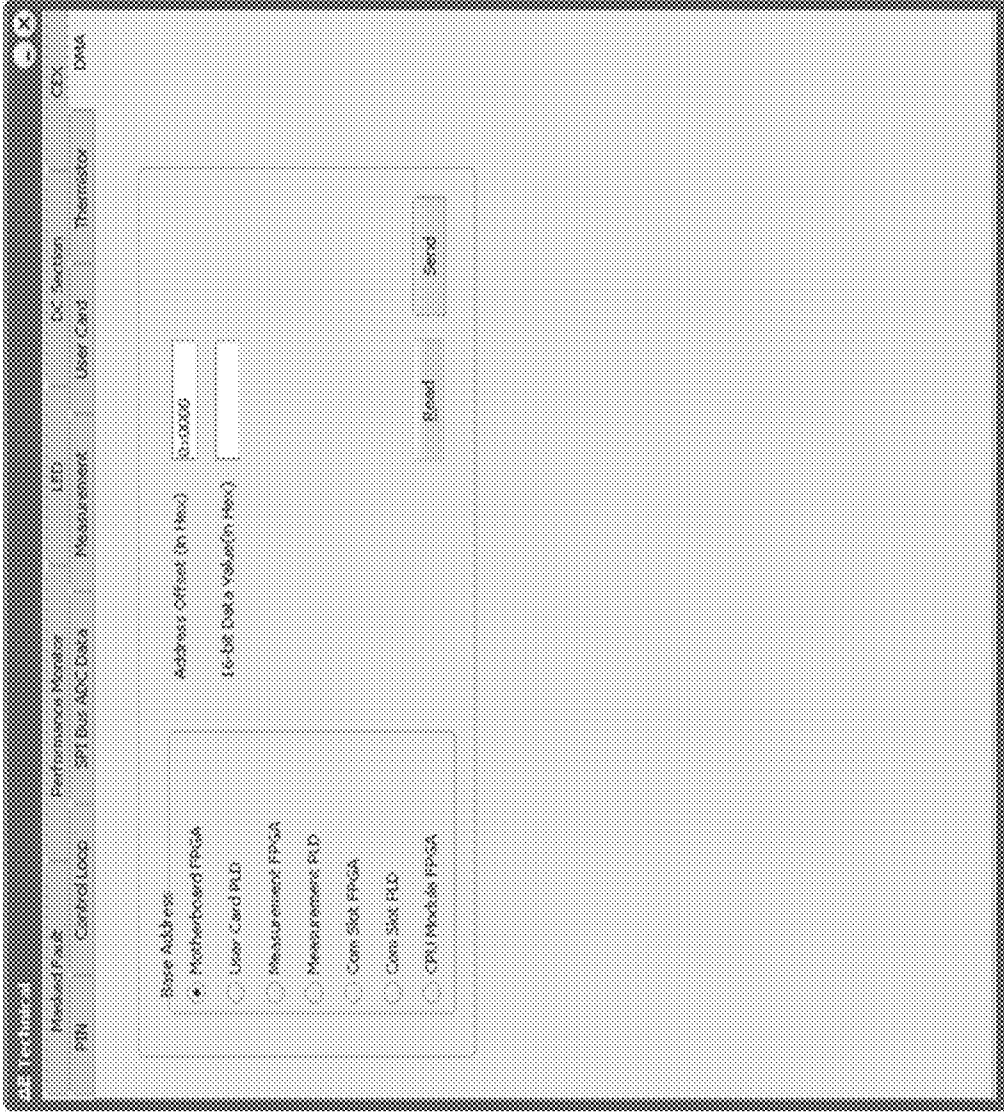


FIG. 52

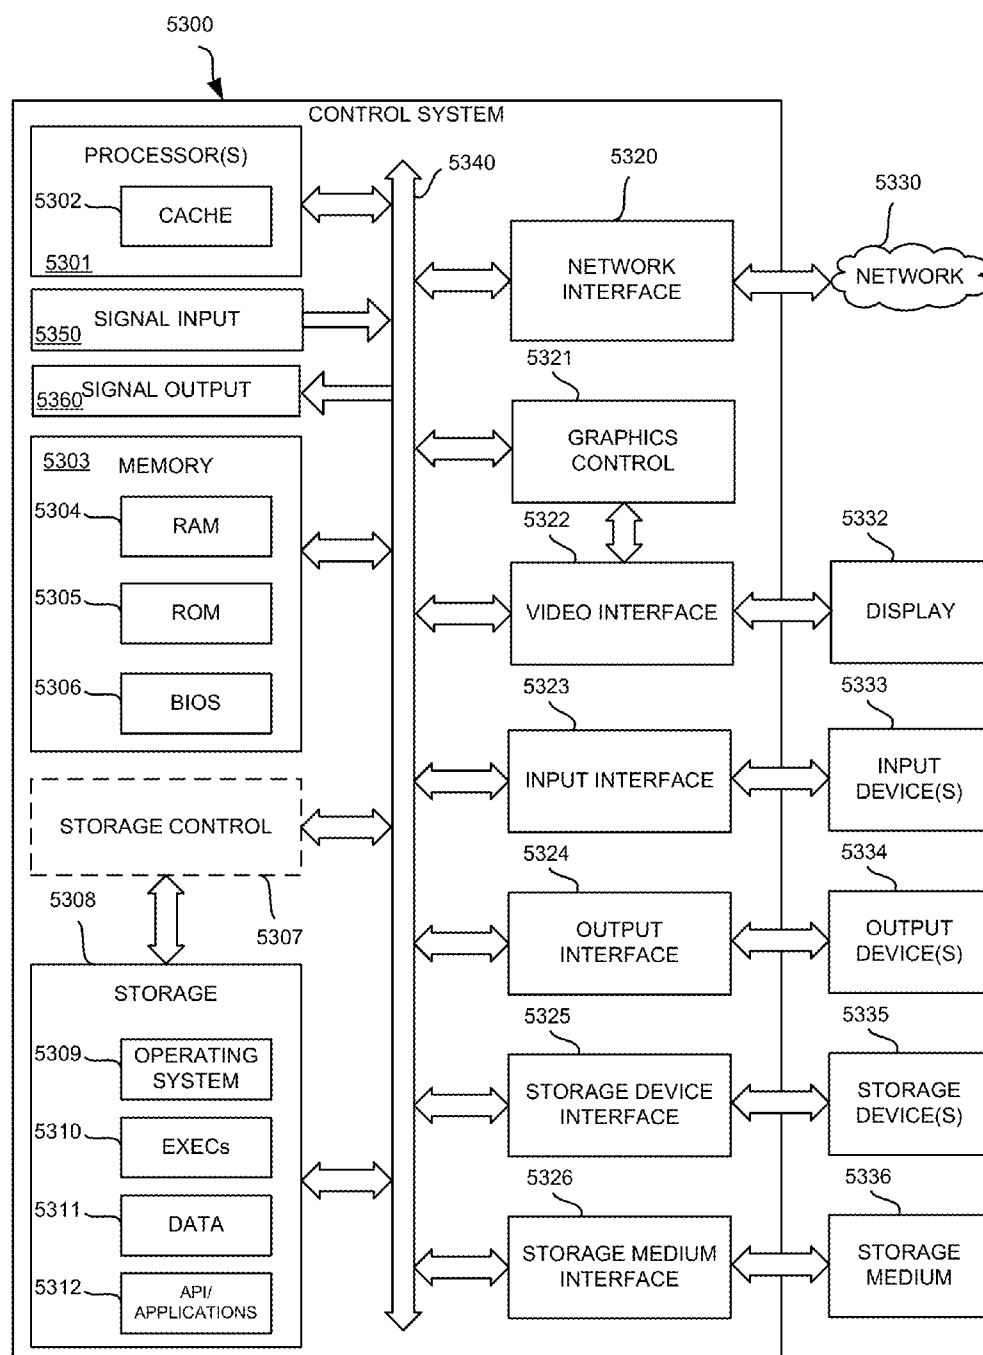


FIG. 53

ION ENERGY BIAS CONTROL APPARATUS

CLAIM OF PRIORITY UNDER 35 USC §120

[0001] The present Application for Patent is a Continuation of patent application Ser. No. 14/011,305 entitled “WIDE DYNAMIC RANGE ION ENERGY BIAS CONTROL; FAST ION ENERGY SWITCHING; ION ENERGY CONTROL AND A PULSED BIAS SUPPLY; AND A VIRTUAL FRONT PANEL” filed Aug. 27, 2013, pending, and assigned to the assignee hereof and hereby expressly incorporated by reference herein.

BACKGROUND

[0002] Plasma processing can benefit from precise control over ion energy and further from an ability to control an ion energy distribution function (IEDF) of ions incident on a substrate during processing. However, precise control is hampered by a lack of non-invasive and real-time means for monitoring ion energy and IEDF.

[0003] Additionally there are various metrics that can be monitored via a knowledge of ion current, I_p , and sheath capacitance, C_2 (or C_{sheath}). However, there is also a lack of systems and methods that can non-invasively and in real-time monitor these values.

FIELD OF THE DISCLOSURE

[0004] The present disclosure relates generally to plasma processing and in particular to controlling ion energy.

SUMMARY OF THE DISCLOSURE

[0005] Exemplary embodiments of the present invention that are shown in the drawings are summarized below. These and other embodiments are more fully described in the Detailed Description section. It is to be understood, however, that there is no intention to limit the invention to the forms described in this Summary of the Invention or in the Detailed Description. One skilled in the art can recognize that there are numerous modifications, equivalents and alternative constructions that fall within the spirit and scope of the invention as expressed in the claims.

[0006] There are five primary aspects of this disclosure: circuit ‘memory’ as a cause of inaccuracies in ion energy, wide dynamic range, fast ion energy switching, pulsed ion energy control, and a virtual front panel. Wide dynamic range involves a bias supply of a plasma processing chamber, where the bias supply can effectuate two or more ion energies within a plasma of the plasma processing chamber. The two or more ion energies can be effectuated with accuracy, stability, and a wide dynamic range (ion energies that have a large ion energy separation). Fast ion energy switching involves the bias supply effectuating the two or more ion energies in a short period of time for instance from one bias supply pulse or cycle to the next (pulses or cycles are also known as periods of a modified periodic voltage function). Fast ion energy switching also includes the bias supply’s ability to compensate for disturbances in ion energy within a single cycle. Pulsed ion energy control involves the timing of a pulsed envelope of bias supply cycles relative to a pulsed envelope of the plasma source supply. The virtual front panel involves a user interface enabling control of the systems, methods, and apparatus discussed in these first three aspects.

[0007] In one aspect of the disclosure, a method of operating a plasma processing chamber is described. The method

can include sustaining a plasma in contact with a substrate on a substrate support within the plasma processing chamber. The method can further include accessing an effective capacitance, C_1 , of the substrate support. The method can yet further include providing a modified periodic voltage function to the substrate support in order to effect a potential on a surface of the substrate, the modified period voltage function formed from a combination of a periodic voltage function and an ion current compensation, I_C . Lastly, the method can include calculating ion current, I_p , in the plasma as a function of measurements of the modified periodic voltage function.

[0008] In another aspect of the disclosure, a plasma processing system is disclosed. The system can include a substrate support in a plasma processing chamber. The substrate support can support a substrate. The system can also include a substrate support bias supply that provides a periodic voltage function. The system can further include an ion current compensation component that provides an ion current compensation. The ion current compensation can be combined with the periodic voltage function to form a modified periodic voltage function, which can be provided to the substrate support. In turn, effects a direct current voltage on a surface of the substrate opposite to the substrate support. This in turn controls an ion energy of ions incident on the surface of the substrate opposite to the substrate support. The modified periodic voltage function can have a first portion, a second portion, and a third portion. The first portion can include a rapidly increasing voltage while the second portion can include a substantially constant voltage. The third portion can include a sloped voltage having a starting voltage that is a voltage step, ΔV , below the substantially constant voltage. The voltage step, ΔV , can correspond to the ion energy, and a slope, dV_o/dt , can be controlled by the ion current compensation. The system can further include a controller having a non-transitory, tangible computer readable storage medium encoded with processor readable instruction to: access an effective capacitance of the substrate support, C_1 ; measure the slope, dV_o/dt , for at least two ion current compensation values; and calculate ion current, I_p , as a function of the effective capacitance, C_1 , and the slope, dV_o/dt .

[0009] In yet another aspect of the disclosure, a non-transitory tangible computer readable storage medium is disclosed. The storage medium can be encoded with processing readable instructions to perform a method for controlling characteristics of an ion energy distribution function of ions from a plasma that are incident on a substrate within a plasma processing chamber. The method can include accessing an effective capacitance, C_1 , of a substrate support supporting the substrate. The method can also include controlling a periodic voltage function provided by a substrate bias supply and an ion current compensation provided by an ion current compensation component. A combination of the periodic voltage function and the ion current compensation can be referred to as a modified periodic voltage function. The modified periodic voltage function can be provided to the substrate support in order to effect a potential on a surface of the substrate opposite to the substrate support and thereby control an ion energy, eV , of ions incident on the substrate from the plasma. The method can further include taking measurements of the modified periodic voltage function and repeatedly calculating an ion current, I_p , in the plasma based on the measurements.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] Various objects and advantages and a more complete understanding of the present invention are apparent and more readily appreciated by referring to the following detailed description and to the appended claims when taken in conjunction with the accompanying drawings:

[0011] FIG. 1 is an embodiment of a plasma processing system;

[0012] FIG. 2 is a schematic representation of components that may be utilized to realize a switch-mode bias supply;

[0013] FIG. 3 is a timing diagram depicting two drive signal waveforms that may be applied to T_1 and T_2 (as V2 and V4) so as to generate the periodic voltage function at V_{out} ;

[0014] FIG. 4 is a graphs depicting V_{bus} versus time, voltage at the surface of the substrate versus time, and the corresponding ion energy distribution;

[0015] FIG. 5 is a single mode of operating the switch mode bias supply, which effectuates an ion energy distribution (or ion energy distribution function (IEDF)) that is concentrated at a particular ion energy;

[0016] FIG. 6 is a block diagram depicting an embodiment in which an ion current compensation component compensates for ion current in the plasma chamber;

[0017] FIG. 7 is an exemplary ion current compensation component;

[0018] FIG. 8 is graph depicting an exemplary voltage (e.g., the modified periodic voltage function) at V_0 ;

[0019] FIG. 9 is illustrates an inductance L_1 between switch components T_1 and T_2 and the series capacitance, C_{series} ;

[0020] FIG. 10 is a bias supply with a particular embodiment of the energy evacuation component;

[0021] FIG. 11 illustrates graphs of various IEDF shapes;

[0022] FIG. 12 is a modified periodic voltage function where a disturbance can be seen in a first cycle, which influences the ΔV of a next cycle;

[0023] FIG. 13 is shows a similar modified periodic voltage function, but in this case a disturbance causes the falling voltage to follow the path rather than the path;

[0024] FIG. 14 is a waveform where the systems and methods herein disclosed are used to achieve a desired ion energy despite different disturbances in a previous cycle;

[0025] FIG. 15 is a waveform where the systems and methods herein disclosed are used to achieve a desired ion energy despite different disturbances in a previous cycle;

[0026] FIG. 16 is an exemplary embodiment of a current source, which may be implemented to realize the current source described with reference to FIG. 7;

[0027] FIG. 17 is one embodiment of a method of controlling an ion energy distribution of ions impacting a surface of a substrate;

[0028] FIG. 18 is another embodiment of a method of controlling an ion energy distribution of ions impacting a surface of a substrate;

[0029] FIG. 19 shows methods for setting the IEDF width and the ion energy;

[0030] FIG. 20 illustrates three relationships between a power supply voltage, V_{PS} , and an ion energy distribution function;

[0031] FIG. 21 is an embodiment of charts showing relations between power supply switch timing, periodic voltage function, ion current compensation, modified periodic voltage function, substrate surface voltage, and ion energy distribution function;

[0032] FIG. 22 is a further embodiment of charts showing relations between power supply switch timing, periodic voltage function, ion current compensation, modified periodic voltage function, substrate surface voltage, and ion energy distribution function;

[0033] FIG. 23 is yet a embodiment of charts showing relations between power supply switch timing, periodic voltage function, ion current compensation, modified periodic voltage function, substrate surface voltage, and ion energy distribution function;

[0034] FIG. 24 is yet a embodiment of charts showing relations between power supply switch timing, periodic voltage function, ion current compensation, modified periodic voltage function, substrate surface voltage, and ion energy distribution function;

[0035] FIG. 25 is another embodiment of charts showing relations between power supply switch timing, periodic voltage function, ion current compensation, modified periodic voltage function, substrate surface voltage, and ion energy distribution function;

[0036] FIG. 26 is yet another embodiment of charts showing relations between power supply switch timing, periodic voltage function, ion current compensation, modified periodic voltage function, substrate surface voltage, and ion energy distribution function;

[0037] FIG. 27 is a further embodiment of charts showing relations between power supply switch timing, periodic voltage function, ion current compensation, modified periodic voltage function, substrate surface voltage, and ion energy distribution function;

[0038] FIG. 28 is a source supply being pulsed within a pulse envelope indicated by dashed lines;

[0039] FIG. 29 is a modified periodic voltage for a bias supply being pulsed within a pulse envelope indicated by dashed lines;

[0040] FIG. 30 shows measured waveforms for plasma density and bias supply;

[0041] FIG. 31 is an embodiment of a virtual front panel;

[0042] FIG. 32 is an embodiment of a virtual front panel;

[0043] FIG. 33 is an embodiment of a virtual front panel;

[0044] FIG. 34 is an embodiment of a virtual front panel;

[0045] FIG. 35 is an embodiment of a virtual front panel;

[0046] FIG. 36 is an embodiment of a virtual front panel;

[0047] FIG. 37 is an embodiment of a virtual front panel;

[0048] FIG. 38 is an embodiment of a virtual front panel;

[0049] FIG. 39 is an embodiment of a virtual front panel;

[0050] FIG. 40 is an embodiment of a virtual front panel;

[0051] FIG. 41 is an embodiment of a virtual front panel;

[0052] FIG. 42 is an embodiment of a virtual front panel;

[0053] FIG. 43 is an embodiment of a virtual front panel;

[0054] FIG. 44 is an embodiment of a virtual front panel;

[0055] FIG. 45 is an embodiment of a virtual front panel;

[0056] FIG. 46 is an embodiment of a virtual front panel;

[0057] FIG. 47 is an embodiment of a virtual front panel;

[0058] FIG. 48 is an embodiment of a virtual front panel;

[0059] FIG. 49 is an embodiment of a virtual front panel;

[0060] FIG. 50 is an embodiment of a virtual front panel;

[0061] FIG. 51 is an embodiment of a virtual front panel;

[0062] FIG. 52 is an embodiment of a virtual front panel;

and

[0063] FIG. 53 shows a diagrammatic representation of one embodiment of a control system within which a set of instruc-

tions can execute for causing a device to perform or execute any one or more of the aspects and/or methodologies of the present disclosure.

DETAILED DESCRIPTION

[0064] An exemplary embodiment of a plasma processing system is shown generally in FIG. 1. As depicted, a plasma power supply **102** is coupled to a plasma processing chamber **104** and a switch-mode power supply **106** is coupled to a support **108** upon which a substrate **110** rests within the chamber **104**. Also shown is a controller **112** that is coupled to the switch-mode power supply **106**.

[0065] In this exemplary embodiment, the plasma processing chamber **104** may be realized by chambers of substantially conventional construction (e.g., including a vacuum enclosure which is evacuated by a pump or pumps (not shown)). And, as one of ordinary skill in the art will appreciate, the plasma excitation in the chamber **104** may be by any one of a variety of sources including, for example, a helicon type plasma source, which includes magnetic coil and antenna to ignite and sustain a plasma **114** in the reactor, and a gas inlet may be provided for introduction of a gas into the chamber **104**.

[0066] As depicted, the exemplary plasma chamber **104** is arranged and configured to carry out plasma-assisted etching of materials utilizing energetic ion bombardment of the substrate **110**, and other plasma processing (e.g., plasma deposition and plasma assisted ion implantation). The plasma power supply **102** in this embodiment is configured to apply power (e.g., RF power) via a matching network (not shown) at one or more frequencies (e.g., 13.56 MHz) to the chamber **104** so as to ignite and sustain the plasma **114**. It should be understood that the present invention is not limited to any particular type of plasma power supply **102** or source to couple power to the chamber **104**, and that a variety of frequencies and power levels may be may be capacitively or inductively coupled to the plasma **114**.

[0067] As depicted, a dielectric substrate **110** to be treated (e.g., a semiconductor wafer), is supported at least in part by a support **108** that may include a portion of a conventional wafer chuck (e.g., for semiconductor wafer processing). The support **108** may be formed to have an insulating layer between the support **108** and the substrate **110** with the substrate **110** being capacitively coupled to the platforms but may float at a different voltage than the support **108**.

[0068] As discussed above, if the substrate **110** and support **108** are conductors, it is possible to apply a non-varying voltage to the support **108**, and as a consequence of electric conduction through the substrate **110**, the voltage that is applied to the support **108** is also applied to the surface of the substrate **110**.

[0069] When the substrate **110** is a dielectric, however, the application of a non-varying voltage to the support **108** is ineffective to place a voltage across the treated surface of the substrate **110**. As a consequence, the exemplary switch-mode power supply **106** is configured to be controlled so as to effectuate a voltage on the surface of the substrate **110** that is capable of attracting ions in the plasma **114** to collide with the substrate **110** so as to carry out a controlled etching and/or deposition of the substrate **110**, and/or other plasma-assisted processes.

[0070] Moreover, as discussed further herein, embodiments of the switch-mode power supply **106** are configured to operate so that there is an insubstantial interaction between

the power applied (to the plasma **114**) by the plasma power supply **102** and the power that is applied to the substrate **110** by the switch-mode power supply **106**. The power applied by the switch-mode power supply **106**, for example, is controllable so as to enable control of ion energy without substantially affecting the density of the plasma **114**.

[0071] Furthermore, many embodiments of the exemplary switch-mode supply **106** depicted in FIG. 1 are realized by relatively inexpensive components that may be controlled by relatively simple control algorithms. And as compared to prior art approaches, many embodiments of the switch mode power supply **106** are much more efficient; thus reducing energy costs and expensive materials that are associated with removing excess thermal energy.

[0072] One known technique for applying a voltage to a dielectric substrate utilizes a high-power linear amplifier in connection with complicated control schemes to apply power to a substrate support, which induces a voltage at the surface of the substrate. This technique, however, has not been adopted by commercial entities because it has not proven to be cost effective nor sufficiently manageable. In particular, the linear amplifier that is utilized is typically large, very expensive, inefficient, and difficult to control. Furthermore, linear amplifiers intrinsically require AC coupling (e.g., a blocking capacitor) and auxiliary functions like chucking are achieved with a parallel feed circuit which harms AC spectrum purity of the system for sources with a chuck.

[0073] Another technique that has been considered is to apply high frequency power (e.g., with one or more linear amplifiers) to the substrate. This technique, however, has been found to adversely affect the plasma density because the high frequency power that is applied to the substrate affects the plasma density.

[0074] In some embodiments, the switch-mode power supply **106** depicted in FIG. 1 may be realized by buck, boost, and/or buck-boost type power technologies. In these embodiments, the switch-mode power supply **106** may be controlled to apply varying levels of pulsed power to induce a potential on the surface of the substrate **110**.

[0075] Referring next to FIG. 2, it is a schematic representation of components that may be utilized to realize a switch-mode bias supply. As shown, the switching components T_1 and T_2 in this embodiment are arranged in a half-bridge (also referred to as or totem pole) type topology. Collectively, R_2 , R_3 , C_1 , and C_2 represent a plasma load, C_{10} is an effective capacitance (also referred to herein as a series capacitance or a chuck capacitance), and C_3 is an optional physical capacitor to prevent DC current from the voltage induced on the surface of the substrate or from the voltage of an electrostatic chuck (not shown) from flowing through the circuit. C_{10} is referred to as the effective capacitance because it includes the series capacitance (or also referred to as a chuck capacitance) of the substrate support and the electrostatic chuck (or e-chuck) as well as other capacitances inherent to the application of a bias such as the insulation and substrate. As depicted, L_1 is stray inductance (e.g., the natural inductance of the conductor that feeds the power to the load). And in this embodiment, there are three inputs: V_{bus} , V_2 , and V_4 .

[0076] V_2 and V_4 represent drive signals, and in this embodiment, V_2 and V_4 can be timed (e.g., the length of the pulses and/or the mutual delay) so that the closure of T_1 and T_2 may be modulated to control the shape of the voltage output V_{out} , which is applied to the substrate support. In many implementations, the transistors used to realize the switching

components T_1 and T_2 are not ideal switches, so to arrive at a desired waveform, the transistor-specific characteristics are taken into consideration. In many modes of operation, simply changing the timing of V2 and V4 enables a desired waveform to be applied at V_{out} .

[0077] For example, the switches T_1 , T_2 may be operated so that the voltage at the surface of the substrate 110 is generally negative with periodic voltage pulses approaching and/or slightly exceeding a positive voltage reference. The value of the voltage at the surface of the substrate 110 is what defines the energy of the ions, which may be characterized in terms of an ion energy distribution function (IEDF). To effectuate desired voltage(s) at the surface of the substrate 110, the pulses at V_{out} may be generally rectangular and have a width that is long enough to induce a brief positive voltage at the surface of the substrate 110 so as to attract enough electrons to the surface of the substrate 110 in order to achieve the desired voltage(s) and corresponding ion energies.

[0078] The periodic voltage pulses that approach and/or slightly exceed the positive voltage reference may have a minimum time limited by the switching abilities of the switches T_1 , T_2 . The generally negative portions of the voltage can extend so long as the voltage does not build to a level that damages the switches. At the same time, the length of negative portions of the voltage should exceed an ion transit time.

[0079] V_{bus} in this embodiment defines the amplitude of the pulses measured at V_{out} , which defines the voltage at the surface of the substrate, and as a consequence, the ion energy.

[0080] The pulse width, pulse shape, and/or mutual delay of the two signals V2, V4 may be modulated to arrive at a desired waveform at V_{out} (also referred to herein as a modified periodic voltage function), and the voltage applied to V_{bus} may affect the characteristics of the pulses. In other words, the voltage V_{bus} may affect the pulse width, pulse shape and/or the relative phase of the signals V2, V4. Referring briefly to FIG. 3, for example, shown is a timing diagram depicting two drive signal waveforms that may be applied to T_1 and T_2 (as V2 and V4) so as to generate the periodic voltage function at V_{out} . To modulate the shape of the pulses at V_{out} (e.g. to achieve the smallest time for the pulse at V_{out} , yet reach a peak value of the pulses) the timing of the two gate drive signals V2, V4 may be controlled.

[0081] For example, the two gate drive signals V2, V4 may be applied to the switching components T_1 , T_2 so the time that each of the pulses is applied at V_{out} may be short compared to the time t between pulses, but long enough to induce a positive voltage at the surface of the substrate 110 to attract electrons to the surface of the substrate 110. Moreover, it has been found that by changing the gate voltage level between the pulses, it is possible to control the slope of the voltage that is applied to V_{out} between the pulses (e.g., to achieve a substantially constant voltage at the surface of the substrate between pulses). In some modes of operation, the repetition rate of the gate pulses is about 400 kHz, but this rate may certainly vary from application to application.

[0082] Although not required, in practice, based upon modeling and refining upon actual implementation, waveforms that may be used to generate the desired (or defined) ion energy distributions may be defined, and the waveforms can be stored (e.g., in the waveform memory portion described with reference to FIG. 1 as a sequence of voltage levels). In addition, in many implementations, the waveforms can be

generated directly (e.g., without feedback from V_{out}); thus avoiding the undesirable aspects of a feedback control system (e.g., settling time).

[0083] Referring again to FIG. 2, V_{bus} can be modulated to control the energy of the ions, and the stored waveforms may be used to control the gate drive signals V2, V4 to achieve a desired pulse amplitude at V_{out} while minimizing the pulse width. Again, this is done in accordance with the particular characteristics of the transistors, which may be modeled or implemented and empirically established. Referring to FIG. 4, for example, shown are graphs depicting V_{bus} versus time, voltage at the surface of the substrate 110 versus time, and the corresponding ion energy distribution.

[0084] The graphs in FIG. 4 depict a single mode of operating the switch mode bias supply 106, which effectuates an ion energy distribution (or ion energy distribution function (IEDF)) that is concentrated at a particular ion energy. As depicted, to effectuate the single concentration of ion energies in this example, the voltage applied at V_{bus} is maintained constant while the voltages applied to V2 and V4 are controlled (e.g., using the drive signals depicted in FIG. 3) so as to generate pulses at the output of the switch-mode bias supply 106, which effectuates the corresponding ion energy distribution shown in FIG. 4.

[0085] As depicted in FIG. 4, the potential at the surface of the substrate 110 is generally negative to attract the ions that bombard and etch the surface of the substrate 110. The periodic short pulses that are applied to the substrate 110 (by applying pulses to V_{out}) have a magnitude defined by the potential that is applied to V_{bus} , and these pulses cause a brief change in the potential of the substrate 110 (e.g., close to positive or slightly positive potential), which attracts electrons to the surface of the substrate to achieve the generally negative potential along the surface of the substrate 110. As depicted in FIG. 4, the constant voltage applied to V_{bus} effectuates a single concentration of ion flux at particular ion energy; thus a particular ion bombardment energy may be selected by simply setting V_{bus} to a particular potential. In other modes of operation, two or more separate concentrations of ion energies may be created (e.g., see FIGS. 5, 20, 23, 25, 26, 27).

[0086] One of skill in the art will recognize that the power supply need not be limited to a switch-mode power supply, and as such the output of the power supply can also be controlled in order to effect a certain ion energy. As such, the output of the power supply, whether switch-mode or otherwise, when considered without being combined with an ion current compensation or an ion current, can also be referred to as a power supply voltage, V_{PS} .

[0087] Referring next to FIG. 5, for example, shown are graphs depicting a bi-modal mode of operation in which two separate peaks in ion energy distribution are generated. As shown, in this mode of operation, the substrate experiences two distinct levels of voltages and periodic pulses, and as a consequence, two separate concentrations of ion energies are created. As depicted, to effectuate the two distinct ion energy concentrations, the voltage that is applied at V_{bus} alternates between two levels, and each level defines the energy level of the two ion energy concentrations.

[0088] Although FIG. 5 depicts the two voltages at the substrate 110 as alternating after every pulse (e.g., FIGS. 25 and 27), this is certainly not required. In other modes of operation for example, the voltages applied to V2 and V4 are switched (e.g., using the drive signals depicted in FIG. 3)

relative to the voltage applied to V_{out} so that the induced voltage at the surface of the substrate alternates from a first voltage to a second voltage (and vice versa) after two or more pulses (e.g., FIG. 26).

[0089] In prior art techniques, attempts have been made to apply the combination of two waveforms (generated by waveform generators) to a linear amplifier and apply the amplified combination of the two waveforms to the substrate in order to effectuate multiple ion energies. This approach, however, is much more complex than the approach described with reference to FIG. 5, and requires an expensive linear amplifier, and waveform generators.

[0090] Referring next to FIG. 6, it is a block diagram depicting an embodiment in which an ion current compensation component 660 compensates for ion current in the plasma chamber 604. Applicants have found that, at higher energy levels, higher levels of ion current within the chamber affect the voltage at the surface of the substrate, and as a consequence, the ion energy distribution is also affected.

[0091] The ion current compensation component 660 may be realized as a separate accessory that may optionally be added to the switch mode power supply 606 and controller 612. In other embodiments, (e.g., as depicted in FIG. 7) the ion current compensation component 660 may share a common housing 766 (see FIG. 7) with other components described herein (e.g., the switch-mode power supply 106, 606 and ion current compensation 660). In this embodiment, the periodic voltage function provided to the plasma chamber 604 can be referred to as a modified periodic voltage function since it comprises the periodic voltage function modified by the ion current compensation from ion current compensation component 660. The controller 612 can sample a voltage, V_o , at different times at an electrical node where outputs of the switch mode power supply 606 and the ion current compensation 660 combine.

[0092] As depicted in FIG. 7, shown is an exemplary ion current compensation component 760 that includes a current source 764 coupled to an output 736 of a switch mode supply and a current controller 762 that is coupled to both the current source 764 and the output 736. Also depicted in FIG. 7 is a plasma chamber 704, and within the plasma chamber are capacitive elements C_1 , C_2 , and ion current I_f . As depicted, C_1 represents the inherent capacitance (also referred to herein as effective capacitance) of components associated with the chamber 704, which may include, but is not limited to, insulation, the substrate, substrate support, and an e-chuck, and C_2 represents sheath capacitance and stray capacitances. In this embodiment, the periodic voltage function provided to the plasma chamber 704, and measurable as V_o , can be referred to as a modified periodic voltage function since it comprises the periodic voltage function modified by the ion current compensation, I_c .

[0093] The sheath (also herein referred to as a plasma sheath) is a layer in a plasma near the substrate surface and possibly walls of the plasma processing chamber with a high density of positive ions and thus an overall excess of positive charge. The surface with which the sheath is in contact with typically has a preponderance of negative charge. The sheath arises by virtue of the faster velocity of electrons than positive ions thus causing a greater proportion of electrons to reach the substrate surface or walls, thus leaving the sheath depleted of electrons. The sheath thickness, λ_{sheath} , is a function of plasma characteristics such as plasma density and plasma temperature.

[0094] It should be noted that because C_1 in this embodiment is an inherent (also referred to herein as effective) capacitance of components associated with the chamber 704, it is not a capacitance that can be controlled during processing. For example, some prior art approaches that utilize a linear amplifier couple bias power to the substrate with a blocking capacitor, and then utilize a monitored voltage across the blocking capacitor as feedback to control their linear amplifier. Although a capacitor could couple a switch mode power supply to a substrate support in many of the embodiments disclosed herein, it is unnecessary to do so because feedback control using a blocking capacitor is not required in several embodiments of the present invention.

[0095] While referring to FIG. 7, simultaneous reference is made to FIG. 8, which is a graph depicting an exemplary voltage (e.g., the modified periodic voltage function) at V_o depicted in FIG. 7. In operation, the current controller 762 monitors the voltage (the modified periodic voltage function) at V_o . Ion current is calculated over an interval t or some sub portion thereof (depicted in FIG. 8) as:

$$I_i = C_1 \frac{dV_o}{dt} \quad (\text{Equation 1})$$

[0096] Ion current, I_p , and inherent capacitance (also referred to as effective capacitance), C_1 , can either or both be time varying. Because C_1 is substantially constant for a given tool and is measureable, only V_o needs to be monitored to enable ongoing control of compensation current. As discussed above, to obtain a more mono-energetic distribution of ion energy the current controller controls the current source 764 so that I_c is substantially the same as I_f (or in the alternative, related according to Equation 3). In this way, a narrow spread of ion energies may be maintained even when the ion current reaches a level that affects the voltage at the surface of the substrate.

[0097] Also depicted in FIG. 7 is a feedback line 770, which may be utilized in connection with controlling an ion energy distribution. For example, the value of ΔV (also referred to herein as a voltage step or the third portion 806) depicted in FIG. 8, is indicative of instantaneous ion energy and may be used in many embodiments as part of a feedback control loop. In one embodiment, the voltage step, ΔV , is related to ion energy according to Equation 6. In other embodiments, the peak-to-peak voltage, V_{PP} , can be related to the instantaneous ion energy. Alternatively, the difference between the peak-to-peak voltage, V_{PP} , and the product of the slope, dV_o/dt , of the fourth portion 808 times time, t , can be correlated to the instantaneous ion energy (e.g., $V_{PP} - dV_o/dt \cdot t$).

[0098] Referring next to FIG. 16, shown is an exemplary embodiment of a current source 1664, which may be implemented to realize the current source 764 described with reference to FIG. 7. In this embodiment, a controllable negative DC voltage source, in connection with a series inductor L2, function as a current source, but one of ordinary skill in the art will appreciate, in light of this specification, that a current source may be realized by other components and/or configurations.

[0099] FIG. 17 illustrates one embodiment of a method of controlling an ion energy distribution of ions impacting a surface of a substrate. The method 1700 starts by applying a modified periodic voltage function 1702 (see the modified periodic voltage function 802 in FIG. 8) to a substrate support

supporting a substrate within a plasma processing chamber. The modified periodic voltage function can be controlled via at least two ‘knobs’ such as an ion current compensation, I_C , (see I_C 2104 in FIG. 21) and a power supply voltage, V_{PS} , (see power supply voltage 2106 in FIG. 21). An exemplary component for generating the power supply voltage is the switch mode power supply 106 in FIG. 1. In order to help explain the power supply voltage, V_{PS} , it is illustrated herein as if measured without coupling to the ion current and ion current compensation. The modified periodic voltage function is then sampled at a first and second value of an ion current compensation, I_C , 1704. At least two samples of a voltage of the modified periodic voltage function are taken for each value of the ion current compensation, I_C . The sampling 1704 is performed in order to enable calculations 1706 (or determinations) of the ion current, I_p , and a sheath capacitance, C_2 , 1706 (e.g., C2 in FIG. 2). Ion current, I_p , for instance, can be determined using Equation 1. Such determinations may involve finding an ion current compensation, I_C , that if applied to the substrate support (or as applied to the substrate support) would generate a narrow (e.g., minimum) ion energy distribution function (IEDF) width. The calculations 1706 can also optionally include determining a voltage step, ΔV , (also known as a third portion of the modified periodic voltage function 1406) based on the sampling 1704 of the waveform of the modified periodic voltage function. The voltage step, ΔV , can be related to an ion energy of ions reaching the substrate’s surface. When finding the ion current, I_p , for the first time, the voltage step, ΔV , can be ignored. Details of the sampling 1704 and the calculations 1706 will be provided in discussions of FIG. 18 to follow. Sheath capacitance, C_2 , can be calculated via the following equation:

$$C_2 = \frac{C_1 \cdot (I_I + I_C)}{I_C - C_1 \cdot \frac{dV_0}{dt}} \quad (\text{Equation 2})$$

[0100] Once the ion current, I_p , and sheath capacitance, C_2 , are known, the method 1700 may move to the method 1900 of FIG. 19 involving setting and monitoring an ion energy and a shape (e.g., width) of the IEDF. For instance, FIG. 23 illustrates how a change in the power supply voltage can effect a change in the ion energy. In particular, a magnitude of the illustrated power supply voltage is decreased resulting in a decreased magnitude of the ion energy. Additionally, FIG. 24 illustrates that given a narrow IEDF 2414, the IEDF can be widened by adjusting the ion current compensation, I_C . Alternatively or in parallel, the method 1700 can perform various metrics that make use of the ion current, I_p , the sheath capacitance, C_2 , and other aspects of the waveform of the modified periodic voltage function.

[0101] In addition to setting the ion energy and/or the IEDF width, the method 1700 may adjust the modified periodic voltage function 1708 in order to maintain the ion energy and the IEDF width. In particular, adjustment of the ion current compensation, I_C , provided by an ion current compensation component, and adjustment of the power supply voltage may be performed 1708. In some embodiments, the power supply voltage can be controlled by a bus voltage, V_{bus} , of the power supply (e.g., the bus voltage V_{bus} of FIG. 2). The ion current compensation, I_C , controls the IEDF width, and the power supply voltage controls the ion energy.

[0102] After these adjustments 1708, the modified periodic voltage function can again be sampled 1704 and calculations of ion current, I_p , sheath capacitance, C_2 , and the voltage step, ΔV , can again be performed 1706. If the ion current, I_p , or the voltage step, ΔV , are other than defined values (or in the alternative, desired values), then the ion current compensation, I_C , and/or the power supply voltage can be adjusted 1708. Looping of the sampling 1704, calculating, 1706, and adjusting 1708 may occur in order to maintain the ion energy, eV, and/or the IEDF width.

[0103] FIG. 18 illustrates another embodiment of a method of controlling an ion energy distribution of ions impacting a surface of a substrate. In some embodiments, as discussed above, it may be desirable to achieve a narrow IEDF width (e.g., a minimum IEDF width or in the alternative, ~6% full-width half maximum). As such, the method 1800 can provide a modified periodic voltage function to the chamber and to the substrate support such that a constant substrate voltage, and hence sheath voltage, exists at the surface of the substrate. This in turn accelerates ions across the sheath using a substantially constant voltage thus enabling ions to impact the substrate with substantially the same ion energy (in other words, a narrow IEDF width). For instance, in FIG. 22 it can be seen that adjusting the ion current compensation, I_C , can cause the substrate voltage, V_{sub} , between pulses to have a constant, or substantially constant voltage thus causing the IEDF to narrow.

[0104] Such a modified periodic voltage function is achieved when the ion current compensation, I_C , equals the ion current, I_p , assuming no stray capacitances (see the last five cycles of the periodic voltage function (V_0) in FIG. 22). In the alternative, where stray capacitance, C_{stray} , is considered, the ion current compensation, I_C , is related to the ion current, I_p , according to Equation 3:

$$I_I = I_C \frac{C_1}{C_1 + C_{stray}} \quad (\text{Equation 3})$$

[0105] where, C_1 , is an effective capacitance (e.g., the inherent capacitance described with reference to FIGS. 2 and 9-10). The effective capacitance, C_1 , can vary in time or be constant. For the purposes of this disclosure, the narrow IEDF width can exist when either $I_I = I_C$ or, in the alternative, when Equation 3 is met (the equivalence of I_I and I_C taking into account stray capacitance). FIGS. 21-27 use the nomenclature, $I_I = I_C$, but it should be understood that this relationship assumes negligible stray capacitance. The more rigorous relationship is shown via Equation 3, and thus Equation 3 could substitute for the equalities used in FIGS. 21-27. The stray capacitance, C_{stray} , is a cumulative capacitance of the plasma chamber as seen by the power supply. There are eight cycles illustrated in FIG. 22.

[0106] The method 1800 can begin with an application of a modified periodic voltage function (e.g., the modified periodic voltage function depicted in FIG. 8 or the modified periodic voltage function 2102 in FIG. 21) to the substrate support 1802 (e.g., substrate support 108 in FIG. 1). A voltage of the modified periodic voltage function can be sampled 1804 at two or more times, and from this sampling, a slope dV_0/dt for at least a portion of a cycle of the modified periodic voltage function can be calculated 1806 (e.g., a slope of the portion between the pulses or the fourth portion 808). At some point before a decision 1810, a previously-determined value

of an effective capacitance C_1 (e.g., inherent capacitance C_1 in FIG. 13, and an inherent capacitance C_{10} in FIG. 2) can be accessed **1808** (e.g., a previously-measured value retrieved from a memory, a value entered by a user, or a value measured in real-time). Based on the slope, dV_0/dt , the effective capacitance, C_1 , and the ion current compensation, I_C , a function f (Equation 4), can be evaluated for each value of the ion current compensation, I_C , as follows:

$$f(I_C) = \frac{dV_0}{dt} - \frac{I_C}{C_1} = 0 \quad (\text{Equation 4})$$

[0107] If the function f is true, then the ion current compensation, I_C , equals the ion current, I_p , or in the alternative, makes Equation 3 true, and a narrow IEDF width has been achieved **1810** (e.g., see FIG. 22). If the function f is not true, then the ion current compensation, I_C , can be adjusted **1812** further until the function f is true. Another way to look at this is that the ion current compensation, I_C , can be adjusted until it matches the ion current, I_p , (or in the alternative, meets the relationship of Equation 3), at which point a narrow IEDF width will exist. Such an adjustment to the ion current compensation, I_C , and resulting narrowing of the IEDF, can be seen in FIG. 22. The ion current, I_p , and the corresponding ion current compensation, I_C , can be stored (e.g., in a memory) in store operation **1814**. The ion current, I_C , can vary in time, as can the effective capacitance, C_1 .

[0108] When Equation 4 is met, ion current, I_p , is known (either because $I_C=I_p$, or because Equation 3 is true). Thus, the method **1800** enables remote and non-invasive measurements of ion current, I_p , in real time without affecting the plasma. This leads to a number of novel metrics such as remote monitoring of plasma density and remote fault detection of the plasma source.

[0109] While adjusting **1812** the compensation current, I_C , the ion energy will likely be broader than a delta function and the ion energy will resemble that of FIG. 21. However, once the compensation current, I_C , is found that meets Equation 3, the IEDF will appear as the right portion of FIG. 22—as having a narrow IEDF width (e.g., a minimum IEDF width). This is because the voltage between pulses of the modified periodic voltage function causes a substantially constant sheath or substrate voltage, and hence ion energy, when $I_C=I_p$ (or alternatively when Equation 3 is true). In FIG. 23 the substrate voltage, **2308**, includes pulses between the constant voltage portions. These pulses have such a short duration that their effect on ion energy and IEDF is negligible and thus the substrate voltage **2308** is referred to as being substantially constant.

[0110] The following provides further details about each of the method steps illustrated in FIG. 18. In one embodiment, the modified periodic voltage function can have a waveform like that illustrated in FIG. 8 and can include a first portion (e.g., first portion **802**), a second portion (e.g., **804**), a third portion (e.g., third portion **806**), and a fourth portion (e.g., fourth portion **808**), where the third portion can have a voltage step, ΔV , and the fourth portion can have a slope, dV_0/dt . The slope, dV_0/dt , can be positive, negative, or zero. The modified periodic voltage function **800** can also be described as having pulses comprising the first portion **802**, the second portion **804**, and the third portion **806**, and a portion between the pulses, a fourth portion **808**, which is often sloped.

[0111] The modified periodic voltage function can be measured as V_0 in FIG. 2 and can appear as the modified periodic voltage function **2102** in FIG. 21. The modified periodic voltage function **2102** is produced by combining the power supply voltage **2106** (also known as the periodic voltage function) with the ion current compensation **2104**. The power supply voltage **2106** is largely responsible for generating and shaping the pulses of the modified periodic voltage function **2102** and the ion current compensation **2104** is largely responsible for generating and shaping the portion between the pulses, which is often a straight sloped voltage. Increasing the ion current compensation, I_C , causes a decrease in a magnitude of the slope of the portion between the pulses as seen in FIG. 22. Decreasing a magnitude of the power supply voltage **2306** causes a decrease in a magnitude of the amplitude of the pulses and the peak-to-peak voltage of the modified periodic voltage function **2302** as seen in FIG. 23.

[0112] In cases where the power supply is a switch-mode power supply, the switching diagram **2110** of a first switch T_1 and a second switch T_2 can apply. For instance, the first switch T_1 can be implemented as the switch T_1 in FIG. 2 and the second switch T_2 can be implemented as the second switch T_2 in FIG. 2. The two switches are illustrated as having identical switching times, but being 180° out of phase. In other embodiments, the switches may have a slight phase offset such as that illustrated in FIG. 3. When the first switch T_1 is on (up to a first time τ_1), the power supply voltage (V_{PS}) is drawn to a maximum magnitude (a negative voltage since the power supply has a negative bus voltage). The second switch T_2 is turned off during this period so that the power supply voltage **2106** is isolated from ground. When the switches reverse (at the first time τ_1), the power supply voltage **2106** ramps and slightly passes ground and then settles at this positive voltage. This ramping and settling occurs between the first time τ_1 and a second time τ_2 . The first switch T_1 is then turned on again and the second switch T_2 is turned off until a third time τ_3 . Turning the first switch T_1 on causes the voltage to drop by a voltage step ΔV , which is then followed by a sloped region having a slope dV_0/dt until the switches again reverse at the third time τ_3 . The third time τ_3 is also a first time of a subsequent cycle or period of the modified periodic voltage function.

[0113] In the illustrated embodiment, there are two pulse widths, but this is not required. In other embodiments, the pulse width can be identical for all cycles. In other embodiments, the pulse width can be varied or modulated in time.

[0114] The modified periodic voltage function can be applied to the substrate support **1802**, and sampled **1804** as V_0 at a last accessible point before the modified periodic voltage function reaches the substrate support (e.g., between the switch mode power supply and the effective capacitance). The unmodified periodic voltage function (or power supply voltage **2106** in FIG. 21) can be sourced from a power supply such as the switch mode power supply **1206** in FIG. 12. The ion current compensation **2104** in FIG. 21 can be sourced from a current source such as the ion current compensation component **1260** in FIG. 12 or **1360** in FIG. 13.

[0115] A portion of or the whole modified periodic voltage function can be sampled **1804**. For instance, the fourth portion (e.g., fourth portion **808**) can be sampled. The sampling **1804** can be performed between the power supply and the substrate support. For instance, in FIG. 1, the sampling **1804** can be performed between the switch mode power supply **106** and the support **108**. In FIG. 2, the sampling **1804** can be

performed between the inductor L1 and the inherent capacitance C10. In one embodiment, the sampling 1804 can be performed at V_0 between the capacitance C3 and the inherent capacitance C10. Since the inherent capacitance C10 and the elements representing the plasma (R2, R3, C1, and C2) are not accessible for real time measurement, the sampling 1804 is typically performed to the left of the inherent capacitance C10 in FIG. 2. Although the inherent capacitance C10 typically is not measured during processing, it is typically a known constant, and can therefore be set during manufacturing. At the same time, in some cases the inherent capacitance C10 can vary with time.

[0116] While only two samples of the modified periodic voltage function are needed in some embodiments, in others, hundreds, thousands, or tens of thousands of samples can be taken for each cycle of the modified periodic voltage function. For instance, the sampling rate can be greater than 400 kHz. These sampling rates enable more accurate and detailed monitoring of the modified periodic voltage function and its shape. In this same vein, more detailed monitoring of the periodic voltage function allows more accurate comparisons of the waveform: between cycles, between different process conditions, between different processes, between different chambers, between different sources, etc. For instance, at these sampling rates, the first, second, third, and fourth portions 802, 804, 806, 808 of the periodic voltage function illustrated in FIG. 8 can be distinguished, which may not be possible at traditional sampling rates. In some embodiments, the higher sampling rates enable resolving of the voltage step, ΔV , and the slope, dV_0/dt , which are not possible in the art. In some embodiments, a portion of the modified periodic voltage function can be sampled while other portions are not sampled.

[0117] The calculation 1806 of the slope, dV_0/dt , can be based on a plurality of V_0 measurements taken during the time t (e.g., the fourth portion 808). For instance, a linear fit can be performed to fit a line to the V_0 values where the slope of the line gives the slope, dV_0/dt . In another instance, the V_0 values at the beginning and end of time t (e.g., the fourth portion 808) in FIG. 8 can be ascertained and a line can be fit between these two points with the slope of the line given as dV_0/dt . These are just two of numerous ways that the slope, dV_0/dt , of the portion between the pulses can be calculated.

[0118] The decision 1810 can be part of an iterative loop used to tune the IEDF to a narrow width (e.g., a minimum width, or in the alternative, 6% full-width half maximum). Equation 4 only holds true where the ion current compensation, I_c , is equal to the ion current, I_f (or in the alternative, is related to I_f according to Equation 3), which only occurs where there is a constant substrate voltage and thus a constant and substantially singular ion energy (a narrow IEDF width). A constant substrate voltage 2308 (V_{sub}) can be seen in FIG. 23. Thus, either ion current, I_f , or alternatively ion current compensation, I_c , can be used in Equation 4.

[0119] Alternatively, two values along the fourth portion 808 (also referred to as the portion between the pulses) can be sampled for a first cycle and a second cycle and a first and second slope can be determined for each cycle, respectively. From these two slopes, an ion current compensation, I_c , can be determined which is expected to make Equation 4 true for a third, but not-yet-measured, slope. Thus, an ion current, I_f , can be estimated that is predicted to correspond to a narrow IEDF width. These are just two of the many ways that a

narrow IEDF width can be determined, and a corresponding ion current compensation, I_c , and/or a corresponding ion current, I_f , can be found.

[0120] The adjustment to the ion current compensation, I_c , 1812 can involve either an increase or a decrease in the ion current compensation, I_c , and there is no limitation on the step size for each adjustment. In some embodiments, a sign of the function f in Equation 4 can be used to determine whether to increase or decrease the ion current compensation. If the sign is negative, then the ion current compensation, I_c , can be decreased, while a positive sign can indicate the need to increase the ion current compensation, I_c .

[0121] Once an ion current compensation, I_c , has been identified that equals the ion current, I_f (or in the alternative, is related thereto according to Equation 3), the method 1800 can advance to further set point operations (see FIG. 19) or remote chamber and source monitoring operations. The further set point operations can include setting the ion energy (see also FIG. 23) and the distribution of ion energy or IEDF width (see also FIG. 24). The source and chamber monitoring can include monitoring plasma density, source supply anomalies, plasma arcing, and others.

[0122] Furthermore, the method 1800 can optionally loop back to the sampling 1804 in order to continuously (or in the alternative, periodically) update the ion current compensation, I_c . For instance, the sampling 1804, calculation 1806, the decision 1810, and the adjusting 1812 can periodically be performed given a current ion current compensation, I_c , in order to ensure that Equation 4 continues to be met. At the same time, if the ion current compensation, I_c , that meets Equation 4 is updated, then the ion current, I_f , can also be updated and the updated value can be stored 1814.

[0123] While the method 1800 can find and set the ion current compensation, I_c , so as to equal the ion current, I_f , or in the alternative, to meet Equation 3, a value for the ion current compensation, I_c , needed to achieve a narrow IEDF width can be determined without (or in the alternative, before) setting the ion current, I_c , to that value. For instance, by applying a first ion current compensation, I_{c1} , for a first cycle and measuring a first slope, dV_{01}/dt , of the voltage between the pulses, and by applying a second ion current compensation, I_{c2} , for a second cycle and measuring a second slope, dV_{02}/dt , of the voltage between the pulses, a third slope, dV_{03}/dt , associated with a third ion current compensation, I_{c3} , can be determined at which Equation 4 is expected to be true. The third ion current compensation, I_{c3} , can be one that if applied would result in a narrow IEDF width. Hence, the ion current compensation, I_c , that meets Equation 4 and thus corresponds to ion current, I_f , can be determined with only a single adjustment of the ion current compensation. The method 1800 can then move on to the methods described in FIG. 19 without ever setting the ion current, I_c , to a value needed to achieve the narrow IEDF width. Such an embodiment may be carried out in order to increase tuning speeds.

[0124] Alternatively, given a first slope, dV_{01}/dt , and a corresponding first ion current compensation, I_{c1} , a second slope, dV_{02}/dt , and a corresponding second ion current compensation, I_{c2} , and the effective capacitance C_1 , the ion current, I_f , can be estimated using the following equation without adjusting the ion compensation current I_c to equal the ion current, I_f , or adjusting it to meet Equation 3:

$$I_I = \frac{C_1 \cdot \left(I_{C1} \cdot \frac{dV_{02}}{dt} - I_{C2} \cdot \frac{dV_{01}}{dt} \right)}{I_{C1} - I_{C2} + C_1 \cdot \left(\frac{dV_{02}}{dt} - \frac{dV_{01}}{dt} \right)} \quad (\text{Equation 5})$$

[0125] FIG. 19 illustrates methods for setting the IEDF width and the ion energy. The method originates from the method 1800 illustrated in FIG. 18, and can take either of the left path 1900 (also referred to as an IEDF branch) or the right path 1901 (also referred to as an ion energy branch), which entail setting of the IEDF width and the ion energy, respectively. Ion energy, eV, is proportional to a voltage step, ΔV , or the third portion 806 of the modified periodic voltage function 800 of FIG. 8. The relationship between ion energy, eV, and the voltage step, ΔV , can be written as Equation 6:

$$eV = \Delta V \cdot \frac{C_1}{C_2 + C_1} \quad (\text{Equation 6})$$

[0126] where C_1 is the effective capacitance (e.g., chuck capacitance; inherent capacitance, C10, in FIG. 2; or inherent capacitance, C1, in FIG. 13), and C_2 is a sheath capacitance (e.g., the sheath capacitance C2 in FIG. 2 or the sheath capacitance C2 in FIG. 13). The sheath capacitance, C_2 , may include stray capacitances and depends on the ion current, I_I . The voltage step, ΔV , can be measured as a change in voltage between the second portion 804 and the fourth portion 808 of the modified periodic voltage function 800. By controlling and monitoring the voltage step, ΔV , (which is a function of a power supply voltage or a bus voltage such as bus voltage, V_{bus} in FIG. 2), ion energy, eV, can be controlled and known.

[0127] Throughout this disclosure ion energy, eV, is referred to as if it is a singular value. However, the meaning of ion energy, eV, has slightly different meanings depending on the IEDF width. Where the IEDF width is minimized, the ion energy, eV, is an average ion energy of the IEDF. When the IEDF width is not minimized, the ion energy, eV, marks either a minimum or maximum of the IEDF, depending on whether $I_I < I_{C1}$ or $I_I > I_{C1}$. Where $I_I < I_{C1}$, the ion energy, eV, corresponds to a minimum ion energy, eV, of the IEDF. Where $I_I > I_{C1}$, the ion energy, eV, corresponds to a maximum ion energy, eV, of the IEDF. Where the IEDF width is small, this technicality is not too important, and thus ion energy, eV, will be treated as if representing an average ion energy for an IEDF. But, for the sake of rigor, one should bear in mind the above description.

[0128] At the same time, the IEDF width can be approximated according to Equation 7:

$$IEDF \text{ width} = V_{PP} - \Delta V - \frac{It}{C} \quad (\text{Equation 7})$$

[0129] where I is I_I where C is C_{series} , or I is I_{C1} where C is $C_{effective}$. Time, t , is the time between pulses, V_{PP} , is the peak-to-peak voltage, and ΔV is the voltage step.

[0130] Additionally, sheath capacitance, C_2 , can be used in a variety of calculations and monitoring operations. For instance, the Debye sheath distance, λ_{sheath} , can be estimated as follows:

$$\lambda_{sheath} = \frac{\epsilon A}{C_2} \quad (\text{Equation 8})$$

[0131] where ϵ is vacuum permittivity and A is an area of the substrate (or in an alternative, a surface area of the substrate support). In some high voltage applications, Equation 8 is written as Equation 9:

$$\lambda_{sheath} = \sqrt{\frac{T_e \cdot \epsilon_0}{n_e q}} \cdot \left(\frac{V}{2 T_e} \right)^{.75} \quad (\text{Equation 9})$$

[0132] Additionally, an e-field in the sheath can be estimated as a function of the sheath capacitance, C_2 , the sheath distance λ_{sheath} , and the ion energy, eV. Sheath capacitance, C_2 , along with the ion current, I_I , can also be used to determine plasma density, n_e , from Equation 10 where saturation current, I_{sat} , is linearly related to the compensation current, I_C , for singly ionized plasma.

$$I_{sat} = \sum n_i q_i \sqrt{\frac{k T_e}{m_i}} A \approx n_e q \sqrt{\frac{k T_e}{m}} A \quad (\text{Equation 10})$$

[0133] An effective mass of ions at the substrate surface can be calculated using the sheath capacitance, C_2 and the saturation current, I_{sat} . Plasma density, n_e , electric field in the sheath, ion energy, eV, effective mass of ions, and a DC potential of the substrate, V_{DC} , are fundamental plasma parameters that are typically only monitored via indirect means in the art. This disclosure enables direct measurements of these parameters thus enabling more accurate monitoring of plasma characteristics in real time.

[0134] As seen in Equation 6, the sheath capacitance, C_2 , can also be used to monitor and control the ion energy, eV, as illustrated in the ion energy branch 1901 of FIG. 19. The ion energy branch 1901 starts by receiving a user selection of ion energy 1902. The ion energy branch 1901 can then set an initial power supply voltage for the switch-mode power supply that supplies the periodic voltage function 1904. At some point before a sample periodic voltage operation 1908, the ion current can also be accessed 1906 (e.g., accessed from a memory). The periodic voltage can be sampled 1908 and a measurement of the third portion of the modified periodic voltage function can be measured 1910. Ion energy, I_I , can be calculated from the voltage step, ΔV , (also referred to as the third portion (e.g., third portion 806)) of the modified periodic voltage function 1912. The ion energy branch 1901 can then determine whether the ion energy equals the defined ion energy 1914, and if so, the ion energy is at the desired set point and the ion energy branch 1901 can come to an end. If the ion energy is not equal to the defined ion energy, then the ion energy branch 1901 can adjust the power supply voltage 1916, and again sample the periodic voltage 1908. The ion energy branch 1901 can then loop through the sampling 1908, measuring 1910, calculating 1912, decision 1914, and the setting 1916 until the ion energy equals the defined ion energy.

[0135] The method for monitoring and controlling the IEDF width is illustrated in the IEDF branch 1900 of FIG. 19. The IEDF branch 1900 includes receiving a user selection of

an IEDF width **1950** and sampling a current IEDF width **1952**. A decision **1954** then determines whether the defined IEDF width equals the current IEDF width, and if the decision **1952** is met, then the IEDF width is as desired (or defined), and the IEDF branch **1900** can come to an end. However, if the current IEDF width does not equal the defined IEDF width, then the ion current compensation, I_c , can be adjusted **1956**. This determination **1954** and the adjustment **1956** can continue in a looping manner until the current IEDF width equals the defined IEDF width.

[0136] In some embodiments, the IEDF branch **1900** can also be implemented to secure a desired IEDF shape. Various IEDF shapes can be generated and each can be associated with a different ion energy and IEDF width. For instance, a first IEDF shape may be a delta function while a second IEDF shape may be a square function. Other IEDF shapes may be cupped. Examples of various IEDF shapes can be seen in FIG. 11.

[0137] With knowledge of the ion current, I_p , and the voltage step, ΔV , Equation 6 can be solved for ion energy, eV. The voltage step, ΔV , can be controlled by changing the power supply voltage which in turn causes the voltage step, ΔV , to change. A larger power supply voltage causes an increase in the voltage step, ΔV , and a decrease in the power supply voltage causes a decrease in the voltage step, ΔV . In other words, increasing the power supply voltage results in a larger ion energy, eV.

[0138] Furthermore, since the above systems and methods operate on a continuously varying feedback loop, the desired (or defined) ion energy and IEDF width can be maintained despite changes in the plasma due to variations or intentional adjustments to the plasma source or chamber conditions.

[0139] Although FIGS. 17-19 have been described in terms of a single ion energy, one of skill in the art will recognize that these methods of generating and monitoring a desired (or defined) IEDF width (or IEDF shape) and ion energy can be further utilized to produce and monitor two or more ion energies, each having its own IEDF width (or IEDF shape). For instance, by providing a first power supply voltage, V_{PS} , in a first, third, and fifth cycles, and a second power supply voltage in a second, fourth, and sixth cycles, two distinct and narrow ion energies can be achieved for ions reaching the surface of the substrate (e.g., top two figures in FIG. 20). Using three different power supply voltages results in three different ion energies (e.g., middle two figures in FIG. 20). By varying a time during which each of multiple power supply voltages is applied, or the number of cycles during which each power supply voltage level is applied, the ion flux of different ion energies can be controlled (e.g., bottom two figures in FIG. 20).

[0140] The above discussion has shown how combining a periodic voltage function provided by a power supply with an ion current compensation provided by an ion current compensation component, can be used to control an ion energy and IEDF width and/or IEDF shape of ions reaching a surface of a substrate during plasma processing.

[0141] Some of the heretofore mentioned controls are enabled by using some combination of the following: (1) a fixed waveform (consecutive cycles of the waveform are the same); (2) a waveform having at least two portions that are proportional to an ion energy and an IEDF (e.g., the third and fourth portions **806** and **808** illustrated in FIG. 8); and (3) a high sampling rate (e.g., 125 MHz) that enables accurate monitoring of the distinct features of the waveform. For

instance, where the prior art, such as linear amplifiers, sends a waveform to the substrate that is similar to the modified periodic voltage function, undesired variations between cycles make it difficult to use those prior art waveforms to characterize the ion energy or IEDF width (or IEDF shape).

[0142] Where linear amplifiers have been used to bias a substrate support, the need to sample at a high rate has not been seen since the waveform is not consistent from cycle to cycle and thus resolving features of the waveform (e.g., a slope of a portion between pulses) typically would not provide useful information. Such useful information does arise when a fixed waveform is used, as seen in this and related disclosures.

[0143] The herein disclosed fixed waveform and the high sampling rate further lead to more accurate statistical observations being possible. Because of this increased accuracy, operating and processing characteristics of the plasma source and the plasma in the chamber can be monitored via monitoring various characteristics of the modified periodic voltage function. For instance, measurements of the modified periodic voltage function enable remote monitoring of sheath capacitance and ion current, and can be monitored without knowledge of the chamber process or other chamber details. A number of examples follow to illustrate just some of the multitude of ways that the heretofore mentioned systems and methods can be used for non-invasive monitoring and fault detection of the source and chamber.

[0144] As an example of monitoring, and with reference to FIG. 8, the DC offset of the waveform **800** can represent a health of the plasma source (hereinafter referred to as the "source"). In another, a slope of a top portion **804** (the second portion) of a pulse of the modified periodic voltage function can be correlated to damping effects within the source. The standard deviation of the slope of the top portion **804** from horizontal (illustrated as having a slope equal to 0) is another way to monitor source health based on an aspect of the waveform **800**. Another aspect involves measuring a standard deviation of sampled V_0 points along the fourth portion **808** of the modified periodic voltage function and correlating the standard deviation to chamber ringing. For instance, where this standard deviation is monitored among consecutive pulses, and the standard deviation increases over time, this may indicate that there is ringing in the chamber, for instance in the e-chuck. Ringing can be a sign of poor electrical connections to, or in, the chamber or of additional unwanted inductance or capacitance.

[0145] One of skill in the art will recognize that the methods illustrated in FIGS. 17, 18, and 19 do not require any particular or described order of operation, nor are they limited to any order illustrated by or implied in the figures. For instance, metrics can be monitored before, during, or after setting and monitoring the IEDF width and/or the ion energy, eV.

[0146] FIG. 21 illustrates various waveforms at different points in the systems herein disclosed. Given the illustrated switching pattern **2110** for switching components of a switch mode power supply, power supply voltage, V_{PS} , **2106** (also referred to herein as a periodic voltage function), ion current compensation, I_c , **2104**, modified periodic voltage function **2102**, and substrate voltage, V_{sub} , **2112**, the IEDF has the illustrated width **2114** (which may not be drawn to scale) or IEDF shape **2114**. This width is wider than what this disclosure has referred to as a "narrow width." As seen, when the ion current compensation, I_c , **2104** is greater than the ion current, I_p , the substrate voltage, V_{sub} , **2112** is not constant. The IEDF

width **2114** is proportional to a voltage difference of the sloped portion between pulses of the substrate voltage, V_{sub} , **2112**.

[0147] Given this non-narrow IEDF width **2114**, the methods herein disclosed call for the ion current compensation, I_c , to be adjusted until $I_c=I_f$ (or in the alternative are related according to Equation 3). FIG. **22** illustrates the effects of making a final incremental change in ion current compensation, I_c , in order to match it to ion current I_f . When $I_c=I_f$ the substrate voltage, V_{sub} , **2212** becomes substantially constant, and the IEDF width **2214** goes from non-narrow to narrow.

[0148] Once the narrow IEDF has been achieved, one can adjust the ion energy to a desired or defined value as illustrated in FIG. **23**. Here, a magnitude of the power supply voltage (or in the alternative a bus voltage, V_{bus} , of a switch-mode power supply) is decreased (e.g., a maximum negative amplitude of the power supply voltage **2306** pulses is reduced). As a result, ΔV_1 decreases to ΔV_2 as does the peak-to-peak voltage, from V_{PP1} to V_{PP2} . A magnitude of the substantially constant substrate voltage, V_{sub} , **2308** consequently decreases, thus decreasing a magnitude of the ion energy from **2315** to **2314** while maintaining the narrow IEDF width.

[0149] Whether the ion energy is adjusted or not, the IEDF width can be widened after the narrow IEDF width is achieved as shown in FIG. **24**. Here, given $I_f=I_c$ (or in the alternative, Equation 3 giving the relation between I_f and I_c), I_c can be adjusted thus changing a slope of the portion between pulses of the modified periodic voltage function **2402**. As a result of ion current compensation, I_c , and ion current, I_f , being not equal, the substrate voltage moves from substantially constant to non-constant. A further result is that the IEDF width **2414** expands from the narrow IEDF **2414** to a non-narrow IEDF **2402**. The more that I_c is adjusted away from I_f , the greater the IEDF **2414** width.

[0150] FIG. **25** illustrates one pattern of the power supply voltage that can be used to achieve more than one ion energy level where each ion energy level has a narrow IEDF **2514** width. A magnitude of the power supply voltage **2506** alternates each cycle. This results in an alternating ΔV and peak-to-peak voltage for each cycle of the modified periodic voltage function **2502**. The substrate voltage **2512** in turn has two substantially constant voltages that alternate between pulses of the substrate voltage. This results in two different ion energies each having a narrow IEDF **2514** width.

[0151] FIG. **26** illustrates another pattern of the power supply voltage that can be used to achieve more than one ion energy level where each ion energy level has a narrow IEDF **2614** width. Here, the power supply voltage **2606** alternates between two different magnitudes but does so for two cycles at a time before alternating. As seen, the average ion energies are the same as if V_{PS} **2606** were alternated every cycle. This shows just one example of how various other patterns of the V_{PS} **2606** can be used to achieve the same ion energies.

[0152] FIG. **27** illustrates one combination of power supply voltages, V_{PS} , **2706** and ion current compensation, I_c , **2704** that can be used to create a defined IEDF **2714**. Here, alternating power supply voltages **2706** result in two different ion energies. Additionally, by adjusting the ion current compensation **2704** away from the ion current, I_f , the IEDF **2714** width for each ion energy can be expanded. If the ion energies are close enough, as they are in the illustrated embodiment, then the IEDF **2714** for both ion energies will overlap resulting in one large IEDF **2714**. Other variations are also pos-

sible, but this example is meant to show how combinations of adjustments to the V_{PS} **2706** and the I_c **2704** can be used to achieve defined ion energies and defined IEDFs **2714**.

Circuit Memory as a Cause of Inaccurate Ion Energies

[0153] Referring to FIGS. **2** and **8**, a modified periodic voltage function **800** can be seen as generated at an output of the switch-mode power supply **206**. The modified period voltage function **800** begins with an upswing in voltage, V_o , as the first switch component **226'** closes and charges a series capacitance, C_{series} , that includes the substrate support **208**. When C_{series} is charged, the first switch component **226'** is opened. The first and second switch components **226'** and **226''** can both be open for a short time (t_c-t) causing the voltage across C_{series} to remain constant. The second switch component **226''** is then closed causing V_o to drop a voltage ΔV , after which point the modified periodic voltage function **800** begins to slope downward with a slope dV_o/dt as ion current compensation from the ion energy control **220** is provided to the substrate support **208**. The voltage step ΔV is related to ion energy for ions striking a substrate surface in the plasma processing chamber **204**. The modified periodic voltage function **800** is illustrated and described without disturbances.

[0154] However, in practice disturbances can affect ΔV and thus ion energy. For instance, where a narrow ion energy distribution function IEDF is desired, ΔV should be constant from cycle to cycle. If a disturbance causes ΔV to differ in some cycles, then the IEDF will have a smear or jitter.

[0155] This problem is illustrated in FIGS. **12** and **13**. FIG. **12** illustrates a modified periodic voltage function **1200** where a disturbance **1212** can be seen in a first cycle, which influences the ΔV of a next cycle. FIG. **12** also shows a more accurate presentation of the voltage rise at the start of each cycle—this shape is more sinusoidal than the vertical shape illustrated in FIG. **8**. The sinusoidal shape is a result of the recharging of C_{series} through L_1 that is occurring during this voltage rise.

[0156] A disturbance **1212** is seen during the downward sloping portion of the first cycle (other types of disturbances are also possible and such disturbances can occur anywhere in a cycle, not just during the sloped portion). Without the disturbance **1212**, the voltage would continue to fall with substantially the same slope along line **1214**. However, the disturbance **1212** causes the voltage to continue to fall with the same slope, but along a line **1208** having a higher voltage. As a result, when the first switch component **226'** is again closed and V_o begins to rise, instead of following the path **1214** followed in the previous cycle, V_o follows the path **1208** leading to a $\Delta V'$ which is lower than the ΔV of the previous cycle and lower than desired. This affect can be referred to as 'memory' since each cycle remembers the voltage at which the previous cycle ended (e.g., when the first switch component **226'** closes).

[0157] FIG. **13** shows a similar modified periodic voltage function **1300**, but in this case a disturbance **1312** causes the falling voltage to follow the path **1308** rather than the path **1314**. As a result, V_o is lower when the first switch component **226'** is closed and C_{series} begins to charge. Consequently, V_o follows the path **1308** rather than **1314** when the first switch component **226'** opens. The result is a $\Delta V'$ that is larger than desired and larger than the ΔV of the previous cycle.

[0158] Thus, this 'memory' causes inaccuracies, and potentially instability, in the ion energy. There is therefore a need in

the art to eliminate this memory and achieve accurate and stable ion energy while still using energy efficient resonant switching.

[0159] The memory is partially the result of excess energy stored in a series capacitance C_{series} that would normally be completely removed from C_{series} by the time the first switch component **226'** closes. However, where there is a disturbance (e.g., **1312**), energy remains in C_{series} when the first switch component **226'** closes. One way to remove this energy is to couple C_{series} to a resistor such that the energy dissipates into the resistor. This is a fast method of removing the memory from C_{series} , but has the downside of wasting energy as the energy is merely converted to heat rather than put to work.

[0160] A preferred operating regime is known as resonant since energy is passed back and forth between a capacitor and an inductor and thus reused rather than being wasted in a resistor (some dissipation in inherent resistances is unavoidable, but at least is smaller than in a resistive regime). However, inductors are not charged quickly, and thus an inductor in a resonant system is not effective to remove excess capacitance from the capacitor at the end of each cycle.

[0161] Thus, there is a need in the art for systems, methods, and apparatus operating in the more efficient resonant regime, while also being able to quickly remove excess charge from a capacitor of the system in order to avoid inaccuracies and instability caused by so-called memory.

[0162] FIGS. **14** and **15** illustrate waveforms where the systems and methods herein disclosed are used to achieve a desired ion energy despite different disturbances in a previous cycle. In FIG. **14** the disturbance **1408** would have caused ΔV to be higher than desired (recall FIG. **13**), but instead, as V_o rises at the start of a cycle (with a first switch component closed), the bias supply monitors the rising voltage and cuts off the increasing voltage when V_o reaches a voltage **1408** that corresponds to a desired ion energy. In other words, the bias supply cuts off the voltage increase before the default period for the voltage rise—or before C_{series} is fully charged. In FIG. **15** the disturbance **1508** would have caused ΔV to be lower than desired (recall FIG. **12**), but instead, as V_o rises at the start of the cycle, the bias supply monitors the rising voltage and cuts off the increasing voltage when V_o reaches a level that corresponds to the desired ion energy **1508**. In this case, the voltage is allowed to rise for longer than a default period for the voltage rise—but still is cutoff before C_{series} is fully charged.

[0163] In FIG. **14**, the key is to cut off the voltage rise before a default period. However, in FIG. **15**, there are two keys to the method: first the bus voltage, V_{bus} is set such that V_o can theoretically be allowed to rise far higher than would ever be required (e.g., level **1514**). In other words, V_{bus} is set such that C_{series} typically will not be fully charged in order to achieve any desired ion energies. In this way, V_o can be cutoff later than the default period, and thus can rise above where it would otherwise reach due to the disturbance **1512**.

[0164] Unfortunately, when V_o is cutoff before the voltage is allowed to rise to a Max V_o , energy remains stored in an inductor of the bias supply, and/or in inherent inductance of the bias supply. Were the bias supply allowed to fully charge C_{series} , the inductor's energy would have been fully discharged into or exchanged with C_{series} . Thus, while the switching algorithm herein described enables resonant operation and the ability to wipe out 'memory' from the previous cycle, thus removing inaccuracy and instability, a new problem is created in that the inductor and/or inductance of the

bias supply is never fully depleted. This stored energy can cause further 'memory' problems for the subsequent cycle, and thus there is a further need to quickly and efficiently remove the remaining stored energy in the inductor and/or inductance of the bias supply. Solutions to this problem are described with reference to the system illustrated in FIG. **9**.

[0165] FIG. **9** illustrates an inductance L_1 between switch components T_1 and T_2 and the series capacitance, C_{series} (the use of C_{series} assumes that there is no stray capacitance; where stray capacitance is considered, $C_{effective}$ can be used, where C_{series} can be a part of $C_{effective}$). The inductance L_1 can represent a discrete inductor or a combination of a discrete inductor and inherent inductances. There is also an inherent resistance R_1 in the switch component T_1 as well as an inherent resistance R_2 in switch component T_2 . The series combination of R_1 and C_{series} acts as a RC circuit leading to an exponential decay or discharge of C_{series} whenever the switch component T_1 is open and switch component T_2 is closed. The series combination of inherent inductance L_1 and series capacitance C_{series} operates as an LC circuit having a resonant nature leading to the exchange of energy between C_{series} and L_1 in a periodic fashion. Were R_1 to dominate over L_1 this RLC circuit would operate resistively and energy discharged from C_{series} would be wasted as heat dissipated in R_1 . This would be an inefficient and undesirable situation.

[0166] One alternative is for this RLC circuit to operate in a resonant regime in which L_1 dominates over R_1 , and energy primarily is exchanged between C_{series} and L_1 with only a small fraction of energy being lost to R_1 . The downside of operating in a resonant fashion is that energy stored in the inductor L_1 and C_{series} leads to what will be referred to as a 'memory,' wherein disturbances in one cycle affect the waveform of a subsequent cycle. Because of this memory, the voltage provided to the right-hand side of C_{series} , which is representative of a substrate surface within a plasma, may see inaccuracies or instability.

[0167] For instance in FIG. **12** a disturbance **1212** in the modified periodic voltage function measured at V_o in FIG. **9** causes an inaccuracy in that $\Delta V'$ is smaller than it would have been without the disturbance and smaller than ΔV in the previous cycle. This leads to some ions being accelerated with ΔV and some being accelerated at $\Delta V'$, leading to a broader-than-desired, or smeared, IEDF. In FIG. **13** a disturbance **1308** causes an inaccuracy in that $\Delta V'$ is larger than it would have been without the disturbance and larger than ΔV of the previous cycle. In both cases, since $\Delta V'$ is other than expected and desired, there is an inaccuracy in ion energy.

[0168] Furthermore, since an inaccuracy in one cycle causes a further inaccuracy in the subsequent cycle, a single disturbance can cause instability—an increasing error in ΔV each cycle.

[0169] In order to have the bias supply **902** operate in an efficient resonant regime, the discrete inductor L_1 is used that renders the resistive effects of R_1 negligible. While L_1 represents at least an inductance of a discrete inductor, in some embodiments it can also represent inherent inductances as well, although these should be small relative to the inductance of the discrete inductor. For purposes of this disclosure, L_1 in FIG. **9** can refer to an inductance of a discrete inductor or to an inductance of a discrete inductor and inherent inductances. Either way, L_1 dominates over R_1 , so that the bias supply **902** operates resonantly. But as described above, this along with the novel switching algorithm leads to unwanted stored energy in L_1 at the end of each cycle.

[0170] To solve the problems associated with excess energy being stored in L_1 when switch component T_1 opens, an energy evacuation component 908 can be used to remove this stored energy and to do so in a fraction of a cycle length. The energy evacuation component 908 can remove energy from L_1 at any point or any period during what is labeled T_{evac} in FIGS. 14 and 15. In other words, the energy evacuation component 1408 can be activated at any time during T_{evac} . The particular time at which the energy evacuation component 908 begins to remove energy from the inductor L_1 is governed by controller 910 and the eV setpoint, which is provided to the controller 910. In particular, the switch component T_1 closes to begin a cycle and charge C_{series} . V_o rises and would reach a maximum voltage (Max V_o) if the switch component T_1 were not opened at some point. In other words, if C_{series} were charged indefinitely, V_o would reach and settle at the Max V_o . V_{bus} can be set such that C_{series} can be charged beyond a level corresponding to a desired ion energy. In this way, if there is a disturbance in a previous cycle, the switch component T_1 can close and then open before C_{series} is fully charged, thus achieving a desired V_o regardless of disturbances. As V_o rises, the controller 910 can receive voltage measurements from V_o and compare these to the eV set point. When V_o matches the eV set point, the controller 910 can instruct the switch component T_1 to open, thus cutting off the increase in V_o . At this time, or any time during T_{evac} , the controller 910 can instruct the energy evacuation component 908 to activate or begin removing energy from L_1 .

[0171] The energy evacuation component 908 can include any variety of circuitry, such as batteries, capacitors, resistors, switches, and/or electrical connections to other portions of the bias supply 902 or any component that can benefit from the energy removed from L_1 . For instance, the energy evacuation component 908 can include a battery or capacitive element that stores the energy evacuated from L_1 for later use (e.g., providing the energy back to V_{bus} to supplement the rail voltage).

[0172] FIG. 10 illustrates a bias supply with a particular embodiment of the energy evacuation component. Here, a switch 1014 of the energy evacuation component 1008 closes at a point during T_{evac} and any energy in L_1 is evacuated into the energy evacuation component 1008 and dissipated in a resistor 1012.

[0173] The controllers 910 and 1010, in some embodiments, can include an analog comparator or an A-to-D converter feeding a digital comparator.

Wide Dynamic Range

[0174] At low energies, the inaccuracies and instability discussed above, become more problematic. This makes it difficult to achieve a wide dynamic range for ion energies since a wide dynamic range of ion energies typically require at least one ion energy having a low value. The systems and methods discussed above can therefore be implemented to remove inaccuracies and instabilities at high energies, and especially at low energies, thus enabling a bias supply to achieve a wide dynamic range of ion energies in a plasma.

Fast Ion Energy Control

[0175] Certain applications call for a 'fast' change in ion energy, where 'fast' can include changes in ion energy within a few cycles of the modified periodic voltage function, or even from cycle to cycle. One way to change ion energy is to adjust

V_{bus} , but this is difficult to do fast enough for 'fast' applications. However, using the switching algorithm discussed above and the energy evacuation component to remove excess energy stored in an inductor of a bias supply, ion energy can be adjusted from cycle to cycle (i.e., where a first cycle produces a first ion energy and a next cycle produces a second ion energy).

[0176] The systems and methods herein disclosed can adjust the ion energy without a change in V_{bus} . For instance, in FIGS. 12-15 it can be seen that various ion energies (different ΔV) can be achieved for a given V_{bus} . Ion energy switching is so 'fast' that the ion energy for a cycle can even be selected while V_o is rising. In other words, ΔV , or the ion energy, can be decided upon at any time prior to the switching component T_1 being opened.

[0177] While 'fast' ion energy control can be advantageous when switching between different ion energies, it is also advantageous when a plasma is ignited, since the ability to stop charging C_{series} at an exact eV set point greatly reduces if not eliminates transients in plasma ion energy that are sometimes seen when a plasma is ignited.

Pulsed Ion Energy Control

[0178] Many plasma processing recipes call for a pulsing envelope for RF power provided by a plasma source. FIG. 28 illustrates a pulsed source supply as a function of time. As seen, the RF sine wave is pulsed according to a pulse envelope indicated with dashed lines. Pulsing enables, for instance, the ratio of ions to free radicals to be controlled. In particular, free radicals typically have a longer lifetime than ions, and therefore, when the RF is turned off, the ratio of free radicals to ions increases with time. An increased ratio of radicals can affect, for instance, the relative etch rates of various materials on the surface of a work piece, which is advantageous in some recipes. However, to maintain a desired level of free radicals and ions, the RF power is turned back on, hence pulsing of the source supply is carried out. In some cases the source supply can be pulsed between two different RF amplitudes rather than between an RF amplitude and 0 for the purpose of maintaining a more consistent level of ions and radicals within the processing chamber.

[0179] When pulsed RF source supplies are used, bias supplies are typically synchronized in some manner to the source supply pulses (see FIG. 29). Where bilevel source supply voltages are used, the bias supply can also be pulsed between two different bias supply voltages. However, systems and methods in the art of pulsing multiple supplies suffer from various disadvantages. For instance, pulsed bias supplies can see transients in the ion density and ion energy every time that the bias supply is turned on. One example can be seen in FIG. 30, where the bias supply illustrates a slow turn-on transient in addition to an overshoot of the desired voltage target shortly after being turned on prior to settling into a desired voltage regime. Similarly, the intra-pulse turn-on transient seen on the source pulse envelope is affected by the turn-on of the bias supply. These transients can result in part from the fact that traditional bias supplies and plasma density are non-orthogonal—a change in bias supply voltage has a substantial effect on the plasma density. These transients not only make accurate processing recipes difficult to design, but when monitoring bias supply voltages, many methods in the art do not use data points from the transient regimes, thus injecting potential measurement and regulation errors while potentially increasing processing time. Some recipes may also call

for rapid changes in ion energy within a given source supply pulse. Traditional systems and methods have difficulty controlling the ion energy with accuracy and stability and have difficulty making such changes at all within a period of time as short as a few cycles of the bias supply.

[0180] The systems and methods herein disclosed solve a number of these issues. FIG. 29 illustrates a modified periodic voltage for a bias supply, such as the bias supply 902 of FIG. 9, being pulsed within a pulse envelope indicated by dashed lines. The pulses of the bias supply are synchronized with those of the source supply in FIG. 28. Transients, such as that seen in FIG. 30, can be reduced and possibly eliminated since the maximum voltage of the modified periodic voltage function produced by the herein disclosed bias supply can be accurately controlled via opening a switch component T_1 at the exact moment needed to achieve a desired ion energy. These systems and methods also enable orthogonality between the ion energy control and the plasma density control. Thus, the same systems and methods that previously were described as reducing inaccuracy and instability in ion energy have the additional benefit of avoiding transients during pulsed bias supply operation and enabling orthogonality between the ion energy and plasma density controls.

[0181] Transients are also avoided since the systems and methods herein disclosed achieve a nearly orthogonal relationship between ion energy and plasma density—thus pulsing of the bias supply (e.g., 902) has a negligible effect on plasma density.

[0182] Further, because the herein disclosed systems and methods can be used to achieve ‘fast’ ion energy changes (e.g., changing ion energy from cycle-to-cycle), ion energy can be altered one or more times within a single source supply or bias supply pulse.

[0183] The systems and methods discussed relative to the wide dynamic range can also be used in pulsed bias supply embodiments to achieve wide dynamic ranges of multiple ion energies within a single pulse of the bias supply.

[0184] Along with changes to ion energy as discussed above, in other embodiments the ion energy distribution function (IEDF) can be adjusted from cycle-to-cycle. In other words, within a given pulse of the bias supply, the IEDF and/or ion energy can be adjusted one or more times.

[0185] Pulsed bias supply embodiments can further benefit from the ability to set presets for I_C . Thus, at the start of a bias supply pulse, I_C can be ‘guessed’ so that a desired ion energy can be achieved in less time. For instance, as previously discussed, some iterations may be required to determine a minimum IEDF after which time the desired ion energy can be set. By starting such iterations with an I_C based on prior IEDF settings, the minimum IEDF may be found quicker and thus the desired ion energy can be established sooner. In other embodiments, the I_C used in a previous pulse can be used as an initial condition at the start of a subsequent pulse to again decrease the time used to set ion energy for the pulse. Further, if multiple ion energies are to be set in a given pulse, than the I_C used in the previous pulse or previous pulses can be used as initial conditions for setting the various ion energies in subsequent pulses. Similarly, C_2 or its more accurate derivative, $C_{series}/(C_2+C_{series})$ can be used as initial conditions in combination with or alternatively to I_C .

[0186] Pulsing embodiments can also benefit from the ability to measure plasma density via ion current and C_2 as discussed earlier, but here applied to pulsed bias supply situations. This leads to further embodiments, in which the bias

supply can be controlled based upon measurements of plasma density during pulse operation. For instance, bias supply pulses can be triggered, or regulated in amplitude, duty factor, etc., based on a plasma density threshold (e.g., the bias supply can turn on when the plasma density falls below a threshold). In another example, changes to ion energy or the eV set point can be triggered by the plasma density falling below or rising above a plasma density threshold. The ion energy and IEDF within a bias supply pulse can also be controlled as a function of plasma density.

[0187] In other embodiments, the source supply can be controlled as a function of plasma density. For instance, pulses of the source supply can be triggered, or amplitude, duty factor, etc. of the pulse envelope, can be regulated based on the plasma density crossing a plasma density threshold or for the purpose of maintaining plasma density near to a desired level.

Virtual Front Panel

[0188] FIGS. 31 to 52 illustrate various ‘virtual front panel’ (VFP) displays associated with a bias supply as disclosed earlier. The VFPs can have a variety of controls (e.g., buttons, sliders, radio buttons), indicators (e.g., color indicators, bar indicators, numerical indicators), and graphs or charts (e.g., voltage versus time). The VFPs can include controls and monitoring charts and indicators for controlling a bias supply and/or a source supply. For instance, the VFPs can enable control of eV setpoints and IEDF shapes and widths and monitoring of achieved ion energies and IEDF shapes and widths. The VFPs can also be used to monitor ion current, I_T , as well as calibration of a bias supply and/or plasma processing chamber. These are just a few of the many embodiments in which a VFP can be used.

[0189] The VFPs can be embodied in a single display (e.g., LCD flat panel display embedded in a bias supply or coupled to a bias supply) or multiple displays. The VFP can include touch-sensitive control.

[0190] FIG. 31 illustrates a VFP charting a modified periodic voltage function. The VFP further includes a power output control to toggle a bias supply output on and off. A number of warning indicators are arranged down the left side of the VFP. There are also bars and numerical indicators for showing a ion energy (eV), an ion current compensation, I_C (compensation), and a peak-to-peak voltage (V_{pp}).

[0191] FIG. 33 illustrates a VFP shows two controls of a bias supply, one for an ion energy set point (eV setpoint) and another for an ion current compensation (Current Offset). The VFP also has a bar indicator for the measured ion energy (eV).

[0192] FIG. 35 illustrates a VFP having a chart for three ion energies. The chart can either be a readout or an input screen. For instance, the chart can be used to indicate the achieved ion energies and the concentrations of ions at each of the three ion energies, or the chart can be used to show ion energies and concentrations that the system is to try and achieve.

[0193] FIG. 36 illustrates a VFP having a chart for an ion energy distribution function having a trapezoidal shape. The IEDF stretches from just below 500 to just above 1000 eV where the concentration of ions increases with ion energy. The VFP also includes controls on the left for controlling the low and high ends of the IEDF as well as a concentration of ions at both ends.

[0194] FIG. 37 illustrates a VFP for controlling a spread of ion energies ($Spread_1$) around an ion energy V_1 . In the illus-

trated embodiments, the concentration of ions at each energy drops off towards 0 for energies moving away from V_1 .

[0195] FIG. 38 illustrates a VFP for controlling two narrow IEDF and one IEDF having a defined spread. As seen, two narrow IEDFs can exist at h_1 and h_2 , and have ion concentrations equal to v_1 and v_2 . The IEDF2 Parameters control the center ion energy of the wide IEDF (V_1) and the IEDF spread (Spread_1).

[0196] FIG. 39 illustrates a VFP for controlling an IEDF comprising four ion energies each having particular concentrations where a spread between any two adjacent ion energies has a concentration that linearly connects the two adjacent ion energies.

[0197] FIG. 40 illustrates a VFP charting ion energy, I_{ion} , as a function of time or position.

[0198] FIG. 43 illustrates a VFP charting plasma density, n_e , as a function of time or position.

[0199] FIG. 44 illustrates a VFP charting a substrate potential, V_{DC} , as a function of time or position.

Pulsed Heater

[0200] In a typical chuck there is an electrical heating system that may be powered from the AC distribution system of the premises where the processing chamber is housed. It is known that RF power can potentially propagate to the AC distribution system. To prevent this undesirable current path, an RF filter may be placed in the heating system so that it passes the 60 Hz or 50 Hz distribution power, but acts as a trap for the RF frequencies (e.g., 13.56 MHz or 60 MHz). But in some instances, there is not enough physical space for a filter (or two filters) because the filter must handle a substantial amount of power, and when a bias substrate supply is utilized, there are several frequencies that are applied (e.g., from 0.4 to 5 MHz), so a filter is difficult to design.

[0201] As a consequence, instead of utilizing a typical filter, a pulse may be generated with a heater power supply that is applied to a primary side of a transformer that has low inter-winding capacitance. The power is passed to a secondary of the transformer, then rectified and applied to the heater. The low capacitance barrier of the transformer does not allow a broad range of frequencies to pass from the secondary back to the primary of the transformer; thus preventing unwanted frequencies from propagating to the AC distribution system of the premises.

[0202] The systems and methods described herein can be implemented in connection with a control and processing components in addition to the specific physical devices previously described herein. FIG. 53 shows a diagrammatic representation of one embodiment of a control system 5300 within which a set of instructions can execute for causing a device to perform or execute any one or more of the aspects and/or methodologies of the present disclosure. For example, the control system 5300 may be utilized to realize the control component 112, 612, 762, 910, 1010. But the components in FIG. 53 are examples only and do not limit the scope of use or functionality of any hardware, software, firmware, embedded logic component, or a combination of two or more such components implementing particular embodiments of this disclosure. Some or all of the illustrated components can be part of the control system 5300. For instance, the control system 5300 can include a general purpose computer or an embedded logic device (e.g., an FPGA), to name just two non-limiting examples.

[0203] Control system 5300 in this embodiment includes at least a processor 5301 such as a central processing unit (CPU) or an FPGA to name two non-limiting examples. The control system 5300 may also comprise a memory 5303 and storage 5308, both communicating with each other, and with other components, via a bus 5340. The bus 5340 may also link a display 5332, one or more input devices 5333 (which may, for example, include a keypad, a keyboard, a mouse, a stylus, etc.), one or more output devices 5334, one or more storage devices 5335, and various non-transitory, tangible processor-readable storage media 5336 with each other and with one or more of the processor 5301, the memory 5303, and the storage 5308. All of these elements may interface directly or via one or more interfaces or adaptors to the bus 5340. For instance, the various non-transitory, tangible processor-readable storage media 5336 can interface with the bus 5340 via storage medium interface 5326. Control system 5300 may have any suitable physical form, including but not limited to one or more integrated circuits (ICs), printed circuit boards (PCBs), mobile handheld devices, laptop or notebook computers, distributed computer systems, computing grids, or servers.

[0204] Processor(s) 5301 (or central processing unit(s) (CPU(s))) optionally contains a cache memory unit 5302 for temporary local storage of instructions, data, or processor addresses. Processor(s) 5301 are configured to assist in execution of non-transitory processor-readable instructions stored on at least one non-transitory, tangible processor-readable storage medium. Control system 5300 may provide functionality as a result of the processor(s) 5301 executing instructions embodied in one or more non-transitory, tangible processor-readable storage media, such as memory 5303, storage 5308, storage devices 5335, and/or storage medium 5336 (e.g., read only memory (ROM)). For instance, instructions to effectuate one or more steps of the methods described with reference to FIGS. 17-19 may be embodied in one or more non-transitory, tangible processor-readable storage media and processor(s) 5301 may execute the instructions. Memory 5303 may read the instructions from one or more other non-transitory, tangible processor-readable storage media (such as mass storage device(s) 5335, 5336) or from one or more other sources through a suitable interface, such as network interface 5320. Carrying out such processes or steps may include defining data structures stored in memory 5303 and modifying the data structures as directed by the software.

[0205] The signal input component 5350 generally operates to receive signals (e.g., digital and/or analog signals) that provide information about one or more aspects of the switch mode power supply 106, switch mode power supply 606, ion current compensation 660, plasma processing chamber 604, and current source 764. In some implementations, controller 112 and 612 may provide an output signal (e.g., a binary bit) to inform the switch mode power supply 106 and 506 to adjust a duty cycle of pulses or power supply voltage. In other implementations, the control system 5300 may be utilized in part to realize the ion current compensation 660, current control 762, controller 910, controller 1010.

[0206] The signal output component 5360 may include digital-to-analog components known to those of ordinary skill in the art to generate switch control signals to control switches T_1 and T_2 . When switches T_1 and T_2 are implemented as field effect transistors (FETs), for example, the signal output component 5360 may generate gate drive signals to control the switches T_1 and T_2 .

[0207] The memory 5303 may include various components (e.g., non-transitory, tangible processor-readable storage media) including, but not limited to, a random access memory component (e.g., RAM 5304) (e.g., a static RAM “SRAM”, a dynamic RAM “DRAM”, etc.), a read-only component (e.g., ROM 5305), and any combinations thereof. ROM 5305 may act to communicate data and instructions unidirectionally to processor(s) 5301, and RAM 5304 may act to communicate data and instructions bidirectionally with processor(s) 5301. ROM 5305 and RAM 5304 may include any suitable non-transitory, tangible processor-readable storage media described below. In some instances, ROM 5305 and RAM 5304 include non-transitory, tangible processor-readable storage media for carrying out the methods described herein.

[0208] Fixed storage 5308 is connected bidirectionally to processor(s) 5301, optionally through storage control unit 5307. Fixed storage 5308 provides additional data storage capacity and may also include any suitable non-transitory, tangible processor-readable media described herein. Storage 5308 may be used to store operating system 5309, EXECs 5310 (executables), data 5311, API applications 5312 (application programs), and the like. Often, although not always, storage 5308 is a secondary storage medium (such as a hard disk) that is slower than primary storage (e.g., memory 5303). Storage 5308 can also include an optical disk drive, a solid-state memory device (e.g., flash-based systems), or a combination of any of the above. Information in storage 5308 may, in appropriate cases, be incorporated as virtual memory in memory 5303.

[0209] In one example, storage device(s) 5335 may be removably interfaced with control system 5300 (e.g., via an external port connector (not shown)) via a storage device interface 5325. Particularly, storage device(s) 5335 and an associated machine-readable medium may provide nonvolatile and/or volatile storage of machine-readable instructions, data structures, program modules, and/or other data for the control system 5300. In one example, software may reside, completely or partially, within a machine-readable medium on storage device(s) 5335. In another example, software may reside, completely or partially, within processor(s) 5301.

[0210] Bus 5340 connects a wide variety of subsystems. Herein, reference to a bus may encompass one or more digital signal lines serving a common function, where appropriate. Bus 5340 may be any of several types of bus structures including, but not limited to, a memory bus, a memory controller, a peripheral bus, a local bus, and any combinations thereof, using any of a variety of bus architectures. As an example and not by way of limitation, such architectures include an Industry Standard Architecture (ISA) bus, an Enhanced ISA (EISA) bus, a Micro Channel Architecture (MCA) bus, a Video Electronics Standards Association local bus (VLB), a Peripheral Component Interconnect (PCI) bus, a PCI-Express (PCI-X) bus, an Accelerated Graphics Port (AGP) bus, HyperTransport (HTX) bus, serial advanced technology attachment (SATA) bus, and any combinations thereof.

[0211] Control system 5300 may also include an input device 5333. In one example, a user of control system 5300 may enter commands and/or other information into control system 5300 via input device(s) 5333. Examples of an input device(s) 5333 include, but are not limited to, a touch screen, an alpha-numeric input device (e.g., a keyboard), a pointing device (e.g., a mouse or touchpad), a touchpad, a joystick, a gamepad, an audio input device (e.g., a microphone, a voice response system, etc.), an optical scanner, a video or still

image capture device (e.g., a camera), and any combinations thereof. Input device(s) 5333 may be interfaced to bus 5340 via any of a variety of input interfaces 5323 (e.g., input interface 5323) including, but not limited to, serial, parallel, game port, USB, FIREWIRE, THUNDERBOLT, or any combination of the above.

[0212] Information and data can be displayed through a display 5332. Examples of a display 5332 include, but are not limited to, a liquid crystal display (LCD), an organic liquid crystal display (OLED), a cathode ray tube (CRT), a plasma display, and any combinations thereof. The display 5332 can interface to the processor(s) 5301, memory 5303, and fixed storage 5308, as well as other devices, such as input device(s) 5333, via the bus 5340. The display 5332 is linked to the bus 5340 via a video interface 5322, and transport of data between the display 5332 and the bus 5340 can be controlled via the graphics control 5321.

[0213] In addition or as an alternative, control system 5300 may provide functionality as a result of logic hardwired or otherwise embodied in a circuit, which may operate in place of or together with software to execute one or more processes or one or more steps of one or more processes described or illustrated herein. Moreover, reference to a non-transitory, tangible processor-readable medium may encompass a circuit (such as an IC) storing instructions for execution, a circuit embodying logic for execution, or both, where appropriate. The present disclosure encompasses any suitable combination of hardware in connection with software.

[0214] The various illustrative logical blocks, modules, and circuits described in connection with the embodiments disclosed herein may be implemented or performed with a general purpose processor, a digital signal processor (DSP), an application specific integrated circuit (ASIC), a field programmable gate array (FPGA) or other programmable logic device, discrete gate or transistor logic, discrete hardware components, or any combination thereof designed to perform the functions described herein. A general purpose processor may be a microprocessor, but in the alternative, the processor may be any conventional processor, controller, microcontroller, or state machine. A processor may also be implemented as a combination of computing devices, e.g., a combination of a DSP and a microprocessor, a plurality of microprocessors, one or more microprocessors in conjunction with a DSP core, or any other such configuration.

[0215] In conclusion, the present invention provides, among other things, a system and method for arc-handling during plasma processing. Those skilled in the art can readily recognize that numerous variations and substitutions may be made in the invention, its use and its configuration to achieve substantially the same results as achieved by the embodiments described herein. Accordingly, there is no intention to limit the invention to the disclosed exemplary forms. Many variations, modifications and alternative constructions fall within the scope and spirit of the disclosed invention as expressed in the claims.

What is claimed is:

1. A plasma processing apparatus comprising:

a substrate support bias supply providing a periodic voltage function;

an ion current compensation component providing an ion current compensation that is combined with the periodic voltage function to form a modified periodic voltage function that is provided to the substrate support and thereby effects a DC voltage on a surface of the substrate

opposite to the substrate support, which in turn controls an ion energy of ions incident on the surface of the substrate opposite to the substrate support, the modified periodic voltage function having:

- a first portion comprising a rapidly increasing voltage;
- a second portion comprising a substantially constant voltage; and
- a third portion comprising:
 - a sloped voltage having a starting voltage that is a voltage step, ΔV , below the substantially constant voltage, the voltage step, ΔV , corresponding to the ion energy, and a slope, dV_o/dt , controlled by the ion current compensation; and

a controller to control ion current, I_p , as a function of the effective capacitance, C_1 , and the slope, dV_o/dt .

* * * * *