



(22) Date de dépôt/Filing Date: 1998/07/23

(41) Mise à la disp. pub./Open to Public Insp.: 2000/01/23

(45) Date de délivrance/Issue Date: 2008/02/26

(51) Cl.Int./Int.Cl. *B61D 3/00* (2006.01),
B61D 3/20 (2006.01), *B61F 1/12* (2006.01)


(72) Inventeur/Inventor:
FORBES, JAMES WILFRED, CA

(73) Propriétaire/Owner:
NATIONAL STEEL CAR LIMITED, CA

(74) Agent: BERESKIN & PARR

(54) Titre : STRUCTURE DE WAGON A EVIDEMENT CENTRAL

(54) Title: WELL CAR STRUCTURE

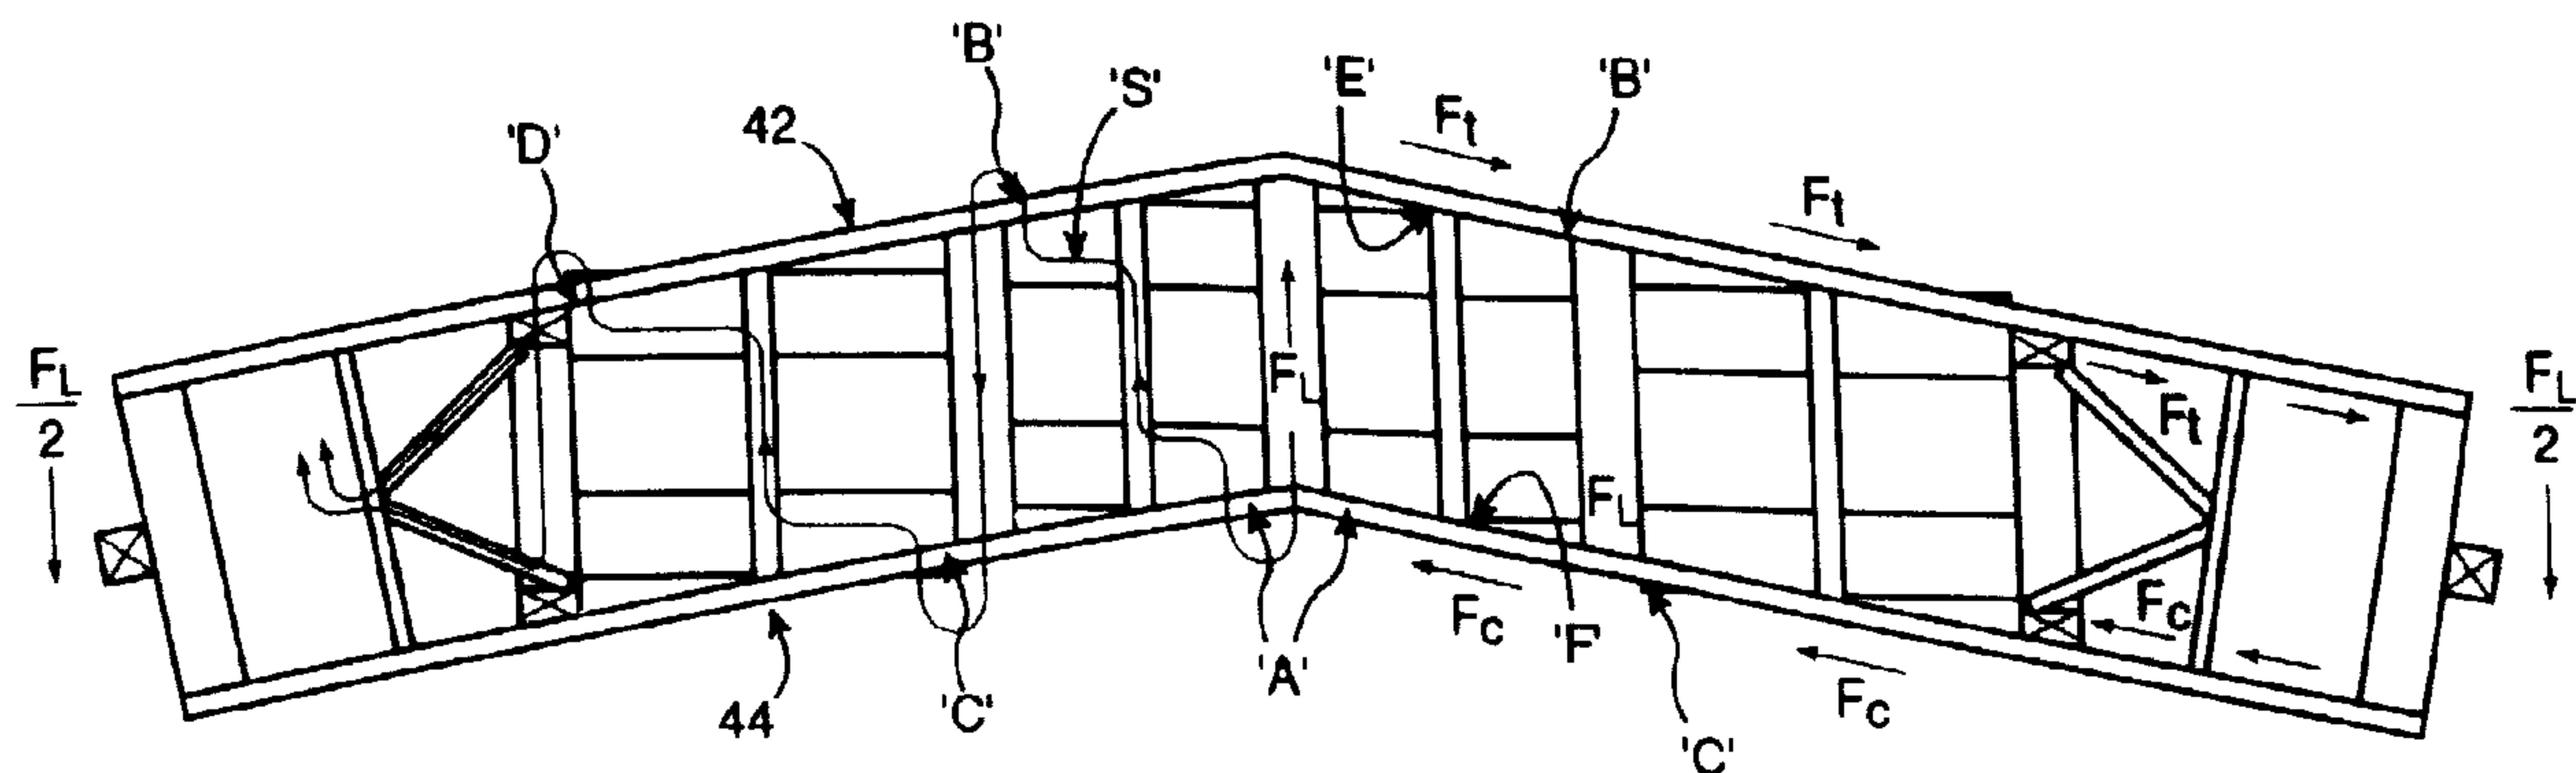

(57) Abrégé/Abstract:

A railcar unit has a pair of opposed side sills that are joined by structure that performs the function of a web in a deep beam or bracing in a truss. The joining structure is able to transmit loads that are applied transversely to the longitudinal direction of the car from one sill to the other, and is also able to transmit a bending moment couple, in the form of opposite longitudinal tensile and compressive forces, also transmitted to the side sills. The locations at which the transverse forces are imposed on, or by, the intermediate structure have longitudinal slip. When the railcar unit is placed in longitudinal tension under draft loads, the longitudinal slip allows the floor structure not to be subject to the longitudinal draft loads. In the embodiment described the joining structure serves the additional function of acting as a floor panel for vertical loads carried within the well car unit.

WELL CAR STRUCTURE**ABSTRACT**

A railcar unit has a pair of opposed side sills that are joined by structure that performs the function of a web in a deep beam or bracing in a truss. The joining structure is able to transmit loads that are applied transversely to the longitudinal direction of the car from one sill to the other, and is also able to transmit a bending moment couple, in the form of opposite
5 longitudinal tensile and compressive forces, also transmitted to the side sills. The locations at which the transverse forces are imposed on, or by, the intermediate structure have longitudinal slip. When the railcar unit is placed in longitudinal tension under draft loads, the longitudinal slip allows the floor structure not to be subject to the longitudinal draft loads. In the embodiment described the joining structure serves the additional function of acting as a floor
10 panel for vertical loads carried within the well car unit.

WELL CAR STRUCTURE**FIELD OF THE INVENTION**

This invention relates to improvements in the structure of well cars, and in particular to a resistance to lateral loads through an improved floor design.

5 BACKGROUND OF THE INVENTION

Railway well cars may be considered as upwardly opening U-shaped channels of a chosen length, simply supported on a pair of railcar trucks. Although single unit well cars are still common, there has been a trend in recent years toward articulated, multi-unit railcars which permit a relatively larger load to be carried on fewer railcar trucks.

10 Contemporary well cars may carry a number of alternative loads made up of containers in International Standards Association (ISO) sizes or domestic sizes, and of highway trailers. The ISO containers are 8'-0" wide, 8' -6" high, and come in a 20'-0" length weighing up to 52,900 lbs., or a 40'-0" length weighing up to 67,200 lbs. Domestic containers are 8'-6" wide and 9'-6" high. Their standard lengths are 45', 48' and 53'. All domestic containers have a
15 maximum weight of 67,200 lbs. Recently 28' long domestic containers have been introduced in North America. They are generally used for courier services which have lower lading densities. The 28' containers have a maximum weight of 35,000 lbs.

Two common sizes of highway trailers are, first, the 28' pup trailer weighing up to 40,000 lbs., and second, the 45' to 53' trailer weighing up to 60, 000 for a two axle trailer
20 and up to 90,000 lbs. for a three axle trailer. It is advantageous to provide well cars with hitches at both ends. This permits either a single 53' three axle trailer to be loaded in either direction, or two back-to-back 28' pup trailers to be loaded.

The wheels of a trailer can rest in the well, with the front, or nose of the trailer overhanging the car end structure at one end or the other of well car unit. A second trailer may rest in the well facing in the opposite direction. Alternatively, shipping containers, typically of 20 ft., 28 ft, or 40 ft lengths may be placed in the well, with other shipping containers stacked on top. Further, well cars may carry mixed loads of containers and trailers.

Whichever the case may be, a well car is required to withstand three kinds of loads. First, it must withstand longitudinal draft and buff loads inherent in pulling or pushing a train, particularly those loads that occur during slack run-ins and run-outs on downgrades and upgrades. Other variations of the longitudinal load are the 1,600,000 lbs. squeeze load and the 1,250,000 lbs. single ended impact load. Second, the well car must support a vertical load due to the trailers or shipping containers it carries. Third, it must be able to withstand lateral loading as the well car travels along curves and switch turn-offs. It is important to carry these structural loads while at the same time reducing the weight of the railcars themselves, first to permit a greater weight of freight to be carried within the overall maximum car and load weight limit, and second to reduce the amount of deadweight that must be pulled when the car is empty. Third, a lighter car may be less costly to build.

The U-shaped section of the car is generally made up of a pair of spaced apart left and right hand side beams, and structure between the side beams to support whatever load is placed in the well, and to carry shear between the sills under lateral loading conditions.

In earlier types of well car the side sills tended to be made in the form of a single, large, beam. While simple in concept, they were often wasteful, having an unnecessary amount of material in locations where stress may have been low. It is advantageous to have a sill in the form of a hollow section, of relatively thin walls, and to provide local reinforcement where required. It is also desirable that the hollow section be as manufactured at the mill, whether as tube or roll formed section, if possible, rather than welded. This often yields a saving in effort, may permit the use of a higher yield stress alloy, and may also reduce

the number of defects or stress concentrations in the resulting structure. As the wall thickness decreases the prospect of buckling under buff loads and vertical loads increases, and measures to deter buckling would be advantageous. It would also be advantageous to provide protection for the sills to discourage damage to the sills due to clumsy loading of trailers or containers.

5 In the past, one method of dealing with areas of higher flange stresses in the side construction was to use a member of greater weight. As the thickness of structural members is reduced it would be advantageous to transfer loads from the railcar trucks to the bolsters, and thence to the side sills, more smoothly to discourage or reduce stress concentrations. One way to do this is to increase the depth of section at the bolster, with a consequent increase in
10 height of the end decking.

SUMMARY OF THE INVENTION

 The present invention provides, in a first aspect, a transverse force resolver for a railcar having a pair of longitudinally extending side sills, comprising a structure having one longitudinal force transfer interface for transferring force to one side sill and another
15 longitudinal force transfer interface for transferring force to the other side sill. A transverse force transfer interface is provided for transmitting a transverse force to one of the side sills. The transverse force transfer interface is offset from the one longitudinal force connection by a longitudinal moment arm distance. The transverse force transfer interface has longitudinal slip.

20 Additionally, that aspect of the invention may be such that the longitudinal force connections are structurally equivalent to a pin jointed connections. Also, additionally, in that first aspect of the invention the longitudinal connections can be for location at substantially the same longitudinal location of the railcar. In yet another additional feature of that aspect of the invention the force resolver can comprise another transverse force connection for transmitting
25 a force to the other side sill, and the other transverse force connection is offset from the longitudinal force connection by another longitudinal moment arm distance.

In a different additional feature of that aspect of the invention, the force resolver can include a cross beam and a moment structure mounted thereto. The longitudinal force connections are located at opposite ends of the beam. The moment structure extends away from the beam; and the transverse force connection is mounted to the moment structure.

5 In yet another additional feature of that aspect of the invention, the force resolver transverse force connection can include an abutment for abutting a reaction member mounted to the side sill. In a still further alternative feature of that aspect of the invention, the force resolver can include abutments for abutting reaction stops for transmitting clockwise and counterclockwise moments to the longitudinal force connections. And, in each case, the force
10 resolver moment structure can be a floor panel of the railcar.

In another aspect of the invention, there is a transverse force resolver for a railcar having a pair of longitudinally extending side sills, comprising a structure having a longitudinal force connection for connection to one of the side sills, and a pair of transverse force transfer interfaces for transmitting transverse forces to the side sills. One of the
15 transverse force transfer interfaces is offset from the longitudinal force connection by a longitudinal moment arm distance; and the transverse force transfer interfaces have longitudinal slip.

In an additional feature of that aspect of the invention, the transverse force resolver is for a railcar having a pair of spaced apart cross beams extending between and connected to the
20 side sills, wherein each of the transverse force connections is mountable to one of the cross beams.

In another aspect of the invention, there is a rail car having a pair of longitudinally extending side sills. A pair of spaced apart cross beams extend between and are connected to the side sills. A pair of force resolvers, as described in the previous aspect of the invention,
25 each have one of the transverse force connection mounted to one of the beams, and the other of the transverse force connections mounted to the other of the beams. One of the force

resolvers has its longitudinal force connection connected to one of the side sills and the other of the force resolvers has its the longitudinal force connection connected to the other of the side sills.

5 In a still further aspect of the invention there is a transverse force resolver for installation between a pair of longitudinally extending side sills of a railcar, comprising a pair of longitudinal force connections, one connected to one of the side sills and the other connected to the other of the side sills. A pair of transverse force transfer interfaces are provided for transmitting transverse forces to the side sills. Each of the transverse force transfer interfaces is offset from the one of the longitudinal force connections by a longitudinal
10 moment arm distance, and each of the transverse force transfer interfaces has longitudinal slip.

In an additional feature of these aspects of the invention the transverse force resolver can have longitudinal force transmitting interfaces chosen from the set of connections
15 consisting of (a) a bolted connection; (b) a pin jointed connection; (c) a welded connection; (d) a rivetted connection; and (e) a sliding connection with transverse slip. Similarly, in an additional feature of these aspects of the invention, the transverse force connections have abutments for transmitting forces to either side of the rail car.

In a further additional feature of any of the above aspects of the invention, the
20 transverse force resolver can include a cross beam having longitudinal force connections at either end thereof and a pair of mounted structures attached to transmit a moment thereto. One of the mounted structures extends longitudinally forwardly and the other extends longitudinally rearwardly therefrom. Each of the mounted structures has one of the transverse force connections mounted thereto. In a yet further additional feature of that additional feature, the
25 transverse force resolver includes a pair of the mounted structures that extend forwardly of the cross beam and a pair of the mounted structures extend rearwardly of the cross beam. Each of the mounted structures have one of the transverse force connections mounted thereto.

In a still further aspect of the invention, there is a floor panel assembly for a railcar having a pair of longitudinally extending side sills, comprising a first cross member extending between and connected to the side sills, and a moment arm structure mounted to the cross member for transmitting a moment thereto. The moment arm extends away from the cross member and has a transverse force transfer interface for transmitting a transverse force to one of the sills. The transverse force transfer interface having longitudinal slip.

In an additional feature of this aspect of the invention, the floor panel assembly can extend substantially perpendicular to the side sills. In another additional feature of this aspect of the invention, the floor panel assembly includes a second moment arm structure. The first moment arm structure extends longitudinally forwardly from the cross member and the second moment arm structure extends rearwardly thereof. The second moment arm structure has a transverse force connection, having longitudinal slip, for transmitting a force to the other side sill.

In yet a still further aspect of the invention, there is a well car comprising a pair of spaced apart, longitudinally extending side sills. A floor cross member extends between and is connected to the side sills. A moment arm structure is connected to the cross member for transmitting a moment thereto. The moment arm having a transverse force transfer interface for transmitting force to one of the side sills, and the transverse force transfer interface has longitudinal slip.

In an additional aspect of that invention, the well car can include a floor cross beam that extend between, and is connected to, the side sills, spaced from the cross member. The transverse force connection is mounted to the cross beam to transmit force to the one side sill through the beam.

In another additional feature of that aspect of the invention, the well car can further comprise another cross beam extending between and connected to the side sills, spaced apart from the one the cross beam. The cross member is located between the cross beams and

another moment arm structure connected to the cross member for transmitting a moment thereto. The other moment arm structure has a transverse force connection to the other cross beam, and the other transverse force connection has longitudinal slip.

BRIEF DESCRIPTION OF THE DRAWINGS

5 For a better understanding of the present invention and to show more clearly how it may be carried into effect, reference will now be made by way of example to the accompanying drawings, which show an apparatus according to the preferred embodiment of the present invention and in which:

Figure 1a is a plan view of an articulated railcar having three articulated well car units.

10 Figure 1b is a side view of the articulated railcar of Figure 1a.

Figure 1c is an enlarged plan view of one end unit of the railcar of Figure 1a.

Figure 1d is an enlarged side view of the end unit of Figure 1c.

Figure 2a is a schematic plan view of an unloaded end unit as in Figure 1c.

Figure 2b is a schematic plan view of a laterally loaded end unit as in Figure 1c.

15 Figure 2c is a load diagram of a floor panel assembly of the loaded end unit of Figure 1c.

Figure 3a is a view from beneath a floor panel of the end unit of Figure 1c.

Figure 3b is a side view of the floor panel of Figure 3a.

Figure 3c is a view of a free edge of the floor panel of Figure 3a.

20 Figure 3d is a view of a welded edge of the floor panel of Figure 3a.

Figure 4a shows a plan view of a moment resolver spine of the end unit of Figure 1c.

Figure 4b is a side view of the spine of Figure 4a.

Figure 4c is a cross section of the spine of Figure 4a taken on section '4c-4c'.

Figure 5a shows a plan view of the central cross beam of the end unit of Figure 1c.

25 Figure 5b shows a side view of the cross beam of Figure 5a.

Figure 5c shows a cross section of the cross beam of Figure 5a taken on section '5c-5c'.

Figure 6a shows a typical cross section of a pair of floor panels welded to a spine as indicated at cross section '6a-6a' of Figure 1c.

Figure 6b shows a typical cross section of an interface between a floor panel and a cross beam as indicated at cross section '6b-6b' of Figure 1c.

5 Figure 6c shows a view on Arrow '6c' of Figure 6b.

Figure 6d shows a view on Arrow '6d' of Figure 6b.

Figure 7a shows a section of a side beam of the end unit of Figure 1d taken on '7a-7a'.

Figure 7b shows an alternate section to that shown in Figure 7a.

Figure 8 shows an end view of the articulation end of the end unit of Figure 1c.

10 Figure 9a is an enlarged detail, in plan view of an articulated connection of the railcar of Figure 1c.

Figure 9b is an enlarged detail, in side view, of an articulated connection of the railcar of Figure 1d.

15 Figure 10a is an enlarged detail of a pin joint assembly taken on Arrow '10a' in Figure 1b.

Figure 10b is section of Figure 10a taken on '10b - 10b'.

Figure 11a shows an alternative floor panel for the railcar of Figure 1c.

Figure 11b shows a further alternative floor panel for the railcar of Figure 1c.

Figure 11c shows a still further alternative floor panel for the railcar of Figure 1c.

20 Figure 11d shows yet another further alternative floor panel for the railcar of Figure 1c.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The description of the invention is facilitated by commencing with reference to the Figures, in which some proportions have been exaggerated for the purposes of conceptual illustration. Referring to Figures 1a and 1b, an articulated rail car is shown generally as 20. It is made up of three articulated well car units, a first end unit 22, an intermediate unit 24 and

a second end unit **26** supported on a pair of standard end trucks **28** and **30**, and a pair of articulated trucks **32** and **34** located between units **22** and **24**, and between units **24** and **26** respectively.

The mechanism for resolving transverse shear force loads will be described generally and in a typical manner, with the aid of Figures **1c** and **1d**, and the loading schematics of Figures **2a**, **2b** and **2c**. A more detailed structural description and variations will follow after the general conceptual description. End unit **22** has a connector end structure, indicated generally as **36**, an articulated end structure indicated generally as **38**, and a well structure, indicated generally as **40** extending between them. Well structure **40** has a pair of opposed side members in the nature of left and right hand longitudinal beam assemblies **42** and **44**, held apart by a floor assembly **50**.

When a lateral load, F_L is applied, as for example when unit **22** travels through a curve, there will be a tendency for beam assemblies **42** and **44** to deflect, as grossly exaggerated in the schematic of Figure **2b**. For the sake of simplifying this conceptual description, load F_L is shown as a single point load at the mid point of unit **22**. In actual use lateral loads would be applied to unit **22** at each location at which a load rests on unit **22**, such as the container supports. However, the same concepts described would continue to apply. F_L could typically be the lateral force imparted on a container or a trailer (carried through its wheels). For the purposes of conceptual explanation it is shown as being applied at a central cross beam such as cross beam **52** of floor assembly **50**. Other cross beams include a pair of medial cross beams are shown as **54** and **56** and a pair of end cross beams **58** and **60**. Initially, in the unloaded condition, all cross members are at 90 degrees to the lower side sills of beam assemblies **42** and **44**. This defines right-angled rectangular areas in the floor, as in Figure **2a**. Conceptually, were the structure to deflect laterally, without the flooring in place, the rectangles would deform into the parallelogram shape shown in Figure **2b**.

While the general shape of the bays of the floor changes to a parallelogram configuration, the arms of H-shaped force resolvers **62** and **64**, continue to extend outwardly

at right angles from cross member 70. Consequently, the deflection due to F_L will cause H-shaped force resolvers 62 and 64 of floor assembly 50 to bind against beam assemblies 42 and 44 in the regions indicated as "A" and "B" respectively. The binding at "A" provides a direction reaction for F_L on cross member 70. The binding faces are in compression at "B", and thereby transmit a force into side beam assemblies 42 and 44. The reaction to this force is provided by the adjacent horizontal cross beam 54 or 56, which is placed in tension. Once again, the shear in beam assemblies 42 and 44 will cause the neighbouring H-shaped force resolver 66 to bind against side sill assemblies 42 and 44 in the regions indicated as "C" and "D", and so on, until the shear is carried all the way to end structures 36 and 38 for ultimate reaction by the counter plate which sides on the railcar trunk.

It will be noted that force resolver 62 is subject to a force couple, or moment, $M = a(F_L/2)$ due to the forces transmitted at regions "A" and "B". This moment is resisted by the bolted longitudinal force connection of force resolver cross member 70 at locations "E" and "F" to side beam assemblies 42 and 44 respectively, whose sum is equal to the product of the longitudinal forces transferred from the side sills, each F_s , multiplied by the moment arm, each being $b/2$ for a total of $2(F_s)(b/2) = F_s(b)$. In this manner the transverse force applied at "A" is reacted by a transverse force at "B", plus a tensile longitudinal force, F_T in assembly 42, and a compressive longitudinal force, F_C , in the opposite direction in assembly 44. Since force resolver 62 does not rotate in space, the moment couple of the forces transferred to and from assemblies 42 and 44 at locations "E" and "F" multiplied by the width between assemblies 42 and 44, is equal and opposite to the moment couple of the forces applied at "A" and "B" multiplied by the longitudinal moment arm distances defined by the longitudinal separation of the effective centers of, for example, "A" from "E" and "B" from "E". In the specific example shown these latter distances are each equal and are more or less $b/2$, the longitudinal half width of force resolver 62.

Force resolver 62 is not under longitudinal tensile stress. When railcar unit 22 stretches longitudinally due to draft loading or due to the tension in the side sill due to vertical loading, or both, the connection, or transverse, force interfaces, at "A" and "B" have longitudinal slip,

so that large tensile forces can not build up due to tensile strain, or displacements in the side sill from vertical and draft loads.

The bolted connections at "E" and "F" can be thought of as approximating, or being roughly equivalent to, pin jointed connections for the purposes of conceptual structural analysis. This approximation will remain true provided that the width, that is, the longitudinal extent of the bolted connection, is small relative to the overall size of the "H" shaped force resolver. That is, in general the moment defined by the forces transmitted at "C" and "D" multiplied by their moment arms is large, or very large, relative to any moment due to twisting at the bolted connections at "E" and "F". Furthermore, even that twisting is limited when cross member 70 is connected at both ends to side beam assemblies 42 and 44. Ideally, the bolted connections at "E" and "F" should transmit a purely shear force which causes either tension or compression in longitudinally extending side sill assemblies 42 and 44. Further, the approximation would remain true even if connection were a pin joint or a welded connection. A bolted connection has advantageous fatigue performance and is preferred. Bolting also makes it possible to remove and replace damaged cross members relatively easily.

The structure of well car unit 22 will now be described in detail, commencing with the structure of floor assembly 50, followed by side beam assemblies 42 and 44, and end structures 36 and 38. For the purposes of the present disclosure the floor assemblies shown are all the same, whether considering the multiple unit articulated railcar of Figures 1a and 1b, or the single unit well car of Figure 1c and 1d.

Referring to floor assembly 50 of unit 22, the spacing between main cross beam 52 and 28' medial cross beams 54 and 56 is unequal to the spacing between 28' medial cross beams 54 and 56 and 40' end cross beams 58 and 60. Four ISO 40' container cones located on 40' cross beams 58 and 60 are indicated as 72. The unequal pitch of the cross members is such that the well structure 40 can accommodate either two ISO 20' containers, each with one end located on cones 72, a single 40' ISO container, also located on cones 72, a single 45' domestic container or a single 48' domestic container. Depending on the configuration of

container carried in well structure **40**, unit **22** is designed also to support an upper, stacked 40' ISO container, or single stacked 45', 48' or 53' domestic containers.

Force resolver cross members **70**, **74**, **76**, and **78** are located midway between each successive pair of cross beams. They have either short floor panels, left handed ones designated as **80** and right handed ones as **82**, or long floor panels, left and right handed ones designated as **84** and **86**, respectively, welded to them as described in greater detail below. Four floor panels are generously welded to each cross member to form the H-shape shown. At each end of floor assembly **50** there is a pair of load spreading struts **88** and **90**. They transfer longitudinal loads between end structures **36** and **38** and side beam assemblies **42** and **44** through end cross beams **58** and **60**. Left and right hand cross beam socket fittings **92** and **94** receive the ends of struts **88** and **90**, as also described in greater detail below. Finally, at either end of floor assembly **50** left and right hand floor panel extensions **96** and **98** are located between socket fittings **92** and **94** and side beam assemblies **42** and **44**. Floor panel extensions **96** and **98** permit a 53' trailer to be carried in well structure **40**.

As noted above, force resolver **62** is made of cross member **70** and floor board panels **80** and **82**. Referring now to Figures **3a**, **3b**, **3c**, and **3d**, whether long or short, the construction of floor panel **82** is typical of all floor panels. For carrying a load it has a top plate **102**, having a welded edge **104**, for welding to cross member **70**, and a free edge **106** for locating freely slidably against cross beam **54** or **56** (as the case may be). A pair of spaced apart, parallel, longitudinally extending channels **108** and **110** are welded, toes up, to the underside of top plate **102**. Channels **108** and **110** extend between and terminate at a welded edge cross member end support plate **112** which depends from top plate **102** near welded edge **104**, and a free edge cross member support plate **114** which depends from top plate **102** near free edge **106**. A floor panel side support **116** lies generally in a shallow arc along, and is spaced inboard from, the longitudinal side sill edge **118** of top plate **102**. An abutment, in the nature of a generously welded floor panel corner tab **120**, is welded to the underside near a

cross beam cut-out 122, and top plate 102 has an upturned lip 124 for facing beam assembly 42 (or 44, as may be). A thrust block 126 is welded to the inboard corner, longitudinal end face of top plate 102 to bear against cross beam 54 or 56, as is described below.

5 Cross member 70 has a downwardly opening channel 130 whose toes terminate at a closure plate 132 that is welded to channel 130 to form a closed box section. Closure plate 132 extends beyond channel 130 to leave horizontal flanges 134 for accommodating, and carrying, the downward face of welded edge support plate 112. Cross member 70 terminates at each end with end flanges 136 having a vertical face 138 for fastening with bolts to side beam assembly 42 (or 44), and a pair of horizontal ears, 140 for bolted connection to the toe of an
10 angle iron of that side sill.

Cross beam 52, being typical, is made of a downwardly opening channel 146. A closure plate 148 is welded across the toes of channel 146 to form a box section, as above, with fore and aft extending horizontal flanges 150 for supporting the downward face of free edge support plate 114. It also has cast end flanges, 152, for bolted connection to side beam assemblies 42
15 and 44 at six places per flange - four on a vertical face 154 and two on opposed ears 156 for engagement with the toe of an angle iron of side beam assemblies 42 and 44 as the case may be.

On assembly, floor panels 82, 84, 86, and 88, as the case may be, are not welded to flanges 152, but are allowed to be located freely thereon. Floor panels 82, 84, 86, and 88 are
20 located with corner tab 120 snug against beam assembly 40 (or 42) which acts as a stop. Once in place, side reaction blocks 160 are generously welded to the vertical side faces of channel 146 as shown in Figure 6c. In this position one end face of each block 160 acts as a stop hard against thrust block 126. Thus the distal ends of floor panels 82, 84, 86, and 88, while not attached to channel 146, are prevented from moving laterally by the inboard face of beam
25 assembly 40 or 42 in one direction, and by thrust block 126 in the other direction and so a slip joint, or slip connection is formed that not only has slip in the longitudinal direction but also has a transverse force transfer interface for transmitting transverse force to either side beam

assembly 42 or 44 either directly or through the force transfer medium cross beam 54, 56 or some other cross beam as the case may be. Floor panels 82, 84, 86, and 88 are also restrained longitudinally by shims 162, of the largest possible dimension, fit on assembly between the vertical side face of channel 146 and support plate 112. Top plate 102 has cut-outs to permit
 5 installation of shims 162. The box section formed by closure plate 148 provides cross member 52 with resistance to deflection under longitudinal compressive loads such as may be imposed by floor panels 82, 84, 86, and 88.

Referring again to the conceptual illustrations of Figures 2a and 2b, the initially rectangular bays mentioned above are defined by longitudinally extending side beam
 10 assemblies 42 and 44, and by transversely extending cross beam pairs, such as, for example, beams 54 and 58. Taking the lateral force once again as F_L , and assuming that half or this force is carried to each of trucks 28 and 32, as, for example, upon the shear flow path indicated as 'S', then the force transferred at each of stops 160 and corner tabs 120 is nominally one quarter of F_L . In actual use the precise values of the forces transferred will
 15 depend on the placement of the loads and the relative stiffness of the various load paths. Lateral loading from either side of the car will produce a tensile load in cross beams 54 and 58. The load is carried across the bolted interface at the end of each beam, to the respective side sill, and then to the adjacent floor panel, or panels in the case of assemblies having stops 160.

A section of side beam assembly 42, identical to side sill assembly 44, taken in the region of maximum vertical bending moment at section '7a-7a' is shown in Figure 7a. It has a top chord member 166 in the form of a generally square or rectangular hollow tube 168, typically with a 1/4" or 5/16" wall thickness, surmounted by a 1" thick top chord plate 170, with fillet welds all along the edges. At each section 'X-X', shown in Figure 1d, plate 178
 20 is supplanted by a thinner, 1/2" thick plate 180. Returning to Figure 7, a web 174 is mounted to and extends downwardly from the inner face of hollow tube 168 to meet lower side sill 176 in the form of a 1/2" thick roll formed angle 178 having a 7 3/8" vertical leg and a 7" inwardly extending toe. A 1/2" thick reinforcement 182 is welded to the lower face of the toe of angle

178. Stiffeners in the nature of side posts **162** in the form of steel channel sections, are welded, toes inward, intermittently along the outside face of side sill assembly **42** at locations corresponding to the junctions of cross beams, such as cross beam **52**, and spines such as cross member **70**.

5 In an alternate embodiment, shown in Figure **7b**, a top chord member **184** has an upwardly opening roll formed, U-shaped channel **186** in place of tube **168**. The toes of channel **186** are welded to the underside of plate **170** (or **180** as the case may be), to yield a closed hollow section.

10 Referring to Figures **8**, **9a** and **9b**, at each end of railcar unit **22** loads carried in the floor and in the side beam assemblies **42** and **44** are transferred to and from a connector **190**. There are three primary load paths. The first load path, generally for carrying vertical shear loads, is from the connector into the webs of a stub sill **192**, thence into a bolster **194**, or superior cross member **208** to the vertical webs of beam assembly **42** or beam assembly **44**. The second load path, generally for carrying lateral loads, is from connector **190** through stub
15 sill **192**, through shear plate **196** to bulkhead **197** into a spreader plate **200** and thence through left and right hand struts **88** and **90** into floor assembly **50**. The third load path, generally for carrying longitudinal loads, is from connector **190** through stub sill **192**, through shear plate **196** to beam assembly **42** or beam assembly **44**. A significant portion of the longitudinal loads, perhaps 20 or 30 %, is carried from stub sill **192** along a downwardly curving and
20 spreading stub sill neck **198** into a spreader plate **200** and thence through left and right hand struts **88** and **90** into cross member **58** or **60**, as the case may be, and into side beam assembly **42** or beam assembly **44**. The eccentricity of the buff and draft loads, due to the difference in height of the centroid of the first moment of area of the stub sill from the height of the centroid of the first moment of area of the side beams, is reacted by a couple carried in bulkhead **197**
25 and bolster **194**.

Care has been taken on each of these paths to reduce stress concentrations that had formerly been found disadvantageous. On the first path lower side sill **176** and web **174** end

at a smoothly curved transition flange **202** which meets main body bolster **194**. Similarly, welded to the top of each of side beam assemblies **40** and **42** is a tapered superior transition member **204** which extends from well beyond the transition of web **174** into beam assembly **40** or **42**, to the end of beam assembly **40** or **42**. This permits a deeper transition section over the wheel well allowance, and a correspondingly better stress distribution. Further, it permits a deeper main bolster **194**, and a deeper transition from side beam assemblies **40** and **42** to bolster **194**, with lower stress levels generally, permitting a heavier loading generally. At the other end a similar superior transition member **206** carries loads into a cross member **208** at the same level as male or female side bearing arms **210** or **212** and allows those side bearing arms to be at a greater elevation from the rails, permitting a heavier duty articulated truck with greater load bearing capacity.

Along the second load path each of load spreading struts **88** and **90** is pin jointed to prevent them from transmitting a bending moment. The pin joints themselves are of non-conventional construction to carry high loading. As shown in Figures **10a** and **10b**, each strut has a trunnion **218** built up at each end for capture in apertures **220** of lower and upper sandwich plates **222** and **224**. Struts **88** and **90** by themselves have insufficient section to afford a hole for a pin, given the large forces involved. Similarly, a circumferential weld around a stub would lack sufficient weld area. Consequently trunnions **218** are formed from a three part assembly. There are two, opposed, hollow, cylindrical, half-moon shaped outer shells **226** that lie upon the upper, or lower, surface of struts **88** or **90**. They are welded inside and out, with externally smoothly ground fillets. Nested inside outer shells **226** is a single inner disc **228** of significantly smaller outer diameter than the inner diameter of shells **226**. The gap, or cavity, "G" between shells **226** and disc **228** is filled with repeated passes of weld metal. The area for transfer of shear from the longitudinal top and bottom members **230** and **232** of struts **88** and **90** to their respective trunnions **218** is greatly increased as compared to a single circumferential fillet weld. Further, members **230** and **232** need not be pierced, thus retaining their entire section. Further still, since members **230** and **232** do not have to have enlarged ends, the distance from the centerline of the pin joint to adjacent structure, is less than it might otherwise be.

As noted above, the well car units each have well structures, like end unit well structure **40**, that are suitable for carrying shipping containers or highway trailers, or a combination load. Each end of the unit is equipped with a trailer hitch **236** or **238** for receiving the king pin of a highway trailer. The decking adjacent to hitches **236** and **238** is kept clear of obstructions that could interfere with the landing gear, or under-carriage of highway trailers. To accommodate this need, and the need that the distance between brake cylinders not exceed 175 ft., a pair of saddle-bag brake reservoirs **240** and **242** have been partially tucked into the hollow next to the outer face of web **174** beneath top chord roll formed channel **168** and a brake valve **244** has been mounted between units **22** and **24**. Reservoir **240** is the normal, or auxiliary brake reservoir for trucks **28** and **32**. Reservoir **242** is the corresponding emergency brake reservoir. A standard brake valve **246** and standard combined reservoir **248** are mounted to the connector end of unit **26**, and is used for operating the brakes of trucks **30** and **34**. The brake piping is arranged to suit this location, but is otherwise conventional in nature.

All of the elements of the load paths have now been described in detail. A number of other configurations of floor panel are also possible as illustrated in Figures **11a**, **11b**, **11c** and **11d**. To begin, additional pairs of thrust and reaction blocks could be used rather than one pair per floor panel. Use of a large number of such blocks would yield a dovetailed joint appearance. Other configurations of force resolving floor panel are also possible. For example, it appears that a roughly triangular floor panel **250** could be used, either in a first alternative as shown in Figure **11a**, with two sides in slip connections **252** and **254** on opposite cross beams and one side **256** bolted to one side sill, or as in a second alternative, **260** shown in Figure **11b**, with opposite sides **262** and **264** bolted to the side sills and one side **266** in a thrust and reaction block joint against one cross beam **268**. The common feature of these alternatives is not that they be triangular, but rather that they employ three force transfer interface points, and that those points form a triangle.

In the alternative of Figures **11a** the shear will be resolved out of phase. However, two such triangular panels can be placed back-to-back, as in Figure **11c**, such that each triangular

bolted shear connection transmits a longitudinal force to one side sill. Similarly, a pair of three point force transfer panels can be oriented to lie across the car as in Figure 11d. However, it is preferred to use a four or six point embodiment in which the floor panels are rectangular for carrying highway trailer wheels, and which permit a transverse couple imposed on the floor panels to be reacted by a longitudinal couple in the side sills.

In each case, the force transfer at the thrust and reaction blocks is a purely normal force, applied across a transverse force transfer interface that is in compression. No moment is transmitted across the interface, and no tensile stress is generated to cause a crack to open. The bolted connections to the side sills have good fatigue characteristics: high tensile strength bolts place the flanges in compression. Furthermore, while it is possible to construct floor panels whose longitudinal force transmitting attachments to the respective side sills are not located at the same longitudinal location of the rail car, it is advantageous and preferred, for them to be at the same longitudinal location.

Although the embodiment illustrated in Figure 1c and described above is preferred, the principles of the present invention are not limited to this specific example which is given by way of illustration. It is possible to make other embodiments that employ the principles of the invention and that fall within its spirit and scope as defined by the following claims and their equivalents .

**THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**

1. A transverse force resolver for a railcar having a pair of longitudinally extending side beams, comprising:
a structure having a first longitudinal force transfer connection for transferring force to one side beam and a second longitudinal force transfer connection for transferring force to the other side beam;
a transverse force transfer interface for transmitting a transverse force to one of the side beams;
said transverse force transfer interface being offset from said first longitudinal force connection by a longitudinal moment arm distance; and
said transverse force transfer interface having a longitudinal slip.
2. The force resolver of claim 1 wherein at least one of said longitudinal force connections functions structurally as a pin joint connection.
3. The force resolver of claim 1 wherein said first longitudinal force transfer connection is locatable at a first longitudinal location relative to the one side beam, said second longitudinal force transfer connection is locatable at a second longitudinal location relative to the other side beam, and, when so located, said first and second longitudinal force transfer connections are opposite each other.
4. The force resolver of claim 1 further comprising:
another transverse force interface for transmitting a force to the other side beam;
said other transverse force interface is offset from said second longitudinal force connection by another longitudinal moment arm distance.
5. The force resolver of claim 4 wherein said first longitudinal force transfer connection is locatable at a first longitudinal location relative to the one side beam, said second longitudinal force transfer connection is locatable at a second longitudinal location relative to the other side

beam, and, when so located, said first and second longitudinal force transfer connections are opposite each other.

6. The force resolver of claim 1 wherein said structure includes a cross beam and a moment structure mounted thereto; said longitudinal force connections are located at opposite ends of said cross beam; said moment structure extends away from said cross beam; and said transverse force interface is mounted to said moment structure.

7. The force resolver of claim 1 wherein said transverse force interface includes an abutment for engaging a reaction member mounted to said side beam.

8. The force resolver of claim 1 wherein said transverse force interface includes abutments for abutting reaction stops for transmitting clockwise and counterclockwise moments to said longitudinal force connections.

9. The force resolver of claim 1 wherein said structure includes a moment structure, and said moment structure is a floor panel of said railcar.

10. A transverse force resolver for a railcar having a pair of longitudinally extending side sills, comprising:
a structure having a longitudinal force connection for connection to one of said side sills;
a pair of transverse force transfer interfaces for transmitting transverse forces to said side sills;
one of said transverse force transfer interfaces being offset from said longitudinal force connection by a longitudinal moment arm distance;
and
said transverse force transfer interfaces having longitudinal slips.

11. A transverse force resolver, as claimed in claim 10, said railcar having a pair of spaced apart cross beams extending between and connected to said side sills, wherein each of said transverse force interfaces is mountable to one of said cross beams.

12. The force resolver of claim 11 wherein said structure includes a floor panel of said rail car.
13. A rail car having:
 - a pair of longitudinally extending side sills;
 - a pair of spaced apart cross beams extending between and connected to said side sills; and
 - a pair of force resolvers, each of said force resolvers including
 - a structure having a longitudinal force connection for transmitting longitudinal forces to one of said side sills,
 - a pair of transverse force transfer interfaces for transmitting transverse forces through said cross beams to said side sills,
 - one of said transverse force transfer interfaces being offset from said longitudinal force connection by a longitudinal moment arm distance, and
 - said transverse force transfer interfaces having longitudinal slips,each of said force resolvers having one of its said transverse force interfaces mounted to one of said beams, and the other of its said transverse force interfaces mounted to the other of said beams,
 - one of said force resolvers having its said longitudinal force connection connected to one of said side sills and the other of said force resolvers having its said longitudinal force connection connected to the other of said side sills.
14. A rail car having a pair of longitudinally extending side sills and a transverse force resolver installed between said side sills, the transverse force resolver being a structural member having:
 - a pair of longitudinal force connections, one connected to one of the side sills and the other connected to the other of the side sills;
 - a pair of transverse force transfer interfaces for transmitting transverse forces to the side sills;
 - each of said transverse force transfer interfaces being offset from the one of said longitudinal force connections by a longitudinal moment arm distance;
 - said pair of longitudinal force connections being operable to transmit a first set of forces exerting a first moment couple on said structural member, said pair of transverse force interfaces being operable to transmit forces exerting a second moment couple on said structural member, said second moment couple being

opposed to said first moment couple; and
each of said transverse force transfer interfaces having a longitudinal slip.

15. The rail car of claim 14 wherein one of said longitudinal force connections is located at a first longitudinal location relative to the one side beam, another one of said longitudinal force transfer connections is located at a second longitudinal location relative to the other side beam, and, when so located, said longitudinal force transfer connections are opposite each other.

16. The rail car of claim 14 wherein said longitudinal force connections function as pin joints.

17. The rail car of claim 14 wherein said longitudinal force connections are chosen from the set of connections consisting of:

- (a) a bolted connection;
- (b) a pin jointed connection;
- (c) a welded connection;
- (d) a rivetted connection;
- (e) a sliding connection with transverse slip.

18. The rail car of claim 14 wherein said transverse force interfaces have abutments for transmitting forces to either side of said rail car.

19. The rail car of claim 14 wherein one of said transverse force interfaces is offset longitudinally forwardly of said one longitudinal force connection and the other one of said transverse force interfaces is offset longitudinally rearwardly of said one of said longitudinal force connections.

20. The rail car of claim 14 wherein said transverse force interfaces are equally longitudinally offset from one of said longitudinal force connections.

21. The transverse force resolver of claim 15 wherein said structural member includes a cross beam having said longitudinal force connections at either end thereof and a pair of mounted structures attached to said beam to transmit a moment thereto, one of said mounted structures extending longitudinally forwardly from said beam, and the other extending longitudinally rearwardly

from said beam, each of said mounted structures having one of said transverse force interfaces mounted to said mounted structure.

22. The rail car of claim 21 wherein said transverse force resolver includes a pair of said mounted structures extending forwardly of said cross beam and a pair of said mounted structures extending rearwardly of said cross beam, each of said mounted structures having one of said transverse force connections mounted to said each mounted structure.

23. The rail car of claim 21 wherein said mounted structures are floor panels.

24. A floor panel assembly for a railcar having a pair of longitudinally extending side sills, comprising:

- a first cross member extending between and connected to the side sills;
- a first moment arm structure mounted to said cross member for transmitting a moment thereto;
- said moment arm structure extending away from said cross member and having a first transverse force transfer interface for transmitting a transverse force to one of said sills; and
- said transverse force transfer interface having a longitudinal slip.

25. The floor panel assembly of claim 24 wherein said cross member extends perpendicular to the side sills.

26. The floor panel assembly of claim 24 wherein said floor panel assembly includes a second moment arm structure, said first moment arm structure extending longitudinally forwardly from said cross member and said second moment arm structure extending rearwardly of said cross member, said second moment arm structure having a second transverse force transfer interface, said second force transfer interface having a longitudinal slip, for transmitting a force to the other of the side sills.

27. The floor panel assembly of claim 24 wherein said floor panel assembly includes a pair of said first moment arm structures extending forwardly from said cross member and a pair of said moment arm structures extending rearwardly of said cross member.

28. The floor panel assembly of claim 26 wherein each of said transverse force transfer interfaces has an abutment mounted to transmit a transverse force to one of said side sills of said railcar.

29. The floor panel assembly of claim 26 wherein each of said moment arm structures includes a floor panel for supporting freight.

30. A well car comprising:

- a pair of spaced apart, longitudinally extending side sills;
- a floor cross member extending between and connected to said side sills;
- a moment arm structure connected to said cross member for transmitting a moment to said cross member;
- said moment arm structure having a transverse force transfer interface for transmitting force to one of said side sills; and
- said transverse force transfer interface having a longitudinal slip.

31. The well car of claim 30 wherein said transverse force interface includes an abutment for engaging said one of said side sills.

32. The well car of claim 30 further comprising:

- a floor cross beam extending between, and connected to, said side sills, spaced from said cross member; and
- said transverse force interface is mounted to said cross beam to transmit force to said one side sill through said cross beam.

33. The well car of claim 32 wherein said cross member and said cross beam extend perpendicularly to said side sills.

34. A well car as claimed in claim 32 wherein said cross member is connected to said side sills at connections that function structurally as pin jointed connections.

35. A well car as claimed in claim 32 wherein said well car further comprises another cross beam extending between and connected to said side sills, spaced apart from said floor cross beam, said cross member being located between said cross beams, and another moment arm structure connected to said cross member for transmitting a moment to said cross member, said other moment arm structure having a transverse force interface mounted to said other cross beam, and said other transverse force interface having a longitudinal slip.

36. A rail car comprising:

a pair of first and second side beams, and a pair of first and second end structures;
said end structures being carried by rail car trucks;
said side beams extending in a longitudinal direction between said end structures to define a well for lading therebetween;
said side beams each including a top chord, a lower side sill and a web extending between said top chord and said lower side sill;
at least one transverse cross member attached between the lower side sills of the respective first and second side beams;
and said cross member including a monolithic member having a first end, a second end, and a spanning portion extending between said first and second ends;
said first and second ends having respective first and second attachment fittings formed thereat, said first and second attachment fittings being portions of said monolithic member, said first and second attachment fittings being attached to said first and second lower side sills at respective first and second moment connections; and
said first and second attachment fittings each including one fitting oriented to be fastened to one of said side beams along a first fastener axis, and another fitting oriented to fasten to that one of said side beams on another fastener axis, said axes extending in different directions.

37. A rail car comprising:

a pair of first and second side beams, and a pair of first and second end structures;
said end structures being carried by rail car trucks;
said side beams extending in a longitudinal direction between said end structures to define a well therebetween;
said side beams each including a top chord, a lower side sill and a web extending between

said top chord and said lower side sill;
at least one cross member extending in a transverse direction between the lower side sills of
the respective first and second side beams; and
said cross member including a monolithic member having a first end, a second end, and a
spanning portion extending between said first and second ends;
said first and second ends having respective first and second attachment fittings formed
thereat, said first and second attachment fittings being portions of said monolithic
member, said first attachment fitting being attached to said first lower side sill and
said second attachment fitting being attached to said second lower side sill;
each said lower side sill having an upwardly extending leg portion and a laterally inwardly
extending toe;
said first attachment fitting having a first portion formed to mate with the upwardly
extending leg portion of said first lower side sill;
said first attachment fitting having a second portion formed to locate above the laterally
inwardly extending toe of said first lower side sill; and
said first attachment fitting having bores defined therein to permit said first attachment fitting
to be fastened to said first side beam.

38. The rail car of claim 37, wherein a floor panel is welded to said cross member.

39. The rail car of claim 37, wherein the first side beam has an upwardly extending stiffener
mounted adjacent to said cross member.

40. The rail car of claim 37, wherein said first portion of said first attachment fitting includes a
first flange having one of said bores defined therein to permit said first flange to be fastened to the
upwardly extending leg portion of the lower side sill.

41. The rail car of claim 40, wherein said spanning portion has an upwardly facing surface lying
in a horizontal plane, and said first flange extends upwardly of said horizontal plane.

42. The rail car of claim 40, wherein said one of said bores defined in said first flange is a
horizontal bore through which to fasten said first flange to the upwardly extending leg portion of the
first lower side sill.

43. The rail car of claim 37, wherein said second portion of said first attachment fitting includes a flange for mating engagement with the laterally inwardly extending toe of the first lower side sill.

44. The rail car of claim 37, wherein:

said first portion of said first attachment fitting includes a first flange having one of said bores defined therein to permit said first flange to be fastened to the upwardly extending leg portion of the first side sill;

and said second portion of said first attachment fitting includes a second flange having another of said bores defined therein to permit said second flange to be fastened to the laterally inwardly extending toe of the first side sill.

45. The rail car of claim 44, wherein said second portion of said first attachment fitting includes a third flange having a further one of said bores defined therein to permit said third flange to be fastened to said laterally inwardly extending toe of the first lower side sill.

46. The rail car of claim 37, wherein:

said first portion of said first attachment fitting includes a first flange, said first flange having a first face for contacting the upwardly extending leg portion of the first lower side sill, said first face lying in a vertical plane and having some of said bores defined therein to permit said first flange to be fastened to the upwardly extending leg portion of the first lower side sill; and

said second portion of said first attachment fitting includes a second flange having a second face for mating engagement with the laterally inwardly extending toe of said first lower side sill, said second face lying in a horizontal plane.

47. The rail car of claim 46, wherein said bores defined in said first flange have horizontal axes, and said horizontal axes of said bores are offset upwardly from said horizontal plane of said second face of said second flange.

48. The rail car of claim 46, wherein said second flange has a bore defined therein to permit said second flange to be fastened to the laterally inward extending toe of said first lower side sill, said bore in said second flange has a vertical axis, and said vertical axis of said bore in said second flange

is horizontally offset laterally inboard of the vertical plane of said first face of said first flange.

49. The rail car of claim 46, wherein:

said bores defined in said first flange have horizontal axes, and said horizontal axes of said bores are offset upwardly from said horizontal plane of said second face of said second flange; and

said second flange has a bore defined therein to permit said second flange to be bolted to the laterally inward extending toe of said first lower side sill, said bore in said second flange has a vertical axis, and said vertical axis of said bore in said second flange is horizontally offset laterally inboard of the vertical plane of said first face of said first flange.

50. The rail car of claim 45, wherein said second flange meets said first flange at a first corner, and said third flange meets said first flange at a second corner.

51. The rail car of claim 45, wherein said second and third flanges each have a face for contacting said laterally inwardly extending toe of said first lower side sill, and said respective faces are coplanar.

52. The rail car of claim 50, wherein said second and third flanges extend away from said first and second corners respectively and toward said second end of said monolithic member.

53. The rail car of claim 52, wherein said second attachment fitting is the same as said first attachment fitting.

54. The rail car of claim 37, wherein:

a cover plate is mounted to said monolithic member to form a compound beam;

a portion of said cover plate forms a first flange portion of said compound beam;

a portion of said monolithic member forms a second flange portion of said compound beam;

and

said second flange portion is spaced from said first flange portion, said first and second flange portions being co-operable to resist flexure of said cross member.

55. The rail car of claim 54, wherein:
said cover plate has a back member and first and second toes extending away therefrom to
define a channel having a U-shaped cross-section; and
each of said toes is attached to a said monolithic member to form a closed hollow section.
56. The rail car of claim 55 wherein said cover plate has a first end attached to said first end
fitting of said monolithic member, and a second end attached to said second end fitting of said
monolithic member.
57. The rail car of claim 55, wherein the monolithic member has a first downward step and a
second downward step formed therein, each of said first and second steps located laterally inboard of
said toes of the lower side sills when said cross member is attached to said first and second side sills,
said spanning portion lying between said first and second downward steps.
58. The rail car of claim 57, wherein said toes of said cover plate each have a profiles cut to
conform to said steps.
59. The rail car of claim 55, wherein:
said monolithic member has a length between said first and second ends and a width
perpendicular to said length;
said U-shaped channel has a width; and
the width of said U-shaped channel is less than said width of said monolithic member, said
monolithic member having margins extending beyond said cover.
60. The rail car of claim 36 wherein:
each of said lower side sills has an upwardly extending leg portion and a laterally inwardly
extending toe;
said first attachment fitting has a first portion formed to mate with the upwardly extending
leg portion of said lower side sill of said first side beam;
said first attachment fitting has a second portion formed to locate above the laterally inwardly
extending toe of said lower side sill of said first side beam; and
said first attachment fitting has bores defined therein to permit said first attachment fitting to
be bolted to said first side beam;

said second attachment fitting has a first portion formed to mate with the upwardly extending leg portion of said lower side sill of said second side beam;

said second attachment fitting has a second portion formed to locate above the laterally inwardly extending toe of said lower side sill of said second side beam; and

said second attachment fitting has bores defined therein to permit said second attachment fitting to be bolted to said second side beam;

said first portion of said first attachment fitting includes a first flange portion matable with said first side beam; and

said first portion of said second attachment fitting includes a first flange portion matable with said second side beam.

61. A cross member for a rail road well car, the rail road well car having a pair of first and second side beams, and a pair of first and second end structures, the side beams extending in a longitudinal direction between the end structures to define a well for lading therebetween, the side beams each including a top chord, a lower side sill and a web extending between the top chord and the lower side sill, each of the lower side sills having an upwardly extending leg portion and a laterally inwardly extending toe, wherein said cross member comprises:

a monolithic member having a first end, a second end, and a spanning portion extending between said first and second ends;

said first and second ends having respective first and second moment connection attachment fittings formed thereat, said first and second moment connection attachment fittings being portions of said monolithic member, said;

said first moment connection attachment fitting being attachable to the lower side sill of the first side beam to form a first moment connection therewith, and said second moment connection attachment fitting being attachable to the lower side sill of the second side beam to form a second moment connection therewith, said moment connections being moment connections; and

said first and second attachment fittings each including one fitting oriented to be fastened to one of said side beams along a first fastener axis, and another fitting oriented to fasten to that one of said side beams on another fastener axis, said axis extending in different directions.

62. A cross member for a rail road well car, the rail road well car having a pair of first and second

side beams, and a pair of first and second end structures, the side beams extending in a longitudinal direction between the end structures to define a well for lading therebetween, the side beams each including a top chord, a lower side sill and a web extending between the top chord and the lower side sill, each of the lower side sills having an upwardly extending leg portion and a laterally inwardly extending toe, wherein said cross member comprises:

- a monolithic member having a first end, a second end, and a spanning portion extending between said first and second ends;
- said first and second ends having respective first and second attachment fittings formed thereat, said first and second attachment fittings being portions of said monolithic member;
- said first attachment fitting being attachable to the lower side sill of the first side beam, and said second attachment fitting being attachable to the lower side sill of the second side beam;
- said first attachment fitting having a first portion formed to mate with the upwardly extending leg portion of the lower side sill of the first side beam;
- said first attachment fitting having a second portion formed to locate above the laterally inwardly extending toe of the lower side sill of the first side beam; and
- said first attachment fitting having bores defined therein to permit said first attachment fitting to be fastened to the first side beam.

63. The cross member of claim 62, wherein said cross member has a floor panel welded thereto.

64. The cross member of claim 62, wherein said first portion of said first attachment fitting includes a first flange having one of said bores defined therein to permit said first flange to be bolted to the upwardly extending leg portion of the lower side sill of the first side beam.

65. The cross member of claim 64, wherein said spanning portion has an upwardly facing surface lying in a plane, and said first flange extends upwardly of said plane.

66. The cross member of claim 62, wherein one of said bores is a horizontal bore defined in said first flange to permit said first flange to be fastened to the upwardly extending leg portion of the lower side sill of the first side beam.

67. The cross member of claim 62, wherein said second portion of said first attachment fitting includes a flange for mating engagement with the laterally inwardly extending toe of the lower side sill of the first side beam.

68. The cross member of claim 62, wherein:
said first portion of said first attachment fitting includes a first flange having one of said bores defined therein to permit said first flange to be fastened to the upwardly extending leg portion of the lower side sill of the first side beam; and
said second portion of said first attachment fitting includes a second flange having another of said bores defined therein to permit said second flange to be fastened to the laterally inwardly extending toe of the lower side sill of the first side beam.

69. The cross member of claim 68, wherein said second portion of said first attachment fitting includes a third flange having a further one of said bores defined therein to permit said third flange to be fastened to the laterally inwardly extending toe of the lower side sill of the first side beam.

70. The cross member of claim 62, wherein:
said first portion of said first attachment fitting includes a first flange, said first flange having a first face for contacting the upwardly extending leg portion of the lower side sill of the first side beam, said first face lying in a vertical plane and having one of said bores defined therein to permit said first flange to be fastened to the upwardly extending leg portion of the lower side sill of the first side beam; and
said second portion of said first attachment fitting includes a second flange having a second face lying in a horizontal plane for mating engagement with the laterally inwardly extending toe of the lower side sill of the first side beam.

71. The cross member of claim 70, wherein said one of said bores defined in said first flange has an horizontal axis, and said horizontal axis of said one of said bores is offset upwardly from said horizontal plane of said second face of said second flange.

72. The cross member of claim 70, wherein said second flange has another of said bores defined therein to permit said second flange to be fastened to the laterally inward extending toe of the lower side sill of the first side beam, said bore in said second flange has a vertical axis, and said vertical

axis of said bore in said second flange is horizontally offset laterally inboard of the vertical plane of said first face of said first flange.

73. The cross member of claim 70, wherein:

said first flange has more than one of said bores defined therein;

said bores defined in said first flange have horizontal axes, and said horizontal axes of said bores are offset upwardly from said horizontal plane of said second face of said second flange; and

said second flange has another of said bores defined therein to permit said second flange to be bolted to the laterally inward extending toe of the lower side sill of the first side beam;

said bore in said second flange has a vertical axis; and

said vertical axis of said bore in said second flange is horizontally offset laterally inboard of the vertical plane of said first face of said first flange.

74. The cross member of claim 69, wherein said second flange meets said first flange at a first corner, and said third flange meets said first flange at a second corner.

75. The cross member of claim 69, wherein said second and third flanges each have a face for contacting said laterally inwardly extending toe of the lower side sill of the first side beam, and said respective faces are co-planar.

76. The cross member of claim 74, wherein said second and third flanges extend away from said first and second corners respectively and toward said second end of said monolithic member.

77. The cross member of claim 76, wherein said second attachment fitting is the same as said first attachment fitting.

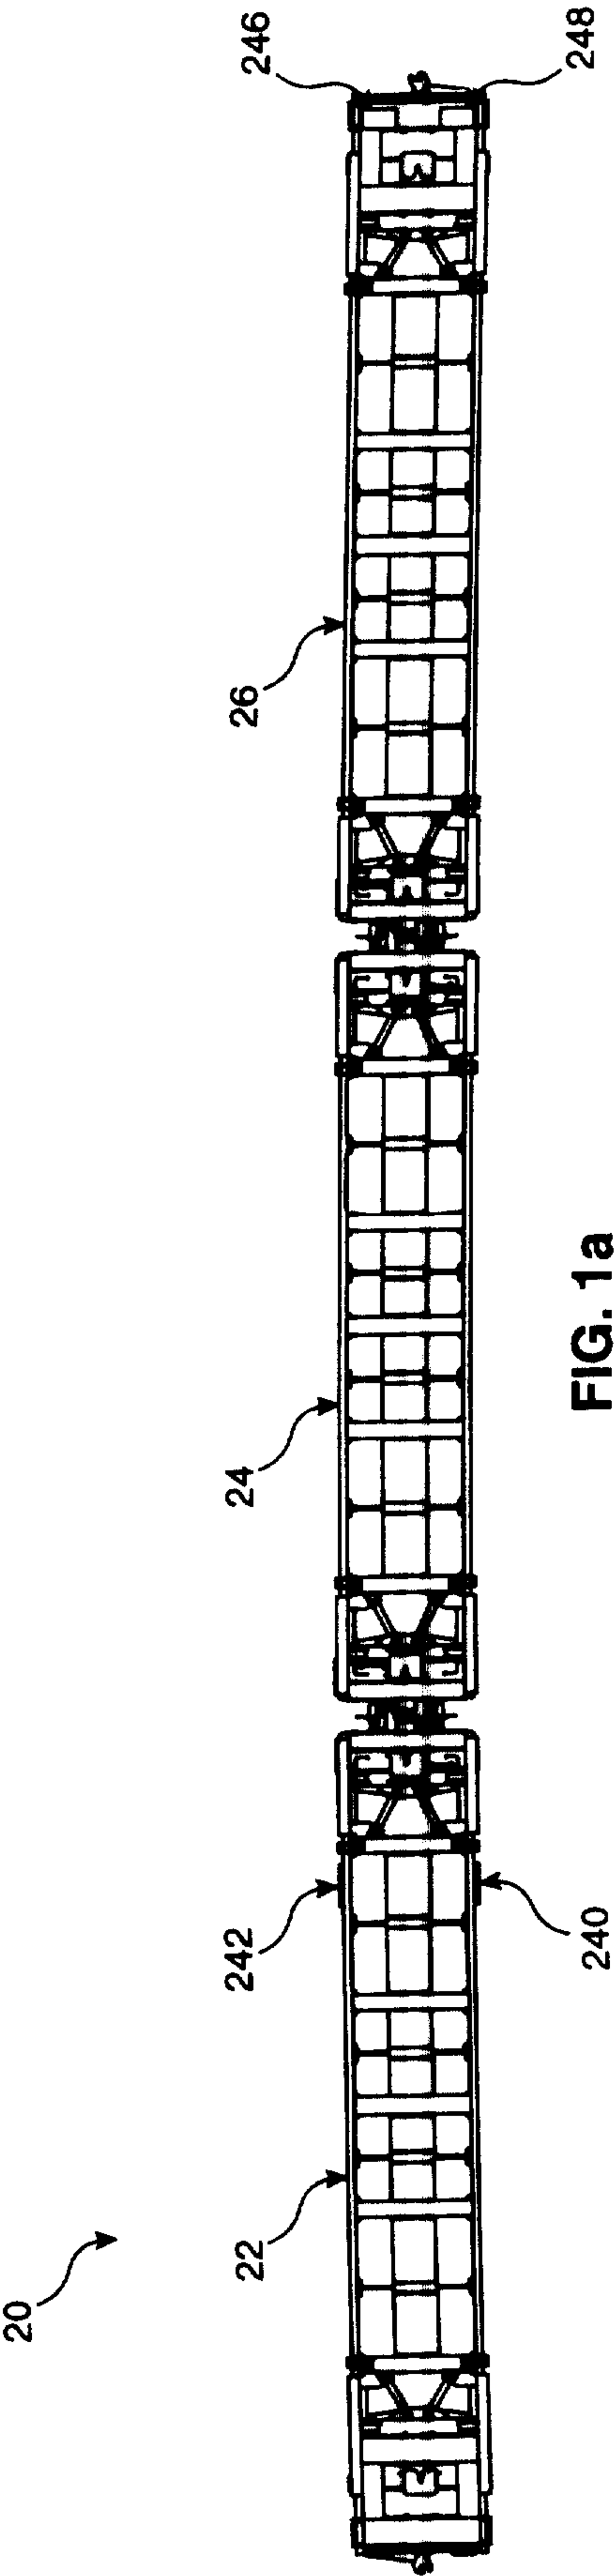


FIG. 1a

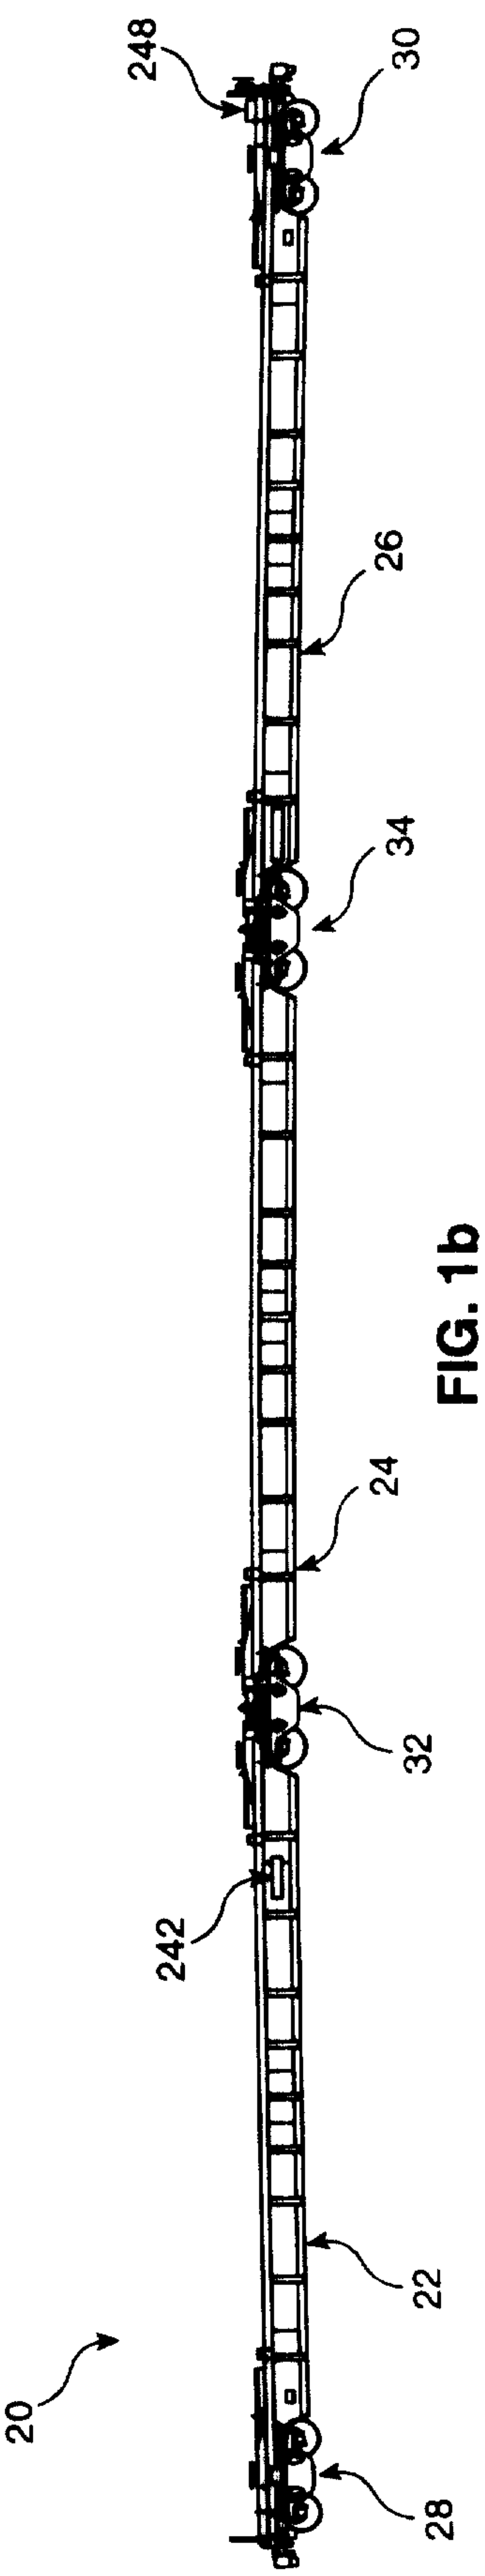


FIG. 1b

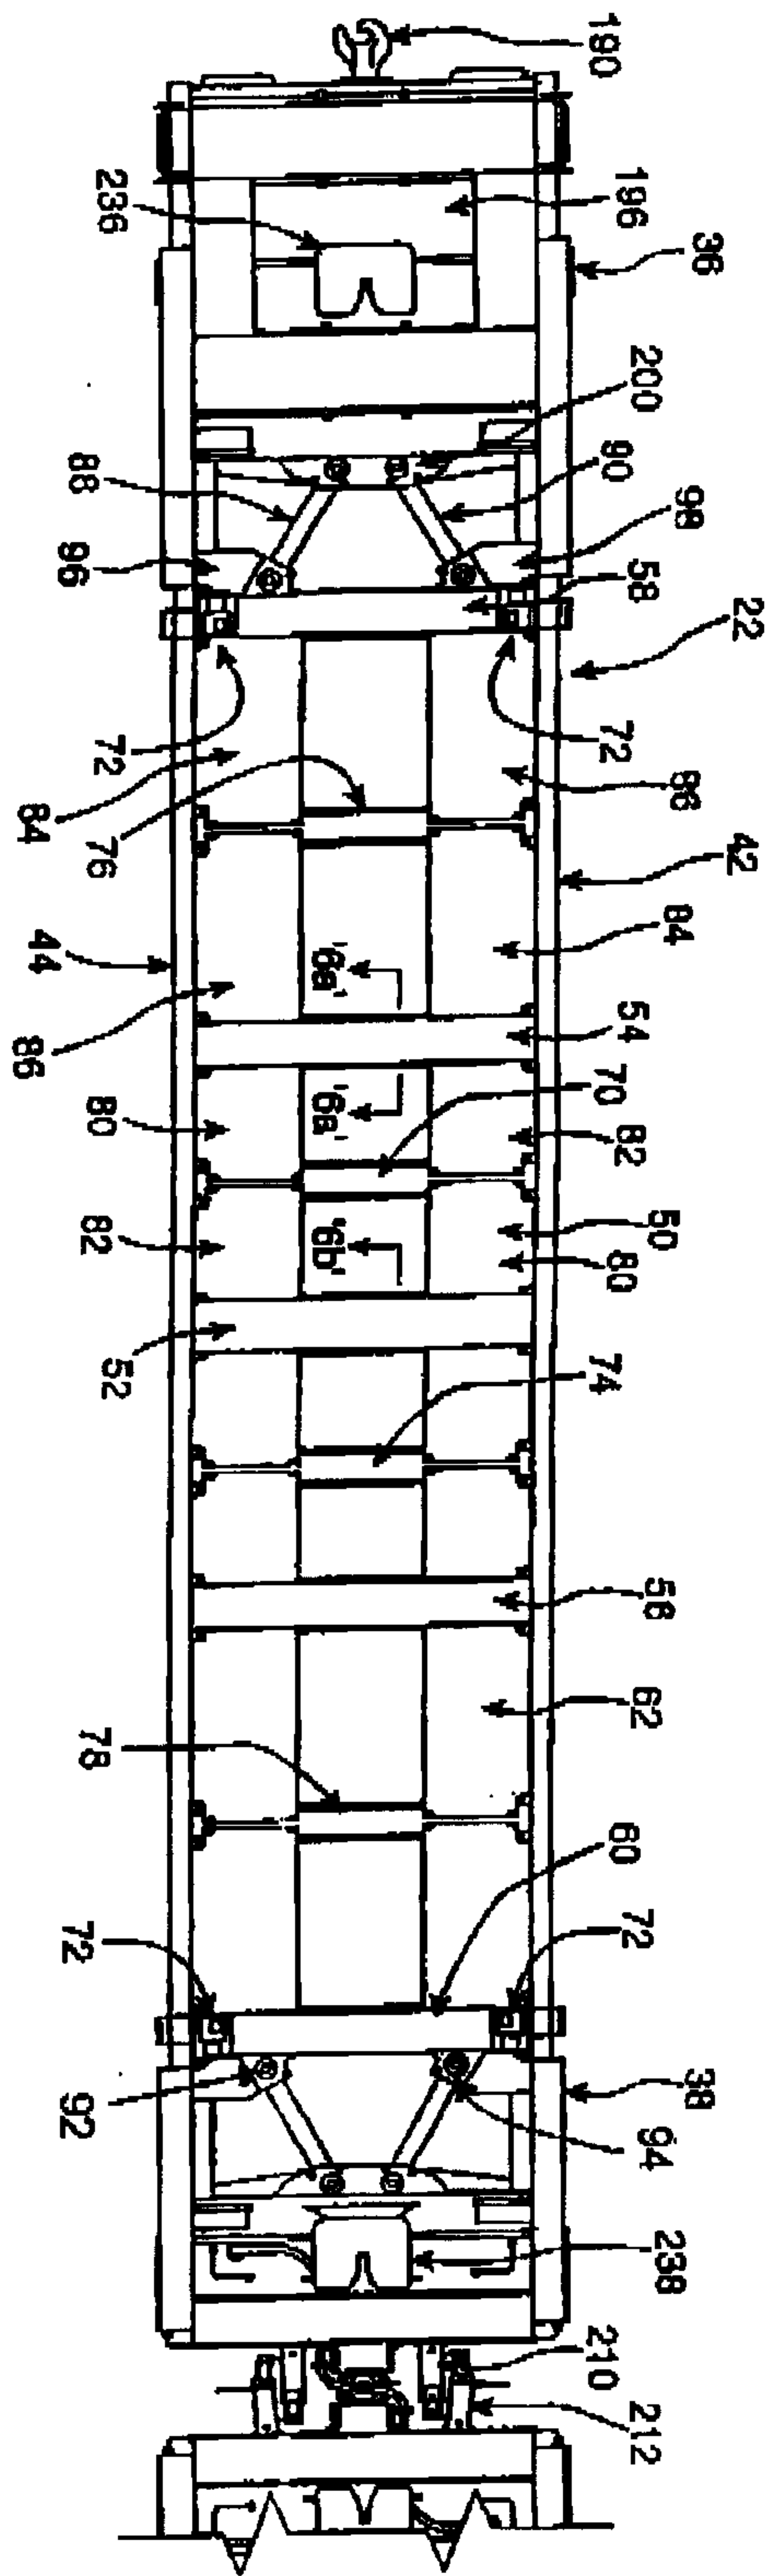


FIG. 1c

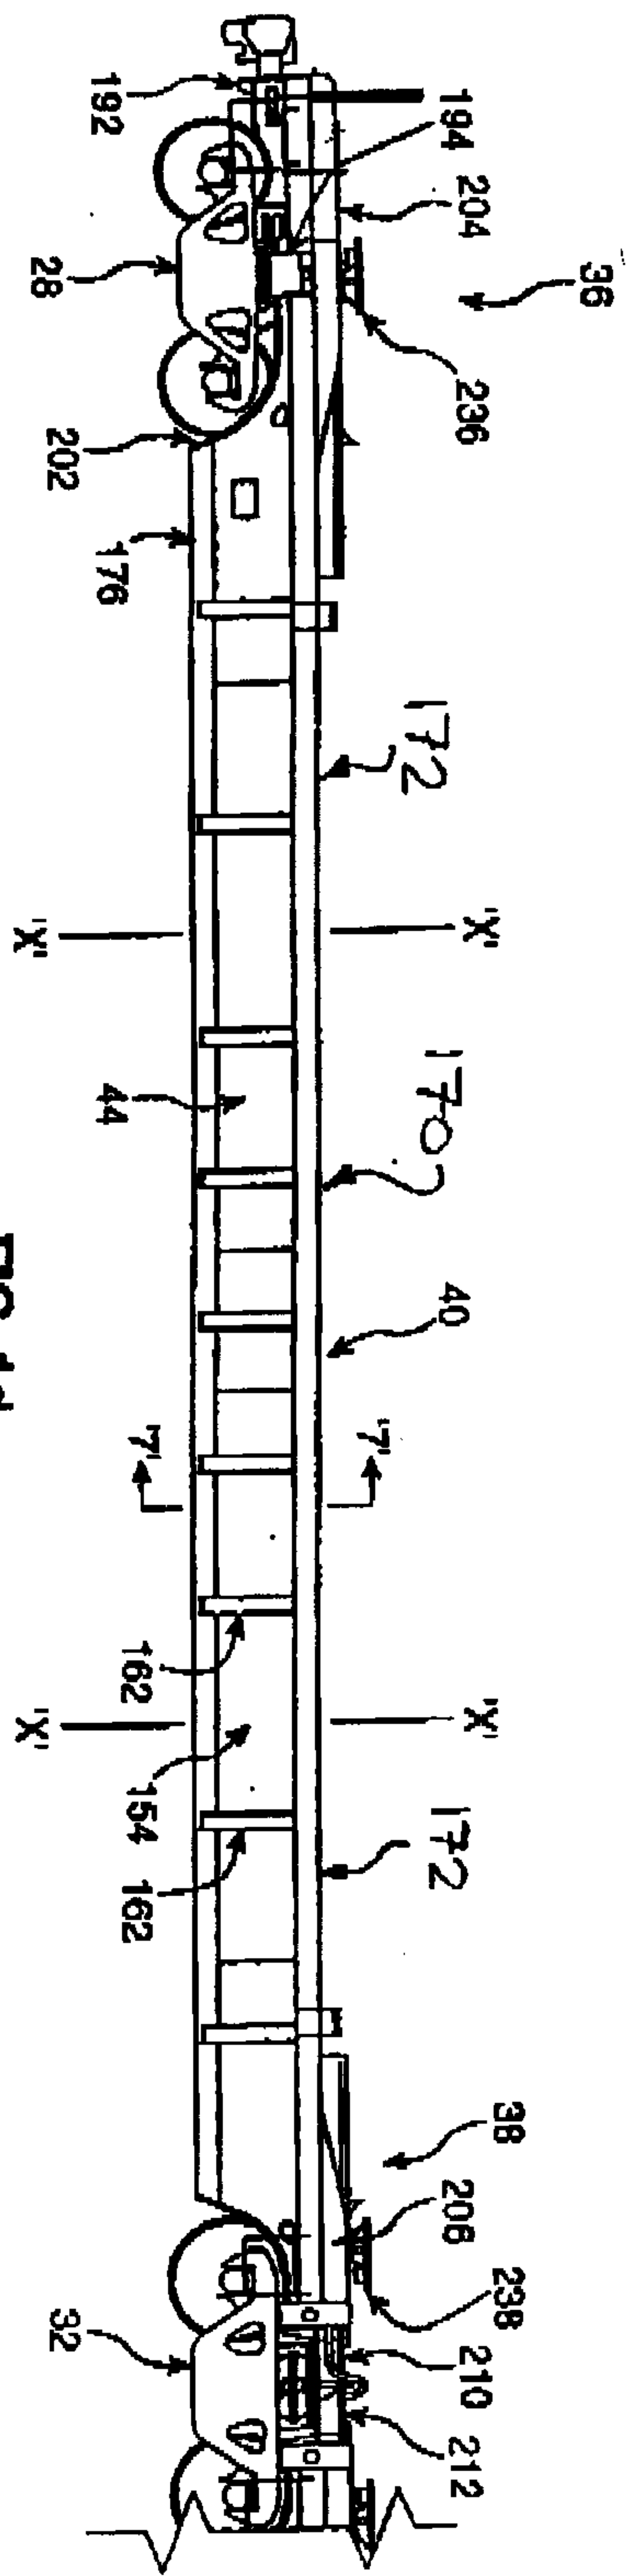


FIG. 1d

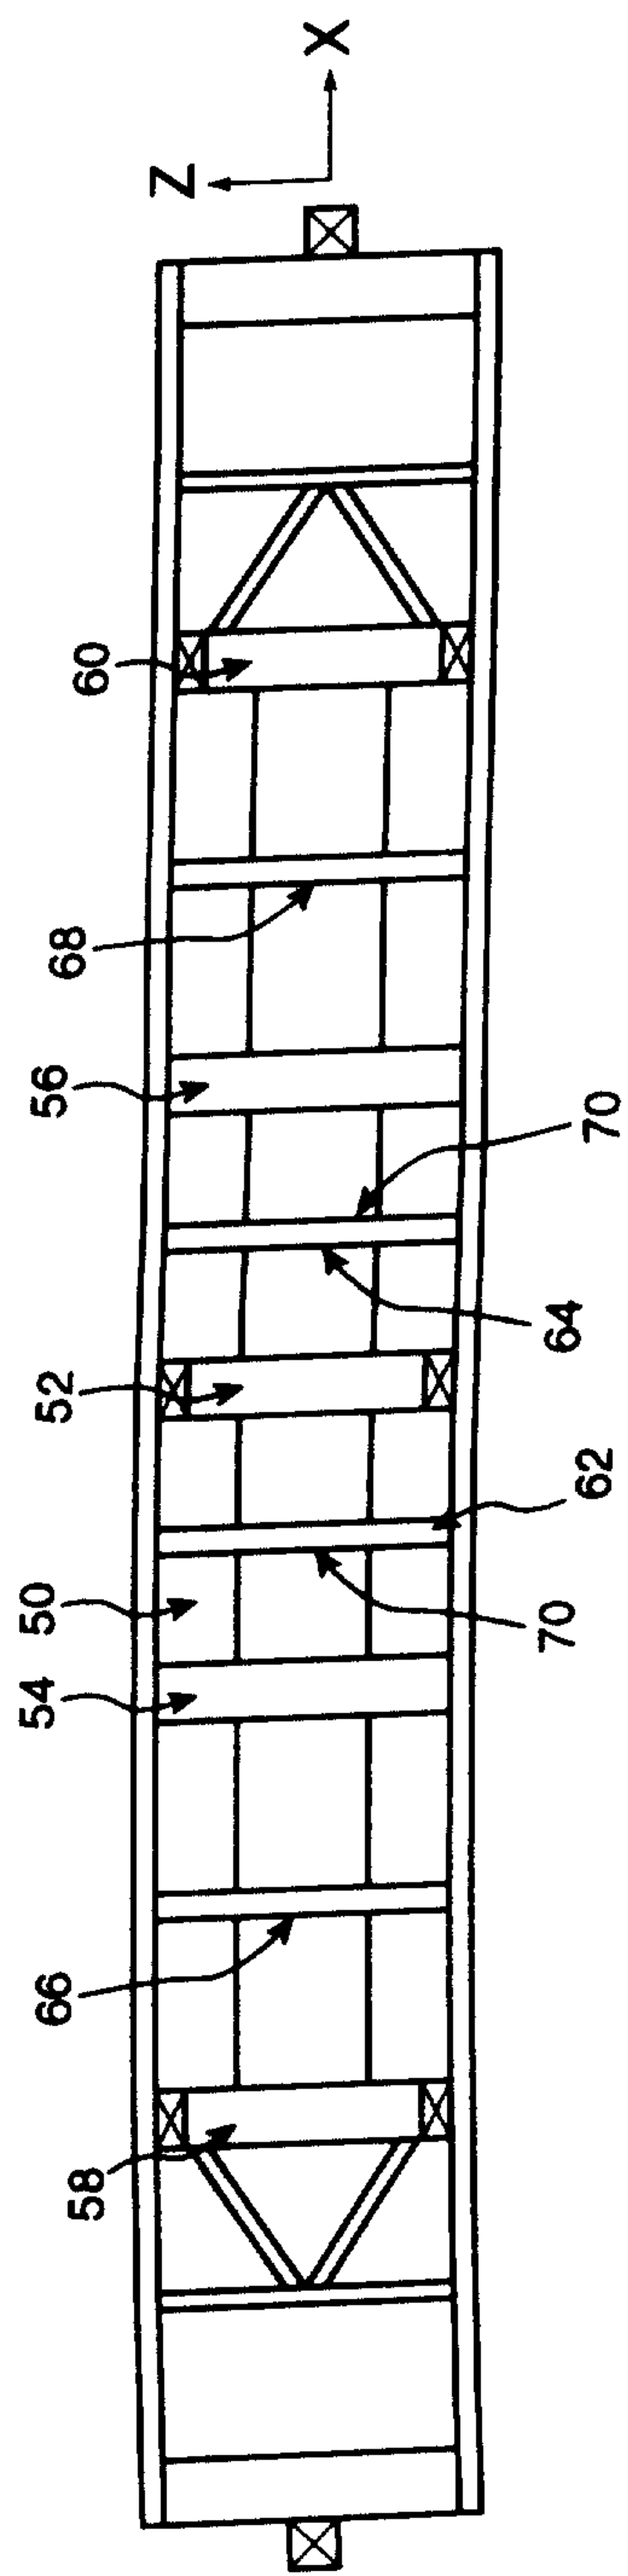


FIG. 2a

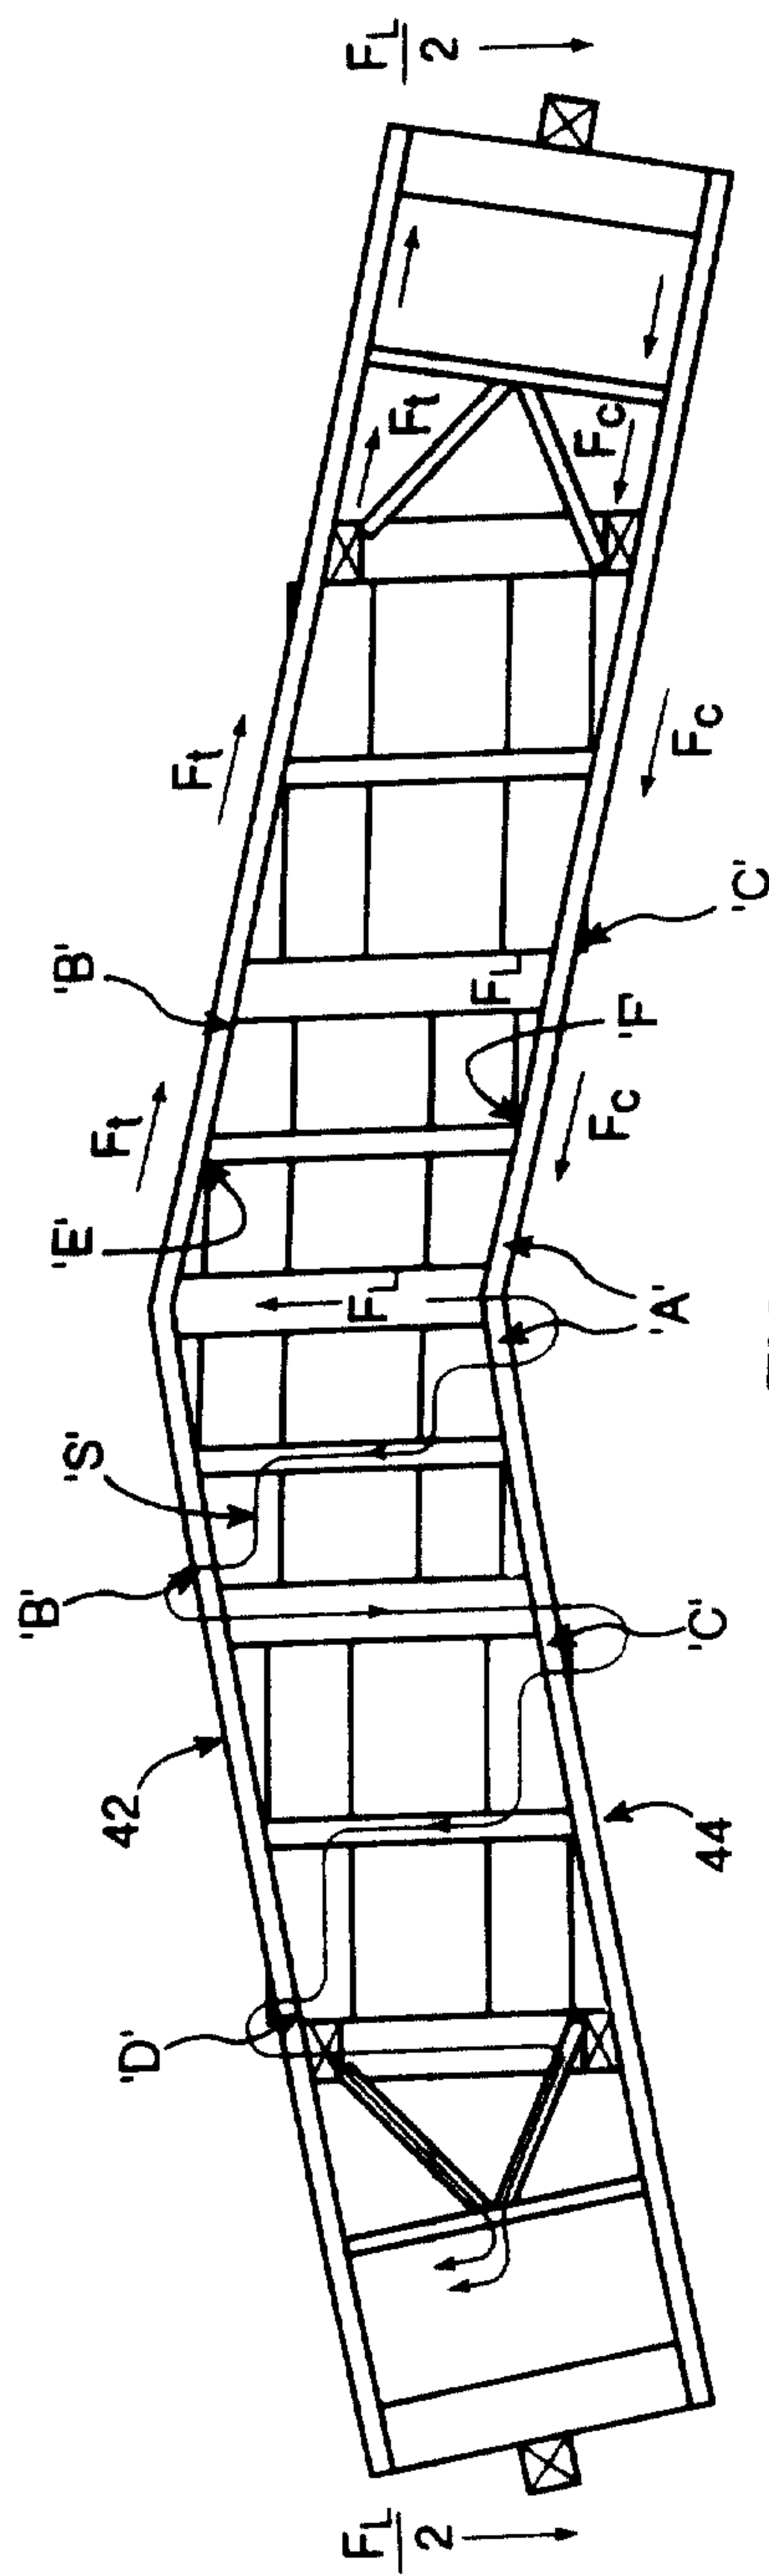


FIG. 2b

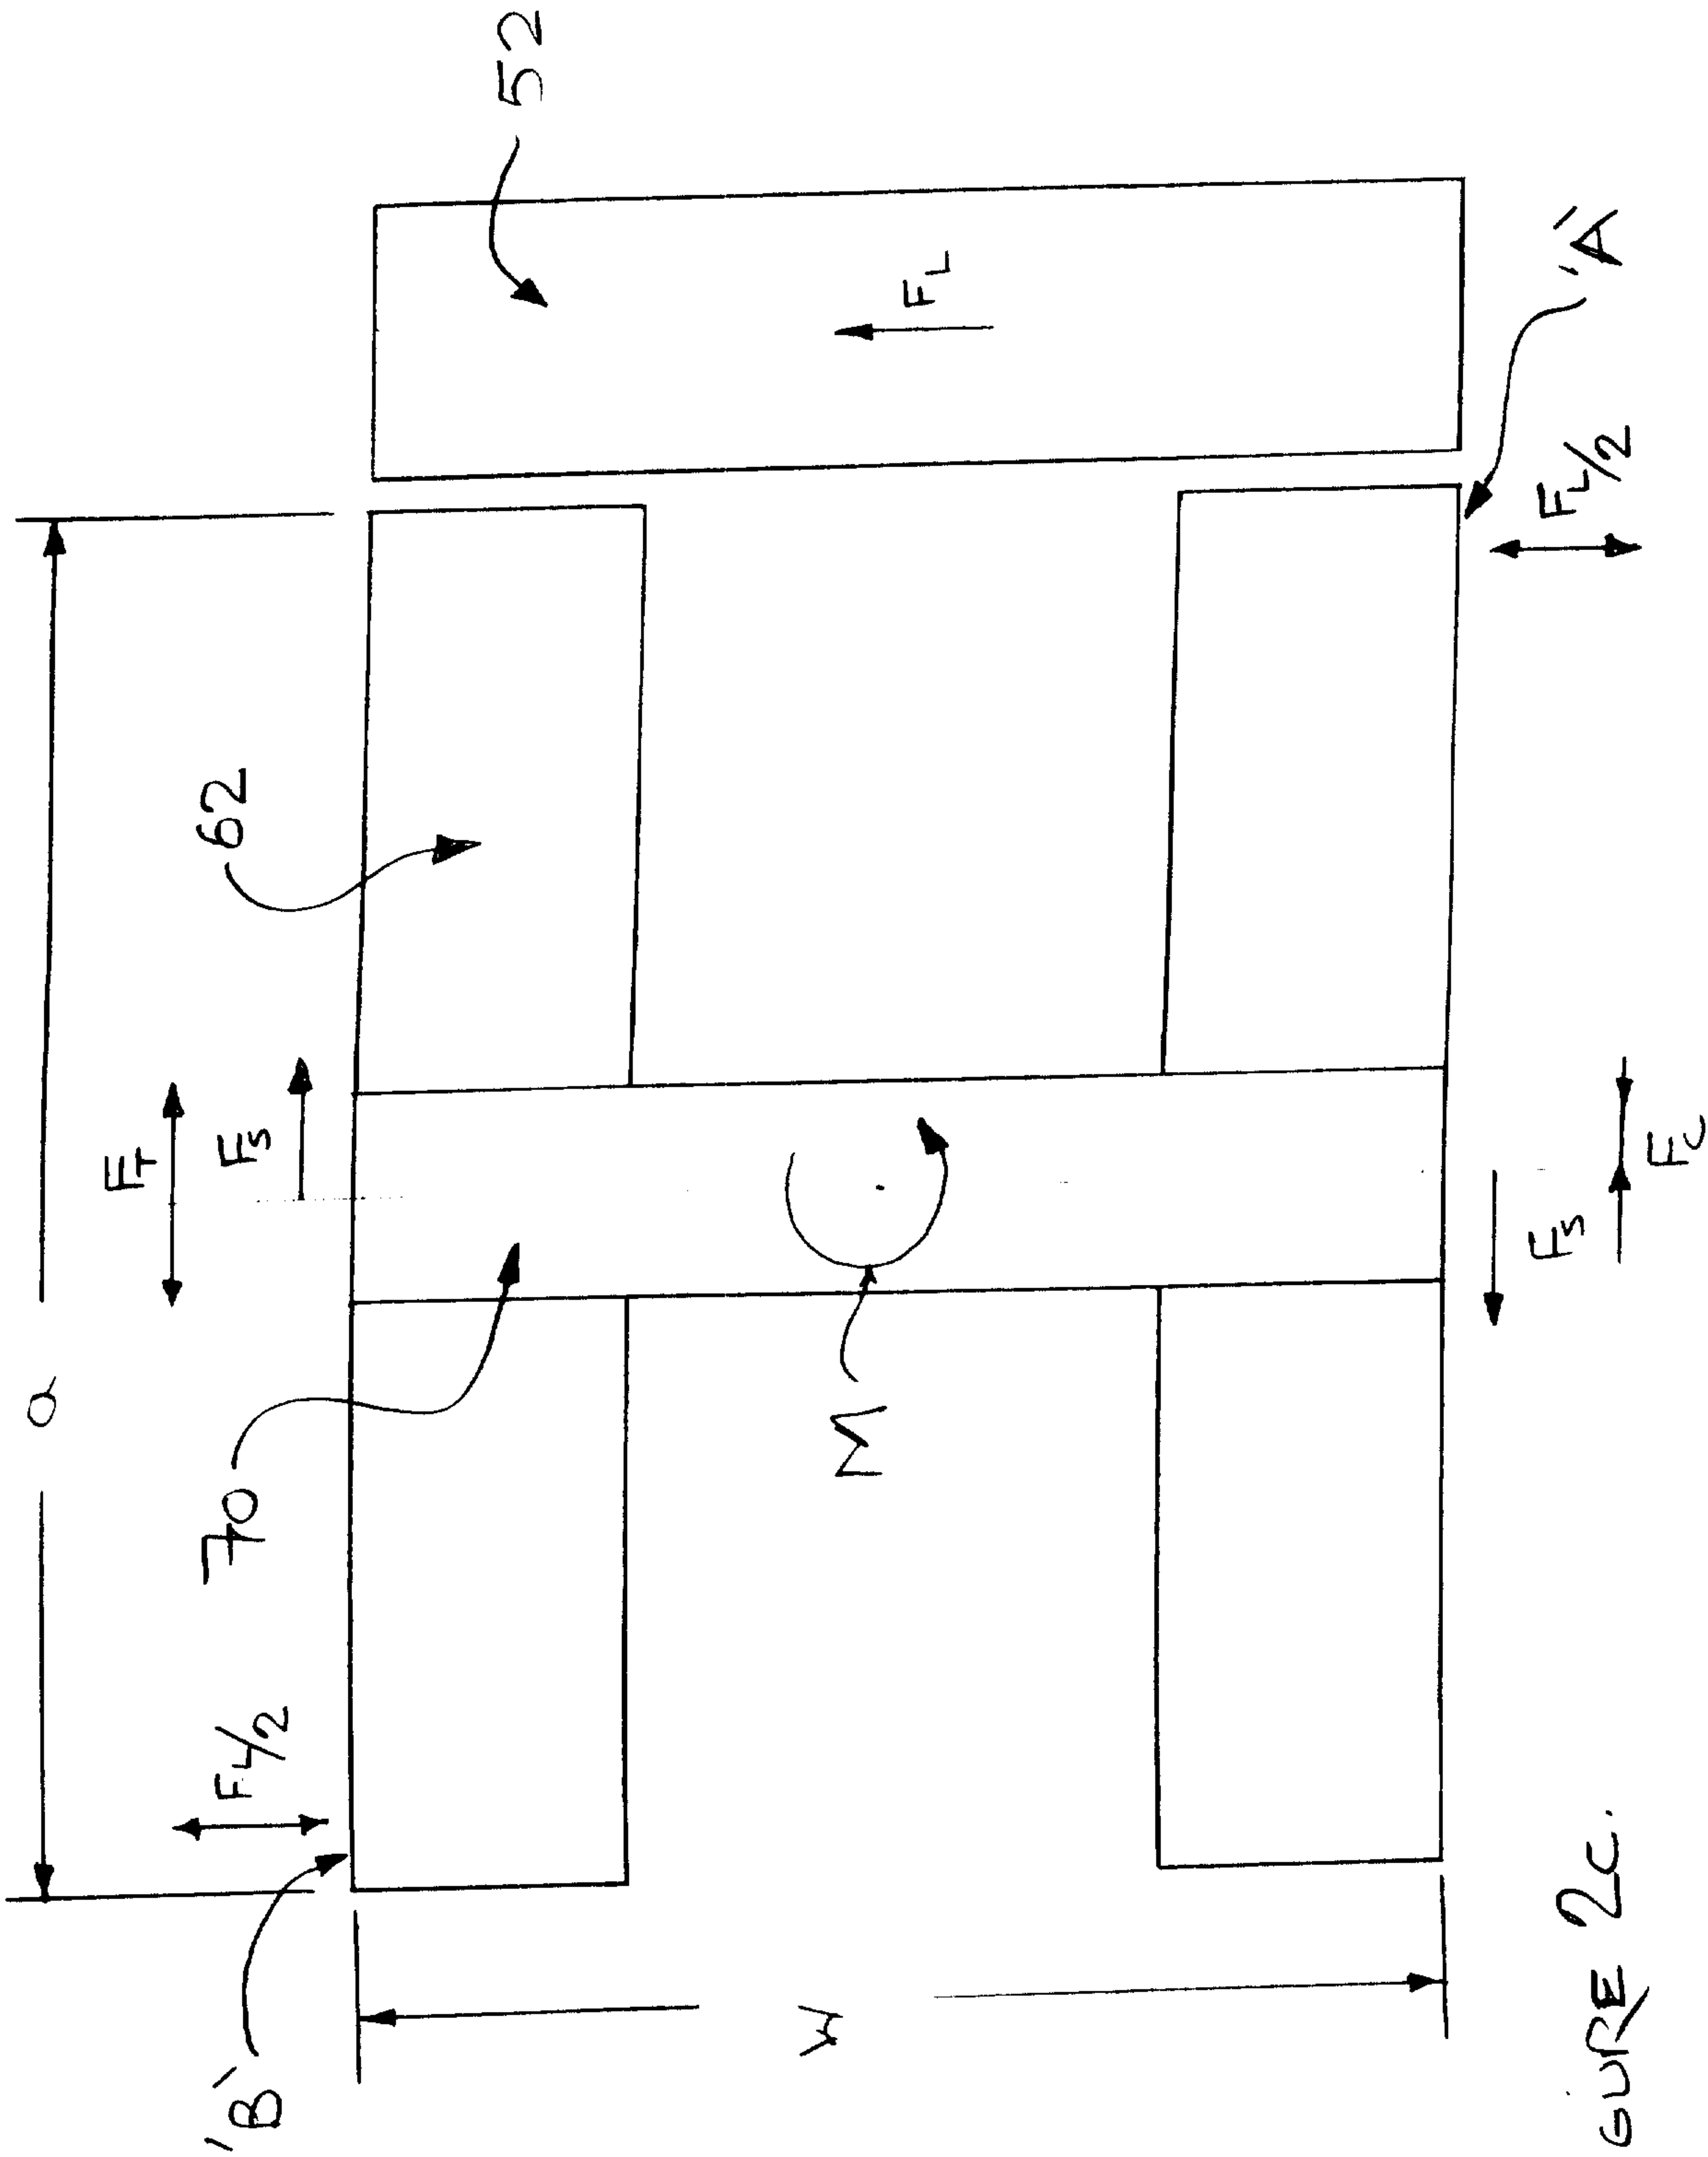
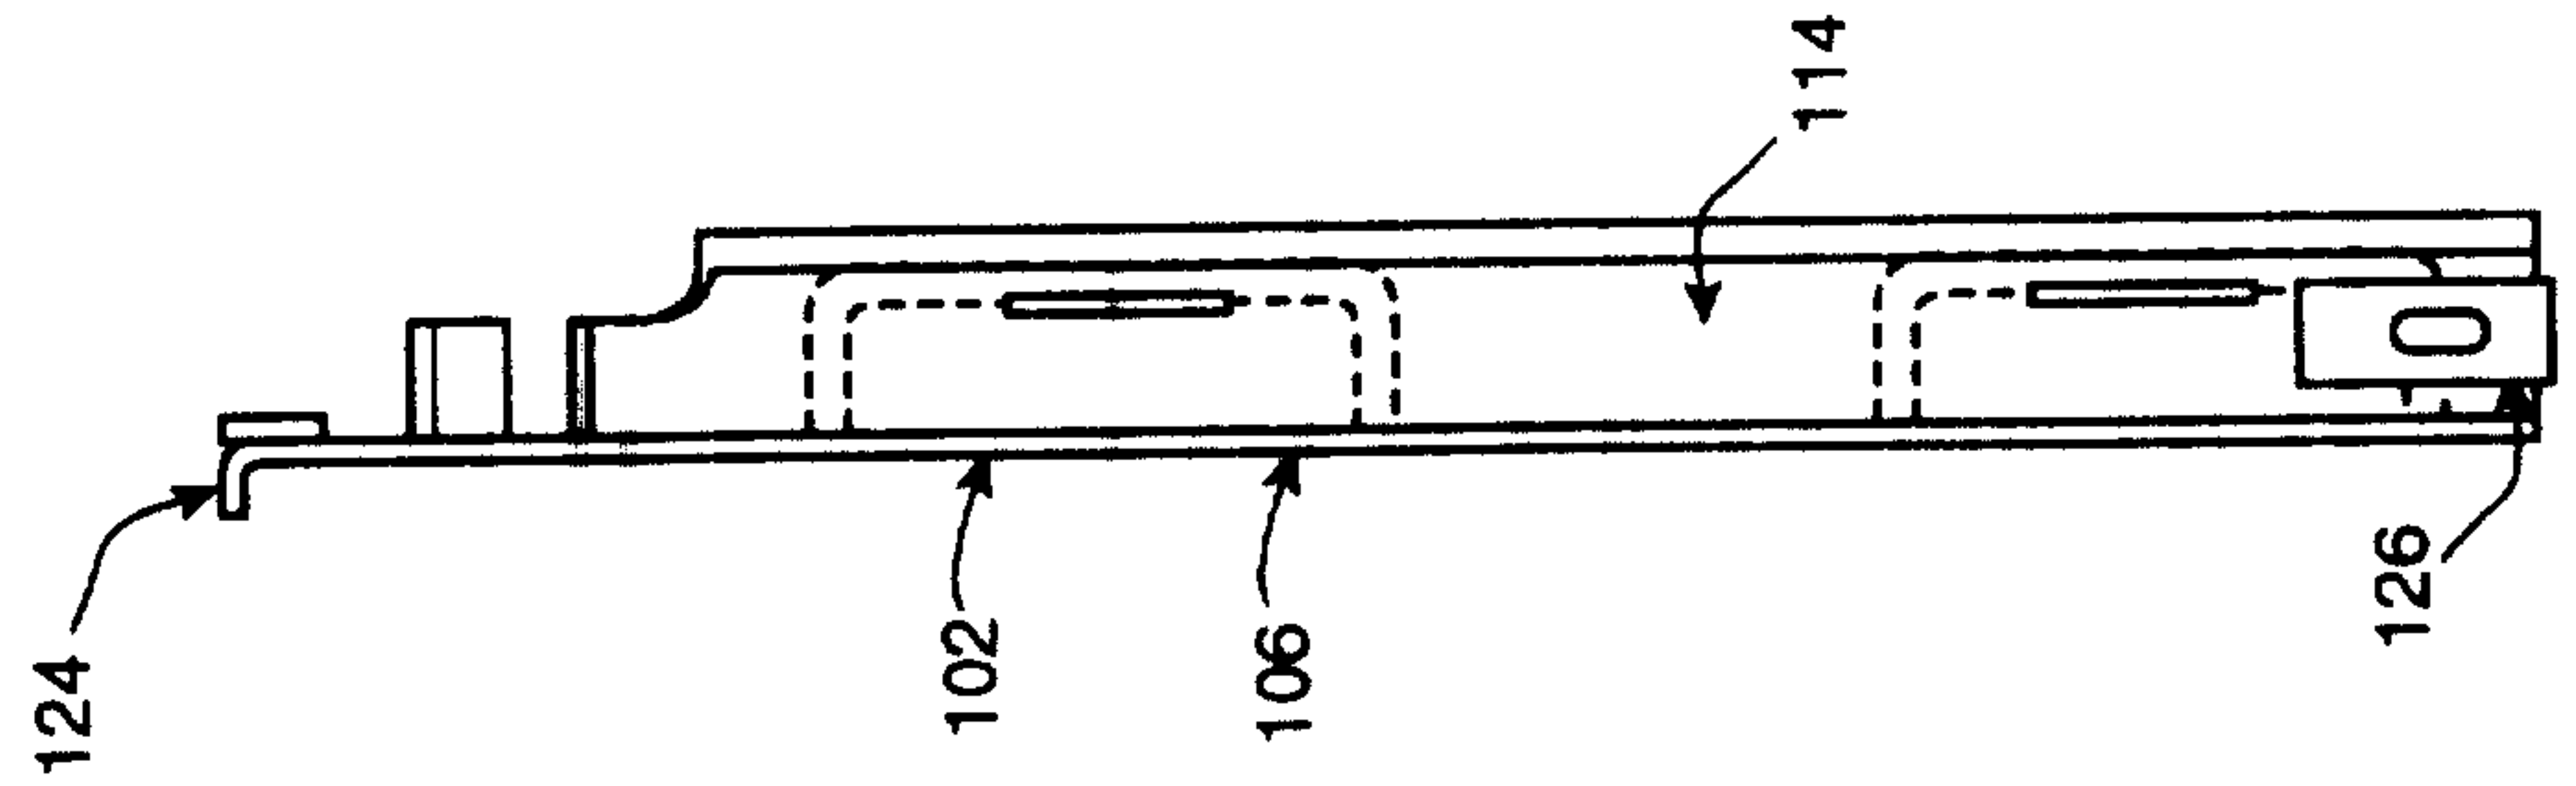
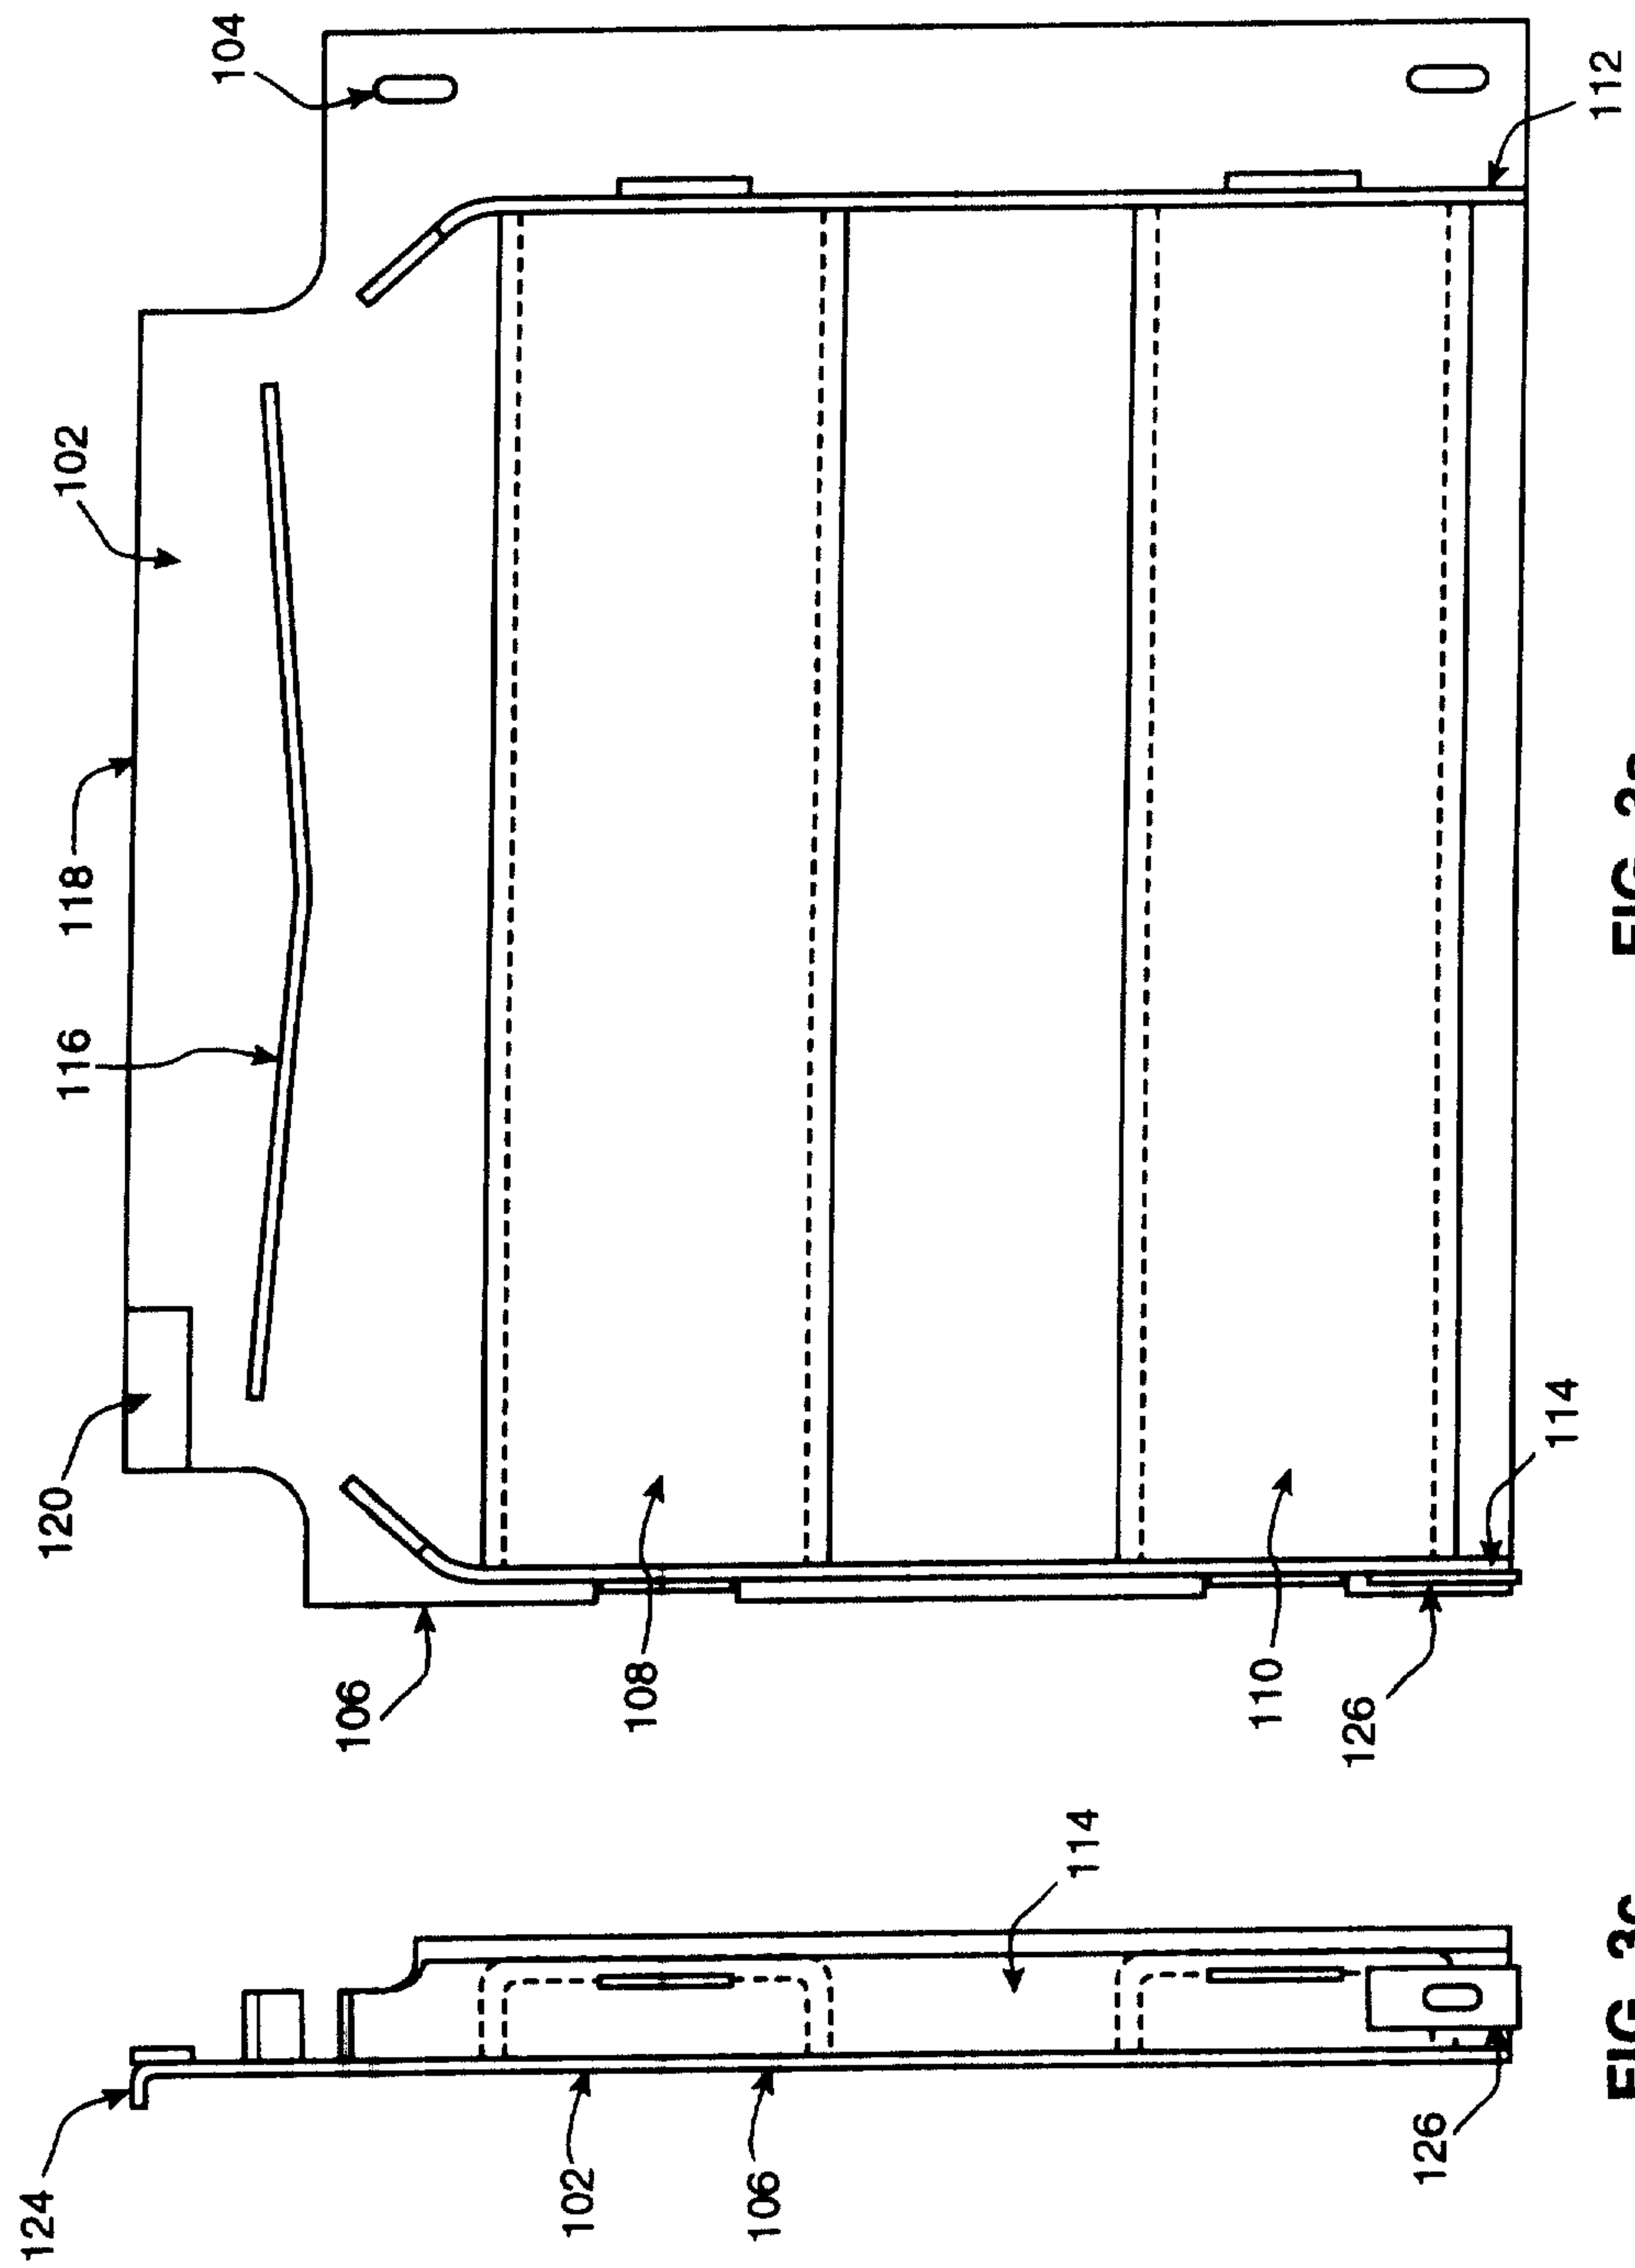
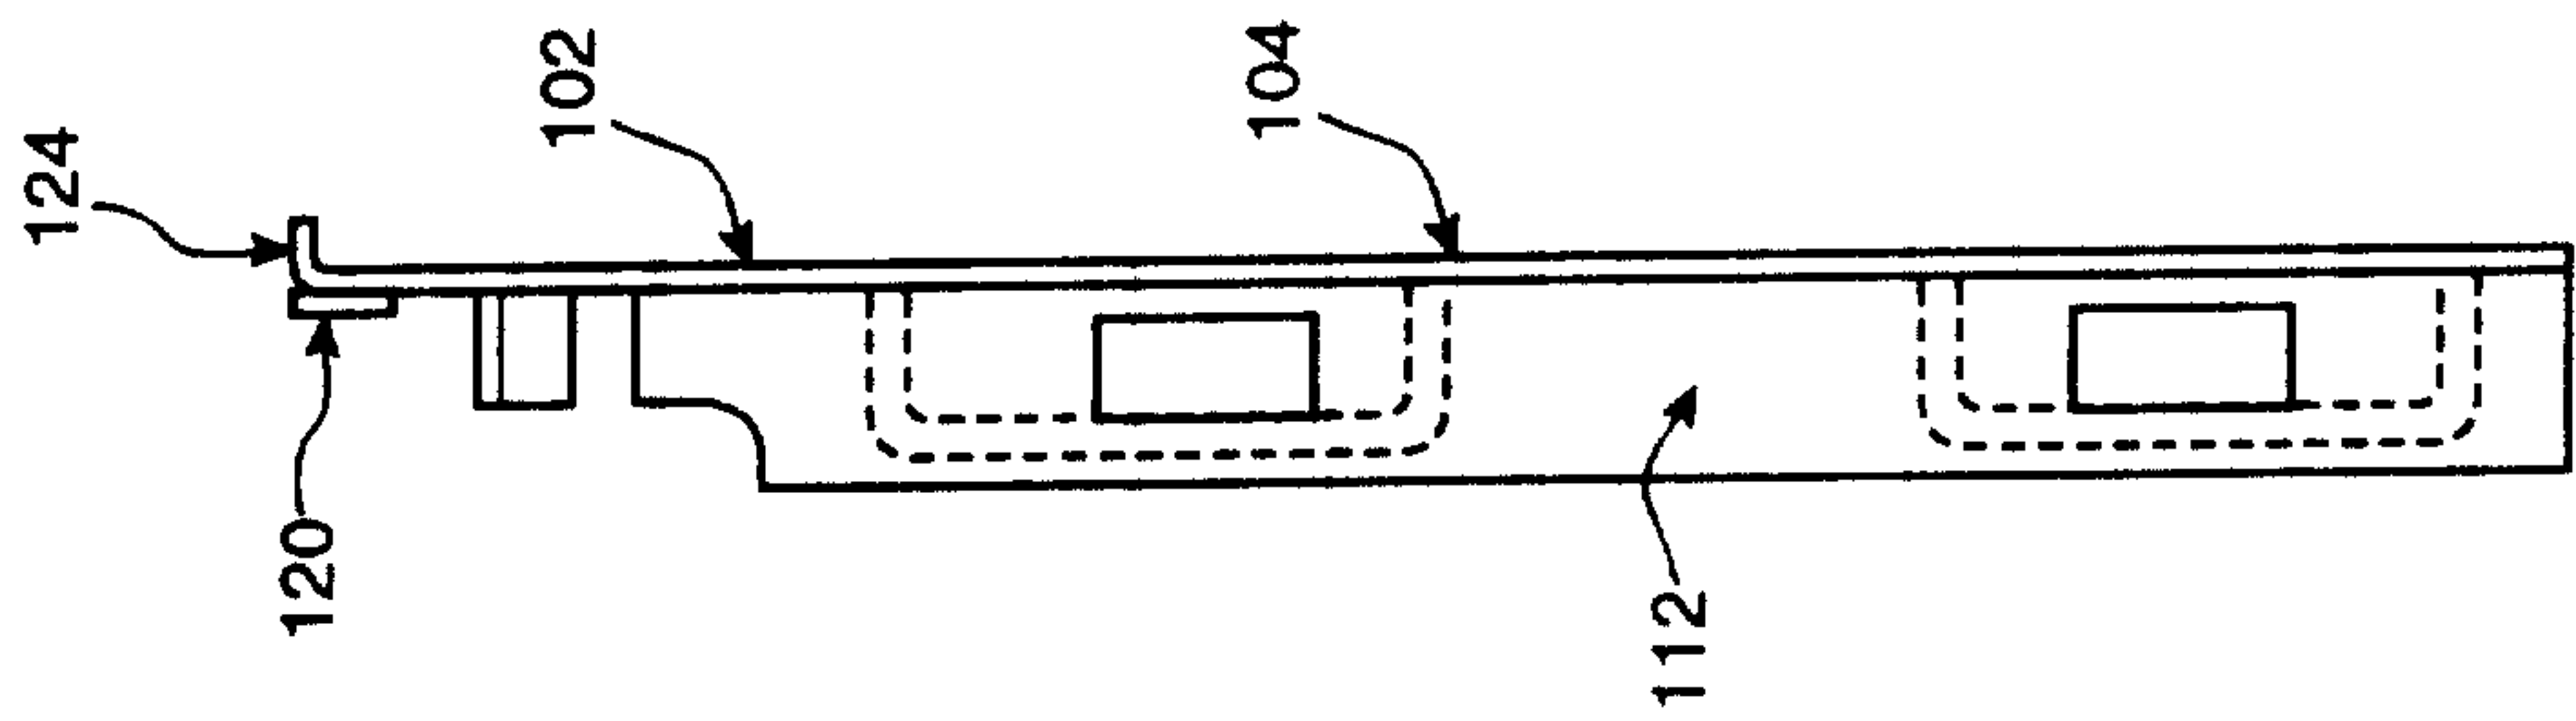
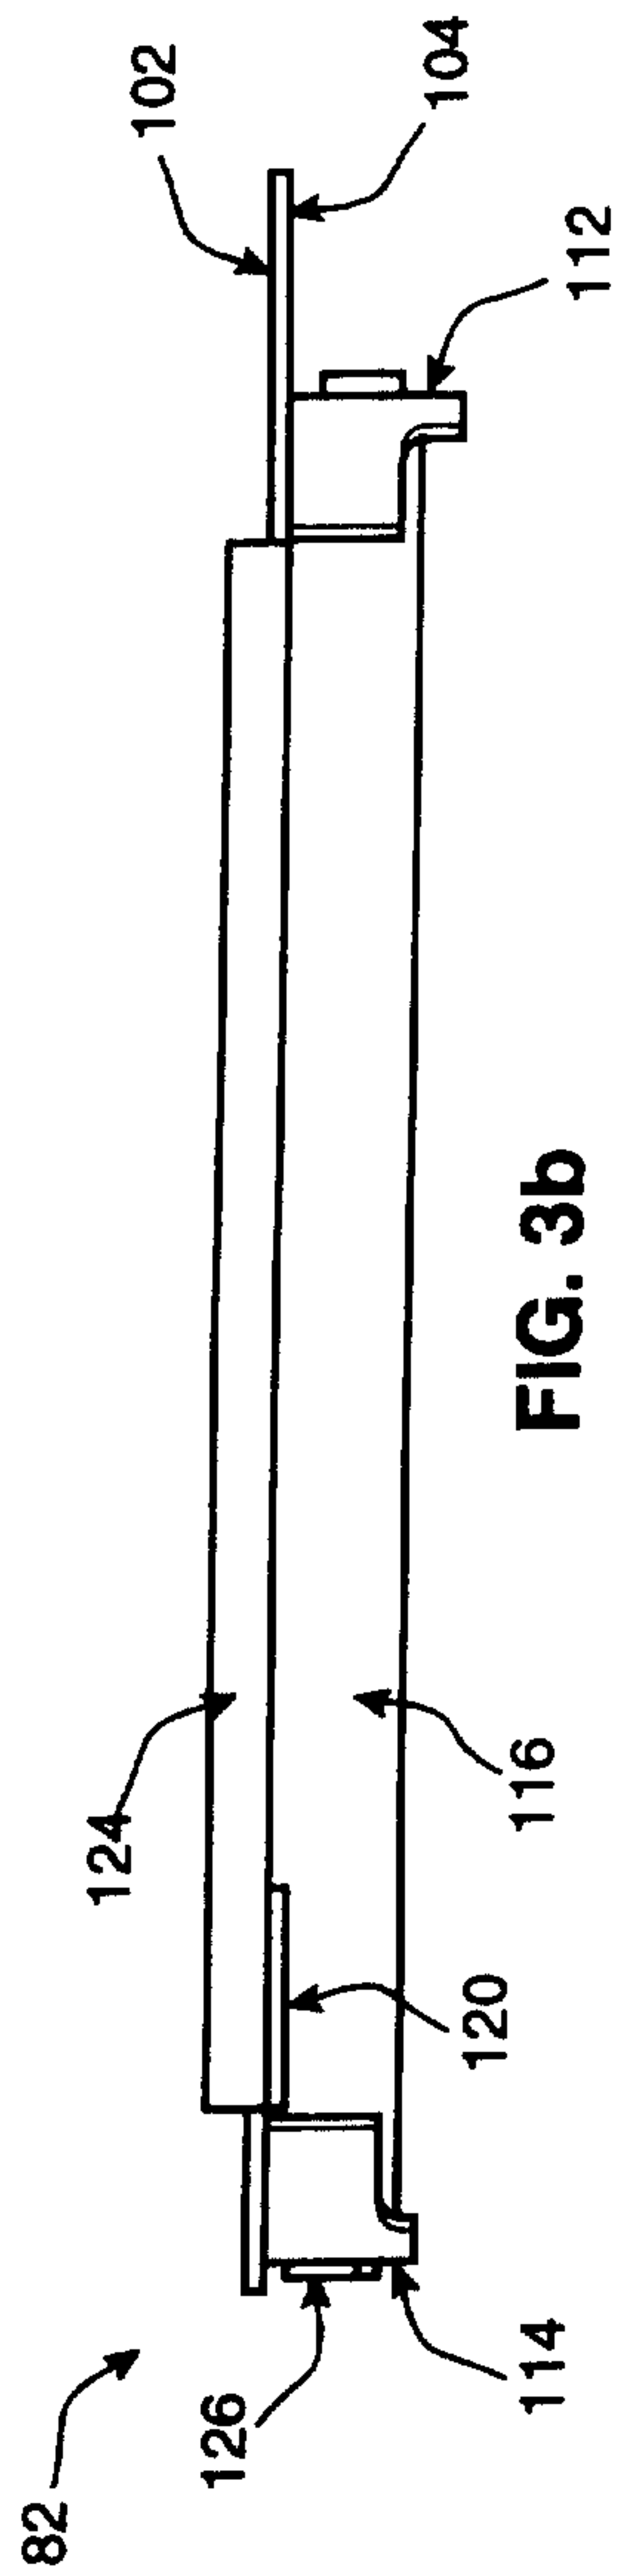
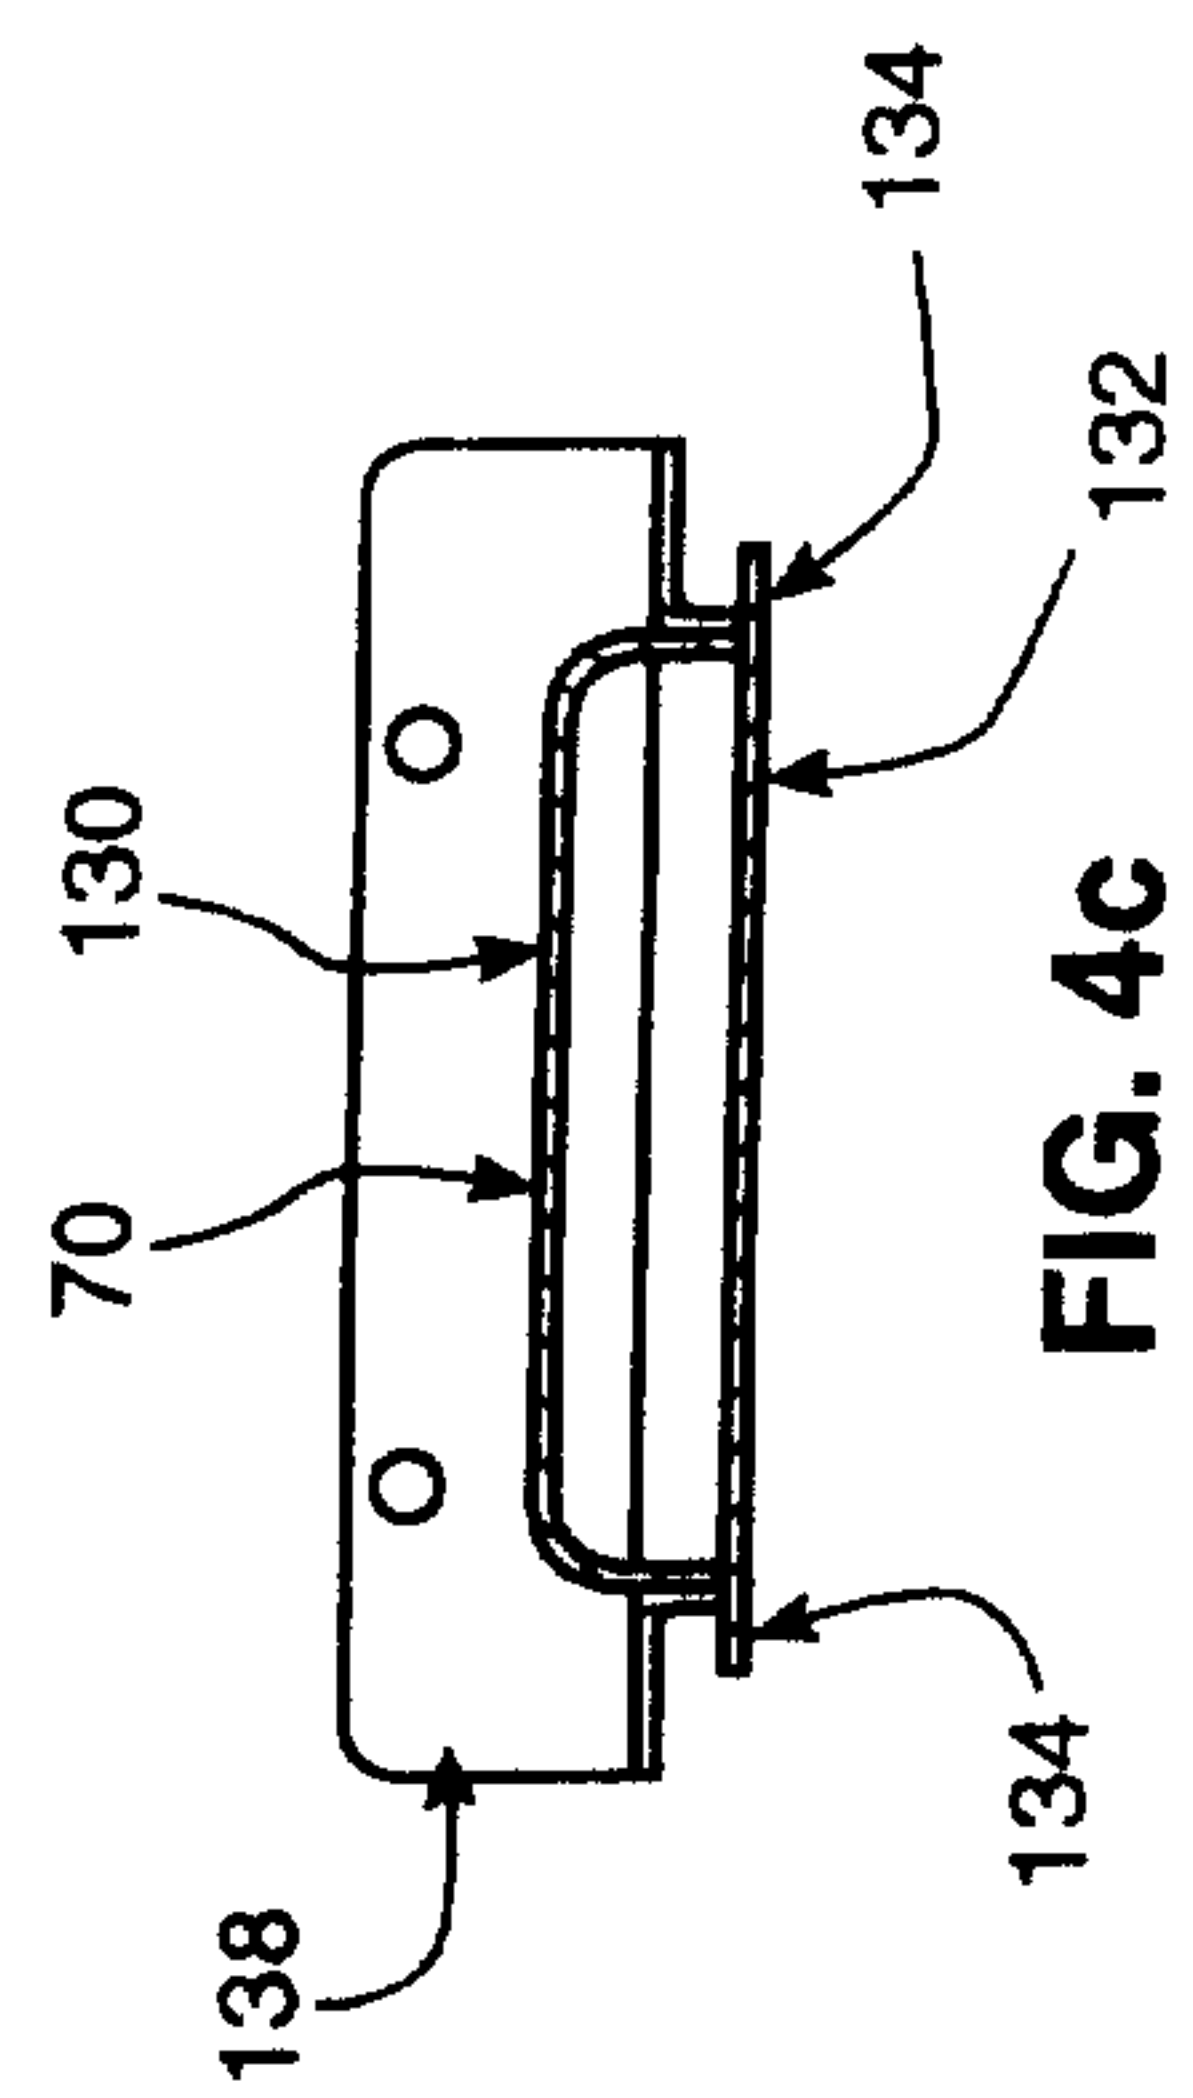
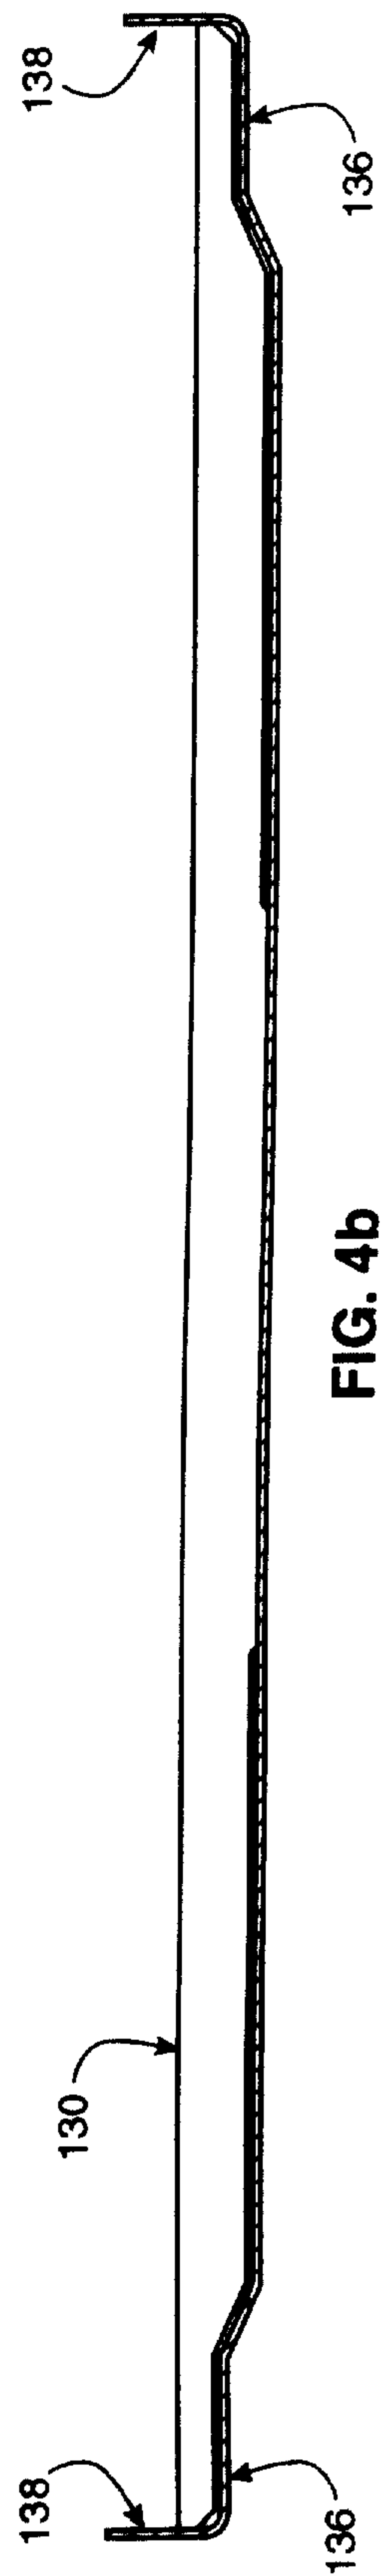
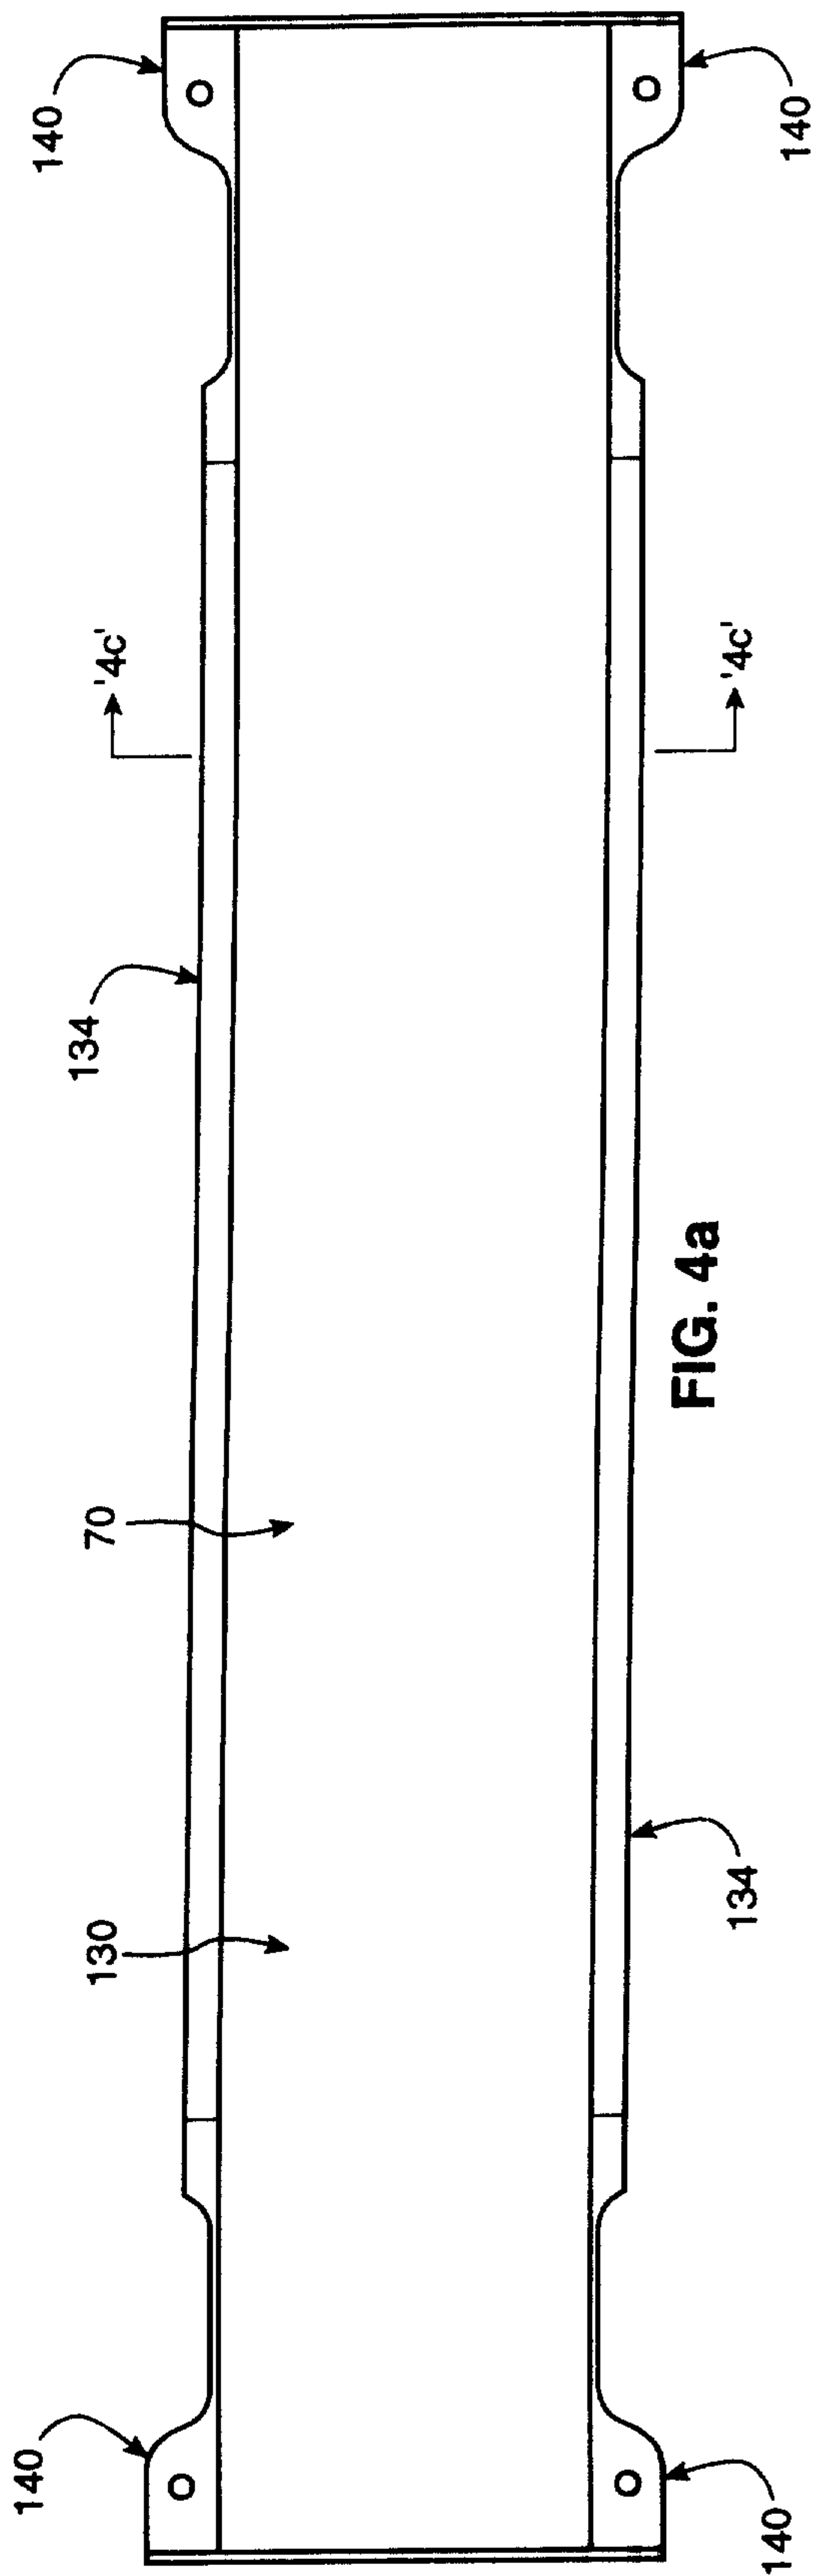
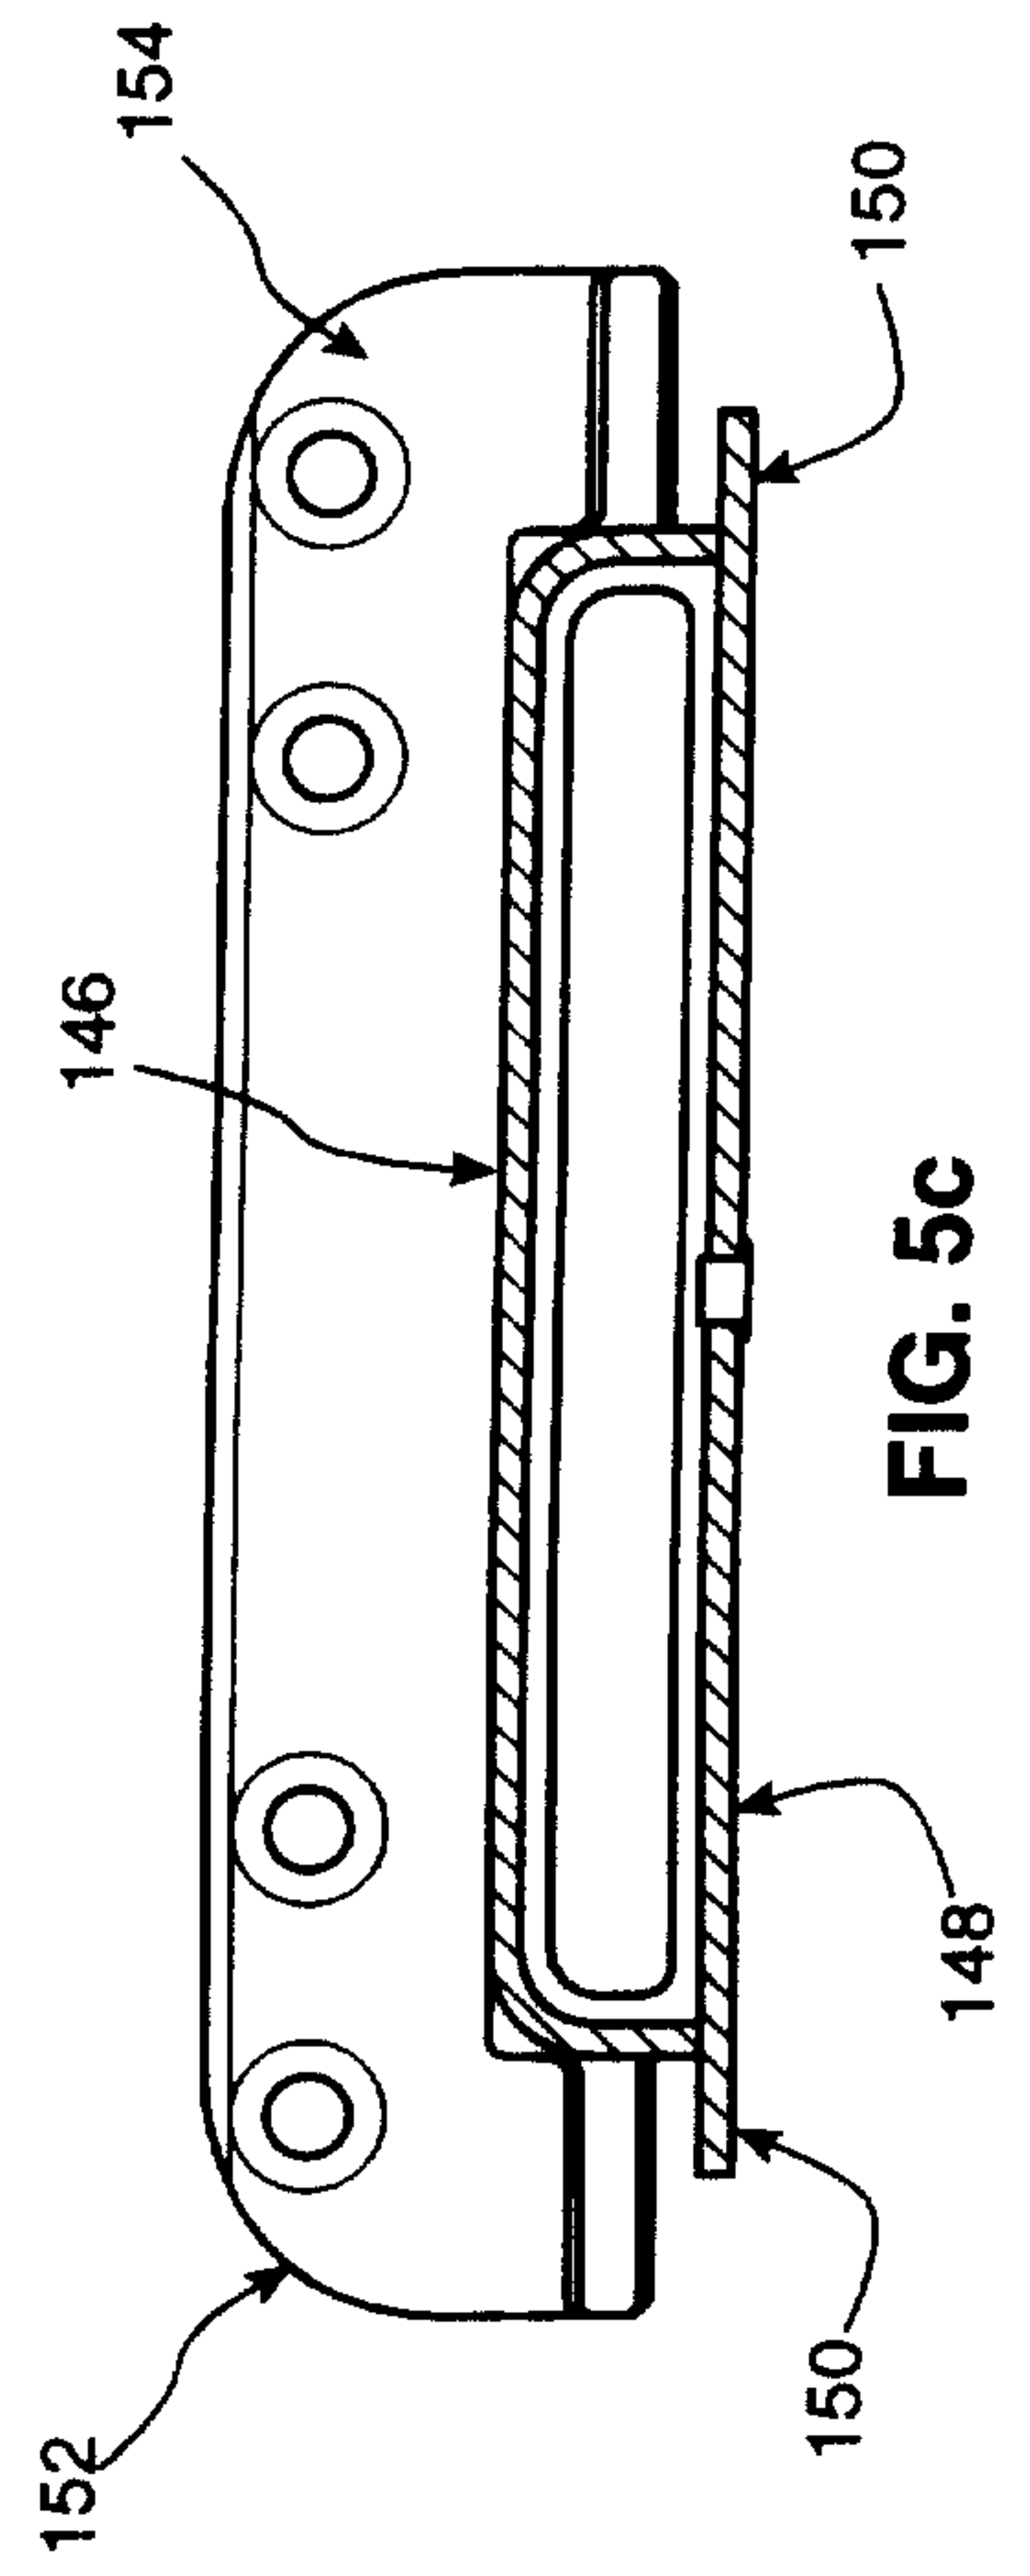
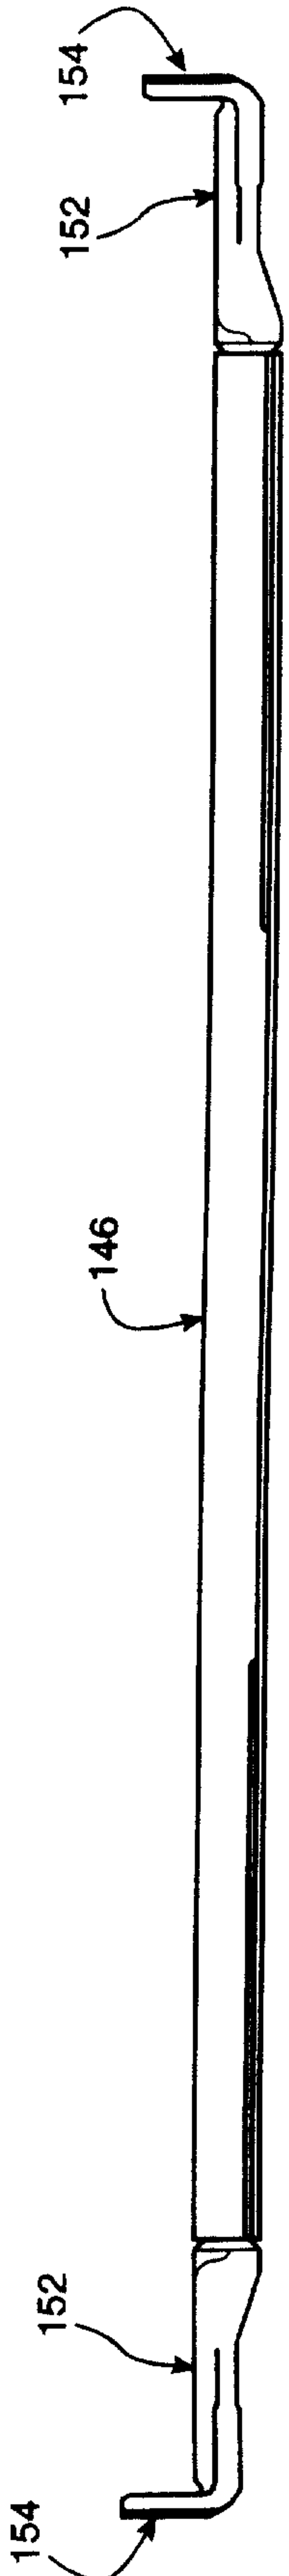
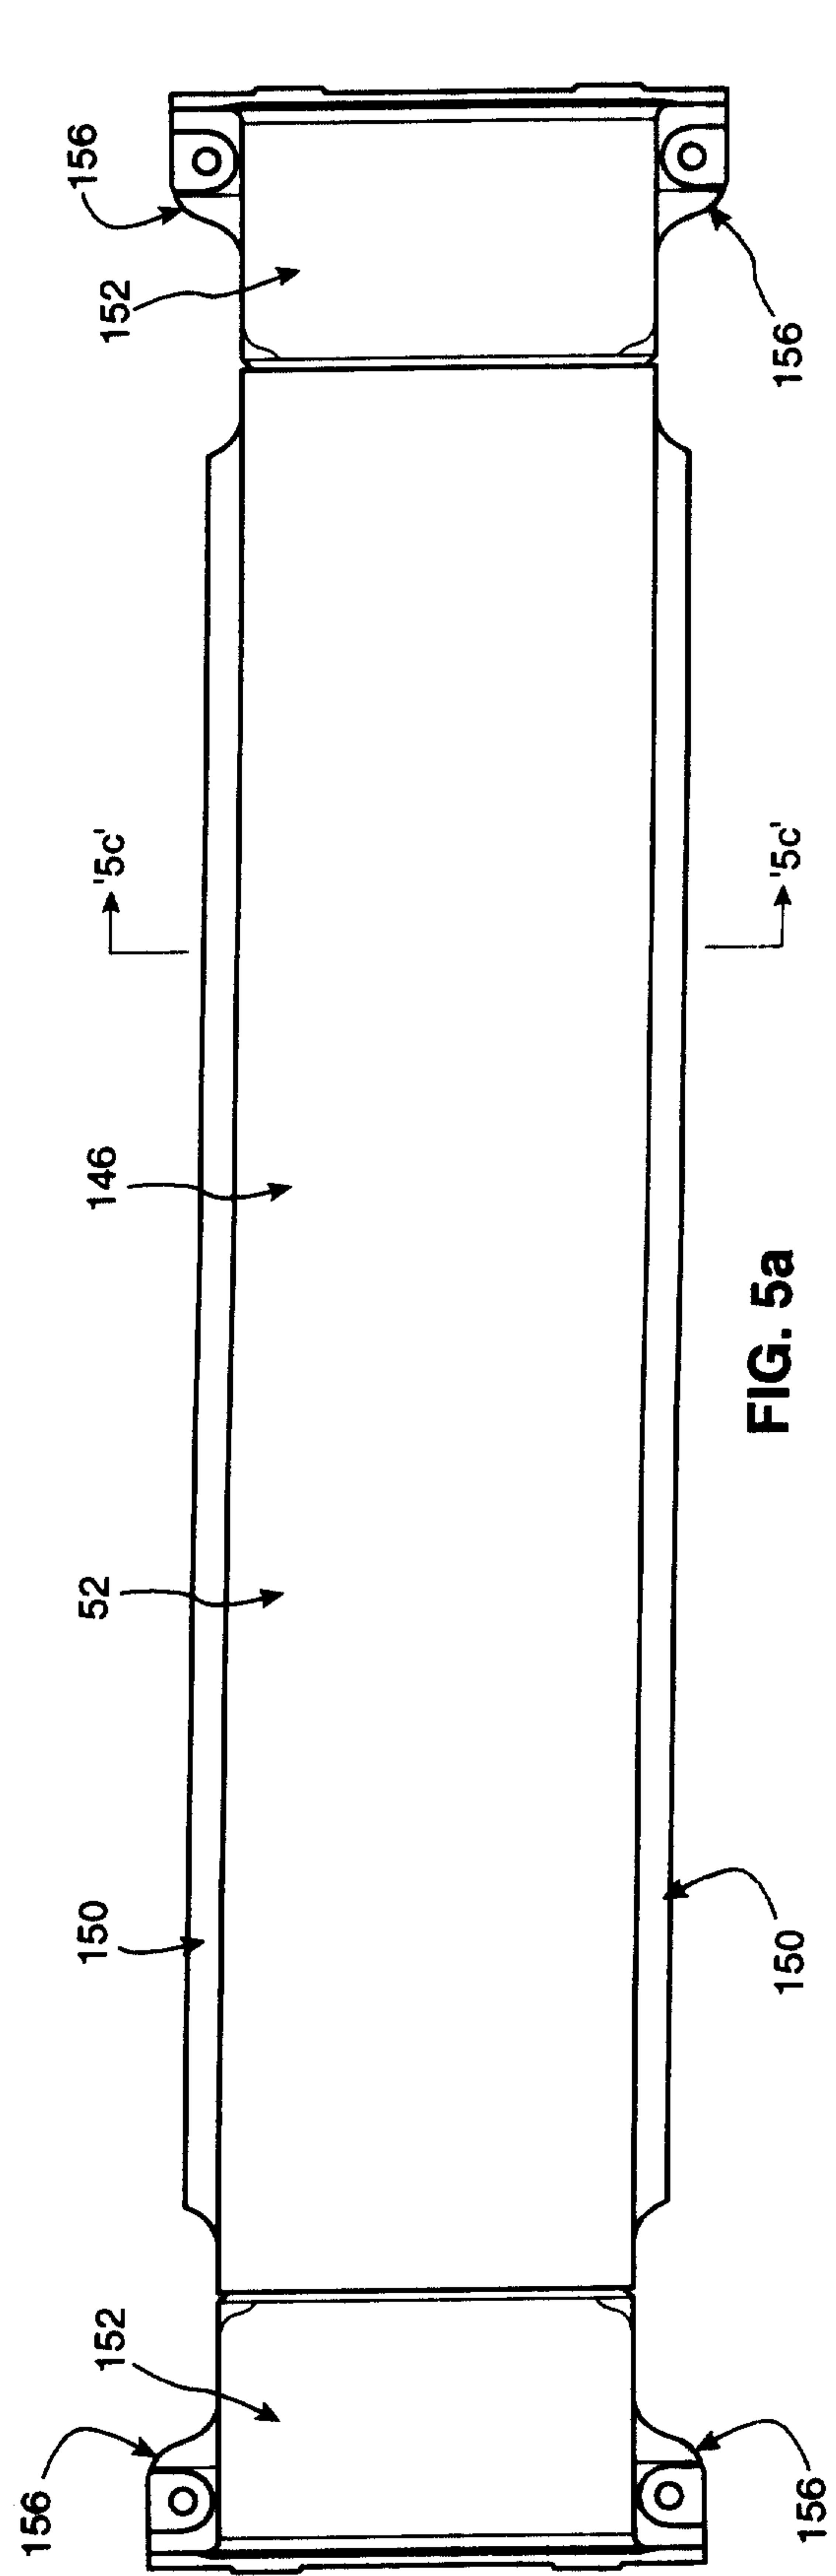


FIGURE 2c.







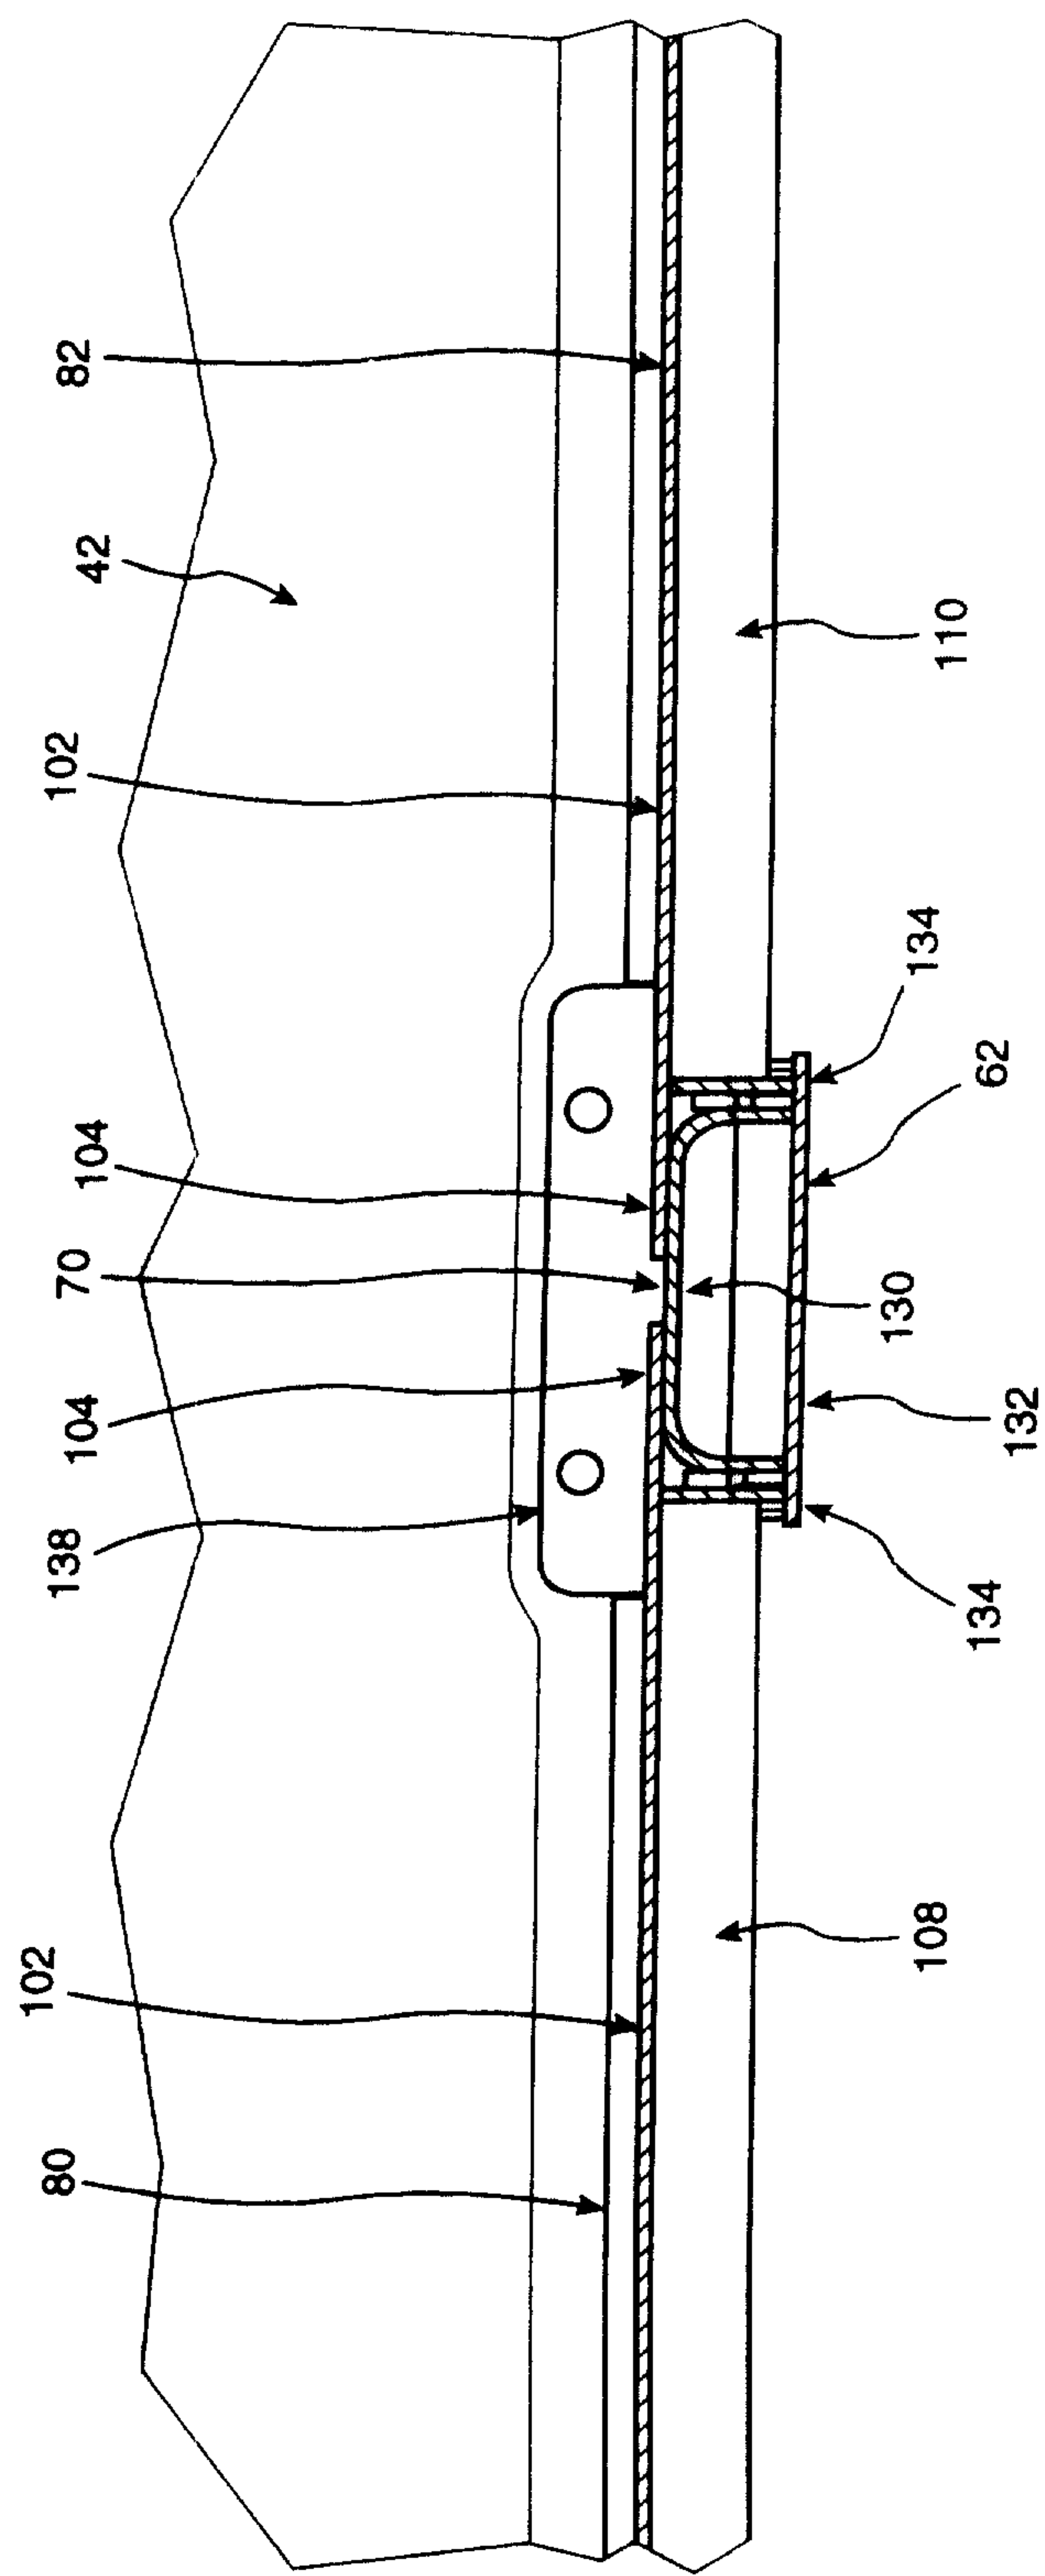


FIG. 6a

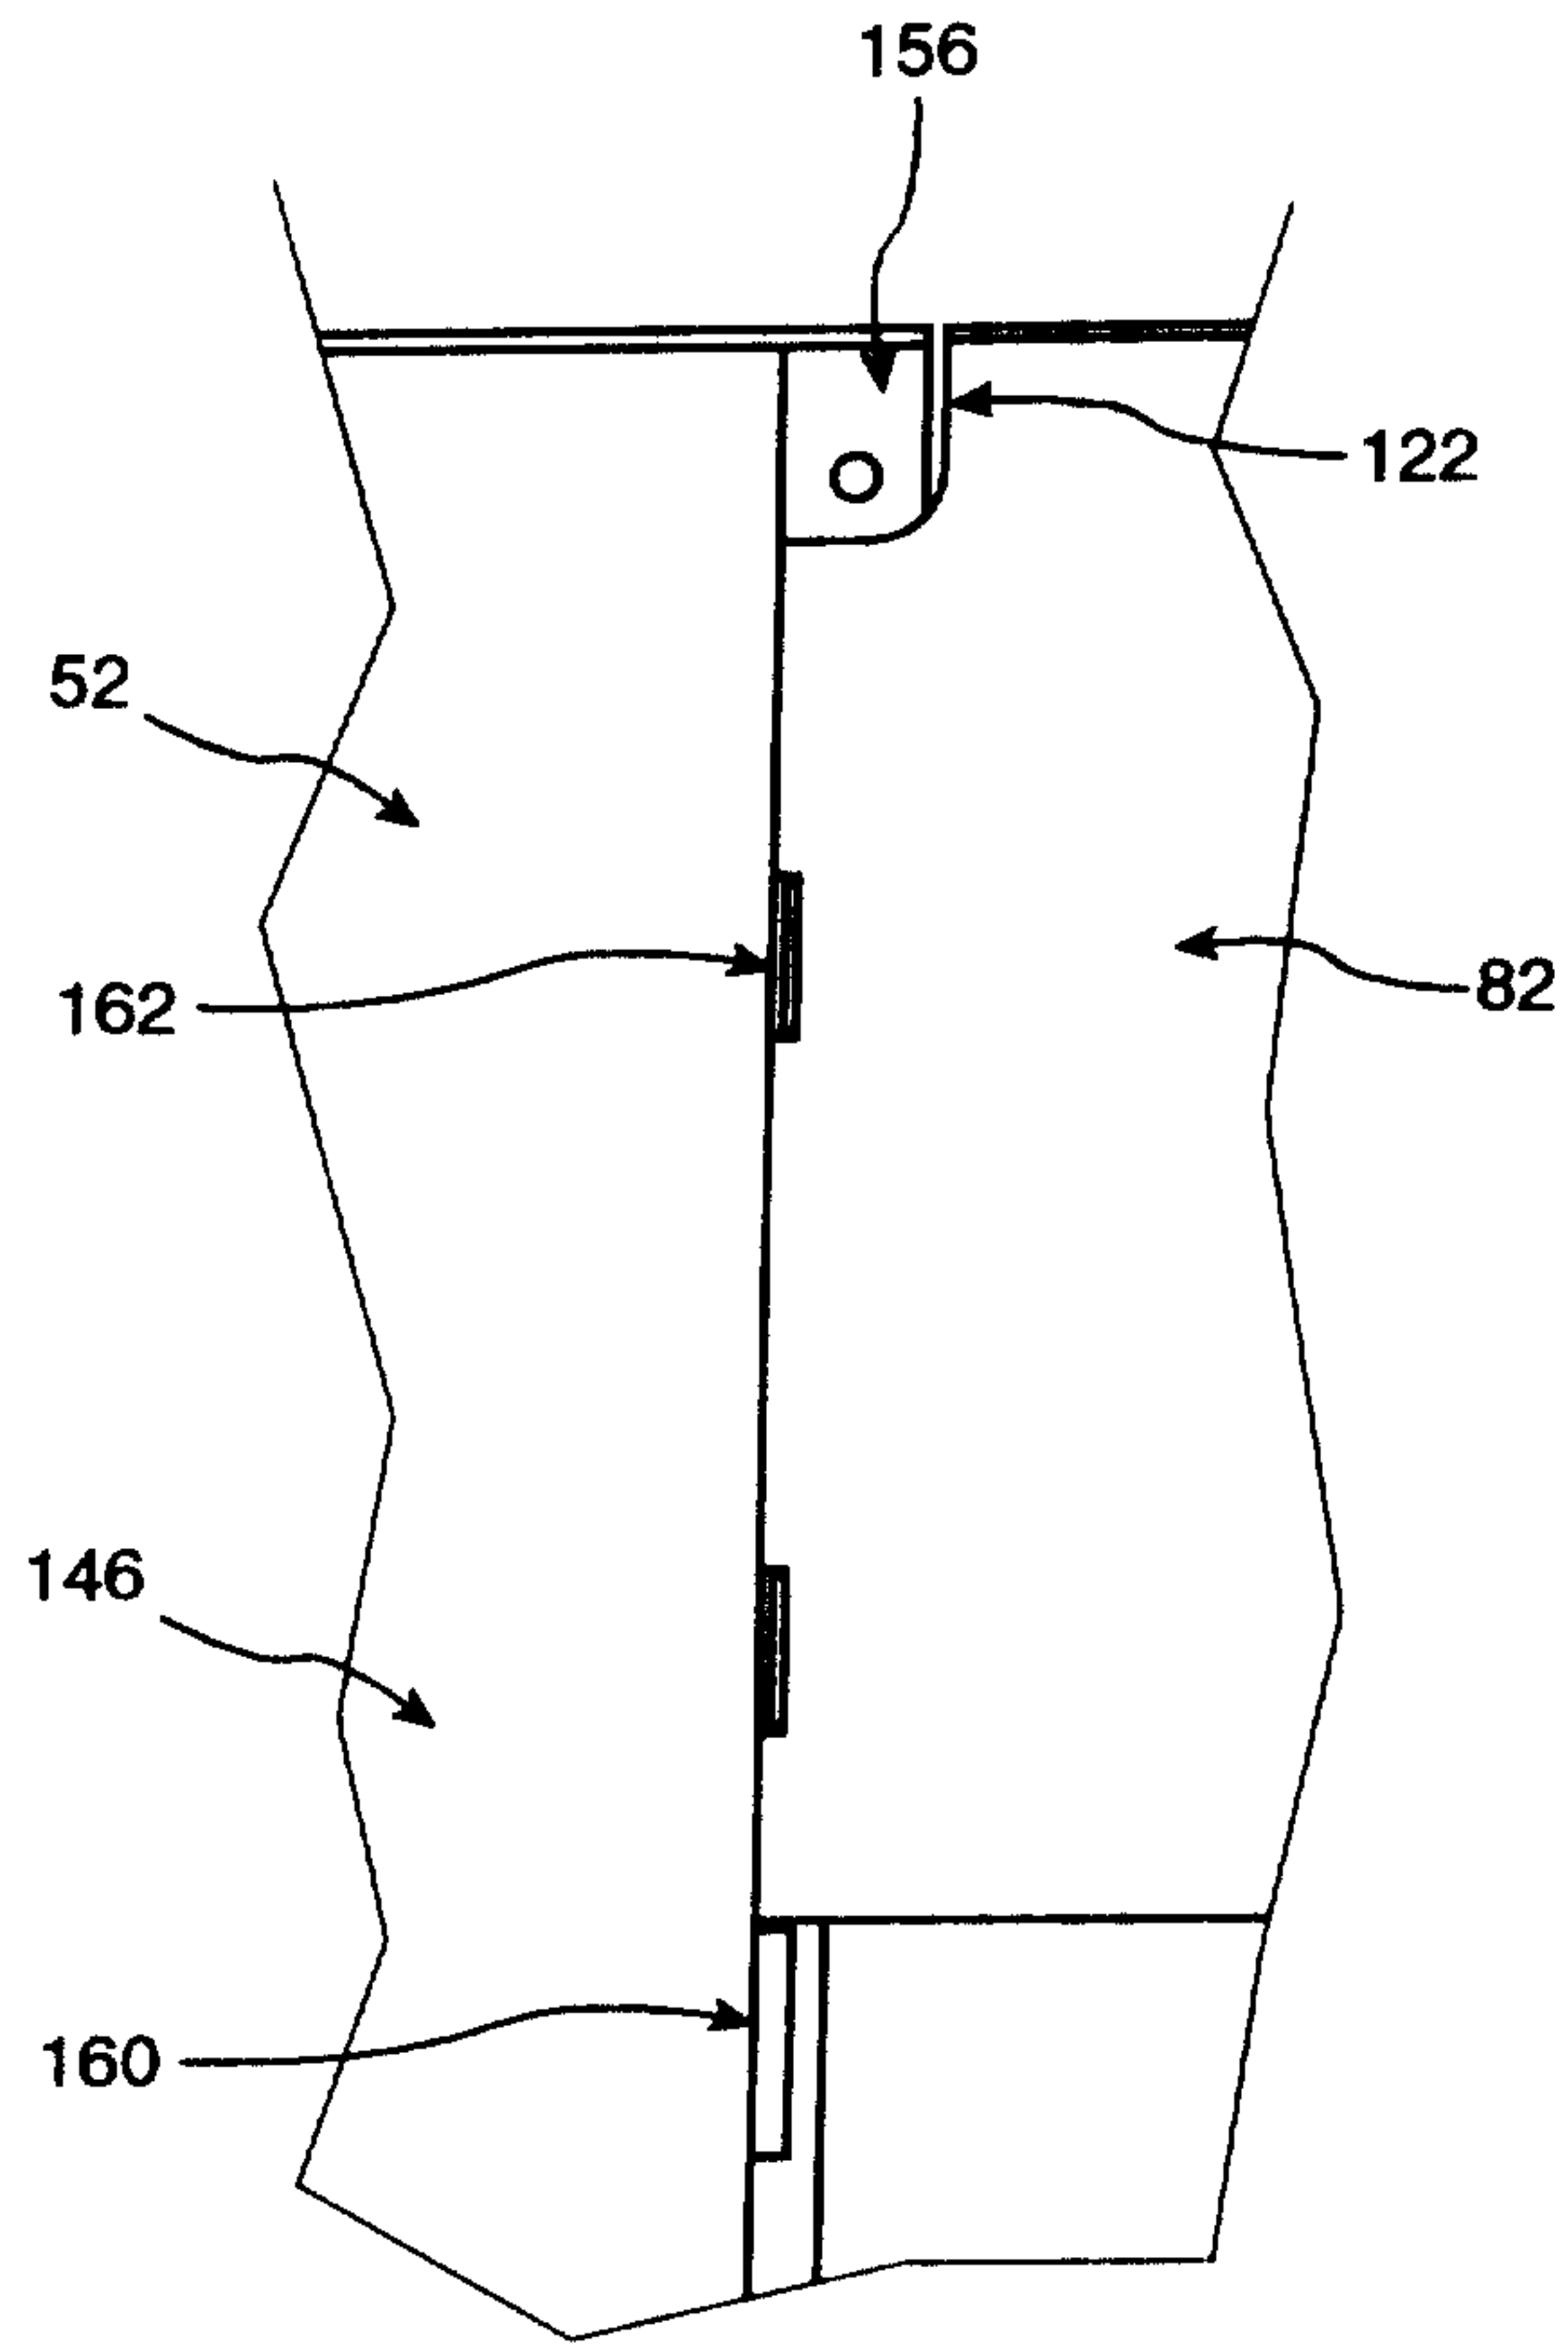


FIG. 6c

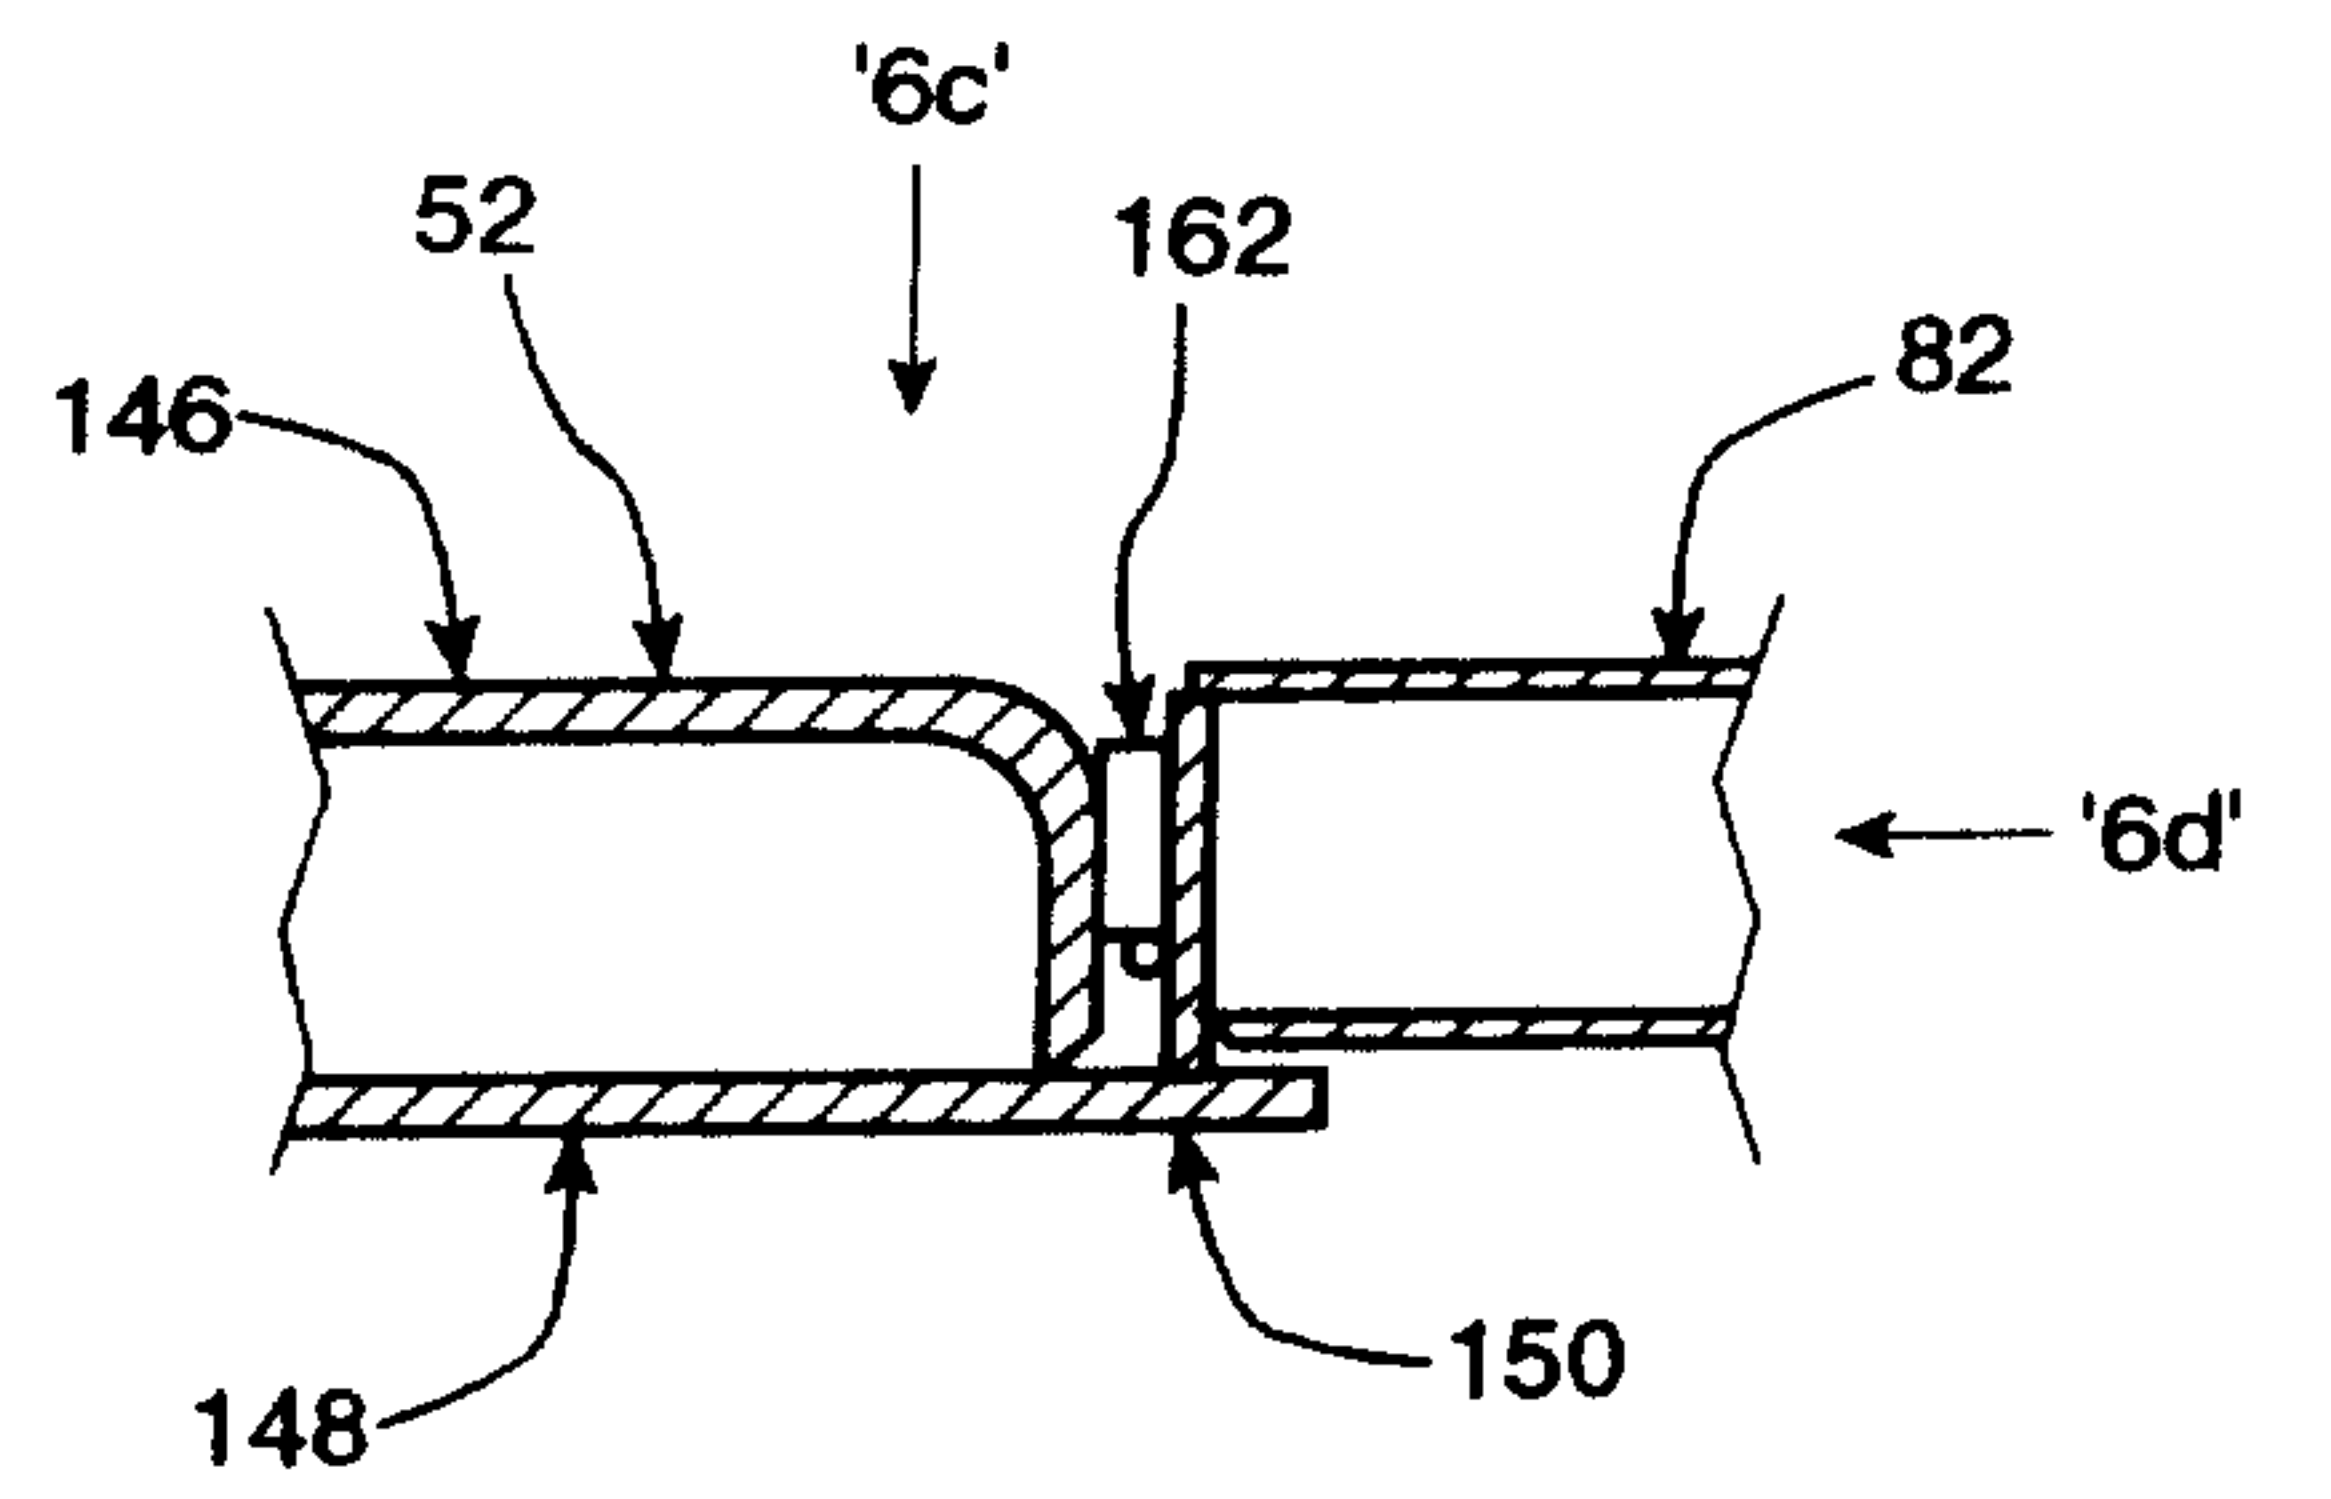


FIG. 6b

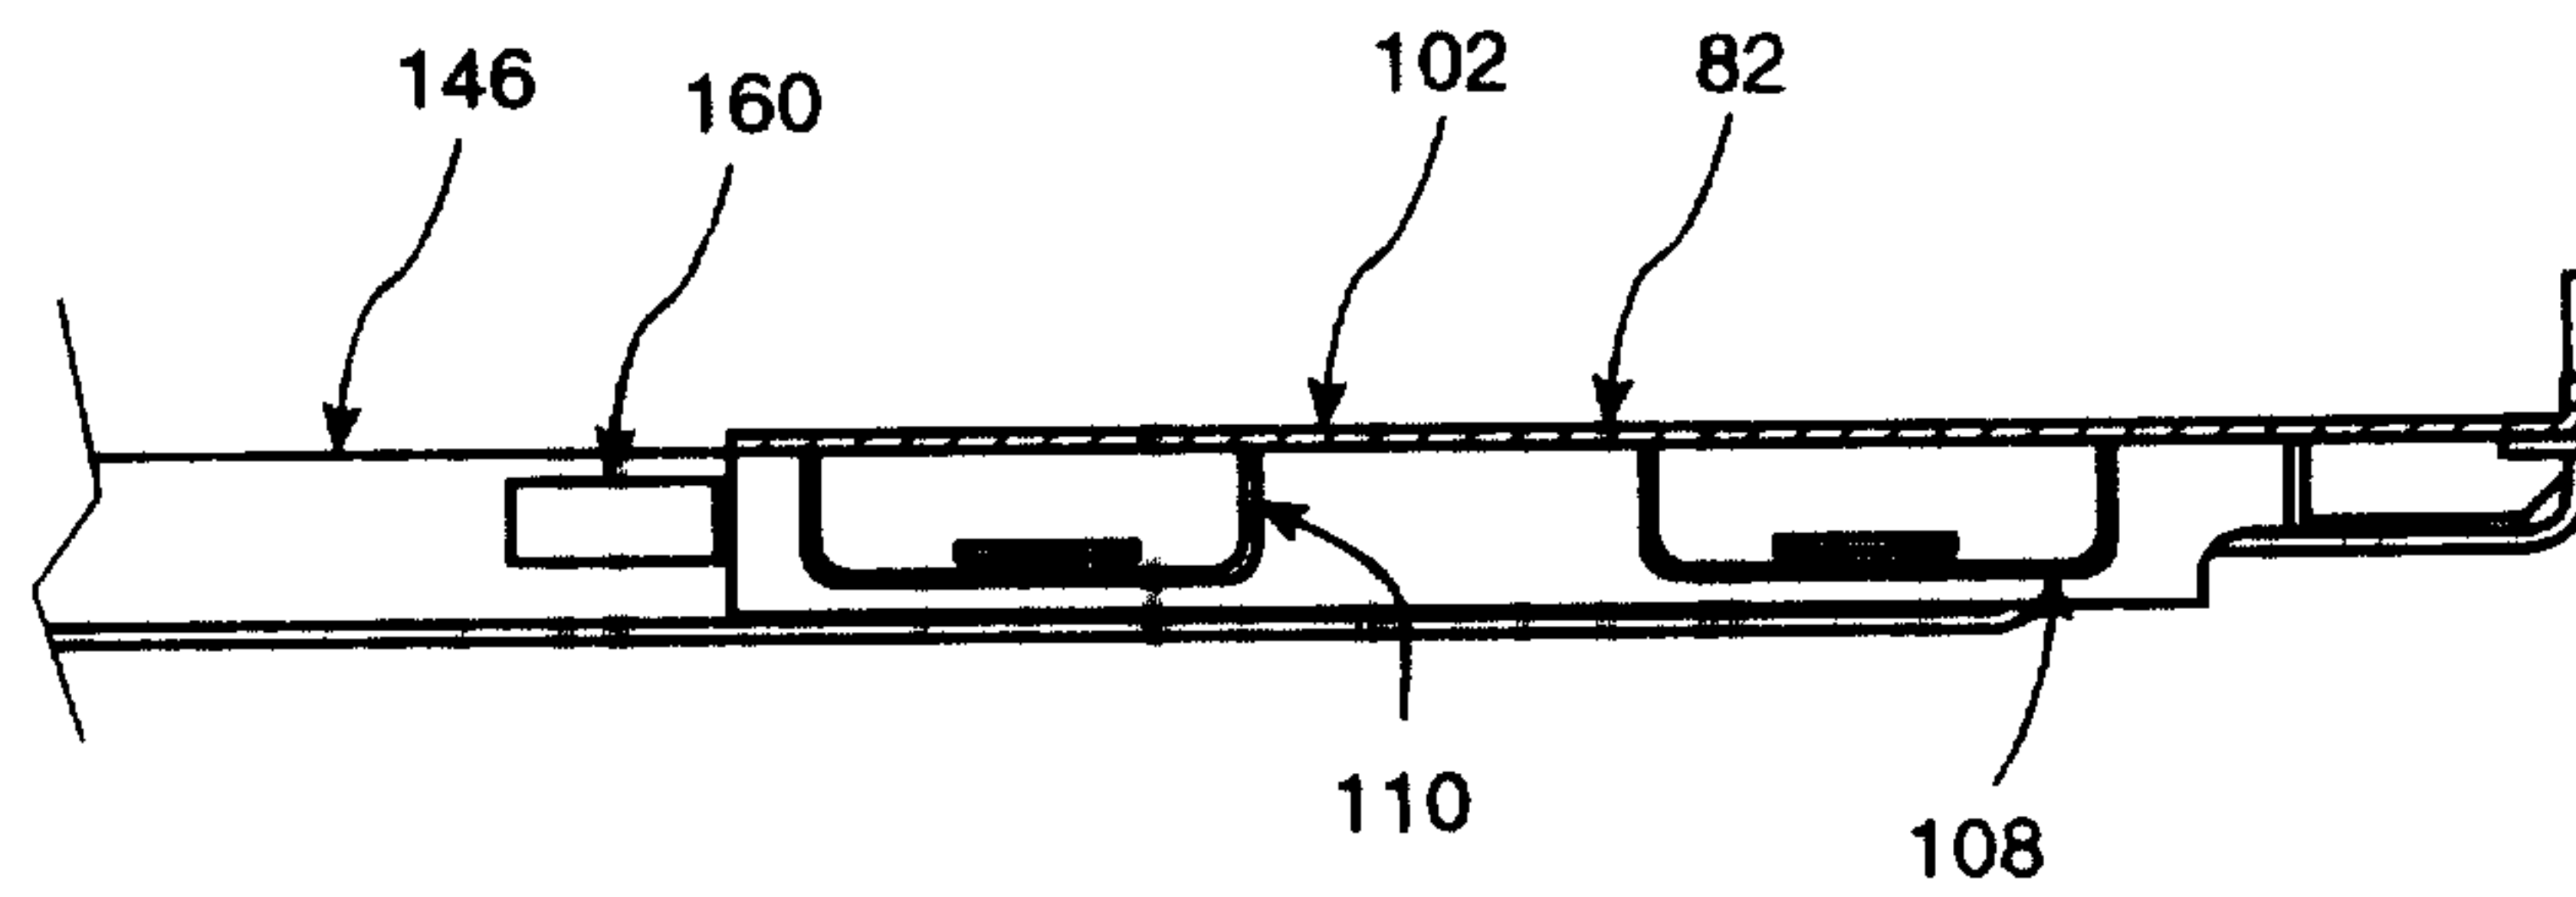


FIG. 6d

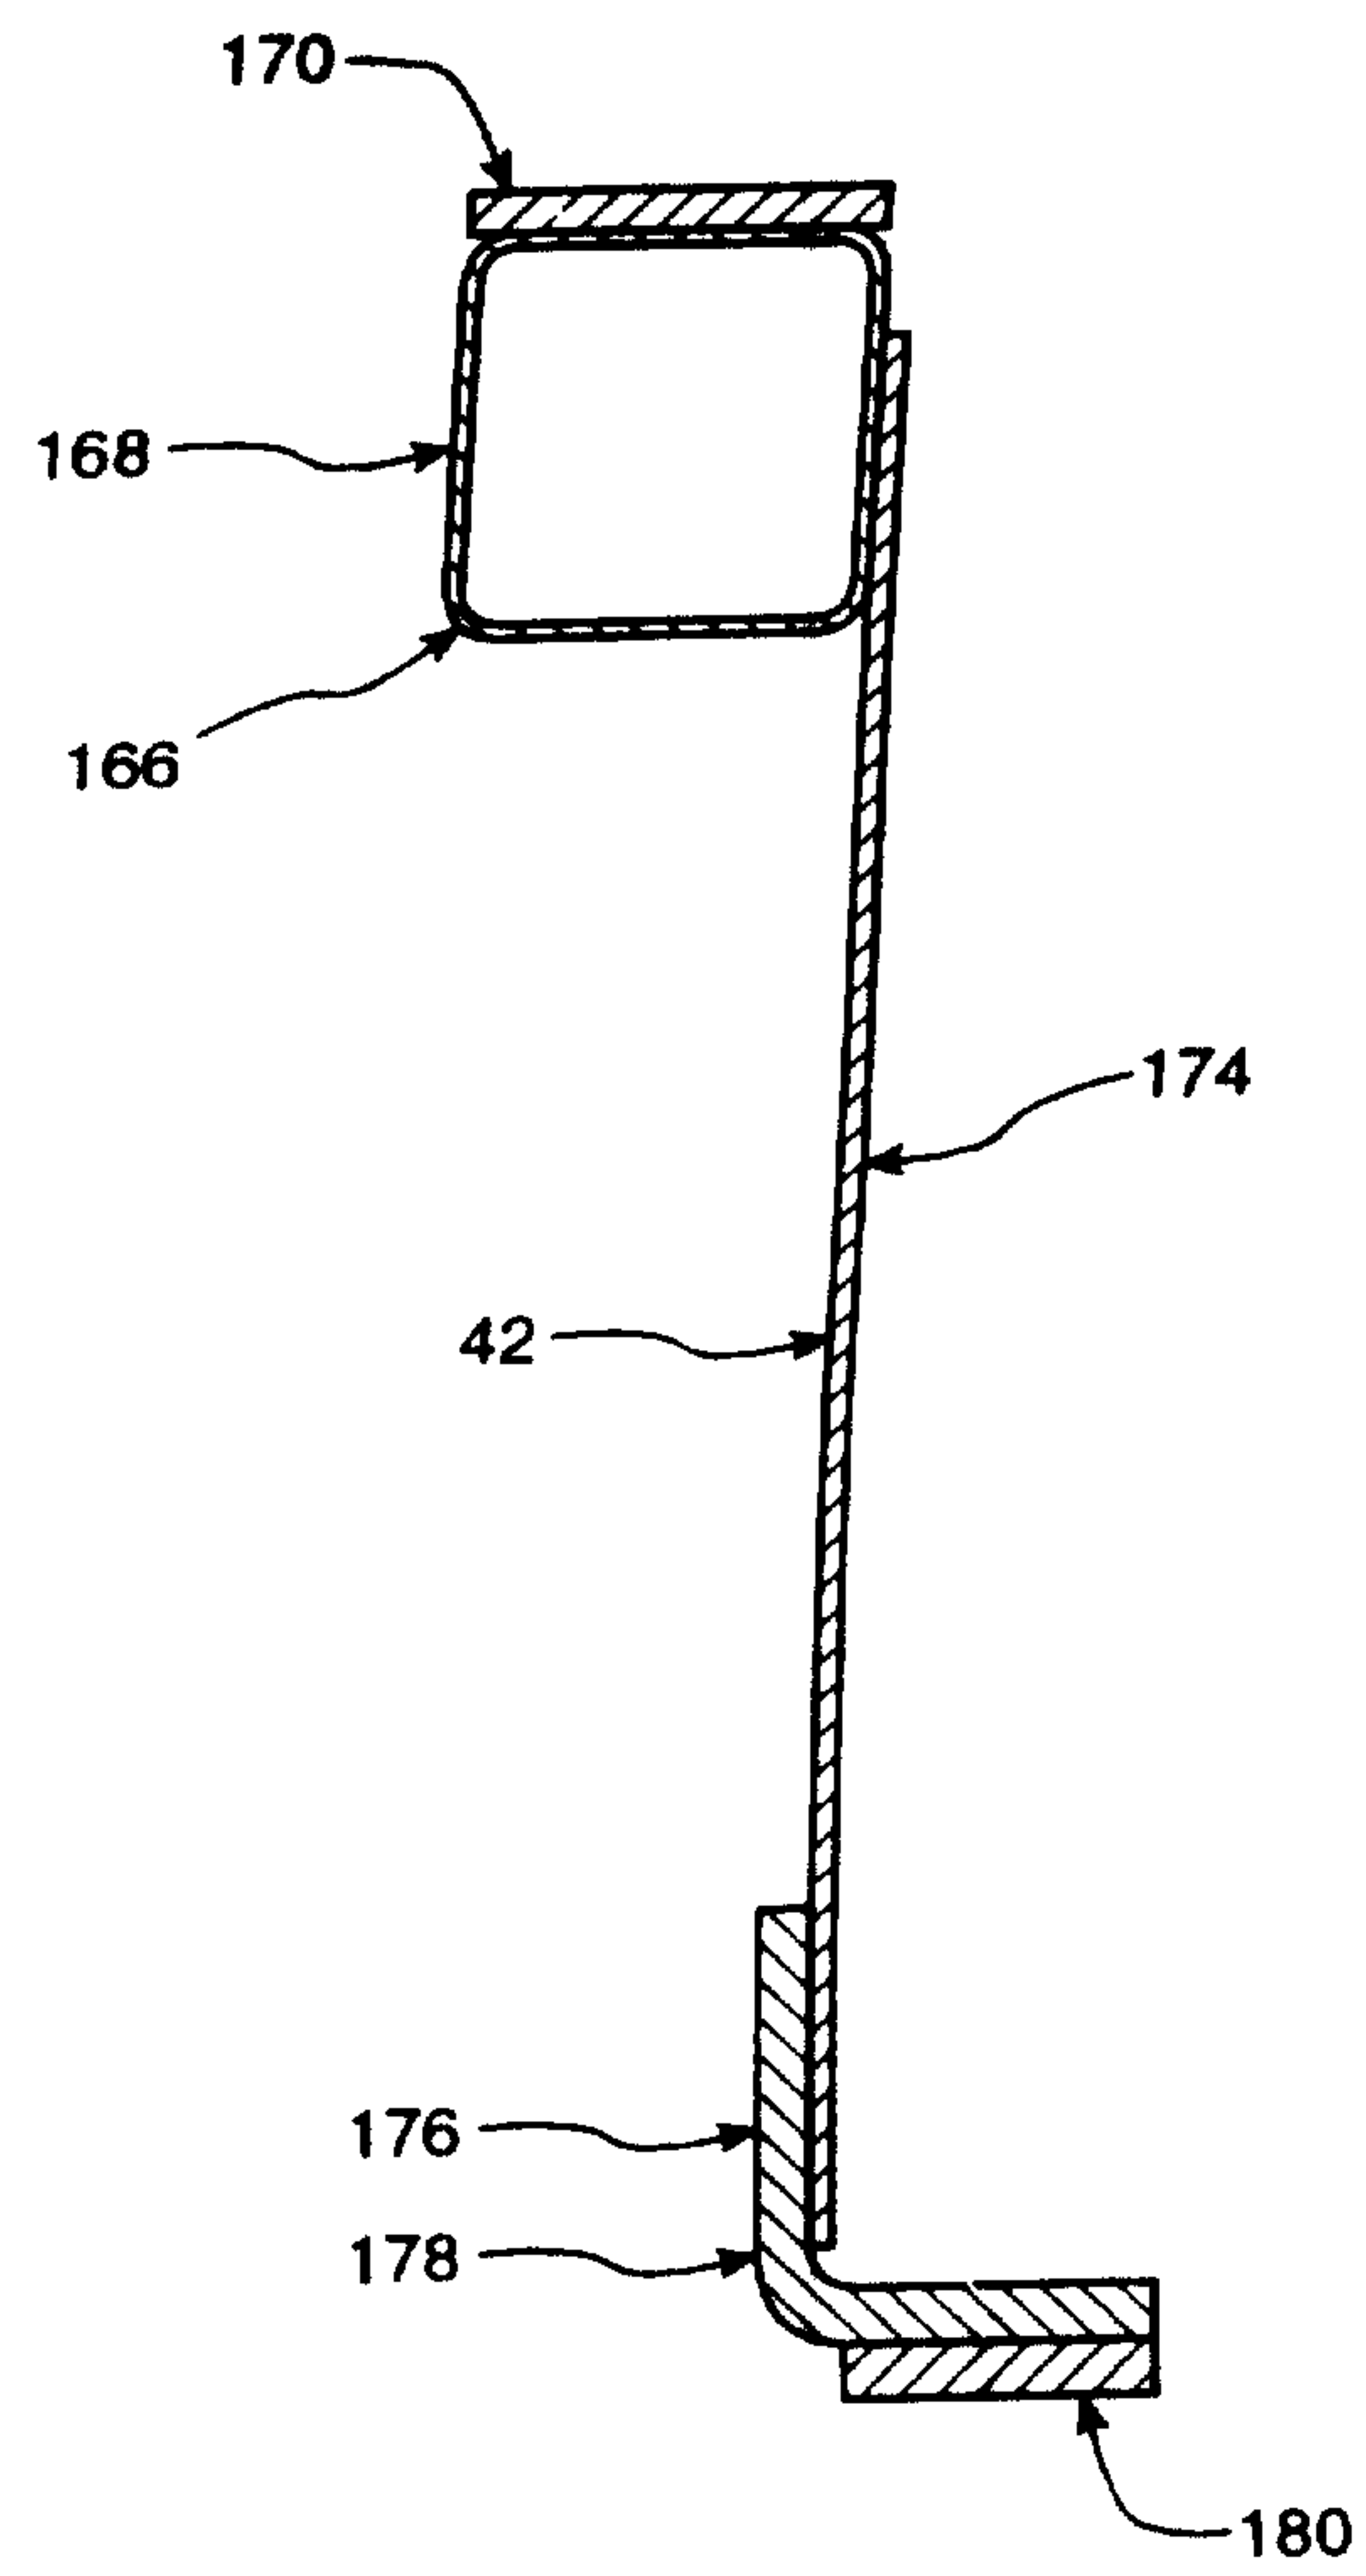


FIG. 7a

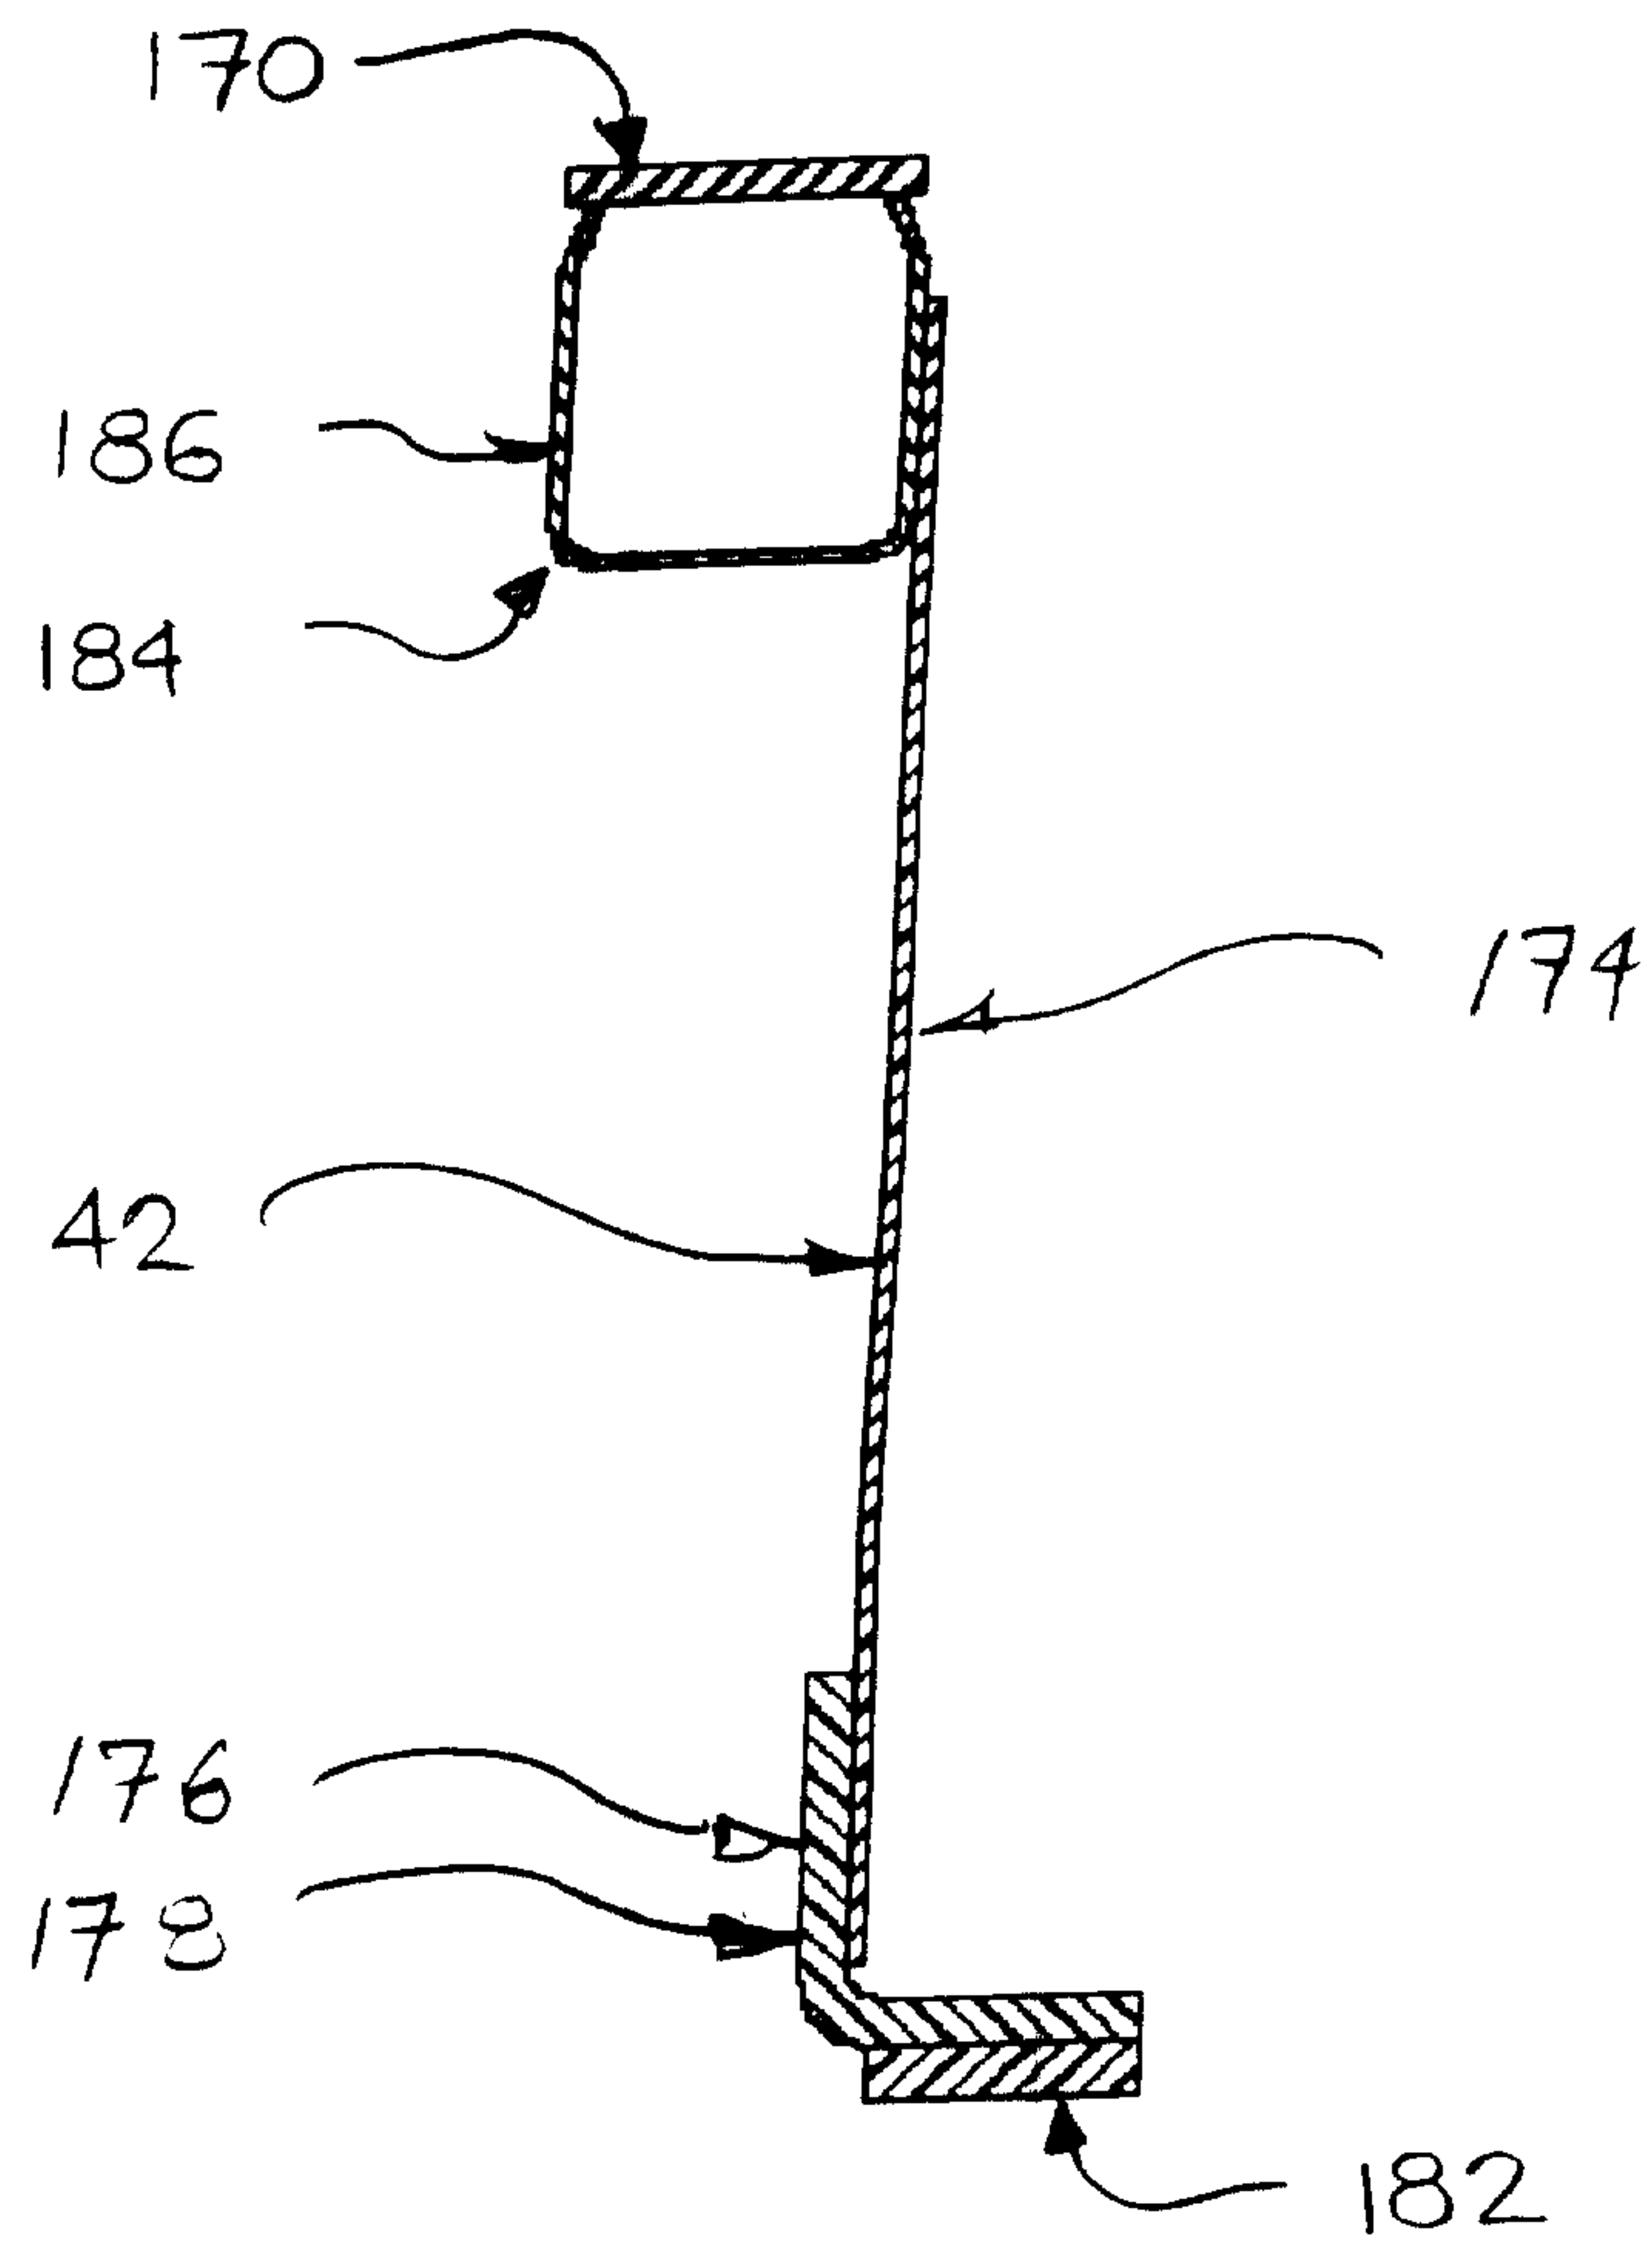


FIGURE 7b.

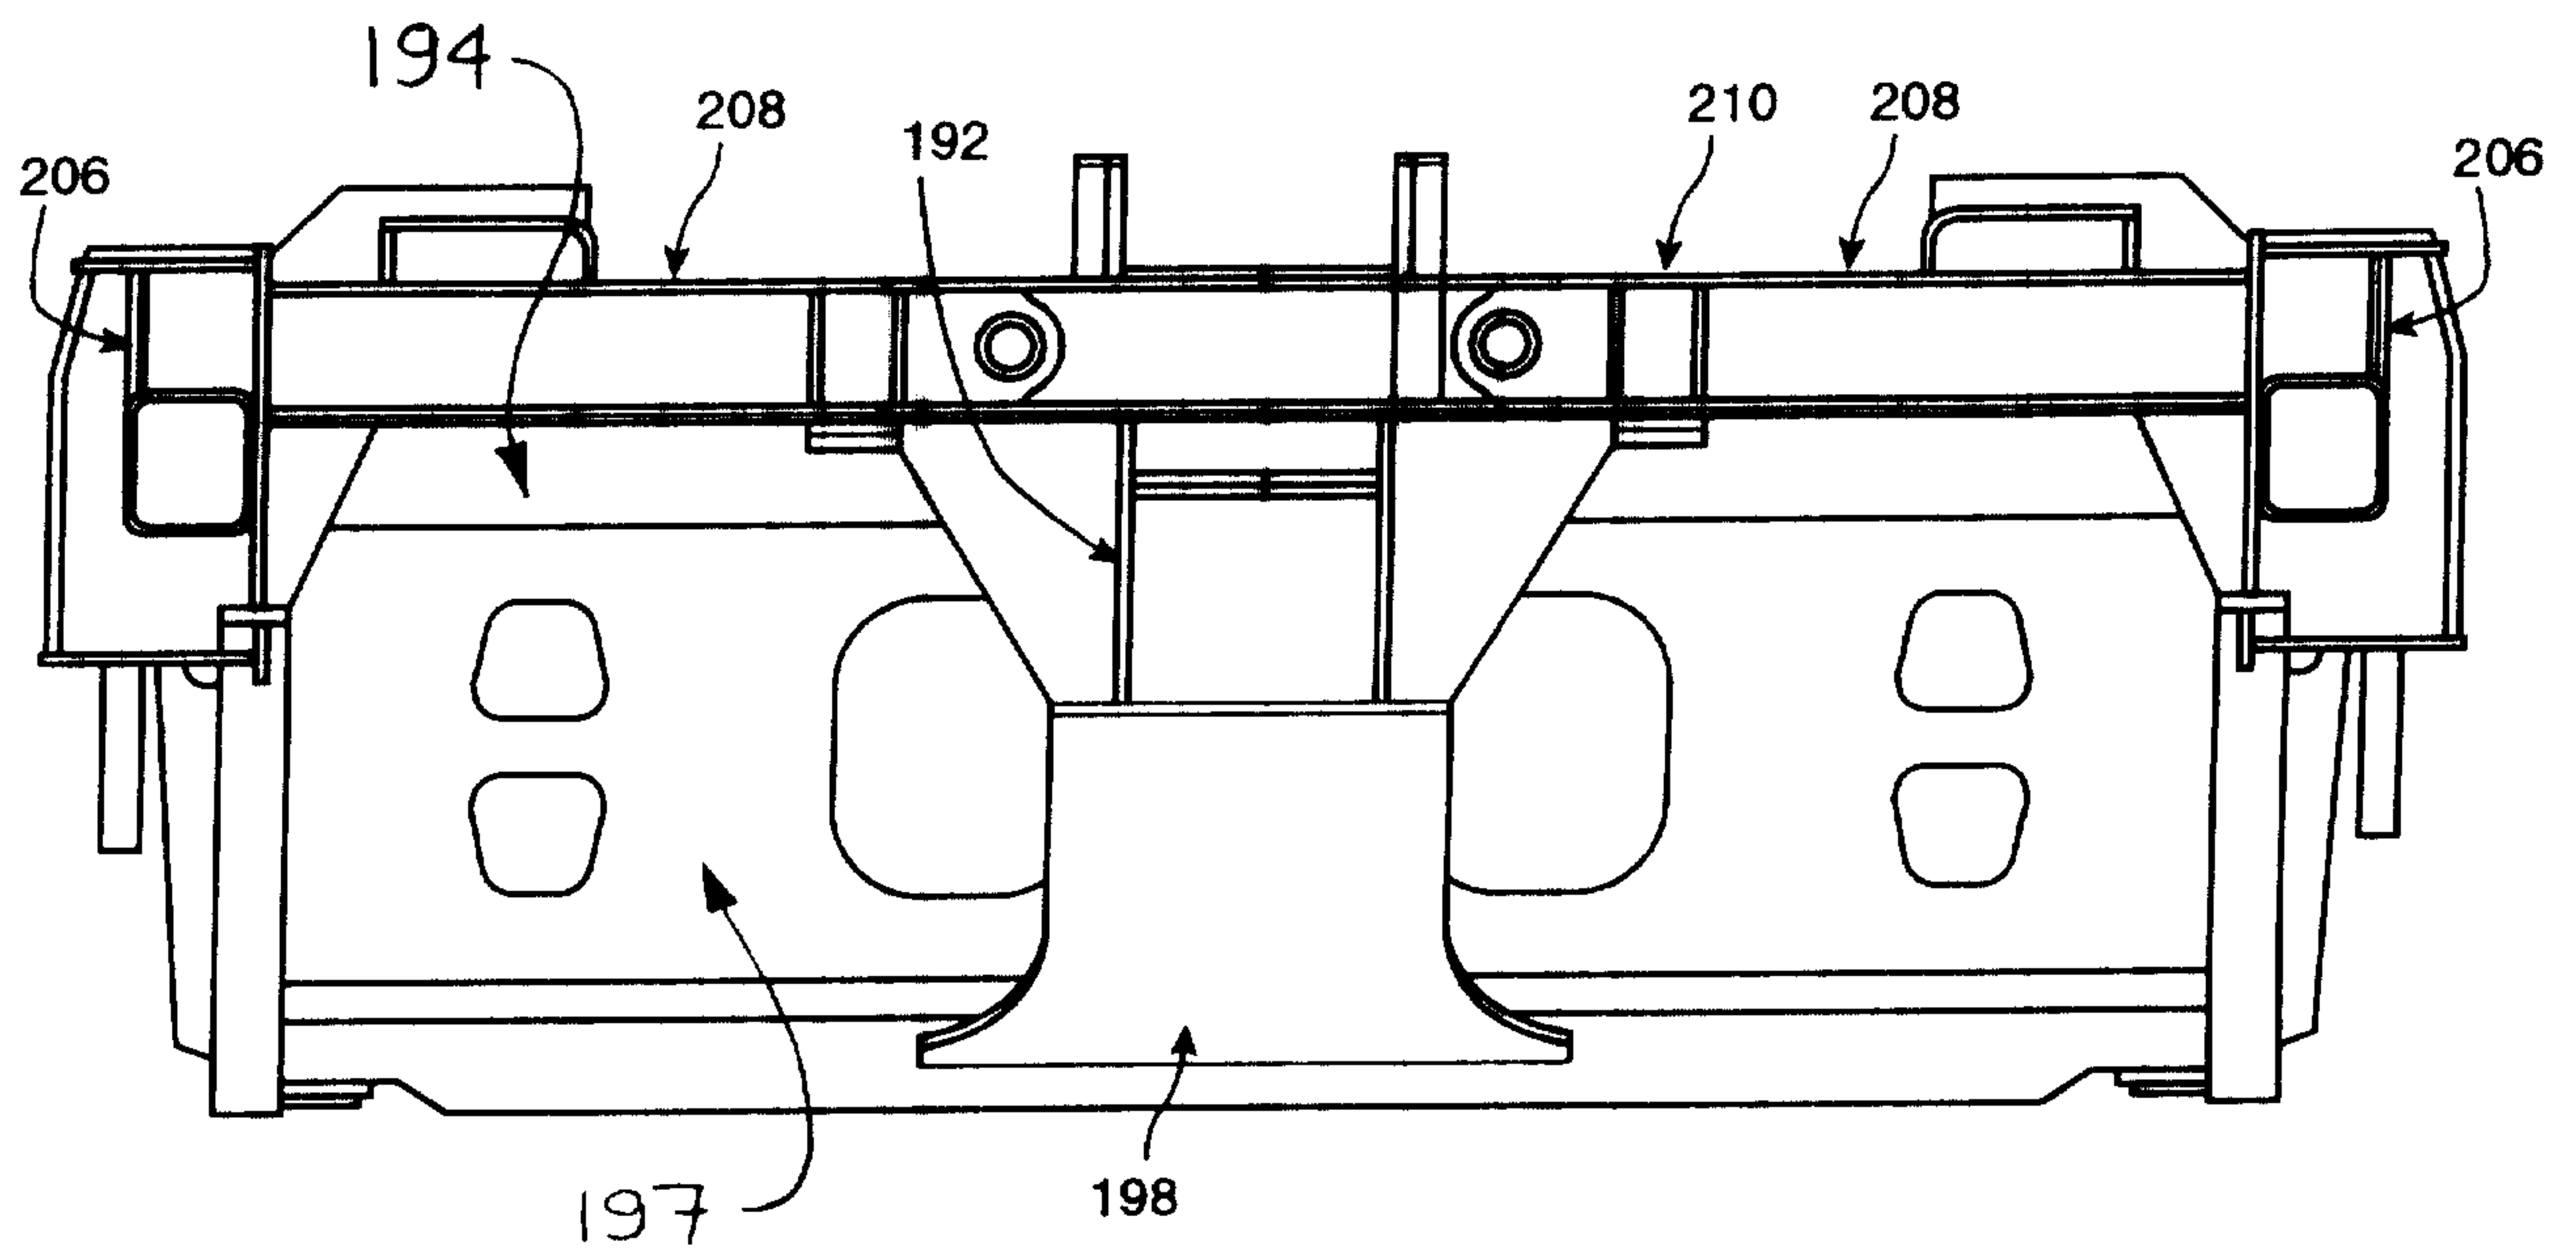


FIG. 8

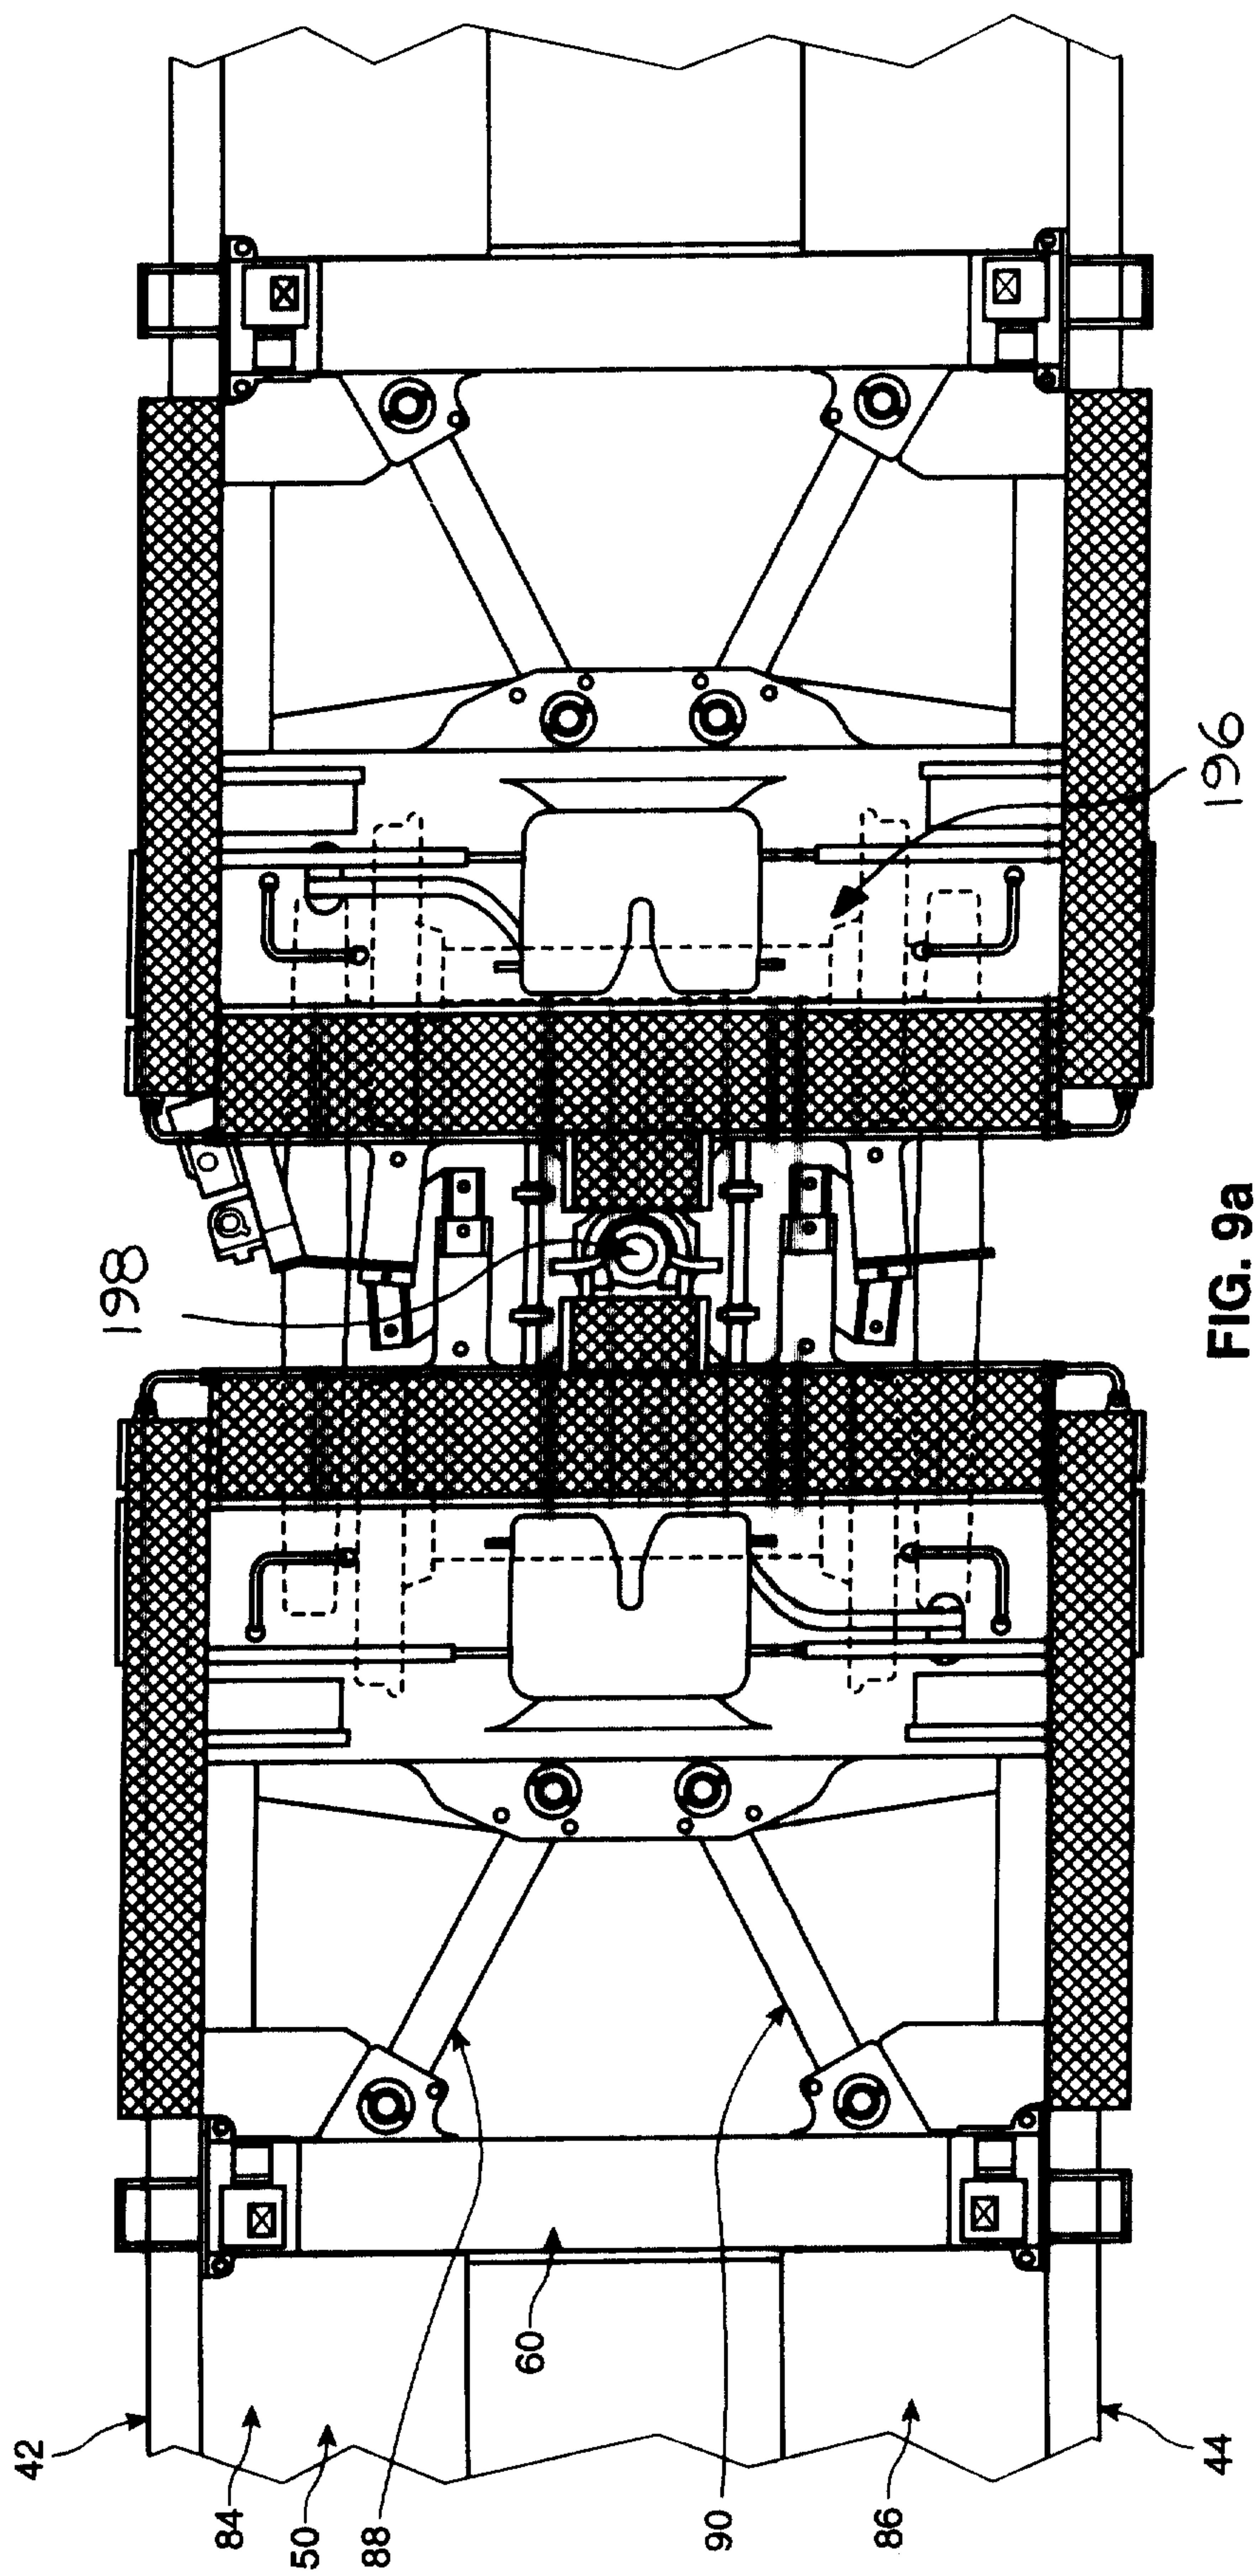


FIG. 9a

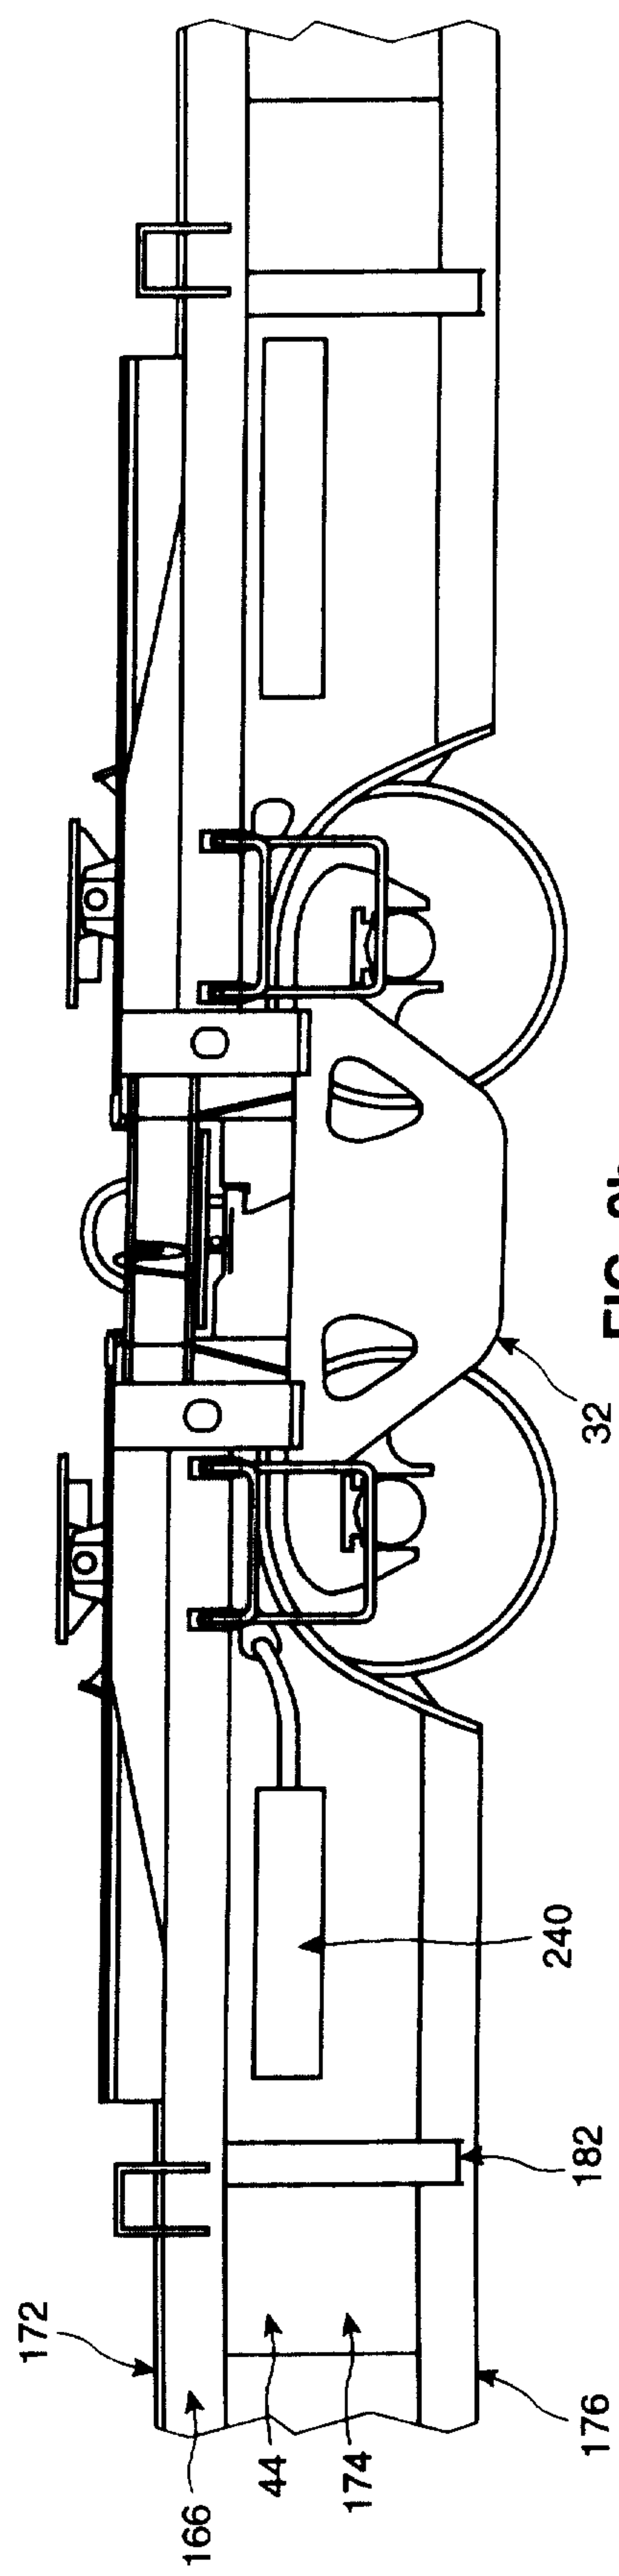


FIG. 9b

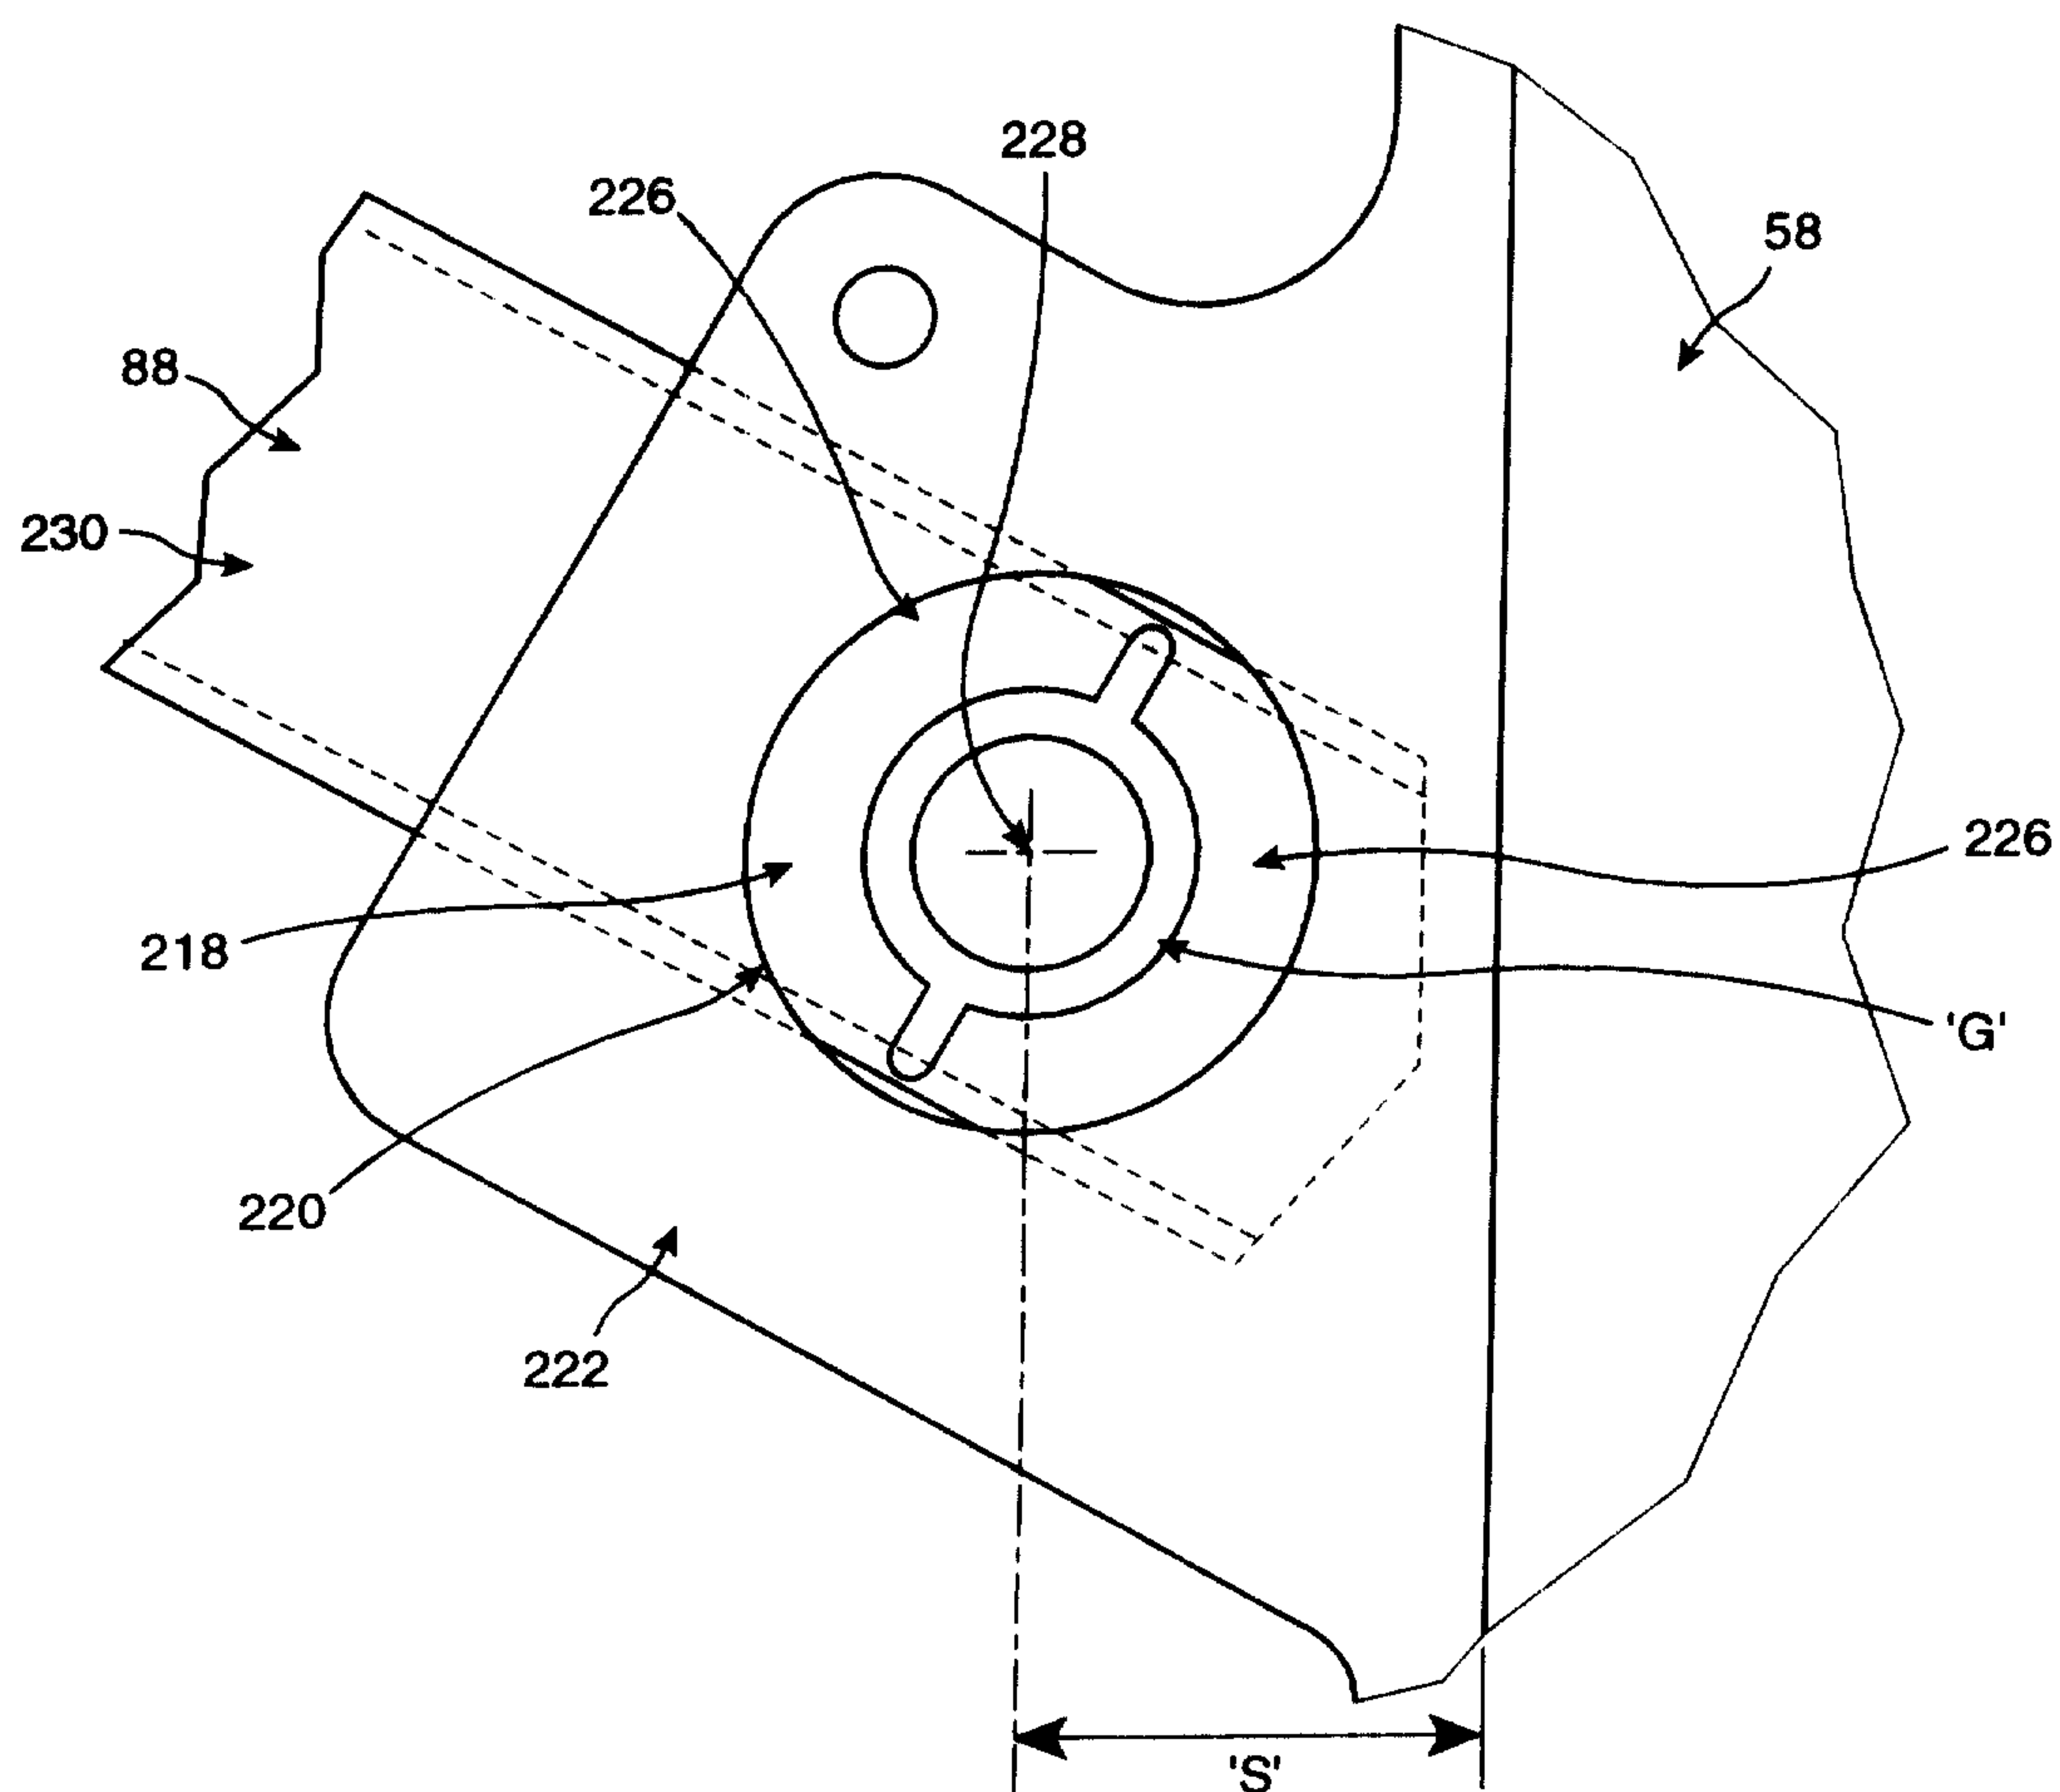


FIG. 10a

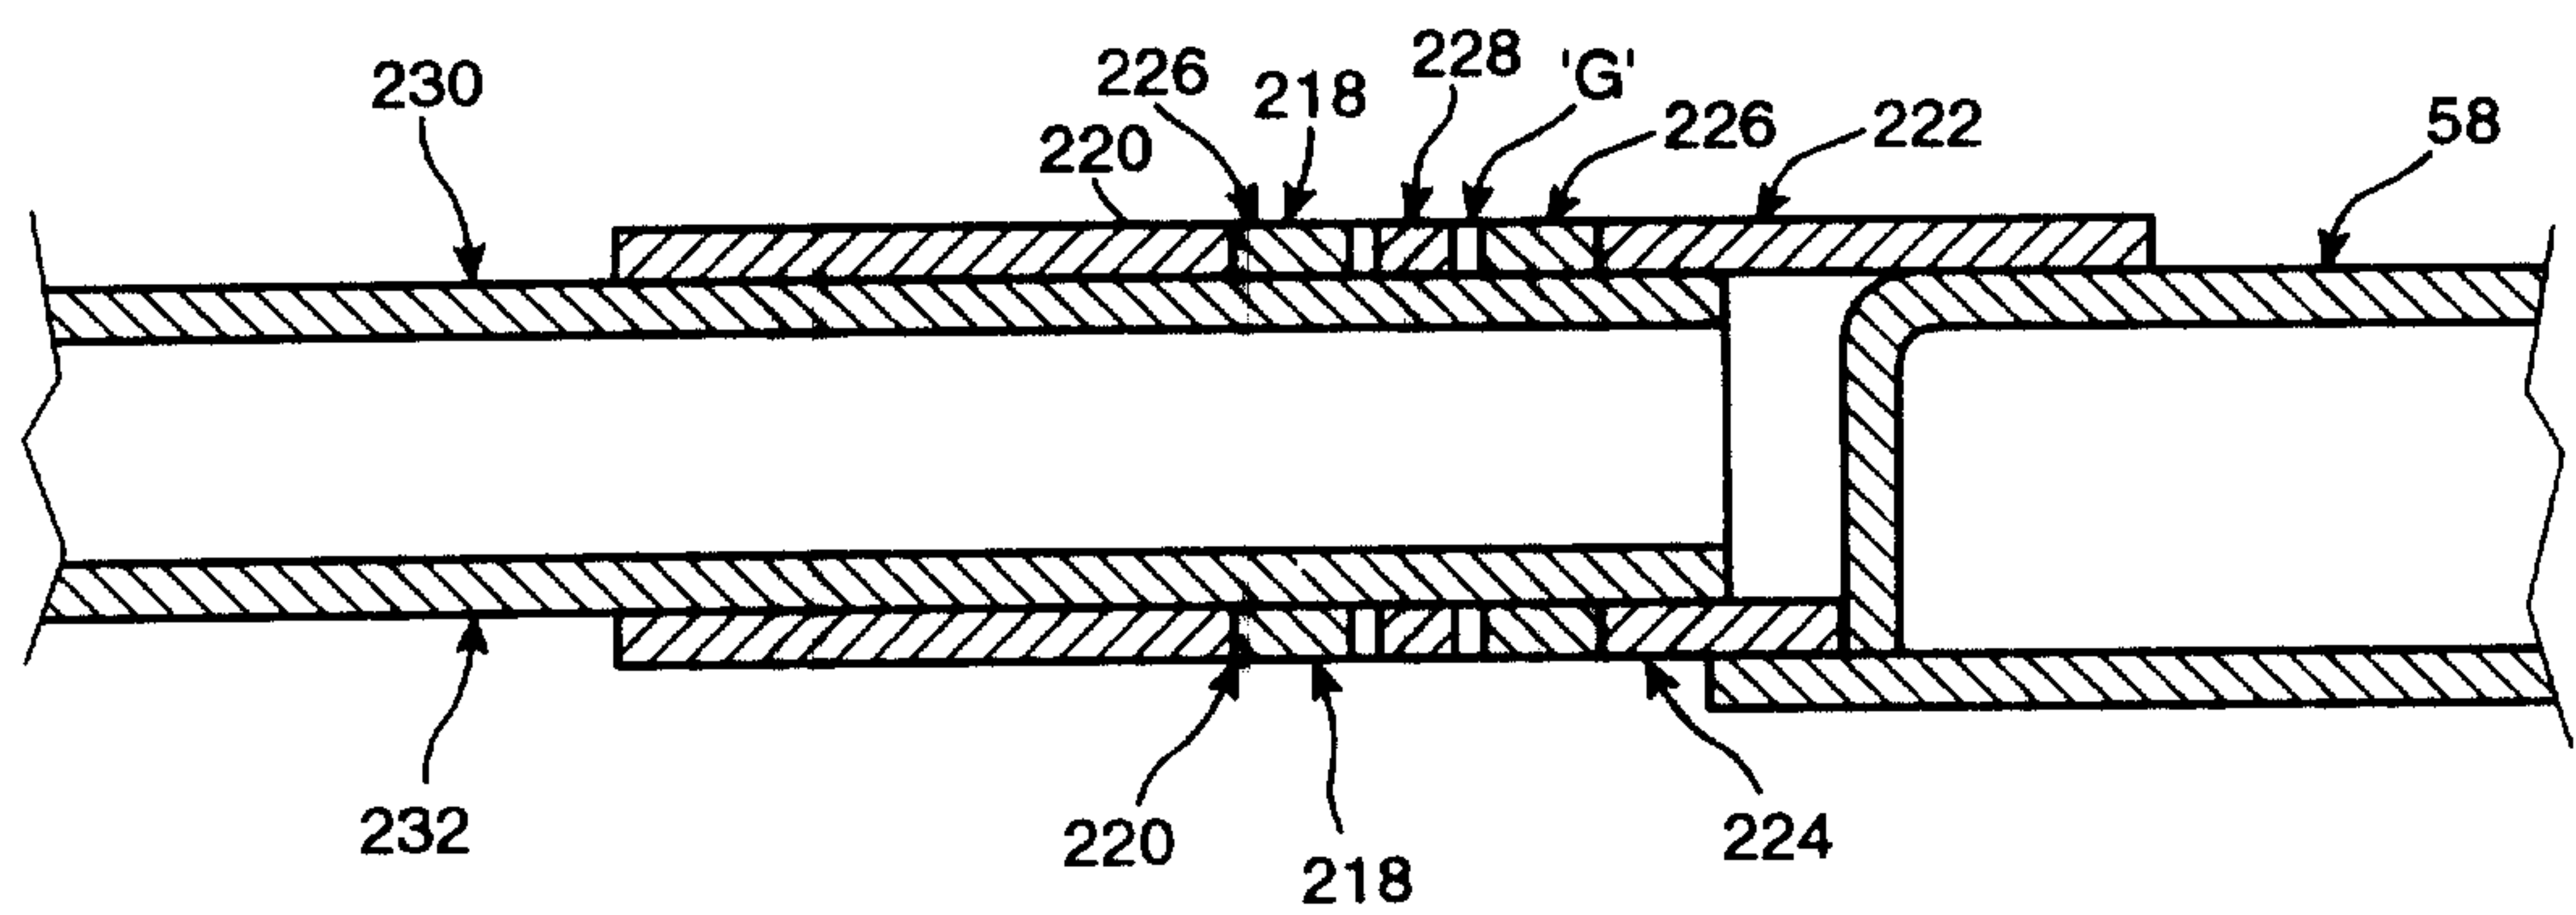


FIG. 10b

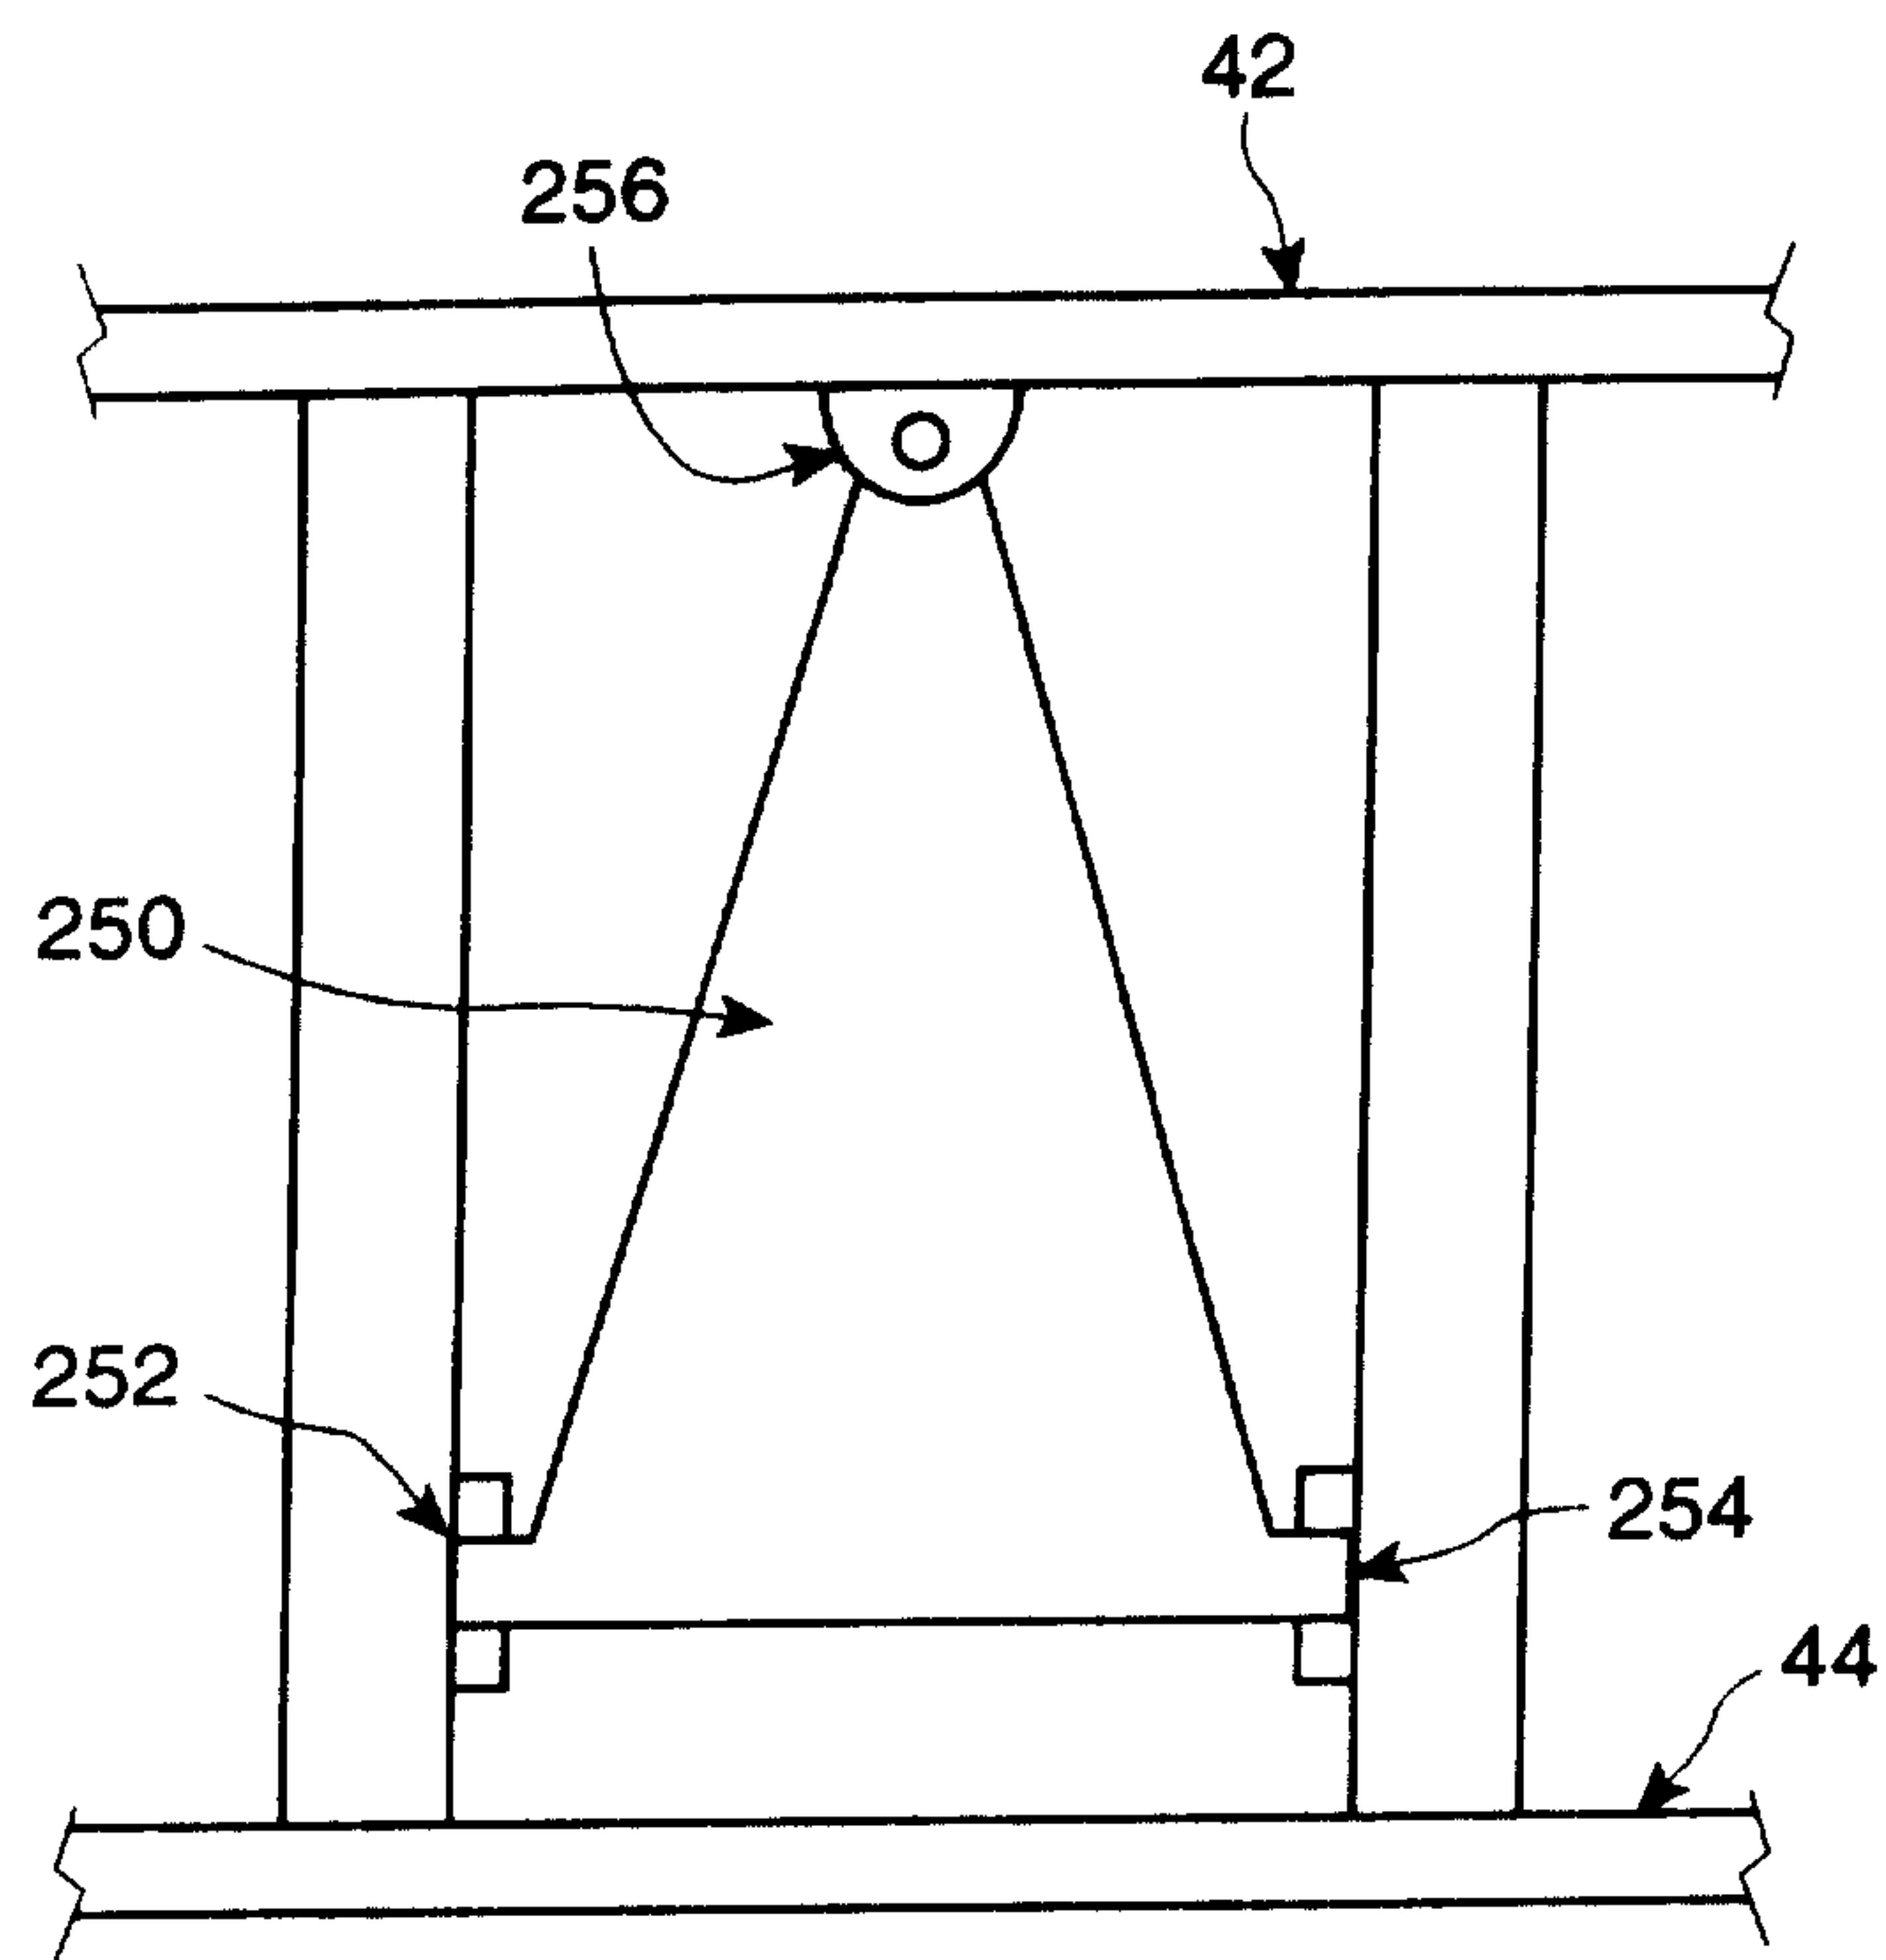


FIG. 11a

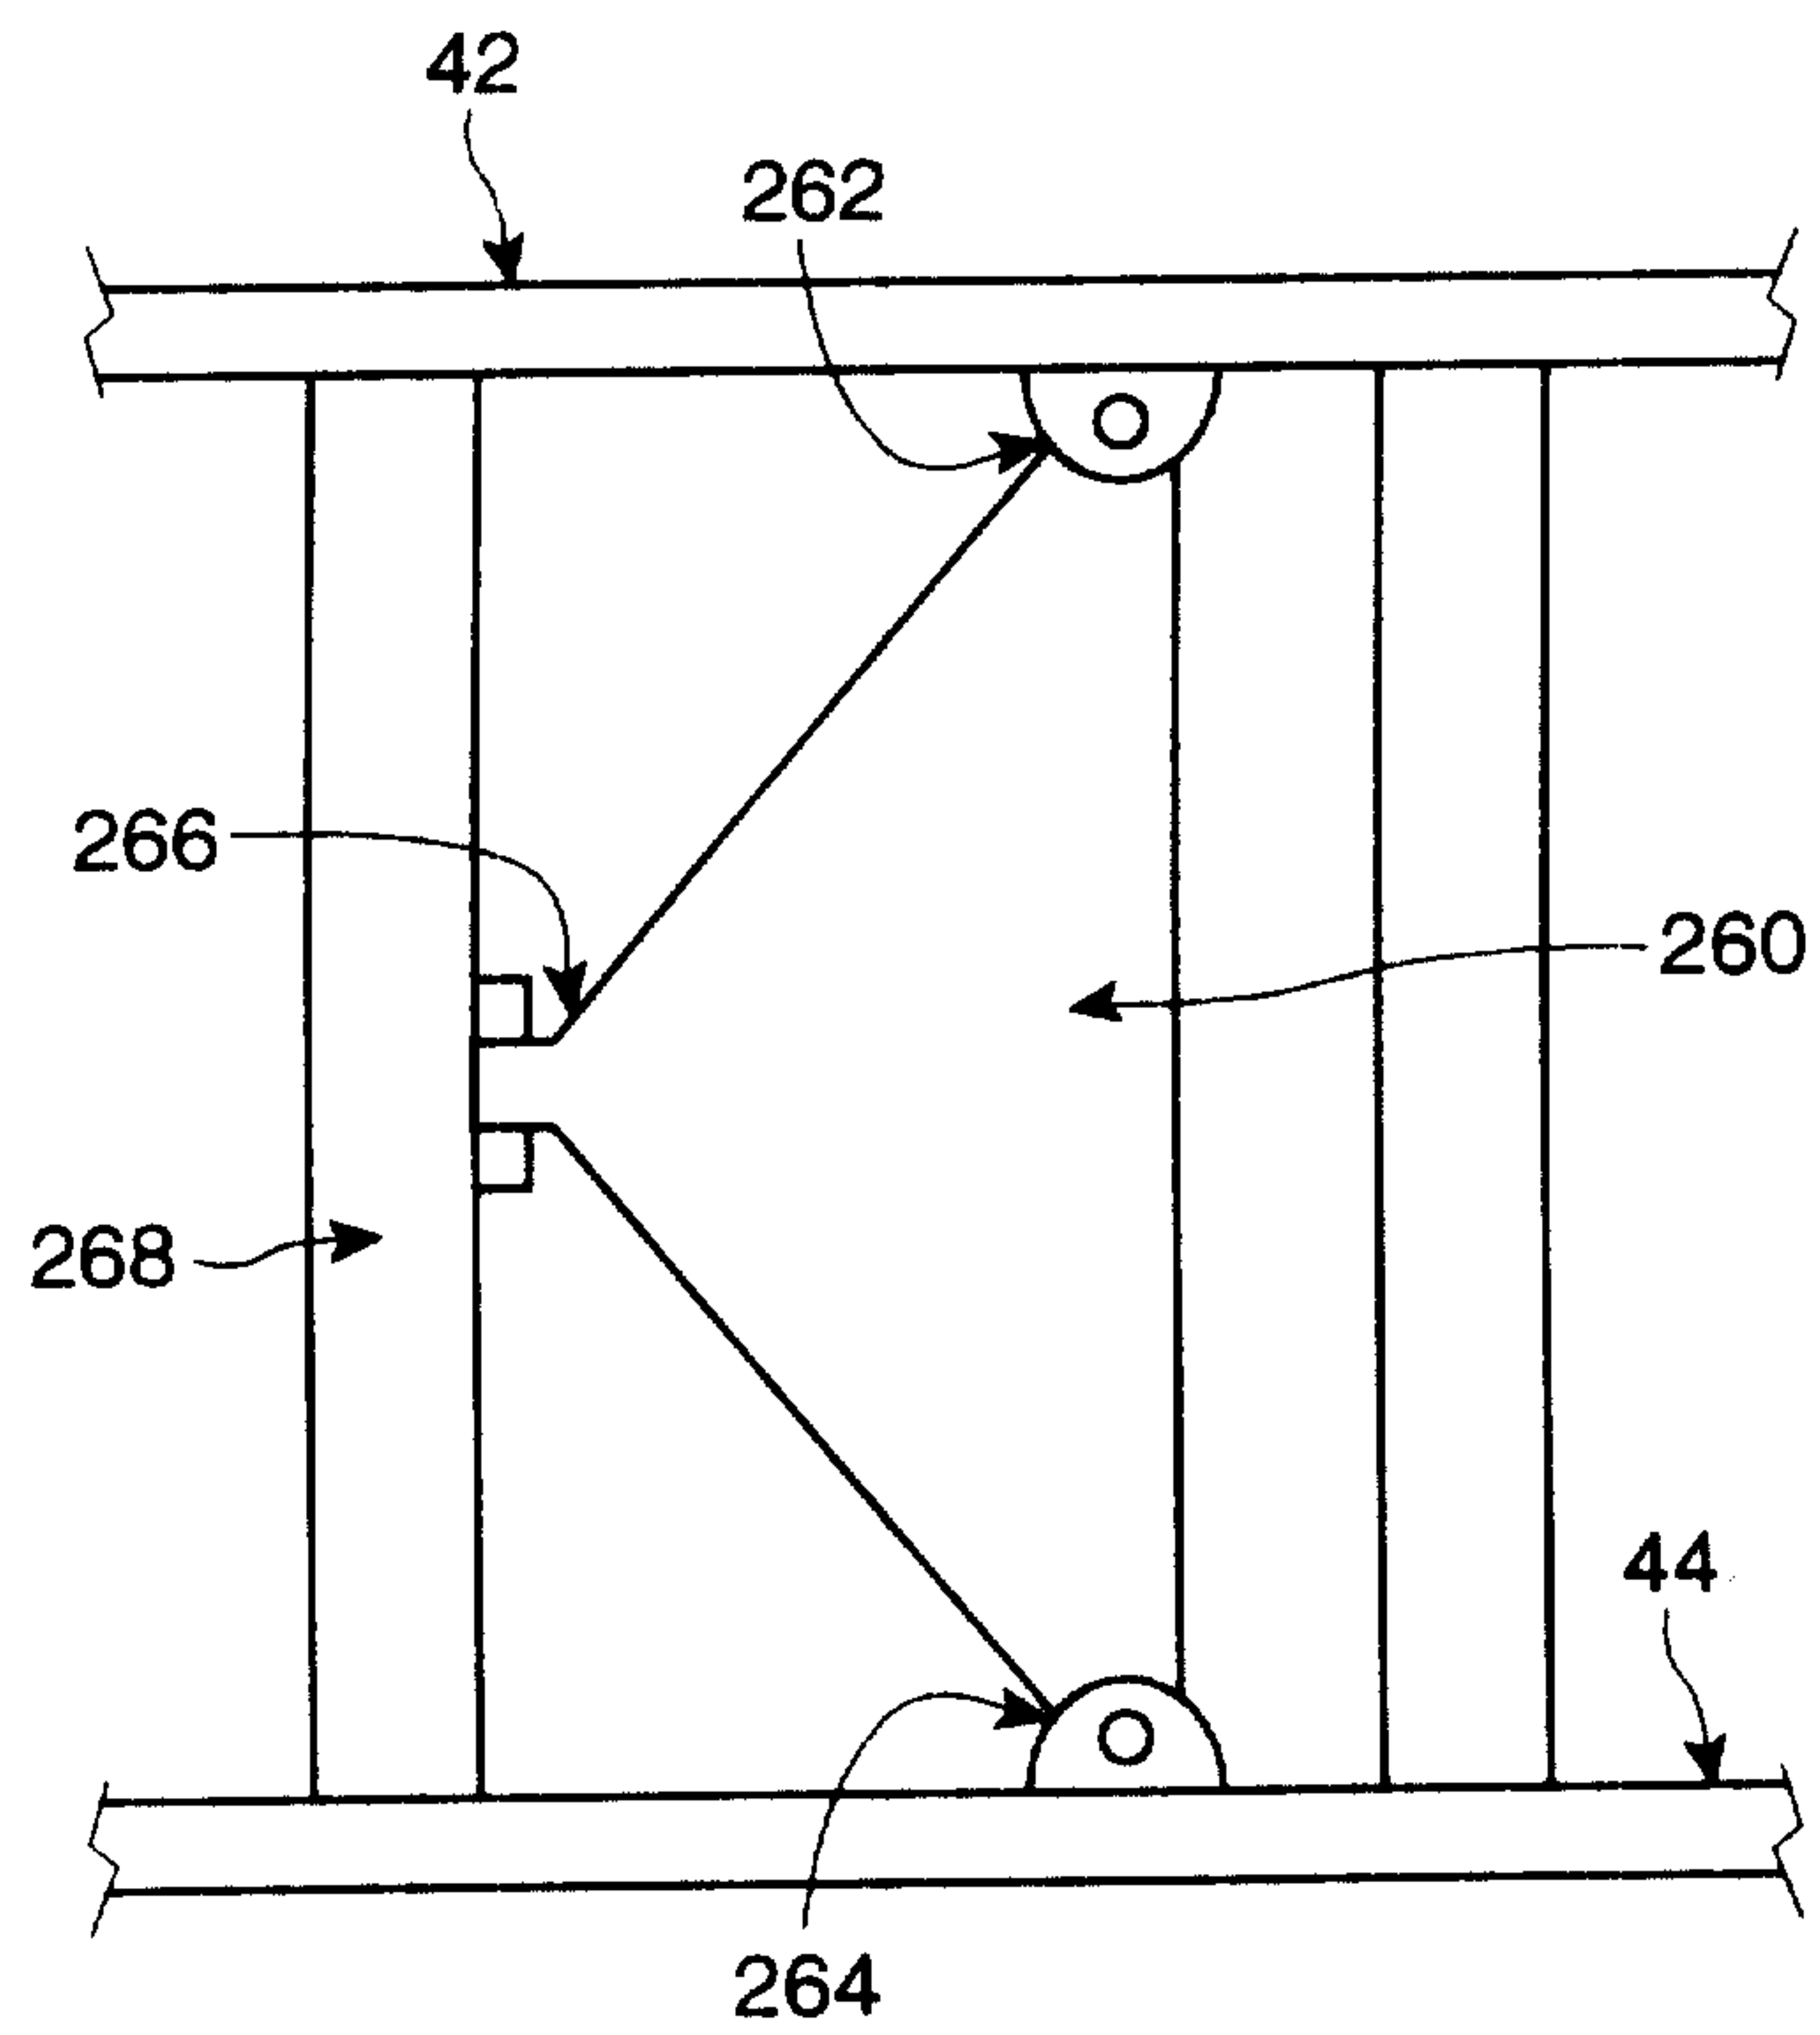


FIG. 11b

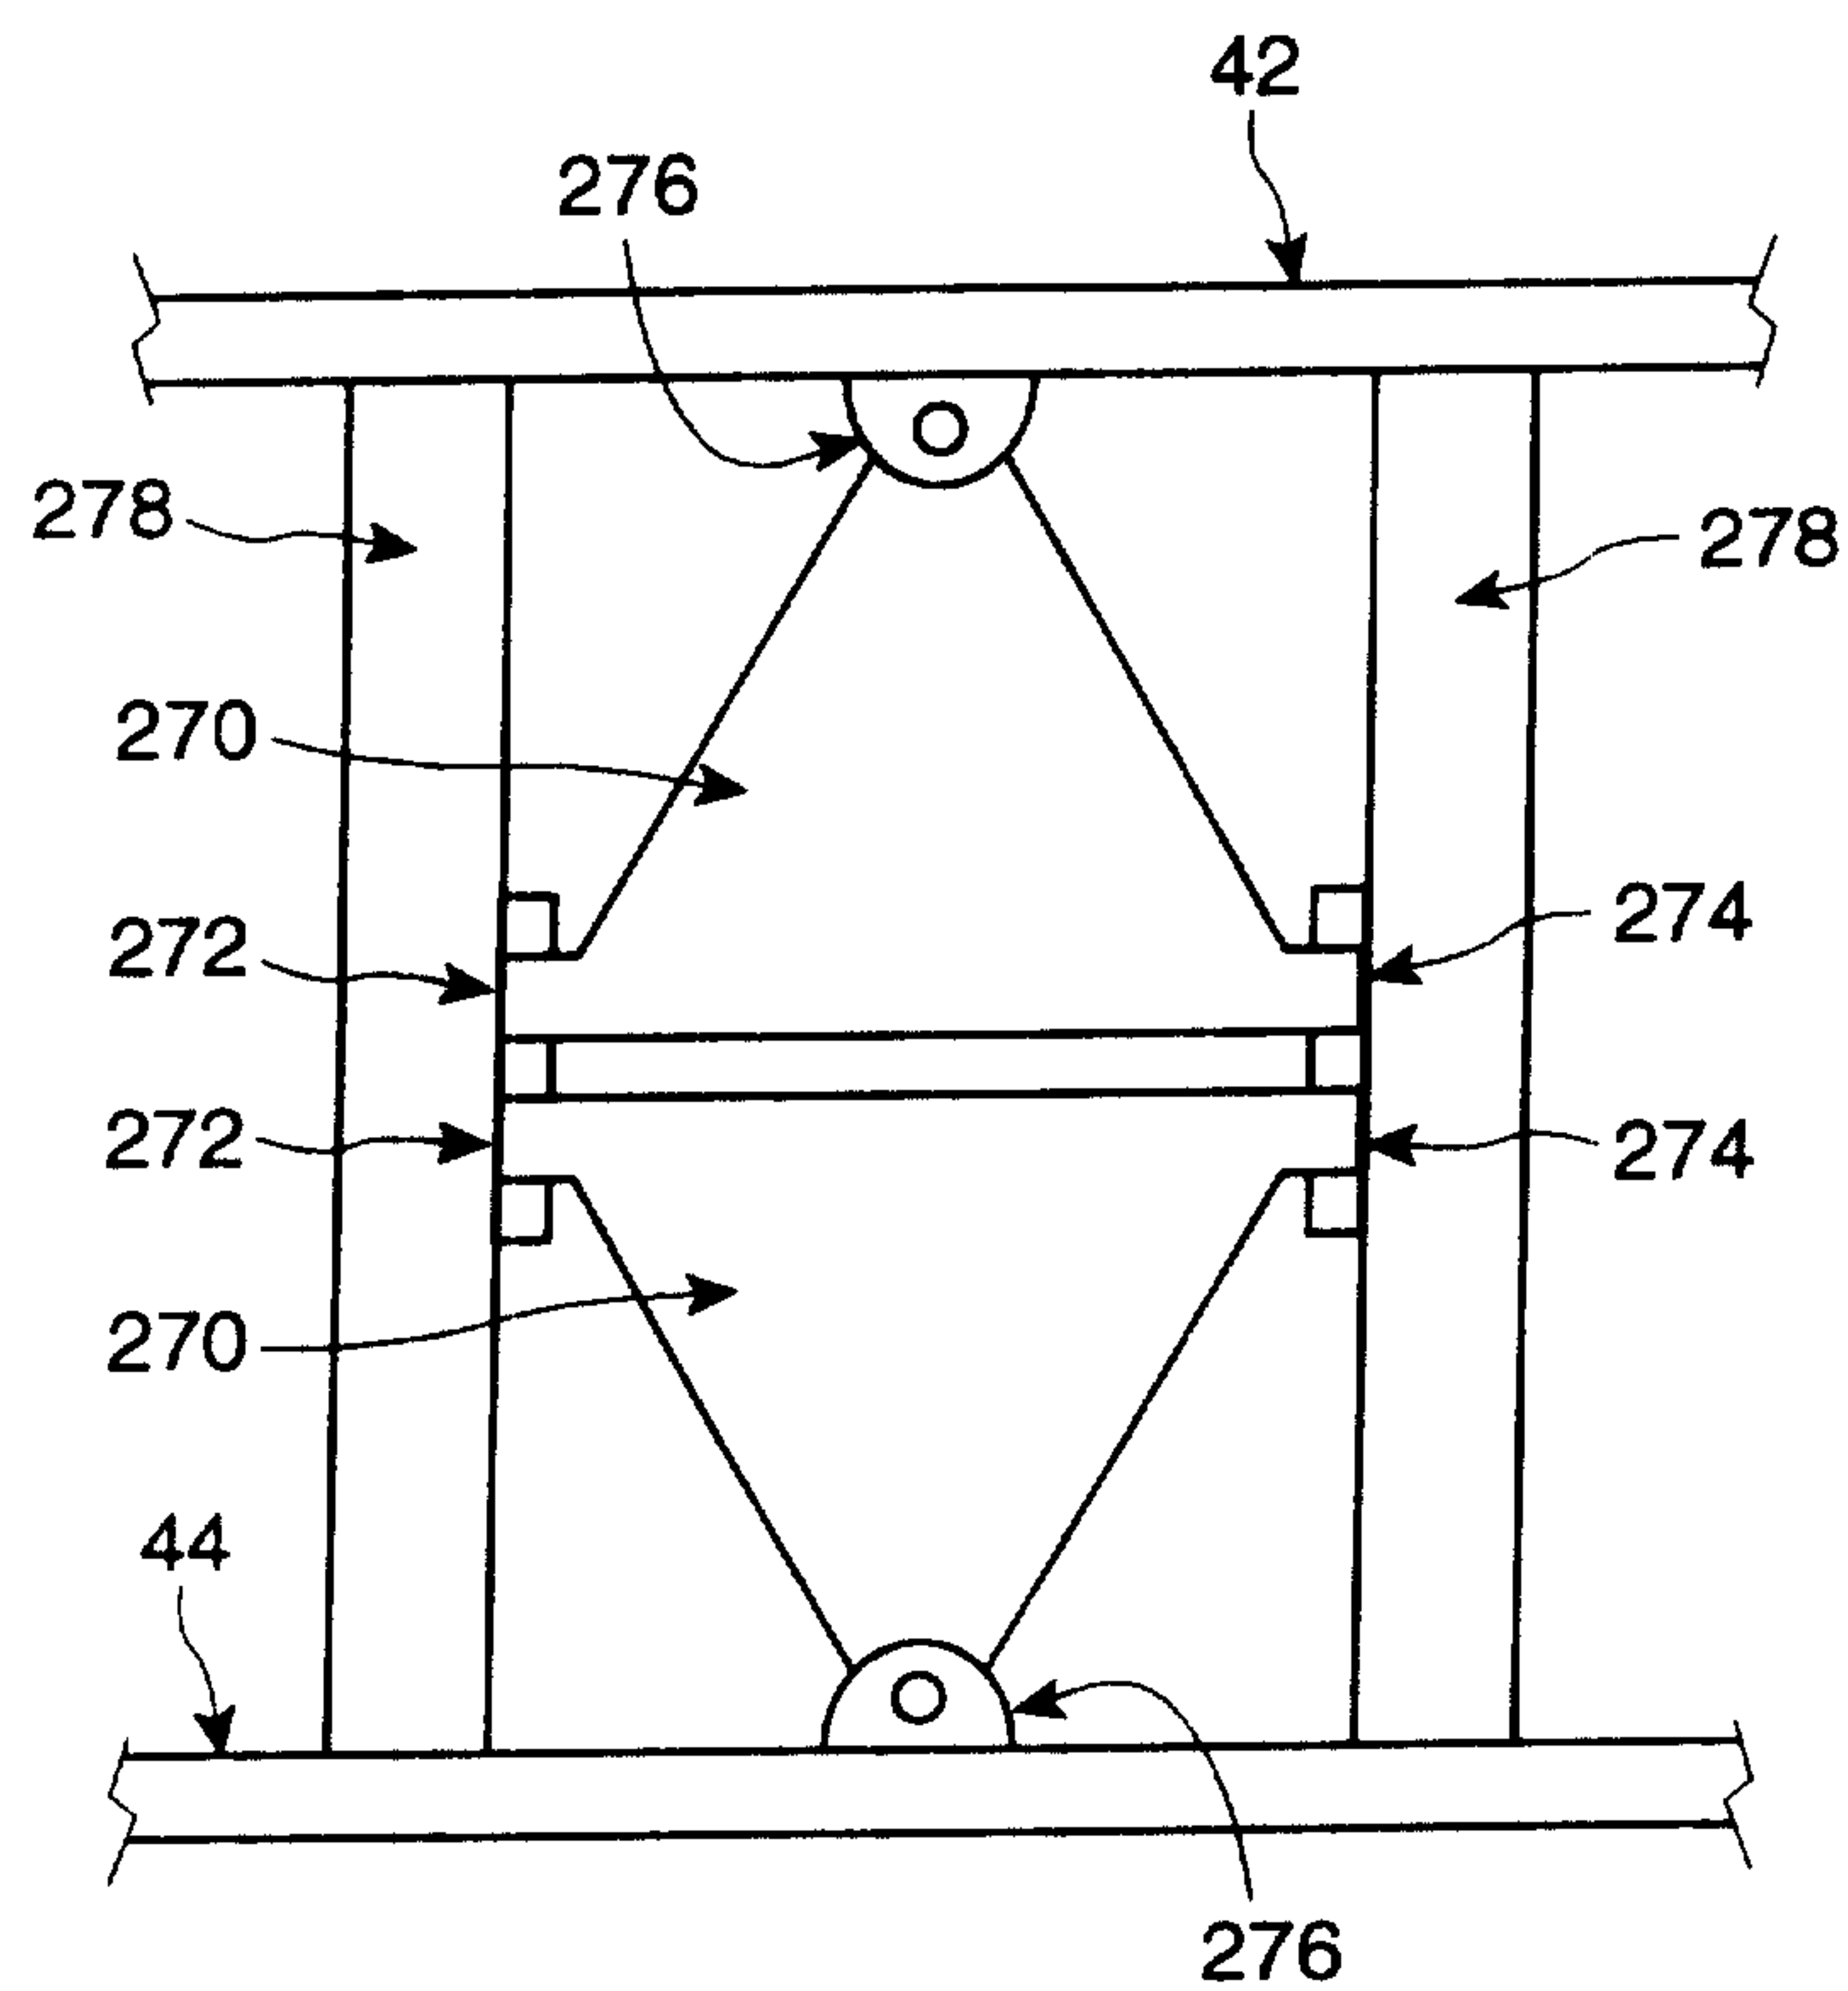


FIG. 11c

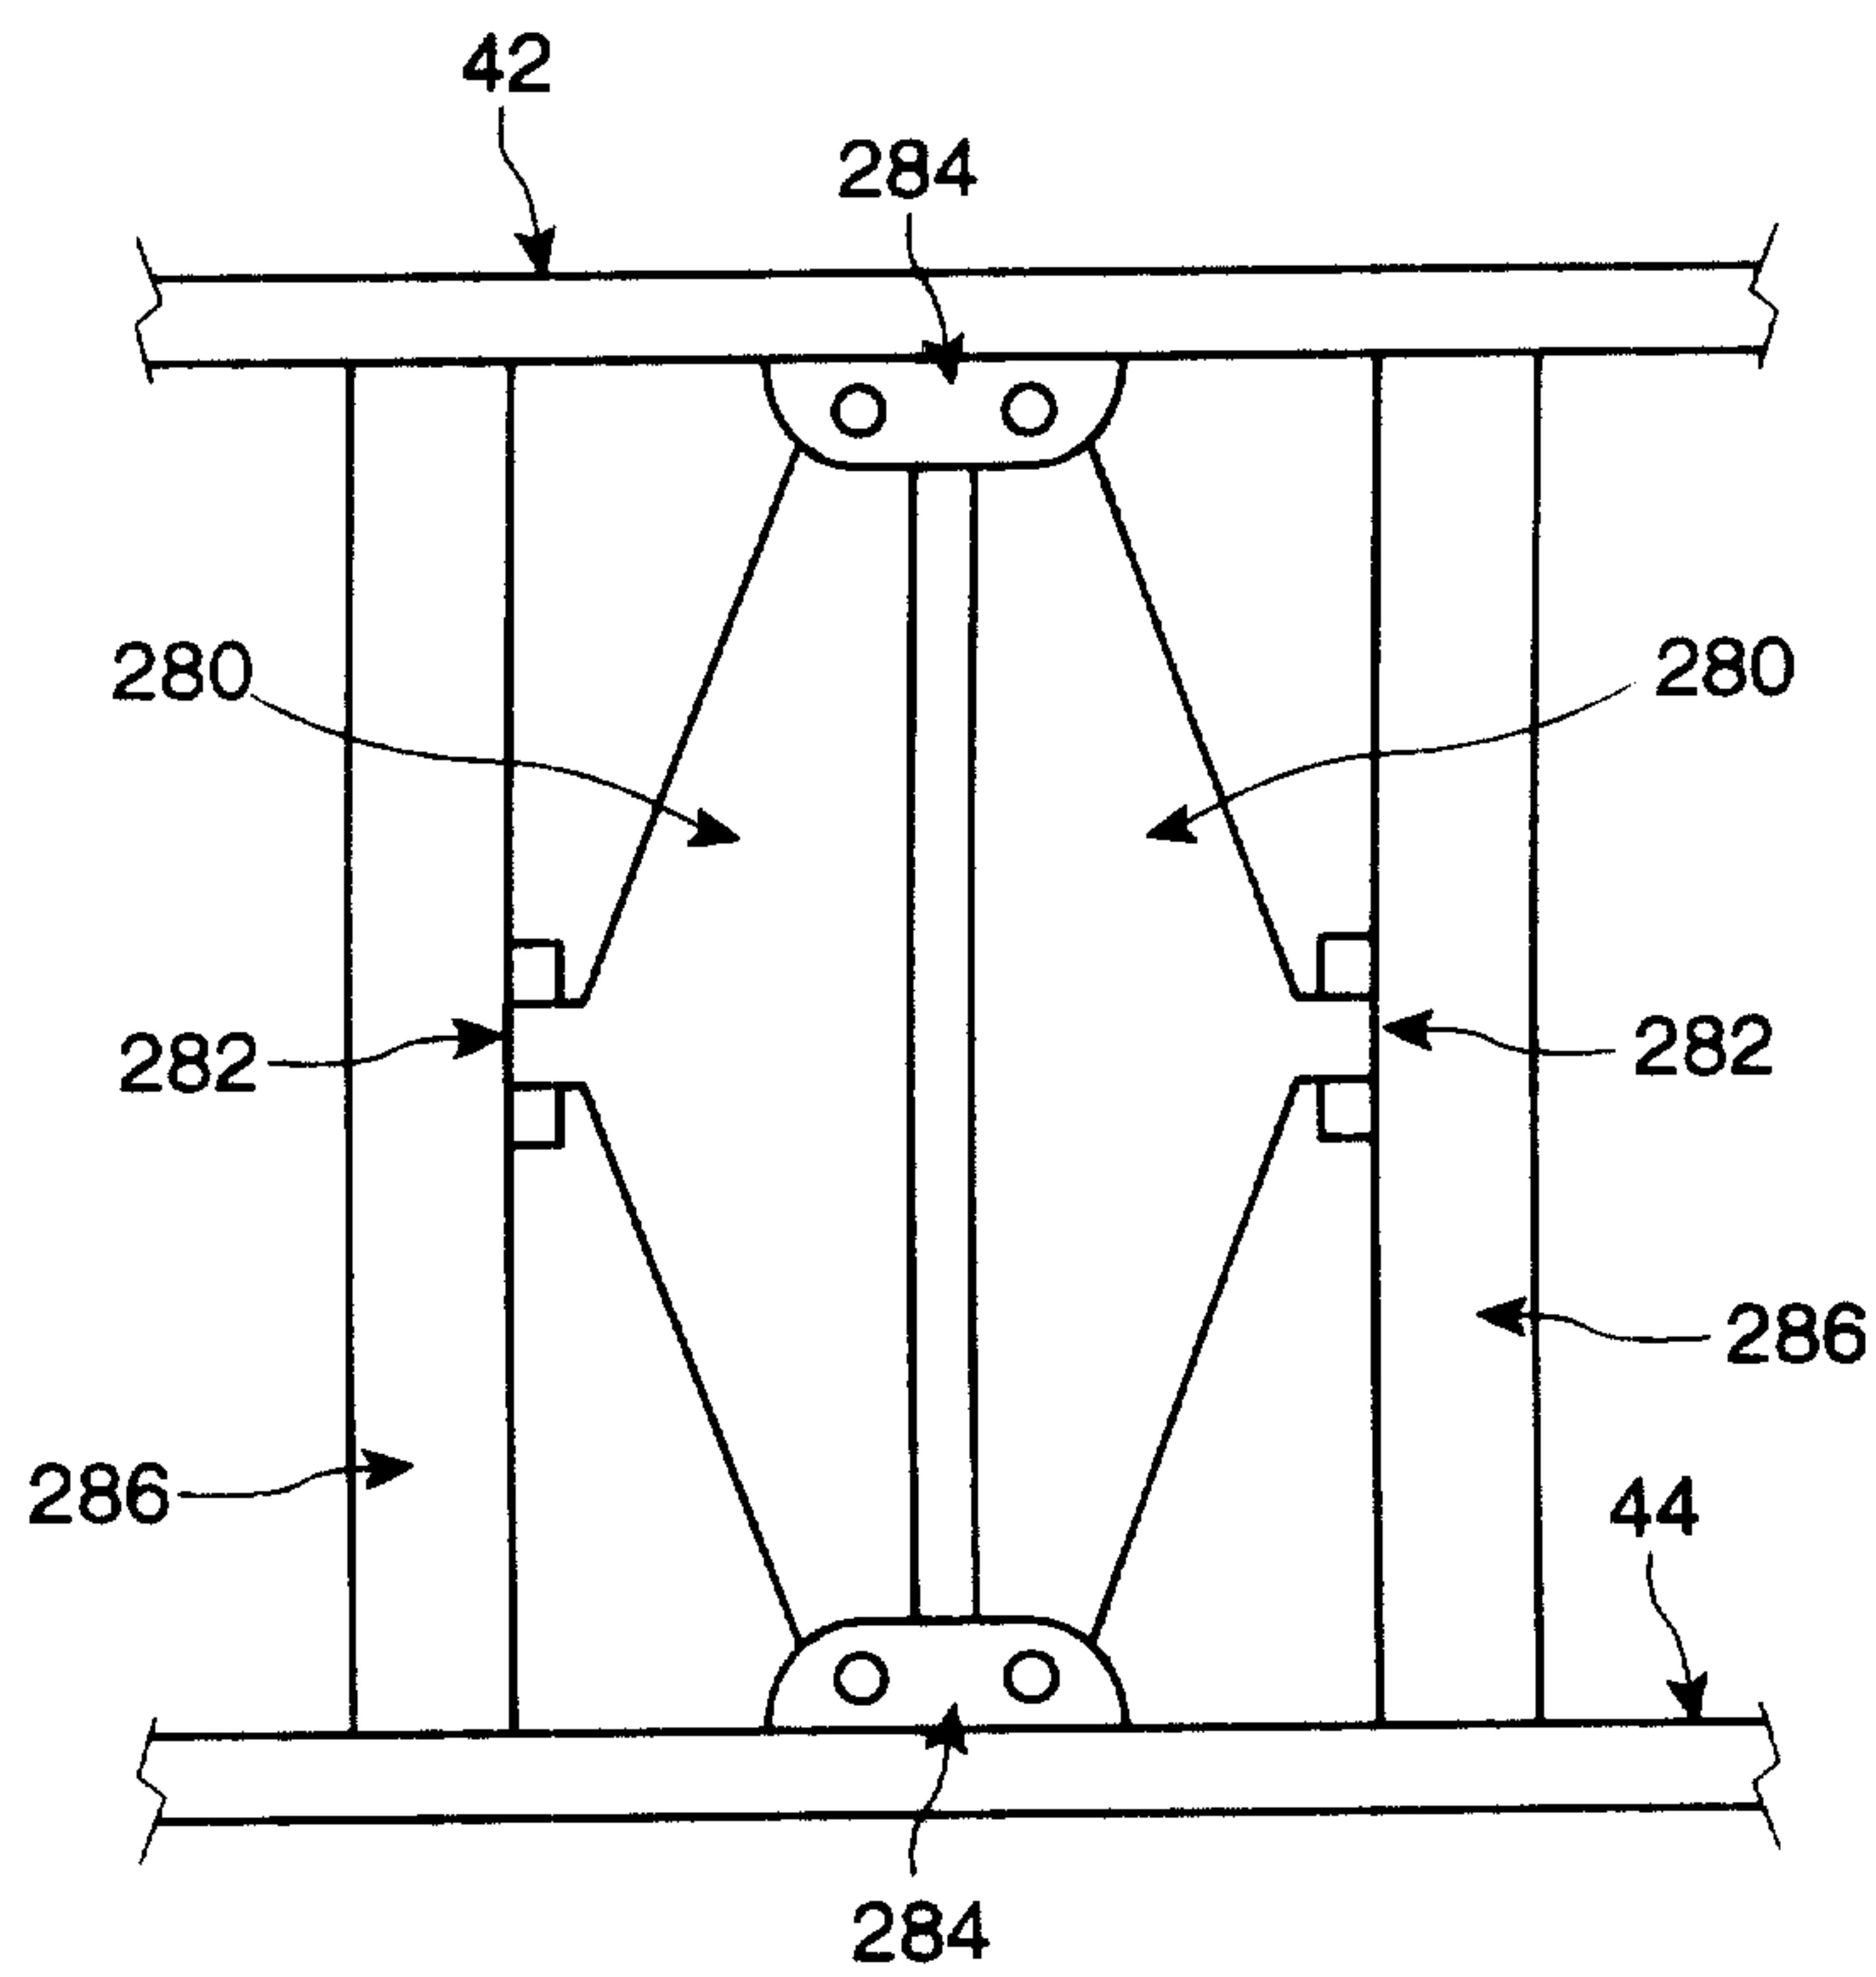


FIG. 11d

