




FORM 1
COMMONWEALTH OF AUSTRALIA
PATENTS ACT 1952-1973

APPLICATION FOR A STANDARD PATENT

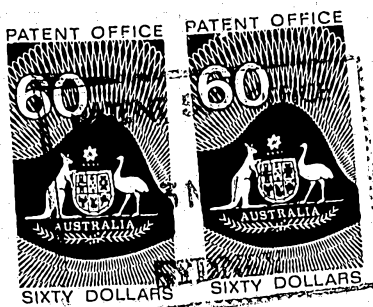

We, N.V. PHILIPS GLOEILAMPENFABRIEKEN, a limited liability company organised under the laws of the Kingdom of the Netherlands and carrying on business at Groenewoudseweg 1, Eindhoven, The Netherlands, hereby apply for the grant of a Standard Patent for an invention entitled:

"DATA PROCESSING SYSTEM"

which is described in the accompanying complete specification.

This application is made under the provisions of Part XVI of the Patents Act 1952 and is based on the following application for a patent or patents or similar protection made in the following country or countries on the following dates or dates.

in Great Britain, Appl.No. 8626198 filed 3rd November, 1986.

Our address for service is: Patent & Trade Marks Division, Philips Industries Holdings Limited, 16th Floor, The Philips Building, 15 Blue Street, North Sydney, N.S.W., 2060.

Dated this third day of November, 1987.

N.V. PHILIPS GLOEILAMPENFABRIEKEN

P. Dawson
ATTORNEY

To: The Commissioner of Patents,
Commonwealth of Australia.

APPLICATION ACCEPTED AND AMENDMENTS

ALLOWED 12-11-90

COMMONWEALTH OF AUSTRALIA
PATENTS ACT 1952-1973

DECLARATION FOR A PATENT APPLICATION

In support of the Convention Application made by N. V. PHILIPS' GLOEILAMPENFABRIEKEN (hereinafter called "applicant" for a patent invention entitled:

"Data Processing System".

I, PAUL WALTON MACKENZIE, Manager, Patent & Trade Marks Division, Philips Industries Holdings Limited of 15 Blue Street, North Sydney, in the state of New South Wales, do solemnly and sincerely declare as follows:-

1. I am authorized to make this declaration on behalf of the applicant.
2. NIGEL LESLIE JOHNSON of 126 Lynn Road, Wisbech, Cambridgeshire, England, is the actual inventor of the invention and the facts upon which the applicant is entitled to make the application are as follows:-

The Applicant is the assignee of Philips Electronic and Associated Industries Limited of Arundel Great Court, 8 Arundel Street, LONDON WC2 R3DT, England. The latter is the assignee of Philips Radio Communication Systems Limited of St Andrews Road, Cambridge, England, who in turn is the assignee of said actual inventor.

3. The basic application for patent or similar protection on which the application is based is identified by country, filing date and basic applicant as follows:

in England on 3rd November 1986
By Philips Electronic and Associated Industries Limited

4. The basic application referred to in paragraph 3 hereof was the first application made in a Convention country in respect of the invention the subject of the application.

Declared at Sydney, this twenty-sixth day of October 1990.


P. W. MACKENZIE
(Attorney)

To: Commissioner of Patents,
Commonwealth of Australia

(12) PATENT ABRIDGMENT (11) Document No. AU-B-80618/87
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 606360

(54) Title
DATA PROCESSING SYSTEM

International Patent Classification(s)
(51)⁴ **G06F 011/30**

(21) Application No. : **80618/87**

(22) Application Date : **03.11.87**

(30) Priority Data

(31) Number (32) Date (33) Country
8626198 03.11.86 GB UNITED KINGDOM

(43) Publication Date : **05.05.88**

(44) Publication Date of Accepted Application : **07.02.91**

(71) Applicant(s)
N.V. PHILIPS GLOEILAMPENFABRIEKEN

(72) Inventor(s)
NIGEL LESLIE JOHNSON

(74) Attorney or Agent
PHILIPS INDUSTRIES HOLDINGS LIMITED, P.O. BOX 1138, NORTH SYDNEY N.S.W. 2060

(56) Prior Art Documents
GB 2065939
US 4594685
US 4566111

(57) Claim

1. A programmed digital data processing system including a watch-dog circuit arrangement, which arrangement comprises timer means to which is coupled a reset signal input, said arrangement being arranged to generate an output signal should a time interval between successive resets of said timer means exceed a predetermined length, to generate a further signal at intervals which do not exceed said predetermined length, and to generate said output signal should a reset signal be supplied to said reset signal input while the further signal is absent, said system being programmed to supply a reset signal to said reset signal input, and thereby reset the timer means, during each occurrence of said further signal and being arranged to respond to the generation of said output signal by assuming a predetermined state, characterised in that said system is programmed to periodically test for the presence of said

(11) AU-B-80618/87
(10) 606360

-2-

further signal, to respond to such presence being detected by supplying a reset signal to said reset signal input while said further signal is still present, and to perform further program steps between each detection of the presence of said further signal and the subsequent supply of the reset signal in response.

ORIGINAL

60 6360

This document contains the
amendments made under
Section 49 and is correct for
printing.

COMMONWEALTH OF AUSTRALIA
PATENTS ACT 1952-1969

COMPLETE SPECIFICATION FOR THE INVENTION ENTITLED:

"Data processing system".

The following statement is a full description of this
invention, including the best method of performing
it known to me:-

"Data Processing System"

5 The invention relates to a programmed digital data processing system including a watch-dog circuit arrangement, which arrangement comprises timer means to which is coupled a reset signal input, said arrangement being arranged to generate an output signal should a time interval between successive resets of said timer means exceed a predetermined length, to generate a further signal at intervals which do not exceed said predetermined length, and to generate said output signal should a reset signal be supplied to said reset signal input while the further signal is absent, said system being programmed to supply a reset signal to said reset signal input, and thereby reset the timer means, during each occurrence of said further signal and being arranged to respond to the generation of said output signal by assuming a predetermined state.

10 Systems of the above general kind are well-known, and serve to monitor the correct implementation of the system program. The timer means may, for example, take the form of a continuously clocked counter which produces an overflow signal (the timer means output signal) should its capacity be exceeded, the counter being provided with a reset input a signal applied to which results in the counter contents being set to zero. The known data processing system may
20 comprise a suitably programmed microcomputer a single bit-line of one of the output ports of which is coupled to the reset input of the counter, the computer being programmed in such a way that a signal which resets the counter is periodically applied to the signal bit-line at such a rate
25 that the counter is always reset before its contents overflow. Thus in normal operation the counter never produces an overflow signal. If, however, the implementation of the program should cease for some reason, resulting in the resetting of the counter also ceasing, then
30 the counter contents will eventually reach the maximum, and the counter will produce an overflow signal. The overflow signal output may, for example, be coupled to a general reset input of the microcomputer, so that the microcomputer is itself reset under these circumstances. A similar result
35



is obtained if the microcomputer should incorrectly enter a program loop which does not include a step entailing the application of a reset signal for the timer to the single bit line, or which does include such a step but in which this step is repeated insufficiently frequently to prevent the counter contents overflowing. However, there are other possible malfunctions which will not give rise to a response by the known arrangements and it is an object of the invention to enable a response to be made to certain of these.

The invention provides a programmed digital data processing system including a watch-dog circuit arrangement, which arrangement comprises timer means to which is coupled a reset signal input, said arrangement being arranged to generate an output signal should a time interval between successive resets of said timer means exceed a predetermined length, to generate a further signal at intervals which do not exceed said predetermined length, and to generate said output signal should a reset signal be supplied to said reset signal input while the further signal is absent, said system being programmed to supply a reset signal to said reset signal input, and thereby reset the timer means, during each occurrence of said further signal and being arranged to respond to the generation of said output signal by assuming a predetermined state, characterised in that said system is programmed to periodically test for the presence of said further signal, to respond to such presence being detected by supplying a reset signal to said reset signal input while said further signal is still present, and to perform further program steps between each detection of the presence of said further signal and the subsequent supply of the reset signal in response. Performing the further program steps, i.e. separating the reset signal in time from the detection which has given rise to it, makes it less likely that, during a malfunction, the reset signal will be supplied within a said time window.

It may be arranged, for example, that the start of each interval during which the further signal is present has a predetermined relationship to, and is spaced in time from,



the instant of occurrence of the reset signal which immediately precedes it. Thus if for example the timer means comprises a continuously clocked binary counter to a reset input of which the reset signal input is coupled, said
5 further signal may be derived from a particular bit position or positions of the counter contents.

10 Preferably the system is programmed to strobe the watch-dog circuit arrangement, for example by generating an address specific to the watch-dog arrangement, each time a reset signal is supplied to the reset signal input. This can facilitate, for example, a direct response of the watch-dog arrangement to the supply of a reset signal outside a said time window to the reset signal input.

15 If the system comprises a programmed microcomputer provided with an external address latch the address latch and the watch-dog circuit arrangement are preferably integrated on the same semiconductor chip.

20 The system may be programmed to supply each said reset signal in the form of a multibit word having a predetermined value, and the watch-dog arrangement may be arranged to also generate a said output signal should



each reset signal supplied to the reset signal input not have the predetermined value. It may be arranged, for example, that the timer means simply responds to each said reset signal only if the reset signal has the predetermined value ,
5 so that the timer means itself generates a said output signal when reset signals having the predetermined value are not supplied to the reset signal input during an interval which exceeds the predetermined length, even though reset signals having other values may be supplied during that
10 interval. Preferably, however, the arrangement is arranged to response directly to the supply of a reset signal not having the predetermined value to the reset signal input by generating a said output signal.

Arranging that each reset signal is in the form of a multibit word having a predetermined value and that the
15 watch-dog arrangement generates an output signal should each reset signal applied thereto not have the predetermined value can, for example, enable several bit lines through which the respective bits of the reset signals may be applied
20 to the watch-dog arrangement to be tested for correct function. These bit lines (if present) may be connected, for example, to respective bit-outputs of an output port of a suitably programmed microcomputer which may form part of the system, which port can therefore itself be tested.

If it is arranged that the predetermined value
25 changes for successive reset signals in accordance with a cyclic sequence the likelihood that, should the program erroneously enter a short loop, the correct predetermined values will be applied to the reset signal input at a
30 sufficient rate to prevent the timer means from generating an output signal can be much less than the likelihood that a conventional watch-dog arrangement would be prevented from generating an output signal in the same circumstances. In principle, such a cyclic sequence can contain any number of
35 different said predetermined values. Preferably, however, it consists of only two, enabling each to be derived from the other; each may be, for example, the compliment of the other, for example a byte consisting of alternate "0"s

and "1"s enabling a check to be made on cross-talk between adjoining bits, and be stored at a single location in RAM. Each time a reset signal is required the single location can be read and rewritten, and the contents of the single location be complemented at some stage between each reset signal and the next. If these operations are separated in time in the program it will be unlikely that they will be carried out in the correct order and at an adequate rate should the program function incorrectly. Moreover, storage in RAM provides a check on the relevant part of RAM being incorrectly overwritten in response to erroneous operation of the program.

An embodiment of the invention will now be described, by way of example, with reference to the accompanying diagrammatic drawings in which,

Figure 1 is a block diagram of the embodiment, and Figure 2 a flow chart illustrating the operation of the embodiment of Figure 1.

Figure 1 shows a programmed digital data processing system which comprises a programmed microcomputer 1 provided with an external address latch 5, and a watch-dog circuit arrangement.

Microcomputer 1 has lower order combined address and data bus lines AD0 ... AD7 and higher order address bus lines A8 ... A15 which may be coupled to other parts (not shown) of the system, for example to a program and/or data store, as indicated at 2, 3 and 4. Because the bus lines AD0 ... AD7 have a dual function the address latch 5 is provided in known manner. When microcomputer 1 outputs a 16-bit address it also outputs an address latch enable signal on an output ALE which is connected to a strobe input 7 of the latch 5. This signal causes latch 5 to store the eight lower order address bits presented to its input 6 and apply them to, inter alia, the output 4, the eight higher order address bits being applied to the output 3, after which the address/data bus lines AD0 ... AD7 become available for the inputting to and/or outputting from microcomputer 1 of data bits, inter alia via the data input/output 2. Microcomputer 1 also has in known manner an output

RD for an active-low read control signal, an output WR for an active-low write control signal and an input RST for an active-low reset signal. Outputs RD and WR may be coupled to other parts (not shown) of the system as indicated diagrammatically at 8 and 9.

The watch-dog arrangement comprises first and second comparators 10 and 11, an eight-into-one decoder 12, a two-into-one multiplexer 13, a frequency divider-by-two formed by a D-type flip-flop 14 the output Q of which is connected to its data input D via an inverter 44, a D-type flip-flop 15, a clock pulse source 16, a counter 17, an eight-bit-wide output buffer 18, a power-up reset pulse generator 68, two AND-gates 69 and 70, a NOR-gate 19, and two OR-gates 20 and 21. The output of latch 5 is connected to an eight-bit wide first input 22 of comparator 11, a fixed eight-bit byte Z being applied to an eight-bit-wide second input 23 thereof. The (active-low) output 27 of decoder 12 is connected to a single-bit-wide third input 24 of comparator 11 to a single-bit-wide fourth input 25 of which a fixed logic "0" signal is applied. Comparator 11 compares the group of bits applied to its input 22 with the group of bits applied to its input 23, and compares the bit applied to its input 24 with the bit applied to its input 25, and generates logic "0" at its output 26 if and only if correspondence occurs in both cases. Decoder 12 generates logic "0" at its output 27 if and only if microcomputer 1 generates a specific group of bits on the bit lines A8 A15 which are connected to the decoder input 46. Thus the arrangement 11, 12 constitutes an address decoder for the watch-dog arrangement; comparator 11 generates logic "0" on its output 26 if and only if microcomputer 1 generates an address the eight lower-order bits of which correspond to the byte Z and the eight higher-order bits of which correspond to the bit group to which decoder 12 responds. Thus the comparator input 22 and the decoder input 46 together constitute a strobe signal input of the watch-dog. The comparator output 26 is connected to one input of each of the OR-gates 20 and 21 to second inputs of which are connected the microcompu-

ter outputs RD and WR respectively. Thus gate 20 generates logic "0" on its output 28 if and only if microcomputer 1 addresses (strokes) the watch-dog and also generates an active-low read signal, and gate 21 generates logic "0" on its output 29 if and only if microcomputer 1 addresses (strokes) the watch-dog and also generates an active-low write signal.

The address/data bit lines AD0 ... AD7 are also connected to an eight-bit-wide first input 30 of comparator 10 to a second eight-bit-wide input 31 of which is connected the eight-bit-wide output 32 of multiplexer 13. The two eight-bit-wide inputs 33 and 34 of multiplexer 13 are fed with fixed eight-bit bytes X and Y respectively. The control input 35 of multiplexer 13 is fed by the output of divider-by-two flip-flop 14. Comparator 10 has an active-low strobe signal input 36 which is connected to the output 29 of gate 21. The output 37 of comparator 10 is connected both to the data input D of flip-flop 15 directly and also via AND-gate 70 to the (active-low) reset input RS of counter 17. The (negative-edge-responsive) clock input 38 of flip-flop 15 is connected to the output of gate 21 and the clock input 39 of counter 17 is connected to the output of clock signal generator 16. The two inputs of gate 19 are connected to the output Q of flip-flop 15 and to the most significant bit output Qn of counter 17 respectively, its output being connected via AND-gate 70 to the active-low input RST of microcomputer 1, to the active-low asynchronous reset inputs RST of flip-flops 14 and 15, and to the second input of AND-gate 70. The second input of AND-gate 69 is fed from the output of the generator 68 which produces a logic "0" output pulse for a short time each time the system is powered up. Generator 68 may comprise, for example, a Schmitt trigger circuit the input of which is connected to one power supply line via a capacitor and to the other power supply line via a resistor. Thus microcomputer 1, flip-flops 14 and 15, and counter 17 are reset on power-up and also should either the output of flip-flop 15 or the most significant bit output of counter 17 become logic "1". When flip-flop 14 is

in the reset state it controls multiplexer 13 to supply the byte X to the input 31 of comparator 10.

5 The most-significant-but-one bit output Qn-1 of counter 17 is coupled to all the bit lines AD0 ... AD7 via the multiple output buffer 18, an active-low output-enable signal input 40 of which is connected to the output 28 of gate 20. The output Qn-1 of counter 17 is also connected to the (negative-edge-responsive) clock input 41 of divider-by-two flip-flop 14 and also to a single-bit third input 42 of comparator 10. A single-bit fourth input 43 of comparator 10 is supplied with a fixed logic "1" signal. The signal level on the output 37 of comparator 10 is normally logic "1". Comparator 10, if and only if a logic "0" level is present on its strobe input 36, compares the byte presented to its input 30 from the bit lines AD0 ... AD7 with the byte (X or Y) presented to its input 31 by the multiplexer 13, and compares the level on its input 42 with the logic "1" presented to its input 43, and generates logic "0" on its output 37 if and only if correspondence occurs in both cases.

20 In operation microcomputer 1 addresses the watch-dog arrangement in two different modes, viz a read mode and a write mode in accordance with whether it produces a logic "0" on its output RD or a logic "0" on its output WR in conjunction with that address on the lines AD0A15 25 which results in the production by comparator 11 of logic "0" on its output 26. In the read mode the resulting enabling of the buffer 18 by the output signal of gate 20 causes this buffer to write the logic state of output Qn-1 of counter 18 onto the bus lines AD0-AD7 and hence to the microcomputer 1 which can thus ascertain what this logic state is. In the write mode (which in normal operation only occurs when the said logic state is "1"; see below) microcomputer 1 in normal operation puts that one of the 35 bytes X and Y which is currently being presented to input 31 of comparator 10 by multiplexer 13 onto the bit lines AD0 ... AD7. Assuming that output Qn-1 of counter 17 is in fact logic "1" comparator 10, strobed by the logic "0"

fed to its input 36 by gate 21, produces logic "0" on its output 37. This logic "0" resets the contents of counter 17 to zero and is also stored in flip-flop 15 which is clocked by the negative-going transition on the output of gate 21.

5 Both inputs of gate 19 are therefore logic "0", so that reset inputs RST of microcomputer 1 and flip-flops 14 and 15 are logic "1", i.e. no resets of these items occur. The resetting of timer/counter 17 results in the level at its output Qn-1 changing from logic "1" to logic "0", and this
10 transition changes over the frequency divider-by-two flip-flop 14 to its other output state, thereby causing multiplexer 13 to feed the other of the bytes X and Y to input 31 of comparator 10. In normal operation the next time microcomputer 1 accesses the watch-dog in the write mode
15 it is arranged to put this other byte onto the bit lines AD0 ... AD7, so a similar result occurs to that just described. The bytes X and Y are put on to the bit lines AD0 ... AD7 alternately for successive accesses of the watch-dog in the write mode, input 30 of comparator 10 therefore constituting an 8-bit wide input for a reset signal for timer/
20 counter 17..

A reset signal will be applied to microcomputer 1 and flip-flops 14 and 15 by gate 19 if either of the two inputs of gate 19 become logic "1" for some reason. A first
25 way in which this can happen is because counter 17 (which is continuously clocked by source 16) is not reset sufficiently frequently to prevent its most significant bit output Qn from becoming logic "1". The program implemented by microcomputer 1 is arranged to contain watch-dog write
30 operations at sufficiently short intervals to ensure that in normal operation this situation never occurs, provided that each such write operation gives the results set forth in the immediately preceding paragraph above. However, if the program implementation should stop for some reason, or
35 should erroneously enter a program loop which does not include a watch-dog write operation, then it will be evident that output Qn of counter 17 will eventually become logic "1", resetting microcomputer 1 via gate 19 as required. This

of course would also be the case with the known watch-dog arrangements. However, the arrangement shown also responds to certain other malfunctions of the system, as will be explained below. A second way in which one of the two inputs of gate 19 will become logic "1", resetting microcomputer 1, is by the setting of flip-flop 15. Flip-flop 15 is clocked each time the watch-dog is addressed in the write mode, and if the correct byte X or Y should not then be present on the bit lines AD0 ... AD7, so that comparator 10 fails to produce logic "0" on its output 37 then logic "1" will be clocked into flip-flop 15, appear at its output Q and thus be applied to NOR-gate 19, resulting in a reset signal being applied immediately to microcomputer 1, i.e. without waiting for output Qn of counter 17 to become logic "1".

As a first point it should be noted that, in contrast to the known watch-dog arrangements in which reset pulses are normally periodically applied by a microcomputer direct to a clocked counter similar to counter 17, for example via a single bit line of one of the microcomputer output ports, and the microcomputer is reset, other than on power-up, only in response to the counter overflowing, in the system of Figure 1 resetting of microcomputer 1 also occurs in response to the generation by microcomputer 1 of a byte other than the correct one, X or Y, on the address/data bit lines AD0 ... AD7 when the watch-dog is addressed in the write mode, because flip-flop 15 is set under these conditions. Thus microcomputer 1 will be reset should one or more of the bit outputs AD0 ... AD7 malfunction (and in fact also should one or more of the bit outputs A8 ... A15 malfunction). Moreover, it is much less likely that microcomputer 1 will erroneously enter a short program loop in which it produces the correct bytes X and Y alternately, so that the required resetting of the microcomputer does not in fact occur, than a loop in which merely a specific single output bit line is repeatedly written to, which would prevent resetting by means of the known arrangements. Furthermore, microcomputer 1 may be programmed to store these bytes in RAM, retrieving them and rewriting the

retrieved byte each time they are required. If this is the case the watch-dog arrangement will provide a check on whether the relevant part of RAM becomes corrupted for some reason, for example if the program caused the relevant storage locations to be overwritten, as may occur in certain error situations. If this should occur a reset signal for the microcomputer will be automatically generated. The alternating bytes X and Y may each be derived from the other; each may be, for example, the complement of the other. Of this is the case only a single RAM location will be required to store them, the microcomputer then being programmed to access this location each time X or Y is required, supply its contents to the watch-dog, and write the accessed byte back to the same location and, in between each pair of successive such accesses, convert the stored byte into the other. If this is the case the bytes X and Y are preferably 10101010 and 01010101 respectively, to provide some check on cross-talk between adjacent ones of the bit lines ADO ... AD7.

As a second point, attention is drawn to the connection of the least significant bit but one output Qn-1 of counter 17 to input 42 of comparator 10 (in which the level on this output is compared with the logic "1" applied to input 43). This means that when the watch-dog is addressed in the write mode then, unless output Qn-1 is then logic "1", comparator 10 will not produce a logic "0" output signal even if microcomputer 1 then applies the correct byte X or Y to the bit-lines ADO ... AD7. In other words, if the watch-dog is addressed in the write mode at a time when output Qn-1 of counter 17 is logic "0", flip-flop 15 will apply a reset signal to microcomputer 1 via gate 19. This feature can provide a further check on the correct implementation of the program in microcomputer 1, and is the reason for the provision of the output buffers 18 and the facility for addressing the watch-dog arrangement in the read mode. The microcomputer 1 can be programmed to periodically address the watch-dog in the read mode to ascertain the logic state of output Qn-1 of counter 17 and thereby determine when this

state has changed from "0" to "1" and set a flag when this has occurred. The write mode addressing steps also included in the program may be arranged to actually take place, also resetting the flag, only if the flag is in fact set at the relevant time. The period of the rectangular-wave signal appearing at output Qn-1 is, of course, known, being determined by the output frequency of generator 16 and the capacity of counter 17. The frequency of the read-mode addressing steps and the interval between each such step and the next write-mode addressing step can therefore be chosen such as to ensure that, in normal operation, each time such a write-mode addressing step occurs, if the flag is set then the signal at output Qn-1 is still logic "1". (The condition for this is that the interval between each pair of successive read-mode addressing steps plus the interval between the second of these steps and the next write mode addressing step must be less than half the period which the signal at output Qn-1 would have were counter 17 allowed to run freely.). If, within this constraint, each write mode addressing step is spaced in time as far as possible in the program from the immediately preceding read mode addressing step this will reduce the likelihood that, should a short program loop entered by microcomputer 1 actually include a watch-dog write-mode addressing step, it will also include the watch-dog read-mode addressing step required to prime it. A further advantage of testing output Qn-q and only writing to the watch-dog when the level thereat has changed from "0" to "1" is that the repetition rate of the watch-dog write operations is automatically adjusted to lie between one half and one times the frequency of the signal at output Qn-1, enabling this repetition rate to be optimised and to be little dependent on what branches the program actually takes each time it is carried out.

An example of the parts of the program with which microcomputer 1 may be is programmed which are relevant to the present invention is shown in Figure 2, which takes the form of a flow chart. In this Figure the various blocks have the following significances.

- 50 - Start. (A reset signal applied to reset input RST of microcomputer 1 in Figure 1 results in a return of the program to this stage).
- 51 - Initialise, including the writing of byte X (see the description of Figure 1) to a specific address AD in RAM and the setting of flags F1 and F2 to logic "0".
- 52 - Part of main program.
- 53 - Is output Qn-1 of counter 17 in Figure 1 logic "1"?
- 54 - Set flag F1 to logic "1".
- 55 - Part of main program
- 56 - Is flag F1 logic "1"?
- 57 - Write contents of RAM address AD to watch-dog.
- 58 - Set flag F2 to logic "1". Set flag F1 to logic "0".
- 59 - Part of main program.
- 60 - Is flag F2 logic "1"?
- 61 - Complement contents of RAM address AD.
- 62 - Set flag F2 to logic "0".

After START (stage 50) the byte X is written in step 51 to a location AD in RAM which is preferably one which is likely to be overwritten should the program malfunction. Moreover a flag F1 which is used to indicate when the signal at output Qn-1 of counter 17 has been determined as being logic "1" is set to logic "0" as is a flag F2 which is used to indicate when the watch-dog has been written to. Then (step 52) part of the main program of the microcomputer is carried out. It is then tested in step 53 whether output Qn-1 is logic "1", microcomputer 1 first generating address byte Z on its outputs AD0 ... AD7 and the byte to which decoder 12 responds on its outputs A8 ... A15, and then logic "0" on its output RD (read mode), reading the output signal of the thus enabled buffer 18 on its outputs/inputs AD0 ... AD7. If Qn-1 is "1" (Y) flag F1 is set to "1" in step 54, and in any case another part of the main program is then carried out in block

55. After this it is ascertained in step 56 whether flag F1 is set, i.e. whether it was determined in step 53 that Qn-1 was logic "1". If it was (Y), the contents of RAM address AD (initially byte X, for example 01010101), are written to the watch-dog in step 57 (and also rewritten to the address AD) microcomputer 1 first generating address byte Z on its outputs AD0 ... AD7 and the byte to which decoder 12 responds on its outputs A8 ... A15, and then logic "0" on its output WR (write mode) and the byte X from RAM address AD on its outputs AD0 ... AD7. In normal operation, when step 57 occurs, output Qn-1 will still be logic "1", resulting in counter 17 being reset, changing over flip-flop 14, but no general reset occurring. Flag F1 is then reset and flag F2 is set to "1" (block 58) indicating that the watch-dog has been written to. The program then proceeds to block 59, as it does directly from step 56 if it is found there that flag F1 is not set (N). Block 59 represents the next part of the main program, after which flag F2 is tested (step 60) to ascertain if step 57 in fact took place. If it did (Y) the byte in RAM address AD is complemented and rewritten in step 61 so that it becomes Y to conform with the new state of multiplexer 13, after which flag F2 is reset in step 62 and the program proceeds back to block 52, as it does directly if the result of test 60 is "no" (N).

In order that, if the result of test 53 is "yes", output Qn-1 of counter 17 will still be "1" when step 57 is performed it is arranged that, provided the system is operating correctly, the time interval between successive pairs of tests 53 plus the time to the next step 57 if it is in fact carried out is always less than one half the period of the signal appearing at output Qn-1 of counter 17.

If required, a delay element (not shown) may be provided at the output of gate 69 in Figure 1 to ensure that any reset signal produced thereat has a sufficiently long duration before the counter 17 or flip-flop 15 which may have given rise to it is itself reset.

It will be appreciated that the parts of the system shown in Figure 1, other than the microcomputer 1, may be very conveniently all be integrated on the same semiconductor chip.

5

10

15

20

25

30

35

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A programmed digital data processing system including a watch-dog circuit arrangement, which arrangement comprises timer means to which is coupled a reset signal input, said arrangement being arranged to generate an output signal should a time interval between successive resets of said timer means exceed a predetermined length, to generate a further signal at intervals which do not exceed said predetermined length, and to generate said output signal should a reset signal be supplied to said reset signal input while the further signal is absent, said system being programmed to supply a reset signal to said reset signal input, and thereby reset the timer means, during each occurrence of said further signal and being arranged to respond to the generation of said output signal by assuming a predetermined state, characterised in that said system is programmed to periodically test for the presence of said further signal, to respond to such presence being detected by supplying a reset signal to said reset signal input while said further signal is still present, and to perform further program steps between each detection of the presence of said further signal and the subsequent supply of the reset signal in response.
2. A system as claimed in Claim 1, wherein the start of each interval during which the further signal is present has a predetermined relationship to, and is spaced in time from, the instant of occurrence of the reset signal which immediately precedes it.
3. A system as claimed in Claim 2, wherein the timer means comprises a continuously clocked binary counter to a reset input of which the reset signal input is coupled, said further signal being derived from a particular bit position or positions of the counter contents.
4. A system as claimed in any preceding claim, programmed to strobe the watch-dog circuit arrangement each time a reset signal is supplied to the reset signal input.
5. A system as claimed in any preceding claim, comprising a programmed microcomputer provided with an external address latch, the address latch and the watch-dog circuit



arrangement being integrated on the same semiconductor chip.

6. A system as claimed in any preceding claim, programmed to supply each said reset signal in the form of a multibit word having a predetermined value, said arrangement being
5 arranged to also generate a said output signal should a reset signal supplied to the reset signal input not have the predetermined value.

7. A system as claimed in Claim 6, wherein the predetermined value changes for successive reset signals in
10 accordance with a cyclic sequence.

8. A system as claimed in Claim 7, wherein the sequence consists of two predetermined values each of which is a complemented version of the other.

9. A system as claimed in Claim 8, wherein each multibit
15 word is a byte consisting of alternate "0"s and "1"s.

10. A system as claimed in any preceding claim, wherein the multibit word is stored in random access memory from which it is read and rewritten for each said reset signal.

11. A system as claimed in Claim 10 when appended to Claim
20 8 or Claim 9, programmed to complement a single stored said multibit word during each interval between the supply of successive said reset signals.

12. A system as claimed in Claim 11, wherein each such complementing operation is separated in the system program
25 from each reset signal supply operation by further program steps.

13. A programmed digital data system substantially as described herein with reference to the accompanying
30 drawings.

DATED THIS TWENTY-FIFTH DAY OF OCTOBER 1990

35

N. V. PHILIPS' GLOEILAMPENFABRIEKEN



Fig. 2.

