




(86) **Date de dépôt PCT/PCT Filing Date:** 2006/06/05
(87) **Date publication PCT/PCT Publication Date:** 2006/12/07
(45) **Date de délivrance/Issue Date:** 2016/07/19
(85) **Entrée phase nationale/National Entry:** 2007/11/29
(86) **N° demande PCT/PCT Application No.:** GB 2006/002028
(87) **N° publication PCT/PCT Publication No.:** 2006/129109
(30) **Priorité/Priority:** 2005/06/03 (GB0511375.8)

(51) **Cl.Int./Int.Cl. H01J 49/42** (2006.01)
(72) **Inventeurs/Inventors:**
MAKAROV, ALEXANDER ALEKSEEVICH, GB;
DENISOV, EDUARD V., DE;
JUNG, GERHARD, DE;
BALSCHUN, WILKO, DE;
HORNING, STEVAN ROY, DE
(73) **Propriétaire/Owner:**
THERMO FINNIGAN LLC, US
(74) **Agent:** FETHERSTONHAUGH & CO.

(54) **Titre : PERFECTIONNEMENTS A UN PIEGE ELECTROSTATIQUE**
(54) **Title: IMPROVEMENTS IN AN ELECTROSTATIC TRAP**

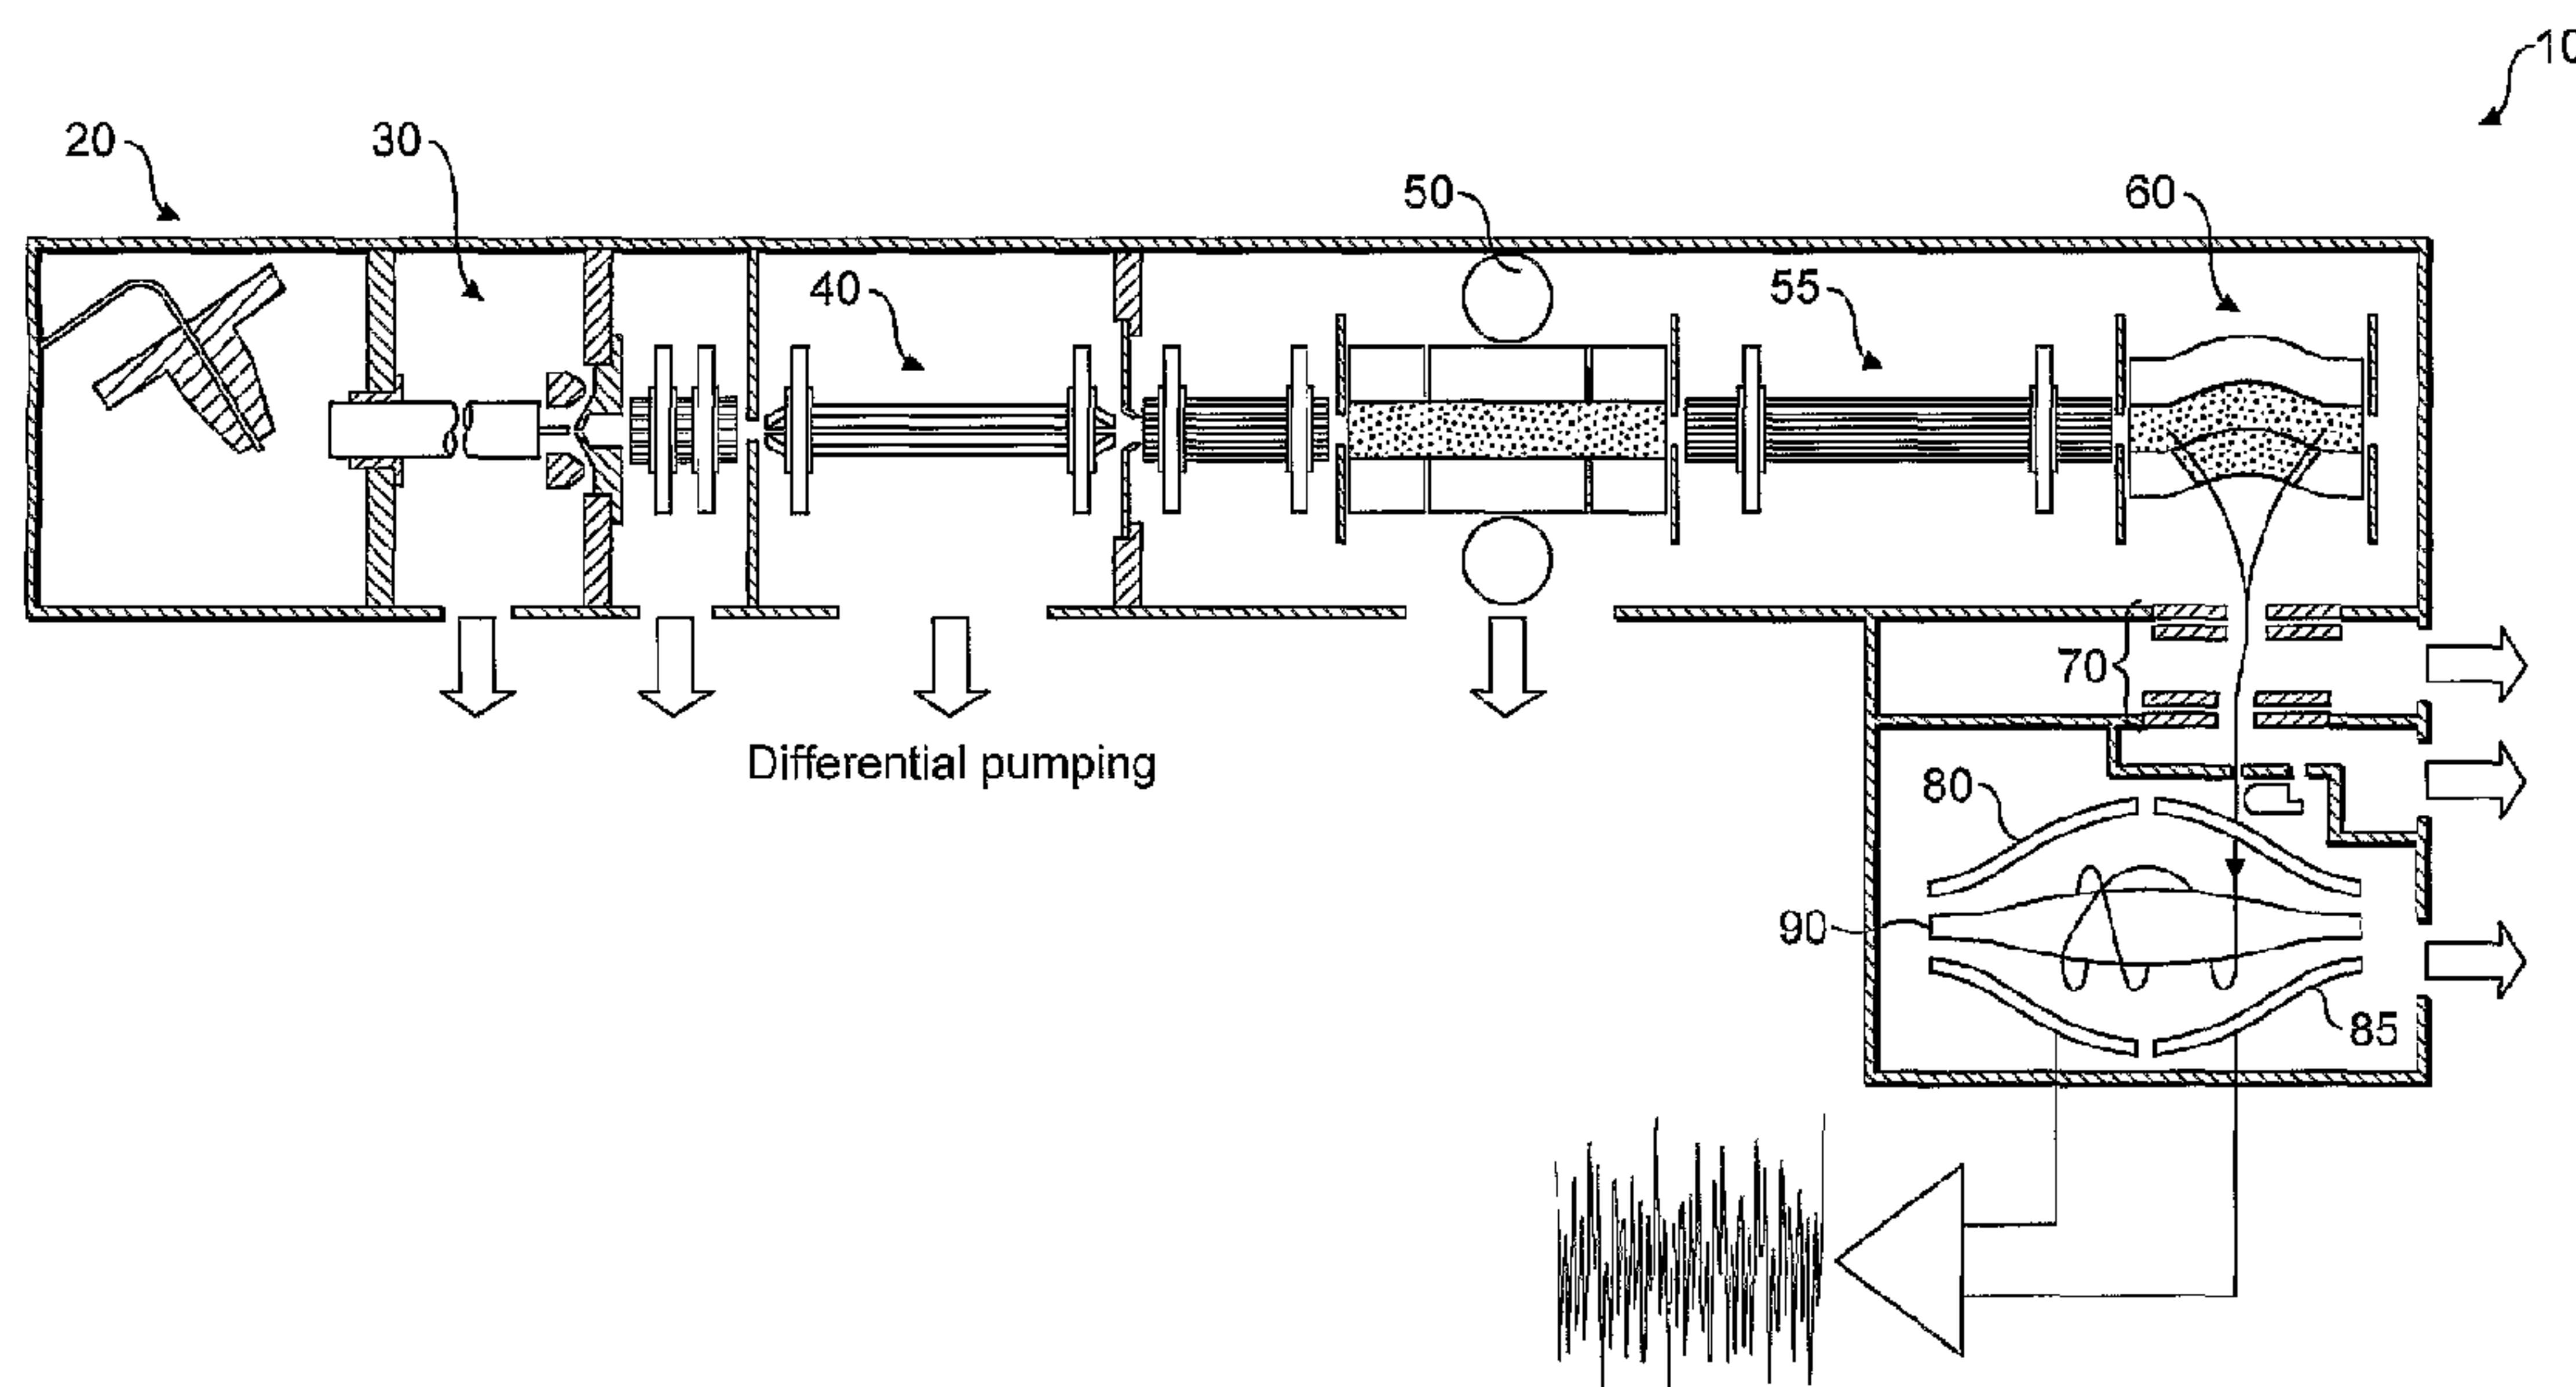

(57) **Abrégé/Abstract:**

An electrostatic trap such as an orbitrap is disclosed, with an electrode structure. An electrostatic trapping field of the form $U'(r, \phi, z)$ is generated to trap ions within the trap so that they undergo isochronous oscillations. The trapping field $U'(r, \phi, z)$ is the result of a perturbation W to an ideal field $U(r, \phi, z)$ which, for example, is hyperlogarithmic in the case of an orbitrap. The perturbation W may be introduced in various ways, such as by distorting the geometry of the trap so that it no longer follows an equipotential of the ideal field $U(r, \phi, z)$, or by adding a distortion field (either electric or magnetic). The magnitude of the perturbation is such that at least some of the trapped ions have an absolute phase spread of more than zero but less than about 2π radians over an ion detection period T_m .

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
7 December 2006 (07.12.2006)

PCT

(10) International Publication Number
WO 2006/129109 A2

(51) International Patent Classification:
H01J 49/42 (2006.01)

(74) Agents: **FROST, Alex, John** et al.; BOULT WADE TENNANT, Verulam Gardens, 70 Gray's Inn Road, London WC1X 8BT (GB).

(21) International Application Number:
PCT/GB2006/002028

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 5 June 2006 (05.06.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0511375.8 3 June 2005 (03.06.2005) GB

(71) Applicant (*for all designated States except US*):
THERMO FINNIGAN LLC [US/US]; 355 River Oaks Parkway, San Jose, California 95134-1991 (US).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **MAKAROV, Alexander** [RU/GB]; 90 Marlborough Avenue, Cheadle Hulme, Cheshire SK8 7AR (GB). **DENISOV, Eduard, V.** [RU/DE]; Buergermeister-Spitta-Allee 56B, 28329 Bremen (DE). **JUNG, Gerhard** [DE/DE]; Katharinenweg 30a, 27751 Delmenhorst (DE). **BALSCHUN, Wilko** [DE/DE]; c/o Thermo Electron (Bremen) GmbH, Finnigan Advanced Mass Spectrometry, Hanna-kunath-str. 11, 28199 Bremen (DE). **HORNING, Stevan, Roy** [US/DE]; Goethestr. 63, 27753 Delmenhorst (DE).

Published:

— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: IMPROVEMENTS IN AN ELECTROSTATIC TRAP

(57) Abstract: An electrostatic trap such as an orbitrap is disclosed, with an electrode structure. An electrostatic trapping field of the form $U(r, \phi, z)$ is generated to trap ions within the trap so that they undergo isochronous oscillations. The trapping field $U(r, \phi, z)$ is the result of a perturbation W to an ideal field $U(r, \phi, z)$ which, for example, is hyperlogarithmic in the case of an orbitrap. The perturbation W may be introduced in various ways, such as by distorting the geometry of the trap so that it no longer follows an equipotential of the ideal field $U(r, \phi, z)$, or by adding a distortion field (either electric or magnetic). The magnitude of the perturbation is such that at least some of the trapped ions have an absolute phase spread of more than zero but less than about 2π radians over an ion detection period T_m .



WO 2006/129109 A2

- 1 -

IMPROVEMENTS IN AN ELECTROSTATIC TRAPField of the Invention

This invention relates to improvements in an
5 electrostatic trap (EST), that is, a mass analyser of the
type where ions injected into it undergo multiple
reflections within a field that is substantially
electrostatic during ion detection, i.e., any time dependent
fields are relatively small. It relates in particular but
10 not exclusively to improvements in the Orbitrap mass
analyser first described in US-A-5,886,346.

Background of the Invention

Electrostatic traps (ESTs) are a class of ion optical
15 devices where moving ions experience multiple reflections in
substantially electrostatic fields. Unlike in RF fields,
trapping in electrostatic traps is possible only for moving
ions. To ensure this movement takes place and also to
maintain conservation of energy, a high vacuum is required
20 so that the loss of ion energy over a data acquisition time
 T_m is negligible.

There are three main classes of EST: linear, where ions
change their direction of motion along one of the
coordinates of the trap; circular, where ions experience
25 multiple deflections without turning points; and orbital,
where both types of motion are present. The so-called
Orbitrap mass analyser is a specific type of EST that falls
into the latter category of ESTs identified above. The
Orbitrap is described in detail in US-A-5,886,346. Briefly,
30 ions from an ion source are injected into a measurement
cavity defined between inner and outer shaped electrodes.
The outer electrode is split into two parts by a
circumferential gap which allows ion injection into the

- 2 -

measurement cavity. As bunches of trapped ions pass a detector (which, in the preferred embodiment is formed by one of the two outer electrode parts), they induce an image current in that detector which is amplified.

5 The inner and outer shaped electrodes, when energized, produce a hyper-logarithmic field in the cavity to allow trapping of injected ions using an electrostatic field. The potential distribution $U(r,z)$ of the hyper-logarithmic field is of the form

10

$$(1) \quad U(r,z) = \frac{k}{2} \left[z^2 - \frac{r^2}{2} \right] + \frac{k}{2} (R_m)^2 \cdot \ln \left[\frac{r}{R_m} \right] + C$$

where r and z are cylindrical coordinates and $z=0$ is the plane of symmetry of the field) C is a constant, k is the field curvature and $R_m > 0$ is the characteristic radius.

15 In this field, the motion of ions with mass m and charge q along the axis z is described as a simple harmonic oscillator with an exact solution for $q, k > 0$:

$$(2) \quad z(t) = A_z \cdot \cos(\omega_0 t + \theta)$$

20

where

$$(3) \quad \omega_0 = \sqrt{\frac{qk}{m}}$$

and ω_0 thus defines the frequency of axial oscillations in radians per second, and A_z and θ are the amplitude and phase of axial oscillations, respectively.

Whilst the foregoing discusses the theoretical situation, in which the electrodes are of ideal hyper-logarithmic shape, in reality there is a limit to the accuracy with which any practical construction can

30

- 3 -

approximate that ideal geometry. As discussed in "Interfacing the Orbitrap Mass Analyser to an Electrospray Ion Source", by Hardman et al, Analytical Chemistry Vo. 75, No. 7, April 2003, any divergence from the ideal electrode geometry, and/or inclusion of electrical perturbations, will result in a perturbation to the ideal field which in turn will transform the harmonic axial oscillations of the ideal field into non-linear oscillations. This in turn may result in a reduction in mass accuracy, peak shape and height, and so forth.

The present invention, in general terms, seeks to address problems arising from the non-ideal nature of a real electrostatic trap.

Summary of the Invention

Against this background, aspects of the present invention provide for an electrostatic ion trap in which deliberate non-linearities or perturbations are introduced to the field so as to control or constrain the rate of phase separation of ions within a given bunch (of single m/z). In particular, the present invention provides, in a first aspect, an electrostatic ion trap for a mass spectrometer, comprising an electrode arrangement defining an ion trapping volume, the electrode arrangement being arranged to generate a trapping field defined by a potential $U'(r, \phi, z) = U(r, \phi, z) + W$, where $U(r, \phi, z)$ is an ideal potential which traps ions in the Z-direction of the trapping volume so that they undergo substantially isochronous oscillations and where W is a perturbation to that ideal potential $U(r, \phi, z)$, wherein the geometry of the electrode arrangement generally follows one or more lines of equipotential of the ideal potential $U(r, \phi, z)$ but wherein at least a part of the electrode arrangement deviates to a degree from that ideal

- 4 -

potential $U(r, \phi, z)$ so as to introduce the perturbation W into the said trapping field, the degree of deviation from the ideal potential $U(r, \phi, z)$ being sufficient to result in the relative phases of the ions in the trap shifting over
5 time such that at least some of the trapped ions have an absolute phase spread of more than zero but less than about 2π radians over an ion detection period T_m .

According to a second aspect of the present invention, there is provided an electrostatic ion trap for a mass
10 spectrometer comprising an electrode arrangement defining an ion trapping volume, the electrode arrangement being arranged to generate a trapping field defined by a potential $U(r, \phi, z)$ where $U(r, \phi, z)$ is a potential which traps ions in the Z -direction of the trapping volume so that they undergo
15 substantially isochronous oscillations, wherein the trap further comprises field perturbation means to introduce a perturbation W to the potential $U(r, \phi, z)$ so as to enforce a relative shift in the phases of the ions over time such that at least some of the trapped ions have an absolute phase
20 spread of more than zero but less than about 2π radians over an ion detection period T_m .

The specific description provides a detailed theoretical analysis of the non-ideal electrostatic trap and the manner in which perturbations W affect the overall
25 performance of the mass analyser. In general terms, however, it may be noted that there are a very large number of trap parameters which affect the mass analysis to varying degrees, including the degree to which the field generation means approximates the ideal electric field, the accuracy of
30 various dimensions of the trap both in absolute terms and relative to other components of the trap, the accuracy and stability of any voltages applied to generate the field, and so forth. Nevertheless, in broad terms these may be

- 5 -

classified into geometric distortions, such as "stretching" of the shape, shifting of the spatial location of the electrodes relative to an equipotential of the ideal field $U(r, \phi, z)$, oversizing or undersizing the electrodes in one or more dimensions etc, and applied distortions such as voltages applied to the trapping and/or to additional distortion electrodes (eg end cap electrodes), or applied magnetic fields, etc. Of course, whilst it is possible to create the appropriate perturbation W using only one of these (geometric or applied distortion), a suitable perturbation could of course be created using a combination of both a geometric and an applied distortion.

In terms of the effect upon the trapped ions, the non-ideal nature of the trap results in one of two general situations. In the ideal trap, the oscillations in the axial (z) direction have a frequency ω_0 that is independent of amplitude (apart from a small, asymptotic shift due to space charge effects, regarding which, see later). For a non-ideal trap, and assuming that W , the perturbation, is a function of z (at least), the oscillations in the z direction of ions are no longer independent of amplitude. Instead, the ions either spread out (separate) in phase over time or compress (bunch) together in phase. In the case of phase bunching, this results in various undesirable artefacts such as the so-called "isotope effect" (explained below), poor mass accuracy, split peaks, poor quantitation (i.e. a distortion of the relation between measured and real intensities of peaks) any one of which may be fatal to the analytical performance of the trap. In the case of phase separation, the spread of phases will continue to increase with time. Once the phase spread exceeds π radians, ions start to move with opposite phases, resulting in

- 6 -

compensating image currents that progressively reduce the overall signal.

If the phase spreading occurs rapidly (relative to a measurement time T_m), then the desirable part of the signal is essentially lost whilst the signal resulting from the phase bunched ions is analytically poor or useless. The present invention in a first aspect provides for a trap with parameters optimized so as to constrain the rate of increase in phase spread. It is likely that a real trap will have parameters that result in a perturbation to the ideal field W which cause some phase spreading. However, if the phase spreading is constrained so as to keep it below about 2π radians, for a time period commensurate with a trap measurement period T_m , then non-bunched ions will be detected without degradation in analytical performance.

An alternative way of looking at this is to consider the rate of decay of the 'transient' detected by the detection means. Typically, such a transient is generated by measuring the image current induced in the detection means by ions in the trap. A trap in which there is a rapid decay in the amplitude of the transient, in the time domain, exhibits a poor analytical performance, and in particular the mass accuracy tends to be poor in the Fourier transformed signal.

Thus in accordance with a third aspect of the present invention, there is provided an ion trap for a mass spectrometer, comprising: electric field generation means to produce an electric field within which the ions may be trapped; and detection means to detect ions according to their mass to charge ratio; wherein the electric field generation means is arranged to produce an electric trapping field which traps ions so that they describe oscillatory motion in which the period of oscillations is dependent upon

- 7 -

the amplitude of oscillations thereof, so as to cause a shift in the relative phase of ions in the trap over time, wherein the detection means is arranged to generate a time domain transient from the ions in the trap, the transient
 5 containing information on those ions, and further wherein the parameters of the trapping field are arranged such that the detected transient decays from a maximum amplitude to no less than a) 1%; b) 5%; c) 10%; d) 30%; e) 50% over an ion detection time T_m .

10 In yet another aspect of the invention there is provided an electrostatic ion trap for a mass spectrometer comprising: electric field generation means to produce an electric field within which the ions may be trapped; and detection means to detect ions according to their mass to
 15 charge ratio, wherein the electric field generation means is arranged to produce an electric field of the form, in cylindrical coordinates:

$$U(r, \phi, z) = \frac{k}{2} \left[z^2 - \frac{r^2}{2} \right] + \frac{k}{2} (R_m)^2 \cdot \ln \left[\frac{r}{R_m} \right] + W(r, \phi, z)$$

20

where U is the field potential at a location r, ϕ, z ; k is the field curvature; $R_m > 0$ is the characteristic radius, and $W(r, \phi, z)$ is a field perturbation, and further wherein W is a function of r and/or ϕ but not z , or wherein W is a
 25 function of at least z but wherein, in that case, the field perturbation W causes the period of oscillation of at least some of the ions along the z axis of the trap to increase with the increase in the period of oscillation in that z direction.

30

Various features of the trap have been ascertained through experiment to result in a perturbation that causes

- 8 -

phase bunching to dominate, with the peak from non-bunched ion packets being lost because of a rapid growth in phase shift. Preferred features of the present invention propose controlled distortions to the trap geometry, configuration
5 and/or applied voltages so as to constrain the rate of growth of non-bunched ion packets so that the phase shift does not exceed about 2π radians over the time scale of ion measurement.

In accordance with a further aspect of the present
10 invention there is provided an electrostatic ion trap for a mass spectrometer comprising: electric field generation means to produce an electric field within which the ions may be trapped; and detection means to detect ions according to their mass to charge ratio; wherein the electric field
15 generation means is arranged to produce an electric trapping field which traps ions so that they describe oscillatory motion in which the period of oscillations is dependent upon the amplitude of oscillations thereof, so as to cause a shift in the relative phase of ions in the trap over time,
20 and further wherein the parameters of the trapping field are arranged such that the spread of phases of at least some of the ions in the trap to be detected is greater than zero but less than about 2π radians over an ion detection time T_m .

The invention also extends to a method of trapping ions
25 in an electrostatic trap having at least one trapping electrode, comprising: applying a substantially electrostatic trapping potential to the or each trapping electrode, so as to generate an electrostatic trapping field within the trap, for trapping ions of a mass to charge ratio
30 m/q in a volume V such that they undergo multiple reflections along at least a first axis z ; and applying a distortion to the geometry of the trap, and/or to the

- 9 -

trapping potential applied to the or each trapping electrode, so as to cause a perturbation in the electrostatic trapping field which results in at least some of the ions of mass to charge ratio m/q to undergo a
5 separation in phase of no more than about 2π radians over a measurement time period T_m . Preferably, such separation should be positive.

The invention also extends to a method of trapping ions in an electrostatic trap having at least one trapping
10 electrode, comprising: applying a substantially electrostatic trapping potential to the or each electrode, so as to generate an electrostatic trapping field within the trap, for trapping ions in a volume V such that they undergo multiple reflections, along at least a first axis z , with a
15 period of oscillation τ increasing with increasing amplitude of oscillation A_z of ions trapped in the field over the volume V .

In still a further aspect of the invention, there is provided a method of determining the acceptability or
20 otherwise of an electrostatic trap, comprising supplying a plurality of ions to the trap; detecting at least some of the ions in the trap; generating a mass spectrum therefrom; and either (a) ascertaining whether or not the peaks in that mass spectrum are split, split peaks being indicative of a
25 poorly performing trap, and/or (b) determining the relative abundances of isotopes of a known ion in the mass spectrum, the degree to which these relative abundances correspond with predicted (theoretical or naturally occurring) abundances being indicative of the acceptability of the
30 trap.

20086-2329

9a

In still a further aspect of the invention, there is provided a method of trapping ions in an electrostatic trap having an electrode assembly, comprising: applying a substantially electrostatic trapping potential to at least a part of the electrode assembly, so as to generate an electrostatic trapping field within the trap, for trapping ions of a mass to charge ratio m/g in a volume V such that they undergo multiple isochronous reflections along a longitudinal axis of the trap; and one or more of (i) distorting the geometry of the trap, (ii) distorting at least a part of the trapping potential, and (iii) applying an additional distortion potential to one or more parts of the electrode assembly; so as to cause a perturbation in the electrostatic trapping field which results in at least some of the ions of mass to charge ratio m/g to undergo a separation in phase of no more than 2π radians over a measurement time period T_m .

In still a further aspect of the invention, there is provided a method of construction of an electrostatic ion trap comprising an electrode assembly arranged to generate a trapping field for trapping ions of mass to charge ratio m/g within the trap, the method comprising the steps of: manufacturing one or more components of the electrode assembly to within a stipulated tolerance of one or more of a nominal shape and dimension; measuring at least one parameter of the manufactured component(s) to a precision greater than the stipulated tolerance; selecting those components of the electrode assembly whose measured parameter(s) are found to differ from one or both of the nominal shape and dimension by an amount that results in the addition, to the trapping field, of a perturbation W which causes at least some of the ions of mass to charge ratio m/g to undergo a separation in phase of no

20086-2329

9b

more than 2π radians over a measurement time period T_m ; and constructing a trap from the selected components.

- 10 -

Brief Description of the Drawings

The invention may be put into practice in a number of ways and some specific embodiments will now be described by way of example only and with reference to the accompanying
5 Figures in which:

Figure 1 shows a schematic arrangement of a mass spectrometer including an electrostatic trap and an external storage device;

10 Figure 2 shows plots of the dependence of the amplitude of oscillation on the period of oscillation in an ideal and a non-ideal electrostatic trap;

Figure 3 shows the change in relative phase of ions in the electrostatic trap as a function of time t , in the presence of various perturbing factors;

15 Figure 4 shows a side sectional view of an electrostatic trap in accordance with a first embodiment of the present invention;

Figure 5 shows a side sectional view of an electrostatic trap in accordance with a second embodiment of
20 the present invention;

Figure 6 shows a side sectional view of an electrostatic trap in accordance with a third embodiment of the present invention;

25 Figure 7 shows a side sectional view of an electrostatic trap in accordance with a fourth embodiment of the present invention;

Figures 8a-8d show mass spectra from a first sample at around $m/z = 195$, with increasing degrees of non-linearity introduced into the electrostatic field such that
30 increasingly rapid phase separation occurs;

Figures 9a-9d show mass spectra from a second sample at around $m/z = 524$, with increasing degrees of non-linearity

- 11 -

introduced into the electrostatic field such that increasingly rapid phase separation occurs;

Figure 10a shows a transient produced from an EST with optimised parameters, resulting in a gradual spread of phases and a gradual decay in the transient; and

Figure 10b shows a transient produced from an EST with poor parameters, resulting in a rapid spread of phases and a rapid initial decrease in the magnitude of the transient.

10 Detailed Description of the Preferred Embodiment

Referring first to Figure 1, a schematic arrangement of a mass spectrometer including an electrostatic trap and an external storage device is shown. The arrangement of Figure 1 is described in detail in commonly assigned
15 WO-A-02/078046 and will not be described in detail here. A brief description of Figure 1 is, however, included in order better to understand the use and purpose of the electrostatic trap to which the present invention relates.

As seen in Figure 1, the mass spectrometer 10 includes
20 a continuous or pulsed ion source 20 which generates gas-phase ions. These pass through an ion source block 30 into an RF transmission device 40 which cools ions. The cooled ions then enter a linear ion trap acting as a mass filter 50 which extracts only those ions within a window of mass
25 charge ratios of interest. Ions within the mass range of interest then proceed via a transfer octapole device 55 into a curved trap 60 which stores ions in a trapping volume through application of an RF potential to a set of rods (typically, quadrupole, hexapole or octapole).

30 As explained in more detail in the above-mentioned WO-A-02/078046, ions are held in the curved trap 60 in a potential well, the bottom of which may be located adjacent to an exit electrode thereof. Ions are ejected orthogonally

- 12 -

out of the curved trap 60 into a deflection lens arrangement 70 by applying a DC pulse to the exit electrode of the curved trap 60. Ions pass through the deflection lens arrangement 70 and into an electrostatic trap 80. In Figure 5 1, the electrostatic trap 80 is the so-called "Orbitrap" type, which contains a split outer electrode 85, and an inner electrode 90. Downstream of the Orbitrap 80 is an optional secondary electron multiplier (not shown in Fig 1), on the optical axis of the ion beam.

10 In use, a voltage pulse is applied to the exit electrode of the curved trap 60 so as to release trapped ions in an orthogonal direction. The magnitude of the pulse is preferably adjusted to meet various criteria as set out in WO-A-02/078046 so that ions exiting the curved trap 60 15 and passing through the deflection lens arrangement 70 focus in time of flight. The purpose of this is to cause ions to arrive at the entrance to the Orbitrap as a convolution of short, energetic packets of similar mass to charge ratio. Such packets are ideally suited to an electrostatic trap 20 which, as will be explained below, requires coherency of ion packets for detection to take place.

The ions entering the Orbitrap 80 as coherent bunches are squeezed towards the central electrode 90. The ions are then trapped in an electrostatic field such that they move 25 in three dimensions within the trap and are captured therein. As is explained in more detail in our commonly assigned US Patent No. US-A-5,886,346, the outer electrodes of the Orbitrap 80 act to detect an image current of the ions as they pass in coherent bunches. The output of the 30 ion detection system (the image current) is a "transient" in the time domain which is converted to the frequency domain and from there to a mass spectrum using a fast Fourier transform (FFT).

- 13 -

Having described the mode of operation of the Orbitrap 80 and its typical use within a mass spectrometer arrangement 10, a theoretical analysis of the trapping of ions within the Orbitrap 80 will now be provided, in order to gain a better understanding of the present invention.

Motion in an Ideal Field

As explained in US-A-5,886,346, the ideal form of electrostatic field within the Orbitrap 80 has a potential distribution $U(r,z)$, as defined in Equation (1) of the introduction above. Note that, in Equation (1), the parameter C is a constant. In this field, the motion of ions with mass m and charge q along the axis z is described as a simple harmonic oscillator with an exact solution defined in Equation (2) above, with $\omega_0 = \sqrt{(qk/m)}$, see Equation 3 above. In other words, the period of oscillation $\tau (=2\pi/\omega_0)$ in that z direction is independent of the amplitude of oscillation of ions in the z direction, A_z .

Motion in a Perturbed Field: 2D Perturbation

In constructing a real electrostatic trap, the field defined by Equation (1) can only be approximated due to finite tolerances.

In cylindrical coordinates (r, ϕ, z) , the potential distribution U can be written, generally, as:

$$(4) \quad U(r, \phi, z), = \frac{k}{2} \left(z^2 - \frac{r^2}{2} \right) + \frac{k}{2} (R_m)^2 \cdot \ln \left[\frac{r}{R_m} \right] + W(r, \phi, z) .$$

Here, the parameters of the equation are as defined in connection with Equation (1), save that the constant C is

- 14 -

replaced by a field perturbation W which is, in its most general form, three-dimensional.

If we consider the situation where W does not depend on z , and also satisfies the Laplace equation given by Equation
5 (5) below:

$$(5) \quad \Delta W(r, \varphi) = 0$$

It may be shown that the motion of ions in the z direction remains defined by Equations (2) and (3) above.
10 In particular, the period of oscillation τ ($=2\pi/\omega_0$) remains independent on the amplitude of oscillation A_z in the z direction. The general solution to Equation (5), in (xy) coordinates, may be written as

$$15 \quad (6) \quad U(x, y) = -\frac{k}{4}[x^2 - y^2]a + \left[A.r^m + \frac{B}{r^m} \right] \cos \left\{ m \cdot \cos^{-1} \left(\frac{x}{r} \right) + \alpha \right\} + b \cdot \ln \left(\frac{r}{D} \right) + \\ E \cdot \exp(F \cdot x) \cos(F \cdot y + \beta) + G \exp(H \cdot y) \cos(H \cdot x + \gamma)$$

where $r = \sqrt{x^2 + y^2}$, $\alpha, \beta, \gamma, a, A, B, D, E, F, G, H$ are arbitrary constants
($D > 0$), and j is an integer. It should be noted that
20 Equation (6) is general enough to remove completely any or all of the terms in Equation (1) that depend upon r , and replace them with other terms, including expressions in other coordinate systems (such as elliptic, hyperbolic, etc. systems of coordinates). However, such great deviations
25 from axial symmetry are rarely advantageous in practice. The construction of an electrostatic trap is, in other words, preferably such that the perturbation W remains small. For example, matching elliptical deformation of both the inner and the outer electrodes of the Orbitrap, or
30 parallel shifting of the inner electrode relative to the

- 15 -

outer electrode along the x- or y-coordinate, will have no influence on Equations (2) and (3) (such that the period of oscillation τ remain independent of the amplitude of axial oscillations), whilst the tolerance requirements on such
 5 deformations for the construction of a trap which operates within acceptable boundaries are less strict.

Motion in a Perturbed Field: Problems with 3D Perturbations

The primary difficulties with a real electrostatic trap
 10 arise in the case where the perturbation W does depend on z (either with or without an additional dependence upon r and/or ϕ). In this case, Equations (2) and (3) are no longer exactly true and the period of oscillation τ becomes a function of the amplitude of oscillation A_z . The vast
 15 majority of manufacturing imperfections, to be discussed in further detail below, result in a perturbation W that has a dependence upon z at least (and, normally, also cross-terms $r^l z^m \cos^n(\phi)$, where l, j, n are integers). The effect itself is very complex. However, it is possible to obtain a useful
 20 and meaningful generalisation by considering two simple but contrasting situations.

Referring to Figure 2, some plots of the dependence of the period of oscillation τ upon the amplitude of oscillation of ions in the z direction are shown. The dotted
 25 line 200 represents the ideal situation where there is no perturbation (that is, the situation of Equation (1) or, alternatively, where the perturbation is not dependent upon z (as described in "Motion in a Perturbed Field: 2D Perturbation" above). The period of oscillation of ions in
 30 the electrostatic trap remains constant, for a given mass to charge ratio, regardless of the amplitude of those oscillations.

- 16 -

Where the electrostatic field is slightly non-linear (Equation (4)) and the perturbation W is dependent upon z , the period of oscillation τ starts to depend upon A_z . Line 220 in Figure 2 illustrates, simplistically, the case where
5 higher amplitudes result in shorter periods of oscillation T . Ions in the beam are spread over a range of amplitudes Δz and have a spread of initial phases $\Delta\theta_z$. It will of course be understood that the real dependence of the period of oscillation τ upon amplitude of oscillation A_z is most
10 unlikely to be linear for all possible A_z , as line 220 suggests, but showing a linear, monotonically decreasing period of oscillation τ with increasing A_z permits more straightforward explanation. The situation where the dependence of period upon amplitude does not increase or
15 decrease in a linear, monotonous fashion will be explored below.

For ions in the ideal field of Equation (1), and in absence of any collisions, the oscillation according to Equations (2) and (3) without shift of parameters will
20 result in a fixed phase spread $\Delta\theta$ over time t . This is shown as dotted line 300 in Figure 3.

Where the perturbation results in a slightly non-linear electric field, due to the perturbed potential distribution defined by equation (4), and that perturbation has a
25 dependence upon z , the ions will still move in accordance with Equations (2) and (3). However, ions will now have a phase θ which changes with time t . In the case of a dependence of period τ on amplitude A_z that is as shown by line 220 in Figure 2 (τ decreases with increasing A_z), the
30 spread of phases will increase with time. This is because ions with a higher A_z will move faster, relatively speaking, and ions with lower A_z will move relatively slower. The

- 17 -

increase in the spread of phases as a consequence is shown by dotted line 310 in Figure 3.

At the point where the phase spread exceeds π radians, ions start to move with opposite phases. This in turn
5 compensates image currents of each other which progressively reduces the overall signal.

There is a minimum detection period within the Orbitrap. The longer the detection period, the higher the resolution. On the other hand, extended measurement periods
10 result in a phase spread shift that exceeds π radians. Therefore, it may be seen that a first restriction upon the manufacture of a real electrostatic trap is that any perturbation introduced should result in a net change in relative phase of no more than about 2π radians, preferably
15 no more than π radians, over a sufficiently long measurement period T_m .

In fact, in a real trap, the increase in phase spread over time is generally not simply a result of a slightly non-linear field (due to a perturbation of the potential,
20 W). When the number of ions in a beam is increased beyond a certain level (typically, beyond 10,000 to 100,000 ions), ion-ion interactions start to affect ion motion, as a consequence of space charge. In the ideal field (1), this results in a spreading of an ion beam that slows down with
25 time, as the ion packets becomes large enough that the distance between ions reaches a high level. This small, time-dependent drift of phase θ , which is a consequence of space charge and occurs even in the absence of a perturbation of the potential, is a known phenomenon and is
30 shown schematically as line 320 in Figure 3. It will be seen the line 320 asymptotically approaches a line with a non-zero slope.

- 18 -

In the case of a non-linear electric field, due to the perturbed potential distribution described by equation (4), which results in a period of oscillations τ that increases with increasing amplitude A_z (line 210 of Figure 2), this
5 small time-dependent phase drift resulting from space charge effects is still present. In this case, however, the space charge effects represented by line 320 are associative with the increase in phase resulting from the dependence of period on amplitude given by line 210 in Figure 2 and shown
10 as line 310 in Figure 3. Adding lines 310 and 320 results in line 330 of Figure 3. Thus it will be seen that, even with the effects of space charge, the consequence of a perturbation on the ideal field which results in a period of oscillations decreasing with increasing amplitude A_z is that
15 the line 330 reaches the π radian phase shift in less time. As explained above, this means that, for a given construction of electrostatic trap, the space charge effect merely reduces the maximum suitable measurement period T_m .

The consequences of a perturbation W resulting in a
20 period of oscillation τ that decreases with amplitude A_z is more problematic, however. Line 220 in Figure 2 illustrates, again schematically and for the purposes of example only, this situation. Physically, the consequence of a dependence such as is shown in line 220 of Figure 2 is
25 that ions are "bunched" together. The reason for this is as follows. The small time-dependent drift of phase θ resulting from space charge is still present. However, this combines with the effect of the non-linear field which results in the dependence of T on A_z shown in line 220 of
30 Figure 2 to produce a shift in phase illustrated by line 340 of Figure 3.

- 19 -

One possible mechanism for this counter-intuitive behaviour is as follows. Ions at the edge of the ion beam are pushed to smaller or larger A_z . For example, an ion on the right-hand edge of the range of amplitudes A_z of Figure 2 is pushed by the space charge effect of other ions to a larger A_z , at the same time lagging in phase θ . As a result of the dependence shown by line 220, however, a larger amplitude A_z corresponds to a lower period of oscillation τ (and a higher frequency ω_0) of oscillations, so that the ion is forced to catch up in phase θ and return to the same phase as ions in the middle of the beam.

Similarly, ions that are pushed to a smaller amplitude A_z and forward in phase θ become slower and also return back to the same phase as ions in the middle of the beam. As a result, rather than continuously increasing the ion beam phase spread (as occurs in the other situation resulting in line 330 above), the ion beam stops increasing its phase spread. For certain non-linearities, as shown by line 340, the phase spread may even begin to decrease over time. Whilst at first glance this may appear desirable, in fact it has a number of consequences which are at best highly undesirable, and at worst can result in an unacceptably poor performance of the electrostatic trap. For example, the peak frequency will shift as a consequence of the curve 340, which in turn affects the measured m/q . In some cases, for example when non-linearity varies significantly over the cross-section of the ion beam, the beam may even split into two or more sub-beams, each with its own behaviour. This will result, in turn, in split peaks (shown in Figures 8d and 9d in particular, regarding which, see below), poor mass accuracy, incorrect isotopic ratios (as an intense ion beam decays more slowly than a less intense beam), poor

- 20 -

quantitation etc. Moreover, these effects may well be different for differing mass to charge ratios, so that, even if a device can be optimised to minimise phase bunching for a specific mass to charge ratio, this may not improve (or
5 may even make worse) the situation with other mass to charge ratios.

In reality, the perturbation W will have a complex structure such that different parts of the same ion beam, with the same mass to charge ratio, may experience vastly
10 different effects. For example, one part of the beam could be self-bunched with one average rate $(d\theta/dt)_1$, a second part of the beam may experience rapid phase spreading (within time $t \ll T_m$), with a third part of the beam self-bunched at a different rate $(d\theta/dt)_2$. This will result in a split peak
15 with a part of the peak at a frequency $\omega_0 + (d\theta/dt)_1$ and another part at a different frequency $\omega_0 + (d\theta/dt)_2$. The second part of the beam, which has experienced rapid phase expansion, will be greatly suppressed, again as explained above. Even more complicated scenarios can be envisaged
20 and, rapidly, the mass accuracy of the device can be fatally compromised.

The foregoing discussion leads to the following conclusions. There is nothing that can be done from an electrostatic field point of view to avoid the inevitable
25 space charge effects which result in a small drift in phase. It is also unrealistic to expect that the parameters of the trap can, in manufacture, be kept to such a tight tolerance that there is no perturbation to the ideal field (1) at all. Thus, the most preferred realistic scenario is that the
30 parameters of the trap are optimised so that the electrostatic field is approximately hyper-logarithmic and has a perturbation to it W which is dependent on r and/or ϕ

- 21 -

only. In this case, other than the small time dependent phase shift resulting from space charge, the phase shift of ions over time should be zero.

In the case where the perturbation W depends upon z as well as, or instead of, r and/or ϕ , it is desirable to ensure that the trap parameters are optimised so that there is phase spreading, rather than phase bunching, over time, and that the phase spreading is at a sufficiently low rate that the time taken for the net phase spread to exceed π radians is greater than an acceptable measurement time period T_m . This is not to imply that there can be no phase bunching at all, and indeed a small degree of phase bunching even without any phase separation may produce an acceptable performance, only that it is preferable that at least a majority of non-bunched ions survive with a phase spread less than 2π radians for the entire measurement period. The difficulties that result from phase bunching become less and less pronounced as the growth of $\Delta\theta$ over the measurement time scale T_m decreases.

There are, of course, a large number of parameters that vary in the construction of an electrostatic trap, however, a number of particularly desirable optimisations have been identified. These have been implemented and are described now with reference to Figures 4 to 7. Referring first to Figure 4, a schematic side view of an Orbitrap 80 is shown. The operation of the Orbitrap is as previously described and as set out in detail in, for example, US-A-5,886,346. The Orbitrap 80 comprises an inner electrode 90 (shown in end section in Figure 1) and split outer electrodes 400, 410. As may be seen in Figure 4, the electrodes are shaped, so far as is possible within manufacturing tolerances, to have the hyper-logarithmic shape of Equation (1). Within the

- 22 -

outer electrode 410 is a deflector 420. Ions are introduced into the trapping volume defined between the inner electrode 90 and outer electrodes 400, 410 through a slot 425 between the outer electrodes 400, 410.

5 End cap electrodes 440, 450 contain ions within the trapping volume. An image current is obtained using a differential amplifier 430 connected between the two outer electrodes 400, 410.

10 In one embodiment, the outer electrodes 400, 410 are stretched in the axial (z) direction. Axial stretching of the outer electrodes relative to the ideal shape improves mass accuracy over a wide mass range for ions injected using electrodynamic squeezing as described by Makarov in Analytical Chemistry Vol. 72 (2000) pages 1156-1162.

15 Moreover, the inner electrode 90 may be radially compressed around its axis of symmetry in order to introduce a perturbation that results in gradual phase spreading. Additionally or alternatively, voltages may be applied to the end electrodes 440, 450.

20 Since the ions exhibit harmonic motion along the z-axis of the trap, the ions exhibit turning points towards the extremities of the trap (+/-z). At these points, the ions are moving relatively slowly and thus experience the potential towards the trap extremities (in the axial

25 direction) for longer than they experience the potential in the vicinity of the centre slot 425 (Fig. 5). The ions at these turning points are also relatively close to the outer electrodes. The result of this is that the shape of the trap in the vicinity of the turning points has a relatively

30 significant impact on the ions. On the other hand, these turning points are axially inward of the outer extremities of the trap. In consequence, the shape of the trap at its axial extremities (outside of the turning points) has

- 23 -

relatively limited effect upon the ions, since it is only the far field of these regions that affect the ions in the region of the turning points. In particular, the shape of the trap over the last 10% of its length is largely
5 irrelevant.

As may be seen in Figure 5, the ion injection slot 425 is axially central. The ions pass this point at maximum velocity and thus spend statistically less time there. They are also well spaced from the outer electrodes at that
10 point. Thus, whilst the shape of the trap there has some impact on the ion trajectories, it is not so critical as the shape of the trap at the turning points. On the other hand the ion injection slot 420 in the embodiment of Figure 4 is located away from the central (z) axis, and is generally in
15 the region of one of the ion turning points. Thus the shape of the trap in the region of the slot 420 is relatively critical to trap performance.

As a related issue, it transpires that there is no apparent need to provide compensation (at the electrode
20 extremities) for the truncation of the electrodes relative to their ideal infinite extent.

Figure 5 shows an alternative arrangement to the embodiment of Figure 4, although it is to be understood that the modifications and features of Figure 5 are by no means
25 mutually exclusive with those applied to the arrangement of Figure 4. Nevertheless, features common to Figures 4 and 5 have been labelled with like reference numerals.

In Figure 5, a spacer electrode 460 is mounted between the outer electrodes 410, 420 and a voltage may be applied
30 to this. In general terms, employing a spacer between the outer electrodes so as to shift them apart may be desirable.

Figure 6 shows still another embodiment. Here, the outer electrodes 400, 410 are segmented into multiple

- 24 -

sections 400', 400", 410', 410". In that case, bias voltages may be applied to the segments. Each of the segment pairs may also be used for ion detection in this mode, allowing detection at multiples of ion frequency. For example, a triple frequency can be detected in the arrangement of Figure 6 without the loss of signal to noise ratio, if the differential signal is collected between connected segment pairs 400'-410', and 400"-410". As another example, the signal may be detected between 400' and 410" (for example, with segment 400" and segment 410' grounded or biased), providing strong third harmonics of axial frequency, albeit at a lower signal to noise ratio. An increase in the detection frequency provides a benefit of higher resolving power within the limited detection time T_m . This is particularly useful for higher mass to charge ratio ions.

Turning finally to Figure 7, still a further embodiment of an electrostatic trap 80 is shown. As with the arrangement of Figure 4, the Orbitrap 80 comprises a pair of outer electrodes 400, 410 with a differential amplifier 430 connected across these. The outer electrode 410 also includes a compensation electrode 420.

The inner electrode 90, however, is split into two segments 90', 90". Bias voltages may be applied to the segments. In addition to the segmentation, a spacer electrode 470 may also be included, preferably on the axis of symmetry ($z=0$). Different segments could, of course, also be employed for detection with or without the outer electrodes.

Although a number of different embodiments have been shown, it is to be understood that these are simply examples of adaptations to the dimensions, shape, size, control and so forth of the trap, to minimise the effect of

- 25 -

perturbations that cause phase bunching and to maintain perturbations which optimise (i.e. minimise) the rate of increase of phase separation over the measurement period T_m . Any of the combinations described in connection with Figures 4 to 7 may be combined. Other means may be employed to produce multipole fields, that is, fields containing terms proportional to z^n , where $n > 2$. Moreover, the Orbitrap 80 may be immersed in a magnetic field which provides mass dependent correction of aberrations. This may be especially effective for low mass to charge ratio ions that usually suffer the greatest scattering during extraction from an external storage device, an effect which is described in further detail in WO-A-02/078046.

It is also to be appreciated that the voltage on the deflection electrode 420 (Figures 4 and 7) should be chosen in such a way that the deflection electrode itself contributes a minimal non-linearity to the field. In general terms, the geometric distortions described in connection with Figures 4 to 7 have a magnitude of a few, to a few tens of, microns.

Empirically, some optimal ranges for geometric distortions have been determined and are listed below. Once more, it is stressed that these are experimentally observed observations that result in a limitation in the phase spread and are in no way intended to be limiting of the general inventive concept. In the following list, the dimension D2 is (as indicated in Figure 6) the inner diameter of the outer electrodes 400, 410, at the axis of symmetry ($z=0$). The dimension D1 is the outer diameter of the central electrode 90, again the axis of symmetry ($z=0$).

(A) For present day machining technology, the optimal inner diameter of the outer electrodes D2 is between 20 and 50 mm, optionally $30 \text{ mm} \pm 5 \text{ mm}$;

- 26 -

(B) In preference, $D1 < 0.8D2$, optionally $0.4D2 \pm 0.1D2$; (so that the inner electrode diameter $D1$ is preferably 12 mm when $D2$ is as in (A) above).

(C) The parameter R_m in Equation (1) and Equation (4) is preferably in the range $0.5D2 < R_m < 2D2$, and optionally $0.75D2 \pm 0.2D2$;

(D) The width of the entrance slot 425 (Figure 4, for example), in the z direction, should in preference lie in the range $0.01D2$ to $0.07D2$ and optionally between $0.02D2$ and $0.03D2$, and, in the direction perpendicular to z (that is, in a direction looking into the page when viewing Figure 4, for example), should be less than $0.2D2$, optionally between $0.12D2$ and $0.16D2$;

(E) The overall inner length of the system should be greater than twice $(D2 - D1)$, and most preferably greater than 1.4 times $D2$;

(F) The accuracy of the shape of the outer electrodes, relative to the hyper-logarithmic form of Equation (1) should be better than $5 \times 10^{-4}D2$, and optionally better than $5 \times 10^{-5}D2$; where the inner diameter of the outer electrode is 30 mm, the total deviation is preferably $7\mu\text{m}$ or better. It has been found that the trap performance is better when the diameter of the outer electrodes is either nominally ideal or is slightly oversized (i.e. not undersized). By contrast the performance is enhanced when the central electrode is undersized (that is, too thin) by a few micrometers when the central electrode is of nominal maximum diameter 6 mm, a slightly ($-4\mu\text{m}$ to $-8\mu\text{m}$) thinner electrode improves trap performance. Central electrodes of the correct nominal diameter or larger appear to result in a trap of reduced performance. One feasible explanation for this is that a slightly undersized central electrode introduces a negative high powered term (such as a fourth or higher power term) in

- 27 -

the potential distribution parallel to the z-axis at a given diameter. The resultant slightly "flattened" potential, provided not too large, exerts a sufficient but not excessive force on the ions to prevent the unwanted "self-organization" of ions described above. In other words, the
5 $-x^4$ or other high order term introduced by a slightly undersized central electrode appears to promote a slow phase spread. This is a desirable situation - the phase does spread (which prevents bunching) but not too fast to prevent
10 ion detection in an acceptable time scale.

(G) The gap between the outer electrodes should be less than $0.005D_2$, in preference, and optionally around $0.001D_2$. It has however been ascertained that the axial gap between the outer electrodes may be $2-4\mu\text{m}$ too large without
15 destroying the trap performance;

(H) The shift of the central electrode along z-axis in either direction should be less than $0.005D_2$, and optionally less than $0.0005D_2$; in the 'r' direction the central electrode shift should be less than $0.01D_2$ and most
20 preferably $<0.001D_2$;

(I) The additional axial stretching of the outer electrodes relative to the ideal shape should be preferably in the range of 0 to $10^{-3}D_2$, and optionally less than $0.0003D_2$;

25 (J) The degree of allowed tilt of the central electrode should be less than 1% of D_2 and preferably less than 0.1% D_2 ;

(K) The allowed misalignment of the outer electrodes should be less than $0.003D_2$ and preferably less than
30 $0.0003D_2$;

(L) The allowed systematic mismatch between outer electrodes should be less than $0.001D_2$ and preferably less than $5 \times 10^{-5}D_2$. In general, the mirror symmetry between the

- 28 -

injection and detection sides of the Orbitrap appears to be very important. Typically, it is desirable that the maximum diameters of the left and right outer electrodes match each other to within around 0.005% which corresponds to 1-2 μ m in
5 a 30 mm diameter trap; and

(M) The allowed surface finish should be better than $2 \times 10^{-4} D^2$ and optionally less than 3×10^{-5} times D^2 . However, small, random variations in surface smoothness seem to have a beneficial effect. In other words, random surface defects
10 appear to provide improved performance whereas long range (systematic) variations reduce performance.

It will be apparent from the foregoing (and with reference to the examples described below in connection with Figures 8, 9 and 10) that the different parameters, do not
15 generally result in a 'perfect' or 'useless' trap but instead combine with one another in a complicated manner to present a trap that lies in a range between these two extremes. Observations nevertheless confirm that, where the parameters are within the ranges specified below, acceptable
20 traps are produced; where the parameters are optimised to the magnitudes listed, currently good traps with correct peak shapes and positions are produced. Moreover, of the above, items (D), (E), (F), (G) and (H) appear to contribute most markedly to a degrading perturbation which forces
25 dominance of phase bunching. Thus particular care should be taken in construction, to minimise the amplitudes or dimensions within the preferred ranges.

The foregoing description has explained a feasible physical basis for a degradation in the performance of a
30 real electrostatic trap, in terms of perturbations to the ideal electrostatic field and the requirement that there should be at least a proportion of the ions which are not phase-bunched but which do not phase-separate too rapidly,

- 29 -

if acceptable trap performance is to be realised. By controlling the parameters of the trap, for example by closely controlling the ranges of the parameters set out in (A) to (M) above, the degree to which any real trap meets the criterion of the present invention (minimising the rate of increase of phase spread) can be determined directly. However, again empirically, a number of indicators of likely trap performance (that is, likelihood that the specific requirement regarding rate of increase of phase spreading over the measurement period T_m) exist.

Various elements have several isotopes which exist in nature at a well known and defined ratio of relative abundances. For example, carbon has two stable isotopes, ^{12}C , ^{13}C which exist in nature in the ratio of approximately 98.93% and 1.07% respectively. By obtaining a mass spectrum of the carbon isotopes using a candidate electrostatic trap, the measured relative abundances of the isotopes can provide an indication of the likely suitability of that candidate trap that is, the likelihood that it will meet minimum performance requirement. The consequence of a badly-performing trap, in which non-self-bunching signals decay very quickly (over time $t \ll T_m$) results in only self-bunched signals (such as in curve 340 of Figure 3) surviving. Although such self-bunched signals give the impression of acceptability, since peaks in a mass spectrum are narrow and peak intensity is good, the smaller isotopic peak for ^{13}C appears much smaller than natural abundance ratios would predict. It may also be split into two or more sub peaks.

As a rule of thumb, therefore, if a real trap indicates an apparent natural abundance of ^{13}C of less than about 0.7% (where its predicted abundance should be in the region of 1.07%), the trap would typically be rejected.

- 30 -

Figures 8a-d and 9a-d show plots of ion abundance against m/z (i.e., mass spectra) for m/z around 195 and m/z around 524, respectively, with differing amounts of field perturbation. In particular, Figure 8a shows a zoom-in of mass spectrum at nominal mass 195. Figure 9a shows a mass spectrum with a main peak at nominal mass 524 and two smaller peaks at nominal masses 525 and 526 indicative of the presence of two isotopes. The label for each peak lists m/z to 4 decimal places together with the resolving power of the Orbitrap. The relative abundances of these two isotopic peaks (normalized to the intensity of the main peak) are 26% and 4% respectively, in the ideal limit.

Figures 8a and 9a are obtained from an Orbitrap that operates with excellent parameters, that is, the rate of decay of the transient (or, put another way, the rate of increase in phase separation) is very slow. Here, peak resolution is limited by the length of the stored transient (i.e. the measurement time T_m), which in Figures 8a and 9a is 0.76 seconds.

Figures 8b and 9b show mass spectra over the same ranges, using the same ions, but with a slight non-linearity in the electrostatic trapping field resulting in a discernable but acceptable amount of phase spreading over the measurement time T_m . It will be noted in Figure 8b that the main peak has developed small wings on each side and that the measured peak position is also shifted very slightly to a lower apparent m/z . Figure 9b also shows a very slight shift in the peak positions of the main peak and the two isotopes, and also the relative abundances of the isotopes are slightly different from those predicted. Nevertheless, the peaks do show good shape and there is no peak splitting.

- 31 -

Turning to Figures 8c and 9c, the mass spectra of an Orbitrap with an unacceptably rapid phase expansion are shown, again for the same ions as were employed in respect of Figures 8a, 8b, 9a and 9b respectively. In Figure 8a, the main peak is seen to be badly suppressed (abundance less than 40% of the 'true' abundance illustrated in Figure 8a) and with a larger number of adjacent peaks which alter the true shape of the peak as well. Figure 9c illustrates the problems of rapid phase expansion (leaving just phase bunched ions to be detected within a short amount of time, relative to the total measurement time T_m) as well. The main peak is suppressed (although in Figure 9c its intensity has been renormalized to 100%) and the two isotopes show a much higher relative abundance than they should (around 37% and 7% respectively, compared with theoretical values of 26% and 4.5%). Inset into Figure 9c is a zoomed part of the spectrum around the main peak, contrary to the correct appearance (that is, the peak shape of Figures 9a and 9b).

Finally, for completeness, Figures 8d and 9d show mass spectra where a very large non-linearity exists or is added to the trap so that any ions that are not phase bunched become undetectable within a very short timescale ($\ll T_m$). In Figure 8a the poor peak shape is apparent - the narrow 'spike' is a result of the phase bunched ions and the smeared signal either side of that spike is a result of the rapidly decaying phase spreading signal. The mass spectrum of Figure 9d demonstrates similar problems with the main peak (a sharp spike resulting from phase bunched ions together with a wide spread of minor peaks surrounding the main peak). Moreover, the smaller isotopic peaks are also severely split (into a 'spike' and a spread of side bands) due to the phase bunched and rapidly phase spreading ions

- 32 -

respectively. The relative magnitudes of the main and isotope peaks are also nowhere near the theoretical values.

Figures 10a and 10b show transients (in the time domain) from traps with rapidly and slowly increasing phase spreads, respectively. It will be seen in Figure 10a how the transient clearly contains a rapidly decaying component (over approximately 200 msec) and a slower decaying component (beyond 200 msec or so). This is what results in the split peaks of Figures 9c and 9d, for example. Figure 10b, by contrast, shows a transient with a much more gradual decay, even over 3 seconds (note the difference in scales on the 'x' axis, between Figures 10 and 10b). The transient of Figure 10b, once transformed into a mass spectrum, shows good mass accuracy, peak shape and so forth, as illustrated in Figures 8a, 8b, 9a and 9b.

Another indicator of poor trap parameters is the presence of an unusual non-linearity in the mass calibration. For example, if a non-monotonous dependence is noted in the mass range, rather than a linear function, it is generally concluded that the trap parameters will not meet the requirement for the maximum rate of phase spreading. Good Orbitraps tend to have a specific dependence of mass deviation on ion injection energy: from 0 to 40 ppm per 150V injection energy increase appears to be indicative of a functional trap. Those traps exhibiting a negative slope (of about -5 to -10 ppm or more) do not generally work. To an extent this can be mitigated (compensated) by the use of a larger spacer electrode 460 (Figure 5), which results in the outer electrodes 410, 420 being moved outwards, which in turn weakens the field at the trap edges.

Finally, as explained above, the presence of split peaks, resulting from the complex structure of the

20086-2329

- 33 -

perturbation W , normally provides a good clue that the performance of the trap in general will not be acceptable.

To optimise the stability of the construction of an electrostatic trap, having optimised the parameters themselves such as in accordance with (A) to (M) above, it is preferable to use temperature invariant materials in the design, such as Invar^(m) for the trap itself, and quartz or glass for insulation. In addition, high or ultra-high vacuum should be maintained within the volume traversed by the ions.

It is of course to be understood that the invention is not limited to the various embodiments of Orbitrap described above, and that various modifications may be contemplated. For example, as described in WO 2007/000587, the Orbitrap electrodes may be formed from a series of rings rather than one or more solid electrodes. In that case, in order to introduce the desirable perturbation W to the ideal hyperlogarithmic electrostatic potential $U(r, \phi, z)$, the rings can be manufactured to have a shape that conforms to an equipotential of the perturbed field $U'(r, \phi, z)$. On the other hand, it may be preferable as well or instead to separate or compress some or all of the rings relative to one another in the axial (z) direction to create the same effects as are listed in (A)-(M) above. For example, spreading the outer electrode rings relative to the ideal equipotential mimics the desirable "flattened" shape discussed in (F) above. Compressing the inner rings together likewise mimics the smaller diameter inner electrode arrangement that is beneficial.

Indeed, the invention is not limited just to the Orbitrap. The ideas may equally be applied to other forms of

- 34 -

EST including a multi-reflection system with either an open geometry (wherein the ion trajectories are not overlapping on themselves after multiple reflections) or a closed geometry (wherein the ion trajectories repetitively pass
5 through substantially the same point). Mass analysis may be based on frequency determination by image current detection or on time-of-flight separation (e.g. using secondary electron multipliers for detection). In the latter case, it will of course be apparent that a phase spread of 2π radians
10 corresponds with a spread of time-of-flights of ions of one period of reflection. Various examples of ESTs to which the invention may be applied are described in the following non limiting list: US-A-6013913, US-A-6888130, US-A-2005-
0151076, US-A-2005-0077462, WO-A-05/001878, US-A-
15 2005/0103992, US-A-6300625, WO-A-02/103747 or GB-A-
2,080,021.

20086-2329

35

CLAIMS:

1. An electrostatic ion trap for a mass spectrometer, comprising:

an electrode arrangement defining an ion trapping
5 volume;

the electrode arrangement being arranged to generate a trapping field defined by a potential $U'(r, \phi, z) = U(r, \phi, z) + W$, where $U(r, \phi, z)$ is an ideal potential which traps ions in the Z-direction of the trapping volume so that they undergo
10 substantially isochronous oscillations and where W is a perturbation to that ideal potential $U(r, \phi, z)$;

wherein:

the geometry of the electrode arrangement generally follows one or more lines of equipotential of the ideal
15 potential $U(r, \phi, z)$ but wherein at least a part of the electrode arrangement deviates to a degree from that ideal potential $U(r, \phi, z)$ so as to introduce the perturbation W into the said trapping field, the degree of deviation from the ideal
20 potential $U(r, \phi, z)$ being sufficient to result in the relative phases of the ions in the trap shifting over time such that at least some of the trapped ions have an absolute phase spread of more than zero but less than about 2π radians over an ion detection period T_m .

2. The trap of claim 1, wherein the electrode
25 arrangement is of a shape that produces a trapping field that traps ions such that, in a longitudinal direction z of the trap, they describe oscillations in which the period of oscillation depends upon the amplitude of oscillation.

20086-2329

36

3. The trap of claim 1, wherein the electrode arrangement is of a shape that produces a trapping field that traps ions such that, in a longitudinal direction z of the trap, they describe perturbed simple harmonic oscillations in which the period of oscillation depends upon the amplitude of oscillation.

4. The trap of claim 2, wherein the electrode arrangement is of the shape that produces a trapping field that traps ions such that, in a longitudinal direction z of the trap, they describe perturbed simple harmonic oscillations in which the period of oscillation depends upon the amplitude of oscillation.

5. The trap of any one of claims 2 to 4, wherein the average rate of change of period as a function of amplitude A_z , $\frac{d\tau}{dA_z}$, is positive such that an increasing amplitude of oscillation causes an increase in ion oscillation period.

6. The trap of any one of claims 1 to 5, wherein the shape of at least a part of the electrode arrangement deviates from the ideal equipotential by an amount sufficient to impart an n^{th} order perturbation to the ideal potential $U(r, \phi, z)$, where $n \geq 2$.

7. The trap of claim 6, wherein the deviation of the shape of at least a part of the electrode arrangement deviates from the ideal potential $U(r, \phi, z)$ by an amount sufficient to introduce a negative, fourth order term into the ideal potential $U(r, \phi, z)$.

20086-2329

37

8. The trap of any one of claims 1 to 7, wherein the electrode arrangement comprises first and second electrode structures defining between them the said ion trapping volume.

9. The trap of claim 8, wherein the first electrode structure comprises a radially inner electrode extending in the z-direction and having a maximum diameter D1, and the second electrode structure comprises a radially outer electrode also extending in that z-direction and having a maximum diameter D2, the trapping field being arranged to trap ions in an potential well along the z direction and also radially.

10. The trap of claim 9, wherein the inner and outer electrodes conform to a shape defined by an equipotential of a trapping field of the form $U'(r, \phi, z)$, where $U'(r, \phi, z) = U(r, \phi, z) + W$, $U(r, \phi, z)$ defines an ideal electrostatic field in which

$$U(r, \phi, z) = \frac{k}{2} \left[z^2 - \frac{r^2}{2} \right] + \frac{k}{2} (R_M)^2 \cdot \ln \left[\frac{r}{R_m} \right]$$

where: $U(r, \phi, z)$ is the potential at a point r, ϕ, z in cylindrical coordinates within the trap;

k is the field curvature; and

20 $R_m > 0$ is the characteristic radius

and where W is a field perturbation dependent upon at least z and which results in the ion oscillation period, T , in the z -direction, depending upon the ion oscillation amplitude A , which in turn causes the net phase shift of ions to be greater than zero but less than about 2π radians over the said ion detection time T_m .

20086-2329

38

11. The trap of claim 9 or claim 10, wherein the outer electrode is stretched or shifted in the z-direction relative to the ideal equipotential of $U(r, \phi, z)$.

12. The trap of claim 11, wherein the amount of stretch
5 of the outer electrode is no more than $(1 \times 10^{-3}) D2$.

13. The trap of claim 11, wherein the amount of stretch of the outer electrode is less than 0.0003 D2.

14. The trap of any one of claims 9 to 13, wherein the inner electrode has a maximum diameter D1 at $z=0$ which is
10 smaller than the maximum of r at $Z=0$ defined by the ideal equipotential of $U(r, \phi, z)$.

15. The trap of claim 14, wherein the maximum diameter D1 in the z-direction is about 0.03 to 0.07% smaller than it would be at $z=0$ if it conformed to an equipotential of the ideal
15 potential $U(r, \phi, z)$.

16. The trap of any one of claims 9 to 15, wherein the outer electrode has a maximum inner diameter D2 at $z=0$ which is larger than the maximum of r at $z=0$ defined by the ideal equipotential of $U(r, \phi, z)$.

20 17. The trap of claim 16, wherein the maximum diameter D2 is about 0.02% larger than it would be at $z=0$ if it conformed to an equipotential of the ideal potential $U(r, \phi, z)$.

18. The trap of any one of claims 9 to 17, wherein the outer electrode comprises a plurality of axially spaced
25 segments.

19. The trap of claim 18, wherein the outer electrode comprises first and second axially spaced segments.

20086-2329

39

20. The trap of claim 19, further comprising a spacer mounted between the first and second axially spaced segments of the outer electrode.

21. The trap of claim 19 or claim 20, wherein the first
5 and second axially spaced segments are dislocated outwards by no more than 0.5% of D2.

22. The trap of claim 19 or claim 20, wherein the first and second spaced segments are dislocated by no more than 0.1% of D2.

10 23. The trap of any one of claims 19 to 22, wherein the first and second axially spaced segments are relatively inward and sandwiched between third and fourth axially spaced, relatively outward segments.

24. The trap of any one of claims 1 to 23, further
15 comprising detection means for detecting ions in the trap.

25. The trap of claim 24 when dependent upon claim 23 wherein the detection means includes two of the first, second, third and fourth axially spaced segments, thereby defining two segments which form a part of the detection means.

20 26. The trap of claim 25, wherein the detection means further includes a differential detector, connected so as to determine the difference between the outputs from the said two segments which form a part of the detection means.

27. The trap of claim 9 or any one of claims 11 to 26
25 when dependent upon claim 9, wherein the parameters of the trap conform to at least one of the criteria selected from the list comprising:

20086-2329

40

(a) the inner diameter at the axial location $z=0$ of the outer electrode, D_2 , lies within the range $20\text{ mm} < D_2 < 50\text{ mm}$;

(b) the outer diameter at the axial location $z=0$ of the inner electrode D_1 is $< 0.8 D_2$;

5 (c) the parameter R_m lies in the range $0.5D_2 < R_m < 2D_2$;

(d) the axial length of the trap is greater than $2 (D_2 - D_1)$;

(e) the inner and outer electrodes conform to the said ideal potential $U(r, \phi, z)$, having a hyper-logarithmic form,
10 to an accuracy better than $(5 \times 10^{-4}) D_2$;

(f) the degree of tilt of the inner electrode is less than 1% of D_2 ;

(g) the outer electrode comprising a plurality of axially spaced segments and the misalignment of the outer
15 electrode segments is $< 0.3\%$ of D_2 ;

(h) the systematic mismatch between the outer electrode segments is $< 0.1\%$ of D_2 ;

(i) a surface finish is better than $2 \times 10^{-4} D_2$.

28. The trap of claim 9 or any one of claims 10 to 26
20 when dependent upon claim 9, wherein the parameters of the trap conform to at least one of the criteria selected from the list comprising:

(a) the inner diameter at the axial location $z=0$ of the outer electrode, D_2 , lies within the range between 25
25 and 35 mm;

20086-2329

41

(b) the outer diameter at the axial location $z=0$ of the inner electrode D1 is between $0.3 D2$ and $0.5 D2$;

(c) the parameter R_m lies in the range between $0.55 D2$ and $0.95 D2$;

5 (d) the axial length of the trap is greater than $1.4 D2$;

(e) the inner and outer electrodes conform to the said ideal potential $U(r, \phi, z)$, having a hyper-logarithmic form, to an accuracy better than $(5 \times 10^{-5}) D2$;

10 (f) the degree of tilt of the inner electrode is less than 0.1% of $D2$;

(g) the outer electrode comprising a plurality of axially spaced segments and the misalignment of the outer electrode segments is $<0.03\%$ of $D2$;

15 (h) the systematic mismatch between outer electrode segments is $<0.005\%$ of $D2$;

(i) a surface finish is better than $3 \times 10^{-5} D2$.

29. The trap of any one of claims 9 to 23 or any one of claims 25 to 27, further comprising an entrance slot formed in
20 the radially outer electrode to allow injection of ions into the trap; wherein the entrance slot has a width, in the z direction, less than $0.07 D2$, and a length, in a direction perpendicular to the direction Z , less than $0.2 D2$.

30. The trap of any of claims 9 to 23 or any one of
25 claims 25 to 27, further comprising an entrance slot formed in the radially outer electrode to allow injection of ions into

20086-2329

42

the trap; wherein the entrance slot has a width, in the z direction, between $0.02 D_2$ and $0.03 D_2$, and a length, in a direction perpendicular to the direction Z , between $0.12 D_2$ and $0.16 D_2$ in that direction.

5 31. An electrostatic ion trap for a mass spectrometer as claimed in any one of claims 1 to 29, further comprising field perturbation means arranged to introduce the perturbation W to the ideal potential $U(r, \phi, z)$ so as to enforce a relative shift in the phases of the ions over time such that at least some of
10 the trapped ions have an absolute phase spread of more than zero but less than about 2π radians over an ion detection period T_m .

32. An electrostatic ion trap for a mass spectrometer comprising:

15 an electrode arrangement defining an ion trapping volume;

the electrode arrangement being arranged to generate a trapping field defined by a potential $U(r, \phi, z)$ where $U(r, \phi, z)$ is a potential which traps ions in the Z -direction of the
20 trapping volume so that they undergo substantially isochronous oscillations;

wherein the trap further comprises field perturbation means to introduce a perturbation W to the potential $U(r, \phi, z)$ so as to enforce a relative shift in the phases of the ions
25 over time such that at least some of the trapped ions have an absolute phase spread of more than zero but less than about 2π radians over an ion detection period T_m .

20086-2329

43

33. The trap of claim 32, wherein the field perturbation means comprises a magnet for providing a mass dependent correction to the electrostatic field perturbation W.

34. The trap of claim 32 or claim 33, wherein an outer
5 electrode of the electrode arrangement comprises first and second axially spaced segments.

35. The trap of claim 34, further comprising a spacer mounted between the first and second axially spaced segments of the outer electrode.

10 36. The trap of claim 34 or 35, wherein the first and second axially spaced segments are separated by no more than 0.5% of D_2 .

37. The trap of claim 34 or 35, wherein the first and second axially spaced segments are separated by no more than
15 0.1% of D_2 .

38. The trap of any one of claims 34 to 37, wherein the outer electrode comprises a plurality of axially spaced segments.

39. The trap of claim 38, wherein the outer electrode
20 comprises first and second axially spaced, relatively inward segments, sandwiched between third and fourth axially spaced, relatively outward segments.

40. The trap of any one of claims 32 to 39, further comprising detection means for detecting ions in the trap.

25 41. The trap of claim 40 when dependent upon claim 39, wherein the detection means includes two of the first, second,

20086-2329

44

third and fourth axially spaced segments, thereby defining two segments which form a part of the detection means.

42. The trap of claim 41, wherein the detection means further includes a differential detector, connected so as to
5 determine the difference between the outputs from the said two segments which form a part of the detection means.

43. The trap of any one of claims 32 to 42, wherein the field perturbation means includes a power supply arranged to supply a perturbation voltage to at least one of the electrodes
10 so as to introduce the said perturbation W to the ideal field $U(r, \phi, z)$.

44. The trap of any one of claims 32 to 42, the field perturbation means comprising one or more trap end caps to which a perturbation voltage is applied.

15 45. A method of trapping ions in an electrostatic trap having an electrode assembly, comprising:

applying a substantially electrostatic trapping potential to at least a part of the electrode assembly, so as to generate an electrostatic trapping field within the trap,
20 for trapping ions of a mass to charge ratio m/g in a volume V such that they undergo multiple isochronous reflections along a longitudinal axis of the trap; and

one or more of (i) distorting the geometry of the trap, (ii) distorting at least a part of the trapping
25 potential, and (iii) applying an additional distortion potential to one or more parts of the electrode assembly;

20086-2329

45

so as to cause a perturbation in the electrostatic trapping field which results in at least some of the ions of mass to charge ratio m/g to undergo a separation in phase of no more than 2π radians over a measurement time period T_m .

5 46. The method of claim 45, further comprising one or more of (i) distorting the geometry of the trap, (ii) distorting at least a part of the trapping potential, and (iii) applying an additional distortion potential to one or more parts of the electrode assembly to an extent such that the
10 average rate of change of period as a function of amplitude A_z , $\frac{d\tau}{dA_z}$, is positive such that an increasing amplitude of oscillation causes an increase in ion oscillation period.

47. The method of claim 45 or claim 46, wherein the perturbed trapping field is of the form $U'(r, \phi, z) = U(r, \phi, z) + W$,
15 where $U(r, \phi, z)$ is an ideal trapping potential and W is a distortion thereto, and wherein the step of distorting the geometry of the trap comprises distorting the shape of a least a part of the electrode arrangement such that it deviates from an equipotential of the ideal potential $U(r, \phi, z)$ by an amount
20 sufficient to impart an n^{th} order perturbation to the ideal potential $U(r, \phi, z)$, where $n \geq 2$.

48. The trap of claim 47, wherein the step of distorting the geometry of the trap comprises distorting the shape of at least a part of the electrode arrangement such that it deviates
25 from the said equipotential of the ideal potential $U(r, \phi, z)$ by an amount sufficient to introduce a negative, fourth order term into the ideal potential $U(r, \phi, z)$.

20086-2329

46

49. The method of claim 45, wherein the trap comprises a plurality of trapping electrodes to generate the electrostatic trapping field and at least one distortion electrode, the method further comprising applying a voltage to the distortion
5 electrode to add a perturbation to the electrostatic trapping field so as to create at least a part of the said perturbation in the trapping field.

50. The method of claim 45, wherein the electrostatic trap comprises first and second electrode structures defining
10 therebetween the said trapping volume V and each generally following a line of equipotential of an ideal trapping field, the step of applying a distortion to the geometry of the trap comprising stretching or shifting one or both of the first and second electrode structures relative to the ideal trapping
15 field equipotential so as to introduce the said geometric distortion that results in the said ion phase separation.

51. A method of construction of an electrostatic ion trap comprising an electrode assembly arranged to generate a trapping field for trapping ions of mass to charge ratio m/g
20 within the trap, the method comprising the steps of:

manufacturing one or more components of the electrode assembly to within a stipulated tolerance of one or more of a nominal shape and dimension;

measuring at least one parameter of the manufactured
25 component(s) to a precision greater than the stipulated tolerance;

selecting those components of the electrode assembly whose measured parameter(s) are found to differ from one or

, 20086-2329

47

both of the nominal shape and dimension by an amount that results in the addition, to the trapping field, of a perturbation W which causes at least some of the ions of mass to charge ratio m/q to undergo a separation in phase of no more than 2π radians over a measurement time period T_m ; and

constructing a trap from the selected components.

52. The method of claim 51, further comprising

determining a performance parameter of the constructed trap.

10 53. The method of claim 52, wherein the step of determining a performance parameter of the trap comprises:

supplying a plurality of ions to the constructed trap;

detecting at least some of the ions in the trap; and

15 generating data which is directly or indirectly representative of the mass to charge ratio of the detected ions.

54. The method of claim 53, further comprising:

obtaining a mass spectrum from the generated data;

ascertaining whether or not the peaks in the obtained
20 mass spectrum are split; and

rejecting the constructed trap when split peaks are detected.

55. The method of claim 53, further comprising

obtaining a mass spectrum from the generated data;

20086-2329

48

determining the relative abundances of isotopes of a known ion in the mass spectrum; and

rejecting the trap when the degree to which these relative abundances correspond with predicted abundances exceed
5 a threshold level.

56. The method of claim 53, wherein the step of generating data which is directly or indirectly representative of the mass to charge ratio of ions in the trap comprises generating a time domain transient from the ions in the trap,
10 the transient containing information on those ions;

the step of determining a performance parameter of the trap further comprising determining the decay of the transient over an ion detection time T_m ;

the method further comprising rejecting a trap
15 wherein the said transient decays from a maximum amplitude to below a predetermined threshold level in the said ion detection time T_m .

57. The method of claim 56, wherein the predetermined threshold level is selected from the list comprising 50%, 30%,
20 10%, 5% and 1% of the maximum amplitude.

58. The method of claim 53, further comprising:

supplying a plurality of ions to the constructed trap at a first ion injection energy;

detecting at least some of the ions injected into the
25 trap with that first ion injection energy and producing a first data set representative of a parameter of those detected ions;

20086-2329

49

obtaining a first mass spectrum from the thus
generated first data set;

supplying a plurality of ions to the constructed trap
at a second ion injection energy;

5 detecting at least some of the ions injected into the
trap with that second ion injection energy and producing a
second data set representative of a parameter of those detected
ions;

 obtaining a second mass spectrum from the thus
10 generated second data set;

 comparing at least a part of the first and second
mass spectra to ascertain whether there is a dependence of
detected mass upon ion injection energy; and

 rejecting the constructed trap when it is determined
15 that there is the dependence of detected mass upon ion
injection energy and which exceeds a threshold criterion.

59. The method of any one of claims 51 to 58, wherein the
step of selecting measured components comprises selecting
components whose measured one or both of shape and dimensions
20 are complementary so that the net distortion of the electrode
assembly is such as to introduce a perturbation of the desired
magnitude.

1 / 14

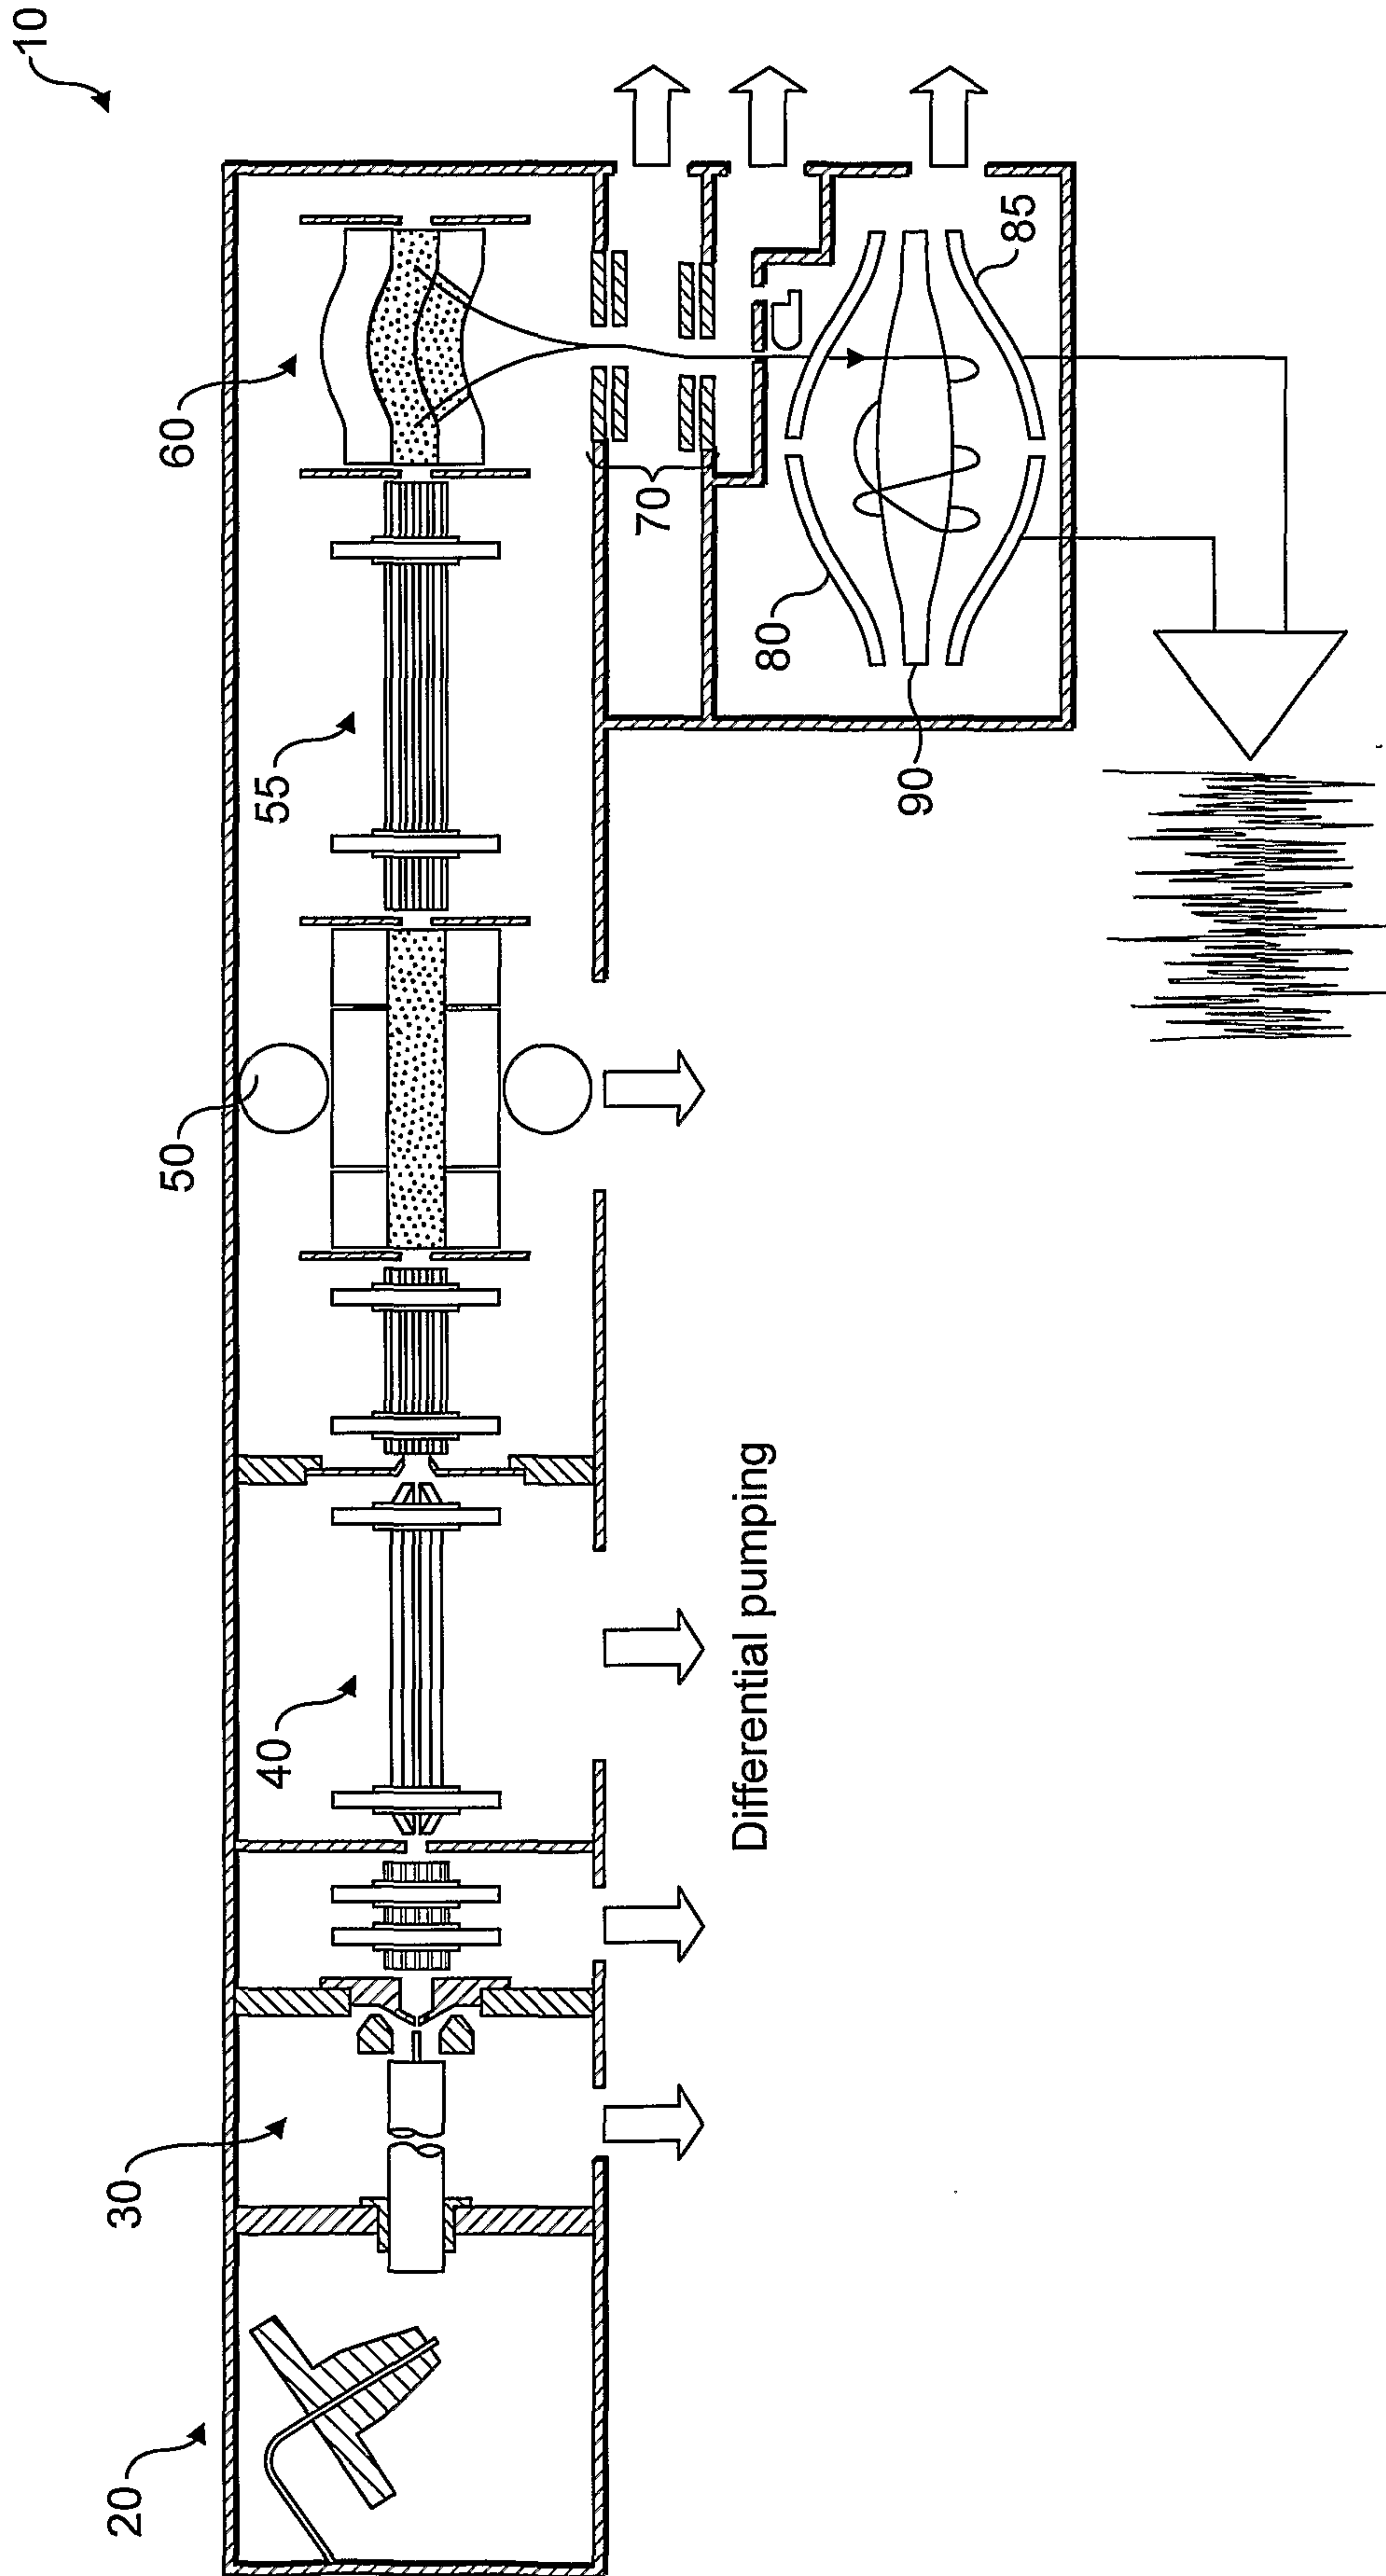


FIG. 1

2 / 14

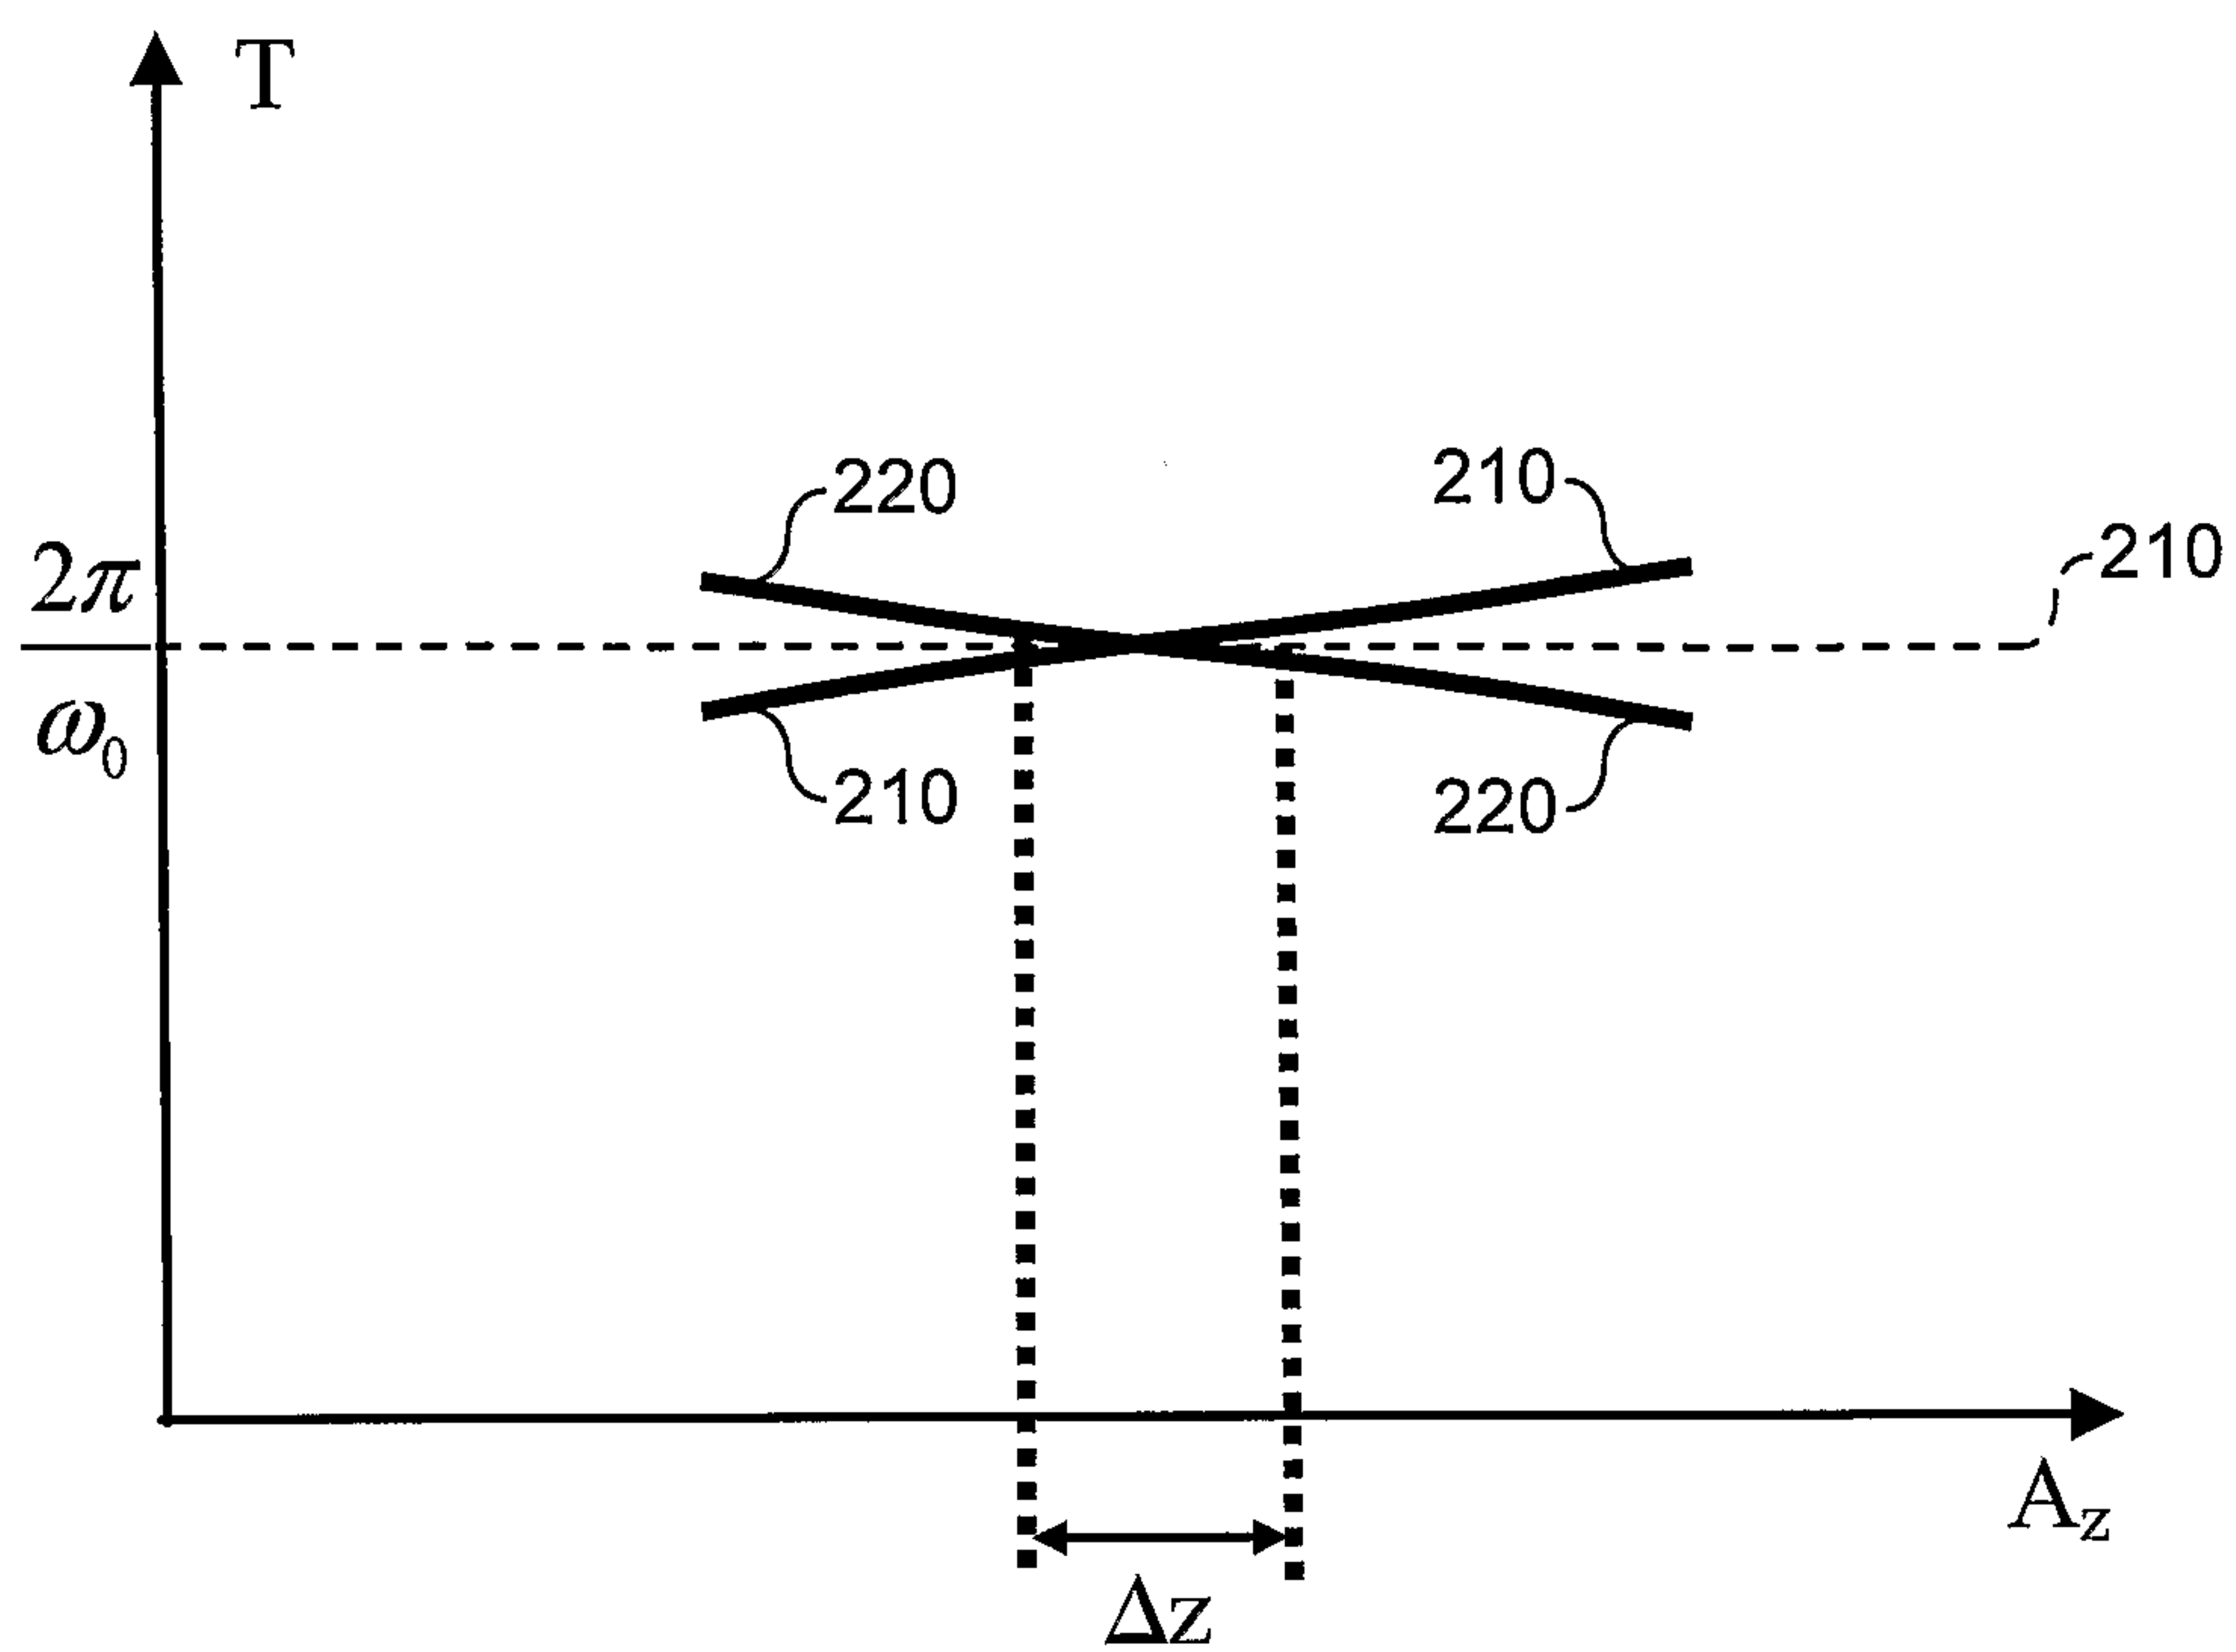


FIG. 2

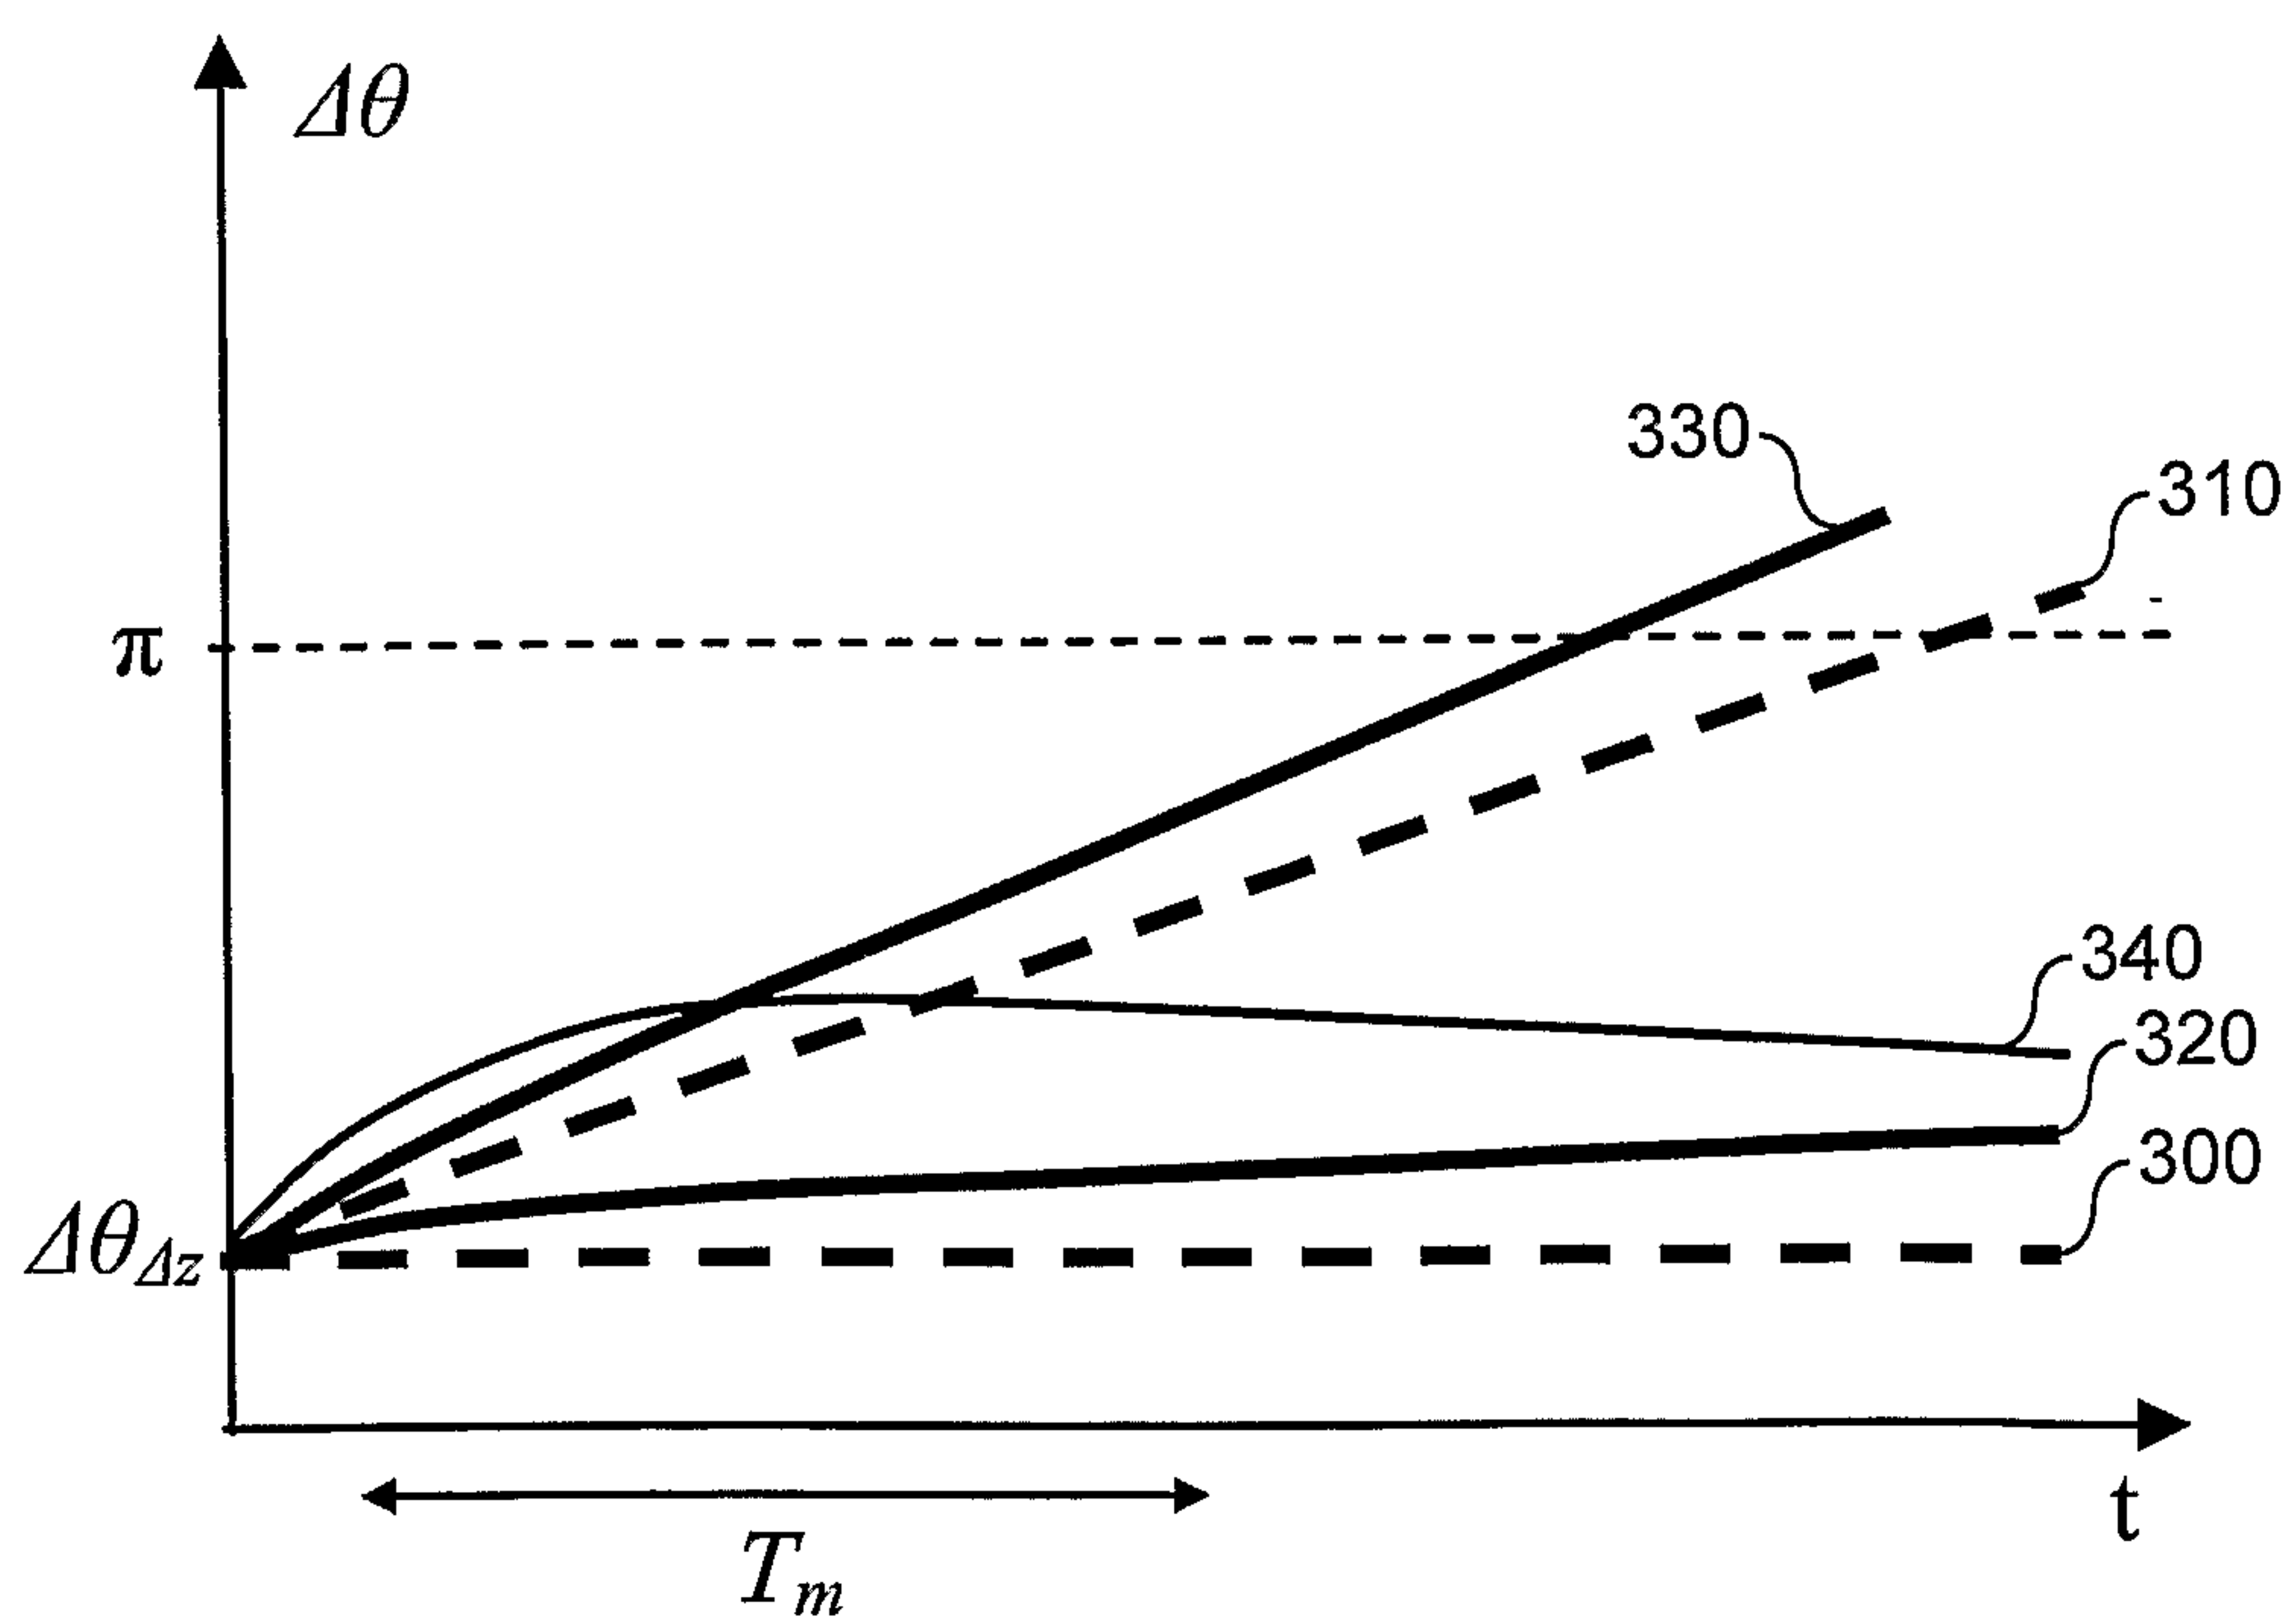


FIG. 3

3 / 14

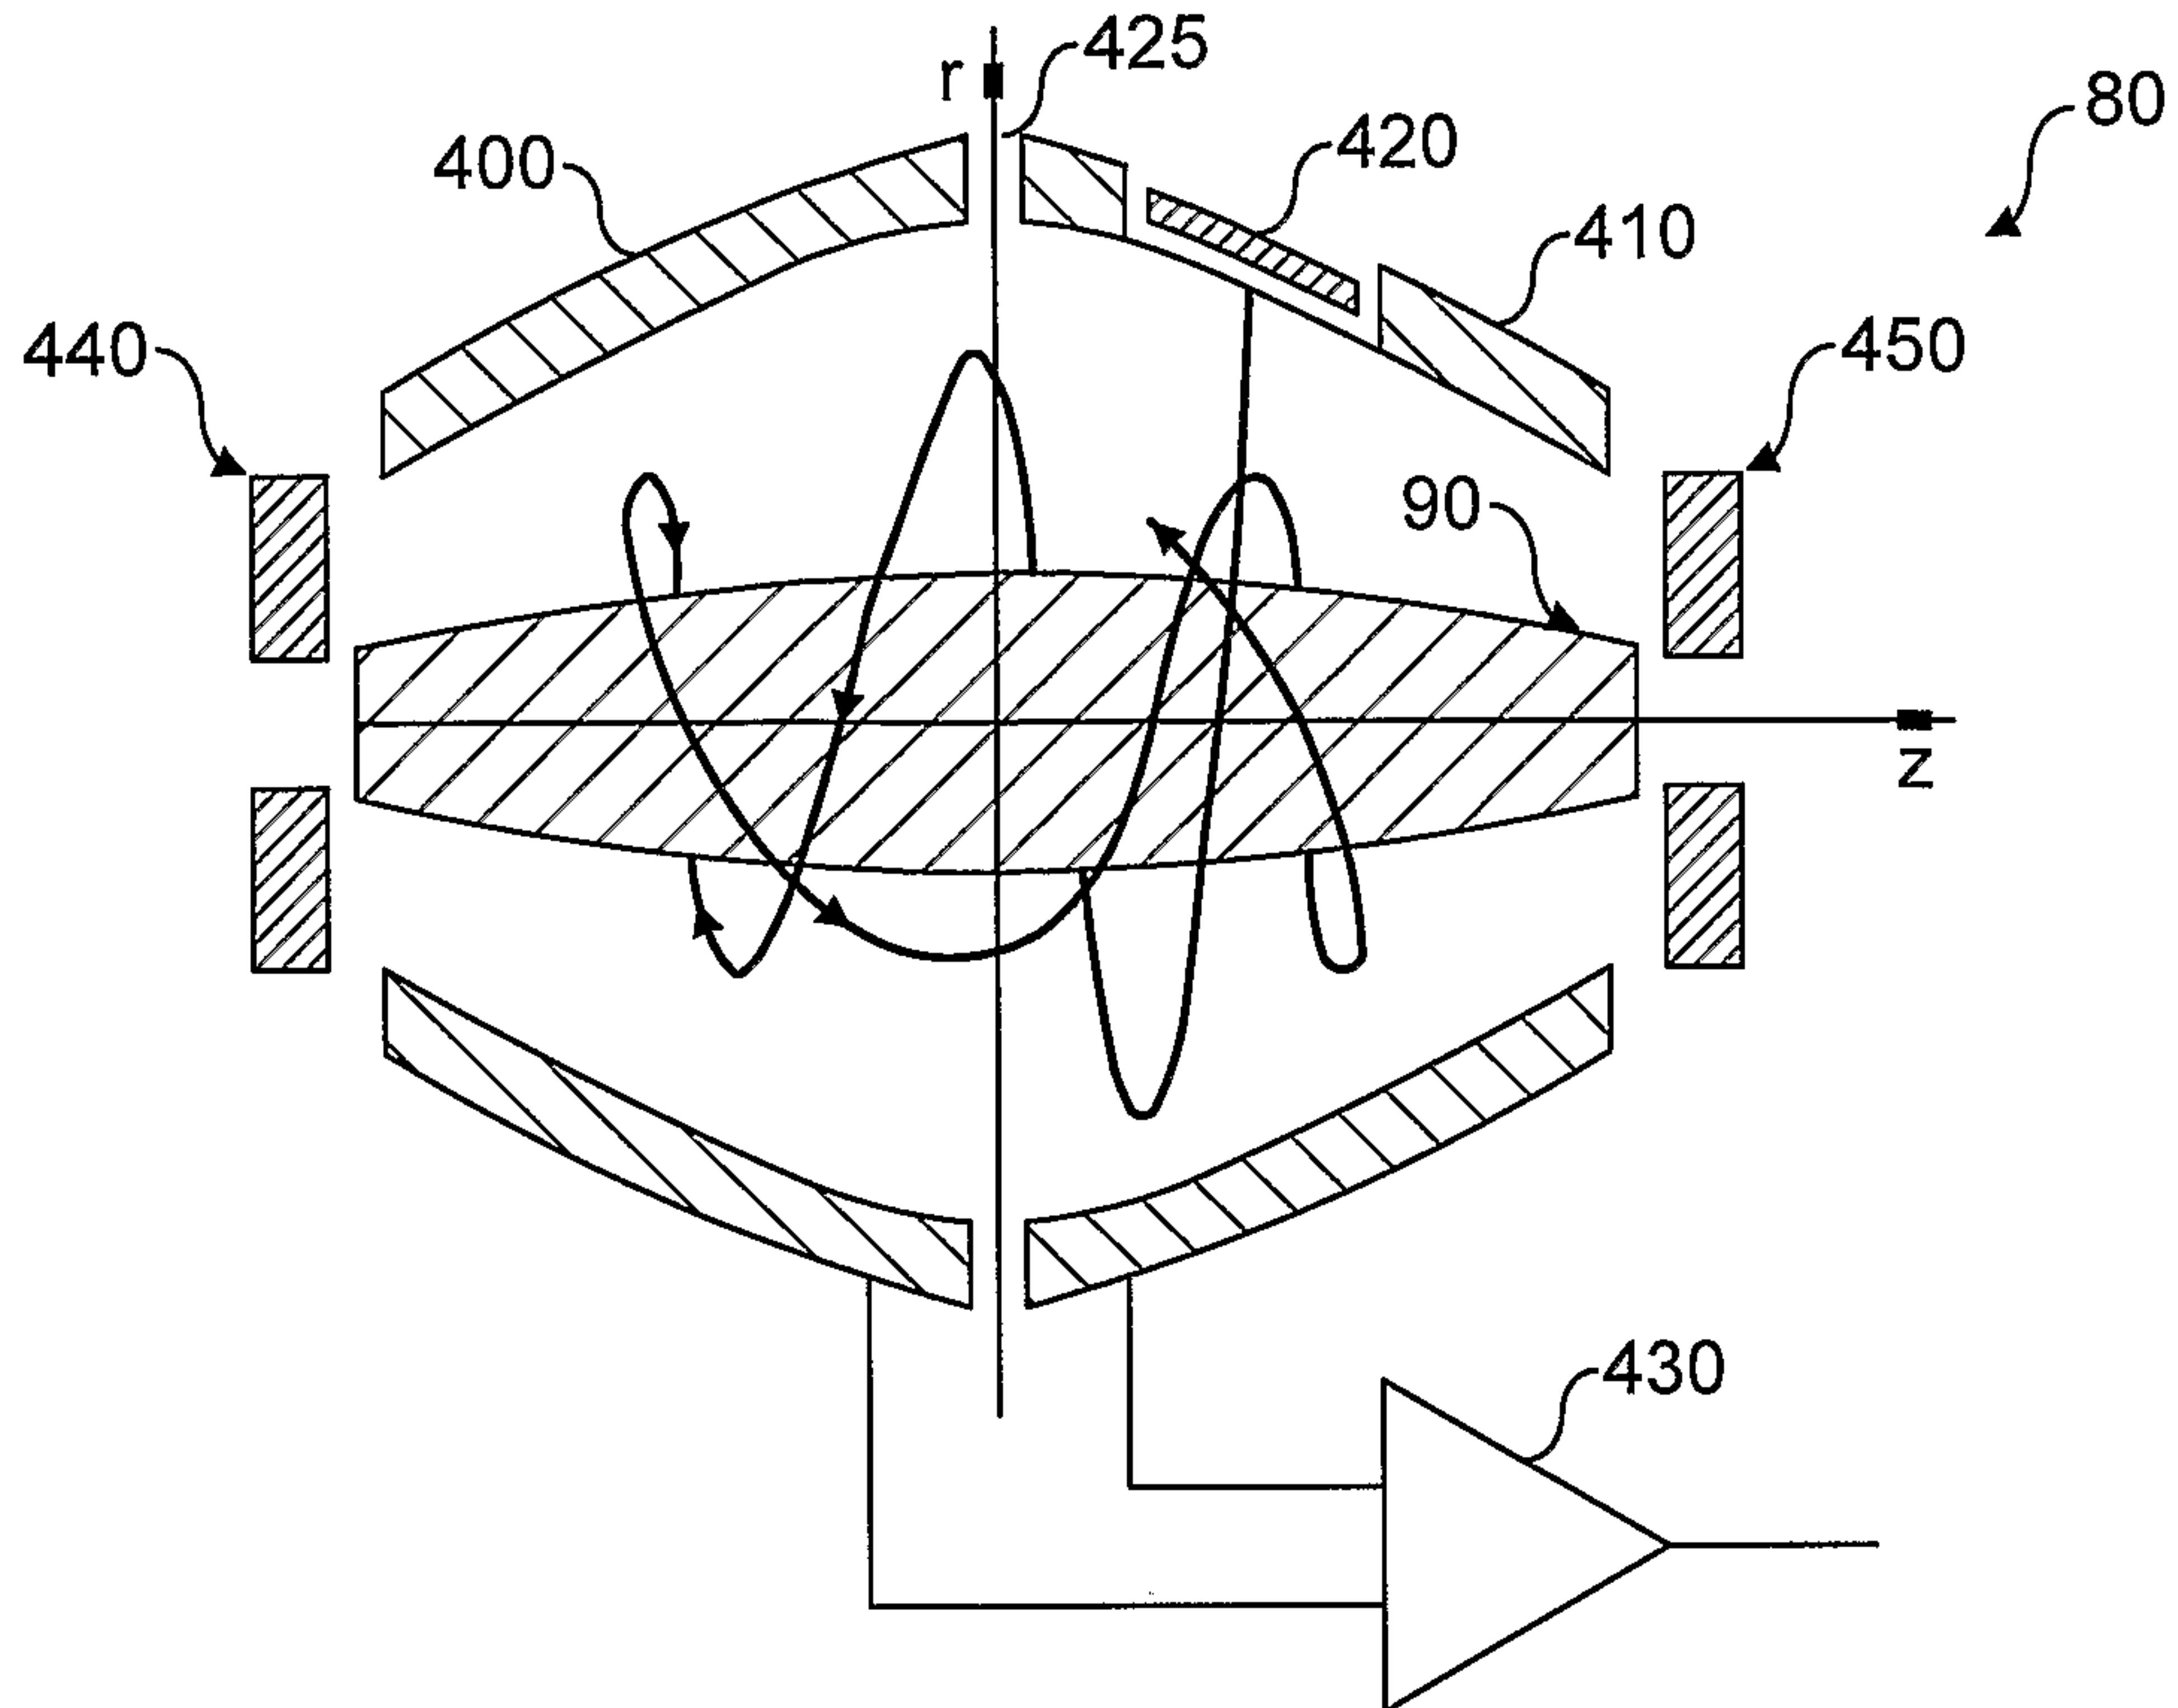


FIG. 4

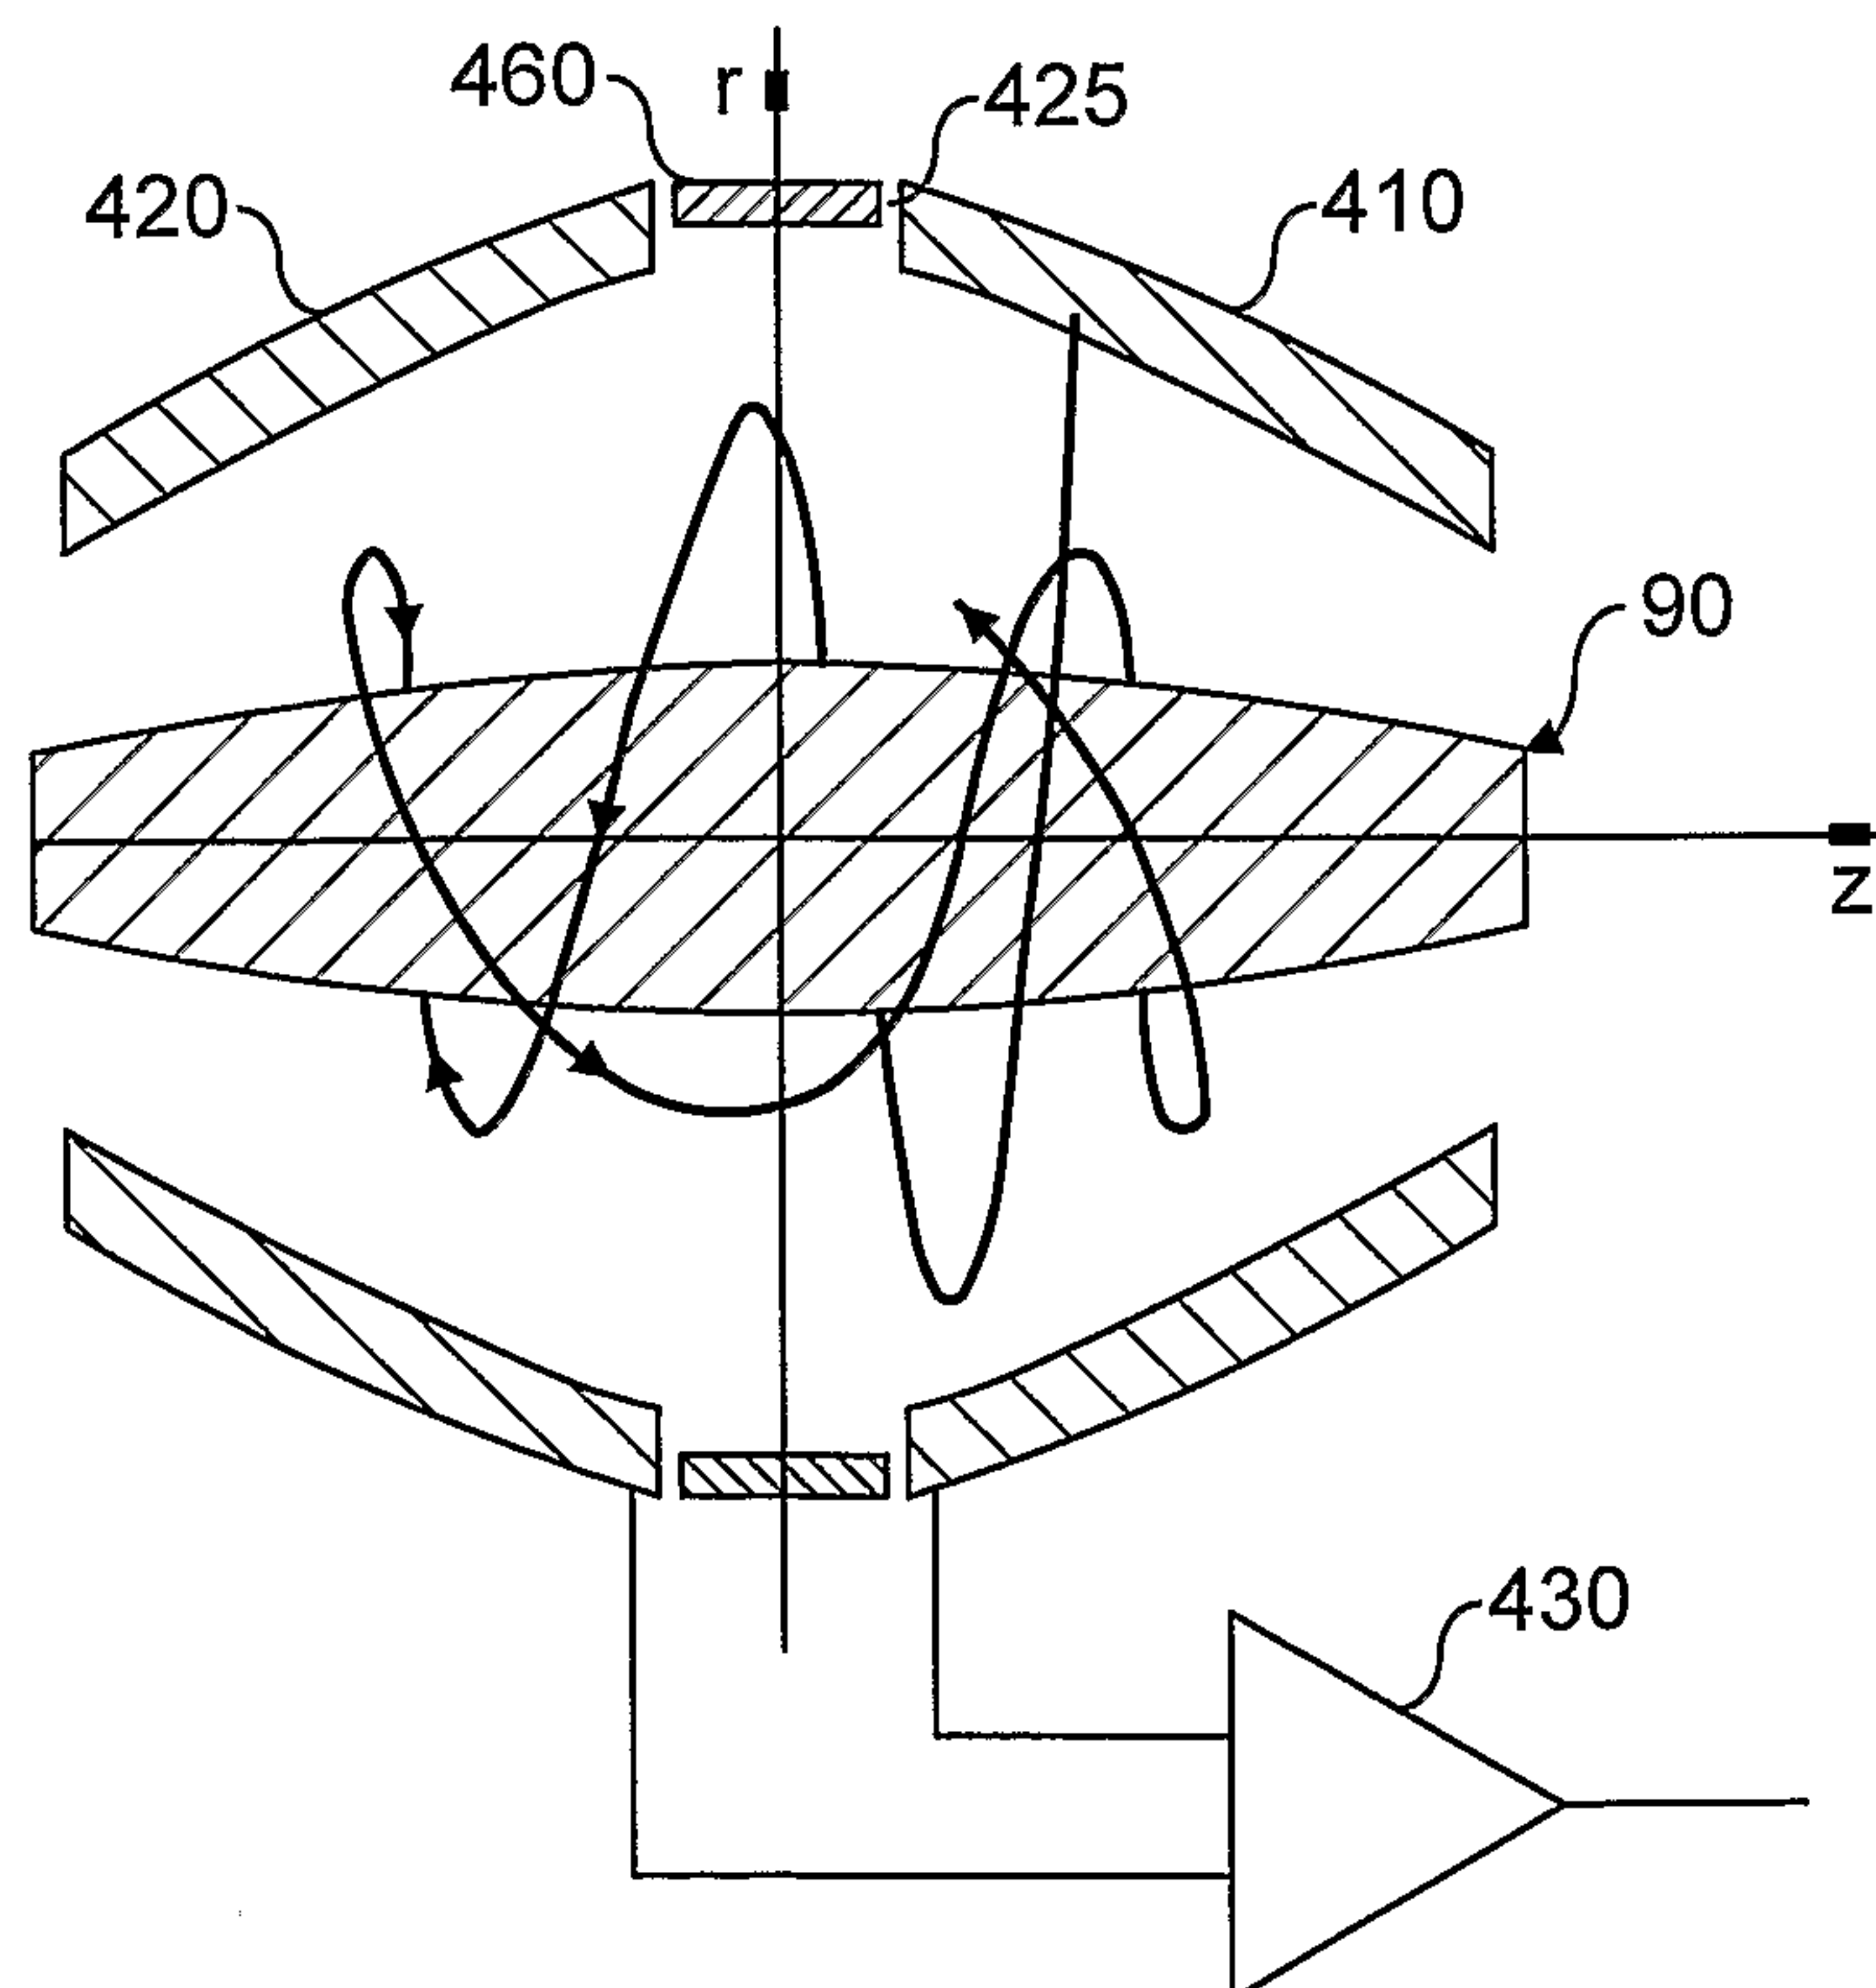


FIG. 5

4 / 14

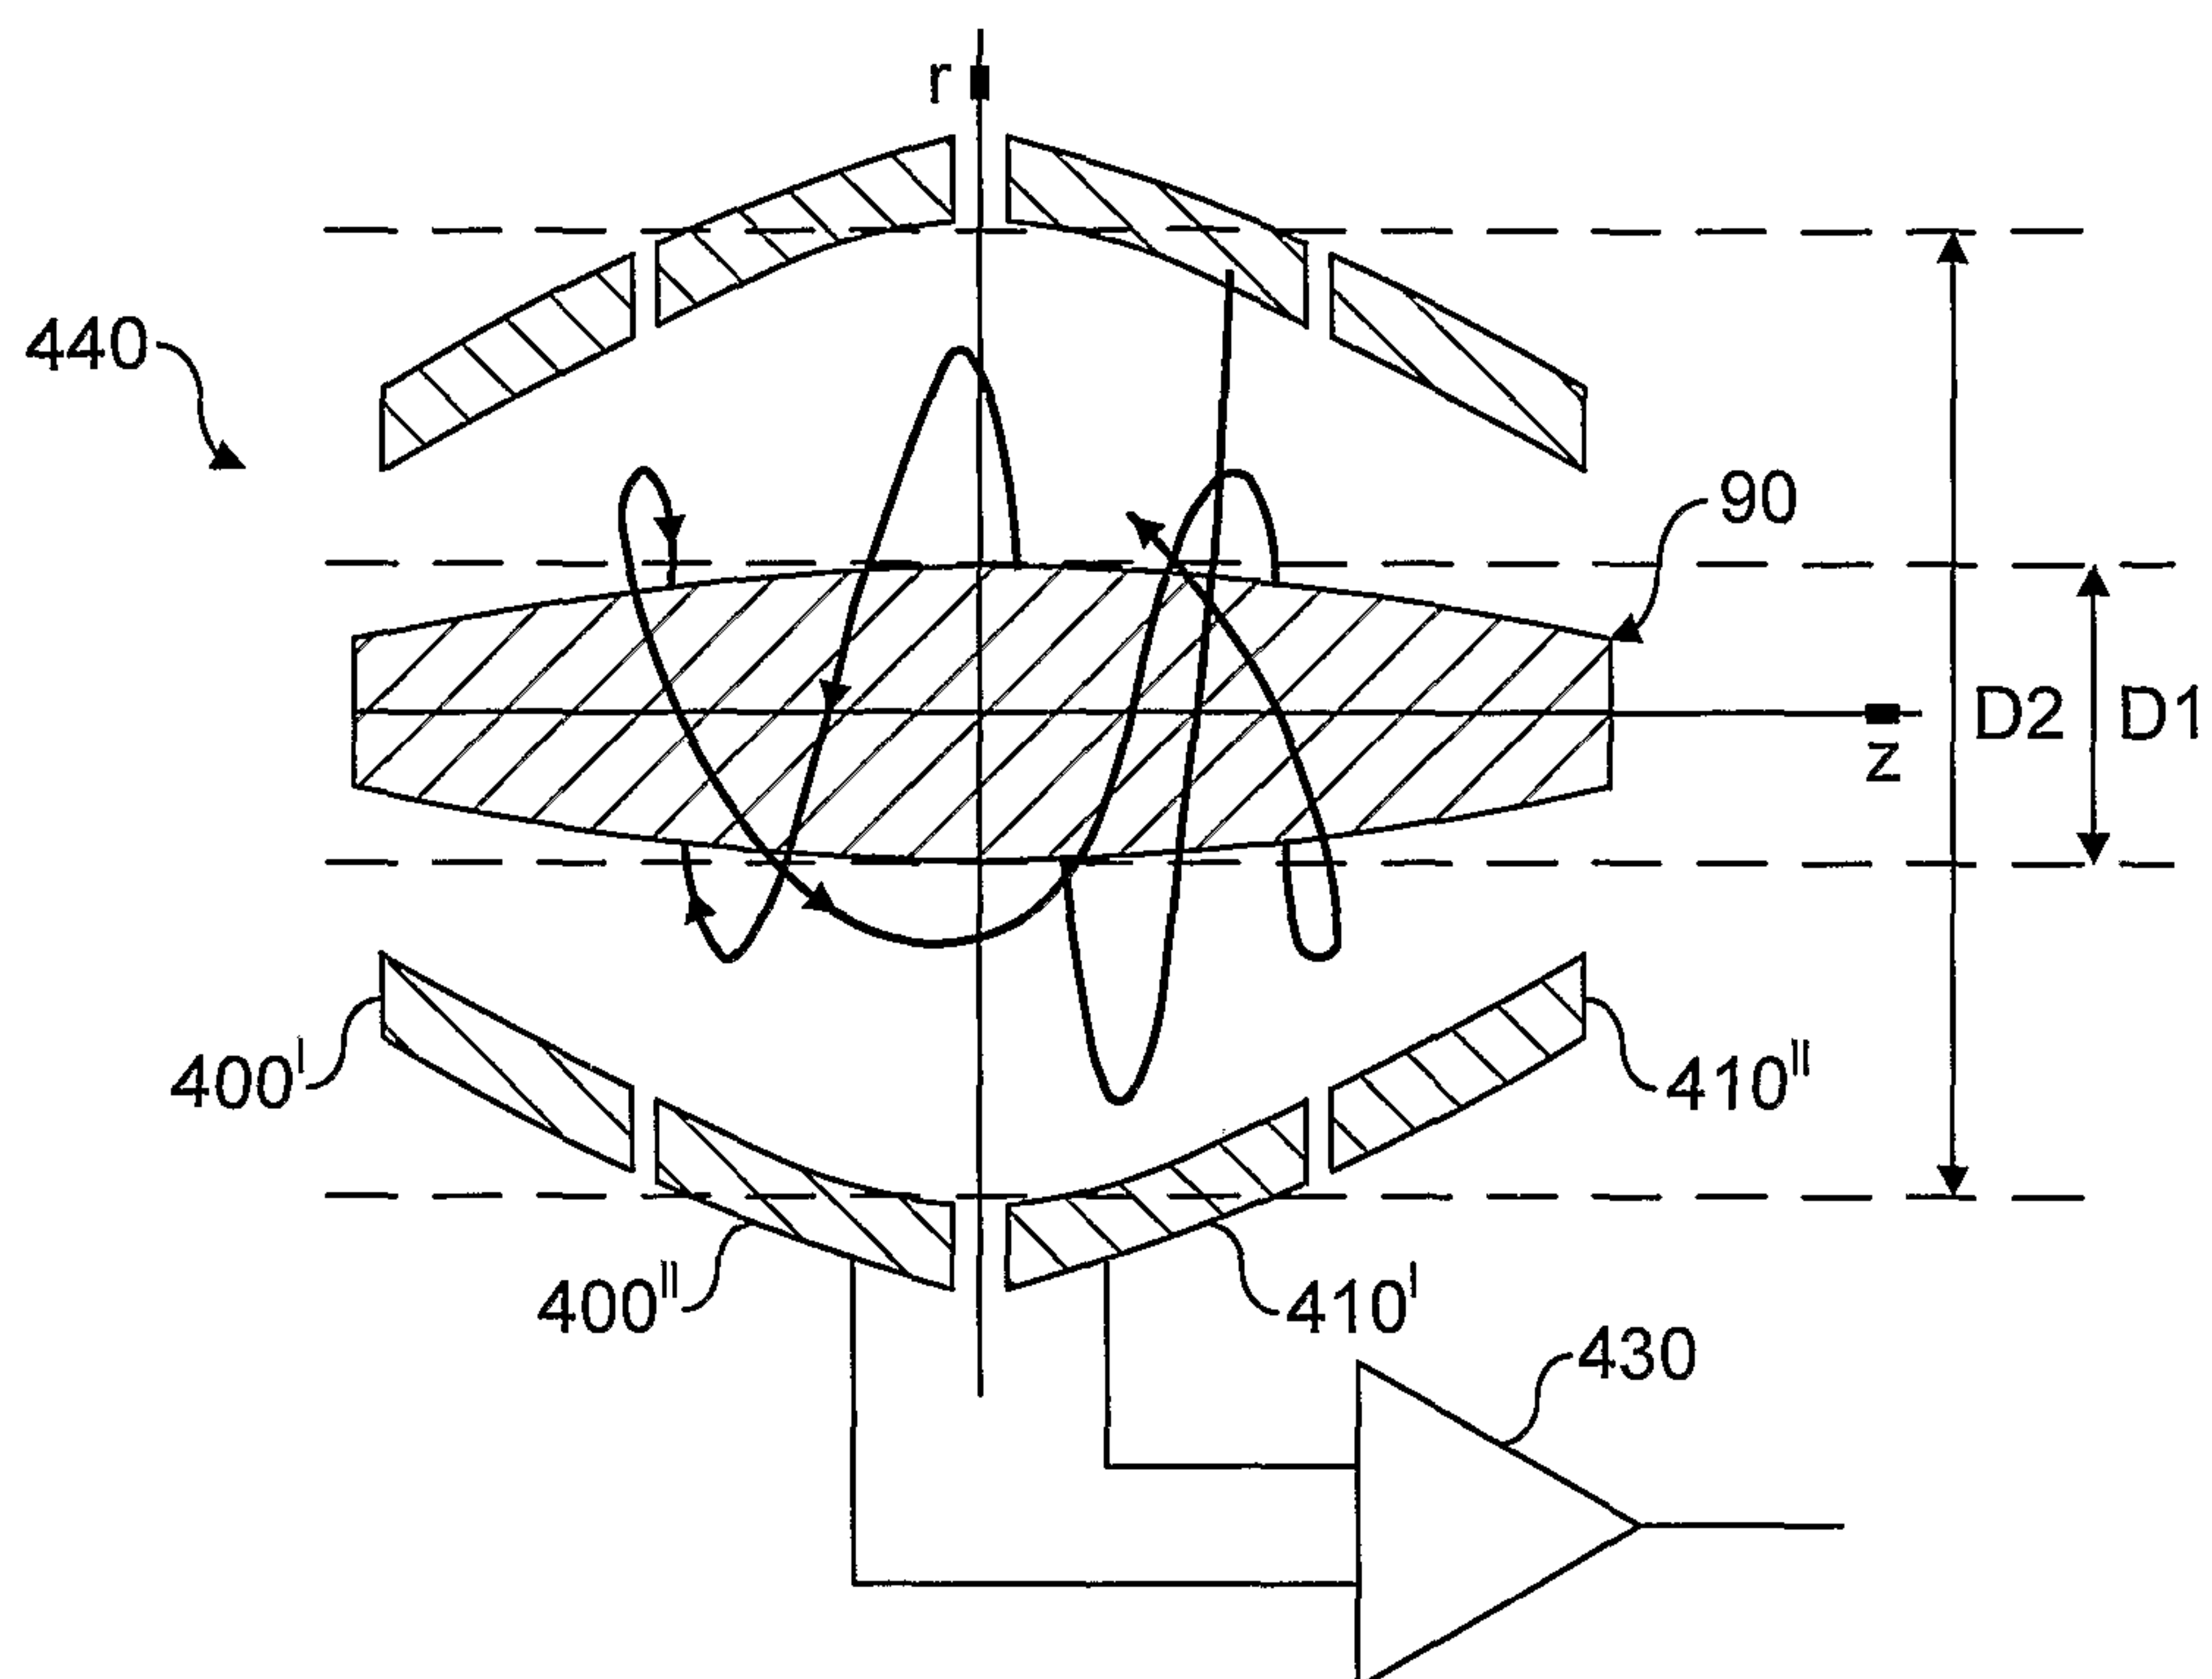


FIG. 6

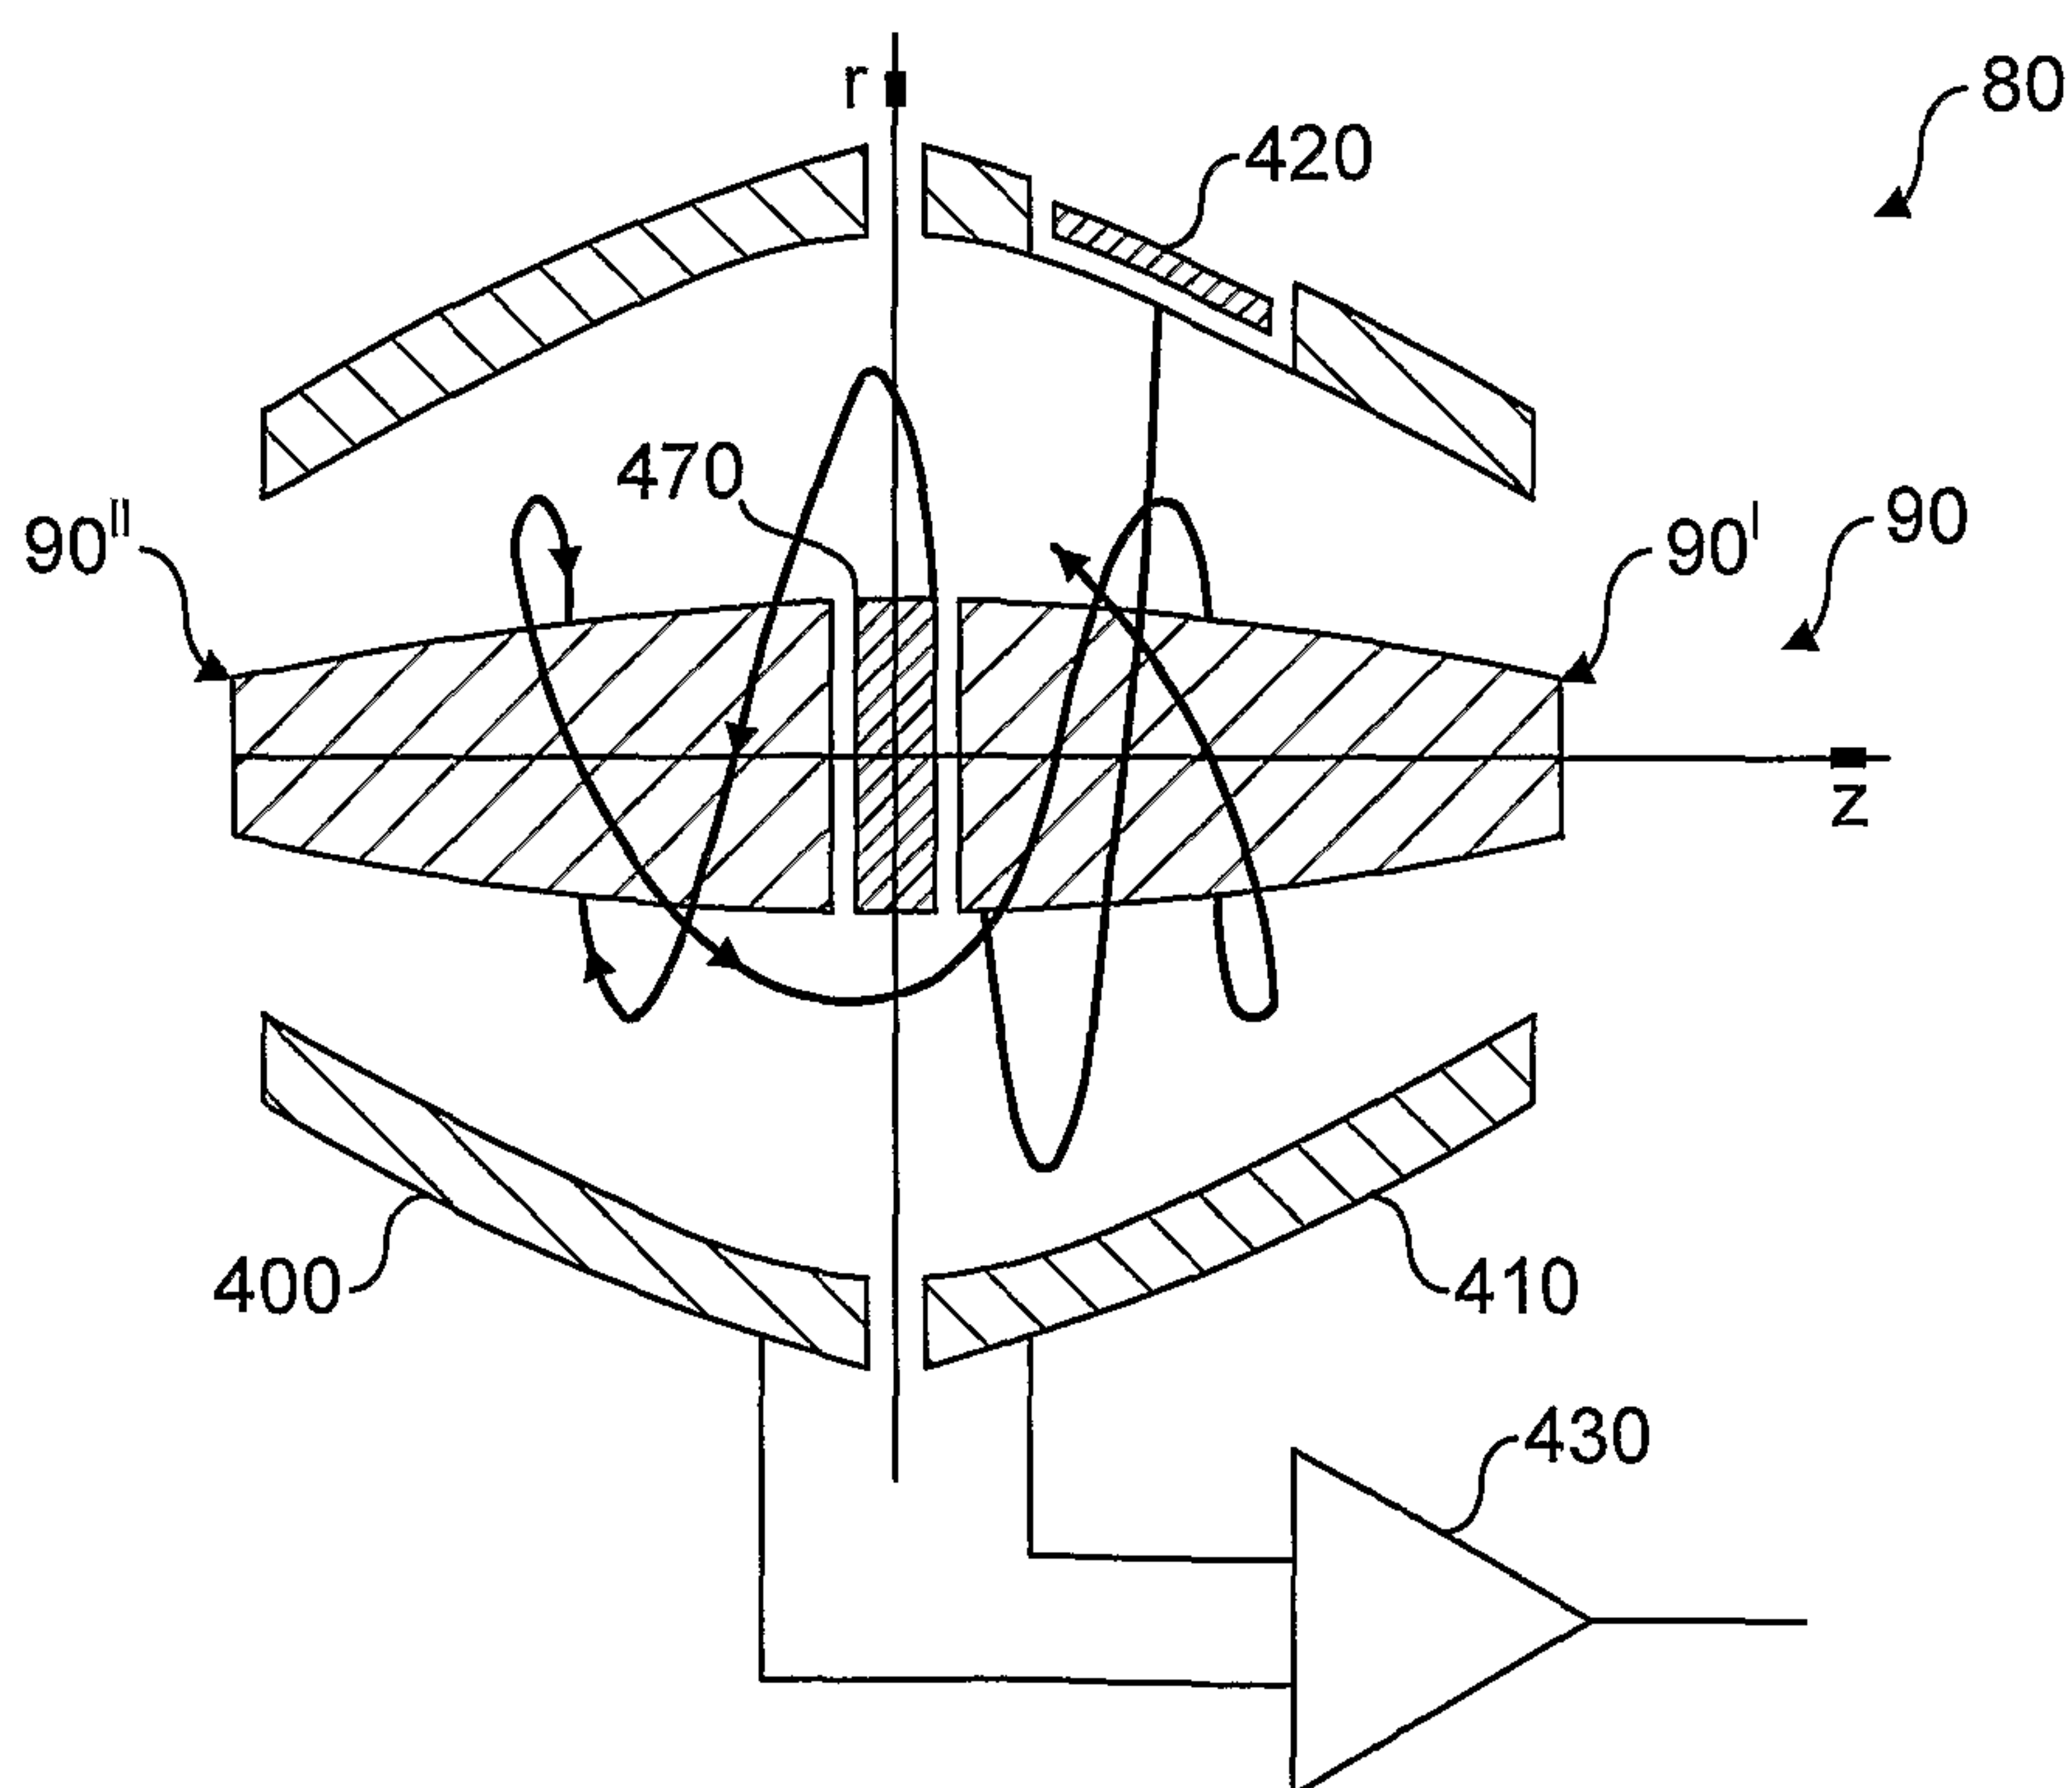


FIG. 7

5 / 14

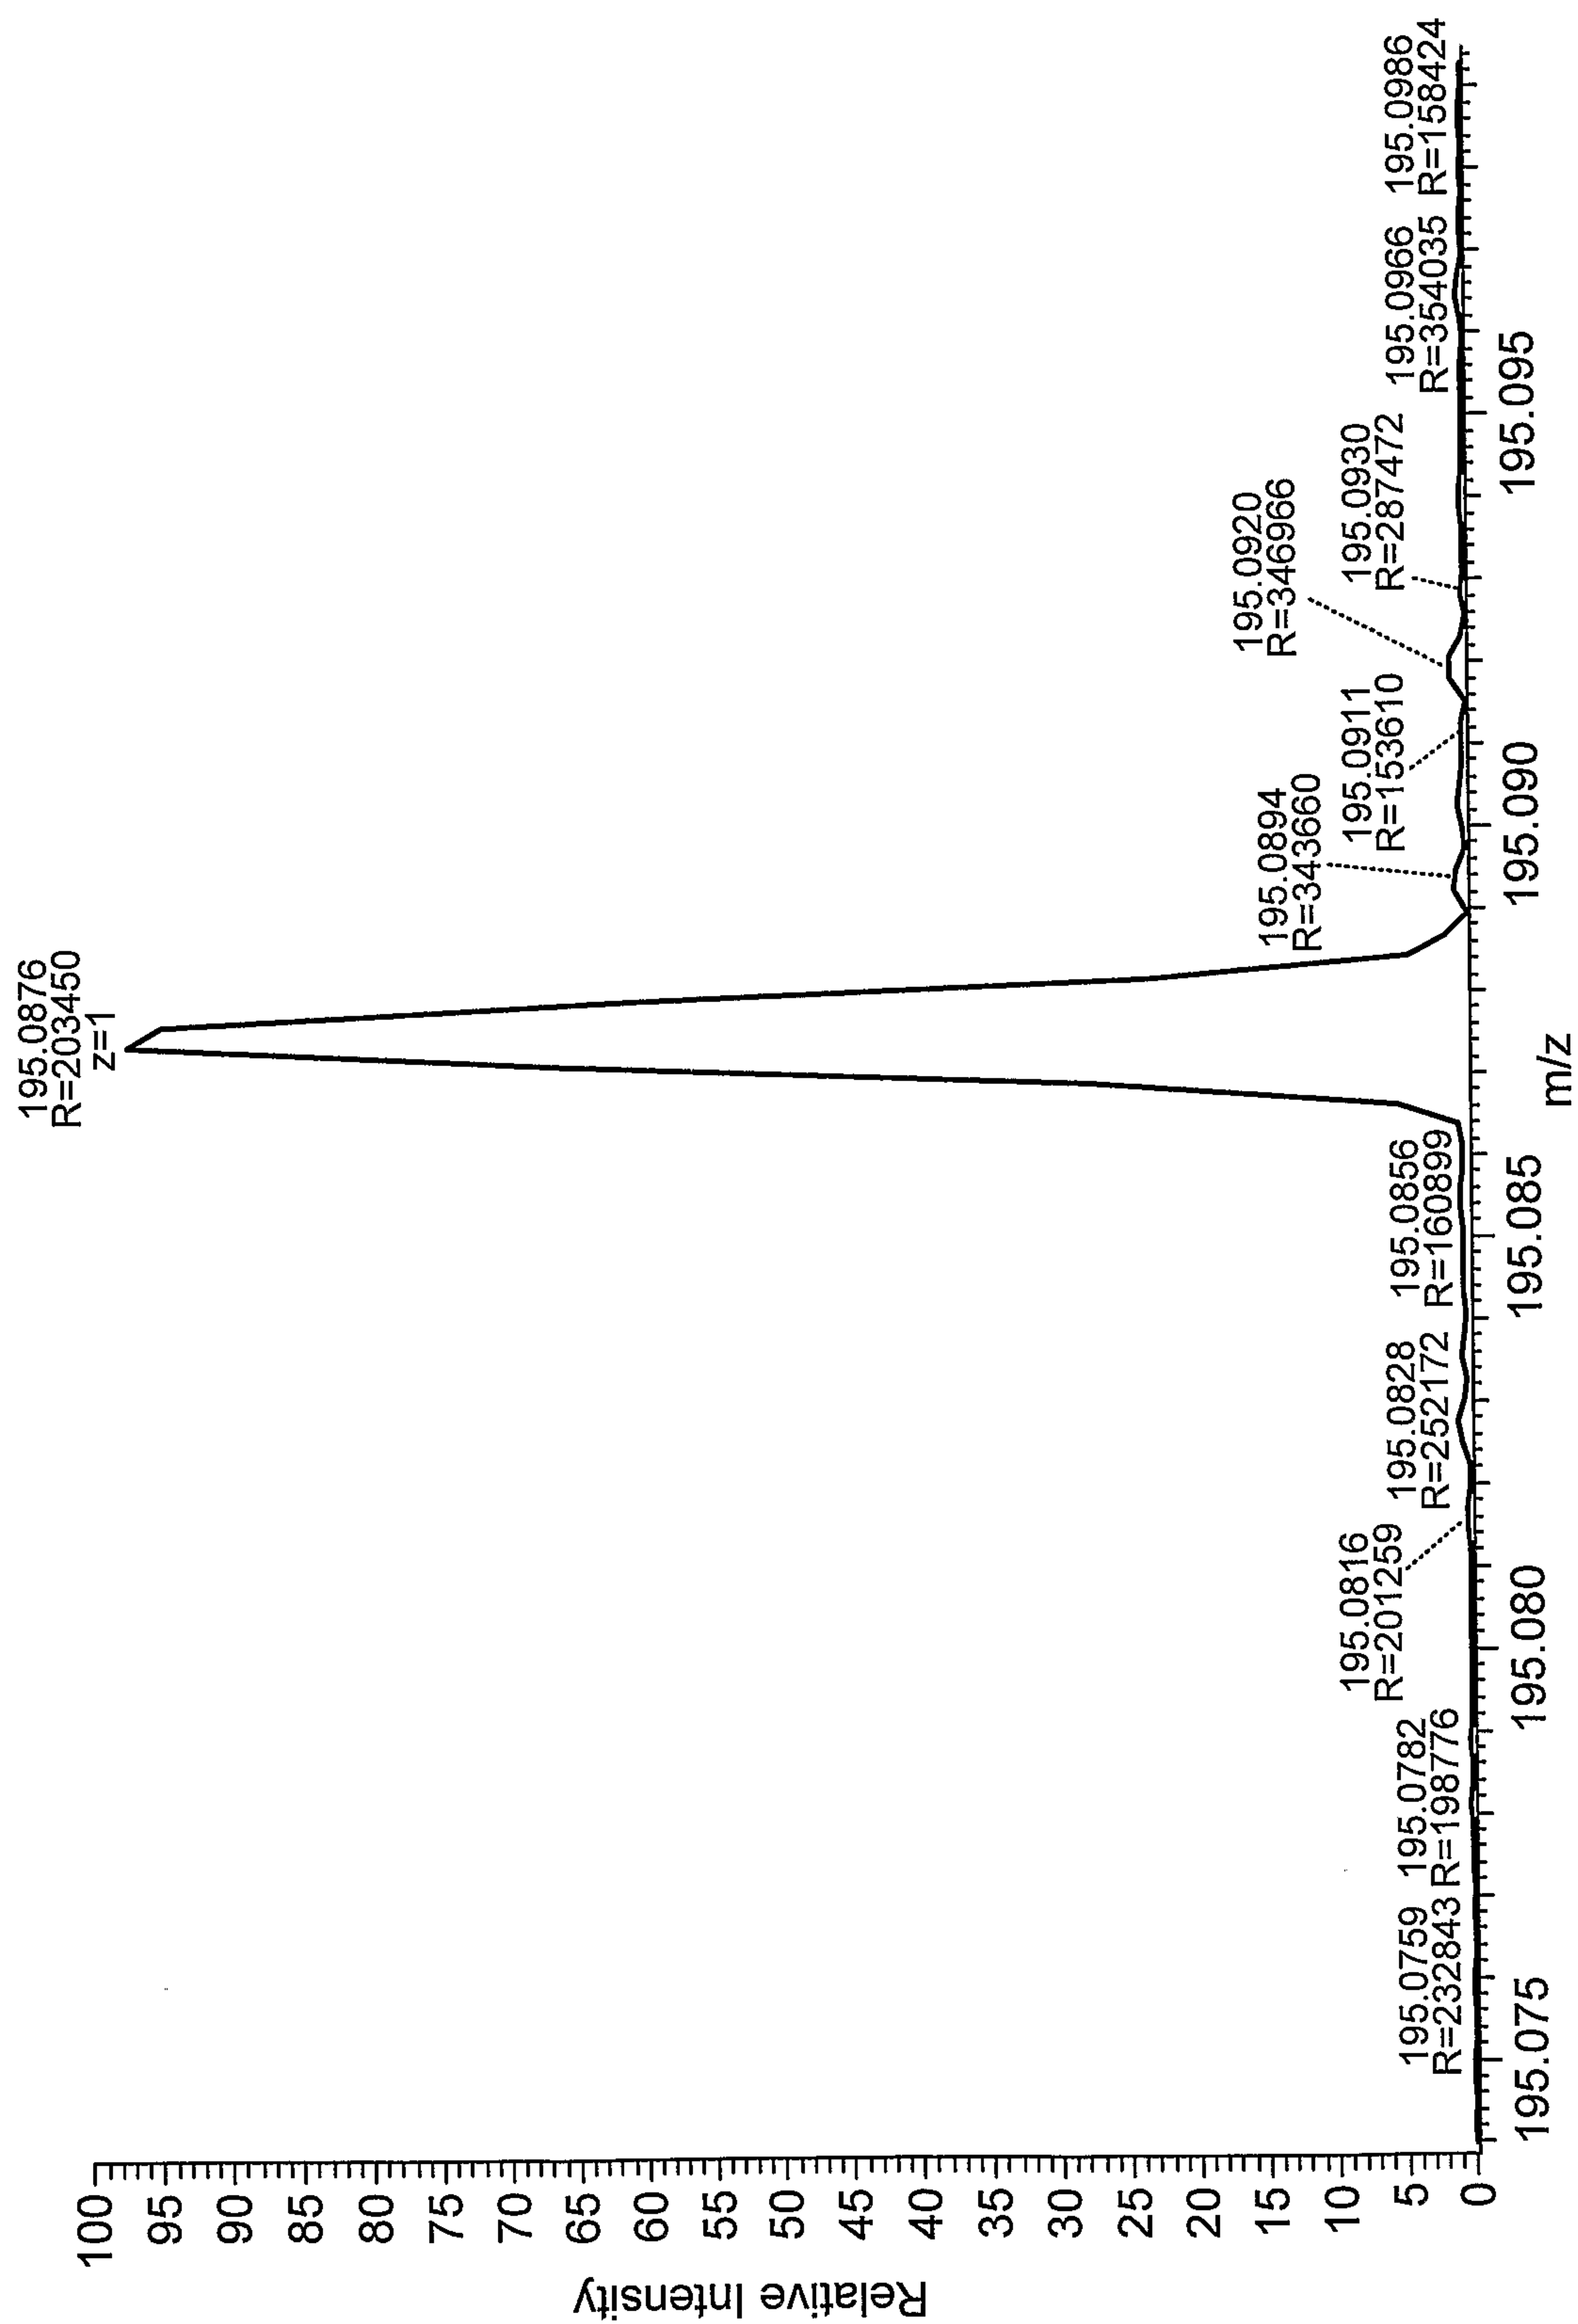


FIG. 8a

6 / 14

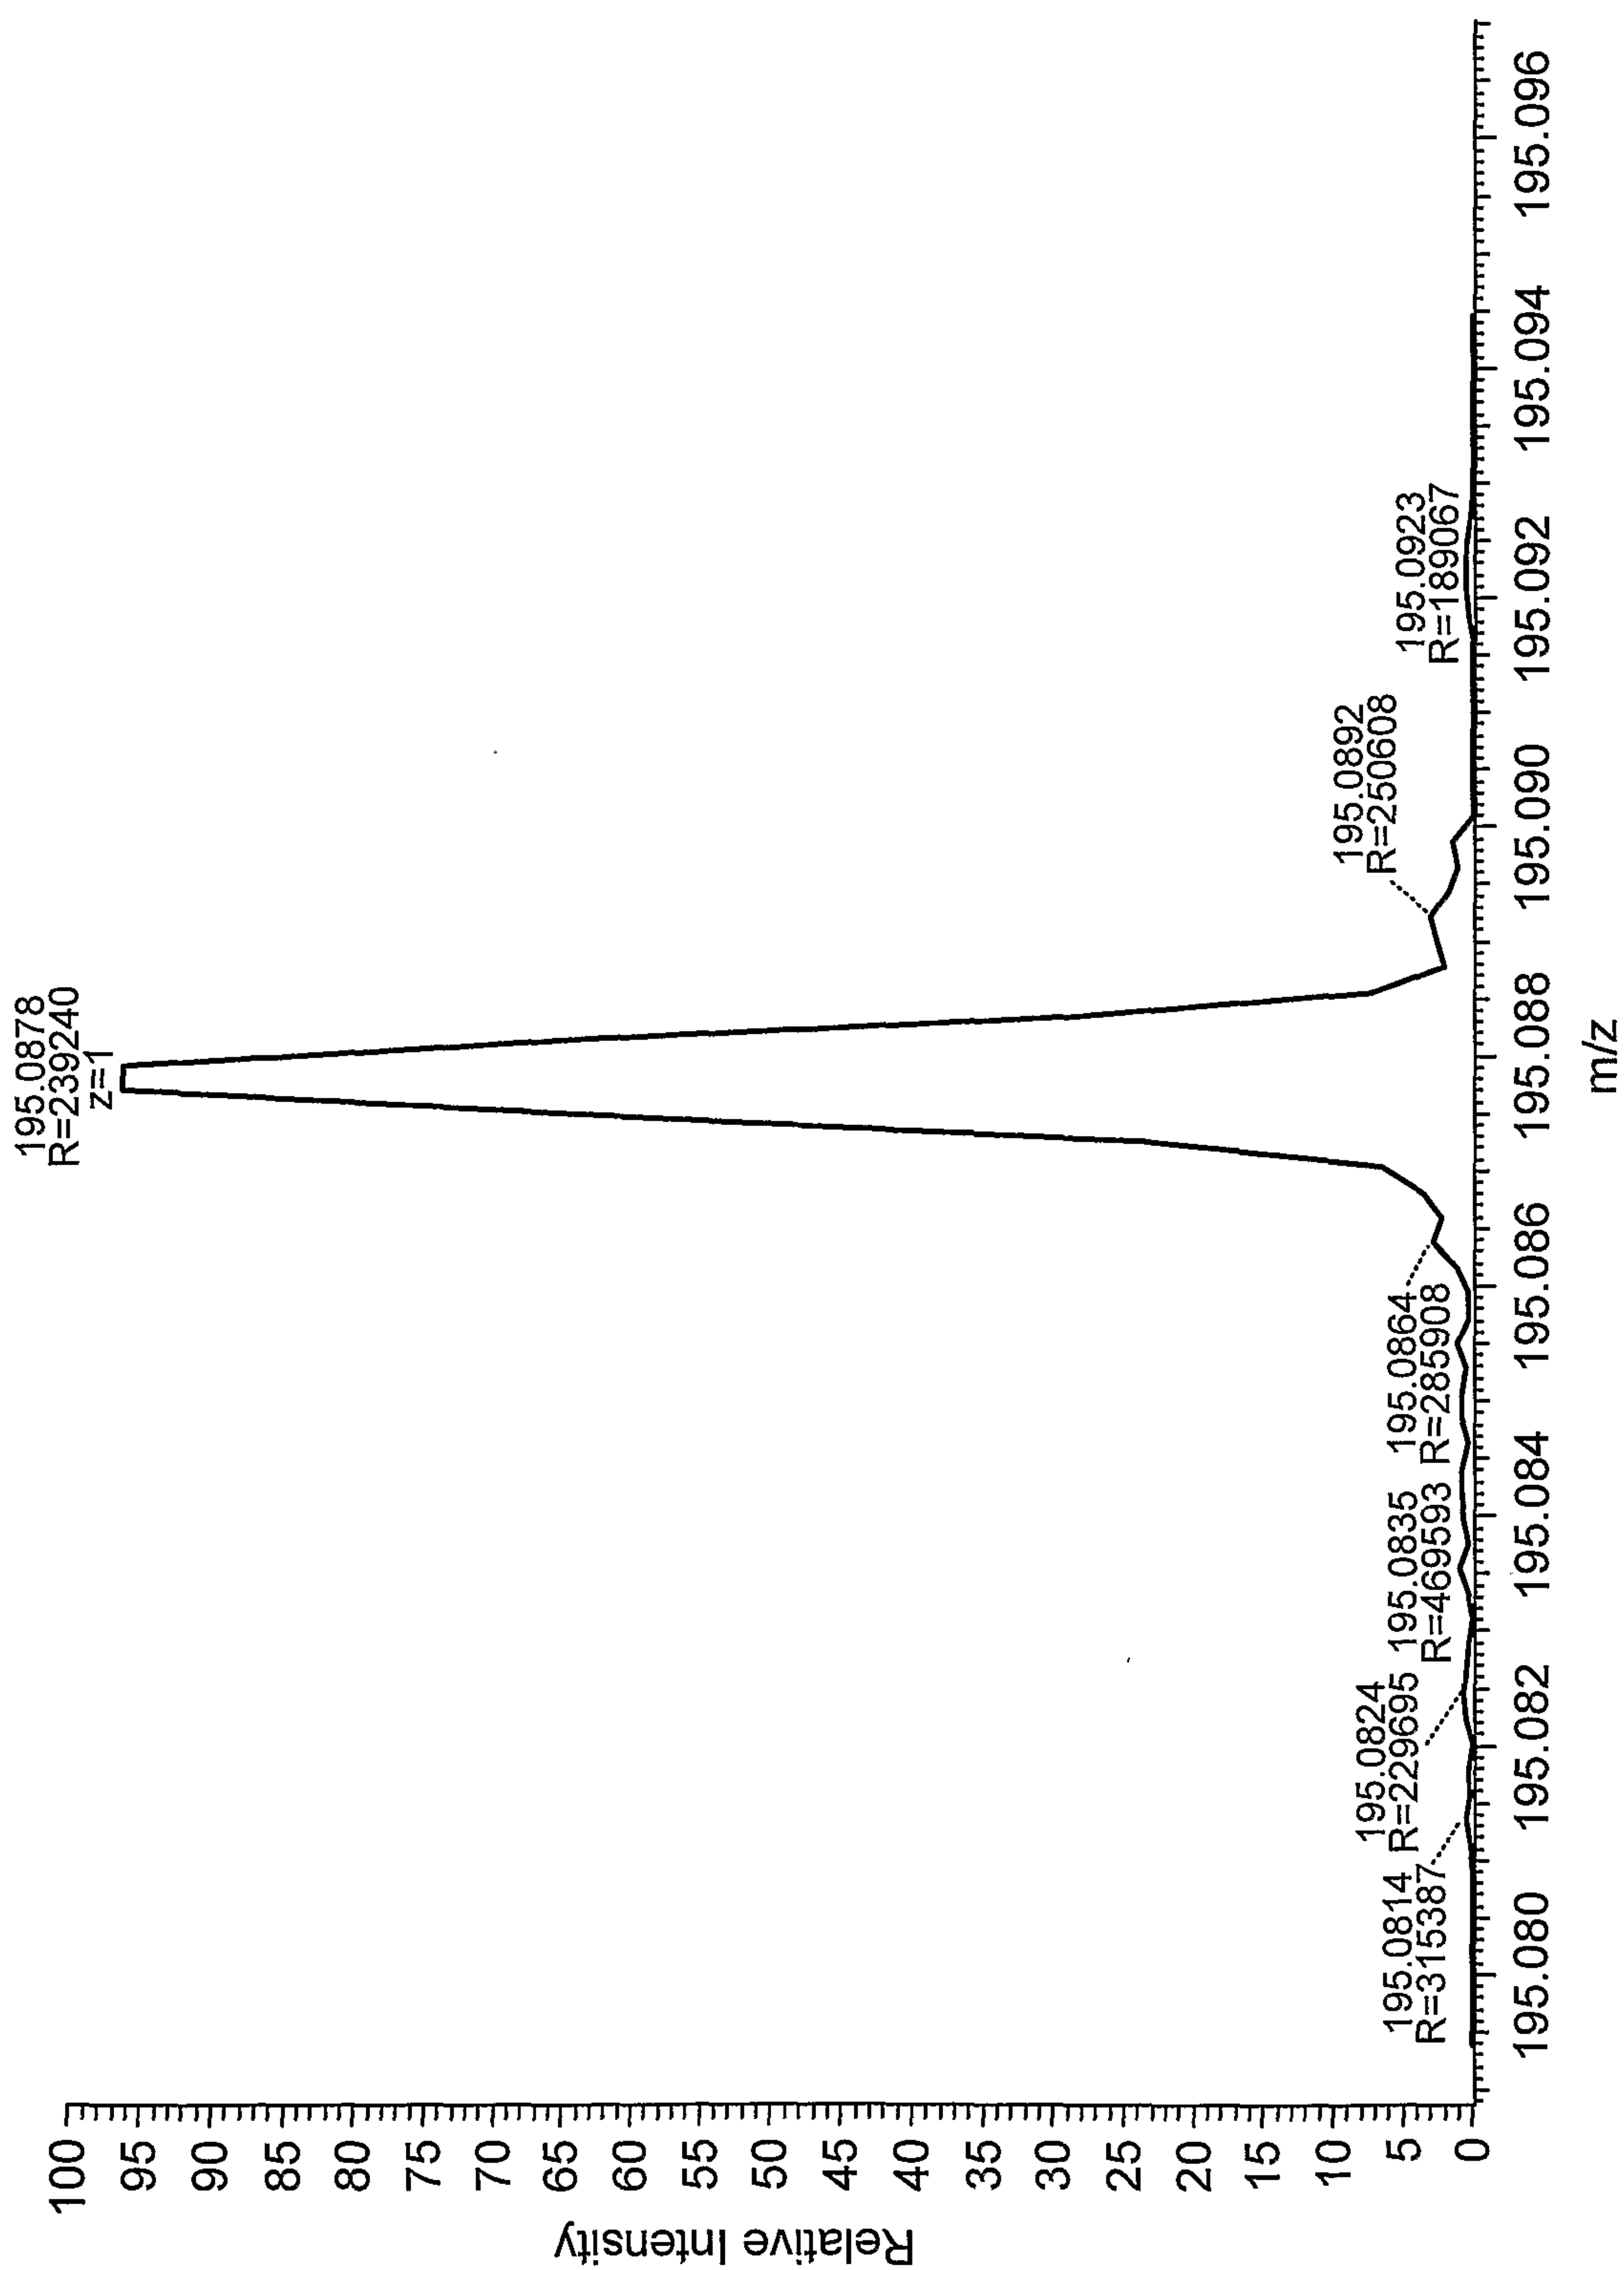


FIG. 8b

7 / 14

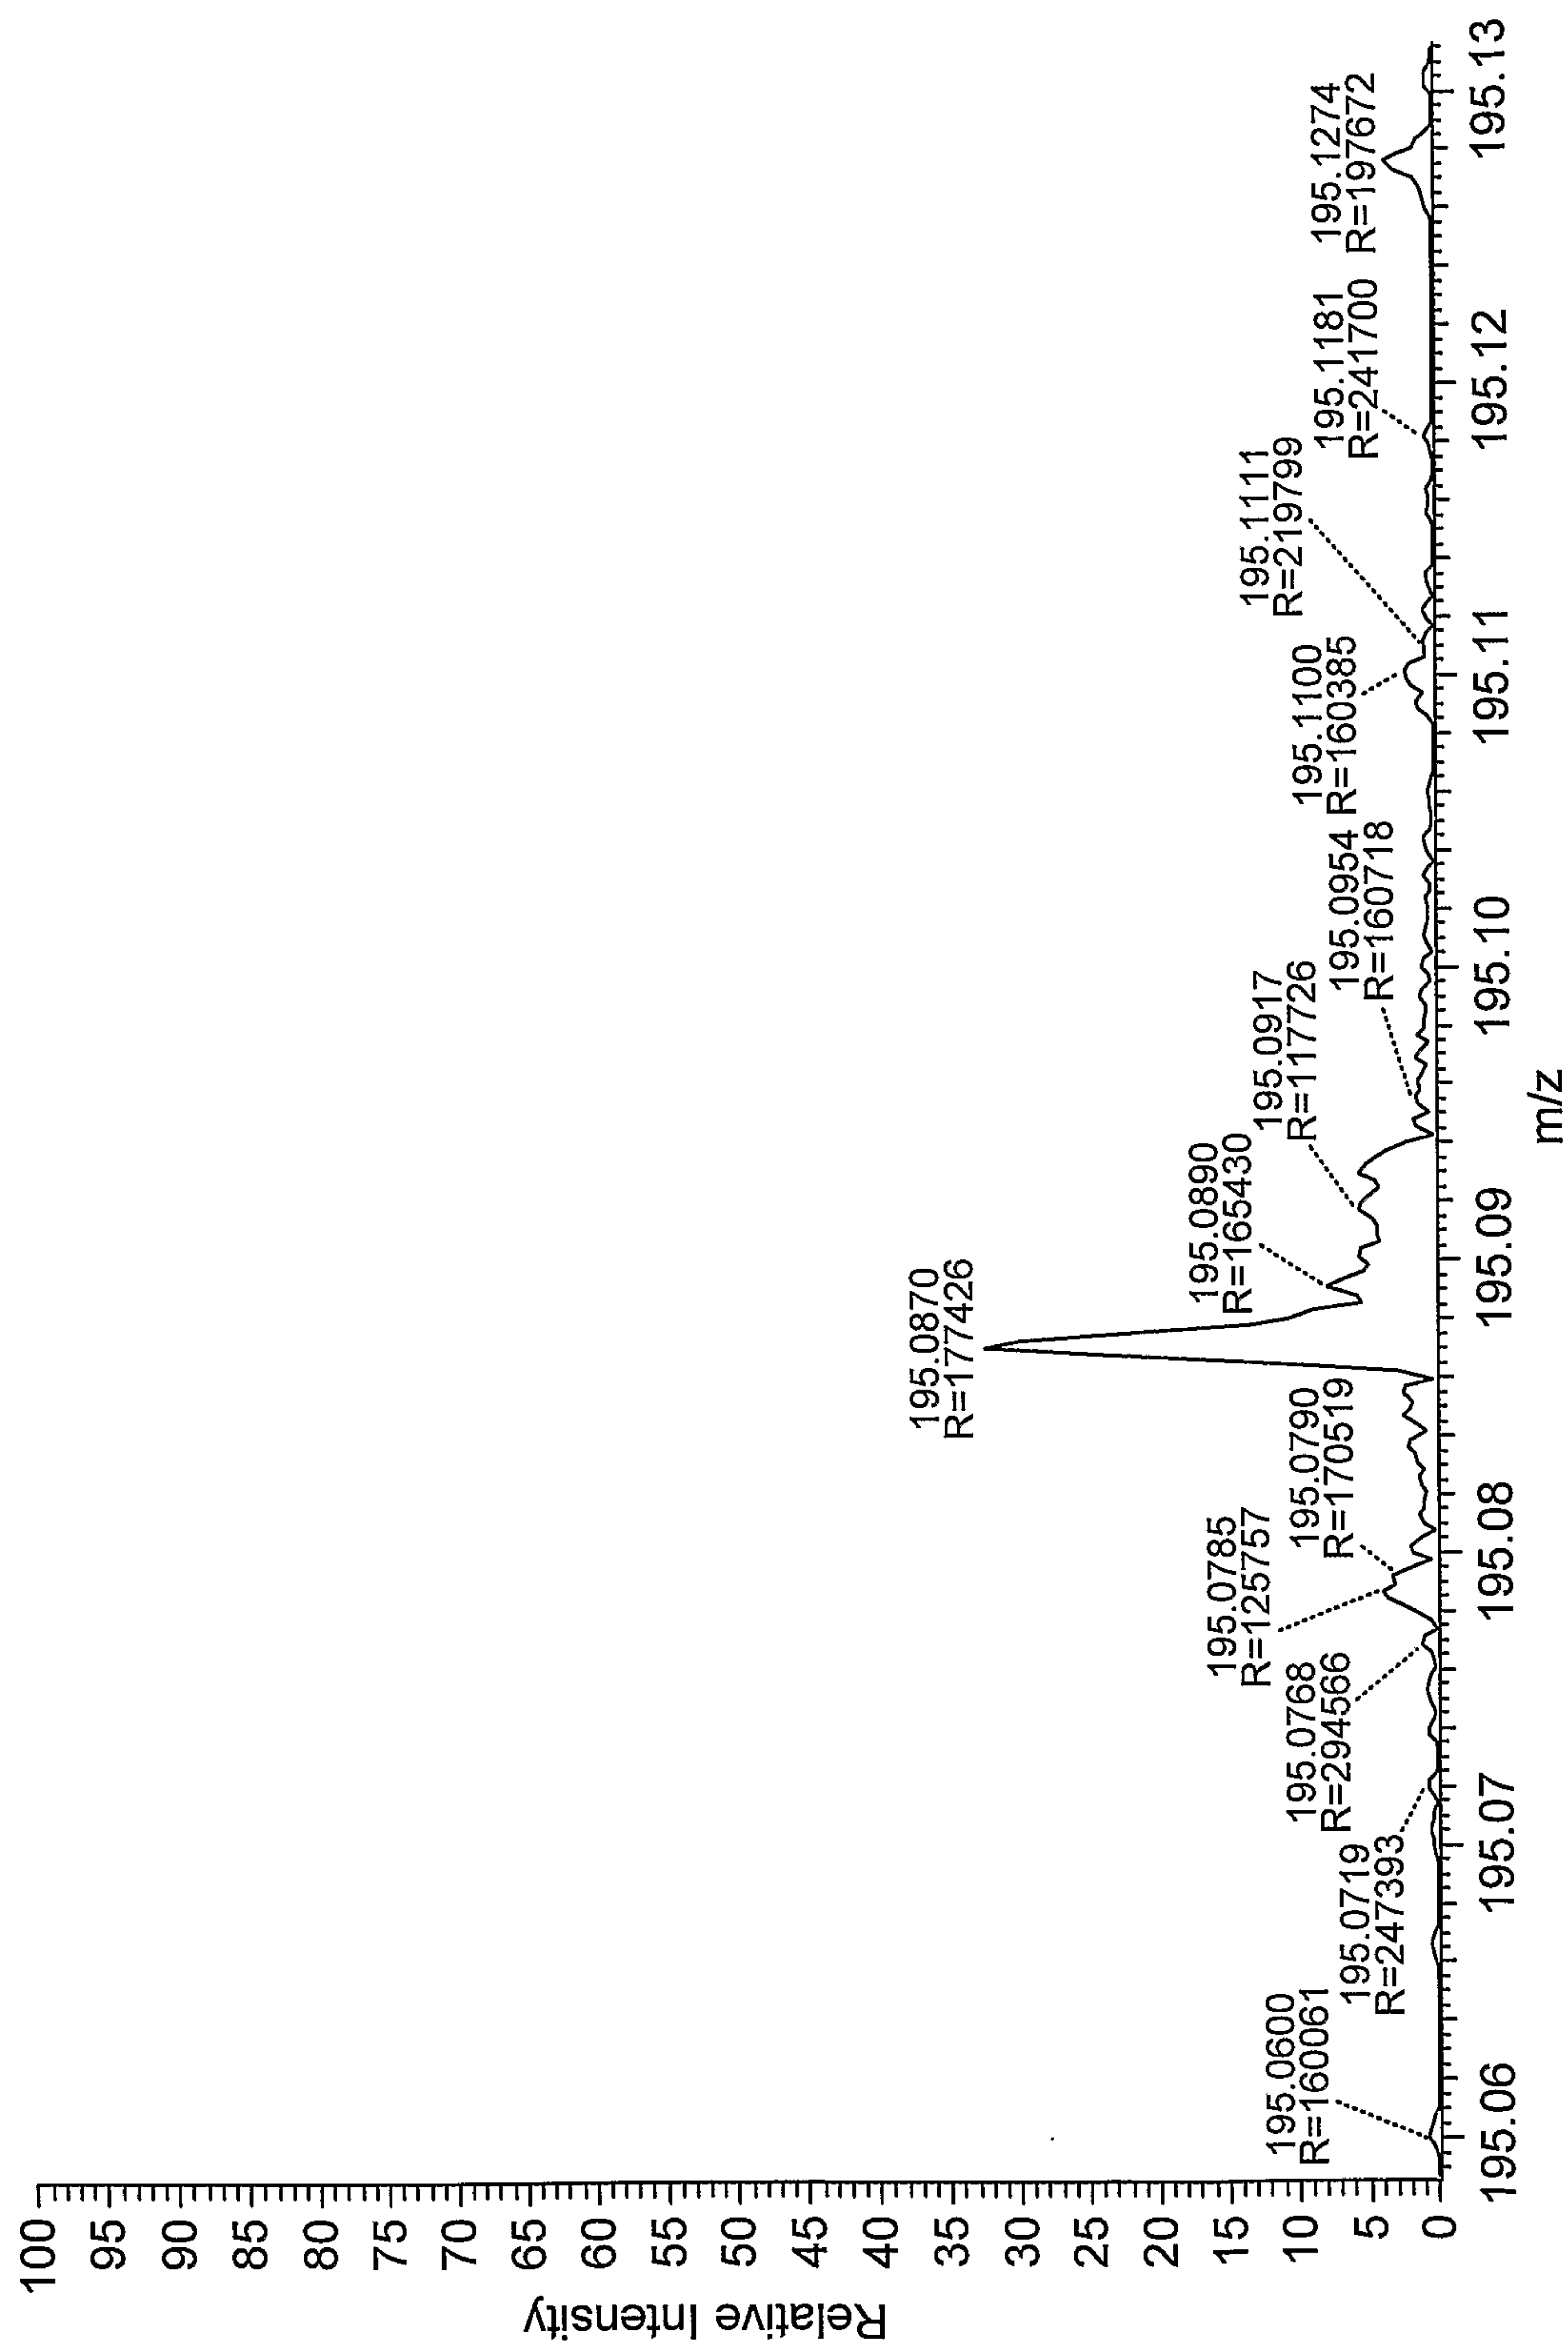


FIG. 8C

8 / 14

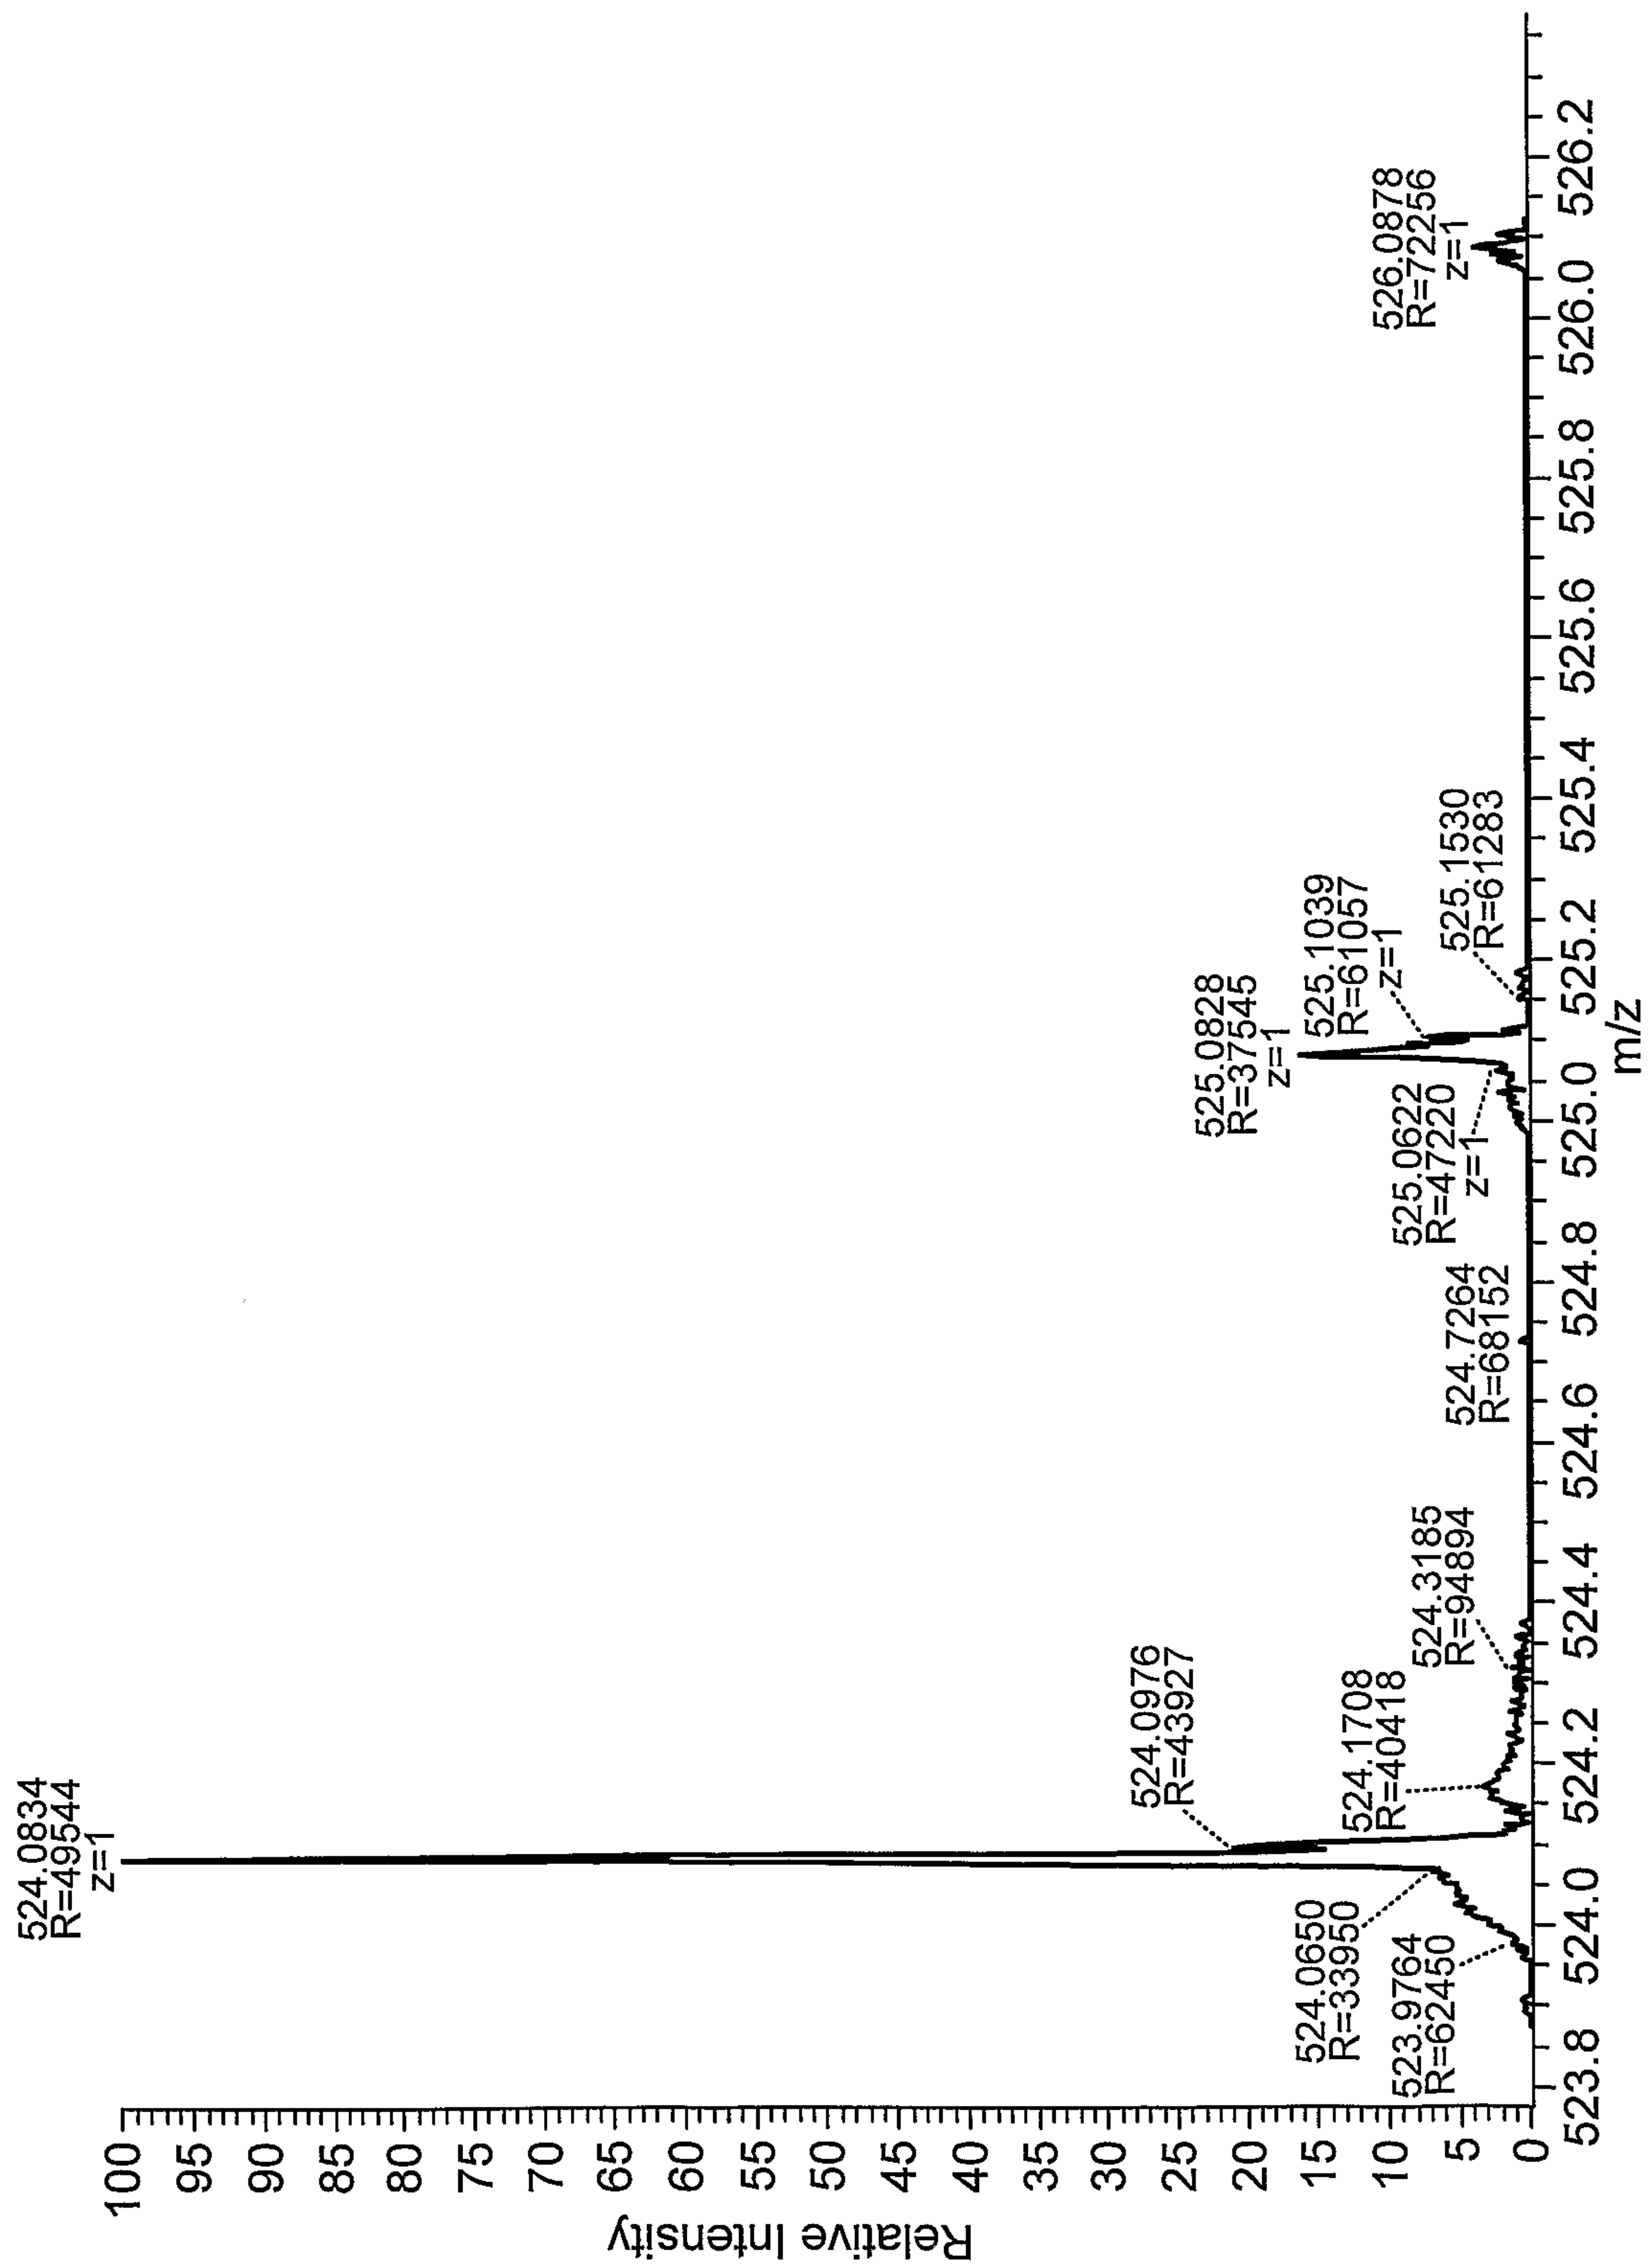


FIG. 8d

9 / 14

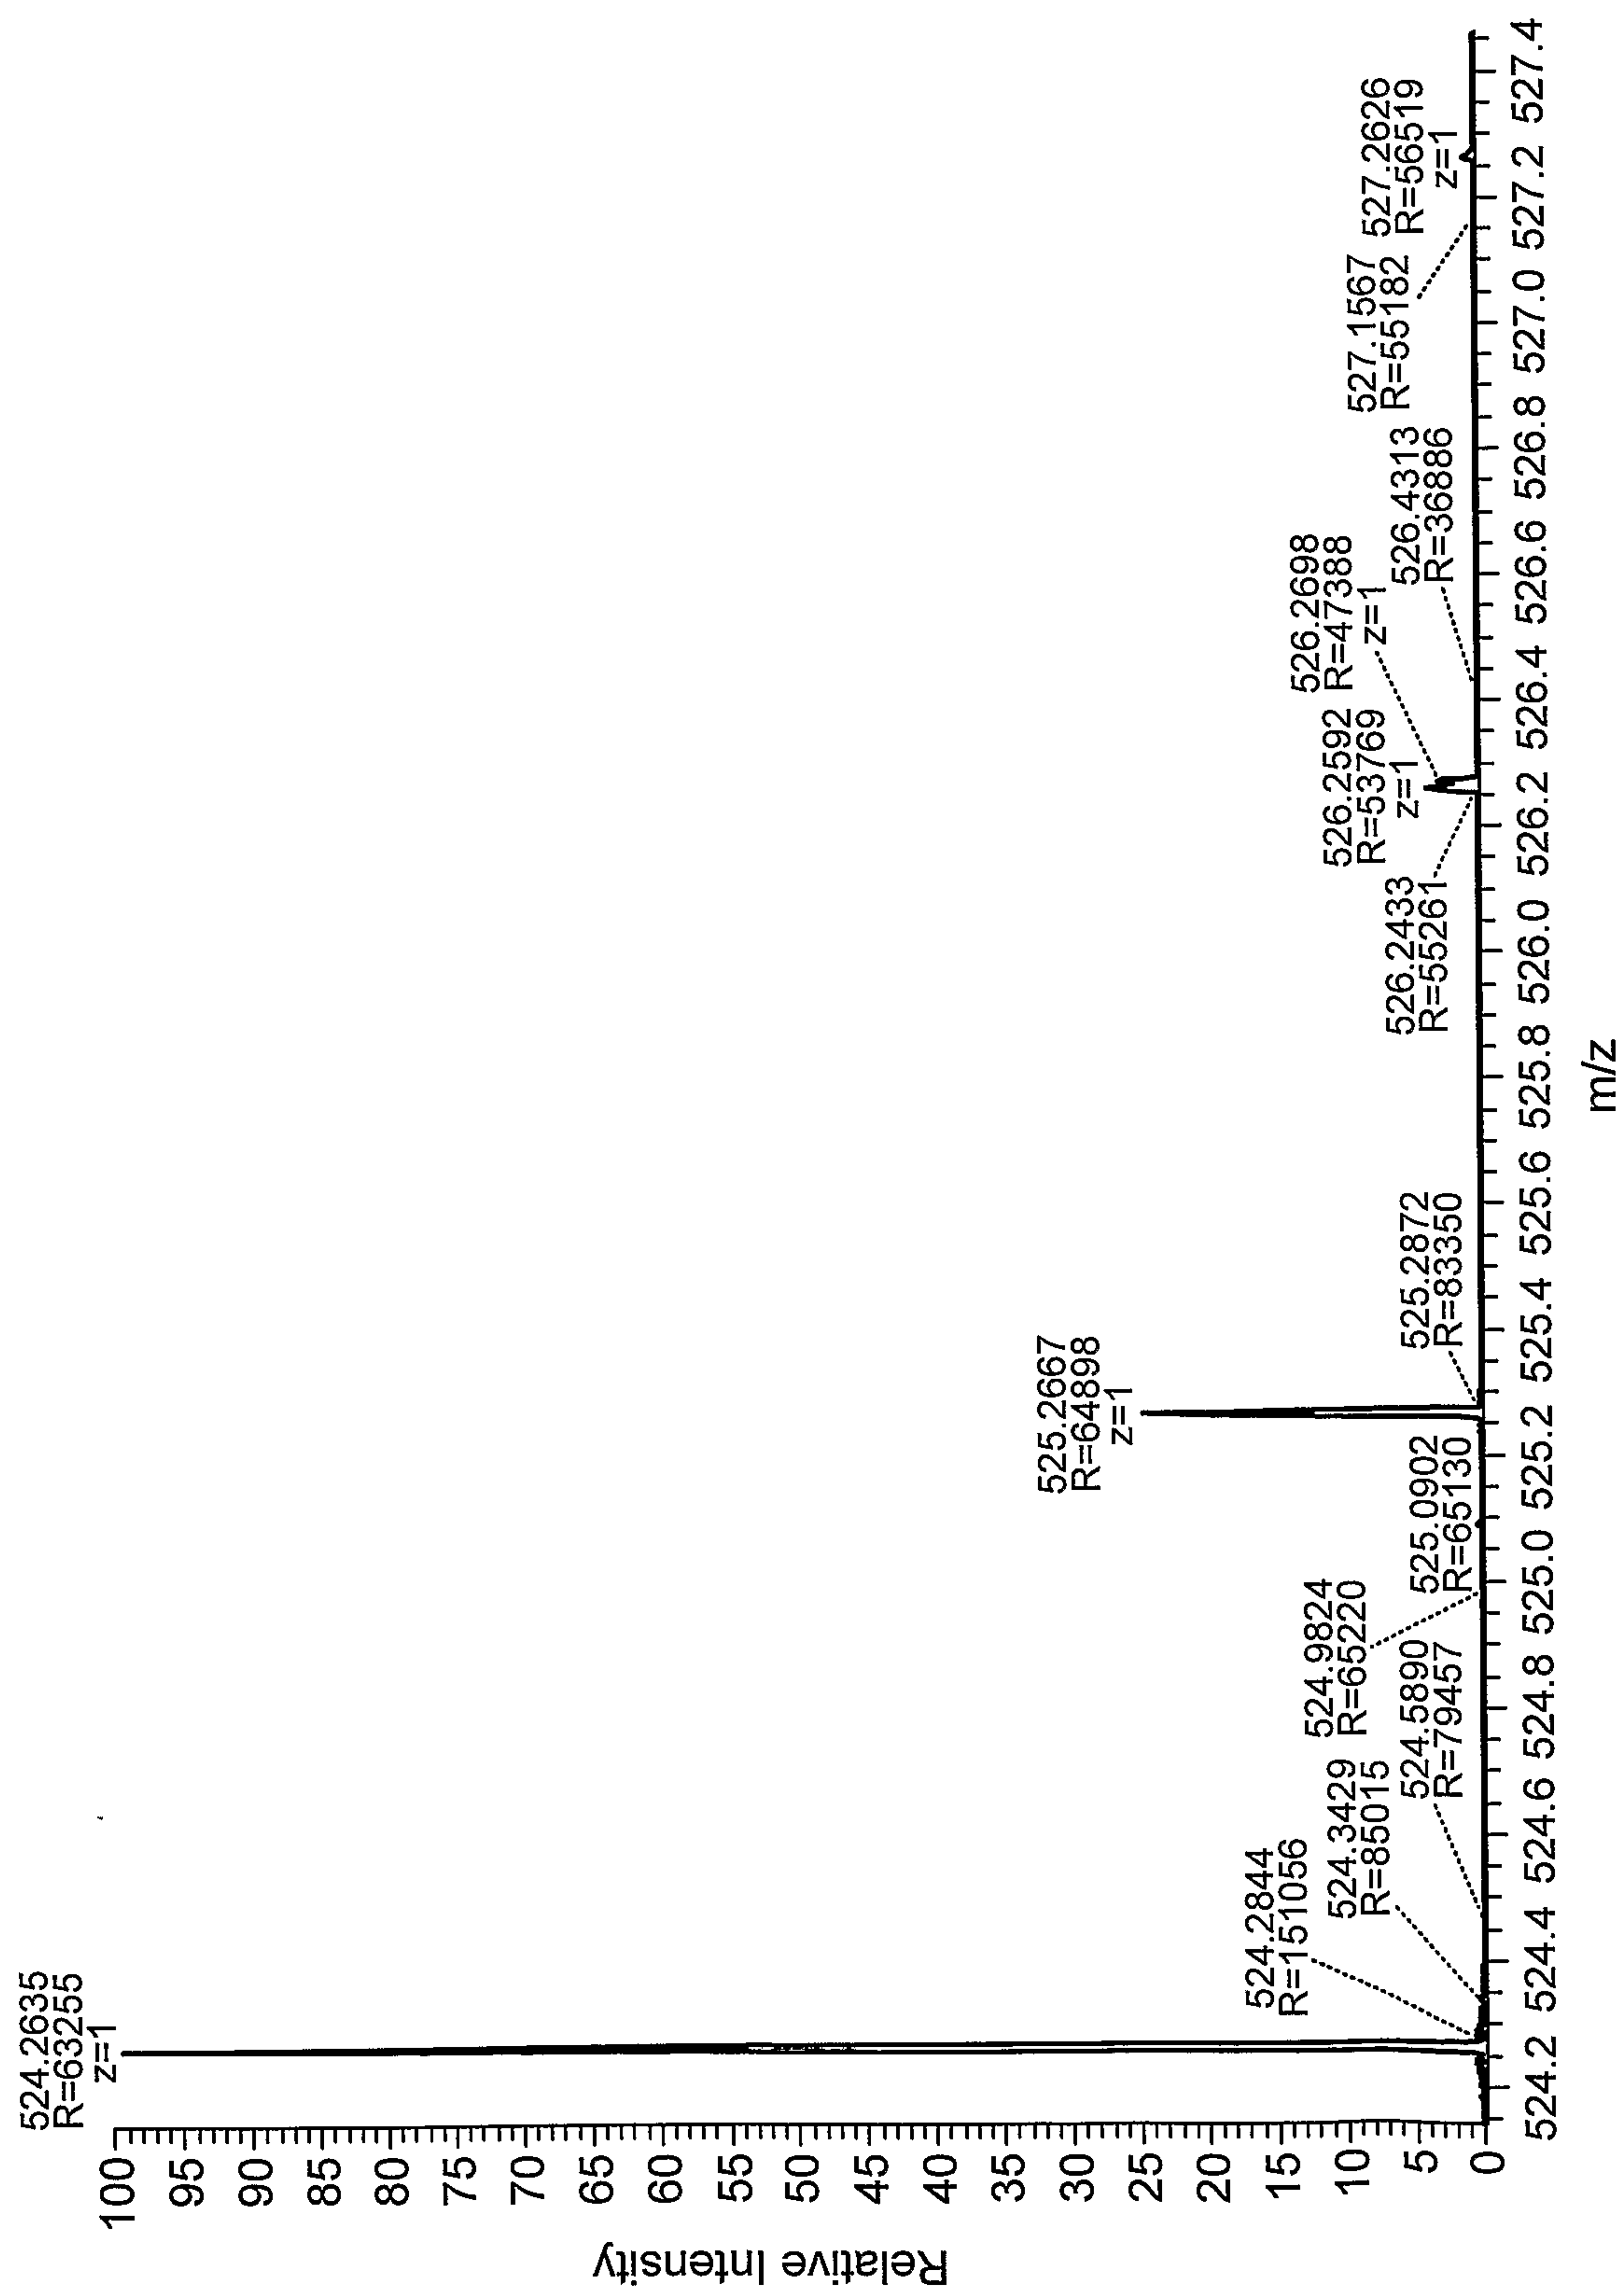


FIG. 9a

10 / 14

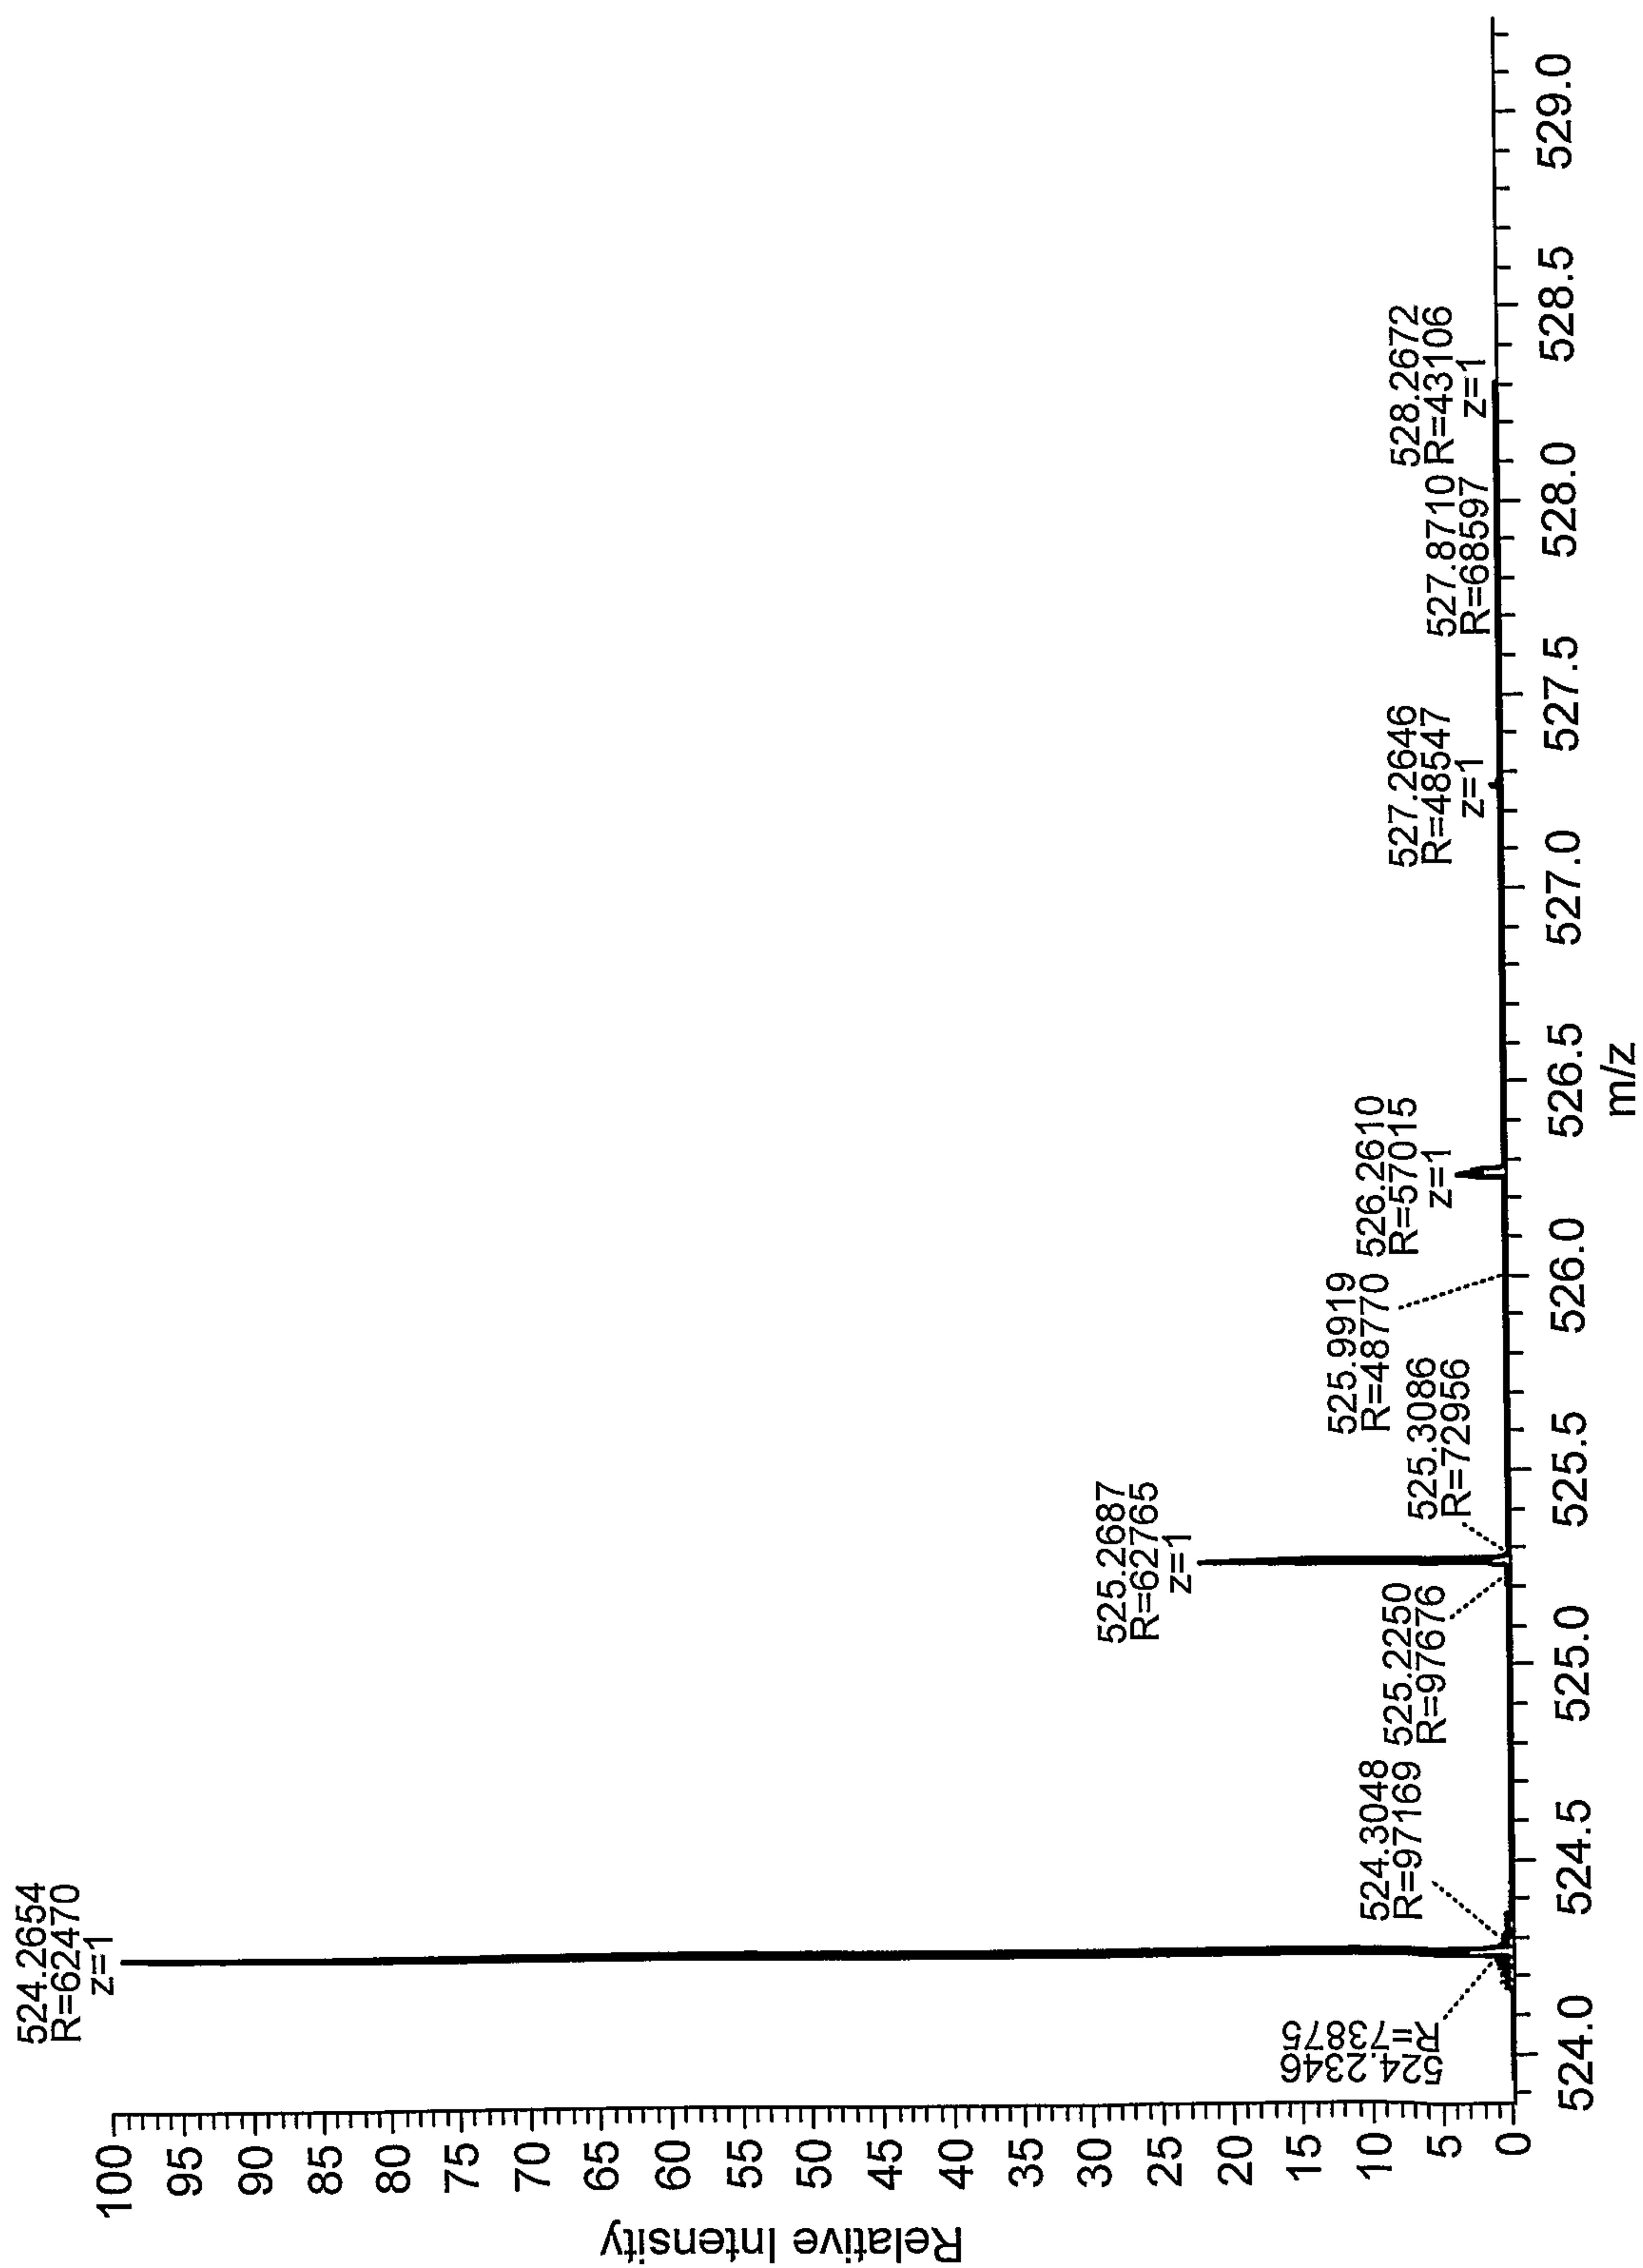


FIG. 9b

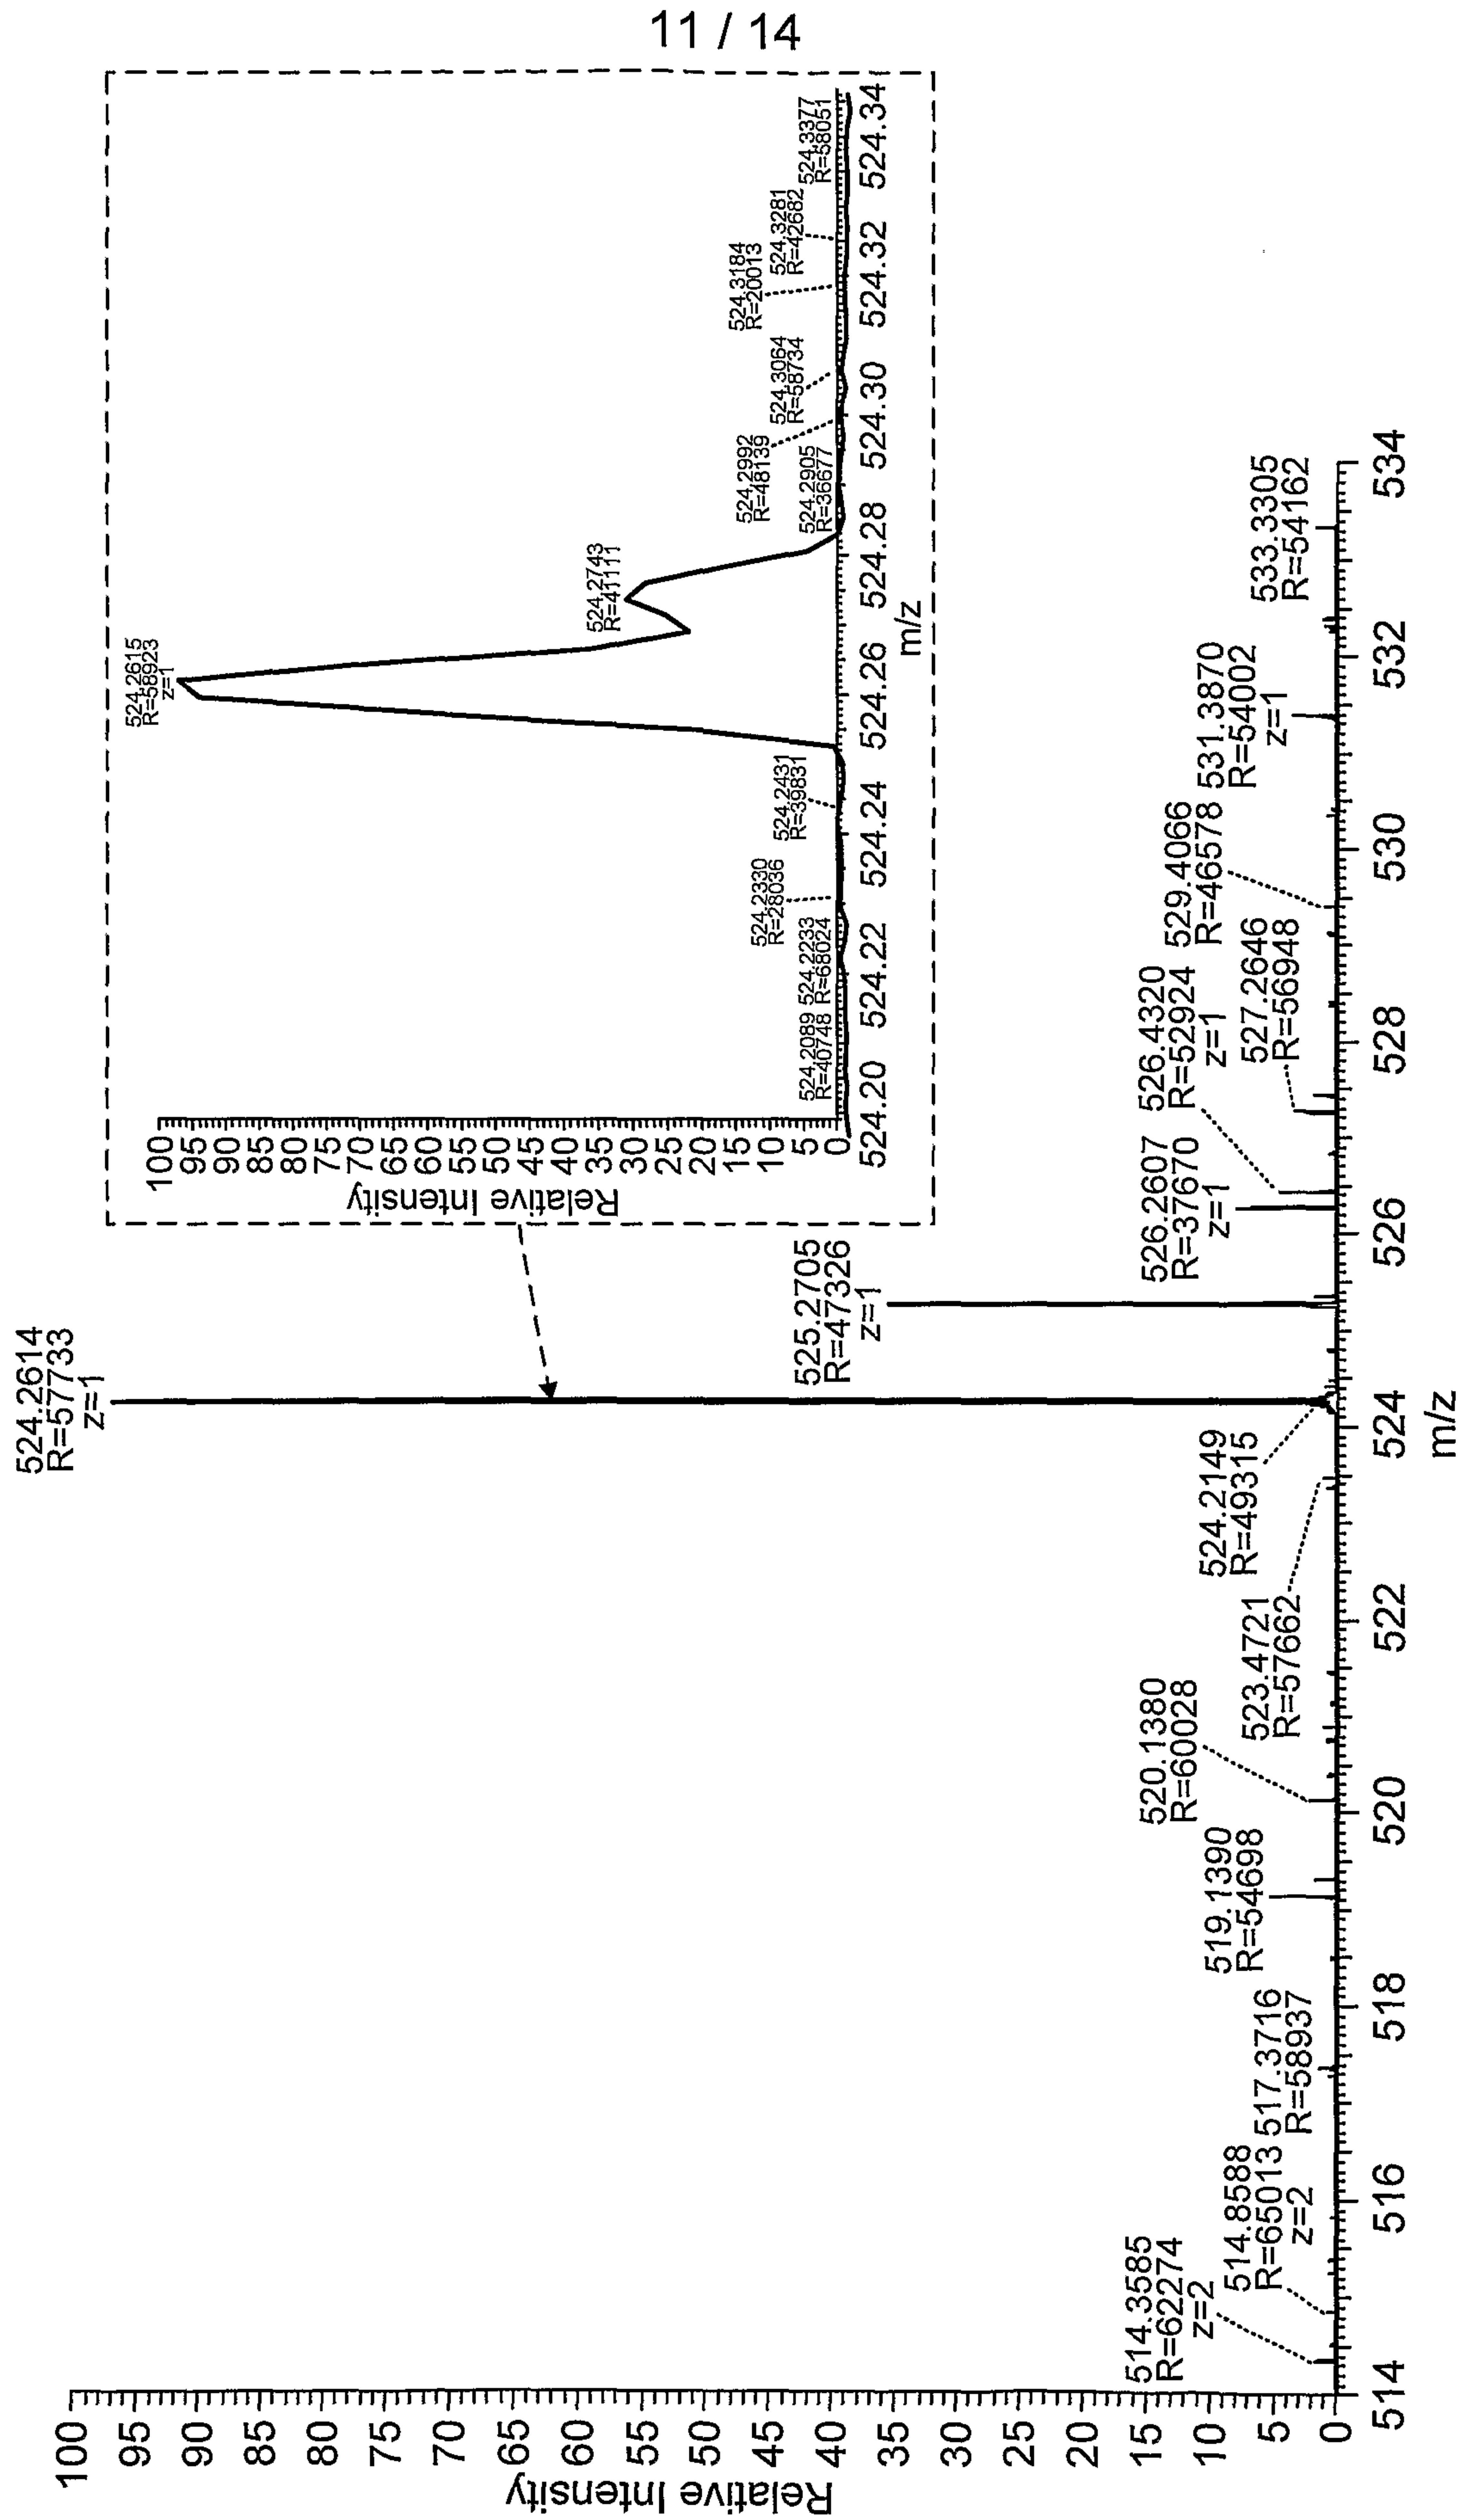


FIG. 9C

12 / 14

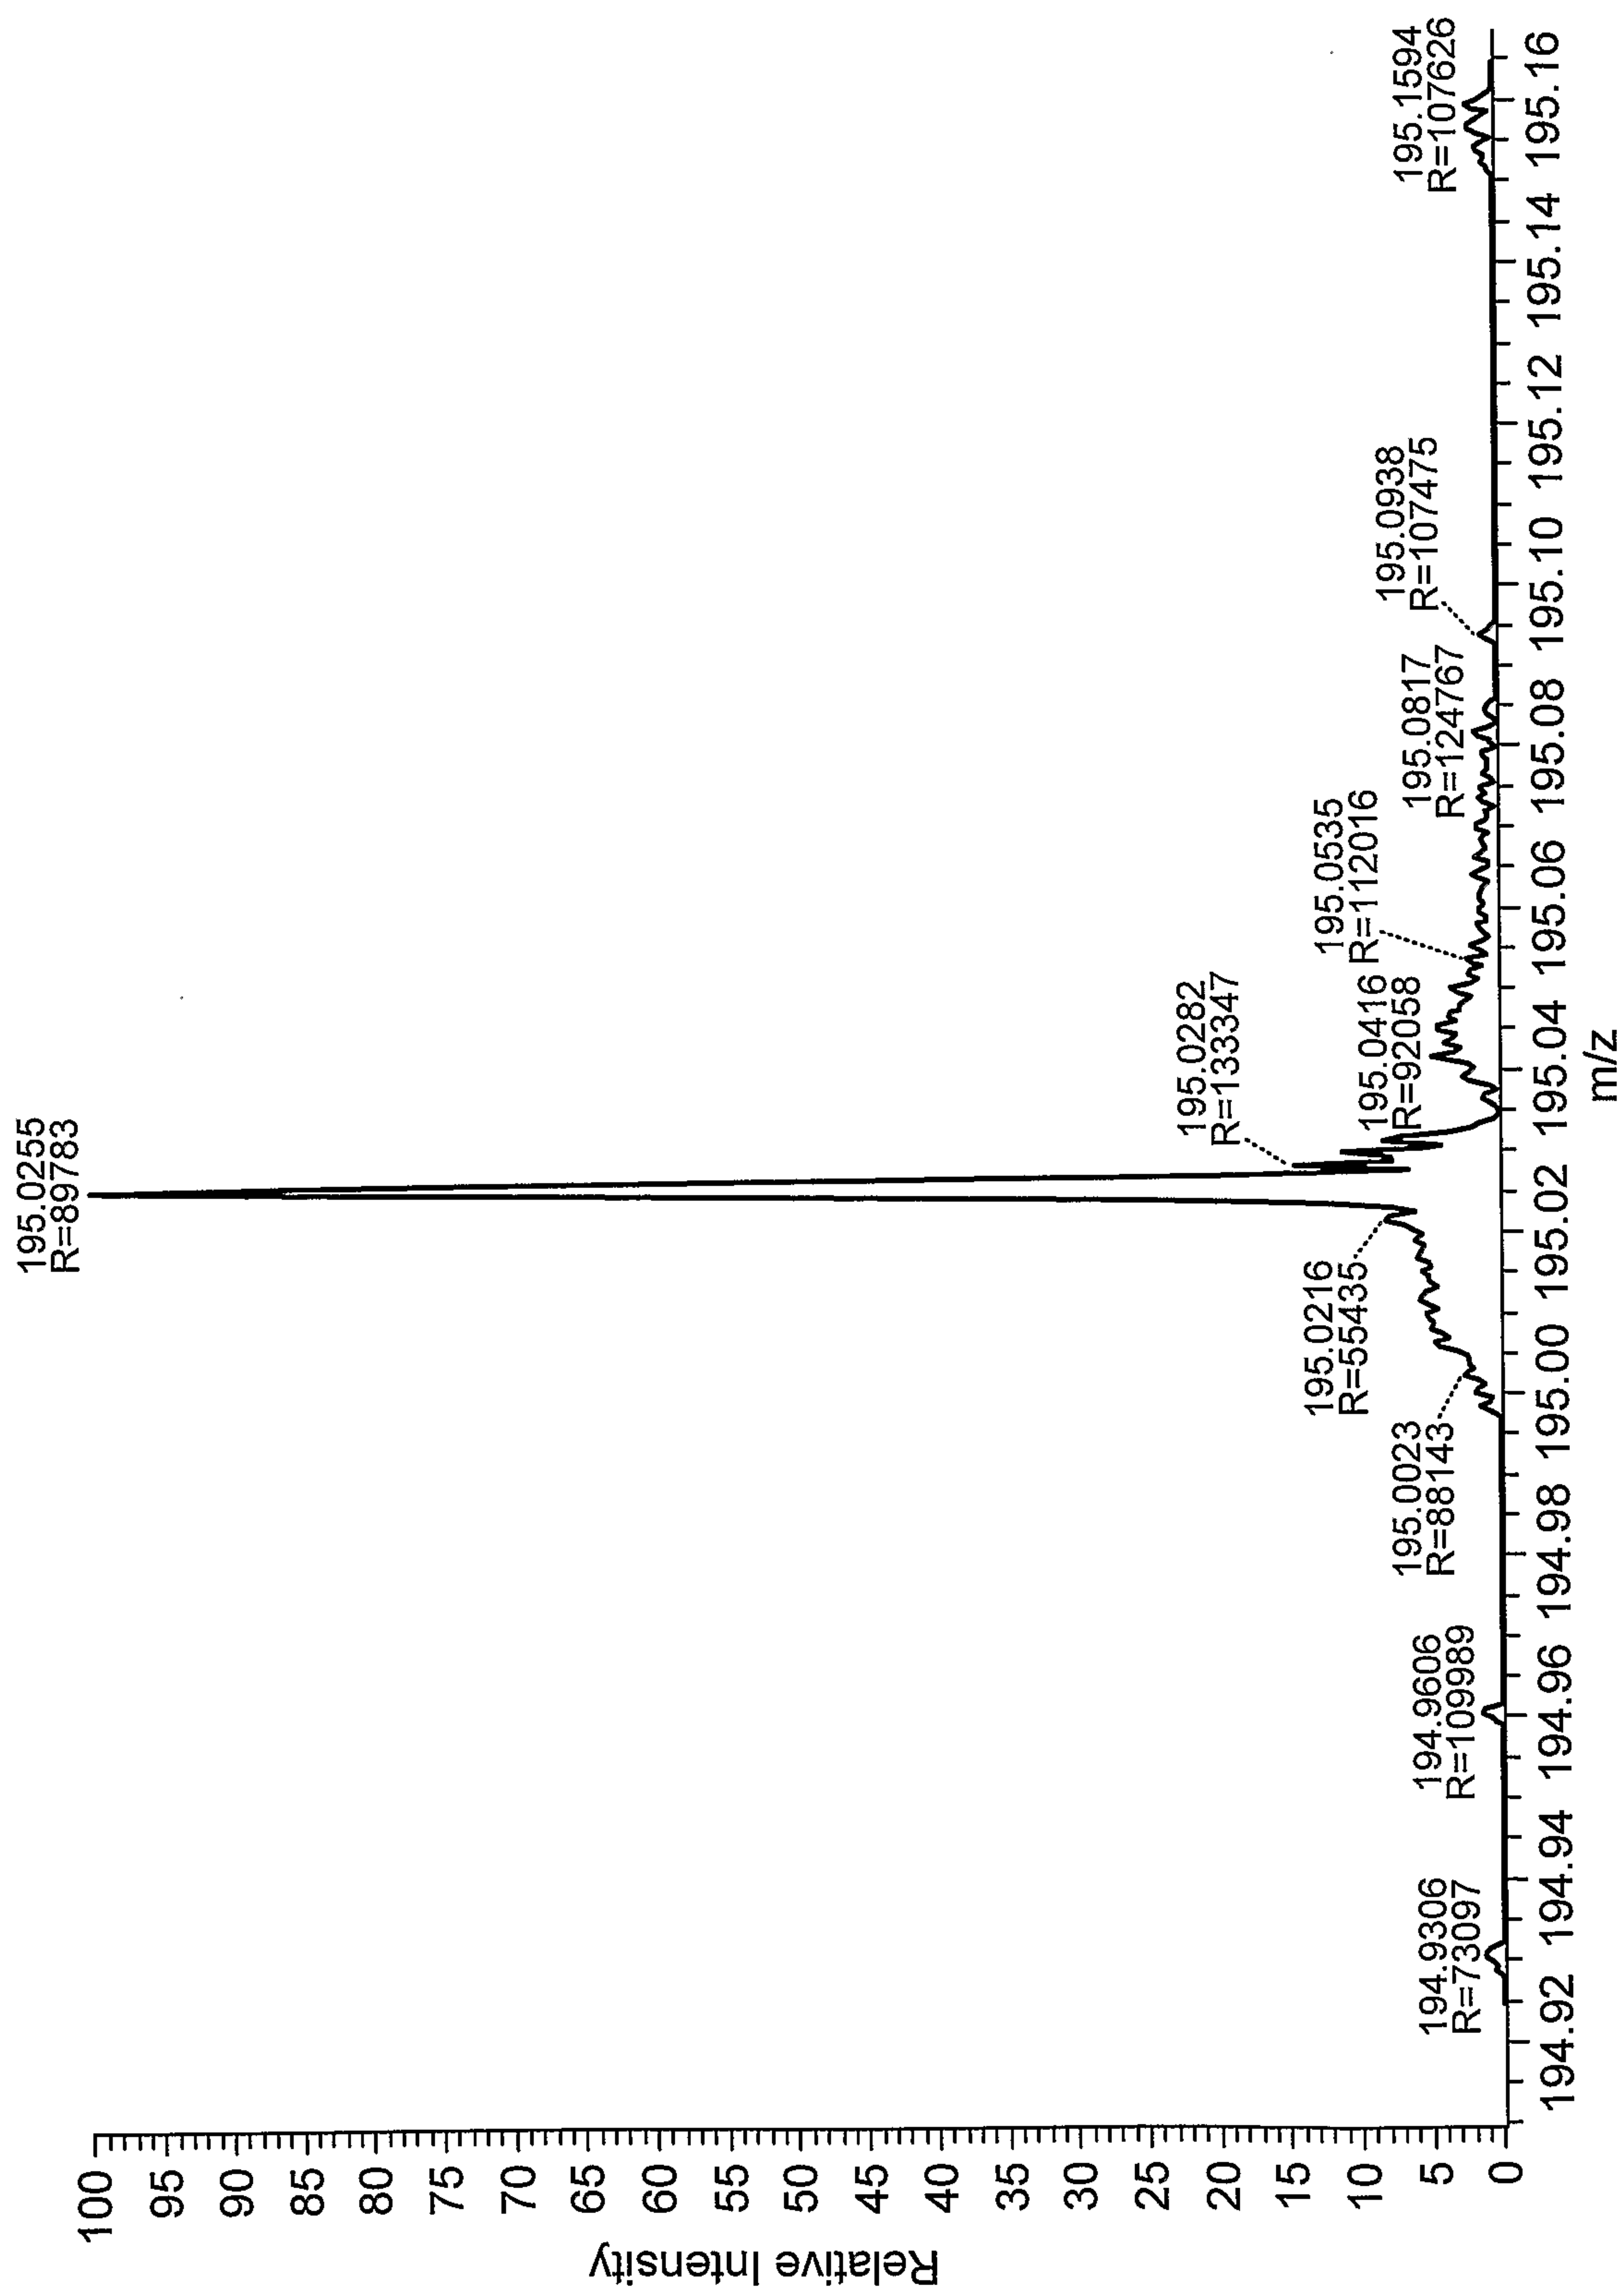


FIG. 9d

13 / 14

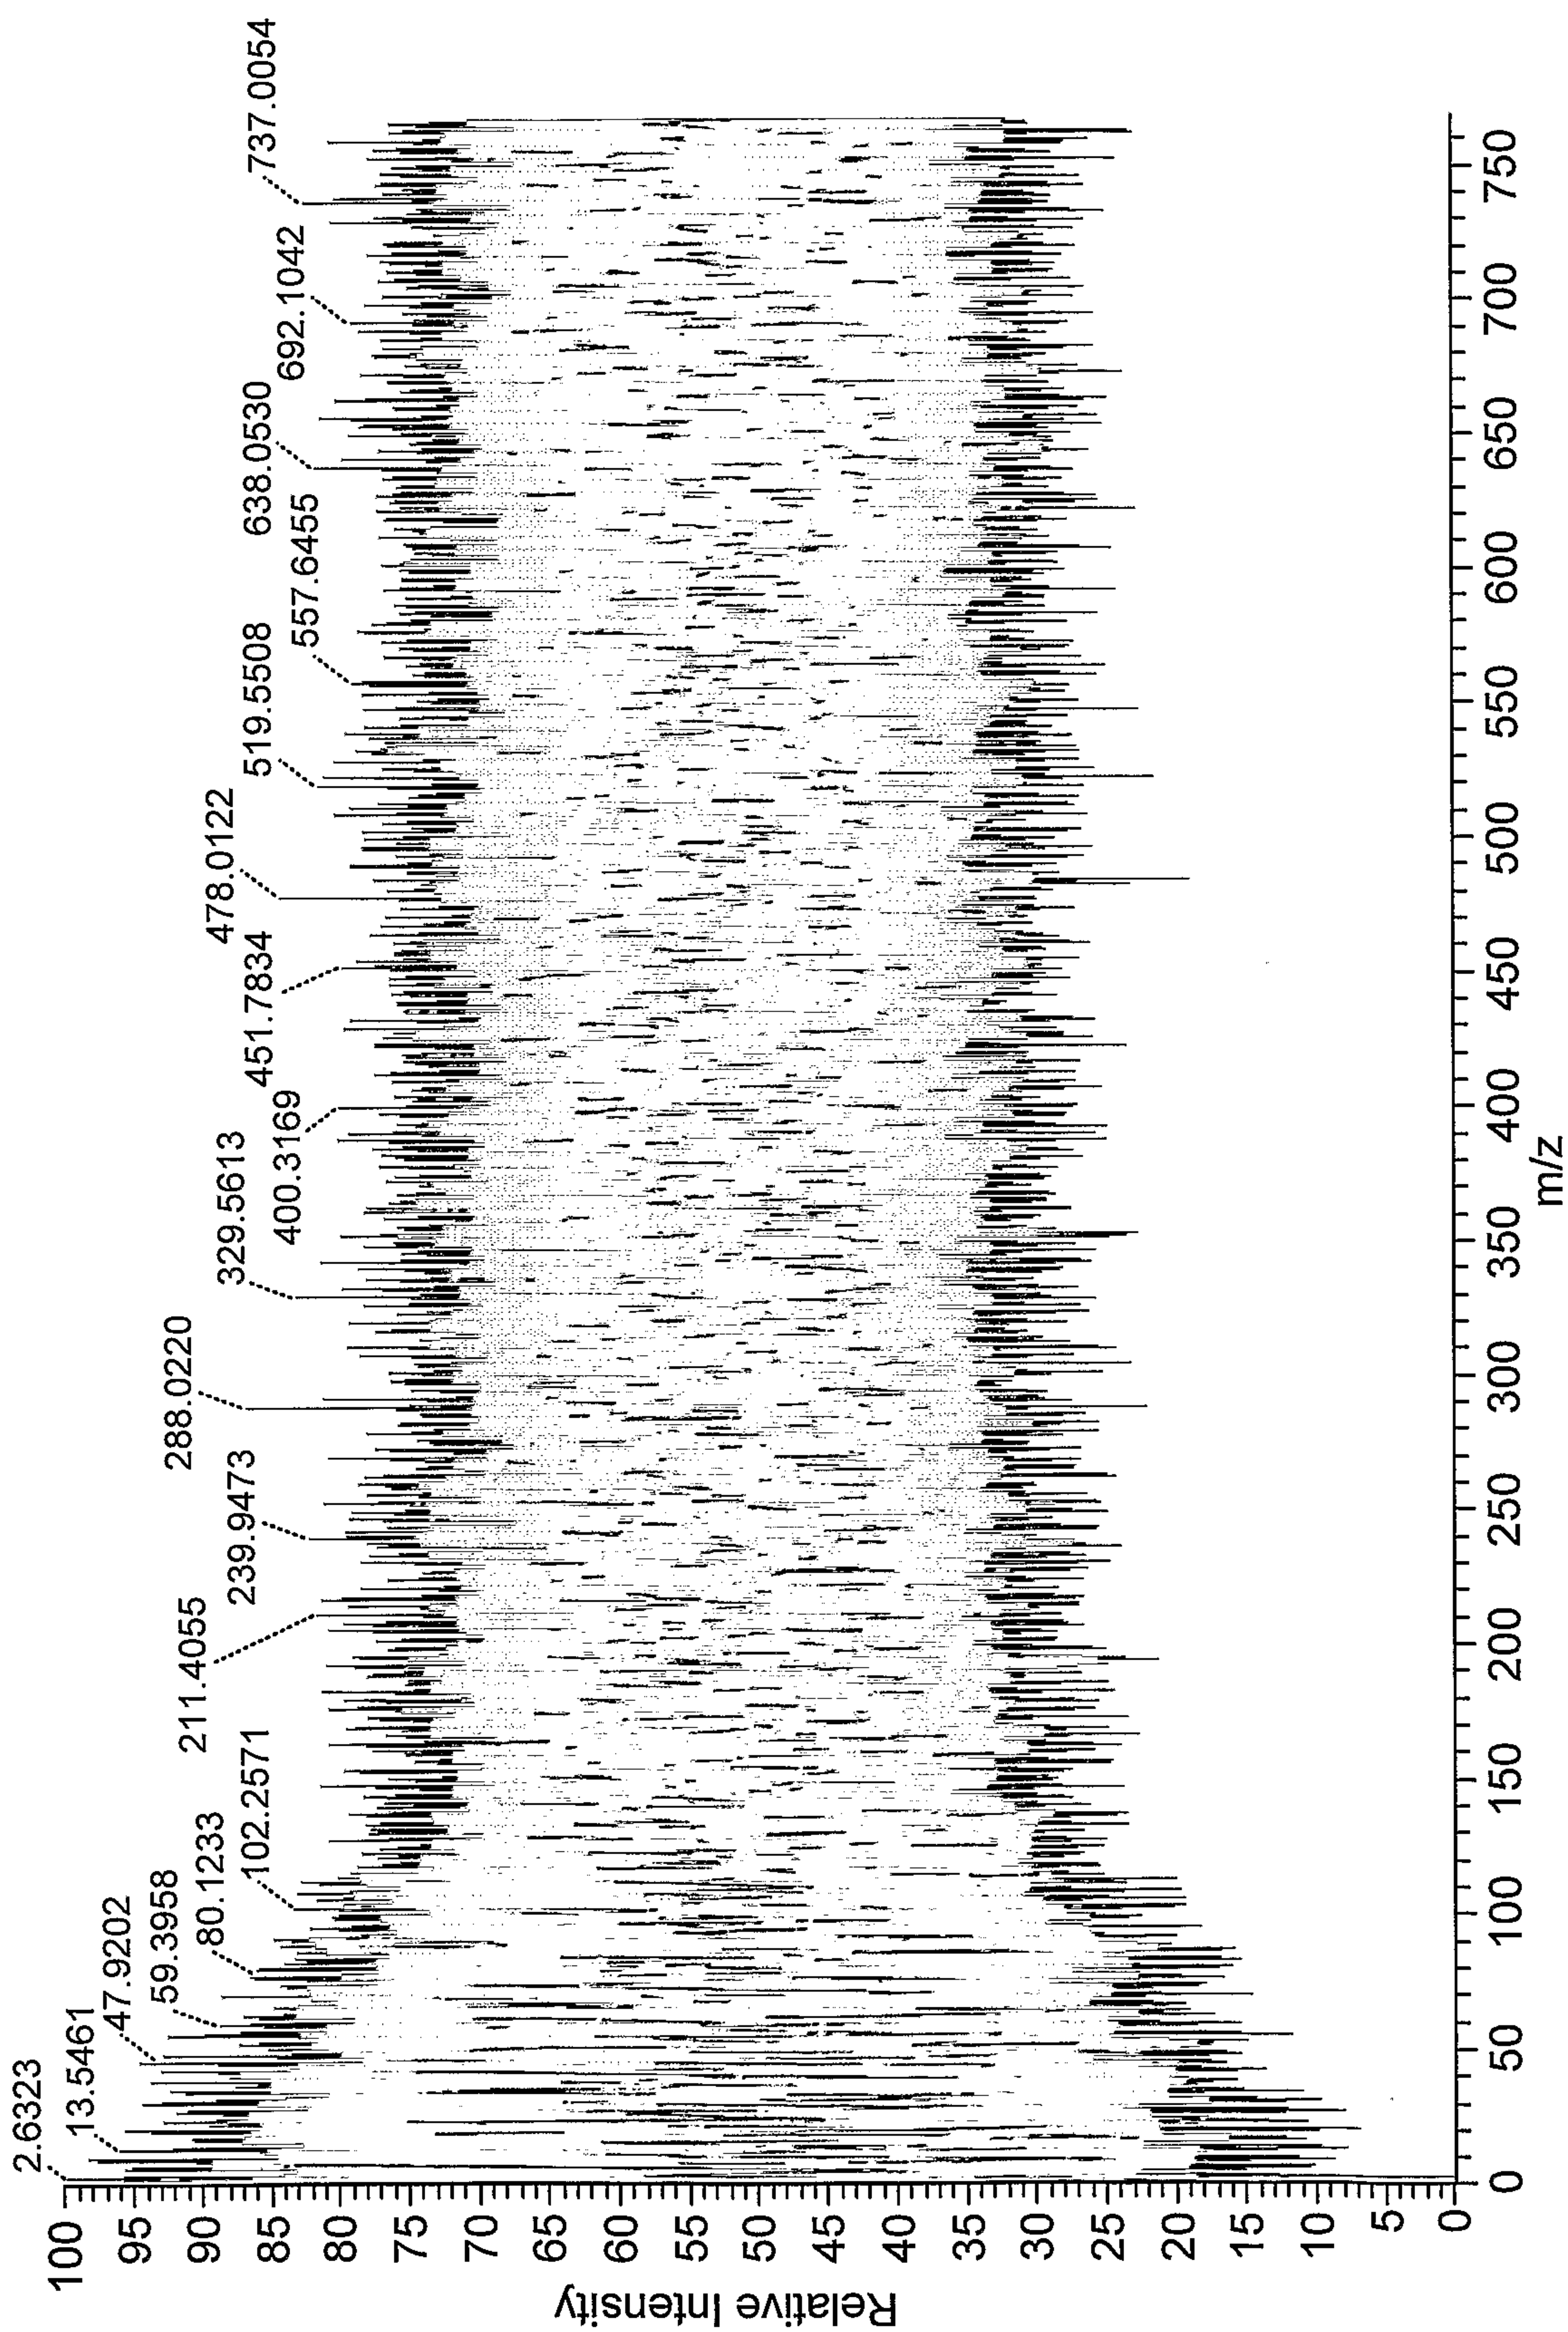


FIG. 10a

14 / 14

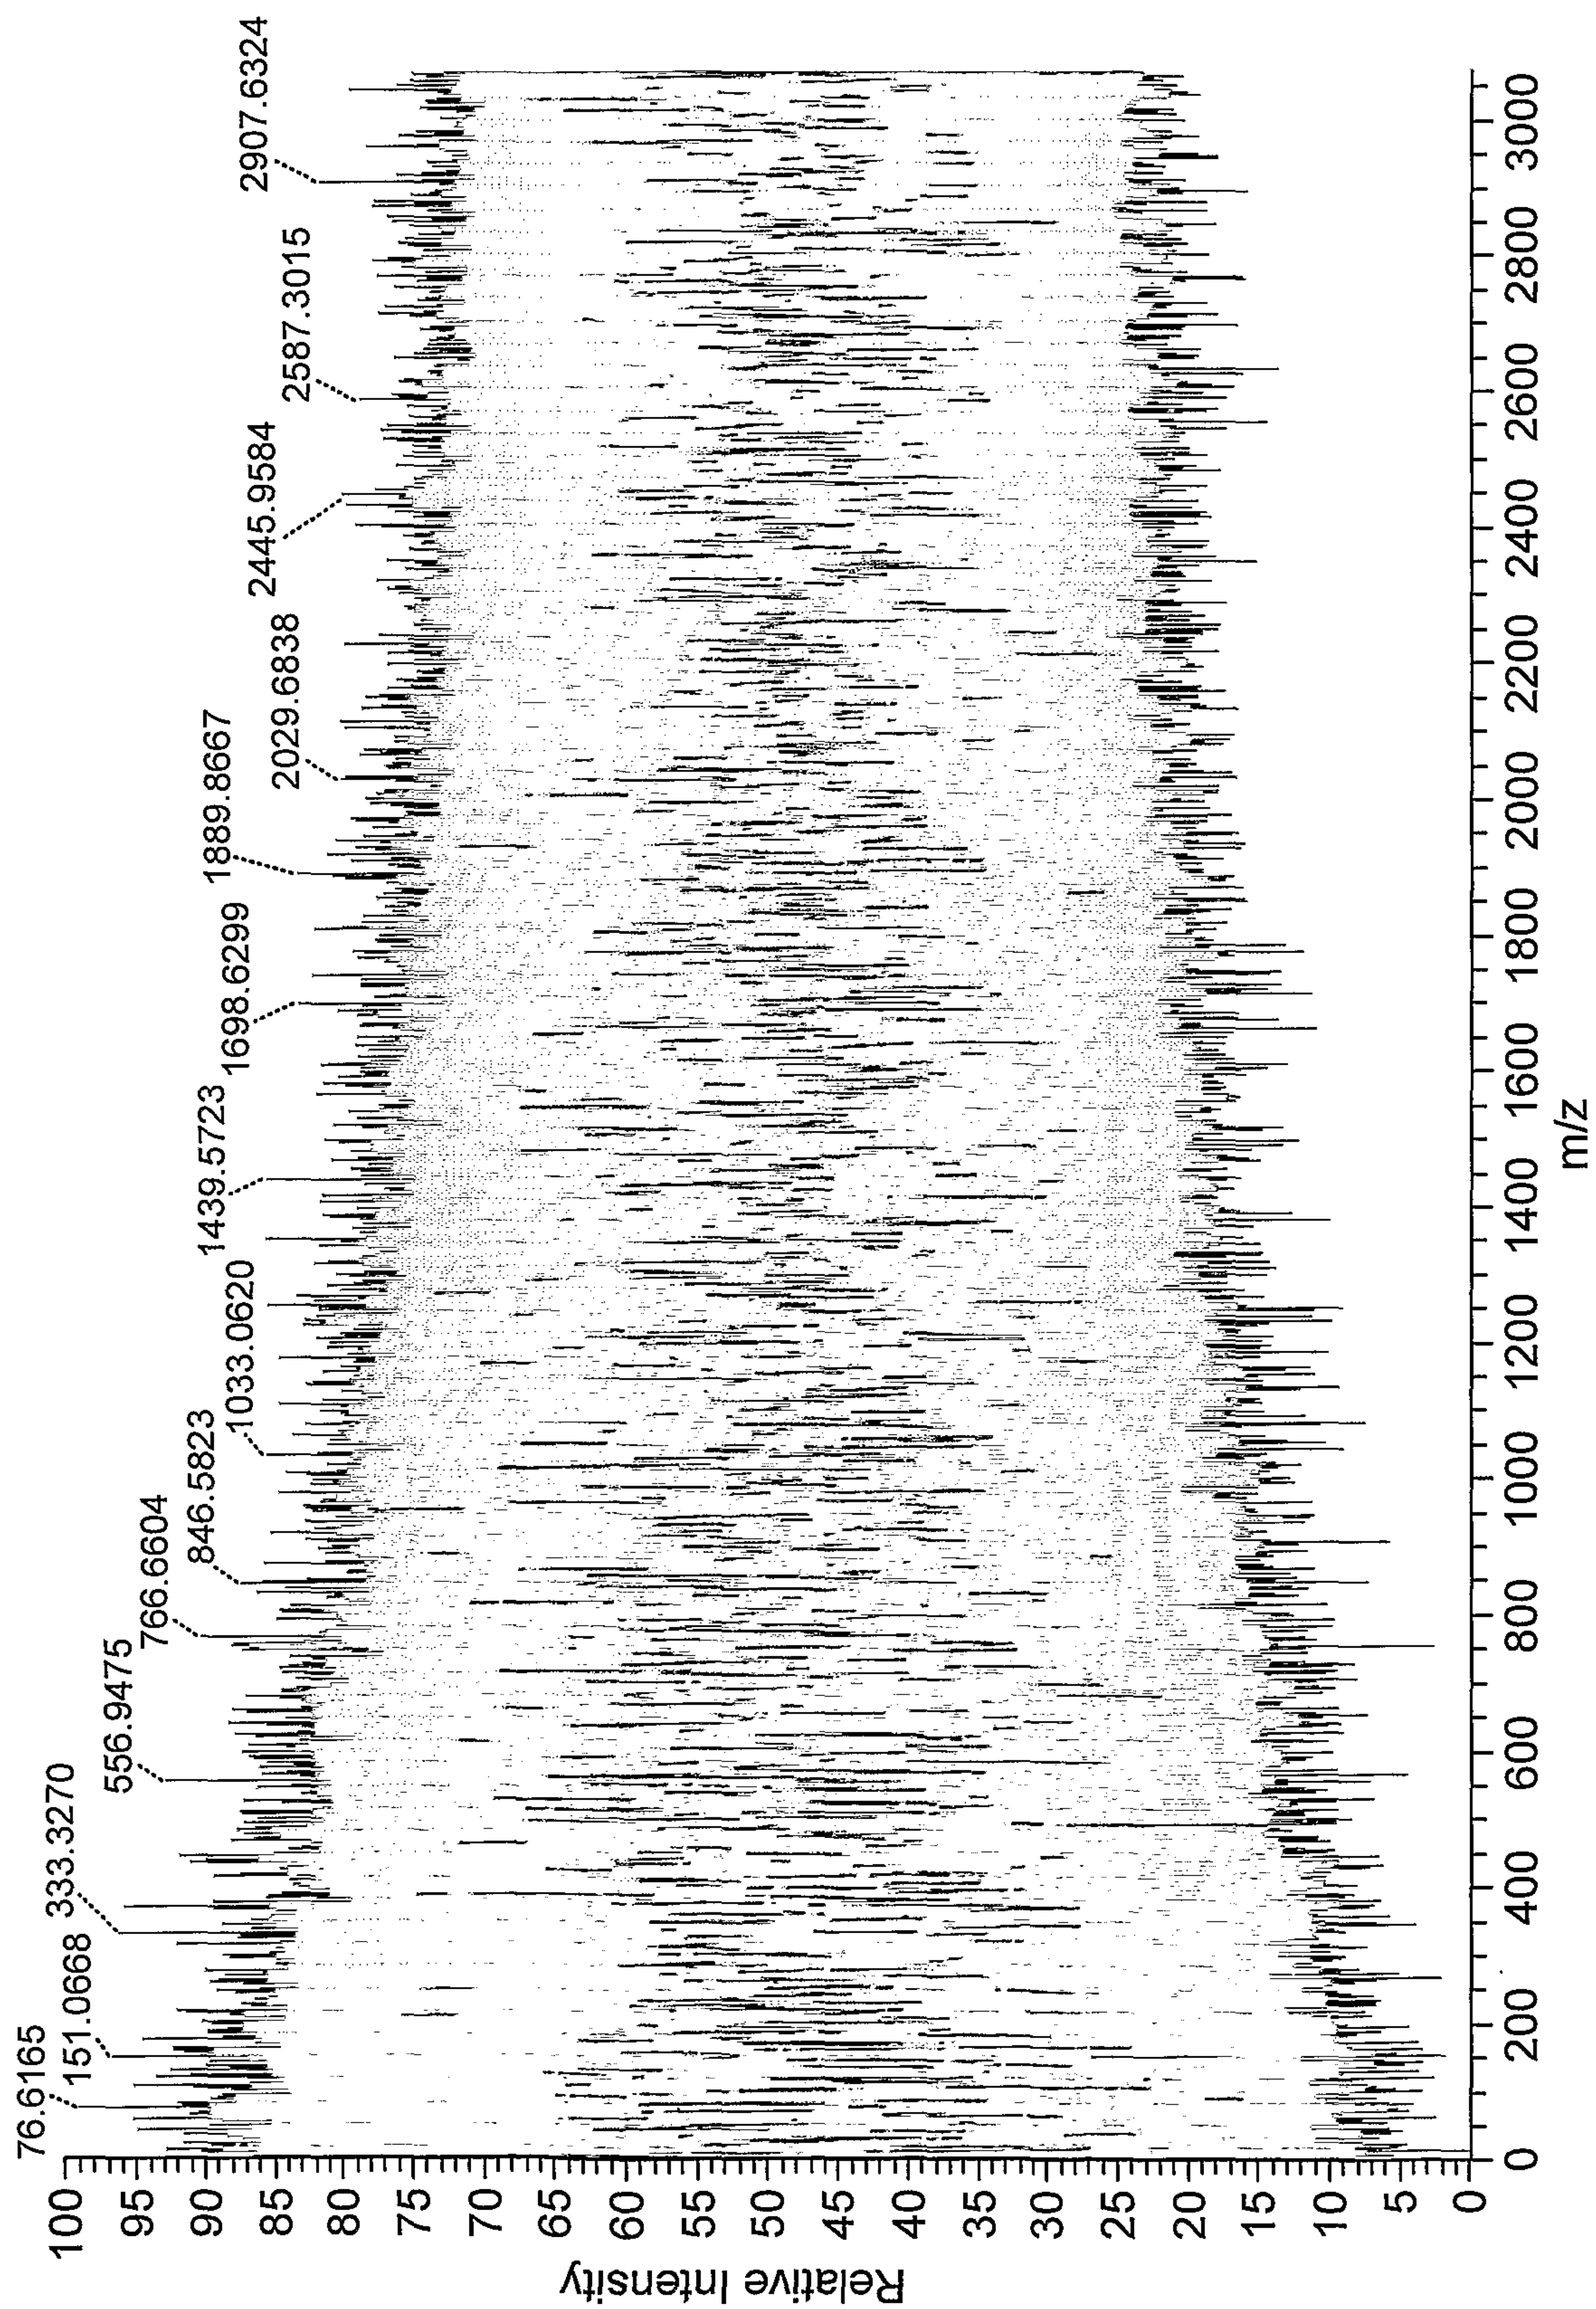


FIG. 10b

