

(19)



(11)

EP 3 289 900 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
19.06.2019 Bulletin 2019/25

(51) Int Cl.:
A41D 13/012 ^(2006.01) **A41D 27/10** ^(2006.01)
B63C 11/04 ^(2006.01)

(21) Application number: **17189102.1**

(22) Date of filing: **01.09.2017**

(54) **WETSUIT**

NEOPRENANZUG

COMBINAISON HUMIDE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **02.09.2016 GB 201614916**

(43) Date of publication of application:
07.03.2018 Bulletin 2018/10

(73) Proprietor: **HUUB LIMITED**
Derby, Derbyshire DE1 3EE (GB)

(72) Inventor: **Jackson, Dean**
Derby, Derbyshire DE1 3AF (GB)

(74) Representative: **Swindell & Pearson Limited**
48 Friar Gate
Derby DE1 1GY (GB)

(56) References cited:
EP-A1- 1 330 963 US-A1- 2013 291 270

EP 3 289 900 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

TECHNOLOGICAL FIELD

[0001] Embodiments of the present invention relate to a wetsuit. In particular, they relate to a triathlon wetsuit.

BACKGROUND

[0002] A wetsuit may be used in a number of different water sports, such as water skiing, snorkeling, scuba diving and triathlon. Wetsuits manufactured for water skiing, snorkeling and scuba diving are typically unsuitable for triathlon, because their sleeves restrict the motion of the wearer's arms during swimming. This has a detrimental effect on performance and can contribute to fatigue.

[0003] EP1330963 A1 discloses a drysuit or a wetsuit made from panels woven from synthetic or naturally occurring fibres joined to one another along their respective edges. At least one panel, in the region of one or more joints of the wearer, is of the same woven material as the remaining materials, but is a panel which is cut from the material on the bias as opposed to parallel to the warp or weft of the weave of that material.

BRIEF SUMMARY

[0004] According to various, but not necessarily all, embodiments of the invention there is provided a wetsuit, comprising: a sleeve, formed from at least a first material and a second material, the sleeve having an upper arm portion and a forearm portion, wherein the first material defines a boundary that is arranged to extend from the forearm portion, around a bicep region in the upper arm portion and back to the forearm portion, and the second material is arranged to be positioned within the boundary in the bicep region and forearm portion, and wherein the first material has a first elastic modulus and the second material has a second elastic modulus, the first elastic modulus being greater than the second elastic modulus.

[0005] The first elastic modulus may be at least 10% greater than the second elastic modulus. The first elastic modulus may be at least 25% greater than the second elastic modulus.

[0006] The boundary may extend along a posterior region of the forearm portion of the sleeve. The boundary may extend from a cuff region of the sleeve. The boundary may extend back to the cuff region of the sleeve. The sleeve may have an elbow region, and the second material may be positioned at the elbow region, within the boundary.

[0007] The boundary may define a channel within which the second material is positioned. The channel may extend to the cuff of the sleeve. The channel may be tapered in the forearm portion.

[0008] The first material may be a composite material. The first, composite, material may comprise neoprene and at least one layer of fabric. The second material may

be a composite material. The second, composite, material may comprise neoprene sandwiched between two layers of fabric.

[0009] The second material may extend from the bicep region to the elbow region. The second material may extend from the elbow region to the forearm portion.

[0010] The wetsuit may be a triathlon wetsuit.

[0011] According to various, but not necessarily all, embodiments of the invention there is provided a wetsuit, comprising: a sleeve, formed from at least a first material and a second material, the sleeve having an upper arm portion and a forearm portion, wherein the first material has a boundary that is arranged to extend around a bicep region in the upper arm portion of the sleeve and around an elbow region of the sleeve, and wherein the first material has a first elastic modulus and the second material has a second elastic modulus, the first elastic modulus being greater than the second elastic modulus.

[0012] The second material may be positioned in a channel defined by the boundary that extends from the bicep region to at least the elbow region of the sleeve. The second material may extend from the elbow region and along the forearm portion to a cuff region of the sleeve.

[0013] According to various, but not necessarily all, embodiments of the invention there is provided a wetsuit as hereinbefore described and illustrated in the appended figures. According to various, but not necessarily all, embodiments of the invention there is provided examples as claimed in the appended claims.

BRIEF DESCRIPTION

[0014] For a better understanding of various examples that are useful for understanding the detailed description, reference will now be made by way of example only to the accompanying drawings in which:

fig. 1 illustrates an anterior elevation of a wetsuit;
fig. 2 illustrates a posterior elevation of the wetsuit;
fig. 3 illustrates a side elevation of the wetsuit; and
figs 4A to 4C illustrate different rotations of a sleeve of the wetsuit.

DETAILED DESCRIPTION

[0015] Fig. 1 illustrates an anterior elevation of a wetsuit 10. The wetsuit 10 is wearable by a person. The wetsuit may be worn by a person, in particular, when participating in water sports such as swimming. In this example, the wetsuit is a triathlon wetsuit that is for wear at least during the swimming stage of a triathlon.

[0016] The wetsuit 10 includes a main body portion 1, first and second arm sleeves 3, 4 and first and second leg sleeves 5, 6. The construction of a first arm sleeve 3 is described below. The second arm sleeve 4 is symmetrical to the first arm sleeve 3 and has a corresponding construction.

[0017] The sleeve 3 comprises an upper arm portion 102 and a forearm portion 104. The upper arm portion 102 is arranged to cover and overlie at least a portion of an upper arm of a wearer. In the illustrated example, the upper arm portion 102 is arranged to extend from the shoulder of the wearer to the elbow of the wearer. The forearm portion 104 is arranged to cover and overlie at least a portion of the forearm arm of the wearer. In the illustrated example, the forearm portion 104 is arranged to extend from the elbow of the wearer to the wrist of the wearer. The forearm portion 104 terminates at a cuff region 116, which is arranged to be positioned at the wrist of the wearer.

[0018] Fig. 2 illustrates a posterior elevation of the wetsuit 10. Fig. 3 illustrates a side elevation of the wetsuit 10. Figs 4A to 4C illustrate different rotations of the sleeve 3 of the wetsuit 10.

[0019] The reference numerals 112 and 114 designate an anterior region of each of the upper arm portion 102 and the forearm portion 104, respectively (see figs 1, 3 and 4A to 4C). The reference numerals 122 and 124 designate a posterior region of each of the upper arm portion 102 and the forearm portion 104, respectively (see figs 1, 2 and 4A to 4C).

[0020] A bicep region 110 is positioned within the anterior region 112 of the upper arm portion 102 (see fig. 1, for example). The bicep region 110 is arranged to cover/overlie at least a portion of the wearer's bicep. A tricep region 126 is positioned within the posterior region 122 of the upper arm portion 102 (see fig. 2, for example). The tricep region 126 is arranged to cover/overlie at least a portion of the wearer's tricep.

[0021] A majority of the wetsuit 10 may be constructed using a first material 106 which, in this example, is a composite material that comprises neoprene and at least one layer of fabric. Those skilled in the art will be aware that neoprene is also known as polychloroprene or chloroprene rubber. The first material 106 may, for example, be closed cell neoprene lined/laminated with a layer of fabric such as nylon or polyester. The layer of fabric may form at least part of the inner lining of the wetsuit 10.

[0022] Some parts of the wetsuit 10 may be constructed using a second material 108. The first and second materials 106, 108 are different materials in this example. The second material 108 may be a composite material that comprises neoprene sandwiched between two layers of fabric. The second material 108 may, for example, be open cell neoprene lined/laminated on each side with a fabric such as nylon or polyester. One of the layers of fabric may form at least part of the inner lining of the wetsuit 10.

[0023] The thickness of the first material 106 may be greater than the thickness of the second material 108. The thickness of the first material 106 may, for example, be in the range 3 millimeters to 5 millimeters. The thickness of the second material 108 may, for example, be in the range 1 millimeter to 3 millimeters.

[0024] The first material 106 has a first elastic modulus

and the second material 108 has a second elastic modulus. The first elastic modulus is greater than the second elastic modulus, making the first material 106 stiffer/less stretchable than the second material 108. The first material 106 is also more thermally insulative than the second material 108.

[0025] In some examples, the first elastic modulus is at least 10% greater than the second elastic modulus. In other examples, the first elastic modulus is at least 25% greater than the second elastic modulus. In some further examples, the first elastic modulus is at least 50% greater than the second elastic modulus.

[0026] The first material 106 defines a boundary 101 that is arranged to extend from the forearm portion 104 (see fig. 2 or 3, for example), around the bicep region 110 in the upper arm portion 102 (see fig. 1 or 3, for example) and back to the forearm portion 104 (see fig. 2 for example).

[0027] In the illustrated example, the boundary 101 extends from the cuff region 116 and along the posterior region 124 of the forearm portion 104, before extending across the outside of the sleeve near the elbow region 118, around the bicep region 110, back across the outside of the sleeve 3, and back along the posterior region 124 of the forearm portion 104 to the cuff region 116, where the boundary 101 terminates.

[0028] The second material 108 is positioned within the boundary 101, such that the boundary 101 provides a junction between the first material 106 and the second material 108. There may be a region of overlap between the first and second materials 106 at (and proximate to) the boundary 101 to allow them to be attached together, for instance by stitching.

[0029] The second material 108 is positioned at the bicep region 110 (overlying the wearer's bicep, at least to some extent) and the elbow region 118 (overlying the wearer's elbow, at least to some extent). The first material 106 is positioned in the tricep region 126 of the posterior region 122 of the upper arm portion 102 (overlying the wearer's tricep, at least to some extent), above the second material 108 at the elbow region 118.

[0030] The second material 108 extends from the bicep region 110, around the outside of the sleeve 3 to the elbow region 118 and then along the posterior region 124 of the forearm portion 104 to the cuff region 116. It can be seen in figs 2 and 4C that the extension of the boundary 101 to and from the cuff region 116 means that the boundary 101 does not completely enclose the second material 108.

[0031] In effect, the boundary 101 of the first material 106 defines a channel within which the second material 108 is positioned. The channel extends from the bicep region 110 around the outside of the sleeve 3 to the elbow region 118 and along the posterior region 124 of the forearm portion 104 to the cuff region 116. The channel tapers (inwardly) as it extends from the elbow region 118 to the cuff region 116.

[0032] In use, when a wearer of the wetsuit 10 is swim-

ming, the lower elastic modulus of the second material 108 in the bicep region 110 advantageously enables the bicep of the wearer to flex more easily than if the whole of the sleeve 3 were formed from the first material 106. The lower elastic modulus of the second material 108 at the elbow region 118 also enables the elbow to bend more easily than if the whole of the sleeve 3 were formed from the first material 106. This advantageously provides improved performance and reduces fatigue.

[0033] Furthermore, if boundary 101 merely surrounded the bicep region 110 and did not extend to the elbow region 118, forearm portion 104 and cuff region 112, for example, one or more points of high tension might appear at the boundary 101 between the first material 106 and the second material 108 when the wearer's arm bends. Advantageously, however, the shape of the boundary 101 described above and illustrated in the figures allows for greater movement of the second material 108, obviating such points of high tension and enabling the wearer's arm to bend more easily.

[0034] The presence of the first material 106 in the forearm portion 104 advantageously adds some increased stiffness, rigidity and thermal insulation to the sleeve 3 in the forearm portion 104.

[0035] Although embodiments of the present invention have been described in the preceding paragraphs with reference to various examples, it should be appreciated that modifications to the examples given can be made without departing from the scope of the invention as claimed. For example, the boundary 101 need not have the exact same shape as that illustrated in the figures. The wetsuit 10 described and illustrated in the figures is a one piece wetsuit, but in other embodiments it could instead be a two piece wetsuit.

[0036] Features described in the preceding description may be used in combinations other than the combinations explicitly described.

[0037] Although functions have been described with reference to certain features, those functions may be performable by other features whether described or not.

[0038] Although features have been described with reference to certain embodiments, those features may also be present in other embodiments whether described or not.

[0039] Whilst endeavoring in the foregoing specification to draw attention to those features of the invention believed to be of particular importance it should be understood that the applicant claims protection in respect of any patentable feature or combination of features hereinbefore referred to and/or shown in the drawings whether or not particular emphasis has been placed thereon.

Claims

1. A wetsuit (10), comprising:
a sleeve (3; 4), formed from at least a first ma-

terial (106) and a second material (108), the sleeve (3;4) having an upper arm portion (102) and a forearm portion (104), wherein the first material (106) defines a boundary (101) that is arranged to extend from the forearm portion (104), around a bicep region (110) in the upper arm portion (102) and back to the forearm portion (104), and the second material (108) is arranged to be positioned within the boundary (101) in the bicep region (110) and forearm portion (104), and wherein the first material (106) has a first elastic modulus and the second material has a second elastic modulus, the first elastic modulus being greater than the second elastic modulus.

2. The wetsuit (10) of claim 1, wherein the first elastic modulus is at least 10% greater than the second elastic modulus.
3. The wetsuit (10) of claim 1 or 2, wherein the first elastic modulus is at least 25% greater than the second elastic modulus.
4. The wetsuit (10) of claim 1, 2 or 3, wherein the boundary (101) extends along a posterior region (124) of the forearm portion (104) of the sleeve (3;4).
5. The wetsuit (10) of any of the preceding claims, wherein the boundary (101) extends from a cuff region (116) of the sleeve (3;4).
6. The wetsuit (10) of claim 5, wherein the boundary (101) extends back to the cuff region (116) of the sleeve (3;4).
7. The wetsuit (10) of any of the preceding claims, wherein the sleeve (3;4) has an elbow region (118), and the second material (108) is positioned at the elbow region (118), within the boundary (101).
8. The wetsuit (10) of any of the preceding claims, wherein the boundary (101) defines a channel within which the second material (108) is positioned.
9. The wetsuit (10) of claim 8, wherein the channel extends to the cuff of the sleeve (3;4).
10. The wetsuit (10) of claim 8 or 9, wherein the channel is tapered in the forearm portion (104).
11. The wetsuit (10) of any of the preceding claims, wherein the first material (106) is a composite material.
12. The wetsuit (10) of claim 11, wherein the first, composite, material comprises neoprene and at least one layer of fabric.

13. The wetsuit (10) of any of the preceding claims, wherein the second material (108) is a composite material.
14. The wetsuit (10) of claim 13, wherein the second, composite, material comprises neoprene sandwiched between two layers of fabric.

Patentansprüche

1. Nassanzug (10), umfassend:
einen Ärmel (3; 4), der aus mindestens einem ersten Material (106) und einem zweiten Material (108) gebildet ist, wobei der Ärmel (3; 4) einen oberen Armabschnitt (102) und einen Unterarmabschnitt (104) aufweist, wobei das erste Material (106) eine Grenze (101) definiert, die so angeordnet ist, dass sie sich vom Unterarmabschnitt (104) um einen Bizepsbereich (110) im Oberarmabschnitt (102) und zurück zum Unterarmabschnitt (104) erstreckt, und das zweite Material (108) so angeordnet ist, dass es innerhalb der Grenze (101) im Bizepsbereich (110) und im Unterarmabschnitt (104) positioniert ist, und wobei das erste Material (106) einen ersten Elastizitätsmodul aufweist und das zweite Material einen zweiten Elastizitätsmodul aufweist, wobei der erste Elastizitätsmodul größer ist als der zweite Elastizitätsmodul.
2. Nassanzug (10) nach Anspruch 1, wobei der erste Elastizitätsmodul mindestens 10% größer ist als der zweite Elastizitätsmodul.
3. Nassanzug (10) nach Anspruch 1 oder 2, wobei der erste Elastizitätsmodul mindestens 25% größer ist als der zweite Elastizitätsmodul.
4. Nassanzug (10) nach Anspruch 1, 2 oder 3, wobei sich die Grenze (101) entlang eines hinteren Bereichs (124) des Unterarmabschnitts (104) des Ärmels (3; 4) erstreckt.
5. Nassanzug (10) nach einem der vorhergehenden Ansprüche, wobei sich die Grenze (101) von einem Manschettenbereich (116) des Ärmels (3; 4) erstreckt.
6. Nassanzug (10) nach Anspruch 5, wobei sich die Grenze (101) bis zum Manschettenbereich (116) des Ärmels (3; 4) erstreckt.
7. Nassanzug (10) nach einem der vorhergehenden Ansprüche, wobei der Ärmel (3; 4) einen Ellbogenbereich (118) aufweist und das zweite Material (108) im Ellbogenbereich (118) innerhalb der Grenze (101) positioniert ist.

8. Nassanzug (10) nach einem der vorhergehenden Ansprüche, wobei die Grenze (101) einen Kanal definiert, in dem das zweite Material (108) positioniert ist.
9. Nassanzug (10) nach Anspruch 8, wobei sich der Kanal bis zur Manschette des Ärmels (3; 4) erstreckt.
10. Nassanzug (10) nach Anspruch 8 oder 9, wobei sich der Kanal im Unterarmabschnitt (104) verjüngt.
11. Nassanzug (10) nach einem der vorhergehenden Ansprüche, wobei das erste Material (106) ein Verbund-Material ist.
12. Nassanzug (10) nach Anspruch 11, wobei das erste Verbund-Material Neopren und mindestens eine Gewebeschicht umfasst.
13. Nassanzug (10) nach einem der vorhergehenden Ansprüche, wobei das zweite Material (108) ein Verbund-Material ist.
14. Nassanzug (10) nach Anspruch 13, wobei das zweite Verbund-Material zwischen zwei Lagen aus Gewebe sandwichartig aufgenommenes Neopren umfasst.

Revendications

1. Combinaison isothermique (10) comprenant :
- un manchon (3 ; 4), formé à partir d'au moins un premier matériau (106) et d'un second matériau (108), le manchon (3 ; 4) comportant une partie de bras supérieure (102) et une partie d'avant-bras (104), dans lequel le premier matériau (106) définit une limite (101) qui est agencée pour s'étendre depuis la partie d'avant-bras (104), autour d'une région de biceps (110) dans la partie de bras supérieure (102) et vers l'arrière jusqu'à la partie d'avant-bras (104), et le second matériau (108) est agencé pour être positionné à l'intérieur de la limite (101) dans la région de biceps (110) et la partie d'avant-bras (104), et dans lequel le premier matériau (106) a un premier module d'élasticité et le second matériau a un second module d'élasticité, le premier module d'élasticité étant supérieur au second module d'élasticité.
2. Combinaison isothermique (10) selon la revendication 1, dans laquelle le premier module d'élasticité est supérieur d'au moins 10% par rapport au second module d'élasticité.

3. Combinaison isothermique (10) selon la revendication 1 ou 2, dans laquelle le premier module d'élasticité est supérieur d'au moins 25% par rapport au second module d'élasticité. 5
4. Combinaison isothermique (10) selon la revendication 1, 2 ou 3, dans laquelle la limite (101) s'étend le long d'une région postérieure (124) de la partie d'avant-bras (104) du manchon (3 ; 4). 10
5. Combinaison isothermique (10) selon l'une quelconque des revendications précédentes, dans laquelle la limite (101) s'étend à partir d'une région de manchette (116) du manchon (3 ; 4). 15
6. Combinaison isothermique (10) selon la revendication 5, dans laquelle la limite (101) s'étend jusqu'à la région de manchette (116) du manchon (3 ; 4).
7. Combinaison isothermique (10) selon l'une quelconque des revendications précédentes, dans laquelle le manchon (3 ; 4) présente une région de coude (118) et le second matériau (108) est positionné au niveau de la région de coude (118) à l'intérieur de la limite (101). 20 25
8. Combinaison isothermique (10) selon l'une quelconque des revendications précédentes, dans laquelle la limite (101) définit un canal à l'intérieur duquel le second matériau (108) est positionné. 30
9. Combinaison isothermique (10) selon la revendication 8, dans laquelle le canal s'étend jusqu'à la manchette du manchon (3 ; 4). 35
10. Combinaison isothermique (10) selon la revendication 8 ou 9, dans laquelle le canal est effilé dans la partie d'avant-bras (104).
11. Combinaison isothermique (10) selon l'une quelconque des revendications précédentes, dans laquelle le premier matériau (106) est un matériau composite. 40
12. Combinaison isothermique (10) selon la revendication 11, dans laquelle le premier matériau composite comprend du néoprène et au moins une couche de textile. 45
13. Combinaison isothermique (10) selon l'une quelconque des revendications précédentes, dans laquelle le deuxième matériau (108) est un matériau composite. 50
14. Combinaison (10) selon la revendication 13, dans laquelle le second matériau composite comprend du néoprène pris en sandwich entre deux couches de textile. 55

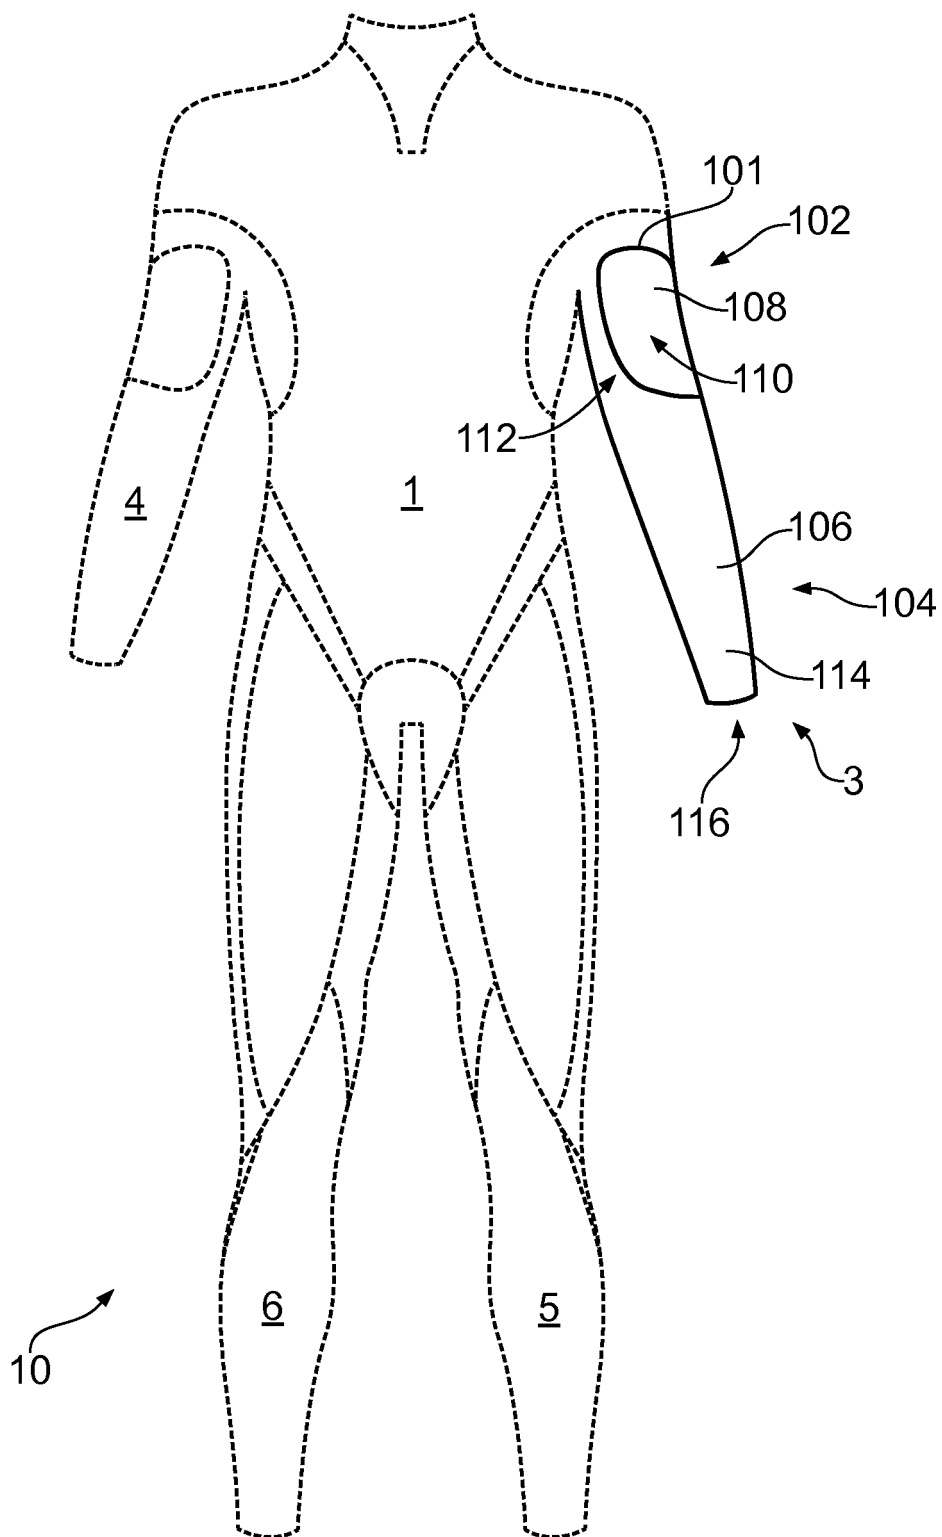


FIG. 1

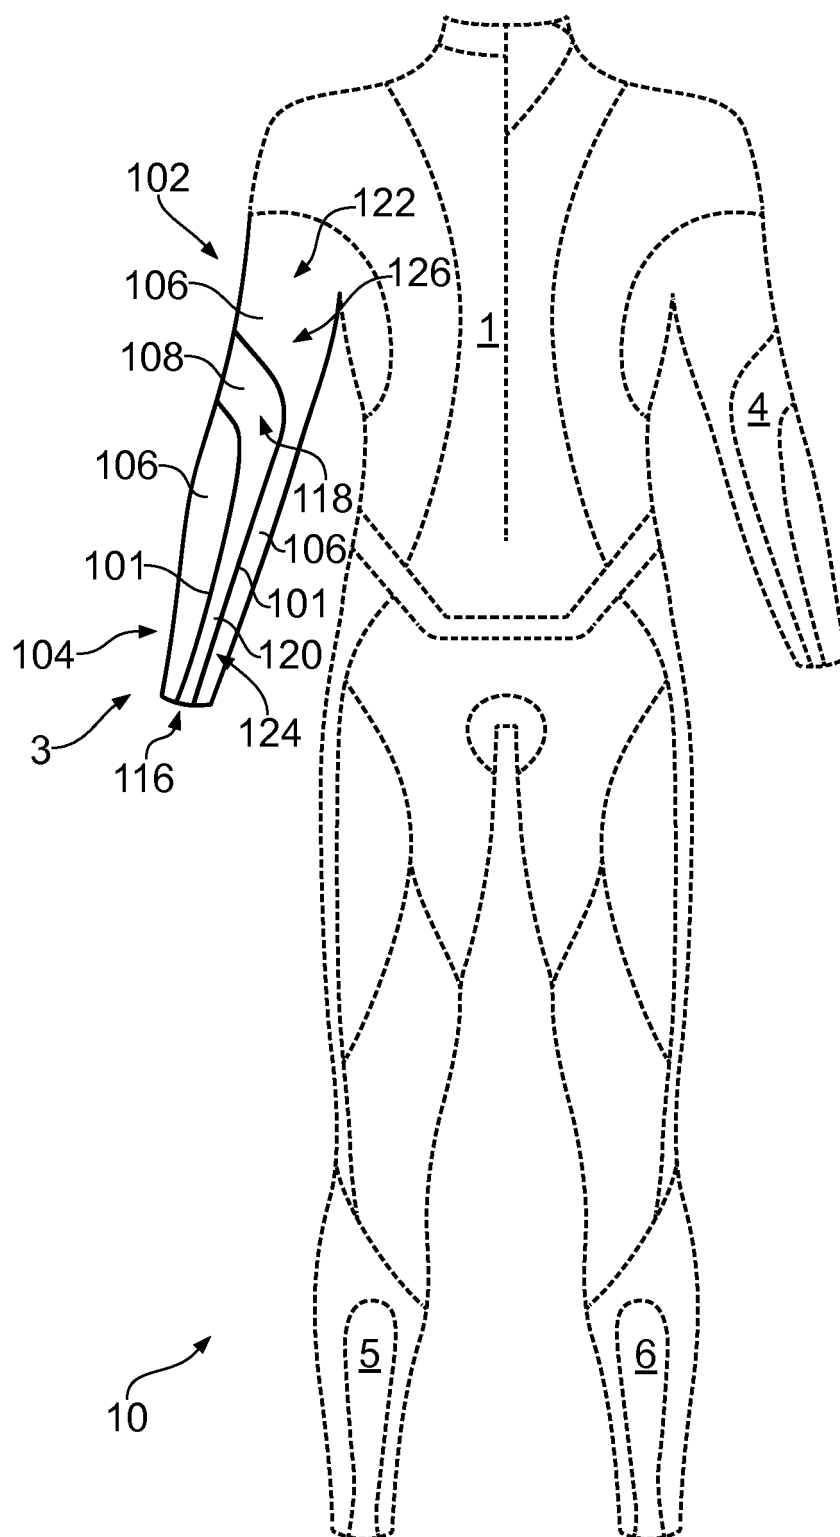


FIG. 2


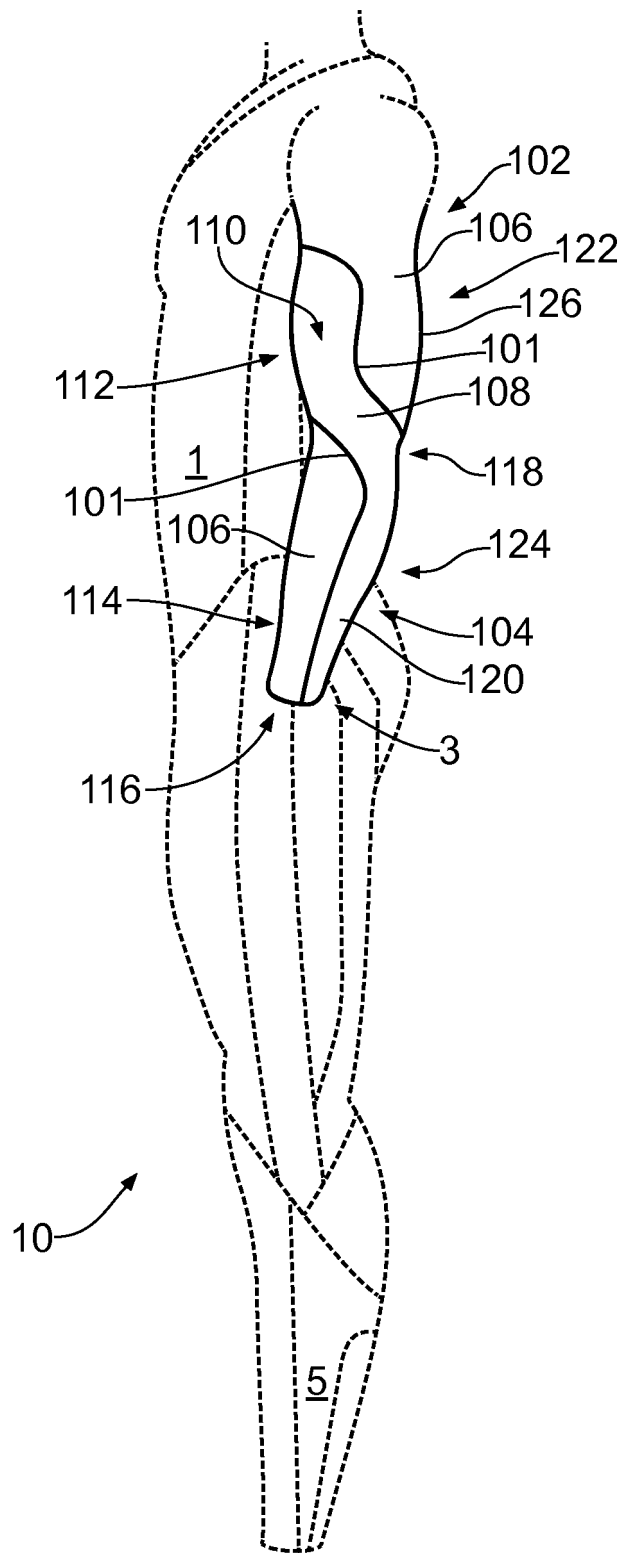


FIG. 3

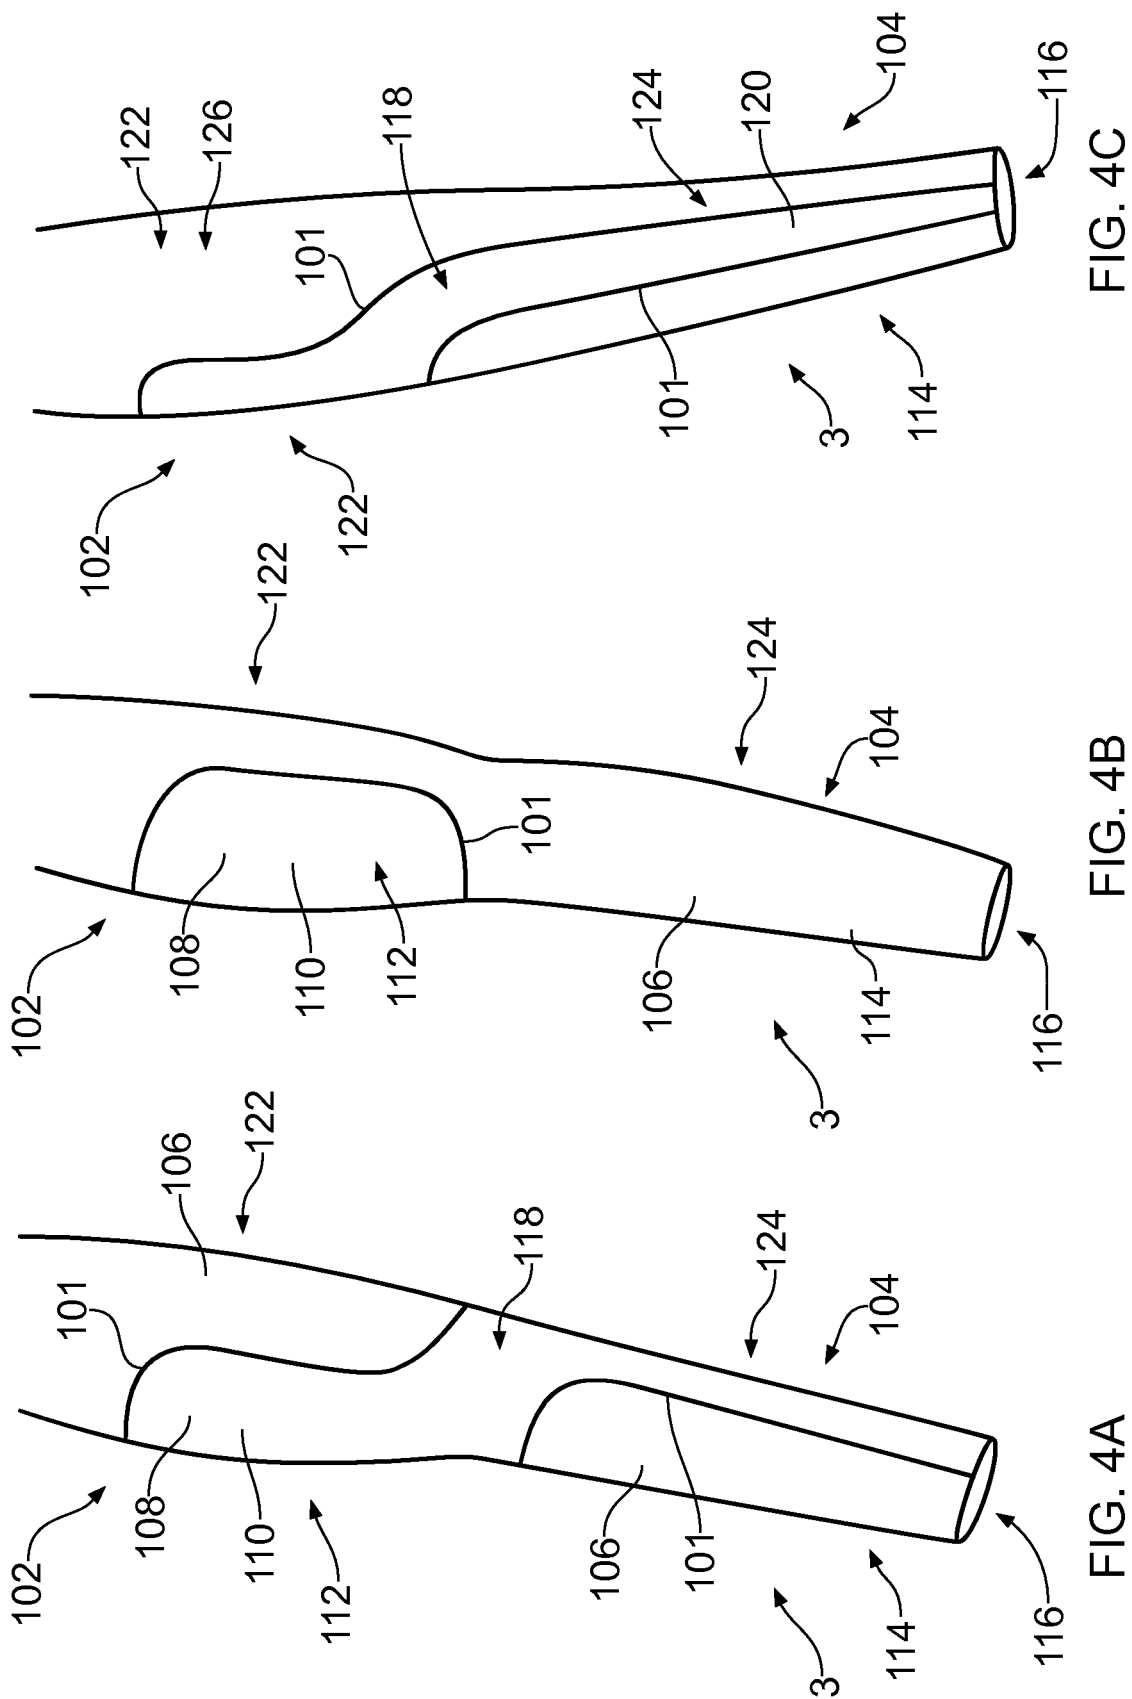

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 1330963 A1 [0003]