




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H03M 13/22, H04N 7/64		A1	(11) International Publication Number: WO 95/18489
			(43) International Publication Date: 6 July 1995 (06.07.95)
(21) International Application Number: PCT/US94/14628		(81) Designated States: CA, CN, JP, KR, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 15 December 1994 (15.12.94)		Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(30) Priority Data: 08/175,325 29 December 1993 (29.12.93) US 08/315,153 29 September 1994 (29.09.94) US			
(71) Applicant: ZENITH ELECTRONICS CORPORATION [US/US]; 1000 Milwaukee Avenue, Glenview, IL 60025-2493 (US).			
(72) Inventors: FIMOFF, Mark; 1020 Concord Lane, Hoffman Estate, IL 60195 (US). HALOZAN, Scott, F.; 379 Oak Trails Road #102, Des Plaines, IL 60016 (US). HAUGE, Raymond, C.; 9011 Gardeners Road, Fox River Grove, IL 60021 (US).			
(74) Agent: CHRYSTAL, John, J.; Ladas & Parry, 224 S. Michigan Avenue, Chicago, IL 60604 (US).			

(54) Title: CONVOLUTIONAL INTERLEAVER AND DEINTERLEAVER

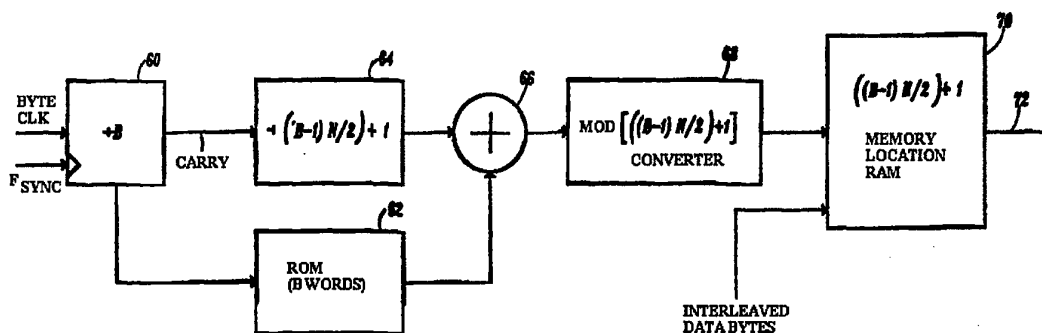

(57) Abstract

A convolutional interleaver or deinterleaver comprises an address signal generator for repeatedly generating $[(B-1)N/2] + 1$ sequences of address signals, where B is a desired interleave depth and N is a value equal to or greater than the number of data bytes in an R-S block of the data stream. Each of the sequences corresponds to a respective row of a B column matrix, the first column of which comprises $[(B-1)N/2] + 1$ consecutively numbered values. Each remaining column comprises the preceding column rotated by an integer multiple of N/B. The address signals are applied to a memory having $[(B-1)N/2] + 1$ storage locations for reading the data stored at the address memory location and then writing the current data byte to the same memory location.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

- 1 -

CONVOLUTIONAL INTERLEAVER AND DEINTERLEAVER

This invention relates generally to digital transmission systems and particularly to a digital data transmission system having a data frame structure and circuit arrangement selected to facilitate operations such as symbol to byte conversion, interleaving and deinterleaving and forward error correction. The system also facilitates the use of a data rate that is related to the signal to noise ration (S/N ratio) of the transmission environment for enhancing system capacity.

U.S. Patent No. 5,087,975 discloses a vestigial sideband (VSB) system for transmitting a television signal in the form of successive M-level symbols over a standard 6 MHz television channel. The television signal may, for example, comprise one or two compressed wideband HDTV signals or a number of compressed NTSC signals. While the number of levels M characterizing the symbols may vary depending on circumstances, the symbol rate is preferably fixed, such as at a rate of $684 H$ (about 10.76 Megasymbols/sec), where H is the NTSC horizontal scanning frequency. The number of symbol levels used in any particular situation is largely a function of the S/N ratio characterizing the transmission medium, a smaller number of symbol levels being used in situations where the S/N ratio is low. It is believed that the ability to accommodate symbol levels of 24, 16, 8, 4 and 2 provides adequate flexibility to satisfy conditions in most systems. It will be appreciated that lower values of M can provide improved S/N ratio performance at the expense of reduced transmission bit rate. For example, assuming a ratio of 10.76 M symbol/sec, a 2-level VSB signal (1 bit per symbol) provides a transmission bit rate of 10.76 Megabits/sec, a 4-level VSB signal (2 bits per symbol) provides a transmission bit rate of 21.52 Megabits/sec and so on up to a 24-level VSB signal which provides a transmission bit rate of about 48.43 Megabits/sec.

- 2 -

It is generally known that the S/N ratio performance of cable television systems decreases as the signal (channel) frequency increases. The foregoing attribute of an M-level VSB transmission system, i.e. improved S/N ratio performance as M decreases, is used in one aspect of the invention to compensate for the S/N ratio degradation in the higher frequency channels of CATV distribution systems. That is, according to this aspect of the invention, VSB transmission is effected in a CATV system wherein the lower frequency channels are transmitted using larger values of M. While the bit rate of the higher frequency channels is thereby reduced, the received signal may be reproduced with a S/N ratio comparable to that of the lower frequency channels.

Moreover, in accordance with other aspects of the invention, system efficiency, particularly in relation to receiver operations, such as data interleaving and deinterleaving, symbol to byte conversion and forward error correction, may be greatly enhanced by selecting a data frame structure which facilitates these operations within the constraints of the variable M-level VSB character of the transmitted signal.

Accordingly, it is a principal object of this invention to provide a novel convolutional interleaver and/or deinterleaver.

Another aspect of this invention is to provide a circuit for deinterleaving convolutionally interleaved bytes of data supplied by a symbol to byte converter.

Further features and advantages of the invention will be apparent upon reading the following description of preferred embodiments of the invention in conjunction with the drawings, in which:

FIG. 1 illustrates the novel data frame structure of the invention;

FIG. 2 is a chart showing the relationship of data constellation size to the other parameters of the

- 3 -

invention;

FIG. 3 is a simplified block diagram of a transmitter in accordance with the invention;

FIG. 3A is a chart illustrating an implementation of the byte to symbol converter in the transmitter of FIG. 3;

FIG. 3B is a chart illustrating the variation of the S/N ratio with frequency in a cable plant and assignment of VSB mode for optimizing cable plant operation;

FIG. 4 is a simplified diagram of a receiver constructed in accordance with the invention;

FIG. 5 is a more detailed showing of the data processor section of the receiver of FIG. 4;

FIG. 6 is a more detailed showing of the symbol to byte converter of the data processor of FIG. 5;

FIG. 7 is a diagram of an exemplary matrix of address signals for deinterleaving a convolutionally interleaved data stream according to the invention;

FIG. 8 is a generalized circuit operable for generating memory address signals according to the invention, including those illustrated in FIG. 7;

FIG. 9 is a deinterleave address signal matrix suitable for use in an actual embodiment of the invention;

FIG. 10 is another deinterleave address signal matrix suitable for use in an embodiment of the invention;

FIG. 11 is a programmable embodiment of the circuit of FIG. 8;

FIG. 12 is a replacement circuit for the ROM of FIG. 8 or the RAM of FIG. 11;

FIG. 13 is a block diagram showing an alternate embodiment of a convolutional deinterleaver according to the invention;

FIGS. 14, 15 and 16 are diagrams of respective convolutional interleave address signal matrices suitable for use in accordance with the invention; and

- 4 -

FIG. 17 is a block diagram showing an alternate embodiment of a convolutional interleaver according to the invention.

The structure of the novel data frame of the invention is illustrated in FIG. 1. The data frame, generally identified by reference numeral 10, comprises 313 data segments (DS) identified as DS0-DS312. Each data segment includes 828 symbols for data and 4 symbols defining a data segment sync character 11. Each data segment sync character 11 comprises four 2-level symbols which preferably assume the form disclosed in copending application Serial No. 894,388. The first data segment DS0 comprises only 2-level symbols. These 2-level symbols represent a pseudo random sequence frame synchronization code, and an 8 symbol VSB mode, or control, signal that identifies the level M (e.g. 24, 16, 8, 4 or 2) of the symbols of the data fields of the remaining 312 data segments of the data frame. The first three bits of the eight bit VSB mode control byte identify the VSB mode and the remaining 5 bits comprise parity bits which may be used by the receiver for error detection. In the previously mentioned CATV distribution system, for example, the VSB mode signal would identify a relatively large M for low frequency channels and a smaller M for higher frequency channels. In a terrestrial broadcast environment, the VSB mode would most likely be M=2, 4 or 8.

Referring to the table of FIG. 2, each data symbol of a data segment DS1-DS312 represents either 4.5 bits (M=24), 4 bits (M=16), 3 bits (M=8), 2 bits (M=4), or 1 bit (M=2). Since there are a fixed number of data symbols per frame ($312 \times 828 = 258,336$), the number of data bytes per frame will vary as shown. That is, each frame comprises 145,314 data bytes for VSB mode M=24; 129,168 data bytes for VSB mode M=16; 96,876 data bytes for VSB mode M=8; 64,584 data bytes for VSB mode M=4; and 32,292 data bytes for VSB mode M=2. However, while the

- 5 -

number of data bytes per frame varies depending on the VSB mode M , it will be observed that for any particular value of M (24, 16, 8, 4 or 2), an integral number of bytes is provided in each frame. This characteristic of the structure of frame 10 substantially simplifies the design of a receiver such that frame synchronization will be effected at a rate corresponding to an integral number of data bytes regardless of the VSB mode (i.e. 24, 16, 8, 4 or 2 level symbols). As will be explained in further detail hereinafter, the receiver forward error correction circuitry, the receiver symbol to byte converter, and the receiver deinterleaver are preferably frame synchronized with the transmitted signal. The frame sync signal can be directly used for these purposes so long as there are an integral number of bytes, forward error corrections blocks and interleave groups in each data frame for each of the VSB modes.

Reed-Solomon (RS) forward error correction is used in the receiver of the invention. A standard transport packet size of 187 bytes has been established by the MPEG (Motion Picture Experts Group) committee. Adding 20 parity bytes to each such transport packet results in an RS block size of 207 data bytes, allowing for the correction of 10 byte errors per RS block. As seen in FIG. 2, an RS block size of 207 bytes advantageously results in an integral number of RS blocks per frame for all of the selected VSB modes, thereby allowing the receiver RS decoder to be synchronized by the frame sync signal. A convolutional interleave group size (B) is defined according to the invention as comprising 26 or 52 data bytes (other values may be used) which also results in an integral number of interleave groups per frame regardless of the selected VSB mode (except for $M=24$ and $B=52$) as shown in FIG. 2. This also allows the frame sync signal to be used to periodically synchronize the receiver deinterleaver, thereby simplifying its design.

- 6 -

FIG. 3 is a simplified block diagram of a transmitter constructed in accordance with the invention. A source 12 of television signals is coupled to a convolutional interleaver 13 which, in turn, supplies interleaved data bytes to a byte to symbol converter and mapper 14. It will be appreciated that signal source 12 may comprise a compressed HDTV signal (or two compressed HDTV signals depending on the VSB mode) or a number of compressed NTSC signals. The symbol output of converter (and mapper) 14 is supplied to a frame formatter 15 that has inputs of data, data segment sync and frame sync and is controlled, along with converter 14, by a VSB mode control signal. The formatted frames, which conform to the arrangement previously described in connection with FIGS. 1 and 2, are supplied to a digital to analog (D/A) converter 16 and thence to a VSB transmitter 17 for transmission over a 6 MHz television channel. The transmission medium may comprise a cable television plant or a terrestrial broadcast environment. In either case, one such transmitter is required for each transmitted 6 MHz channel.

FIG. 3A is a chart illustrating a method of implementing the byte to symbol converter. The chart comprises four columns, one for each of the VSB modes $M=16$, $M=8$, $M=4$ and $M=2$. Converter 14 is operative in response to the applied VSB mode control signal for using the identified column of the chart of FIG. 3A for converting the input data bytes to output data symbols. For example, for VSB mode $M=16$, the input data byte 11010101 would be converted to two successive data symbols having relative amplitudes of +88 and -40. For VSB mode $M=8$, the input data byte would be converted to three successive data symbols having relative amplitudes of +80, +48 and -16 (assuming the first bit of the next data byte is 1) or +80, +48 and -48 (assuming the first bit of the next data byte is 0). For VSB mode $M=4$, the data byte

- 7 -

would be converted to four successive symbols having relative amplitudes of +96, -32, -32 and -32. Finally for VSB mode M=2, eight output symbols would be provided at relative amplitudes +64, +64, -64, +64, -64, +64, -64 and +64. In the case of VSB mode M=24, converter and mapper 14 includes appropriate memory and look-up tables for mapping successive groups of 9 input data bits into two successive 24 level output symbols. In this way each symbol can be referred to as representing 4.5 bits (i.e. 9 bits/ 2 symbols).

In connection with the foregoing, it will be observed that the relative levels of the symbols of each VSB mode are evenly spaced and lie midway between the relative levels of selected symbols of all higher VSB modes. For example, relative level +112 of VSB mode M=8 lies midway between relative levels +120 and +104 of VSB mode M=16, relative level +96 of VSB mode M=4 lies midway between relative levels +112 and +80 of VSB mode M=8 and midway between relative levels +104 and +88 of VSB mode M=16, relative level +64 of VSB mode M=2 lies midway between relative levels +96 and +32 of VSB mode M=4, +80 and +48 of VSB mode M=8 and +72 and +56 of VSB mode M=16, and so on. Preferably the symbol levels are offset from the values shown by a predetermined amount (e.g. +20) prior to transmission to provide a small pilot for facilitating carrier acquisition in the receiver. Also, it will be observed that the data rate characterizing each VSB mode increases by one bit per symbol relative to the data rate of the immediately lower VSB mode while its S/N ratio performance is reduced by one-half.

The above represents the situation in the version of the invention presently being implemented in chip form, in which 16 VSB is the highest mode. However, it will be apparent to those skilled in the art that the 24 VSB mode implementation will require different relative levels as taught by the invention. The technique and apparatus for

- 8 -

processing a 24 VSB mode signal is discussed below and claimed in copending application Serial No. 178,085 above.

FIG. 3B illustrates the general S/N ratio fall off of a cable plant with increasing frequency. As is specified in the invention, the higher S/N ratio transmission characteristics for lower frequency television signals can be used to advantageously employ higher VSB transmissions (and a higher data rate) for similar performance. The "noisier" portion of the spectrum (low S/N ratio) may be used for signals of lower VSB modes. It will be apparent that this technique optimizes the utilization of the cable plant.

FIG. 4 is a simplified block diagram of a receiver constructed according to the invention. The received RF television signal from the transmitter of FIG. 3 comprises an M-level VSB signal having the frame format of FIG. 1. The receive signal is converted to an IF frequency by a tuner 20 and applied to a VSB demodulator 22. VSB demodulator 22 generates an analog baseband output signal comprising the M-level symbols at a rate of about 10.76 Megasymbols/sec. This analog signal is sampled by an analog to digital (A/D) converter 24 which converts the symbols to binary form and applies them to a data processor 26. Data processor 26 provides a feedback signal for controlling A/D 24 to insure that the analog baseband signal is sampled at the appropriate symbol times (see copending application Serial No. 894,388). Data processor 26 applies the processed binary data, in the form of data bytes corresponding to the output of television source 12 in FIG. 3, to a demultiplexer 28, which distributes the received data to a video processor 30 and to an audio processor 32, each of which includes appropriate decompression circuitry.

Data processor 26 is shown in more detail in FIG. 5. The binary symbols from A/D are applied to a data acquisition circuit 34 which performs a number of

- 9 -

functions including generating the feedback signal for controlling A/D 24, generating a symbol clock signal, generating a frame sync (FSYNC) signal and generating an 8 times symbol clock signal. The symbol clock signal has a frequency of about 10.76 MHz for all VSB modes except VSB mode M=24, in which case, as will be explained, its frequency is reduced by one-half to about 5.38 MHz. The FSYNC used in the preferred embodiment is approximately 41 Hz. The frame synchronization code of data segment DS0 enables derivation of the FSYNC signal which coincides in time with the first data symbol of data segment DS1 of each data frame 10.

The binary symbols from A/D 24 (representing the amplitudes of the sampled analog signal from VSB demodulator 22) are applied by data acquisition circuit 34 to a multi-level slicer 36 which converts the received symbols to bits according to the chart of FIG. 3A. As in the case of the transmitter, for VSB mode M=24, slicer 36 includes appropriate memory and look-up tables for mapping each successively received pair of symbols into 9 bits of output data. Slicer 36 couples the sliced values of the VSB mode control byte (eight 2-level symbols) of data segment DS0 of each frame to a VSB mode decoder 37, which detects the first three bits of the mode control byte and develops a 3-bit VSB mode select signal. This signal identifies the VSB mode (M=24, 16, 8, 4 or 2) of the received symbols for controlling data acquisition circuit 34, slicer 36 and a symbol to byte converter 38 during the remainder of the respective frame. The remaining 5 bits of the mode control byte are used for error detection by VSB mode decoder 37. Slicer 36, which includes a nine line output bus, is responsive to the VSB mode select signal for converting the binary signal, representing the symbol amplitudes, to their corresponding bit values. Thus, in the M=2 VSB mode, each binary symbol amplitude signal is converted to the corresponding 1-bit signal on

- 10 -

one of the nine output lines, to the corresponding 2-bit signal on two of the output lines in the M=4 VSB mode, to the corresponding 3-bit signal on three of the output lines in the M=8 VSB mode and to the corresponding 4-bit signal on four of the output lines in the M=16 VSB mode. In the M=24 VSB mode, two successive symbols are converted to the corresponding 9-bit signal (on all nine output lines) at one-half the symbol clock rate.

The nine-line output of slicer 36, together with the 3-bit VSB mode select signal from decoder 37 and the timing signals from data acquisition circuit 34 are coupled to symbol to byte converter 38, the output of which supplies a deinterleaver 40 that, in turn, supplies an RS decoder 42. Symbol to byte converter 38 converts the input bits representing the received symbols into a series of 8-bit data bytes for each of the VSB modes. Deinterleaver 40 deinterleaves the convolutionally interleaved data bytes supplied by converter 38 and RS decoder 42 performs error correction on the deinterleaved data bytes.

Symbol to byte converter 38 is shown in more detail in FIG. 6. The 9-line data symbol bus from slicer 36 and the symbol clock signal from data acquisition circuit 34 are applied to a 1 x 9 parallel-in, serial-out register 44. The 3-bit VSB mode signal, the symbol clock signal and the 8 times symbol clock signal are applied to the inputs of a variable pulse generator 46. Generator 46 produces a series of pulses (bit clocks) at the 8 times symbol clock rate in response to each received symbol clock, the series including one pulse for VSB mode M=2, two pulses for VSB mode M=4, 3 pulses for VSB mode M=8, and 4 pulses for VSB mode M=16. A series of 9 pulses are sent for VSB mode M=24, while the symbol clock is halved.

Assuming, for example, VSB mode M=8, the 3 bits from slicer 36 (representing a received symbol) are simultaneously written into the top three locations of

- 11 -

register 44 in response to a symbol clock. At the same time, the symbol clock starts pulse generator 46 which produces 3 bit clocks (at 8 times the symbol clock rate) which are applied to the Read (RD) input of register 44, to the Write (WR) input of a 1 x 8 Serial-in, Parallel-out register 48 and to the input of a divide-by-eight circuit divider 50. Divider 50 is reset at the beginning of each data frame 10 by FSYNC for synchronizing converter 38 with the received data, since FSYNC always represents a byte boundary. The 3 bits previously loaded into register 44 are serially read out of register 44 in response to the 3 bit clock pulses and written into register 48. The next 3-bit symbol from slicer 36 is processed in the same manner, resulting in 6 bits being stored in register 48. After the first two bits of the next (i.e. third) 3-bit symbol are written into register 48 from register 44, divider 50 generates an output (Byte Clock) causing the accumulated 8-bit data byte stored in register 48 to be read out (in parallel). The remaining single bit of the third symbol is stored in register 48 and read out with the next 7 bits of the succeeding 3-bit symbol as the next data byte. In this manner, converter 38 arranges the input 3-bit symbols (for M=8) into a series of successive 8-bit output data bytes, which are supplied to deinterleaver 40 at the rate of the byte clock.

A substantially similar procedure is carried out for VSB modes M=2, 4 and 16 except that, depending on the VSB mode, it will take a longer or shorter time period to compose the data bytes. For example, in VSB modes M=2 and 4, the bit clock generated by pulse generator 46 in response to each symbol clock signal comprises one and two pulses respectively, so that 8 and 4 symbol clock signals are required to produce the respective data bytes (versus 2-2/3 for VSB mode M=8).

For VSB mode M=24, slicer 36 combines two 4.5 bit symbols into 9 bits at one-half the symbol clock rate and

- 12 -

applies these signals to converter 38. Consequently, in response to each symbol clock, 9 bits from slicer 36 are loaded into register 44. Then, the 9 bits are serially read out of register 44 and written into register 48. However, after the 8th such bit has been written into the register, a Byte Clock output is generated by divider 50, reading these 8 bits out of register 48 as a data byte. The remaining bit will be read out of register 48 with the first 7 bits of the next symbol as the next data byte two symbol times later.

Converter 38 further includes a divider 52 which is also reset by FSYNC to synchronize its operation with the beginning of each data frame 10. In particular, divider 52 is a divide-by-207 counter which is clocked by the Byte Clock generated by divider 50 to generate a Begin RS Block signal for identifying the beginning of each block of 207 data bytes synchronously with the first data byte of each data frame. As will be explained hereinafter, this signal is used to synchronize the operation of RS decoder 42. Divider 52 includes means responsive to the symbol and byte clocks for converting the one-symbol-wide input FSYNC to a byte wide output FSYNC.

As described earlier, the outputs of converter 38 are applied to deinterleaver 40. As will be explained in further detail hereinafter, deinterleaver 40 deinterleaves the convolutionally interleaved data bytes received from converter 38 using a minimum of memory.

As is well known, interleaving is done at the transmitter (see interleaver 13 of FIG. 3) to spread contiguous data bytes apart from each other to help immunize the transmitted data from burst noise. In the receiver, the interleaved bytes must be deinterleaved to re-establish their original relationship prior to forward error correction. Thus, burst noise of some given time duration will corrupt only a limited number of bytes

within an RS block of the deinterleaved data, which corrupted bytes can be corrected by the RS decoder. The interleaving algorithm used is selected in anticipation of the maximum expected burst noise duration at the fastest byte clock rate (i.e. corresponding to VSB mode $M=24$) to insure that the RS decoder is capable of error correcting the corrupted deinterleaved data bytes. Thus, as maximum expected burst noise duration increases, the interleaving algorithm must spread contiguous data bytes further apart. Alternatively, a more powerful RS code may be used, but this approach has the disadvantage of using more overhead, i.e. requiring more bytes for error correction. Also, by referencing the system to the highest byte clock rate (corresponding to 24 VSB), increased burst error protection will be provided as the VSB mode and the corresponding byte rate decrease, because the interleave pattern is effected over a given number of bytes regardless of VSB mode.

Convolutional interleave algorithms are commonly used to immunize transmitted data from burst noise. Such algorithms delay the individual bytes of successive groups of bytes, sometimes referred to as the interleave depth, by different amounts to effectively scatter the bytes over a portion or all of the data frame. Deinterleaving is effected by delaying the received bytes by opposite amounts. In implementing such a system, three parameters are of particular significance; the maximum expected burst length BL , the number of byte errors T which the RS decoder can correct and the RS block size. As mentioned previously, there preferably are an integral number of RS blocks in the data frame so that the RS decoder can be synchronized by the frame sync signal $FSYNC$. By selecting an interleave group size (of which there are preferably an integral number in each frame) equal to a parameter $B=BL/T$ and the different delays as integral multiples of a parameter N equal to or greater than the RS block size,

- 14 -

the RS decoder will be able to correct the deinterleaved data for burst noise up to the maximum expected duration of BL byte clocks.

Consider the simplified example of a system in which the maximum expected burst length is 4 data byte clocks and the RS decoder is capable of correcting one data byte error in each 8 data byte RS block (i.e. $BL=4$, $T=1$, $N=8$). Using these parameters, the interleave group size $B=BL/T=4/1=4$. Convolutional interleaving is performed using these parameters such that for each group of $B=4$ data bytes, the first data byte is exposed to a delay of 0, the second to a delay of $1N=8$ data byte clocks, the third to a delay of $2N=16$ data byte clocks and the fourth to a delay of $3N=24$ data byte clocks. Deinterleaving is effected by reversing the delays such that for each group of $B=4$ received interleaved data bytes, the first is delayed by $3N=24$ data byte clocks, the second by $2N=16$ data byte clocks, the third by $1N=8$ data byte clocks and the fourth by 0.

Conventional convolutional deinterleavers implementing the above algorithm comprise a memory having $(B-1)N/2$ memory locations. For realistic values of B and N , which are typically much larger than the values used in the simplified example given above, this leads to a very complex architecture because of the large number of shift registers required. An alternate architecture which may be employed uses a standard linear memory array for which a large number of fifo head and tail pointers must be maintained in hardware. This is a very complex task and thus highly undesirable.

These problems are solved according to this invention by using a linear memory array with an address generator for generating a repeating sequence of read-write addresses that results in correctly deinterleaving the received data. The memory array is of a relatively small size utilizing only one memory location

- 15 -

in excess of the number required to impose the different delays on the respective data bytes of each group. This invention is described below in relation to the simplified example given above and is extended to implementations using more realistic parameters.

More specifically, it has been discovered that a linear memory array having $[(B-1)N/2] + 1$ memory locations may be addressed by a particular sequence of read-write addresses to correctly deinterleave a convolutionally interleaved data stream. The sequence of addresses is developed by first writing a column of $[(B-1)N/2] + 1$ consecutive integers beginning with 0. This is represented by the first column of the addressing matrix of FIG. 7, which is for the simplified example with $B=4$ and $N=8$. Next a second column that is the same as the first is written except that it is rotated down by $(B-1)N/B = (3 \times 2) = 6$ rows. This is the second column in the matrix of FIG. 7. The third column is developed by rotating the second column down by $(B-2)N/B = (2 \times 2) = 4$ rows and, finally, the fourth and last column is developed by rotating the third column down by $(B-3)N/B = (1 \times 2) = 2$ rows. This matrix has a size of $B=4$ columns and $[(B-1)N/2] + 1 = 13$ rows, the number of rows being the required size of the deinterleave linear memory array. If the numbers in the matrix are read out a row at a time, they can be used as read-write addresses for application to the deinterleave memory to continuously deinterleave the received data, i.e. read out the old data at the addressed memory location and write in the new data at the same location.

A circuit for generating the address matrix of FIG. 7 is illustrated in FIG. 8. A divide by B up-counter 60, which is reset to zero by FSYNC, is responsive to the byte clock from converter 38 for applying a repeating sequence of counts from a minimum number to a maximum number, e.g. from 0 to $(B-1)$, for addressing a B word ROM 62 at the byte clock rate. ROM 62 stores the B words

- 16 -

comprising the first row of the address matrix. The carry output of divider 60 is used to clock a second divider 64 at the slower rate of byte clock/B, the division ratio of divider 64 being $[(B-1)N/2]+1$. The outputs of divider 64 and ROM 62 are summed in an adder 66 and applied through a modulo $[(B-1)N/2]+1$ converter 68 for addressing a linear deinterleave memory array 70 having $[(B-1)N/2]+1$ memory locations. Converter 68 preferably comprises a circuit which either couples its input signal to its output or, if the input is greater than $[(B-1)N/2]+1$, subtracts this value from the input signal before coupling it to its output.

For the simplified example described above, i.e. $B=4$ and $N=8$, divider 60 ($\div 4$) repetitively generates the output count sequence 0, 1, 2, 3 for addressing and reading the four words 0, 7, 3, 1 stored in ROM 62 at the byte clock rate. Divider 64 ($\div 13$) repetitively generates the output sequence 0, 1, 2 ... 12 at $1/4$ the byte clock rate. Consequently, for each group of 4 successive byte clocks, the four words 0, 7, 3, 1 read from ROM 62 are each added to the output of divider 64 in adder 66 to produce, after processing by modulo 13 converter 68, a row of the address matrix of FIG. 7. For example, the first row 0, 7, 3, 1 of the matrix is produced during the first four byte clocks wherein 0 (from divider 64) is added to the outputs 0, 7, 3, 1 of ROM 62. During the next 4 byte clocks the value 1 (from divider 64) is added to the words 0, 7, 3, 1 generated by ROM 62 to produce the second row 1, 8, 4, 2 of the address matrix and so on until finally the last row is generated by adding 12 to each of the 4 words 0, 7, 3, 1 to produce the last row 12, 6 (=19 modulo 13), 2 (=15 modulo 13), 0 (0= modulo 13).

Each address signal generated at the output of modulo 13 converter 68 initiates a read-write operation of RAM 70. That is, each address first causes the data byte stored at the addressed memory location to be read

- 17 -

out on bus 72 and then the new interleaved data byte to be written into the same memory location. By following the addressing scheme disclosed herein, the data bytes read from RAM 70 will be in the correct deinterleaved format. The fact that the input data bytes are correctly deinterleaved can be seen from a close examination of the matrix of FIG. 7. In particular, it will be recalled that convolutional interleaving is effected for each group of four data bytes by delaying the first data byte by 0, the second data byte by 8 byte clocks, the third data byte by 16 byte clocks and the fourth data byte by 24 byte clocks. Theoretically, deinterleaving is then effected by delaying the first received data byte by 24 byte clocks, the second received data byte by 16 byte clocks, the third received data byte by 8 byte clocks and the fourth received data byte by 0 byte clocks. Adding a one byte clock delay to each received data byte will not affect the deinterleaving process so that delays of 25, 17, 9, 1 data clocks are equivalent to using deinterleaving delays of 24, 16, 8, 0 data clocks. Referring to the matrix of FIG. 7, the first received data byte is written into memory location 0 of RAM 70 and read out 25 byte clocks later at column 2, row 7 (i.e. after a delay of 25 byte clocks), the second is written into memory location 7 and read out 17 byte clocks later at column 3, row 5 (i.e. after a delay of 17 byte clocks), the third is written into memory location 3 and read out 9 byte clocks later at column 4, row 3 (i.e. after a delay of 9 byte clocks) and the fourth is written into memory location 1 from which it is read out 1 byte clock later at column 1, row 2 (i.e. after a delay of 1 byte clock). It will be apparent from this analysis that the deinterleaving algorithm is correctly executed.

In an embodiment of the invention actually being constructed for use in a cable television system the following parameters were selected: BL=260 bytes, T=10

- 18 -

and $N=208$. Therefore, $B=BL/T=26$ bytes, which is integrally related to the frame size for all VSB modes. For this case divider 60 of the circuit of FIG. 8 is a divide-by-26 divider (periodically reset by FSYNC) which sequentially address the 26 words of ROM 62 comprising the first row of the address matrix (0, 2401, ... 1) shown in FIG. 9. Divider 64 is a divide by 2601 divider and converter 68 is a modulo 2601 converter. Operation of this embodiment of the circuit is identical to that described for the simplified example.

As previously mentioned, the system parameters may have values other than those given above. For example, in a terrestrial application it may be desirable to increase the interleave depth B since a larger maximum burst noise length is to be expected. Thus, in a terrestrial application the following parameters may be used: $BL = 520$ bytes, $T = 10$ and $N = 208$. Therefore $B = BL/T = 52$. The address matrix for these parameters ($B = 52$ and $N = 208$) is shown in FIG. 10. The circuit of FIG. 8 may also be used for generating the address matrix of FIG. 10 by substituting the appropriate values of B and N in the various circuit elements.

It may also be desirable to provide the circuit of FIG. 8 in a programmable form for selectively generating either the address matrix of FIG. 9 or the address matrix of FIG. 10. Such a circuit is shown in FIG. 11 wherein a microprocessor 74 is used at initialization to program counters 60 and 64 and modulo converter 68 with the appropriate values of B and N . Also, microprocessor 74 initializes memory 62 by loading the first row of addresses from either the matrix of FIG. 9 or FIG. 10. Thus, the circuit may be selectively operated in a first mode ($B = 26$, $N = 208$) by loading the value 26 into counter 60, the value 2601 into counter 64 and modulo converter 68 and by writing the first row of addresses from the matrix of FIG. 9 into memory 62. The

- 19 -

circuit may be operated in a second mode to provide a larger interleave depth ($B = 52$, $N = 208$) by loading the value 52 into counter 60, the value 5305 into counter 64 and modulo converter 68 and by writing the first row of addresses from the matrix of FIG. 10 into memory 62. It will be understood that once programmed the circuit will operate as previously explained in connection with FIG. 8.

It will be noted that the circuits of FIGS. 8 and 11 automatically adapt to the different received VSB modes. The circuits simply operate at an increased or decreased rate in response to the byte clock as the VSB mode varies. The deinterleaved data on bus 72, together with the FSYNC and Begin RS Block signals from converter 38 are applied to RS decoder 42 which error corrects the deinterleaved data bytes. Operation of RS decoder 42 is facilitated by synchronization with FSYNC at the beginning of each data frame and by providing an integral number of RS blocks each frame regardless of the VSB mode as previously explained.

FIG. 12 shows a circuit which may be used in place of memory 62 of FIGS. 8 or 11 to generate the first row of matrix addresses. The circuit implements the following equations for generating the first row of addresses $C(X)$:

$$C(0) = 0$$

$$C(X) = [C(X-1) - (B-X)N/B] \bmod [(B-1)N/2 + 1],$$

$$\text{where } X=1, \dots (B-1).$$

For the simplified example (i.e. $B=4$ and $N=8$) the term $C(X)$ becomes $C(X) = [C(X-1) - (4-X)2] \bmod 13$. Thus, for example, if $X=1$, $C(X) = (0-6) \bmod 13 = -6 \bmod 13 = 7$. Similarly, for $X=2$, $C(X) = (7-4) \bmod 13 = 3$. And finally, for $X=3$, $C(X) = (3-2) \bmod 13 = 1$. The first row for the larger matrices of FIGS. 9 and 10 may likewise be derived using these relationships. Referring to FIG. 12, the circuit comprises an input divide by B count down divider 80 which is reset by FSYNC and clocked by the byte clock.

- 20 -

In response to being reset, an output of divider 80 clears a latch 82. The output of divider 80 is provided in reverse order (B-1, B-2, ... 0) so that when it is incremented by one (1) in an adder 84, the result is (B-X). The variable (B-X) is multiplied by N/B in a multiplier 86 to provide the expression (B-X)N/B. Multiplier 86 may comprise a relatively simple bit-shifting circuit since, in both embodiments, the factor N/B is a power of two (i.e. $208/52 = 4$ and $208/26 = 8$). Expression (B-X) N/B is then subtracted from the output C(X-1) of latch 82 in subtractor 88 to provide $C(X-1) - (B-X)N/B$. Finally, the output of the subtractor is coupled by a modulo $[(B-1)N/2] + 1$ circuit for temporary storage in latch 82 in response to a byte clock. As in the previous case, the circuit may be made programmable by providing a microprocessor 76 or other suitable controller for loading the appropriate divisor in divider 80, the value N/B into multiplier 86 and the value $[(B-1)N/2] + 1$ into modulo converter 90 upon initialization.

FIG. 13 illustrates an alternate embodiment of the deinterleaver circuits of FIGS. 8 and 11. In this embodiment a divide-by-B down-counter 100 is reset to zero by FSYNC and clocked by the byte clock. The output of counter 100 supplies one input of a multiplier 102, whose other input is supplied with the value N/B. As in the case of multiplier 86 of FIG. 12, multiplier 102 preferably comprises a bit-shifter since for both modes B=26 and B=52 the value N/B comprises a power of two. The output of multiplier 102 is applied to the negative input of a subtracting circuit 104, the output of which is applied by a latch 106 to the input of a modulo $[(B-1)N/2] + 1$ converter 108. The output of converter 108, which represents the address signal sequences applied to memory 70 (see FIG. 8), is coupled back to the positive input of subtractor 104. As in the previous embodiments, a B=26 or B=52 mode control signal may be applied to

- 21 -

counter 100, multiplier 102 and converter 108 for effecting operation in either of the respective modes.

Considering the simplified example of $B=4$, $N=8$, assume that counter 100 has just been reset to zero and that the current output of converter 108 is zero. Consequently, a value of zero will be developed at the outputs of both multiplier 102 and subtractor 104 and applied by latch 106 for development at the output of converter 108. The output of counter 100 next increments to a value of 3 so that the output of multiplier 102 goes to 6 and the output of subtractor 104 to -6. The value -6 is coupled by latch 106 to converter 108 where it is converted to the value 7. The output of counter 100 next increments to a value of 2 causing the output of converter 108 to assume the value of $[7-(2 \times 2)] \text{ modulo } 13 = 3$. The next byte clock causes the output of counter 100 to increment to a value of 1 and the output of converter 108 to assume the value $[3-(2 \times 1)] \text{ mod } 13 = 1$. Referring to FIG. 7, it will be seen that these four consecutive outputs comprise the first row of the address signal matrix. It will be understood that the subsequent rows of the address signal matrix are generated in a like manner and, when used to address the linear memory 70 as previously described, properly deinterleave the received convolutionally interleaved data bytes.

While the previous discussion has largely focused on the implementation of convolutional deinterleavers according to the invention, it will be understood that essentially the same techniques can be applied to the design and construction of convolutional interleavers. In particular, in order to provide a convolutional interleaver according to the invention it is only necessary to reverse the order of the address signal sequence represented by the matrices of FIGS. 7, 9 and 10 and to make some relatively minor circuit changes. The reversed order addressing matrix for the simplified case

- 22 -

of $B=4$ and $N=8$ is shown in FIG. 14. The first column of the matrix is developed by writing a column of $[(B-1)N/2]+1 = 13$ consecutive integers beginning with 12 and ending with 0. The second column comprises the first column rotated down by $(B-3)N/B=(1 \times 2) = 2$ rows, the third column comprises the second column rotated down by $(B-2)N/B=(2 \times 2) = 4$ rows, and the fourth column comprises the third column rotated down by $(B-1)N/B=(3 \times 2) = 6$ rows. Similar interleave address signal matrices may be developed for the cases of $B=26$, $N=208$ and $B=52$, $N=208$, and these are shown in FIGS. 15 and 16 respectively.

The circuits of FIGS. 8 and 11 may be made to operate in an interleave mode by configuring counter 60 as a down-counter and by storing the last row of the respective address signal matrix of FIG. 14, 15 or 16 in memory 62. With these changes, the output 72 of memory 70 will comprise the desired convolutionally interleaved data stream.

An alternate interleaver embodiment, similar to the deinterleaver embodiment of FIG. 13, is shown in FIG. 17. In this embodiment a divide-by- B up-counter 110 is reset to zero by FSYNC and clocked by the byte clock. The output of counter 110 supplies one input of a multiplier 112, whose other input is supplied with the value N/B . As in the previous embodiments, multiplier 112 preferably comprises a bit-shifter since for both modes $B=26$ and $B=52$ the value of N/B comprises a power of two (i.e. $208/26 = 8$ and $208/52 = 4$). The output of multiplier 112 is applied to one input of an adder 114, the output of which is applied by a latch 116 to the input of a modulo $[(B-1)N/2] + 1$ converter 118. The output of converter 118, which represents the address signal sequences applied to memory 70, is coupled back to the second input of adder 114. A $B=26$ or $B=52$ mode control signal may be applied to counter 110, multiplier 112 and converter 118 for effecting operation in either of the respective modes.

- 23 -

Considering again the simplified example of $B=4$, $N=8$, and assuming that the current output of converter 118 is 0, the address signal matrix of FIG. 14 is generated by the circuit of FIG. 17 as follows. Counter 110 will produce successive outputs of 0, 1, 2, 3, 0, 1, 2, 3 ... in response to the byte clock. Multiplier 112 will therefore produce the corresponding outputs 0, 2, 4, 6, 0, 2, 4, 6 ... The corresponding outputs of adder 114 and latch 116 are therefore 0 (0+0), 2(2+0), 6(4+2), 12(6+6), 12(0+12), 14(2+12), 5(4+1), 11(6+5) ... and the outputs of converter 118 are 0, 2, 6, 12, 12, 1, 5, 11 ... It will be seen that the latter outputs comprise the last and first rows respectively of the address signal matrix of FIG. 14 and that the remaining rows will be generated in a like manner. The output of converter 118, when used to address a memory such as linear memory 70 will therefore properly interleave the data bytes prior to transmission.

It will be appreciated that the invention is limited only as defined in the claims.

- 24 -

CLAIMS

1. Apparatus for convolutionally interleaving or deinterleaving a data signal, said apparatus including means for generating $[(B-1)N/2] + 1$ sequences of address signals, each of said sequences corresponding to a respective row of a B column matrix, the first column of said matrix comprising $[(B-1)N/2] + 1$ consecutively numbered values and each of the remaining columns comprising the preceding column rotated by a selected amount, where B and N are selected predetermined values, memory means having $[(B-1)N/2] + 1$ storage locations, and means for applying each of said address signals to said memory means for initially reading the data stored at the addressed memory location and for subsequently writing current data from said data signal into the addressed memory location.

2. The apparatus of claim 1 wherein said data signal comprises a plurality of successive data frames, each of said data frames comprising an integral number of R-S blocks featuring a predetermined number of data bytes, said value N being selected to have a value equal to or greater than said predetermined number.

3. The apparatus of claim 2 wherein said generating means comprises means for initiating generation of said address signal sequences in synchronism with said data frames.

4. The apparatus of claim 1, 2 or 3 wherein the first column of said matrix begins with or ends with a zero value.

5. The apparatus of claim 2 or 3 wherein said predetermined number is equal to 207 and N is equal to 208.

6. The apparatus of claim 5 wherein B is equal to 26 or 52.

7. The apparatus of claim 1, 2 or 3 wherein said generating means comprises means for generating said sequences of address signals such that each of said

- 25 -

remaining columns of said matrix comprises the preceding column rotated by a factor $(B-I)N/B$, where I is an index value which increases by unity from a value of 1 to a value of $(B-1)$ or from a value of $(B-1)$ to a value of 1 for each successive one of said remaining columns.

8. The apparatus of claim 7 wherein $N=208$ and $B=26$ or 52.

9. A circuit for convolutionally interleaving or deinterleaving a data stream comprising successive equal length blocks of R-S encoded data bytes, said circuit including a divide-by-B counter responsive to a byte clock signal for generating an output count, where B is a selected interleave depth, means for multiplying said output count by the factor N/B , where N is a value equal to or greater than the number of data bytes comprising said R-S blocks, a modulo $[(B-1)N/2] + 1$ converter, and a combining circuit for combining the output of said multiplying means and the output of said modulo converter and applying said combined signal to the input of said modulo converter.

10. A method of convolutionally interleaving or deinterleaving a stream of data bytes, said method including the steps of repeatedly developing a first predetermined sequence of numbers, developing a second sequence of numbers, at a lower rate, extending from a first number to a second number, combining each number of said second sequence of numbers with each of the numbers of said first sequence of numbers to generate a sequence of addresses to address memory locations, reading the stored data byte at each addressed memory location, and writing a new data byte to the same addressed memory location.

1 / 10

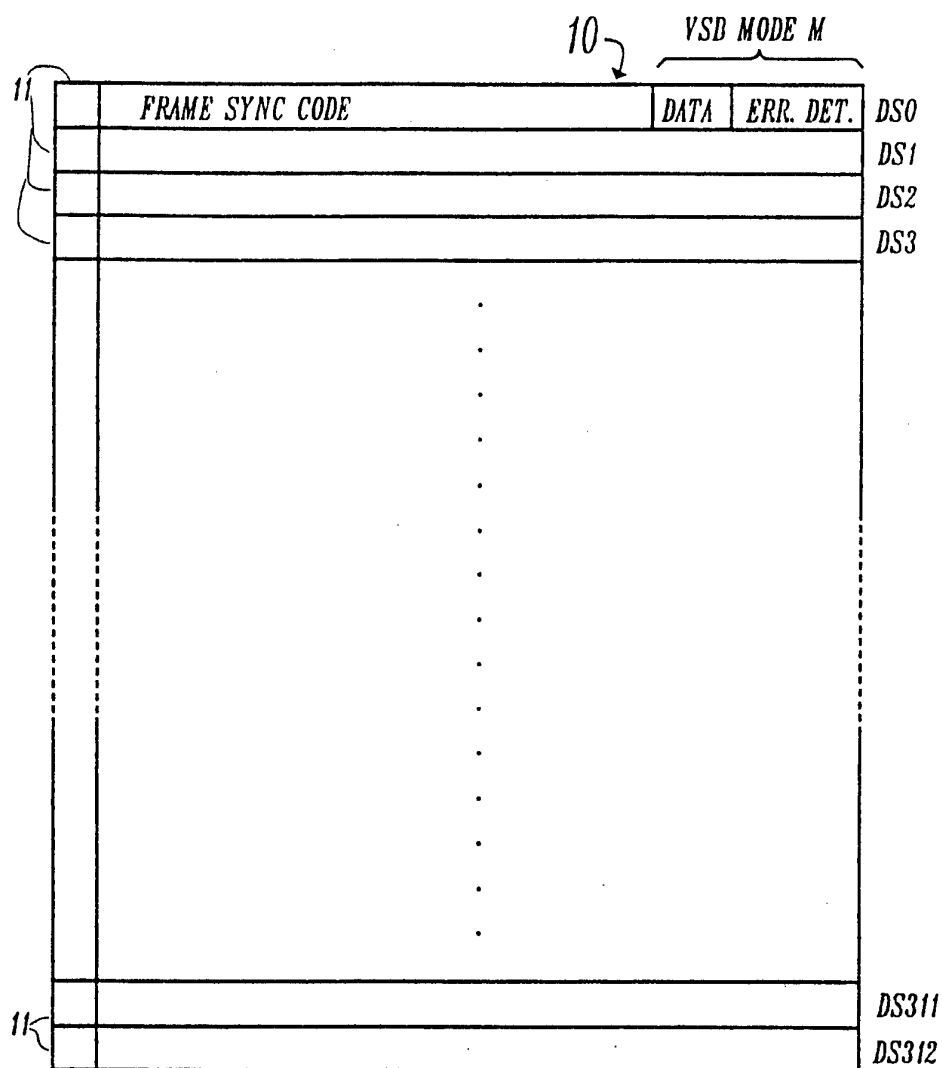


FIG. 1

FIG. 2

VSD MODE M	DATA SYMBOLS PER FRAME	DITS PER SYMBOL	DATA BYTES PER FRAME	RS BLOCKS PER FRAME	INTERLEAVE GROUPS PER FRAME (D=26)	INTERLEAVE GROUPS PER FRAME (D=52)
24	258,336	4.5	145,314	702	5589	-
16	258,336	4	129,168	624	4968	2484
8	258,336	3	96,876	468	3726	1863
4	258,336	2	64,584	312	2484	1242
2	258,336	1	32,292	156	1242	621

2/10

FIG. 3

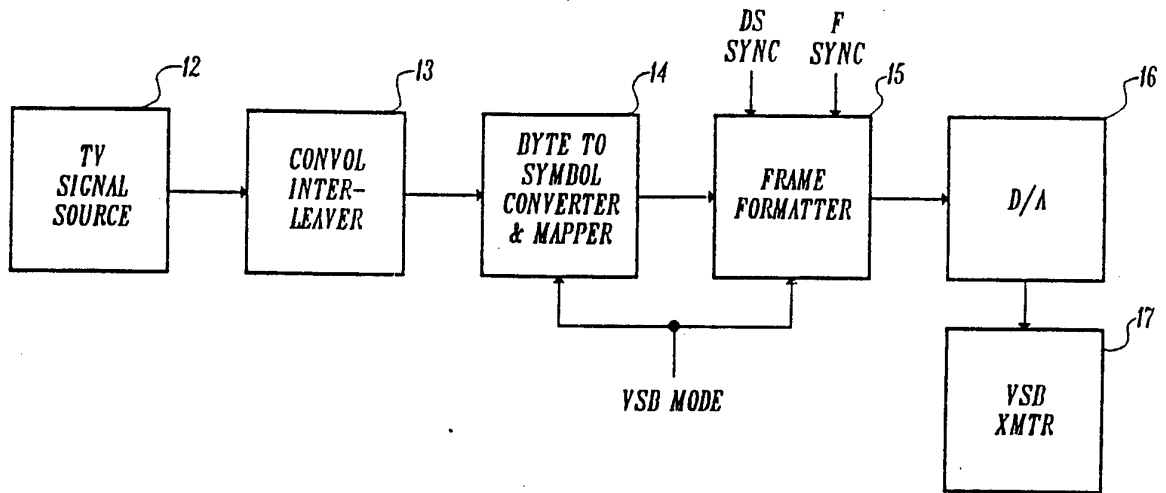


FIG. 4


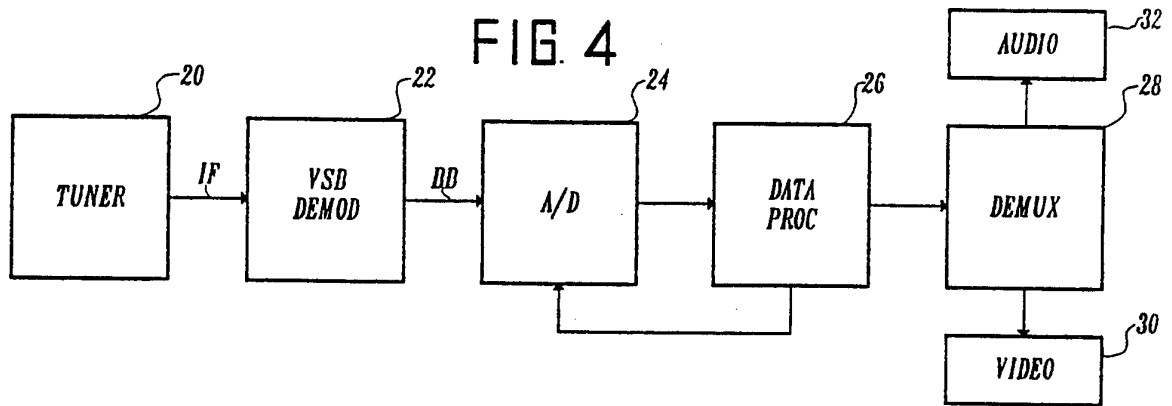


FIG. 5

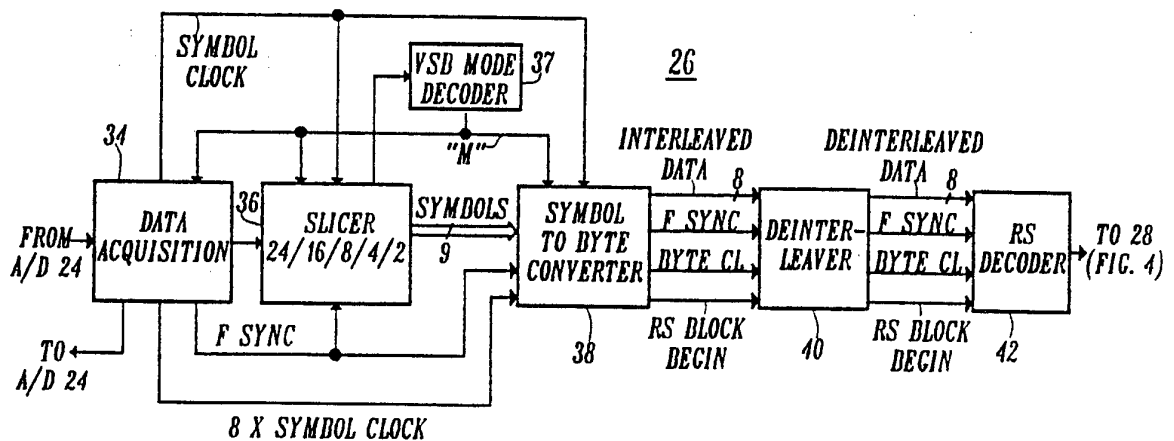


VSB MODE M=16	VSB MODE M=8	VSB MODE M=4	VSB MODE M=2
-----	-----	-----	-----
<u>1111</u> +120			
-----	<u>111</u> +112		
<u>1110</u> +104			
-----	-----	<u>11</u> +96	
<u>1101</u> +88			
-----	<u>110</u> +80		
<u>1100</u> +72			
-----	-----	-----	<u>1</u> +64
<u>1011</u> +56			
-----	<u>101</u> +48		
<u>1010</u> +40			
-----	-----	<u>10</u> +32	
<u>1001</u> +24			
-----	<u>100</u> +16		
<u>1000</u> +8			
-----	-----	-----	-----
<u>0111</u> -8			
-----	<u>011</u> -16		
<u>0110</u> -24			
-----	-----	<u>01</u> -32	
<u>0101</u> -40			
-----	<u>010</u> -48		
<u>0100</u> -56			
-----	-----	-----	<u>0</u> -64
<u>0011</u> -72			
-----	<u>001</u> -80		
<u>0010</u> -88			
-----	-----	<u>00</u> -96	
<u>0001</u> -104			
-----	<u>000</u> -112		
<u>0000</u> -120			
-----	-----	-----	-----

FIG. 3A

4 / 10


FIG. 3B

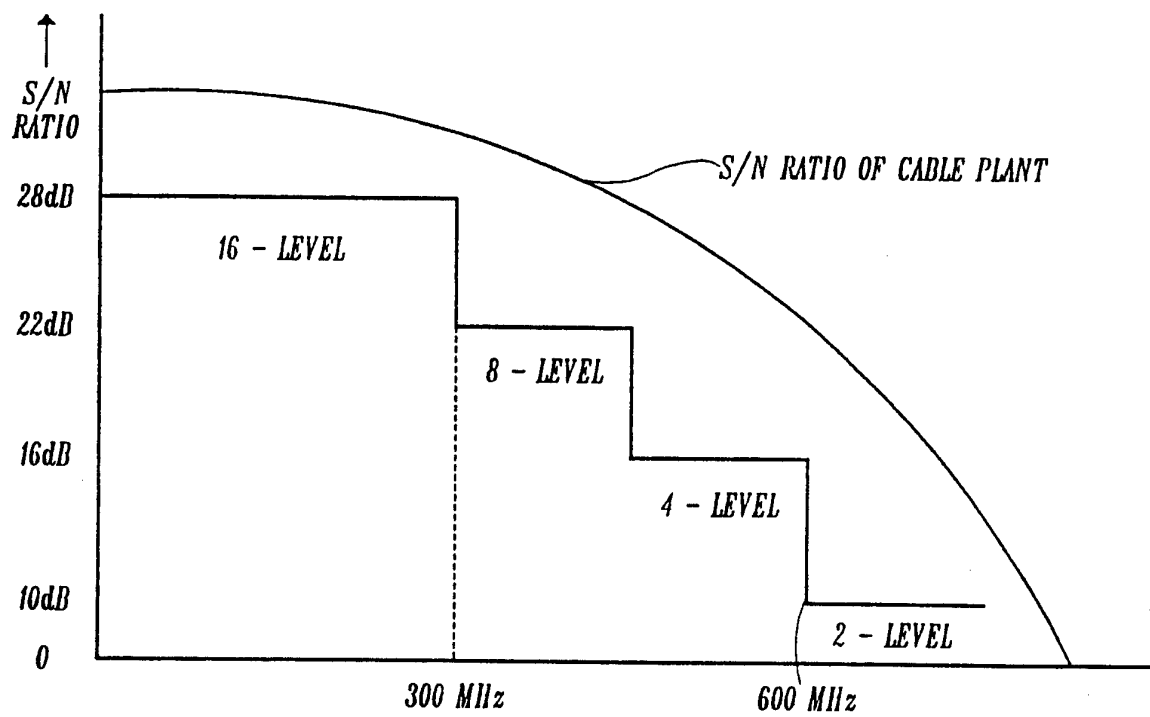

5/10

FIG. 6

SYMBOL TO BYTE CONVERTER 38

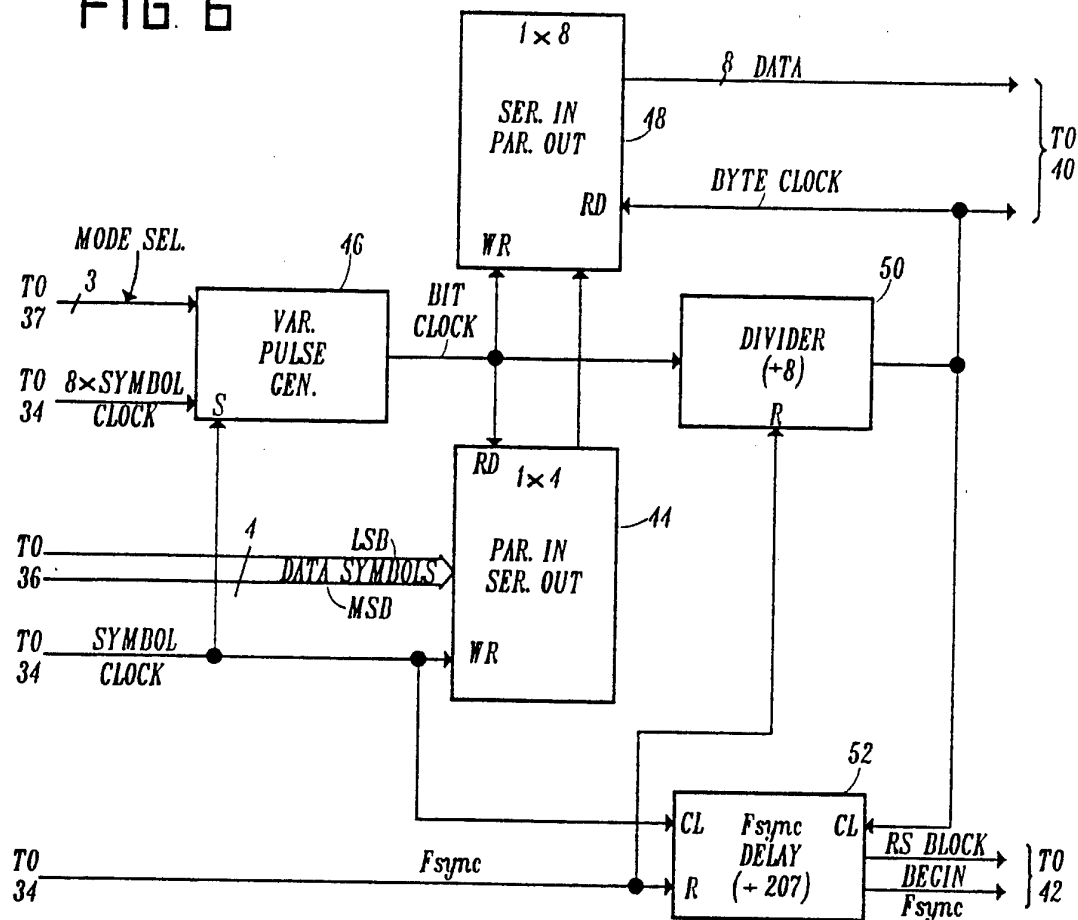

D=26, N=208

$B=4, N=8$


	1	2	3	4
1	0	7	3	1
2	1	8	4	2
3	2	9	5	3
4	3	10	6	4
5	4	11	7	5
6	5	12	8	6
7	6	0	9	7
8	7	1	10	8
9	8	2	11	9
10	9	3	12	10
11	10	4	0	11
12	11	5	1	12
13	12	6	2	0

FIG. 7

0	2401	-	-	-	-	-	-	-	-	1
1	2402	-	-	-	-	-	-	-	-	2
2	2403	-	-	-	-	-	-	-	-	3
,	,									,
,	,									,
,	,									,
,	,									,
,	,									,
,	,									,
,	,									,
,	,									,
,	,									,
,	,									,
,	,									,
,	,									,
2600										2600
										0

FIG. 9

FIG. 8

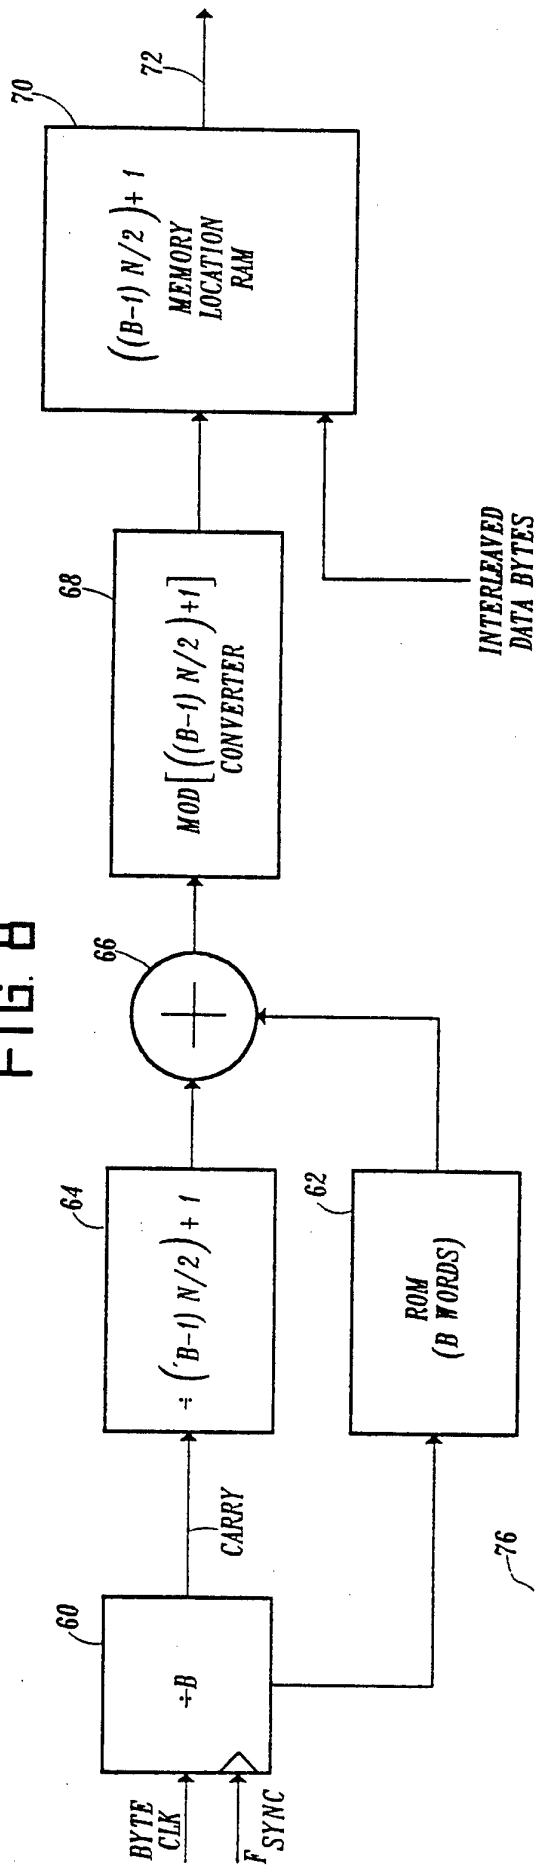

76

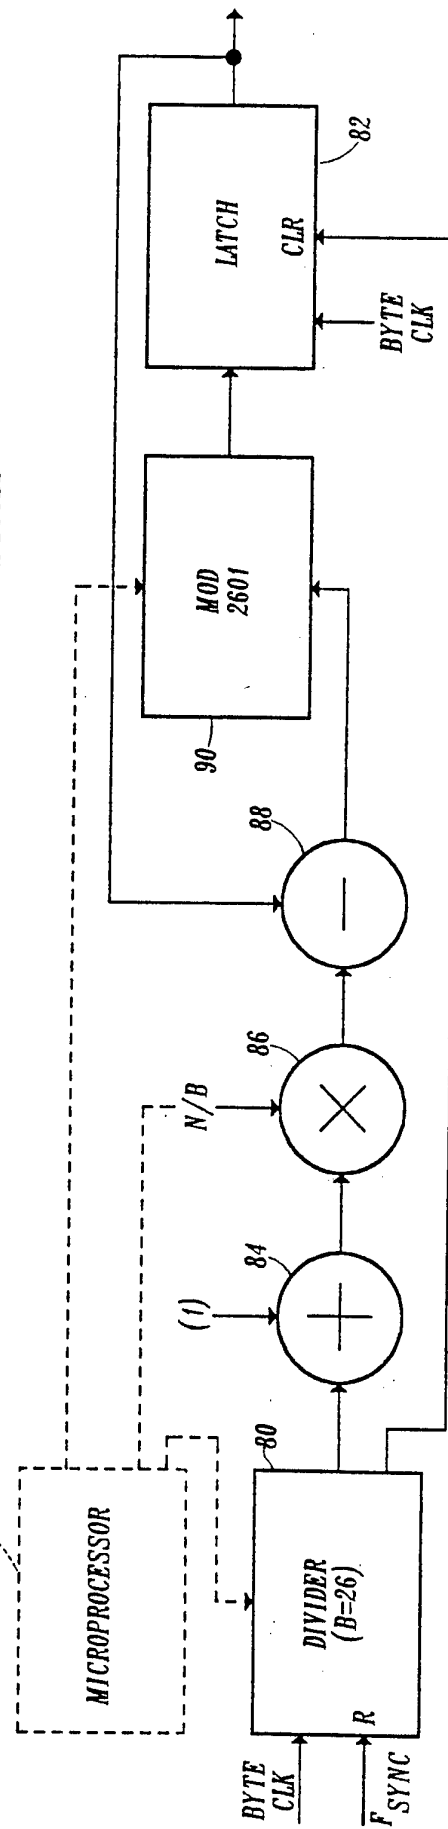


FIG. 12

7 / 10

 $B=52, N=208$

0	5101	-	-	-	-	-	-	-	-	-	1
1	5102	-	-	-	-	-	-	-	-	-	2
2	5103	-	-	-	-	-	-	-	-	-	3
,	,										,
,	,										,
,	,										,
,	,										,
,	,										,
,	,										,
,	,										,
,	,										,
,	,										,
,	,										,
,	,										,
,	,										,
5304	,										5304
											0

FIG. 10

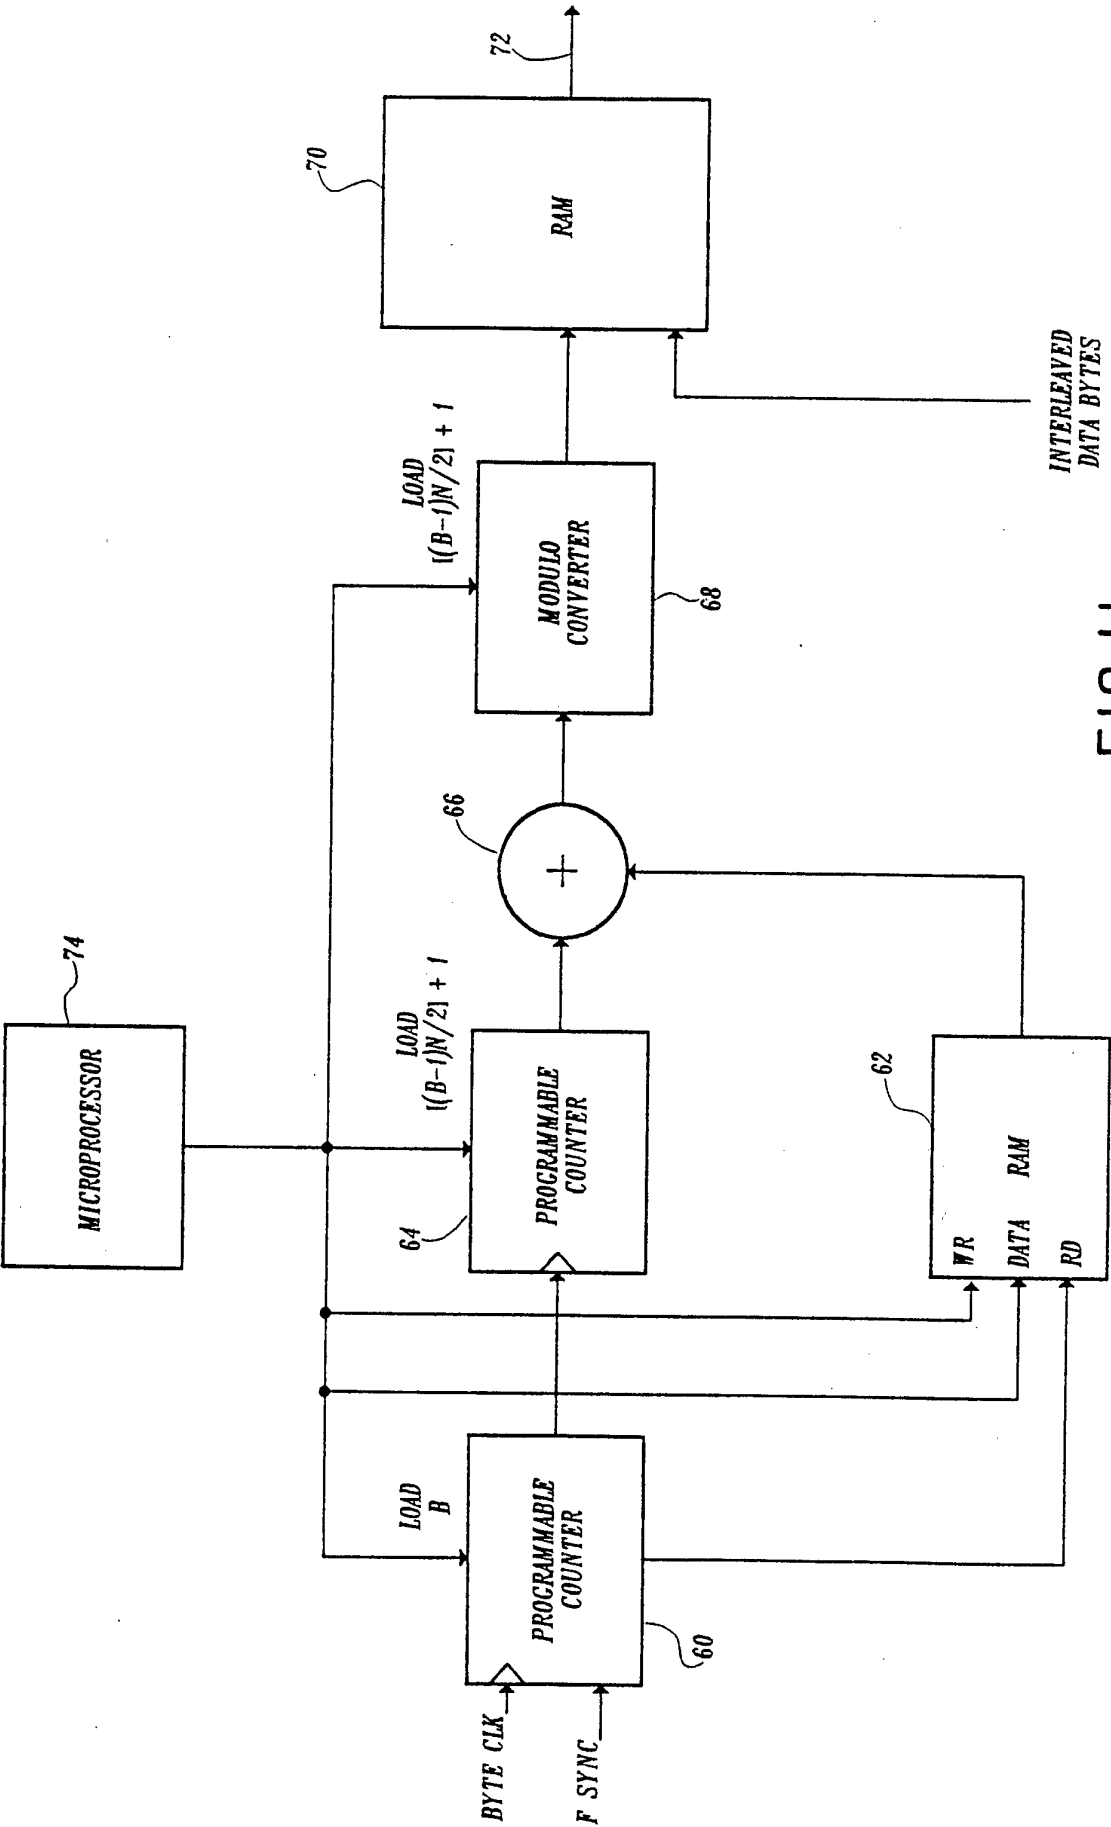


FIG. 11

9 / 10

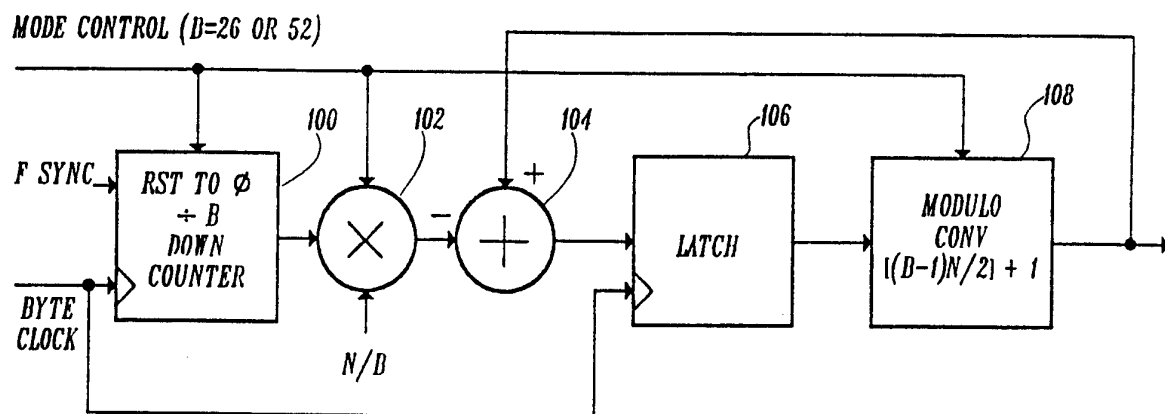


FIG. 13

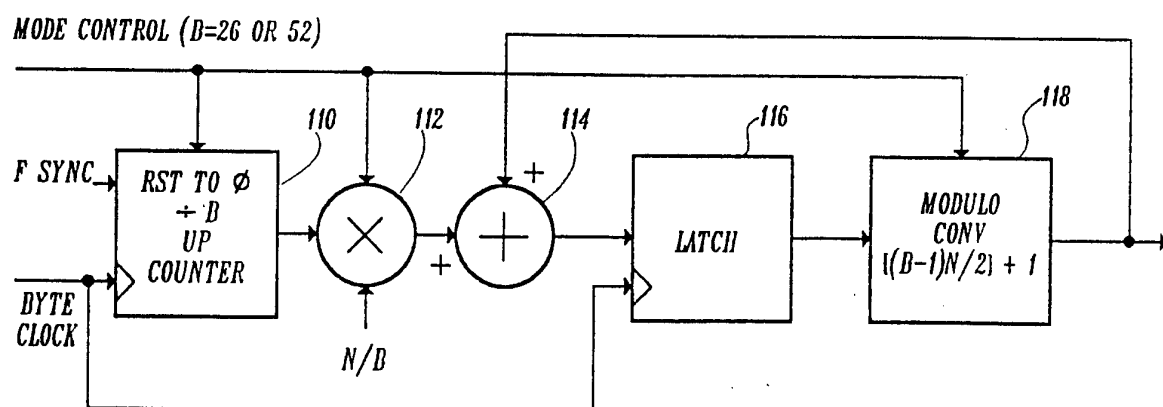


FIG. 17

10 / 10

 $B=26, N=208$

12	1	5	11
11	0	4	10
10	12	3	9
9	11	2	8
8	10	1	7
7	9	0	6
6	8	12	5
5	7	11	4
4	6	10	3
3	5	9	2
2	4	8	1
1	3	7	0
0	2	6	12

FIG. 14

[illegible]

FIG. 15

 $B=52, N=208$ [illegible]

FIG. 16

INTERNATIONAL SEARCH REPORT

Int: onal Application No

PCT/US 94/14628

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H03M13/22 H04N7/64

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H03M H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP,A,0 370 444 (ALCATEL TRANSMISSION; ALCATEL NV) 30 May 1990 see abstract see page 2, line 49 - page 3, line 10 ---	1-10
A	US,A,4 394 642 (CURRIE ROBERT J ET AL) 19 July 1983 see abstract; figure 8 ---	1-10
A	US,A,5 042 033 (COSTA TONY M) 20 August 1991 see abstract; figure 2 ---	1-10
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

19 April 1995

Date of mailing of the international search report

08.05.95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 cpo nl,
Fax: (+ 31-70) 340-3016

Authorized officer

Giannotti, P

INTERNATIONAL SEARCH REPORT

Int. l. Application No
PCT/US 94/14628

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	MILCOM 92, COMMUNICATIONS - FUSING COMMAND, CONTROL AND INTELLIGENCE, SAN DIEGO, OCT. 11 - 14, 1992, vol. 2/3, INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS, pages 799-804, XP 000346692 CHI D T 'A NEW BLOCK HELICAL INTERLEAVER' see the whole document ---	1-10
A	EP,A,0 405 673 (PHILIPS NV) 2 January 1991 see the whole document ---	1-10
A	EP,A,0 235 477 (THOMSON CSF) 9 September 1987 see abstract see column 3, line 43 - column 5, line 56 ---	1-10
A	EP,A,0 467 717 (MATSUSHITA ELECTRIC IND CO LTD) 22 January 1992 see abstract see page 3, line 14 - line 46 see figure 1 ---	1-10
A	MILCOM 89, BRIDGING THE GAP: INTEROPERABILITY, SURVIVABILITY, SECURITY, BOSTON, OCT. 15 - 18 1989, IEEE, vol. 1/3, pages 6-10, DARMON ET AL. 'A new pseudo-random interleaving for antijamming applications' see abstract ---	1-10
A	G.C.CLARK, J.B.CAIN 'Error correction coding for digital communication' 1981, NEW YORK see page 349 - page 342 -----	1-10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 94/14628

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
EP-A-0370444	30-05-90	FR-A-	2639781	01-06-90
		CA-A-	2003716	25-05-90
		DE-D-	68920830	09-03-95
		US-A-	5056105	08-10-91

US-A-4394642	19-07-83	NONE		

US-A-5042033	20-08-91	NONE		

EP-A-0405673	02-01-91	NL-A-	8901631	16-01-91
		JP-A-	3038125	19-02-91
		US-A-	5276827	04-01-94

EP-A-0235477	09-09-87	FR-A-	2592258	26-06-87
		DE-A-	3685434	25-06-92

EP-A-0467717	22-01-92	JP-A-	4265083	21-09-92
		JP-A-	4079616	13-03-92
		KR-B-	9411603	22-12-94
