



(86) Date de dépôt PCT/PCT Filing Date: 2006/08/10
(87) Date publication PCT/PCT Publication Date: 2007/02/22
(45) Date de délivrance/Issue Date: 2010/12/07
(85) Entrée phase nationale/National Entry: 2008/02/04
(86) N° demande PCT/PCT Application No.: JP 2006/316118
(87) N° publication PCT/PCT Publication No.: 2007/020948
(30) Priorité/Priority: 2005/08/12 (JP2005-234560)

(51) Cl.Int./Int.Cl. *B21D 51/26* (2006.01),
B65D 8/16 (2006.01)


(72) Inventeurs/Inventors:
KUBO, HIROSHI, JP;
KOJIMA, KATSUMI, JP;
NISHIHARA, YUKA, JP;
YASUE, YOSHIHIKO, JP;
IWASA, HIROKI, JP

(73) Propriétaire/Owner:
JFE STEEL CORPORATION, JP

(74) Agent: MOFFAT & CO.

(54) Titre : PROCÉDE DE FABRICATION DE BOITE EN DEUX PARTIES ET BOITE STATIFIÉE EN DEUX PARTIES

(54) Title: PROCESS FOR PRODUCING TWO-PIECE CAN AND TWO-PIECE LAMINATED CAN

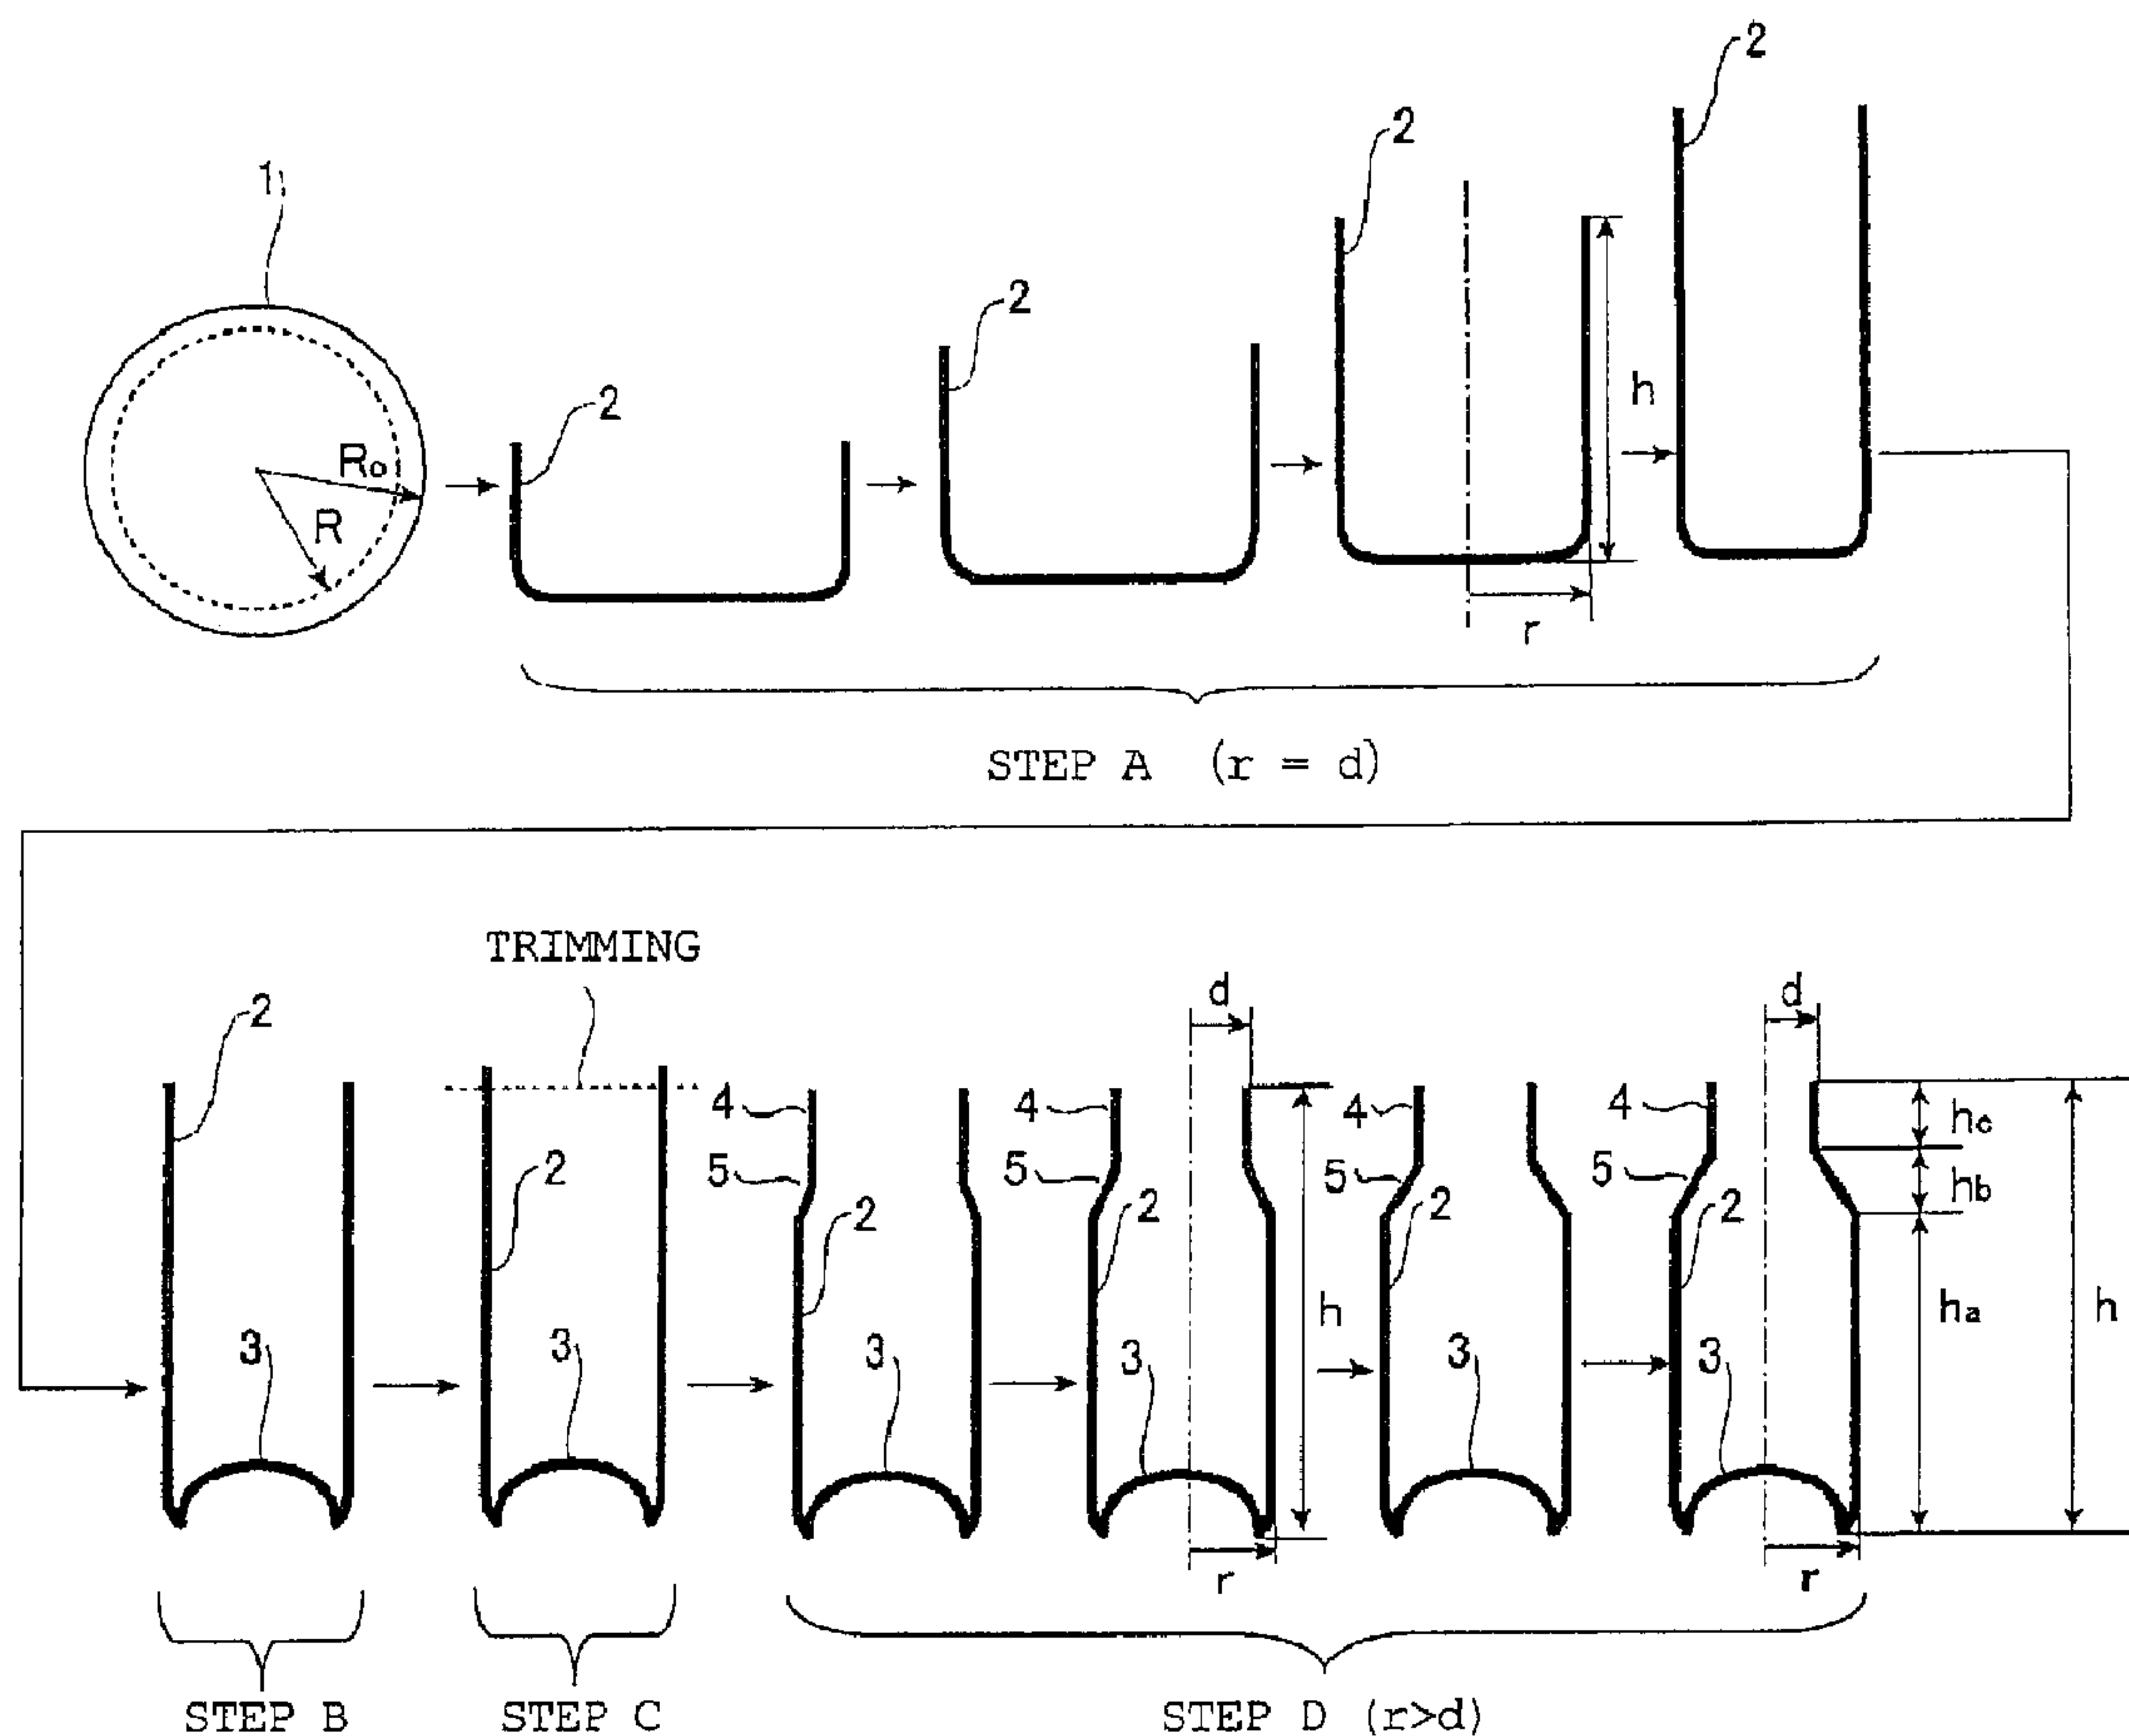

(57) Abrégé/Abstract:

In a method for producing a two-piece can, a circular disk of a laminated steel sheet having a thermoplastic resin coating layer is subjected to multistage forming to produce a final formed body having a height h , maximum radius r , and a minimum radius d (the

(57) **Abrégé(suite)/Abstract(continued):**

case where r is equal to d is also included). Forming is performed so that the height h , maximum radius r , and minimum radius d of the final formed body satisfy the relationship $0.1 \leq d/R \leq 0.25$ and $1.5 \leq h/(R - r) \leq 4$ with respect to a radius R of a circular disk before forming whose weight is equal to that the final formed body. At an intermediate stage of forming, a formed body is subjected to heat treatment at a temperature of not less than a melting point of a thermoplastic resin but not more than a temperature 30°C higher than the melting point.

ABSTRACT

In a method for producing a two-piece can, a circular disk of a laminated steel sheet having a thermoplastic resin coating layer is subjected to multistage forming to produce a final formed body having a height h , a maximum radius r , and a minimum radius d (the case where r is equal to d is also included). Forming is performed so that the height h , maximum radius r , and minimum radius d of the final formed body satisfy the relationships $0.1 \leq d/R \leq 0.25$ and $1.5 \leq h/(R - r) \leq 4$ with respect to a radius R of a circular disk before forming whose weight is equal to that the final formed body. At an intermediate stage of forming, a formed body is subjected to heat treatment at a temperature of not less than a melting point of a thermoplastic resin but not more than a temperature 30°C higher than the melting point.

- 1 -

DESCRIPTION**METHOD FOR PRODUCING TWO-PIECE CAN AND TWO-PIECE LAMINATED CAN****FIELD OF THE INVENTION**

The present invention relates to a method for producing a two-piece can of a high strain level, such as an aerosol can, and to a two-piece laminated can of a high strain level.

DESCRIPTION OF THE RELATED ARTS

Metal containers of aerosol are largely grouped into two-piece can and three-piece can. The two-piece can is a can structured by two segments, namely the can body integrated with can bottom and the can end. The three-piece can is a can structured by three segments, namely the can body, the top end, and the bottom end. The two-piece can has no seam (welded part) so that it gives beautiful appearance. However, the two-piece can generally requires high strain. Since the three-piece can has the seam, it is inferior in appearance to the two-piece can. The three-piece can, however, generally requires low strain.

Therefore, two-piece can is widely used for small capacity and high grade goods in the market, and the three-piece can is generally used for large capacity and low price goods.

The metal base material for aerosol two-piece can usually adopts expensive and thick aluminum sheet, and

- 2 -

rarely uses steel sheet base material such as inexpensive and thin sheet including tinplate and tin-free steel. The reason is that, since the aerosol two-piece can requires high strain, drawing and DI working are difficult to apply, while aluminum allows applying impact-molding applicable to soft metallic materials. In this situation, if the steel sheet base material such as tinplate and tin-free steel which are inexpensive and high strength even with a thin sheet thickness is applicable, the industrial significance becomes remarkably high.

Although there were many proposals of drawing and DI working methods of laminated steel sheet, there is no proposal of the method for manufacturing cans such as aerosol two-piece can of large drawing ratio and high elongation in the can height direction.

For example, Patent Documents 1 to 3 disclose the working methods for drawing and drawing-ironing for resin-laminated metal sheet. The strain level described in Patent Documents 1 to 3, (drawing ratio in Patent Documents 1 to 3), is lower than the range specified by the present invention. This is because Patent Documents 1 to 3 place the target to beverage cans, food cans, and the like, and beverage cans and food cans are the cans requiring lower strain than the range of strain level specified by the present invention.

Patent Documents 2 and 3 describe that, aiming to gain the prevention of delamination of resin layer and the barrier property after working, a heat treatment is applied during working and/or at an interim stage of working, or at

- 3 -

the final stage. Patent Document 2 uses an orientating thermoplastic resin, and Patent Document 3 uses a compound of saturated polyester and ionomer.

Patent Documents 4 and 5 describes methods of relaxing internal stress mainly by applying heat treatment at or above the melting point of the resin, and describe the application of heat treatment at a stage after the can-forming. The strain level of the can is low suggested by the detail description and by the description of examples.

Patent Document 2 proposes heat treatment in order to relax the internal stress and to enhance the orientation crystallization, which method has become common to beverage can and the like. Although Patent Document 2 does not give detail description, the temperature of heat treatment is presumably at or below the melting point since the orientation crystallization is accelerated at or below the melting point. The description and the examples of Patent Document 2 show that the strain level is lower than the strain level specified by the present invention.

[Patent Document 1] Examined Japanese Patent Publication No. 7-106394

[Patent Document 2] Japanese Patent No. 2526725

[Patent Document 3] Japanese Patent Laid-Open No. 2004-148324

[Patent Document 4] Examined Japanese Patent Publication No. 59-35344

[Patent Document 5] Examined Japanese Patent Publication No. 61-22626

- 4 -

The conventional technologies did not propose the method for manufacturing can such as aerosol two-piece can using laminated steel sheet applying high strain. To this point, the inventors of the present invention fabricated two-piece cans using laminated steel sheet applying high strain of the steps of drawing-ironing of the laminated steel sheet to form into a shape of cylinder integrated with bottom, followed by diametral reduction in the vicinity of opening of the cylinder, and found the occurrence of problems characteristic to high strain, specifically the problem of delamination and fracture of resin layer. Investigations of the inventors of the present invention revealed the effectiveness of the heat treatment in qualitative view. However, sole heat treatment was not sufficient, and the delamination of resin layer unavoidably appeared in a zone of high strain. As a result, simple application of related art could not solve the problem of delamination of the resin layer. In addition, there appeared a problem of deterioration of formability of the resin layer during the forming after the heat treatment.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a method for producing a two-piece can in which delamination and fracture of a laminate resin layer can be prevented even when a can body of a high strain level such as an aerosol

-5-

two-piece can is produced.

It is another object of the present invention to provide a can body of a high strain level such as an aerosol two-piece can using a laminated steel sheet.

5 The present invention is based on the finding that, in a high strain level forming required for aerosol two-piece cans, instead of performing continuous forming until the last stage, heat treatment should be performed under particular conditions at an intermediate stage of forming where a strain level is within a specified range so that
10 delimitation and fracture of the resin in the subsequent forming can be suppressed.

To achieve the objects, the present invention provides a method for producing a two-piece can, comprising
15 subjecting a circular disk of a laminated steel sheet having a thermoplastic resin coating layer to multistage forming to form a final formed body having a height h , a maximum radius r , and a minimum radius d , characterized by comprising:
forming the circular disk so that the height h , maximum radius r , and the minimum radius d of the final formed body
20 satisfy the relationships $d \leq r$, $0.1 \leq d/R \leq 0.25$ and $1.5 \leq h/(R-r) \leq 4$ with respect to a radius R of the circular disk, before forming, having the same weight to that of the final formed body; and during the forming, subjecting a formed body to heat treatment at a temperature in a range from a melting
25 point of the thermoplastic resin to the melting point plus 30°C .

The heat treatment may be performed a plurality of times during the forming.

30 The heat treatment preferably comprises the method for producing the two-piece can according to claim 1, wherein

-6-

the heat treatment comprises heating the formed body to a temperature in a range from the melting point of the thermoplastic resin to the melting point plus 30°C in an intermediate forming stage where a height h , a maximum radius r , and a minimum radius d of the formed body at the intermediate stage satisfy relationships $d \leq r$, $0.2 \leq d/R \leq 0.5$ and $1.5 \leq h/(R-r) \leq 2.5$ with respect to the radius R .

The heat treatment in the intermediate forming stage may be performed a plurality of times.

The heat treatment is preferably performed for 15 to 120 seconds.

Furthermore, the steel sheet is preferably cooled to a temperature not more than the glass transition point T_g of the thermoplastic resin within 10 seconds from completion of the heat treatment.

- 7 -

The thermoplastic resin in the thermoplastic resin coating layer described above is preferably a polyester resin.

The polyester resin is preferably obtained by polycondensation of a dicarboxylic acid component and a diol component. The dicarboxylic acid component preferably contains terephthalic acid as a main component, and the diol component preferably contains ethylene glycol and/or butylene glycol as a main component. The dicarboxylic acid component preferably further contains isophthalic acid component as a comonomer, and the diol component preferably further contains diethylene glycol and/or cyclohexanediol as a comonomer.

The thermoplastic resin is preferably obtained by polycondensation of a dicarboxylic acid component and a diol component. The dicarboxylic acid component preferably contains terephthalic acid as a main component, and the diol component is preferably a mixed resin in which a main phase composed of a polyester containing ethylene glycol and/or butylene glycol as a main component and an auxiliary phase dispersed in the main phase and composed of a resin incompatible with the main phase and having a glass transition point (T_g) of 5°C or less are mixed.

The dicarboxylic acid component preferably further contains an isophthalic acid component as a comonomer,

- 8 -

and the diol component preferably further contains diethylene glycol and/or cyclohexanediol as a comonomer.

The auxiliary phase is preferably at least one type of resin selected from a polyethylene, a polypropylene, an acid-modified polyethylene, an acid-modified polypropylene, and an ionomer.

The thermoplastic resin coating layer preferably has a plane orientation factor of 0.06 or less.

The method for producing the two-piece can according to the present invention preferably comprises following:

step (A) of drawing a disk-shaped blank to form a bottomed cylindrical formed body having a radius r of a can outer surface;

dome-forming step (B) of raising a bottom part of the formed body to give an upward concave shape so as to form a dome-shaped part;

step (C) of trimming an opening-side end part of the formed body; and

step D of subjecting the opening of the formed body to diametral reduction to bring the opening-side of the formed body to a radius d of the can outer surface, thus obtaining a final formed body.

The present invention also provide a two-piece can laminate can produced by the method for producing the two-piece can described above.

- 9 -

BRIEF DESCRIPTION OF THE DRAWING

Fig. 1 is a diagram describing one embodiment of production method of a can body according to the present invention.

EMBODIMENTS FOR CARRYING OUT THE INVENTION

Fig.1 illustrates an embodiment of the manufacturing process of the can according to the present invention. A circular blank is formed into a formed body in a shape of cylinder integrated with bottom by drawing (including DI forming). The vicinity of opening of the formed body is subjected to diametral reduction to produce a two-piece can with a diametral reduction part in the vicinity of the opening.

In Fig.1, the reference symbol 1 is the circular disk blank (blank sheet) before forming, 2 is the straight wall part as the base part of the formed body, (in the step D, straight wall part not being worked by diametral reduction), 3 is the dome-shaped part, 4 is the straight wall part at the neck-shaped part being worked by diametral reduction, and 5 is the taper-shape part, or the tapered wall part after worked by diametral reduction.

First, the circular disk blank 1 is subjected to one or plurality steps of drawing (including DI forming) to form a formed body in a shape of cylinder integrated with

- 10 -

bottom, having a specified can diameter (radius r : radius of outer face of can), (Step A). Then, the bottom part of the formed body is subjected to dome-forming, or to form into an upward convex shape to form the dome-shaped part 3, (Step B). Further the edge of the opening of the formed body is trimmed, (Step C). Next, the opening of the formed body is subjected to one or pluralities of stages of diametral reduction to bring the opening side of the formed body to a specified can diameter, (radius d : radius of the can outer face), thus obtaining the desired final formed body (two-piece can). In Fig. 1, the reference symbol R_0 is the radius of the circular disk blank 1 before forming, and h , r , and d are the height, the maximum radius, and the minimum radius of the formed body during forming or of the final formed body, respectively, and R is the radius of the circular disk, before forming, having equal weight to that of the final formed body. According to the manufacturing process of the two-piece can, Step A gives the maximum radius equal to the minimum radius, or $r = d$, while Step D gives $r > d$.

The radius R of the circular disk, before forming, having the same weight to that of the final formed body is determined based on the measured weight of the final formed body. That is, the weight of the final formed body is measured, and the size (radius) of the circular disk, before forming, having the same weight to the measured weight is determined, which determined size is used as the radius R of the circular disk, before forming, having the

- 11 -

same weight to that of the final formed body. The can edge part is trimmed during the can manufacturing process.

Since, however, the radius R of the circular disk, before forming, having the same weight to that of the final formed body eliminates the effect of the trimming, more suitable evaluation of the strain is available.

On the two-piece can which is fabricated by above drawing (including DI working) and diametral reduction applying to the circular disk blank, the resin layer is elongated in the height direction and is compressed in the circumferential direction. When the strain level is high, the deformation of resin becomes large, which leads to fracture of the resin layer. According to the present invention, the index of strain level adopts not only the parameter d/R representing the degree of compression but also the parameter $[h/(R - r)]$ relating to the elongation in the can height direction because the expression of strain level in a high strain zone needs to consider the elongation in addition to the drawing ratio. That is, by specifying the strain level by both the degree of compression and the degree of elongation, the degree of deformation of the resin layer is quantified. By elongation in the height direction and compression in the circumferential direction, the resin layer tends to delaminate, thus the elongation in the height direction becomes an important variable adding to the degree of compression.

According to the present invention, the strain level

- 12 -

of finally manufactured can (final formed body) is specified so as the relation of the height h of final formed body, the maximum radius r thereof, the minimum radius d thereof, and the radius R of circular disk, before forming, having the same weight to that of the final formed body, to satisfy $[0.1 \leq d/R \leq 0.25]$ and $[1.5 \leq h/(R - r) \leq 4]$.

As described before, the object of the present invention is to allow laminated steel sheet to manufacture high strain level of can which was difficult to be achieved by conventional technologies. Conventional technologies were difficult to manufacture high strain level of can that satisfies both the parameter d/R specifying the degree of compression not higher than 0.25 and the parameter $[h/(R - r)]$ specifying the degree of elongation not smaller than 1.5 using laminated steel sheet. Consequently, the present invention specifies the strain level d/R of the manufacturing can to 0.25 or less, and specifies $[h/(R - r)]$ to 1.5 or more.

If the strain level is high to give the parameter d/R specifying the degree of compression not higher than 0.1 or the parameter $[h/(R - r)]$ specifying the degree of elongation exceeding 4, the number of forming stages increases even if the forming is available, or the sheet elongation reaches the limit by the progress of work hardening, which causes the sheet fracture problem. Therefore, the present invention specifies the strain level of manufacturing can to $[0.1 \leq d/R]$ and $[h/(R - r) \leq 4]$.

- 13 -

The multiple stage forming as a target of the present invention is any of drawing, drawing-ironing, diametral reduction, and combination of them. If the diametral reduction is included in the working, the size d of the final formed body is $[r > d]$. If the diametral reduction is not included, the size of the final formed body is $[r = d]$, (r and d are the radius of final formed body).

The present invention specifies the laminated steel sheet with resin laminate as the metal sheet of base material.

Steel sheet is selected as the base metallic material because steel is more inexpensive and is superior in economy to aluminum. The steel sheet can be ordinary tin-free steel or tinplate. Tin-free steel preferably has a metal chromium layer of 50 to 200 mg/m² of surface coating weight and a chromium oxide layer of 3 to 30 mg/m² of coating weight as metal chromium. Tinplate preferably has 0.5 to 15 g/m² of plating. The sheet thickness is not specifically limited, and that in a range from 0.15 to 0.30 mm, for example, is applicable. If no economic consideration is needed, the technology can simply apply also to aluminum base material.

The reason for limiting to the resin layer to the thermoplastic resin is because the resin layer must follow the forming, and thermosetting resins are difficult to use. Among thermoplastic resins, polyesters are particularly preferable. This is because they achieve a good balance

- 14 -

between the elongation and the strength. Although olefin resins are usable, those olefin resins which have a low strength are not suited for ironing and are preferably used in a method in which no ironing is performed.

The forming region targeted by the present invention is a high forming region in which the strain level is higher than the related art, that is, a region in which the compression in the circumferential direction is large. The film is not only compressed significantly in the circumferential direction but also elongated significantly in the height direction; thus, the thickness changes, resulting in three-dimensional deformation. In forming in the high-strain level region, delamination of the resin layer is inevitable due to a sharp increase in internal stresses unless heat treatment is performed in the course of forming. Although it is effective for high strain forming to perform heat treatment in the course of forming, the formability is degraded as a result by orientation crystallization. In particular, when the elongation in the height direction and the compressive deformation in the circumferential direction are large, orientation of the resin increases in the height direction. As the orientation progresses, internal stresses increase and the film becomes more easily delaminate, and as the bonding force in the circumferential direction decreases, the likelihood of film

- 15 -

fracture increases.

The heat treatment provided in the present invention relaxes the internal stresses generated by forming so that the forming in the subsequent step can be carried out. In particular, the heat treatment is performed to recover the adhesion force and reduce orientation. The objective of the heat treatment in the related art described above is to relax the internal stresses or promote orientation, and this idea of the related art is completely opposite of the idea of the present invention.

As the forming progresses, the resin layer becomes more and more oriented in the forming direction and the formability is degraded as a result. In order to prevent this, the resin layer is heated at a temperature not less than the melting point of the thermoplastic resin so that the resin layer enters a non-oriented state (or a state close to a non-oriented state). As a result of the forming, internal stresses accumulate in the resin layer. To put it simply, the accumulated internal stresses are the force that renders the layer compress when the layer is elongated or elongate when the layer is compressed. The resin layer is urged by this force to deform but cannot deform because the resin layer is adhered on the base metal sheet. Accordingly, if the adhesion force is weak, the resin will delaminate due to this force. On the contrary, if the internal stresses

- 16 -

are so large that the layer cannot be supported by the adhesion force, the resin layer will delaminate. By conducting heat-treatment at a temperature not less than the melting point of the resin, this can be moderated as the molecules become rearranged.

The upper limit temperature of the heat treatment is limited to a temperature 30°C higher than the melting point of the polyester resin. This is because when the temperature exceeds a temperature 30°C higher than the melting point, the film surface becomes rough, and not only appearance is degraded as a result but also the formability in the subsequent steps is adversely affected. By conducting the heat treatment, the resin regains the formability and can be made suitable for the forming in the subsequent steps.

In the present invention, the timing of the heat treatment is preferably an intermediate forming stage where the height h , the maximum radius r , and the minimum radius d (the case where r is equal to d is also included) of the formed body at an intermediate stage satisfy relationships $0.2 \leq d/R \leq 0.5$ and $1.5 \leq h/(R - r) \leq 2.5$ with respect to the radius R . When the strain level is within this range, the heat treatment is most effective from the viewpoint of preventing the fracture and delamination of the resin layer. In other words, if the heat treatment is conducted at the

- 17 -

stage involving a low strain level, the above-described effects are small because the relaxation of the internal stresses is conducted at the stage where the internal stresses are not high. Moreover, orientation crystallization is accelerated and formability is degraded. Furthermore, if the heat treatment is conducted at a stage involving an excessively high strain level, the adhesion force is decreased, and delamination may occur as a result, which sometime makes the timing of the heat treatment too late. The upper and lower limits of the strain level are specified as above from these viewpoints.

The heat treatment may be conducted in one or both of Step A and Step D of the method shown in Fig. 1. With respect to the timing of the heat treatment described above, the reason why the case in which R is equal to d is included is because, in the can production method including diametral reduction, the heat treatment can be performed in Step A, and, in the can production method not including diametral reduction, r is equal to d . The heat treatment may be conducted two or more times in two or more intermediate stages if there is necessity of relaxing the internal stresses.

In the present invention, it is preferable to cool the steel sheet to a temperature not more than the glass transition point T_g of the thermoplastic resin within 10

- 18 -

seconds from the completion of the heat treatment. This is to avoid formation of spherulites during the cooling step. When the cooling rate is low, there is a greater tendency of development of spherulites in the resin. Since the spherulites degrade formability, the steel sheet is cooled to a temperature not more than glass transition point T_g within 10 seconds from the completion of the heat treatment depending on the strain level and the purpose of use.

The method of heat treatment is not particularly limited. It has been confirmed that similar effects can be obtained from electrical furnaces, gas ovens, infrared furnaces, induction heaters, and the like. Moreover, the heating rate and the heating time may be adequately selected according to the effects. The efficiency is higher when the heating rate is high. The heating time is typically about 15 second to 60 seconds but is not limited to this range. The heating time may be adequately selected according to the effect.

If the cooling rate after completion of the heat treatment is low, spherulites may grow in the resin. The spherulites degrade the formability. In order to prevent formation of spherulites during cooling, it is preferable to quench the steel sheet to a temperature not more than the glass transition point T_g within 10 seconds from the completion of the heat treatment.

- 19 -

It was found that in order for the resin layer to follow the deformation at a high strain level, the initial orientation of the laminated steel sheet is also important. That is, while a film prepared by biaxial stretching or the like is oriented in a planar direction, if the film retains highly oriented state even after lamination, the film cannot follow the forming, thereby possibly resulting in fracture. From this viewpoint, the plane orientation factor of the resin layer is preferably 0.06 or less in the present invention. Since the heat treatment provided in the present invention extinguishes (or moderates) the orientation of the resin layer, working is possible even when the plane orientation factor is higher than the defined value depending on the timing of the heat treatment. However, in such a case, the timing of the heat treatment must be made earlier, and thus the efficiency is low. From these standpoints, the plane orientation factor is preferably 0.06 or less.

In order to form such a laminated steel sheet by using a biaxially stretched film having a high plane orientation factor, the temperature during lamination should be increased so that the oriented crystals are thoroughly melted. Alternatively, a film formed by extrusion has nearly no orientation and is thus preferable from this standpoint. Similarly, a direct lamination method by which

- 20 -

molten resin is directly laminated with a steel sheet is preferable for the same reason.

For the laminated steel sheet provided in the present invention, from the standpoints of the elongation and strength required for forming, the polyester resin is preferably a resin obtained by polycondensation of a carboxylic acid component and a diol component, in which the dicarboxylic acid component contains terephthalic acid as the main component and optionally an isophthalic acid component as another comonomer and in which the diol component contains ethylene glycol and/or butylene glycol as the main component and optionally diethylene glycol and/or cyclohexanediol as another comonomer.

Alternatively, the resin layer is preferably a mixed resin containing a main phase composed of the above-described resin and an auxiliary phase dispersed in the main phase, the auxiliary phase being composed of a resin incompatible with the main phase and having a glass transition point (T_g) of 5°C or less. In the case where the resin dispersed in the main phase has a glass transition point exceeding 5°C , the resin may not easily deform when subjected to working. However, in the case where a resin having a glass transition point of 5°C or less is used, the resin easily deforms by forming and the adhesion of the resin layer after the working can be improved.

- 21 -

At least one selected from a polyethylene, a polypropylene, an acid-modified polyethylene, an acid-modified polypropylene, and an ionomer can be used as the dispersed resin incompatible with the main phase and having a glass transition point (T_g) of 5°C or less.

If the volume ratio of the auxiliary phase in the mixed resin in which the main phase and the auxiliary phase are mixed is less than 3 vol%, the effect of the auxiliary phase cannot be sufficiently expressed, and at a ratio exceeding 30 vol%, the auxiliary phase grains cannot stably exist in the resin layer. Thus, the volume ratio of the auxiliary phase in the mixed resin is preferably 3 vol% or more and 30 vol% or less.

The laminated steel sheet of the present invention may be used while adding additives such as a pigment, a lubricant, a stabilizer, or the like, in the resin layer. Alternatively, another resin layer having another function may be provided in addition to the resin layer of the present invention so that this another resin layer is disposed on the resin layer or as an intermediate layer between the resin layer and the base steel sheet.

The thickness of the resin layer is not particularly limited but is preferably in $10\text{ }\mu\text{m}$ or more and $50\text{ }\mu\text{m}$ or less. This is due to the following reasons. In the case of film lamination, the cost of film less than $10\text{ }\mu\text{m}$ is usually high.

- 22 -

The formability can be improved as the film thickness increases but the cost also increases. At a thickness exceeding 50 μm , the contribution to the formability is saturated and cost is high.

In the laminated steel sheet provided by the present invention, at least one surface of the steel sheet should be coated with the resin layer provided by the present invention.

Furthermore, the lamination method for the steel sheet is not particularly limited. Any suitable method such as heat lamination in which a biaxially stretched film or an unstretched film is thermally press-bonded or extrusion in which a resin layer is directly formed on the steel sheet using a T-die or the like may be employed. It has been confirmed that satisfactory effects can be obtained in either case.

EXAMPLE 1

Examples of the present invention will now be described.

"Preparation of Laminated steel sheet"

A 0.20 mm-thick T4CA, TFS (metallic chromium layer: 120 mg/m^2 , chromium oxide layer: 10 mg/m^2 on metallic chromium basis) was used as the substrate metal sheet. Various resin layers were formed on this sheet by a film lamination technique (heat lamination method) and a direct lamination

- 23 -

method (direct extrusion method). As for the film lamination, two types of films, a biaxially oriented film and a non-oriented film, were used. Films each having a thickness of 25 μm were laminated on both sides of the metal sheet.

The plane orientation factor of the laminate film on the laminated steel sheet prepared as above was calculated by the method below.

"Measurement of Plane orientation factor"

Abbe's refractometer was used to determine the refractive index under the condition of: light source of sodium/D ray; intermediate liquid of methylene iodide; and temperature of 25°C. The determined refractive indexes were N_x in the machine direction, N_y in the transverse direction, and N_z in the thickness direction of the film. Then, the plane orientation factor N_s was calculated by the following formula.

$$\text{Plane orientation factor } (N_s) = (N_x + N_y)/2 - N_z$$

The method for producing the laminated steel sheet and the details of the laminated steel sheet fabricated are shown in Table 1. The types of resins described in Table 1 are as follows:

PET: polyethylene terephthalate

PET-I (5): polyethylene terephthalate-isophthalate

- 24 -

copolymer (isophthalic acid copolymerization ratio: 5 mol%)

PET-I (12): polyethylene terephthalate-isophthalate
copolymer (isophthalic acid copolymerization ratio: 12 mol%)

PET-PBT (60): polyethylene terephthalate-butylene
terephthalate copolymer (butylene terephthalate
copolymerization ratio: 60 mol%)

PET-DEG: polyethylene terephthalate-diethylene glycol
copolymer

PET-CHDM: polyethylene terephthalate-cyclohexanediol
copolymer

PBT: polybutylene terephthalate

PET-PE: PET is the main phase and polyethylene (Tg: -
125°C) is the auxiliary phase, where the polyethylene
content is 15 vol%.

PET-PP: PET is the main phase and polypropylene (Tg: -
20°C) is the auxiliary phase, where the polypropylene
content is 13 vol%.

PET-IO: PET is the main phase and ionomer (ethylene-
unsaturated carboxylic acid copolymer neutralized with Zn,
Tg: -30°C or lower) is the auxiliary phase, where the
ionomer content is 14 vol%.

The lamination methods are the following.

Heat lamination method 1: A film prepared by the
biaxial orientation method was thermocompressed on a steel
sheet which was heated to [the melting point of resin +

- 25 -

10°C] using a nip roll. Then the film was cooled within 7 seconds by water.

Heat lamination method 2: A non-oriented film was thermocompressed on a steel sheet which was heated to [the melting point of resin + 10°C] using a nip roll. Then the film was cooled within 7 seconds by water.

Direct extrusion method: Resin pellets were kneaded and melted in an extruder, which were then extruded through a T-die to laminate onto a running steel sheet. The steel sheet with the resin laminate was nip-cooled on a cooling roll at 80°C, and was further cooled by water.

The lamination techniques were as follows.

A coated steel sheet of a comparative example was formed by applying an epoxy thermosetting resin and heating the steel sheet at 220°C for 10 minutes to form a coating having a thickness of 8 µm.

Table 1

Sample steel sheet No.	Type of resin	Melting point °C	Lamination method	Plane orientation factor	Remarks
A1	PET-I (12)	228	Heat lamination method 1	0.02	Invention steel sheet example
A2	PET-I (5)	245	Heat lamination method 1	0.02	Invention steel sheet example
A3	PET	258	Heat lamination method 1	0.02	Invention steel sheet example
A4	PET-PBT(60)	251	Heat lamination method 1	0.02	Invention steel sheet example
A5	PBT	220	Heat lamination method 1	0.02	Invention steel sheet example
A6	PET-I (12)	228	Heat lamination method 1	0.04	Invention steel sheet example
A7	PET-PE	258	Heat lamination method 1	<0.01	Invention steel sheet example
A8	PET-PP	258	Heat lamination method 1	<0.01	Invention steel sheet example
A9	PET-IO	258	Heat lamination method 1	<0.01	Invention steel sheet example
A10	PET-I (12)	228	Heat lamination method 2	0.02	Invention steel sheet example
A11	PET-I (12)	228	Direct Extrusion method	0.02	Invention steel sheet example
A12	PET-I (12)	228	Heat lamination method 1	0.06	Invention steel sheet example
A13	PET-PBT(60)	251	Heat lamination method 2	<0.01	Invention steel sheet example
A14	PET-DEG	248	Heat lamination method 2	<0.01	Invention steel sheet example
A15	PET-CHDM	249	Heat lamination method 2	<0.01	Invention steel sheet example
A16	Epoxy thermosetting resin	-	Application	-	Comparative steel sheet example

- 27 -

"Forming of Can Body"

The resulting sample steel sheet was used to form a can body (final formed body) by the procedure below according to the production method shown in Fig. 1. The profiles of the intermediate formed body (Step C) and the final formed body (Step D) are described in Table 2. The drawing in Step A was conducted in 5 stages, and the diametral reduction in Step D was conducted in 7 stages. The heat treatment was conducted during Steps A to D, and the can body was heated in an infrared furnace and cooled with water after the heat treatment. The timing of the heat treatment (strain level of the can body during the heat treatment) and the heat treatment conditions are shown in Table 3.

In Table 2, h , r , d , h_a , h_c , and R of the final formed body (Step D) respectively denote, the height to the opening end portion, the diameter of the base portion 2, the diameter of the neck-shaped portion 3, the height of the base portion 2, the height of the neck-shaped portion 3, and the radius of the disk-shaped blank before forming whose weight is equivalent to that of the final formed body (see Fig. 1). The radius R of the disk-shaped blank was measured as follows. The weight of the blank sheet before forming and the weight of the final formed body after the trimming step were measured, and, on the basis of the measurement results, the radius of the blank sheet before forming that

- 28 -

can render the weight of the blank sheet to be equal to the weight of the final formed body was calculated, and the given radius was assumed to be the radius R of the disk-shaped blank before forming whose weight is equivalent to that of the final formed body.

Table 2

Can profile	Blank radius R_0 (mm)	Intermediate formed body (Step C)		Final formed body (Step D)								Rate of change in sheet thickness **
		r (mm)	h (mm)	r (mm)	d (mm)	h (mm)	ha (mm)	hc (mm)	Blank radius R^* (mm)	d/R	h/(R-r)	
B1	41	11	63.6	11	7.8	65.9	47	9.9	40.4	0.19	2.24	1.20
B2	33	11	63.5	11	7.8	65.9	47	9.9	32.2	0.24	3.11	0.65

*) Blank radius R is determined from the weight of the end product.

**) Sheet thickness of the thinnest portion of the can/sheet thickness of the blank sheet. The thickness is the thickness of the steel sheet in all

- 30 -

Table 3

Can No.	Sample steel sheet No.	Resin layer melting point °C	Strain level during heat treatment		Heat treatment conditions		Cooling time* (sec)	Final profile of can	Film formability	Film adhesiveness	Remarks
			d/R	h/(R-r)	Temperature (°C)	Temperature (sec)					
C1	A1	228	0.30	1.50	238	30	8	B1	◎	○	Invention example
C2	A1	228	0.30	1.50	238	60	8	B1	◎	○	Invention example
C3	A1	228	0.30	1.50	238	90	8	B1	◎	○	Invention example
C4	A1	228	0.30	1.50	238	120	8	B1	◎	○	Invention example
C5	A1	228	0.30	1.50	255	30	8	B1	◎	○	Invention example
C6	A1	228	0.30	1.50	248	30	8	B1	◎	○	Invention example
C7	A1	228	0.30	1.50	228	30	8	B1	◎	○	Invention example
C9	A1	228	0.30	1.50	238	30	1	B1	◎	○	Invention example
C10	A1	228	0.30	1.50	238	30	2	B1	◎	○	Invention example
C11	A1	228	0.30	1.50	238	30	4	B1	◎	○	Invention example
C12	A1	228	0.30	1.50	238	30	6	B1	◎	○	Invention example
C13	A1	228	0.30	1.50	238	30	15	B1	○	○	Invention example
C14	A1	228	0.38	1.79	238	30	8	B1	◎	○	Invention example
C15	A1	228	0.23	2.20	238	30	8	B1	◎	○	Invention example
C16	A1	228	0.47	1.55	238	30	8	B1	◎	○	Invention example
C17	A1	228	0.40	2.60	238	30	8	B2	○	○	Invention example
C18	A1	228	0.35	2.90	238	30	8	B2	○	○	Invention example
C19	A1	228	0.23	3.05	238	30	8	B2	○	○	Invention example
C20	A2	245	0.30	1.50	255	30	8	B1	◎	○	Invention example
C21	A3	258	0.30	1.50	268	30	8	B1	◎	○	Invention example
C22	A4	251	0.30	1.50	261	30	8	B1	◎	○	Invention example
C23	A5	220	0.30	1.50	238	30	8	B1	◎	○	Invention example
C24	A6	228	0.30	1.50	238	30	8	B1	◎	○	Invention example
C25	A7	258	0.30	1.50	268	30	8	B1	◎	○	Invention example
C26	A8	258	0.30	1.50	268	30	8	B1	◎	○	Invention example
C27	A9	258	0.30	1.50	268	30	8	B1	◎	○	Invention example
C28	A10	228	0.30	1.50	238	30	8	B1	◎	○	Invention example
C29	A11	228	0.30	1.50	238	30	8	B1	◎	○	Invention example
C30	A12	228	0.30	1.50	238	30	8	B1	○	○	Invention example
C31	A13	251	0.30	1.50	261	30	8	B1	◎	○	Invention example
C32	A14	248	0.30	1.50	258	30	8	B1	◎	○	Invention example
C33	A15	249	0.30	1.50	259	30	8	B1	◎	○	Invention example
C34	A16	—	0.30	1.50	238	30	8	B1	×	×	Comparative
C35	A1	228	0.30	1.50	220	30	8	B1	×	×	Comparative

* Time taken until the temperature is reduced to T_g or less after completion of the heat treatment.

- 31 -

- 1) Blanking (66 to 82 mm ϕ)
- 2) Drawing and ironing (Step A)

A can body (intermediate can body) having a radius r and a height h satisfying the ranges of d/R of 0.27 to 0.34 and $h/(R - r)$ of 2.23 to 3.09 was manufactured by 5-stage drawing. In order to make a desired can, ironing was also employed where necessary.

- 3) Dome forming in the can bottom portion (Step B)

The can bottom portion was raised to form a hemisphere having a depth of 6 mm.

- 4) Trimming (Step C)

The upper end portion of the can was trimmed by about 2 mm.

- 5) Diametral reduction at opening portion of the cylinder (Step D)

The upper portion of the cylinder was subjected to diametral reduction. In particular, the diametral reduction was conducted by a die-neck method in which a die having a tapered inner face was pressed against the opening end portion to produce a can having a final profile described in Table 2.

The adhesiveness, formability, and appearance of the film layer of the can body made by the above-described procedure were evaluated as follows. The results of the evaluation are also shown in Table 3.

- 32 -

"Adhesiveness Test"

A can body was sheared into a substantially rectangular shape sheet elongating in the can height direction so that the length in the circumferential direction was 15 mm. At a position 10 mm from the bottom in the can height direction, the steel sheet only was sheared along a straight line in the circumferential direction. As a result, a test piece was obtained which was constituted from the part 10 mm from the bottom surface in the can height direction and the remainder, the boundary of the 10 mm portion and the remainder being the shearing position. A steel sheet having a width of 15 mm and a length of 60 mm was connected (welded) to the 10 mm part, and the film in the remainder portion was separated for about 10 mm from the sheared position while holding the 60 mm steel sheet part. A 180° peeling test was then conducted while using the part where the film was separated and the 60 mm steel part as grips. The minimum value of the peel strength observed was used as the index of the adhesiveness.

"Peel Strength"

Less than 6 N/15 mm: ×

6 N/15 mm or more: ○

- 33 -

"Evaluation of Film Formability"

A seal with a small opening of 15 mm ϕ was attached around the position 10 mm from the upper end of the can so that the measurement area was 15 mm ϕ . The portion exposed in the small opening was dipped in an electrolyte (KCl: 5% solution, temperature: normal temperature), and a voltage of 6.2 V was applied between the steel sheet and the electrolyte. Evaluation was conducted according to the value of the current detected as described below.

"Current Value"

0.01 mA or less: ◎

More than 0.01 mA but not less than 0.1 mA: ○

More than 0.1 mA: ×

"Results of Evaluation"

Can bodies C1 to C7 and C8 to C33 are examples of the present invention. They exhibited satisfactory values in both film adhesiveness and formability.

Among the examples of the present invention, evaluation of formability is higher for samples in which the cooling time after completion of the heat treatment is 10 sec or less than samples in which the cooling time was more than 10 sec (can body C13). Can bodies C17 to C19 are examples of the present invention but the timing of the heat treatment is outside the range of the second invention. Their film

- 34 -

formability and adhesiveness were both pass but the evaluation of the formability was only O.

Can body C34 is a comparative example of the present invention. The resin layer was formed by application using a thermosetting paint, and both formability and adhesiveness were x.

In Can C35, the heat treatment temperature was outside the range of the present invention. The formability was x.

-35-

What is claimed is:

1. A method for producing a two-piece can, comprising
subjecting a circular disk of a laminated steel sheet having
a thermoplastic resin coating layer to multistage forming to
5 form a final formed body having a height h , a maximum radius
 r , and a minimum radius d ,

characterized by comprising:

forming the circular disk so that the height h , maximum
radius r , and the minimum radius d of the final formed body
10 satisfy the relationships $d \leq r$, $0.1 \leq d/R \leq 0.25$ and $1.5 \leq h/(R-r) \leq$
4 with respect to a radius R of the circular disk, before
forming, having the same weight to that of the final formed
body; and

during the forming, subjecting a formed body to heat
15 treatment at a temperature in a range from a melting point
of the thermoplastic resin to the melting point plus 30°C .

2. The method for producing the two-piece can according to
claim 1, wherein the heat treatment comprises heating the
20 formed body to a temperature in a range from the melting
point of the thermoplastic resin to the melting point plus
 30°C in an intermediate forming stage where a height h , a
maximum radius r , and a minimum radius d of the formed
body at the intermediate stage satisfy relationships $d \leq r$,
25 $0.2 \leq d/R \leq 0.5$ and $1.5 \leq h/(R-r) \leq 2.5$ with respect to the radius R .

3. The method for producing the two-piece can according to
claim 1, wherein the heat treatment is performed a plurality
of time during the forming.

30

-36-

4. The method for producing the two-piece can according to claim 2, wherein the heat treatment is performed a plurality of times during the intermediate forming stage.

5 5. The method for producing the two-piece can according to claim 1, wherein the heat treatment is performed for 15 to 120 seconds.

10 6. The method for producing the two-piece can according to claim 2, wherein the heat treatment is performed for 15 to 120 seconds.

7. The method for producing the two-piece can according to claim 1, wherein the steel sheet is cooled to a temperature not more than a glass transition point T_g of the

1/1

FIG. 1

